

ANAM Electronics

Model Name	DH150
ANAM P/N	ANT 1(160L) : CSA3A081Z ANT 2(210L) : CSA3A082Z


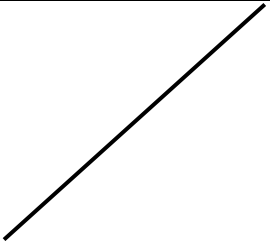

Date: March 28, 2019

PRODUCT SPECIFICATION

Product : Internal WIFI/Bluetooth Antenna

Part No. :ANT 1(160L): KH-WFDI-AN001

ANT 2(210L): KH-WFDI-AN002

RF Eng'r	Mfg. Eng'r	Approved By
		
2019. 03. 28.	-	2019. 03. 28.

KWANG HYUN AIRTECH

Address :

Rm 414, Woolim Lions Valley II , 680 Gasan-Dong,
Geumcheon-Gu, Seoul 153-787 Korea
Tel: 82-2-2027-2615, Fax: 82-2-2027-2614

Table of Contents

1. General		
1.1	The Product	----- Page 3
1.2	Electrical Properties	----- Page 3
1.3	Mechanical Properties	----- Page 3
2. Electrical Properties		
2.1	Frequency Bands	----- Page 4
2.2	Impedance	----- Page 4
2.3	VSWR	----- Page 4
2.4	Gain(dBi)	----- Page 5
3. Test Data		
5.1	Network Data	----- Page 6
5.2	Gain Data	----- Page 7~8
4. Mechanical Drawing		----- Page 9

1. General

1.1 The Product

Model Name	DH150 WIFI / Bluetooth Antenna
Part No.	ANT 1(160L): KH-WFDI-AN001 ANT 2(210L): KH-WFDI-AN002
Antenna Type	Dipole Antenna
Applications	WIFI 2.4~2.5 / 5.15~5.825

1.2 Electrical Properties

Frequency Range(Tx)	2.4~2.5 Ghz / 5.15~5.825 Ghz	
Frequency Range(Rx)	2.4~2.5 Ghz / 5.15~5.825 Ghz	
VSWR	2.4~2.5	Less Than 2.0 : 1
	5.15~5.825	Less Than 3.0 : 1
GAIN dBi (Avr. / Peak)	2.4~2.5	-0.3 ~ -1.4 / 3.4 ~ 4.0
	5.15~5.825	-1.3 ~ -3.6 / 0.9 ~ 2.8
Polarization	Vertical	
Impedance	50Ω ± 10Ω	

1.3 Mechanical Properties

Dimension	Ipex Cable : ANT ① = 160L / ANT ② = 210L
	PCB : 40 x 8.0 x 0.8.t
Operational Temperature	-30°C ~ +75°C
Connector Type	Ipex Connector + PCB Type

2. Electrical Properties

2.1 Frequency Band

Service \ Band	KH-WFDI-AN001 / KH-WFDI-AN002	
Tx (MHz)	2,400 ~ 2,500	5,150 ~ 5,825
Rx (MHz)	2,400 ~ 2,500	5,150 ~ 5,825

2.2 Impedance

2.2.1 Normal Value

$50\Omega \pm 10\Omega$

2.2.2 Measuring Method

The impedance over the frequency bands shall be as close as possible to 50Ω after matching. Both free space and talk position are considered.

2.3 VSWR

2.3.1 Maximum values in free space

Service \ Band	KH-WFDI-AN001 / KH-WFDI-AN002	
	2,400 ~ 2,500	5,150 ~ 5,825
VSWR	2.0 : 1	3.0 : 1

2.3.2 Measuring Method

A 50Ω coaxial cable is connected(soldered) to the 50Ω point, at the duplex-filter on the main PCB. The connection of the coaxial cable shall be done to introduce a minimum of mismatch. As much as possible the coaxial cable arrangement shall prevent influences from induced currents on the cable. In the other end, the coaxial cable is connected to a network analyzer. The measurement is performed at room temperature. The handset, including the PCB, must not in any significant way differ from the mass produced handset, i.e. the antenna feeding network has to be equivalent to the feeding network in mass production. The specification shall be met in the entire frequency band. The free space means that the handset is placed on a non-conductive surface of cellular plastic.

2.4 Gain(dBi)

2.4.1 Typical minimum values in maximum direction

Band / Service	KH-WFDI-AN001 / KH-WFDI-AN002	
	2,400 ~ 2,500	5,150 ~ 5,825
Gain(Avr./Peak)	-0.3 ~ -1.4 / 3.4 ~ 4.0	-1.3 ~ -3.6 / 0.9 ~ 2.8

2.4.2 Measuring Method

The connection is done according to 2.3.2.

Radiation patterns are measured at 6 different frequencies : Txmin, Txmid, Txmax, Rxmin, Rxmid and Rxmax. The antenna is measured in the 3D


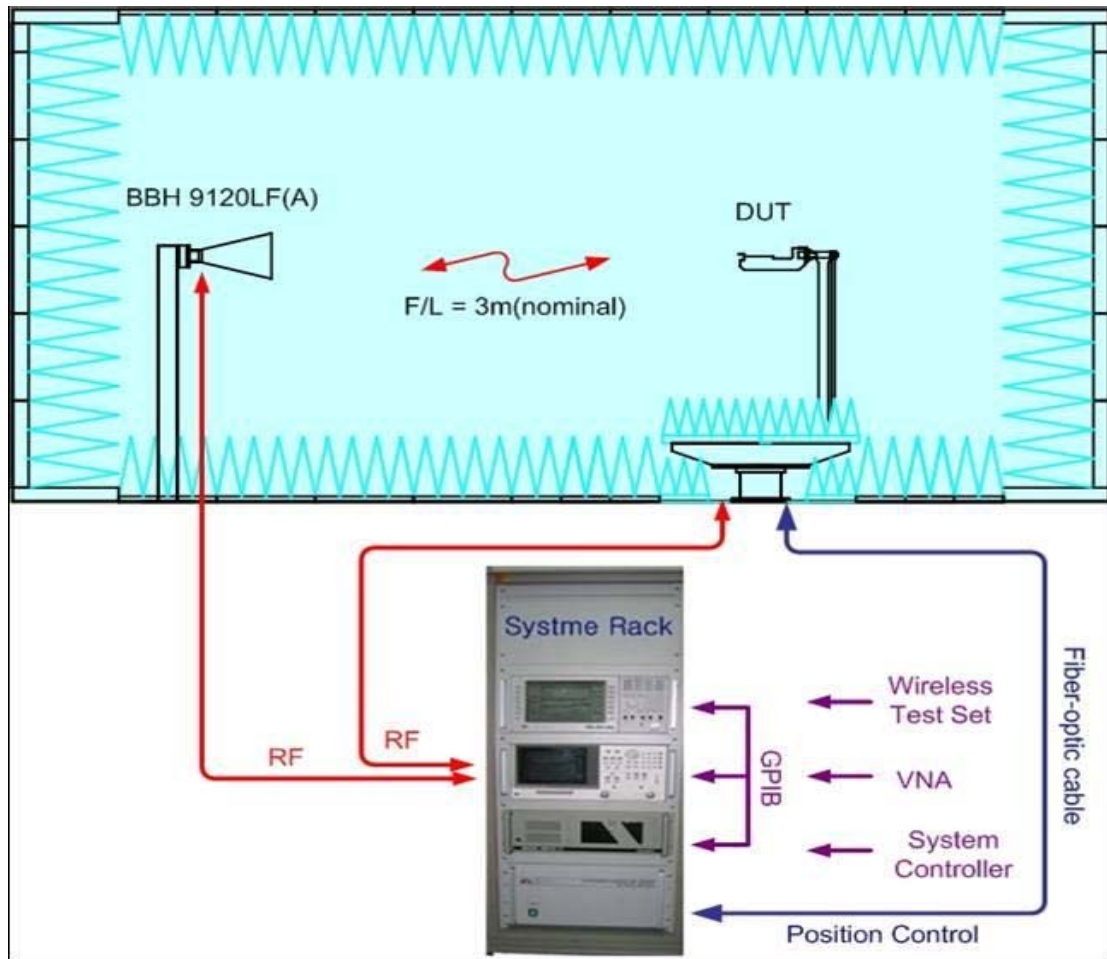


Figure 1. 3D Antenna Gain Test


3. Test Data

3.1 Network Data

- KH-WFDI-AN001 (ANT 1)

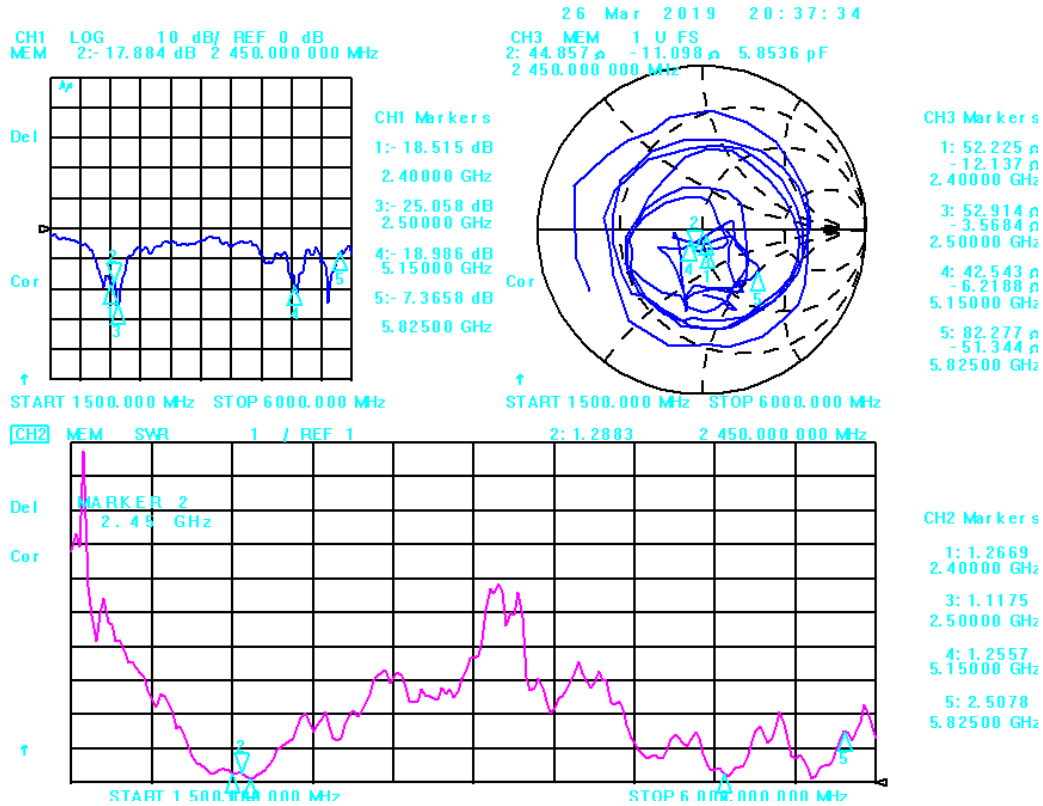


- KH-WFDI-AN002 (ANT 2)

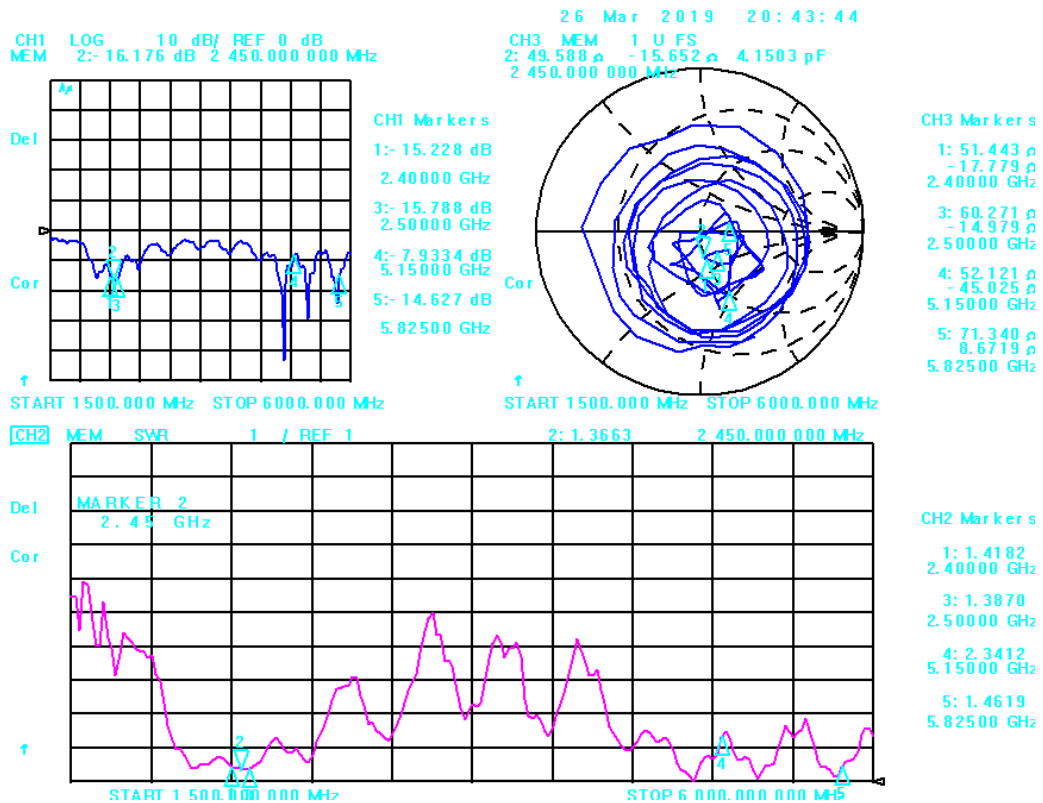


3.2 Radiation Pattern Data

- KH-WFDI-AN001 (ANT 1)

-Radiation

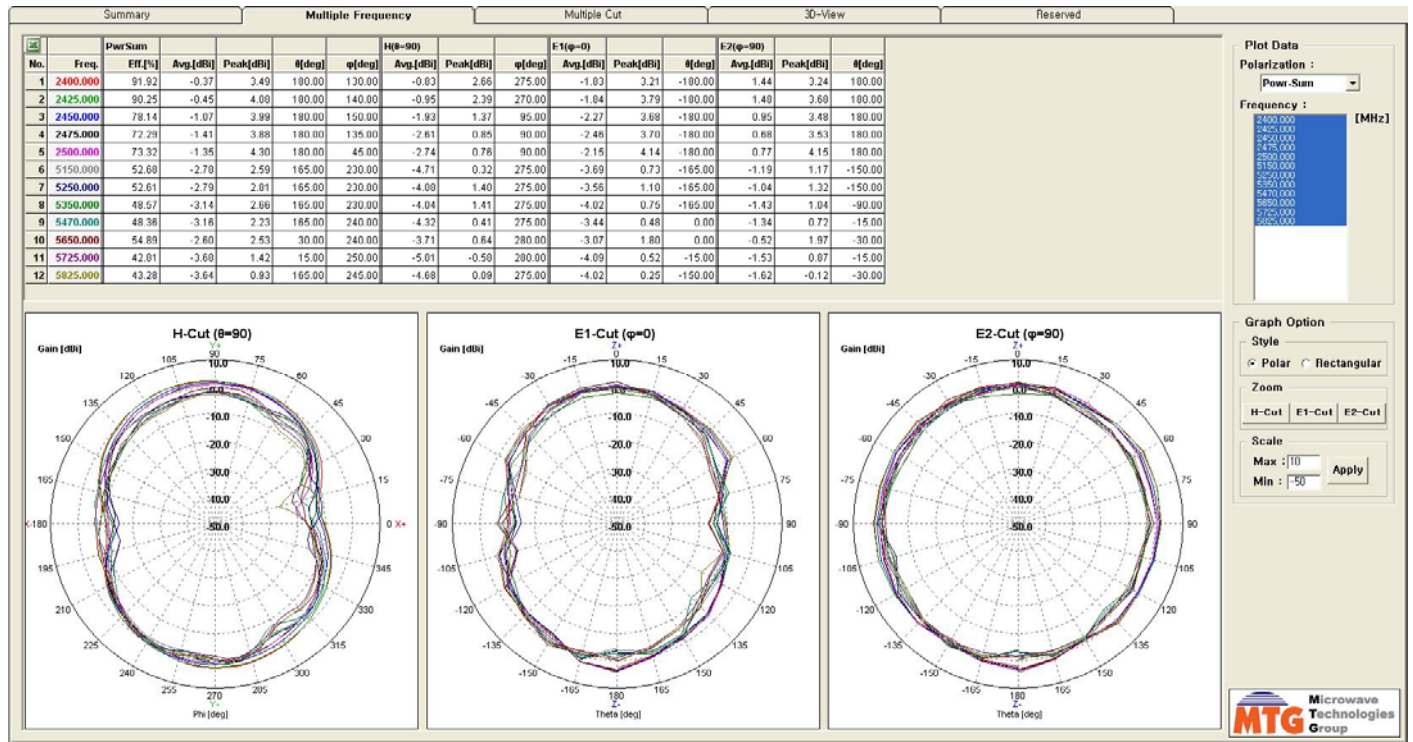


-3D View

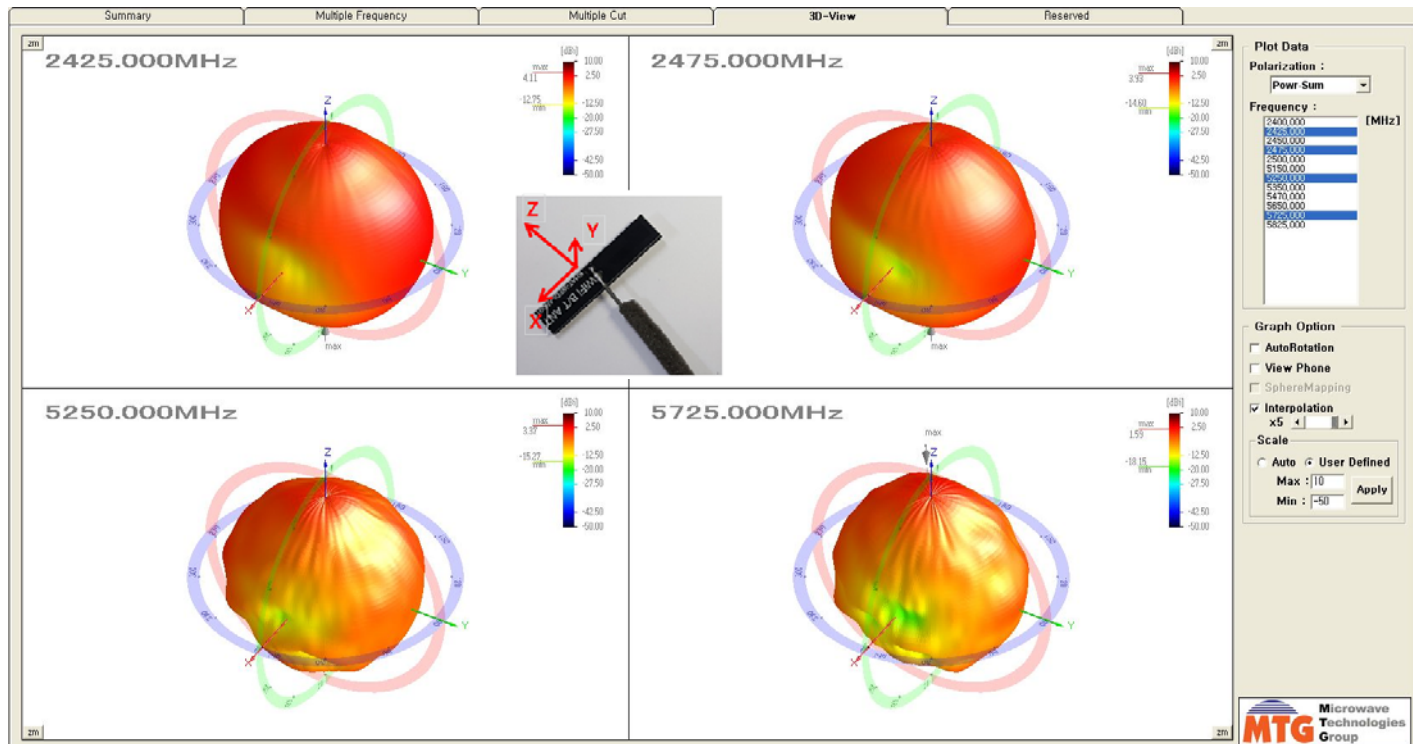


- KH-WFDI-AN002 (ANT 2)

-Radiation

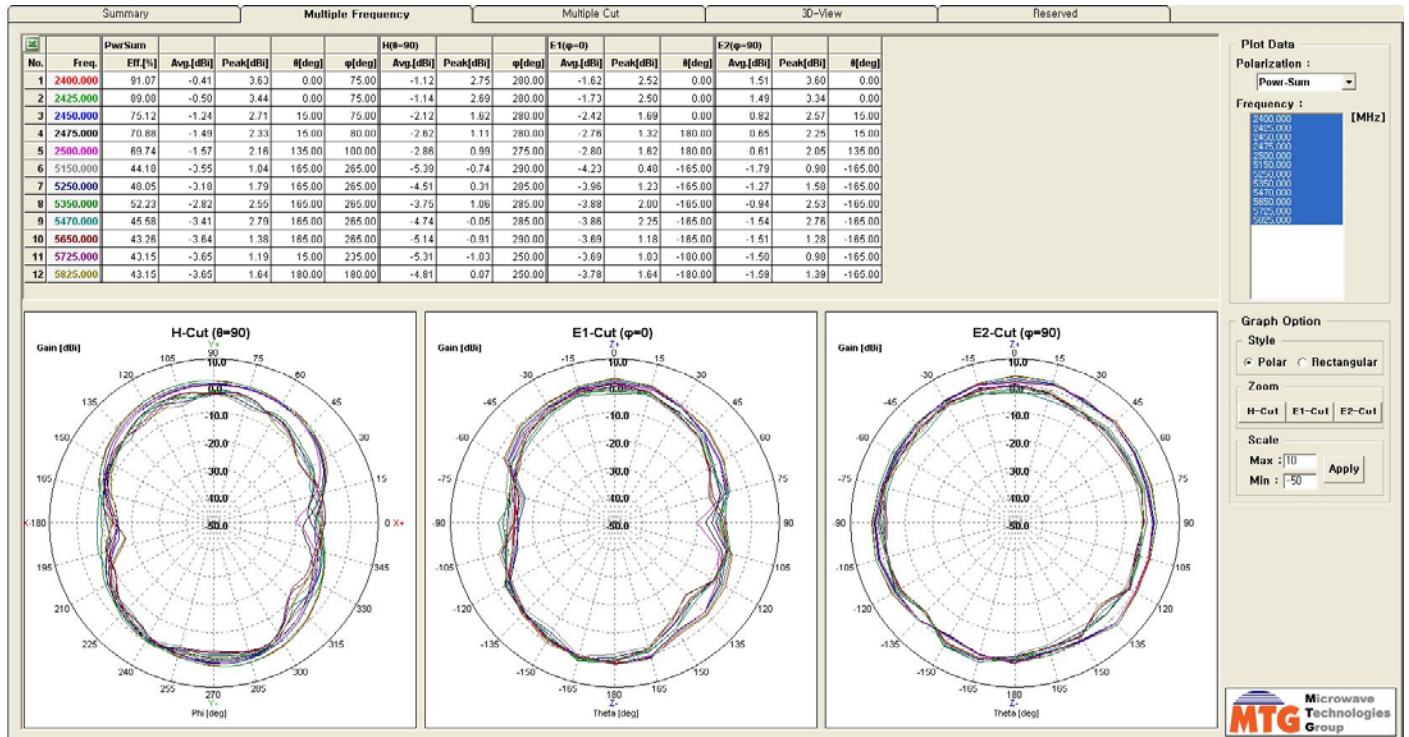


-3D View

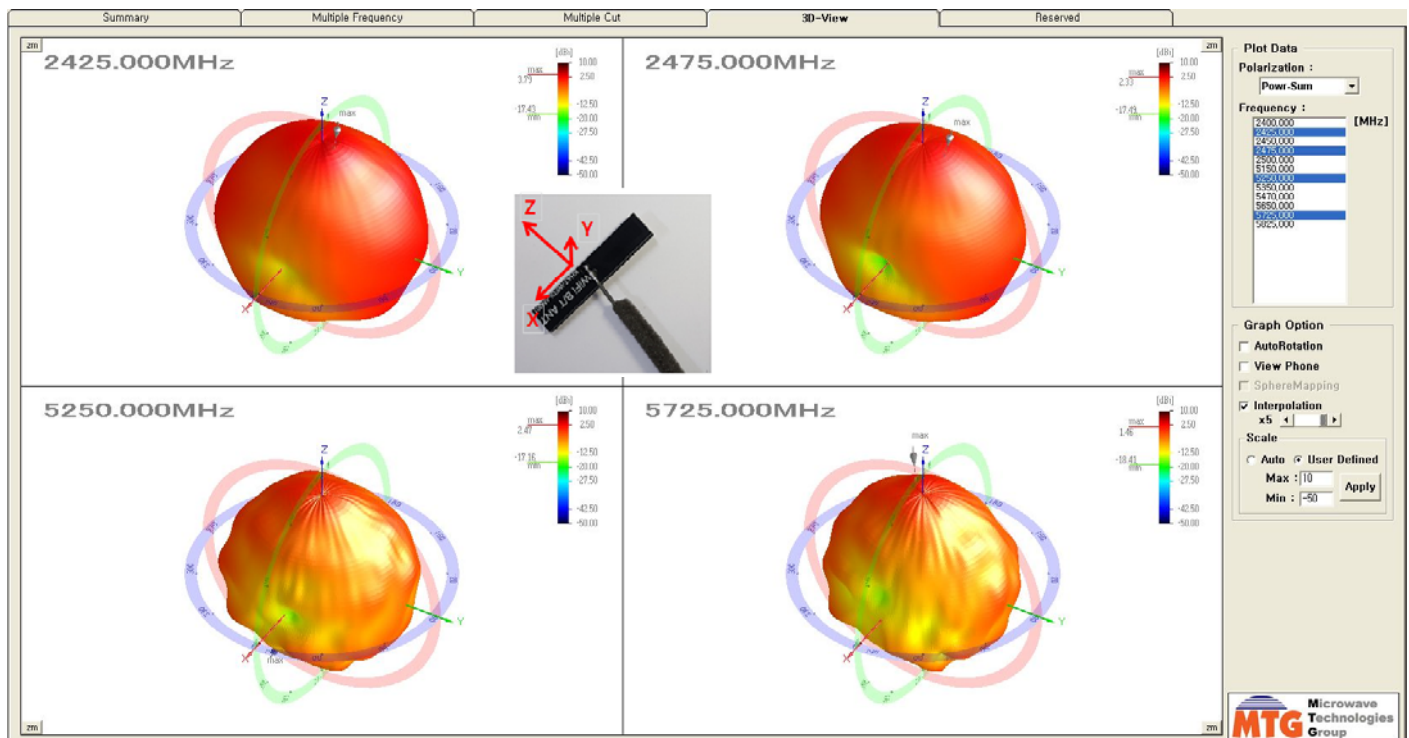

4. Mechanical Drawing

A3 (297 420)

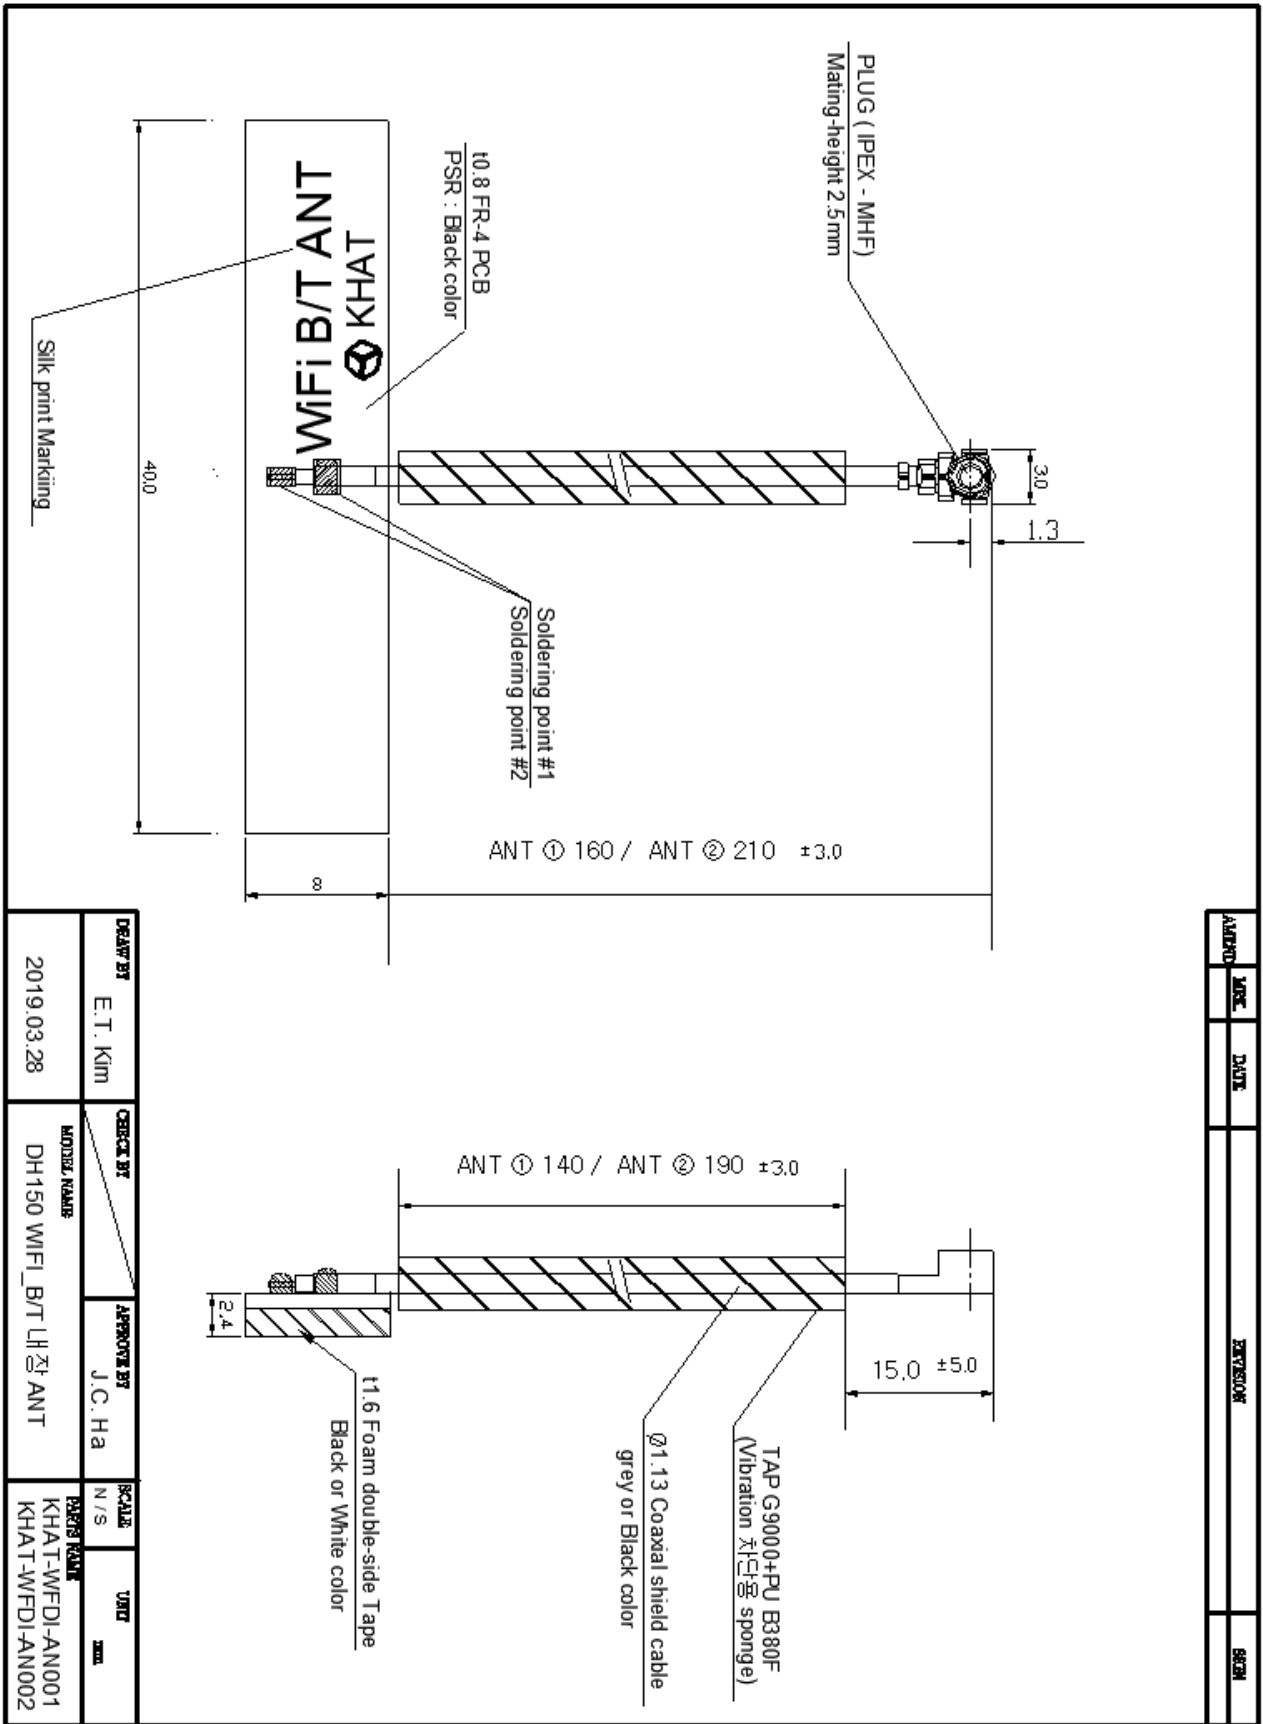

REV	DATE	REVISION	BY

DRAW BY E.T. KIM 2019.03.28	CHECK BY DH150 WIFI_B/T 내장 ANT	APPROVE BY J.C. Ha	SCALE N/S	UNIT mm
MODEL NAME DH150 WIFI_B/T 내장 ANT		PART NAME KHAT-WFEDI-AN001 KHAT-WFEDI-AN002		

