




Appendix A Test of AC Power Line Conducted Emission

Test Mode :
 2TX 11ax160 CH111 NSS1 MCS0
 Voltage : From Adapter(AC 120V/60Hz)
 Phase : Line

Data: 21

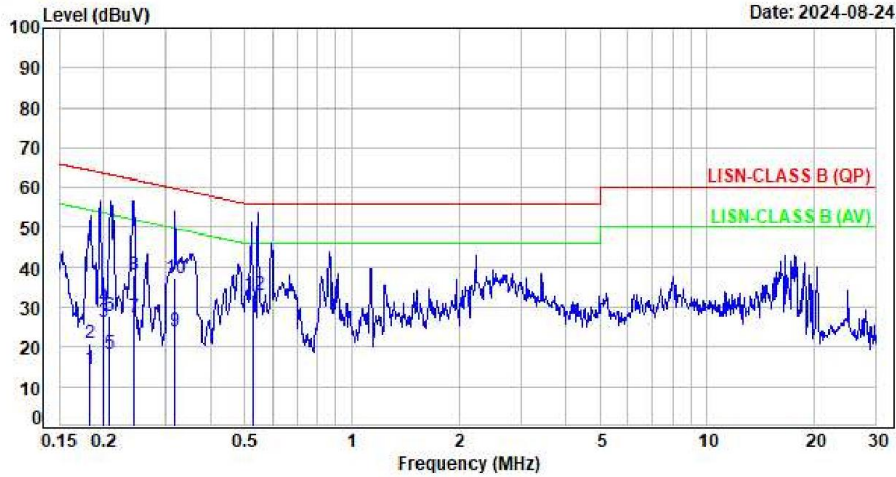


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1823	9.92	4.59	14.51	54.38	-39.87	Average	P
2	0.1823	9.92	10.88	20.80	64.38	-43.58	QP	P
3	0.2002	9.92	16.45	26.37	53.60	-27.23	Average	P
4	0.2002	9.92	20.30	30.22	63.60	-33.38	QP	P
5	0.2082	9.92	8.43	18.35	53.28	-34.93	Average	P
6	0.2082	9.92	17.76	27.68	63.28	-35.60	QP	P
7	0.2429	9.92	17.53	27.45	52.00	-24.55	Average	P
8	0.2429	9.92	28.27	38.19	62.00	-23.81	QP	P
9	0.3181	9.92	14.16	24.08	49.76	-25.68	Average	P
10	0.3181	9.92	27.24	37.16	59.76	-22.60	QP	P
11	0.5287	9.93	20.59	30.52	46.00	-15.48	Average	P
12	0.5287	9.93	23.29	33.22	56.00	-22.78	QP	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=(LISN or ISN or Current Probe)Factor + Cable Loss



Test Mode : 2TX 11ax160 CH111 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Phase : Neutral

Data: 22

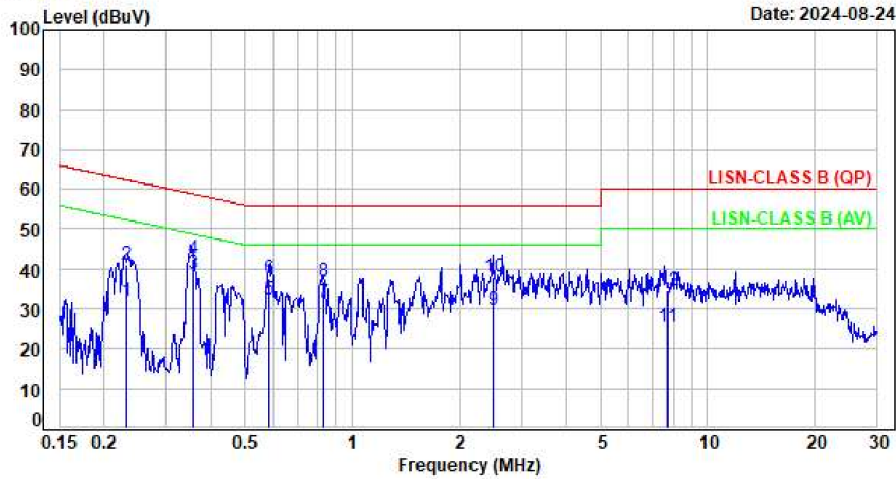

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.2316	9.94	22.14	32.08	52.39	-20.31	Average	P
2	0.2316	9.94	30.99	40.93	62.39	-21.46	QP	P
3	0.3565	9.96	28.81	38.77	48.81	-10.04	Average	P
4	0.3565	9.96	32.59	42.55	58.81	-16.26	QP	P
5	0.5851	9.96	22.32	32.28	46.00	-13.72	Average	P
6	0.5851	9.96	27.78	37.74	56.00	-18.26	QP	P
7	0.8297	9.98	21.45	31.43	46.00	-14.57	Average	P
8	0.8297	9.98	26.76	36.74	56.00	-19.26	QP	P
9	2.4857	10.04	19.76	29.80	46.00	-16.20	Average	P
10	2.4857	10.04	28.12	38.16	56.00	-17.84	QP	P
11	7.7129	10.25	15.06	25.31	50.00	-24.69	Average	P
12	7.7129	10.25	24.18	34.43	60.00	-25.57	QP	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=(LISN or ISN or Current Probe)Factor + Cable Loss