



Temperature	24°C	Humidity	64%
Test Engineer	Rush Kao	Configurations	802.11a Turbo Channel 160 / Ant. 8/9

Vertical

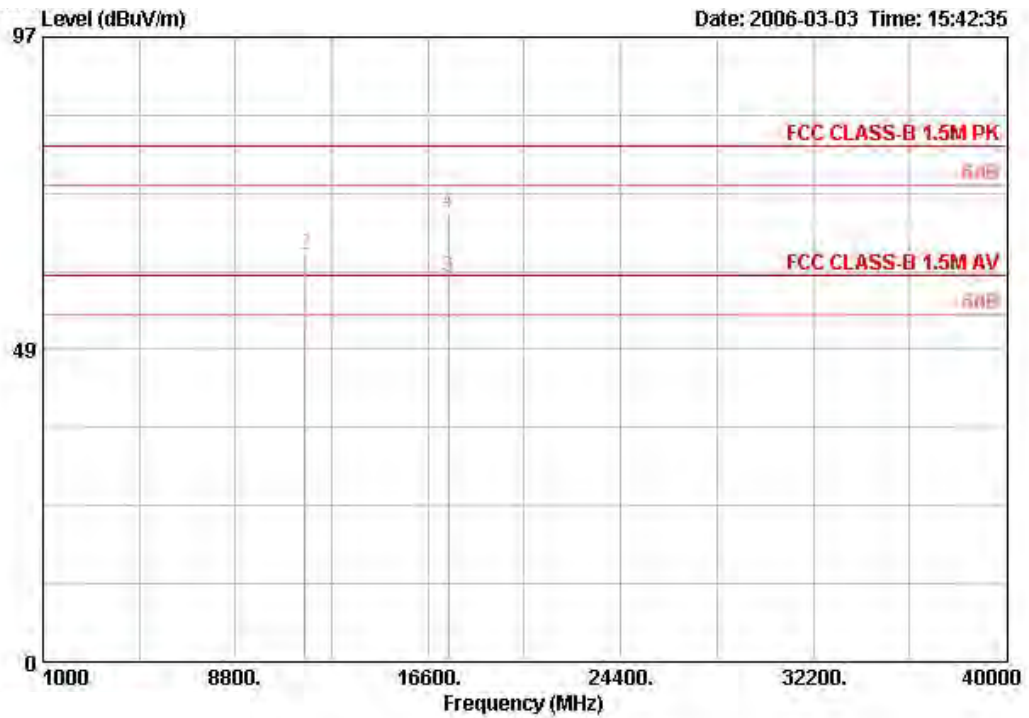

	Freq	Level	Over Limit	Antenna Line	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV	cm	deg
1	11597.600	51.95	-8.05	60.00	39.22	7.10	35.14	40.77 AVERAGE	103	11
2	11597.600	63.25	-16.75	80.00	39.22	7.10	35.14	52.07 PEAK	103	11
3	17407.400	59.76	-0.24	60.00	41.66	16.91	35.06	36.25 AVERAGE	127	313
4	17407.400	69.81	-10.19	80.00	41.66	16.91	35.06	46.30 PEAK	127	313

Horizontal

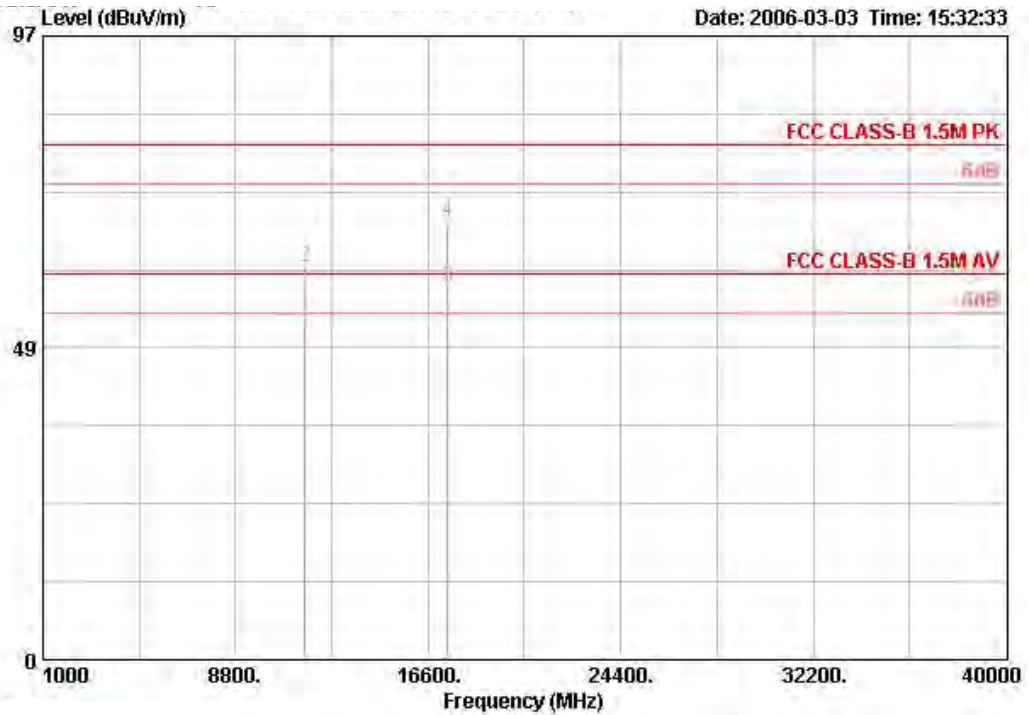

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBUV/m	dB	dBUV/m	dB/m	dB	dB	dBUV		cm	deg
1	11600.900	50.62	-9.38	60.00	39.22	7.10	35.14	39.44	AVERAGE	125	265
2	11600.900	61.17	-18.83	80.00	39.22	7.10	35.14	49.98	PEAK	125	265
3 @	17404.700	57.76	-2.24	60.00	41.66	16.91	35.06	34.25	AVERAGE	108	272
4	17404.700	68.28	-11.72	80.00	41.66	16.91	35.06	44.77	PEAK	108	272

Note:


The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBUV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	24°C	Humidity	64%
Test Engineer	Rush Kao	Configurations	802.11a Channel 149 / Ant. 10


Vertical

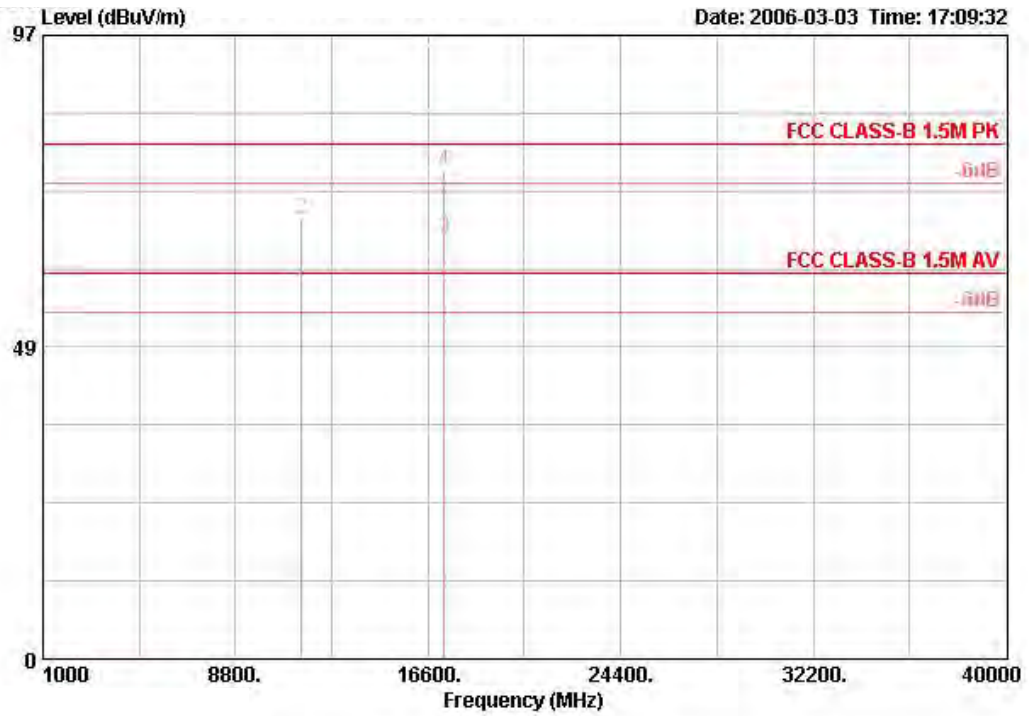

	Freq	Level	Over	Limit	Antenna	Cable	Preamp	Read	Remark	Ant	Table
	MHz	dBUV/m	dB	dBUV/m	dB/m	dB	dB	dBUV		cm	deg
1	11487.840	57.04	-2.96	60.00	39.20	6.96	35.10	45.98	AVERAGE	107	1
2	11487.840	68.56	-11.44	80.00	39.20	6.96	35.10	57.50	PEAK	107	1
3	17238.520	65.45			40.93	18.15	35.00	41.38	AVERAGE	107	264
4	17238.520	76.04	-3.96	80.00	40.93	18.15	35.00	51.96	PEAK	107	264

Note: Item 3 is on an un-restricted band, so the limit is -20dBc for the field strength of fundamental emission.

Horizontal

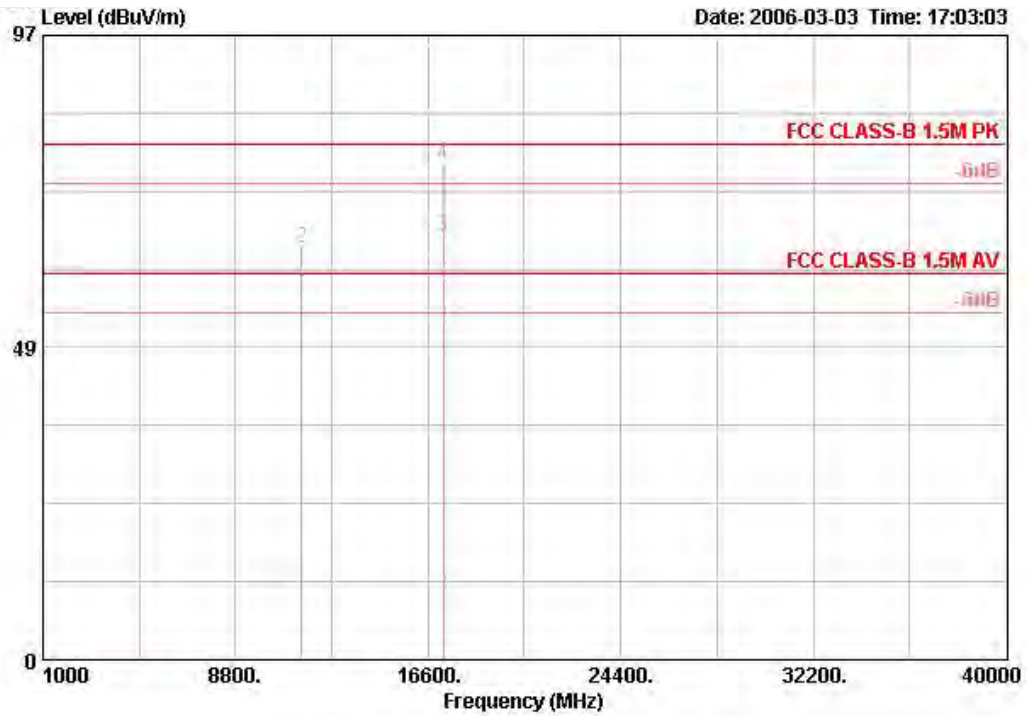


	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	11489.280	54.11	-5.89	60.00	39.20	6.96	35.10	43.05	AVERAGE	105	313
2	11489.280	64.07	-15.93	80.00	39.20	6.96	35.10	53.01	PEAK	105	313
3	17231.640	65.78			40.93	18.15	35.00	41.70	AVERAGE	104	284
4	17231.640	76.95	-3.05	80.00	40.93	18.15	35.00	52.87	PEAK	104	284

Note: Item 3 is on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission.

Temperature	24°C	Humidity	64%
Test Engineer	Rush Kao	Configurations	802.11a Channel 157 / Ant. 10


Vertical

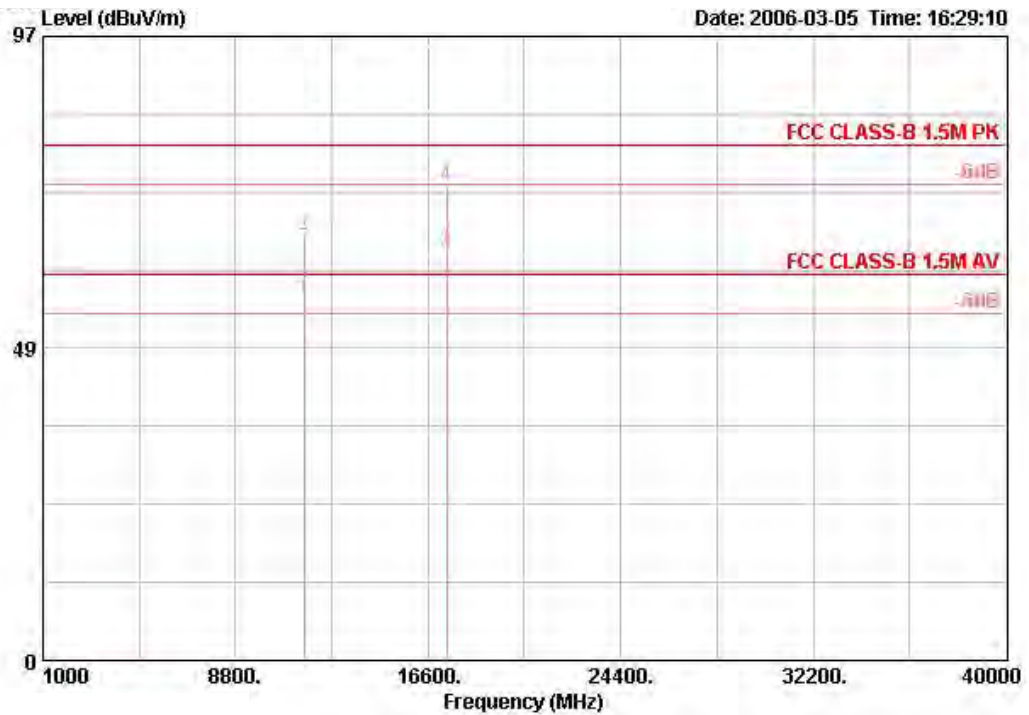

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1 @	11569.680	56.39	-3.61	60.00	39.21	7.06	35.12	45.24	AVERAGE	100	232
2 @	11569.680	66.15	-13.85	80.00	39.21	7.06	35.12	55.01	PEAK	100	232
3 @	17357.240	63.48			41.44	17.41	35.04	39.67	AVERAGE	100	300
4 @	17357.240	73.61	-6.39	80.00	41.44	17.41	35.04	49.80	PEAK	100	300

Note: Item 3 is on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission.

Horizontal

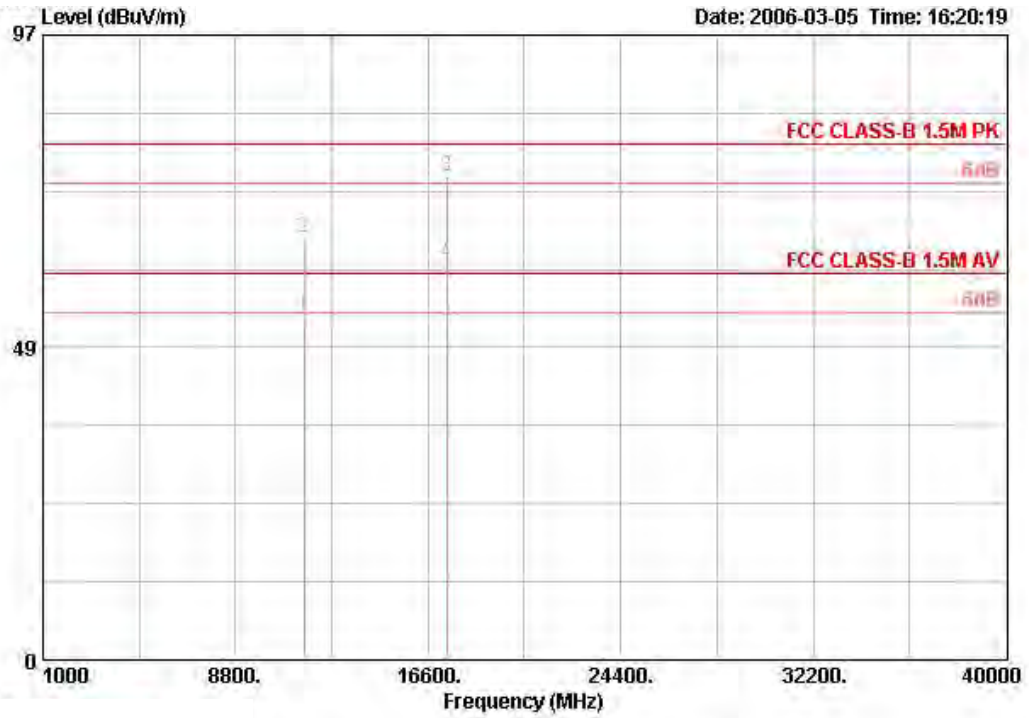


	Over	Limit	Antenna	Cable	Preamp	Read		Ant	Table		
Freq	Level	Limit	Line	Loss	Factor	Level	Remark	Pos	Pos		
MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV	cm	deg		
1 @	11569.080	53.48	-6.52	60.00	39.21	7.06	35.12	42.33	AVERAGE	125	263
2 @	11569.080	65.42	-14.58	80.00	39.21	7.06	35.12	54.27	PEAK	125	263
3 @	17348.040	75.03	-4.97	80.00	41.44	17.41	35.04	51.22	PEAK	100	318
4 @	17356.680	61.61			41.44	17.41	35.04	37.80	AVERAGE	100	318

Note: Item 4 is on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission.



<b>Temperature</b>	24°C	<b>Humidity</b>	64%
<b>Test Engineer</b>	Rush Kao	<b>Configurations</b>	802.11a Channel 165 / Ant. 10


Vertical

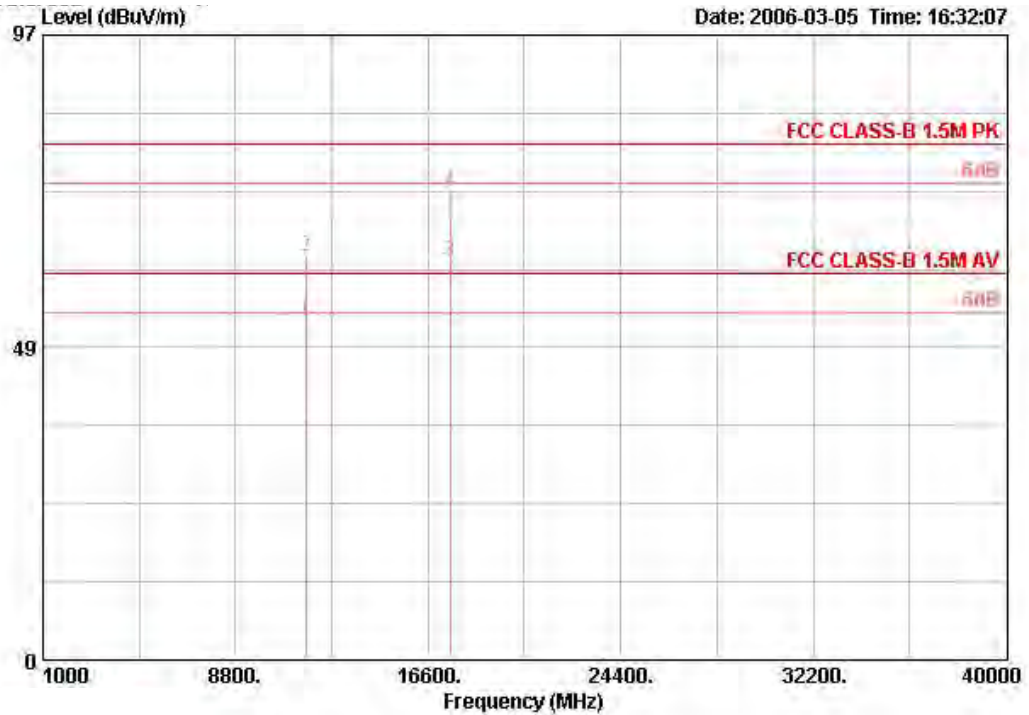

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBUV/m	dB	dBUV/m	dB/m	dB	dB	dBUV		cm	deg
1 @	11649.720	52.48	-7.52	60.00	39.23	7.15	35.16	41.27	AVERAGE	100	237
2 @	11649.720	62.69	-17.31	80.00	39.23	7.15	35.16	51.48	PEAK	100	237
3 @	17473.640	61.88			41.95	16.66	35.09	38.35	AVERAGE	100	311
4 @	17473.640	72.63	-7.37	80.00	41.95	16.66	35.09	49.10	PEAK	100	311

Note: Item 3 is on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission.

Horizontal

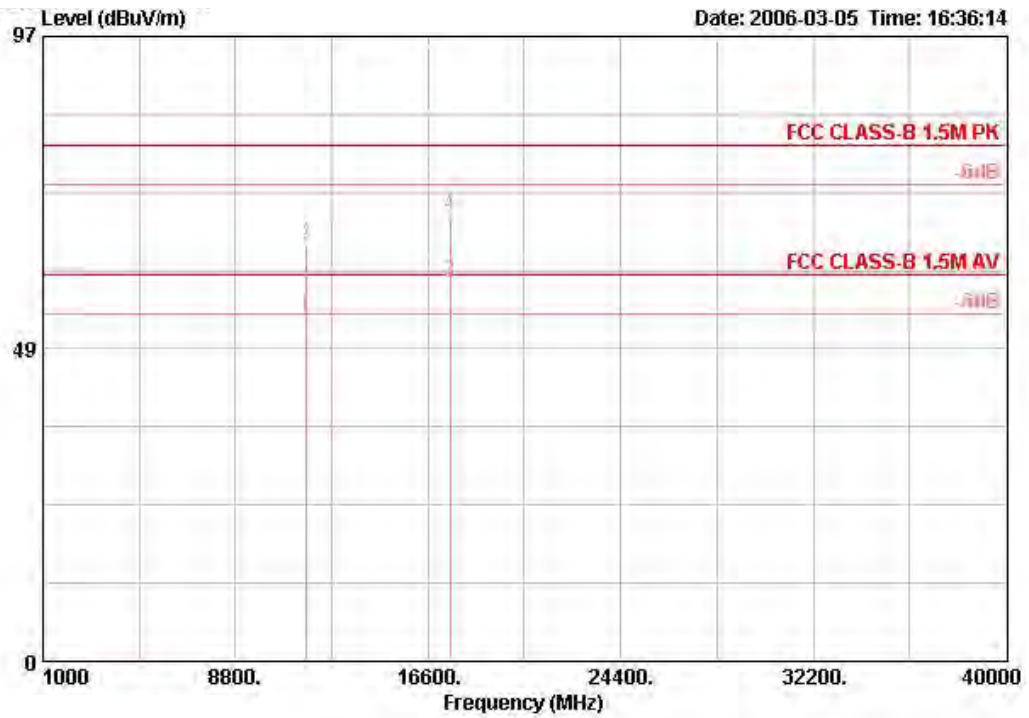


	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1 @	11650.160	53.69	-6.31	60.00	39.23	7.15	35.16	42.48	AVERAGE	118	273
2 @	11650.160	64.82	-15.18	80.00	39.23	7.15	35.16	53.60	PEAK	118	273
3 @	17473.640	58.83	-1.17	60.00	41.95	16.66	35.09	35.30	AVERAGE	100	284
4 @	17473.640	69.17	-10.83	80.00	41.95	16.66	35.09	45.64	PEAK	100	284



<b>Temperature</b>	24°C	<b>Humidity</b>	64%
<b>Test Engineer</b>	Rush Kao	<b>Configurations</b>	802.11a Turbo Channel 152 / Ant. 10


Vertical

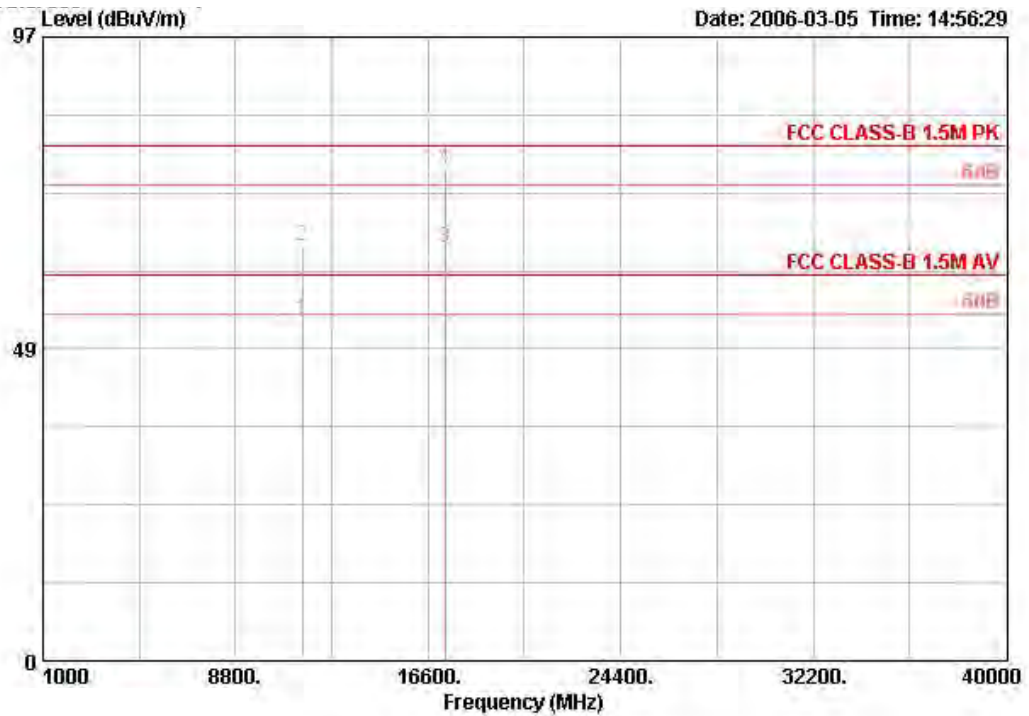

	Over	Limit	Antenna	Cable	Preamp	Read		Ant	Table		
Freq	Level	Limit	Line	Factor	Loss	Factor	Level	Remark	Pos	Pos	
MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg	
1 @	11518.100	53.10	-6.90	60.00	39.20	7.01	35.10	41.99	AVERAGE	103	7
2 @	11518.100	64.49	-15.51	80.00	39.20	7.01	35.10	53.38	PEAK	103	7
3 @	17279.100	64.19			41.15	17.90	35.01	40.15	AVERAGE	125	236
4 @	17279.100	76.77	-3.23	80.00	41.15	17.90	35.01	52.73	PEAK	125	236

Note: Item 3 is on an un-restricted band, so the limit is -20dBc for the field strength of fundamental emission.

Horizontal

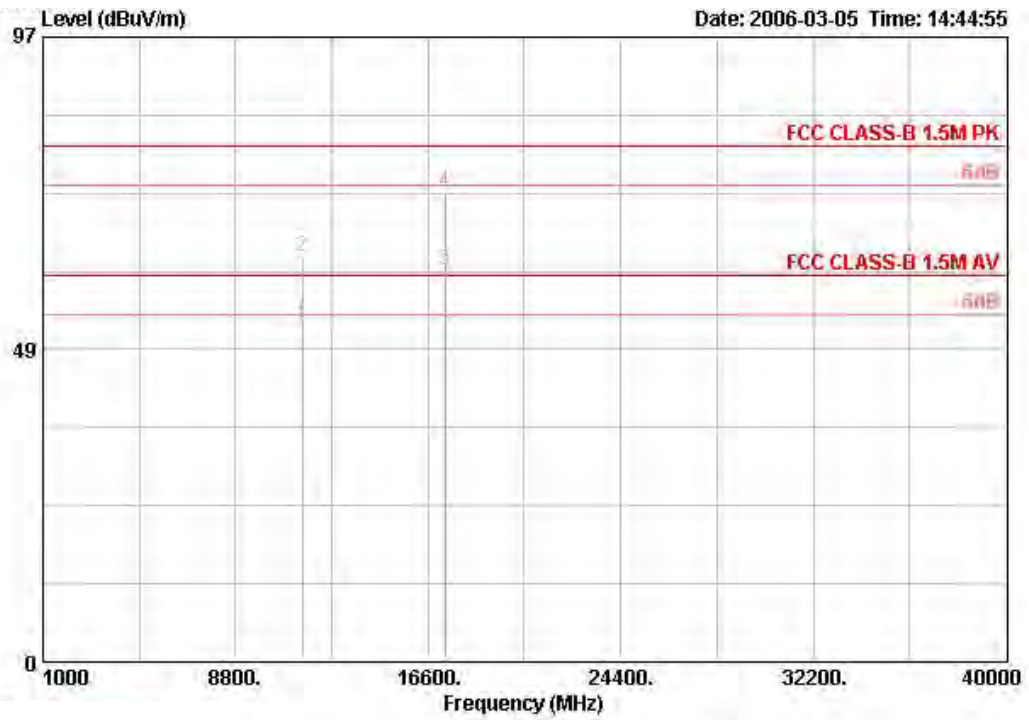


	Over	Limit	Antenna	Cable	Preamp	Read		Ant	Table		
Freq	Level	Limit	Line Factor	Loss Factor	Loss Factor	Level	Remark	Pos	Pos		
MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV	cm	deg		
1 @	11519.100	52.29	-7.71	60.00	39.20	7.01	35.11	41.18	AVERAGE	100	306
2 @	11519.100	62.91	-17.09	80.00	39.20	7.01	35.11	51.81	PEAK	100	306
3 @	17275.700	60.82			41.07	17.90	35.01	36.85	AVERAGE	131	250
4 @	17275.700	72.96	-7.04	80.00	41.07	17.90	35.01	48.99	PEAK	131	250

Note: Item 3 is on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission.

<b>Temperature</b>	24°C	<b>Humidity</b>	64%
<b>Test Engineer</b>	Rush Kao	<b>Configurations</b>	802.11a Turbo Channel 160 / Ant. 10


Vertical

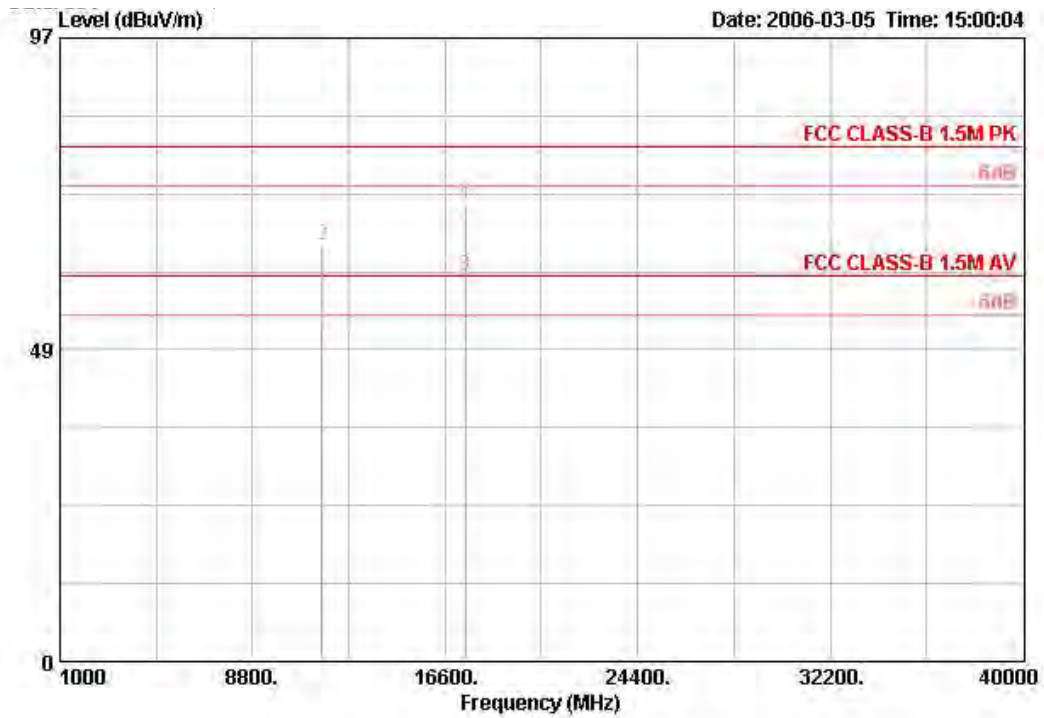

	Over	Limit	Antenna	Cable	Preamp	Read		Ant	Table		
Freq	Level	Limit	Line	Loss	Factor	Level	Remark	Pos	Pos		
MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV	cm	deg		
1 @	11601.600	53.08	-6.92	60.00	39.22	7.10	35.14	41.90	AVERAGE	100	10
2 @	11601.600	64.81	-15.19	80.00	39.22	7.10	35.14	53.63	PEAK	100	10
3 @	17415.000	60.12			41.73	16.91	35.07	36.55	AVERAGE	101	310
4 @	17415.000	71.18	-8.82	80.00	41.73	16.91	35.07	47.60	PEAK	101	310

Note: Item 3 is on an un-restricted band, so the limit is -20dBc for the field strength of fundamental emission.

Horizontal

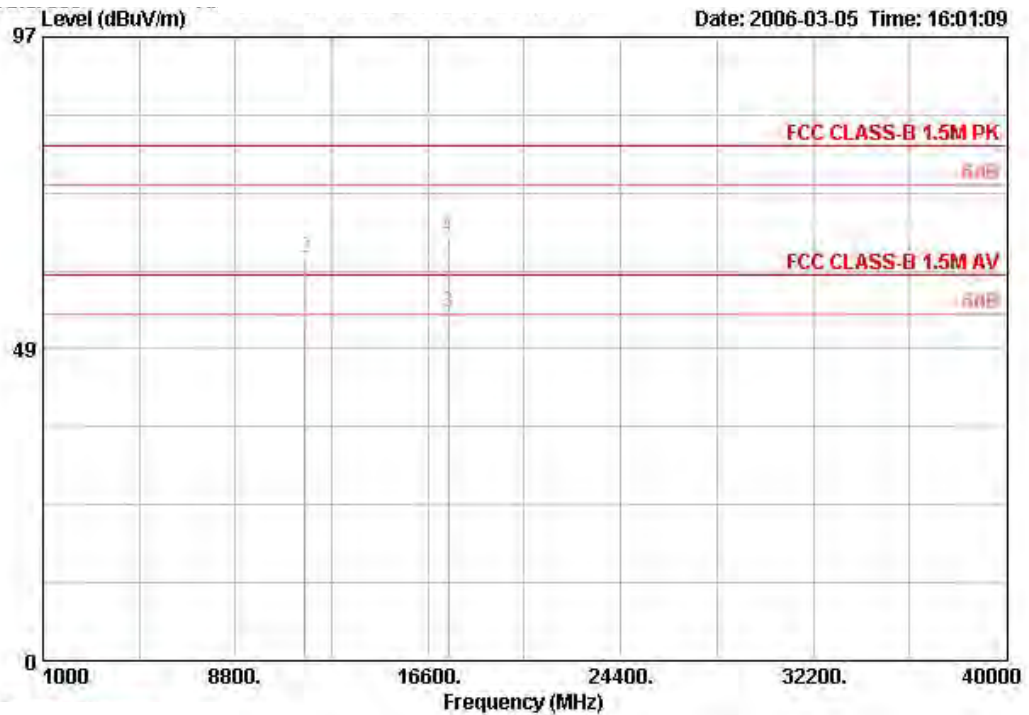

	Freq	Level	Over Limit	Antenna Line	Antenna Factor	Cable Loss	Preamp	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBUV/m	dB	dB/m	dB/m	dB	dB	dBUV		cm	deg
1 @	11600.800	50.84	-9.16	60.00	39.22	7.10	35.14	39.66	AVERAGE	131	274
2 @	11600.800	62.70	-17.30	80.00	39.22	7.10	35.14	51.52	PEAK	131	274
3 @	17409.200	54.12	-5.88	60.00	41.66	16.91	35.06	30.61	AVERAGE	100	278
4 @	17409.200	65.84	-14.16	80.00	41.66	16.91	35.06	42.33	PEAK	100	278

Note:


The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBUV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


Temperature	24°C	Humidity	64%
Test Engineer	Rush Kao	Configurations	802.11a Channel 149 / Ant. 11

Vertical

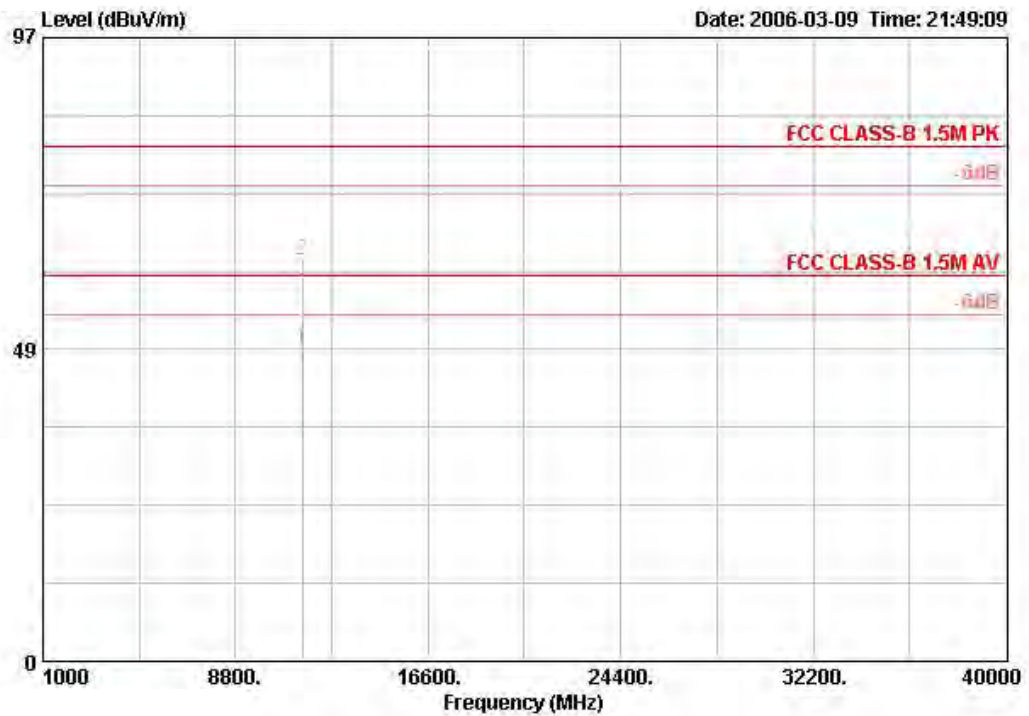

	Over	Limit	Antenna	Cable	Preamp	Read	Ant	Table			
Freq	Level	Limit	Line	Loss	Factor	Level	Pos	Pos			
MHz	dBUV/m	dB	dBUV/m	dB/m	dB	dB	cm	deg			
1 @	11491.080	48.56	-11.44	60.00	39.20	6.96	35.10	37.50	AVERAGE	101	332
2 @	11497.360	62.43	-17.57	80.00	39.20	6.96	35.10	51.37	PEAK	101	332

Horizontal

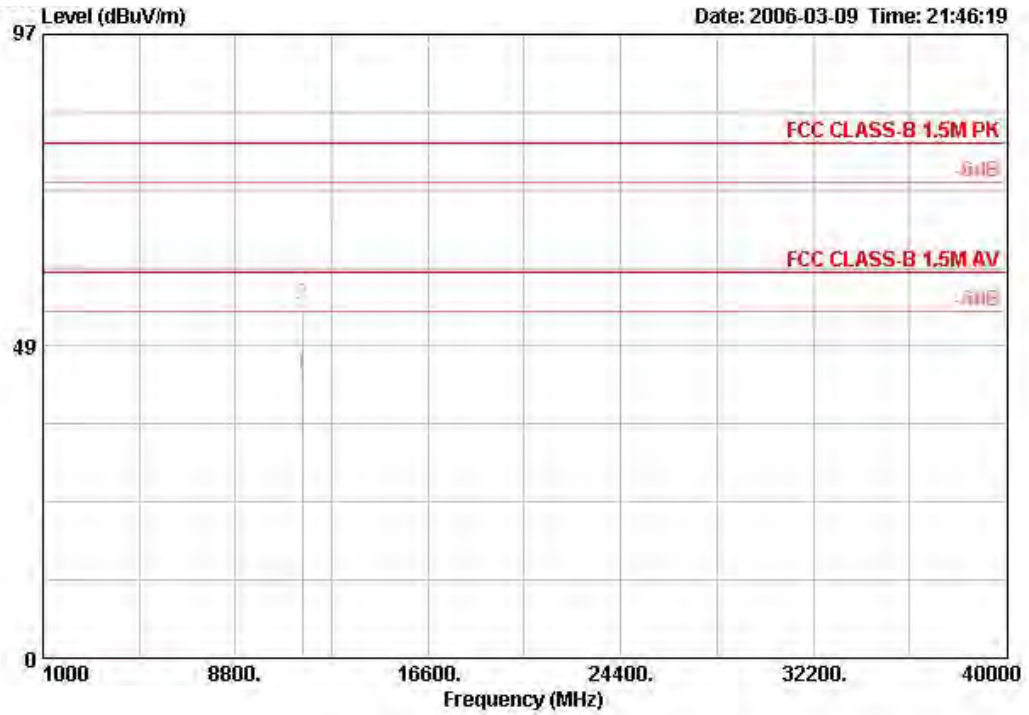


	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1 @	11489.520	44.07	-15.93	60.00	39.20	6.96	35.10	33.01	AVERAGE	100	101
2 @	11489.520	54.93	-25.07	80.00	39.20	6.96	35.10	43.87	PEAK	100	101




Temperature	24°C	Humidity	64%
Test Engineer	Rush Kao	Configurations	802.11a Channel 157 / Ant. 11

Vertical

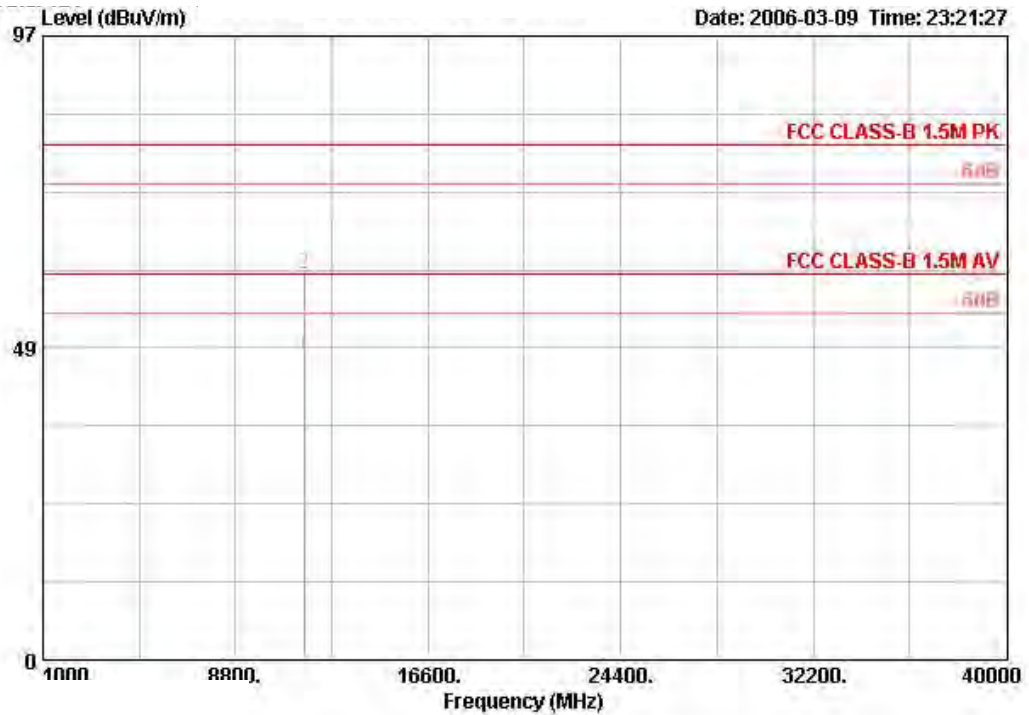

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	11570.240	47.24	-12.76	60.00	39.21	7.06	35.13	36.10	AVERAGE	102	310
2	11570.240	59.90	-20.10	80.00	39.21	7.06	35.13	48.77	PEAK	102	310


Horizontal

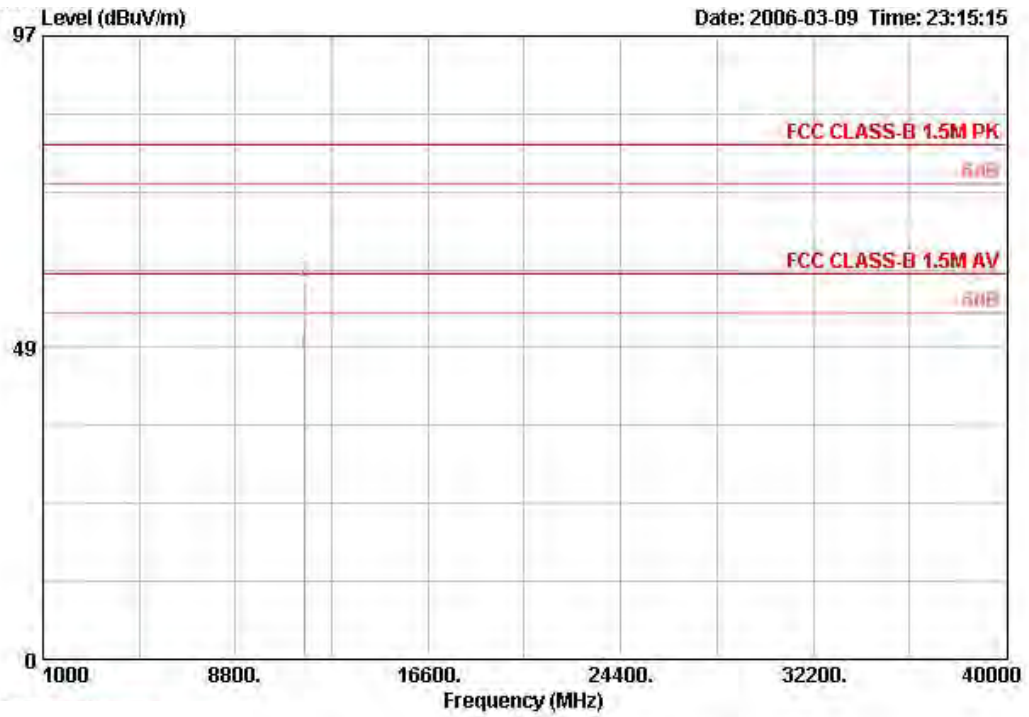

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	11570.240	47.39	-12.61	60.00	39.21	7.06	35.13	36.26	AVERAGE	100	340
2	11570.240	58.55	-21.45	80.00	39.21	7.06	35.13	47.41	PEAK	100	340


Temperature	24°C	Humidity	64%
Test Engineer	Rush Kao	Configurations	802.11a Channel 165 / Ant. 11

Vertical

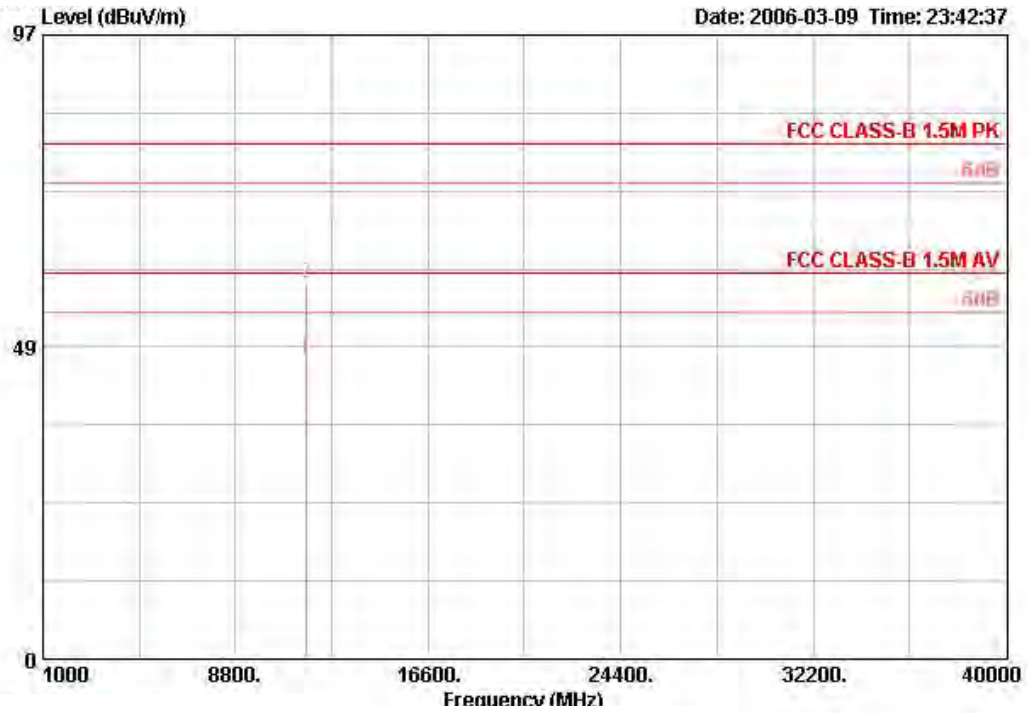

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1 @	11650.120	46.54	-13.46	60.00	39.23	7.15	35.16	35.33	AVERAGE	102	311
2 @	11650.120	58.30	-21.70	80.00	39.23	7.15	35.16	47.08	PEAK	102	311


Horizontal

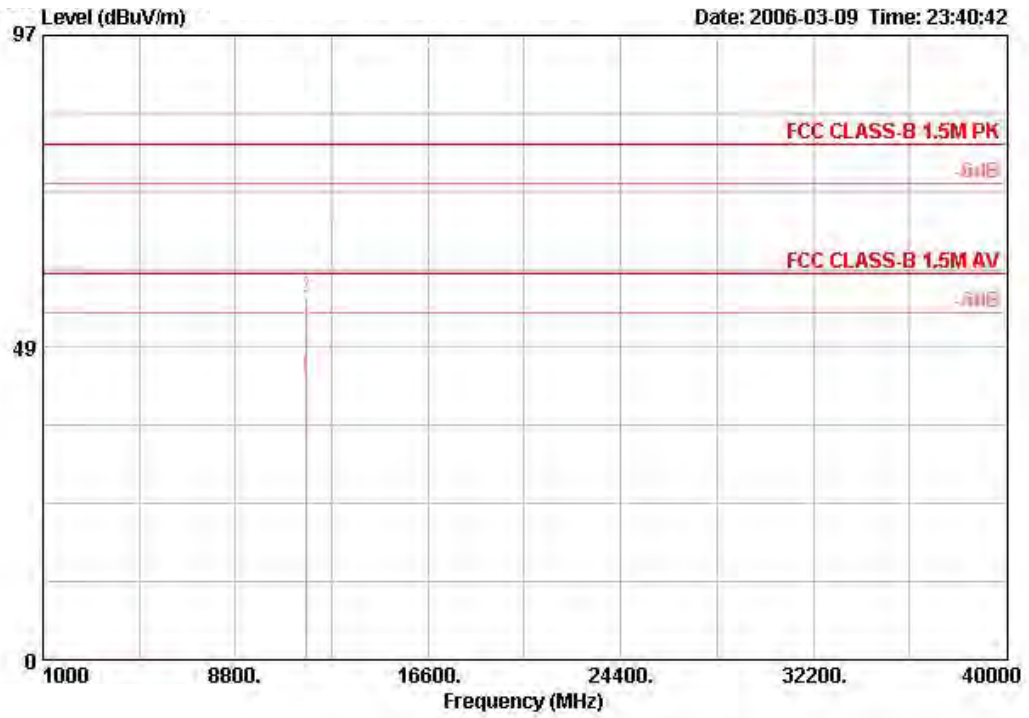

	Freq	Level	Over Limit	Antenna Line	Factor	Cable Loss	Preamp	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1 @	11650.200	43.88	-16.12	60.00	39.23	7.15	35.16	32.67	AVERAGE	100	56
2 @	11650.200	56.33	-23.67	80.00	39.23	7.15	35.16	45.11	PEAK	100	56


Temperature	24°C	Humidity	64%
Test Engineer	Rush Kao	Configurations	802.11a Turbo Channel 152 / Ant. 11

Vertical

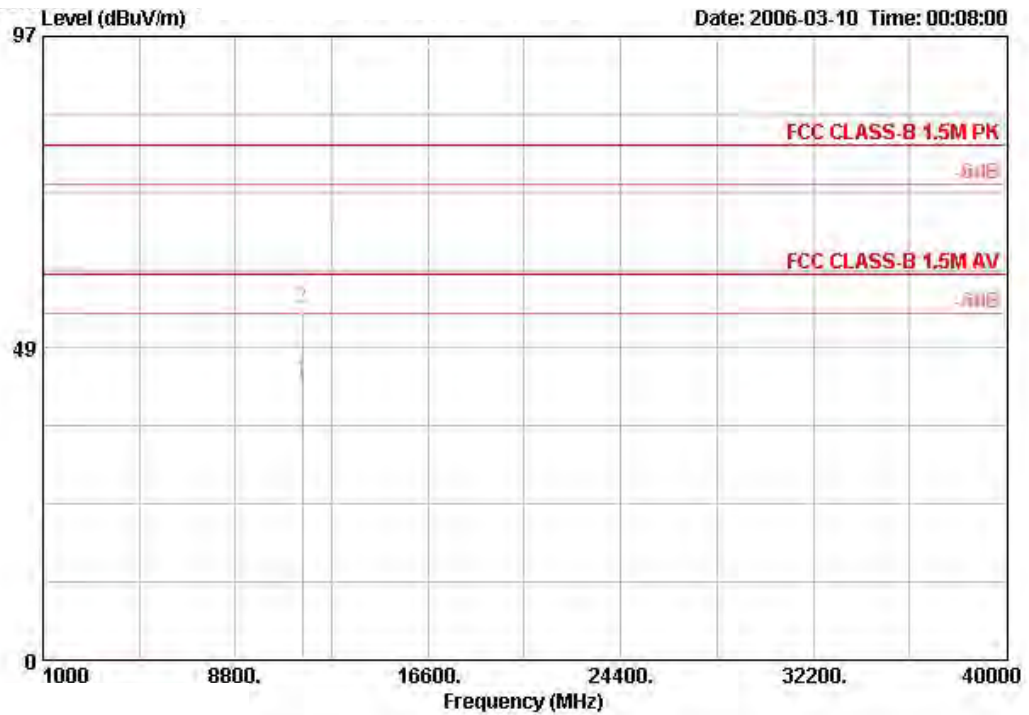

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBUV/m	dB	dBUV/m	dB/m	dB	dB	dBUV		cm	deg
1 @	11521.560	43.32	-16.68	60.00	39.20	7.01	35.11	32.22	AVERAGE	101	311
2 @	11521.560	54.77	-25.23	80.00	39.20	7.01	35.11	43.67	PEAK	101	311

Horizontal

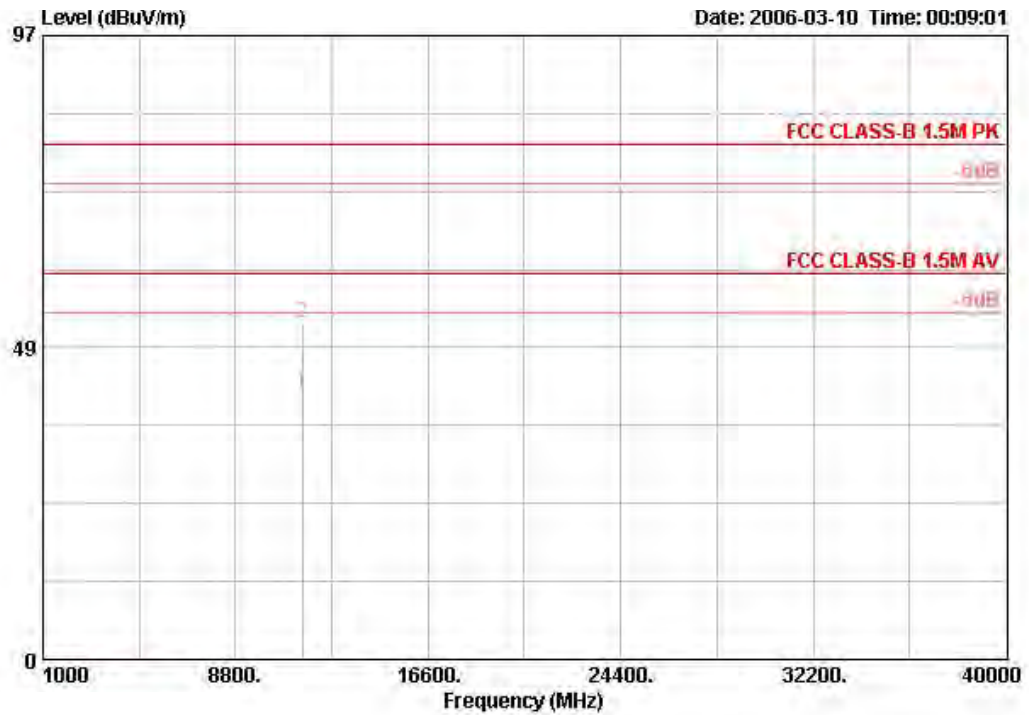


	Over	Limit	Antenna	Cable	Preamp	Read		Ant	Table		
Freq	Level	Limit	Line	Factor	Loss	Factor	Level	Pos	Pos		
MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV	cm	deg		
1 @	11521.640	41.45	-18.55	60.00	39.20	7.01	35.11	30.35	AVERAGE	100	56
2 @	11521.640	52.22	-27.78	80.00	39.20	7.01	35.11	41.12	PEAK	100	56




<b>Temperature</b>	24°C	<b>Humidity</b>	64%
<b>Test Engineer</b>	Rush Kao	<b>Configurations</b>	802.11a Turbo Channel 160 / Ant. 11

Vertical

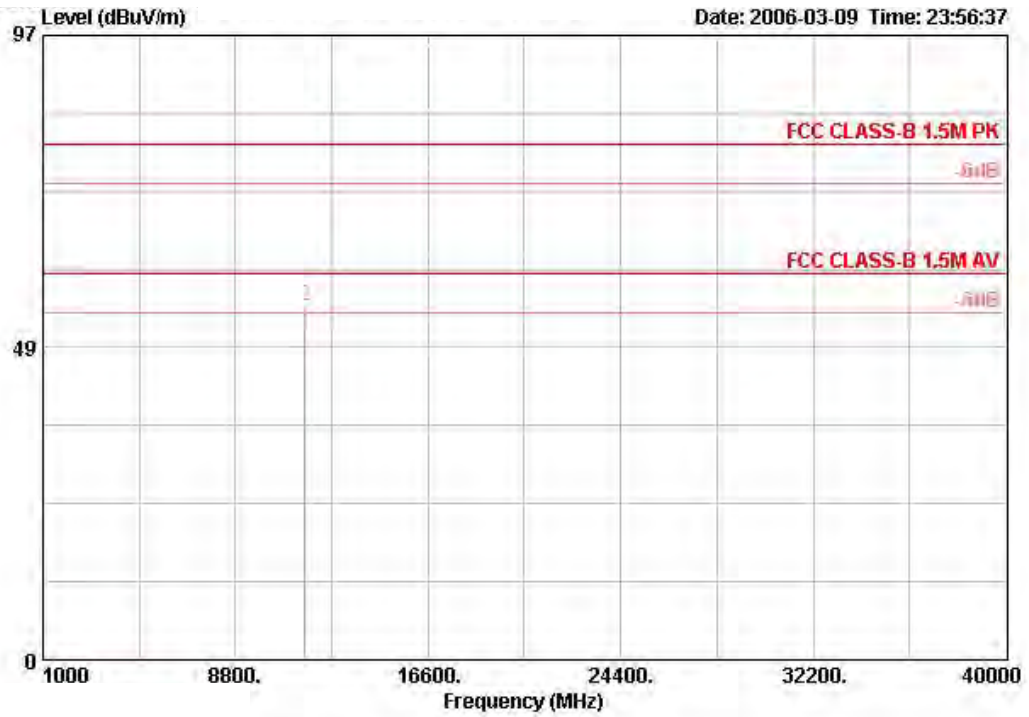

	Freq	Level	Over Limit	Antenna Line	Antenna Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBUV/m	dB	dBuV/m	dB/m	dB	dB	dBUV		cm	deg
1 @	11597.560	45.27	-14.73	60.00	39.22	7.10	35.14	34.09	AVERAGE	100	311
2 @	11597.560	55.11	-24.89	80.00	39.22	7.10	35.14	43.93	PEAK	100	311

Horizontal

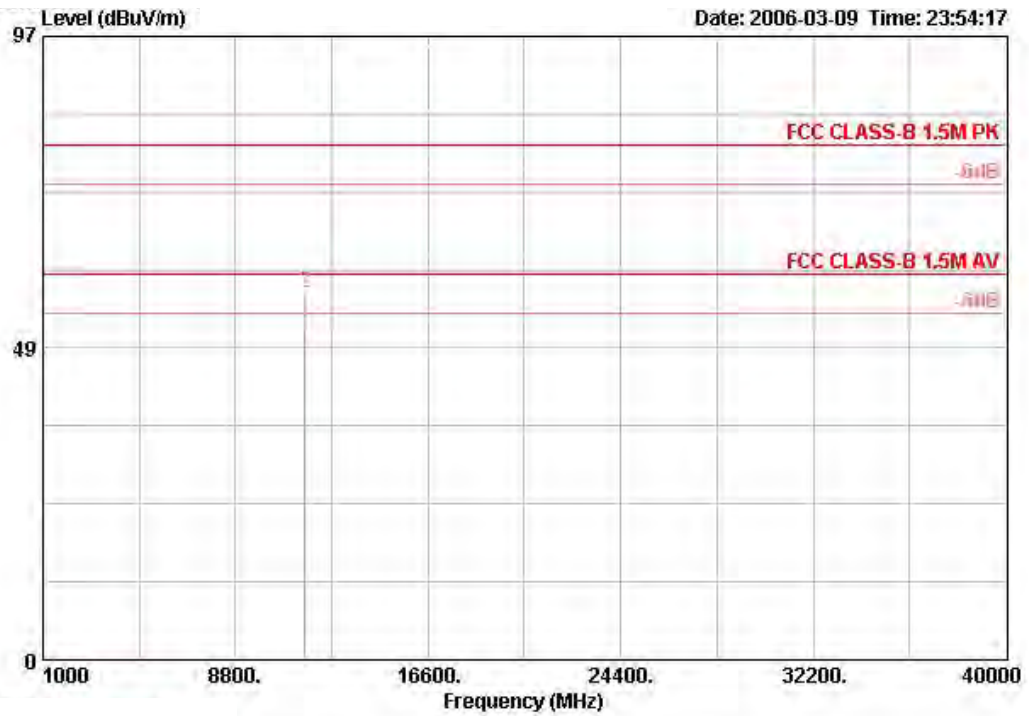

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1 @	11597.520	43.87	-16.13	60.00	39.22	7.10	35.14	32.69	AVERAGE	100	56
2 @	11597.520	57.06	-22.94	80.00	39.22	7.10	35.14	45.88	PEAK	100	56

Note:


The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

<b>Temperature</b>	24°C	<b>Humidity</b>	64%
<b>Test Engineer</b>	Rush Kao	<b>Configurations</b>	802.11a Channel 149 / Ant. 12


Vertical

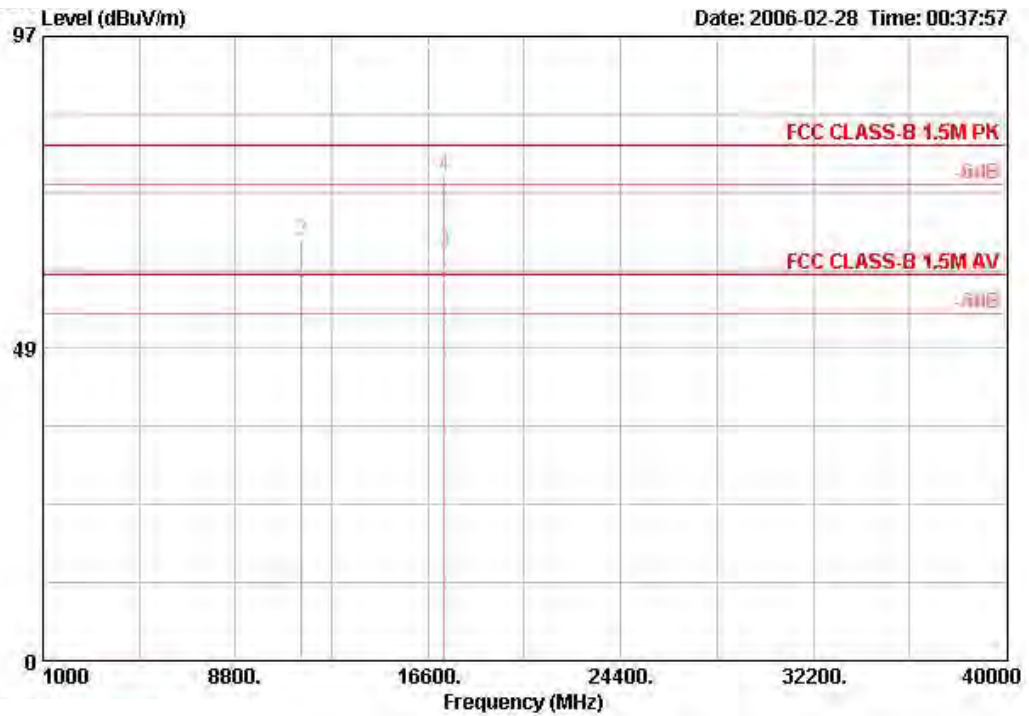

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1 @	11489.300	55.31	-4.69	60.00	39.20	6.96	35.10	44.25	AVERAGE	102	242
2 @	11489.300	65.34	-14.66	80.00	39.20	6.96	35.10	54.28	PEAK	102	242
3 @	17233.520	63.49			40.93	18.15	35.00	39.42	AVERAGE	100	313
4 @	17235.600	75.35	-4.65	80.00	40.93	18.15	35.00	51.27	PEAK	100	313

Note: Item 3 is on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission.

Horizontal

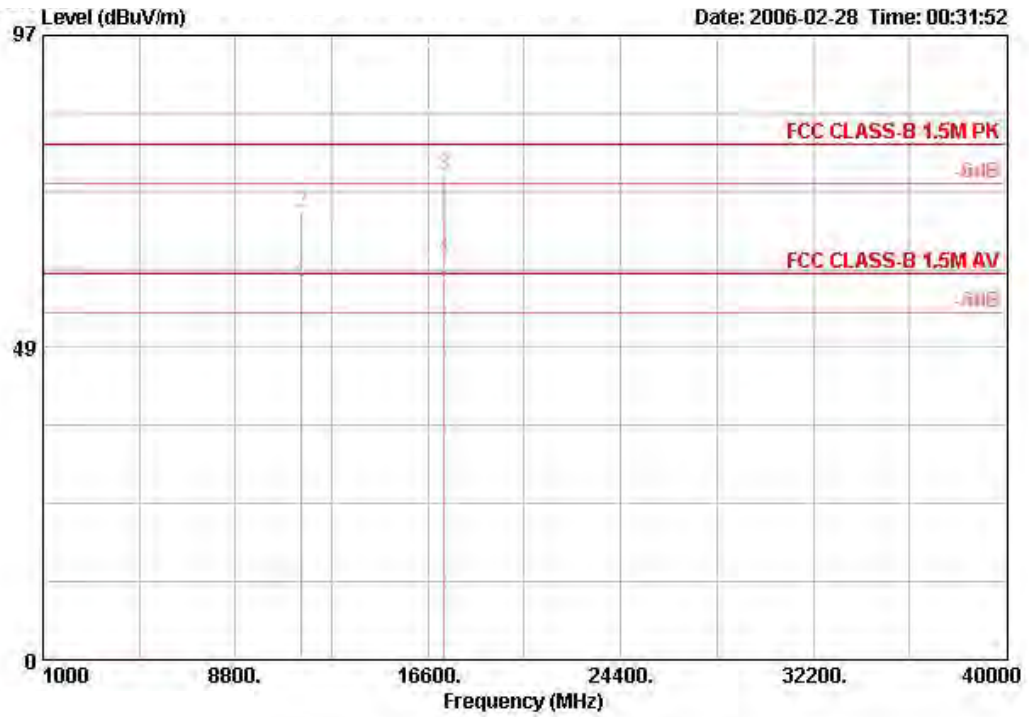


	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1 @	11488.080	58.47	-1.53	60.00	39.20	6.96	35.10	47.41	AVERAGE	102	3
2 @	11488.080	69.54	-10.46	80.00	39.20	6.96	35.10	58.48	PEAK	102	3
3 @	17232.880	75.44	-4.56	80.00	40.93	18.15	35.00	51.36	PEAK	100	280
4 @	17241.680	62.28			40.93	18.15	35.00	38.20	AVERAGE	100	280

Note: Item 4 is on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission.

Temperature	24°C	Humidity	64%
Test Engineer	Rush Kao	Configurations	802.11a Channel 157 / Ant. 12


Vertical

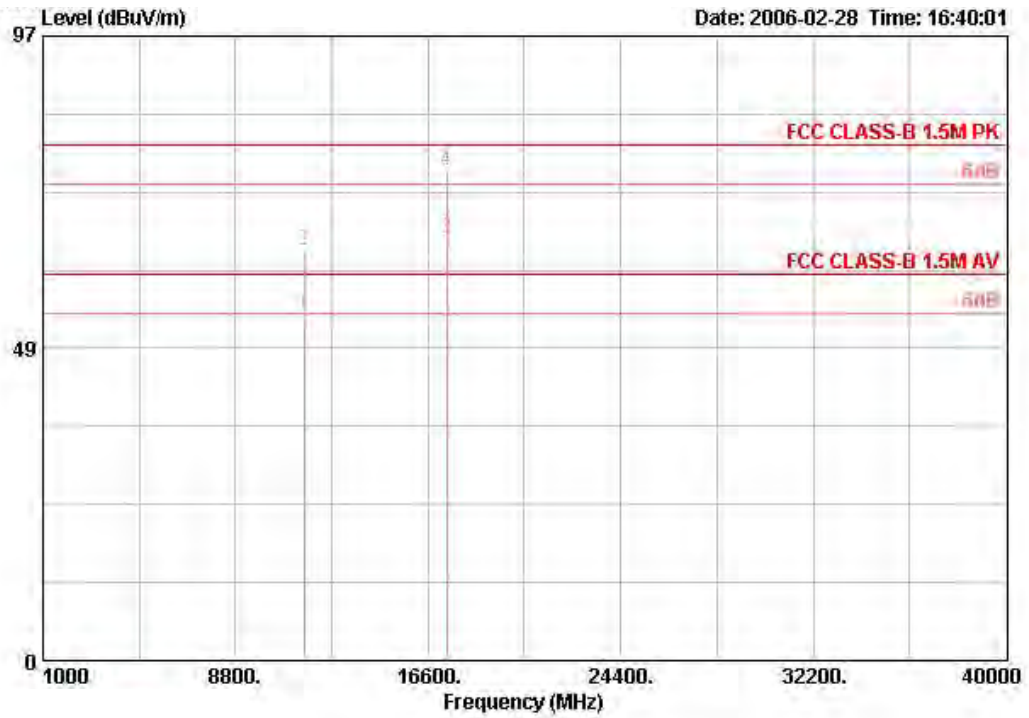

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1 @	11570.080	53.92	-6.08	60.00	39.21	7.06	35.13	42.78	AVERAGE	111	240
2 @	11570.080	63.82	-16.18	80.00	39.21	7.06	35.13	52.68	PEAK	111	240
3 @	17359.160	65.45			41.44	17.41	35.05	41.66	AVERAGE	106	260
4 @	17359.160	76.11	-3.89	80.00	41.44	17.41	35.05	52.32	PEAK	106	260

Note: Item 3 is on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission.

Horizontal

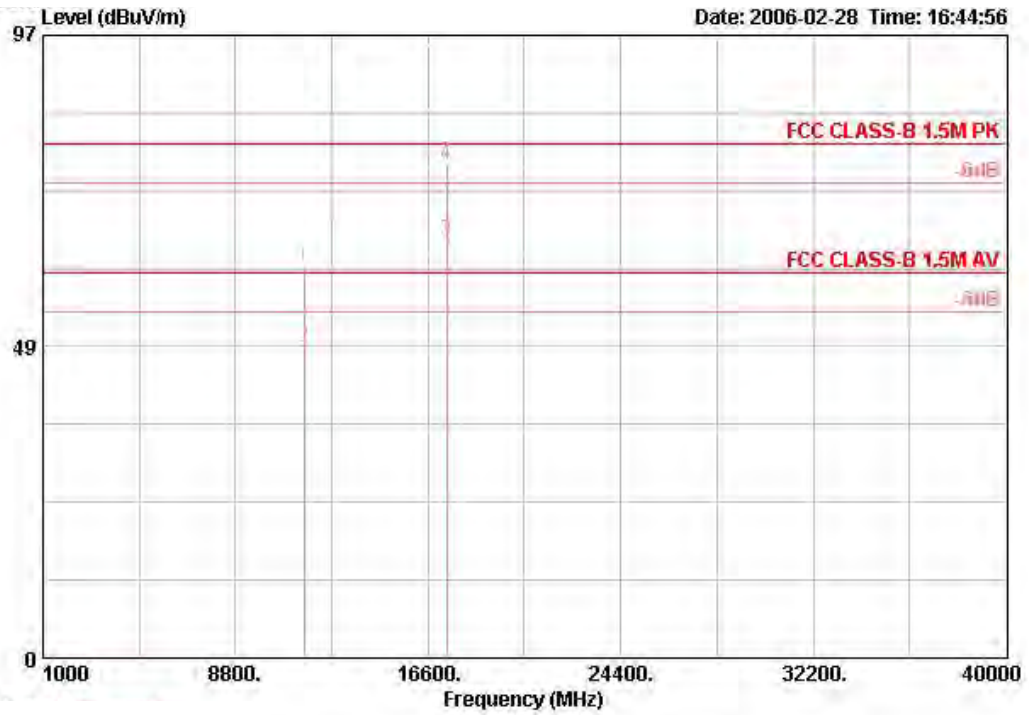


	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1 @	11572.800	61.11	-18.89	80.00	39.21	7.06	35.13	49.97	PEAK	126	320
2 @	11573.320	48.33	-11.67	60.00	39.21	7.06	35.13	37.20	AVERAGE	126	320
3 @	17359.160	64.98			41.44	17.41	35.05	41.19	AVERAGE	126	293
4 @	17359.160	76.83	-3.17	80.00	41.44	17.41	35.05	53.03	PEAK	126	293

Note: Item 3 is on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission.



Temperature	24°C	Humidity	64%
Test Engineer	Rush Kao	Configurations	802.11a Channel 165 / Ant. 12


Vertical

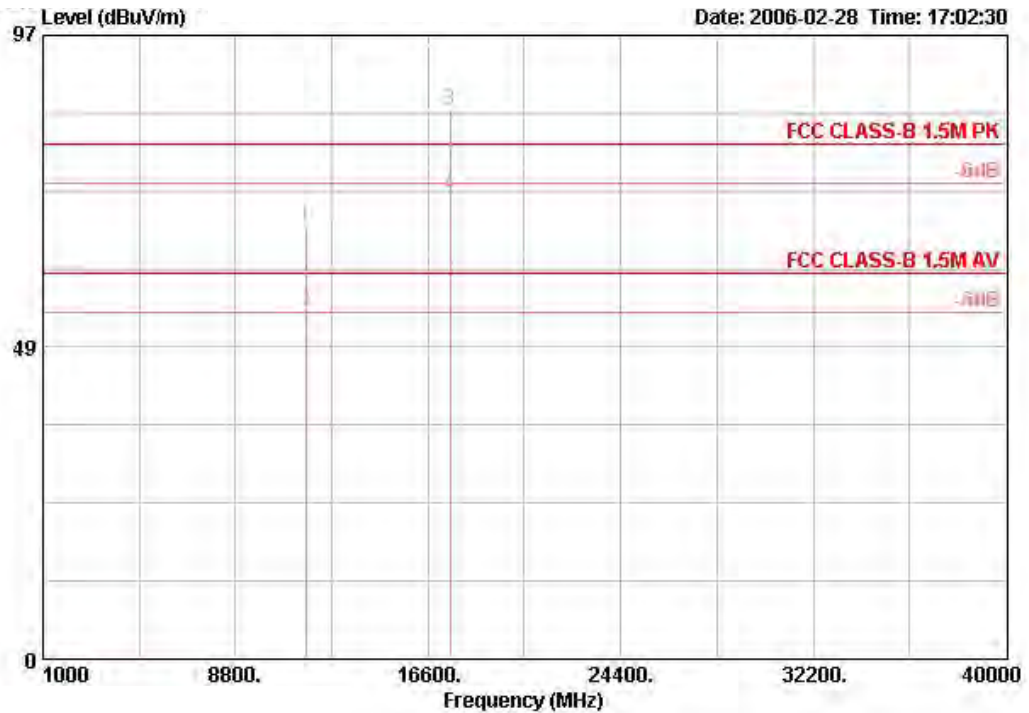

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1 @	11654.040	67.05	-12.95	80.00	39.23	7.15	35.16	55.83	PEAK	122	244
2 @	11656.160	54.22	-5.78	60.00	39.23	7.15	35.16	43.00	AVERAGE	122	244
3 @	17477.680	85.28			41.95	16.42	35.09	62.00	PEAK	120	241
4 @	17480.400	72.21			41.95	16.42	35.09	48.93	AVERAGE	120	241

Note: Item 3, 4 are on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission.

Horizontal

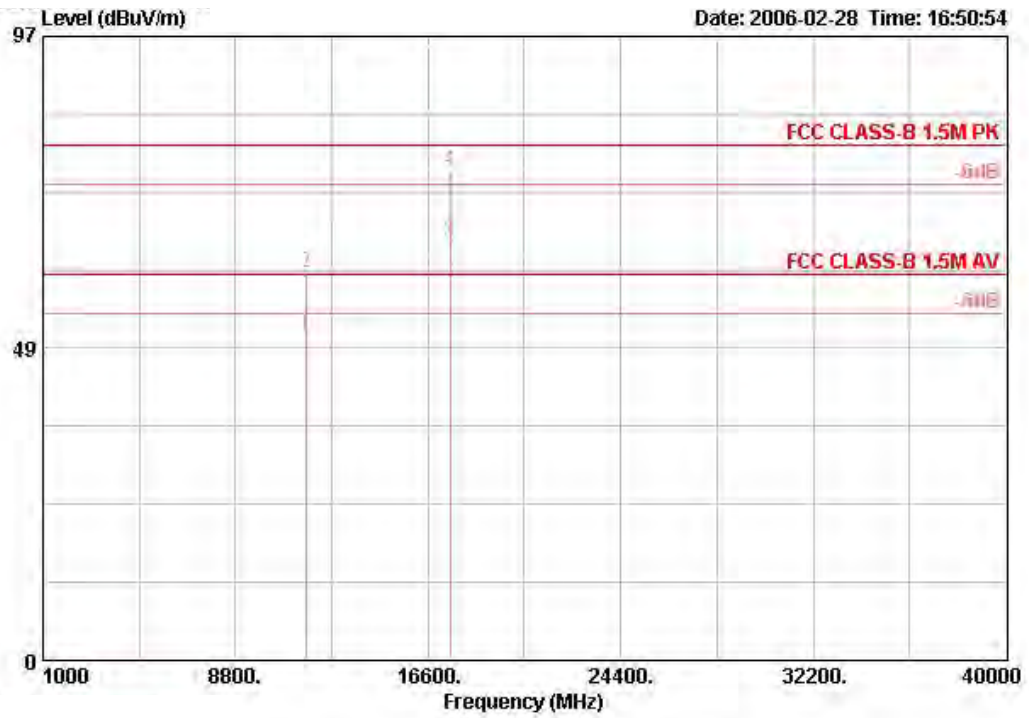


	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1 @	11650.160	50.16	-9.84	60.00	39.23	7.15	35.16	38.94	AVERAGE	134	306
2 @	11650.160	60.30	-19.70	80.00	39.23	7.15	35.16	49.09	PEAK	134	306
3 @	17476.680	64.96			41.95	16.66	35.09	41.43	AVERAGE	139	268
4 @	17476.680	76.23	-3.77	80.00	41.95	16.66	35.09	52.70	PEAK	139	268

Note: Item 3 is on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission.

Temperature	24°C	Humidity	64%
Test Engineer	Rush Kao	Configurations	802.11a Turbo Channel 152 / Ant. 12


Vertical

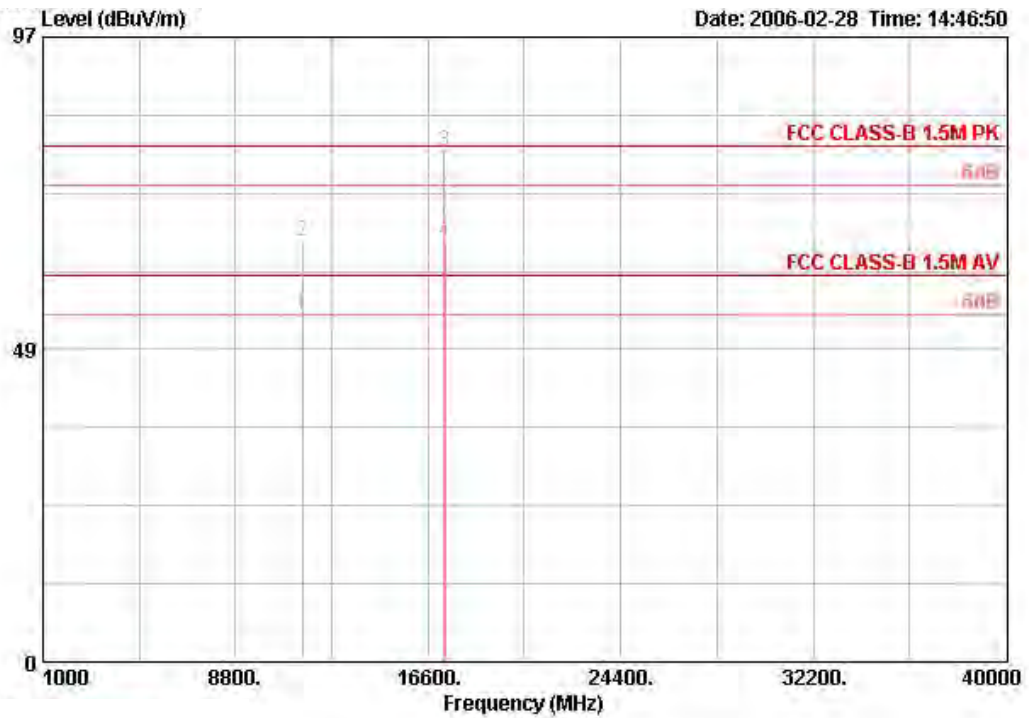

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBUV/m	dB	dBUV/m	dB/m	dB	dB	dBUV		cm	deg
1 @	11518.400	53.80	-6.20	60.00	39.20	7.01	35.10	42.69	AVERAGE	112	239
2 @	11518.400	65.37	-14.63	80.00	39.20	7.01	35.10	54.26	PEAK	112	239
3 @	17258.800	79.20	-0.80	80.00	41.00	17.90	35.01	55.30	PEAK	122	312
4 @	17272.400	65.38			41.07	17.90	35.01	41.41	AVERAGE	122	312

Note: Item 4 is on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission.

Horizontal

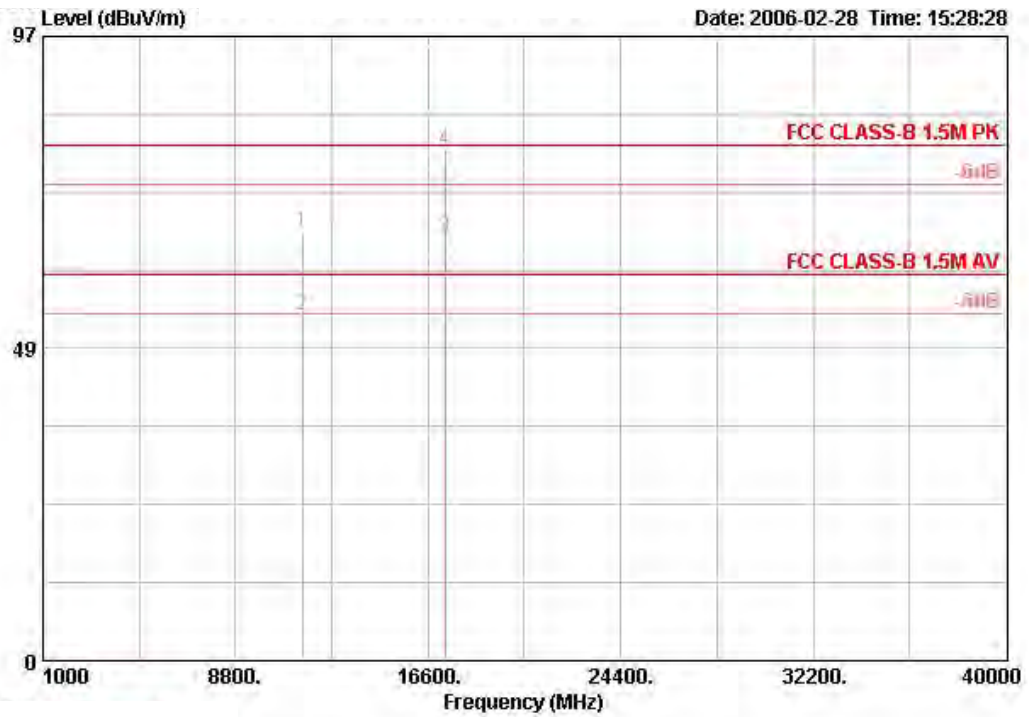


	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1 @	11518.900	66.61	-13.39	80.00	39.20	7.01	35.11	55.51	PEAK	100	280
2 @	11519.100	53.70	-6.30	60.00	39.20	7.01	35.11	42.60	AVERAGE	100	280
3 @	17275.300	65.70			41.07	17.90	35.01	41.73	AVERAGE	100	280
4 @	17276.200	79.28	-0.72	80.00	41.07	17.90	35.01	55.31	PEAK	100	280

Note: Item 3 is on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission.

<b>Temperature</b>	24°C	<b>Humidity</b>	64%
<b>Test Engineer</b>	Rush Kao	<b>Configurations</b>	802.11a Turbo Channel 160 / Ant. 12


Vertical

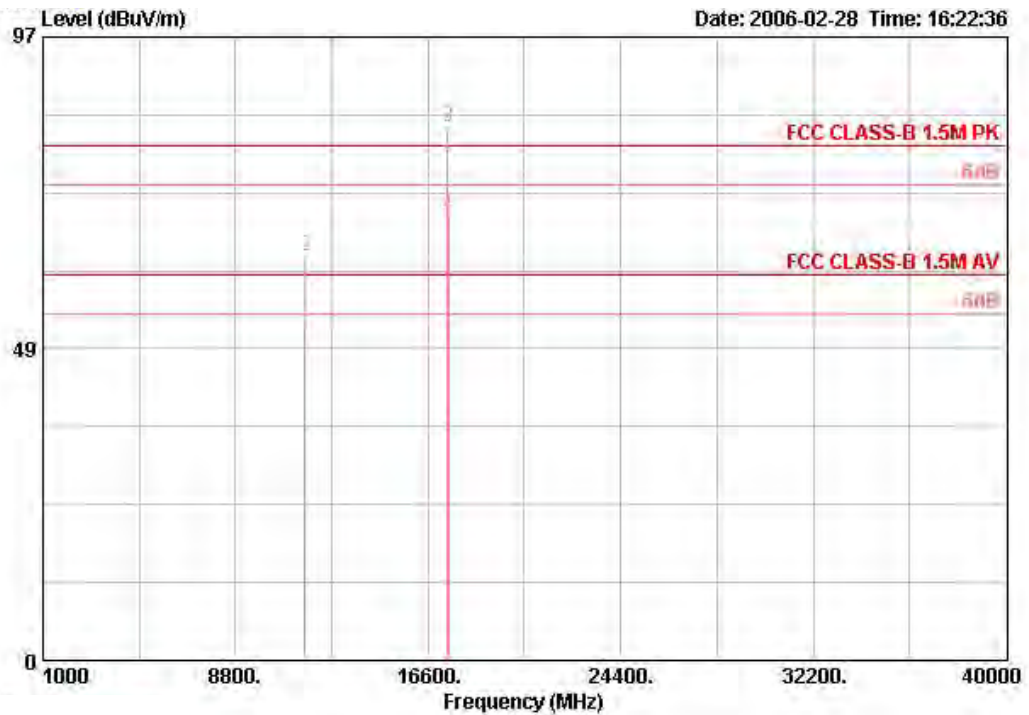

	Over	Limit	Antenna	Cable	Preamp	Read	Ant	Table			
Freq	Level	Limit	Line Factor	Loss Factor	Loss Factor	Level Remark	Pos	Pos			
MHz	dBUV/m	dB	dBUV/m	dB/m	dB	dB	cm	deg			
1 @	11602.100	49.98	-10.02	60.00	39.22	7.10	35.14	38.80	AVERAGE	125	247
2 @	11602.600	62.81	-17.19	80.00	39.22	7.10	35.14	51.63	PEAK	125	247
3 @	17391.500	82.87			41.59	17.16	35.06	59.18	PEAK	126	318
4 @	17407.100	69.13			41.66	16.91	35.06	45.62	AVERAGE	126	318

Note: Item 3, 4 are on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission.

Horizontal

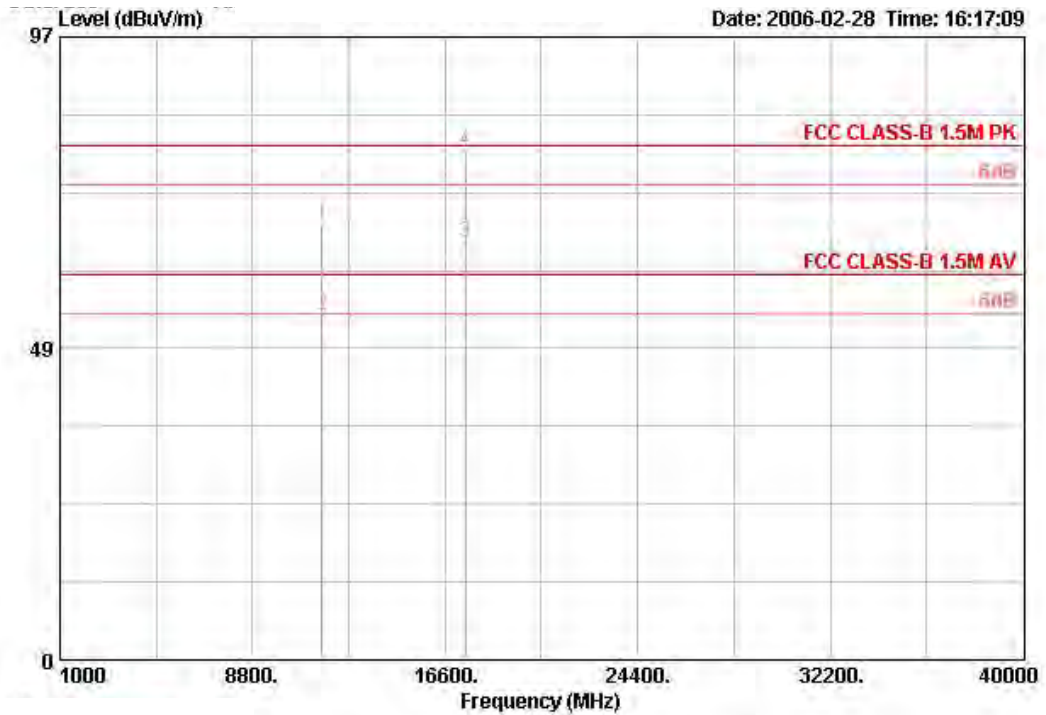

	Freq	Level	Over Limit	Limit	Antenna Line	Antenna Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dB	dBuV		cm	deg
1 @	11602.100	68.03	-11.97	80.00	39.22	7.10	35.14	56.85	PEAK		100	282
2 @	11602.300	53.72	-6.28	60.00	39.22	7.10	35.14	42.53	AVERAGE		100	282
3 @	17407.300	64.95			41.66	16.91	35.06	41.44	AVERAGE		100	276
4 @	17413.000	79.26	-0.74	80.00	41.66	16.91	35.07	55.76	PEAK		100	276

Note: Item 3 is on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission.

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.


Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.




Temperature	24°C	Humidity	64%
Test Engineer	Rush Kao	Configurations	802.11a Channel 149 / Ant. 13

Vertical

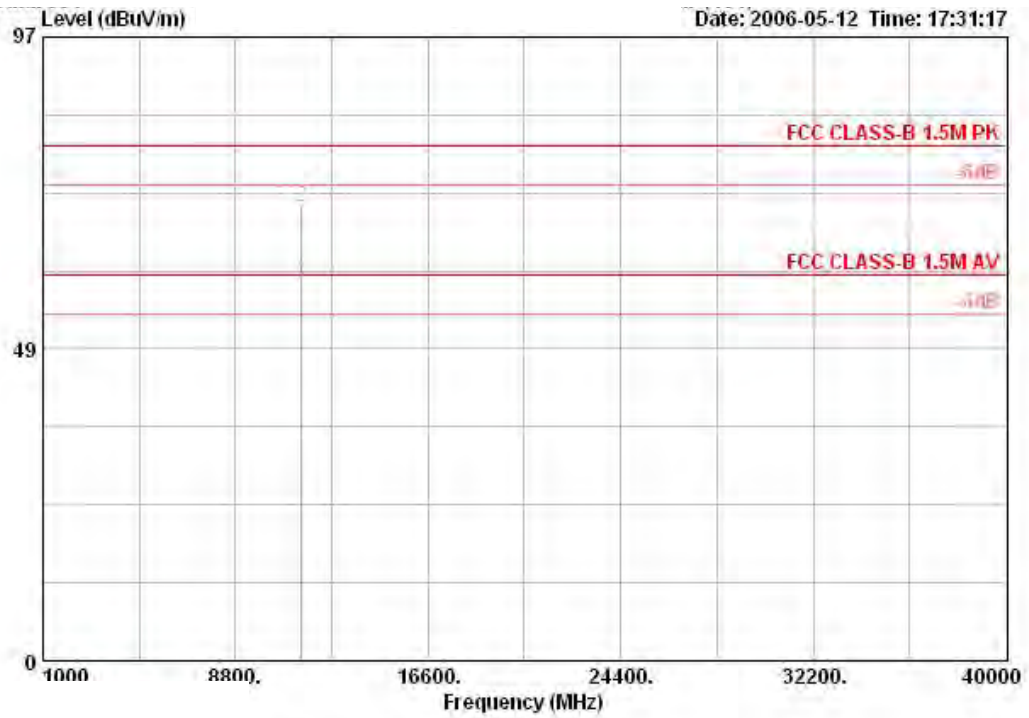

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	11489.000	59.76	-0.24	60.00	39.20	6.96	35.10	48.70	AVERAGE	102	344
2	11489.000	70.59	-9.41	80.00	39.20	6.96	35.10	59.53	PEAK	102	344


Horizontal

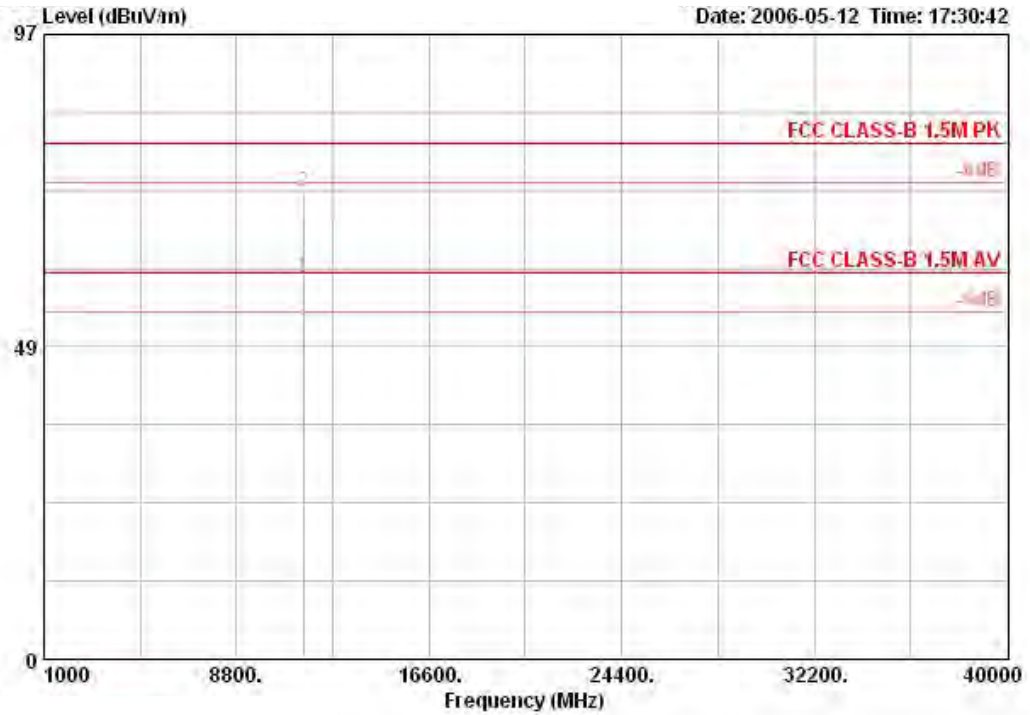

	Over	Limit	Antenna	Cable	Preamp	Read		Ant	Table		
	Freq	Level	Line	Factor	Loss	Factor	Level	Pos	Pos		
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dBuV	cm	deg		
1 @	11490.700	59.28	-0.72	60.00	39.20	6.96	35.10	48.22	AVERAGE	102	344
2	11490.700	72.47	-7.53	80.00	39.20	6.96	35.10	61.41	PEAK	102	344


Temperature	24°C	Humidity	64%
Test Engineer	Rush Kao	Configurations	802.11a Channel 157 / Ant. 13

Vertical

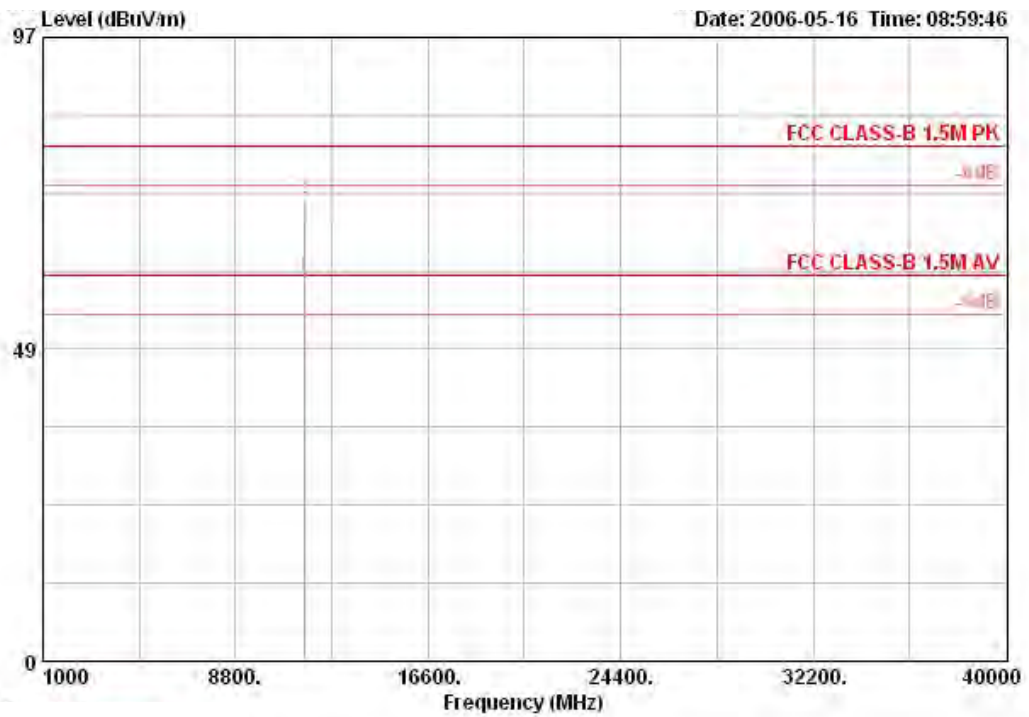

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1 @	11570.440	59.85	-0.15	60.00	39.21	7.06	35.13	48.72	AVERAGE	100	44
2	11570.440	71.93	-8.07	80.00	39.21	7.06	35.13	60.79	PEAK	100	44


Horizontal

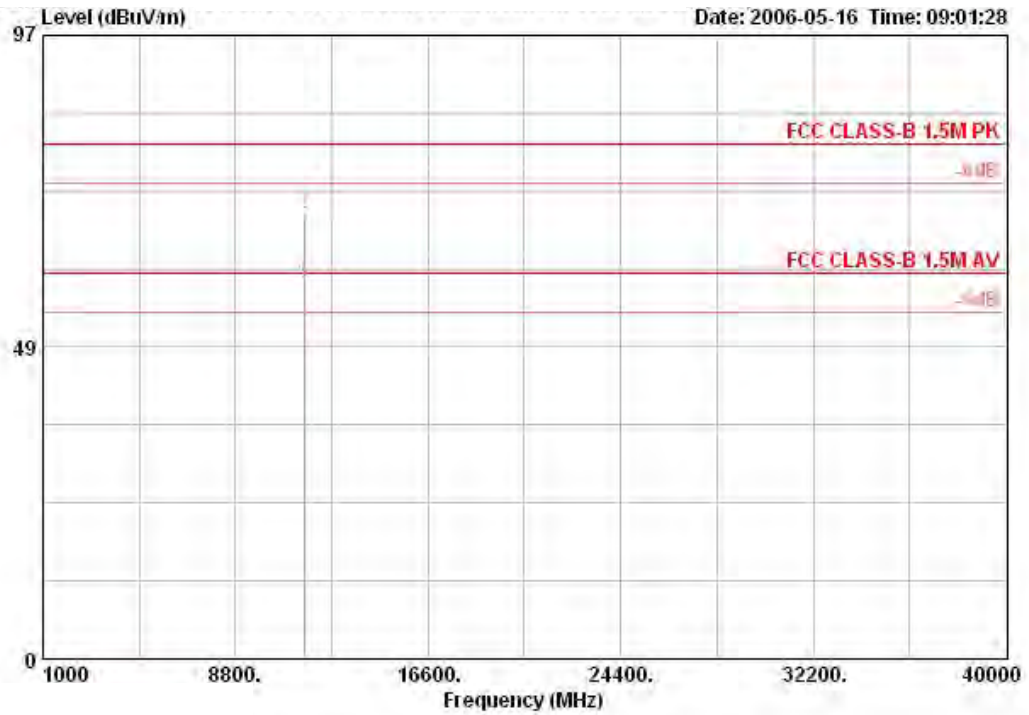

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1 @	11571.800	58.32	-1.68	60.00	39.21	7.06	35.13	47.18	AVERAGE	100	322
2	11571.800	69.12	-10.88	80.00	39.21	7.06	35.13	57.98	PEAK	100	322


Temperature	24°C	Humidity	64%
Test Engineer	Rush Kao	Configurations	802.11a Channel 165 / Ant. 13

Vertical

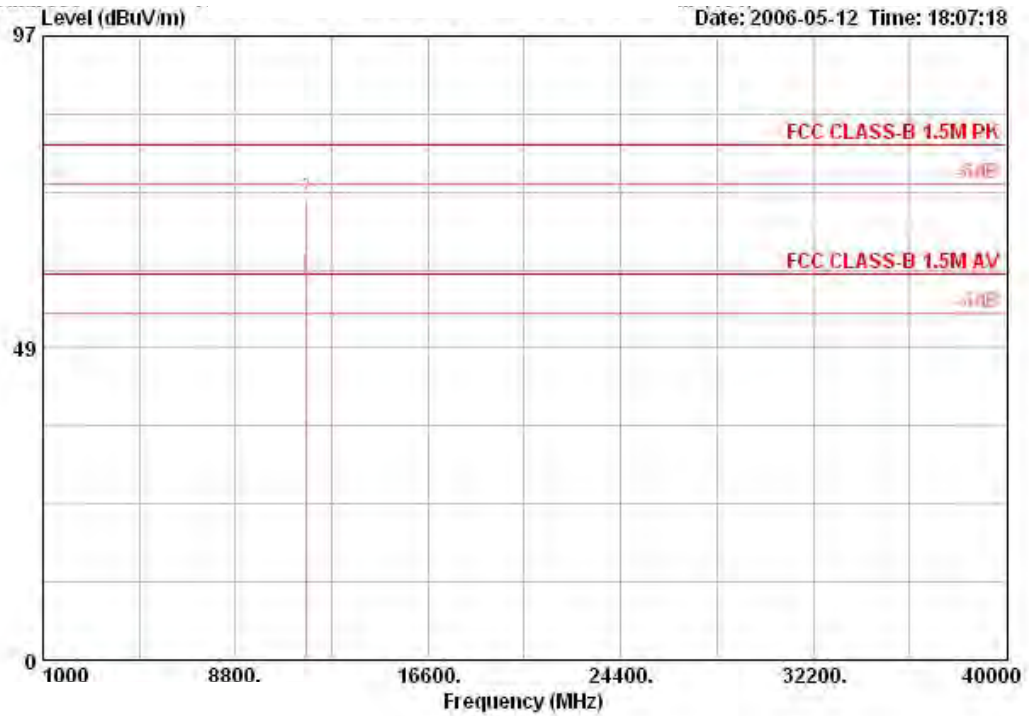

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	11650.960	59.83	-0.17	60.00	39.23	7.15	35.16	48.62	AVERAGE	110	347
2	11650.960	71.65	-8.35	80.00	39.23	7.15	35.16	60.44	PEAK	110	347

Horizontal

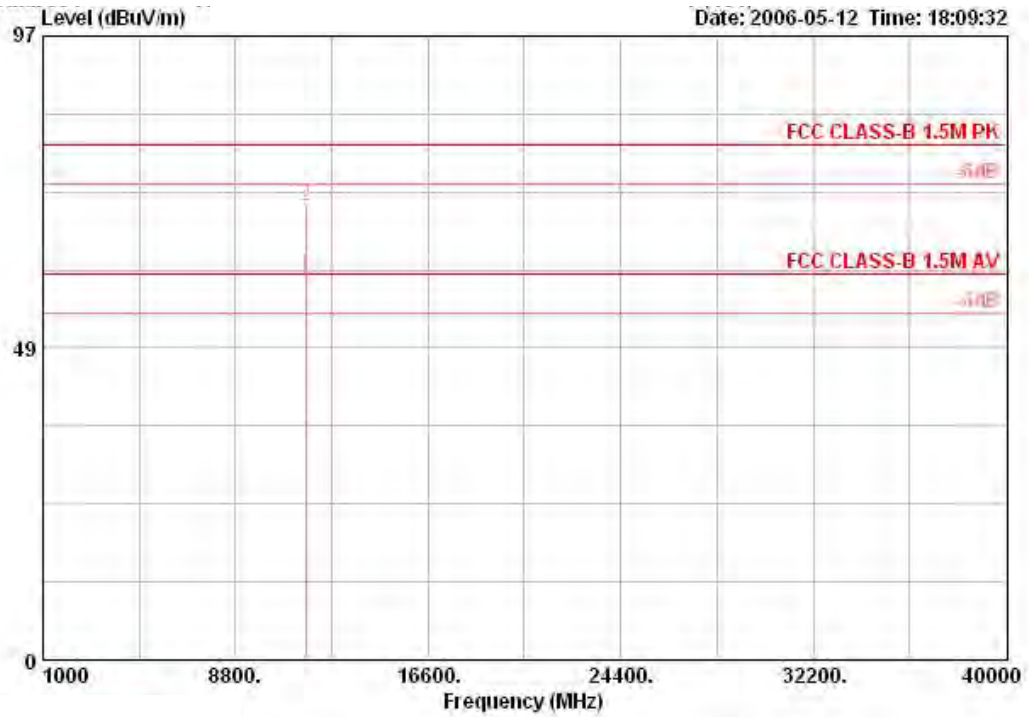


	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	11650.840	59.84	-0.16	60.00	39.23	7.15	35.16	48.62	AVERAGE	100	24
2	11650.840	70.47	-9.53	80.00	39.23	7.15	35.16	59.25	PEAK	100	24




Temperature	24°C	Humidity	64%
Test Engineer	Rush Kao	Configurations	802.11a Turbo Channel 152 / Ant. 13

Vertical

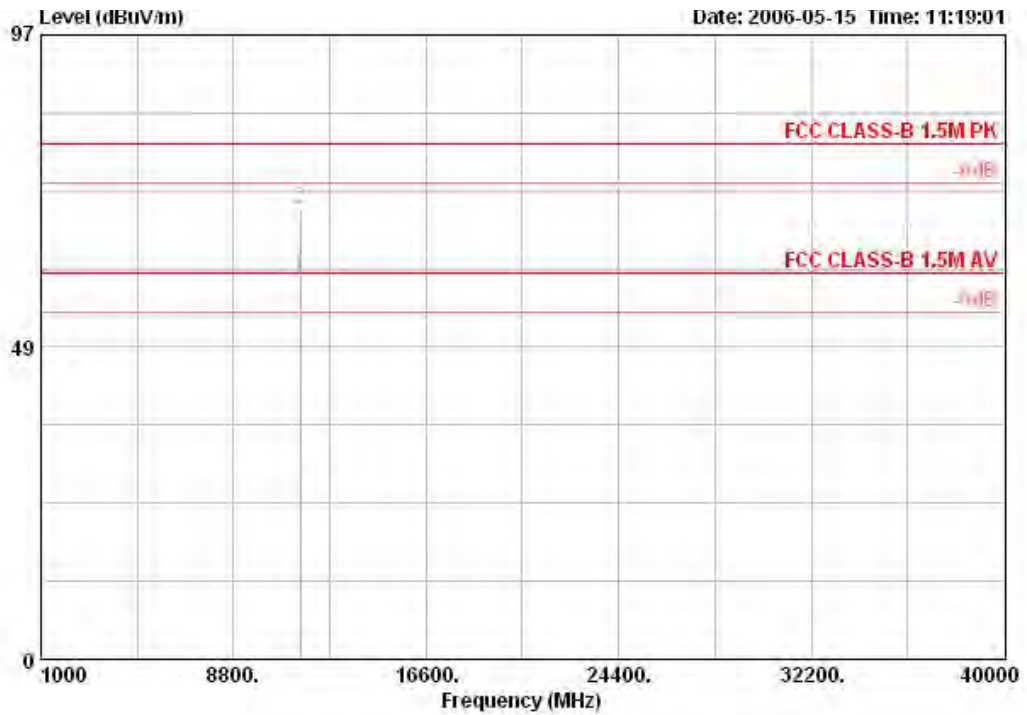

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	11519.400	59.80	-0.20	60.00	39.20	7.01	35.11	48.70	AVERAGE	100	341
2	11519.400	69.92	-10.08	80.00	39.20	7.01	35.11	58.82	PEAK	100	341

Horizontal

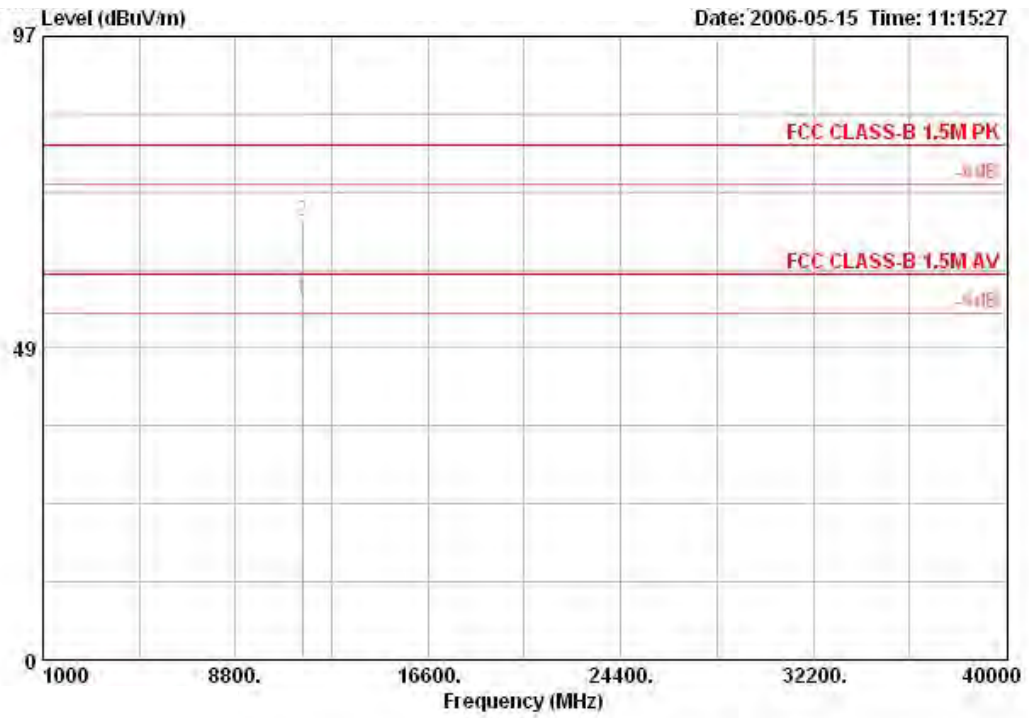

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	11521.300	56.18	-3.82	60.00	39.20	7.01	35.11	45.08	AVERAGE	100	60
2	11521.300	68.32	-11.68	80.00	39.20	7.01	35.11	57.22	PEAK	100	60