

FCC Test Report

Product Name : Handheld Terminal

Brand Name : KEYENCE

Model No. : DX-W600

FCC ID : RF41539G

Applicant : Keyence Corporation

Address : 1-3-14 Higashinakajima, Higashiyodagawa-ku Osaka
533-8555 Japan

Date of Receipt : May 23, 2022

Issued Date : Jul. 21, 2022

Report No. : 2250673R-RFUSOTHV03-A

Report Version : V1.0



The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by TAF or any agency of the government.

Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system, but are based on the results of the compliance measurement.

The test report shall not be reproduced except in full without the written approval of DEKRA Testing and Certification Co., Ltd.



Product Name : Handheld Terminal
Applicant : Keyence Corporation
Address : 1-3-14 Higashinakajima, Higashiyodagawa-ku Osaka 533-8555
Japan
Manufacturer : KEYENCE CORPORATION
Address : 1-3-14 Higashinakajima, Higashiyodagawa-ku Osaka 533-8555
Japan
Brand Name : KEYENCE
Model No. : DX-W600
FCC ID : RF41539G
EUT Voltage : DC 5V (host equipment)
DC 3.8V (li-ion battery)
Testing Voltage : AC 120V/60Hz
Applicable Standard : FCC CFR Title 47 Part 15 Subpart C Section 15.225
ANSI C63.10: 2013
Laboratory Name : DEKRA Testing and Certification Co., Ltd.
Hsin Chu Laboratory
Address : No.372-2, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu
County 310, Taiwan, R.O.C.
Test Result : Complied

Documented By : Amelia Wu
(Amelia Wu / Project Specialist)

Approved By : Rueyyan Lin
(Rueyyan Lin / Supervisor)

The test results relate only to the samples tested.
The test report shall not be reproduced except in full without the written approval of DEKRA
Testing and Certification Co., Ltd.

Revision History

Version	Description	Issued Date
V1.0	Initial issue of report	Jul. 21, 2022

TABLE OF CONTENTS

Description	Page
1. General Information	6
1.1. EUT Description	6
1.2. Test Mode.....	7
1.3. Comments and Remarks	7
1.4. Tested System Details	8
1.5. Configuration of tested System.....	8
1.6. EUT Operation of during Test	8
1.7. Test Facility	9
1.8. List of Test Equipment	10
1.9. Measurement Uncertainty.....	11
2. AC Power Line Conducted Emission	12
2.1. Test Setup	12
2.2. Test Limit	12
2.3. Test Procedure	12
2.4. Test Specification	12
2.5. Test Result of AC Power Line Conducted Emission	13
3. Emission Bandwidth.....	15
3.1. Test Setup	15
3.2. Test Limit	15
3.3. Test Procedures	15
3.4. Test Specification	15
3.5. Test Result of Emission Bandwidth.....	16
4. Field Strength of Fundamental Emissions and Spectrum Mask	17
4.1. Test Setup	17
4.2. Test Limit	17
4.3. Test Procedure	18
4.4. Test Specification	18
4.5. Test Result of Field Strength of Fundamental Emissions	19
4.6. Test Result of Spectrum Mask	22
5. Radiated Emission	23
5.1. Test Setup	23
5.2. Test Limit	24
5.3. Test Procedure	24
5.4. Test Specification	25
5.5. Test Result of Radiated Emissions	26
6. Frequency Stability	28

6.1.	Test Setup	28
6.2.	Test Limit	28
6.3.	Test Procedures	28
6.4.	Test Specification	28
6.5.	Test Result of Frequency Stability.....	29
Appendix A	30
	Test Setup Photograph	30

1. General Information

1.1. EUT Description

Product Name	Handheld Terminal
Brand Name	KEYENCE
Model No.	DX-W600
Frequency	13.56 MHz
Channel Number	1 Channel
Type of Modulation	ASK

Accessories Information				
No.	Equipment Name	Brand Name	Model No.	Rating
1	Li-ion Battery	KEYENCE	DX-BQ6	3.8Vdc (23.02Wh), 6060mAh

Antenna Information				
Ant.	Brand Name	Model No.	Type	Gain (dBi)
0	INPAQ Technology Co., Ltd.	RFNFC311800NNFB001	Integrated	0

Working Frequency of Each Channel	
Channel	Frequency
01	13.56 MHz

Note: The above EUT information is declared by the manufacturer.

1.2. Test Mode

DEKRA has verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:

Test Mode	Mode 1: Transmit
-----------	------------------

Test Items	Test Mode	Modulation	Result
AC Power Line Conducted Emission	Mode 1	ASK	Pass
20dB Bandwidth	Mode 1	ASK	Pass
Field Strength of Fundamental Emissions and Spectrum Mask	Mode 1	ASK	Pass
Radiated Emission	Mode 1	ASK	Pass
Frequency Tolerance	Mode 1	ASK	Pass

Note: Determining compliance shall be based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

1.3. Comments and Remarks


The product specification and testing instructions for the EUT declared in the report are provided by the manufacturer who will take all responsibilities for the accuracy.

1.4. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system.

	Product	Manufacturer	Model No.	Serial No.
1	Adapter	ASUS	PA-1070-07	N/A
2	Easy Card	Easy Card	N/A	N/A

1.5. Configuration of tested System

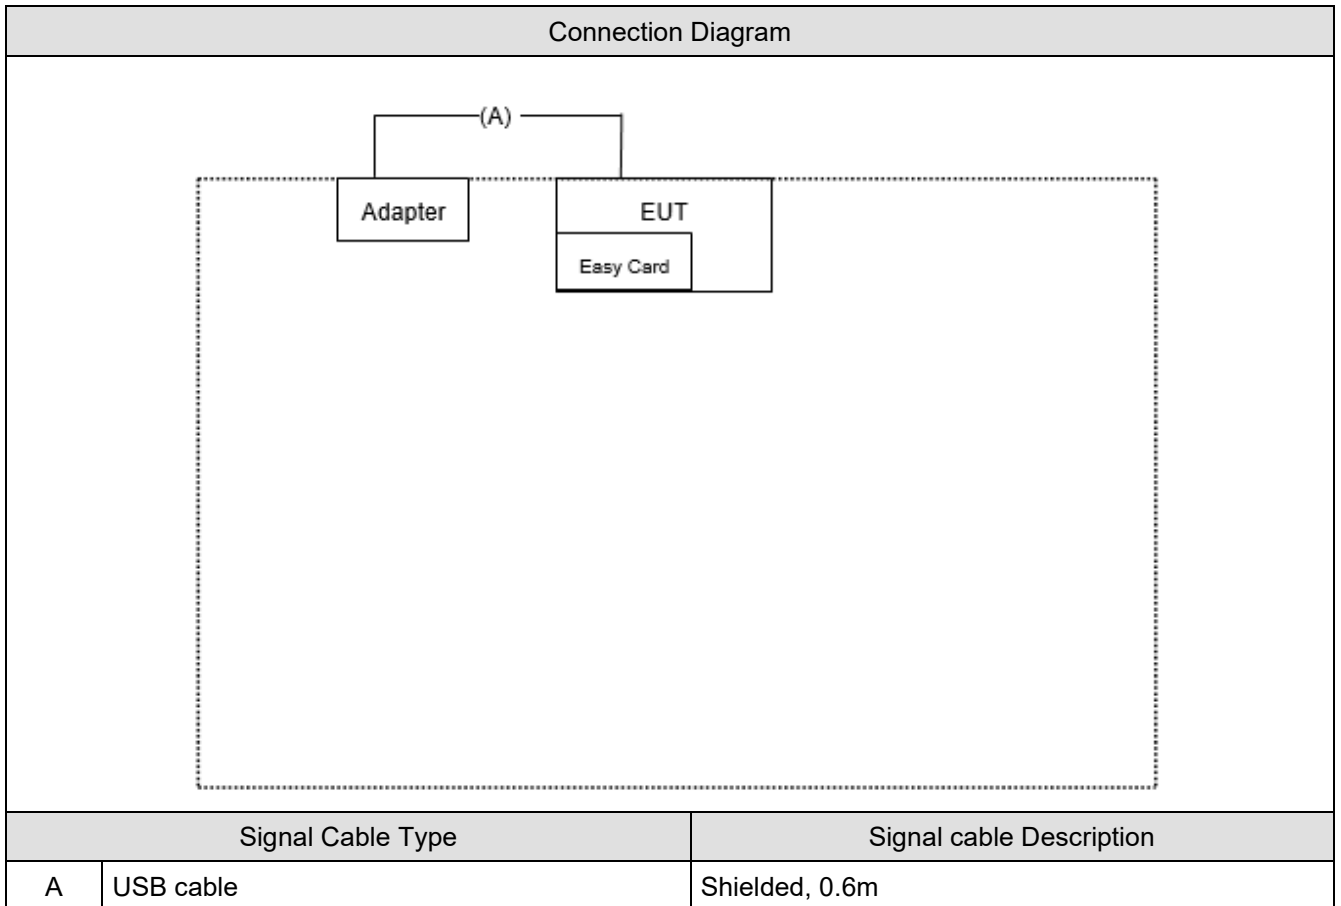

1.6. EUT Operation of during Test

1	Set the EUT as shown.
2	EUT power on.
3	Make the EUT to start the continuous transmitting.
4	Verify that device is working properly.

1.7. Test Facility

Ambient conditions in the laboratory:

Items	Test Item	Actually	Tested by	Test Date	Test Site
Temperature (°C)	AC Power Line Conducted Emission	23.9	Ling Chen	2022/06/07	HC-SR02
Humidity (%RH)		60			
Temperature (°C)	Emission Bandwidth	24.1	Ling Chen	2022/06/01	HC-CB04
Humidity (%RH)		61			
Temperature (°C)	Field Strength of Fundamental Emissions and Spectrum Mask	24.1	Ling Chen	2022/06/01	HC-CB04
Humidity (%RH)		61			
Temperature (°C)	Radiated Emission	24.1	Ling Chen	2022/06/01	HC-CB04
Humidity (%RH)		61			
Temperature (°C)	Frequency Stability	22.5	Scott Chang	2022/07/08	HC-SR12
Humidity (%RH)		61			

Note: Test site information refers to Laboratory Information.

Laboratory Information

USA : FCC Registration Number: TW3024
Canada : CAB identifier : TW3024

The address and introduction of DEKRA Testing and Certification Co., Ltd. laboratories can be founded in our Web site: <http://www.dekra.com.tw>

If you have any comments, please don't hesitate to contact us. Our test sites as below:

Test Laboratory	DEKRA Testing and Certification Co., Ltd.
Address	1. No.372-2, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County 31061, Taiwan, R.O.C. 2. No.372, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County 31061, Taiwan, R.O.C.
Phone number	1. +886-3-582-8001 2. +886-3-582-8001
Fax number	1. +886-3-582-8958 2. +886-3-582-8958
Email address	info.tw@dekra.com
Website	http://www.dekra.com.tw
Note: Test site number for address 1 includes HC-SR02. Test site number for address 2 includes HC-CB02, HC-CB03, HC-CB04, HC-SR10 and HC-SR12.	

1.8. List of Test Equipment

HC-SR02

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
Artificial Mains Network	R&S	ENV4200	848411/010	2021/12/27	2022/12/26
EMI Test Receiver	R&S	ESR3	102608	2022/05/30	2023/05/29
LISN	R&S	ENV216	100092	2022/04/29	2023/04/28
Coaxial Cable(9 m)	Harbour	RG-400	HC-SR02	2021/08/15	2022/08/14
DEKRA Testing System	DEKRA	Version 2.0	HC-SR02	N/A	N/A

HC-SR12

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
Spectrum Analyzer	Keysight	N9030B	MY57140404	2022/05/03	2023/05/02
Spectrum Analyzer	Keysight	N9010B	MY57110159	2022/03/15	2023/03/14
Spectrum Analyzer	Agilent	N9010A	US47140172	2022/05/08	2023/05/07
Signal & Spectrum Analyzer	R&S	FSV40	101049	2022/04/25	2023/04/24

HC-CB04

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
Signal Analyzer	R&S	FSVA40	101455	2021/10/22	2022/10/21
Signal & Spectrum Analyzer	R&S	FSV40	101049	2022/04/25	2023/04/24
Signal and Spectrum Analyzer	R&S	FSVA40	101435	2022/05/30	2023/05/29
EXA Signal Analyzer	Keysight	N9010A	MY51440132	2022/01/07	2023/01/06
Trilog Broadband Antenna	Schwarzbeck	VULB 9168	1272	2022/05/19	2023/05/18
Horn Antenna	Schwarzbeck	BBHA 9120D	01640	2021/09/03	2022/09/02
Horn Antenna	Schwarzbeck	BBHA 9170	203	2022/02/23	2023/02/22
Pre-Amplifier	EMCI	EMC01820I	980365	2022/04/15	2023/04/14
Pre-Amplifier	EMEC	EM01G18GA	060835	2022/07/04	2023/07/03
Pre-Amplifier	DEKRA	AP-400C	201801231	2021/12/24	2022/12/23
Coaxial Cable(10m)	Suhner	SF102_SF104	HC-CB04	2021/08/09	2022/08/08
EMI Test Receiver	R&S	ESR7	102260	2021/12/22	2022/12/21
Magnetic Loop Antenna	Teseq	HLA 6121	44287	2021/09/06	2022/09/05
Radiated Software	AUDIX	e3 V9	HC-CB04	N/A	N/A

Note: All equipment upon which need to calibrated are with calibration period of 1 year.


1.9. Measurement Uncertainty

Uncertainties have been calculated according to the DEKRA internal document with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor ($k=2$)).

Test item	Uncertainty
AC Power Line Conducted Emission	± 2.10 dB
Emission Bandwidth	± 282.55 Hz
Field Strength of Fundamental Emissions and Spectrum Mask	± 3.27 dB
Radiated Emission	± 3.25 dB
Frequency Stability	± 282.55 Hz

2. AC Power Line Conducted Emission

2.1. Test Setup

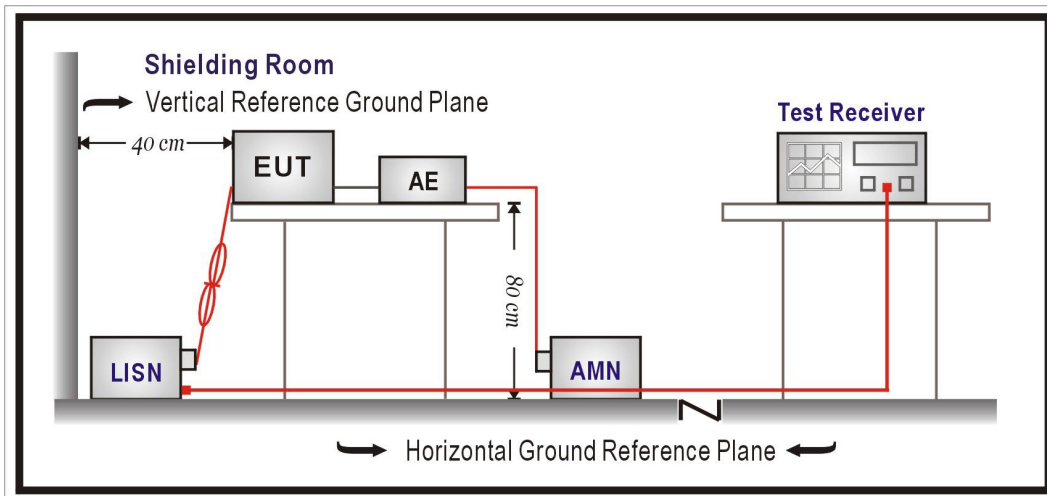

2.2. Test Limit

Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Remarks: In the above table, the tighter limit applies at the band edges.

2.3. Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm /50uH coupling impedance with 50 ohm termination. (Please refer to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.


Conducted emissions were investigated over the frequency range from 0.15 MHz to 30 MHz using a receiver bandwidth of 9 kHz.

2.4. Test Specification

According to FCC Part 15 Subpart C Paragraph 15.207

2.5. Test Result of AC Power Line Conducted Emission

Test Mode	Mode 1: Transmit	Phase	Line
Test Condition	13.56 MHz		

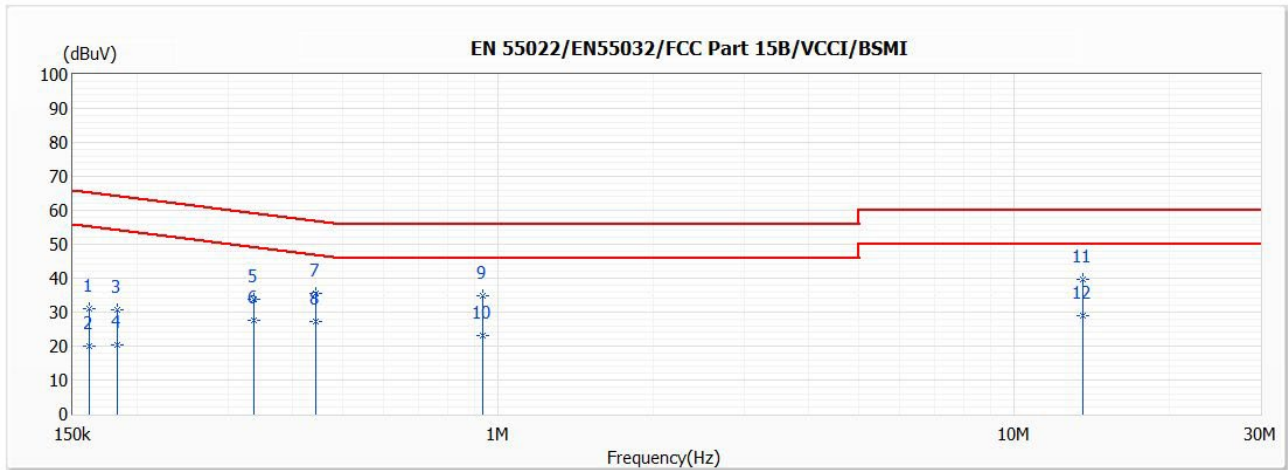


No	Frequency (MHz)	Emission Level (dBuV)	Limit (dBuV)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	0.161	31.11	65.39	-34.28	21.49	9.62	QP
2	0.161	19.97	55.39	-35.42	10.35	9.62	AV
3	0.183	30.54	64.35	-33.81	20.92	9.62	QP
4	0.183	20.18	54.35	-34.17	10.56	9.62	AV
5	0.337	33.82	59.28	-25.46	24.18	9.64	QP
6	0.337	27.54	49.28	-21.74	17.90	9.64	AV
7	0.442	35.64	57.02	-21.38	25.99	9.65	QP
*8	0.442	27.37	47.02	-19.65	17.72	9.65	AV
9	0.935	34.87	56.00	-21.13	25.18	9.69	QP
10	0.935	22.98	46.00	-23.02	13.29	9.69	AV
11	13.561	39.82	60.00	-20.18	29.65	10.17	QP
12	13.561	29.12	50.00	-20.88	18.95	10.17	AV

Remark:

1. "*" means this data is the worst emission level.
2. Emission Level = Reading Level + Correct Factor (Correct Factor = LISN Insertion Loss + Cable Loss).
3. Margin = Emission Level - Limit.

Test Mode	Mode 1: Transmit	Phase	Neutral
Test Condition	13.56 MHz		

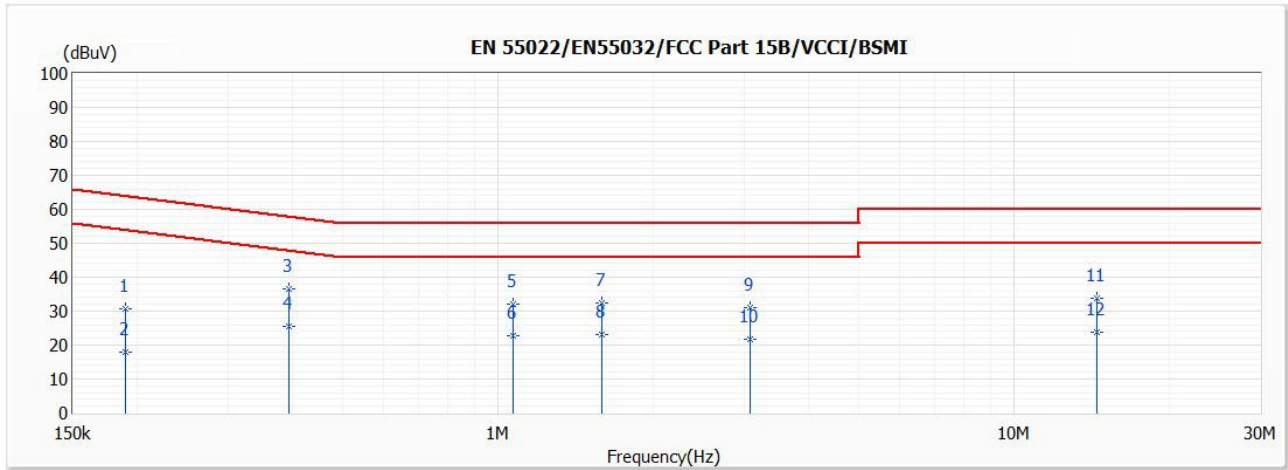


No	Frequency (MHz)	Emission Level (dBuV)	Limit (dBuV)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	0.189	30.68	64.06	-33.38	21.07	9.61	QP
2	0.189	17.82	54.06	-36.24	8.21	9.61	AV
*3	0.394	36.55	57.99	-21.44	26.91	9.64	QP
4	0.394	25.48	47.99	-22.51	15.84	9.64	AV
5	1.069	32.06	56.00	-23.94	22.36	9.70	QP
6	1.069	22.66	46.00	-23.34	12.96	9.70	AV
7	1.585	32.36	56.00	-23.64	22.62	9.74	QP
8	1.585	23.00	46.00	-23.00	13.26	9.74	AV
9	3.073	30.99	56.00	-25.01	21.18	9.81	QP
10	3.073	21.58	46.00	-24.42	11.77	9.81	AV
11	14.500	33.80	60.00	-26.20	23.50	10.30	QP
12	14.500	23.73	50.00	-26.27	13.43	10.30	AV

Remark:

1. "*" means this data is the worst emission level.
2. Emission Level = Reading Level + Correct Factor (Correct Factor = LISN Insertion Loss + Cable Loss).
3. Margin = Emission Level - Limit.

3. Emission Bandwidth

3.1. Test Setup

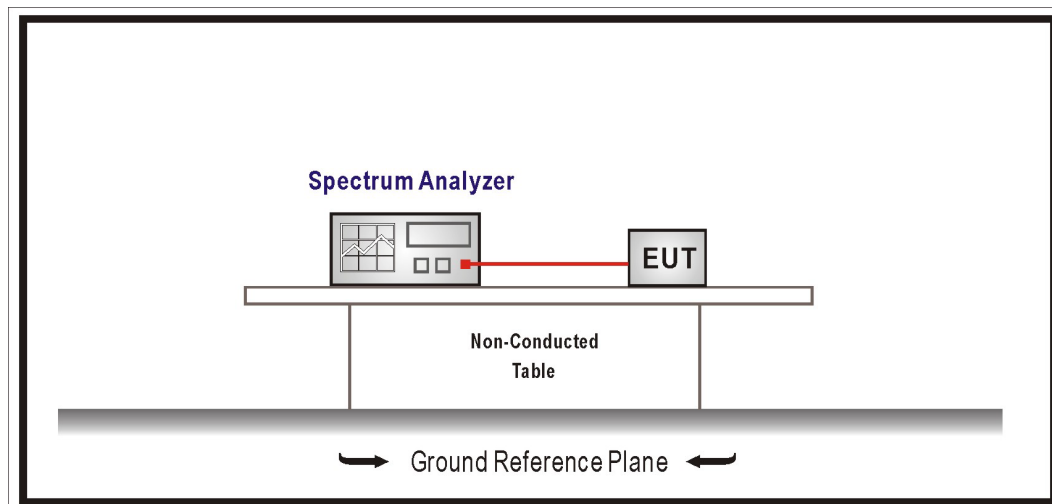

3.2. Test Limit

Intentional radiators must be designed to ensure that the emission bandwidth of the emissions in the specific band. (13.553 ~ 13.567 MHz)

3.3. Test Procedures


1. For radiated measurement. Loop antenna was rotated about the horizontal and vertical axis and the equipment to be measured and the test antenna shall be oriented to obtain the maximum emitted field strength level.
2. The resolution bandwidth of 1 kHz and the video bandwidth of 3 kHz were used.

3.4. Test Specification

According to FCC Part 15 Subpart C Paragraph 15.225.


3.5. Test Result of Emission Bandwidth

Frequency (MHz)	Measure Level (kHz)	Limit (MHz)
13.56	5.521	-

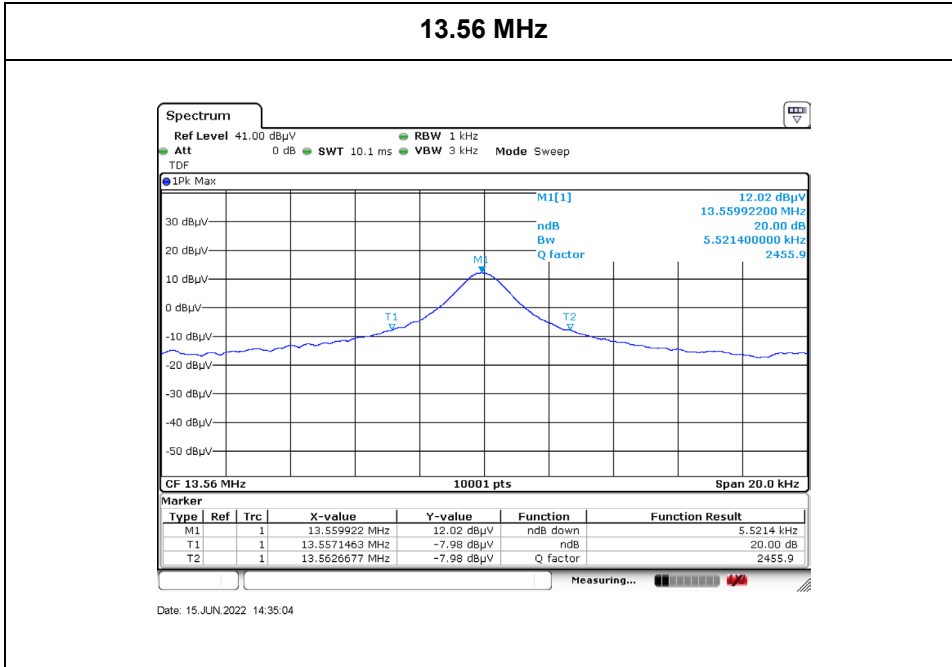

4. Field Strength of Fundamental Emissions and Spectrum Mask

4.1. Test Setup

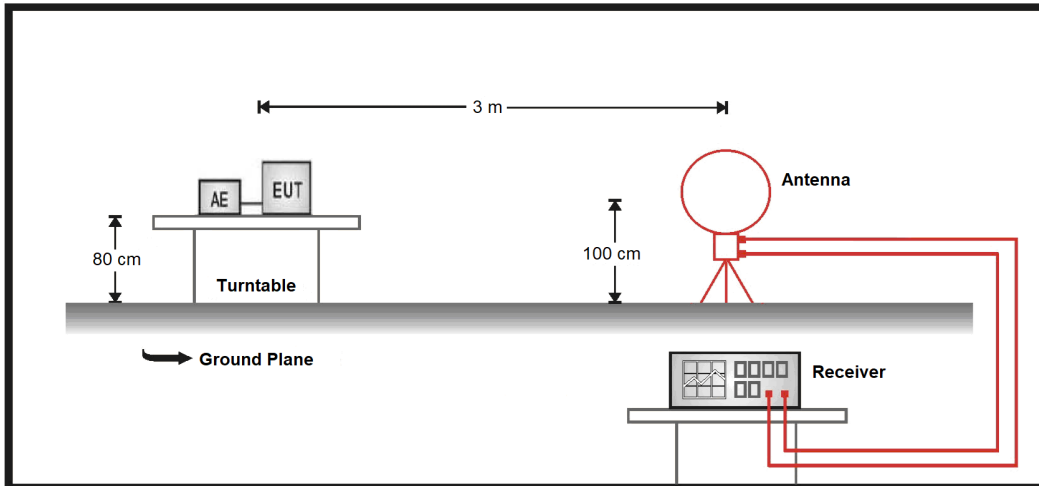

4.2. Test Limit

Field Strength of Fundamental Emissions			
Frequencies (MHz)	Field Strength (microvolts/meter) at 30m	Field Strength (dBµV/m) at 10m	Field Strength (dBµV/m) at 3m
13.553 – 13.567 MHz	15848	103.08 (QP)	124 (QP)

Quasi peak measurement of the fundamental.

Spectrum Mask					
Rules and specifications	CFR 47 Part 15 section 15.225(a)-(d)				
Description	Compliance with the spectrum mask is tested using a spectrum analyzer with RBW set to a 9kHz for the band 13.553 – 13.567 MHz.				
Limit	Freq. of Emission (MHz)	Field Strength			
		(uV/m)@30m	(dBuV/m)@30m	(dBuV/m)@10m	(dBuV/m)@3m
	1.705~13.110	30	29.5	48.6	69.5
	13.110~13.410	106	40.5	59.6	80.5
	13.410~13.553	334	50.5	69.6	90.5
	13.553~13.567	15848	84.0	103.1	124.0
	13.567~13.710	334	50.5	69.6	90.5
	13.710~14.010	106	40.5	59.6	80.5
14.010~30.000	30	29.5	48.6	69.5	

4.3. Test Procedure





1. Configure the EUT according to ANSI C63.10: 2013. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the loop receiving antenna mounted antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the receiving antenna was fixed at one meter above ground to find the maximum emissions field strength.
4. For Fundamental emissions, use the receiver to measure QP reading.
5. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
6. Compliance with the spectrum mask is tested using a spectrum analyzer with RBW set to a 9kHz for the band 13.553 – 13.567 MHz.

4.4. Test Specification


According to FCC Part 15 Subpart C Paragraph 15.225.

4.5. Test Result of Field Strength of Fundamental Emissions

<p>Site :HC-CB04 Condition :3m Loop Mode :NFC_TX_13.56MHz_X_X Test By :Ling</p> <table border="1"> <thead> <tr> <th>No.</th> <th>Frequency MHz</th> <th>Level dBuV/m</th> <th>Limit Line dBuV/m</th> <th>Over Limit dB</th> <th>Read Level dBuV</th> <th>Factor dB</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>13.560</td> <td>9.05</td> <td>84.00</td> <td>-74.95</td> <td>27.71</td> <td>-18.66</td> <td>Peak</td> </tr> </tbody> </table> <p>Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Aux Factor 3. Over Limit = Level - Limit Line 4. Aux Factor = Convert distance formula = $40 \cdot \log(3/300) = -80\text{dB @}300\text{m}$ = $40 \cdot \log(3/30) = -40\text{dB @}30\text{m}$ 5. The other emission levels were very low against the limit.</p>	No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark	1	13.560	9.05	84.00	-74.95	27.71	-18.66	Peak	<p>Site :HC-CB04 Condition :3m Loop Mode :NFC_TX_13.56MHz_X_Y Test By :Ling</p> <table border="1"> <thead> <tr> <th>No.</th> <th>Frequency MHz</th> <th>Level dBuV/m</th> <th>Limit Line dBuV/m</th> <th>Over Limit dB</th> <th>Read Level dBuV</th> <th>Factor dB</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>13.560</td> <td>11.88</td> <td>84.00</td> <td>-72.12</td> <td>30.54</td> <td>-18.66</td> <td>Peak</td> </tr> </tbody> </table> <p>Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Aux Factor 3. Over Limit = Level - Limit Line 4. Aux Factor = Convert distance formula = $40 \cdot \log(3/300) = -80\text{dB @}300\text{m}$ = $40 \cdot \log(3/30) = -40\text{dB @}30\text{m}$ 5. The other emission levels were very low against the limit.</p>	No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark	1	13.560	11.88	84.00	-72.12	30.54	-18.66	Peak
No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark																										
1	13.560	9.05	84.00	-74.95	27.71	-18.66	Peak																										
No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark																										
1	13.560	11.88	84.00	-72.12	30.54	-18.66	Peak																										
<p>Site :HC-CB04 Condition :3m Loop Mode :NFC_TX_13.56MHz_X_Z Test By :Ling</p> <table border="1"> <thead> <tr> <th>No.</th> <th>Frequency MHz</th> <th>Level dBuV/m</th> <th>Limit Line dBuV/m</th> <th>Over Limit dB</th> <th>Read Level dBuV</th> <th>Factor dB</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>13.560</td> <td>3.52</td> <td>84.00</td> <td>-80.48</td> <td>22.18</td> <td>-18.66</td> <td>Peak</td> </tr> </tbody> </table> <p>Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Aux Factor 3. Over Limit = Level - Limit Line 4. Aux Factor = Convert distance formula = $40 \cdot \log(3/300) = -80\text{dB @}300\text{m}$ = $40 \cdot \log(3/30) = -40\text{dB @}30\text{m}$ 5. The other emission levels were very low against the limit.</p>	No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark	1	13.560	3.52	84.00	-80.48	22.18	-18.66	Peak	<p>Site :HC-CB04 Condition :3m Loop Mode :NFC_TX_13.56MHz_Y_X Test By :Ling</p> <table border="1"> <thead> <tr> <th>No.</th> <th>Frequency MHz</th> <th>Level dBuV/m</th> <th>Limit Line dBuV/m</th> <th>Over Limit dB</th> <th>Read Level dBuV</th> <th>Factor dB</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>13.560</td> <td>8.68</td> <td>84.00</td> <td>-75.32</td> <td>27.34</td> <td>-18.66</td> <td>Peak</td> </tr> </tbody> </table> <p>Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Aux Factor 3. Over Limit = Level - Limit Line 4. Aux Factor = Convert distance formula = $40 \cdot \log(3/300) = -80\text{dB @}300\text{m}$ = $40 \cdot \log(3/30) = -40\text{dB @}30\text{m}$ 5. The other emission levels were very low against the limit.</p>	No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark	1	13.560	8.68	84.00	-75.32	27.34	-18.66	Peak
No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark																										
1	13.560	3.52	84.00	-80.48	22.18	-18.66	Peak																										
No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark																										
1	13.560	8.68	84.00	-75.32	27.34	-18.66	Peak																										

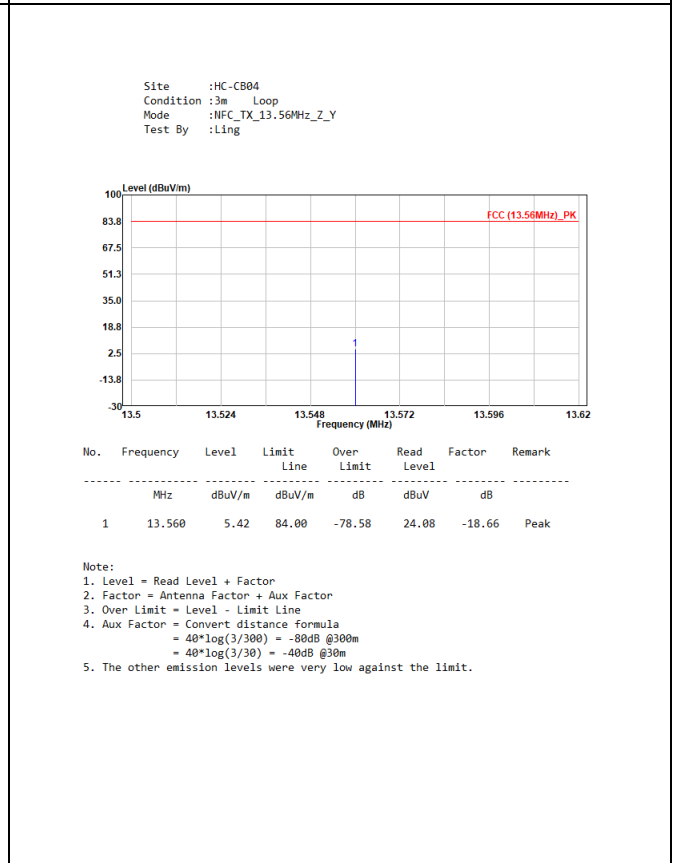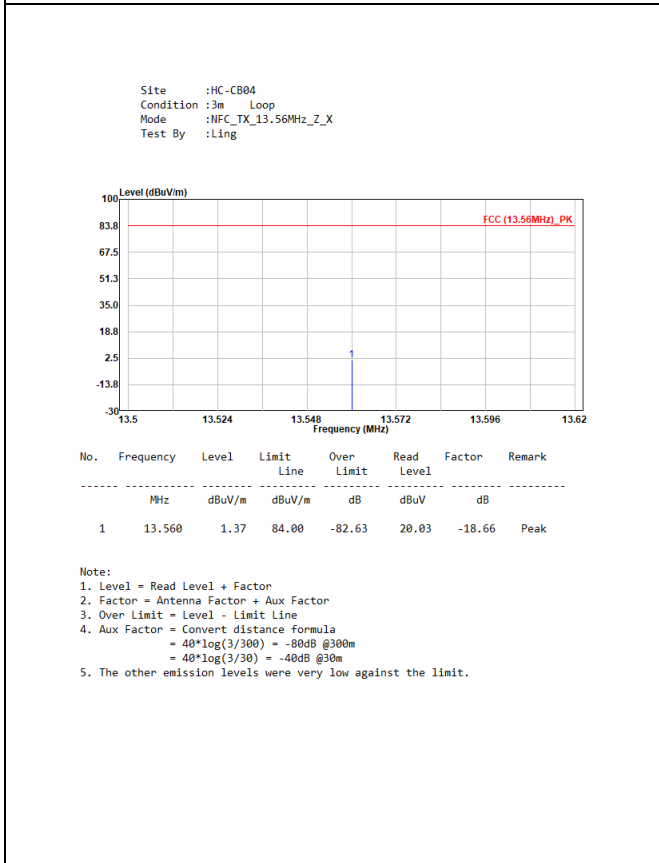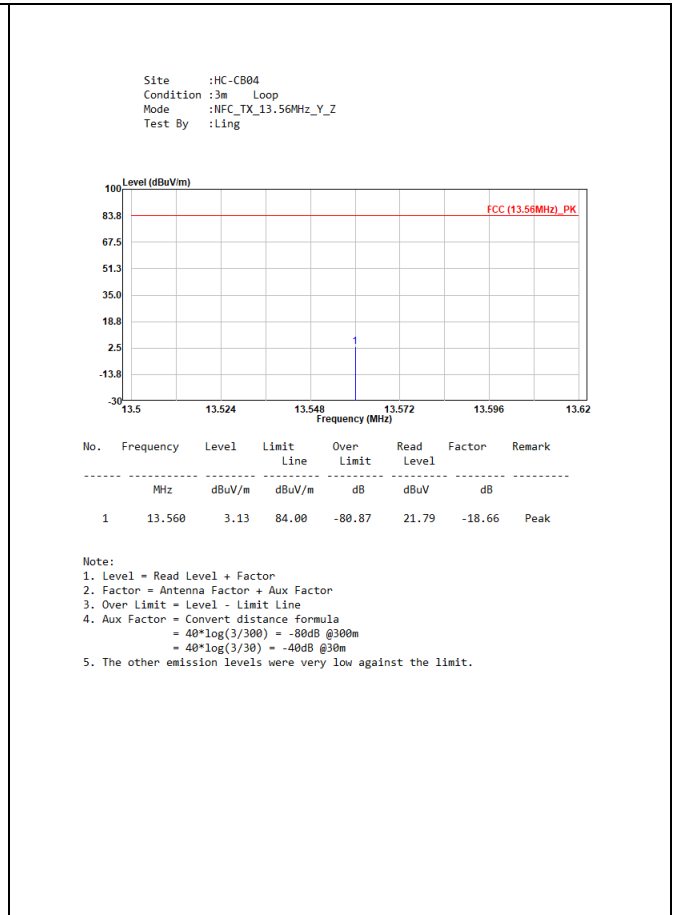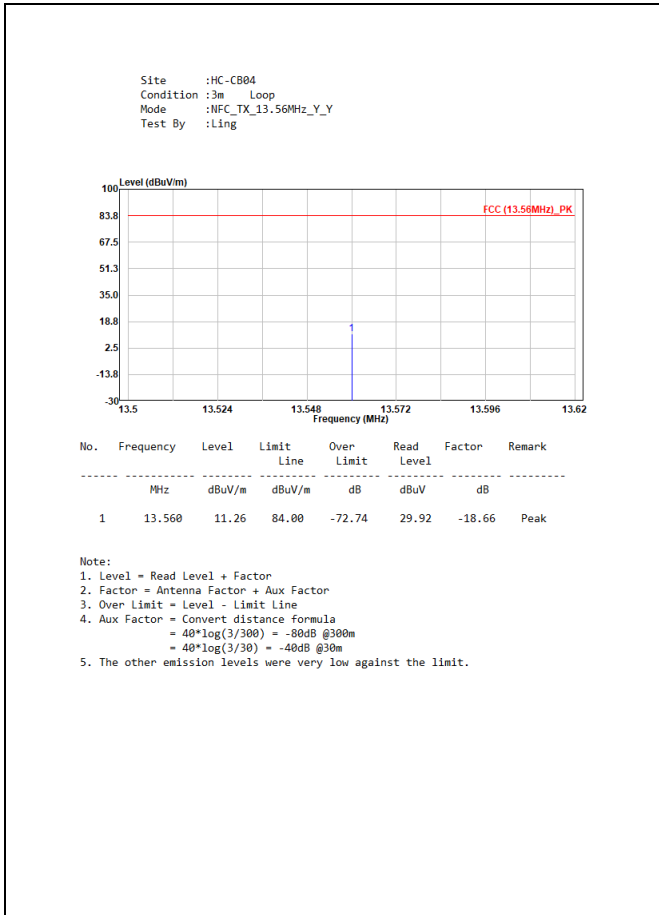

Site :HC-CB04
 Condition :3m Loop
 Mode :NFC_TX_13.56MHz_Z_Z
 Test By :Ling

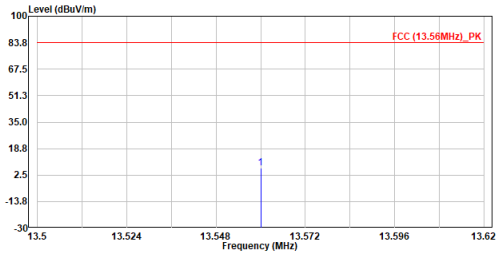

No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	13.560	6.71	84.00	-77.29	25.37	-18.66	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert distance formula
 = $40 \times \log(3/300) = -80\text{dB @}300\text{m}$
 = $40 \times \log(3/30) = -40\text{dB @}30\text{m}$
5. The other emission levels were very low against the limit.

4.6. Test Result of Spectrum Mask

Site :HC-CB04
Condition :3m Loop
Mode :NFC_TX_13.56MHz_X_X
Test By :Ling

No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	12.954	-0.72	29.50	-30.22	17.96	-18.68	Peak
2	13.249	-0.90	40.50	-41.40	17.77	-18.67	Peak
3	13.489	-2.55	50.50	-53.05	16.11	-18.66	Peak
4	13.560	8.59	84.00	-75.41	27.25	-18.66	Peak
5	13.610	-2.64	50.50	-53.14	16.02	-18.66	Peak
6	13.909	-2.73	40.50	-43.23	15.91	-18.64	Peak
7	14.030	-3.22	29.50	-32.72	15.42	-18.64	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert distance formula
= $40 \cdot \log(3/300) = -80\text{dB @}300\text{m}$
= $40 \cdot \log(3/30) = -40\text{dB @}30\text{m}$
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m Loop
Mode :NFC_TX_13.56MHz_X_Y
Test By :Ling

No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	13.040	-3.96	29.50	-33.46	14.72	-18.68	Peak
2	13.147	-2.48	40.50	-42.98	16.19	-18.67	Peak
3	13.441	-2.23	50.50	-52.73	16.43	-18.66	Peak
4	13.560	11.53	84.00	-72.47	30.19	-18.66	Peak
5	13.675	-1.42	50.50	-51.92	17.23	-18.65	Peak
6	13.770	-3.45	40.50	-43.95	15.20	-18.65	Peak
7	14.184	-4.88	29.50	-34.38	13.75	-18.63	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert distance formula
= $40 \cdot \log(3/300) = -80\text{dB @}300\text{m}$
= $40 \cdot \log(3/30) = -40\text{dB @}30\text{m}$
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m Loop
Mode :NFC_TX_13.56MHz_X_Z
Test By :Ling


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	13.092	-4.00	29.50	-33.50	14.68	-18.68	Peak
2	13.172	-4.63	40.50	-45.13	14.04	-18.67	Peak
3	13.494	-3.41	50.50	-53.91	15.25	-18.66	Peak
4	13.561	2.64	84.00	-81.36	21.30	-18.66	Peak
5	13.627	-4.29	50.50	-54.79	14.36	-18.65	Peak
6	13.723	-4.04	40.50	-44.54	14.61	-18.65	Peak
7	14.068	-4.58	29.50	-34.08	14.06	-18.64	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert distance formula
= $40 \cdot \log(3/300) = -80\text{dB @}300\text{m}$
= $40 \cdot \log(3/30) = -40\text{dB @}30\text{m}$
5. The other emission levels were very low against the limit.


5. Radiated Emission

5.1. Test Setup

9 kHz ~ 30 MHz

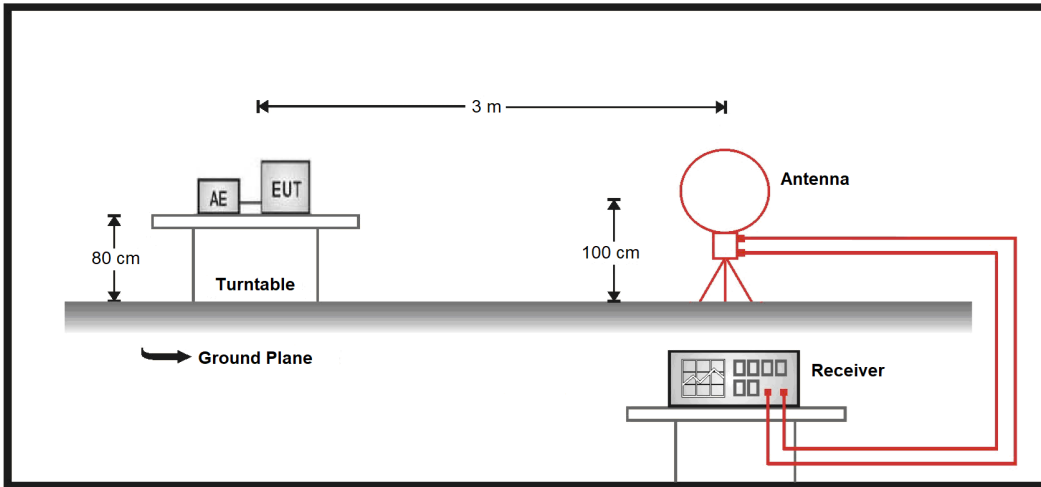

30 MHz ~ 1 GHz

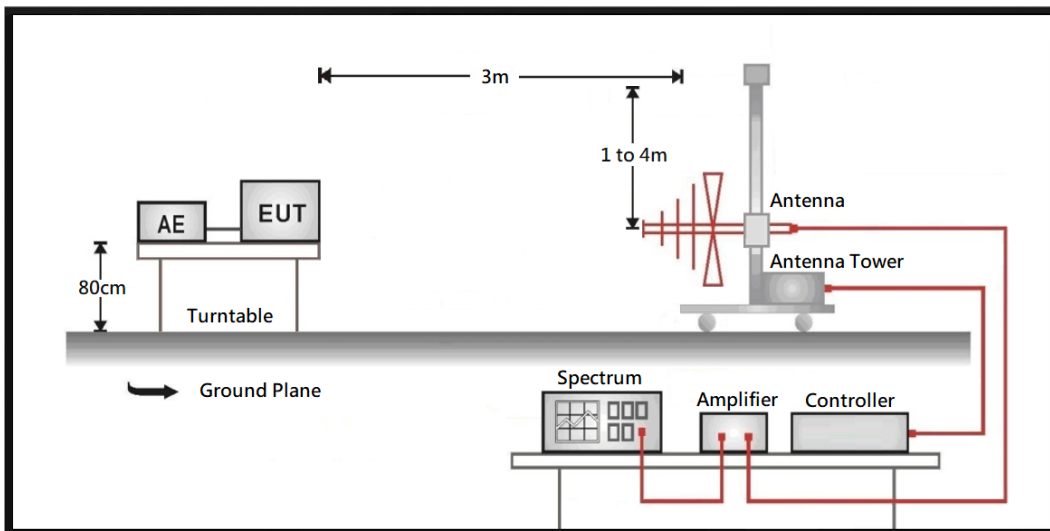

5.2. Test Limit

The field strength of any emissions which appear outside of 13.553 ~ 13.567MHz band shall not exceed the general radiated emissions limits.

Frequency (MHz)	Field strength (uV/m)	Field strength (dBuV/m)	Measurement distance (m)
0.009 – 0.490	2400/F(kHz)	20 log (2400/F(kHz))	300
0.490 – 1.705	24000/F(kHz)	20 log (24000/F(kHz))	30
1.705 - 30	30	29.5	30
30 - 88	100	40	3
88 - 216	150	43.5	3
216 - 960	200	46	3
Above 960	500	54	3

Remarks:

1. Field strength (dBuV/m) = 20 log Field strength (uV/m)
2. In the Above Table, the tighter limit applies at the band edges.
3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system

5.3. Test Procedure




1. Configure the EUT according to ANSI C63.10: 2013. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
7. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

5.4. Test Specification

According to FCC Part 15 Subpart C Paragraph 15.225.


5.5. Test Result of Radiated Emission

9 kHz ~ 30 MHz

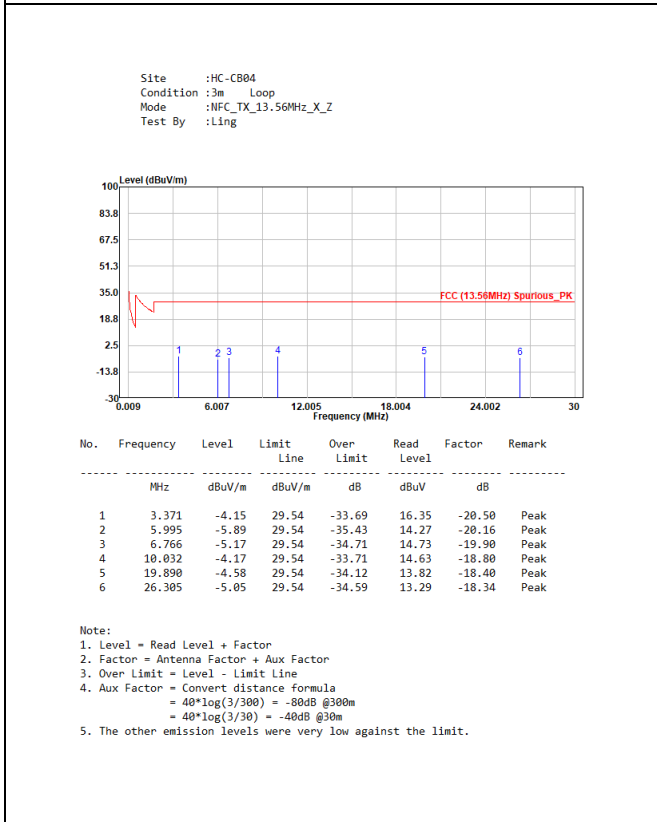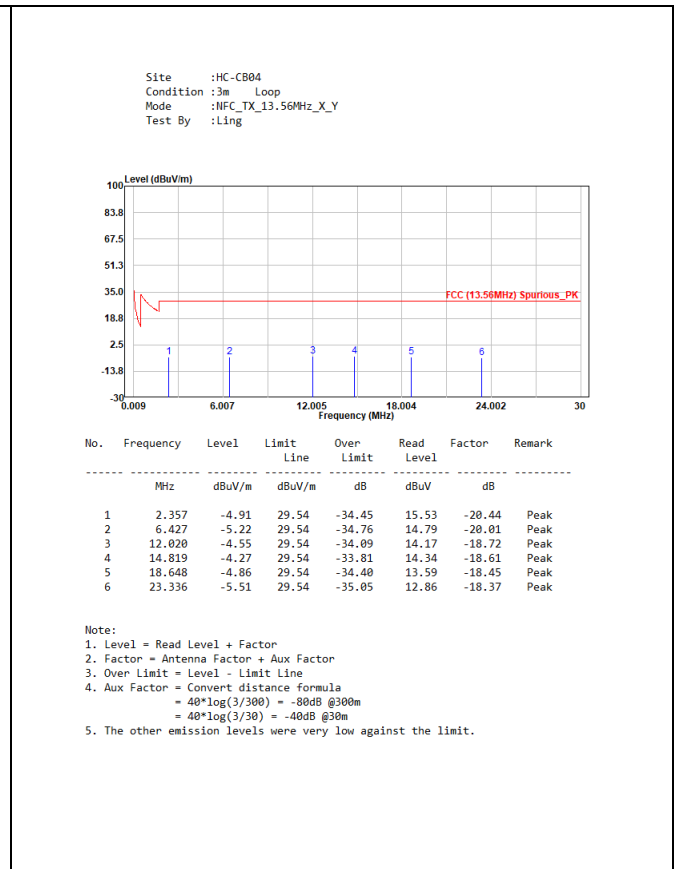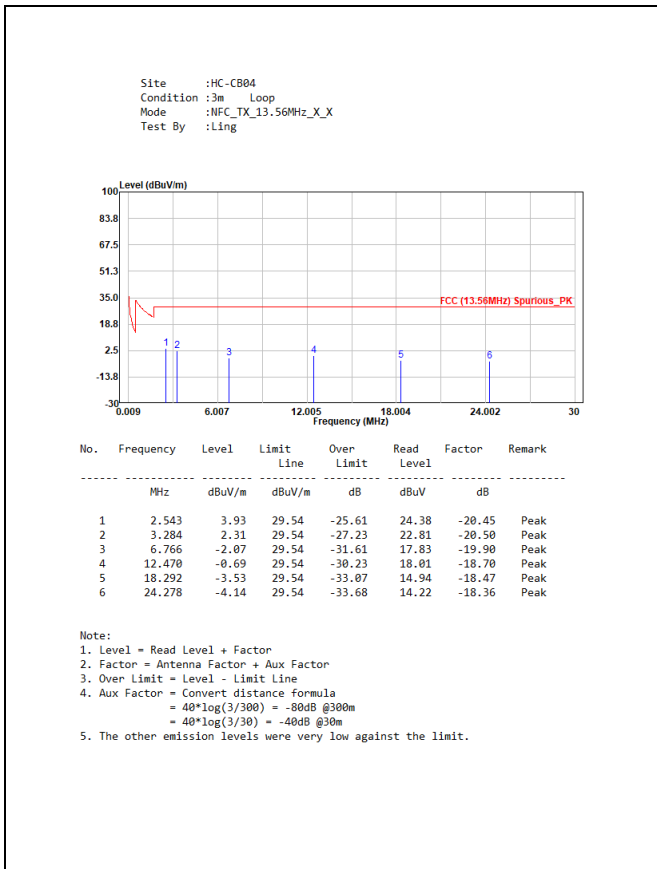

30 MHz ~ 1 GHz


Site :HC-CB04
 Condition :3m Horizontal
 Mode :NFC_TX_13.56MHz
 Test By :Ling

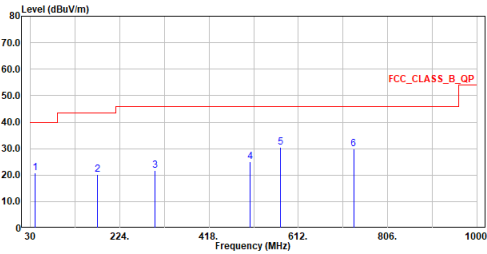

No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	40.670	20.72	40.00	-19.28	23.91	-3.19	QP
2	176.276	20.30	43.50	-23.20	24.69	-4.39	QP
3	300.048	21.74	46.00	-24.26	24.75	-3.01	QP
4	507.240	24.97	46.00	-21.03	22.77	2.20	QP
5	572.715	30.42	46.00	-15.58	26.95	3.47	QP
6	732.086	29.92	46.00	-16.08	23.46	6.46	QP

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission under 30MHz was not included since the emission levels are very low against the limit.
 5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m Vertical
 Mode :NFC_TX_13.56MHz
 Test By :Ling

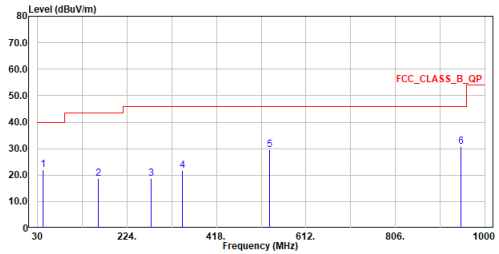


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	42.610	21.94	40.00	-18.06	24.69	-2.75	QP
2	161.338	18.76	43.50	-24.74	22.19	-3.43	QP
3	277.059	18.68	46.00	-27.32	22.14	-3.46	QP
4	343.989	21.78	46.00	-24.22	23.73	-1.95	QP
5	533.333	29.46	46.00	-16.54	26.78	2.68	QP
6	947.717	30.81	46.00	-15.19	21.45	9.36	QP

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission under 30MHz was not included since the emission levels are very low against the limit.
 5. The other emission levels were very low against the limit.

6. Frequency Stability

6.1. Test Setup

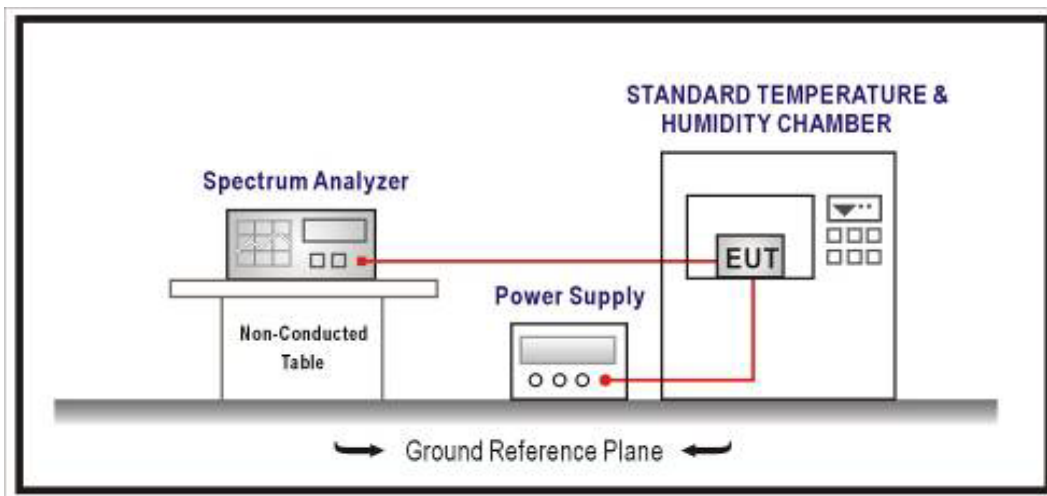

6.2. Test Limit

Carrier frequency stability shall be maintained to $\pm 0.01\%$ (± 100 ppm).

6.3. Test Procedures

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency over a temperature variation of -20 degrees to 50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.

For battery operated equipment, the equipment tests shall be performed using a new battery.

6.4. Test Specification

According to FCC Part 15 Subpart C Paragraph 15.225.

6.5. Test Result of Frequency Stability

Test Conditions		Center Frequency			Frequency Tolerance (%)	Limit (%)
		(MHz)				
		f _L	f _C	f _H		
20°C	4.37V	13.54714	13.55994	13.57273	-0.00048	± 0.01
20°C	3.8V	13.54714	13.55995	13.57276	-0.00037	± 0.01
20°C	3.23V	13.54710	13.55994	13.57278	-0.00044	± 0.01

Test Conditions		Center Frequency			Frequency Tolerance (%)	Limit (%)
		(MHz)				
		f _L	f _C	f _H		
-20°C	3.8V	13.54713	13.55996	13.57278	-0.00033	± 0.01
-10°C	3.8V	13.54715	13.55995	13.57274	-0.00041	± 0.01
0°C	3.8V	13.54715	13.55997	13.57278	-0.00026	± 0.01
10°C	3.8V	13.54709	13.55991	13.57273	-0.00066	± 0.01
20°C	3.8V	13.54712	13.55994	13.57275	-0.00048	± 0.01
30°C	3.8V	13.54710	13.55995	13.57279	-0.00041	± 0.01
40°C	3.8V	13.54713	13.55995	13.57276	-0.00041	± 0.01
50°C	3.8V	13.54713	13.55993	13.57273	-0.00052	± 0.01