




# Part No. 1000146

## Wi-Fi 6 & Wi-Fi 6E or CBRS/n78 Stamped Metal Embedded Antenna

2.4 / 5 GHz or 3.3 – 3.8 GHz

Supports: Wi-Fi applications, Agriculture, Bluetooth, Zigbee, WLAN, Smart Home, Healthcare, Digital Signage

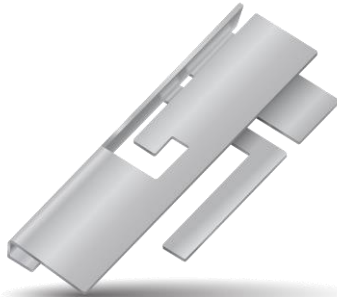

\*CBRS/n78 layout offered in Appendix 1

**Wi-Fi 6 & Wi-Fi 6E or CBRS/n78  
 Stamped Metal Embedded Antenna**  
 2.400 GHz – 2.485 GHz;  
 3.300 - 3.800 GHz;  
 5.150 GHz – 5.825 GHz;  
 5.975 GHz – 7.125 GHz

### KEY BENEFITS

#### Stay-in-Tune

KYOCERA AVX antenna technology provides superior RF field containment, resulting in less interaction with surrounding components.

#### Quicker Time-to-Market

By optimizing antenna size, performance and emissions, customer and regulatory specifications are more easily met.

#### Reliability

Products are the latest RoHS version compliant

### APPLICATIONS

- Embedded design
- Cellular, Headsets, Tablets
- Gateway, Access Point
- Handheld
- Telematics
- Tracking
- Healthcare
- M2M, Industrial devices
- Smart Grid
- OBD-II

KYOCERA AVX Stamped Metal series of Isolated Magnetic Dipole™ (IMD) antennas deliver on the key needs of device designers for higher functionality and performance in smaller/thinner designs. These innovative antennas provide compelling advantages for full WIFI 6 and WiFi 6E handheld devices, media players and other mobile devices. 1000146 Automotive A-series version offered.

### Greater Flexibility

KYOCERA AVX first-in-class IMD technology enables you to develop concept designs that are more advanced and that deliver superior performance in reception critical applications. The 1000146 can also achieve CBRS/n78 performance with proper tuning and layout shown on Appendix 1.

### Electrical Specifications

Typical Characteristics, on 125 x 45 mm PCB

Frequency (GHz)	2.400 – 2.485	5150 – 5.825	5925 - 7125	3.300– 3.800
Peak Gain	1.7 dBi	4.1 dBi	3.8 dBi	Refer to Appendix 1
Average Efficiency	81%	68%	64%	
VSWR Match	2.0:1 max	2.0:1 max	2.2:1 max	
Feed Point Impedance	50 ohms unbalanced			
Polarization	Linear			
Power Handling	0.5 Watt CW			

### Mechanical Specifications & Ordering Part Number



Ordering Part Number	1000146
Size (mm)	17.85 x 6.9 x 4.3
Mounting	SMT
Weight (grams)	0.35
Packaging	Tape & Reel, 1000146 – 1,200 pieces per reel
Demo Board	1005456 (WiFi/WiFi6E) 1000146-03 (n78/CBRS)

Wi-Fi 6 & Wi-Fi 6E KYOCERA AVX Stamped Metal Embedded Antenna.  
 KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.


### Antenna Dimensions

Typical antenna dimensions (mm)

Part Number	A	B	C
1000146	17.85 ± 0.3	6.9 ± 0.3	4.3 ± 0.4

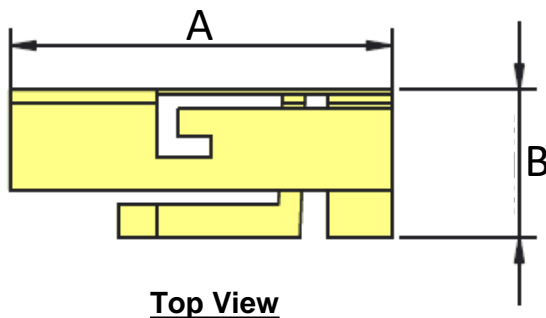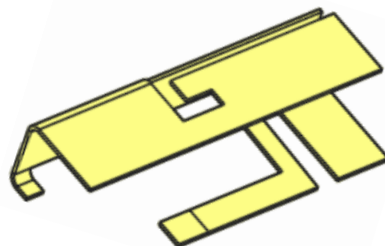

### Height

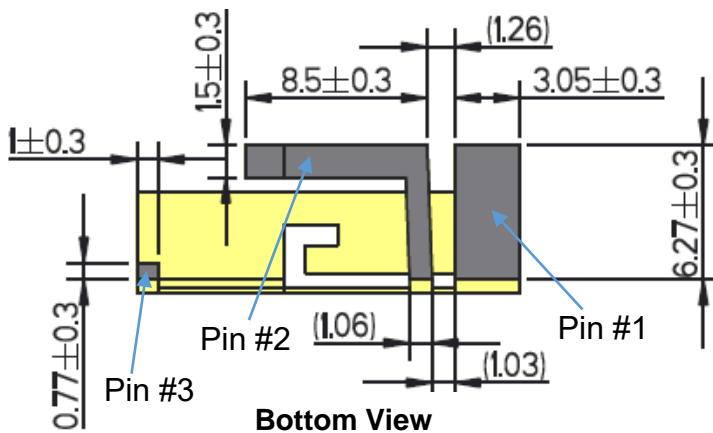


Pin	Description
1	Feed
2	Ground
3	Dummy Pad

Wi-Fi 6 & Wi-Fi 6E KYOCERA AVX Stamped Metal Embedded Antenna.  
KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.

**Test Setup (1005456)**

Typical Performance on 125 x 45 mm PCB

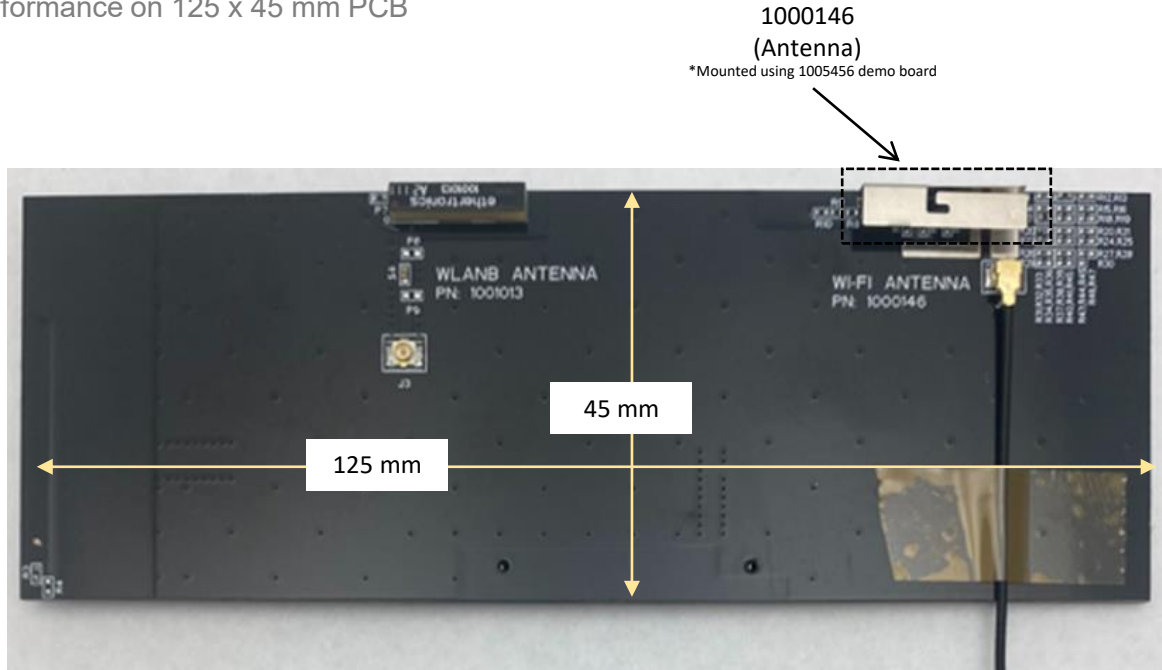


Wi-Fi 6 & Wi-Fi 6E KYOCERA AVX Stamped Metal Embedded Antenna.  
 KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.


**VSWR, Efficiency, and Peak Gain Plots**

Typical Performance on 125 x 45 mm PCB


**VSWR  
(2.400 – 2.490) GHz**

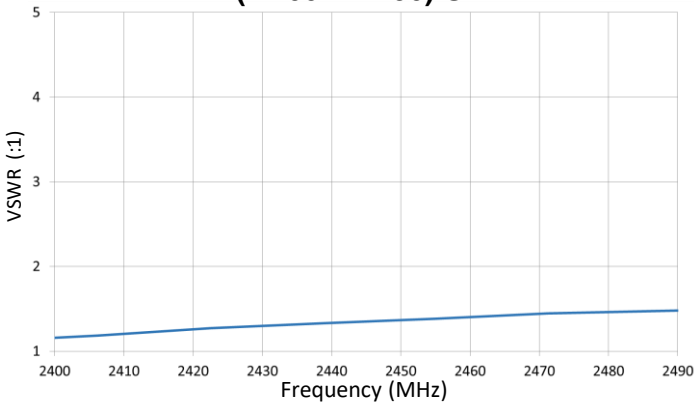


**VSWR  
(5.100 – 7.200) GHz**

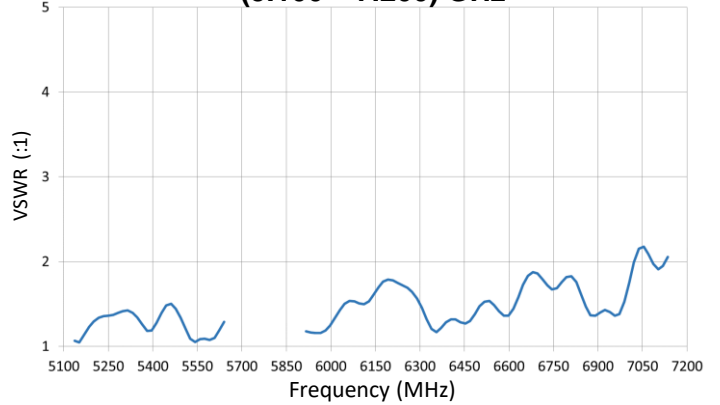


**Efficiency  
(2.400 – 2.490) GHz**

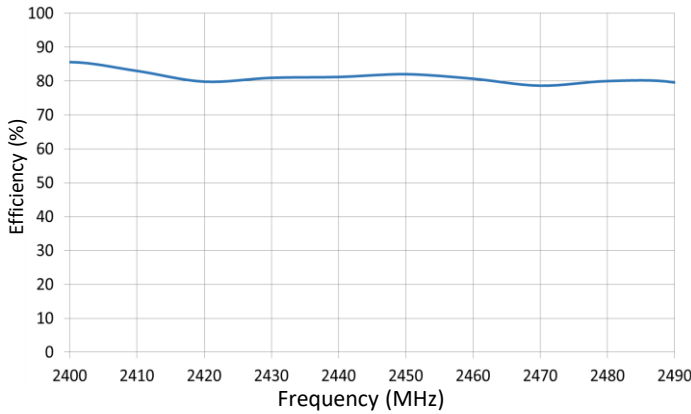


**Efficiency  
(5.100 – 7.200) GHz**

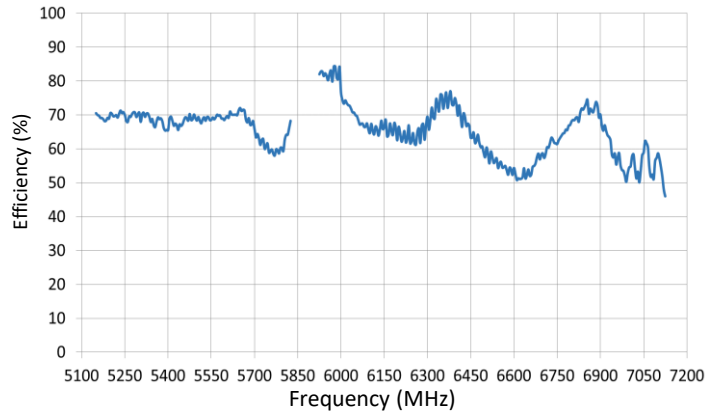

**Peak Gain  
(2.400 – 2.490) GHz**

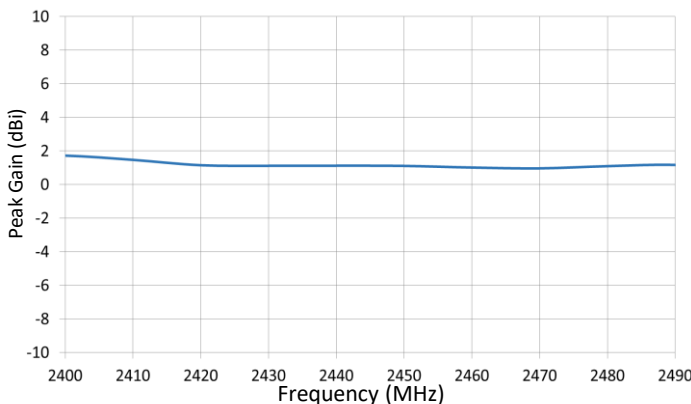





**Peak Gain  
(5.100 – 7.200) GHz**

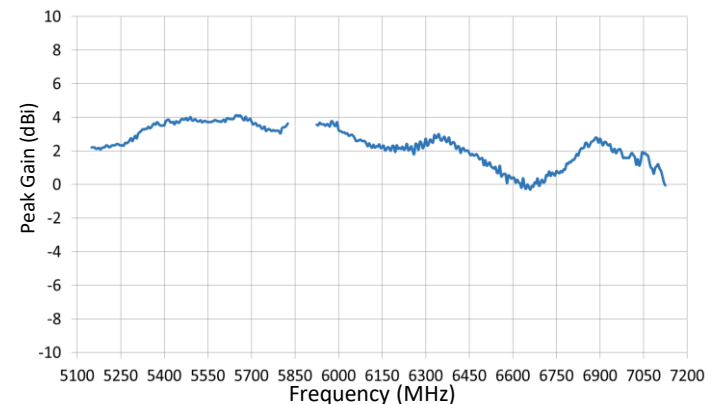

Wi-Fi 6 & Wi-Fi 6E KYOCERA AVX Stamped Metal Embedded Antenna.  
 KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.

### Antenna Radiation Patterns





Typical Performance on 125 x 45 mm PCB  
 Measured @ 2.440 GHz

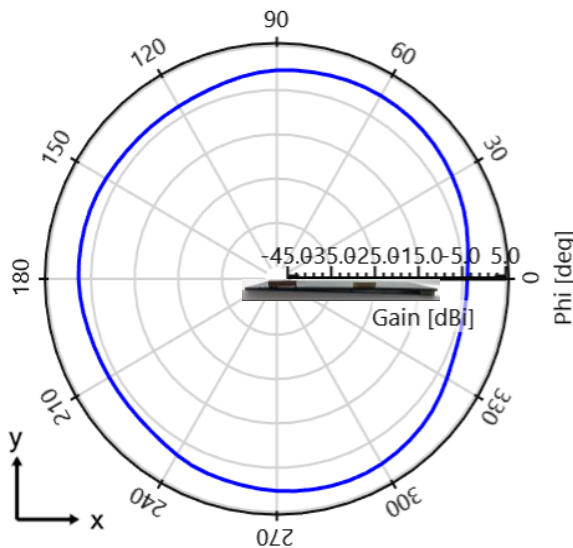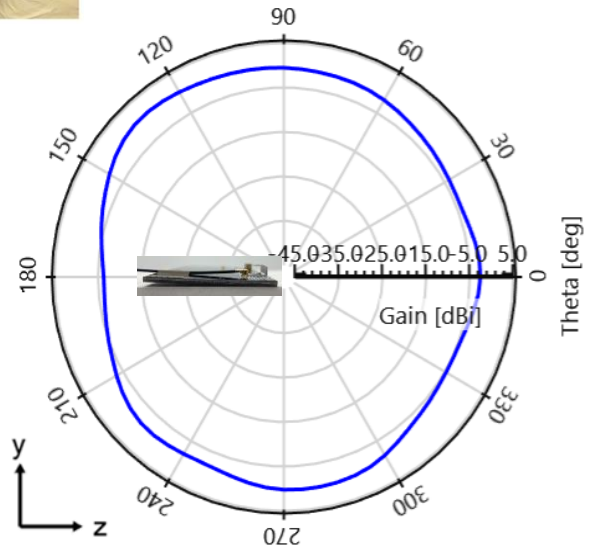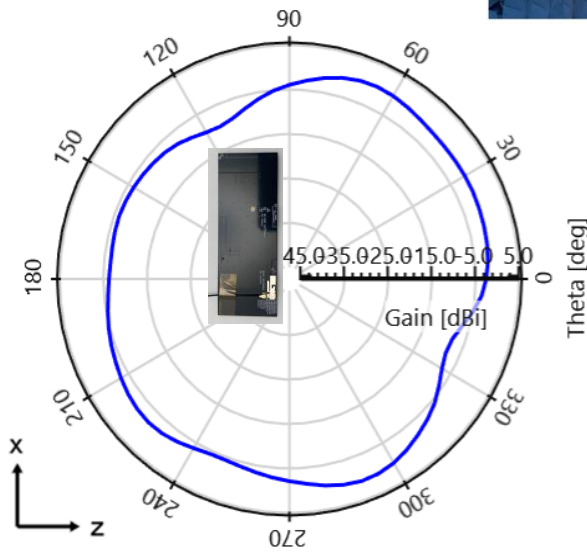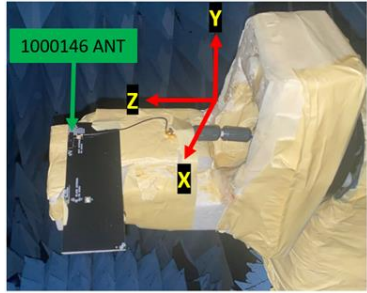

Wi-Fi 6 & Wi-Fi 6E KYOCERA AVX Stamped Metal Embedded Antenna.  
 KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.

### Antenna Radiation Patterns





Typical Performance on 125 x 45 mm PCB  
 Measured @ 5.550 GHz

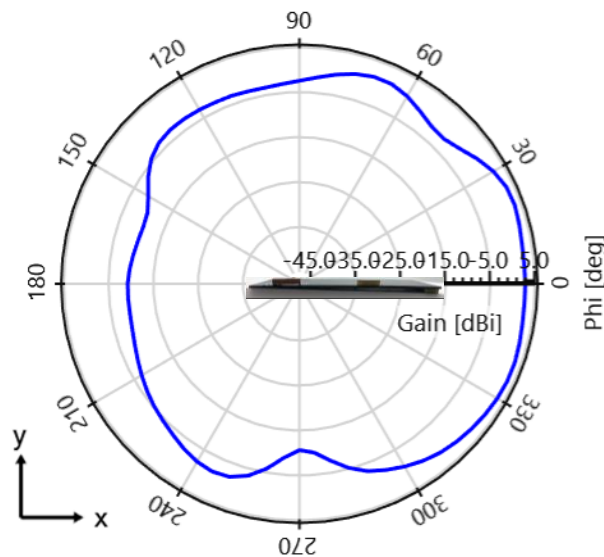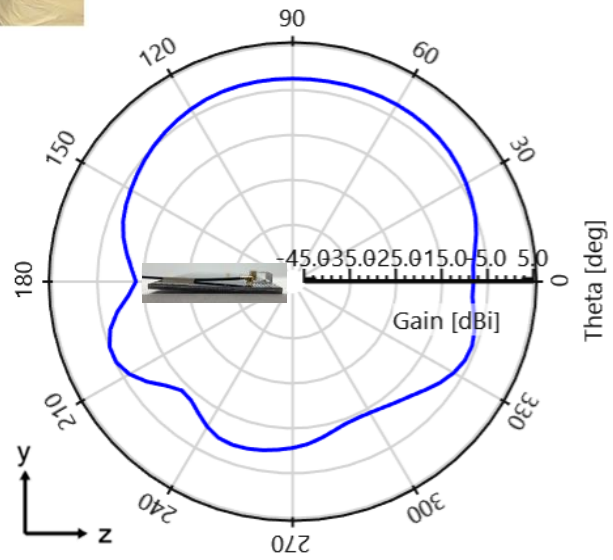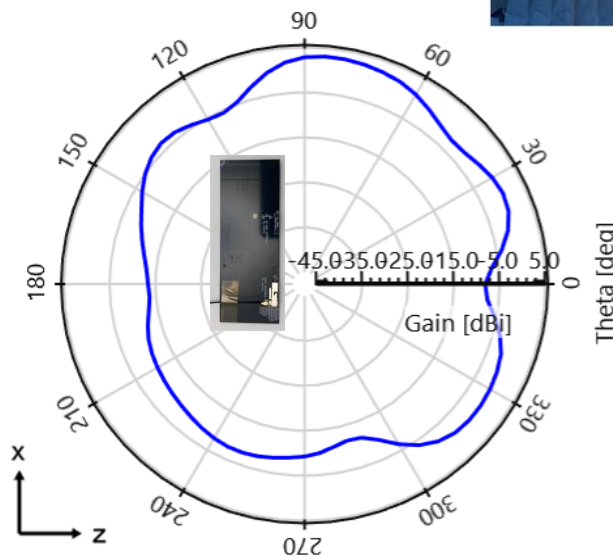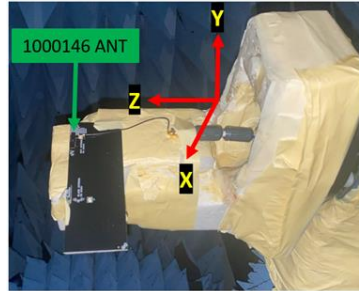

Wi-Fi 6 & Wi-Fi 6E KYOCERA AVX Stamped Metal Embedded Antenna.  
 KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.

**Antenna Radiation Patterns**

Typical Performance on 125 x 45 mm PCB  
 Measured @ 6.425 GHz

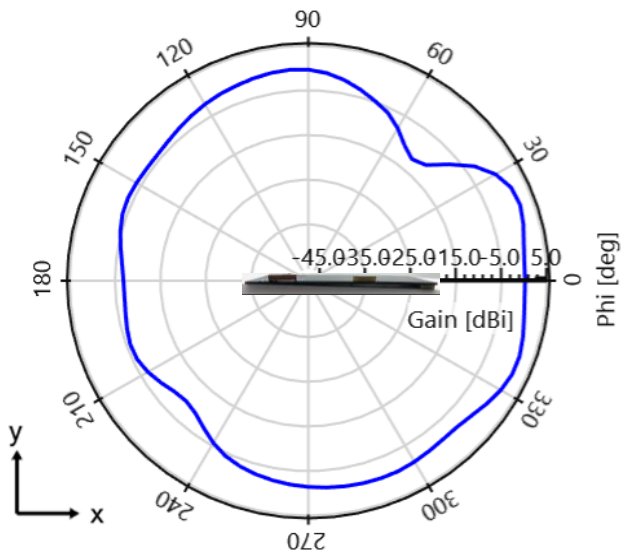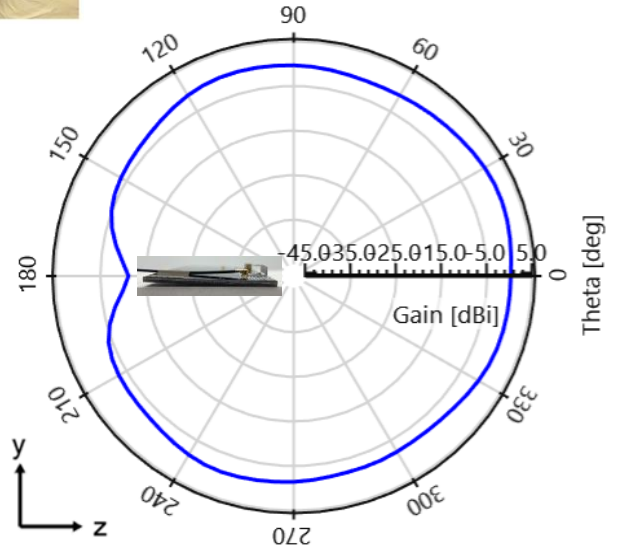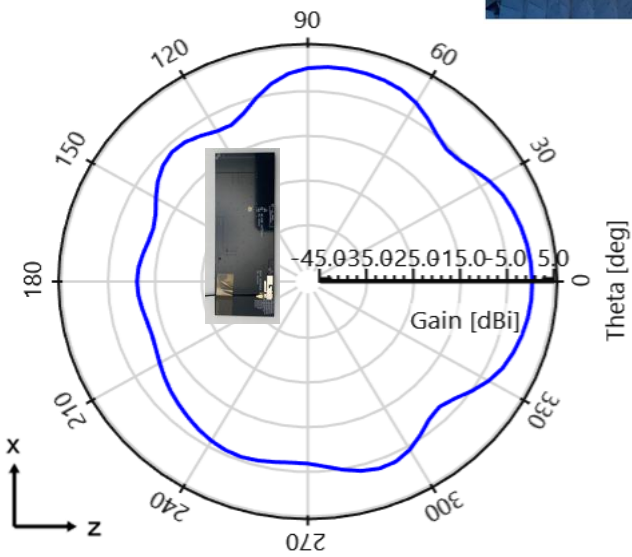
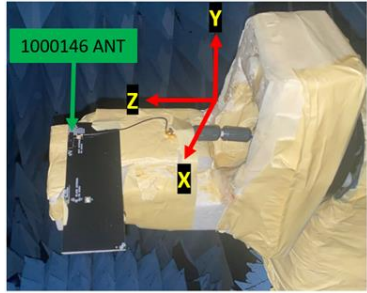




Wi-Fi 6 & Wi-Fi 6E KYOCERA AVX Stamped Metal Embedded Antenna.  
KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.

### Antenna Layout (Minor Tuning Layout)




Typical layout dimensions (mm)

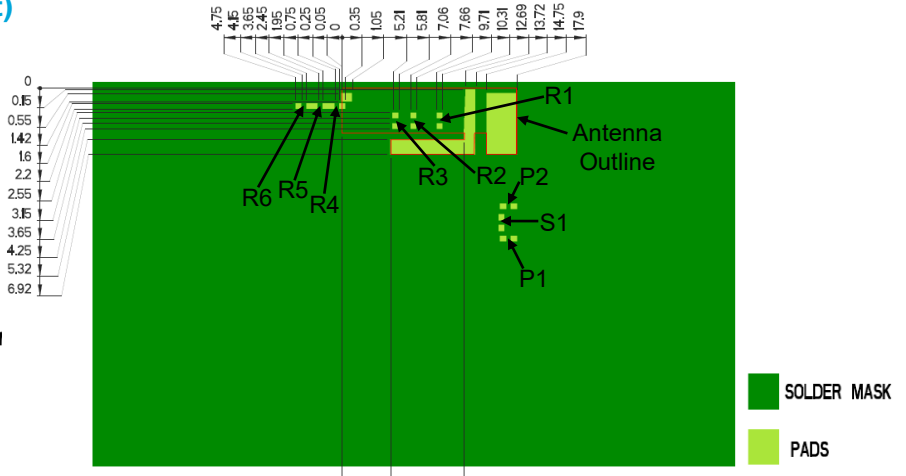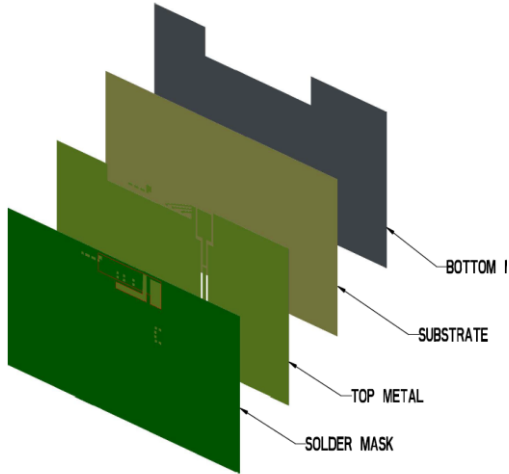

Note:  
Layout has minor tuning capabilities to allow for small antenna footprint.

#### Pin Descriptions

Pin#	Description
1	Feed
2	Ground
3	Dummy Pad

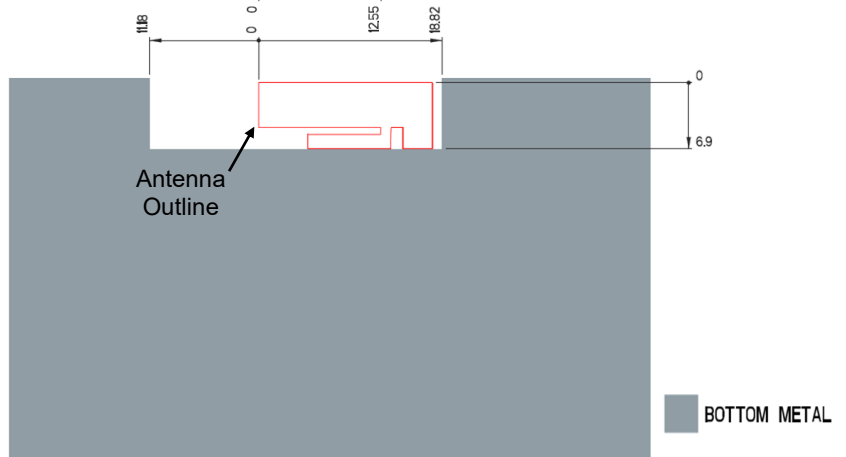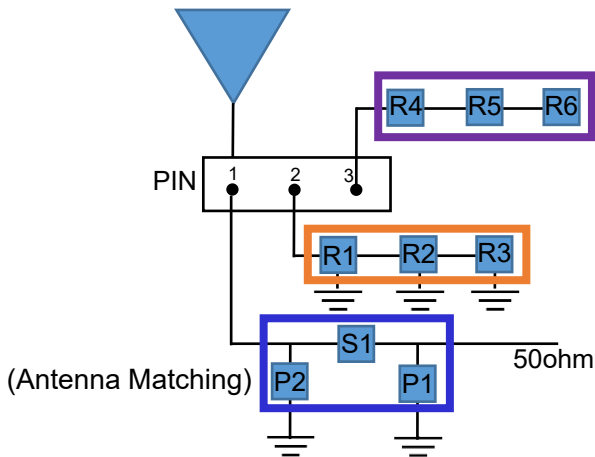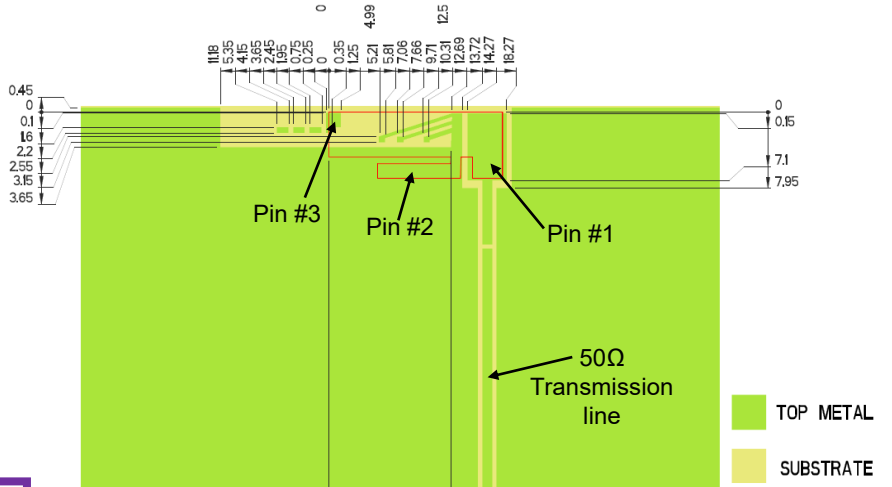

#### Antenna Matching & Tuning Component Values


	P1	S1	P2	R1 – R3	R4 – R6
Default Values	DNI	0Ω	DNI	DNI	DNI
Component Tolerance	N/A	N/A	N/A	N/A	N/A



Wi-Fi 6 & Wi-Fi 6E KYOCERA AVX Stamped Metal Embedded Antenna.  
 KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.

### Antenna Layout (Major Tuning Layout)




Typical layout dimensions (mm)

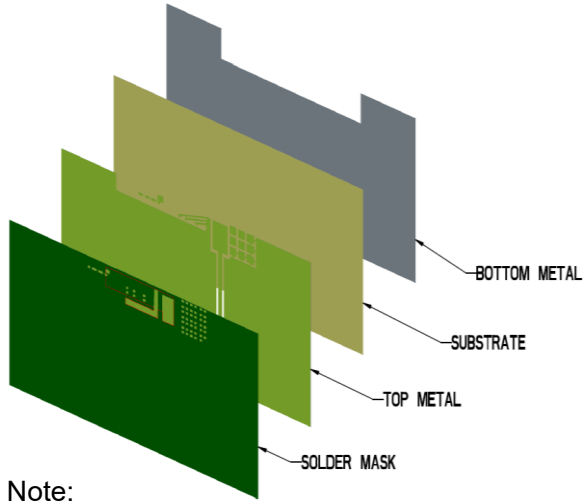

Note:  
 Layout has Major tuning capabilities to allow for robust tuning after board spin, instructions on [Antenna Matching Structure](#) page.

#### Pin Descriptions



Pin#	Description
1	Feed
2	Ground
3	Dummy Pad

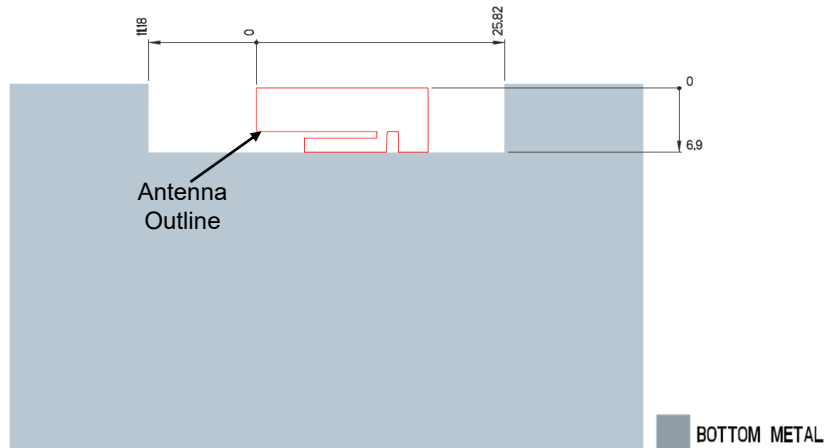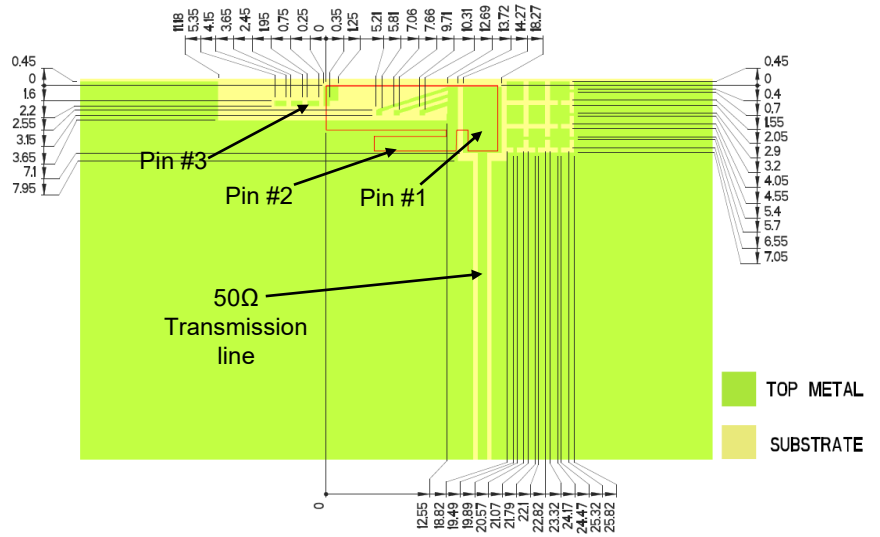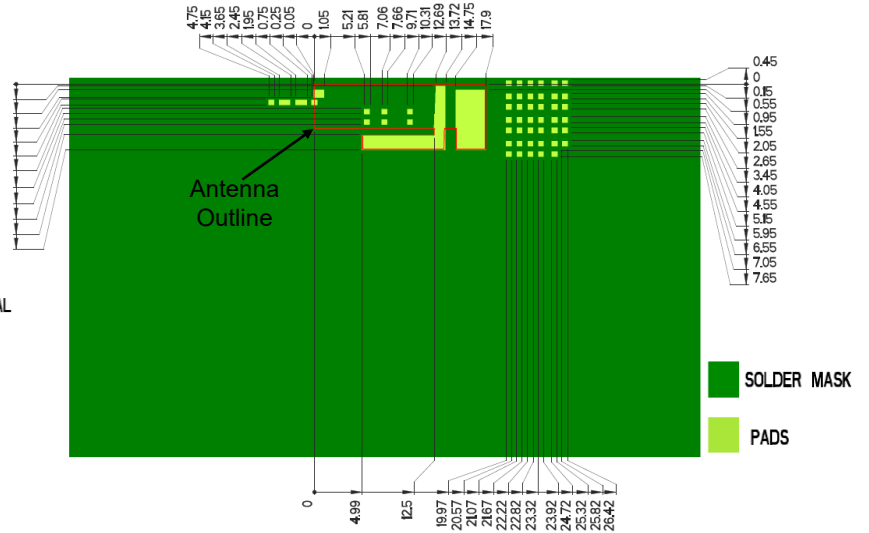

Wi-Fi 6 & Wi-Fi 6E KYOCERA AVX Stamped Metal Embedded Antenna.  
KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.



### Antenna Matching Structure (Major Tuning Structure)

Typical matching values on 125 x 45 mm PCB

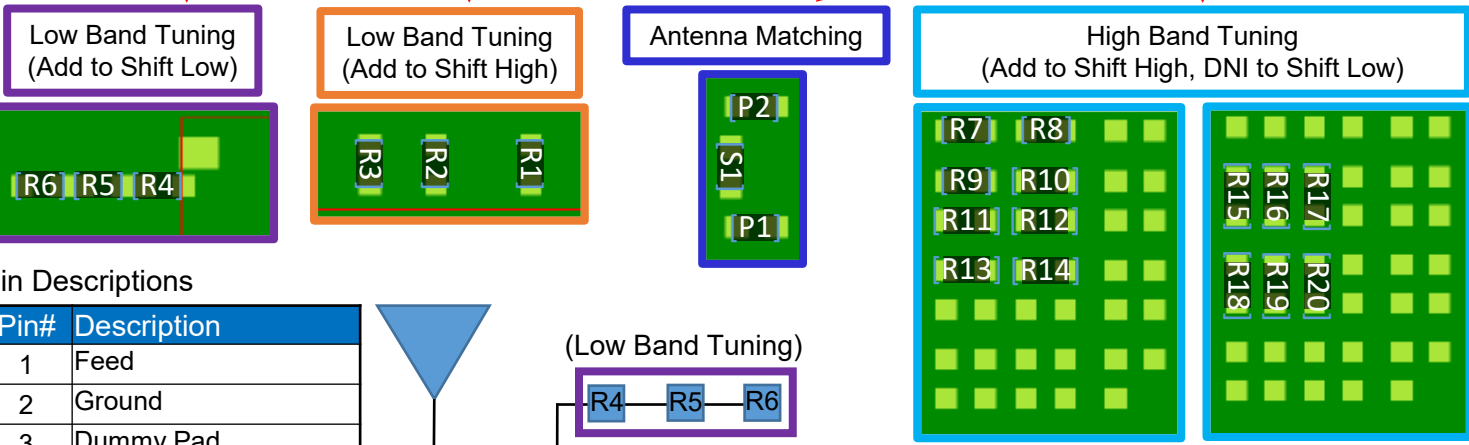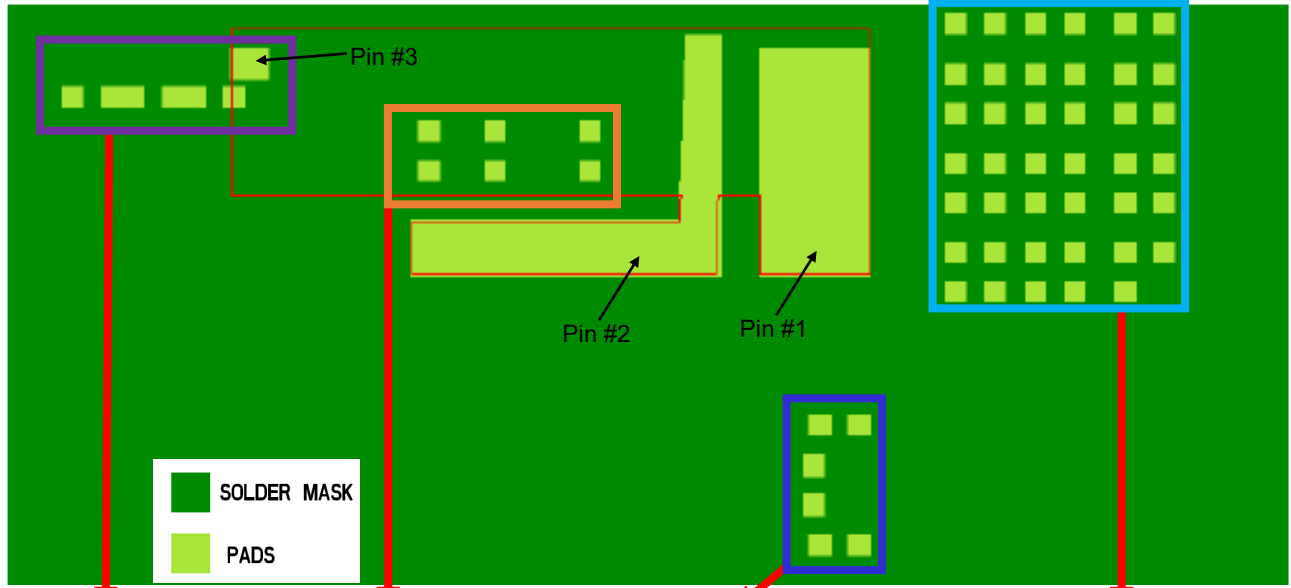

#### Pin Descriptions

Pin#	Description
1	Feed
2	Ground
3	Dummy Pad

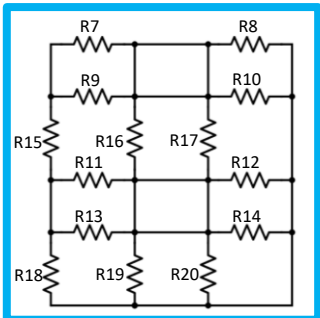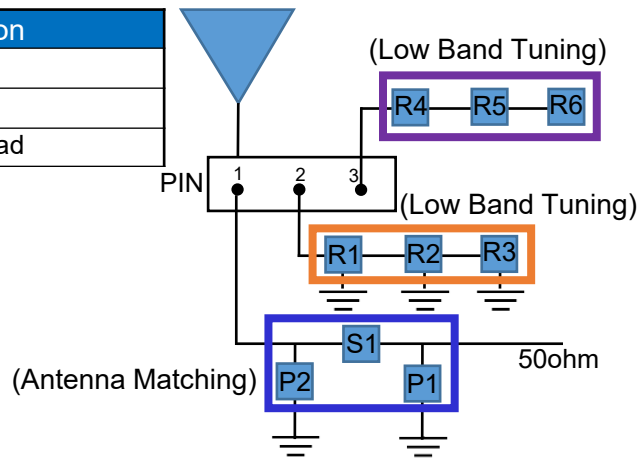

\*Extend ground towards antenna feed with 0Ω component(s). R7- R20 can improve high band bandwidth/ performance with ground coupling.

	P1	S1	P2	R1 - R3	R4 - R6	R7 - R14	R15 - R20
Default Values	DNI	0Ω	DNI	DNI	DNI	DNI	DNI
Tolerance	N/A	N/A	N/A	N/A	N/A	N/A	N/A

Appendix 1 CBRS/n78 KYOCERA AVX Stamped Metal Embedded Antenna.  
 KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.

# Appendix 1

Appendix 1 gives instructions on how to achieve CBRS/n78 performances through layout and impedance matching network.  
**(3.300 – 3.800 GHz)**


Frequency (GHz)	3.300 – 3.800
Peak Gain	4.21 dBi
Average Efficiency	76%
VSWR Match	2.0:1 max
Feed Point Impedance	50 ohms unbalanced
Polarization	Linear
Power Handling	0.5 Watt CW

\*Data shown above has Appendix 1 matching applied on (1000146-03) 100 x 50 mm pcb.

Appendix 1 CBRS/n78 KYOCERA AVX Stamped Metal Embedded Antenna.  
KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.

**Appendix 1 (1000146-03)**

Typical Performance on 100 x 50 mm PCB

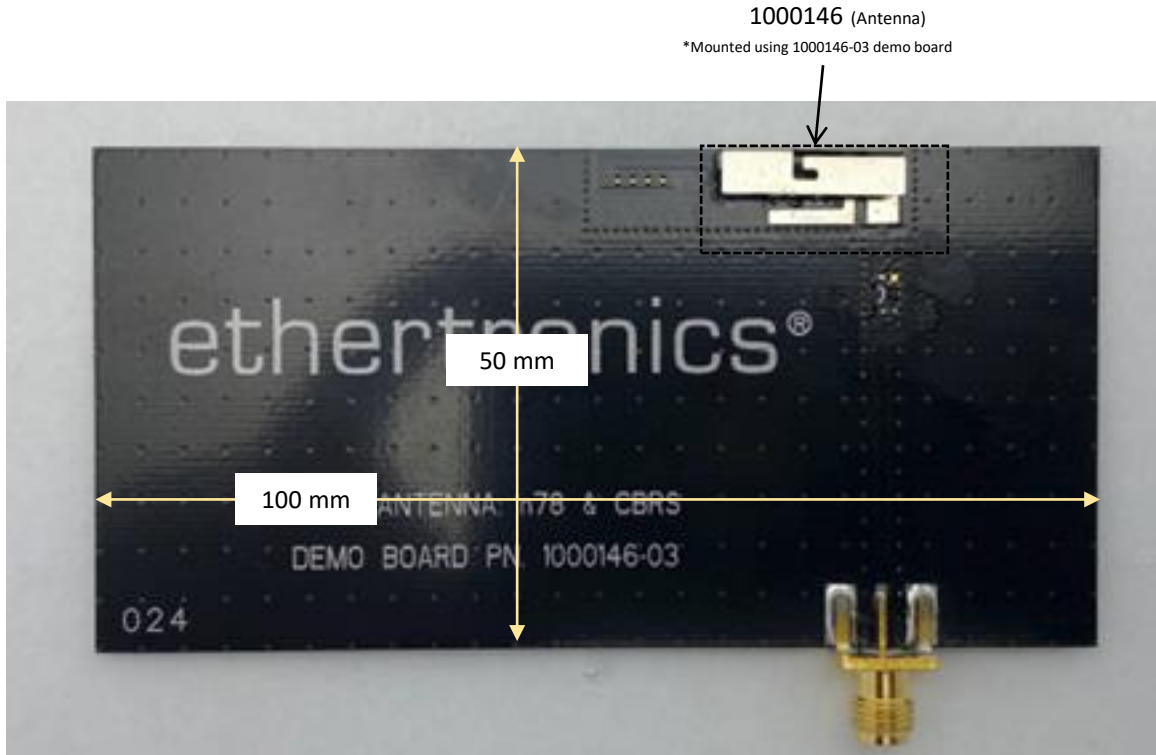


Appendix 1 CBRS/n78 KYOCERA AVX Stamped Metal Embedded Antenna.  
 KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.

### Appendix 1 VSWR and Efficiency Plots


Typical Performance on 100 x 50 mm PCB




**VSWR**

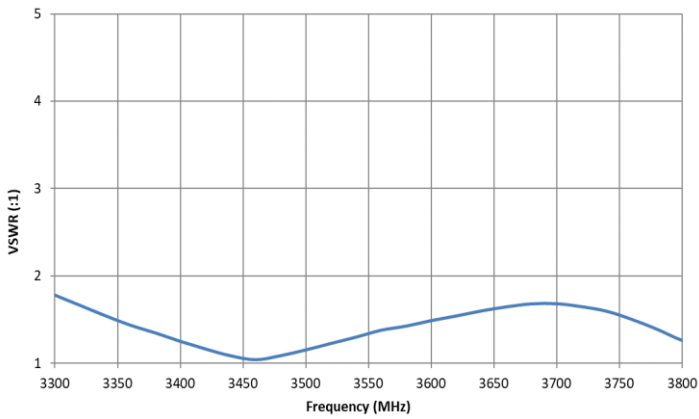

**Efficiency**

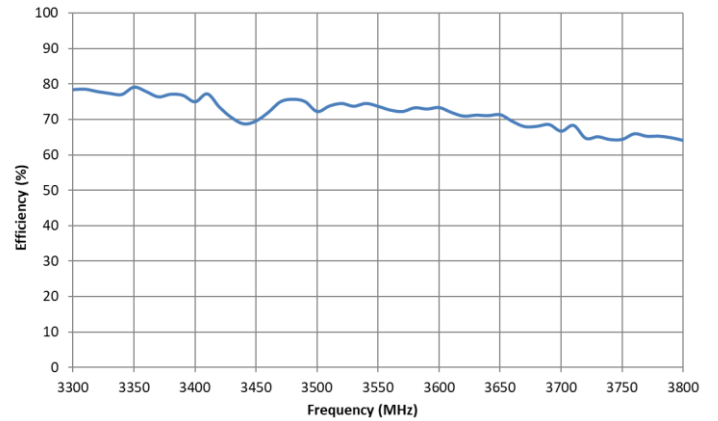


**Peak Gain**

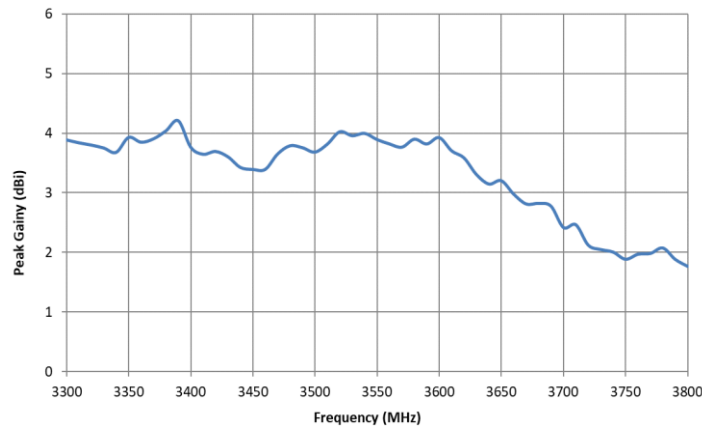




**Appendix 1 CBRS/n78 KYOCERA AVX Stamped Metal Embedded Antenna.**  
 KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.

**Appendix 1 Antenna Radiation Patterns**

Typical Performance on 100 x 50 mm PCB  
 Measured @ 3500 MHz

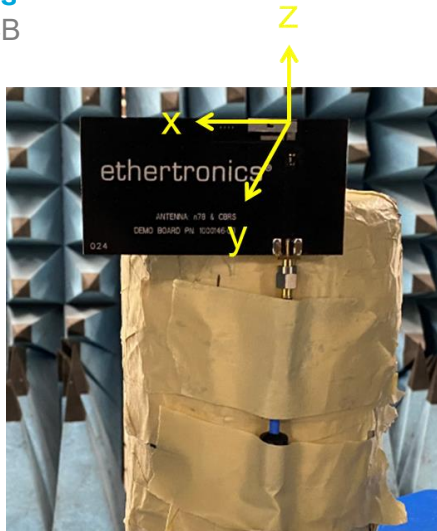



**Measured at 3500 MHz**

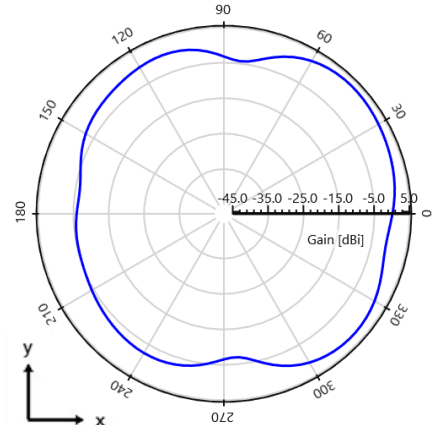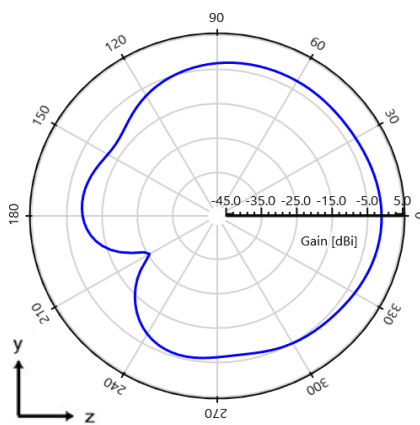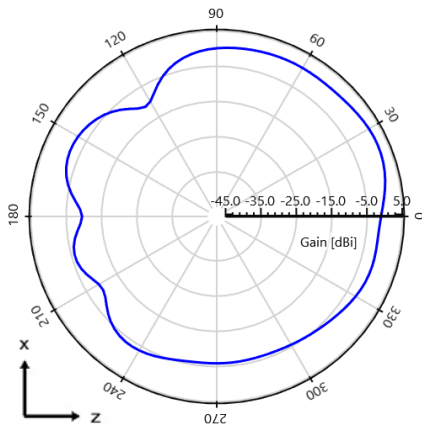

Appendix 1 CBRs/n78 KYOCERA AVX Stamped Metal Embedded Antenna.  
KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.

**Antenna Layout (CBRS/n78 performances)**




Typical layout dimensions (mm)

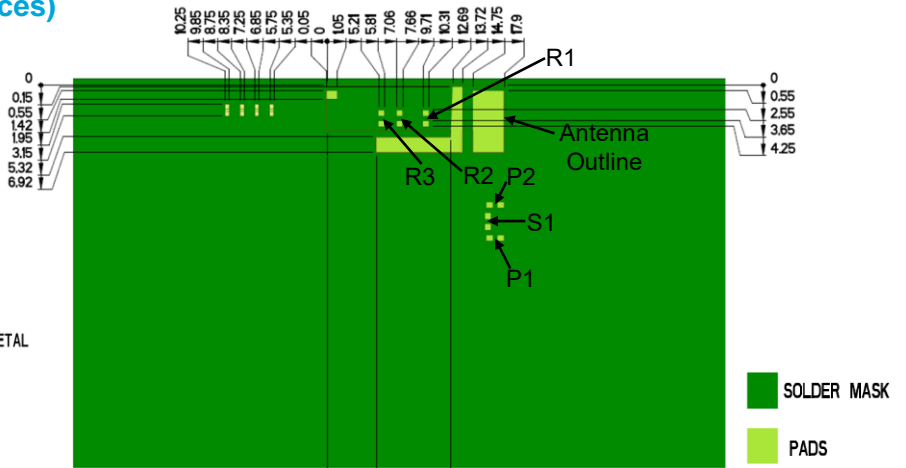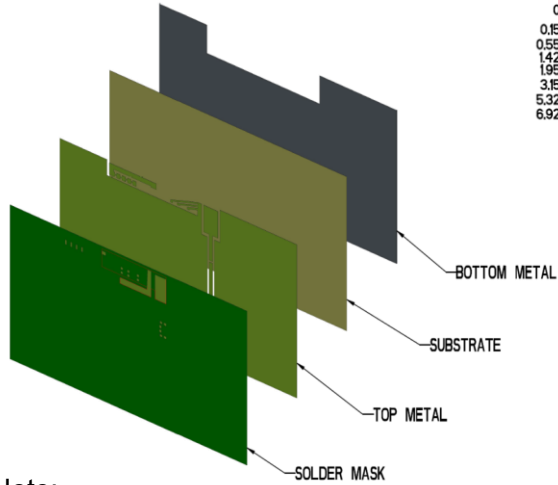

Note:  
Layout has minor tuning capabilities to allow for small antenna footprint.

**Pin Descriptions**

Pin#	Description
1	Feed
2	Ground
3	Dummy Pad

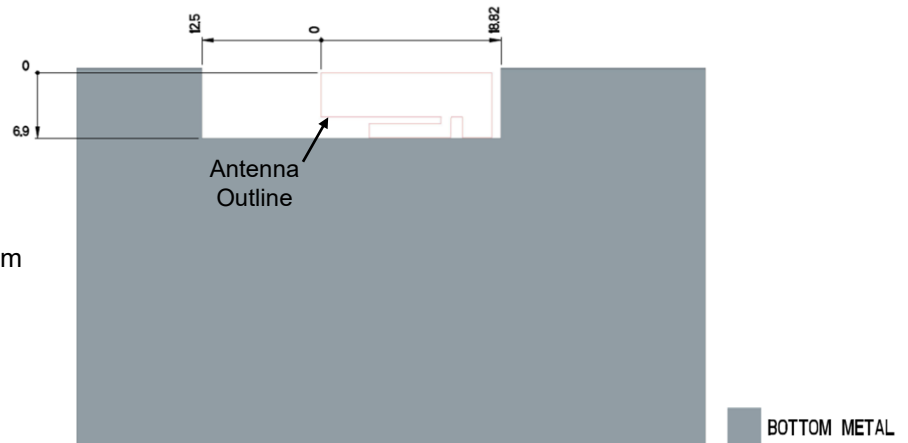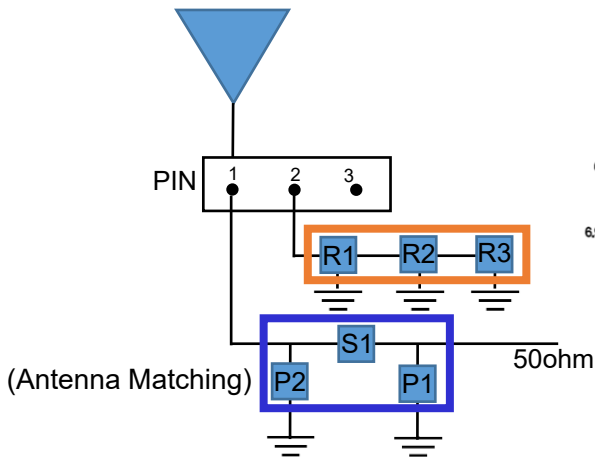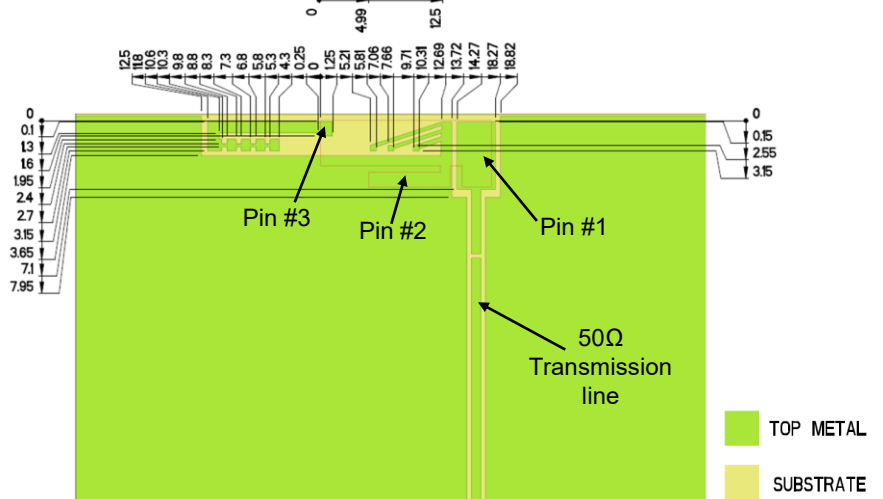

**Antenna Matching & Tuning Component Values**


	P1	S1	P2	R1 – R3
Default Values	DNI	1.5 nH	0.8 pF	DNI
Component Tolerance	N/A	(+/-0.05)	(+/-0.05)	N/A



Appendix 1 CBRS/n78 KYOCERA AVX Stamped Metal Embedded Antenna.  
 KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.


### Antenna Matching Structure

Typical matching values on 100 x 50 mm PCB

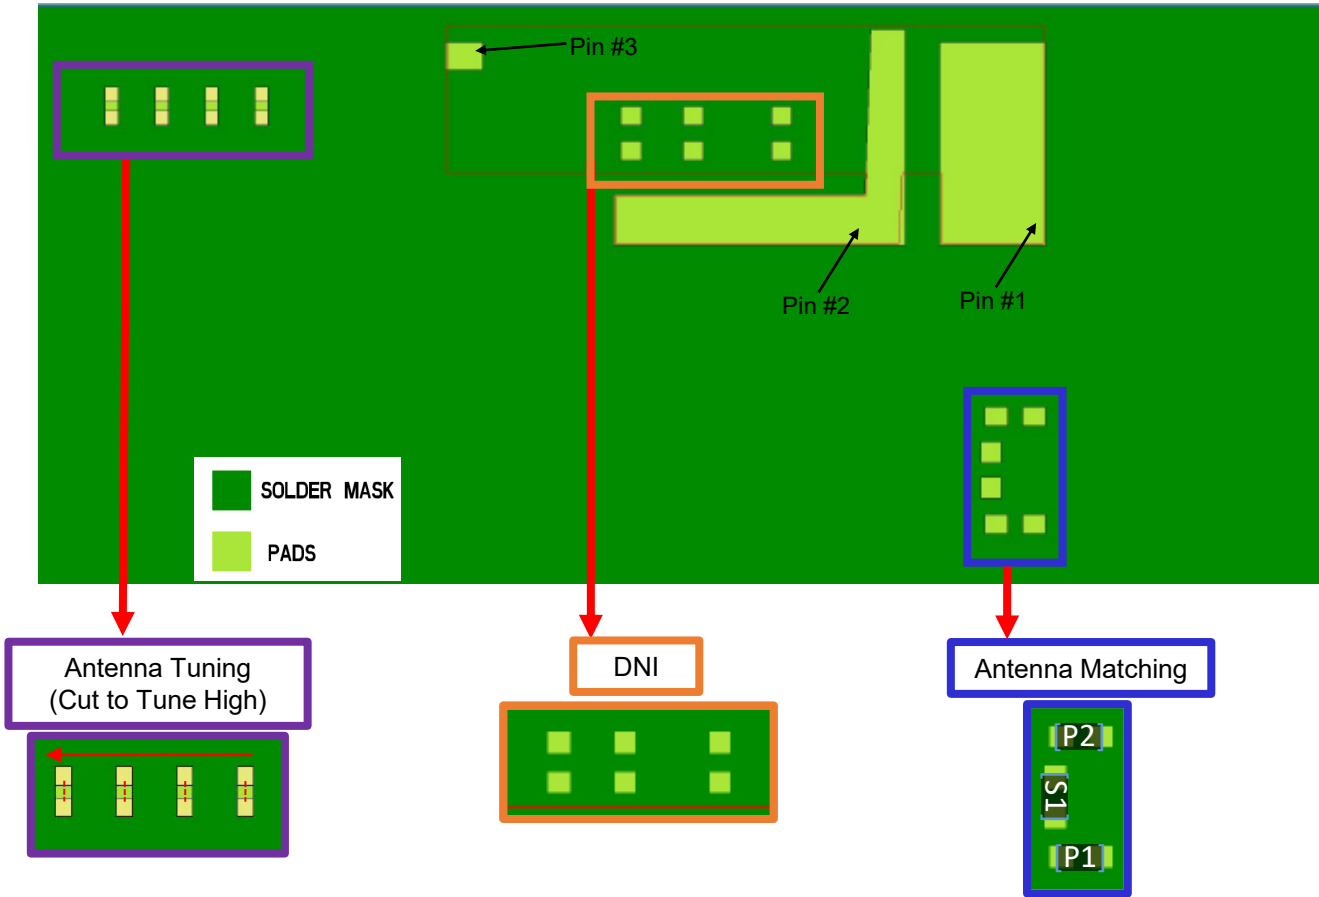

#### Pin Descriptions

Pin#	Description
1	Feed
2	Ground
3	Dummy Pad

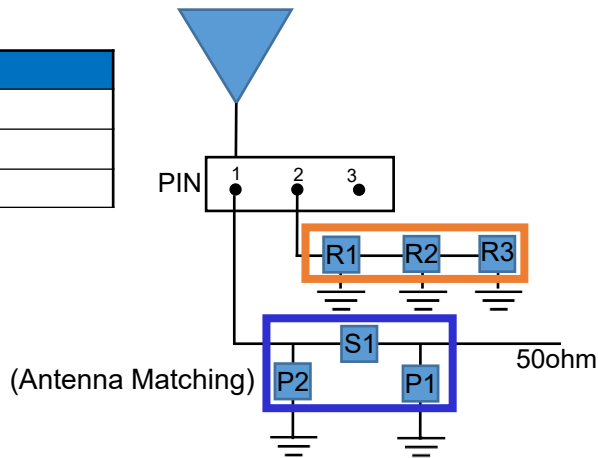

#### Antenna Matching & Tuning Component Values

	P1	S1	P2	R1 - R3
Default Values	DNI	1.5 nH	0.8 pF	DNI
Component Tolerance	N/A	(+/-0.05)	(+/-0.05)	N/A