

# GE865-QUAD Product Description

80309ST10054A Rev.3 – 2009-10-08



## Disclaimer

The information contained in this document is the proprietary information of Telit Communications S.p.A. and its affiliates ("TELIT").

The contents are confidential and any disclosure to persons other than the officers, employees, agents or subcontractors of the owner or licensee of this document, without the prior written consent of Telit, is strictly prohibited.

Telit makes every effort to ensure the quality of the information it makes available. Notwithstanding the foregoing, Telit does not make any warranty as to the information contained herein, and does not accept any liability for any injury, loss or damage of any kind incurred by use of or reliance upon the information.

Telit disclaims any and all responsibility for the application of the devices characterized in this document, and notes that the application of the device must comply with the safety standards of the applicable country, and where applicable, with the relevant wiring rules.

Telit reserves the right to make modifications, additions and deletions to this document due to typographical errors, inaccurate information, or improvements to programs and/or equipment at any time and without notice.

Such changes will, nevertheless be incorporated into new editions of this document.

Copyright: Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication thereof to others without express authorization are prohibited. Offenders will be held liable for payment of damages. All rights are reserved.

Copyright © Telit Communications S.p.A. 2009.



## Contents

|   |           |
|---|-----------|
| <b>1. Introduction .....</b>              | <b>6</b>  |
| 1.1. Scope .....                          | 6         |
| 1.2. Audience .....                       | 6         |
| 1.3. Contact Information, Support .....   | 6         |
| 1.4. Document Organization.....           | 6         |
| 1.5. ga .....                             |           |
| 1.6. Related Documents .....              | 7         |
| 1.7. Document History.....                | 8         |
| <b>2. The GE865-QUAD .....</b>            | <b>9</b>  |
| 2.1. Product Overview .....               | 9         |
| 2.2. Target Market.....                   | 9         |
| 2.3. Product Features .....               | 9         |
| <b>3. Product Description .....</b>       | <b>14</b> |
| 3.1. Size and 2D mechanical drawing ..... | 14        |
| 3.2. Weight .....                         | 15        |
| 3.3. Environmental requirements .....     | 15        |
| 3.3.1. Temperature range.....             | 15        |
| 3.3.2. RoHS compliance.....               | 15        |
| 3.4. Operating Frequency.....             | 15        |
| 3.5. Transmitter output power .....       | 16        |
| 3.6. Reference sensitivity .....          | 16        |
| 3.7. Antenna.....                         | 16        |
| 3.8. Supply voltage .....                 | 16        |
| 3.9. Power consumption.....               | 17        |
| 3.10. The user interface.....             | 17        |
| 3.11. Speech CODEC .....                  | 17        |
| 3.12. SIM Reader .....                    | 17        |
| 3.13. SMS.....                            | 17        |



|           |  |           |
|-----------|--|-----------|
| 3.14.     | Real Time Clock and Alarm.....             | 18        |
| 3.15.     | Data transmission capabilities.....        | 18        |
| 3.16.     | Local security management.....             | 18        |
| 3.17.     | Call control.....                          | 18        |
| 3.18.     | Phonebook.....                             | 18        |
| 3.19.     | Characters management.....                 | 18        |
| 3.20.     | SIM related functions.....                 | 19        |
| 3.21.     | Call status indication.....                | 19        |
| 3.22.     | Automatic answer (Voice, Data).....        | 19        |
| 3.23.     | Supplementary services (SS).....           | 19        |
| 3.24.     | Acoustic signaling.....                    | 19        |
| 3.25.     | Buzzer output.....                         | 20        |
| 3.26.     | RF Transmission Monitor (RFTXMON).....     | 20        |
| 3.27.     | RF Transmission Control.....               | 20        |
| 3.28.     | TTY (Telephone Text).....                  | 20        |
| 3.29.     | Logic level specifications.....            | 20        |
| 3.30.     | Audio.....                                 | 21        |
| 3.30.1.   | Analog.....                                | 21        |
| 3.30.2.   | Digital.....                               | 21        |
| 3.31.     | Serial Ports.....                          | 21        |
| 3.32.     | Converters.....                            | 21        |
| 3.32.1.   | ADC Converter.....                         | 21        |
| 3.32.2.   | DAC Converter.....                         | 21        |
| 3.33.     | Mounting the GE865-QUAD on your Board..... | 21        |
| 3.34.     | Packing system.....                        | 21        |
| <b>4.</b> | <b>Evaluation Kit.....</b>                 | <b>22</b> |
| <b>5.</b> | <b>Software Features.....</b>              | <b>23</b> |
| 5.1.      | Easy GPRS Extension.....                   | 23        |
| 5.1.1.    | Overview.....                              | 23        |
| 5.2.      | Multisocket.....                           | 23        |



|   |           |
|---|-----------|
| 5.3. Jamming Detection .....                          | 24        |
| 5.3.1. Overview .....                                 | 24        |
| 5.4. CMUX .....                                       | 24        |
| 5.4.1. Architecture .....                             | 24        |
| 5.4.2. Features .....                                 | 24        |
| 5.5. Easy Script Extension - Python interpreter ..... | 26        |
| 5.5.1. Overview .....                                 | 26        |
| 5.5.2. Python 1.5.2+ Copyright Notice.....            | 27        |
| 5.6. SAP: SIM Access Profile .....                    | 28        |
| 5.6.1. Architecture .....                             | 28        |
| 5.6.2. Implementation features.....                   | 28        |
| 5.6.3. Remote SIM Message Command Description .....   | 28        |
| 5.7. Premium FOTA Management (PFM) Service .....      | 29        |
| 5.7.1. FOTA (Firmware Over The Air).....              | 29        |
| 5.8. AT Commands .....                                | 30        |
| <b>6. Conformity Assessment Issues .....</b>          | <b>31</b> |
| 6.1. RoHS Certificate.....                            | 33        |
| <b>7. SAFETY RECOMMENDATIONS .....</b>                | <b>34</b> |
| <b>8. List of acronyms .....</b>                      | <b>36</b> |



## 1. Introduction

### 1.1. Scope

Scope of this document is giving an overview of the Telit GE865-QUAD module, which is a very small GSM/GPRS module with data and voice capabilities.

### 1.2. Audience

This document is intended for customers who are evaluating the GE865-QUAD.

### 1.3. Contact Information, Support

For general contact, technical support, to report documentation errors and to order manuals, contact Telit's Technical Support Center (TTSC) at:

[TS-EMEA@telit.com](mailto:TS-EMEA@telit.com)  
[TS-NORTHAMERICA@telit.com](mailto:TS-NORTHAMERICA@telit.com)  
[TS-LATINAMERICA@telit.com](mailto:TS-LATINAMERICA@telit.com)  
[TS-APAC@telit.com](mailto:TS-APAC@telit.com)

Alternatively, use:

<http://www.telit.com/en/products/technical-support-center/contact.php>

For detailed information about where you can buy the Telit modules or for recommendations on accessories and components visit:

<http://www.telit.com>

To register for product news and announcements or for product questions contact Telit's Technical Support Center (TTSC).

Our aim is to make this guide as helpful as possible. Keep us informed of your comments and suggestions for improvements.

Telit appreciates feedback from the users of our information.

### 1.4. Document Organization

This document contains the following chapters:

[“Chapter 1: “Introduction”](#) provides a scope for this document, target audience, contact and support information, and text conventions.

[“Chapter 2: “The GE865-QUAD”](#) gives an overview of the features of the product.



[“Chapter 3: “Product Description”](#) describes in details the characteristics of the product.

[“Chapter 4: “Evaluation Kit”](#) provides some basic information about the Evaluation Kit.

[“Chapter 5: “Software Features”](#) provides an overview of the software features of the products.

[“Chapter 6: “Conformity Assessment Issues”](#) provides some fundamental hints about the conformity assessment that the final application might need.

[“Chapter 7: “Safety Recommendation”](#) provides some safety recommendations that must be followed by the customer in the design of the application that makes use of the GE865.

## 1.5. Text Conventions



***Danger – This information MUST be followed or catastrophic equipment failure or bodily injury may occur.***



***Caution or Warning – Alerts the user to important points about integrating the module, if these points are not followed, the module and end user equipment may fail or malfunction.***



**Tip or Information – Provides advice and suggestions that may be useful when integrating the module.**

All dates are in ISO 8601 format, i.e. YYYY-MM-DD.

## 1.6. Related Documents

- Hardware User Guide
- Software User Guide
- AT Command User Guide
- CMUX User Guide
- SAP User Guide
- Easy Script User Guide
- Audio Settings User Guide



- Easy GPRS User Guide

## 1.7. Document History

| Revision | Date       | Changes   | Location |
|----------|------------|---|----------|
| 0        | 2009-02-16 | First issue   | Trieste  |
| 1        | 2009-06-12 | DVI added<br>Update of power consumption data<br>FAX removed<br>Update on packing system<br>TTY support added<br>SMS over GPRS added<br>Multiple audio settings added<br>3GPP Release 4 compliance added<br>CSD transparent data removed<br>GERAN feature package 1 added<br>DARP/SAIC added<br>GSM, 8859-1 and UCS2 character sets added<br>Jamming Detection reviewed<br>ICMP protocol support added<br>SPI support removed | Trieste  |
| 2        | 2009-07-17 | SIM Toolkit 3GPP reference spec added<br>NACC, Extended TBF added<br>Conformity Assessment Issues updated<br>RoHS certificate added<br>Safety Recommendations updated   | Trieste  |
| 3        | 2009-10-08 | Sensitivity updated<br>Power consumption figures updated<br>Enhanced Measurement Report added   | Trieste  |





## 2. The GE865-QUAD

### 2.1. Product Overview

The new GE865-QUAD product introduces the smallest GSM/GPRS Ball-Grid-Array (BGA) module in the market.

The GE865-QUAD extends Telit's range of BGA products, incorporating a single-chip solution built on 0.13  $\mu\text{m}$  CMOS technology into a 22 x 22 x 3 mm block.

The low profile and small size of the unique BGA package for the GE865-QUAD enable the design of extremely compact applications. Since connectors are eliminated, the solution cost is significantly reduced compared to conventional mounting.

With its ultra-compact design and extended temperature range, the Telit GE865-QUAD product is the perfect platform for high-volume m2m applications and mobile data devices. Additional features such as integrated TCP/IP protocol stack and serial multiplexer extend functionality of the application at no additional cost.

The GE865-QUAD makes it possible to run the customer's application inside the module using Python Script Interpreter, thus making it the smallest, complete platform for m2m solutions.

The GE865-QUAD module, support Over-the-Air firmware update by means Premium FOTA Management. By embedding the RedBend's vCurrent Mobile® agent, a proven and battle-tested technology powering hundreds of millions of cellular handsets world-wide, Telit is able to update its products by transmitting only a delta file, which represents the difference between one firmware version and another.

### 2.2. Target Market

The GE865-QUAD is designed and developed for the usage in applications such as:

- Telemetry
- Telematics
- Security alarms
- Automated Meter Reading (AMR)
- POS terminals
- PDAs and Mobile Computing
- Automotive and Fleet Management applications

### 2.3. Product Features

- Quad-band EGSM 850 / 900 / 1800 / 1900 MHz



- GSM/GPRS protocol stack 3GPP Release 4 compliant
- Output power
  - Class 4 (2W) @ 850 / 900 MHz
  - Class 1 (1W) @ 1800 / 1900 MHz
- Control via AT commands according to 3GPP 27.005, 27.007 and Telit custom AT commands
- Control via Remote AT commands
- Power consumption (typical values)
  - Power off: < 62 uA
  - Idle (registered, power saving): 1.6 mA @ DRX=9
- Serial port multiplexer 3GPP 27.010
- SIM Application Toolkit 3GPP TS 51.014
- SIM Access Profile
- Extended Supply voltage range: 3.22 – 4.5 V DC (3.8 V DC nominal)
- TCP/IP stack access via AT commands
- Sensitivity:
  - ≤ - 107 dBm (typ.) @ 850 / 900 MHz
  - ≤ - 106 dBm (typ.) @ 1800 / 1900 MHz
- DARP/SAIC support
- Enhanced Measurement Report support
- Dimensions: 22 x 22 x 3 mm
- Weight: 3.2 grams
- Extended temperature range
  - 40°C to +85°C (operational)
  - 40°C to +85°C (storage temperature)
- RoHS compliant

## Interfaces

- 10 I/O ports maximum
- Analog audio (balanced)
- Digital Voice Interface
- 2 A/D plus 1 D/A converters



- Buzzer output
- ITU-T V.24 serial link through CMOS UART:
  - Baud rate from 300 to 115.200 bps
  - Autobauding up to 115.200 bps

### Audio

- Telephony, emergency call
- Half rate, full rate, enhanced full rate and adaptive multi rate voice codecs (HR, FR, EFR, AMR)
- Superior echo cancellation & noise reduction
- Multiple audio profiles pre-programmed and fully configurable
- DTMF

### Approvals

- Fully type approved conforming with R&TTE directive
- CE, GCF, FCC, PTCRB, IC

### SMS

- Point-to-point mobile originated and mobile terminated SMS
- Concatenated SMS supported
- SMS cell broadcast
- Text and PDU mode
- SMS over GPRS

### Circuit switched data transmission

- Asynchronous non-transparent CSD up to 9.6 kbps
- V.110

### GPRS data

- GPRS class 10
- Mobile station class B
- Coding scheme 1 to 4



- PBCCH support
- GERAN Feature Package 1 support (NACC, Extended TBF)

### GSM Supplementary Services

- Call forwarding
- Call barring
- Call waiting & call hold
- Advice of charge
- Calling line identification presentation (CLIP)
- Calling line identification restriction (CLIR)
- Unstructured supplementary services mobile originated data (USSD)
- Closed user group

### Additional features

- SIM phonebook
- Fixed dialling number (FDN)
- Real Time Clock
- Alarm management
- Network LED support
- IRA, GSM, 8859-1 and UCS2 character sets
- Jamming detection
- Embedded TCP/IP stack, including TCP, IP, UDP, SMTP, ICMP and FTP protocols
- EASY SCAN ® automatic scan over GSM frequencies (also without SIM card)

### Python\* application resources

- Python\* script interpreter (module takes the application code directly in the Python\* language)
- Memory: 1.9 MB of NV memory for the user scripts and 1 MB RAM for the Python\* engine usage
- Over-the-air application SW update






### 3. Product Description

#### 3.1. Size and 2D mechanical drawing

The Telit GE865-QUAD module overall dimensions are:

- Length: 22 mm
- Width: 22 mm
- Thickness: 3 mm

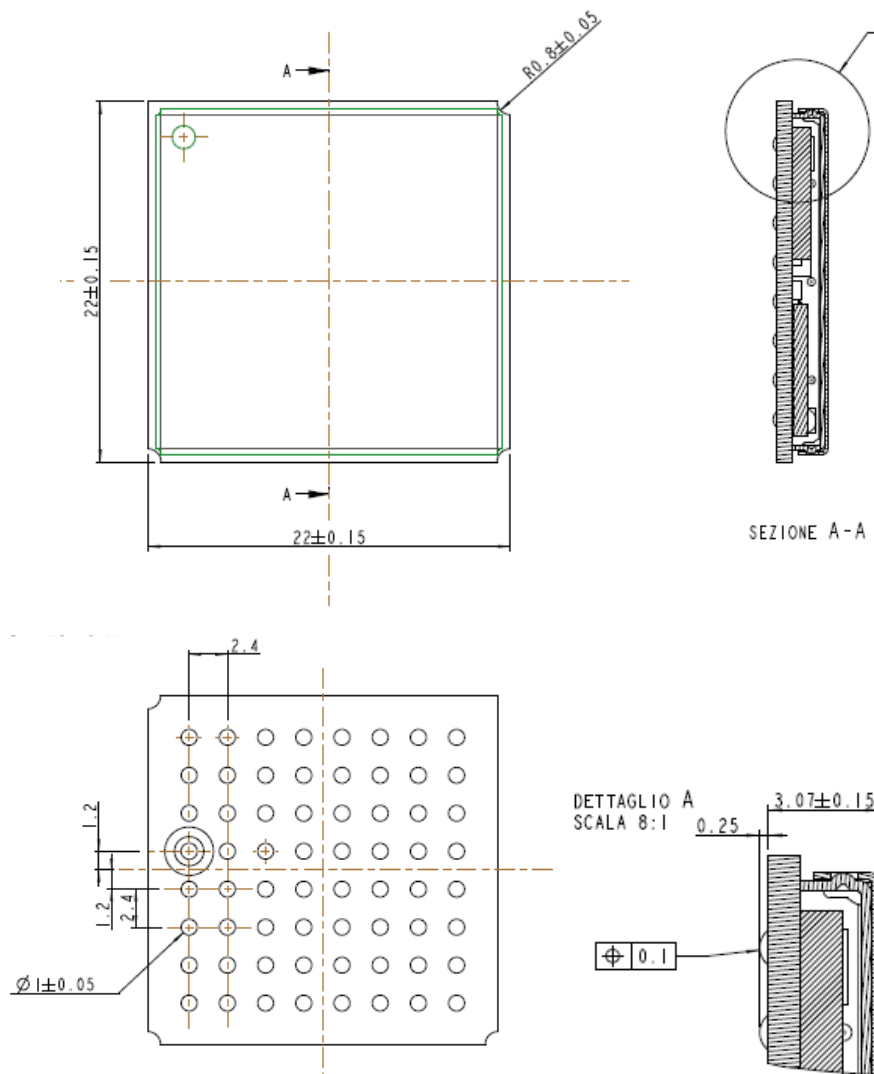

### 3.2. Weight

The weight of the GE865-QUAD is 3.2 grams.

### 3.3. Environmental requirements

#### 3.3.1. Temperature range

|   |               | Note  |
|---|---------------|---|
| Operating Temperature Range                 | -20°C ÷ +55°C | The module is fully functional(*) in all the temperature range, and it fully meets the 3GPP specifications. |
|   | -40°C ÷ +85°C | The module is fully functional (*) in all the temperature range.  |
| Storage and non operating Temperature Range | -40°C ÷ +85°C |   |

(\*)Functional: the module is able to make and receive voice calls, data calls, SMS and make GPRS traffic.

#### 3.3.2. RoHS compliance

As a part of Telit's corporate policy of environmental protection, the GE865-QUAD product comply to the RoHS (Restriction of Hazardous Substances) directive of the European Union (EU Directive 2002/95/EG).

### 3.4. Operating Frequency

The operating frequencies in GSM, DCS, PCS modes are conform to the GSM specifications.

| Mode     | Freq. TX (MHz)  | Freq. RX (MHz)  | Channels (ARFC) | TX - RX offset |
|----------|-----------------|-----------------|-----------------|----------------|
| GSM 850  | 824.2÷848.8     | 869.2÷893.8     | 124 ÷ 251       | 45 MHz         |
| EGSM 900 | 890.0 - 914.8   | 935.0 - 959.8   | 0 ÷ 124         | 45 MHz         |
|          | 880.2 - 889.8   | 925.2 - 934.8   | 975 ÷ 1023      | 45 MHz         |
| DCS-1800 | 1710.2 - 1784.8 | 1805.2 - 1879.8 | 512 ÷ 885       | 95 MHz         |
| PCS-1900 | 1850.2 - 1909.8 | 1930.2 - 1989.8 | 512 ÷ 810       | 80 MHz         |









The GE865-QUAD also supports SMS over GPRS

### 3.14. Real Time Clock and Alarm

The GE865-QUAD supports the Real Time Clock and Alarm functions through AT commands. An alarm output pin can be configured to indicate the alarm with a hardware line output.

Furthermore the Voltage Output of the RTC power supply is provided so that a backup capacitor can be added externally to increase the RTC autonomy.

### 3.15. Enhanced Measurement Report

The GE865-QUAD supports the Enhanced Measurement Report on SACCH channel according to 3GPP TS 44.018 version 4.22.0 Release 4 (par. 3.4.1.2, 9.1.54, 9.1.55) and 3GPP TS 45.008 version 4.17.0 Release 4 (par. 8.4.8).

### 3.16. Data transmission capabilities

The Telit GE865-QUAD is a mobile station class B supporting GPRS Class 10, coding schemes 1 to 4 and PBCCH. Moreover, it supports GERAN feature package 1, which consist in supporting the Extended Uplink TBF and Network Assisted Cell Change (NACC).

As for circuit switched data, the GE865-QUAD supports asynchronous non-transparent data up to 9.6 Kbps. Moreover, it supports the V.110.

### 3.17. Local security management

The local security management can be done with the lock of Subscriber Identity module (SIM). The security code will be requested at power-up.

### 3.18. Call control

The call cost control function is supported.

### 3.19. Phonebook

This function allows the storing of the telephone numbers in SIM memory. The capability depends on SIM version and its embedded memory.

### 3.20. Characters management

The GE865-QUAD supports the IRA, GSM, 8859-1 and UCS2 characters sets, in TEXT and PDU mode.



### 3.21. SIM related functions

Fixed Dialing Numbers (FDN), Abbreviated Dialing Number (ADN) and PIN insertion are supported

Extension at the PIN2 for the PUK2 insertion capability for lock condition is supported too.

### 3.22. Call status indication

The call status indication is supported.

### 3.23. Automatic answer (Voice, Data)

The automatic answer is supported. The user/application can specify the number of rings after which the module will automatically answer.

The user/application can set the number of rings by means of the command `ATS0=<n>`.

### 3.24. Supplementary services (SS)

The following supplementary services are supported:

- Call Barring,
- Call Forwarding,
- Calling Line Identification Presentation (CLIP),
- Calling Line Identification Restriction (CLIR),
- Call Waiting, other party call Waiting Indication,
- Call Hold, other party Hold / Retrieved Indication,
- Closed User Group supplementary service (CUG),
- Advice of Charge,
- Unstructured SS Mobile Originated (MO)

### 3.25. Acoustic signaling

The acoustic signaling of the GE865-QUAD on the selected acoustic device are the following:

- Call waiting;
- Ringing tone;
- SMS received tone;
- Busy tone;



- Power on/off tone;
- Off Hook dial tone;
- Congestion tone;
- Connected tone;
- Call dropped;
- No service tone;
- Alarm tone.

### 3.26. Buzzer output

A general purpose I/O pin can be configured to output the BUZZER output signal. With an external MOSFET or transistor and a diode, a buzzer can be directly driven.

The ringing tone and the other signaling tones can be redirected to this buzzer output with a specific AT command.

### 3.27. RF Transmission Monitor (RFTXMON)

As alternate function of the GPIO5, the GE865-QUAD can provide the RF transmission monitor. When the alternate function is activated, the pin of GPIO5 changes to HIGH every time the module transmits an RF signal and remains HIGH for the duration of the transmission sequence, i.e. it does not change with every GSM signal burst.

### 3.28. RF Transmission Control

As alternate function of the GPIO4 pin, when configured as RF Transmission Control Input, it allows to disable the Transmitter when the GPIO is set to Low by the application.

### 3.29. TTY (Telephone Text)

The TTY feature is supported. Please refer to 3GPP TS 26.226 and 3GPP TS 26.231 for details.

### 3.30. Logic level specifications

Where not specifically stated, all the interface circuits work at 2.8V CMOS logic levels. To get more detailed information about the logic level specifications used in the GE865-QUAD, please check with the Hardware User Guide.



### 3.31. Audio

#### 3.31.1. Analog

The GE865-QUAD offers one audio line balanced. The GE865-QUAD has a built-in echo canceller and a noise suppressor. For more details, please refer to the GE865-QUAD Hardware User Guide.

#### 3.31.2. Digital

The GE865-QUAD offers the digital voice interface. For more details, please refer to the Digital Voice Interface Application Note.

### 3.32. Serial Ports

Two serial ports are available on the module:

- Main serial port (full RS232), auto-bauding up to 115,200 bps
- AUX serial port (RX & TX only), 115,200 bps

### 3.33. Converters

#### 3.33.1. ADC Converter

The GE865-QUAD has two on board ADC, which are 11-bit converter. They are able to read a voltage level in the range of 0÷2 volts applied on the ADC pin input, store and convert it into 11 bit word.

#### 3.33.2. DAC Converter

The GE865-QUAD has one on board DAC, which is a 10 bit converter, able to generate an analogue value based a specific input in the range from 0 up to 1023. However, an external low-pass filter is necessary. See the HW User Guide for the details.

### 3.34. Mounting the GE865-QUAD on your Board

The Telit GE865-QUAD module has been designed in order to be compliant with a standard lead-free SMT process. For detailed information about PCB pad design and conditions to use in SMT process please check with the GE865-QUAD Hardware User Guide.

### 3.35. Packing system

The Telit GE865-QUAD is supplied on trays of 50 pieces each or, in Tape&Reel of 250 pcs a reel



## 4. Evaluation Kit

In order to assist the customer in the development of the application, Telit offers the EVK2 Evaluation Kit that can be ordered separately. The EVK2 has a SIM card holder, the RS 232 serial port level translator, a direct UART connection, audio and antenna connector.

The EVK2 provides a fully functional solution for a complete data or phone application. The standard serial RS232 9 pin connector placed on the Evaluation Kit allows the connection of the EVK2 system with a PC or other DTE.

The development of the applications utilizing the Telit GE865-QUAD module must present a proper design of all the interfaces towards and from the module (e.g. power supply, audio paths, level translators), otherwise a decrease in the performances will be introduced or, in the worst case, a wrong design can even lead to an operating failure of the module.

In order to assist the hardware designer in his project phase, the EVK2 board presents a series of different solutions, which will cover the most common design requirements on the market, and which can be easily integrated in the OEM design as building blocks or can be taken as starting points to develop a specific one.

For a detailed description of the Telit Evaluation Kit, please refer to the documentation provided with the Telit GE865-QUAD Hardware User Guide and EVK2 User Manual.




## 5. Software Features

### 5.1. Easy GPRS Extension

#### 5.1.1. Overview

The Easy GPRS feature allows the Telit GE865-QUAD user to contact a device in internet and establish with it a raw data flow over the GPRS and Internet networks.

This feature can be seen as a way to obtain a "virtual" serial connection between the Application Software on the Internet machine involved and the controller of the Telit GE865-QUAD module, regardless of all the software stacks underlying.

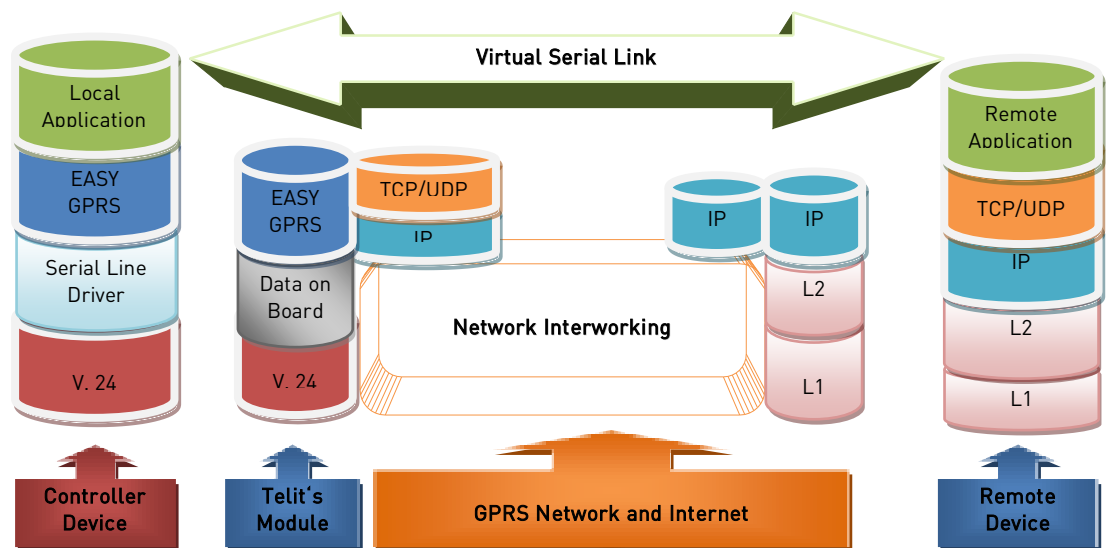

This particular implementation allows to the devices interfacing to the Telit GE865-QUAD module the use of the GPRS and Internet packet service without the need to have an internal TCP/IP stack since this function is embedded in the module.

For more detailed information regarding the use of the Easy GPRS feature, please consult Easy GPRS User Guide and AT Commands Reference Guide.

### 5.2. Multisocket

The multisocket is an extension of Telit Easy GPRS feature, which allows the user to have two contexts activated (that means two different IP address), more than one socket connection (with a maximum of 6) and simultaneous FTP client service.



For more detailed information please consult the Easy GPRS User Guide.

## 5.3. Jamming Detection

### 5.3.1. Overview

The Jammed Detect feature allows the GE865-QUAD to detect the presence of a disturbing device such as a Communication Jammer and give indication to the user.

This feature can be very important in alarm, security and safety applications that rely on the module for the communications. In these applications, the presence of a Jammer device can compromise the whole system reliability and functionality and therefore shall be recognized and reported to the local system for countermeasure actions.

## 5.4. CMUX

CMUX (Converter-Multiplexer) is a multiplexing protocol implemented in the GE865-QUAD that can be used to send any data, SMS, or TCP data.

### 5.4.1. Architecture

The Multiplexer mode enables one serial interface to transmit data to four different customer applications. This is achieved by providing four virtual channels using a Multiplexer (MUX).

This is especially advantageous when a data/GPRS call is ongoing. Using the Multiplexer features, e.g. controlling the module or using the SMS service can be done via the additional channels without disturbing the data flow; access to the second UART is not necessary.

Furthermore, several accesses to the module can be created with the Multiplexer. This is of great advantage when several independent electronic devices or interfaces are used.

To access the three virtual interfaces, both the GSM engine and the customer application must contain MUX components, which communicate over the multiplexer protocol.

In Multiplexer mode, AT commands and data are encapsulated into packets. Each packet has channel identification and may vary in length.

### 5.4.2. Features

- 3GPP 27.010 CMUX Basic Option used
- CMUX implementation support four full DLCI (Serial Port)











## 5.6. SAP: SIM Access Profile

### 5.6.1. Architecture

The SAP feature allows the module to use the SIM of a remote SIM Server. This feature is implemented using special AT Command on a Virtual circuit of the CMUX interface.

### 5.6.2. Implementation features

- SAP is based on 3GPP 27.010 CMUX Basic Option used
- Only SAP Client features
- Logic HW flow control is recommended on the Virtual instance selected for the SAP command.

### 5.6.3. Remote SIM Message Command Description

The module sends request commands to the client application through a binary message that is crowned in the CMUX message. The client application shall extract the message and send it to the SAP server, through the appropriate protocols (e.g. by RFCOMM, that is the Bluetooth serial port emulation entity).

The client application shall extract all the messages sent by SAP server and put them in the CMUX message, to be sent to the module.

The module fulfill the following feature requirements:

- Connection management
- Transfer APDU
- Transfer ATR
- Power SIM on
- Report Status
- Error Handling







## 6. Conformity Assessment Issues

The Telit GE865-QUAD has been assessed in order to satisfy the essential requirements of the R&TTE Directive 1999/05/EC (Radio Equipment & Telecommunications Terminal Equipments) to demonstrate the conformity against the harmonized standards with the final involvement of a Notified Body.

# CE 0889

If the module is installed in conformance to the Telit installation manuals, no further evaluation under Article 3.2 of the R&TTE Directive and do not require further involvement of a R&TTE Directive Notified Body for the final product.

In all other cases, or if the manufacturer of the final product is in doubt, then the equipment integrating the radio module must be assessed against Article 3.2 of the R&TTE Directive.

In all cases the assessment of the final product must be made against the Essential requirements of the R&TTE Directive Articles 3.1(a) and (b), Safety and EMC respectively, and any relevant Article 3.3 requirements.

This Product Description, the Hardware User Guide and Software User Guide contain all the information you may need for developing a product meeting the R&TTE Directive.

Furthermore the GE865-QUAD module is FCC Approved as module to be installed in other devices. This device is to be used only for fixed and mobile applications. If the final product after integration is intended for portable use, a new application and FCC is required.

The GE865-QUAD is conforming to the following US Directives:

- Use of RF Spectrum. Standards: FCC 47 Part 24 (GSM 1900)
- EMC (Electromagnetic Compatibility). Standards: FCC47 Part 15







## 6.1. RoHS Certificate



### DECLARATION OF EU RoHS Compliance

We, **Telit Communications S.p.A**

Of: **Via Stazione di Prosecco, 5/b  
34010 Sgonico (TRIESTE)  
ITALY**

declare under our sole responsibility that the:

**GE865 products family**

to which this declaration relates, is in full compliance with EU Directive 2002/95/EC on Restriction of the use of certain Hazardous Substances in electrical and electronic equipment (RoHS), subsequent amendments and the European Court of Justice decision on Deca-BDE substances from July 1, 2008.

This information represents Telit's knowledge and belief as of the date that it is provided. Telit bases its material content knowledge on information provided by third parties and has taken and continues to take commercially reasonable steps to provide representative and accurate information, but may not have conducted chemical analysis on incoming materials and chemicals.

The technical documentation or other information showing that the product which has put on the market complies the requirements of regulation, and the applicable compliance process description P32-EN dated April 20<sup>th</sup>, 2009, are held at:

**Telit Communications S.p.A**  
**Via Stazione di Prosecco, 5/b**  
**34010 Sgonico (TRIESTE)**  
**ITALY**

Trieste **July 13, 2009**



**Brian Tucker**  
Global Quality Management



## 7. SAFETY RECOMMENDATIONS

### READ CAREFULLY

Be sure the use of this product is allowed in the country and in the environment required. The use of this product may be dangerous and has to be avoided in the following areas:

- Where it can interfere with other electronic devices in environments such as hospitals, airports, aircrafts, etc
- Where there is risk of explosion such as gasoline stations, oil refineries, etc

It is responsibility of the user to enforce the country regulation and the specific environment regulation.

Do not disassemble the product; any mark of tampering will compromise the warranty validity.

We recommend following the instructions of the hardware user guides for a correct wiring of the product. The product has to be supplied with a stabilized voltage source and the wiring has to be conforming to the security and fire prevention regulations.

The product has to be handled with care, avoiding any contact with the pins because electrostatic discharges may damage the product itself. Same cautions have to be taken for the SIM, checking carefully the instruction for its use. Do not insert or remove the SIM when the product is in power saving mode.

The system integrator is responsible of the functioning of the final product; therefore, care has to be taken to the external components of the module, as well as of any project or installation issue, because the risk of disturbing the GSM network or external devices or having impact on the security. Should there be any doubt, please refer to the technical documentation and the regulations in force.

Every module has to be equipped with a proper antenna with specific characteristics. The antenna has to be installed with care in order to avoid any interference with other electronic devices and has to guarantee a minimum distance from the body (20 cm). In case of this requirement cannot be satisfied, the system integrator has to assess the final product against the SAR regulation.

The European Community provides some Directives for the electronic equipments introduced on the market. All the relevant information's are available on the European Community website:

<http://ec.europa.eu/enterprise/rtte/dir99-5.htm>

The text of the Directive 99/05 regarding telecommunication equipments is available, while the applicable Directives (Low Voltage and EMC) are available at:



[http://ec.europa.eu/enterprise/electr\\_equipment/index\\_en.htm](http://ec.europa.eu/enterprise/electr_equipment/index_en.htm)



## 8. List of acronyms

|       |  |
|-------|--|
| ACM   | Accumulated Call Meter                             |
| ASCII | American Standard Code for Information Interchange |
| AT    | Attention commands                                 |
| CB    | Cell Broadcast                                     |
| CBS   | Cell Broadcasting Service                          |
| CCM   | Call Control Meter                                 |
| CLIP  | Calling Line Identification Presentation           |
| CLIR  | Calling Line Identification Restriction            |
| CMOS  | Complementary Metal-Oxide Semiconductor            |
| CR    | Carriage Return                                    |
| CSD   | Circuit Switched Data                              |
| CTS   | Clear To Send                                      |
| DAI   | Digital Audio Interface                            |
| DCD   | Data Carrier Detected                              |
| DCE   | Data Communications Equipment                      |
| DRX   | Data Receive                                       |
| DSR   | Data Set Ready                                     |
| DTA   | Data Terminal Adaptor                              |
| DTE   | Data Terminal Equipment                            |
| DTMF  | Dual Tone Multi Frequency                          |
| DTR   | Data Terminal Ready                                |
| EMC   | Electromagnetic Compatibility                      |
| ETSI  | European Telecommunications Equipment Institute    |
| FTA   | Full Type Approval (ETSI)                          |
| GPRS  | General Radio Packet Service                       |
| GSM   | Global System for Mobile communication             |
| HF    | Hands Free   |
| IMEI  | International Mobile Equipment Identity            |
| IMSI  | International Mobile Subscriber Identity           |
| IRA   | International Reference Alphabet                   |
| ITU   | International Telecommunications Union             |
| IWF   | Inter-Working Function                             |
| LCD   | Liquid Crystal Display                             |
| LED   | Light Emitting Diode                               |
| LF    | Linefeed   |
| ME    | Mobile Equipment                                   |
| MMI   | Man Machine Interface                              |
| MO    | Mobile Originated                                  |
| MS    | Mobile Station                                     |
| MT    | Mobile Terminated                                  |
| OEM   | Other Equipment Manufacturer                       |



