


# FCC SAR Test Report

APPLICANT : Telit Communications S.p.A.  
EQUIPMENT : Data Card  
BRAND NAME : Telit  
MODEL NAME : LN930  
FCC ID : RI7LN930D  
STANDARD : FCC 47 CFR Part 2 (2.1093)  
ANSI/IEEE C95.1-1992  
IEEE 1528-2003

The product was installed into Portable Computer-Tablet (Brand Name: DELL, Regulatory Mode: T01D, Regulatory Type: T01D001) during test.

The product was testing completed on Feb. 18, 2014. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.



Reviewed by: Eric Huang / Deputy Manager



Approved by: Jones Tsai / Manager



## SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.



## Table of Contents

<b>1. Statement of Compliance</b> .....	<b>4</b>
<b>2. Administration Data</b> .....	<b>5</b>
2.1 Testing Laboratory .....	5
2.2 Applicant .....	5
2.3 Manufacturer .....	5
2.4 Application Details .....	5
<b>3. General Information</b> .....	<b>6</b>
3.1 Description of Equipment Under Test (EUT) .....	6
3.2 Maximum RF output power among production units .....	7
3.3 Applied Standard .....	11
3.4 Device Category and SAR Limits .....	11
3.5 Test Conditions .....	11
<b>4. Specific Absorption Rate (SAR)</b> .....	<b>15</b>
4.1 Introduction .....	15
4.2 SAR Definition .....	15
<b>5. SAR Measurement System</b> .....	<b>16</b>
5.1 E-Field Probe .....	17
5.2 Data Acquisition Electronics (DAE) .....	18
5.3 Robot .....	18
5.4 Measurement Server .....	18
5.5 Phantom .....	19
5.6 Device Holder .....	20
5.7 Data Storage and Evaluation .....	21
5.8 Test Equipment List .....	23
<b>6. Tissue Simulating Liquids</b> .....	<b>24</b>
<b>7. System Verification Procedures</b> .....	<b>26</b>
7.1 Purpose of System Performance check .....	26
7.2 System Setup .....	26
7.3 SAR System Verification Results .....	27
<b>8. EUT Testing Position</b> .....	<b>28</b>
<b>9. Measurement Procedures</b> .....	<b>28</b>
9.1 Spatial Peak SAR Evaluation .....	28
9.2 Power Reference Measurement .....	29
9.3 Area & Zoom Scan Procedures .....	29
9.4 Volume Scan Procedures .....	30
9.5 SAR Averaged Methods .....	30
9.6 Power Drift Monitoring .....	30
<b>10. Conducted RF Output Power (Unit: dBm)</b> .....	<b>31</b>
<b>11. Antenna Location</b> .....	<b>58</b>
<b>12. SAR Test Results</b> .....	<b>60</b>
12.1 Body SAR .....	61
12.2 Repeated SAR Measurement .....	66
<b>13. Simultaneous Transmission Analysis</b> .....	<b>67</b>
13.1 Body Exposure Conditions .....	68
13.2 SPLSR Evaluation and Analysis .....	71
<b>14. Uncertainty Assessment</b> .....	<b>81</b>
<b>15. References</b> .....	<b>83</b>
<b>Appendix A. Plots of System Performance Check</b>	
<b>Appendix B. Plots of High SAR Measurement</b>	
<b>Appendix C. DASYS Calibration Certificate</b>	
<b>Appendix D. Test Setup Photos</b>	





1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for Telit Communications S.p.A. Data Card, LN930 are as follows.

<Highest SAR Summary>

Table with 5 columns: Exposure Position, Frequency Band, Reported 1g-SAR (W/kg), Equipment Class, Highest Reported 1g-SAR (W/kg). Rows include GPRS850, GPRS1900, WCDMA Band V, WCDMA Band IV, WCDMA Band II, LTE Band 17, LTE Band 13, LTE Band 5, LTE Band 4, LTE Band 2, LTE Band 7.

<Highest Simultaneous transmission SAR>

Table with 4 columns: Exposure Position, Frequency Band, Equipment Class, Highest Reported Simultaneous Transmission 1g-SAR (W/kg). Rows include GSM1900, WLAN2.4GHz Band.

Table with 4 columns: Exposure Position, Frequency Band, Equipment Class, Highest Reported Simultaneous Transmission 1g-SAR (W/kg). Rows include LTE Band 4, Bluetooth.

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2003.



## 2. Administration Data

### 2.1 Testing Laboratory

Test Site	SPORTON INTERNATIONAL INC.
Test Site Location	No. 52, Hwa Ya 1 <sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978

### 2.2 Applicant

Company Name	Telit Communications S.p.A.
Address	Viale Stazione di Prosecco 5/b, Trieste Italy 34010

### 2.3 Manufacturer

Company Name	Foxconn International Holdings Ltd.
Address	No.4, Mingsheng St., Tu-Cheng Dist., New Taipei City 23679, Taiwan

### 2.4 Application Details

Date of Start during the Test	Feb. 10, 2014
Date of End during the Test	Feb. 18, 2014



3. General Information

3.1 Description of Equipment Under Test (EUT)

Product Feature & Specification	
EUT	Data Card
Brand Name	Telit
Model Name	LN930
FCC ID	RI7LN930D
IMEI Code	359336050002240
Wireless Technology and Frequency Range	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz WCDMA Band IV: 1712.4 MHz ~ 1752.6 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz LTE Band 17: 706.5 MHz ~ 713.5 MHz LTE Band 13: 779.5 MHz ~ 784.5 MHz LTE Band 5: 824.7 MHz ~ 848.3 MHz LTE Band 4: 1710.7 MHz ~ 1754.3 MHz LTE Band 2: 1850.7 MHz ~ 1909.3 MHz LTE Band 7: 2502.5 MHz ~ 2567.5 MHz
Mode	<ul style="list-style-type: none"> <li>• GPRS/EGPRS</li> <li>• RMC 12.2Kbps Rel 99</li> <li>• HSDPA Rel 7, Cat14</li> <li>• HSUPA Rel 6, Cat6</li> <li>• DC-HSDPA Rel 8 Cat24</li> <li>• HSPA+ (downlink only)</li> <li>• LTE: QPSK, 16QAM</li> </ul>
EUT Stage	Production Unit
<b>Remark:</b> 1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description. 2. WLAN/Bluetooth module is also integrated into this host, WLAN/Bluetooth power and WLAN SAR testing data which can be refer to Sporton FCC SAR Report, FCC ID: PPD-QCA6234, Report No: FA391239 Rev.01.	

Host Information	
Host Name	Portable Computer-Tablet
Brand Name	DELL
Regulatory Model	T01D
Regulatory Type	T01D001
Wireless Technology	<ul style="list-style-type: none"> <li>• 802.11 a/b/g/n HT20/HT40</li> <li>• Bluetooth v2.1+EDR, Bluetooth v4.0+LE</li> </ul>
Antenna Type	WWAN: Dipole Antenna WLAN: PIFA Antenna Bluetooth: PIFA Antenna



**3.2 Maximum RF output power among production units**

Mode / Band	Burst Average Power (dBm)			
	GSM 850		GSM 1900	
Output Power Status	Full Power Mode	Reduce Power Mode	Full Power Mode	Reduce Power Mode
GPRS (GMSK, 1 Tx slot)	33.00	30.00	30.00	29.00
GPRS (GMSK, 2 Tx slots)	33.00	27.00	30.00	26.00
GPRS (GMSK, 3 Tx slot)	33.00	25.00	30.00	24.00
GPRS (GMSK, 4 Tx slots)	32.00	24.50	29.00	23.00
EDGE (8PSK, 1 Tx slot)	28.00	28.00	27.00	27.00
EDGE (8PSK, 2 Tx slots)	28.00	26.00	27.00	25.00
EDGE (8PSK, 3 Tx slot)	27.00	25.00	26.00	23.00
EDGE (8PSK, 4 Tx slots)	26.00	24.00	25.00	22.00

Mode / Band	Average Power (dBm)					
	WCDMA Band V		WCDMA Band II		WCDMA Band IV	
Output Power Status	Full Power Mode	Reduce Power Mode	Full Power Mode	Reduce Power Mode	Full Power Mode	Reduce Power Mode
RMC 12.2K	24.50	21.0	24.50	19.50	24.50	18.00
HSDPA Subtest-1	24.50	21.0	24.50	19.50	24.50	18.00
DC-HSDPA Subtest-1	24.50	21.0	24.50	19.50	24.50	18.00
HSUPA Subtest-5	24.50	21.0	24.50	19.50	24.50	18.00

LTE Band 17						
Average power(dBm)						
Modulation	BW (MHz)	RB size	Full Power Mode (MPR)	Full Power Mode	Reduce Power Mode (MPR)	Reduce Power Mode
QPSK	10	≤ 12	0	24.00	0	22.00
QPSK	10	> 12	1	23.00	1	21.00
16QAM	10	≤ 12	1	23.00	1	21.00
16QAM	10	> 12	1	23.00	1	21.00
QPSK	5	≤ 8	0	24.00	0	22.00
QPSK	5	> 8	1	23.00	1	21.00
16QAM	5	≤ 8	1	23.00	1	21.00
16QAM	5	> 8	1	23.00	1	21.00

LTE Band 13						
Average power(dBm)						
Modulation	BW (MHz)	RB size	Full Power Mode (MPR)	Full Power Mode	Reduce Power Mode (MPR)	Reduce Power Mode
QPSK	10	≤ 12	0	24.00	0	20.00
QPSK	10	> 12	1	23.00	1	19.00
16QAM	10	≤ 12	1	23.00	1	19.00
16QAM	10	> 12	1	23.00	1	19.00
QPSK	5	≤ 8	0	24.00	0	20.00
QPSK	5	> 8	1	23.00	1	19.00
16QAM	5	≤ 8	1	23.00	1	19.00
16QAM	5	> 8	1	23.00	1	19.00



LTE Band 5						
Average power(dBm)						
Modulation	BW (MHz)	RB size	Full Power Mode (MPR)	Full Power Mode	Reduce Power Mode (MPR)	Reduce Power Mode
QPSK	10	≤ 12	0	24.00	0	20.00
QPSK	10	> 12	1	23.00	1	19.00
16QAM	10	≤ 12	1	23.00	1	19.00
16QAM	10	> 12	1	23.00	1	19.00
QPSK	5	≤ 8	0	24.00	0	20.00
QPSK	5	> 8	1	23.00	1	19.00
16QAM	5	≤ 8	1	23.00	1	19.00
16QAM	5	> 8	1	23.00	1	19.00
QPSK	3	≤ 4	0	24.00	0	20.00
QPSK	3	>4	1	23.00	1	19.00
16QAM	3	≤ 4	1	23.00	1	19.00
16QAM	3	> 4	1	23.00	1	19.00
QPSK	1.4	≤ 5	0	24.00	0	20.00
QPSK	1.4	> 5	1	23.00	1	19.00
16QAM	1.4	≤ 5	1	23.00	1	19.00
16QAM	1.4	> 5	1	23.00	1	19.00

LTE Band 4						
Average power(dBm)						
Modulation	BW (MHz)	RB size	Full Power Mode (MPR)	Full Power Mode	Reduce Power Mode (MPR)	Reduce Power Mode
QPSK	20	≤ 18	0	24.00	0	18.00
QPSK	20	> 18	1	23.00	1	17.00
16QAM	20	≤ 18	1	23.00	1	17.00
16QAM	20	> 18	1	23.00	1	17.00
QPSK	15	≤ 16	0	24.00	0	18.00
QPSK	15	> 16	1	23.00	1	17.00
16QAM	15	≤ 16	1	23.00	1	17.00
16QAM	15	> 16	1	23.00	1	17.00
QPSK	10	≤ 12	0	24.00	0	18.00
QPSK	10	> 12	1	23.00	1	17.00
16QAM	10	≤ 12	1	23.00	1	17.00
16QAM	10	> 12	1	23.00	1	17.00
QPSK	5	≤ 8	0	24.00	0	18.00
QPSK	5	> 8	1	23.00	1	17.00
16QAM	5	≤ 8	1	23.00	1	17.00
16QAM	5	> 8	1	23.00	1	17.00
QPSK	3	≤ 4	0	24.00	0	18.00
QPSK	3	>4	1	23.00	1	17.00
16QAM	3	≤ 4	1	23.00	1	17.00
16QAM	3	> 4	1	23.00	1	17.00
QPSK	1.4	≤ 5	0	24.00	0	18.00
QPSK	1.4	> 5	1	23.00	1	17.00
16QAM	1.4	≤ 5	1	23.00	1	17.00
16QAM	1.4	> 5	1	23.00	1	17.00





LTE Band 2						
Average power(dBm)						
Modulation	BW (MHz)	RB size	Full Power Mode (MPR)	Full Power Mode	Reduce Power Mode (MPR)	Reduce Power Mode
QPSK	20	≤ 18	0	24.00	0	19.50
QPSK	20	> 18	1	23.00	1	18.50
16QAM	20	≤ 18	1	23.00	1	18.50
16QAM	20	> 18	1	23.00	1	18.50
QPSK	15	≤ 16	0	24.00	0	19.50
QPSK	15	> 16	1	23.00	1	18.50
16QAM	15	≤ 16	1	23.00	1	18.50
16QAM	15	> 16	1	23.00	1	18.50
QPSK	10	≤ 12	0	24.00	0	19.50
QPSK	10	> 12	1	23.00	1	18.50
16QAM	10	≤ 12	1	23.00	1	18.50
16QAM	10	> 12	1	23.00	1	18.50
QPSK	5	≤ 8	0	24.00	0	19.50
QPSK	5	> 8	1	23.00	1	18.50
16QAM	5	≤ 8	1	23.00	1	18.50
16QAM	5	> 8	1	23.00	1	18.50
QPSK	3	≤ 4	0	24.00	0	19.50
QPSK	3	>4	1	23.00	1	18.50
16QAM	3	≤ 4	1	23.00	1	18.50
16QAM	3	> 4	1	23.00	1	18.50
QPSK	1.4	≤ 5	0	24.00	0	19.50
QPSK	1.4	> 5	1	23.00	1	18.50
16QAM	1.4	≤ 5	1	23.00	1	18.50
16QAM	1.4	> 5	1	23.00	1	18.50

LTE Band 7						
Average power(dBm)						
Modulation	BW (MHz)	RB size	Full Power Mode (MPR)	Full Power Mode	Reduce Power Mode (MPR)	Reduce Power Mode
QPSK	20	≤ 18	0	24.00	0	18.50
QPSK	20	> 18	1	23.00	1	17.50
16QAM	20	≤ 18	1	23.00	1	17.50
16QAM	20	> 18	1	23.00	1	17.50
QPSK	15	≤ 16	0	24.00	0	18.50
QPSK	15	> 16	1	23.00	1	17.50
16QAM	15	≤ 16	1	23.00	1	17.50
16QAM	15	> 16	1	23.00	1	17.50
QPSK	10	≤ 12	0	24.00	0	18.50
QPSK	10	> 12	1	23.00	1	17.50
16QAM	10	≤ 12	1	23.00	1	17.50
16QAM	10	> 12	1	23.00	1	17.50
QPSK	5	≤ 8	0	24.00	0	18.50
QPSK	5	> 8	1	23.00	1	17.50
16QAM	5	≤ 8	1	23.00	1	17.50
16QAM	5	> 8	1	23.00	1	17.50



The table below summarized necessary items addressed in KDB 941225 D05 v02r03.

FCC ID	RI7LN930D											
EUT	Data Card											
Operating Frequency Range of each LTE transmission band	LTE Band 17: 706.5 MHz ~ 713.5 MHz LTE Band 13: 779.5 MHz ~ 784.5 MHz LTE Band 05: 824.7 MHz ~ 848.3 MHz LTE Band 04: 1710.7 MHz ~ 1754.3 MHz LTE Band 02: 1850.7 MHz ~ 1909.3 MHz LTE Band 07: 2502.5 MHz ~ 2567.5 MHz											
Channel Bandwidth	LTE Band 17: 5MHz, 10MHz LTE Band 13: 5MHz, 10MHz LTE Band 05: 1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 04: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 02: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 07: 5MHz, 10MHz, 15MHz, 20MHz											
Transmission (H, M, L) channel numbers and frequencies in each LTE band												
Band 17												
	Bandwidth 5 MHz				Bandwidth 10 MHz							
	Channel #		Frequency (MHz)		Channel #		Frequency (MHz)					
L	23755		706.5		23780		709					
M	23790		710		23790		710					
H	23825		713.5		23800		711					
Band 13												
	Bandwidth 5 MHz				Bandwidth 10 MHz							
	Channel #		Frequency (MHz)		Channel #		Frequency (MHz)					
L	23205		779.5		23230		782					
M	23230		782									
H	23255		784.5									
LTE Band 5												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)		
L	20407	824.7	20415	825.5	20425	826.5	20450	829				
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5				
H	20643	848.3	20635	847.5	20625	846.5	20600	844				
LTE Band 4												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745
LTE Band 2												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900
LTE Band 7												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	20775	2502.5	20800	2505	20825	2507.5	20850	2510				
M	21100	2535	21100	2535	21100	2535	21100	2535				
H	21425	2567.5	21400	2565	21375	2562.5	21350	2560				



LTE category, uplink modulations used	Category 3, QPSK, and 16QAM																																						
LTE transmitter and antenna implementation (standalone or sharing hardware components / antennas )	A primary antenna is used for LTE and other wireless interfaces (GSM/WCDMA) for transmitting and receiving. LTE and other wireless interfaces (GSM/WCDMA) share the same antenna, and cannot transmit simultaneously A 2 <sup>nd</sup> antenna is used for LTE and other wireless interfaces (GSM/WCDMA) for receiving only																																						
LTE Voice / Data requirements	Data only																																						
LTE MPR permanently built-in by design	Yes, per 3GPP TS 36.101 v11.0.0 <b>Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3</b> <table border="1"> <thead> <tr> <th rowspan="2">Modulation</th> <th colspan="6">Channel bandwidth / Transmission bandwidth (RB)</th> <th rowspan="2">MPR (dB)</th> </tr> <tr> <th>1.4 MHz</th> <th>3.0 MHz</th> <th>5 MHz</th> <th>10 MHz</th> <th>15 MHz</th> <th>20 MHz</th> </tr> </thead> <tbody> <tr> <td>QPSK</td> <td>&gt; 5</td> <td>&gt; 4</td> <td>&gt; 8</td> <td>&gt; 12</td> <td>&gt; 16</td> <td>&gt; 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>&gt; 5</td> <td>&gt; 4</td> <td>&gt; 8</td> <td>&gt; 12</td> <td>&gt; 16</td> <td>&gt; 18</td> <td>≤ 2</td> </tr> </tbody> </table>	Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)																																
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																
LTE A-MPR	In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)																																						
Base station simulator used for Testing	Anritsu MT8820C																																						
Power reduction applied to satisfy SAR compliance	Yes, proximity sensor.																																						

### 3.3 Applied Standard

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2003
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r03
- FCC KDB 865664 D02 SAR Reporting v01r01
- FCC KDB 447498 D01 General RF Exposure Guidance v05r02
- FCC KDB 616217 D04 SAR for laptop and tablets v01r01
- FCC KDB 941225 D01 SAR test for 3G devices v02
- FCC KDB 941225 D02 HSPA and 1x Advanced v02r02
- FCC KDB 941225 D03 SAR Test Reduction GSM GPRS EDGE v01
- FCC KDB 941225 D05 SAR for LTE Devices v02r03
- FCC KDB 941225 D07 UMPC Mini Tablet v01r01

### 3.4 Device Category and SAR Limits

This device belongs to portable device category because its radiating structure is allowed to be used within 20 centimeters of the body of the user. Limit for General Population/Uncontrolled exposure should be applied for this device, it is 1.6 W/kg as averaged over any 1 gram of tissue.

### 3.5 Test Conditions

#### 3.5.1 Ambient Condition

Ambient Temperature	20 to 24 °C
Humidity	< 60 %

#### 3.5.2 Test Configuration

For WWAN SAR testing, the device was controlled by using a base station emulator. Communication between the device and the emulator was established by air link. The distance between the EUT and the antenna of the emulator is larger than 50 cm and the output power radiated from the emulator antenna is at least 30 dB smaller than the output power of EUT.



Target Power reduction applied for each wireless mode and orientation

Exposure Position / wireless mode	Bottom Face <sup>(1)</sup>	Curved surface of Edge1 <sup>(1)</sup>	Edge 1 <sup>(1)</sup>	Edge 2	Edge 3	Edge 4
GSM850 GPRS (GMSK 1 Tx slot)	3.0 dB	3.0 dB	3.0 dB	0 dB	0 dB	0 dB
GSM850 GPRS (GMSK 2 Tx slots)	6.0 dB	6.0 dB	6.0 dB	0 dB	0 dB	0 dB
GSM850 GPRS (GMSK 3 Tx slots)	8.0 dB	8.0 dB	8.0 dB	0 dB	0 dB	0 dB
GSM850 GPRS (GMSK 4 Tx slots)	7.5 dB	7.5 dB	7.5 dB	0 dB	0 dB	0 dB
GSM850 EDGE (8PSK 1 Tx slot)	0.0 dB	0.0 dB	0.0 dB	0 dB	0 dB	0 dB
GSM850 EDGE (8PSK 2 Tx slots)	2.0 dB	2.0 dB	2.0 dB	0 dB	0 dB	0 dB
GSM850 EDGE (8PSK 3 Tx slots)	2.0 dB	2.0 dB	2.0 dB	0 dB	0 dB	0 dB
GSM850 EDGE (8PSK 4 Tx slots)	2.0 dB	2.0 dB	2.0 dB	0 dB	0 dB	0 dB
GSM1900 GPRS (GMSK 1 Tx slot)	1.0 dB	1.0 dB	1.0 dB	0 dB	0 dB	0 dB
GSM1900 GPRS (GMSK 2 Tx slots)	4.0 dB	4.0 dB	4.0 dB	0 dB	0 dB	0 dB
GSM1900 GPRS (GMSK 3 Tx slots)	6.0 dB	6.0 dB	6.0 dB	0 dB	0 dB	0 dB
GSM1900 GPRS (GMSK 4 Tx slots)	6.0 dB	6.0 dB	6.0 dB	0 dB	0 dB	0 dB
GSM1900 EDGE (8PSK 1 Tx slot)	0.0 dB	0.0 dB	0.0 dB	0 dB	0 dB	0 dB
GSM1900 EDGE (8PSK 2 Tx slots)	2.0 dB	2.0 dB	2.0 dB	0 dB	0 dB	0 dB
GSM1900 EDGE (8PSK 3 Tx slots)	3.0 dB	3.0 dB	3.0 dB	0 dB	0 dB	0 dB
GSM1900 EDGE (8PSK 4 Tx slots)	3.0 dB	3.0 dB	3.0 dB	0 dB	0 dB	0 dB
WCDMA Band V	3.5 dB	3.5 dB	3.5 dB	0 dB	0 dB	0 dB
WCDMA Band IV	6.5 dB	6.5 dB	6.5 dB	0 dB	0 dB	0 dB
WCDMA Band II	5.0 dB	5.0 dB	5.0 dB	0 dB	0 dB	0 dB
LTE Band 13	2.0 dB	2.0 dB	2.0 dB	0 dB	0 dB	0 dB
LTE Band 17	4.0 dB	4.0 dB	4.0 dB	0 dB	0 dB	0 dB
LTE Band 5	4.0 dB	4.0 dB	4.0 dB	0 dB	0 dB	0 dB
LTE Band 4	6.0 dB	6.0 dB	6.0 dB	0 dB	0 dB	0 dB
LTE Band 2	4.5 dB	4.5 dB	4.5 dB	0 dB	0 dB	0 dB
LTE Band 7	5.5 dB	5.5 dB	5.5 dB	0 dB	0 dB	0 dB


Remark:

- 1. <sup>(1)</sup>: Reduced maximum limit applied by activation of proximity sensor.




Measurement on EUT:


Band/Mode	Ch #	Measured power reduction (dBm)		Reduction Levels
		w/o power back-off	w/ power back-off	(dB)
GSM850 GPRS (GMSK 4 Tx slot) - CS1	251	30.31	22.87	7.44
GSM1900 GPRS (GMSK 4 Tx slot) - CS1	661	27.79	22.20	5.59
WCDMA Band V	4233	23.32	22.55	0.77
WCDMA Band IV	1513	23.91	17.89	6.02
WCDMA Band II	9538	23.57	19.49	4.08
LTE Band 17	23790	22.92	21.31	1.61
LTE Band 13	23230	23.50	19.51	3.99
LTE Band 5	20450	23.30	18.85	4.45
LTE Band 4	20175	23.72	17.96	5.76
LTE Band 2	18700	23.62	18.98	4.64
LTE Band 7	20850	23.41	17.90	5.51

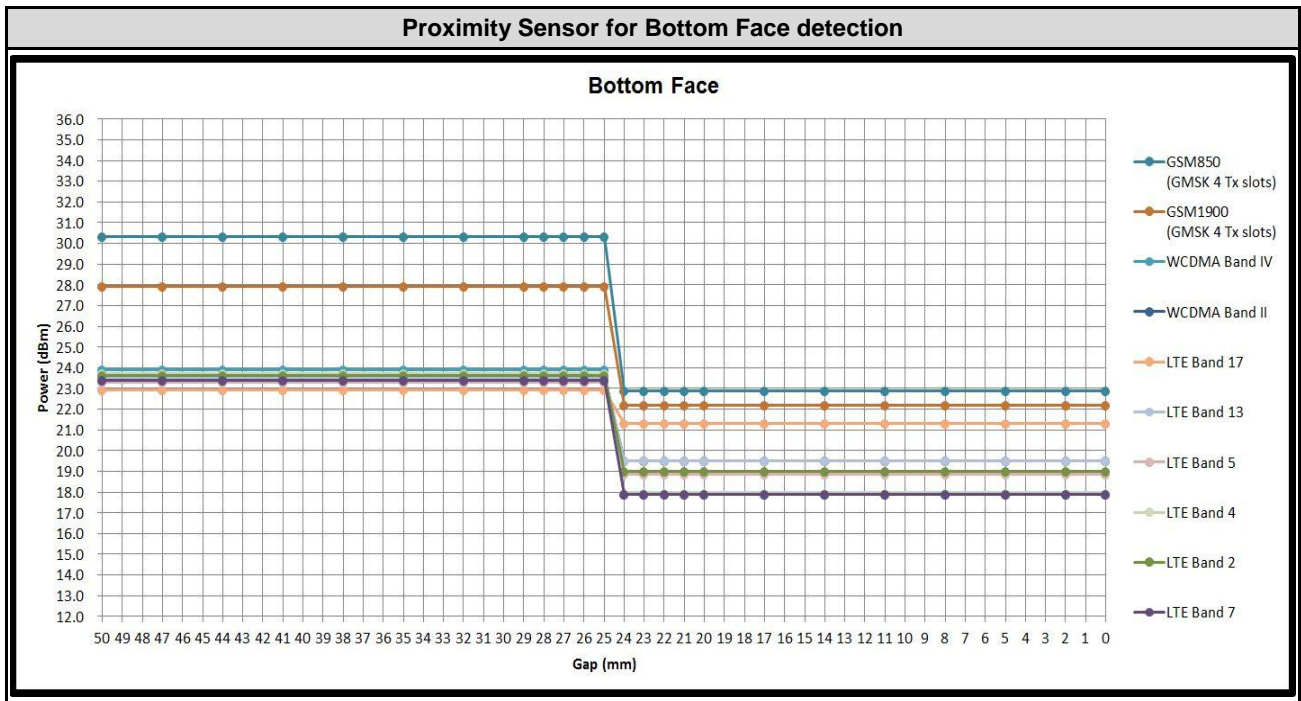

Proximity Sensor for Edge 1 detection

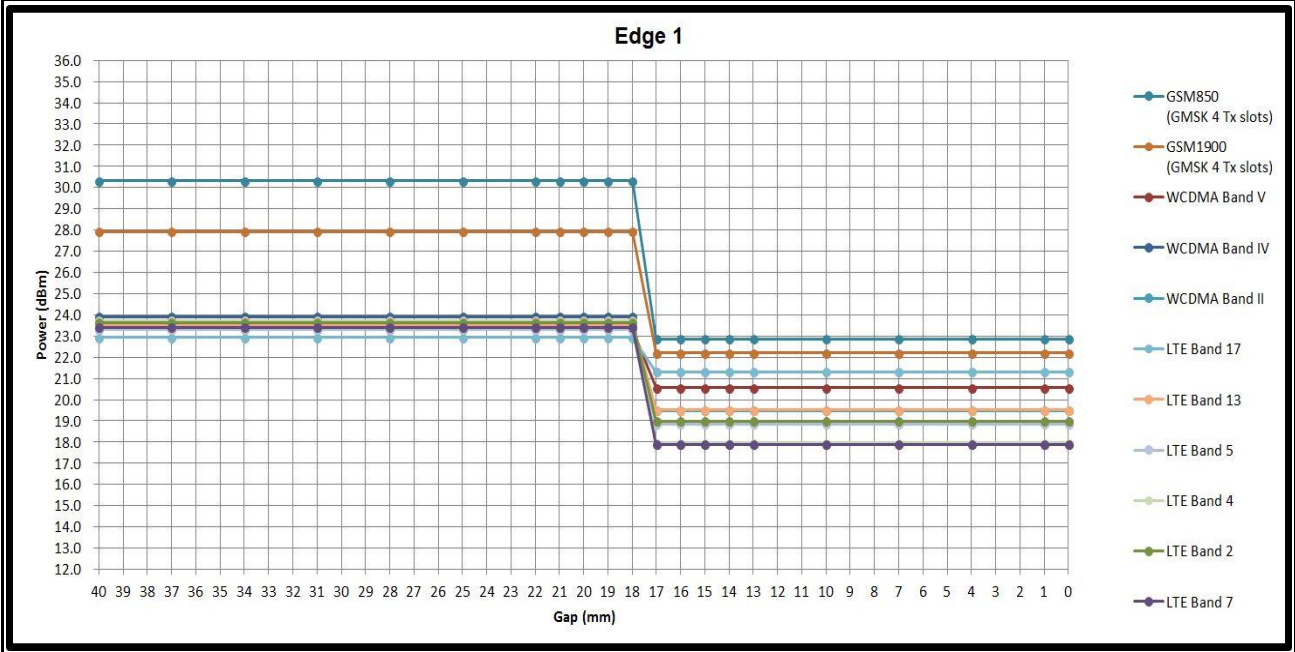

Proximity Sensor for Curved surface of Edge 1 detection

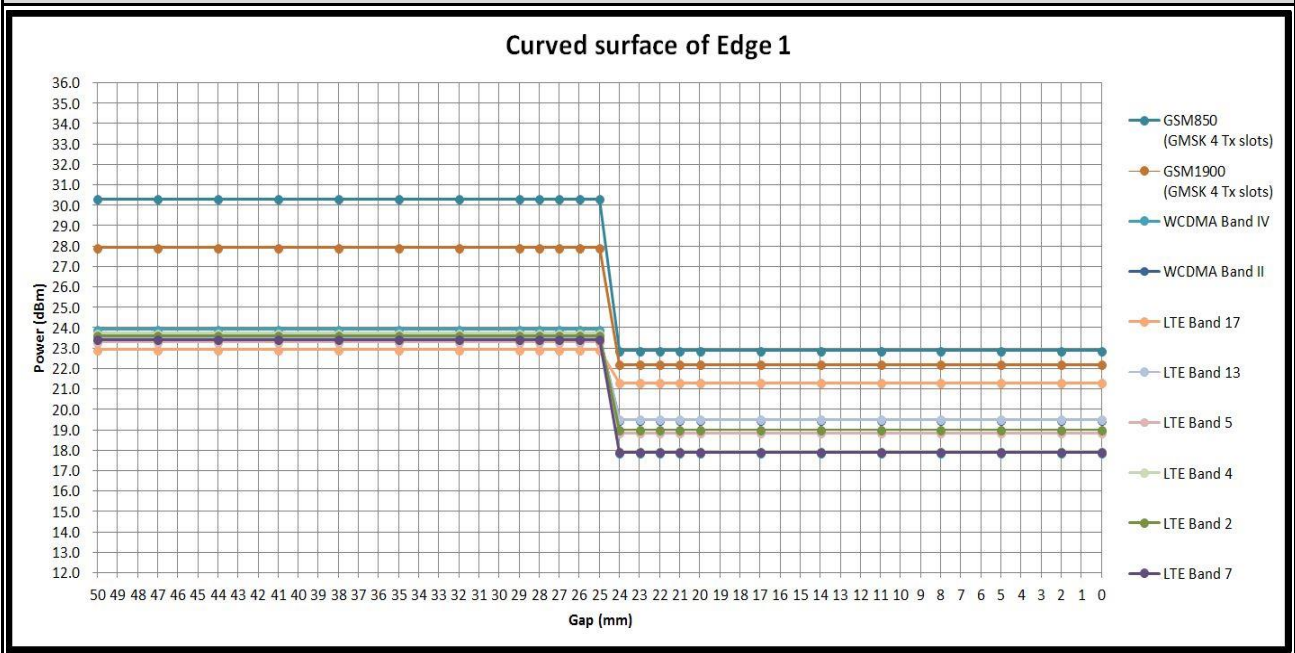

## **4. Specific Absorption Rate (SAR)**

### **4.1 Introduction**

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

### **4.2 SAR Definition**

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density ( $\rho$ ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$\text{SAR} = C \left( \frac{\delta T}{\delta t} \right)$$

Where: C is the specific heat capacity,  $\delta T$  is the temperature rise and  $\delta t$  is the exposure duration, or related to the electrical field in the tissue by


$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where:  $\sigma$  is the conductivity of the tissue,  $\rho$  is the mass density of the tissue and E is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.



## 5. SAR Measurement System

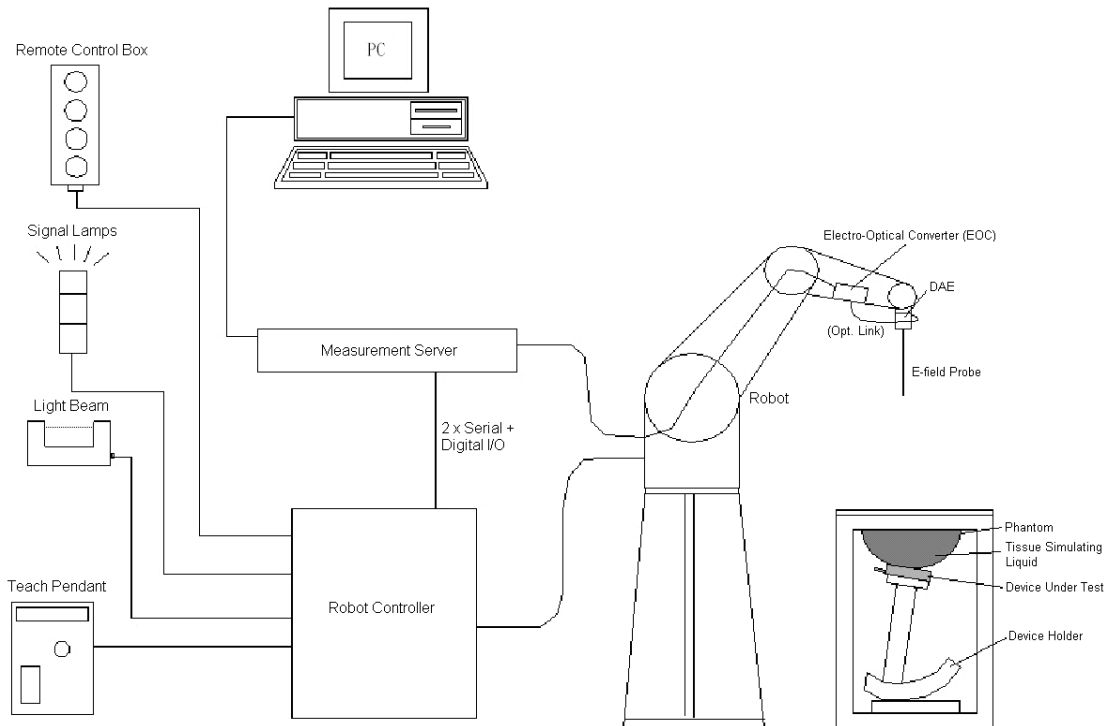

**Fig 5.1 SPEAG DASY System Configurations**

The DASY system for performance compliance tests is illustrated above graphically. This system consists of the following items:

- A standard high precision 6-axis robot with controller, a teach pendant and software
- A data acquisition electronic (DAE) attached to the robot arm extension
- A dosimetric probe equipped with an optical surface detector system
- The electro-optical converter (EOC) performs the conversion between optical and electrical signals
- A measurement server performs the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the accuracy of the probe positioning
- A computer operating Windows XP
- DASY software
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom
- A device holder
- Tissue simulating liquid
- Dipole for evaluating the proper functioning of the system

Component details are described in in the following sub-sections.



**5.1 E-Field Probe**

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

**5.1.1 E-Field Probe Specification**

**<ES3DV3 Probe >**

<b>Construction</b>	Symmetrical design with triangular core Built-in optical fiber for surface detection system. Built-in shielding against static charges. PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
<b>Frequency</b>	10 MHz to 3 GHz; Linearity: $\pm 0.2$ dB
<b>Directivity</b>	$\pm 0.2$ dB in HSL (rotation around probe axis) $\pm 0.4$ dB in HSL (rotation normal to probe axis)
<b>Dynamic Range</b>	5 $\mu$ W/g to 100 mW/g; Linearity: $\pm 0.2$ dB
<b>Dimensions</b>	Overall length: 337 mm (Tip: 10 mm) Tip diameter: 4 mm (Body: 10 mm) Distance from probe tip to dipole centers: 3 mm



**Fig 5.2 Photo of ES3DV3**

**<EX3DV4 Probe>**

<b>Construction</b>	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
<b>Frequency</b>	10 MHz to 6 GHz; Linearity: $\pm 0.2$ dB
<b>Directivity</b>	$\pm 0.3$ dB in HSL (rotation around probe axis) $\pm 0.5$ dB in tissue material (rotation normal to probe axis)
<b>Dynamic Range</b>	10 $\mu$ W/g to 100 mW/g; Linearity: $\pm 0.2$ dB (noise: typically $< 1$ $\mu$ W/g)
<b>Dimensions</b>	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm



**Fig 5.3 Photo of EX3DV4/ES3DV4**

**5.1.2 E-Field Probe Calibration**

Each probe needs to be calibrated according to a dosimetric assessment procedure with accuracy better than  $\pm 10\%$ . The spherical isotropy shall be evaluated and within  $\pm 0.25$ dB. The sensitivity parameters (NormX, NormY, and NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested. The calibration data can be referred to appendix C of this report.

### 5.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock. The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Fig 5.4 Photo of DAE

### 5.3 Robot

The SPEAG DASY system uses the high precision robots (DASY4: RX90BL; DASY5: TX90XL) type from Stäubli SA (France). For the 6-axis controller system, the robot controller version (DASY4: CS7MB; DASY5: CS8c) from Stäubli is used. The Stäubli robot series have many features that are important for our application:

- High precision (repeatability  $\pm 0.035$  mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)



Fig 5.5 Photo of DASY4



Fig 5.6 Photo of DASY5

### 5.4 Measurement Server

The measurement server is based on a PC/104 CPU board with CPU (DASY4: 166 MHz, Intel Pentium; DASY5: 400 MHz, Intel Celeron), chipdisk (DASY4: 32 MB; DASY5: 128 MB), RAM (DASY4: 64 MB, DASY5: 128 MB). The necessary circuits for communication with the DAE electronic box, as well as the 16 bit AD converter system for optical detection and digital I/O interface are contained on the DASY I/O board, which is directly connected to the PC/104 bus of the CPU board.

The measurement server performs all the real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operations.



Fig 5.7 Photo of Server for DASY4



Fig 5.8 Photo of Server for DASY5

**5.5 Phantom**

**<SAM Twin Phantom>**

<b>Shell Thickness</b>	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm
<b>Filling Volume</b>	Approx. 25 liters
<b>Dimensions</b>	Length: 1000 mm; Width: 500 mm; Height: adjustable feet
<b>Measurement Areas</b>	Left Hand, Right Hand, Flat Phantom



**Fig 5.9 Photo of SAM Phantom**

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

**<ELI4 Phantom>**

<b>Shell Thickness</b>	2 ± 0.2 mm (sagging: <1%)
<b>Filling Volume</b>	Approx. 30 liters
<b>Dimensions</b>	Major ellipse axis: 600 mm Minor axis: 400 mm



**Fig 5.10 Photo of ELI4 Phantom**

The ELI4 phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

## 5.6 Device Holder

### <Device Holder for SAM Twin Phantom>

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5 mm distance, a positioning uncertainty of  $\pm 0.5$  mm would produce a SAR uncertainty of  $\pm 20$  %. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.

The DASY device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation center for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.

The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity  $\epsilon = 3$  and loss tangent  $\delta = 0.02$ . The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.



Fig 5.11 Device Holder

### <Laptop Extension Kit>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.

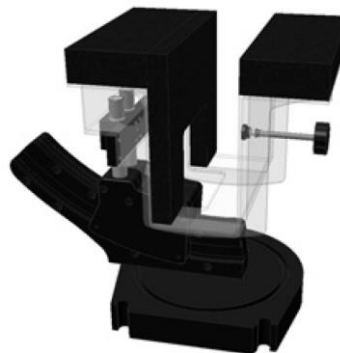


Fig 5.12 Laptop Extension Kit



## 5.7 Data Storage and Evaluation

### 5.7.1 Data Storage

The DASY software stores the assessed data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all the necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files. The post-processing software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of erroneous parameter settings. For example, if a measurement has been performed with an incorrect crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be reevaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type (e.g., [V/m], [A/m], [mW/g]). Some of these units are not available in certain situations or give meaningless results, e.g., a SAR-output in a non-lose media, will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

### 5.7.2 Data Evaluation

The DASY post-processing software (SEMCAD) automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software :

<b>Probe parameters :</b>	- Sensitivity	Norm <sub>i</sub> , a <sub>i0</sub> , a <sub>i1</sub> , a <sub>i2</sub>
	- Conversion factor	ConvF <sub>i</sub>
	- Diode compression point	dcp <sub>i</sub>
<b>Device parameters :</b>	- Frequency	f
	- Crest factor	cf
<b>Media parameters :</b>	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multi-meter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power.

The formula for each channel can be given as :

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

with  $V_i$  = compensated signal of channel i, (i = x, y, z)  
 $U_i$  = input signal of channel i, (i = x, y, z)  
 cf = crest factor of exciting field (DASY parameter)  
 dcp<sub>i</sub> = diode compression point (DASY parameter)

From the compensated input signals, the primary field data for each channel can be evaluated :

$$\text{E-field Probes : } E_i = \sqrt{\frac{V_i}{\text{Norm}_i \cdot \text{ConvF}}}$$

$$\text{H-field Probes : } H_i = \sqrt{V_i \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}}$$

with  $V_i$  = compensated signal of channel i, (i = x, y, z)  
 $\text{Norm}_i$  = sensor sensitivity of channel i, (i = x, y, z),  $\mu\text{V}/(\text{V/m})^2$  for E-field Probes  
 ConvF = sensitivity enhancement in solution  
 $a_{ij}$  = sensor sensitivity factors for H-field probes  
 f = carrier frequency [GHz]  
 $E_i$  = electric field strength of channel i in V/m  
 $H_i$  = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude) :

$$E_{\text{tot}} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$\text{SAR} = E_{\text{tot}}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$$

with SAR = local specific absorption rate in mW/g  
 $E_{\text{tot}}$  = total field strength in V/m  
 $\sigma$  = conductivity in [mho/m] or [Siemens/m]  
 $\rho$  = equivalent tissue density in  $\text{g}/\text{cm}^3$

Note that the density is set to 1, to account for actual head tissue density rather than the density of the tissue simulating liquid.





**5.8 Test Equipment List**

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	750MHz System Validation Kit	D750V3	1099	Nov. 11, 2013	Nov. 10, 2014
SPEAG	835MHz System Validation Kit	D835V2	4d162	Nov. 11, 2013	Nov. 10, 2014
SPEAG	1750MHz System Validation Kit	D1750V2	1068	Nov. 27, 2013	Nov. 26, 2014
SPEAG	1900MHz System Validation Kit	D1900V2	5d182	Nov. 12, 2013	Nov. 11, 2014
SPEAG	2600MHz System Validation Kit	D2600V2	1070	Nov. 13, 2013	Nov. 12, 2014
SPEAG	Data Acquisition Electronics	DAE4	778	Aug. 21, 2013	Aug. 20, 2014
SPEAG	Data Acquisition Electronics	DAE3	577	May. 08, 2013	May. 07, 2014
SPEAG	Data Acquisition Electronics	DAE3	495	May. 08, 2013	May. 07, 2014
SPEAG	Data Acquisition Electronics	DAE4	1399	Nov. 07, 2013	Nov. 06, 2014
SPEAG	Dosimetric E-Field Probe	ES3DV3	3270	Sep. 24, 2013	Sep. 23, 2014
SPEAG	Dosimetric E-Field Probe	EX3DV4	3931	Sep. 10, 2013	Sep. 09, 2014
SPEAG	Dosimetric E-Field Probe	EX3DV4	3925	Jun. 12, 2013	Jun. 11, 2014
SPEAG	Dosimetric E-Field Probe	EX3DV4	3955	Nov. 12, 2013	Nov. 11, 2014
Wisewind	Thermometer	ETP-101	TM560	Oct. 22, 2013	Oct. 21, 2014
Wisewind	Thermometer	ETP-101	TM685	Oct. 22, 2013	Oct. 21, 2014
Wisewind	Thermometer	HTC-1	TM642	Oct. 22, 2013	Oct. 21, 2014
Wisewind	Thermometer	HTC-1	TM281	Oct. 22, 2013	Oct. 21, 2014
Anritsu	Radio Communication Analyzer	MT8820C	6201074414	Feb. 11, 2014	Feb. 10, 2014
Agilent	Wireless Communication Test Set	E5515C	GB46311322	Mar. 25, 2013	Mar. 24, 2014
Agilent	Wireless Communication Test Set	E5515C	MY50266977	May. 06, 2013	May. 05, 2014
R&S	Radio communication Tester	CMW500	113998	Oct. 04, 2013	Oct. 03, 2014
SPEAG	Device Holder	N/A	N/A	NCR	NCR
R&S	Signal Generator	SMF 100A	101107	May. 27, 2013	May. 26, 2014
SPEAG	Dielectric Probe Kit	DAK-3.5	1126	Jul. 23, 2013	Jul. 22, 2014
Agilent	ENA Network Analyzer	E5071C	MY46316648	Feb. 07, 2014	Feb. 06, 2015
Anritsu	Power Meter	ML2495A	1132003	Aug. 28, 2013	Aug. 27, 2014
Anritsu	Power Sensor	MA2411B	1126017	Aug. 27, 2013	Aug. 26, 2014
Agilent	Dual Directional Coupler	778D	50422	Note 2	
Woken	Attenuator 1	WK0602-XX	N/A	Note 2	
PE	Attenuator 2	PE7005-10	N/A	Note 2	
PE	Attenuator 3	PE7005- 3	N/A	Note 2	
AR	Power Amplifier	5S1G4M2	328767	Note 3	
R&S	Spectrum Analyzer	FSP 7	101131	Jul. 09, 2013	Jul. 08, 2014

**Table 5.1 Test Equipment List**

**Note:**

1. The calibration certificate of DASY can be referred to appendix C of this report.
2. The Insertion Loss calibration of Dual Directional Coupler and Attenuator were characterized via the network analyzer and compensated during system check.
3. In system check we need to monitor the level on the power meter, and adjust the power amplifier level to have precise power level to the dipole; the measured SAR will be normalized to 1W input power according to the ratio of 1W to the input power to the dipole. For system check, the calibration of the power amplifier is deemed not critically required for correct measurement; the power meter is critical and we do have calibration for it
4. Attenuator 1 insertion loss is calibrated by the network Analyzer, which the calibration is valid, before system check.

## 6. Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 6.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 6.2.

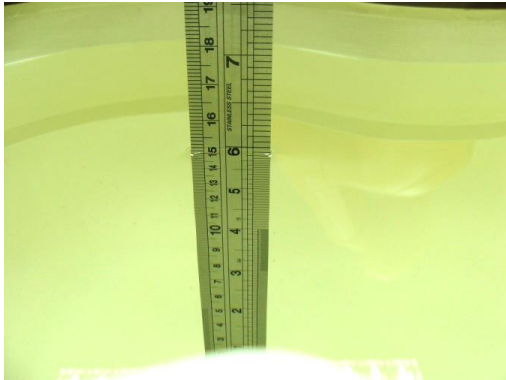


Fig 6.1 Photo of Liquid Height for Head SAR



Fig 6.2 Photo of Liquid Height for Body SAR

The following table gives the recipes for tissue simulating liquid.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity ( $\sigma$ )	Permittivity ( $\epsilon_r$ )
<b>For Head</b>								
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
900	40.3	57.9	0.2	1.4	0.2	0	0.97	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0
<b>For Body</b>								
750	51.7	47.2	0	0.9	0.1	0	0.96	55.5
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
900	50.8	48.2	0	0.9	0.1	0	1.05	55.0
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0	0	31.4	1.95	52.7
2600	68.1	0	0	0.1	0	31.8	2.16	52.5

Table 6.1 Recipes of Tissue Simulating Liquid

### Simulating Liquid for 5G, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%





The dielectric parameters of the liquids were verified prior to the SAR evaluation using an SPEAG DAK-3.5 Dielectric Probe Kit and an Agilent Network Analyzer.

The following table shows the measuring results for simulating liquid.

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity ( $\sigma$ )	Permittivity ( $\epsilon_r$ )	Conductivity Target ( $\sigma$ )	Permittivity Target ( $\epsilon_r$ )	Delta ( $\sigma$ ) (%)	Delta ( $\epsilon_r$ ) (%)	Limit (%)	Date
750	Body	22.4	0.963	54.245	0.96	55.50	0.31	-2.26	±5	2014/2/11
750	Body	22.2	0.961	53.917	0.96	55.50	0.10	-2.85	±5	2014/2/12
750	Body	22.3	0.962	53.914	0.96	55.50	0.21	-2.86	±5	2014/2/17
835	Body	22.5	0.963	54.498	0.97	55.20	-0.72	-1.27	±5	2014/2/11
835	Body	22.5	0.964	54.492	0.97	55.20	-0.62	-1.28	±5	2014/2/12
835	Body	22.6	0.981	54.446	0.97	55.20	1.13	-1.37	±5	2014/2/15
1750	Body	22.3	1.527	51.913	1.52	53.30	0.46	-2.60	±5	2014/2/10
1750	Body	22.3	1.528	51.762	1.52	53.30	0.53	-2.89	±5	2014/2/18
1900	Body	22.2	1.530	52.859	1.52	53.30	0.66	-0.83	±5	2014/2/10
1900	Body	22.6	1.566	53.208	1.52	53.30	3.03	-0.17	±5	2014/2/14
1900	Body	22.5	1.545	51.942	1.52	53.30	1.64	-2.55	±5	2014/2/18
2600	Body	22.3	2.165	53.823	2.16	52.50	0.23	2.52	±5	2014/2/12

Table 6.2 Measuring Results for Simulating Liquid

## 7. System Verification Procedures

Each DASY system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the DASY software, enable the user to conduct the system performance check and system validation. System validation kit includes a dipole, tripod holder to fix it underneath the flat phantom and a corresponding distance holder.

### 7.1 Purpose of System Performance check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

### 7.2 System Setup

In the simplified setup for system evaluation, the EUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

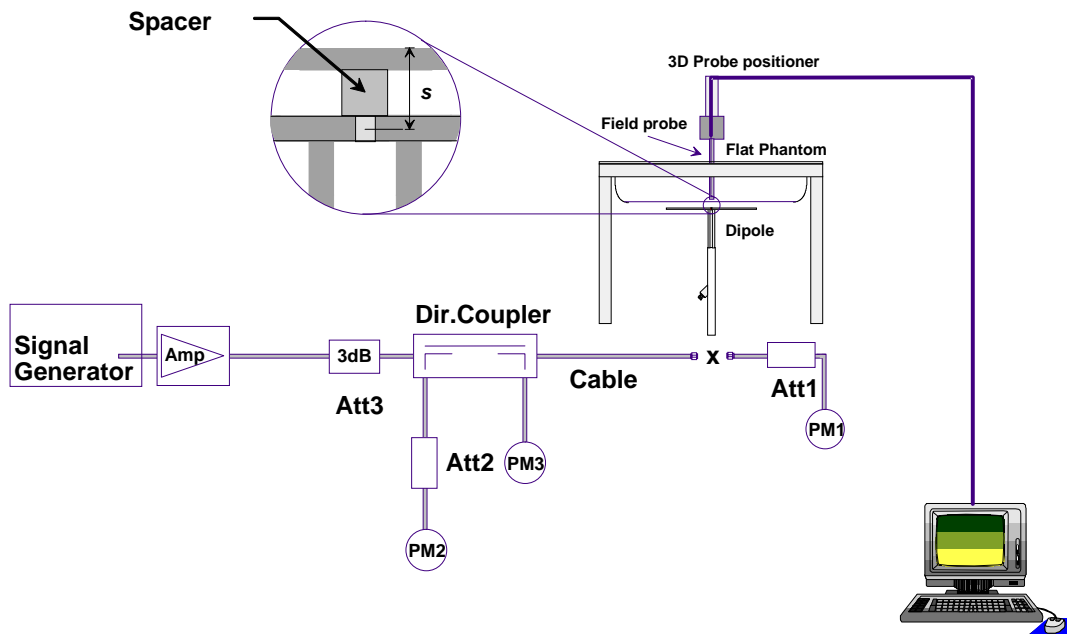


Fig 7.1 System Setup for System Evaluation

1. Signal Generator
2. Amplifier
3. Directional Coupler
4. Power Meter
5. Calibrated Dipole



**Fig 7.2 Photo of Dipole Setup**

**7.3 SAR System Verification Results**

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Table 7.1 shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured SAR (W/kg)	Targeted SAR (W/kg)	Normalized SAR (W/kg)	Deviation (%)
2014/2/11	750	Body	250	D750V3-1099	3955	1399	2.17	8.56	8.68	1.40
2014/2/12	750	Body	250	D750V3-1099	3955	1399	2.01	8.56	8.04	-6.07
2014/2/17	750	Body	250	D750V3-1099	3925	495	2.19	8.56	8.76	2.34
2014/2/11	835	Body	250	D835V2-4d162	3270	778	2.35	9.28	9.4	1.29
2014/2/12	835	Body	250	D835V2-4d162	3955	1399	2.34	9.28	9.36	0.86
2014/2/15	835	Body	250	D835V2-4d162	3270	778	2.45	9.28	9.8	5.60
2014/2/10	1750	Body	250	D1750V2-1068	3931	577	8.69	37.50	34.76	-7.31
2014/2/18	1750	Body	250	D1750V2-1068	3270	778	8.94	37.50	35.76	-4.64
2014/2/10	1900	Body	250	D1900V2-5d182	3931	577	10.30	39.50	41.2	4.30
2014/2/14	1900	Body	250	D1900V2-5d182	3931	577	10.60	39.50	42.4	7.34
2014/2/18	1900	Body	250	D1900V2-5d182	3270	778	10.10	39.50	40.4	2.28
2014/2/12	2600	Body	250	D2600V2-1070	3955	1399	13.00	55.70	52	-6.64

**Table 7.1 Target and Measurement SAR after Normalized**



## 8. EUT Testing Position

Please refer to Appendix D for the test setup photos.

## 9. Measurement Procedures

The measurement procedures are as follows:

### <Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

### <SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

### 9.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

### 9.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

### 9.3 Area & Zoom Scan Procedures

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g. Area scan and zoom scan resolution setting follows KDB 865664 D01v01r03 quoted below.

When the 1-g SAR of the highest peak is within 2 dB of the SAR limit, additional zoom scans are required for other peaks within 2 dB of the highest peak that have not been included in any zoom scan to ensure there is no increase in SAR.

		$\leq 3$ GHz	$> 3$ GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface		$5 \pm 1$ mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location		$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{Area}$ , $\Delta y_{Area}$		$\leq 2$ GHz: $\leq 15$ mm 2 – 3 GHz: $\leq 12$ mm	3 – 4 GHz: $\leq 12$ mm 4 – 6 GHz: $\leq 10$ mm
		When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}$ , $\Delta y_{Zoom}$		$\leq 2$ GHz: $\leq 8$ mm 2 – 3 GHz: $\leq 5$ mm*	3 – 4 GHz: $\leq 5$ mm* 4 – 6 GHz: $\leq 4$ mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	$\leq 5$ mm	3 – 4 GHz: $\leq 4$ mm 4 – 5 GHz: $\leq 3$ mm 5 – 6 GHz: $\leq 2$ mm
	graded grid	$\Delta z_{Zoom}(1)$ : between 1 <sup>st</sup> two points closest to phantom surface	$\leq 4$ mm
		$\Delta z_{Zoom}(n>1)$ : between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$
Minimum zoom scan volume	x, y, z	$\geq 30$ mm	3 – 4 GHz: $\geq 28$ mm 4 – 5 GHz: $\geq 25$ mm 5 – 6 GHz: $\geq 22$ mm
<p>Note: <math>\delta</math> is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.</p> <p>* When zoom scan is required and the <i>reported</i> SAR from the area scan based 1-g SAR estimation procedures of KDB 447498 is <math>\leq 1.4</math> W/kg, <math>\leq 8</math> mm, <math>\leq 7</math> mm and <math>\leq 5</math> mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.</p>			



### **9.4 Volume Scan Procedures**

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

### **9.5 SAR Averaged Methods**

In DASYS, the interpolation and extrapolation are both based on the modified Quadratic Shepard's method. The interpolation scheme combines a least-square fitted function method and a weighted average method which are the two basic types of computational interpolation and approximation.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5 mm.

### **9.6 Power Drift Monitoring**

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASYS measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.



10. Conducted RF Output Power (Unit: dBm)

<GSM Conducted Power>

Note:

- 1. Per KDB 447498 D01v05r02, the maximum output power channel is used for SAR testing and for further SAR test reduction.
2. Following KDB 941225 D03v01, for Body SAR testing, the EUT operating without power back-off was set in GPRS (4 Tx slots) and the EUT operating with power back-off was set in GPRS (4 Tx slots) due to its highest frame-average power.

Full Power mode (Proximity Sensor Inactive)

Table with 7 columns: Band GSM850, TX Channel, Frequency (MHz), Burst Average Power (dBm) [128, 189, 251], and Frame-Average Power (dBm) [128, 189, 251]. Rows include GPRS (GMSK, 1 Tx slot) to EDGE (8PSK, 4 Tx slots).

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.

The calculated method are shown as below:

- Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB
Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB
Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB
Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

Reduced Power Mode (Proximity Sensor active)

Table with 7 columns: Band GSM850, TX Channel, Frequency (MHz), Burst Average Power (dBm) [128, 189, 251], and Frame-Average Power (dBm) [128, 189, 251]. Rows include GPRS (GMSK, 1 Tx slot) to EDGE (8PSK, 4 Tx slots).

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.

The calculated method are shown as below:

- Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB
Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB
Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB
Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB





**Full Power mode (Proximity Sensor Inactive)**

Band GSM1900 TX Channel	Burst Average Power (dBm)			Frame-Average Power (dBm)		
	512	661	810	512	661	810
Frequency (MHz)	1850.2	1880	1909.8	1850.2	1880	1909.8
GPRS (GMSK, 1 Tx slot)	28.90	29.00	29.23	19.90	20.00	20.23
GPRS (GMSK, 2 Tx slots)	28.92	28.99	29.19	22.92	22.99	23.19
GPRS (GMSK, 3 Tx slots)	28.45	28.55	28.76	24.19	24.29	24.50
GPRS (GMSK, 4 Tx slots)	27.48	27.63	27.92	24.48	24.63	24.92
EDGE (8PSK, 1 Tx slot)	26.15	26.18	26.32	17.15	17.18	17.32
EDGE (8PSK, 2 Tx slots)	26.12	26.16	26.30	20.12	20.16	20.30
EDGE (8PSK, 3 Tx slots)	25.40	25.42	25.54	21.14	21.16	21.28
EDGE (8PSK, 4 Tx slots)	24.16	24.24	24.36	21.16	21.24	21.36

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.  
 The calculated method are shown as below:  
 Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB  
 Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB  
 Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB  
 Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

**Reduced Power Mode (Proximity Sensor active)**

Band GSM1900 TX Channel	Burst Average Power (dBm)			Frame-Average Power (dBm)		
	512	661	810	512	661	810
Frequency (MHz)	1850.2	1880	1909.8	1850.2	1880	1909.8
GPRS (GMSK, 1 Tx slot)	28.02	28.06	28.06	19.02	19.06	19.06
GPRS (GMSK, 2 Tx slots)	25.00	25.04	25.19	19.00	19.04	19.19
GPRS (GMSK, 3 Tx slots)	22.08	22.03	22.18	17.82	17.77	17.92
GPRS (GMSK, 4 Tx slots)	21.95	22.04	22.20	18.95	19.04	19.20
EDGE (8PSK, 1 Tx slot)	26.15	26.18	26.32	17.15	17.18	17.32
EDGE (8PSK, 2 Tx slots)	24.18	24.19	24.33	18.18	18.19	18.33
EDGE (8PSK, 3 Tx slots)	22.48	22.50	22.64	18.22	18.24	18.38
EDGE (8PSK, 4 Tx slots)	21.20	21.28	21.62	18.20	18.28	18.62

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.  
 The calculated method are shown as below:  
 Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB  
 Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB  
 Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB  
 Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB



**<WCDMA Conducted Power>**

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.

A summary of these settings are illustrated below:

**HSDPA Setup Configuration:**

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
  - i. Set Gain Factors ( $\beta_c$  and  $\beta_d$ ) and parameters were set according to each
  - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
  - iii. Set RMC 12.2Kbps + HSDPA mode.
  - iv. Set Cell Power = -86 dBm
  - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
  - vi. Select HSDPA Uplink Parameters
  - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
  - viii. Set Ack-Nack Repetition Factor to 3
  - ix. Set CQI Feedback Cycle (k) to 4 ms
  - x. Set CQI Repetition Factor to 2
  - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

**Table C.10.1.4:  $\beta$  values for transmitter characteristics tests with HS-DPCCH**

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c/\beta_d$	$\beta_{HS}$ (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1:  $\Delta_{ACK}, \Delta_{NACK}$  and  $\Delta_{CQI} = 30/15$  with  $\beta_{HS} = 30/15 * \beta_c$ .

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA,  $\Delta_{ACK}$  and  $\Delta_{NACK} = 30/15$  with  $\beta_{HS} = 30/15 * \beta_c$ , and  $\Delta_{CQI} = 24/15$  with  $\beta_{HS} = 24/15 * \beta_c$ .

Note 3: CM = 1 for  $\beta_c/\beta_d = 12/15, \beta_{HS}/\beta_c = 24/15$ . For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the  $\beta_c/\beta_d$  ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 11/15$  and  $\beta_d = 15/15$ .

**Setup Configuration**

**HSUPA Setup Configuration:**

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting \* :
  - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
  - ii. Set the Gain Factors ( $\beta_c$  and  $\beta_d$ ) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
  - iii. Set Cell Power = -86 dBm
  - iv. Set Channel Type = 12.2k + HSPA
  - v. Set UE Target Power
  - vi. Power Ctrl Mode= Alternating bits
  - vii. Set and observe the E-TFCl
  - viii. Confirm that E-TFCl is equal to the target E-TFCl of 75 for sub-test 1, and other subtest's E-TFCl
- d. The transmitted maximum output power was recorded.

**Table C.11.1.3:  $\beta$  values for transmitter characteristics tests with HS-DPCCH and E-DCH**

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c/\beta_d$	$\beta_{HS}$ (Note 1)	$\beta_{ec}$	$\beta_{ed}$ (Note 5) (Note 6)	$\beta_{ed}$ (SF)	$\beta_{ed}$ (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 6)	E-TFCl
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/225	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}: 47/15$ $\beta_{ed2}: 47/15$	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 (Note 4)	15/15 (Note 4)	64	15/15 (Note 4)	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1:  $\Delta_{ACK}, \Delta_{NACK}$  and  $\Delta_{CQI} = 30/15$  with  $\beta_{hs} = 30/15 * \beta_c$ .

Note 2: CM = 1 for  $\beta_c/\beta_d = 12/15, \beta_{hs}/\beta_c = 24/15$ . For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the  $\beta_c/\beta_d$  ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 10/15$  and  $\beta_d = 15/15$ .

Note 4: For subtest 5 the  $\beta_c/\beta_d$  ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 14/15$  and  $\beta_d = 15/15$ .

Note 5: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 6:  $\beta_{ed}$  can not be set directly, it is set by Absolute Grant Value.

**Setup Configuration**

**DC-HSDPA 3GPP release 8 Setup Configuration:**

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration below
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
  - i. Set RMC 12.2Kbps + HSDPA mode.
  - ii. Set Cell Power = -25 dBm
  - iii. Set HS-DSCH Configuration Type to FRC (H-set 12, QPSK)
  - iv. Select HSDPA Uplink Parameters
  - v. Set Gain Factors ( $\beta_c$  and  $\beta_d$ ) and parameters were set according to each Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
    - a). Subtest 1:  $\beta_c/\beta_d=2/15$
    - b). Subtest 2:  $\beta_c/\beta_d=12/15$
    - c). Subtest 3:  $\beta_c/\beta_d=15/8$
    - d). Subtest 4:  $\beta_c/\beta_d=15/4$
  - vi. Set Delta ACK, Delta NACK and Delta CQI = 8
  - vii. Set Ack-Nack Repetition Factor to 3
  - viii. Set CQI Feedback Cycle (k) to 4 ms
  - ix. Set CQI Repetition Factor to 2
  - x. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

C.8.1.12 Fixed Reference Channel Definition H-Set 12

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload ( $N_{INF}$ )	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table. Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

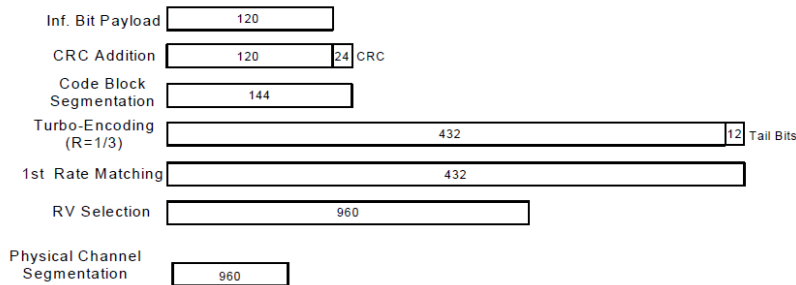


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

**Setup Configuration**



**<WCDMA Conducted Power>**

**Note:**

- Per KDB 941225 D02v02r02, RMC 12.2kbps setting is used to evaluate SAR. If HSDPA / HSUPA / DC-HSDPA output power is < 0.25dB higher than RMC, or reported SAR with RMC 12.2kbps setting is ≤ 1.2W/kg, HSDPA / HSUPA / DC-HSDPA SAR evaluation can be excluded..

**Full Power Mode (Proximity Sensor Inactive)**

Band			WCDMA V			WCDMA II			WCDMA IV		
TX Channel			4132	4182	4233	9262	9400	9538	1312	1413	1513
Frequency (MHz)			826.4	836.4	846.6	1852.4	1880	1907.6	1712.4	1732.6	1752.6
MPR(dB)	3GPP Rel 99	RMC 12.2Kbps									
0	3GPP Rel 6	HSDPA Subtest-1	23.02	23.06	23.32	23.15	23.32	23.57	23.85	23.84	23.91
0	3GPP Rel 6	HSDPA Subtest-2	22.74	22.81	22.87	22.69	22.77	23.07	23.11	23.04	23.18
0.5	3GPP Rel 6	HSDPA Subtest-3	22.30	22.38	22.44	22.41	22.55	22.57	22.66	22.56	22.68
0.5	3GPP Rel 6	HSDPA Subtest-4	22.11	22.17	22.17	22.09	22.23	22.34	22.39	22.35	22.47
0	3GPP Rel 8	DC-HSDPA Subtest-1	23.10	23.18	23.29	23.24	23.26	23.49	23.55	23.49	23.57
0	3GPP Rel 8	DC-HSDPA Subtest-2	23.05	23.05	23.29	23.39	23.42	23.48	23.47	23.46	23.57
0.5	3GPP Rel 8	DC-HSDPA Subtest-3	22.67	22.70	22.91	22.68	22.76	23.01	23.06	23.05	23.11
0.5	3GPP Rel 8	DC-HSDPA Subtest-4	22.63	22.70	22.93	22.87	22.87	23.04	23.05	22.95	23.12
0	3GPP Rel 6	HSUPA Subtest-1	22.22	22.23	22.47	22.25	22.41	22.63	22.75	22.74	22.78
2	3GPP Rel 6	HSUPA Subtest-2	20.36	20.42	20.67	20.54	20.72	20.93	20.96	20.91	21.01
1	3GPP Rel 6	HSUPA Subtest-3	21.57	21.58	21.72	21.55	21.67	21.89	21.90	21.85	21.94
2	3GPP Rel 6	HSUPA Subtest-4	20.67	20.76	20.99	20.92	21.05	21.22	21.26	21.22	21.28
0	3GPP Rel 6	HSUPA Subtest-5	22.61	22.59	22.89	22.61	22.79	23.00	23.02	23.10	23.15

**Reduced Power Mode (Proximity Sensor active)**

Band			WCDMA V			WCDMA II			WCDMA IV		
TX Channel			4132	4182	4233	9262	9400	9538	1312	1413	1513
Frequency (MHz)			826.4	836.4	846.6	1852.4	1880	1907.6	1712.4	1732.6	1752.6
MPR(dB)	3GPP Rel 99	RMC 12.2Kbps									
0	3GPP Rel 6	HSDPA Subtest-1	20.10	20.21	20.37	19.26	19.40	19.42	17.59	17.62	17.69
0	3GPP Rel 6	HSDPA Subtest-2	20.08	20.19	20.39	19.25	19.38	19.46	17.62	17.72	17.80
0.5	3GPP Rel 6	HSDPA Subtest-3	20.13	20.22	20.41	18.80	18.82	18.86	17.30	17.33	17.39
0.5	3GPP Rel 6	HSDPA Subtest-4	20.16	20.21	20.35	18.92	18.95	18.99	17.32	17.34	17.42
0	3GPP Rel 8	DC-HSDPA Subtest-1	20.05	20.16	20.32	19.11	19.29	19.39	17.79	17.83	17.86
0	3GPP Rel 8	DC-HSDPA Subtest-2	20.03	20.14	20.34	19.09	19.27	19.32	17.75	17.81	17.84
0.5	3GPP Rel 8	DC-HSDPA Subtest-3	20.08	20.17	20.36	18.70	18.75	18.76	17.20	17.25	17.33
0.5	3GPP Rel 8	DC-HSDPA Subtest-4	20.11	20.16	20.30	18.75	18.82	18.86	17.23	17.28	17.38
0	3GPP Rel 6	HSUPA Subtest-1	20.29	20.38	20.52	18.12	18.17	18.29	17.33	17.46	17.55
2	3GPP Rel 6	HSUPA Subtest-2	18.24	18.33	18.59	16.29	16.34	16.59	15.33	15.49	15.62
1	3GPP Rel 6	HSUPA Subtest-3	19.22	19.26	19.62	17.43	17.49	17.66	16.48	16.55	16.92
2	3GPP Rel 6	HSUPA Subtest-4	18.35	18.39	18.61	16.59	16.64	16.88	15.39	15.51	15.66
0	3GPP Rel 6	HSUPA Subtest-5	20.31	20.40	20.55	18.29	18.37	18.59	17.39	17.52	17.59



**<LTE Conducted Power>**

**Note:**

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r03, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r03, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r03, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r03, when reported SAR of 1RB and 50%RB allocation for QPSK  $\leq 0.8W/kg$ , and 100%RB with QPSK output power is less than 1RB and 50%RB, 100%RB allocation for QPSK is not required.
6. Per KDB 941225 D05v02r03, when reported SAR of 1RB and 50%RB allocation for QPSK  $> 0.8W/kg$  for any exposure position, SAR testing of 100%RB allocation for QPSK is performed at the highest power channel.
7. 16QAM output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is  $\leq 1.45 W/kg$ ; Per KDB 941225 D05v02r03, 16QAM SAR testing is not required.
8. Smaller bandwidth output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is  $\leq 1.45 W/kg$ ; Per KDB 941225 D05v02r03, smaller bandwidth SAR testing is not required.



**<LTE Band 17 Conducted Power>**  
**Full Power Mode (Proximity Sensor Inactive)**

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune up Limit (dBm)	MPR (dB)
Channel				23780	23790	23800		
Frequency (MHz)				709	710	711		
10	QPSK	1	0	22.60	22.92	22.90		
10	QPSK	1	24	22.52	22.75	22.80	24	0
10	QPSK	1	49	22.30	22.68	22.70		
10	QPSK	25	0	22.11	22.30	22.60		
10	QPSK	25	12	21.95	22.26	22.32	23	1
10	QPSK	25	24	22.30	22.36	22.32		
10	QPSK	50	0	22.10	22.50	22.31		
10	16QAM	1	0	22.50	22.75	22.86	23	1
10	16QAM	1	24	22.41	22.62	22.75		
10	16QAM	1	49	22.48	22.51	22.42		
10	16QAM	25	0	21.24	21.40	21.62	23	1
10	16QAM	25	12	21.66	21.83	21.89		
10	16QAM	25	24	21.90	21.92	21.95		
10	16QAM	50	0	21.66	21.77	21.77		
Channel				23755	23790	23825		
Frequency (MHz)				706.5	710	713.5		
5	QPSK	1	0	22.46	22.90	22.39	24	0
5	QPSK	1	12	22.70	22.87	22.89		
5	QPSK	1	24	22.11	22.78	22.28		
5	QPSK	12	0	22.00	22.56	22.26	23	1
5	QPSK	12	6	22.08	22.53	22.33		
5	QPSK	12	11	22.00	22.55	22.24		
5	QPSK	25	0	22.61	22.43	22.22	23	1
5	16QAM	1	0	22.49	22.81	22.27		
5	16QAM	1	12	22.23	22.75	22.69		
5	16QAM	1	24	22.00	22.58	22.62	23	1
5	16QAM	12	0	21.62	21.81	21.89		
5	16QAM	12	6	21.71	22.12	22.04		
5	16QAM	12	11	21.57	22.14	21.95	23	1
5	16QAM	25	0	21.46	22.02	21.91		



**<LTE Band 17 Conducted Power>**  
**Reduced Power Mode (Proximity Sensor active)**

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune up Limit (dBm)	MPR (dB)
Channel				23780	23790	23800		
Frequency (MHz)				709	710	711		
10	QPSK	1	0	21.24	21.31	21.30		
10	QPSK	1	24	21.03	21.22	21.24	22	0
10	QPSK	1	49	20.81	21.08	20.92		
10	QPSK	25	0	20.49	20.48	20.46		
10	QPSK	25	12	20.40	20.37	20.31	21	1
10	QPSK	25	24	20.28	20.21	20.22		
10	QPSK	50	0	20.46	20.30	20.47		
10	16QAM	1	0	20.36	20.47	20.40	21	1
10	16QAM	1	24	20.41	20.34	20.29		
10	16QAM	1	49	20.23	20.11	20.18		
10	16QAM	25	0	19.84	19.82	19.76	21	1
10	16QAM	25	12	19.76	19.78	19.73		
10	16QAM	25	24	19.61	19.72	19.71		
10	16QAM	50	0	19.55	19.64	19.63	21	1
Channel				23755	23790	23825		
Frequency (MHz)				706.5	710	713.5		
5	QPSK	1	0	20.90	21.28	21.29	22	0
5	QPSK	1	12	21.17	21.16	21.15		
5	QPSK	1	24	20.61	21.09	20.89		
5	QPSK	12	0	20.42	20.47	20.47	21	1
5	QPSK	12	6	20.49	20.47	20.44		
5	QPSK	12	11	20.41	20.43	20.42		
5	QPSK	25	0	20.34	20.41	20.41	21	1
5	16QAM	1	0	20.44	20.44	20.33		
5	16QAM	1	12	20.45	20.39	20.49		
5	16QAM	1	24	20.27	20.37	20.29	21	1
5	16QAM	12	0	19.73	19.61	19.71		
5	16QAM	12	6	19.83	19.61	19.80		
5	16QAM	12	11	19.65	19.72	19.65	21	1
5	16QAM	12	11	19.65	19.72	19.65		
5	16QAM	25	0	19.62	19.74	19.65		



**<LTE Band 13 Conducted Power>**  
**Full Power Mode (Proximity Sensor Inactive)**

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune up Limit (dBm)	MPR (dB)
Channel					23230			
Frequency (MHz)					782			
10	QPSK	1	0		23.50		24	0
10	QPSK	1	24		23.28			
10	QPSK	1	49		23.43			
10	QPSK	25	0		22.41		23	1
10	QPSK	25	12		22.12			
10	QPSK	25	24		22.31			
10	QPSK	50	0		22.45		23	1
10	16QAM	1	0		22.94			
10	16QAM	1	24		22.80			
10	16QAM	1	49		22.77		23	1
10	16QAM	25	0		22.12			
10	16QAM	25	12		22.14			
10	16QAM	25	24		22.08		23	1
10	16QAM	50	0		22.01			
Channel				23205	23230	23255		
Frequency (MHz)				779.5	782	784.5		
5	QPSK	1	0	23.45	23.30	23.43	24	0
5	QPSK	1	12	23.08	23.20	23.37		
5	QPSK	1	24	23.09	22.99	22.86		
5	QPSK	12	0	22.43	22.40	22.33	23	1
5	QPSK	12	6	22.56	22.57	22.46		
5	QPSK	12	11	22.60	22.41	22.40		
5	QPSK	25	0	22.50	22.42	22.27	23	1
5	16QAM	1	0	22.97	22.69	22.76		
5	16QAM	1	12	22.95	22.59	22.74		
5	16QAM	1	24	22.95	22.48	22.60	23	1
5	16QAM	12	0	22.50	22.29	22.50		
5	16QAM	12	6	22.50	22.26	22.34		
5	16QAM	12	11	22.45	22.15	22.21	23	1
5	16QAM	12	11	22.45	22.15	22.21		
5	16QAM	25	0	22.30	22.07	22.18		





**<LTE Band 13 Conducted Power>**  
**Reduced Power Mode (Proximity Sensor active)**

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune up Limit (dBm)	MPR (dB)
Channel					23230			
Frequency (MHz)					782			
10	QPSK	1	0		19.51		20	0
10	QPSK	1	24		19.42			
10	QPSK	1	49		19.48			
10	QPSK	25	0		18.50		19	1
10	QPSK	25	12		18.22			
10	QPSK	25	24		18.40			
10	QPSK	50	0		18.50		19	1
10	16QAM	1	0		18.99			
10	16QAM	1	24		18.90			
10	16QAM	1	49		18.93		19	1
10	16QAM	25	0		18.10			
10	16QAM	25	12		18.04			
10	16QAM	25	24		18.06		19	1
10	16QAM	50	0		18.02			
Channel				23205	23230	23255		
Frequency (MHz)				779.5	782	784.5		
5	QPSK	1	0	19.46	19.39	19.45	20	0
5	QPSK	1	12	19.40	19.27	19.42		
5	QPSK	1	24	19.46	19.19	19.13		
5	QPSK	12	0	18.80	18.45	18.53	19	1
5	QPSK	12	6	18.94	18.73	18.72		
5	QPSK	12	11	18.92	18.48	18.67		
5	QPSK	25	0	18.89	18.49	18.41	19	1
5	16QAM	1	0	18.98	18.92	19.00		
5	16QAM	1	12	18.89	18.87	18.89		
5	16QAM	1	24	18.85	18.77	18.75	19	1
5	16QAM	12	0	18.15	18.00	18.13		
5	16QAM	12	6	18.24	18.06	18.14		
5	16QAM	12	11	18.22	18.04	18.05	19	1
5	16QAM	25	0	18.11	18.08	17.92		



**<LTE Band 5 Conducted Power>**  
**Full Power Mode (Proximity Sensor Inactive)**

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune up Limit (dBm)	MPR (dB)
Channel				20450	20525	20600		
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	23.30	23.18	23.08		
10	QPSK	1	24	23.22	23.00	22.80	24	0
10	QPSK	1	49	23.11	22.66	22.77		
10	QPSK	25	0	23.00	22.74	22.65		
10	QPSK	25	12	22.99	22.52	22.63	23	1
10	QPSK	25	24	22.81	22.50	22.68		
10	QPSK	50	0	22.80	22.48	22.39		
10	16QAM	1	0	22.96	22.97	22.88	23	1
10	16QAM	1	24	22.93	22.86	22.84		
10	16QAM	1	49	22.94	22.78	22.45		
10	16QAM	25	0	22.80	22.75	22.41	23	1
10	16QAM	25	12	22.79	22.80	22.38		
10	16QAM	25	24	22.78	22.66	22.39		
10	16QAM	50	0	22.60	22.70	22.40		
Channel				20425	20525	20625		
Frequency (MHz)				826.5	836.5	846.5		
5	QPSK	1	0	23.25	22.93	22.98		
5	QPSK	1	12	23.00	22.80	22.87	24	0
5	QPSK	1	24	23.07	22.70	22.77		
5	QPSK	12	0	22.57	22.66	22.55		
5	QPSK	12	6	22.58	22.74	22.42	23	1
5	QPSK	12	11	22.60	22.70	22.33		
5	QPSK	25	0	22.58	22.71	22.30		
5	16QAM	1	0	23.00	22.91	22.90	23	1
5	16QAM	1	12	22.94	22.80	22.78		
5	16QAM	1	24	22.83	22.74	22.60		
5	16QAM	12	0	22.60	22.70	22.58	23	1
5	16QAM	12	6	22.65	22.74	22.48		
5	16QAM	12	11	22.70	22.71	22.40		
5	16QAM	25	0	22.78	22.70	22.30		
Channel				20415	20525	20635		
Frequency (MHz)				825.5	836.5	847.5		
3	QPSK	1	0	22.80	22.90	23.04		
3	QPSK	1	7	22.77	22.87	23.05	24	0
3	QPSK	1	14	22.74	22.95	22.75		
3	QPSK	8	0	22.75	22.53	22.72		
3	QPSK	8	4	22.66	22.47	22.58	23	1
3	QPSK	8	7	22.41	22.49	22.56		
3	QPSK	15	0	22.38	22.41	22.68		
3	16QAM	1	0	22.58	22.60	22.68	23	1
3	16QAM	1	7	22.61	22.64	22.66		
3	16QAM	1	14	22.77	22.50	22.49		
3	16QAM	8	0	22.46	22.50	22.39	23	1
3	16QAM	8	4	22.30	22.40	22.35		
3	16QAM	8	7	22.15	22.33	22.40		
3	16QAM	15	0	22.11	22.40	22.39		



Channel				20407	20525	20643	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				824.7	836.5	848.3		
1.4	QPSK	1	0	22.70	22.93	22.96	24	0
1.4	QPSK	1	2	22.69	22.73	22.76		
1.4	QPSK	1	5	22.67	22.61	22.64		
1.4	QPSK	3	0	22.72	22.79	22.82		
1.4	QPSK	3	1	22.72	22.70	22.73		
1.4	QPSK	3	2	22.70	22.66	22.69		
1.4	QPSK	6	0	22.21	22.32	22.35	23	1
1.4	16QAM	1	0	22.62	22.69	22.72	23	1
1.4	16QAM	1	2	22.63	22.59	22.62		
1.4	16QAM	1	5	22.65	22.42	22.45		
1.4	16QAM	3	0	22.42	22.41	22.44		
1.4	16QAM	3	1	22.42	22.40	22.43		
1.4	16QAM	3	2	22.40	22.32	22.35		
1.4	16QAM	6	0	22.30	22.30	22.38	23	1



**<LTE Band 5 Conducted Power>**  
**Reduced Power Mode (Proximity Sensor active)**

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune up Limit (dBm)	MPR (dB)
Channel				20450	20525	20600	20	0
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	18.53	18.85	18.41		
10	QPSK	1	24	18.50	18.53	18.21	19	1
10	QPSK	1	49	18.31	18.37	18.20		
10	QPSK	25	0	18.21	18.31	18.08		
10	QPSK	25	12	18.16	18.26	18.07	19	1
10	QPSK	25	24	18.06	18.25	18.04		
10	QPSK	50	0	18.21	18.26	17.87		
10	16QAM	1	0	18.21	18.53	18.10	19	1
10	16QAM	1	24	18.23	18.35	18.09		
10	16QAM	1	49	18.15	18.21	17.87		
10	16QAM	25	0	18.22	18.25	17.79	19	1
10	16QAM	25	12	18.19	18.21	17.73		
10	16QAM	25	24	18.04	18.17	17.71		
10	16QAM	50	0	18.00	18.15	17.95	19	1
Channel				20425	20525	20625		
Frequency (MHz)				826.5	836.5	846.5		
5	QPSK	1	0	18.80	18.50	18.51	20	0
5	QPSK	1	12	18.49	18.20	18.44		
5	QPSK	1	24	18.58	18.17	18.14		
5	QPSK	12	0	18.32	18.19	18.13	19	1
5	QPSK	12	6	18.13	18.19	17.90		
5	QPSK	12	11	18.11	18.17	17.92		
5	QPSK	25	0	18.16	18.11	17.99	19	1
5	16QAM	1	0	18.48	18.10	18.18		
5	16QAM	1	12	18.44	18.10	18.08		
5	16QAM	1	24	18.38	18.19	18.01	19	1
5	16QAM	12	0	18.05	18.13	18.13		
5	16QAM	12	6	18.11	18.04	17.96		
5	16QAM	12	11	18.18	18.02	17.83	19	1
5	16QAM	12	11	18.18	18.02	17.83		
5	16QAM	25	0	18.32	18.13	17.85		
Channel				20415	20525	20635	20	0
Frequency (MHz)				825.5	836.5	847.5		
3	QPSK	1	0	18.38	18.34	18.44		
3	QPSK	1	7	18.25	18.45	18.49	19	1
3	QPSK	1	14	18.24	18.54	18.29		
3	QPSK	8	0	18.05	18.08	18.15		
3	QPSK	8	4	17.90	17.93	18.14	19	1
3	QPSK	8	7	17.99	18.01	17.96		
3	QPSK	15	0	17.91	17.95	18.16		
3	16QAM	1	0	18.06	18.19	18.11	19	1
3	16QAM	1	7	18.08	18.10	18.10		
3	16QAM	1	14	17.88	17.94	18.07		
3	16QAM	8	0	18.00	18.04	17.87	19	1
3	16QAM	8	4	17.87	17.86	17.82		
3	16QAM	8	7	17.69	17.85	17.81		
3	16QAM	15	0	17.67	17.81	17.84		



Channel				20407	20525	20643	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				824.7	836.5	848.3		
1.4	QPSK	1	0	18.22	18.28	18.30	20	0
1.4	QPSK	1	2	18.20	18.26	18.24		
1.4	QPSK	1	5	18.18	18.21	18.19		
1.4	QPSK	3	0	18.13	18.21	18.39		
1.4	QPSK	3	1	18.20	18.23	18.25		
1.4	QPSK	3	2	18.21	18.24	18.14		
1.4	QPSK	6	0	17.61	17.73	17.82	19	1
1.4	16QAM	1	0	17.88	17.96	18.07	19	1
1.4	16QAM	1	2	17.75	17.88	18.04		
1.4	16QAM	1	5	17.85	17.95	18.03		
1.4	16QAM	3	0	17.80	17.95	17.89		
1.4	16QAM	3	1	17.69	17.86	17.84		
1.4	16QAM	3	2	17.63	17.78	17.76		
1.4	16QAM	6	0	17.70	17.74	17.89	19	1



**<LTE Band 4 Conducted Power>**  
**Full Power Mode (Proximity Sensor Inactive)**

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune up Limit (dBm)	MPR (dB)		
Channel				20050	20175	20300				
Frequency (MHz)				1720	1732.5	1745				
20	QPSK	1	0	23.48	23.72	23.70	24	0		
20	QPSK	1	49	23.41	23.20	23.34				
20	QPSK	1	99	23.00	23.33	23.21				
20	QPSK	50	0	22.88	22.91	22.86	23	1		
20	QPSK	50	24	22.71	22.77	22.82				
20	QPSK	50	49	22.73	22.61	22.90				
20	QPSK	100	0	22.86	22.88	22.83	23	1		
20	16QAM	1	0	22.72	22.95	22.86				
20	16QAM	1	49	22.75	22.91	22.76				
20	16QAM	1	99	22.73	22.74	22.84	23	1		
20	16QAM	50	0	22.42	22.83	22.48				
20	16QAM	50	24	22.48	22.93	22.67				
20	16QAM	50	49	22.54	22.77	22.67	23	1		
20	16QAM	100	0	22.47	22.89	22.49				
Channel				20025	20175	20325			Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				1717.5	1732.5	1747.5				
15	QPSK	1	0	23.40	23.11	23.10				
15	QPSK	1	37	23.00	23.00	23.08	24	0		
15	QPSK	1	74	23.11	23.03	22.70				
15	QPSK	36	0	22.90	22.73	22.45				
15	QPSK	36	18	22.86	22.97	22.74	23	1		
15	QPSK	36	37	22.60	22.79	22.68				
15	QPSK	75	0	22.78	22.97	22.83				
15	16QAM	1	0	22.73	22.97	22.92	23	1		
15	16QAM	1	37	22.78	22.99	22.82				
15	16QAM	1	74	22.72	22.85	22.90				
15	16QAM	36	0	22.56	22.38	22.31	23	1		
15	16QAM	36	18	22.55	22.58	22.26				
15	16QAM	36	37	22.77	22.56	22.33				
15	16QAM	75	0	22.61	22.62	22.28	23	1		
Channel				20000	20175	20350			Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1732.5	1750				
10	QPSK	1	0	23.00	23.33	23.04				
10	QPSK	1	24	23.18	23.00	22.89	24	0		
10	QPSK	1	49	23.25	23.01	22.70				
10	QPSK	25	0	22.96	22.93	22.55				
10	QPSK	25	12	22.97	22.90	22.44	23	1		
10	QPSK	25	24	22.90	22.92	22.47				
10	QPSK	50	0	22.80	22.92	22.47				
10	16QAM	1	0	22.74	22.98	22.99	23	1		
10	16QAM	1	24	22.70	22.94	22.97				
10	16QAM	1	49	22.68	22.91	22.88				
10	16QAM	25	0	22.07	22.54	22.22	23	1		
10	16QAM	25	12	22.16	22.52	22.12				
10	16QAM	25	24	22.21	22.47	22.16				
10	16QAM	50	0	22.17	22.51	22.11				



Channel				19975	20175	20375	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	23.01	23.13	23.00	24	0
5	QPSK	1	12	23.00	23.00	22.90		
5	QPSK	1	24	22.95	23.00	22.81		
5	QPSK	12	0	22.40	22.74	22.48	23	1
5	QPSK	12	6	22.55	22.70	22.41		
5	QPSK	12	11	22.48	22.73	22.42		
5	QPSK	25	0	22.45	22.60	22.38	23	1
5	16QAM	1	0	22.76	22.80	22.95		
5	16QAM	1	12	22.83	22.91	22.94		
5	16QAM	1	24	22.80	22.82	22.92	23	1
5	16QAM	12	0	22.32	22.41	22.12		
5	16QAM	12	6	22.41	22.48	22.18		
5	16QAM	12	11	22.34	22.39	22.21	23	1
5	16QAM	12	11	22.34	22.39	22.21		
5	16QAM	25	0	22.25	22.33	22.12		
Channel				19965	20175	20385	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	22.90	23.08	23.01	24	0
3	QPSK	1	7	22.91	23.01	22.90		
3	QPSK	1	14	22.88	22.88	22.80		
3	QPSK	8	0	22.50	22.74	22.70	23	1
3	QPSK	8	4	22.60	22.61	22.60		
3	QPSK	8	7	22.35	22.49	22.41		
3	QPSK	15	0	22.33	22.38	22.33	23	1
3	16QAM	1	0	22.60	22.58	22.70		
3	16QAM	1	7	22.72	22.70	22.73		
3	16QAM	1	14	22.46	22.94	22.80	23	1
3	16QAM	8	0	22.09	22.12	22.10		
3	16QAM	8	4	22.03	22.03	22.12		
3	16QAM	8	7	22.05	22.11	22.06	23	1
3	16QAM	8	7	22.05	22.11	22.06		
3	16QAM	15	0	22.01	22.20	22.04		
Channel				19957	20175	20393	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	23.00	23.01	23.00	24	0
1.4	QPSK	1	2	22.75	22.89	22.77		
1.4	QPSK	1	5	22.66	22.77	22.75		
1.4	QPSK	3	0	22.58	22.64	22.69	23	1
1.4	QPSK	3	1	22.50	22.58	22.58		
1.4	QPSK	3	2	22.47	22.47	22.47		
1.4	QPSK	6	0	22.33	22.33	22.48	23	1
1.4	16QAM	1	0	22.64	22.87	22.81		
1.4	16QAM	1	2	22.62	22.79	22.70		
1.4	16QAM	1	5	22.55	22.83	22.76	23	1
1.4	16QAM	3	0	22.42	22.66	22.48		
1.4	16QAM	3	1	22.39	22.41	22.41		
1.4	16QAM	3	2	22.37	22.39	22.39	23	1
1.4	16QAM	3	2	22.37	22.39	22.39		
1.4	16QAM	6	0	22.56	22.47	22.38		



**<LTE Band 4 Conducted Power>**  
**Reduced Power Mode (Proximity Sensor active)**

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune up Limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	17.77	17.94	17.96	18	0
20	QPSK	1	49	17.47	17.57	17.65		
20	QPSK	1	99	17.21	17.38	17.59		
20	QPSK	50	0	16.78	16.94	16.91	17	1
20	QPSK	50	24	16.79	16.77	16.86		
20	QPSK	50	49	16.76	16.65	16.83		
20	QPSK	100	0	16.85	16.69	16.78	17	1
20	16QAM	1	0	16.97	16.82	16.94		
20	16QAM	1	49	16.91	16.98	16.70		
20	16QAM	1	99	16.89	16.93	16.71	17	1
20	16QAM	50	0	16.43	16.86	16.62		
20	16QAM	50	24	16.39	16.84	16.70		
20	16QAM	50	49	16.44	16.67	16.57	17	1
20	16QAM	100	0	16.55	16.80	16.58		
Channel				20025	20175	20325		
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	17.44	17.03	17.12	18	0
15	QPSK	1	37	16.98	16.90	17.04		
15	QPSK	1	74	16.90	16.93	16.75		
15	QPSK	36	0	16.70	16.62	16.56	17	1
15	QPSK	36	18	16.66	16.59	16.50		
15	QPSK	36	37	16.50	16.52	16.52		
15	QPSK	75	0	16.44	16.51	16.60	17	1
15	16QAM	1	0	16.96	16.66	16.76		
15	16QAM	1	37	16.94	16.64	16.56		
15	16QAM	1	74	16.90	16.62	16.58	17	1
15	16QAM	36	0	16.60	16.45	16.24		
15	16QAM	36	18	16.51	16.53	16.23		
15	16QAM	36	37	16.75	16.57	16.37	17	1
15	16QAM	75	0	16.71	16.69	16.38		
Channel				20000	20175	20350		
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	17.33	17.26	17.05	18	0
10	QPSK	1	24	17.23	16.94	16.95		
10	QPSK	1	49	17.03	16.96	16.70		
10	QPSK	25	0	16.91	16.94	16.50	17	1
10	QPSK	25	12	16.85	16.88	16.44		
10	QPSK	25	24	16.79	16.83	16.50		
10	QPSK	50	0	16.78	16.88	16.52	17	1
10	16QAM	1	0	16.76	16.85	16.70		
10	16QAM	1	24	16.74	16.67	16.58		
10	16QAM	1	49	16.77	16.49	16.31	17	1
10	16QAM	25	0	16.12	16.53	16.13		
10	16QAM	25	12	16.07	16.41	16.05		
10	16QAM	25	24	16.30	16.39	16.15	17	1
10	16QAM	50	0	16.16	16.41	16.17		





Channel				19975	20175	20375	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	16.92	17.13	16.91	18	0
5	QPSK	1	12	17.02	16.97	16.90		
5	QPSK	1	24	16.89	17.03	16.78		
5	QPSK	12	0	16.31	16.68	16.48	17	1
5	QPSK	12	6	16.49	16.76	16.43		
5	QPSK	12	11	16.53	16.66	16.45		
5	QPSK	25	0	16.53	16.56	16.43	17	1
5	16QAM	1	0	16.64	16.80	16.60		
5	16QAM	1	12	16.61	16.77	16.59		
5	16QAM	1	24	16.54	16.72	16.59	17	1
5	16QAM	12	0	16.28	16.51	16.09		
5	16QAM	12	6	16.33	16.56	16.20		
5	16QAM	12	11	16.34	16.31	16.25	17	1
5	16QAM	25	0	16.33	16.38	16.19		
Channel				19965	20175	20385	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	16.95	17.16	16.99	18	0
3	QPSK	1	7	16.91	17.09	16.90		
3	QPSK	1	14	16.90	16.84	16.81		
3	QPSK	8	0	16.51	16.76	16.65	17	1
3	QPSK	8	4	16.48	16.59	16.64		
3	QPSK	8	7	16.35	16.46	16.41		
3	QPSK	15	0	16.27	16.33	16.39	17	1
3	16QAM	1	0	16.61	16.66	16.58		
3	16QAM	1	7	16.58	16.74	16.54		
3	16QAM	1	14	16.52	16.80	16.52	17	1
3	16QAM	8	0	16.11	16.10	16.07		
3	16QAM	8	4	16.06	16.01	16.14		
3	16QAM	8	7	15.98	16.21	16.03	17	1
3	16QAM	15	0	16.11	16.17	15.99		
Channel				19957	20175	20393	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	16.93	16.95	17.01	18	0
1.4	QPSK	1	2	16.68	16.96	16.74		
1.4	QPSK	1	5	16.72	16.72	16.73		
1.4	QPSK	3	0	16.61	16.60	16.66	17	1
1.4	QPSK	3	1	16.59	16.51	16.56		
1.4	QPSK	3	2	16.51	16.53	16.58		
1.4	QPSK	6	0	16.50	16.50	16.52	17	1
1.4	16QAM	1	0	16.55	16.48	16.55		
1.4	16QAM	1	2	16.55	16.41	16.45		
1.4	16QAM	1	5	16.59	16.45	16.52	17	1
1.4	16QAM	3	0	16.51	16.38	16.44		
1.4	16QAM	3	1	16.35	16.38	16.40		
1.4	16QAM	3	2	16.45	16.31	16.29	17	1
1.4	16QAM	6	0	16.60	16.32	16.30		



**<LTE Band 2 Conducted Power>**  
**Full Power Mode (Proximity Sensor Inactive)**

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune up Limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	23.62	22.42	22.09	24	0
20	QPSK	1	49	22.93	22.95	22.36		
20	QPSK	1	99	22.99	22.30	22.43		
20	QPSK	50	0	22.30	22.17	21.53	23	1
20	QPSK	50	24	22.11	22.15	21.67		
20	QPSK	50	49	22.00	22.03	21.81		
20	QPSK	100	0	21.95	22.00	21.60	23	1
20	16QAM	1	0	22.50	22.03	21.66		
20	16QAM	1	49	22.01	22.62	21.93		
20	16QAM	1	99	22.06	21.88	21.95	23	1
20	16QAM	50	0	22.00	21.68	21.11		
20	16QAM	50	24	22.28	21.86	21.28		
20	16QAM	50	49	22.30	21.63	21.48	23	1
20	16QAM	100	0	22.00	21.71	21.29		
Channel				18675	18900	19125		
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	23.00	22.64	22.45	24	0
15	QPSK	1	37	22.53	23.10	22.88		
15	QPSK	1	74	22.49	22.65	22.65		
15	QPSK	36	0	22.28	22.26	21.74	23	1
15	QPSK	36	18	21.72	22.31	22.02		
15	QPSK	36	37	21.56	22.22	22.15		
15	QPSK	75	0	21.78	22.20	22.01	23	1
15	16QAM	1	0	22.77	22.35	22.03		
15	16QAM	1	37	22.60	22.91	22.48		
15	16QAM	1	74	21.79	22.51	22.23	23	1
15	16QAM	36	0	21.75	22.03	21.49		
15	16QAM	36	18	21.56	22.17	21.75		
15	16QAM	36	37	21.49	21.95	21.78	23	1
15	16QAM	75	0	21.47	22.06	21.71		
Channel				18650	18900	19150		
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	23.00	22.46	22.10	24	0
10	QPSK	1	24	22.65	22.82	22.43		
10	QPSK	1	49	22.48	22.58	22.29		
10	QPSK	25	0	22.46	21.98	21.57	23	1
10	QPSK	25	12	21.83	22.05	21.61		
10	QPSK	25	24	21.57	22.00	21.58		
10	QPSK	50	0	22.03	21.95	21.55	23	1
10	16QAM	1	0	22.78	22.13	21.65		
10	16QAM	1	24	22.19	22.54	21.95		
10	16QAM	1	49	21.81	22.16	21.85	23	1
10	16QAM	25	0	21.82	21.66	21.29		
10	16QAM	25	12	21.31	21.72	21.31		
10	16QAM	25	24	21.40	21.55	21.29	23	1
10	16QAM	50	0	21.38	21.63	21.28		



Channel				18625	18900	19175	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	23.25	22.66	22.16	24	0
5	QPSK	1	12	23.20	23.00	22.68		
5	QPSK	1	24	23.00	22.51	22.40		
5	QPSK	12	0	22.70	22.09	21.86	23	1
5	QPSK	12	6	22.46	22.19	21.99		
5	QPSK	12	11	22.09	22.13	21.97		
5	QPSK	25	0	22.26	22.09	21.89	23	1
5	16QAM	1	0	22.65	22.32	21.82		
5	16QAM	1	12	22.57	22.72	22.30		
5	16QAM	1	24	21.57	22.14	21.93	23	1
5	16QAM	12	0	22.09	21.83	21.53		
5	16QAM	12	6	21.96	21.91	21.65		
5	16QAM	12	11	21.62	21.85	21.63	23	1
5	16QAM	12	11	21.62	21.85	21.63		
5	16QAM	25	0	21.85	21.82	21.55		
Channel				18615	18900	19185	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	23.49	22.98	22.62	24	0
3	QPSK	1	7	23.23	22.96	22.57		
3	QPSK	1	14	22.82	22.99	22.64		
3	QPSK	8	0	22.59	22.20	21.87	23	1
3	QPSK	8	4	22.46	22.14	21.87		
3	QPSK	8	7	22.36	22.19	21.94		
3	QPSK	15	0	22.47	22.23	21.90	23	1
3	16QAM	1	0	22.82	22.66	22.10		
3	16QAM	1	7	22.70	22.66	22.08		
3	16QAM	1	14	22.30	22.65	22.15	23	1
3	16QAM	8	0	22.22	21.97	21.58		
3	16QAM	8	4	22.02	21.92	21.57		
3	16QAM	8	7	21.95	21.96	21.65	23	1
3	16QAM	8	7	21.95	21.96	21.65		
3	16QAM	15	0	22.07	21.97	21.58		
Channel				18607	18900	19193	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	23.37	22.69	22.50	24	0
1.4	QPSK	1	2	23.34	22.74	22.54		
1.4	QPSK	1	5	23.17	22.71	22.52		
1.4	QPSK	3	0	23.25	22.75	22.51	23	1
1.4	QPSK	3	1	23.23	22.77	22.51		
1.4	QPSK	3	2	23.18	22.77	22.43		
1.4	QPSK	6	0	22.40	21.92	21.78	23	1
1.4	16QAM	1	0	22.75	22.43	22.01		
1.4	16QAM	1	2	22.74	22.49	22.07		
1.4	16QAM	1	5	22.62	22.47	22.06	23	1
1.4	16QAM	3	0	22.56	22.30	21.86		
1.4	16QAM	3	1	22.55	22.33	21.89		
1.4	16QAM	3	2	22.53	22.33	21.89	23	1
1.4	16QAM	3	2	22.53	22.33	21.89		
1.4	16QAM	6	0	22.10	21.77	21.56		



**<LTE Band 2 Conducted Power>**  
**Reduced Power Mode (Proximity Sensor active)**

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune up Limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	18.98	18.88	18.77	19.5	0
20	QPSK	1	49	18.59	18.55	18.52		
20	QPSK	1	99	18.57	18.33	18.33		
20	QPSK	50	0	17.85	17.80	17.57	18.5	1
20	QPSK	50	24	17.69	17.76	17.45		
20	QPSK	50	49	17.58	17.45	17.35		
20	QPSK	100	0	17.62	17.59	17.32	18.5	1
20	16QAM	1	0	18.39	18.17	18.06		
20	16QAM	1	49	17.68	17.75	17.59		
20	16QAM	1	99	17.58	17.67	17.49	18.5	1
20	16QAM	50	0	17.56	17.52	17.19		
20	16QAM	50	24	17.52	17.33	17.14		
20	16QAM	50	49	17.54	17.24	17.33	18.5	1
20	16QAM	100	0	17.52	17.21	17.23		
Channel				18675	18900	19125		
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	18.84	18.88	18.72	19.5	0
15	QPSK	1	37	18.69	18.79	18.36		
15	QPSK	1	74	18.56	18.66	18.22		
15	QPSK	36	0	18.23	17.98	17.89	18.5	1
15	QPSK	36	18	17.94	18.00	17.62		
15	QPSK	36	37	17.79	17.96	17.63		
15	QPSK	75	0	17.68	17.89	17.51	18.5	1
15	16QAM	1	0	18.33	18.22	18.22		
15	16QAM	1	37	18.11	18.14	18.09		
15	16QAM	1	74	17.89	18.04	17.90	18.5	1
15	16QAM	36	0	17.41	17.23	17.34		
15	16QAM	36	18	17.34	17.32	17.14		
15	16QAM	36	37	17.17	17.28	17.15	18.5	1
15	16QAM	75	0	17.14	17.21	17.09		
Channel				18650	18900	19150		
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	18.95	18.89	18.65	19.5	0
10	QPSK	1	24	18.69	18.86	18.38		
10	QPSK	1	49	18.49	18.55	18.07		
10	QPSK	25	0	18.23	17.89	17.79	18.5	1
10	QPSK	25	12	17.88	17.55	17.48		
10	QPSK	25	24	17.79	17.64	17.47		
10	QPSK	50	0	17.64	17.51	17.41	18.5	1
10	16QAM	1	0	18.35	18.09	17.93		
10	16QAM	1	24	18.22	17.88	17.74		
10	16QAM	1	49	17.89	17.86	17.54	18.5	1
10	16QAM	25	0	17.44	17.24	17.34		
10	16QAM	25	12	17.31	17.33	17.24		
10	16QAM	25	24	17.28	17.29	17.26	18.5	1
10	16QAM	50	0	17.26	17.21	17.16		



Channel				18625	18900	19175	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	18.95	18.75	18.66	19.5	0
5	QPSK	1	12	18.79	18.39	18.46		
5	QPSK	1	24	18.66	18.41	18.39		
5	QPSK	12	0	18.39	18.19	18.09	18.5	1
5	QPSK	12	6	18.21	17.89	17.88		
5	QPSK	12	11	17.93	17.77	17.62		
5	QPSK	25	0	18.06	17.88	17.62		
5	16QAM	1	0	18.32	18.24	18.19	18.5	1
5	16QAM	1	12	18.21	17.95	17.89		
5	16QAM	1	24	18.10	17.99	17.85		
5	16QAM	12	0	17.55	17.16	17.25	18.5	1
5	16QAM	12	6	17.49	17.08	17.09		
5	16QAM	12	11	17.32	17.16	16.97		
5	16QAM	25	0	17.31	17.14	16.96		
Channel				18615	18900	19185	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	18.97	18.91	18.75	19.5	0
3	QPSK	1	7	18.88	18.71	18.68		
3	QPSK	1	14	18.71	18.58	18.54		
3	QPSK	8	0	18.20	18.32	18.05	18.5	1
3	QPSK	8	4	18.07	18.22	18.07		
3	QPSK	8	7	18.00	18.17	18.12		
3	QPSK	15	0	18.13	18.04	18.08		
3	16QAM	1	0	18.14	18.16	18.29	18.5	1
3	16QAM	1	7	17.97	18.14	18.17		
3	16QAM	1	14	17.84	18.12	18.09		
3	16QAM	8	0	17.66	17.44	17.26	18.5	1
3	16QAM	8	4	17.46	17.26	17.15		
3	16QAM	8	7	17.38	17.27	17.20		
3	16QAM	15	0	17.48	17.24	17.12		
Channel				18607	18900	19193	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	18.80	18.73	18.85	19.5	0
1.4	QPSK	1	2	18.77	18.62	18.67		
1.4	QPSK	1	5	18.70	18.60	18.52		
1.4	QPSK	3	0	18.57	18.60	18.43		
1.4	QPSK	3	1	18.50	18.48	18.29		
1.4	QPSK	3	2	18.40	18.35	18.19		
1.4	QPSK	6	0	18.01	18.23	18.05	18.5	1
1.4	16QAM	1	0	17.97	18.19	18.26	18.5	1
1.4	16QAM	1	2	17.87	18.11	18.19		
1.4	16QAM	1	5	17.80	18.09	18.13		
1.4	16QAM	3	0	17.76	17.69	18.09		
1.4	16QAM	3	1	17.70	17.65	17.94		
1.4	16QAM	3	2	17.63	17.57	17.68		
1.4	16QAM	6	0	17.13	17.15	17.55		



**<LTE Band 7 Conducted Power>**  
**Full Power Mode (Proximity Sensor Inactive)**

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune up Limit (dBm)	MPR (dB)
Channel				20850	21100	21350		
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	23.41	23.06	22.11	24	0
20	QPSK	1	49	23.20	23.04	22.63		
20	QPSK	1	99	23.32	22.37	22.73		
20	QPSK	50	0	22.52	22.78	21.40	23	1
20	QPSK	50	24	22.57	22.52	21.84		
20	QPSK	50	49	22.77	22.16	22.11		
20	QPSK	100	0	22.67	22.38	21.80	23	1
20	16QAM	1	0	22.77	22.87	21.68		
20	16QAM	1	49	22.74	22.91	22.18		
20	16QAM	1	99	22.92	22.28	22.23	23	1
20	16QAM	50	0	21.81	21.99	21.14		
20	16QAM	50	24	21.87	21.86	21.51		
20	16QAM	50	49	21.94	21.70	21.67	23	1
20	16QAM	100	0	21.95	21.96	21.52		
Channel				20825	21100	21375		
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	23.34	23.30	22.41	24	0
15	QPSK	1	37	22.90	23.20	22.90		
15	QPSK	1	74	23.07	22.72	22.79		
15	QPSK	36	0	22.55	22.54	21.83	23	1
15	QPSK	36	18	22.50	22.39	22.18		
15	QPSK	36	37	22.67	22.11	22.23		
15	QPSK	75	0	22.38	22.29	22.12	23	1
15	16QAM	1	0	22.67	22.84	22.12		
15	16QAM	1	37	22.42	22.75	22.61		
15	16QAM	1	74	22.64	22.29	22.50	23	1
15	16QAM	36	0	21.87	21.96	21.70		
15	16QAM	36	18	21.78	21.98	21.94		
15	16QAM	36	37	21.87	21.85	22.00	23	1
15	16QAM	75	0	21.86	21.91	21.85		
Channel				20800	21100	21400		
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	22.98	22.95	22.42	24	0
10	QPSK	1	24	22.64	22.96	22.67		
10	QPSK	1	49	22.63	22.54	22.44		
10	QPSK	25	0	22.09	22.23	21.92	23	1
10	QPSK	25	12	21.81	22.09	21.96		
10	QPSK	25	24	21.76	21.93	21.99		
10	QPSK	50	0	21.94	22.05	21.98	23	1
10	16QAM	1	0	22.23	22.55	21.97		
10	16QAM	1	24	22.16	22.55	22.21		
10	16QAM	1	49	22.17	22.15	22.13	23	1
10	16QAM	25	0	21.62	21.87	21.52		
10	16QAM	25	12	21.44	21.80	21.57		
10	16QAM	25	24	21.45	21.69	21.61	23	1
10	16QAM	50	0	21.63	21.78	21.60		



Channel				20775	21100	21425	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	22.82	22.27	22.73	24	0
5	QPSK	1	12	22.73	22.56	22.29		
5	QPSK	1	24	22.20	22.32	22.17		
5	QPSK	12	0	22.45	22.05	22.24	23	1
5	QPSK	12	6	22.37	22.20	22.20		
5	QPSK	12	11	22.17	22.22	22.19		
5	QPSK	25	0	22.23	22.11	22.32		
5	16QAM	1	0	22.31	21.99	22.57	23	1
5	16QAM	1	12	22.34	22.32	22.15		
5	16QAM	1	24	21.99	22.10	21.88		
5	16QAM	12	0	21.96	21.69	21.96	23	1
5	16QAM	12	6	21.97	21.83	21.92		
5	16QAM	12	11	21.79	21.84	21.91		
5	16QAM	12	11	21.79	21.84	21.91		
5	16QAM	25	0	21.83	21.74	21.74		



**<LTE Band 7 Conducted Power>**  
**Reduced Power Mode (Proximity Sensor active)**


BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune up Limit (dBm)	MPR (dB)
Channel				20850	21100	21350		
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	17.90	17.75	17.63	18.5	0
20	QPSK	1	49	17.65	17.64	17.30		
20	QPSK	1	99	17.80	17.32	17.41		
20	QPSK	50	0	17.49	17.33	17.30	17.5	1
20	QPSK	50	24	17.48	17.27	17.22		
20	QPSK	50	49	17.47	17.33	17.16		
20	QPSK	100	0	17.49	17.15	17.11	17.5	1
20	16QAM	1	0	17.34	17.21	17.23		
20	16QAM	1	49	17.30	17.23	16.99		
20	16QAM	1	99	17.33	17.00	17.01	17.5	1
20	16QAM	50	0	16.27	16.25	15.97		
20	16QAM	50	24	16.50	16.13	16.07		
20	16QAM	50	49	16.47	16.15	16.05	17.5	1
20	16QAM	100	0	16.46	16.23	16.08		
Channel				20825	21100	21375		
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	17.78	17.86	17.60	18.5	0
15	QPSK	1	37	17.49	17.87	17.49		
15	QPSK	1	74	17.69	17.38	17.35		
15	QPSK	36	0	17.14	17.26	16.92	17.5	1
15	QPSK	36	18	17.22	17.18	17.00		
15	QPSK	36	37	17.29	17.22	16.97		
15	QPSK	75	0	17.17	17.17	16.94	17.5	1
15	16QAM	1	0	17.26	17.36	16.94		
15	16QAM	1	37	17.12	17.31	17.04		
15	16QAM	1	74	17.23	17.17	16.99	17.5	1
15	16QAM	36	0	16.48	16.44	16.25		
15	16QAM	36	18	16.46	16.42	16.22		
15	16QAM	36	37	16.47	16.51	16.30	17.5	1
15	16QAM	75	0	16.43	16.43	16.29		
Channel				20800	21100	21400		
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	17.61	17.68	17.38	18.5	0
10	QPSK	1	24	17.39	17.59	17.25		
10	QPSK	1	49	17.21	17.29	17.14		
10	QPSK	25	0	17.04	16.98	16.91	17.5	1
10	QPSK	25	12	16.95	17.05	16.78		
10	QPSK	25	24	16.94	17.06	16.75		
10	QPSK	50	0	16.92	17.07	16.73	17.5	1
10	16QAM	1	0	17.19	17.26	16.96		
10	16QAM	1	24	17.03	17.21	16.94		
10	16QAM	1	49	16.96	17.10	16.87	17.5	1
10	16QAM	25	0	16.17	16.38	15.96		
10	16QAM	25	12	16.11	16.03	15.96		
10	16QAM	25	24	16.12	16.12	16.04	17.5	1
10	16QAM	50	0	16.14	16.19	15.95		





Channel				20775	21100	21425	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	17.42	17.02	17.32	18.5	0
5	QPSK	1	12	17.30	17.11	16.89		
5	QPSK	1	24	16.90	16.93	16.84		
5	QPSK	12	0	17.00	16.63	16.99	17.5	1
5	QPSK	12	6	16.94	16.60	16.87		
5	QPSK	12	11	16.73	16.44	16.94		
5	QPSK	25	0	16.95	16.78	16.87		
5	16QAM	1	0	16.90	16.66	16.99	17.5	1
5	16QAM	1	12	16.90	16.68	16.74		
5	16QAM	1	24	16.72	16.65	16.66		
5	16QAM	12	0	16.09	15.74	15.92	17.5	1
5	16QAM	12	6	16.07	15.71	15.93		
5	16QAM	12	11	16.01	15.65	15.80		
5	16QAM	25	0	15.98	15.73	15.79		

### 11. Antenna Location

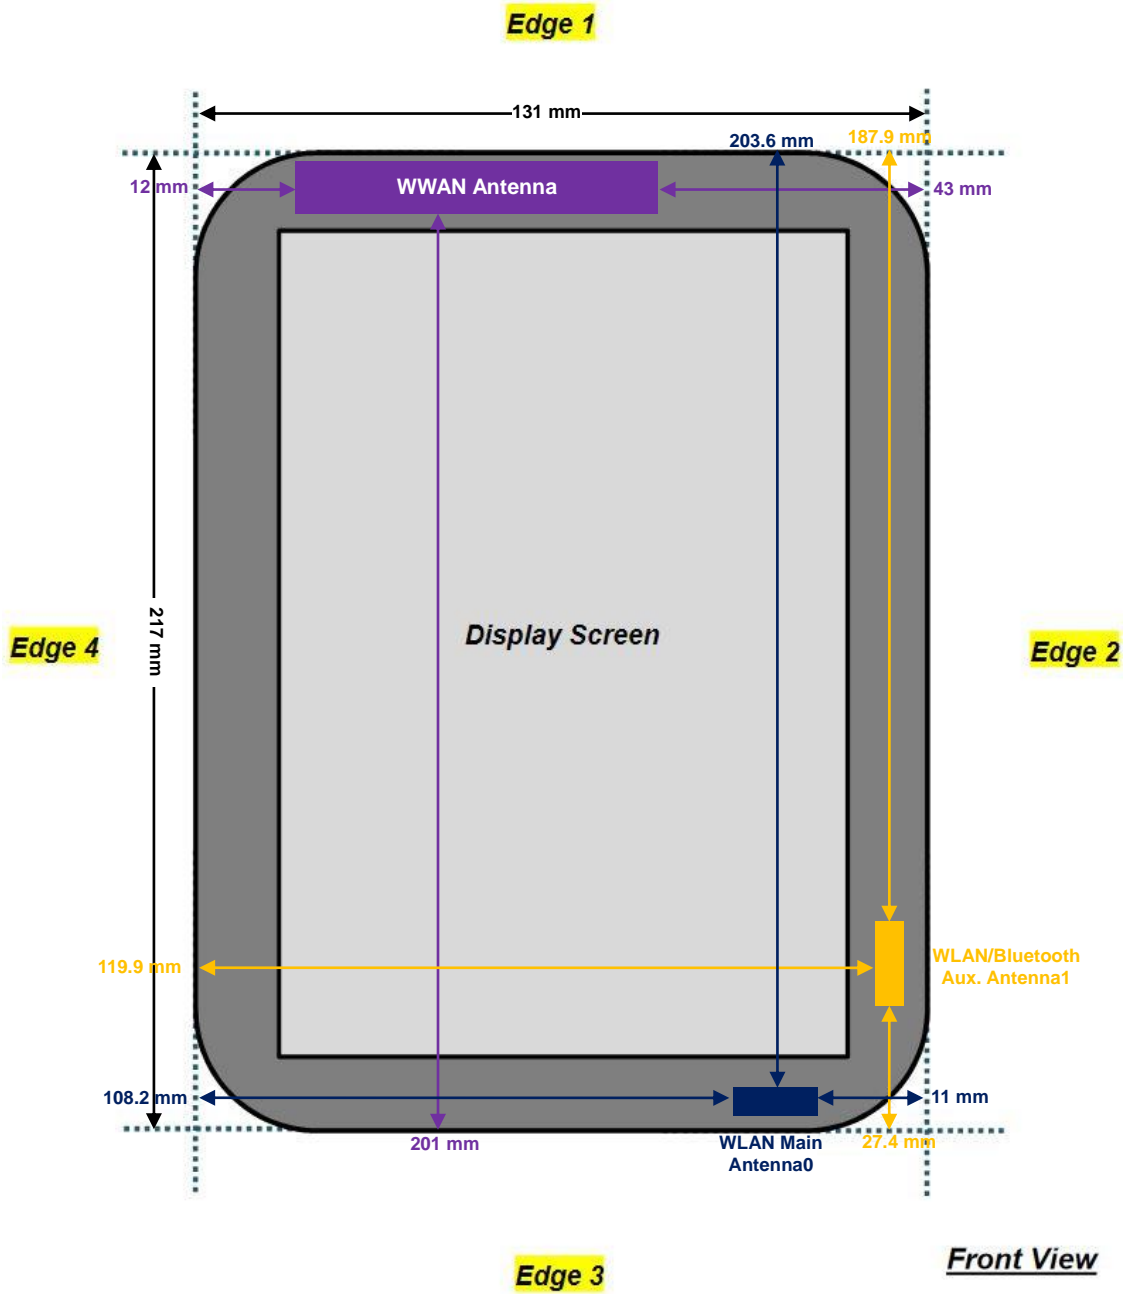



< SAR test exclusion table>

Exposure Position	Wireless Interface	GPRS 850 Class 12	GPRS 1900 Class 12	WCDMA Band V	WCDMA Band IV	WCDMA Band II	LTE Band 17	LTE Band 13	LTE Band 5	LTE Band 4	LTE Band 2	LTE Band 7
		Calculated Frequency	848MHz	1909MHz	846MHz	1750MHz	1907MHz	713MHz	784MHz	848MHz	1754MHz	1909MHz
Maximum power (dBm)	29	26	24.5	24.5	24.5	24	24	24	24	24	24	24
Maximum rated power(mW)	794	398	282	282	282	251	251	251	251	251	251	251
Bottom Face	Separation distance(mm)	5										
	exclusion threshold	146	110	52	75	78	42	44	46	66	69	80
	Testing required?	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Edge 1	Separation distance(mm)	5										
	exclusion threshold	146	110	52	75	78	42	44	46	66	69	80
	Testing required?	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Edge 2	Separation distance(mm)	43										
	exclusion threshold	17	13	6	9	9	5	5	5	8	8	9
	Testing required?	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Edge 3	Separation distance(mm)	201										
	exclusion threshold	1017	1619	1015	1623	1619	895	959	1017	1623	1619	1604
	Testing required?	No	No	No	No	No	No	No	No	No	No	No
Edge 4	Separation distance(mm)	12										
	exclusion threshold	61	46	22	31	32	18	19	19	28	29	34
	Testing required?	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes

Note:

- Above the table, when the distance is < 50 mm exclusion threshold is "Ratio", when the distance is > 50 mm exclusion threshold is "mW"
- Maximum power is the source-based time-average power and represents the maximum RF output power among production units
- Per KDB 447498 D01v05r02, for larger devices, the test separation distance of adjacent edge configuration is determined by the closest separation between the antenna and the user.
- Per KDB 447498 D01v05r02, standalone SAR test exclusion threshold is applied; if the test separation distance is < 5mm, 5mm is used to determine SAR exclusion threshold.
- Per KDB 447498 D01v05r02, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:
 
$$[(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)] \cdot [\sqrt{f(GHz)}] \leq 3.0$$
 for 1-g SAR and ≤ 7.5 for 10-g extremity SAR
  - f(GHz) is the RF channel transmit frequency in GHz
  - Power and distance are rounded to the nearest mW and mm before calculation
  - The result is rounded to one decimal place for comparison
- Per KDB 447498 D01v05r02, at 100 MHz to 6 GHz and for test separation distances > 50 mm, the SAR test exclusion threshold is determined according to the following
  - [Threshold at 50 mm in step 1) + (test separation distance - 50 mm)·( f(MHz)/150)] mW, at 100 MHz to 1500 MHz.
  - [Threshold at 50 mm in step 1) + (test separation distance - 50 mm)·10] mW at > 1500 MHz and ≤ 6 GHz.



## 12. SAR Test Results

**Note:**

1. Per KDB 447498 D01v05r02, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
  - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
  - b. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)\*Tune-up Scaling Factor
2. Per KDB 447498 D01v05r02, for each exposure position, if the highest output channel reported SAR  $\leq 0.8W/kg$ , other channels SAR testing is not necessary.
3. Per KDB 941225 D02v02r02, RMC 12.2kbps setting is used to evaluate SAR. If HSDPA/HSUPA output power is  $< 0.25dB$  higher than RMC12.2Kbps, or reported SAR with RMC 12.2kbps setting is  $\leq 1.2W/kg$ , HSDPA/HSUPA SAR evaluation can be excluded.
4. Per KDB 941225 D05v02r02, when reported SAR of 1RB and 50%RB allocation for QPSK  $\leq 0.8W/kg$ , and 100%RB with QPSK output power is less than 1RB and 50%RB, 100%RB allocation for QPSK is not required.
5. Per KDB 941225 D05v02r02, when reported SAR of 1RB and 50%RB allocation for QPSK  $> 0.8W/kg$  for any exposure position, SAR testing of 100%RB allocation for QPSK is performed at the highest power channel.
6. 16QAM output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is  $\leq 1.45 W/kg$ ; Per KDB 941225 D05v02, 16QAM SAR testing is not required.
7. Smaller bandwidth output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is  $\leq 1.45 W/kg$ ; Per KDB 941225 D05v02r02, smaller bandwidth SAR testing is not required.
8. For the exposure positions that proximity sensor power reduction is applied for SAR compliance, additional SAR testing with EUT transmitting full power in normal mode was performed; 1.5cm for Bottom Face, 1.3cm for Edge 1 and 1.5cm for Curved surface of Edge 1.
9. Per KDB 616217 D04v01r01, the additional separation introduced by the contour against a flat phantom is smaller than 5mm, only wireless interfaces which SAR level at standard bottom-face and edge positions  $> 1.2w/kg$ , are chosen to test SAR at the curved surface, and for these wireless interfaces full-power SAR testing for this tilt position was also performed at 15mm, more detail information please refer to the setup photo.
10. Considering the curvature transition from bottom face to the edge, SAR testing at the curvature was performed. The SAR test setup is included in test setup photo exhibit, and the details of the curvature are included in operation description exhibit.
11. For SAR testing of the curved region of the device, the device was placed directly against the phantom at the point where the distance between the antenna and device exterior is a minimum.



12.1 Body SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (cm)	Power Back-off	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS (4 Tx slots)	Bottom Face	0cm	ON	251	848.8	22.87	24.50	1.455	0.11	0.742	1.080
	GSM850	GPRS (4 Tx slots)	Bottom Face	0cm	ON	128	824.2	22.65	24.50	1.531	0.03	0.750	1.148
	GSM850	GPRS (4 Tx slots)	Bottom Face	0cm	ON	189	836.4	22.76	24.50	1.493	-0.06	0.759	1.133
	GSM850	GPRS (4 Tx slots)	Edge 1	0cm	ON	251	848.8	22.87	24.50	1.455	-0.04	0.546	0.795
	GSM850	GPRS (4 Tx slots)	Bottom Face	1.5cm	OFF	251	848.8	30.31	32.00	1.476	-0.01	0.678	1.001
	GSM850	GPRS (4 Tx slots)	Bottom Face	1.5cm	OFF	128	824.2	30.02	32.00	1.578	0.05	0.416	0.656
	GSM850	GPRS (4 Tx slots)	Bottom Face	1.5cm	OFF	189	836.4	30.13	32.00	1.538	0	0.467	0.718
01	GSM850	GPRS (4 Tx slots)	Edge 1	1.3cm	OFF	251	848.8	30.31	32.00	1.476	-0.05	0.905	1.336
	GSM850	GPRS (4 Tx slots)	Edge 1	1.3cm	OFF	128	824.2	30.02	32.00	1.578	0.03	0.733	1.156
	GSM850	GPRS (4 Tx slots)	Edge 1	1.3cm	OFF	189	836.4	30.13	32.00	1.538	0	0.810	1.246
	GSM850	GPRS (4 Tx slots)	Curved surface of Edge 1	1.5cm	OFF	251	848.8	30.31	32.00	1.476	0.05	0.205	0.303
	GSM850	GPRS (4 Tx slots)	Edge 2	0cm	OFF	251	848.8	30.31	32.00	1.476	0.04	0.254	0.375
	GSM850	GPRS (4 Tx slots)	Edge 4	0cm	OFF	251	848.8	30.31	32.00	1.476	-0.09	0.775	1.144
	GSM850	GPRS (4 Tx slots)	Edge 4	0cm	OFF	128	824.2	30.02	32.00	1.578	-0.09	0.656	1.035
	GSM850	GPRS (4 Tx slots)	Edge 4	0cm	OFF	189	836.4	30.13	32.00	1.538	-0.12	0.727	1.118
	GSM1900	GPRS (4 Tx slots)	Bottom Face	0cm	ON	810	1909.8	22.20	23.00	1.202	0.14	0.842	1.012
02	GSM1900	GPRS (4 Tx slots)	Bottom Face	0cm	ON	512	1850.2	21.95	23.00	1.274	-0.12	0.928	1.182
	GSM1900	GPRS (4 Tx slots)	Bottom Face	0cm	ON	661	1880	22.04	23.00	1.247	0.09	0.809	1.009
	GSM1900	GPRS (4 Tx slots)	Edge 1	0cm	ON	810	1909.8	22.20	23.00	1.202	0.09	0.450	0.541
	GSM1900	GPRS (4 Tx slots)	Bottom Face	1.5cm	OFF	810	1909.8	27.92	29.00	1.282	0.14	0.460	0.590
	GSM1900	GPRS (4 Tx slots)	Edge 1	1.3cm	OFF	810	1909.8	27.92	29.00	1.282	-0.08	0.544	0.698
	GSM1900	GPRS (4 Tx slots)	Edge 2	0cm	OFF	810	1909.8	27.92	29.00	1.282	0.03	0.299	0.383
	GSM1900	GPRS (4 Tx slots)	Edge 4	0cm	OFF	810	1909.8	27.92	29.00	1.282	0.09	0.446	0.572



<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (cm)	Power Back-off	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
03	WCDMA V	RMC12.2Kbps	Bottom Face	0cm	ON	4233	846.6	20.55	21.00	1.109	0.14	1.010	1.120
	WCDMA V	RMC12.2Kbps	Bottom Face	0cm	ON	4132	826.4	20.28	21.00	1.180	0.1	0.948	1.119
	WCDMA V	RMC12.2Kbps	Bottom Face	0cm	ON	4182	836.4	20.32	21.00	1.169	-0.1	0.954	1.116
	WCDMA V	RMC12.2Kbps	Edge 1	0cm	ON	4233	846.6	20.55	21.00	1.109	-0.03	0.741	0.822
	WCDMA V	RMC12.2Kbps	Edge 1	0cm	ON	4132	826.4	20.28	21.00	1.180	-0.05	0.684	0.807
	WCDMA V	RMC12.2Kbps	Edge 1	0cm	ON	4182	836.4	20.32	21.00	1.169	-0.06	0.698	0.816
	WCDMA V	RMC12.2Kbps	Bottom Face	1.5cm	OFF	4233	846.6	23.32	24.50	1.312	0.02	0.330	0.433
	WCDMA V	RMC12.2Kbps	Edge 1	1.3cm	OFF	4233	846.6	23.32	24.50	1.312	-0.05	0.405	0.531
	WCDMA V	RMC12.2Kbps	Edge 2	0cm	OFF	4233	846.6	23.32	24.50	1.312	0.11	0.065	0.085
	WCDMA V	RMC12.2Kbps	Edge 4	0cm	OFF	4233	846.6	23.32	24.50	1.312	-0.13	0.393	0.516
	WCDMA IV	RMC12.2Kbps	Bottom Face	0cm	ON	1513	1752.6	17.89	18.00	1.026	0.09	1.050	1.077
	WCDMA IV	RMC12.2Kbps	Bottom Face	0cm	ON	1413	1732.6	17.66	18.00	1.081	0.12	1.110	1.200
	WCDMA IV	RMC12.2Kbps	Bottom Face	0cm	ON	1312	1712.4	17.65	18.00	1.084	0.09	1.180	1.279
	WCDMA IV	RMC12.2Kbps	Edge 1	0cm	ON	1513	1752.6	17.89	18.00	1.026	-0.01	0.407	0.417
	WCDMA IV	RMC12.2Kbps	Curved surface of Edge 1	0cm	ON	1513	1752.6	17.89	18.00	1.026	0.04	0.681	0.698
	WCDMA IV	RMC12.2Kbps	Bottom Face	1.5cm	OFF	1513	1752.6	23.91	24.50	1.146	0.17	0.590	0.676
	WCDMA IV	RMC12.2Kbps	Edge 1	1.3cm	OFF	1513	1752.6	23.91	24.50	1.146	0.13	0.261	0.299
	WCDMA IV	RMC12.2Kbps	Edge 2	0cm	OFF	1513	1752.6	23.91	24.50	1.146	0.13	0.231	0.265
	WCDMA IV	RMC12.2Kbps	Edge 4	0cm	OFF	1513	1752.6	23.91	24.50	1.146	-0.13	1.150	1.317
04	WCDMA IV	RMC12.2Kbps	Edge 4	0cm	OFF	1413	1732.6	23.84	24.50	1.164	-0.07	1.170	1.362
	WCDMA IV	RMC12.2Kbps	Edge 4	0cm	OFF	1312	1712.4	23.85	24.50	1.161	-0.06	1.090	1.266
	WCDMA II	RMC12.2Kbps	Bottom Face	0cm	ON	9538	1907.6	19.49	19.50	1.002	0.03	1.060	1.062
	WCDMA II	RMC12.2Kbps	Bottom Face	0cm	ON	9400	1880	19.39	19.50	1.026	-0.03	1.055	1.082
05	WCDMA II	RMC12.2Kbps	Bottom Face	0cm	ON	9262	1852.4	19.21	19.50	1.069	0.09	1.050	1.123
	WCDMA II	RMC12.2Kbps	Edge 1	0cm	ON	9538	1907.6	19.49	19.50	1.002	-0.16	0.674	0.676
	WCDMA II	RMC12.2Kbps	Bottom Face	1.5cm	OFF	9538	1907.6	23.57	24.50	1.239	0.11	0.463	0.574
	WCDMA II	RMC12.2Kbps	Edge 1	1.3cm	OFF	9538	1907.6	23.57	24.50	1.239	-0.07	0.445	0.551
	WCDMA II	RMC12.2Kbps	Edge 2	0cm	OFF	9538	1907.6	23.57	24.50	1.239	0.06	0.017	0.021
	WCDMA II	RMC12.2Kbps	Edge 4	0cm	OFF	9538	1907.6	23.57	24.50	1.239	-0.15	0.426	0.528



<LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (cm)	Power Back-off	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
06	LTE Band 17	10M	QPSK	1	0	Bottom Face	0cm	ON	23790	710	21.31	22.00	1.172	0.01	0.796	0.933
	LTE Band 17	10M	QPSK	1	0	Bottom Face	0cm	ON	23780	709	21.24	22.00	1.191	0.09	0.902	1.075
	LTE Band 17	10M	QPSK	1	0	Bottom Face	0cm	ON	23800	711	21.30	22.00	1.175	0.05	0.752	0.884
	LTE Band 17	10M	QPSK	25	0	Bottom Face	0cm	ON	23780	709	20.49	21.00	1.125	0.01	0.659	0.741
	LTE Band 17	10M	QPSK	50	0	Bottom Face	0cm	ON	23800	711	20.47	21.00	1.130	0.01	0.872	0.985
	LTE Band 17	10M	QPSK	1	0	Edge 1	0cm	ON	23790	710	21.31	22.00	1.172	-0.08	0.670	0.785
	LTE Band 17	10M	QPSK	25	0	Edge 1	0cm	ON	23780	709	20.49	21.00	1.125	-0.12	0.590	0.664
	LTE Band 17	10M	QPSK	1	0	Bottom Face	1.5cm	OFF	23790	710	22.92	24.00	1.282	0.05	0.120	0.154
	LTE Band 17	10M	QPSK	25	0	Bottom Face	1.5cm	OFF	23800	711	22.60	23.00	1.096	0.11	0.129	0.141
	LTE Band 17	10M	QPSK	1	0	Edge 1	1.3cm	OFF	23790	710	22.92	24.00	1.282	-0.06	0.136	0.174
	LTE Band 17	10M	QPSK	25	0	Edge 1	1.3cm	OFF	23800	711	22.60	23.00	1.096	-0.01	0.130	0.143
	LTE Band 17	10M	QPSK	1	0	Edge 2	0cm	OFF	23790	710	22.92	24.00	1.282	0.06	0.051	0.065
	LTE Band 17	10M	QPSK	25	0	Edge 2	0cm	OFF	23800	711	22.60	23.00	1.096	0.03	0.051	0.056
	LTE Band 17	10M	QPSK	1	0	Edge 4	0cm	OFF	23790	710	22.92	24.00	1.282	0.13	0.102	0.131
LTE Band 17	10M	QPSK	25	0	Edge 4	0cm	OFF	23800	711	22.60	23.00	1.096	0.12	0.107	0.117	
07	LTE Band 13	10M	QPSK	1	0	Bottom Face	0cm	ON	23230	782	19.51	20.00	1.119	0.11	0.941	1.053
	LTE Band 13	10M	QPSK	25	0	Bottom Face	0cm	ON	23230	782	18.50	19.00	1.122	0.05	0.878	0.985
	LTE Band 13	10M	QPSK	50	0	Bottom Face	0cm	ON	23230	782	18.50	19.00	1.122	0.12	0.672	0.754
	LTE Band 13	10M	QPSK	1	0	Edge 1	0cm	ON	23230	782	19.51	20.00	1.119	-0.08	0.646	0.723
	LTE Band 13	10M	QPSK	25	0	Edge 1	0cm	ON	23230	782	18.50	19.00	1.122	-0.1	0.475	0.533
	LTE Band 13	10M	QPSK	1	0	Bottom Face	1.5cm	OFF	23230	782	23.50	24.00	1.122	0.08	0.452	0.507
	LTE Band 13	10M	QPSK	25	0	Bottom Face	1.5cm	OFF	23230	782	22.41	23.00	1.146	0.02	0.280	0.321
	LTE Band 13	10M	QPSK	1	0	Edge 1	1.3cm	OFF	23230	782	23.50	24.00	1.122	-0.02	0.427	0.479
	LTE Band 13	10M	QPSK	25	0	Edge 1	1.3cm	OFF	23230	782	22.41	23.00	1.146	-0.06	0.228	0.261
	LTE Band 13	10M	QPSK	1	0	Edge 2	0cm	OFF	23230	782	23.50	24.00	1.122	0.1	0.104	0.117
	LTE Band 13	10M	QPSK	25	0	Edge 2	0cm	OFF	23230	782	22.41	23.00	1.146	0.15	0.082	0.094
	LTE Band 13	10M	QPSK	1	0	Edge 4	0cm	OFF	23230	782	23.50	24.00	1.122	-0.08	0.361	0.405
	LTE Band 13	10M	QPSK	25	0	Edge 4	0cm	OFF	23230	782	22.41	23.00	1.146	-0.01	0.288	0.330
	LTE Band 5	10M	QPSK	1	0	Bottom Face	0cm	ON	20525	836.5	18.85	20.00	1.303	0.15	0.531	0.692
LTE Band 5	10M	QPSK	25	0	Bottom Face	0cm	ON	20525	836.5	18.31	19.00	1.172	-0.11	0.414	0.485	
08	LTE Band 5	10M	QPSK	1	0	Edge 1	0cm	ON	20525	836.5	18.85	20.00	1.303	0.04	0.537	0.700
	LTE Band 5	10M	QPSK	25	0	Edge 1	0cm	ON	20525	836.5	18.31	19.00	1.172	-0.12	0.568	0.666
	LTE Band 5	10M	QPSK	1	0	Bottom Face	1.5cm	OFF	20450	829	23.30	24.00	1.175	-0.01	0.188	0.221
	LTE Band 5	10M	QPSK	25	0	Bottom Face	1.5cm	OFF	20450	829	23.00	23.00	1.000	-0.1	0.206	0.206
	LTE Band 5	10M	QPSK	1	0	Edge 1	1.3cm	OFF	20450	829	23.30	24.00	1.175	0	0.333	0.391
	LTE Band 5	10M	QPSK	25	0	Edge 1	1.3cm	OFF	20450	829	23.00	23.00	1.000	-0.07	0.319	0.319
	LTE Band 5	10M	QPSK	1	0	Edge 2	0cm	OFF	20450	829	23.30	24.00	1.175	0.16	0.110	0.129
	LTE Band 5	10M	QPSK	25	0	Edge 2	0cm	OFF	20450	829	23.00	23.00	1.000	0.08	0.086	0.086
	LTE Band 5	10M	QPSK	1	0	Edge 4	0cm	OFF	20450	829	23.30	24.00	1.175	0.04	0.347	0.408
	LTE Band 5	10M	QPSK	25	0	Edge 4	0cm	OFF	20450	829	23.00	23.00	1.000	0	0.242	0.242



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (cm)	Power Back-off	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 4	20M	QPSK	1	0	Bottom Face	0cm	ON	20300	1745	17.96	18.00	1.009	0.19	1.020	1.029
	LTE Band 4	20M	QPSK	1	0	Bottom Face	0cm	ON	20175	1732.5	17.94	18.00	1.014	0.14	1.150	1.166
	LTE Band 4	20M	QPSK	1	0	Bottom Face	0cm	ON	20050	1720	17.77	18.00	1.054	0.05	1.281	1.351
	LTE Band 4	20M	QPSK	50	0	Bottom Face	0cm	ON	20175	1732.5	16.94	17.00	1.014	0.11	0.867	0.879
	LTE Band 4	20M	QPSK	50	0	Bottom Face	0cm	ON	20050	1720	16.78	17.00	1.052	-0.18	1.010	1.062
	LTE Band 4	20M	QPSK	50	0	Bottom Face	0cm	ON	20300	1745	16.91	17.00	1.021	0.17	0.867	0.885
	LTE Band 4	20M	QPSK	100	0	Bottom Face	0cm	ON	20050	1720	16.85	17.00	1.035	-0.12	0.981	1.015
	LTE Band 4	20M	QPSK	1	0	Edge 1	0cm	ON	20300	1745	17.96	18.00	1.009	-0.09	0.331	0.334
	LTE Band 4	20M	QPSK	50	0	Edge 1	0cm	ON	20175	1732.5	16.94	17.00	1.014	-0.1	0.246	0.249
	LTE Band 4	20M	QPSK	1	0	Curved surface of Edge 1	0cm	ON	20300	1745	17.96	18.00	1.009	0.01	0.645	0.651
	LTE Band 4	20M	QPSK	50	0	Curved surface of Edge 1	0cm	ON	20175	1732.5	16.94	17.00	1.014	0.03	0.550	0.558
	LTE Band 4	20M	QPSK	1	0	Bottom Face	1.5cm	OFF	20175	1732.5	23.72	24.00	1.067	0.08	0.576	0.614
	LTE Band 4	20M	QPSK	50	0	Bottom Face	1.5cm	OFF	20175	1732.5	22.91	23.00	1.021	0.03	0.450	0.459
	LTE Band 4	20M	QPSK	1	0	Edge 1	1.3cm	OFF	20175	1732.5	23.72	24.00	1.067	0.08	0.214	0.228
	LTE Band 4	20M	QPSK	50	0	Edge 1	1.3cm	OFF	20175	1732.5	22.91	23.00	1.021	0.06	0.158	0.161
	LTE Band 4	20M	QPSK	1	0	Edge 2	0cm	OFF	20175	1732.5	23.72	24.00	1.067	0.09	0.112	0.119
	LTE Band 4	20M	QPSK	50	0	Edge 2	0cm	OFF	20175	1732.5	22.91	23.00	1.021	-0.03	0.157	0.160
	LTE Band 4	20M	QPSK	1	0	Edge 4	0cm	OFF	20175	1732.5	23.72	24.00	1.067	0	1.240	1.323
	LTE Band 4	20M	QPSK	1	0	Edge 4	0cm	OFF	20050	1720	23.48	24.00	1.127	-0.03	1.000	1.127
09	LTE Band 4	20M	QPSK	1	0	Edge 4	0cm	OFF	20300	1745	23.70	24.00	1.072	-0.1	1.280	1.372
	LTE Band 4	20M	QPSK	50	0	Edge 4	0cm	OFF	20175	1732.5	22.91	23.00	1.021	-0.12	1.050	1.072
	LTE Band 4	20M	QPSK	50	0	Edge 4	0cm	OFF	20050	1720	22.88	23.00	1.028	-0.03	0.934	0.960
	LTE Band 4	20M	QPSK	50	0	Edge 4	0cm	OFF	20300	1745	22.86	23.00	1.033	0.16	1.010	1.043
	LTE Band 4	20M	QPSK	100	0	Edge 4	0cm	OFF	20175	1732.5	22.88	23.00	1.028	-0.07	1.100	1.131
10	LTE Band 2	20M	QPSK	1	0	Bottom Face	0cm	ON	18700	1860	18.98	19.50	1.127	0.03	1.010	1.138
	LTE Band 2	20M	QPSK	1	0	Bottom Face	0cm	ON	18900	1880	18.88	19.50	1.153	-0.1	0.704	0.812
	LTE Band 2	20M	QPSK	1	0	Bottom Face	0cm	ON	19100	1900	18.77	19.50	1.183	0.06	0.927	1.097
	LTE Band 2	20M	QPSK	50	0	Bottom Face	0cm	ON	18700	1860	17.85	18.50	1.161	0.05	0.921	1.070
	LTE Band 2	20M	QPSK	50	0	Bottom Face	0cm	ON	18900	1880	17.80	18.50	1.175	-0.01	0.615	0.723
	LTE Band 2	20M	QPSK	50	0	Bottom Face	0cm	ON	19100	1900	17.57	18.50	1.239	0.07	0.680	0.842
	LTE Band 2	20M	QPSK	100	0	Bottom Face	0cm	ON	18700	1860	17.62	18.50	1.225	-0.01	0.824	1.009
	LTE Band 2	20M	QPSK	1	0	Edge 1	0cm	ON	18700	1860	18.98	19.50	1.127	-0.13	0.549	0.619
	LTE Band 2	20M	QPSK	50	0	Edge 1	0cm	ON	18700	1860	17.85	18.50	1.161	-0.04	0.464	0.539
	LTE Band 2	20M	QPSK	1	0	Bottom Face	1.5cm	OFF	18700	1860	23.62	24.00	1.091	0.13	0.316	0.345
	LTE Band 2	20M	QPSK	50	0	Bottom Face	1.5cm	OFF	18700	1860	22.30	23.00	1.175	0.08	0.258	0.303
	LTE Band 2	20M	QPSK	1	0	Edge 1	1.3cm	OFF	18700	1860	23.62	24.00	1.091	-0.02	0.258	0.282
	LTE Band 2	20M	QPSK	50	0	Edge 1	1.3cm	OFF	18700	1860	22.30	23.00	1.175	0.11	0.153	0.180
	LTE Band 2	20M	QPSK	1	0	Edge 2	0cm	OFF	18700	1860	23.62	24.00	1.091	0.03	0.097	0.106
	LTE Band 2	20M	QPSK	50	0	Edge 2	0cm	OFF	18700	1860	22.30	23.00	1.175	-0.11	0.077	0.090
	LTE Band 2	20M	QPSK	1	0	Edge 4	0cm	OFF	18700	1860	23.62	24.00	1.091	-0.19	0.474	0.517
	LTE Band 2	20M	QPSK	50	0	Edge 4	0cm	OFF	18700	1860	22.30	23.00	1.175	-0.1	0.357	0.419





Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (cm)	Power Back-off	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 7	20M	QPSK	1	0	Bottom Face	0cm	ON	20850	2510	17.90	18.50	1.148	-0.08	0.991	1.138
	LTE Band 7	20M	QPSK	1	0	Bottom Face	0cm	ON	21100	2535	17.75	18.50	1.189	0.14	0.945	1.123
	LTE Band 7	20M	QPSK	1	0	Bottom Face	0cm	ON	21350	2560	17.63	18.50	1.222	0.01	1.090	1.332
	LTE Band 7	20M	QPSK	50	0	Bottom Face	0cm	ON	20850	2510	17.49	17.50	1.002	0.05	1.030	1.032
	LTE Band 7	20M	QPSK	50	0	Bottom Face	0cm	ON	21100	2535	17.33	17.50	1.040	0.02	0.730	0.759
	LTE Band 7	20M	QPSK	50	0	Bottom Face	0cm	ON	21350	2560	17.30	17.50	1.047	0.16	1.070	1.120
	LTE Band 7	20M	QPSK	100	0	Bottom Face	0cm	ON	20850	2510	17.49	17.50	1.002	0.14	1.130	1.133
	LTE Band 7	20M	QPSK	1	0	Edge 1	0cm	ON	20850	2510	17.90	18.50	1.148	-0.01	1.080	1.240
11	LTE Band 7	20M	QPSK	1	0	Edge 1	0cm	ON	21100	2535	17.75	18.50	1.189	-0.02	1.150	1.367
	LTE Band 7	20M	QPSK	1	0	Edge 1	0cm	ON	21350	2560	17.63	18.50	1.222	-0.06	1.040	1.271
	LTE Band 7	20M	QPSK	50	0	Edge 1	0cm	ON	20850	2510	17.49	17.50	1.002	-0.01	1.010	1.012
	LTE Band 7	20M	QPSK	50	0	Edge 1	0cm	ON	21100	2535	17.33	17.50	1.040	-0.09	0.848	0.882
	LTE Band 7	20M	QPSK	50	0	Edge 1	0cm	ON	21350	2560	17.30	17.50	1.047	-0.03	1.050	1.099
	LTE Band 7	20M	QPSK	100	0	Edge 1	0cm	ON	20850	2510	17.49	17.50	1.002	-0.02	0.979	0.981
	LTE Band 7	20M	QPSK	1	0	Curved surface of Edge 1	0cm	ON	20850	2510	17.90	18.50	1.148	-0.02	1.110	1.274
	LTE Band 7	20M	QPSK	1	0	Curved surface of Edge 1	0cm	ON	21100	2535	17.75	18.50	1.189	0.08	1.030	1.224
	LTE Band 7	20M	QPSK	1	0	Curved surface of Edge 1	0cm	ON	21350	2560	17.63	18.50	1.222	0.04	1.090	1.332
	LTE Band 7	20M	QPSK	50	0	Curved surface of Edge 1	0cm	ON	20850	2510	17.49	17.50	1.002	-0.04	1.090	1.093
	LTE Band 7	20M	QPSK	50	0	Curved surface of Edge 1	0cm	ON	21100	2535	17.33	17.50	1.040	-0.08	0.817	0.850
	LTE Band 7	20M	QPSK	50	0	Curved surface of Edge 1	0cm	ON	21350	2560	17.30	17.50	1.047	-0.11	1.080	1.131
	LTE Band 7	20M	QPSK	100	0	Curved surface of Edge 1	0cm	ON	20850	2510	17.49	17.50	1.002	-0.17	1.140	1.143
	LTE Band 7	20M	QPSK	1	0	Bottom Face	1.5cm	OFF	20850	2510	23.41	24.00	1.146	0.16	0.445	0.510
	LTE Band 7	20M	QPSK	50	0	Bottom Face	1.5cm	OFF	21100	2535	22.78	23.00	1.052	-0.1	0.261	0.275
	LTE Band 7	20M	QPSK	1	0	Edge 1	1.3cm	OFF	20850	2510	23.41	24.00	1.146	-0.05	0.594	0.680
	LTE Band 7	20M	QPSK	50	0	Edge 1	1.3cm	OFF	21100	2535	22.78	23.00	1.052	-0.05	0.559	0.588
	LTE Band 7	20M	QPSK	1	0	Edge 2	0cm	OFF	20850	2510	23.41	24.00	1.146	0.11	0.033	0.038
	LTE Band 7	20M	QPSK	50	0	Edge 2	0cm	OFF	21100	2535	22.78	23.00	1.052	0.08	0.020	0.021
	LTE Band 7	20M	QPSK	1	0	Edge 4	0cm	OFF	20850	2510	23.41	24.00	1.146	-0.02	0.629	0.721
	LTE Band 7	20M	QPSK	50	0	Edge 4	0cm	OFF	21100	2535	22.78	23.00	1.052	-0.02	0.511	0.538



**12.2 Repeated SAR Measurement**

No.	Band	BW (MHz)	Mode	RB Size	RB offset	Test Position	Gap (cm)	Power Back-off	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	WCDMA V		RMC12.2Kbps			Bottom Face	0cm	ON	4233	846.6	20.55	21.00	1.109	0.14	1.010	-	1.120
2nd	WCDMA V		RMC12.2Kbps			Bottom Face	0cm	ON	4233	846.6	20.55	21.00	1.109	0.05	0.956	1.06	1.060
1st	WCDMA II		RMC12.2Kbps			Bottom Face	0cm	ON	9538	1907.6	19.49	19.50	1.002	0.03	1.060	-	1.062
2nd	WCDMA II		RMC12.2Kbps			Bottom Face	0cm	ON	9538	1907.6	19.49	19.50	1.002	-0.1	0.981	1.08	0.983
1st	LTE Band 17	10M	QPSK	1	0	Bottom Face	0cm	ON	23780	709	21.24	22.00	1.191	0.09	0.902	-	1.075
2nd	LTE Band 17	10M	QPSK	1	0	Bottom Face	0cm	ON	23780	709	21.24	22.00	1.191	0.1	0.891	1.01	1.061
1st	LTE Band 4	20M	QPSK	1	0	Bottom Face	0cm	ON	20050	1720	17.77	18.00	1.054	0.05	1.281	-	1.351
2nd	LTE Band 4	20M	QPSK	1	0	Bottom Face	0cm	ON	20050	1720	17.77	18.00	1.054	-0.1	1.120	1.14	1.181
1st	LTE Band 7	20M	QPSK	1	0	Edge 1	0cm	ON	21100	2535	17.75	18.50	1.189	-0.02	1.150	-	1.367
2nd	LTE Band 7	20M	QPSK	1	0	Edge 1	0cm	ON	21100	2535	17.75	18.50	1.189	-0.12	1.140	1.01	1.355

**Note:**

1. Per KDB 865664 D01v01r03, for each frequency band, repeated SAR measurement is required only when the measured SAR is  $\geq 0.8W/kg$
2. Per KDB 865664 D01v01r03, if the ratio among the repeated measurement is  $\leq 1.2$  and the measured SAR  $< 1.45W/kg$ , only one repeated measurement is required.
3. The ratio is the largest SAR to the smallest SAR among original and repeated measurement.
4. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.



**13. Simultaneous Transmission Analysis**

NO.	Simultaneous Transmission Configurations	Portable Tablet	Note
		Body	
1.	GPRS/EDGE(Data) + WLAN2.4GHz(data)	Yes	2.4GHz Hotspot
2.	WCDMA(Data) + WLAN2.4GHz(data)	Yes	2.4GHz Hotspot
3.	LTE(Data) + WLAN2.4GHz(data)	Yes	2.4GHz Hotspot
4.	GPRS/EDGE(Data) + Bluetooth(data)	Yes	
5.	WCDMA(Data) + Bluetooth(data)	Yes	
6.	LTE(Data) + Bluetooth(data)	Yes	
7.	GPRS/EDGE(data) + WLAN5GHz(data)	No	
8.	WCDMA(data) + WLAN5GHz(data)	No	
9.	LTE(data) + WLAN5GHz(data)	No	

**Note:**

1. WLAN/Bluetooth module is also integrated into this host, WLAN/Bluetooth power and WLAN SAR testing data which can be refer to Sporton FCC SAR Report, FCC ID: PPD-QCA6234, Report No: FA391239 Rev.01.
2. For simultaneous transmission analysis, WLAN SAR tested at 0mm separation is worse and the test data is used for conservative SAR summation.
3. For co-location analysis:
  - i) For WWAN SAR testing was performed on bottom face, Edge1, Edge2 and Edge4, according to KDB 447498 D01v05r02 exclusion thresholds which can be referred to page59.
  - ii) The WLAN SAR testing was performed on bottom face, Edge2 and Edge3, according to KDB 447498 D01v05r02 exclusion thresholds which can be referred to Sporton FCC SAR Report, FCC ID: PPD-QCA6234, Report No: FA391239 Rev.01 page33.
  - iii) For co-location analysis was performed at the same exposure positions, which are bottom face and Edge2, where both WWAN standalone SAR and WLAN standalone SAR was assessed.
4. Per KDB 447498 D01v05r01, simultaneous transmission SAR is compliant if,
  - i) Scalar SAR summation < 1.6W/kg.
  - ii)  $SPLSR = (SAR_1 + SAR_2)^{1.5} / (min. \text{ separation distance, mm})$ . If  $SPLSR \leq 0.04$ , simultaneously transmission SAR measurement is not necessary
  - iii) Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg
  - iv) The SPLSR calculated results please refer to section 13.2.
5. For simultaneous transmission analysis, Bluetooth SAR is estimated per KDB 447498 D01v05r02 based on the formula below.
  - i)  $(max. \text{ power of channel, including tune-up tolerance, mW}) / (min. \text{ test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})/x}] \text{ W/kg}$  for test separation distances  $\leq 50 \text{ mm}$ ; where  $x = 7.5$  for 1-g SAR, and  $x = 18.75$  for 10-g SAR.
  - ii) When the minimum test separation distance is < 5mm, the distance is used 5mm to determine SAR test exclusion.
  - iii) 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is > 50 mm.
  - iv) Bluetooth estimated SAR is conservatively determined by 5mm separation, for all applicable exposure positions.

Bluetooth Max Power	Exposure Position	All Positions
7.24 dBm	Estimated SAR (W/kg)	0.210 W/kg



**13.1 Body Exposure Conditions**

**<WWAN + WLAN2.4GHz (SISO mode)>**

Position	WWAN		WLAN Ant 0	Summed SAR (W/kg)	SPLSR Result	Case No
	WWAN Band	SAR (W/kg)	SAR (W/kg)			
Bottom Face At 1.5 cm	GSM850	1.001	1.124	2.13	0.01	Case 23
	GSM1900	0.590	1.124	1.71	0.01	Case 24
	WCDMA V	0.433	1.124	1.56		
	WCDMA IV	0.676	1.124	1.80	0.01	Case 25
	WCDMA II	0.574	1.124	1.70	0.01	Case 26
	LTE Band 17	0.154	1.124	1.28		
	LTE Band 13	0.507	1.124	1.63	0.01	Case 27
	LTE Band 5	0.221	1.124	1.35		
	LTE Band 4	0.614	1.124	1.74	0.01	Case 28
	LTE Band 2	0.345	1.124	1.47		
	LTE Band 7	0.510	1.124	1.63	0.01	Case 29
Bottom Face At 0cm	GSM850	1.148	1.124	2.27	0.02	Case 1
	GSM1900	1.182	1.124	2.31	0.02	Case 2
	WCDMA V	1.120	1.124	2.24	0.02	Case 3
	WCDMA IV	1.279	1.124	2.40	0.02	Case 4
	WCDMA II	1.123	1.124	2.25	0.02	Case 5
	LTE Band 17	1.075	1.124	2.20	0.01	Case 6
	LTE Band 13	1.053	1.124	2.18	0.01	Case 7
	LTE Band 5	0.692	1.124	1.82	0.01	Case 8
	LTE Band 4	1.351	1.124	2.48	0.02	Case 9
	LTE Band 2	1.138	1.124	2.26	0.02	Case 10
	LTE Band 7	1.332	1.124	2.46	0.02	Case 11
Edge2 At 0cm	GSM850	0.375	0.204	0.58		
	GSM1900	0.383	0.204	0.59		
	WCDMA V	0.085	0.204	0.29		
	WCDMA IV	0.265	0.204	0.47		
	WCDMA II	0.021	0.204	0.23		
	LTE Band 17	0.065	0.204	0.27		
	LTE Band 13	0.117	0.204	0.32		
	LTE Band 5	0.129	0.204	0.33		
	LTE Band 4	0.119	0.204	0.32		
	LTE Band 2	0.282	0.204	0.49		
	LTE Band 7	0.038	0.204	0.24		



<WWAN + WLAN2.4GHz (MIMO) mode>

Position	WWAN		WLAN Ant 0+1	Summed SAR (W/kg)	SPLSR Result	Case No
	WWAN Band	SAR (W/kg)	SAR (W/kg)			
Bottom Face At 1.5 cm	GSM850	1.001	1.195	2.20	0.02	Case 30
	GSM1900	0.590	1.195	1.79	0.01	Case 31
	WCDMA V	0.433	1.195	1.63	0.01	Case 32
	WCDMA IV	0.676	1.195	1.87	0.01	Case 33
	WCDMA II	0.574	1.195	1.77	0.01	Case 34
	LTE Band 17	0.154	1.195	1.35		
	LTE Band 13	0.507	1.195	1.70	0.01	Case 35
	LTE Band 5	0.221	1.195	1.42		
	LTE Band 4	0.614	1.195	1.81	0.01	Case 36
	LTE Band 2	0.345	1.195	1.54		
	LTE Band 7	0.510	1.195	1.71	0.01	Case 37
Bottom Face At 0cm	GSM850	1.148	1.195	2.34	0.02	Case 12
	GSM1900	1.182	1.195	2.38	0.02	Case 13
	WCDMA V	1.120	1.195	2.32	0.02	Case 14
	WCDMA IV	1.279	1.195	2.47	0.02	Case 15
	WCDMA II	1.123	1.195	2.32	0.02	Case 16
	LTE Band 17	1.075	1.195	2.27	0.02	Case 17
	LTE Band 13	1.053	1.195	2.25	0.02	Case 18
	LTE Band 5	0.692	1.195	1.89	0.01	Case 19
	LTE Band 4	1.351	1.195	2.55	0.02	Case 20
	LTE Band 2	1.138	1.195	2.33	0.02	Case 21
	LTE Band 7	1.332	1.195	2.53	0.02	Case 22
Edge2 At 0cm	GSM850	0.375	1.187	1.56		
	GSM1900	0.383	1.187	1.57		
	WCDMA V	0.085	1.187	1.27		
	WCDMA IV	0.265	1.187	1.45		
	WCDMA II	0.021	1.187	1.21		
	LTE Band 17	0.065	1.187	1.25		
	LTE Band 13	0.117	1.187	1.30		
	LTE Band 5	0.129	1.187	1.32		
	LTE Band 4	0.119	1.187	1.31		
	LTE Band 2	0.282	1.187	1.47		
LTE Band 7	0.038	1.187	1.23			




<WWAN + Bluetooth>


Position	WWAN		Bluetooth	Summed SAR (W/kg)	SPLSR Result	Case No
	WWAN Band	SAR (W/kg)	Estimated SAR (W/kg)			
Bottom Face At 1.5 cm	GSM850	1.001	0.210	1.21		
	GSM1900	0.590	0.210	0.80		
	WCDMA V	0.433	0.210	0.64		
	WCDMA IV	0.676	0.210	0.89		
	WCDMA II	0.574	0.210	0.78		
	LTE Band 17	0.154	0.210	0.36		
	LTE Band 13	0.507	0.210	0.72		
	LTE Band 5	0.221	0.210	0.43		
	LTE Band 4	0.614	0.210	0.82		
	LTE Band 2	0.345	0.210	0.56		
	LTE Band 7	0.510	0.210	0.72		
Bottom Face At 0cm	GSM850	1.148	0.210	1.36		
	GSM1900	1.182	0.210	1.39		
	WCDMA V	1.120	0.210	1.33		
	WCDMA IV	1.279	0.210	1.49		
	WCDMA II	1.123	0.210	1.33		
	LTE Band 17	1.075	0.210	1.29		
	LTE Band 13	1.053	0.210	1.26		
	LTE Band 5	0.692	0.210	0.90		
	LTE Band 4	1.351	0.210	1.56		
	LTE Band 2	1.138	0.210	1.35		
	LTE Band 7	1.332	0.210	1.54		
Edge2 At 0cm	GSM850	0.375	0.210	0.59		
	GSM1900	0.383	0.210	0.59		
	WCDMA V	0.085	0.210	0.30		
	WCDMA IV	0.265	0.210	0.48		
	WCDMA II	0.021	0.210	0.23		
	LTE Band 17	0.065	0.210	0.28		
	LTE Band 13	0.117	0.210	0.33		
	LTE Band 5	0.129	0.210	0.34		
	LTE Band 4	0.119	0.210	0.33		
	LTE Band 2	0.282	0.210	0.49		
	LTE Band 7	0.038	0.210	0.25		

**13.2 SPLSR Evaluation and Analysis**


Case 1	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Result	Simultaneous SAR
					X	Y	Z				
	GSM850	Bottom Face	1.148	0	0.017	0.106	-0.181	215.1	2.27	0.02	Not required
	WLAN2.4GHz		1.124	0	-0.0378	-0.102	-0.178				

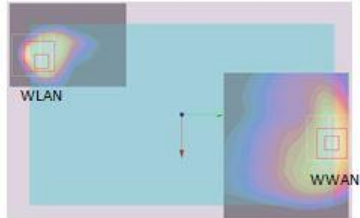

Case 2	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Result	Simultaneous SAR
					X	Y	Z				
	GSM1900	Bottom Face	1.182	0	0.011	0.1	-0.182	207.8	2.31	0.02	Not required
	WLAN2.4GHz		1.124	0	-0.0378	-0.102	-0.178				

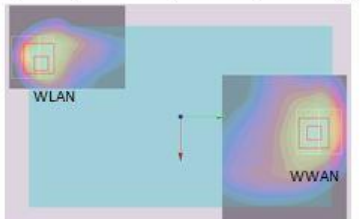


Case 3	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Result	Simultaneous SAR
					X	Y	Z				
	WCDMA V	Bottom Face	1.120	0	0.0185	0.106	-0.18	215.5	2.24	0.02	Not required
	WLAN2.4GHz		1.124	0	-0.0378	-0.102	-0.178				

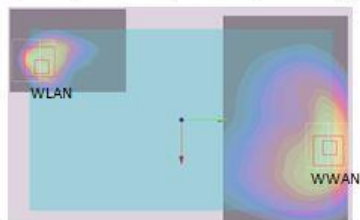





Case 4	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Result	Simultaneous SAR
					X	Y	Z				
	WCDMA IV	Bottom Face	1.280	0	0.017	0.0985	-0.181	207.9	2.40	0.02	Not required
	WLAN2.4GHz		1.120	0	-0.0378	-0.102	-0.178				




Case 5	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Result	Simultaneous SAR
					X	Y	Z				
	WCDMA II	Bottom Face	1.123	0	0.014	0.0985	-0.181	207.1	2.25	0.02	Not required
	WLAN2.4GHz		1.124	0	-0.0378	-0.102	-0.178				



Case 6	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Result	Simultaneous SAR
					X	Y	Z				
	LTE Band 17	Bottom Face	1.075	0	0.025	0.108	-0.181	219.2	2.20	0.01	Not required
	WLAN2.4GHz		1.124	0	-0.0378	-0.102	-0.178				

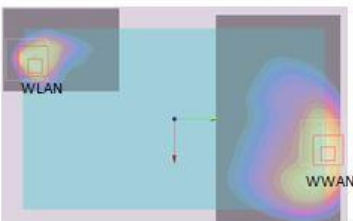


Case 7	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Result	Simultaneous SAR
					X	Y	Z				
	LTE Band 13	Bottom Face	1.053	0	0.0275	0.105	-0.181	217.1	2.18	0.01	Not required
	WLAN2.4GHz		1.124	0	-0.0378	-0.102	-0.178				







Case 8	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Result	Simultaneous SAR
					X	Y	Z				
	LTE Band 5	Bottom Face	0.692	0	0.017	0.106	-0.18	215.1	1.82	0.01	Not required
	WLAN2.4GHz		1.124	0	-0.0378	-0.102	-0.178				

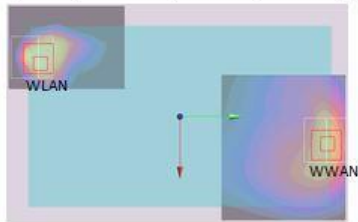


Case 9	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Result	Simultaneous SAR
					X	Y	Z				
	LTE Band 4	Bottom Face	1.318	0	0.0185	0.1	-0.181	209.7	2.44	0.02	Not required
	WLAN2.4GHz		1.124	0	-0.0378	-0.102	-0.178				




Case 10	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Result	Simultaneous SAR
					X	Y	Z				
	LTE Band 2	Bottom Face	1.138	0	0.0125	0.1	-0.179	208.2	2.26	0.02	Not required
	WLAN2.4GHz		1.124	0	-0.0378	-0.102	-0.178				




Case 11	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Result	Simultaneous SAR
					X	Y	Z				
	LTE Band 7	Bottom Face	1.332	0	0.0108	0.113	-0.182	220.5	2.46	0.02	Not required
	WLAN2.4GHz		1.124	0	-0.0378	-0.102	-0.178				

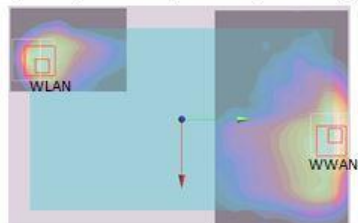


Case 12	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Result	Simultaneous SAR
					X	Y	Z				
	GSM850	Bottom Face	1.148	0	0.017	0.106	-0.181	200.2	2.34	0.02	Not required
	WLAN2.4GHz		1.195	0	-0.0614	-0.0782	-0.181				

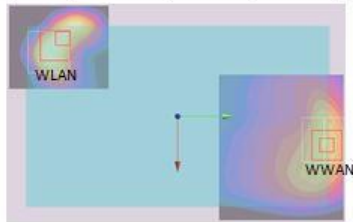


Case 13	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Result	Simultaneous SAR
					X	Y	Z				
	GSM1900	Bottom Face	1.182	0	0.011	0.1	-0.182	192.3	2.38	0.02	Not required
	WLAN2.4GHz		1.195	0	-0.0614	-0.0782	-0.181				




Case 14	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Result	Simultaneous SAR
					X	Y	Z				
	WCDMA V	Bottom Face	1.120	0	0.0185	0.106	-0.18	200.8	2.32	0.02	Not required
	WLAN2.4GHz		1.195	0	-0.0614	-0.0782	-0.181				

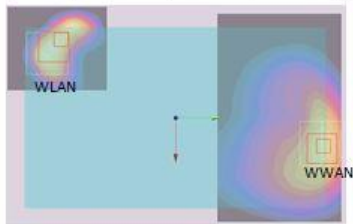


Case 15	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Result	Simultaneous SAR
					X	Y	Z				
	WCDMA IV	Bottom Face	1.279	0	0.017	0.0985	-0.181	193.3	2.47	0.02	Not required
	WLAN2.4GHz		1.195	0	-0.0614	-0.0782	-0.181				




Case 16	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Result	Simultaneous SAR
					X	Y	Z				
	WCDMA II	Bottom Face	1.123	0	0.014	0.0985	-0.181	192.1	2.32	0.02	Not required
	WLAN2.4GHz		1.195	0	-0.0614	-0.0782	-0.181				




Case 17	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Result	Simultaneous SAR
					X	Y	Z				
	LTE Band 17	Bottom Face	1.075	0	0.025	0.108	-0.181	205.3	2.27	0.02	Not required
	WLAN2.4GHz		1.195	0	-0.0614	-0.0782	-0.181				

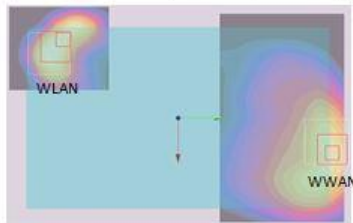


Case 18	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Result	Simultaneous SAR
					X	Y	Z				
	LTE Band 13	Bottom Face	1.053	0	0.0275	0.105	-0.181	203.6	2.25	0.02	Not required
	WLAN2.4GHz		1.195	0	-0.0614	-0.0782	-0.181				




Case 19	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Result	Simultaneous SAR
					X	Y	Z				
	LTE Band 5	Bottom Face	0.692	0	0.017	0.106	-0.18	200.2	1.89	0.01	Not required
	WLAN2.4GHz		1.195	0	-0.0614	-0.0782	-0.181				




Case 20	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Result	Simultaneous SAR
					X	Y	Z				
	LTE Band 4	Bottom Face	1.318	0	0.0185	0.1	-0.181	195.3	2.51	0.02	Not required
	WLAN2.4GHz		1.195	0	-0.0614	-0.0782	-0.181				




Case 21	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Result	Simultaneous SAR
					X	Y	Z				
	LTE Band 2	Bottom Face	1.138	0	0.0125	0.1	-0.179	192.9	2.33	0.02	Not required
	WLAN2.4GHz		1.195	0	-0.0614	-0.0782	-0.181				



Case 22	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Result	Simultaneous SAR
					X	Y	Z				
	LTE Band 7	Bottom Face	1.332	0	0.0108	0.113	-0.182	204.4	2.53	0.02	Not required
	WLAN2.4GHz		1.195	0	-0.0614	-0.0782	-0.181				

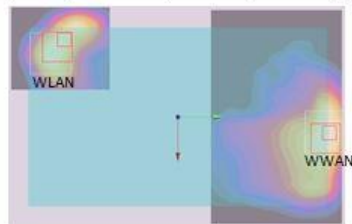


Case 23	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Result	Simultaneous SAR
					X	Y	Z				
	GSM850	Bottom Face	1.001	1.5	0.0275	0.115	-0.181	226.6	2.13	0.01	Not required
	WLAN2.4GHz		1.124	0	-0.0378	-0.102	-0.178				







Case 24	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Result	Simultaneous SAR
					X	Y	Z				
	GSM1900	Bottom Face	0.590	1.5	0.0095	0.1	-0.182	207.5	1.71	0.01	Not required
	WLAN2.4GHz		1.124	0	-0.0378	-0.102	-0.178				




Case 25	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Result	Simultaneous SAR
					X	Y	Z				
	WCDMA IV	Bottom Face	0.676	1.5	0.017	0.0985	-0.181	207.9	1.80	0.01	Not required
	WLAN2.4GHz		1.124	0	-0.0378	-0.102	-0.178				




Case 26	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Result	Simultaneous SAR
					X	Y	Z				
	WCDMA II	Bottom Face	0.574	1.5	0.014	0.0985	-0.181	207.1	1.70	0.01	Not required
	WLAN2.4GHz		1.124	0	-0.0378	-0.102	-0.178				




Case 27	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Result	Simultaneous SAR
					X	Y	Z				
	LTE Band 13	Bottom Face	0.507	1.5	0.004	0.067	-0.183	174.2	1.63	0.01	Not required
	WLAN2.4GHz		1.124	0	-0.0378	-0.102	-0.178				




Case 28	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Result	Simultaneous SAR
					X	Y	Z				
	LTE Band 4	Bottom Face	0.614	1.5	0.029	0.091	-0.182	204.3	1.74	0.01	Not required
	WLAN2.4GHz		1.124	0	-0.0378	-0.102	-0.178				

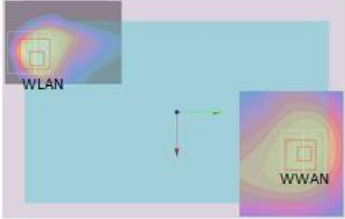


Case 29	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Result	Simultaneous SAR
					X	Y	Z				
	LTE Band 7	Bottom Face	0.510	1.5	0.0096	0.101	-0.182	208.5	1.63	0.01	Not required
	WLAN2.4GHz		1.124	0	-0.0378	-0.102	-0.178				

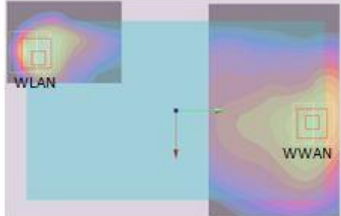


Case 30	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Result	Simultaneous SAR
					X	Y	Z				
	GSM850	Bottom Face	1.001	1.5	0.0275	0.115	-0.181	212.7	2.20	0.02	Not required
	WLAN2.4GHz		1.195	0	-0.0614	-0.0782	-0.181				

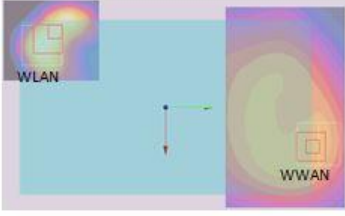


Case 31	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Result	Simultaneous SAR
					X	Y	Z				
	GSM1900	Bottom Face	0.590	1.5	0.0095	0.1	-0.182	191.8	1.79	0.01	Not required
	WLAN2.4GHz		1.195	0	-0.0614	-0.0782	-0.181				

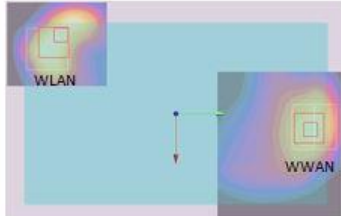


Case 32	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Result	Simultaneous SAR
					X	Y	Z				
	WCDMA V	Bottom Face	0.433	1.5	-0.0055	0.0715	-0.183	159.8	1.63	0.01	Not required
	WLAN2.4GHz		1.195	0	-0.0614	-0.0782	-0.181				




Case 33	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Result	Simultaneous SAR
					X	Y	Z				
	WCDMA IV	Bottom Face	0.676	1.5	0.017	0.0985	-0.181	193.3	1.87	0.01	Not required
	WLAN2.4GHz		1.195	0	-0.0614	-0.0782	-0.181				




Case 34	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Result	Simultaneous SAR
					X	Y	Z				
	WCDMA II	Bottom Face	0.574	1.5	0.014	0.0985	-0.181	192.1	1.77	0.01	Not required
	WLAN2.4GHz		1.195	0	-0.0614	-0.0782	-0.181				




Case 35	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Result	Simultaneous SAR
					X	Y	Z				
	LTE Band 13	Bottom Face	0.507	1.5	0.004	0.067	-0.183	159.3	1.70	0.01	Not required
	WLAN2.4GHz		1.195	0	-0.0614	-0.0782	-0.181				



Case 36	Band	Position	SAR (W/kg)	Gap	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Result	Simultaneous SAR
				(cm)	X	Y	Z				
	LTE Band 4	Bottom Face	0.614	1.5	0.029	0.091	-0.182	191.8	1.81	0.01	Not required
	WLAN2.4GHz		1.195	0	-0.0614	-0.0782	-0.181				



Case 37	Band	Position	SAR (W/kg)	Gap	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Result	Simultaneous SAR
				(cm)	X	Y	Z				
	LTE Band 7	Bottom Face	0.510	1.5	0.0096	0.101	-0.182	192.8	1.71	0.01	Not required
	WLAN2.4GHz		1.195	0	-0.0614	-0.0782	-0.181				



Test Engineer : Iran Wang, Mood Huang, Tom Jiang, and Nick Yu



## 14. Uncertainty Assessment

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observations is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience, and knowledge of the behavior and properties of relevant materials and instruments, manufacture's specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in Table 14.1

Uncertainty Distributions	Normal	Rectangular	Triangular	U-Shape
Multi-plying Factor <sup>(a)</sup>	1/k <sup>(b)</sup>	1/√3	1/√6	1/√2

(a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity

(b)  $\kappa$  is the coverage factor

**Table 14.1. Standard Uncertainty for Assumed Distribution**

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual "root-sum-squares" (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is shown in the following tables.



Error Description	Uncertainty Value (±%)	Probability Distribution	Divisor	Ci (1g)	Ci (10g)	Standard Uncertainty (1g)	Standard Uncertainty (10g)
<b>Measurement System</b>							
Probe Calibration	6.0	Normal	1	1	1	± 6.0 %	± 6.0 %
Axial Isotropy	4.7	Rectangular	√3	0.7	0.7	± 1.9 %	± 1.9 %
Hemispherical Isotropy	9.6	Rectangular	√3	0.7	0.7	± 3.9 %	± 3.9 %
Boundary Effects	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Linearity	4.7	Rectangular	√3	1	1	± 2.7 %	± 2.7 %
System Detection Limits	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Readout Electronics	0.3	Normal	1	1	1	± 0.3 %	± 0.3 %
Response Time	0.8	Rectangular	√3	1	1	± 0.5 %	± 0.5 %
Integration Time	2.6	Rectangular	√3	1	1	± 1.5 %	± 1.5 %
RF Ambient Noise	3.0	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
RF Ambient Reflections	3.0	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
Probe Positioner	0.4	Rectangular	√3	1	1	± 0.2 %	± 0.2 %
Probe Positioning	2.9	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
Max. SAR Eval.	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
<b>Test Sample Related</b>							
Device Positioning	2.9	Normal	1	1	1	± 2.9 %	± 2.9 %
Device Holder	3.6	Normal	1	1	1	± 3.6 %	± 3.6 %
Power Drift	5.0	Rectangular	√3	1	1	± 2.9 %	± 2.9 %
<b>Phantom and Setup</b>							
Phantom Uncertainty	4.0	Rectangular	√3	1	1	± 2.3 %	± 2.3 %
Liquid Conductivity (Target)	5.0	Rectangular	√3	0.64	0.43	± 1.8 %	± 1.2 %
Liquid Conductivity (Meas.)	2.5	Normal	1	0.64	0.43	± 1.6 %	± 1.1 %
Liquid Permittivity (Target)	5.0	Rectangular	√3	0.6	0.49	± 1.7 %	± 1.4 %
Liquid Permittivity (Meas.)	2.5	Normal	1	0.6	0.49	± 1.5 %	± 1.2 %
<b>Combined Standard Uncertainty</b>						± 11.0 %	± 10.8 %
<b>Coverage Factor for 95 %</b>						K=2	
<b>Expanded Uncertainty</b>						± 22.0 %	± 21.5 %

Table 14.2. Uncertainty Budget for frequency range 300 MHz to 3 GHz



## **15. References**

- [1] FCC 47 CFR Part 2 “Frequency Allocations and Radio Treaty Matters; General Rules and Regulations”
- [2] ANSI/IEEE Std. C95.1-1992, “IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz”, September 1992
- [3] IEEE Std. 1528-2003, “Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques”, December 2003
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 447498 D01 v05r02, “Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies”, Feb 2014
- [6] FCC KDB 941225 D01 v02, “SAR Measurement Procedures for 3G Devices – CDMA 2000 / Ev-Do / WCDMA / HSDPA / HSPA”, October 2007
- [7] FCC KDB 941225 D02 v02r02, “SAR Guidance for HSPA, HSPA+, DC-HSDPA and 1x-Advanced”, May 2013.
- [8] FCC KDB 941225 D03 v01, “Recommended SAR Test Reduction Procedures for GSM / GPRS / EDGE”, December 2008
- [9] FCC KDB 941225 D05 v02r03, “SAR Evaluation Considerations for LTE Devices”, Dec 2013
- [10] FCC KDB 616217 D04 v01r01, “SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers”, May 2013
- [11] FCC KDB 941225 D07 v01r01, " SAR Evaluation Procedures for UMPC Mini-Tablet Devices", May 2013
- [12] FCC KDB 865664 D01 v01r03, "SAR Measurement Requirements for 100 MHz to 6 GHz", Feb 2014.
- [13] FCC KDB 865664 D02 v01r01, “RF Exposure Compliance Reporting and Documentation Considerations” May 2013.