

FCC TEST REPORT

(PART 24)

REPORT NO.: RF130805C06-1

MODEL NO.: TR-313 (Refer to item 3.1 for more detail)

FCC ID: RID-TR313

RECEIVED: Aug. 05, 2013

TESTED: Aug. 15 ~ Oct. 02, 2013

ISSUED: Oct. 15, 2013

APPLICANT: GlobalSat WorldCom Corporation

ADDRESS: 16F., No. 186, Jian 1st Rd., Zhonghe Dist., New Taipei City 235, Taiwan (R.O.C.)

ISSUED BY: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

This report should not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.



TABLE OF CONTENTS

RELEASE CONTROL RECORD	3
1 CERTIFICATION	4
2 SUMMARY OF TEST RESULTS	5
2.1 MEASUREMENT UNCERTAINTY	5
2.2 TEST SITE AND INSTRUMENTS	6
3 GENERAL INFORMATION.....	7
3.1 GENERAL DESCRIPTION OF EUT	7
3.2 CONFIGURATION OF SYSTEM UNDER TEST	8
3.3 DESCRIPTION OF SUPPORT UNITS	9
3.4 TEST ITEM AND TEST CONFIGURATION	10
3.5 EUT OPERATING CONDITIONS	11
3.6 GENERAL DESCRIPTION OF APPLIED STANDARDS	11
4 TEST TYPES AND RESULTS	12
4.1 OUTPUT POWER MEASUREMENT	12
4.1.1 LIMITS OF OUTPUT POWER MEASUREMENT	12
4.1.2 TEST PROCEDURES	12
4.1.3 TEST SETUP	13
4.1.4 TEST RESULTS	14
4.2 FREQUENCY STABILITY MEASUREMENT	19
4.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT	19
4.2.2 TEST PROCEDURE	19
4.2.3 TEST SETUP	19
4.2.4 TEST RESULTS	20
4.3 OCCUPIED BANDWIDTH MEASUREMENT	21
4.3.1 TEST PROCEDURES	21
4.3.2 TEST SETUP	21
4.3.3 TEST RESULTS	22
4.4 BAND EDGE MEASUREMENT	23
4.4.1 LIMITS OF BAND EDGE MEASUREMENT	23
4.4.2 TEST SETUP	23
4.4.3 TEST PROCEDURES	23
4.4.4 TEST RESULTS	24
4.5 CONDUCTED SPURIOUS EMISSIONS	26
4.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT	26
4.5.2 TEST PROCEDURE	26
4.5.3 TEST SETUP	26
4.5.4 TEST RESULTS	27
4.6 RADIATED EMISSION MEASUREMENT	42
4.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT	42
4.6.2 TEST PROCEDURES	42
4.6.3 DEVIATION FROM TEST STANDARD	42
4.6.4 TEST SETUP	43
4.6.5 TEST RESULTS	44
5 PHOTOGRAPHS OF THE TEST CONFIGURATION.....	59
6 INFORMATION ON THE TESTING LABORATORIES	60
7 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB.....	61



A D T

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF130805C06-1	Original release	Oct. 15, 2013



A D T

1 CERTIFICATION

PRODUCT: Personal Tracker

MODEL: TR-313 (Refer to item 3.1 for more detail)

BRAND: GlobalSat (Refer to item 3.1 for more detail)

APPLICANT: GlobalSat WorldCom Corporation

TESTED: Aug. 15 ~ Oct. 02, 2013

TEST SAMPLE: ENGINEERING SAMPLE

STANDARDS: FCC Part 24, Subpart E

The above equipment (model: TR-313) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY :  , **DATE** : Oct. 15, 2013
Pettie Chen / Senior Specialist

APPROVED BY :  , **DATE** : Oct. 15, 2013
Anderson Chiu / Senior Engineer

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 24 & Part 2			
STANDARD SECTION	TEST TYPE	RESULT	REMARK
2.1046 24.232	Equivalent isotropically radiated power	PASS	Meet the requirement of limit.
2.1055 24.235	Frequency Stability	PASS	Meet the requirement of limit.
2.1049 24.238(b)	Occupied Bandwidth	PASS	Meet the requirement of limit.
24.238(b)	Band Edge Measurements	PASS	Meet the requirement of limit.
2.1051 24.238	Conducted Spurious Emissions	PASS	Meet the requirement of limit.
2.1053 24.238	Radiated Spurious Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -18.70dB at 5729.40MHz.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	150kHz~30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	3.34 dB
	200MHz ~1000MHz	3.35 dB
	1GHz ~ 18GHz	2.26 dB
	18GHz ~ 40GHz	1.94 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

2.2 TEST SITE AND INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESI7	838496/016	Dec. 25, 2012	Dec. 24, 2013
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100039	Jan. 31, 2013	Jan. 30, 2014
BILOG Antenna SCHWARZBECK	VULB9168	9168-160	Mar. 20, 2013	Mar. 19, 2014
HORN Antenna SCHWARZBECK	BBHA 9120D	9120D-404	Dec. 22, 2012	Dec. 21, 2013
HORN Antenna SCHWARZBECK	BBHA 9170	148	Jul. 15, 2013	Jul. 14, 2014
Preamplifier Agilent	8447D	2944A10633	Oct. 25, 2012	Oct. 24, 2013
Preamplifier Agilent	8449B	3008A01964	Oct. 25, 2012	Oct. 24, 2013
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	250723/4	Aug. 28, 2012	Aug. 27, 2013
			Aug. 23, 2013	Aug. 22, 2014
RF signal cable HUBER+SUHNNER	SUCOFLEX 106	12738/6+309224/4	Aug. 28, 2012	Aug. 27, 2013
			Aug. 23, 2013	Aug. 22, 2014
Software BV ADT	ADT_Radiated_ V7.6.15.9.4	NA	NA	NA
Antenna Tower inn-co GmbH	MA 4000	013303	NA	NA
Antenna Tower Controller inn-co GmbH	CO2000	017303	NA	NA
Turn Table BV ADT	TT100	TT93021703	NA	NA
Turn Table Controller BV ADT	SC100	SC93021703	NA	NA
JFW 20dB attenuation	50HF-020-SMA	NA	NA	NA
Communications Tester-Wireless	E5515C	MY50266653	Oct. 08, 2012	Oct. 09, 2013

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 3.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The FCC Site Registration No. is 988962.
 5. The IC Site Registration No. is IC 7450F-3.

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

EUT	Personal Tracker	
MODEL NO.	TR-313 (Refer to NOTE for more detail)	
POWER SUPPLY	4.2Vdc (Battery) 5.0Vdc (Adapter)	
MODULATION TYPE	GSM, GPRS, EDGE	GMSK
	WCDMA, HSDPA	BPSK
FREQUENCY RANGE	GSM, GPRS, EDGE	1850.2MHz ~ 1909.8MHz
	WCDMA, HSDPA	1852.4MHz ~ 1907.6MHz
MAX. EIRP POWER	GSM	188.799mW (22.76dBm)
	GPRS	189.234mW (22.77dBm)
	EDGE	189.671mW (22.78dBm)
	WCDMA	22.594mW (13.54dBm)
EMISSION DESIGNATOR	GSM	260KGXW
	GPRS	255KG7W
	EDGE	255KG7W
	WCDMA	4M18F9W
MULTI-SLOTS CLASS	10	
WCDMA RELEASE VERSION	5	
ANTENNA TYPE	PIFA antenna with -7.5dBi gain	
I/O PORTS	Refer to users' manual	
DATA CABLE	1.05m non-shielded USB cable without core	
ACCESSORY DEVICES	Cradle (Brand: PHIHONG, Model: PSB05R-050Q(GB)-R)	

NOTE:

1. All models are listed as below.

Brand	Model	Difference
GlobalSat	TR-313	All models are electrically identical, different brand and model names are for marketing purpose.
GlobalSat	ST-M13	
SecuraTrac	ST1013	
LogicMark	42911	
Sentry Alert	ASGGPS-ST	

* The model of the TR-313 was chosen for final test.


2. The EUT is powered by the following adapter.

Brand:	PHIHONG
Model:	PSAI05R-050Q
Input:	100-240V, 50-60Hz, 0.3A 12-17VA
Output:	5Vdc, 1A



3. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 CONFIGURATION OF SYSTEM UNDER TEST

Test Mode A

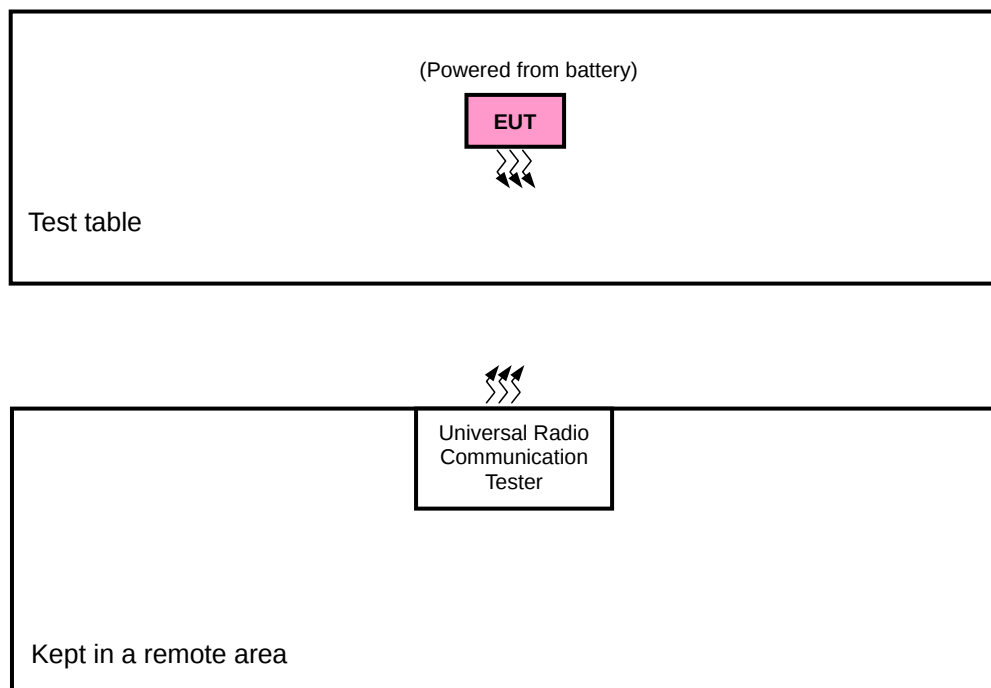

Test Mode B

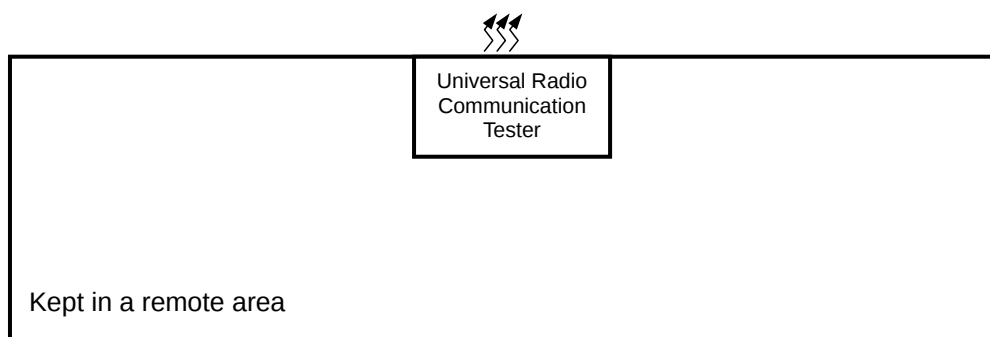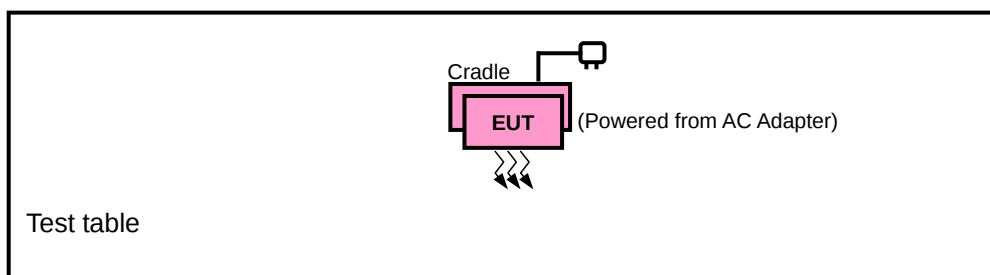

3.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Universal Radio Communication Tester	R&S	CMU200	104958	NA

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA

NOTE:

1. All power cords of the above support units are non shielded (1.8m).
2. Item 1 act as a communication partner to transfer data.

3.4 TEST ITEM AND TEST CONFIGURATION

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports. The worst case was found when positioned on Y-plane. Following channel(s) was (were) selected for the final test as listed below:

Test results are presented in the report as below.

Test Mode	Test Condition
A	Standalone
B	Charge

GPRS MODE

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	MODE
A	EIRP	512 to 810	512, 661, 810	GSM, GPRS, EDGE
A	FREQUENCY STABILITY	512 to 810	661	GPRS, EDGE
A	OCCUPIED BANDWIDTH	512 to 810	512, 661, 810	GSM, GPRS, EDGE
A	BAND EDGE	512 to 810	512, 810	GSM, GPRS, EDGE
A	CONDUCTED EMISSION	512 to 810	512, 661, 810	GSM, GPRS, EDGE
A, B	RADIATED EMISSION BELOW 1 GHz	512 to 810	661	GPRS, EDGE
A	RADIATED EMISSION ABOVE 1 GHz	512 to 810	512, 661, 810	GPRS, EDGE

WCDMA MODE

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	MODE
A	EIRP	9262 to 9538	9262, 9400, 9538	WCDMA
A	FREQUENCY STABILITY	9262 to 9538	9400	WCDMA
A	OCCUPIED BANDWIDTH	9262 to 9538	9262, 9400, 9538	WCDMA, HSDPA
A	BAND EDGE	9262 to 9538	9262, 9538	WCDMA, HSDPA
A	CONDUCTED EMISSION	9262 to 9538	9262, 9400, 9538	WCDMA, HSDPA
A, B	RADIATED EMISSION BELOW 1 GHz	9262 to 9538	9538	WCDMA
A	RADIATED EMISSION ABOVE 1 GHz	9262 to 9538	9262, 9400, 9538	WCDMA

TEST CONDITION:

TEST ITEM	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
EIRP	25deg. C, 65%RH	4.2Vdc	Chris Lin
FREQUENCY STABILITY	24deg. C, 64%RH	4.2Vdc	Match Tsui
OCCUPIED BANDWIDTH	24deg. C, 64%RH	4.2Vdc	Match Tsui
BAND EDGE	24deg. C, 64%RH	4.2Vdc	Match Tsui
CONDUCTED EMISSION	24deg. C, 64%RH	4.2Vdc	Match Tsui
RADIATED EMISSION	25deg. C, 65%RH	4.2Vdc (Test Mode A) 120Vac, 60Hz (Test Mode B)	Ted Chang, Chris Lin

3.5 EUT OPERATING CONDITIONS

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

3.6 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 24

ANSI/TIA/EIA-603-C 2004

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

4 TEST TYPES AND RESULTS

4.1 OUTPUT POWER MEASUREMENT

4.1.1 LIMITS OF OUTPUT POWER MEASUREMENT

Mobile and portable stations are limited to 2 watts EIRP

4.1.2 TEST PROCEDURES

CONDUCTED POWER MEASUREMENT:


The EUT was set up for the maximum power with GSM, GPRS & WCDMA link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.

EIRP MEASUREMENT:

- a. All measurements were done at low, middle and high operational frequency range. RBW and VBW is 1MHz for GSM, GPRS, EDGE and 5MHz for WCDMA mode.
- b. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- c. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a tx cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step b. Record the power level of S.G
- d. $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}.$


4.1.3 TEST SETUP

CONDUCTED POWER MEASUREMENT:

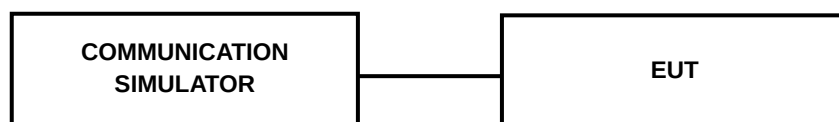

For the actual test configuration, please refer to the attached file (Test Setup Photo).

EIRP MEASUREMENT:

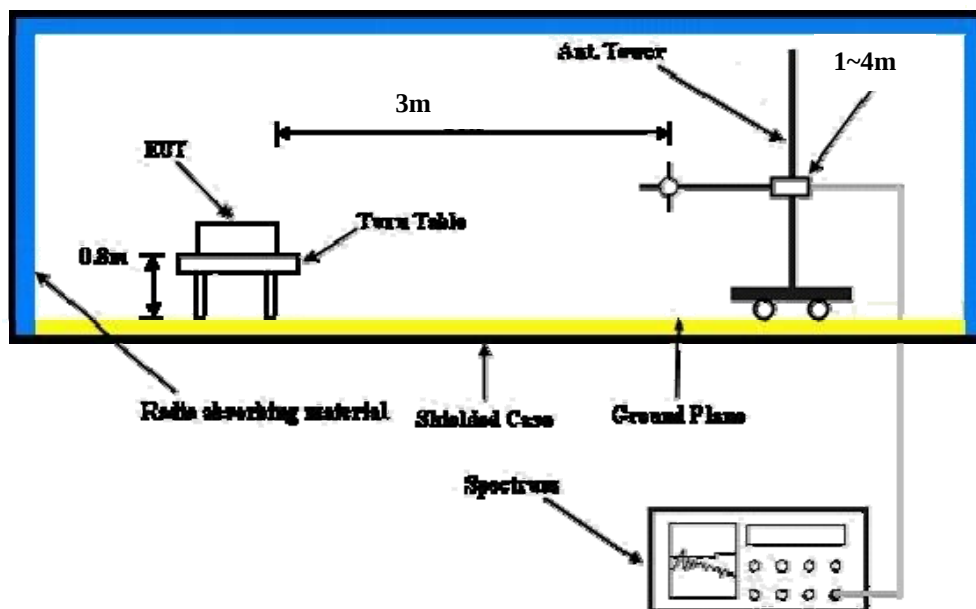

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.4 TEST RESULTS

CONDUCTED OUTPUT POWER (dBm)

Band	GPRS1900		
Channel	512	661	810
Frequency (MHz)	1850.2	1880.0	1909.8
GSM	29.43	29.18	28.87
GPRS 8	29.44	29.19	28.88
GPRS 10	27.92	27.67	27.36
GPRS 11	25.93	25.68	25.37
GPRS 12	27.81	27.56	27.25
DTM 9 (GPRS)	27.91	27.66	27.35
DTM 11 (GPRS)	25.90	25.65	25.34
EDGE 8 (MCS1)	29.40	29.23	28.92
EDGE 10 (MCS1)	27.94	27.69	27.38
EDGE 11 (MCS1)	25.95	25.70	25.39
EDGE 12 (MCS1)	27.79	27.54	27.23
EDGE 8 (MCS9)	25.00	24.83	24.52
EDGE 10 (MCS9)	24.98	24.79	24.48
EDGE 11 (MCS9)	24.00	23.78	23.47
EDGE 12 (MCS9)	23.00	22.75	22.44
DTM 9 (EDGE)	24.99	24.74	24.43
DTM 11 (EDGE)	24.93	24.68	24.37

Band	WCDMA II		
Channel	9262	9400	9538
Frequency (MHz)	1852.4	1880.0	1907.6
RMC 12.2K	21.97	21.62	21.78
HSDPA Subtest-1	21.88	21.53	21.69
HSDPA Subtest-2	21.83	21.48	21.64
HSDPA Subtest-3	21.93	21.58	21.74
HSDPA Subtest-4	21.86	21.51	21.67

EIRP POWER (dBm)

FOR GSM MODE:

MODE		TX channel 512					
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1850.20	-21.20	14.90	1.07	15.97	33.00	-17.03
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1850.20	-13.43	21.54	1.07	22.61	33.00	-10.39

MODE		TX channel 661					
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1880.00	-20.91	14.59	1.12	15.71	33.00	-17.29
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1880.00	-12.73	21.64	1.12	22.76	33.00	-10.24

MODE		TX channel 810					
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1909.90	-22.63	12.79	1.11	13.90	33.00	-19.10
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1909.80	-14.44	20.90	1.11	22.01	33.00	-10.99

NOTE: Power Value (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

FOR GPRS MODE:

MODE		TX channel 512					
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1850.20	-21.19	14.91	1.07	15.98	33.00	-17.02
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1850.20	-13.41	21.56	1.07	22.63	33.00	-10.37

MODE		TX channel 661					
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1880.00	-20.89	14.61	1.12	15.73	33.00	-17.27
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1880.00	-12.72	21.65	1.12	22.77	33.00	-10.23

MODE		TX channel 810					
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1909.90	-22.62	12.80	1.11	13.91	33.00	-19.09
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1909.80	-14.42	20.92	1.11	22.03	33.00	-10.97

NOTE: Power Value (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

FOR EDGE MODE:

MODE		TX channel 512					
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1850.20	-21.26	14.84	1.07	15.91	33.00	-17.09
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1850.20	-13.50	21.47	1.07	22.54	33.00	-10.46

MODE		TX channel 661					
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1880.00	-20.88	14.62	1.12	15.74	33.00	-17.26
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1880.00	-12.71	21.66	1.12	22.78	33.00	-10.22

MODE		TX channel 810					
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1909.90	-22.57	12.85	1.11	13.96	33.00	-19.04
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1909.80	-14.40	20.94	1.11	22.05	33.00	-10.95

NOTE: Power Value (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

FOR WCDMA MODE:

MODE		TX channel 9262					
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1852.40	-31.78	4.28	1.07	5.35	33.00	-27.65
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1852.40	-24.58	10.35	1.07	11.42	33.00	-21.58

MODE		TX channel 9400					
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1880.00	-30.27	5.23	1.12	6.35	33.00	-26.65
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1880.00	-24.15	10.22	1.12	11.34	33.00	-21.66

MODE		TX channel 9538					
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1907.60	-30.86	4.57	1.11	5.68	33.00	-27.32
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1907.60	-22.84	12.43	1.11	13.54	33.00	-19.46

NOTE: Power Value (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

4.2 FREQUENCY STABILITY MEASUREMENT

4.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT


The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

4.2.2 TEST PROCEDURE

- Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the $\pm 0.5^{\circ}\text{C}$ during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

NOTE: The frequency error was recorded frequency error from the communication simulator.

4.2.3 TEST SETUP

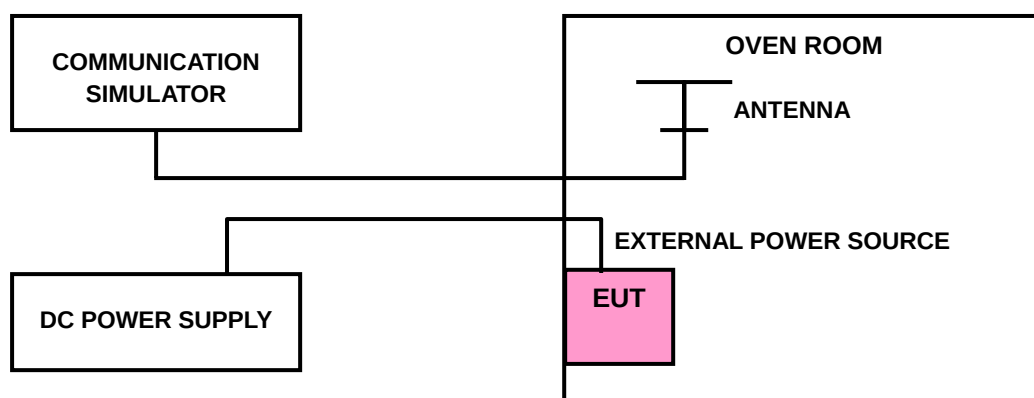

4.2.4 TEST RESULTS

FREQUENCY ERROR VS. VOLTAGE

VOLTAGE (Volts)	FREQUENCY ERROR (ppm)			LIMIT (ppm)
	GPRS	EDGE	WCDMA	
4.8	-0.013	-0.013	-0.011	2.5
4.2	-0.009	-0.009	-0.009	2.5
3.6	-0.011	-0.010	-0.010	2.5

NOTE: The applicant defined the normal working voltage of the adapter and battery is from 3.6Vdc to 4.8Vdc.

FREQUENCY ERROR vs. TEMPERATURE.


TEMP. (°C)	FREQUENCY ERROR (ppm)			LIMIT (ppm)
	GPRS	EDGE	WCDMA	
50	-0.021	-0.020	-0.018	2.5
40	-0.018	-0.019	-0.015	2.5
30	-0.013	-0.013	-0.013	2.5
20	-0.009	-0.009	-0.009	2.5
10	-0.011	-0.014	-0.012	2.5
0	-0.020	-0.017	-0.016	2.5
-10	-0.022	-0.022	-0.018	2.5
-20	-0.024	-0.023	-0.019	2.5

4.3 OCCUPIED BANDWIDTH MEASUREMENT

4.3.1 TEST PROCEDURES


The EUT makes a call to the communication simulator. All measurements were done at low, middle and high operational frequency range. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.

4.3.2 TEST SETUP

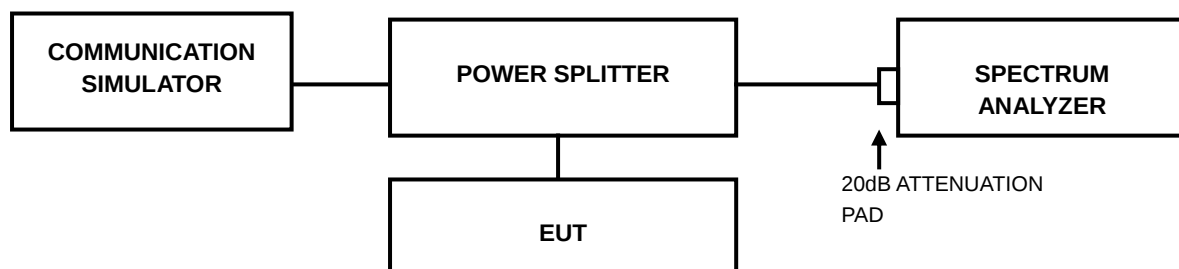

4.3.3 TEST RESULTS

CHANNEL	FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH (kHz)			CHANNEL	FREQ. (MHz)	99% OCCUPIED BANDWIDTH (MHz)	
		GSM	GPRS	EDGE			WCDMA	HSDPA
512	1850.2	255.00	255.00	255.00	9262	1852.4	4.17	4.15
661	1880.0	260.00	250.00	250.00	9400	1880.0	4.17	4.18
810	1909.8	255.00	255.00	255.00	9538	1907.6	4.17	4.18

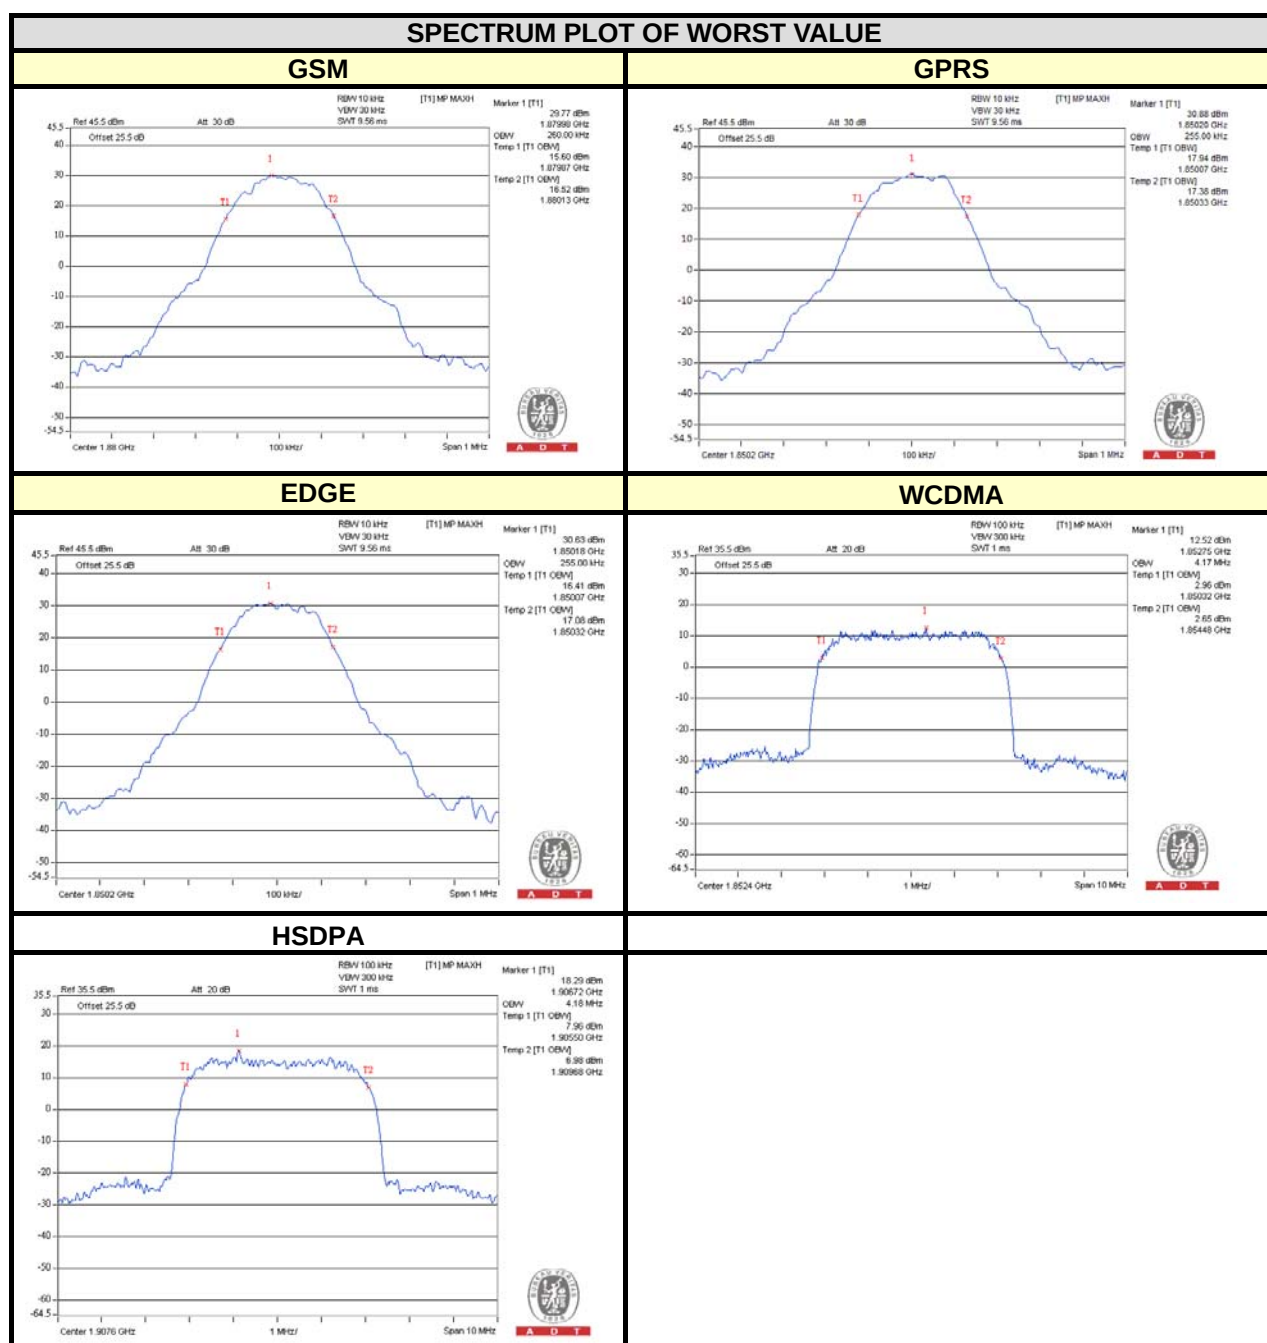


4.4 BAND EDGE MEASUREMENT

4.4.1 LIMITS OF BAND EDGE MEASUREMENT

Power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.


4.4.2 TEST SETUP

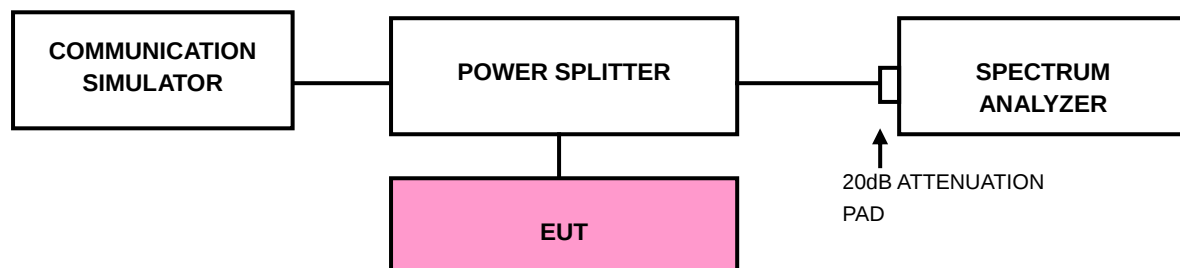

4.4.3 TEST PROCEDURES


- All measurements were done at low and high operational frequency range.
- The center frequency of spectrum is the band edge frequency and span is 1.5 MHz. RB of the spectrum is 3kHz and VB of the spectrum is 10kHz (GSM/GPRS/EDGE).
- The center frequency of spectrum is the band edge frequency and span is 10MHz. RB of the spectrum is 100kHz and VB of the spectrum is 300kHz (WCDMA).
- Record the max trace plot into the test report.

4.4.4 TEST RESULTS

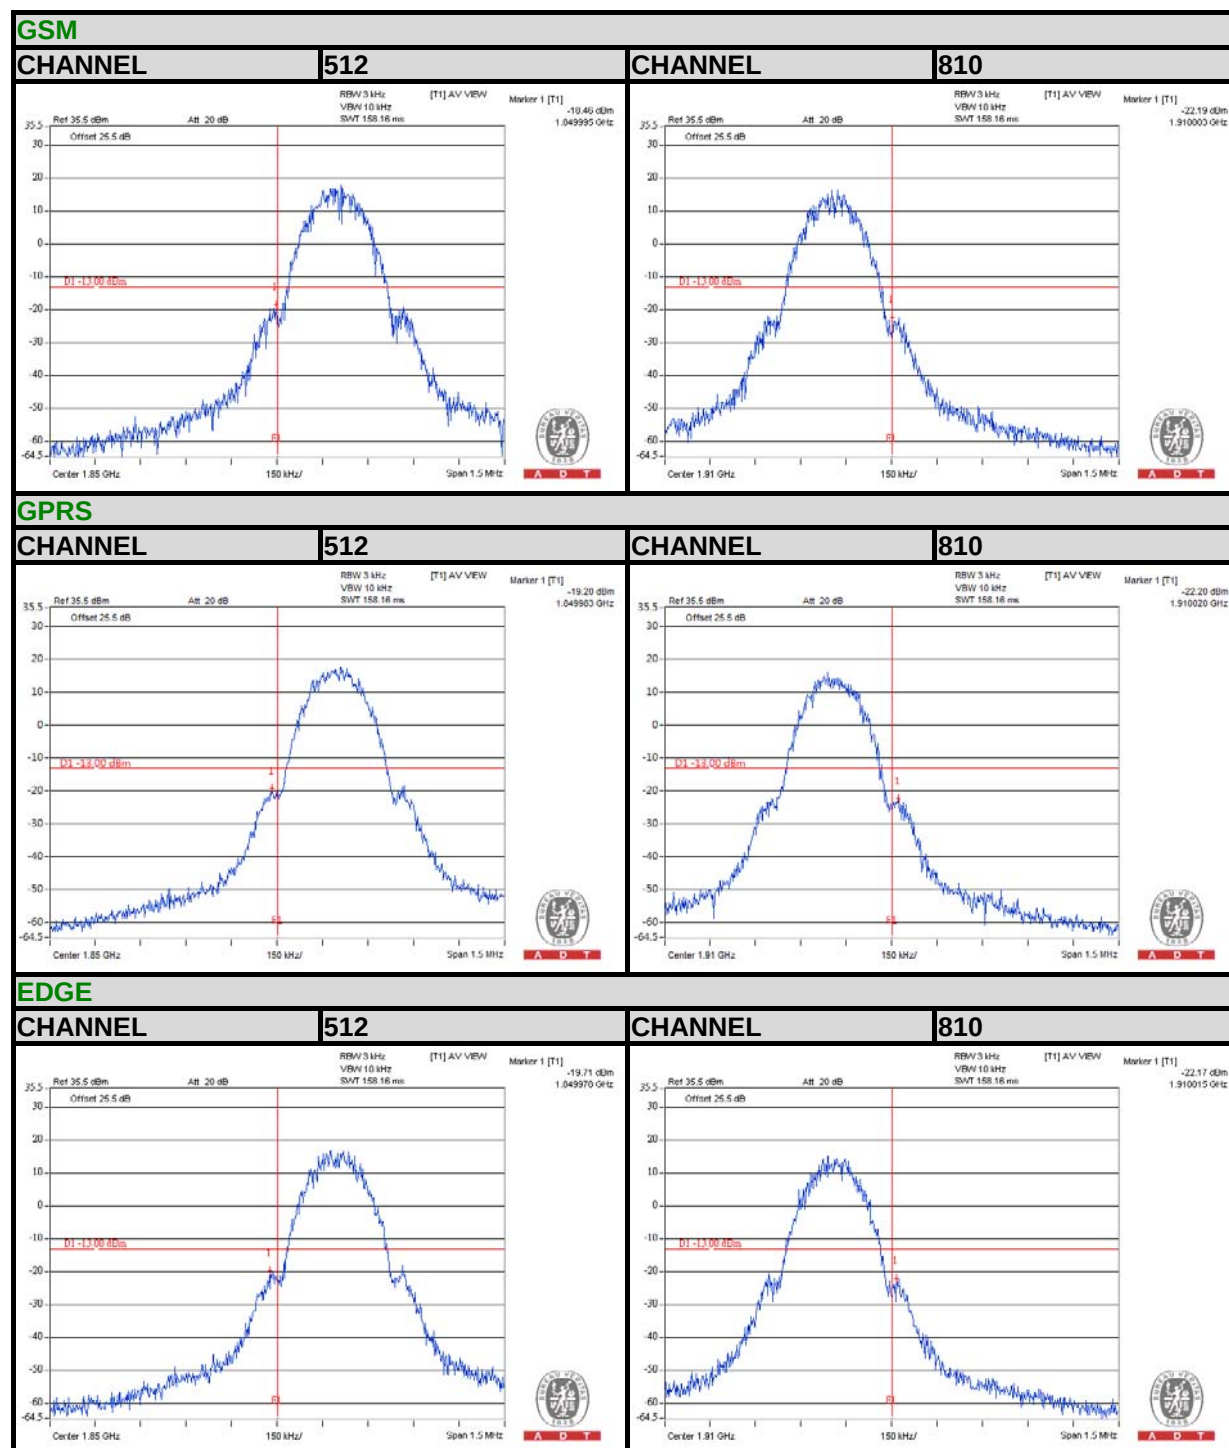


CHANNEL

CHANNEL	9262
---------	------

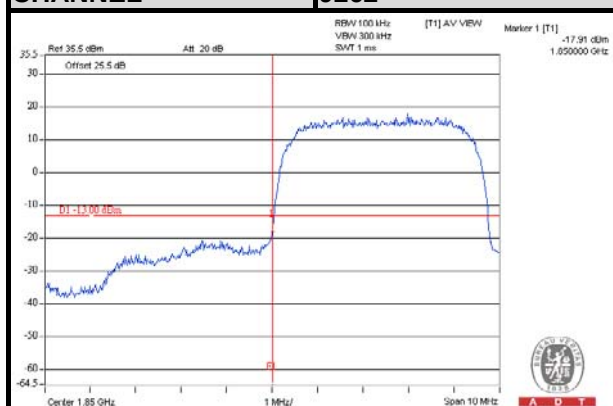


CHANNEL	9538
---------	------

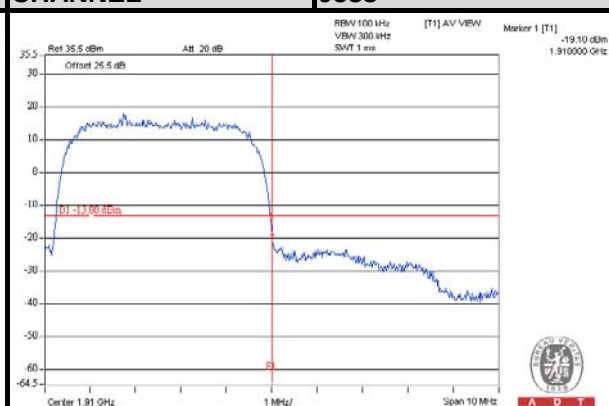


CHANNEL

CHANNEL	9262
---------	------

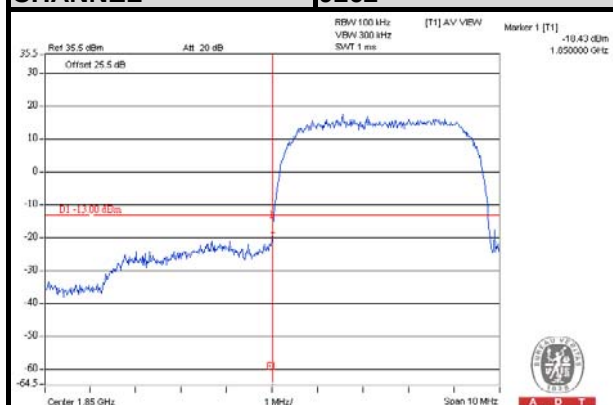

CHANNEL	9538
---------	------

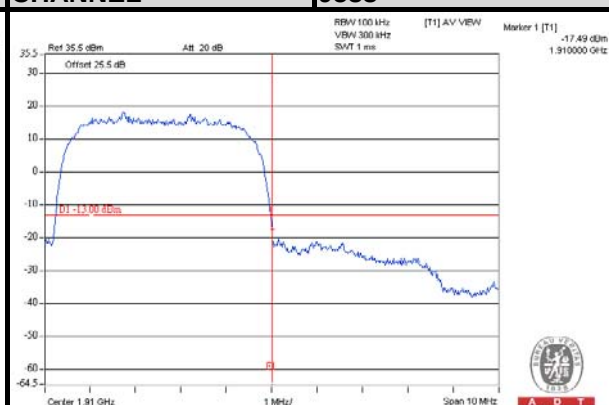

4.5 CONDUCTED SPURIOUS EMISSIONS


4.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm .

4.5.2 TEST PROCEDURE

- The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- Measuring frequency range is from 9kHz to 20GHz. 20dB attenuation pad is connected with spectrum. RBW=1MHz and VBW=3MHz is used for conducted emission measurement.

4.5.3 TEST SETUP

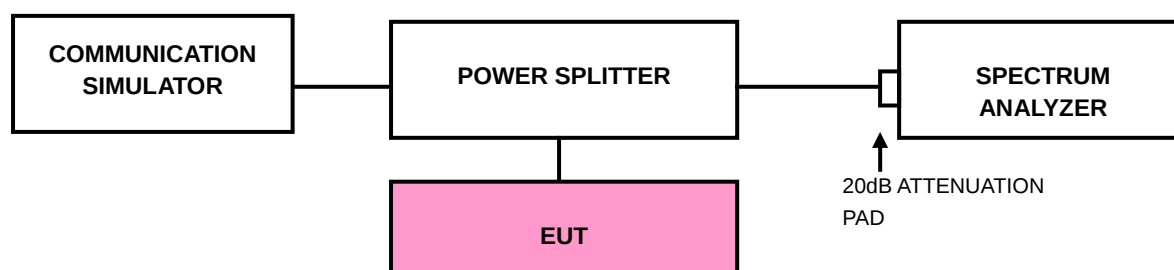

4.5.4 TEST RESULTS






A D T


GSM

CHANNEL 661


FREQUENCY RANGE : 9kHz~3GHz

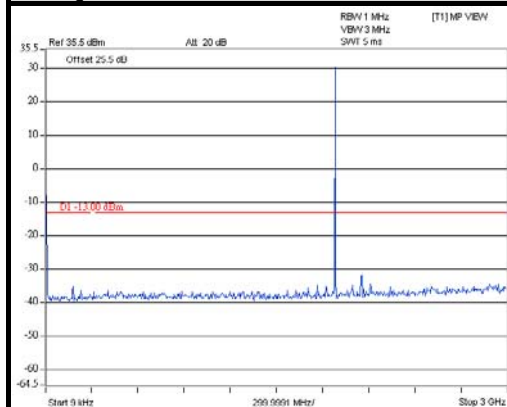

FREQUENCY RANGE : 3GHz~10GHz

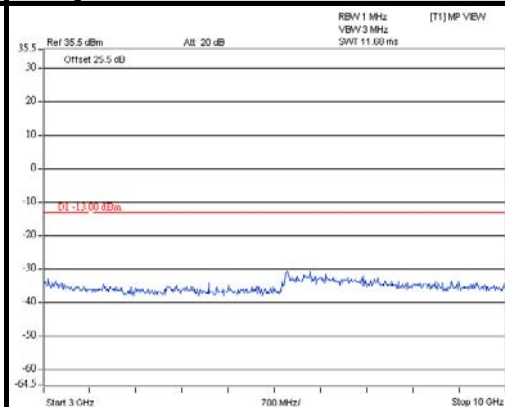


FREQUENCY RANGE : 10GHz~20GHz

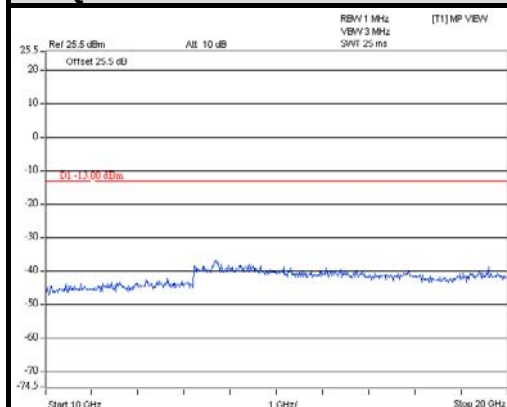


GSM

CHANNEL 810


FREQUENCY RANGE : 9kHz~3GHz

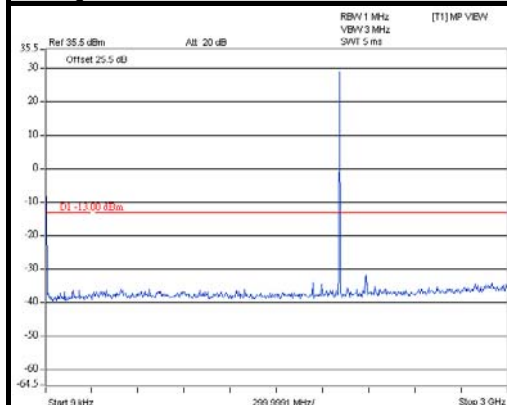

FREQUENCY RANGE : 3GHz~10GHz

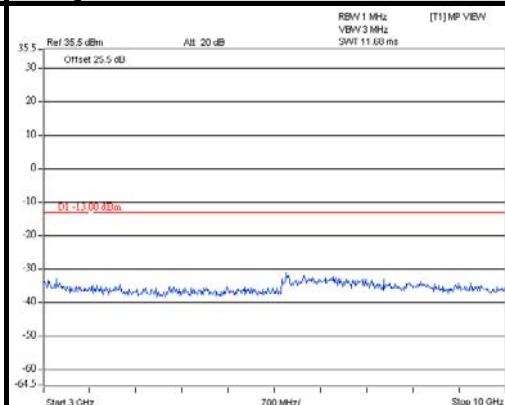

FREQUENCY RANGE : 10GHz~20GHz

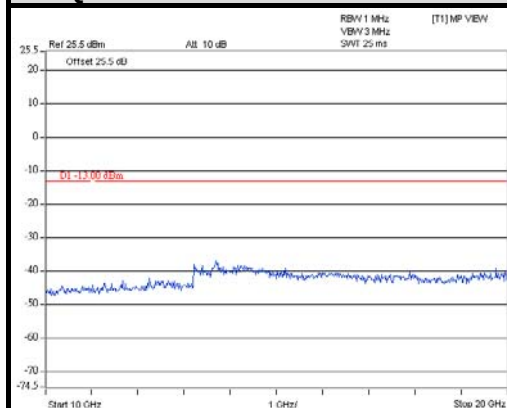




A D T

GPRS


CHANNEL 512

FREQUENCY RANGE : 9kHz~3GHz

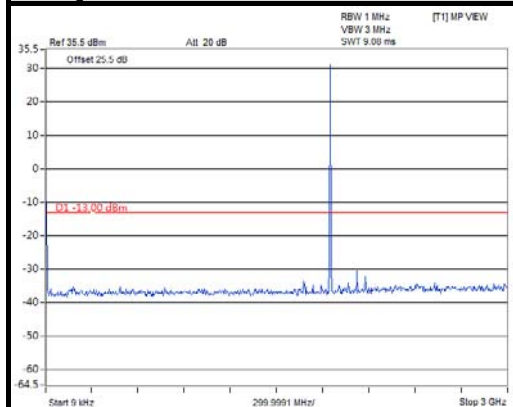


A D T

FREQUENCY RANGE : 3GHz~10GHz

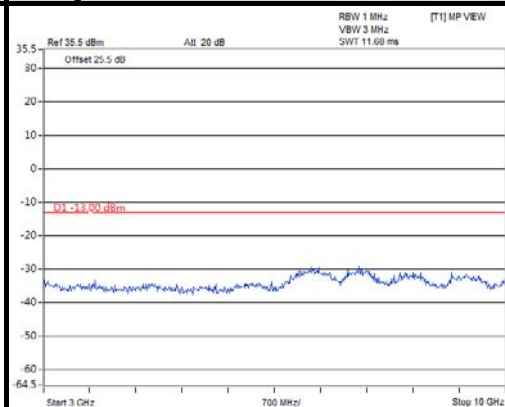

A D T

FREQUENCY RANGE : 10GHz~20GHz

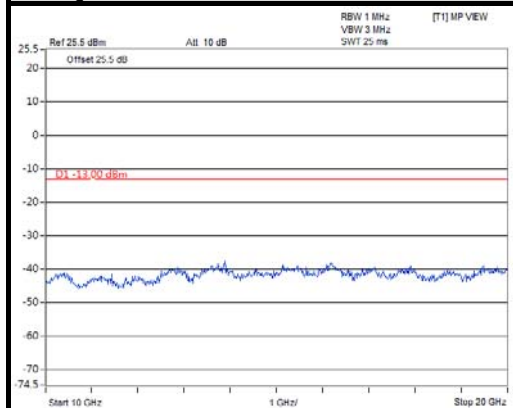


A D T


GPRS

CHANNEL 661

FREQUENCY RANGE : 9kHz~3GHz

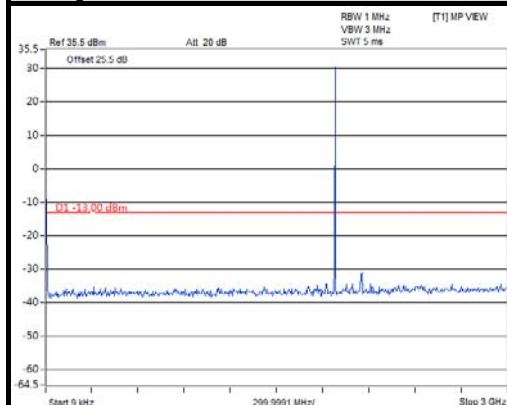

FREQUENCY RANGE : 3GHz~10GHz

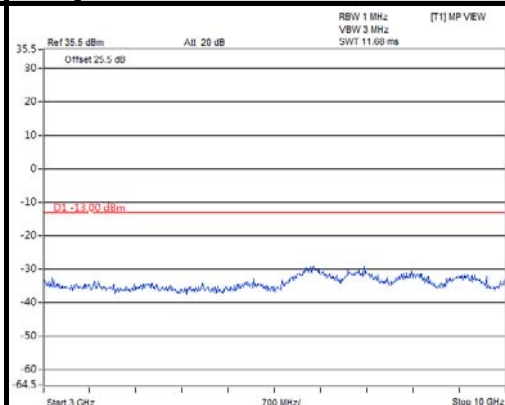


FREQUENCY RANGE : 10GHz~20GHz




GPRS

CHANNEL 810


FREQUENCY RANGE : 9kHz~3GHz

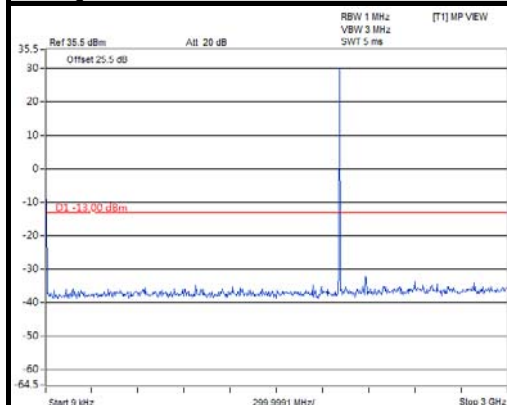

FREQUENCY RANGE : 3GHz~10GHz

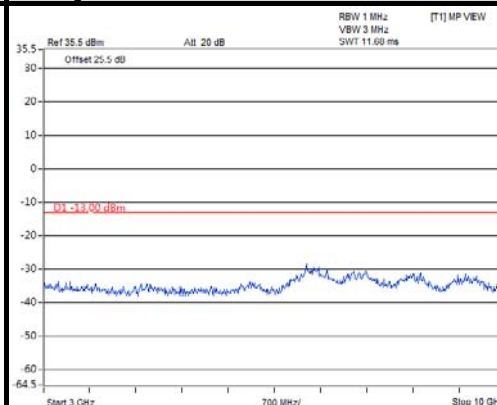

FREQUENCY RANGE : 10GHz~20GHz

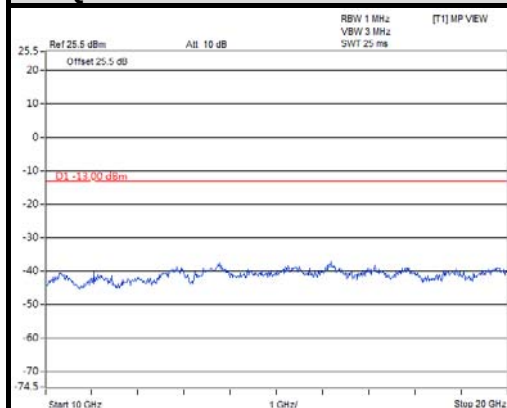




A D T


EDGE

CHANNEL 512


FREQUENCY RANGE : 9kHz~3GHz

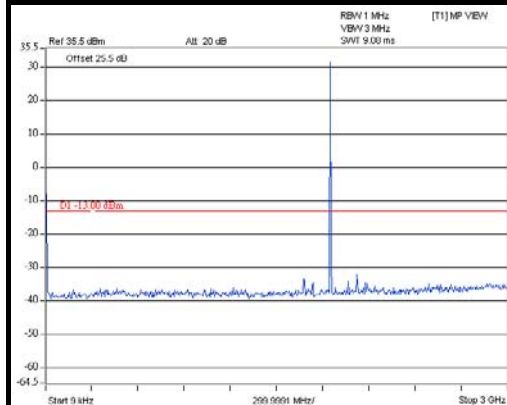

FREQUENCY RANGE : 3GHz~10GHz

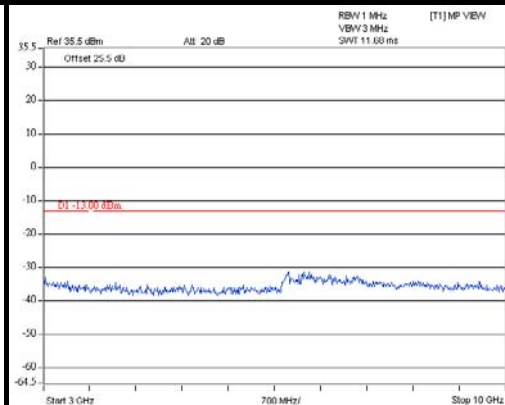


FREQUENCY RANGE : 10GHz~20GHz

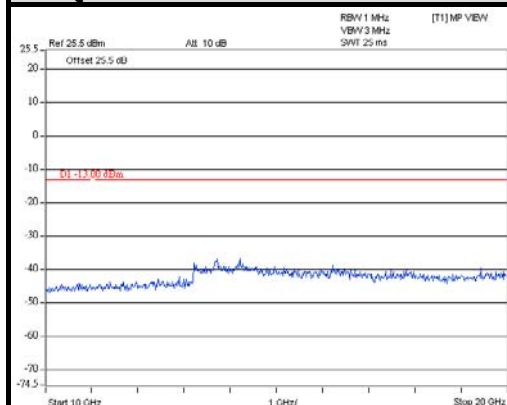


EDGE

CHANNEL 661


FREQUENCY RANGE : 9kHz~3GHz

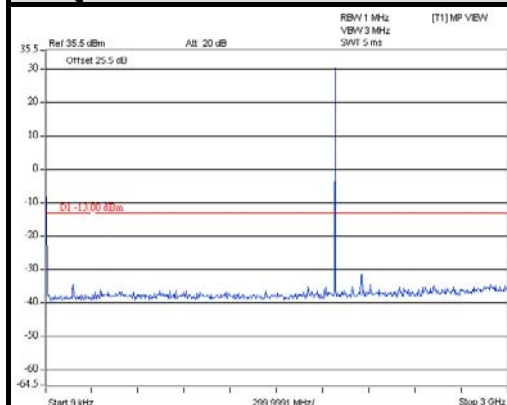

FREQUENCY RANGE : 3GHz~10GHz

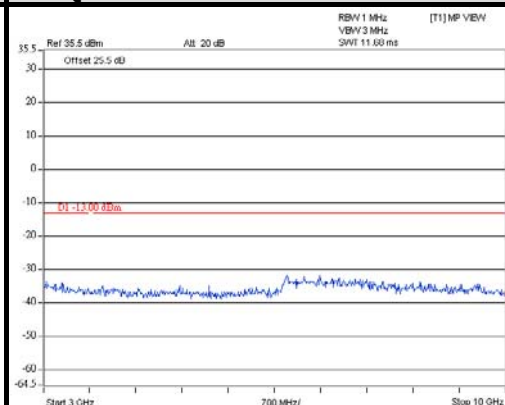

FREQUENCY RANGE : 10GHz~20GHz

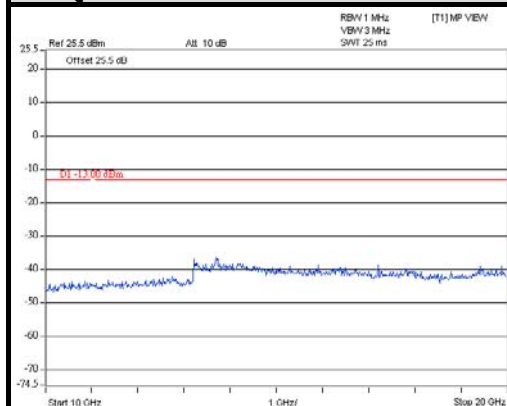





A D T

EDGE


CHANNEL 810

FREQUENCY RANGE : 9kHz~3GHz

FREQUENCY RANGE : 3GHz~10GHz

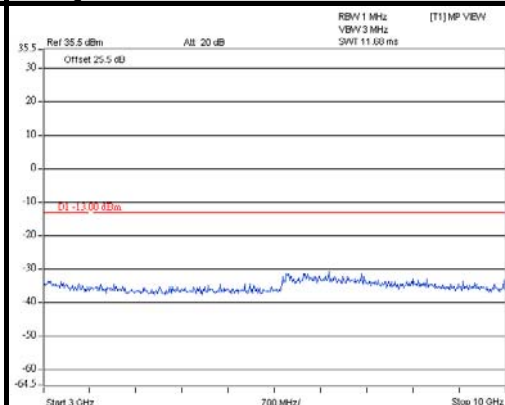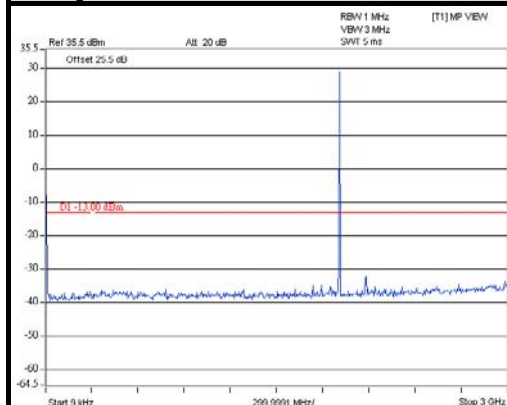


FREQUENCY RANGE : 10GHz~20GHz

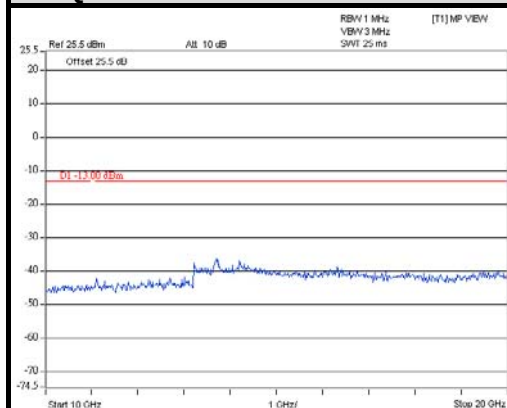

WCDMA

CHANNEL 9262


FREQUENCY RANGE : 9kHz~3GHz

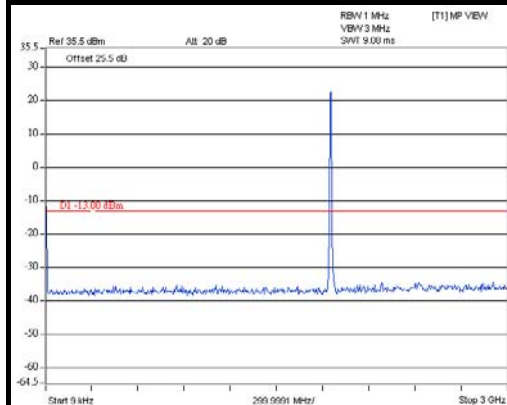

FREQUENCY RANGE : 3GHz~10GHz




FREQUENCY RANGE : 10GHz~20GHz

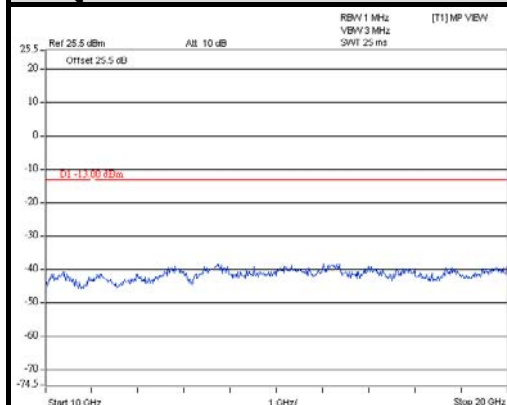

WCDMA

CHANNEL 9400

FREQUENCY RANGE : 9kHz~3GHz

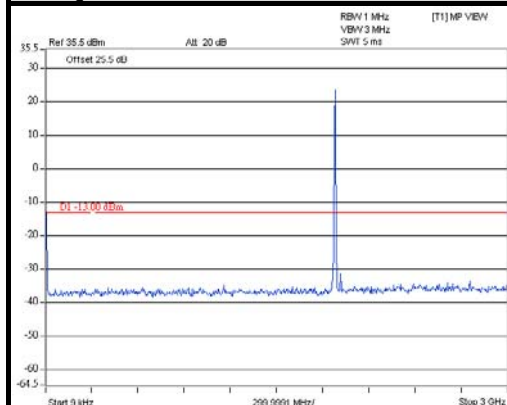

FREQUENCY RANGE : 3GHz~10GHz




FREQUENCY RANGE : 10GHz~20GHz



WCDMA

CHANNEL 9538


FREQUENCY RANGE : 9kHz~3GHz

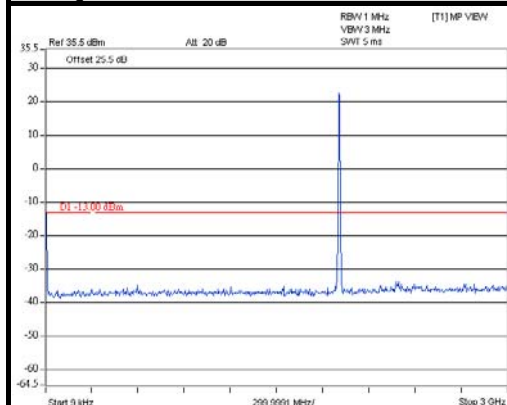

FREQUENCY RANGE : 3GHz~10GHz



FREQUENCY RANGE : 10GHz~20GHz

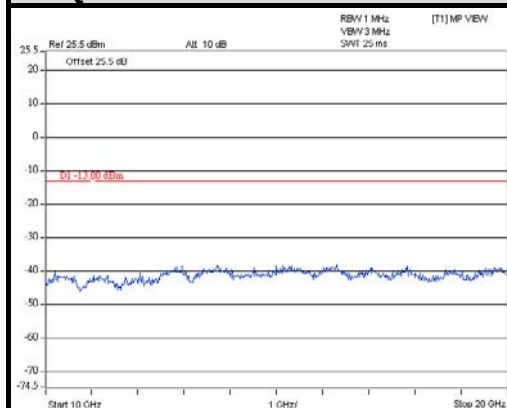




A D T

HSDPA

CHANNEL 9262

FREQUENCY RANGE : 9kHz~3GHz

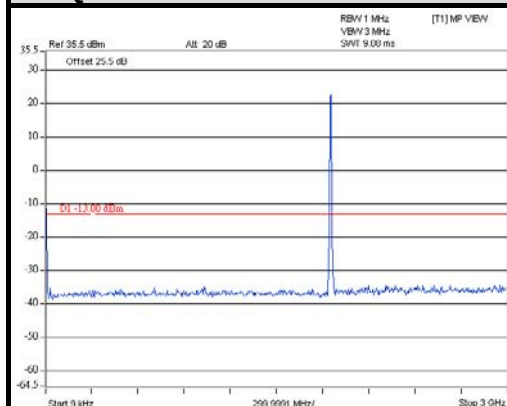

FREQUENCY RANGE : 3GHz~10GHz




FREQUENCY RANGE : 10GHz~20GHz



HSDPA

CHANNEL 9400


FREQUENCY RANGE : 9kHz~3GHz

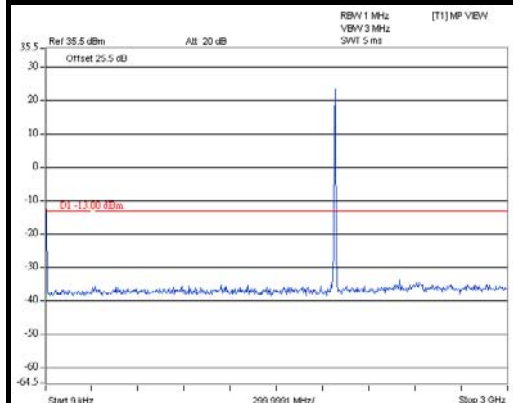

FREQUENCY RANGE : 3GHz~10GHz




FREQUENCY RANGE : 10GHz~20GHz

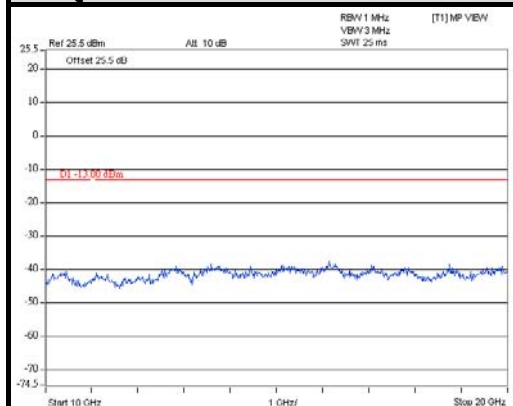


HSDPA

CHANNEL 9538

FREQUENCY RANGE : 9kHz~3GHz

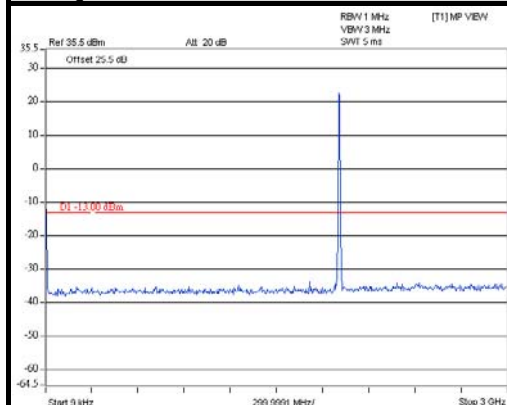

FREQUENCY RANGE : 3GHz~10GHz

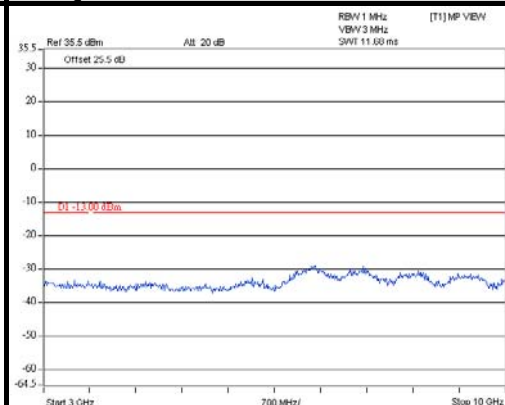

FREQUENCY RANGE : 10GHz~20GHz



4.6 RADIATED EMISSION MEASUREMENT

4.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm .

4.6.2 TEST PROCEDURES


- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step a. Record the power level of S.G
- c. $\text{EIRP} = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}.$
- d. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole,
 $\text{E.R.P power} = \text{E.I.R.P power} - 2.15\text{dBi}.$

NOTE: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.

4.6.3 DEVIATION FROM TEST STANDARD

No deviation

4.6.4 TEST SETUP

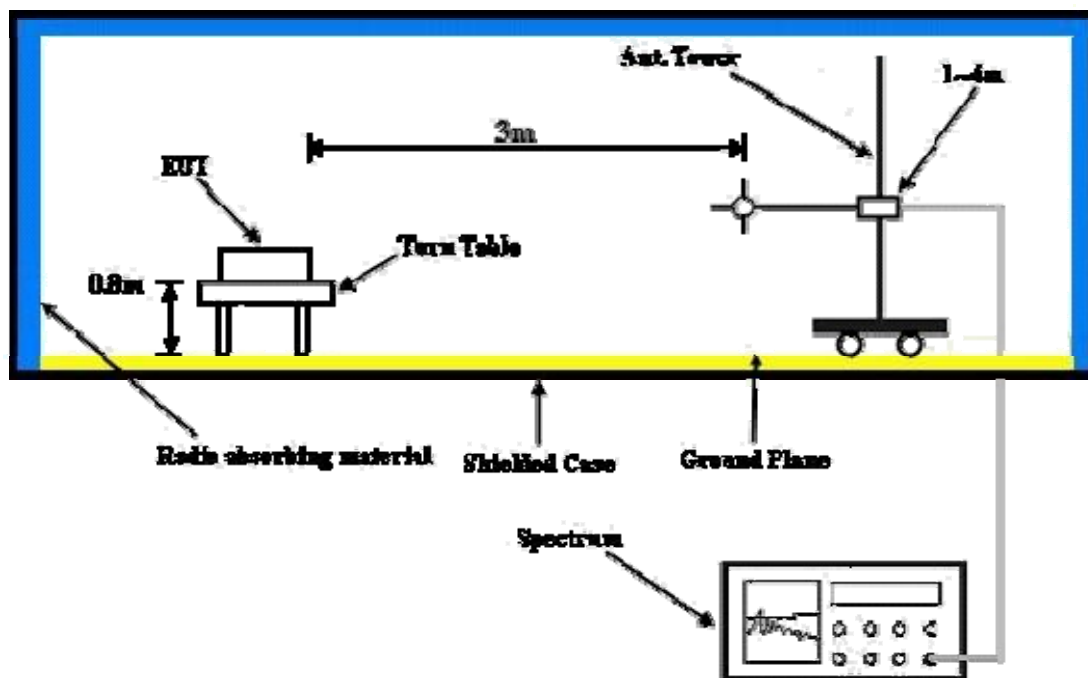

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.6.5 TEST RESULTS

Below 1GHz

GPRS

MODE	TX channel 661	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	INPUT POWER	4.2Vdc
TEST MODE	A	TESTED BY	Ted Chang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	95.96	-51.76	-53.28	0.98	-52.30	-13.00	-39.30
2	191.02	-49.65	-54.52	4.33	-50.19	-13.00	-37.19
3	268.62	-48.93	-54.76	5.29	-49.47	-13.00	-36.47
4	379.20	-62.40	-68.19	5.25	-62.94	-13.00	-49.94
5	534.40	-68.55	-73.82	4.73	-69.09	-13.00	-56.09
6	722.58	-69.37	-74.88	4.97	-69.91	-13.00	-56.91
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	57.16	-43.64	-37.58	-8.21	-45.79	-13.00	-32.79
2	179.38	-53.22	-58.20	2.83	-55.37	-13.00	-42.37
3	274.44	-55.55	-62.96	5.26	-57.70	-13.00	-44.70
4	367.56	-63.44	-70.80	5.21	-65.59	-13.00	-52.59
5	511.12	-68.94	-75.93	4.84	-71.09	-13.00	-58.09
6	617.82	-68.09	-74.82	4.58	-70.24	-13.00	-57.24

REMARKS:

1. Power Value (dBm) = S.G Power Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).



A D T

MODE	TX channel 661	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	INPUT POWER	120Vac, 60 Hz
TEST MODE	B	TESTED BY	Ted Chang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	95.96	-53.35	-54.87	0.98	-53.89	-13.00	-40.89
2	187.14	-50.44	-54.82	3.84	-50.98	-13.00	-37.98
3	274.44	-50.79	-56.59	5.26	-51.33	-13.00	-38.33
4	385.02	-63.74	-69.53	5.25	-64.28	-13.00	-51.28
5	534.40	-67.85	-73.12	4.73	-68.39	-13.00	-55.39
6	674.08	-68.71	-74.29	5.04	-69.25	-13.00	-56.25
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	57.16	-45.07	-39.01	-8.21	-47.22	-13.00	-34.22
2	88.20	-52.15	-54.93	0.63	-54.30	-13.00	-41.30
3	179.38	-54.02	-59.00	2.83	-56.17	-13.00	-43.17
4	276.38	-57.60	-65.00	5.25	-59.75	-13.00	-46.75
5	365.62	-63.98	-71.35	5.22	-66.13	-13.00	-53.13
6	515.00	-68.62	-75.59	4.82	-70.77	-13.00	-57.77

REMARKS:

1. Power Value (dBm) = S.G Power Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).



A D T

EDGE

MODE	TX channel 661	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	INPUT POWER	4.2Vdc
TEST MODE	A	TESTED BY	Ted Chang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	57.74	-57.87	-50.32	-8.09	-58.41	-13.00	-45.41
2	155.31	-52.33	-53.00	0.13	-52.87	-13.00	-39.87
3	269.12	-47.70	-53.53	5.29	-48.24	-13.00	-35.24
4	379.36	-61.01	-66.80	5.25	-61.55	-13.00	-48.55
5	444.57	-66.56	-72.20	5.10	-67.10	-13.00	-54.10
6	534.66	-67.87	-73.14	4.73	-68.41	-13.00	-55.41
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	57.41	-41.26	-35.26	-8.15	-43.41	-13.00	-30.41
2	99.47	-50.69	-53.72	0.88	-52.84	-13.00	-39.84
3	257.24	-57.66	-65.18	5.37	-59.81	-13.00	-46.81
4	367.36	-60.46	-67.82	5.21	-62.61	-13.00	-49.61
5	451.22	-66.97	-74.20	5.08	-69.12	-13.00	-56.12
6	534.01	-68.93	-75.81	4.73	-71.08	-13.00	-58.08

REMARKS:

1. Power Value (dBm) = S.G Power Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).



A D T

MODE	TX channel 661	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	INPUT POWER	120Vac, 60 Hz
TEST MODE	B	TESTED BY	Ted Chang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	57.36	-58.34	-50.72	-8.16	-58.88	-13.00	-45.88
2	154.01	-52.67	-53.27	0.06	-53.21	-13.00	-40.21
3	187.24	-49.33	-53.72	3.85	-49.87	-13.00	-36.87
4	274.10	-50.23	-56.03	5.26	-50.77	-13.00	-37.77
5	385.21	-62.47	-68.26	5.25	-63.01	-13.00	-50.01
6	604.88	-66.94	-71.95	4.47	-67.48	-13.00	-54.48
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	89.21	-51.06	-54.12	0.91	-53.21	-13.00	-40.21
2	179.41	-52.84	-57.82	2.83	-54.99	-13.00	-41.99
3	276.24	-56.95	-64.36	5.26	-59.10	-13.00	-46.10
4	364.95	-62.26	-69.62	5.21	-64.41	-13.00	-51.41
5	476.74	-67.92	-75.04	4.97	-70.07	-13.00	-57.07
6	679.12	-69.31	-76.53	5.07	-71.46	-13.00	-58.46

REMARKS:

1. Power Value (dBm) = S.G Power Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

WCDMA

MODE	TX channel 9538	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	INPUT POWER	4.2Vdc
TEST MODE	A	TESTED BY	Ted Chang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	95.96	-52.17	-53.69	0.98	-52.71	-13.00	-39.71
2	191.02	-50.41	-55.28	4.33	-50.95	-13.00	-37.95
3	268.62	-48.80	-54.63	5.29	-49.34	-13.00	-36.34
4	385.02	-61.84	-67.63	5.25	-62.38	-13.00	-49.38
5	602.30	-68.09	-73.08	4.45	-68.63	-13.00	-55.63
6	738.10	-69.12	-74.45	4.79	-69.66	-13.00	-56.66
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	57.16	-45.23	-39.17	-8.21	-47.38	-13.00	-34.38
2	179.38	-53.01	-57.99	2.83	-55.16	-13.00	-42.16
3	270.56	-56.45	-63.89	5.29	-58.60	-13.00	-45.60
4	365.62	-63.40	-70.77	5.22	-65.55	-13.00	-52.55
5	495.60	-67.94	-74.99	4.90	-70.09	-13.00	-57.09
6	681.84	-69.05	-76.30	5.10	-71.20	-13.00	-58.20

REMARKS:

1. Power Value (dBm) = S.G Power Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).



A D T

MODE	TX channel 9538	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	INPUT POWER	120Vac, 60 Hz
TEST MODE	B	TESTED BY	Ted Chang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	119.24	-53.07	-53.71	0.10	-53.61	-13.00	-40.61
2	189.08	-50.60	-55.22	4.08	-51.14	-13.00	-38.14
3	272.50	-50.27	-56.09	5.28	-50.81	-13.00	-37.81
4	365.62	-61.10	-66.86	5.22	-61.64	-13.00	-48.64
5	462.62	-68.66	-74.22	5.02	-69.20	-13.00	-56.20
6	677.96	-69.18	-74.79	5.07	-69.72	-13.00	-56.72
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	55.22	-45.74	-39.26	-8.63	-47.89	-13.00	-34.89
2	88.20	-51.82	-54.60	0.63	-53.97	-13.00	-40.97
3	181.32	-54.24	-59.47	3.08	-56.39	-13.00	-43.39
4	276.38	-57.00	-64.40	5.25	-59.15	-13.00	-46.15
5	367.56	-62.74	-70.10	5.21	-64.89	-13.00	-51.89
6	520.82	-68.49	-75.44	4.80	-70.64	-13.00	-57.64

REMARKS:

1. Power Value (dBm) = S.G Power Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).



A D T

Above 1GHz

GPRS

MODE	Channel 512	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	INPUT POWER	4.2Vdc
TESTED BY	Ted Chang		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3700.40	-53.40	-49.30	7.10	-42.20	-13.00	-29.20
2	5550.60	-50.80	-39.90	6.80	-33.10	-13.00	-20.10
3	7400.80	-61.30	-44.10	4.30	-39.80	-13.00	-26.80
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3700.40	-55.00	-51.10	7.10	-44.00	-13.00	-31.00
2	5550.60	-49.00	-39.60	6.80	-32.80	-13.00	-19.80
3	7400.80	-54.30	-37.80	4.30	-33.50	-13.00	-20.50

REMARKS:

1. Power Value (dBm) = S.G Power Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).



A D T

MODE	Channel 661	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	INPUT POWER	4.2Vdc
TESTED BY	Ted Chang		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3760.00	-49.90	-45.50	7.10	-38.40	-13.00	-25.40
2	5640.00	-50.20	-39.10	6.70	-32.40	-13.00	-19.40
3	7520.00	-58.90	-41.30	4.20	-37.10	-13.00	-24.10
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3760.00	-50.90	-46.90	7.10	-39.80	-13.00	-26.80
2	5640.00	-48.50	-38.70	6.70	-32.00	-13.00	-19.00
3	7520.00	-59.50	-42.70	4.20	-38.50	-13.00	-25.50

REMARKS:

1. Power Value (dBm) = S.G Power Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).



A D T

MODE	Channel 810	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	INPUT POWER	4.2Vdc
TESTED BY	Ted Chang		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3819.60	-49.60	-45.00	7.10	-37.90	-13.00	-24.90
2	5729.40	-49.50	-38.40	6.70	-31.70	-13.00	-18.70
3	7639.20	-60.80	-43.00	4.20	-38.80	-13.00	-25.80
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3819.60	-50.50	-46.40	7.10	-39.30	-13.00	-26.30
2	5729.40	-50.50	-40.30	6.70	-33.60	-13.00	-20.60
3	7639.20	-61.00	-44.10	4.20	-39.90	-13.00	-26.90

REMARKS:

1. Power Value (dBm) = S.G Power Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).



A D T

EDGE

MODE	Channel 512	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	INPUT POWER	4.2Vdc
TESTED BY	Ted Chang		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3700.40	-54.03	-49.94	7.16	-42.78	-13.00	-29.78
2	5550.60	-51.43	-40.48	6.78	-33.70	-13.00	-20.70
3	7400.80	-61.65	-44.49	4.31	-40.18	-13.00	-27.18
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3700.40	-55.63	-51.76	7.16	-44.60	-13.00	-31.60
2	5550.60	-49.41	-39.96	6.78	-33.18	-13.00	-20.18
3	7400.80	-54.66	-38.17	4.31	-33.86	-13.00	-20.86

REMARKS:

1. Power Value (dBm) = S.G Power Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).



A D T

MODE	Channel 661	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	INPUT POWER	4.2Vdc
TESTED BY	Ted Chang		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3760.00	-50.40	-46.05	7.10	-38.95	-13.00	-25.95
2	5640.00	-50.58	-39.58	6.77	-32.81	-13.00	-19.81
3	7520.00	-59.61	-42.07	4.23	-37.84	-13.00	-24.84
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3760.00	-51.93	-47.92	7.10	-40.82	-13.00	-27.82
2	5640.00	-49.04	-39.27	6.77	-32.50	-13.00	-19.50
3	7520.00	-59.69	-42.94	4.23	-38.71	-13.00	-25.71

REMARKS:

1. Power Value (dBm) = S.G Power Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).



A D T

MODE	Channel 810	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	INPUT POWER	4.2Vdc
TESTED BY	Ted Chang		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3819.60	-50.00	-45.39	7.05	-38.34	-13.00	-25.34
2	5729.40	-50.64	-39.56	6.74	-32.82	-13.00	-19.82
3	7639.20	-61.31	-43.54	4.20	-39.34	-13.00	-26.34
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3819.60	-51.10	-46.96	7.05	-39.91	-13.00	-26.91
2	5729.40	-51.01	-40.89	6.74	-34.15	-13.00	-21.15
3	7639.20	-62.31	-45.39	4.20	-41.19	-13.00	-28.19

REMARKS:

1. Power Value (dBm) = S.G Power Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).



A D T

WCDMA

MODE	Channel 9262	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	INPUT POWER	4.2Vdc
TESTED BY	Ted Chang		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3704.80	-50.32	-48.36	7.15	-41.21	-13.00	-28.21
2	5557.20	-55.21	-46.40	6.78	-39.62	-13.00	-26.62
3	7409.60	-55.94	-40.91	4.31	-36.60	-13.00	-23.60
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3704.80	-51.49	-49.76	7.15	-42.61	-13.00	-29.61
2	5557.20	-53.86	-46.54	6.78	-39.76	-13.00	-26.76
3	7409.60	-55.28	-40.93	4.31	-36.62	-13.00	-23.62

REMARKS:

1. Power Value (dBm) = S.G Power Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).



A D T

MODE	Channel 9400	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	INPUT POWER	4.2Vdc
TESTED BY	Ted Chang		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3760.00	-50.00	-47.80	7.10	-40.70	-13.00	-27.70
2	5640.00	-52.88	-44.03	6.77	-37.26	-13.00	-24.26
3	7520.00	-53.70	-38.31	4.23	-34.08	-13.00	-21.08
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3760.00	-50.47	-48.61	7.10	-41.51	-13.00	-28.51
2	5640.00	-53.50	-45.88	6.77	-39.11	-13.00	-26.11
3	7520.00	-55.56	-40.96	4.23	-36.73	-13.00	-23.73

REMARKS:

1. Power Value (dBm) = S.G Power Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).



A D T

MODE	Channel 9538	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	INPUT POWER	4.2Vdc
TESTED BY	Ted Chang		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3815.20	-50.50	-48.07	7.06	-41.01	-13.00	-28.01
2	5722.80	-52.70	-43.78	6.74	-37.04	-13.00	-24.04
3	7630.40	-55.31	-39.71	4.20	-35.51	-13.00	-22.51
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3815.20	-50.72	-48.75	7.06	-41.69	-13.00	-28.69
2	5722.80	-52.67	-44.73	6.74	-37.99	-13.00	-24.99
3	7630.40	-55.08	-40.32	4.20	-36.12	-13.00	-23.12

REMARKS:

1. Power Value (dBm) = S.G Power Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).



A D T

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).

6 INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.



A D T

7 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---