



Introduction

RE2300 remote control is dainty and delicate, easy to carry. It can be attached to your key ring, or just put into your pockets or purses. When you are about to exit or entry the house, you can use it to arm or disarm the system, In case of emergency, press the [SOS] button, the alarm will be activated immediately.

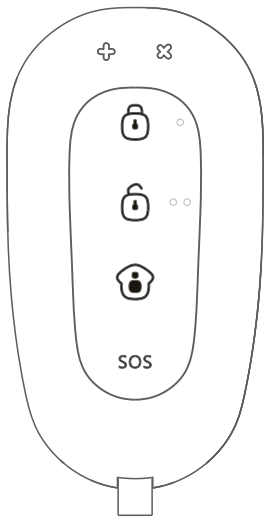

Overview

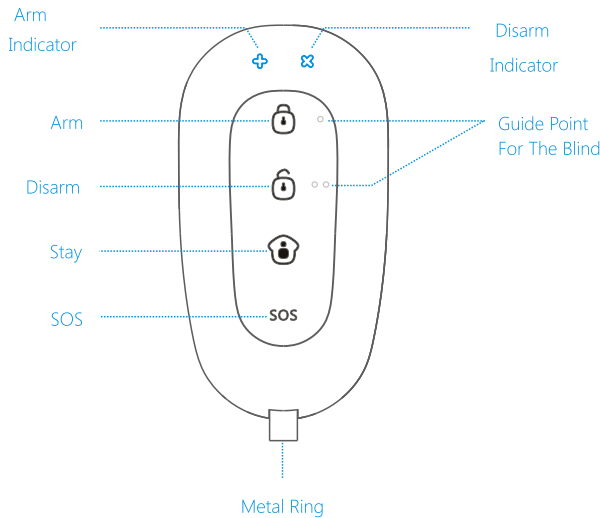

LED Indication

- + LED flashes once: Armed or in home mode
- × LED flashes once: Disarmed
- +, × LEDs flashes once: SOS

Connect Remote Control

Connect the remote control is to build a wireless connection between the remote control and the control panel.

- Control panel enters connecting state (For details, please refer to the relative user manual).
- Press any key on the remote control, the control panel beeps once, indicating a successful connection.

Note: If the control panel beeps twice when the above operation is done, it means the remote control has been connected before.

Operating Instructions

Icon	Operation	Meaning
	Arm	Press this button, the control panel beeps once, indicating the whole system is armed.
	Disarm	Press this button, the control panel beeps twice, then the system is disarmed except those sensors in the 24-hour zone.
	Stay	Press this button, all the sensors in home mode will enter disarm status. While other sensors remain in arm status, then user can move freely in the home zone.
	SOS	Press this button, the system will enter alarm state immediately.
	Mute Arm	Press the [Stay] button for 1 second, then press the [Arm] button within 3 seconds, the system is armed silently.
	Mute Disarm	Press the [Stay] button for 1 second, then press the [Disarm] button within 3 seconds, the system is disarmed silently.

Specifications

- Power Supply** DC 3V (CR2032 lithium button cell battery × 1)
- Transmit Current** ≤ 9.5mA
- Transmitting Distance** ≤ 80m (Open area/ no interference)
- Radio Frequency** 868MHz
- Housing Material** PC plastic
- Operation Condition**
 - Temperature -10°C ~ +55°C
 - Relative Humidity ≤ 80% (non-condensing)
- Dimensions** 71 x 38 x 12 mm

Federal Communications Commission (FCC) Interference Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generate, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

RF exposure warning

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment.

The equipment must not be co-located or operating in conjunction with any other antenna or transmitter.