



802.11ax (40 MHz) / Ant.0 / 2422 MHz (Band Edge)

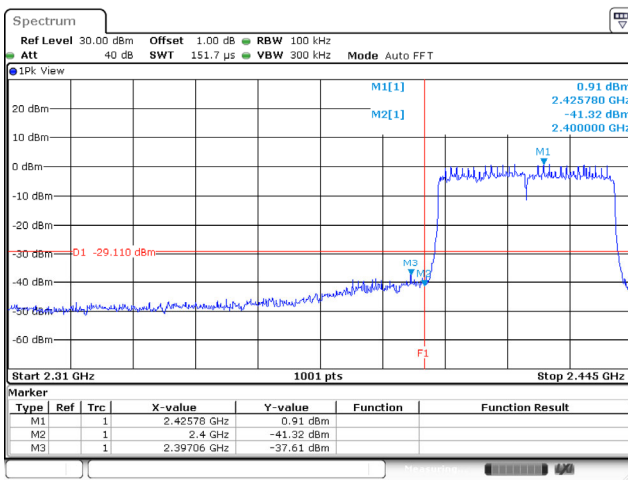


Date: 2.NOV.2023 08:53:22

802.11 ax (40 MHz) / Ant.0 / 2427 MHz (Band Edge)

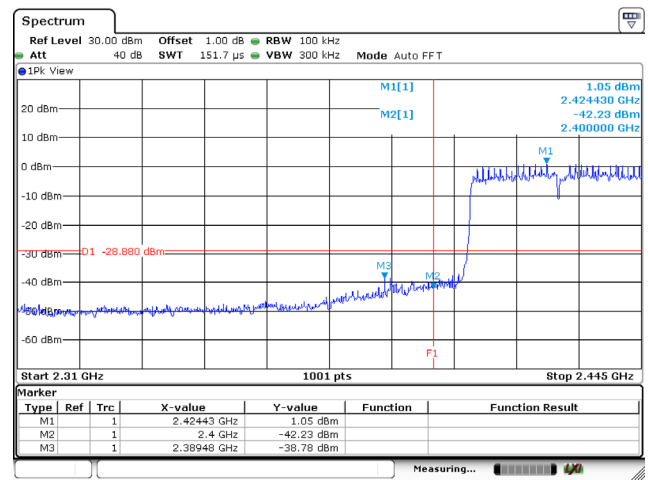


Date: 2.NOV.2023 10:41:39

802.11 ax (40 MHz) / Ant.0 / 2447 MHz (Band Edge)

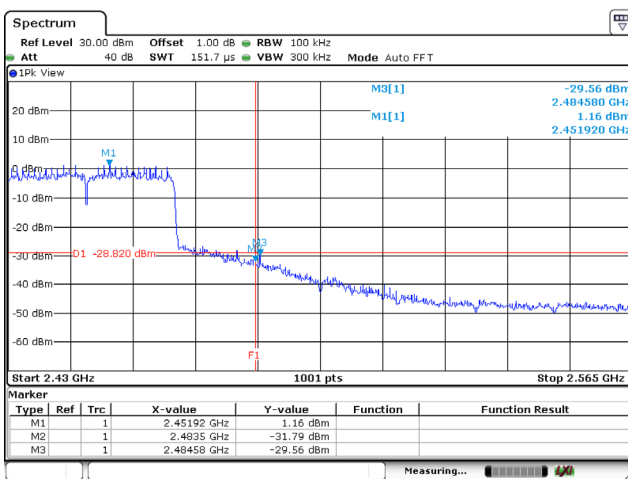


Date: 2.NOV.2023 10:33:06

802.11 ax (40 MHz) / Ant.0 / 2452 MHz (Band Edge)

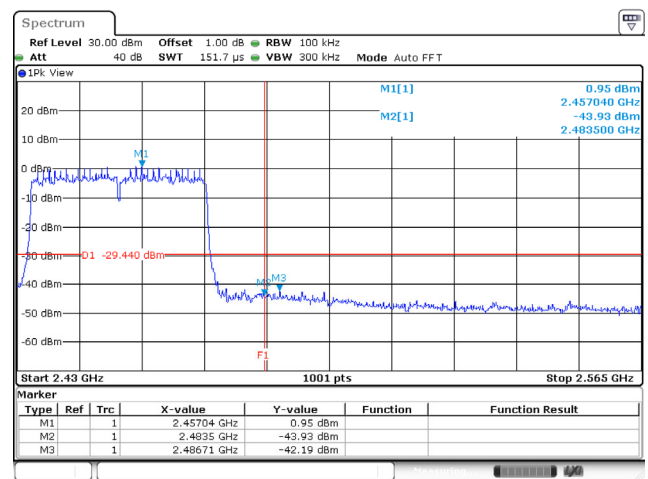


Date: 2.NOV.2023 08:58:01

802.11 ax (40 MHz) / Ant.1 / 2422 MHz (Band Edge)

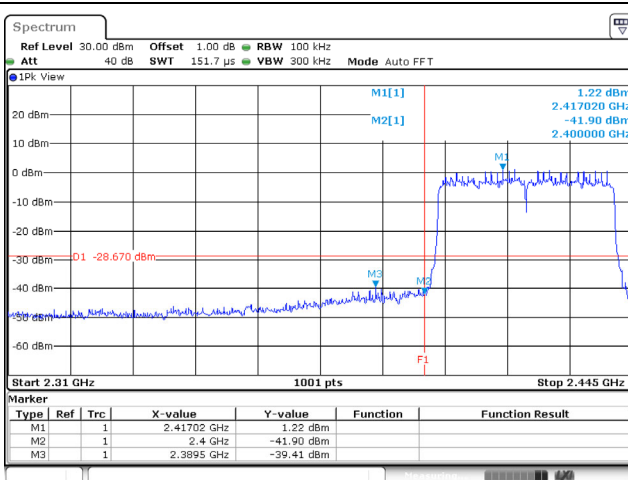


Date: 2.NOV.2023 09:22:02

802.11 ax (40 MHz) / Ant.1 / 2427 MHz (Band Edge)

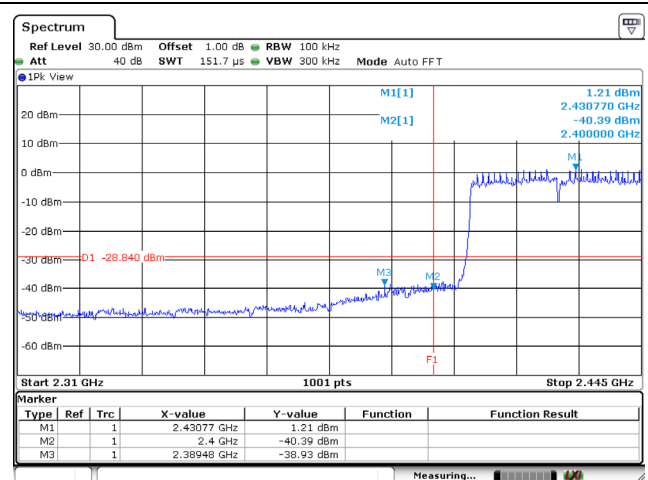


Date: 2.NOV.2023 10:40:15

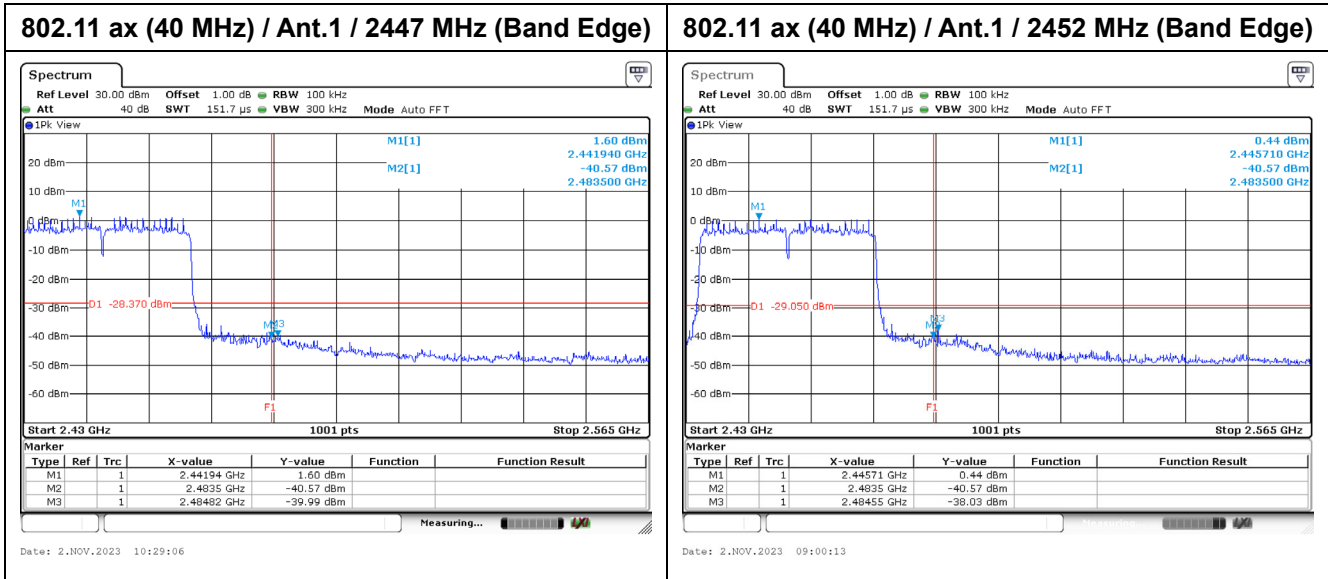

Appendix F. Test Result of Transmitter Radiated Spurious Emission


30 MHz ~ 1 GHz

Mode 1: EUT + Adapter 1

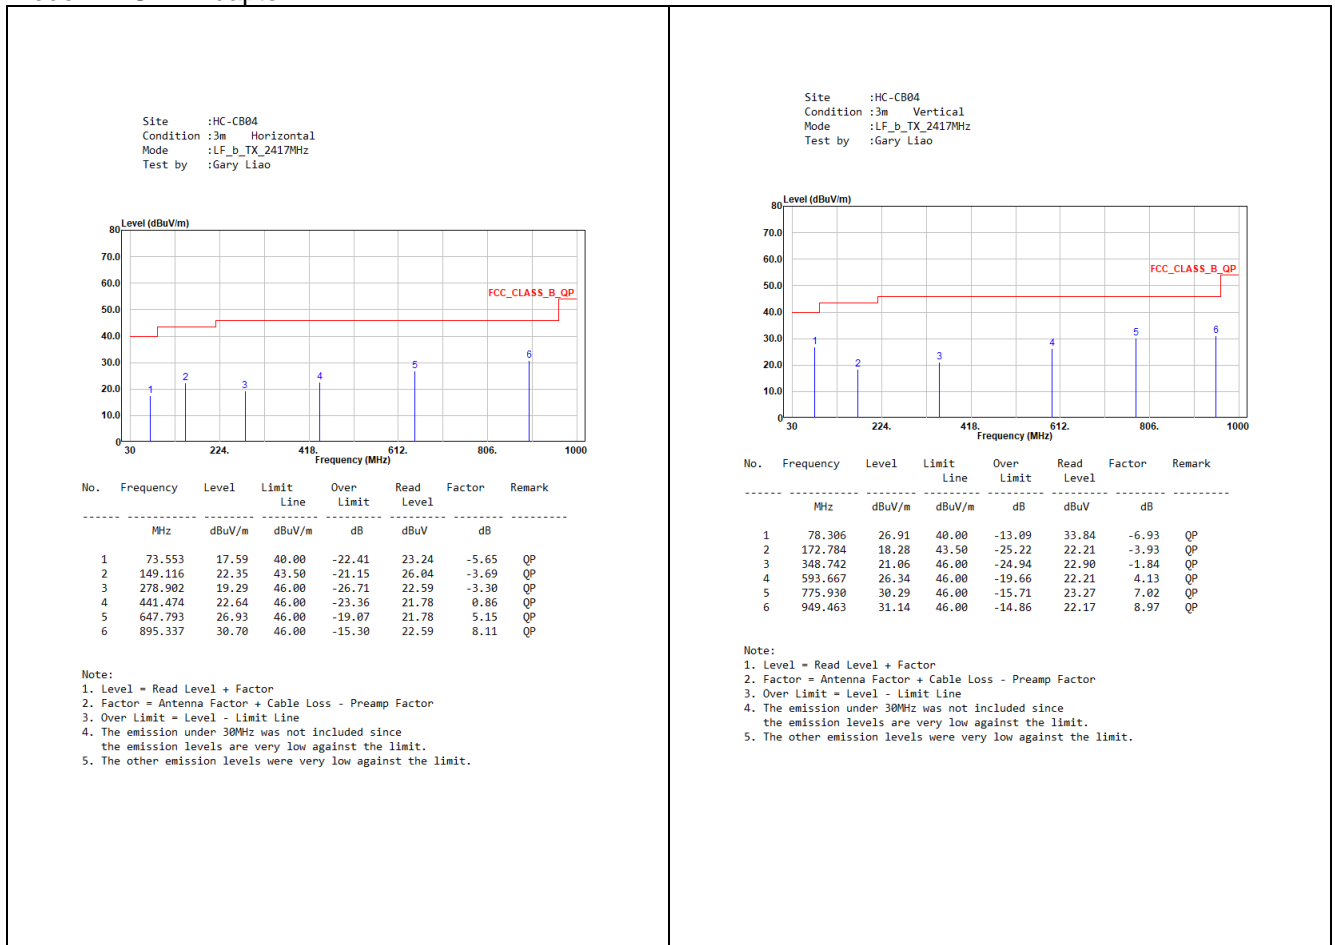

Mode 2: EUT + Adapter 2

Site :HC-CB04
 Condition :3m Horizontal
 Mode :LF_b_TX_2417MHz
 Test by :Gary Liao

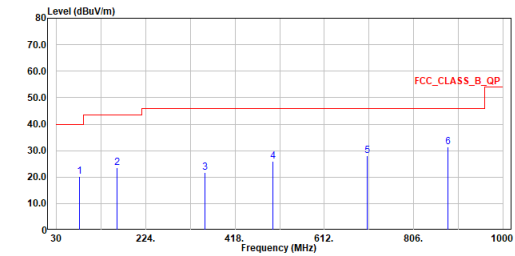


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	79.373	20.28	40.00	-19.72	27.60	-7.32	QP
2	161.144	23.55	43.50	-19.95	26.84	-3.29	QP
3	353.301	21.64	46.00	-24.36	23.37	-1.73	QP
4	499.965	25.85	46.00	-20.15	23.92	1.93	QP
5	705.799	28.01	46.00	-17.99	22.17	5.84	QP
6	879.720	31.46	46.00	-14.54	23.59	7.87	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m Vertical
 Mode :LF_b_TX_2417MHz
 Test by :Gary Liao

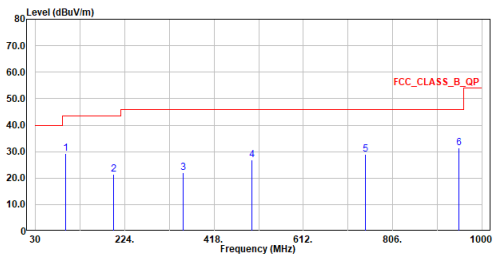


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	95.960	29.30	43.50	-14.20	38.00	-8.70	QP
2	199.362	21.54	43.50	-21.96	28.38	-6.84	QP
3	350.876	22.09	46.00	-23.91	23.88	-1.79	QP
4	499.965	26.95	46.00	-19.05	25.02	1.93	QP
5	747.315	29.01	46.00	-16.99	22.27	6.74	QP
6	949.269	31.50	46.00	-14.50	22.53	8.97	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.

Above 1 GHz


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :b_TX_2412MHz
 Test by :Gary Liao

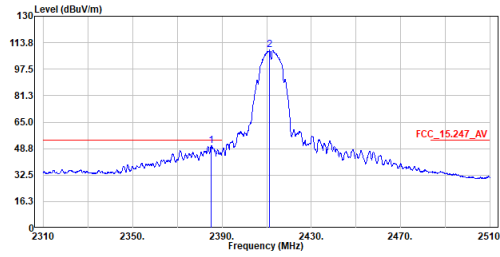

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2385.200	50.68	54.00	-3.32	40.12	10.56	Average
2	2411.200	109.16	-----	-----	98.48	10.68	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :b_TX_2412MHz
 Test by :Gary Liao

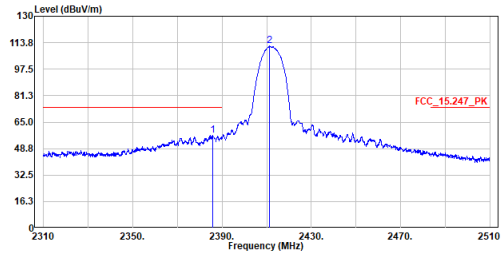

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2385.900	56.83	74.00	-17.17	46.26	10.57	Peak
2	2411.200	111.64	-----	-----	100.96	10.68	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :b_TX_2412MHz
 Test by :Gary Liao

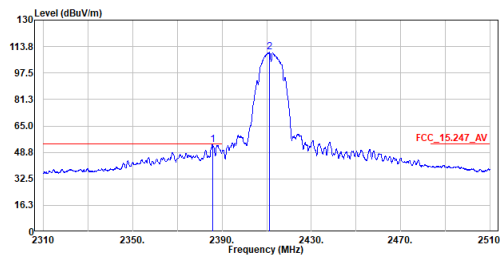

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2385.700	53.50	54.00	-0.50	42.94	10.56	Average
2	2411.200	110.32	-----	-----	99.64	10.68	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :b_TX_2412MHz
 Test by :Gary Liao

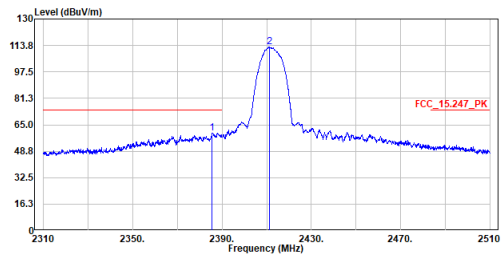

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2385.600	60.08	74.00	-13.92	49.52	10.56	Peak
2	2411.200	112.76	-----	-----	102.08	10.68	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :b_TX_2412MHz
 Test by :Gary Liao

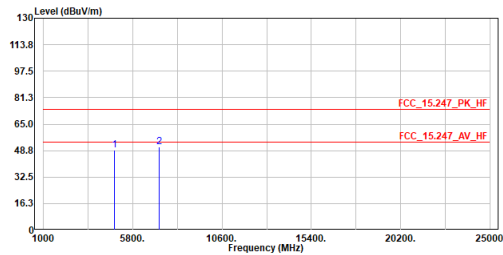

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4824.000	49.21	74.00	-24.79	67.04	-17.83	Peak
2	7236.000	50.86	74.00	-23.14	63.59	-12.73	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :b_TX_2412MHz
 Test by :Gary Liao

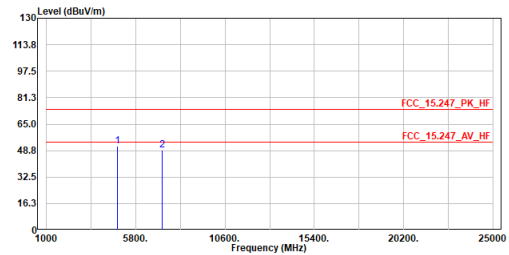

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4824.000	51.63	74.00	-22.37	69.46	-17.83	Peak
2	7236.000	49.14	74.00	-24.86	61.87	-12.73	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :b_TX_2417MHz
 Test by :Gary Liao

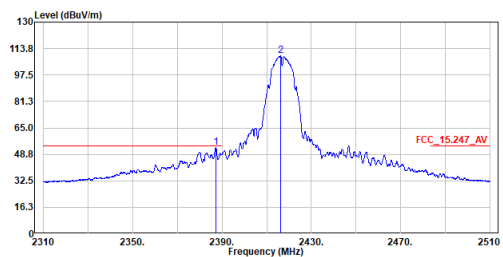

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2387.200	53.13	54.00	-0.87	42.55	10.58	Average
2	2416.300	109.28	-----	-----	98.58	10.70	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :b_TX_2417MHz
 Test by :Gary Liao

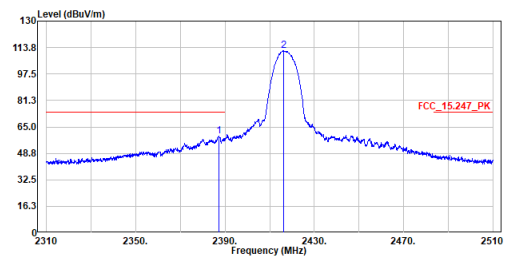

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2387.400	59.19	74.00	-14.81	48.61	10.58	Peak
2	2416.200	111.91	-----	-----	101.21	10.70	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :b_TX_2417MHz
 Test by :Gary Liao

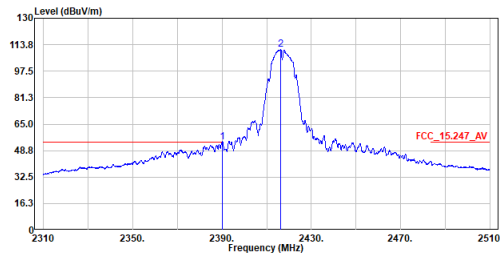


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2390.000	53.97	54.00	-0.03	43.38	10.59	Average
2	2416.200	111.09	-----	-----	100.39	10.70	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :b_TX_2417MHz
 Test by :Gary Liao

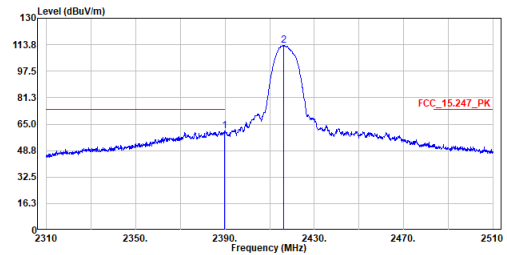


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2389.800	60.67	74.00	-13.33	50.08	10.59	Peak
2	2416.200	113.49	-----	-----	102.79	10.70	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :b_TX_2417MHz
 Test by :Gary Liao

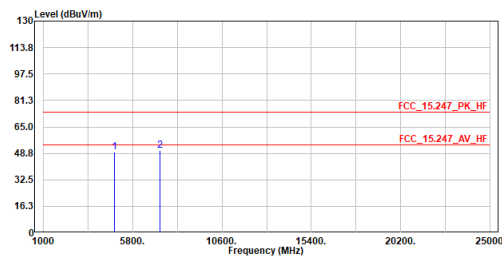


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	4834.000	49.43	74.00	-24.57	67.23	-17.80	Peak
2	7251.000	50.76	74.00	-23.24	63.47	-12.71	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :b_TX_2417MHz
 Test by :Gary Liao

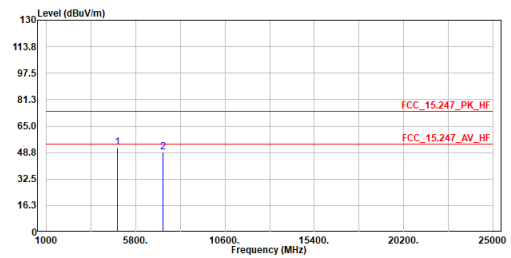


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	4834.000	51.84	74.00	-22.16	69.64	-17.80	Peak
2	7251.000	49.21	74.00	-24.79	61.92	-12.71	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :b_TX_2437MHz
 Test by :Gary Liao

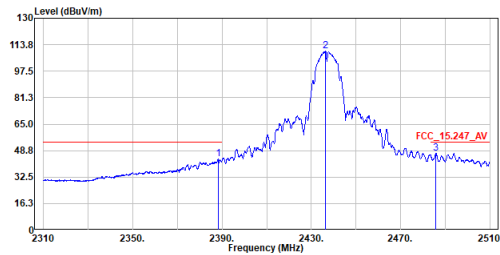


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2388.400	43.85	54.00	-10.15	33.27	10.58	Average
2	2436.300	109.77	-----	-----	98.98	10.79	Average
3	2485.700	47.04	54.00	-6.96	36.04	11.00	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :b_TX_2437MHz
 Test by :Gary Liao

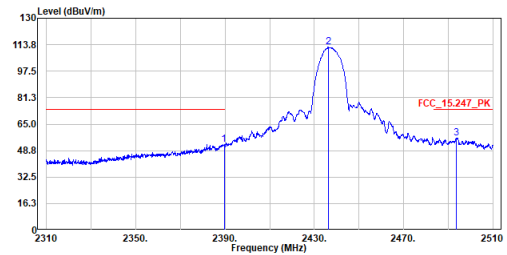


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.600	52.62	74.00	-21.38	42.03	10.59	Peak
2	2436.300	112.28	-----	-----	101.49	10.79	Peak
3	2493.700	56.65	74.00	-17.35	45.62	11.03	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :b_TX_2437MHz
 Test by :Gary Liao

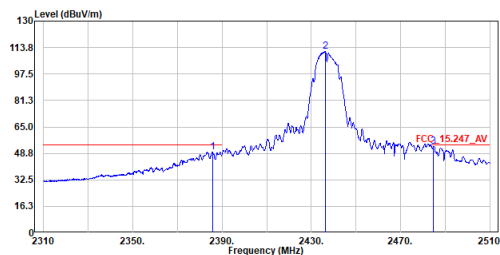


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2385.700	49.65	54.00	-4.35	39.09	10.56	Average
2	2436.200	111.34	-----	-----	100.55	10.79	Average
3	2484.800	53.12	54.00	-0.88	42.12	11.00	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :b_TX_2437MHz
 Test by :Gary Liao

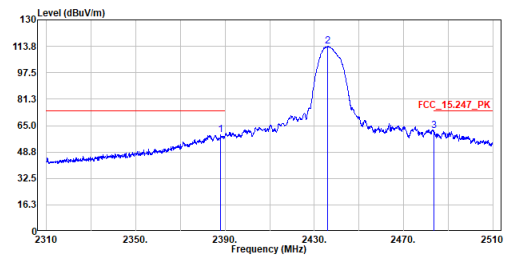


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2388.100	59.59	74.00	-14.41	49.01	10.58	Peak
2	2436.100	113.85	-----	-----	103.07	10.78	Peak
3	2483.700	61.86	74.00	-12.14	50.87	10.99	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :b_TX_2437MHz
 Test by :Gary Liao

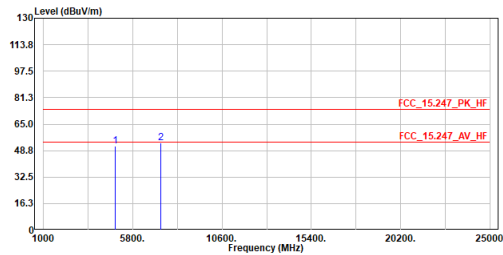

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4874.000	51.60	74.00	-22.40	69.27	-17.67	Peak
2	7311.000	53.24	74.00	-20.76	65.86	-12.62	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :b_TX_2437MHz
 Test by :Gary Liao

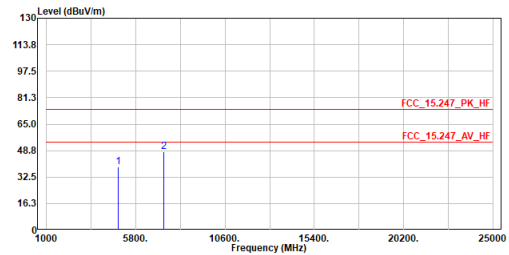

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4874.000	38.68	74.00	-35.32	56.35	-17.67	Peak
2	7311.000	48.26	74.00	-25.74	60.88	-12.62	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :b_TX_2457MHz
 Test by :Gary Liao

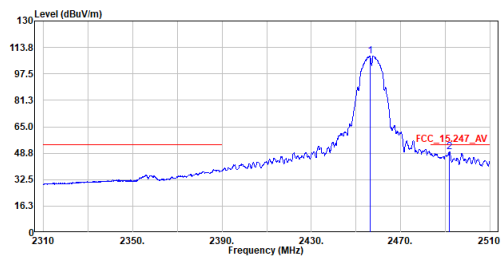

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2456.300	108.62	-----	-----	97.75	10.87	Average
2	2491.800	49.64	54.00	-4.36	38.61	11.03	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :b_TX_2457MHz
 Test by :Gary Liao

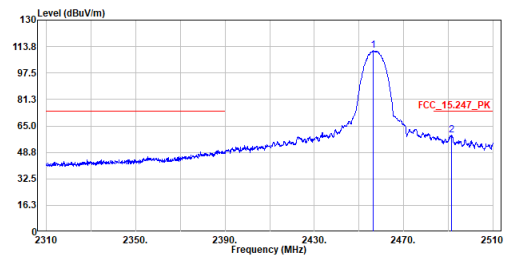

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2456.300	111.13	-----	-----	100.26	10.87	Peak
2	2491.600	59.25	74.00	-14.75	48.23	11.02	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :b_TX_2457MHz
 Test by :Gary Liao

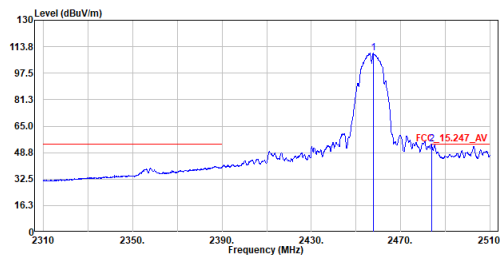

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2457.800	109.72	-----	-----	98.85	10.87	Average
2	2483.800	53.75	54.00	-0.25	42.76	10.99	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :b_TX_2457MHz
 Test by :Gary Liao

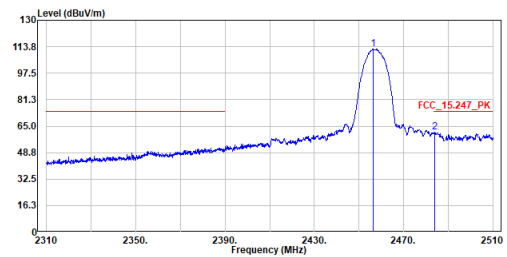

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2456.300	112.25	-----	-----	101.38	10.87	Peak
2	2484.100	61.38	74.00	-12.62	50.39	10.99	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :b_TX_2457MHz
 Test by :Gary Liao

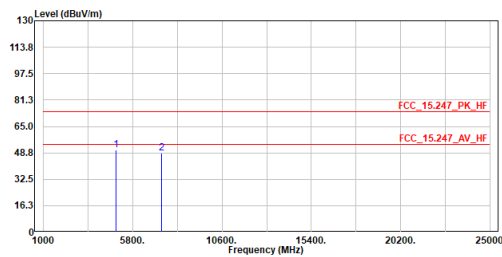

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4914.000	50.32	74.00	-23.68	67.88	-17.56	Peak
2	7371.000	48.70	74.00	-25.30	61.23	-12.53	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :b_TX_2457MHz
 Test by :Gary Liao

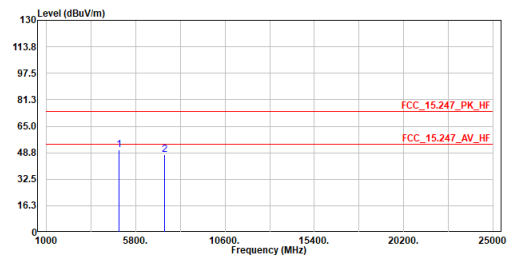

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4914.000	50.37	74.00	-23.63	67.93	-17.56	Peak
2	7371.000	47.47	74.00	-26.53	60.00	-12.53	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :b_TX_2462MHz
 Test by :Gary Liao

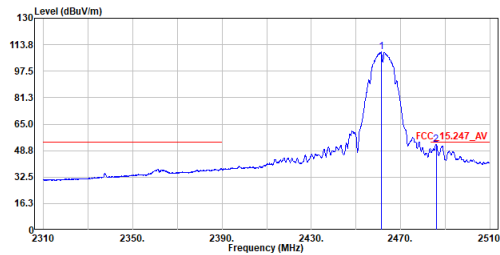

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2461.300	109.19	-----	-----	98.30	10.89	Average
2	2485.900	52.54	54.00	-1.46	41.54	11.00	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :b_TX_2462MHz
 Test by :Gary Liao

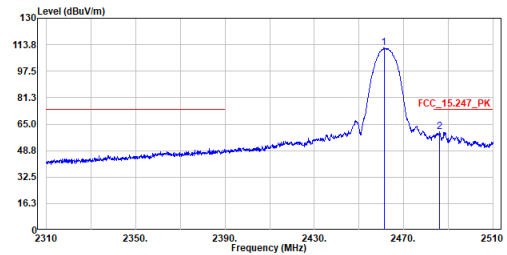

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2461.200	111.70	-----	-----	100.81	10.89	Peak
2	2486.100	60.31	74.00	-13.69	49.31	11.00	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :b_TX_2462MHz
 Test by :Gary Liao

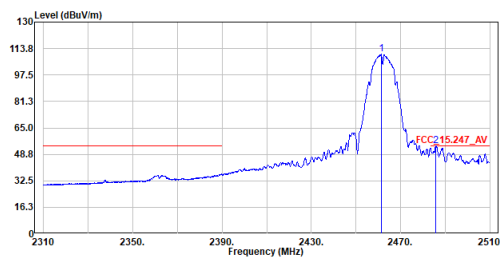

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2461.300	110.26	-----	-----	99.37	10.89	Average
2	2485.800	53.89	54.00	-0.11	42.89	11.00	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :b_TX_2462MHz
 Test by :Gary Liao

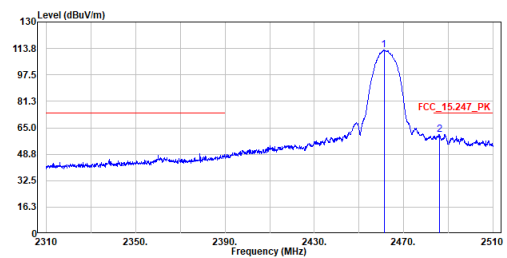

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2461.200	112.71	-----	-----	101.82	10.89	Peak
2	2486.100	61.06	74.00	-12.94	50.06	11.00	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :b_TX_2462MHz
 Test by :Gary Liao

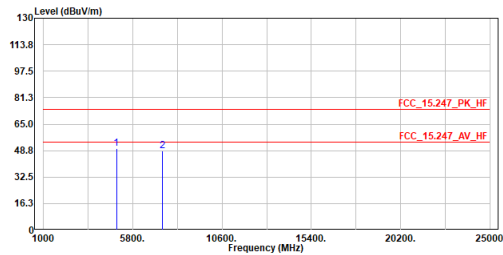

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4924.000	50.25	74.00	-23.75	67.77	-17.52	Peak
2	7386.000	48.43	74.00	-25.57	60.94	-12.51	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :b_TX_2462MHz
 Test by :Gary Liao

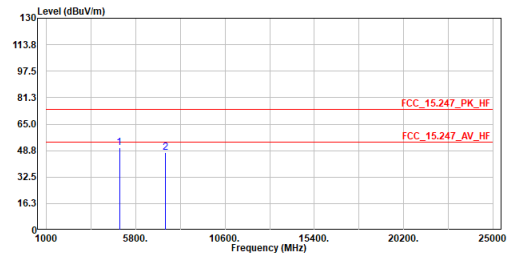

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4924.000	50.75	74.00	-23.25	68.27	-17.52	Peak
2	7386.000	47.50	74.00	-26.50	60.01	-12.51	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :g_TX_2412MHz
 Test by :Gary Liao

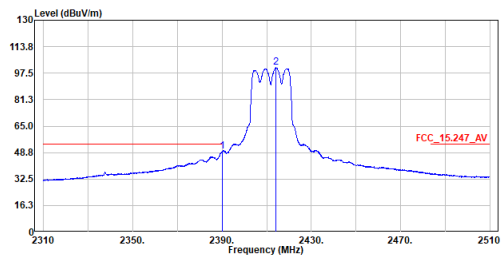

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2390.000	49.45	54.00	-4.55	38.86	10.59	Average
2	2414.100	100.83	-----	-----	90.14	10.69	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :g_TX_2412MHz
 Test by :Gary Liao

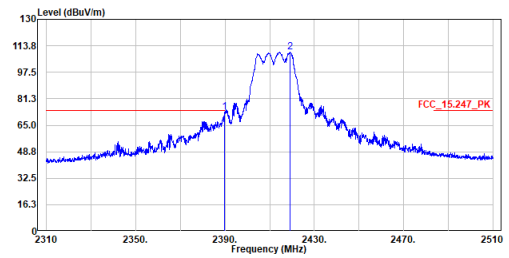

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.900	73.20	74.00	-0.80	62.61	10.59	Peak
2	2419.200	109.80	-----	-----	99.09	10.71	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :g_TX_2412MHz
 Test by :Gary Liao

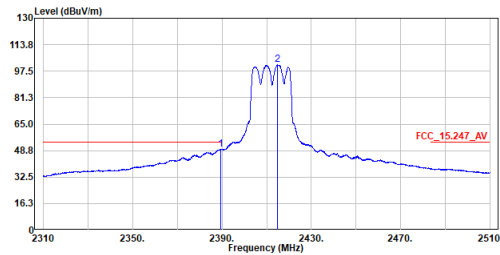


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.300	49.76	54.00	-4.24	39.17	10.59	Average
2	2414.900	101.32	-----	-----	90.62	10.70	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :g_TX_2412MHz
 Test by :Gary Liao

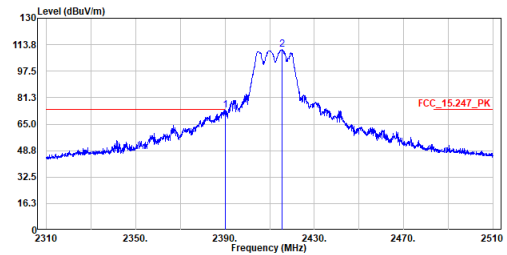


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2390.000	73.51	74.00	-0.49	62.92	10.59	Peak
2	2415.600	110.93	-----	-----	100.23	10.70	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :g_TX_2412MHz
 Test by :Gary Liao

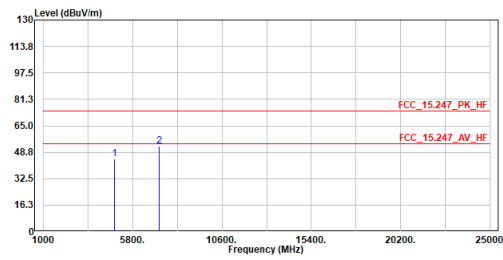


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4824.000	44.47	74.00	-29.53	62.30	-17.83	Peak
2	7236.000	52.33	74.00	-21.67	65.06	-12.73	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :g_TX_2412MHz
 Test by :Gary Liao

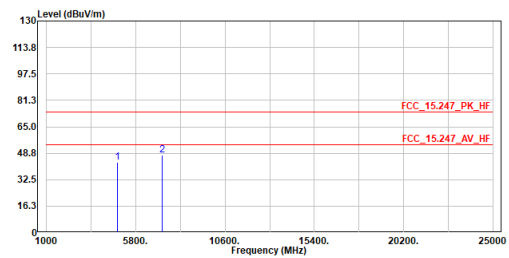


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4824.000	43.40	74.00	-30.60	61.23	-17.83	Peak
2	7236.000	47.47	74.00	-26.53	60.20	-12.73	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :g_TX_2417MHz
 Test by :Gary Liao

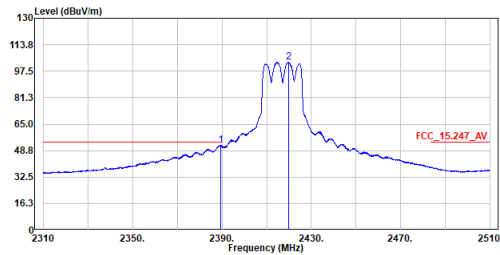

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.300	52.17	54.00	-1.83	41.58	10.59	Average
2	2419.700	103.02	-----	-----	92.30	10.72	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :g_TX_2417MHz
 Test by :Gary Liao

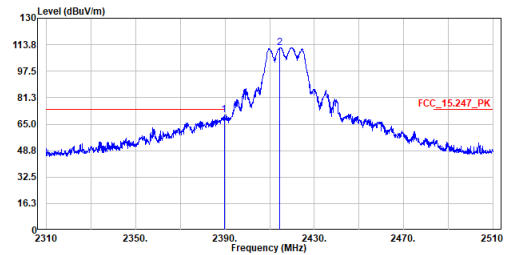

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.600	70.55	74.00	-3.45	59.96	10.59	Peak
2	2414.500	111.94	-----	-----	101.25	10.69	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :g_TX_2417MHz
 Test by :Gary Liao

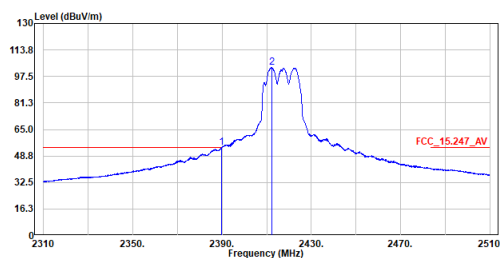

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.800	53.80	54.00	-0.20	43.21	10.59	Average
2	2412.200	103.26	-----	-----	92.58	10.68	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :g_TX_2417MHz
 Test by :Gary Liao

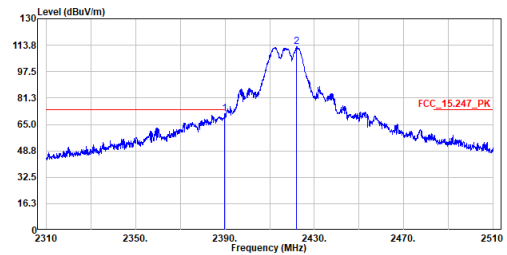

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.900	71.60	74.00	-2.40	61.01	10.59	Peak
2	2422.100	112.74	-----	-----	102.01	10.73	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :g_TX_2417MHz
 Test by :Gary Liao

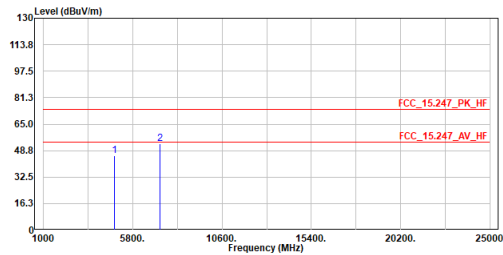

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4834.000	45.67	74.00	-28.33	63.47	-17.80	Peak
2	7251.000	52.83	74.00	-21.17	65.54	-12.71	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :g_TX_2417MHz
 Test by :Gary Liao

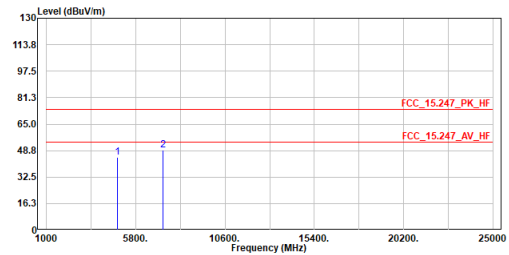

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4834.000	44.49	74.00	-29.51	62.29	-17.80	Peak
2	7251.000	48.87	74.00	-25.13	61.58	-12.71	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :g_TX_2437MHz
 Test by :Gary Liao

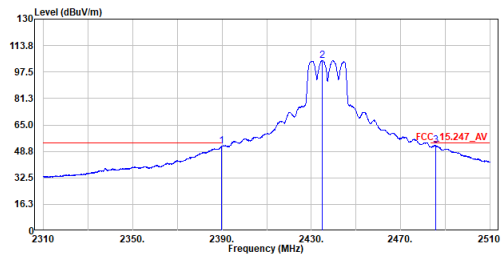

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.800	51.92	54.00	-2.08	41.33	10.59	Average
2	2435.000	104.67	-----	-----	93.89	10.78	Average
3	2485.600	52.32	54.00	-1.68	41.32	11.00	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :g_TX_2437MHz
 Test by :Gary Liao

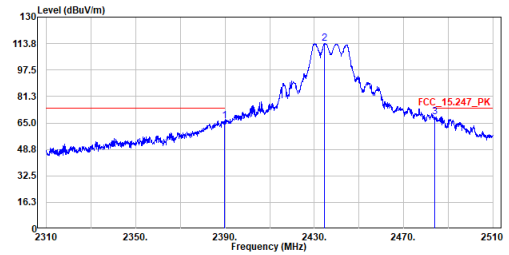

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.900	66.07	74.00	-7.93	55.48	10.59	Peak
2	2434.400	113.95	-----	-----	103.17	10.78	Peak
3	2483.900	68.80	74.00	-5.20	57.81	10.99	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :g_TX_2437MHz
 Test by :Gary Liao

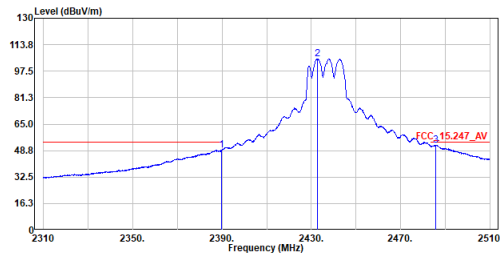


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.800	49.15	54.00	-4.85	38.56	10.59	Average
2	2432.800	105.03	-----	-----	94.26	10.77	Average
3	2485.600	52.07	54.00	-1.93	41.07	11.00	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :g_TX_2437MHz
 Test by :Gary Liao

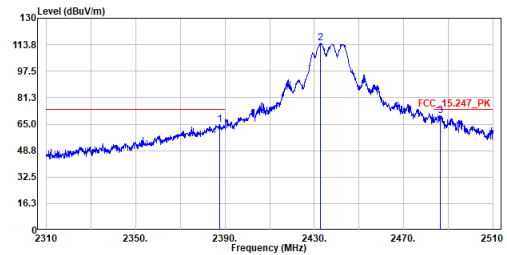


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2387.700	65.00	74.00	-9.00	54.42	10.58	Peak
2	2432.700	114.74	-----	-----	103.97	10.77	Peak
3	2486.300	70.14	74.00	-3.86	59.13	11.01	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :g_TX_2437MHz
 Test by :Gary Liao

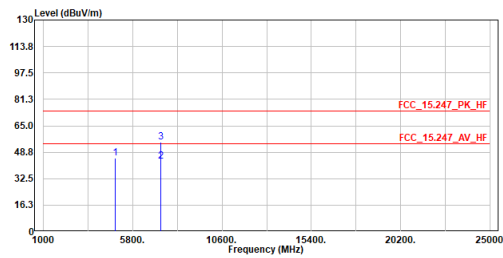


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4874.000	45.31	74.00	-28.69	62.98	-17.67	Peak
2	7311.000	43.38	54.00	-10.62	56.00	-12.62	Average
3	7311.000	55.10	74.00	-18.90	67.72	-12.62	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :g_TX_2437MHz
 Test by :Gary Liao

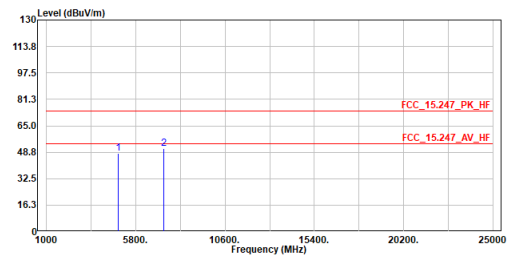


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4874.000	47.96	74.00	-26.04	65.63	-17.67	Peak
2	7311.000	50.85	74.00	-23.15	63.47	-12.62	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :g_TX_2457MHz
 Test by :Gary Liao

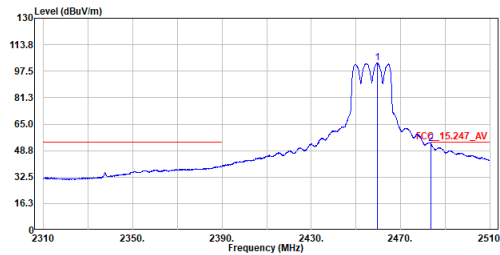


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2459.600	102.41	-----	-----	91.52	10.89	Average
2	2483.700	52.81	54.00	-1.19	41.82	10.99	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :g_TX_2457MHz
 Test by :Gary Liao

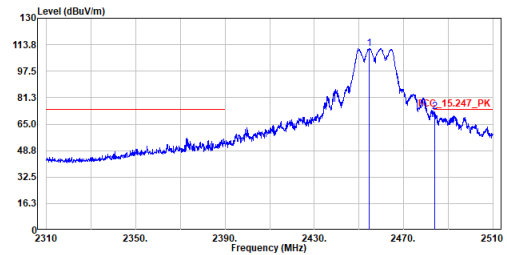


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2454.600	111.37	-----	-----	100.50	10.87	Peak
2	2483.900	72.45	74.00	-1.55	61.46	10.99	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :g_TX_2457MHz
 Test by :Gary Liao

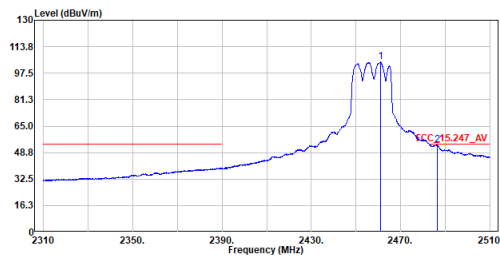


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2460.900	104.46	-----	-----	93.57	10.89	Average
2	2486.300	53.58	54.00	-0.42	42.57	11.01	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :g_TX_2457MHz
 Test by :Gary Liao

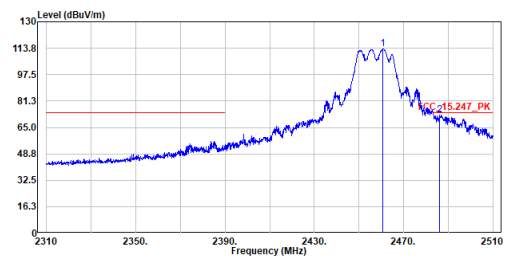


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2460.800	113.36	-----	-----	102.47	10.89	Peak
2	2486.000	72.69	74.00	-1.31	61.69	11.00	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :g_TX_2457MHz
 Test by :Gary Liao

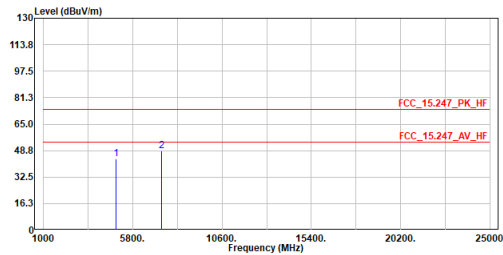

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4914.000	43.78	74.00	-30.22	61.34	-17.56	Peak
2	7371.000	48.51	74.00	-25.49	61.04	-12.53	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :g_TX_2457MHz
 Test by :Gary Liao

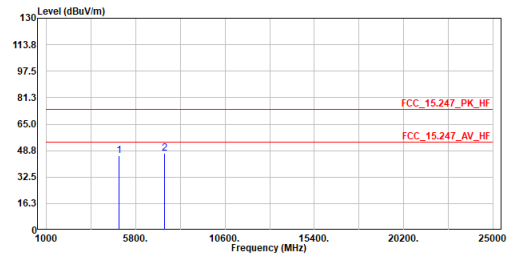

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4914.000	45.54	74.00	-28.46	63.10	-17.56	Peak
2	7371.000	47.06	74.00	-26.94	59.59	-12.53	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :g_TX_2462MHz
 Test by :Gary Liao

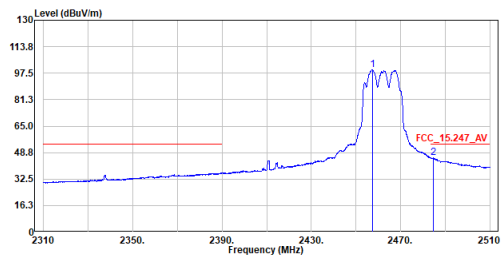

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2457.400	99.57	-----	-----	88.70	10.87	Average
2	2484.600	45.45	54.00	-8.55	34.45	11.00	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :g_TX_2462MHz
 Test by :Gary Liao

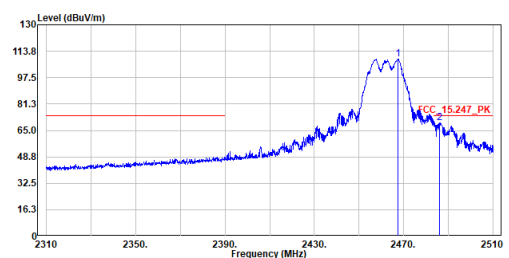

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2467.400	108.86	-----	-----	97.94	10.92	Peak
2	2486.100	69.82	74.00	-4.18	58.82	11.00	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :g_TX_2462MHz
 Test by :Gary Liao

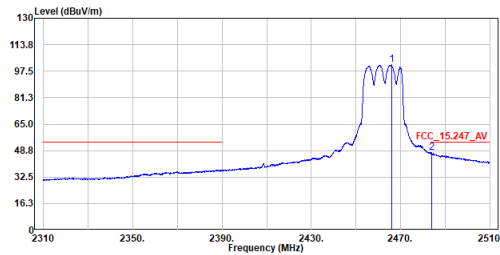


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2466.000	101.60	54.00	-6.60	90.68	10.92	Average
2	2483.800	47.40	54.00	-6.60	36.41	10.99	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :g_TX_2462MHz
 Test by :Gary Liao

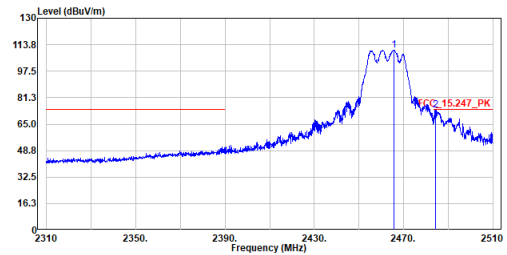


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2465.800	110.61	74.00	-0.53	99.69	10.92	Peak
2	2484.200	73.47	74.00	-0.53	62.47	11.00	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :g_TX_2462MHz
 Test by :Gary Liao

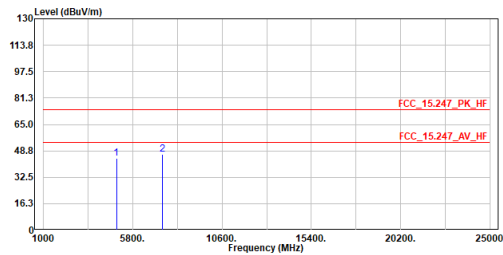


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4924.000	44.26	74.00	-29.74	61.78	-17.52	Peak
2	7386.000	46.70	74.00	-27.30	59.21	-12.51	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :g_TX_2462MHz
 Test by :Gary Liao

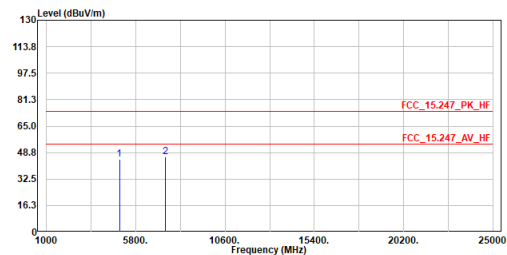


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4924.000	44.63	74.00	-29.37	62.15	-17.52	Peak
2	7386.000	45.88	74.00	-28.12	58.39	-12.51	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax20_TX_2412MHz
 Test by :Gary Liao

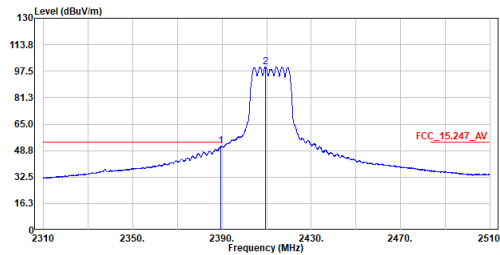

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.300	51.61	54.00	-2.39	41.02	10.59	Average
2	2409.300	100.27	-----	-----	89.59	10.68	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax20_TX_2412MHz
 Test by :Gary Liao

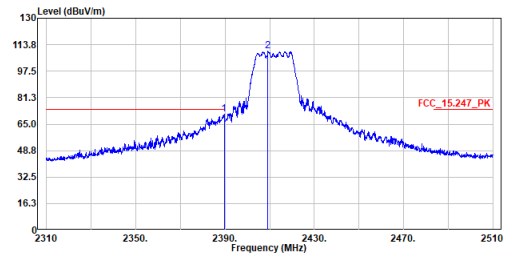

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.600	71.11	74.00	-2.89	60.52	10.59	Peak
2	2409.200	109.86	-----	-----	99.18	10.68	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax20_TX_2412MHz
 Test by :Gary Liao

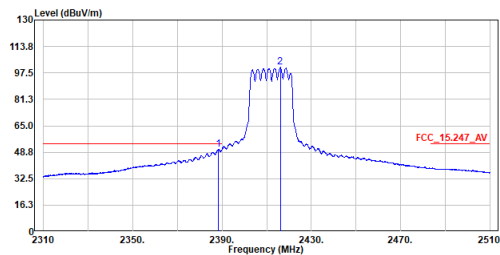

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2388.500	50.50	54.00	-3.50	39.92	10.58	Average
2	2416.100	100.89	-----	-----	90.19	10.70	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax20_TX_2412MHz
 Test by :Gary Liao

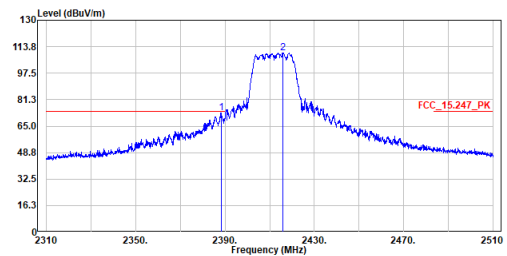

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2388.400	73.20	74.00	-0.80	62.62	10.58	Peak
2	2416.000	110.00	-----	-----	99.30	10.70	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax20_TX_2412MHz
 Test by :Gary Liao

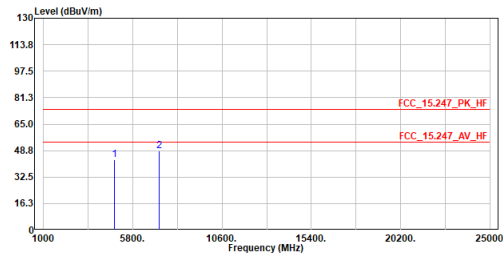

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4824.000	43.21	74.00	-30.79	61.04	-17.83	Peak
2	7236.000	48.79	74.00	-25.21	61.52	-12.73	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax20_TX_2412MHz
 Test by :Gary Liao

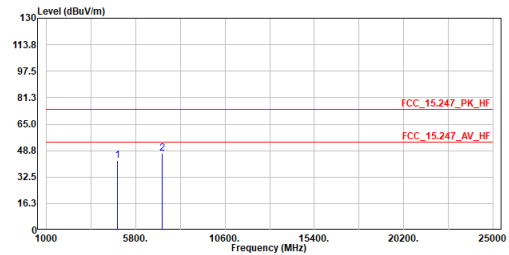

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4824.000	42.69	74.00	-31.31	60.52	-17.83	Peak
2	7236.000	47.18	74.00	-26.82	59.91	-12.73	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax20_TX_2417MHz
 Test by :Gary Liao

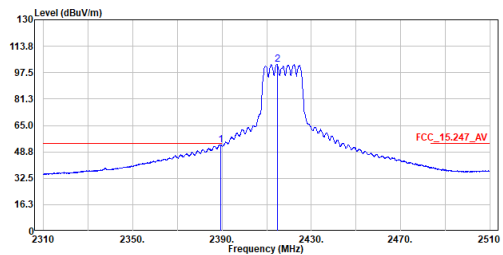

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.300	53.12	54.00	-0.88	42.53	10.59	Average
2	2414.700	102.61	-----	-----	91.91	10.70	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax20_TX_2417MHz
 Test by :Gary Liao

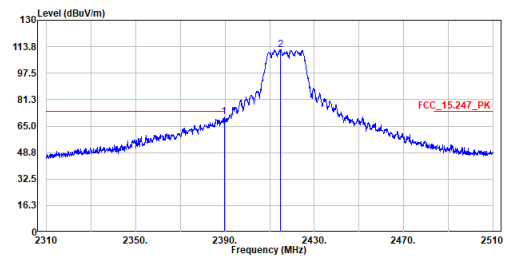

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.600	70.57	74.00	-3.43	59.98	10.59	Peak
2	2415.000	112.04	-----	-----	101.34	10.70	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax20_TX_2417MHz
 Test by :Gary Liao

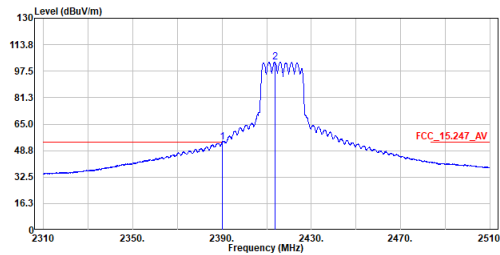

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2390.000	53.73	54.00	-0.27	43.14	10.59	Average
2	2413.600	103.13	-----	-----	92.45	10.68	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax20_TX_2417MHz
 Test by :Gary Liao

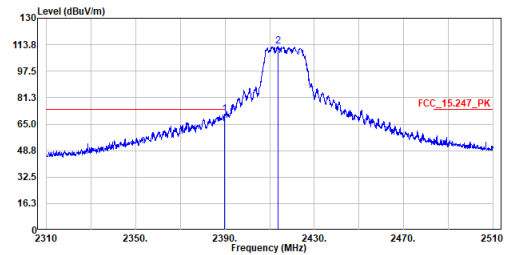

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.800	70.92	74.00	-3.08	60.33	10.59	Peak
2	2413.800	112.61	-----	-----	101.93	10.68	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax20_TX_2417MHz
 Test by :Gary Liao

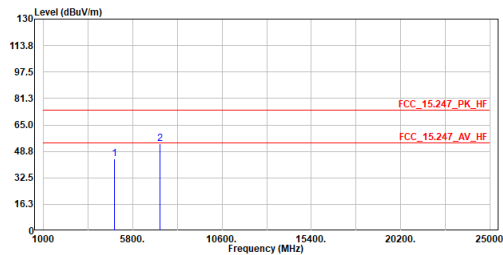

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4834.000	43.99	74.00	-30.01	61.79	-17.80	Peak
2	7251.000	53.27	74.00	-20.73	65.98	-12.71	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax20_TX_2417MHz
 Test by :Gary Liao

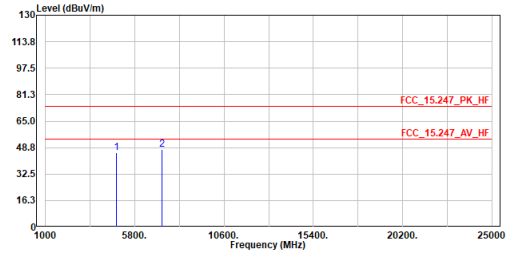

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4834.000	45.76	74.00	-28.24	63.56	-17.80	Peak
2	7251.000	47.72	74.00	-26.28	60.43	-12.71	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax20_TX_2437MHz
 Test by :Gary Liao

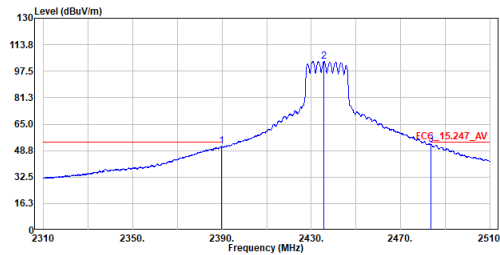


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.900	51.31	54.00	-2.69	40.72	10.59	Average
2	2435.600	103.44	-----	-----	92.66	10.78	Average
3	2483.600	52.40	54.00	-1.60	41.42	10.98	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax20_TX_2437MHz
 Test by :Gary Liao

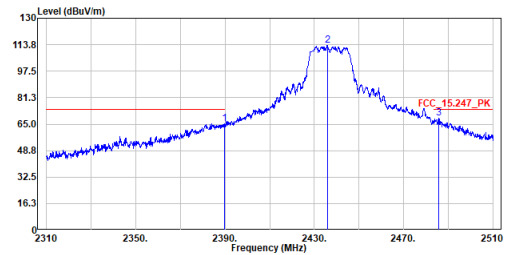


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.700	65.28	74.00	-8.72	54.69	10.59	Peak
2	2435.800	113.20	-----	-----	102.42	10.78	Peak
3	2485.600	68.57	74.00	-5.43	57.57	11.00	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax20_TX_2437MHz
 Test by :Gary Liao

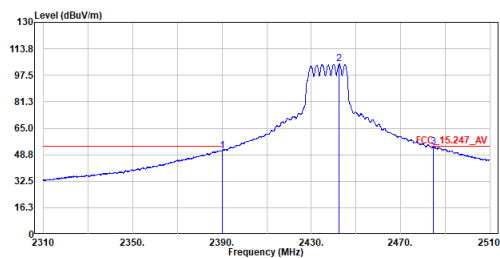


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2390.000	51.19	54.00	-2.81	40.60	10.59	Average
2	2442.500	104.30	-----	-----	93.48	10.82	Average
3	2484.600	53.69	54.00	-0.31	42.69	11.00	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax20_TX_2437MHz
 Test by :Gary Liao

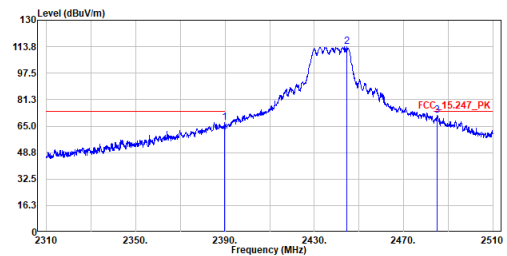


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.900	67.41	74.00	-6.59	56.82	10.59	Peak
2	2444.500	113.79	-----	-----	102.97	10.82	Peak
3	2485.000	71.58	74.00	-2.42	60.58	11.00	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax20_TX_2437MHz
 Test by :Gary Liao

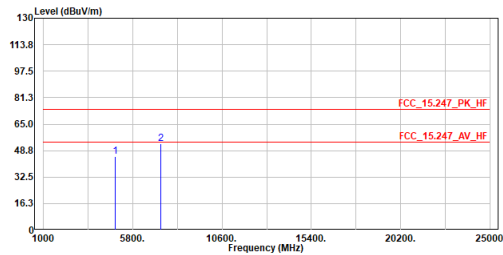

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4874.000	45.11	74.00	-28.89	62.78	-17.67	Peak
2	7311.000	52.93	74.00	-21.07	65.55	-12.62	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax20_TX_2437MHz
 Test by :Gary Liao

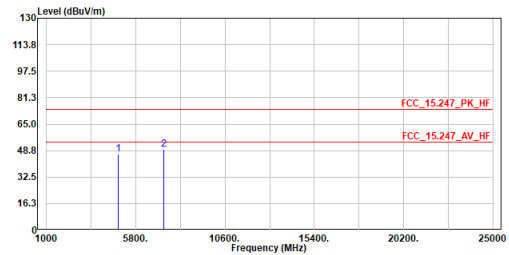

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4874.000	46.42	74.00	-27.58	64.09	-17.67	Peak
2	7311.000	49.36	74.00	-24.64	61.98	-12.62	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax20_TX_2457MHz
 Test by :Gary Liao

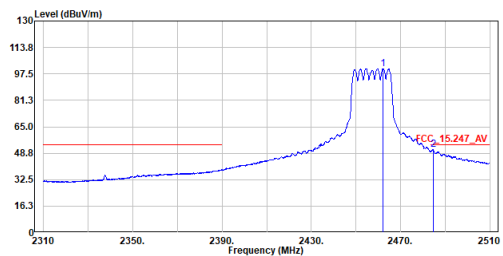

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2462.100	100.00	-----	-----	89.90	10.90	Average
2	2484.600	51.15	54.00	-2.85	48.15	11.00	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax20_TX_2457MHz
 Test by :Gary Liao

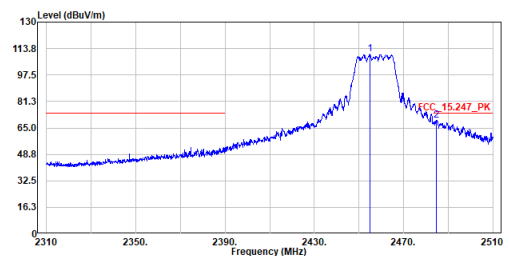

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2454.800	110.30	-----	-----	99.43	10.87	Peak
2	2484.600	69.90	74.00	-4.10	58.90	11.00	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax20_TX_2457MHz
 Test by :Gary Liao

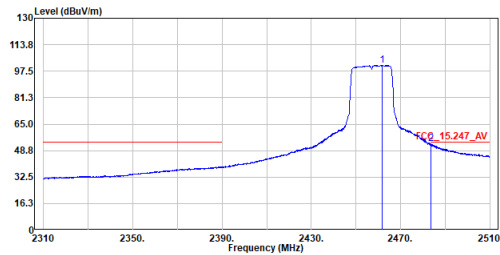


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2461.800	101.20	-----	-----	90.31	10.89	Average
2	2483.600	52.88	54.00	-1.12	41.90	10.98	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax20_TX_2457MHz
 Test by :Gary Liao

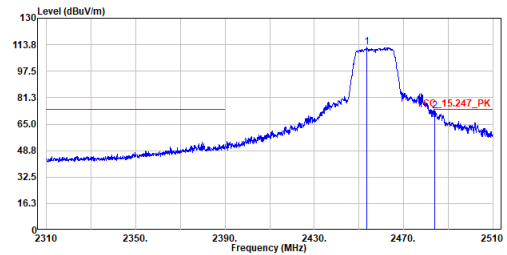


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2453.500	112.55	-----	-----	101.68	10.87	Peak
2	2483.900	73.09	74.00	-0.91	62.10	10.99	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax20_TX_2457MHz
 Test by :Gary Liao

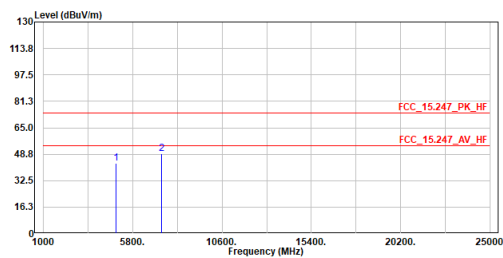


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4914.000	43.28	74.00	-30.72	60.84	-17.56	Peak
2	7371.000	49.27	74.00	-24.73	61.80	-12.53	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax20_TX_2457MHz
 Test by :Gary Liao

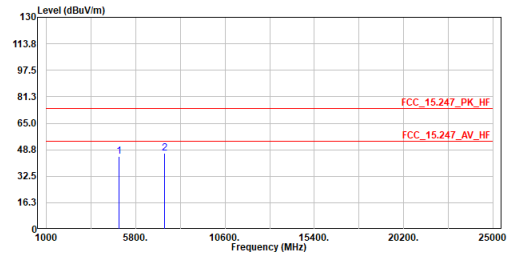


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4914.000	44.55	74.00	-29.45	62.11	-17.56	Peak
2	7371.000	46.02	74.00	-27.18	59.35	-12.53	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax20_TX_2462MHz
 Test by :Gary Liao

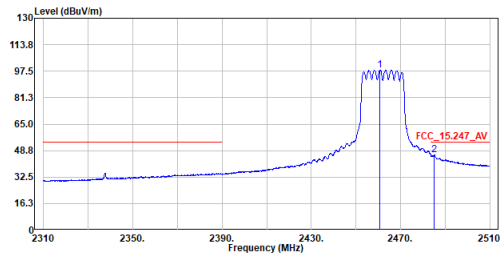

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2460.700	98.24	-----	-----	614.18	-515.94	Average
2	2485.000	46.34	54.00	-7.66	562.21	-515.87	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax20_TX_2462MHz
 Test by :Gary Liao

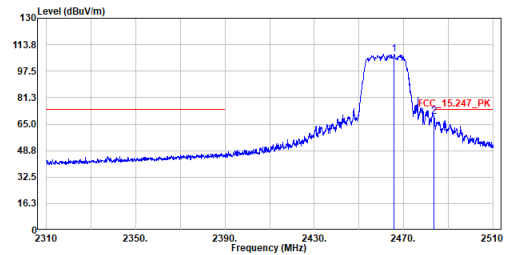

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2465.800	107.77	-----	-----	96.85	10.92	Peak
2	2483.600	69.51	74.00	-4.49	58.53	10.98	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax20_TX_2462MHz
 Test by :Gary Liao

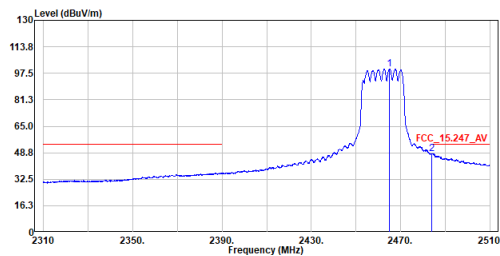

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2465.000	100.25	-----	-----	89.34	10.91	Average
2	2484.000	48.23	54.00	-5.77	37.24	10.99	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax20_TX_2462MHz
 Test by :Gary Liao

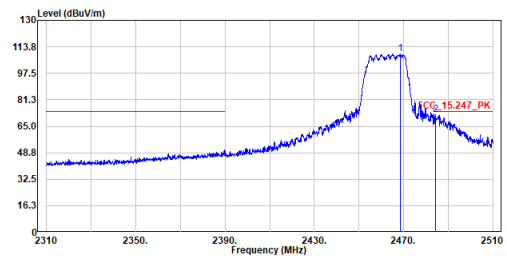

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2468.600	109.31	-----	-----	98.39	10.92	Peak
2	2484.300	71.94	74.00	-2.06	60.94	11.00	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax20_TX_2462MHz
 Test by :Gary Liao

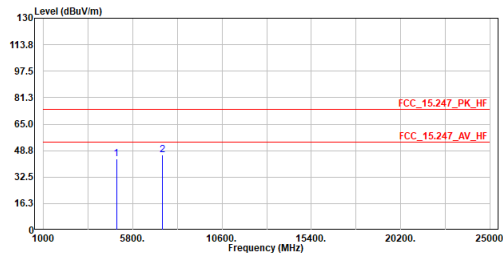

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4924.000	43.78	74.00	-30.22	61.30	-17.52	Peak
2	7386.000	46.28	74.00	-27.72	58.79	-12.51	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax20_TX_2462MHz
 Test by :Gary Liao

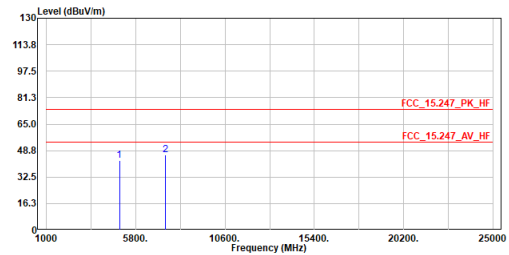

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4924.000	42.83	74.00	-31.17	60.35	-17.52	Peak
2	7386.000	46.28	74.00	-27.72	58.79	-12.51	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax40_TX_2422MHz
 Test by :Gary Liao

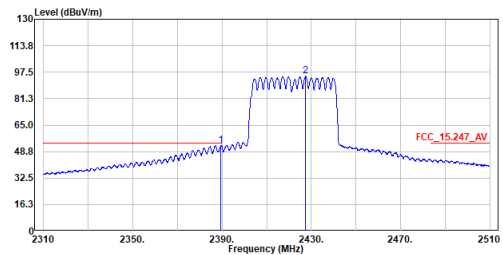

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.400	52.38	54.00	-1.62	41.79	10.59	Average
2	2427.500	94.94	-----	-----	84.19	10.75	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax40_TX_2422MHz
 Test by :Gary Liao

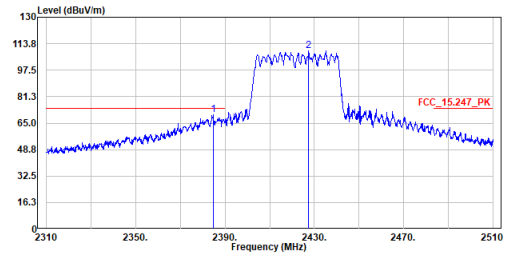

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2384.700	70.01	74.00	-3.99	59.45	10.56	Peak
2	2427.500	109.47	-----	-----	98.72	10.75	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax40_TX_2422MHz
 Test by :Gary Liao

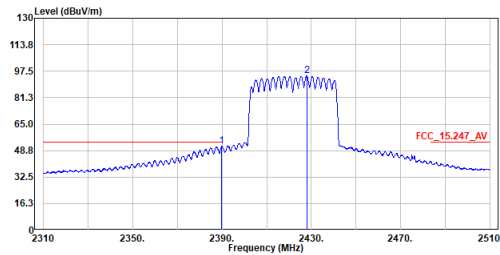

No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.900	51.74	54.00	-2.26	41.15	10.59	Average
2	2428.000	94.77	-----	-----	84.02	10.75	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax40_TX_2422MHz
 Test by :Gary Liao

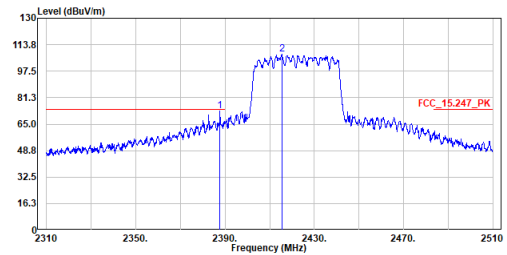

No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2387.800	72.98	74.00	-1.02	62.40	10.58	Peak
2	2415.500	107.85	-----	-----	97.15	10.70	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax40_TX_2422MHz
 Test by :Gary Liao

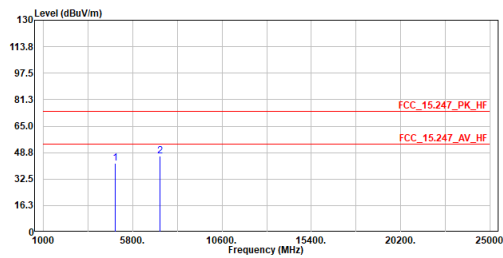

No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4844.000	42.08	74.00	-31.92	59.85	-17.77	Peak
2	7266.000	46.77	74.00	-27.23	59.46	-12.69	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax40_TX_2422MHz
 Test by :Gary Liao

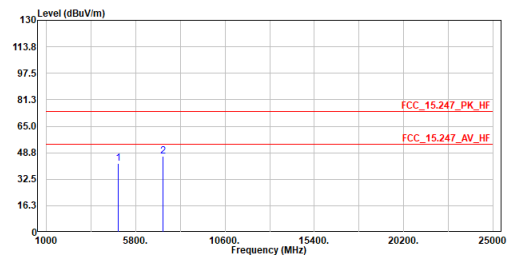

No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4844.000	42.07	74.00	-31.93	59.84	-17.77	Peak
2	7266.000	46.79	74.00	-27.21	59.48	-12.69	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax40_TX_2427MHz
 Test by :Gary Liao

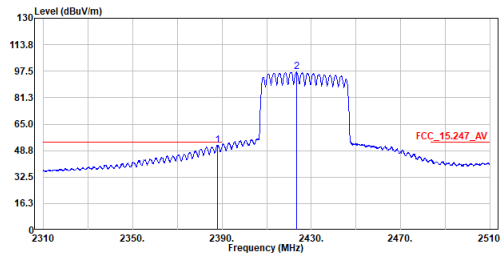

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2387.900	52.07	54.00	-1.93	41.49	10.58	Average
2	2423.500	96.94	-----	-----	86.21	10.73	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax40_TX_2427MHz
 Test by :Gary Liao

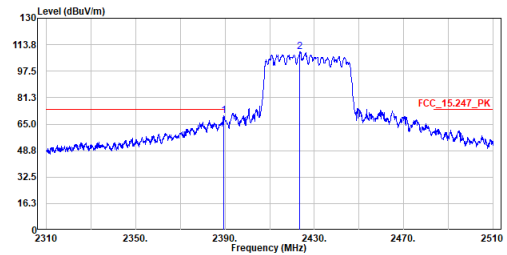

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2389.500	69.94	74.00	-4.06	59.35	10.59	Peak
2	2423.600	109.47	-----	-----	98.74	10.73	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax40_TX_2427MHz
 Test by :Gary Liao

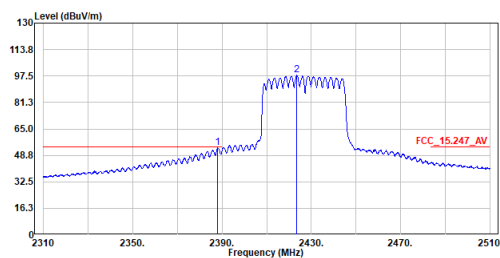

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2388.100	53.29	54.00	-0.71	42.71	10.58	Average
2	2423.500	98.00	-----	-----	87.27	10.73	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax40_TX_2427MHz
 Test by :Gary Liao

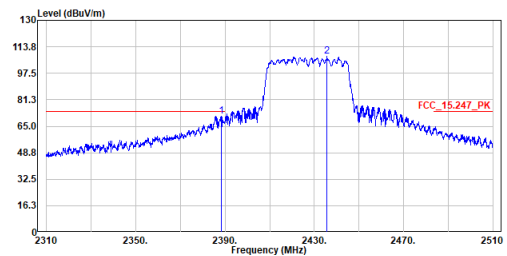

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2388.400	71.33	74.00	-2.67	60.75	10.58	Peak
2	2435.700	107.69	-----	-----	96.91	10.78	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax40_TX_2427MHz
 Test by :Gary Liao

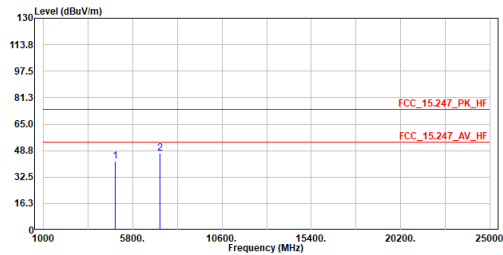

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4854.000	42.30	74.00	-31.70	60.04	-17.74	Peak
2	7281.000	46.87	74.00	-27.13	59.54	-12.67	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax40_TX_2427MHz
 Test by :Gary Liao

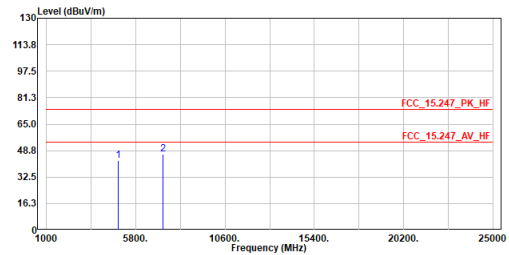

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4854.000	42.85	74.00	-31.15	60.59	-17.74	Peak
2	7281.000	46.58	74.00	-27.42	59.25	-12.67	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax40_TX_2437MHz
 Test by :Gary Liao

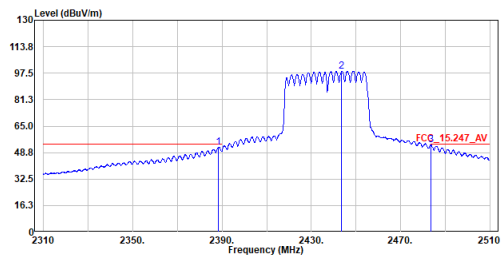

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2388.400	52.10	54.00	-1.90	41.52	10.58	Average
2	2443.600	98.83	-----	-----	88.01	10.82	Average
3	2483.700	53.45	54.00	-0.55	42.46	10.99	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax40_TX_2437MHz
 Test by :Gary Liao

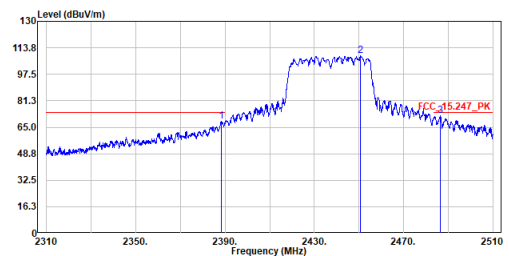

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2388.300	68.63	74.00	-5.37	58.05	10.58	Peak
2	2450.800	109.11	-----	-----	98.27	10.84	Peak
3	2486.400	71.90	74.00	-2.10	60.89	11.01	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax40_TX_2437MHz
 Test by :Gary Liao

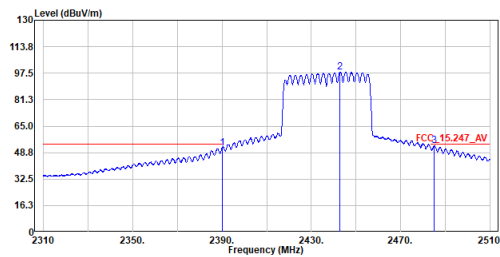


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2390.000	51.74	54.00	-2.26	41.15	10.59	Average
2	2442.700	98.15	-----	-----	87.33	10.82	Average
3	2485.100	52.99	54.00	-1.01	41.99	11.00	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax40_TX_2437MHz
 Test by :Gary Liao

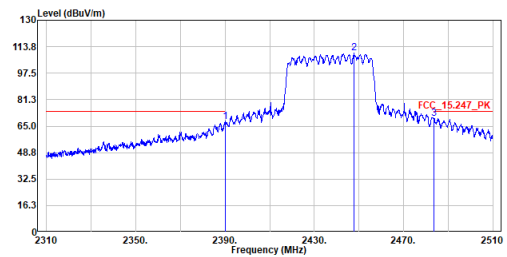


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2390.000	67.64	74.00	-6.36	57.05	10.59	Peak
2	2442.700	109.77	-----	-----	98.93	10.84	Peak
3	2483.600	69.86	74.00	-4.14	58.88	10.98	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax40_TX_2437MHz
 Test by :Gary Liao

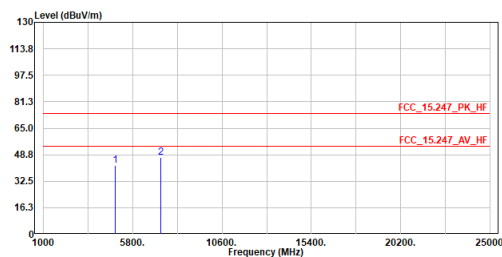


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4874.000	42.05	74.00	-31.95	59.72	-17.67	Peak
2	7311.000	47.34	74.00	-26.66	59.96	-12.62	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax40_TX_2437MHz
 Test by :Gary Liao

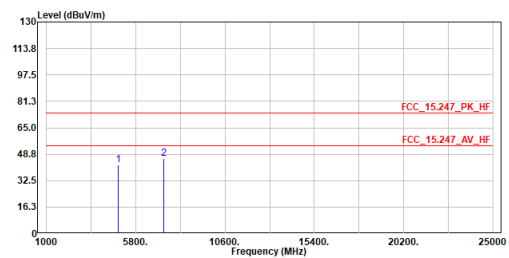


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4874.000	42.41	74.00	-31.59	60.08	-17.67	Peak
2	7311.000	46.33	74.00	-27.67	58.95	-12.62	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax40_TX_2447MHz
 Test by :Gary Liao

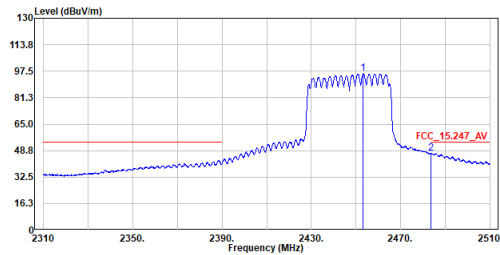

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2453.300	95.93	-----	-----	85.06	10.87	Average
2	2483.600	47.19	54.00	-6.81	36.21	10.98	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax40_TX_2447MHz
 Test by :Gary Liao

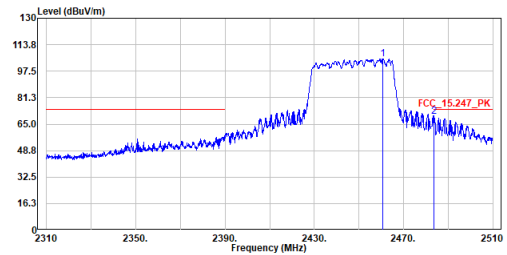

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2460.600	105.10	-----	-----	94.21	10.89	Peak
2	2483.700	69.59	74.00	-4.41	58.60	10.99	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax40_TX_2447MHz
 Test by :Gary Liao

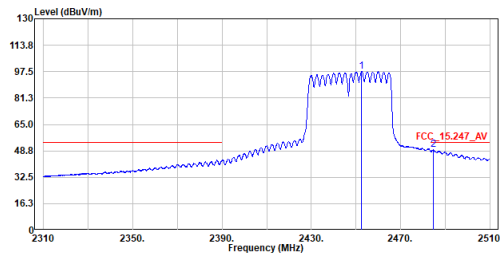

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2452.600	97.57	-----	-----	86.71	10.86	Average
2	2484.500	49.46	54.00	-4.54	38.46	11.00	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax40_TX_2447MHz
 Test by :Gary Liao

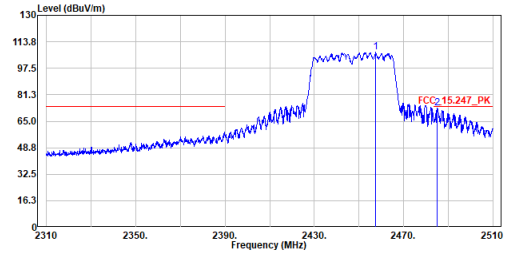

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2457.600	107.32	-----	-----	96.45	10.87	Peak
2	2485.000	73.00	74.00	-1.00	62.00	11.00	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax40_TX_2447MHz
 Test by :Gary Liao

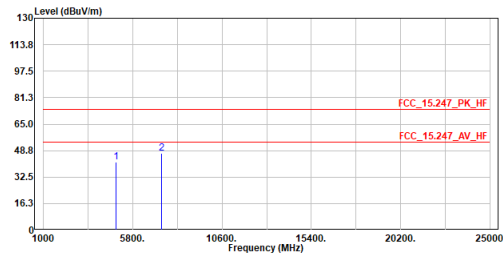

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4894.000	41.93	74.00	-32.07	59.55	-17.62	Peak
2	7341.000	47.04	74.00	-26.96	59.62	-12.58	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax40_TX_2447MHz
 Test by :Gary Liao

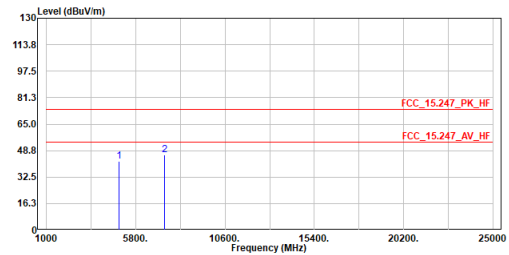

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4894.000	42.31	74.00	-31.69	59.93	-17.62	Peak
2	7341.000	46.04	74.00	-27.96	58.62	-12.58	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax40_TX_2452MHz
 Test by :Gary Liao

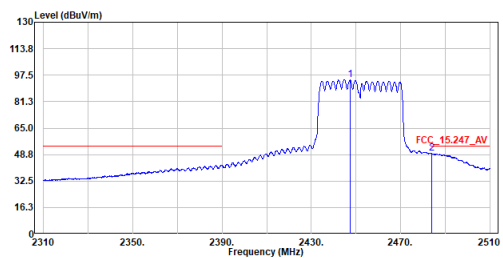

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2447.400	94.78	-----	-----	83.94	10.84	Average
2	2483.900	49.63	54.00	-4.37	38.64	10.99	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax40_TX_2452MHz
 Test by :Gary Liao

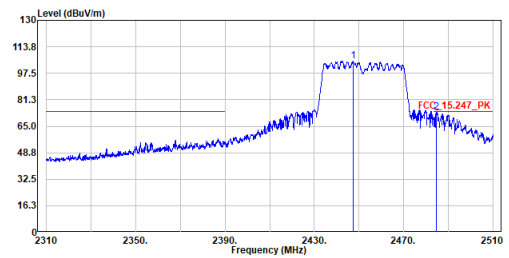

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2447.300	105.16	-----	-----	94.32	10.84	Peak
2	2484.600	73.73	74.00	-0.27	62.73	11.00	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax40_TX_2452MHz
 Test by :Gary Liao

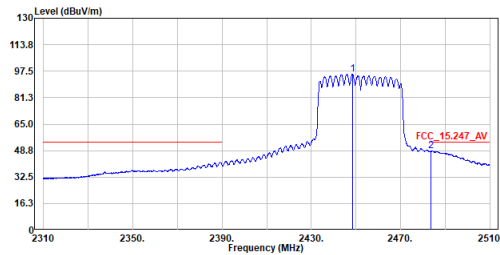

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2448.500	95.64	-----	-----	84.80	10.84	Average
2	2483.700	48.54	54.00	-5.46	37.55	10.99	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax40_TX_2452MHz
 Test by :Gary Liao

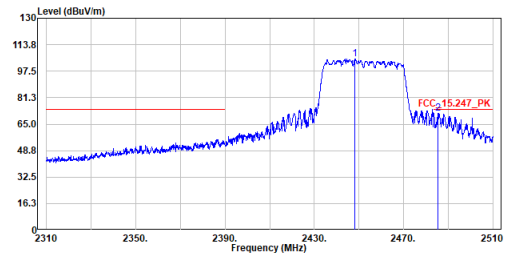

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2448.300	105.08	-----	-----	94.24	10.84	Peak
2	2485.400	71.76	74.00	-2.24	60.76	11.00	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax40_TX_2452MHz
 Test by :Gary Liao

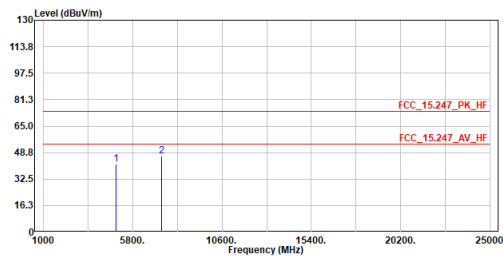

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4984.000	41.74	74.00	-32.26	59.32	-17.58	Peak
2	7356.000	46.69	74.00	-27.31	59.24	-12.55	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax40_TX_2452MHz
 Test by :Gary Liao

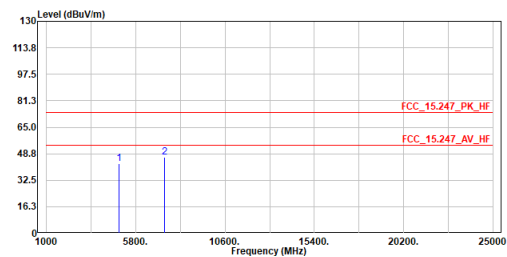

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4984.000	42.61	74.00	-31.39	60.19	-17.58	Peak
2	7356.000	46.42	74.00	-27.58	58.97	-12.55	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.