



Spectrum plot value of power


802.11ax (160 MHz) / Ant. 0 / 5250 MHz (U-NII-2C)

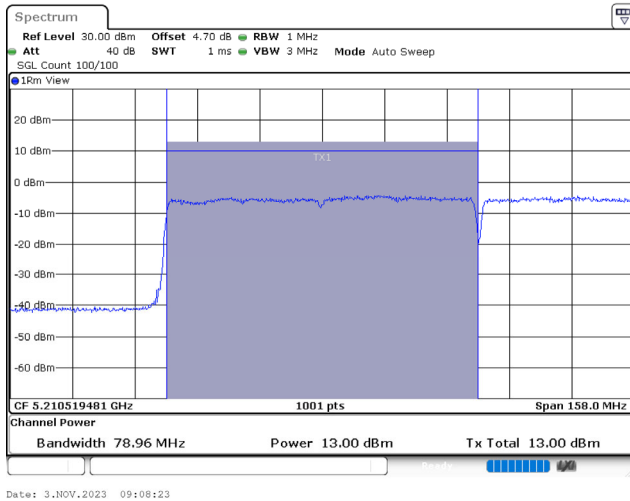


802.11ax (160 MHz) / Ant. 0 / 5250 MHz (U-NII-3)

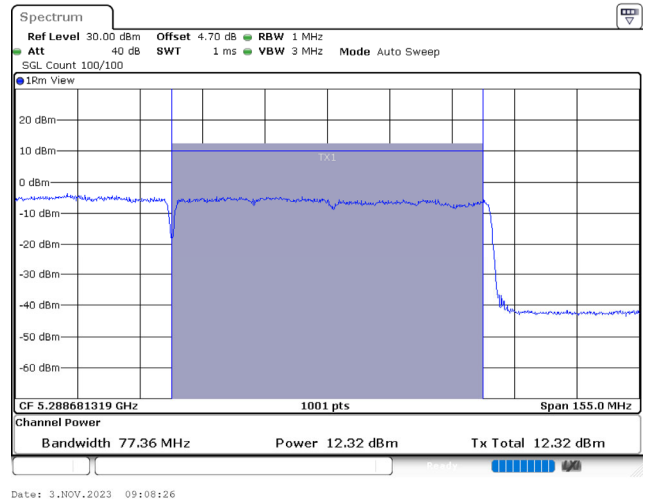


802.11ax (160 MHz) / Ant. 1 / 5250 MHz (U-NII-2C)

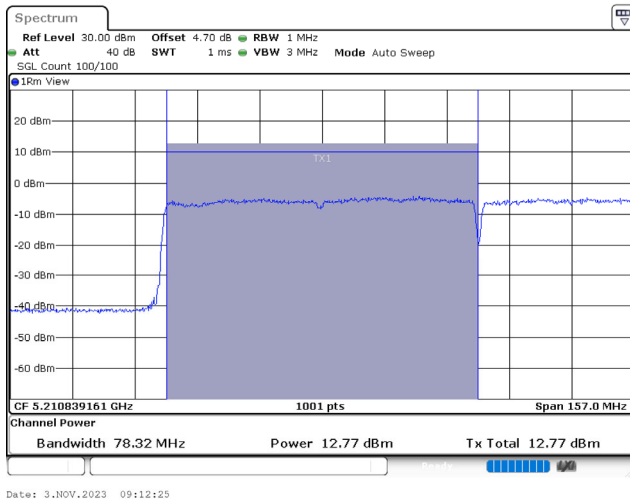


802.11ax (160 MHz) / Ant. 1 / 5250 MHz (U-NII-3)

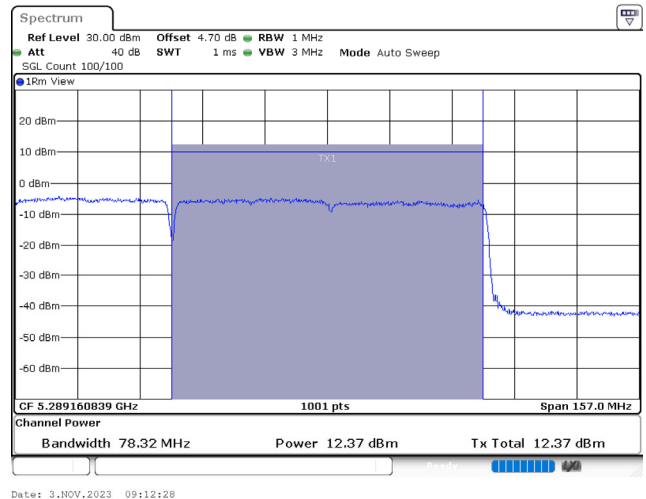

802.11ax (160 MHz) / Ant. 2 / 5250 MHz (U-NII-2C)

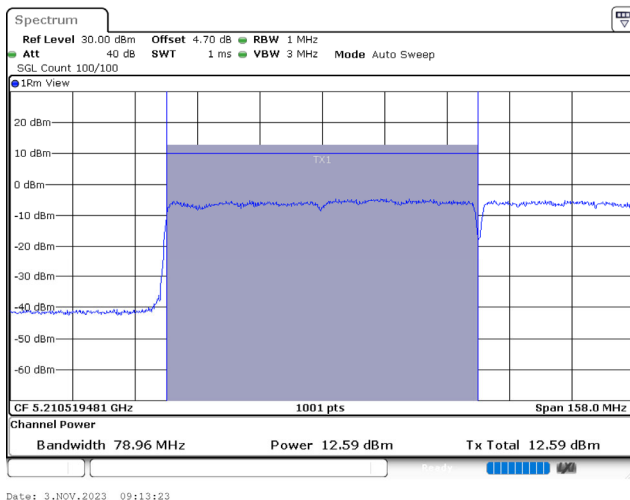



802.11ax (160 MHz) / Ant. 2 / 5250 MHz (U-NII-3)

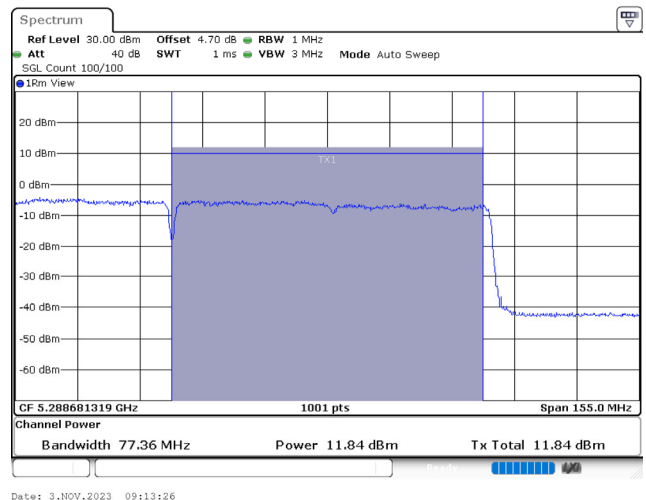

Spectrum plot value of power

802.11ax (160 MHz) / Ant. 3 / 5250 MHz (U-NII-2C)

802.11ax (160 MHz) / Ant. 3 / 5250 MHz (U-NII-3)

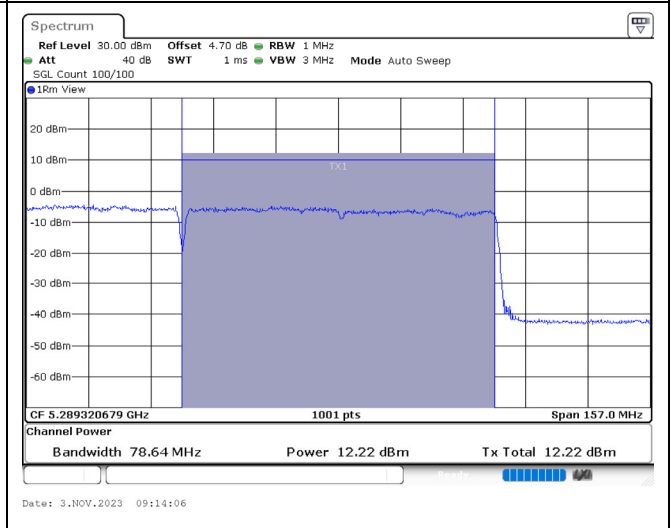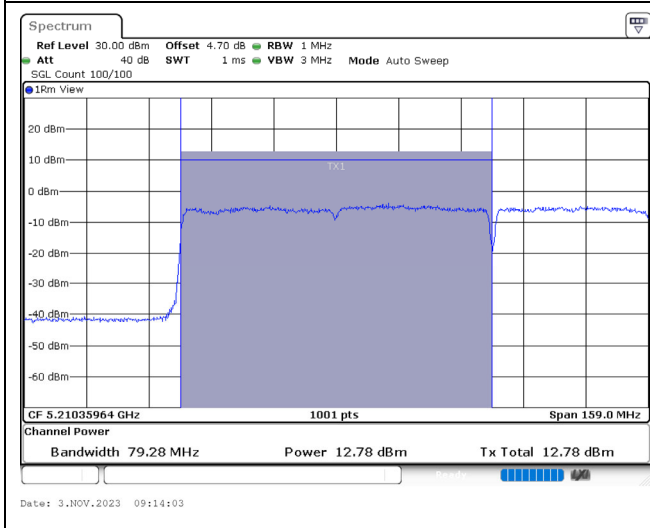

Appendix D. Test Result of Maximum Power Spectral Density

| Modulation | Frequency (MHz) | Power Spectral Density (dBm) | | | | | Limit (dBm) | Result |
|-------------------|-----------------|------------------------------|--------|--------|--------|--------|-------------|--------|
| | | Ant. 0 | Ant. 1 | Ant. 2 | Ant. 3 | Total | | |
| 802.11a | 5180 | 7.580 | 8.030 | 7.570 | 7.490 | 13.693 | 13.707 | Pass |
| | 5220 | 7.480 | 7.600 | 7.660 | 7.790 | 13.655 | 13.707 | Pass |
| | 5240 | 8.050 | 7.820 | 7.210 | 7.540 | 13.687 | 13.707 | Pass |
| | 5260 | 2.120 | 1.570 | 1.250 | -0.700 | 7.201 | 7.533 | Pass |
| | 5300 | 1.600 | 2.020 | 1.370 | -0.650 | 7.218 | 7.533 | Pass |
| | 5320 | 1.890 | 1.950 | 0.690 | 1.360 | 7.522 | 7.533 | Pass |
| | 5500 | 1.180 | 1.100 | 1.620 | 1.400 | 7.350 | 7.533 | Pass |
| | 5580 | 0.980 | 0.990 | 1.540 | 1.290 | 7.227 | 7.533 | Pass |
| | 5700 | 1.690 | 1.170 | 1.380 | 1.660 | 7.501 | 7.533 | Pass |
| | 5720 (U-NII-2C) | 1.280 | 1.070 | 1.760 | 1.460 | 7.421 | 7.533 | Pass |
| | 5720 (U-NII-3) | -1.940 | -1.800 | -1.830 | -2.070 | 4.112 | 26.750 | Pass |
| | 5745 | 1.940 | 1.900 | 1.530 | 1.940 | 7.851 | 26.750 | Pass |
| | 5785 | 2.570 | 2.210 | 2.050 | 2.420 | 8.338 | 26.750 | Pass |
| | 5825 | 2.200 | 1.610 | 1.800 | 2.370 | 8.026 | 26.750 | Pass |
| 802.11ax (20 MHz) | 5180 | 7.970 | 7.800 | 6.990 | 6.720 | 13.422 | 13.707 | Pass |
| | 5220 | 7.250 | 7.200 | 6.570 | 6.890 | 13.007 | 13.707 | Pass |
| | 5240 | 7.760 | 7.980 | 7.480 | 7.160 | 13.626 | 13.707 | Pass |
| | 5260 | 1.780 | 2.130 | 1.430 | -0.380 | 7.361 | 7.533 | Pass |
| | 5300 | 1.930 | 2.050 | 1.720 | -0.050 | 7.511 | 7.533 | Pass |
| | 5320 | 1.910 | 2.230 | 1.780 | -0.400 | 7.514 | 7.533 | Pass |
| | 5500 | 1.480 | 1.250 | 1.160 | 1.660 | 7.413 | 7.533 | Pass |
| | 5580 | 1.370 | 1.760 | 1.060 | 1.810 | 7.531 | 7.533 | Pass |
| | 5700 | 1.260 | 1.480 | 1.380 | 1.800 | 7.505 | 7.533 | Pass |
| | 5720 (U-NII-2C) | 1.460 | 0.920 | 1.020 | 1.860 | 7.352 | 7.533 | Pass |
| | 5720 (U-NII-3) | -2.140 | -2.260 | -2.060 | -1.950 | 3.920 | 26.750 | Pass |
| | 5745 | 0.650 | 0.410 | 0.450 | 0.680 | 6.570 | 26.750 | Pass |
| | 5785 | 0.470 | 0.480 | 0.610 | 0.740 | 6.597 | 26.750 | Pass |
| | 5825 | 0.670 | 0.940 | 0.640 | 0.980 | 6.831 | 26.750 | Pass |


| Modulation | Frequency (MHz) | Power Spectral Density (dBm) | | | | | Limit (dBm) | Result |
|-----------------------|--------------------|------------------------------|--------|--------|--------|--------|-------------|--------|
| | | Ant. 0 | Ant. 1 | Ant. 2 | Ant. 3 | Total | | |
| 802.11ax (40 MHz) | 5190 | 3.350 | 3.160 | 3.420 | 3.830 | 9.468 | 13.707 | Pass |
| | 5230 | 6.820 | 6.370 | 6.220 | 6.700 | 12.555 | 13.707 | Pass |
| | 5270 | 1.460 | 1.370 | 0.660 | 1.340 | 7.240 | 7.533 | Pass |
| | 5310 | 1.250 | 1.380 | 1.260 | 1.320 | 7.323 | 7.533 | Pass |
| | 5510 | 1.210 | 1.210 | 1.370 | 1.600 | 7.371 | 7.533 | Pass |
| | 5550 | 1.290 | 1.240 | 1.340 | 1.490 | 7.362 | 7.533 | Pass |
| | 5670 | 0.980 | 1.040 | 1.200 | 1.760 | 7.277 | 7.533 | Pass |
| | 5710 (U-NII-2C) | 1.350 | 1.190 | 1.170 | 1.930 | 7.442 | 7.533 | Pass |
| | 5710 (U-NII-3) | -2.210 | -2.600 | -2.520 | -2.320 | 3.611 | 26.750 | Pass |
| | 5755 | 2.200 | 1.950 | 1.770 | 2.730 | 8.198 | 26.750 | Pass |
| 5795 | 1.770 | 1.600 | 1.900 | 2.350 | 7.935 | 26.750 | Pass | |
| 802.11ax (80 MHz) | 5210 | -0.850 | -0.700 | -1.330 | -0.890 | 5.084 | 13.707 | Pass |
| | 5290 | -0.730 | -0.580 | 0.150 | -0.590 | 5.597 | 7.533 | Pass |
| | 5530 | -0.200 | 0.120 | 0.090 | 0.110 | 6.053 | 7.533 | Pass |
| | 5610 | -0.480 | -0.570 | -0.240 | 0.160 | 5.747 | 7.533 | Pass |
| | 5690 (U-NII-2C) | 0.720 | 0.190 | 0.760 | 0.440 | 6.554 | 7.533 | Pass |
| | 5690 (U-NII-3) | -3.170 | -3.150 | -3.330 | -3.420 | 2.755 | 26.750 | Pass |
| 5775 | 1.370 | 0.930 | 0.890 | 1.560 | 7.218 | 26.750 | Pass | |
| 802.11ax (160 MHz) | 5250 (U-NII-2C) | -4.390 | -3.930 | -4.040 | -4.480 | 1.817 | 13.707 | Pass |
| | 5250 (U-NII-3) | -4.700 | -4.600 | -5.170 | -4.630 | 1.252 | 7.533 | Pass |
| | 5570 | -3.740 | -4.150 | -4.370 | -3.960 | 1.972 | 7.533 | Pass |

Note:

1. Total power spectral density = power spectral density + duty factor, and the duty factor refer to section 2.3.
2. (U-NII-1) Directional Gain = $10 \log [(10G1/20 + 10G2/20 + \dots + 10GN/20)^2 / NAnt] = 9.293 \text{dBi} > 6 \text{dBi}$, so the limit = $17 - (9.293 - 6) = 13.707 \text{dBm}$.
3. (U-NII-2A) Directional Gain = $10 \log [(10G1/20 + 10G2/20 + \dots + 10GN/20)^2 / NAnt] = 9.467 \text{dBi} > 6 \text{dBi}$, so the limit = $11 - (9.467 - 6) = 7.533 \text{dBm}$.
4. (U-NII-2C) Directional Gain = $10 \log [(10G1/20 + 10G2/20 + \dots + 10GN/20)^2 / NAnt] = 9.467 \text{dBi} > 6 \text{dBi}$, so the limit = $11 - (9.467 - 6) = 7.533 \text{dBm}$.
5. (U-NII-3) Directional Gain = $10 \log [(10G1/20 + 10G2/20 + \dots + 10GN/20)^2 / NAnt] = 9.250 \text{dBi} > 6 \text{dBi}$, so the limit = $30 - (9.250 - 6) = 26.750 \text{dBm}$.


Spectrum plot of worst value

802.11a / Ant. 1 / 5180 MHz (U-NII-1)

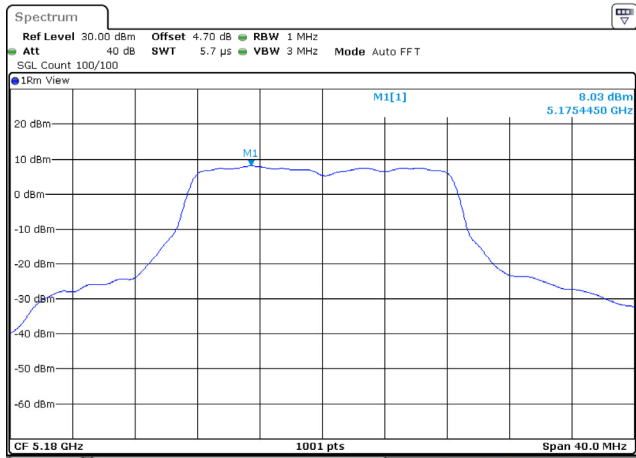


Date: 3.NOV.2023 11:45:56

802.11a / Ant. 1 / 5320 MHz (U-NII-2A)

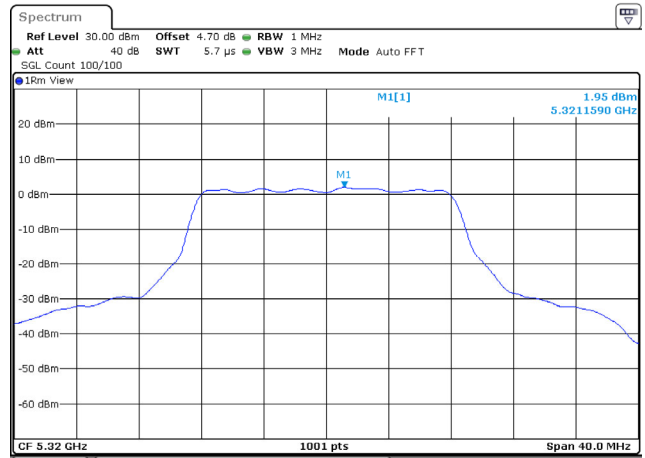


Date: 3.NOV.2023 13:15:02

802.11a / Ant. 0 / 5700 MHz (U-NII-2C)

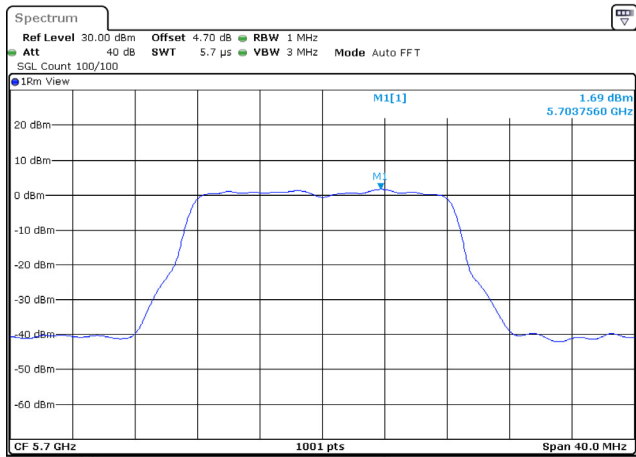

Date: 3.NOV.2023 14:23:39


802.11a / Ant. 0 / 5785 MHz (U-NII-3)

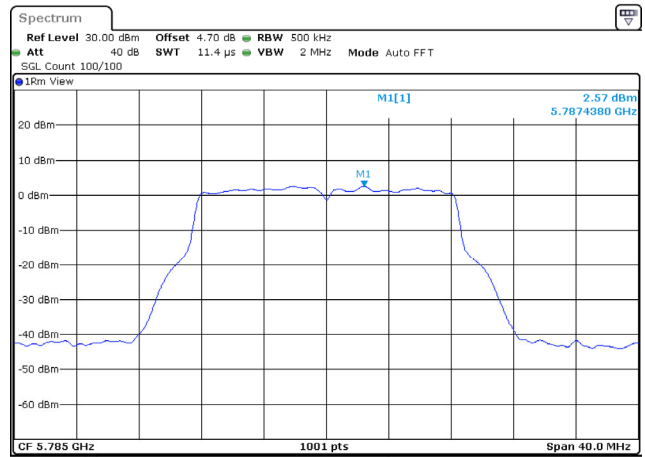

Date: 3.NOV.2023 14:52:26


Spectrum plot of worst value

802.11ax (20 MHz) / Ant. 1 / 5240 MHz (U-NII-1)

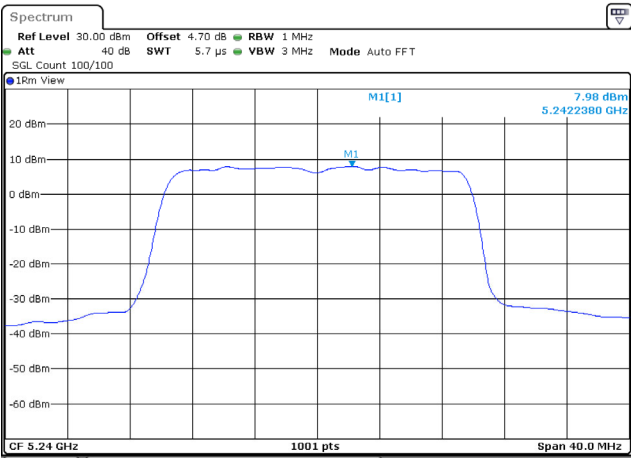


Date: 3.NOV.2023 15:39:46

802.11ax (20 MHz) / Ant. 1 / 5320 MHz (U-NII-2A)

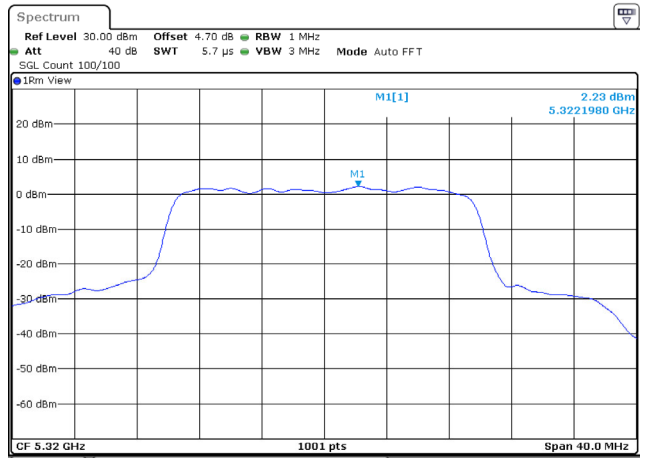


Date: 3.NOV.2023 16:26:49

802.11ax (20 MHz) / Ant. 3 / 5580 MHz (U-NII-2C)

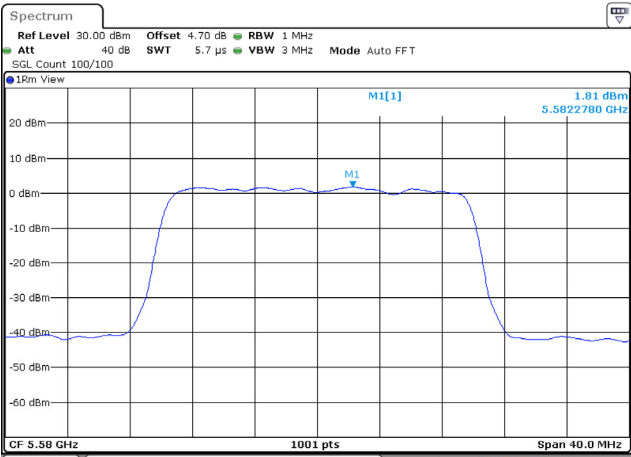

Date: 3.NOV.2023 16:56:59


802.11ax (20 MHz) / Ant. 3 / 5825 MHz (U-NII-3)

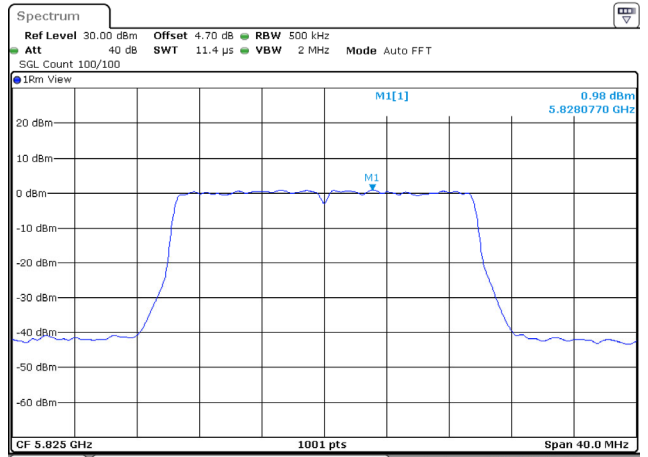


Date: 3.NOV.2023 17:32:49

Spectrum plot of worst value


802.11ax (40 MHz) / Ant. 0 / 5230 MHz (U-NII-1)

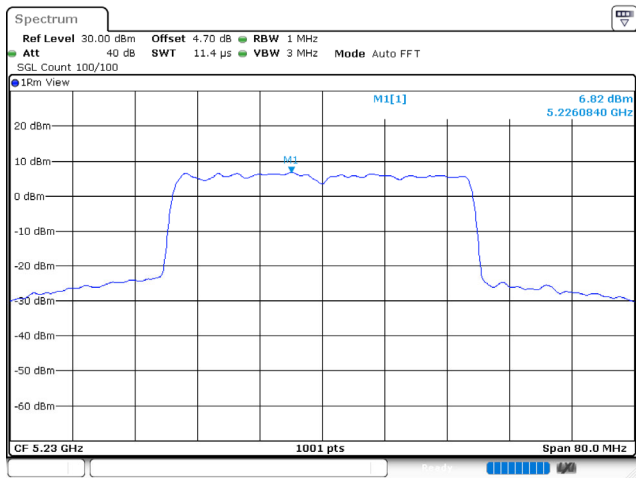


802.11ax (40 MHz) / Ant. 1 / 5310 MHz (U-NII-2A)

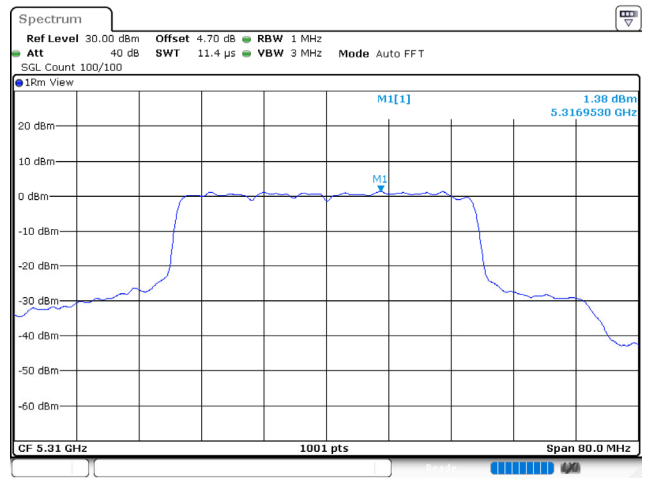

802.11ax (40 MHz) / Ant. 3 / 5710 MHz (U-NII-2C)

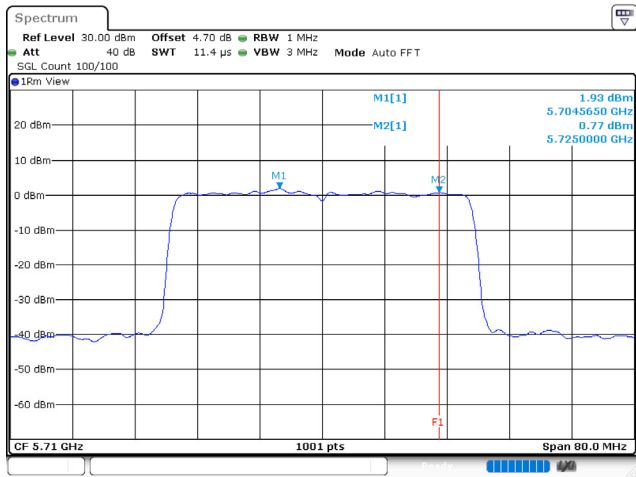


802.11ax (40 MHz) / Ant.3 / 5755 MHz (U-NII-3)

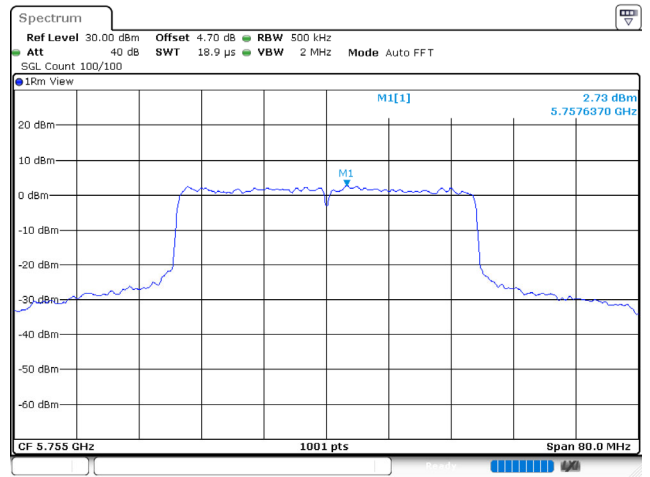


Spectrum plot of worst value

802.11ax (80 MHz) / Ant. 1 / 5210 MHz (U-NII-1)

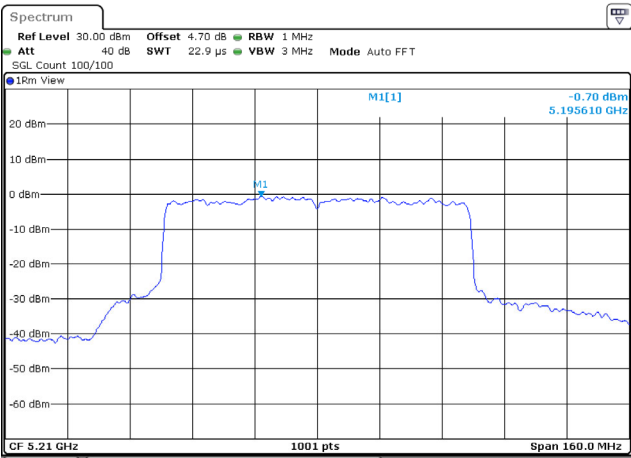


Date: 2.NOV.2023 17:51:20

802.11ax (80 MHz) / Ant. 2 / 5290 MHz (U-NII-2A)

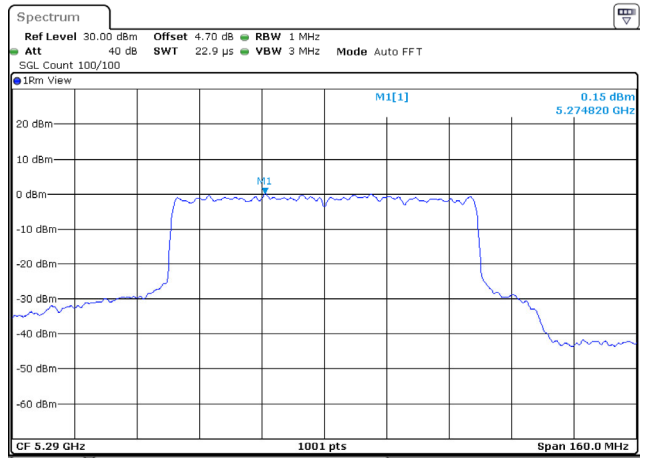


Date: 8.NOV.2023 15:18:45

802.11ax (80 MHz) / Ant. 2 / 5690 MHz (U-NII-2C)

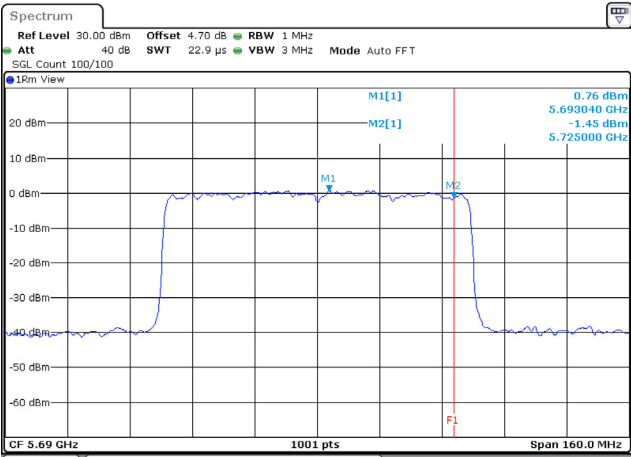

Date: 8.NOV.2023 15:44:43


802.11ax (80 MHz) / Ant. 3 / 5775 MHz (U-NII-3)

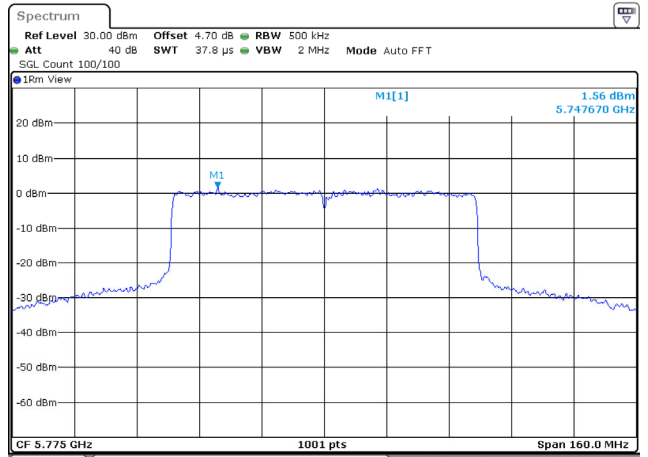

Date: 2.NOV.2023 18:13:55


Spectrum plot of worst value

802.11ax (80 MHz) / Ant. 1 / 5250 MHz (U-NII-1)

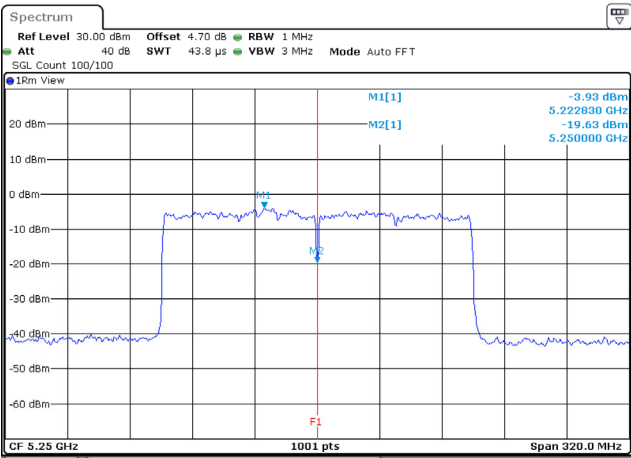


Date: 2.NOV.2023 18:18:03

802.11ax (80 MHz) / Ant. 1 / 5250 MHz (U-NII-2A)

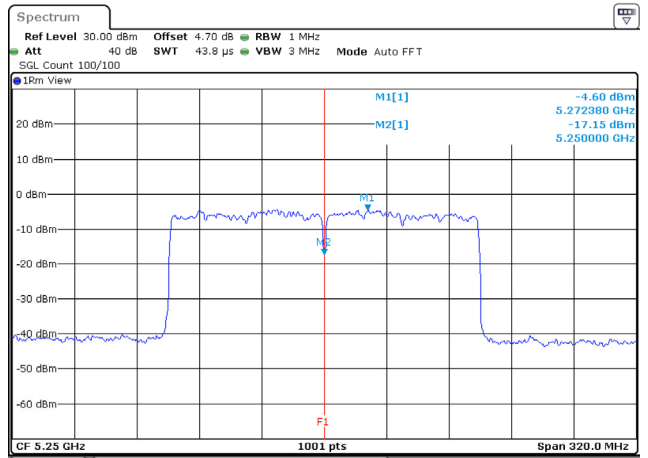

Date: 2.NOV.2023 18:18:15

802.11ax (80 MHz) / Ant. 0 / 5570 MHz (U-NII-2C)

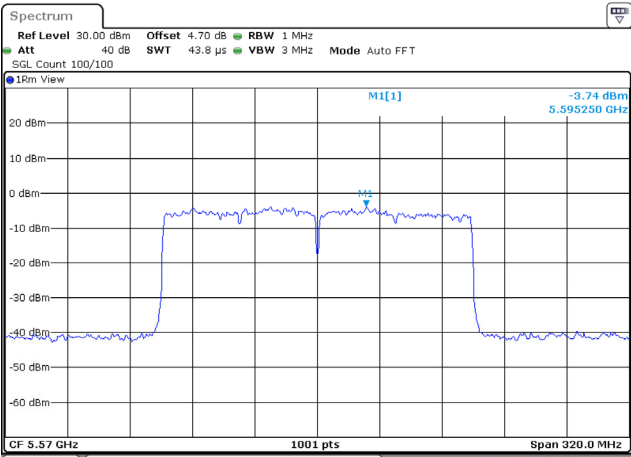


Date: 3.NOV.2023 10:19:20

Appendix E. Test Result of Transmitter Radiated Spurious Emission


30 MHz ~ 1 GHz

Mode 1: EUT + Adapter 1

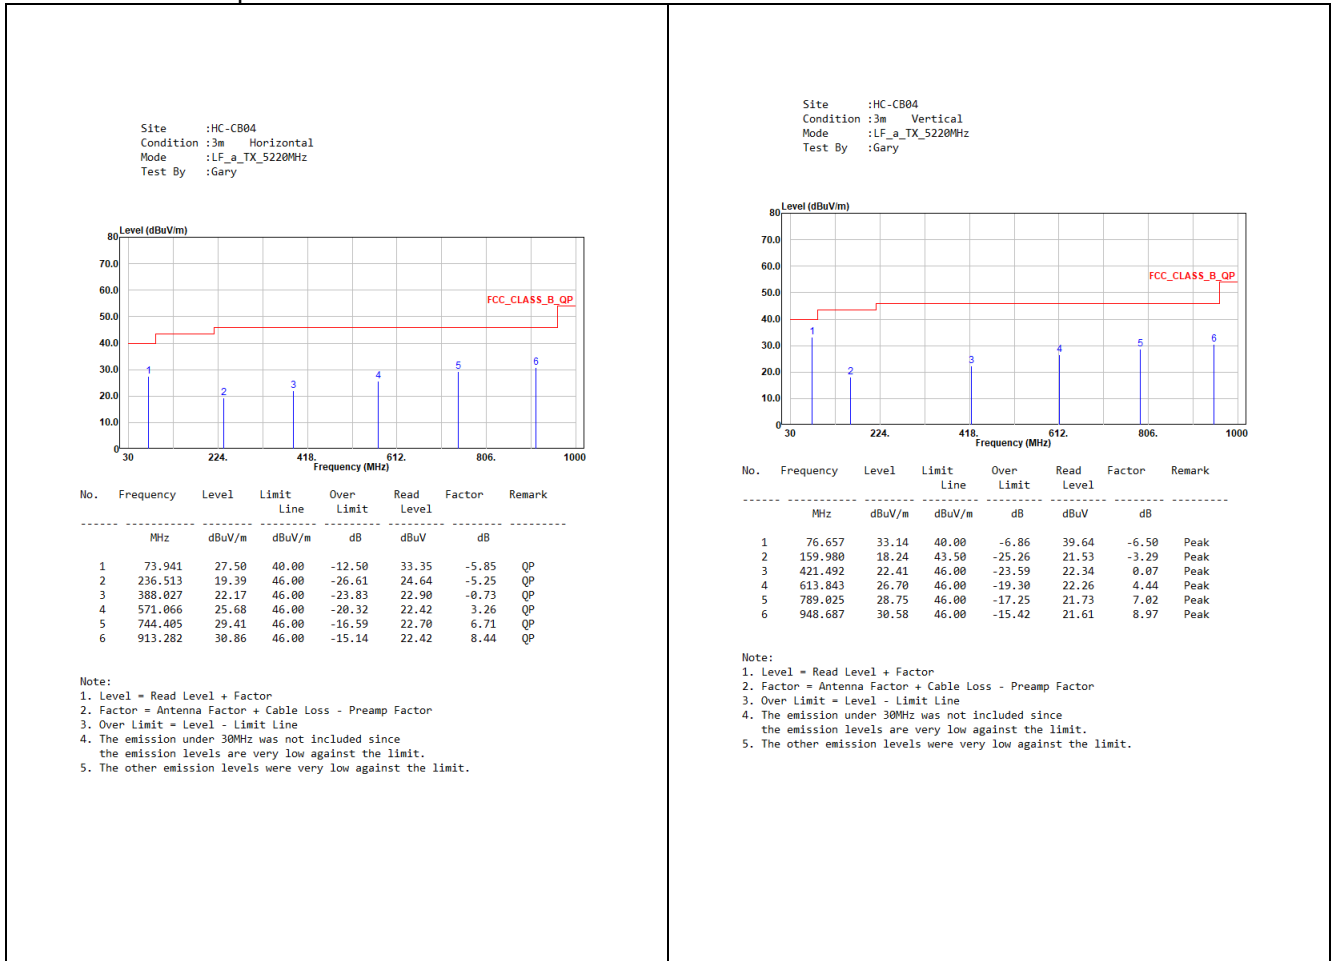

Mode 2: EUT + Adapter 2

Site :HC-CB04
 Condition :3m Horizontal
 Mode :LF_a_TX_5220MHz
 Test By :Gary

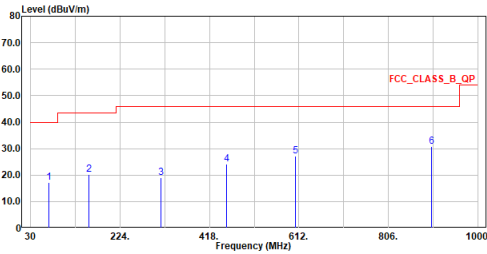


| No. | Frequency MHz | Level dBuV/m | Limit Line dBuV/m | Over Limit dB | Read Level dBuV | Factor dB | Remark |
|-----|------------------|-----------------|-------------------------|---------------------|-----------------------|--------------|--------|
| 1 | 68.994 | 17.36 | 40.00 | -22.64 | 21.79 | -4.43 | QP |
| 2 | 156.585 | 20.24 | 43.50 | -23.26 | 23.48 | -3.24 | QP |
| 3 | 313.434 | 19.13 | 46.00 | -26.87 | 21.72 | -2.59 | QP |
| 4 | 455.539 | 24.05 | 46.00 | -21.95 | 22.83 | 1.22 | QP |
| 5 | 604.240 | 27.04 | 46.00 | -18.96 | 22.54 | 4.50 | QP |
| 6 | 890.829 | 30.66 | 46.00 | -15.34 | 22.54 | 8.12 | QP |

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m Vertical
 Mode :LF_a_TX_5220MHz
 Test By :Gary

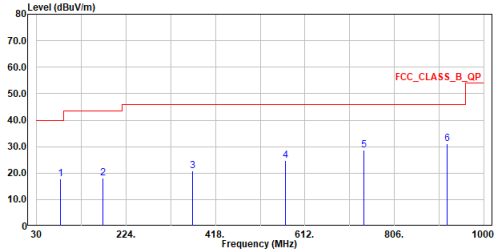


| No. | Frequency MHz | Level dBuV/m | Limit Line dBuV/m | Over Limit dB | Read Level dBuV | Factor dB | Remark |
|-----|------------------|-----------------|-------------------------|---------------------|-----------------------|--------------|--------|
| 1 | 81.119 | 17.84 | 40.00 | -22.16 | 25.48 | -7.64 | QP |
| 2 | 173.948 | 18.16 | 43.50 | -25.34 | 22.23 | -4.07 | QP |
| 3 | 368.336 | 20.84 | 46.00 | -25.16 | 22.06 | -1.22 | QP |
| 4 | 570.193 | 24.63 | 46.00 | -21.37 | 21.40 | 3.23 | QP |
| 5 | 740.719 | 28.64 | 46.00 | -17.36 | 22.01 | 6.63 | QP |
| 6 | 921.139 | 31.00 | 46.00 | -15.00 | 22.41 | 8.59 | QP |

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.

Above 1 GHz


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :a_TX_5180MHz
 Test by :Gary Liao

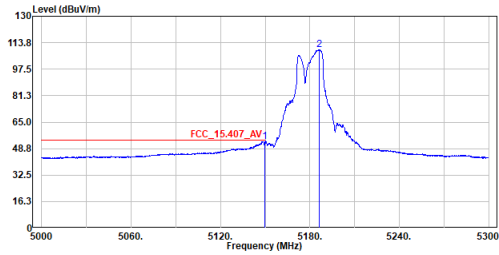

| No. | Frequency | Level | Limit Line | Over Limit | Read Level | Factor | Remark |
|-----|-----------|--------|------------|------------|------------|--------|---------|
| | Mhz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 5149.850 | 53.17 | 54.00 | -0.83 | 31.79 | 21.38 | Average |
| 2 | 5186.450 | 109.38 | ----- | ----- | 87.99 | 21.39 | Average |

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :a_TX_5180MHz
 Test by :Gary Liao

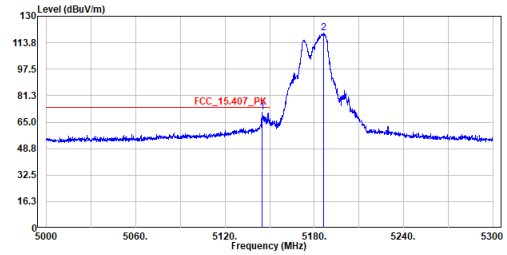

| No. | Frequency | Level | Limit Line | Over Limit | Read Level | Factor | Remark |
|-----|-----------|--------|------------|------------|------------|--------|--------|
| | Mhz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 5144.750 | 71.00 | 74.00 | -3.00 | 49.62 | 21.38 | Peak |
| 2 | 5186.450 | 119.61 | ----- | ----- | 98.22 | 21.39 | Peak |

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :a_TX_5180MHz
 Test by :Gary Liao

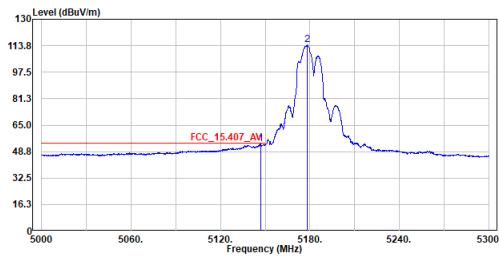

| No. | Frequency | Level | Limit Line | Over Limit | Read Level | Factor | Remark |
|-----|-----------|--------|------------|------------|------------|--------|---------|
| | Mhz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 5147.150 | 53.26 | 54.00 | -0.74 | 31.88 | 21.38 | Average |
| 2 | 5178.200 | 114.10 | ----- | ----- | 92.71 | 21.39 | Average |

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :a_TX_5180MHz
 Test by :Gary Liao

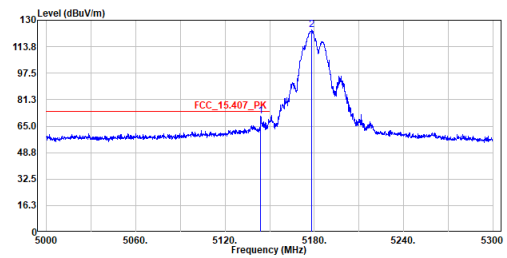

| No. | Frequency | Level | Limit Line | Over Limit | Read Level | Factor | Remark |
|-----|-----------|--------|------------|------------|------------|--------|--------|
| | Mhz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 5144.000 | 71.22 | 74.00 | -2.78 | 49.84 | 21.38 | Peak |
| 2 | 5178.200 | 123.91 | ----- | ----- | 102.52 | 21.39 | Peak |

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :a_TX_5180MHz
 Test By :Ling

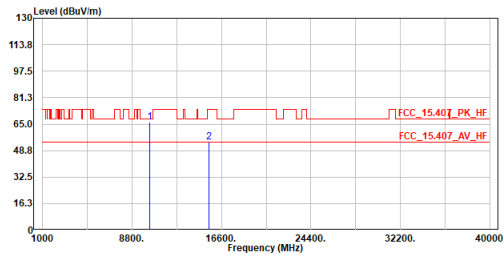

| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 10360.000 | 66.03 | 68.20 | -2.17 | 74.00 | -7.97 | Peak |
| 2 | 15540.000 | 53.88 | 74.00 | -20.12 | 57.10 | -3.22 | Peak |

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :a_TX_5180MHz
 Test By :Ling

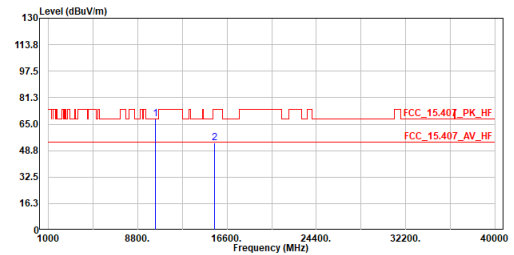

| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 10360.000 | 68.01 | 68.20 | -0.19 | 75.98 | -7.97 | Peak |
| 2 | 15540.000 | 53.54 | 74.00 | -20.46 | 56.76 | -3.22 | Peak |

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :a_TX_5220MHz
 Test by :Gary Liao

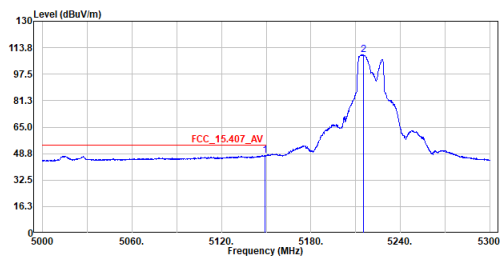

| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|-------|-------|--------|---------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 5149.250 | 47.81 | 54.00 | -6.19 | 26.43 | 21.38 | Average |
| 2 | 5215.400 | 109.32 | ----- | ----- | 87.93 | 21.39 | Average |

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :a_TX_5220MHz
 Test by :Gary Liao

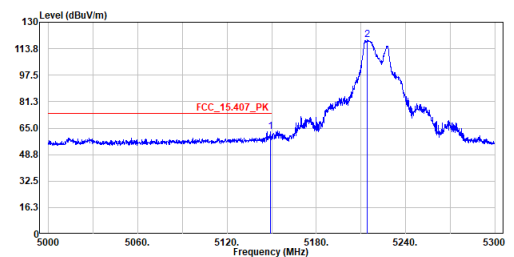

| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 5149.250 | 62.93 | 74.00 | -11.07 | 41.55 | 21.38 | Peak |
| 2 | 5214.200 | 119.10 | ----- | ----- | 97.71 | 21.39 | Peak |

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :a_TX_5220MHz
 Test by :Gary Liao

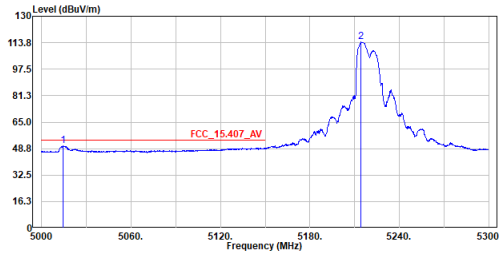

| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|-------|-------|--------|---------|
| | Mhz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 5014.550 | 50.50 | 54.00 | -3.50 | 29.14 | 21.36 | Average |
| 2 | 5214.350 | 114.09 | ----- | ----- | 92.70 | 21.39 | Average |

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :a_TX_5220MHz
 Test by :Gary Liao

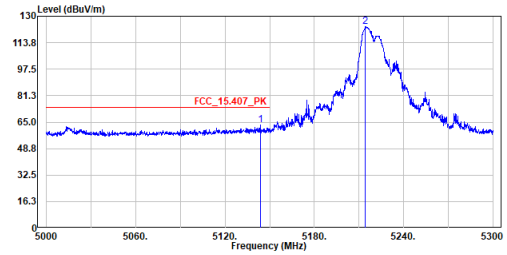

| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|--------|--------|--------|--------|
| | Mhz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 5143.700 | 63.23 | 74.00 | -10.77 | 41.85 | 21.38 | Peak |
| 2 | 5214.350 | 123.85 | ----- | ----- | 102.46 | 21.39 | Peak |

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :a_TX_5220MHz
 Test By :Ling

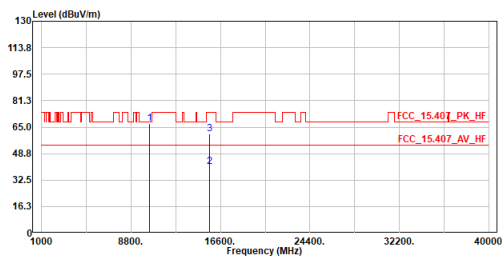

| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|---------|
| | Mhz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 10440.000 | 67.39 | 68.20 | -0.81 | 75.22 | -7.83 | Peak |
| 2 | 15660.000 | 40.85 | 54.00 | -13.15 | 44.04 | -3.19 | Average |
| 3 | 15660.000 | 61.07 | 74.00 | -12.93 | 64.26 | -3.19 | Peak |

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :a_TX_5220MHz
 Test By :Ling

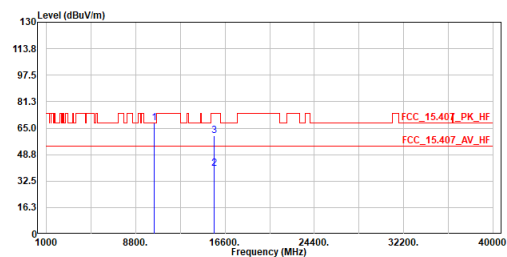

| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|---------|
| | Mhz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 10440.000 | 68.16 | 68.20 | -0.04 | 75.99 | -7.83 | Peak |
| 2 | 15660.000 | 40.12 | 54.00 | -13.88 | 43.31 | -3.19 | Average |
| 3 | 15660.000 | 60.49 | 74.00 | -13.51 | 63.68 | -3.19 | Peak |

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :a_TX_5240MHz
 Test by :Gary Liao

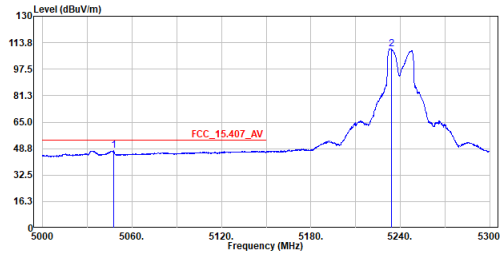

| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|-------|-------|--------|---------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 5047.850 | 47.46 | 54.00 | -6.54 | 26.09 | 21.37 | Average |
| 2 | 5234.000 | 110.13 | ----- | ----- | 88.73 | 21.40 | Average |

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :a_TX_5240MHz
 Test by :Gary Liao

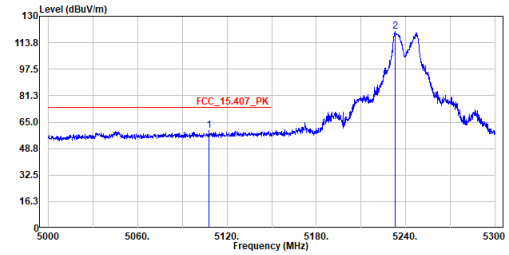

| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 5107.850 | 59.84 | 74.00 | -14.16 | 38.46 | 21.38 | Peak |
| 2 | 5232.800 | 120.59 | ----- | ----- | 99.19 | 21.40 | Peak |

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :a_TX_5240MHz
 Test by :Gary Liao

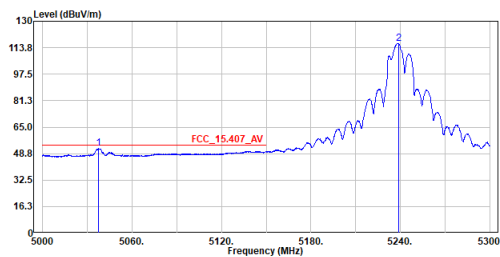

| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|-------|-------|--------|---------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 5037.500 | 51.85 | 54.00 | -2.15 | 30.48 | 21.37 | Average |
| 2 | 5238.650 | 116.50 | ----- | ----- | 95.11 | 21.39 | Average |

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :a_TX_5240MHz
 Test by :Gary Liao

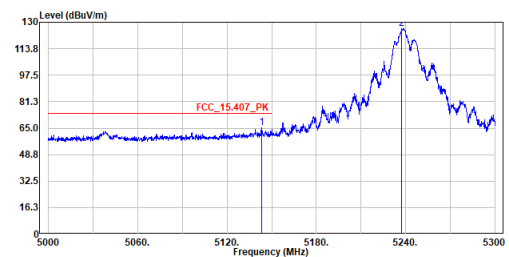

| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|-------|--------|--------|--------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 5143.100 | 65.27 | 74.00 | -8.73 | 43.89 | 21.38 | Peak |
| 2 | 5237.450 | 126.20 | ----- | ----- | 104.80 | 21.40 | Peak |

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :a_TX_5240MHz
 Test By :Ling

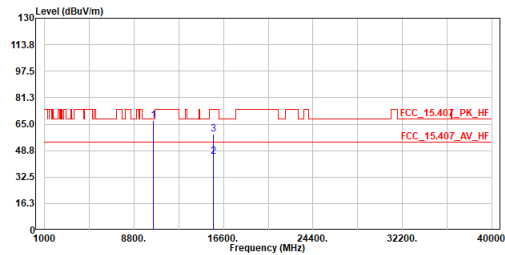

| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|---------|
| | Mhz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 10480.000 | 67.18 | 68.20 | -1.02 | 74.94 | -7.76 | Peak |
| 2 | 15720.000 | 45.36 | 54.00 | -8.64 | 48.52 | -3.16 | Average |
| 3 | 15720.000 | 58.89 | 74.00 | -15.11 | 62.05 | -3.16 | Peak |

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :a_TX_5240MHz
 Test By :Ling

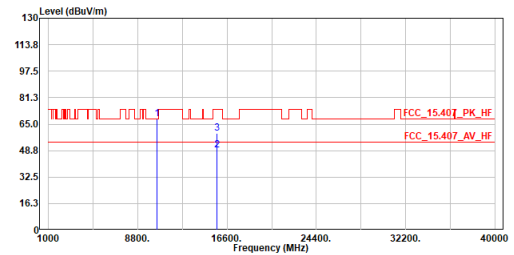

| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|---------|
| | Mhz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 10480.000 | 67.99 | 68.20 | -0.21 | 75.75 | -7.76 | Peak |
| 2 | 15720.000 | 48.82 | 54.00 | -5.18 | 51.98 | -3.16 | Average |
| 3 | 15720.000 | 59.29 | 74.00 | -14.71 | 62.45 | -3.16 | Peak |

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :a_TX_5300MHz
 Test By :Ling

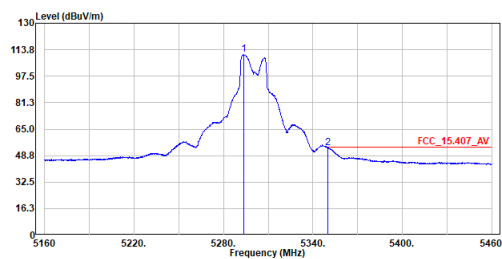

| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|-------|-------|--------|---------|
| | Mhz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 5293.650 | 110.63 | ----- | ----- | 89.22 | 21.41 | Average |
| 2 | 5350.200 | 53.46 | 54.00 | -0.54 | 32.04 | 21.42 | Average |

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :a_TX_5300MHz
 Test By :Ling

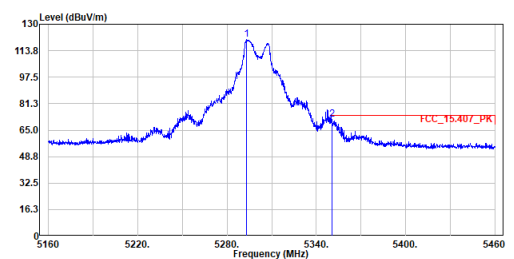

| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|-------|-------|--------|--------|
| | Mhz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 5293.350 | 120.91 | ----- | ----- | 99.50 | 21.41 | Peak |
| 2 | 5350.650 | 71.64 | 74.00 | -2.36 | 50.22 | 21.42 | Peak |

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :a_TX_5260MHz
 Test By :Ling

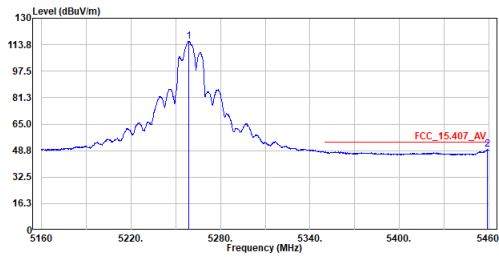


| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|-------|-------|--------|---------|
| | Mhz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 5258.700 | 115.84 | ----- | ----- | 94.43 | 21.41 | Average |
| 2 | 5459.250 | 49.35 | 54.00 | -4.65 | 27.91 | 21.44 | Average |

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :a_TX_5260MHz
 Test By :Ling

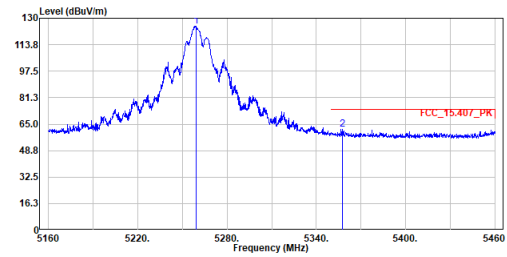


| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|--------|--------|--------|--------|
| | Mhz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 5259.300 | 125.34 | ----- | ----- | 103.93 | 21.41 | Peak |
| 2 | 5357.400 | 61.90 | 74.00 | -12.10 | 40.48 | 21.42 | Peak |

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :a_TX_5260MHz
 Test By :Ling

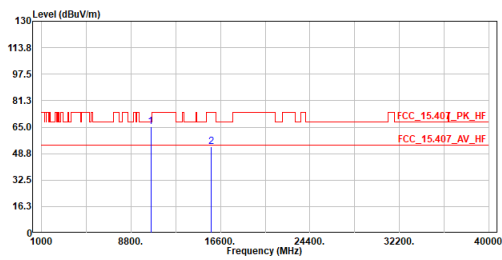


| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
| | Mhz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 10520.000 | 65.09 | 68.20 | -3.11 | 72.80 | -7.71 | Peak |
| 2 | 15780.000 | 53.15 | 74.00 | -20.85 | 56.30 | -3.15 | Peak |

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :a_TX_5260MHz
 Test By :Ling

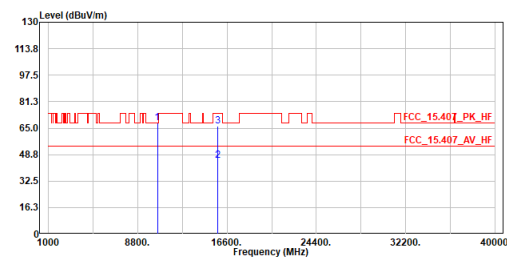


| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|-------|-------|--------|---------|
| | Mhz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 10520.000 | 68.09 | 68.20 | -0.11 | 75.80 | -7.71 | Peak |
| 2 | 15780.000 | 45.02 | 54.00 | -8.98 | 48.17 | -3.15 | Average |
| 3 | 15780.000 | 65.99 | 74.00 | -8.01 | 69.14 | -3.15 | Peak |

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :a_TX_5300MHz
 Test By :Ling

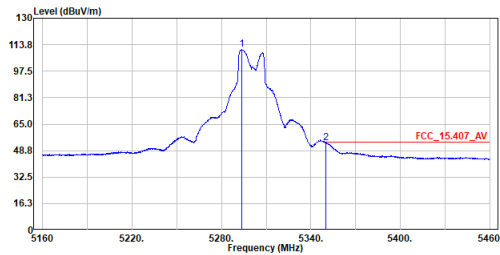


| No. | Frequency | Level | Limit Line | Over Limit | Read Level | Factor | Remark |
|-----|-----------|--------|------------|------------|------------|--------|---------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 5293.650 | 110.63 | ----- | ----- | 89.22 | 21.41 | Average |
| 2 | 5350.200 | 53.46 | 54.00 | -0.54 | 32.04 | 21.42 | Average |

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :a_TX_5300MHz
 Test By :Ling

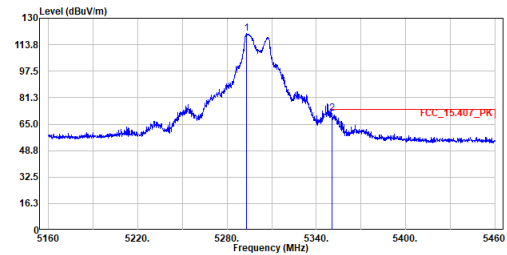


| No. | Frequency | Level | Limit Line | Over Limit | Read Level | Factor | Remark |
|-----|-----------|--------|------------|------------|------------|--------|--------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 5293.350 | 120.91 | ----- | ----- | 99.50 | 21.41 | Peak |
| 2 | 5350.650 | 71.64 | 74.00 | -2.36 | 50.22 | 21.42 | Peak |

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :a_TX_5300MHz
 Test By :Ling

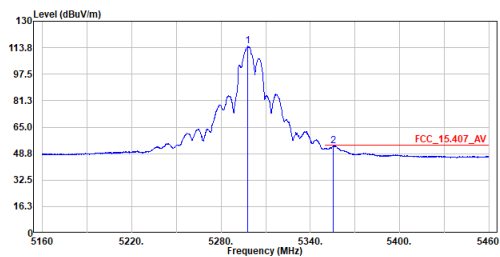


| No. | Frequency | Level | Limit Line | Over Limit | Read Level | Factor | Remark |
|-----|-----------|--------|------------|------------|------------|--------|---------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 5298.000 | 114.70 | ----- | ----- | 93.29 | 21.41 | Average |
| 2 | 5355.150 | 53.36 | 54.00 | -0.64 | 31.94 | 21.42 | Average |

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :a_TX_5300MHz
 Test By :Ling

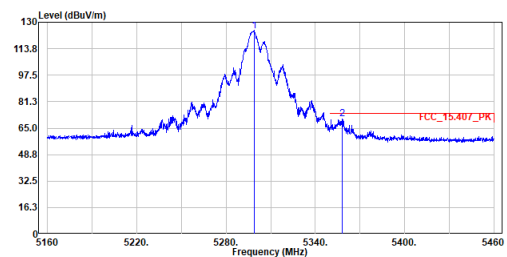


| No. | Frequency | Level | Limit Line | Over Limit | Read Level | Factor | Remark |
|-----|-----------|--------|------------|------------|------------|--------|--------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 5298.750 | 124.71 | ----- | ----- | 103.30 | 21.41 | Peak |
| 2 | 5357.850 | 70.66 | 74.00 | -3.34 | 49.24 | 21.42 | Peak |

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :a_TX_5300MHz
 Test By :Ling

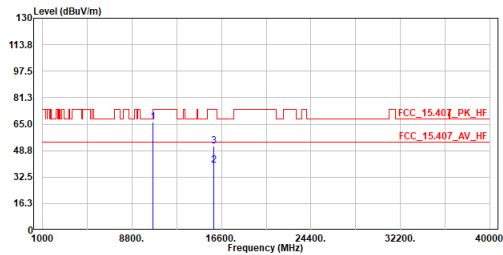


| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|---------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 10600.000 | 66.45 | 68.20 | -1.75 | 74.07 | -7.62 | Peak |
| 2 | 15900.000 | 39.54 | 54.00 | -14.46 | 42.65 | -3.11 | Average |
| 3 | 15900.000 | 51.67 | 74.00 | -22.33 | 54.78 | -3.11 | Peak |

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :a_TX_5300MHz
 Test By :Ling

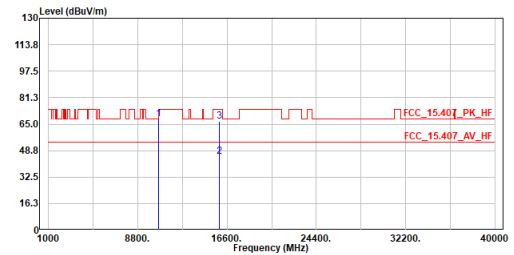


| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|-------|-------|--------|---------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 10600.000 | 68.06 | 68.20 | -0.14 | 75.68 | -7.62 | Peak |
| 2 | 15900.000 | 45.00 | 54.00 | -9.00 | 48.11 | -3.11 | Average |
| 3 | 15900.000 | 66.57 | 74.00 | -7.43 | 69.68 | -3.11 | Peak |

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :a_TX_5320MHz
 Test By :Ling

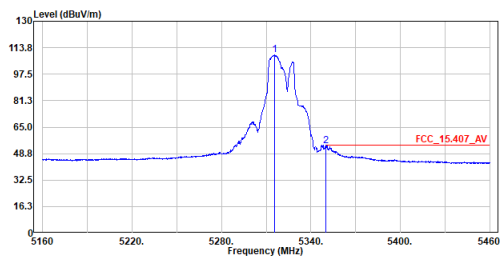


| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|-------|-------|--------|---------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 5315.400 | 109.19 | ----- | ----- | 87.78 | 21.41 | Average |
| 2 | 5350.200 | 53.56 | 54.00 | -0.44 | 32.14 | 21.42 | Average |

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :a_TX_5320MHz
 Test By :Ling

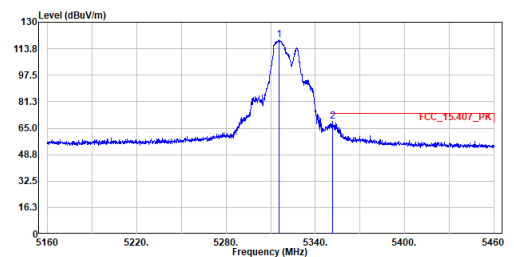


| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|-------|-------|--------|--------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 5315.700 | 119.12 | ----- | ----- | 97.71 | 21.41 | Peak |
| 2 | 5351.400 | 69.16 | 74.00 | -4.84 | 47.74 | 21.42 | Peak |

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :a_TX_5320MHz
 Test By :Ling

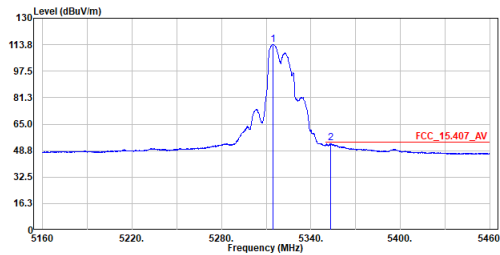

| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|-------|-------|--------|---------|
| | Mhz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 5314.800 | 113.76 | ----- | ----- | 92.35 | 21.41 | Average |
| 2 | 5353.200 | 53.37 | 54.00 | -0.63 | 31.95 | 21.42 | Average |

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :a_TX_5320MHz
 Test By :Ling

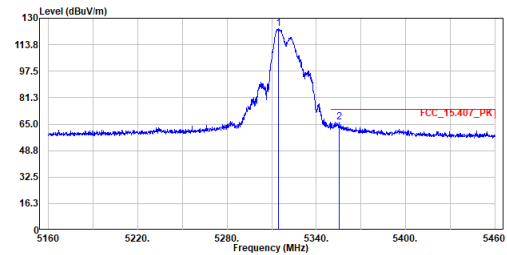

| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|-------|--------|--------|--------|
| | Mhz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 5314.650 | 123.78 | ----- | ----- | 102.37 | 21.41 | Peak |
| 2 | 5355.300 | 66.45 | 74.00 | -7.55 | 45.03 | 21.42 | Peak |

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :a_TX_5320MHz
 Test By :Ling

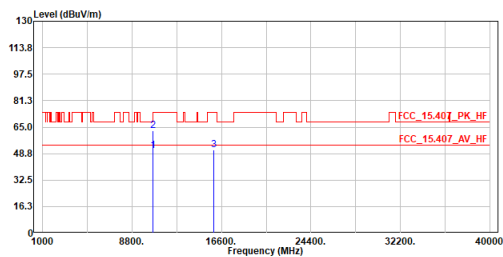

| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|---------|
| | Mhz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 10640.000 | 50.57 | 54.00 | -3.43 | 58.13 | -7.56 | Average |
| 2 | 10640.000 | 63.02 | 74.00 | -10.98 | 70.58 | -7.56 | Peak |
| 3 | 15960.000 | 50.92 | 74.00 | -23.08 | 54.01 | -3.09 | Peak |

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :a_TX_5320MHz
 Test By :Ling

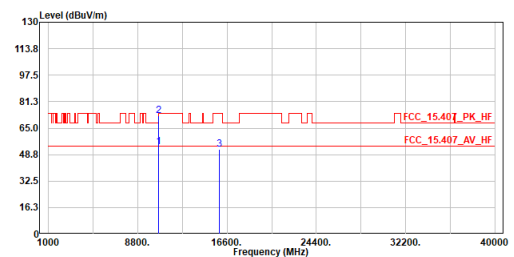

| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|---------|
| | Mhz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 10640.000 | 53.53 | 54.00 | -0.47 | 61.09 | -7.56 | Average |
| 2 | 10640.000 | 72.41 | 74.00 | -1.59 | 79.97 | -7.56 | Peak |
| 3 | 15960.000 | 51.76 | 74.00 | -22.24 | 54.85 | -3.09 | Peak |

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :a_TX_5500MHz
 Test By :Gary

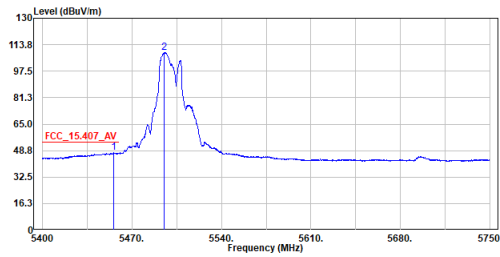


| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|-------|-------|--------|---------|
| | Mhz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 5455.475 | 47.48 | 54.00 | -6.52 | 26.04 | 21.44 | Average |
| 2 | 5495.025 | 109.01 | ----- | ----- | 87.57 | 21.44 | Average |

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :a_TX_5500MHz
 Test By :Gary

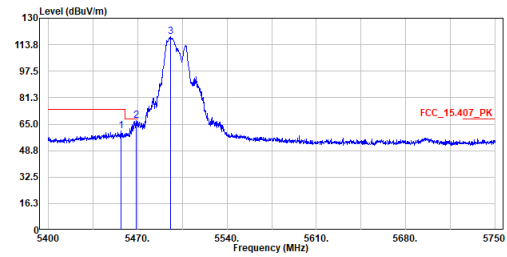


| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
| | Mhz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 5456.875 | 60.81 | 74.00 | -13.19 | 39.37 | 21.44 | Peak |
| 2 | 5468.775 | 67.37 | 68.20 | -0.83 | 45.94 | 21.43 | Peak |
| 3 | 5495.725 | 118.81 | ----- | ----- | 97.37 | 21.44 | Peak |

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :a_TX_5500MHz
 Test By :Gary

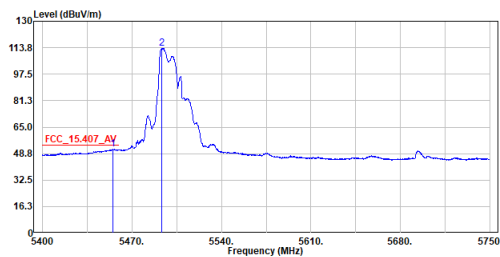


| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|-------|-------|--------|---------|
| | Mhz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 5454.950 | 51.62 | 54.00 | -2.38 | 30.18 | 21.44 | Average |
| 2 | 5493.450 | 113.36 | ----- | ----- | 91.92 | 21.44 | Average |

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :a_TX_5500MHz
 Test By :Gary

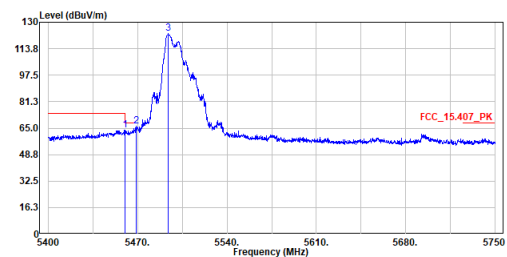


| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|--------|--------|--------|--------|
| | Mhz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 5459.850 | 63.79 | 74.00 | -10.21 | 42.35 | 21.44 | Peak |
| 2 | 5468.600 | 66.13 | 68.20 | -2.07 | 44.70 | 21.43 | Peak |
| 3 | 5494.150 | 122.99 | ----- | ----- | 101.55 | 21.44 | Peak |

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :a_TX_5500MHz
 Test By :Gary

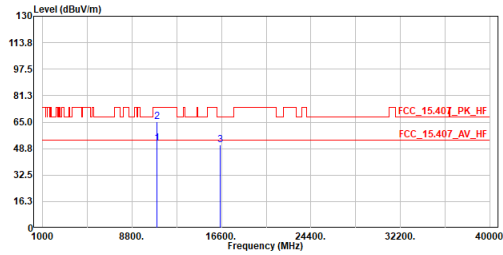

| No. | Frequency MHz | Level dBuV/m | Limit Line dBuV/m | Over Limit dB | Read Level dBuV | Factor dB | Remark |
|-----|------------------|-----------------|-------------------------|---------------------|-----------------------|--------------|---------|
| 1 | 11000.000 | 52.16 | 54.00 | -1.84 | 59.32 | -7.16 | Average |
| 2 | 11000.000 | 65.47 | 74.00 | -8.53 | 72.63 | -7.16 | Peak |
| 3 | 16500.000 | 51.20 | 68.20 | -17.00 | 54.54 | -3.34 | Peak |

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :a_TX_5500MHz
 Test By :Gary

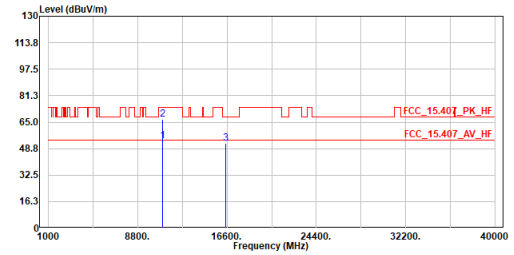

| No. | Frequency MHz | Level dBuV/m | Limit Line dBuV/m | Over Limit dB | Read Level dBuV | Factor dB | Remark |
|-----|------------------|-----------------|-------------------------|---------------------|-----------------------|--------------|---------|
| 1 | 11000.000 | 53.60 | 54.00 | -0.40 | 60.76 | -7.16 | Average |
| 2 | 11000.000 | 66.66 | 74.00 | -7.34 | 73.82 | -7.16 | Peak |
| 3 | 16500.000 | 51.99 | 68.20 | -16.21 | 55.33 | -3.34 | Peak |

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :a_TX_5580MHz
 Test By :Gary

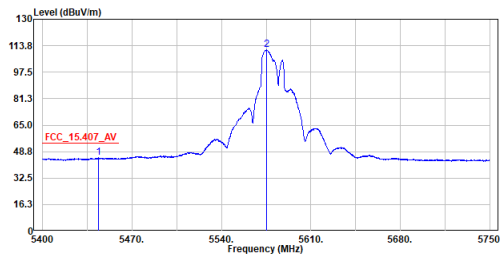

| No. | Frequency MHz | Level dBuV/m | Limit Line dBuV/m | Over Limit dB | Read Level dBuV | Factor dB | Remark |
|-----|------------------|-----------------|-------------------------|---------------------|-----------------------|--------------|---------|
| 1 | 5443.575 | 44.91 | 54.00 | -9.09 | 23.48 | 21.43 | Average |
| 2 | 5575.175 | 111.36 | ----- | ----- | 89.64 | 21.72 | Average |

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :a_TX_5580MHz
 Test By :Gary

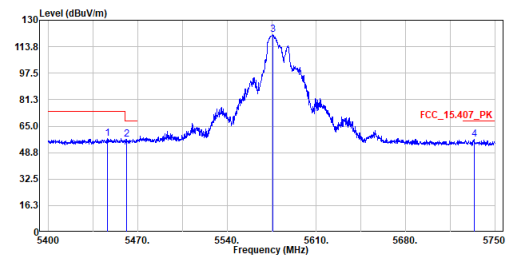

| No. | Frequency MHz | Level dBuV/m | Limit Line dBuV/m | Over Limit dB | Read Level dBuV | Factor dB | Remark |
|-----|------------------|-----------------|-------------------------|---------------------|-----------------------|--------------|--------|
| 1 | 5446.375 | 57.53 | 74.00 | -16.47 | 36.10 | 21.43 | Peak |
| 2 | 5461.075 | 56.96 | 68.20 | -11.24 | 35.52 | 21.44 | Peak |
| 3 | 5575.875 | 121.12 | ----- | ----- | 99.40 | 21.72 | Peak |
| 4 | 5733.550 | 56.94 | 68.20 | -11.26 | 34.66 | 22.28 | Peak |

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :a_TX_5580MHz
 Test By :Gary

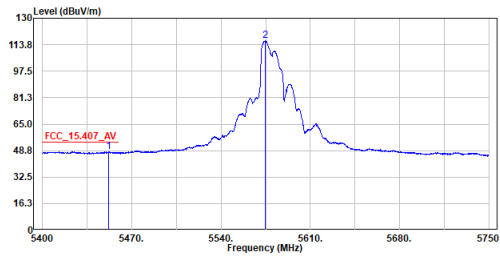


| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|-------|-------|--------|---------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 5452.150 | 48.00 | 54.00 | -6.00 | 26.57 | 21.43 | Average |
| 2 | 5574.825 | 116.06 | ----- | ----- | 94.35 | 21.71 | Average |

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :a_TX_5580MHz
 Test By :Gary

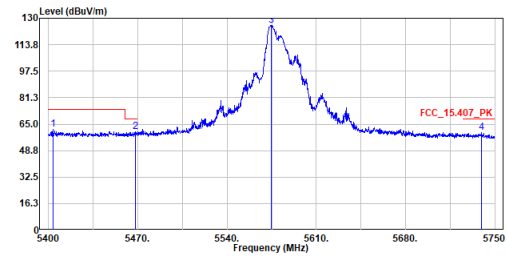


| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|--------|--------|--------|--------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 5403.500 | 62.03 | 74.00 | -11.97 | 40.60 | 21.43 | Peak |
| 2 | 5467.900 | 60.21 | 68.20 | -7.99 | 38.78 | 21.43 | Peak |
| 3 | 5574.475 | 125.81 | ----- | ----- | 104.10 | 21.71 | Peak |
| 4 | 5739.675 | 59.82 | 68.20 | -8.38 | 37.50 | 22.32 | Peak |

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :a_TX_5580MHz
 Test By :Gary

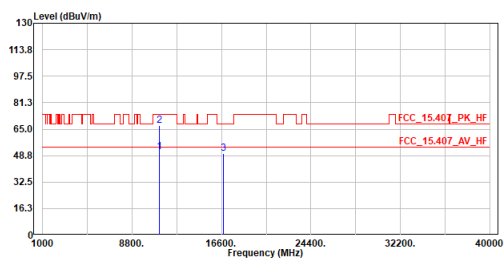


| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|---------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 11160.000 | 51.17 | 54.00 | -2.83 | 58.01 | -6.84 | Average |
| 2 | 11160.000 | 67.18 | 74.00 | -6.82 | 74.02 | -6.84 | Peak |
| 3 | 16740.000 | 49.93 | 68.20 | -18.27 | 53.42 | -3.49 | Peak |

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :a_TX_5580MHz
 Test By :Gary

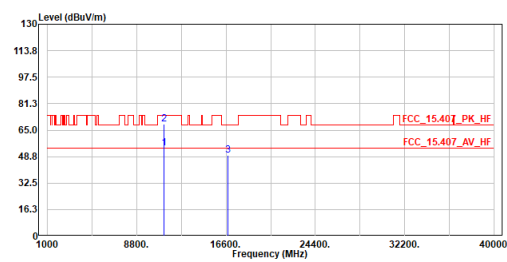


| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|---------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 11160.000 | 53.77 | 54.00 | -0.23 | 60.61 | -6.84 | Average |
| 2 | 11160.000 | 68.70 | 74.00 | -5.30 | 75.54 | -6.84 | Peak |
| 3 | 16740.000 | 49.57 | 68.20 | -18.63 | 53.06 | -3.49 | Peak |

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :a_TX_5700MHz
 Test By :Gary

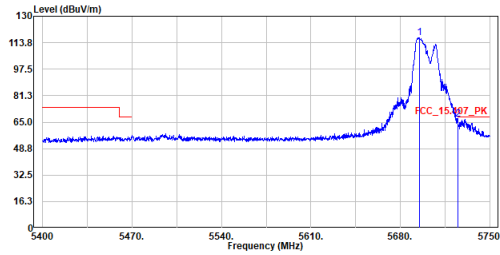

| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|-------|-------|--------|--------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 5695.050 | 116.89 | 68.20 | -1.31 | 94.74 | 22.15 | Peak |
| 2 | 5725.150 | 66.89 | 68.20 | -1.31 | 44.63 | 22.26 | Peak |

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :a_TX_5700MHz
 Test By :Gary

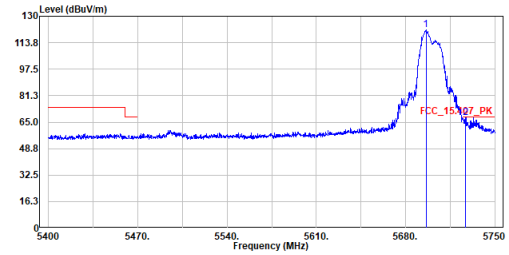

| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|-------|-------|--------|--------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 5695.925 | 121.65 | 68.20 | -0.39 | 99.50 | 22.15 | Peak |
| 2 | 5726.900 | 67.81 | 68.20 | -0.39 | 45.54 | 22.27 | Peak |

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :a_TX_5700MHz
 Test By :Gary

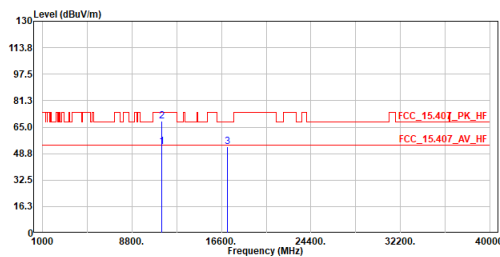

| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|---------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 11400.000 | 53.17 | 68.20 | -15.28 | 59.54 | -6.37 | Average |
| 2 | 11400.000 | 68.76 | 74.00 | -5.24 | 75.13 | -6.37 | Peak |
| 3 | 17100.000 | 52.92 | 68.20 | -15.28 | 56.43 | -3.51 | Peak |

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :a_TX_5700MHz
 Test By :Gary

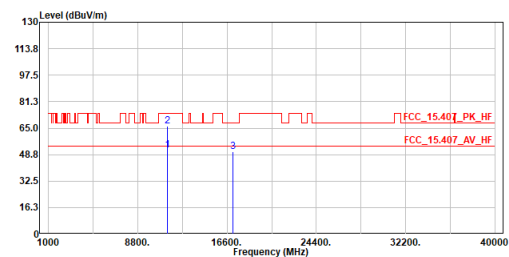

| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|---------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 11400.000 | 51.64 | 68.20 | -17.48 | 58.01 | -6.37 | Average |
| 2 | 11400.000 | 66.46 | 74.00 | -7.54 | 72.83 | -6.37 | Peak |
| 3 | 17100.000 | 50.72 | 68.20 | -17.48 | 54.23 | -3.51 | Peak |

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :a_TX_5720MHz
 Test By :Ling

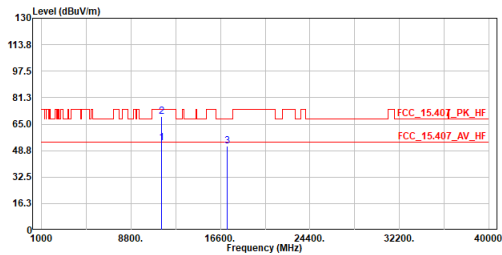


| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|---------|
| | Mhz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 11440.000 | 53.69 | 54.00 | -0.31 | 59.97 | -6.28 | Average |
| 2 | 11440.000 | 69.90 | 74.00 | -4.10 | 76.18 | -6.28 | Peak |
| 3 | 17160.000 | 51.47 | 68.20 | -16.73 | 54.89 | -3.42 | Peak |

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :a_TX_5720MHz
 Test By :Ling

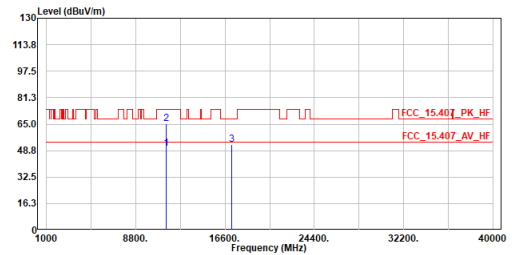


| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|---------|
| | Mhz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 11440.000 | 49.88 | 54.00 | -4.12 | 56.16 | -6.28 | Average |
| 2 | 11440.000 | 65.02 | 74.00 | -8.98 | 71.30 | -6.28 | Peak |
| 3 | 17160.000 | 52.48 | 68.20 | -15.72 | 55.90 | -3.42 | Peak |

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :a_TX_5745MHz
 Test By :Ling

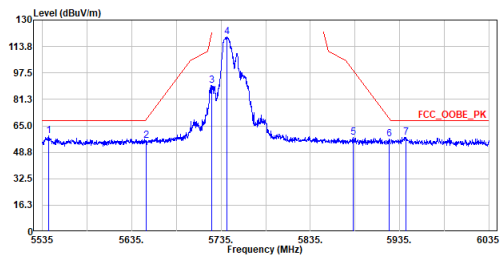


| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
| | Mhz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 5541.750 | 58.76 | 68.20 | -9.44 | 37.17 | 21.59 | Peak |
| 2 | 5651.250 | 55.98 | 69.13 | -13.15 | 34.00 | 21.98 | Peak |
| 3 | 5724.250 | 89.84 | 120.49 | -30.65 | 67.59 | 22.25 | Peak |
| 4 | 5741.250 | 119.50 | ----- | ----- | 97.18 | 22.32 | Peak |
| 5 | 5882.750 | 57.74 | 99.47 | -41.73 | 34.91 | 22.83 | Peak |
| 6 | 5923.250 | 56.81 | 69.50 | -12.69 | 33.83 | 22.98 | Peak |
| 7 | 5942.250 | 57.79 | 68.20 | -10.41 | 34.75 | 23.04 | Peak |

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :a_TX_5745MHz
 Test By :Ling

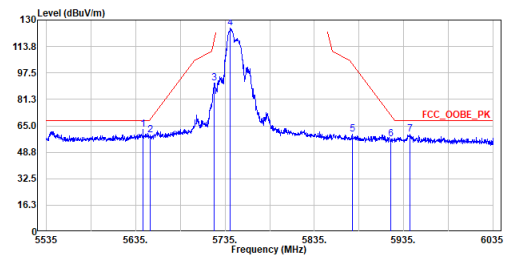


| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|--------|--------|--------|--------|
| | Mhz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 5643.250 | 62.61 | 68.20 | -5.59 | 40.64 | 21.97 | Peak |
| 2 | 5651.000 | 59.20 | 68.95 | -9.75 | 37.22 | 21.98 | Peak |
| 3 | 5722.750 | 91.40 | 117.07 | -25.67 | 69.15 | 22.25 | Peak |
| 4 | 5741.000 | 124.98 | ----- | ----- | 102.66 | 22.32 | Peak |
| 5 | 5877.250 | 60.08 | 103.54 | -43.46 | 37.27 | 22.81 | Peak |
| 6 | 5921.000 | 56.85 | 71.17 | -14.32 | 33.87 | 22.98 | Peak |
| 7 | 5942.500 | 59.63 | 68.20 | -8.57 | 36.59 | 23.04 | Peak |

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :a_TX_5745MHz
 Test By :Ling

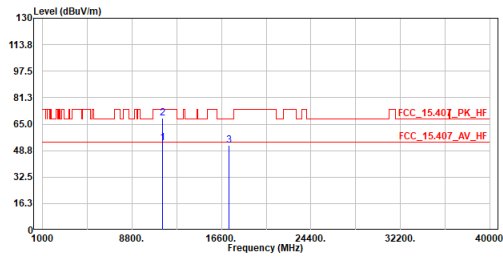


| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|---------|
| | Mhz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 11490.000 | 53.71 | 54.00 | -0.29 | 59.89 | -6.18 | Average |
| 2 | 11490.000 | 68.52 | 74.00 | -5.48 | 74.70 | -6.18 | Peak |
| 3 | 17235.000 | 52.24 | 68.20 | -15.96 | 55.56 | -3.32 | Peak |

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :a_TX_5745MHz
 Test By :Ling

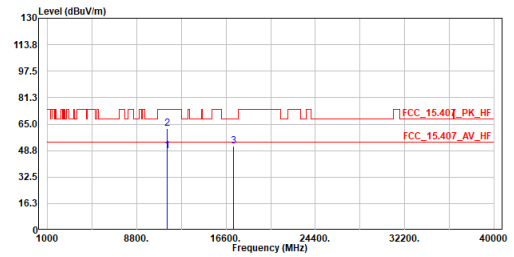


| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|---------|
| | Mhz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 11490.000 | 48.34 | 54.00 | -5.66 | 54.52 | -6.18 | Average |
| 2 | 11490.000 | 62.16 | 74.00 | -11.84 | 68.34 | -6.18 | Peak |
| 3 | 17235.000 | 51.53 | 68.20 | -16.67 | 54.85 | -3.32 | Peak |

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :a_TX_5785MHz
 Test By :Ling

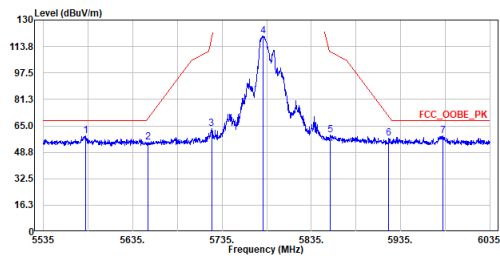


| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
| | Mhz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 5582.000 | 58.75 | 68.20 | -9.45 | 37.01 | 21.74 | Peak |
| 2 | 5651.750 | 55.00 | 69.50 | -14.50 | 33.02 | 21.98 | Peak |
| 3 | 5723.250 | 63.27 | 118.21 | -54.94 | 41.02 | 22.25 | Peak |
| 4 | 5781.250 | 120.12 | ----- | ----- | 97.66 | 22.46 | Peak |
| 5 | 5856.250 | 59.41 | 110.45 | -51.04 | 36.68 | 22.73 | Peak |
| 6 | 5921.750 | 57.36 | 70.61 | -13.25 | 34.38 | 22.98 | Peak |
| 7 | 5982.250 | 58.64 | 68.20 | -9.56 | 35.44 | 23.20 | Peak |

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :a_TX_5785MHz
 Test By :Ling

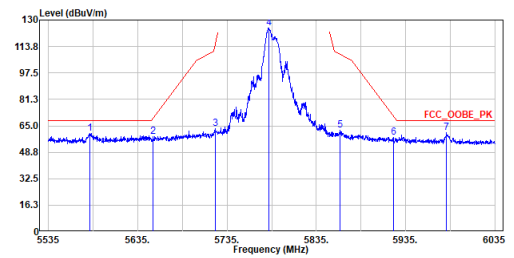


| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|--------|--------|--------|--------|
| | Mhz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 5581.750 | 60.25 | 68.20 | -7.95 | 38.51 | 21.74 | Peak |
| 2 | 5652.000 | 58.28 | 69.69 | -11.41 | 36.30 | 21.98 | Peak |
| 3 | 5721.750 | 63.31 | 114.79 | -51.48 | 41.06 | 22.25 | Peak |
| 4 | 5781.500 | 124.88 | ----- | ----- | 102.42 | 22.46 | Peak |
| 5 | 5861.500 | 62.26 | 108.98 | -46.72 | 39.50 | 22.76 | Peak |
| 6 | 5921.250 | 57.99 | 70.98 | -12.99 | 35.01 | 22.98 | Peak |
| 7 | 5980.750 | 60.80 | 68.20 | -7.40 | 37.61 | 23.19 | Peak |

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :a_TX_5785MHz
 Test By :Ling

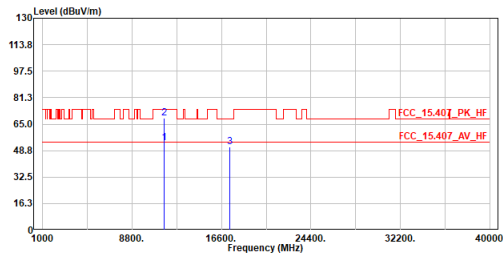


| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|---------|
| | Mhz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 11570.000 | 53.59 | 54.00 | -0.41 | 59.72 | -6.13 | Average |
| 2 | 11570.000 | 68.70 | 74.00 | -5.30 | 74.83 | -6.13 | Peak |
| 3 | 17355.000 | 51.13 | 68.20 | -17.07 | 54.29 | -3.16 | Peak |

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :a_TX_5785MHz
 Test By :Ling

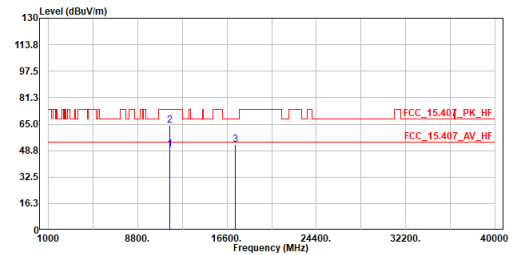


| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|---------|
| | Mhz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 11570.000 | 49.71 | 54.00 | -4.29 | 55.84 | -6.13 | Average |
| 2 | 11570.000 | 64.16 | 74.00 | -9.84 | 70.29 | -6.13 | Peak |
| 3 | 17355.000 | 52.42 | 68.20 | -15.78 | 55.58 | -3.16 | Peak |

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :a_TX_5825MHz
 Test By :Ling

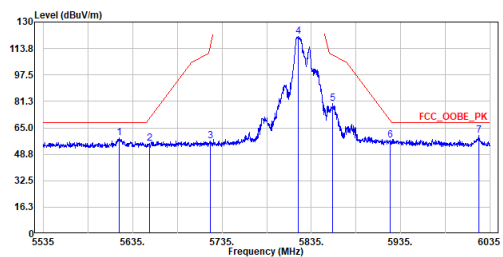


| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
| | Mhz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 5619.750 | 58.95 | 68.20 | -9.25 | 37.08 | 21.87 | Peak |
| 2 | 5653.500 | 55.26 | 70.80 | -15.54 | 33.25 | 22.01 | Peak |
| 3 | 5722.250 | 56.93 | 115.93 | -59.00 | 34.68 | 22.25 | Peak |
| 4 | 5820.750 | 120.94 | ----- | ----- | 98.33 | 22.61 | Peak |
| 5 | 5859.250 | 80.08 | 109.61 | -29.53 | 57.34 | 22.74 | Peak |
| 6 | 5923.500 | 57.61 | 69.32 | -11.71 | 34.63 | 22.98 | Peak |
| 7 | 6023.000 | 60.55 | 68.20 | -7.65 | 37.18 | 23.37 | Peak |

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :a_TX_5825MHz
 Test By :Ling

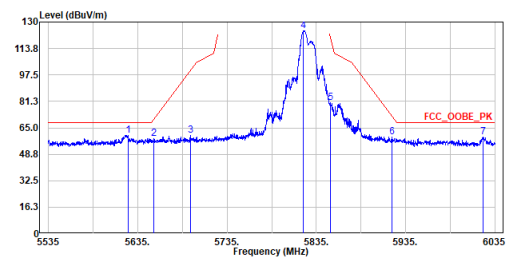


| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|--------|--------|--------|--------|
| | Mhz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 5624.000 | 60.46 | 68.20 | -7.74 | 38.57 | 21.89 | Peak |
| 2 | 5653.250 | 58.29 | 70.61 | -12.32 | 36.28 | 22.01 | Peak |
| 3 | 5694.250 | 60.15 | 100.95 | -40.80 | 38.00 | 22.15 | Peak |
| 4 | 5820.750 | 124.75 | ----- | ----- | 102.14 | 22.61 | Peak |
| 5 | 5850.500 | 80.56 | 121.06 | -40.50 | 57.84 | 22.72 | Peak |
| 6 | 5920.000 | 59.42 | 71.91 | -12.49 | 36.46 | 22.96 | Peak |
| 7 | 6021.500 | 59.21 | 68.20 | -8.99 | 35.85 | 23.36 | Peak |

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :a_TX_5825MHz
 Test By :Ling

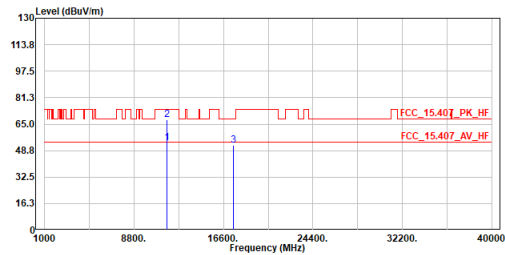


| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|---------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 11650.000 | 53.68 | 54.00 | -0.32 | 59.74 | -6.06 | Average |
| 2 | 11650.000 | 67.73 | 74.00 | -6.27 | 73.79 | -6.06 | Peak |
| 3 | 17475.000 | 51.79 | 68.20 | -16.41 | 54.78 | -2.99 | Peak |

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :a_TX_5825MHz
 Test By :Ling

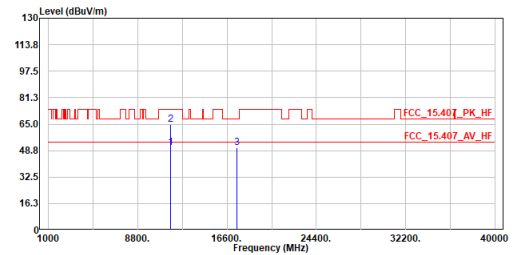


| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|---------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 11650.000 | 50.53 | 54.00 | -3.47 | 56.59 | -6.06 | Average |
| 2 | 11650.000 | 64.54 | 74.00 | -9.46 | 70.60 | -6.06 | Peak |
| 3 | 17475.000 | 50.35 | 68.20 | -17.85 | 53.34 | -2.99 | Peak |

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax20_TX_5180MHz
 Test by :Gary Liao

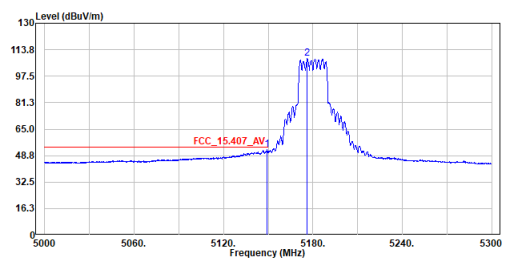


| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|-------|-------|--------|---------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 5149.100 | 52.49 | 54.00 | -1.51 | 31.11 | 21.38 | Average |
| 2 | 5176.250 | 108.24 | ----- | ----- | 86.85 | 21.39 | Average |

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax20_TX_5180MHz
 Test by :Gary Liao

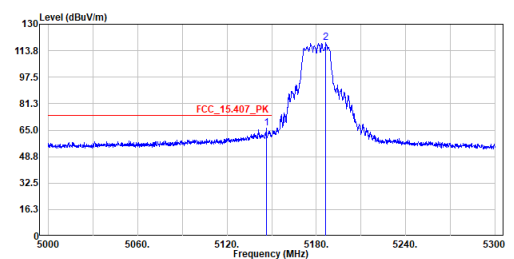


| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|-------|-------|--------|--------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 5146.400 | 66.03 | 74.00 | -7.97 | 44.65 | 21.38 | Peak |
| 2 | 5186.300 | 118.53 | ----- | ----- | 97.14 | 21.39 | Peak |

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax20_TX_5180MHz
 Test by :Gary Liao

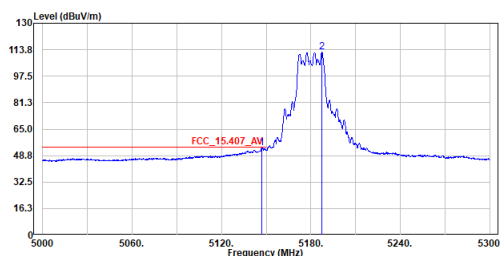

| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|-------|-------|--------|---------|
| | Mhz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 5147.000 | 53.33 | 54.00 | -0.67 | 31.95 | 21.38 | Average |
| 2 | 5187.500 | 112.34 | ----- | ----- | 90.96 | 21.38 | Average |

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax20_TX_5180MHz
 Test by :Gary Liao

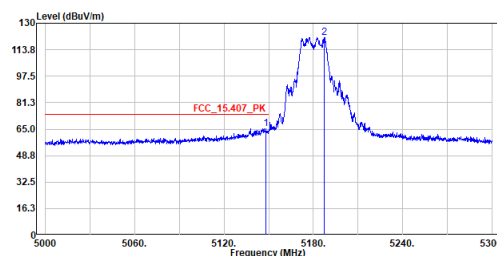

| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|-------|-------|--------|--------|
| | Mhz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 5148.050 | 65.49 | 74.00 | -8.51 | 44.11 | 21.38 | Peak |
| 2 | 5187.500 | 121.17 | ----- | ----- | 99.79 | 21.38 | Peak |

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax20_TX_5180MHz
 Test By :Ling

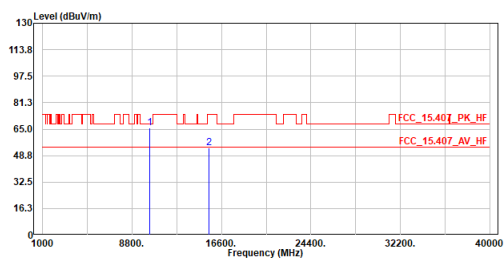

| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
| | Mhz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 10360.000 | 65.76 | 68.20 | -2.44 | 73.73 | -7.97 | Peak |
| 2 | 15540.000 | 53.66 | 74.00 | -20.34 | 56.88 | -3.22 | Peak |

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax20_TX_5180MHz
 Test By :Ling

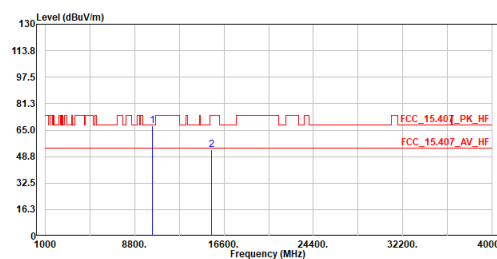

| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
| | Mhz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 10360.000 | 67.90 | 68.20 | -0.30 | 75.87 | -7.97 | Peak |
| 2 | 15540.000 | 53.13 | 74.00 | -20.87 | 56.35 | -3.22 | Peak |

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax20_TX_5220MHz
 Test by :Gary Liao

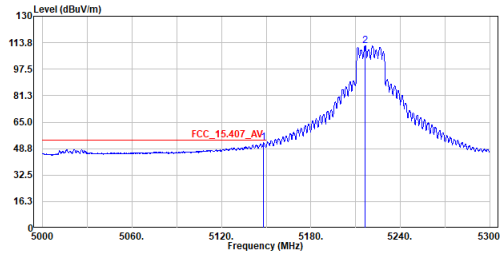

| No. | Frequency | Level | Limit Line | Over Limit | Read Level | Factor | Remark |
|-----|-----------|--------|------------|------------|------------|--------|---------|
| | Mhz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 5148.350 | 52.51 | 54.00 | -1.49 | 31.13 | 21.38 | Average |
| 2 | 5216.150 | 111.98 | ----- | ----- | 90.59 | 21.39 | Average |

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax20_TX_5220MHz
 Test by :Gary Liao

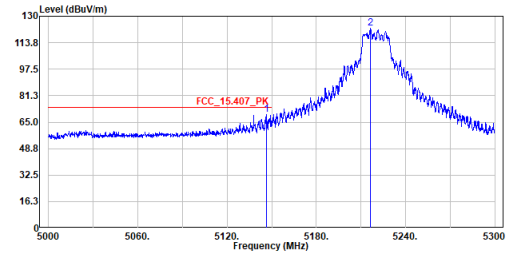

| No. | Frequency | Level | Limit Line | Over Limit | Read Level | Factor | Remark |
|-----|-----------|--------|------------|------------|------------|--------|--------|
| | Mhz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 5146.400 | 69.79 | 74.00 | -4.21 | 48.41 | 21.38 | Peak |
| 2 | 5216.450 | 122.62 | ----- | ----- | 101.23 | 21.39 | Peak |

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax20_TX_5220MHz
 Test by :Gary Liao

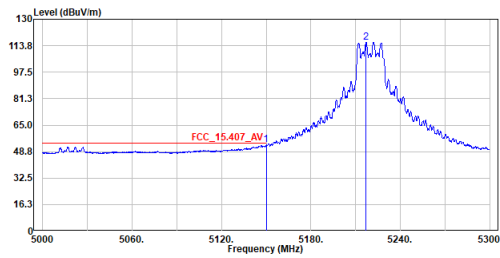

| No. | Frequency | Level | Limit Line | Over Limit | Read Level | Factor | Remark |
|-----|-----------|--------|------------|------------|------------|--------|---------|
| | Mhz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 5150.000 | 53.11 | 54.00 | -0.89 | 31.73 | 21.38 | Average |
| 2 | 5217.050 | 115.97 | ----- | ----- | 94.58 | 21.39 | Average |

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax20_TX_5220MHz
 Test by :Gary Liao

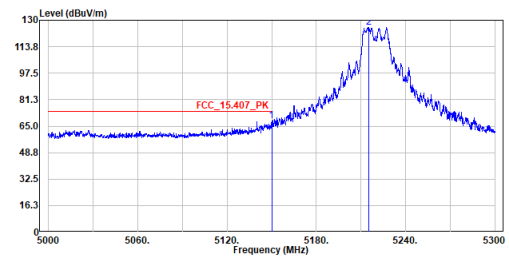

| No. | Frequency | Level | Limit Line | Over Limit | Read Level | Factor | Remark |
|-----|-----------|--------|------------|------------|------------|--------|--------|
| | Mhz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 5150.000 | 68.13 | 74.00 | -5.87 | 46.75 | 21.38 | Peak |
| 2 | 5215.250 | 125.58 | ----- | ----- | 104.19 | 21.39 | Peak |

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax20_TX_5220MHz
 Test By :Ling

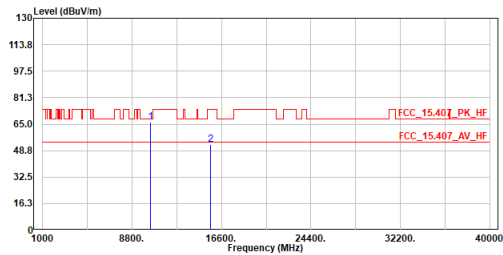


| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 10440.000 | 66.25 | 68.20 | -1.95 | 74.08 | -7.83 | Peak |
| 2 | 15660.000 | 52.68 | 74.00 | -21.32 | 55.87 | -3.19 | Peak |

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax20_TX_5220MHz
 Test By :Ling

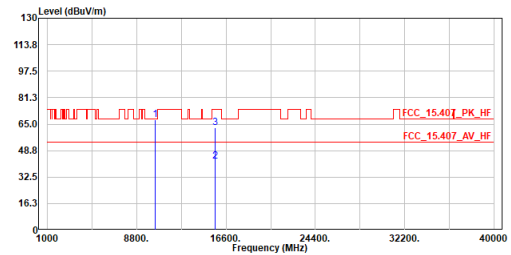


| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|---------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 10440.000 | 67.71 | 68.20 | -0.49 | 75.54 | -7.83 | Peak |
| 2 | 15660.000 | 42.34 | 54.00 | -11.66 | 45.53 | -3.19 | Average |
| 3 | 15660.000 | 62.94 | 74.00 | -11.06 | 66.13 | -3.19 | Peak |

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax20_TX_5240MHz
 Test by :Gary Liao

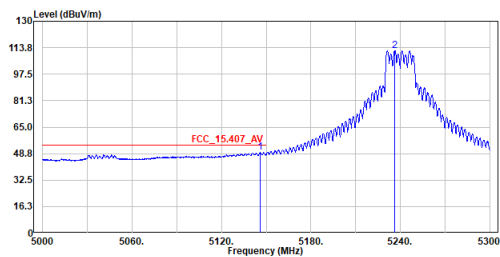


| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|-------|-------|--------|---------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 5145.950 | 49.48 | 54.00 | -4.52 | 28.10 | 21.38 | Average |
| 2 | 5236.100 | 112.05 | ----- | ----- | 90.65 | 21.40 | Average |

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax20_TX_5240MHz
 Test by :Gary Liao

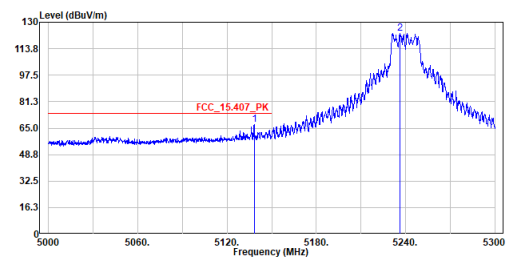


| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|-------|--------|--------|--------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 5138.300 | 67.10 | 74.00 | -6.90 | 45.73 | 21.37 | Peak |
| 2 | 5236.250 | 123.36 | ----- | ----- | 101.96 | 21.40 | Peak |

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax20_TX_5240MHz
 Test by :Gary Liao

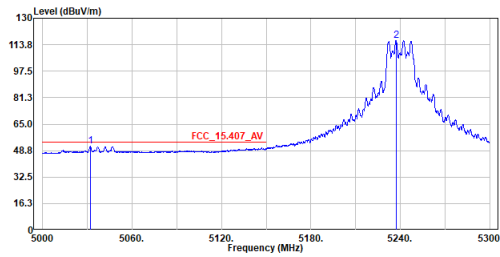


| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|-------|-------|--------|---------|
| | Mhz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 5031.950 | 51.43 | 54.00 | -2.57 | 30.06 | 21.37 | Average |
| 2 | 5237.150 | 116.29 | ----- | ----- | 94.89 | 21.40 | Average |

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax20_TX_5240MHz
 Test by :Gary Liao

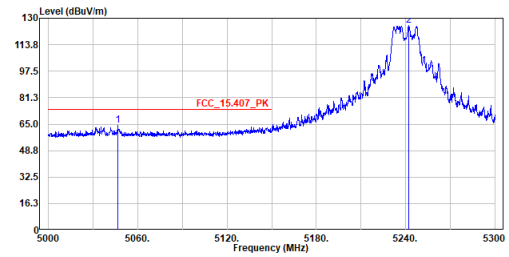


| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|-------|--------|--------|--------|
| | Mhz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 5046.650 | 64.36 | 74.00 | -9.64 | 42.99 | 21.37 | Peak |
| 2 | 5242.250 | 125.44 | ----- | ----- | 104.05 | 21.39 | Peak |

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax20_TX_5240MHz
 Test By :Ling

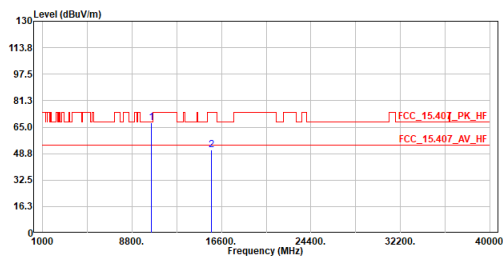


| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
| | Mhz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 10480.000 | 67.94 | 68.20 | -0.26 | 75.70 | -7.76 | Peak |
| 2 | 15720.000 | 51.26 | 74.00 | -22.74 | 54.42 | -3.16 | Peak |

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax20_TX_5240MHz
 Test By :Ling

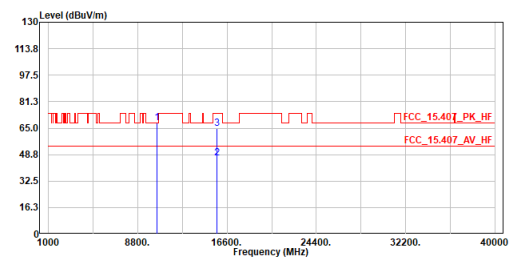


| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|-------|-------|--------|---------|
| | Mhz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 10480.000 | 68.08 | 68.20 | -0.12 | 75.84 | -7.76 | Peak |
| 2 | 15720.000 | 46.39 | 54.00 | -7.61 | 49.55 | -3.16 | Average |
| 3 | 15720.000 | 64.94 | 74.00 | -9.06 | 68.10 | -3.16 | Peak |

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax20_TX_5260MHz
 Test By :Ling

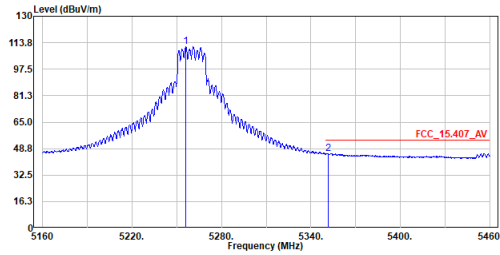

| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|-------|-------|--------|---------|
| | Mhz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 5256.150 | 111.43 | ----- | ----- | 90.02 | 21.41 | Average |
| 2 | 5351.400 | 45.85 | 54.00 | -8.15 | 24.43 | 21.42 | Average |

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax20_TX_5260MHz
 Test By :Ling

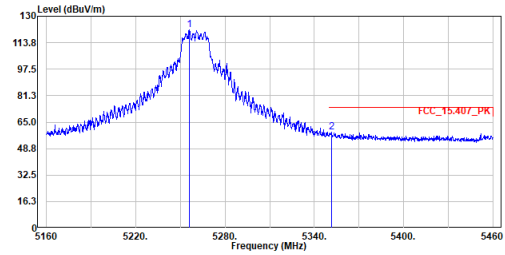

| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|--------|--------|--------|--------|
| | Mhz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 5256.150 | 121.89 | ----- | ----- | 100.48 | 21.41 | Peak |
| 2 | 5351.550 | 58.89 | 74.00 | -15.11 | 37.47 | 21.42 | Peak |

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax20_TX_5260MHz
 Test By :Ling

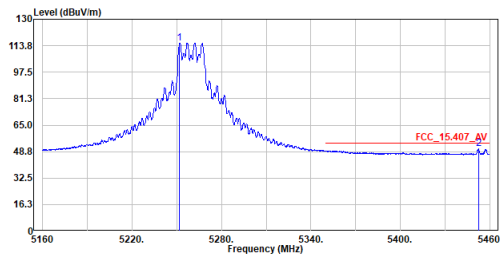

| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|-------|-------|--------|---------|
| | Mhz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 5251.950 | 115.45 | ----- | ----- | 94.04 | 21.41 | Average |
| 2 | 5452.350 | 50.34 | 54.00 | -3.66 | 28.91 | 21.43 | Average |

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax20_TX_5260MHz
 Test By :Ling

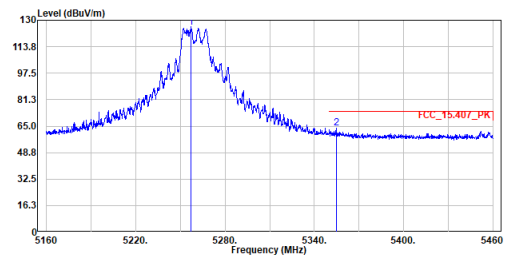

| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|--------|--------|--------|--------|
| | Mhz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 5257.050 | 125.57 | ----- | ----- | 104.16 | 21.41 | Peak |
| 2 | 5354.850 | 63.70 | 74.00 | -10.30 | 42.28 | 21.42 | Peak |

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax20_TX_5260MHz
 Test By :Ling

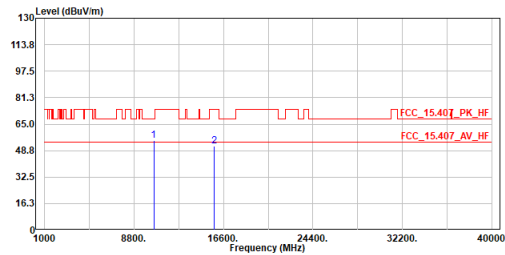

| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 10520.000 | 54.77 | 68.20 | -13.43 | 62.48 | -7.71 | Peak |
| 2 | 15780.000 | 51.41 | 74.00 | -22.59 | 54.56 | -3.15 | Peak |

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax20_TX_5260MHz
 Test By :Ling

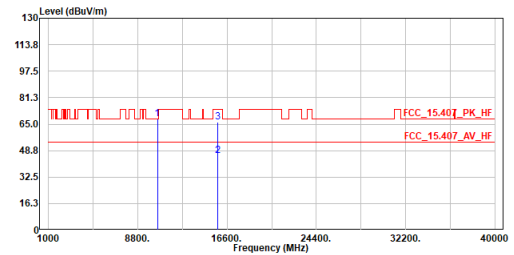

| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|-------|-------|--------|---------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 10520.000 | 68.09 | 68.20 | -0.11 | 75.80 | -7.71 | Peak |
| 2 | 15780.000 | 45.60 | 54.00 | -8.40 | 48.75 | -3.15 | Average |
| 3 | 15780.000 | 66.25 | 74.00 | -7.75 | 69.40 | -3.15 | Peak |

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax20_TX_5300MHz
 Test By :Ling

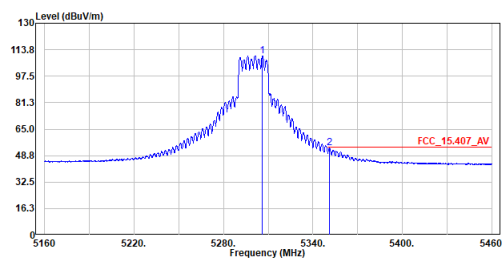

| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|-------|-------|--------|---------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 5306.100 | 110.11 | ----- | ----- | 88.69 | 21.42 | Average |
| 2 | 5350.950 | 53.45 | 54.00 | -0.55 | 32.03 | 21.42 | Average |

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax20_TX_5300MHz
 Test By :Ling

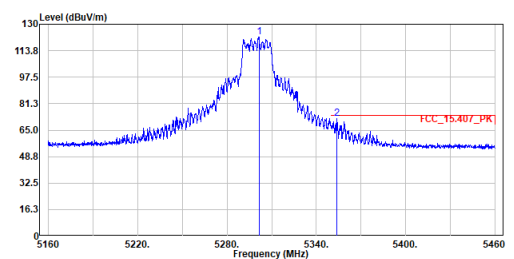

| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|-------|--------|--------|--------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 5301.450 | 122.24 | ----- | ----- | 100.83 | 21.41 | Peak |
| 2 | 5353.950 | 72.28 | 74.00 | -1.72 | 50.86 | 21.42 | Peak |

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax20_TX_5300MHz
 Test By :Ling

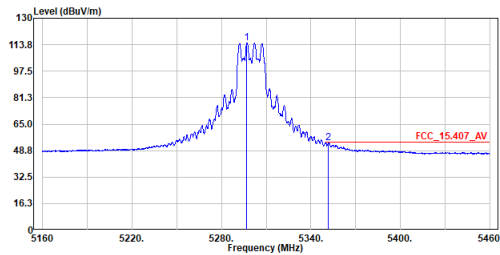

| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|-------|-------|--------|---------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 5297.100 | 114.75 | ----- | ----- | 93.34 | 21.41 | Average |
| 2 | 5351.550 | 53.46 | 54.00 | -0.54 | 32.04 | 21.42 | Average |

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax20_TX_5300MHz
 Test By :Ling

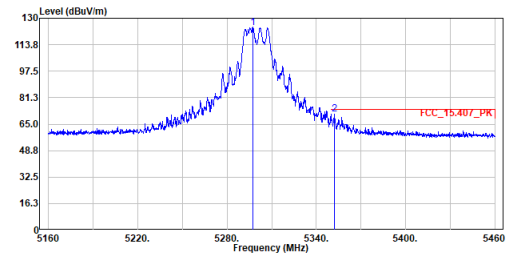

| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|-------|--------|--------|--------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 5297.250 | 124.29 | ----- | ----- | 102.88 | 21.41 | Peak |
| 2 | 5352.150 | 71.27 | 74.00 | -2.73 | 49.85 | 21.42 | Peak |

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax20_TX_5300MHz
 Test By :Ling

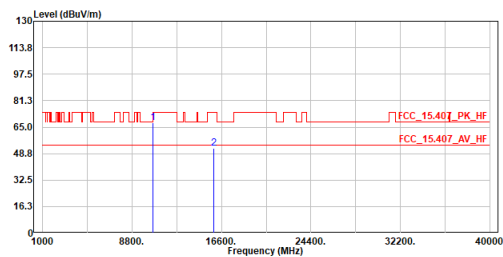

| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 10600.000 | 67.73 | 68.20 | -0.47 | 75.35 | -7.62 | Peak |
| 2 | 15900.000 | 52.19 | 74.00 | -21.81 | 55.30 | -3.11 | Peak |

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax20_TX_5300MHz
 Test By :Ling

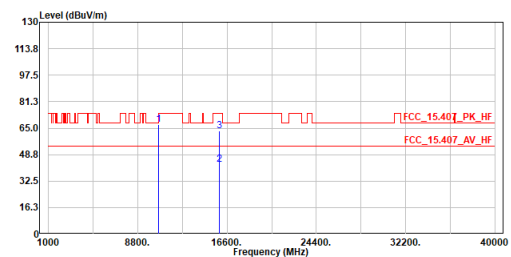

| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|---------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 10600.000 | 67.23 | 68.20 | -0.97 | 74.85 | -7.62 | Peak |
| 2 | 15900.000 | 42.62 | 54.00 | -11.38 | 45.73 | -3.11 | Average |
| 3 | 15900.000 | 63.15 | 74.00 | -10.85 | 66.26 | -3.11 | Peak |

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax20_TX_5320MHz
 Test By :Ling

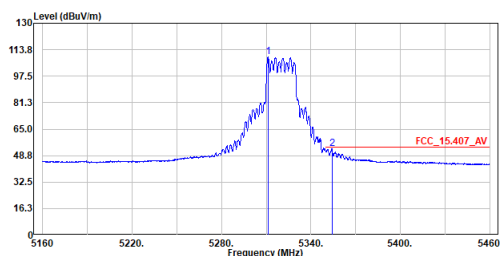

| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|-------|-------|--------|---------|
| | Mhz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 5311.200 | 109.23 | ----- | ----- | 87.81 | 21.42 | Average |
| 2 | 5354.100 | 52.89 | 54.00 | -1.11 | 31.47 | 21.42 | Average |

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax20_TX_5320MHz
 Test By :Ling

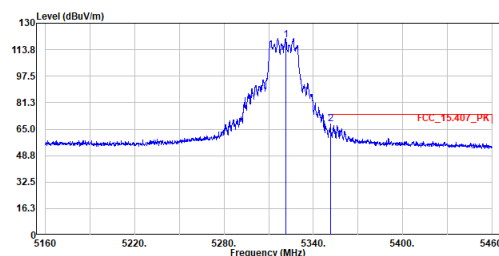

| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|-------|-------|--------|--------|
| | Mhz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 5321.400 | 119.68 | ----- | ----- | 98.27 | 21.41 | Peak |
| 2 | 5351.550 | 68.13 | 74.00 | -5.87 | 46.71 | 21.42 | Peak |

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax20_TX_5320MHz
 Test By :Ling

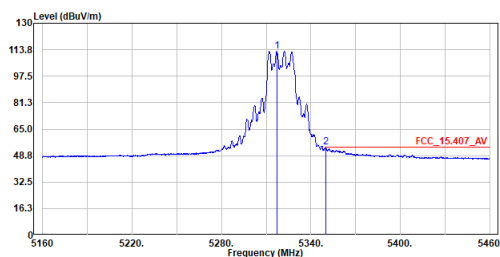

| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|-------|-------|--------|---------|
| | Mhz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 5317.200 | 112.85 | ----- | ----- | 91.44 | 21.41 | Average |
| 2 | 5350.200 | 53.82 | 54.00 | -0.18 | 32.40 | 21.42 | Average |

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax20_TX_5320MHz
 Test By :Ling

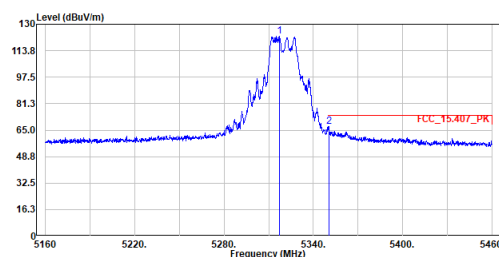

| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|-------|--------|--------|--------|
| | Mhz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 5317.050 | 122.46 | ----- | ----- | 101.05 | 21.41 | Peak |
| 2 | 5350.500 | 67.09 | 74.00 | -6.91 | 45.67 | 21.42 | Peak |

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax20_TX_5320MHz
 Test By :Ling

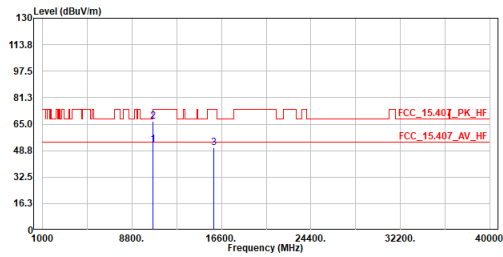

| No. | Frequency MHz | Level dBuV/m | Limit Line dBuV/m | Over Limit dB | Read Level dBuV | Factor dB | Remark |
|-----|------------------|-----------------|-------------------------|---------------------|-----------------------|--------------|---------|
| 1 | 10640.000 | 52.37 | 54.00 | -1.63 | 59.93 | -7.56 | Average |
| 2 | 10640.000 | 66.82 | 74.00 | -7.18 | 74.38 | -7.56 | Peak |
| 3 | 15960.000 | 50.69 | 74.00 | -23.31 | 53.78 | -3.09 | Peak |

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax20_TX_5320MHz
 Test By :Ling

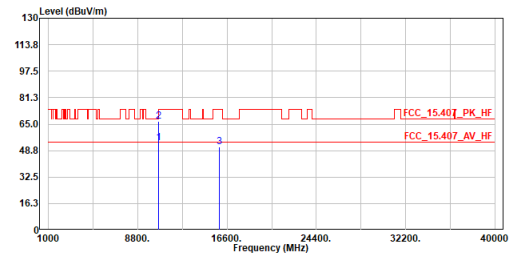

| No. | Frequency MHz | Level dBuV/m | Limit Line dBuV/m | Over Limit dB | Read Level dBuV | Factor dB | Remark |
|-----|------------------|-----------------|-------------------------|---------------------|-----------------------|--------------|---------|
| 1 | 10640.000 | 53.65 | 54.00 | -0.35 | 61.21 | -7.56 | Average |
| 2 | 10640.000 | 66.89 | 74.00 | -7.11 | 74.45 | -7.56 | Peak |
| 3 | 15960.000 | 50.84 | 74.00 | -23.16 | 53.93 | -3.09 | Peak |

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax20_TX_5500MHz
 Test By :Gary

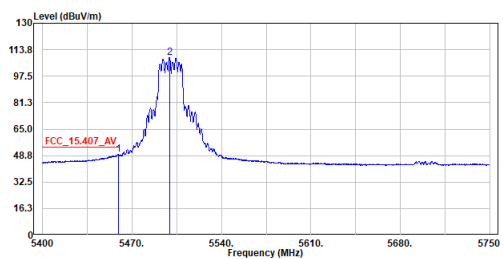

| No. | Frequency MHz | Level dBuV/m | Limit Line dBuV/m | Over Limit dB | Read Level dBuV | Factor dB | Remark |
|-----|------------------|-----------------|-------------------------|---------------------|-----------------------|--------------|---------|
| 1 | 5459.150 | 49.45 | 54.00 | -4.55 | 28.01 | 21.44 | Average |
| 2 | 5499.225 | 108.88 | ----- | ----- | 87.44 | 21.44 | Average |

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax20_TX_5500MHz
 Test By :Gary

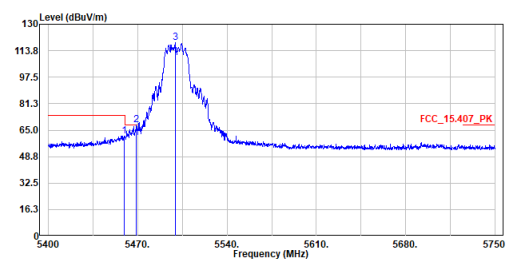

| No. | Frequency MHz | Level dBuV/m | Limit Line dBuV/m | Over Limit dB | Read Level dBuV | Factor dB | Remark |
|-----|------------------|-----------------|-------------------------|---------------------|-----------------------|--------------|--------|
| 1 | 5459.500 | 61.28 | 74.00 | -12.72 | 39.84 | 21.44 | Peak |
| 2 | 5468.950 | 68.00 | 68.20 | -0.20 | 46.57 | 21.43 | Peak |
| 3 | 5499.400 | 118.86 | ----- | ----- | 97.42 | 21.44 | Peak |

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax20_TX_5500MHz
 Test By :Gary

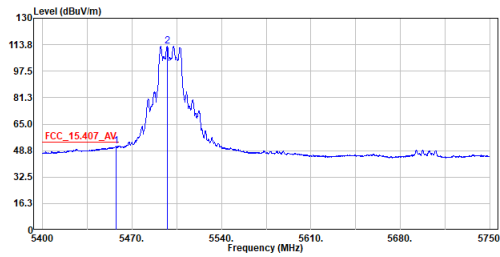


| No. | Frequency | Level | Limit Line | Over Limit | Read Level | Factor | Remark |
|-----|-----------|--------|------------|------------|------------|--------|---------|
| | Mhz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 5457.575 | 51.60 | 54.00 | -2.40 | 30.16 | 21.44 | Average |
| 2 | 5497.650 | 112.84 | ----- | ----- | 91.40 | 21.44 | Average |

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax20_TX_5500MHz
 Test By :Gary

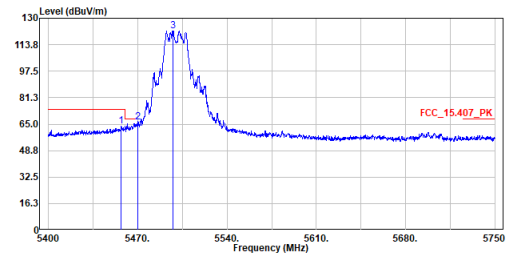


| No. | Frequency | Level | Limit Line | Over Limit | Read Level | Factor | Remark |
|-----|-----------|--------|------------|------------|------------|--------|--------|
| | Mhz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 5457.050 | 63.70 | 74.00 | -10.30 | 42.26 | 21.44 | Peak |
| 2 | 5470.000 | 66.02 | 68.20 | -2.18 | 44.59 | 21.43 | Peak |
| 3 | 5497.475 | 122.38 | ----- | ----- | 100.94 | 21.44 | Peak |

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax20_TX_5500MHz
 Test By :Gary

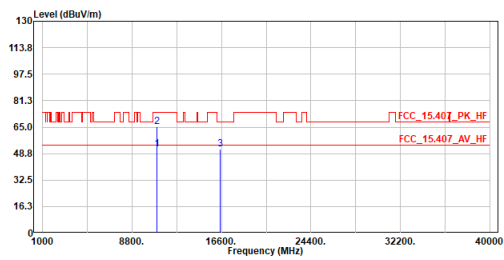


| No. | Frequency | Level | Limit Line | Over Limit | Read Level | Factor | Remark |
|-----|-----------|--------|------------|------------|------------|--------|---------|
| | Mhz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 11000.000 | 51.59 | 54.00 | -2.41 | 58.75 | -7.16 | Average |
| 2 | 11000.000 | 65.12 | 74.00 | -8.88 | 72.28 | -7.16 | Peak |
| 3 | 16500.000 | 51.74 | 68.20 | -16.46 | 55.08 | -3.34 | Peak |

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax20_TX_5500MHz
 Test By :Gary

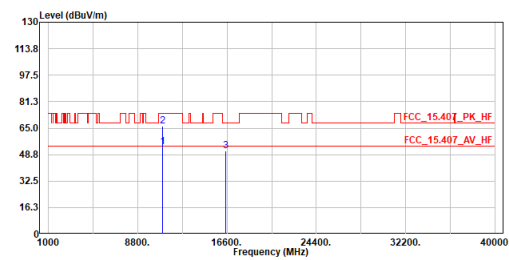


| No. | Frequency | Level | Limit Line | Over Limit | Read Level | Factor | Remark |
|-----|-----------|--------|------------|------------|------------|--------|---------|
| | Mhz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 11000.000 | 53.47 | 54.00 | -0.53 | 60.63 | -7.16 | Average |
| 2 | 11000.000 | 66.19 | 74.00 | -7.81 | 73.35 | -7.16 | Peak |
| 3 | 16500.000 | 51.06 | 68.20 | -17.14 | 54.40 | -3.34 | Peak |

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax20_TX_5580MHz
 Test By :Gary

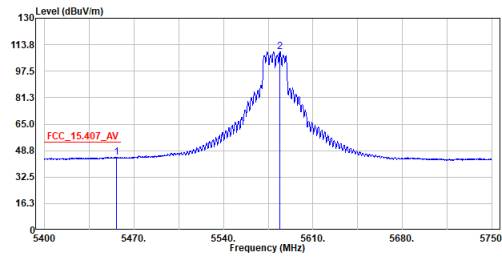


| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|-------|-------|--------|---------|
| | Mhz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 5456.000 | 44.74 | 54.00 | -9.26 | 23.30 | 21.44 | Average |
| 2 | 5584.275 | 109.50 | ----- | ----- | 87.75 | 21.75 | Average |

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax20_TX_5580MHz
 Test By :Gary

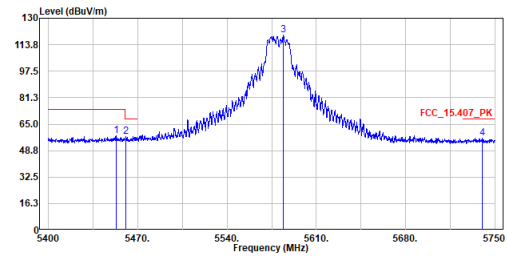


| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
| | Mhz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 5453.375 | 58.11 | 74.00 | -15.89 | 36.68 | 21.43 | Peak |
| 2 | 5460.550 | 57.20 | 68.20 | -11.00 | 35.76 | 21.44 | Peak |
| 3 | 5584.275 | 119.55 | ----- | ----- | 97.80 | 21.75 | Peak |
| 4 | 5740.200 | 56.23 | 68.20 | -11.97 | 33.91 | 22.32 | Peak |

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax20_TX_5580MHz
 Test By :Gary

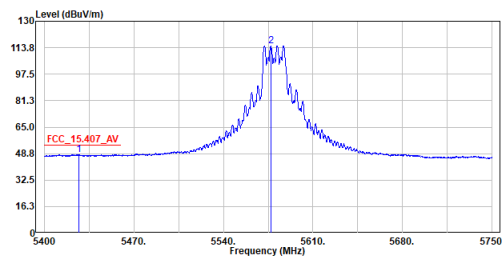


| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|-------|-------|--------|---------|
| | Mhz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 5426.950 | 48.23 | 54.00 | -5.77 | 26.80 | 21.43 | Average |
| 2 | 5577.100 | 115.00 | ----- | ----- | 93.28 | 21.72 | Average |

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax20_TX_5580MHz
 Test By :Gary

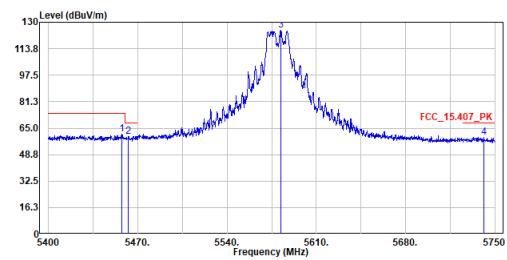


| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|--------|--------|--------|--------|
| | Mhz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 5457.750 | 61.09 | 74.00 | -12.91 | 39.65 | 21.44 | Peak |
| 2 | 5462.650 | 60.09 | 68.20 | -8.11 | 38.66 | 21.43 | Peak |
| 3 | 5582.000 | 125.11 | ----- | ----- | 103.37 | 21.74 | Peak |
| 4 | 5741.075 | 59.33 | 68.20 | -8.87 | 37.01 | 22.32 | Peak |

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax20_TX_5580MHz
 Test By :Gary

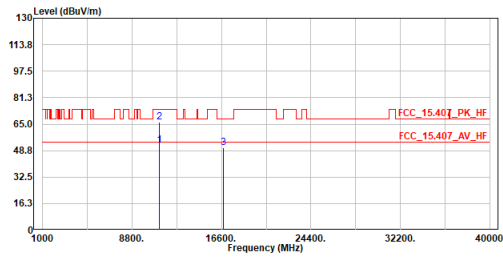

| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|---------|
| | Mhz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 11160.000 | 51.95 | 54.00 | -2.05 | 58.79 | -6.84 | Average |
| 2 | 11160.000 | 66.08 | 74.00 | -7.92 | 72.92 | -6.84 | Peak |
| 3 | 16740.000 | 50.53 | 68.20 | -17.67 | 54.02 | -3.49 | Peak |

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax20_TX_5580MHz
 Test By :Gary

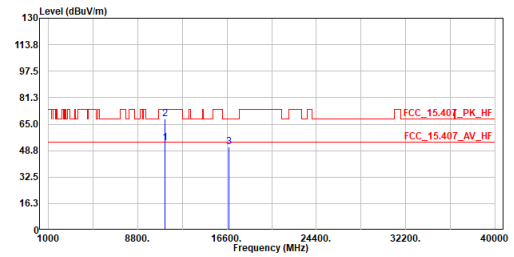

| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|---------|
| | Mhz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 11160.000 | 53.28 | 54.00 | -0.72 | 60.12 | -6.84 | Average |
| 2 | 11160.000 | 68.27 | 74.00 | -5.73 | 75.11 | -6.84 | Peak |
| 3 | 16740.000 | 50.86 | 68.20 | -17.34 | 54.35 | -3.49 | Peak |

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax20_TX_5700MHz
 Test By :Gary

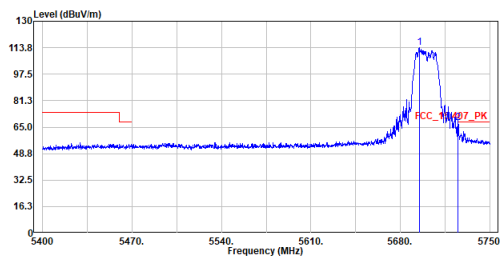

| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|-------|-------|--------|--------|
| | Mhz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 5694.700 | 113.58 | ----- | ----- | 91.43 | 22.15 | Peak |
| 2 | 5725.150 | 67.64 | 68.20 | -0.56 | 45.38 | 22.26 | Peak |

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax20_TX_5700MHz
 Test By :Gary

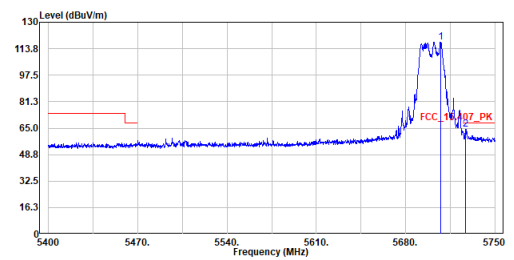

| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|-------|-------|--------|--------|
| | Mhz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 5707.300 | 117.55 | ----- | ----- | 95.35 | 22.20 | Peak |
| 2 | 5727.075 | 64.51 | 68.20 | -3.69 | 42.24 | 22.27 | Peak |

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax20_TX_5700MHz
 Test By :Gary

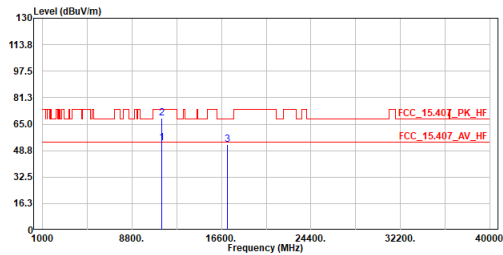


| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|---------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 11400.000 | 53.58 | 54.00 | -0.42 | 59.95 | -6.37 | Average |
| 2 | 11400.000 | 68.74 | 74.00 | -5.26 | 75.11 | -6.37 | Peak |
| 3 | 17100.000 | 52.40 | 68.20 | -15.80 | 55.91 | -3.51 | Peak |

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax20_TX_5700MHz
 Test By :Gary

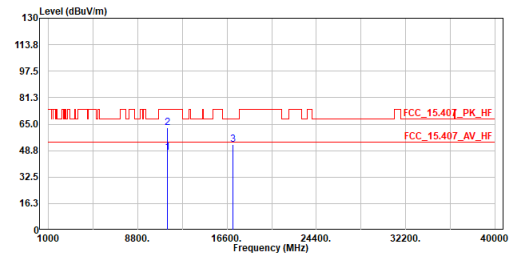


| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|---------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 11400.000 | 47.77 | 54.00 | -6.23 | 54.14 | -6.37 | Average |
| 2 | 11400.000 | 62.60 | 74.00 | -11.40 | 68.97 | -6.37 | Peak |
| 3 | 17100.000 | 52.33 | 68.20 | -15.87 | 55.84 | -3.51 | Peak |

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax20_TX_5720MHz
 Test By :Ling

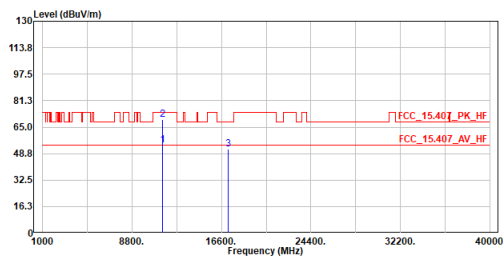


| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|---------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 11440.000 | 53.77 | 54.00 | -0.23 | 60.05 | -6.28 | Average |
| 2 | 11440.000 | 69.54 | 74.00 | -4.46 | 75.82 | -6.28 | Peak |
| 3 | 17160.000 | 51.51 | 68.20 | -16.69 | 54.93 | -3.42 | Peak |

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax20_TX_5720MHz
 Test By :Ling

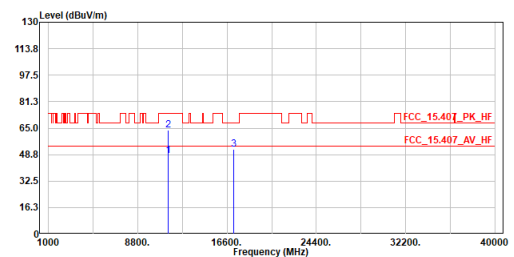


| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|---------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 11440.000 | 47.85 | 54.00 | -6.15 | 54.13 | -6.28 | Average |
| 2 | 11440.000 | 63.69 | 74.00 | -10.31 | 69.97 | -6.28 | Peak |
| 3 | 17160.000 | 51.77 | 68.20 | -16.43 | 55.19 | -3.42 | Peak |

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax20_TX_5745MHz
 Test By :Ling

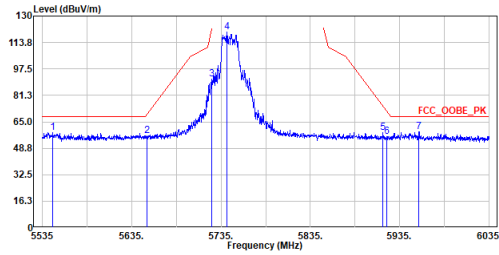

| No. | Frequency | Level | Limit Line | Over Limit | Read Level | Factor | Remark |
|-----|-----------|--------|------------|------------|------------|--------|--------|
| | Mhz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 5546.500 | 58.53 | 68.20 | -9.67 | 36.92 | 21.61 | Peak |
| 2 | 5652.500 | 56.61 | 70.06 | -13.45 | 34.61 | 22.00 | Peak |
| 3 | 5724.500 | 91.25 | 121.06 | -29.81 | 69.00 | 22.25 | Peak |
| 4 | 5741.750 | 120.06 | ----- | ----- | 97.74 | 22.32 | Peak |
| 5 | 5916.250 | 58.39 | 74.68 | -16.29 | 35.43 | 22.96 | Peak |
| 6 | 5920.500 | 55.95 | 71.54 | -15.59 | 32.98 | 22.97 | Peak |
| 7 | 5956.750 | 58.92 | 68.20 | -9.28 | 35.83 | 23.09 | Peak |

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax20_TX_5745MHz
 Test By :Ling

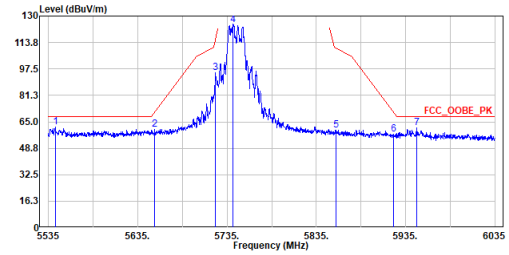

| No. | Frequency | Level | Limit Line | Over Limit | Read Level | Factor | Remark |
|-----|-----------|--------|------------|------------|------------|--------|--------|
| | Mhz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 5542.500 | 61.80 | 68.20 | -6.40 | 40.21 | 21.59 | Peak |
| 2 | 5654.000 | 60.23 | 71.17 | -10.94 | 38.22 | 22.01 | Peak |
| 3 | 5722.250 | 95.33 | 115.93 | -20.60 | 73.08 | 22.25 | Peak |
| 4 | 5742.000 | 124.81 | ----- | ----- | 102.49 | 22.32 | Peak |
| 5 | 5856.750 | 59.83 | 110.31 | -50.48 | 37.10 | 22.73 | Peak |
| 6 | 5921.250 | 57.15 | 70.98 | -13.83 | 34.17 | 22.98 | Peak |
| 7 | 5947.250 | 61.13 | 68.20 | -7.07 | 38.06 | 23.07 | Peak |

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :ax20_TX_5745MHz
 Test By :Ling

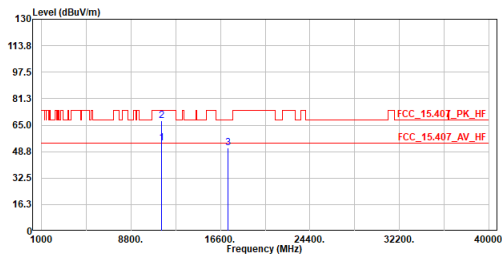

| No. | Frequency | Level | Limit Line | Over Limit | Read Level | Factor | Remark |
|-----|-----------|--------|------------|------------|------------|--------|---------|
| | Mhz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 11490.000 | 53.75 | 54.00 | -0.25 | 59.93 | -6.18 | Average |
| 2 | 11490.000 | 67.52 | 74.00 | -6.48 | 73.70 | -6.18 | Peak |
| 3 | 17235.000 | 51.04 | 68.20 | -17.16 | 54.36 | -3.32 | Peak |

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :ax20_TX_5745MHz
 Test By :Ling

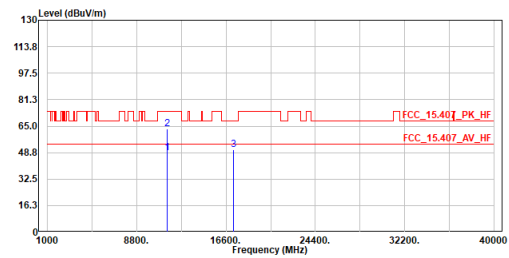

| No. | Frequency | Level | Limit Line | Over Limit | Read Level | Factor | Remark |
|-----|-----------|--------|------------|------------|------------|--------|---------|
| | Mhz | dBuV/m | dBuV/m | dB | dBuV | dB | |
| 1 | 11490.000 | 48.78 | 54.00 | -5.22 | 54.96 | -6.18 | Average |
| 2 | 11490.000 | 63.27 | 74.00 | -10.73 | 69.45 | -6.18 | Peak |
| 3 | 17235.000 | 50.63 | 68.20 | -17.57 | 53.95 | -3.32 | Peak |

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.