



Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :ax20\_TX\_5785MHz  
 Test By :Ling

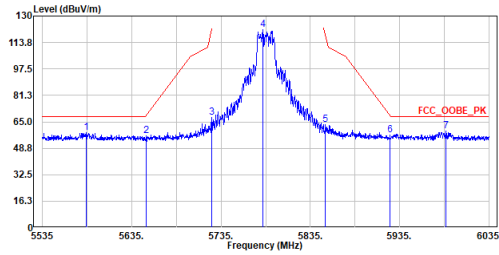

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	Mhz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5584.500	58.59	68.20	-9.61	36.84	21.75	Peak
2	5651.500	56.29	69.32	-13.03	34.31	21.98	Peak
3	5724.250	67.49	120.49	-53.00	45.24	22.25	Peak
4	5781.750	121.55	-----	-----	99.09	22.46	Peak
5	5851.500	63.50	118.78	-55.28	40.78	22.72	Peak
6	5924.000	56.71	68.95	-12.24	33.73	22.98	Peak
7	5987.250	59.14	68.20	-9.06	35.93	23.21	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :ax20\_TX\_5785MHz  
 Test By :Ling

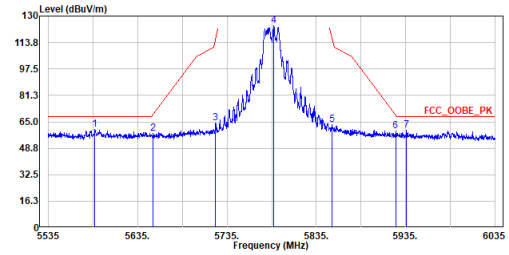

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	Mhz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5587.000	60.15	68.20	-8.05	38.40	21.75	Peak
2	5652.250	58.00	69.87	-11.87	36.02	21.98	Peak
3	5721.750	64.36	114.79	-50.43	42.11	22.25	Peak
4	5787.500	124.04	-----	-----	101.55	22.49	Peak
5	5853.000	63.44	115.36	-51.92	40.71	22.73	Peak
6	5923.750	59.42	69.13	-9.71	36.44	22.98	Peak
7	5936.250	59.69	68.20	-8.51	36.66	23.03	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :ax20\_TX\_5785MHz  
 Test By :Ling

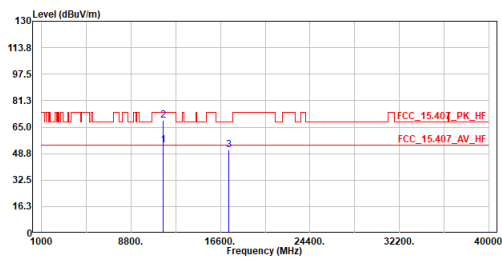

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	Mhz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11570.000	53.83	54.00	-0.17	59.96	-6.13	Average
2	11570.000	69.40	74.00	-4.60	75.53	-6.13	Peak
3	17355.000	50.94	68.20	-17.26	54.10	-3.16	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :ax20\_TX\_5785MHz  
 Test By :Ling

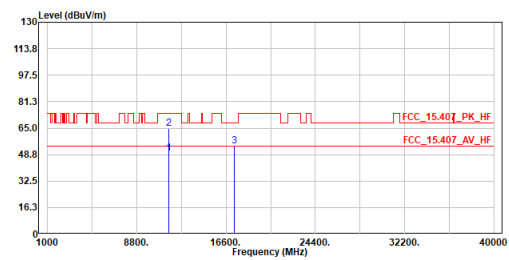

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	Mhz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11570.000	49.72	54.00	-4.28	55.85	-6.13	Average
2	11570.000	64.52	74.00	-9.48	70.65	-6.13	Peak
3	17355.000	53.90	68.20	-14.30	57.06	-3.16	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :ax20\_TX\_5825MHz  
 Test By :Ling

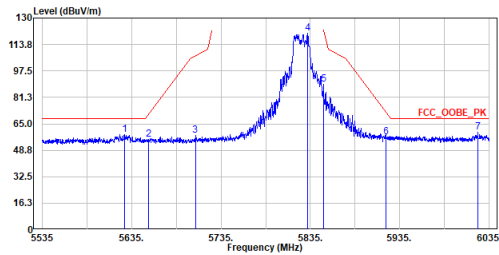

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	Mhz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5626.750	58.60	68.20	-9.60	36.70	21.90	Peak
2	5653.500	55.42	70.80	-15.38	33.41	22.01	Peak
3	5706.250	58.00	106.95	-48.95	35.81	22.19	Peak
4	5832.250	120.48	-----	-----	97.83	22.65	Peak
5	5850.000	89.08	122.20	-33.12	66.36	22.72	Peak
6	5920.000	57.05	71.91	-14.86	34.09	22.96	Peak
7	6022.500	59.93	68.20	-8.27	36.56	23.37	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :ax20\_TX\_5825MHz  
 Test By :Ling

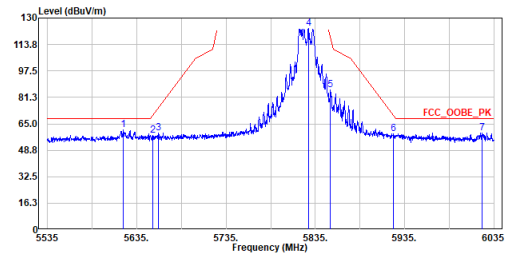

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	Mhz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5620.250	61.32	68.20	-6.88	39.45	21.87	Peak
2	5652.750	58.12	70.24	-12.12	36.12	22.00	Peak
3	5659.500	59.24	75.24	-16.00	37.22	22.02	Peak
4	5827.500	123.63	-----	-----	101.00	22.63	Peak
5	5852.000	85.94	117.64	-31.70	63.22	22.72	Peak
6	5922.750	58.85	69.87	-11.02	35.87	22.98	Peak
7	6021.750	59.38	68.20	-8.82	36.01	23.37	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :ax20\_TX\_5825MHz  
 Test By :Ling

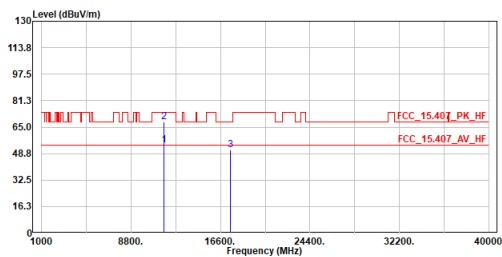

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	Mhz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11650.000	53.72	54.00	-0.28	59.78	-6.06	Average
2	11650.000	68.00	74.00	-6.00	74.06	-6.06	Peak
3	17475.000	51.16	68.20	-17.04	54.15	-2.99	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :ax20\_TX\_5825MHz  
 Test By :Ling

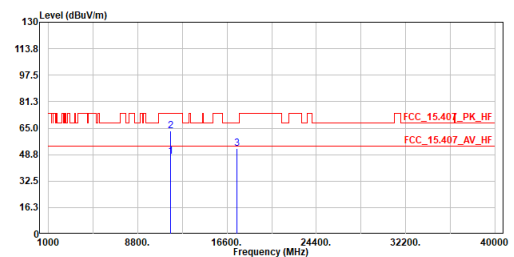

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	Mhz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11650.000	47.70	54.00	-6.30	53.76	-6.06	Average
2	11650.000	63.17	74.00	-10.83	69.23	-6.06	Peak
3	17475.000	52.67	68.20	-15.53	55.66	-2.99	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :ax40\_TX\_5190MHz  
 Test by :Gary Liao

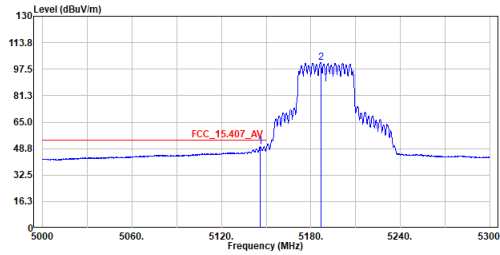

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5145.950	50.22	54.00	-3.78	28.84	21.38	Average
2	5186.600	101.42	-----	-----	80.03	21.39	Average

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :ax40\_TX\_5190MHz  
 Test by :Gary Liao

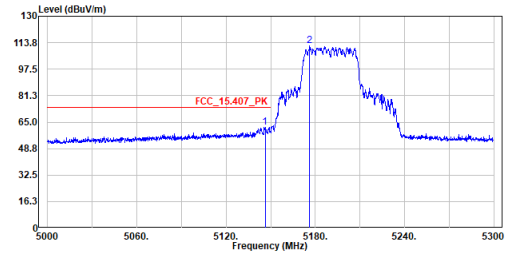

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5146.250	62.03	74.00	-11.97	40.65	21.38	Peak
2	5176.250	111.95	-----	-----	90.56	21.39	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :ax40\_TX\_5190MHz  
 Test by :Gary Liao

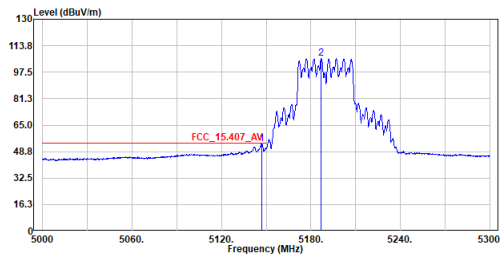

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5147.000	53.53	54.00	-0.47	32.15	21.38	Average
2	5186.900	105.81	-----	-----	84.42	21.39	Average

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :ax40\_TX\_5190MHz  
 Test by :Gary Liao

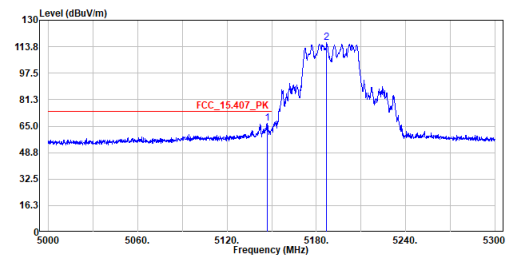

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5147.150	66.72	74.00	-7.28	45.34	21.38	Peak
2	5187.050	116.38	-----	-----	94.99	21.39	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :ax40\_TX\_5190MHz  
 Test By :Ling

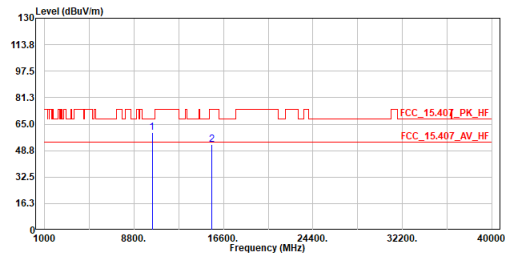

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	10380.000	59.70	68.20	-8.50	67.62	-7.92	Peak
2	15570.000	52.54	74.00	-21.46	55.75	-3.21	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :ax40\_TX\_5190MHz  
 Test By :Ling

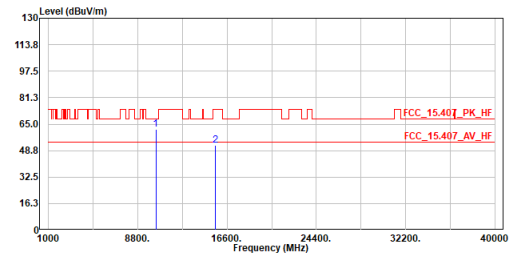

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	10380.000	62.05	68.20	-6.15	69.97	-7.92	Peak
2	15570.000	52.21	74.00	-21.79	55.42	-3.21	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :ax40\_TX\_5230MHz  
 Test by :Gary Liao

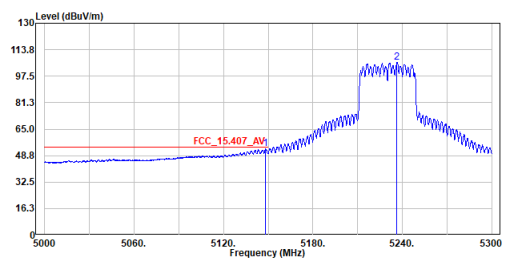

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5148.350	53.08	54.00	-0.92	31.70	21.38	Average
2	5236.400	106.02	-----	-----	84.62	21.40	Average

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :ax40\_TX\_5230MHz  
 Test by :Gary Liao

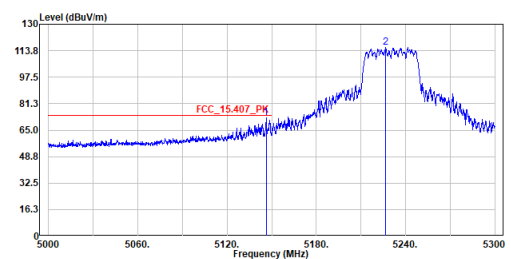

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5146.250	72.47	74.00	-1.53	51.09	21.38	Peak
2	5226.500	115.61	-----	-----	94.22	21.39	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :ax40\_TX\_5230MHz  
 Test by :Gary Liao

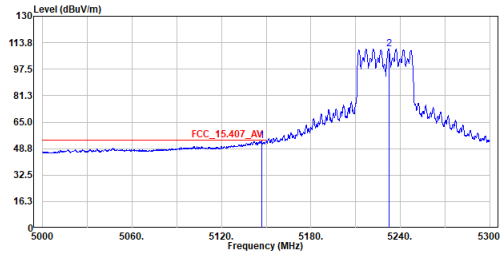

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	Mhz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5146.850	53.29	54.00	-0.71	31.91	21.38	Average
2	5232.200	109.89	-----	-----	88.49	21.40	Average

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :ax40\_TX\_5230MHz  
 Test by :Gary Liao

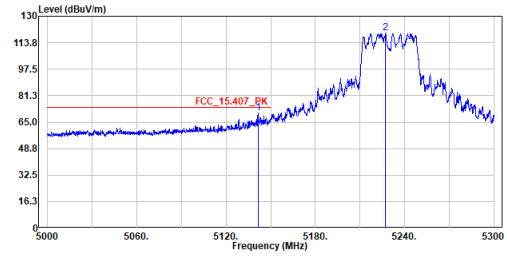

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	Mhz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5141.450	70.60	74.00	-3.40	49.22	21.38	Peak
2	5226.950	119.62	-----	-----	98.23	21.39	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :ax40\_TX\_5230MHz  
 Test By :Ling

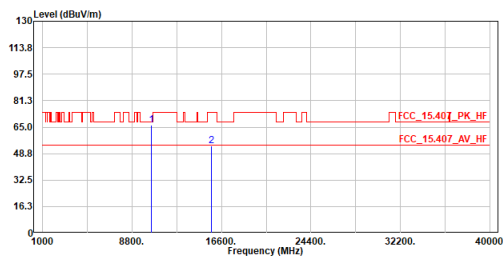

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	Mhz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	10460.000	66.03	68.20	-2.17	73.83	-7.80	Peak
2	15690.000	53.48	74.00	-20.52	56.65	-3.17	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :ax40\_TX\_5230MHz  
 Test By :Ling

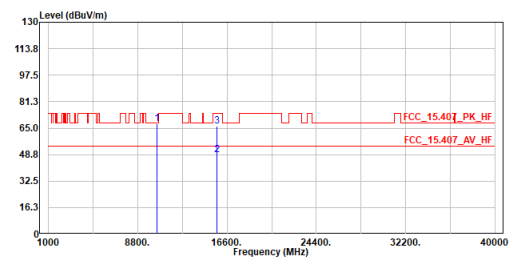

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	Mhz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	10460.000	67.77	68.20	-0.43	75.57	-7.80	Peak
2	15690.000	48.79	54.00	-5.21	51.96	-3.17	Average
3	15690.000	66.22	74.00	-7.78	69.39	-3.17	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :ax40\_TX\_5270MHz  
 Test By :Ling

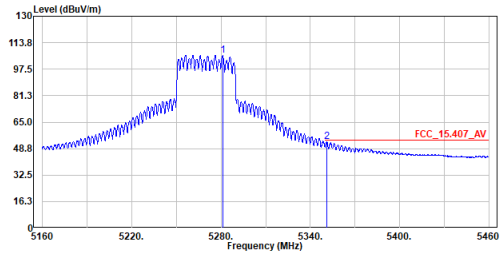

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	Mhz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5281.050	105.87	-----	-----	84.46	21.41	Average
2	5351.250	53.08	54.00	-0.92	31.66	21.42	Average

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :ax40\_TX\_5270MHz  
 Test By :Ling

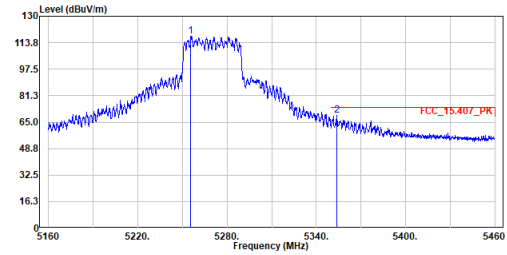

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	Mhz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5255.700	117.76	-----	-----	96.35	21.41	Peak
2	5353.800	69.00	74.00	-5.00	47.58	21.42	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :ax40\_TX\_5270MHz  
 Test By :Ling

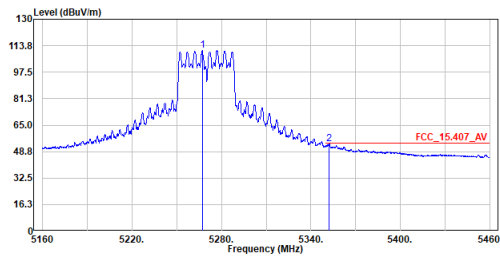

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	Mhz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5267.250	110.66	-----	-----	89.26	21.40	Average
2	5352.300	53.63	54.00	-0.37	32.21	21.42	Average

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :ax40\_TX\_5270MHz  
 Test By :Ling

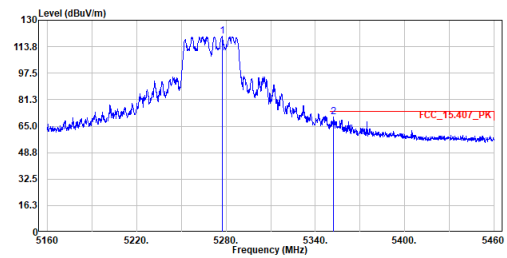

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	Mhz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5277.450	119.97	-----	-----	98.56	21.41	Peak
2	5352.150	70.79	74.00	-3.21	49.37	21.42	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :ax40\_TX\_5270MHz  
 Test By :Ling

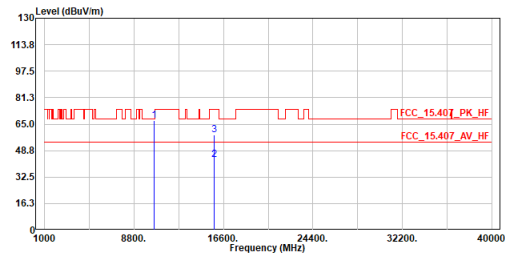

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	10540.000	67.36	68.20	-0.84	75.04	-7.68	Peak
2	15810.000	42.97	54.00	-11.03	46.11	-3.14	Average
3	15810.000	58.17	74.00	-15.83	61.31	-3.14	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :ax40\_TX\_5270MHz  
 Test By :Ling

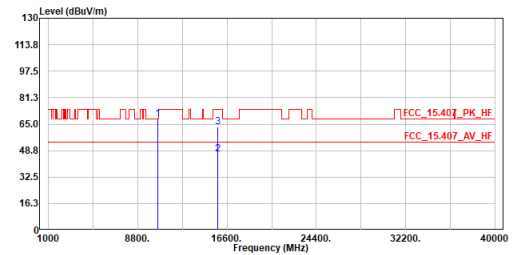

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	10540.000	67.96	68.20	-0.24	75.64	-7.68	Peak
2	15810.000	46.76	54.00	-7.24	49.90	-3.14	Average
3	15810.000	63.50	74.00	-10.50	66.64	-3.14	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :ax40\_TX\_5310MHz  
 Test By :Ling

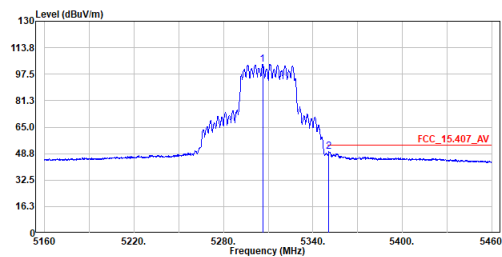

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5306.250	103.66	-----	-----	82.24	21.42	Average
2	5350.800	49.95	54.00	-4.05	28.53	21.42	Average

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :ax40\_TX\_5310MHz  
 Test By :Ling

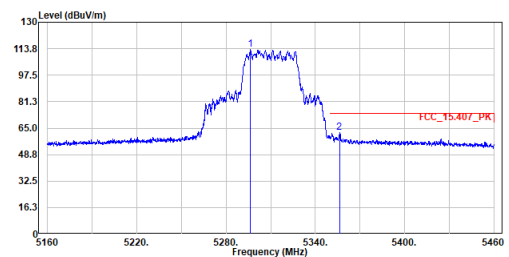

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5296.500	113.20	-----	-----	91.79	21.41	Peak
2	5356.200	62.32	74.00	-11.68	40.90	21.42	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :ax40\_TX\_5310MHz  
 Test By :Ling

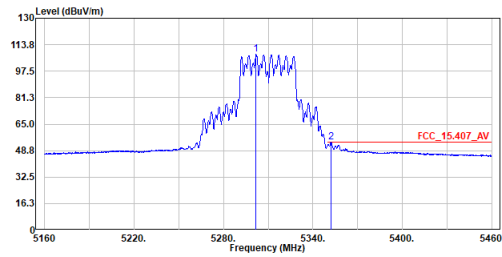

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5301.900	107.73	-----	-----	86.32	21.41	Average
2	5352.150	53.78	54.00	-0.22	32.36	21.42	Average

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :ax40\_TX\_5310MHz  
 Test By :Ling

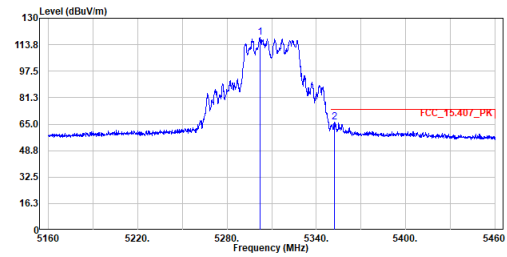

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5302.050	118.43	-----	-----	97.02	21.41	Peak
2	5352.150	66.13	74.00	-7.87	44.71	21.42	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :ax40\_TX\_5310MHz  
 Test By :Ling

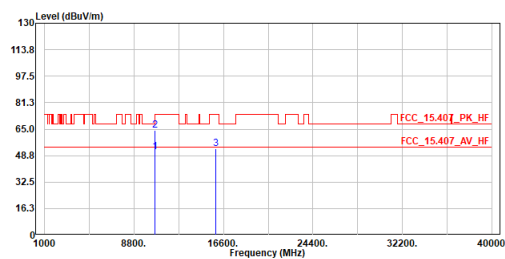

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	10620.000	51.26	54.00	-2.74	58.86	-7.60	Average
2	10620.000	64.04	74.00	-9.96	71.64	-7.60	Peak
3	15930.000	53.03	74.00	-20.97	56.14	-3.11	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.

Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :ax40\_TX\_5310MHz  
 Test By :Ling

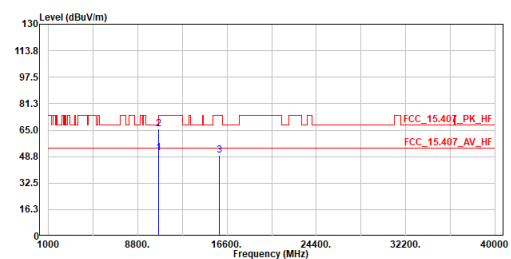


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	10620.000	51.10	54.00	-2.90	58.70	-7.60	Average
2	10620.000	65.52	74.00	-8.48	73.12	-7.60	Peak
3	15930.000	49.37	74.00	-24.63	52.48	-3.11	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.




Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :ax40\_TX\_5510MHz  
 Test By :Gary

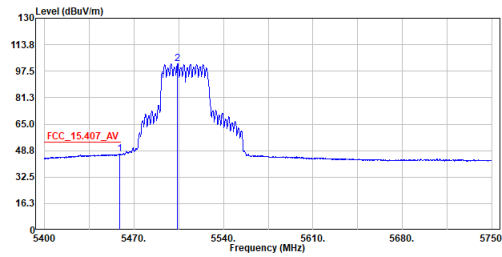

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	Mhz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5458.975	46.75	54.00	-7.25	25.31	21.44	Average
2	5504.125	102.20	-----	-----	80.75	21.45	Average

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :ax40\_TX\_5510MHz  
 Test By :Gary

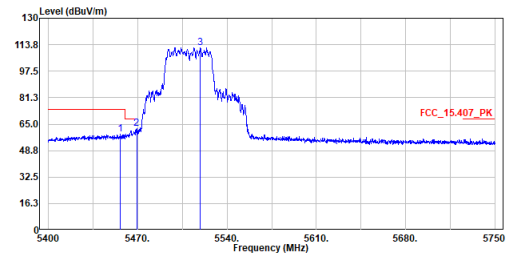

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	Mhz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5456.000	58.77	74.00	-15.23	37.33	21.44	Peak
2	5469.125	62.34	68.20	-5.86	40.91	21.43	Peak
3	5519.000	112.03	-----	-----	90.52	21.51	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :ax40\_TX\_5510MHz  
 Test By :Gary

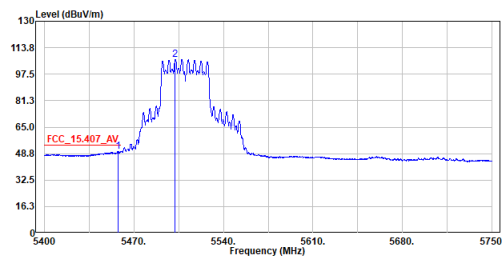

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	Mhz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5457.400	50.23	54.00	-3.77	28.79	21.44	Average
2	5502.200	106.48	-----	-----	85.04	21.44	Average

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :ax40\_TX\_5510MHz  
 Test By :Gary

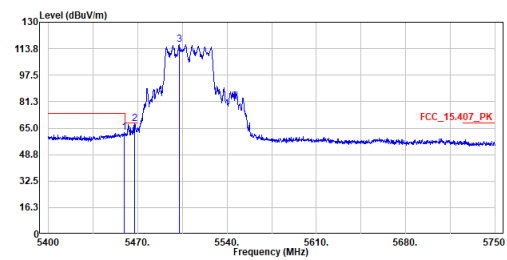

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	Mhz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5459.675	62.25	74.00	-11.75	40.81	21.44	Peak
2	5467.550	67.75	68.20	-0.45	46.32	21.43	Peak
3	5502.550	116.45	-----	-----	95.00	21.45	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :ax40\_TX\_5510MHz  
 Test By :Gary

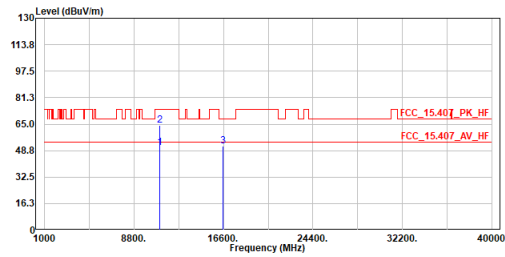

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11020.000	50.34	54.00	-3.66	57.46	-7.12	Average
2	11020.000	64.07	74.00	-9.93	71.19	-7.12	Peak
3	16530.000	51.70	68.20	-16.50	55.06	-3.36	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :ax40\_TX\_5510MHz  
 Test By :Gary

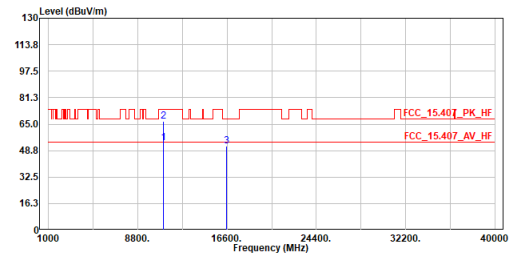

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11020.000	53.31	54.00	-0.69	60.43	-7.12	Average
2	11020.000	66.90	74.00	-7.10	74.02	-7.12	Peak
3	16530.000	51.53	68.20	-16.67	54.89	-3.36	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :ax40\_TX\_5550MHz  
 Test By :Gary

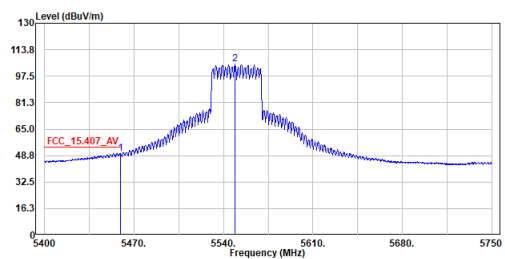

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5459.150	50.20	54.00	-3.80	28.76	21.44	Average
2	5549.100	104.99	-----	-----	83.37	21.62	Average

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :ax40\_TX\_5550MHz  
 Test By :Gary

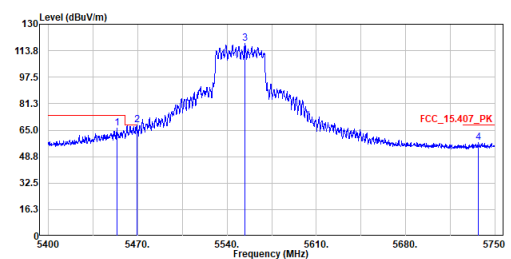

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5453.725	66.06	74.00	-7.94	44.62	21.44	Peak
2	5469.300	68.07	68.20	-0.13	46.64	21.43	Peak
3	5554.175	118.05	-----	-----	96.42	21.63	Peak
4	5737.050	57.29	68.20	-10.91	34.99	22.30	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.

Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :ax40\_TX\_5550MHz  
 Test By :Gary

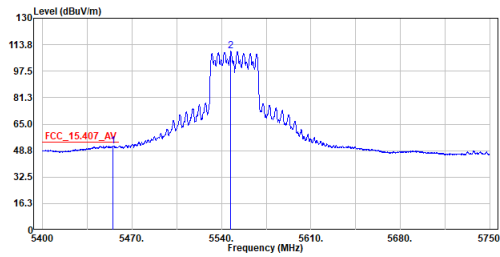


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5455.300	51.53	54.00	-2.47	30.09	21.44	Average
2	5547.350	109.80	-----	-----	88.19	21.61	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :ax40\_TX\_5550MHz  
 Test By :Gary

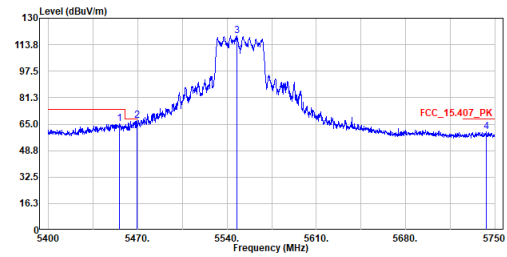


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5455.650	65.46	74.00	-8.54	44.02	21.44	Peak
2	5469.300	67.05	68.20	-1.15	45.62	21.43	Peak
3	5547.875	119.25	-----	-----	97.63	21.62	Peak
4	5743.175	68.36	68.20	-7.84	38.04	22.32	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :ax40\_TX\_5550MHz  
 Test By :Gary

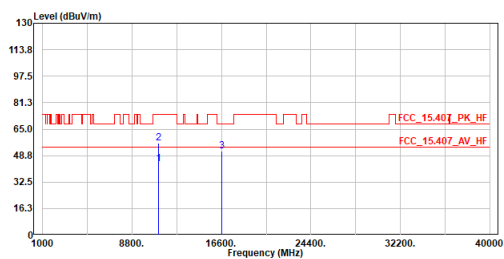


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11100.000	43.75	54.00	-10.25	50.71	-6.96	Average
2	11100.000	56.55	74.00	-17.45	63.51	-6.96	Peak
3	16650.000	51.30	68.20	-16.90	54.73	-3.43	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :ax40\_TX\_5550MHz  
 Test By :Gary

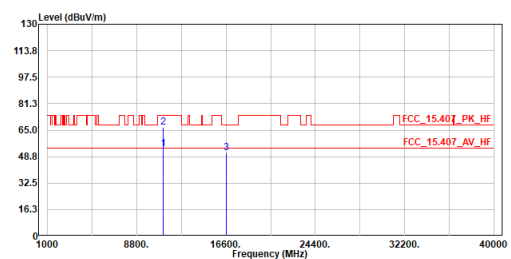


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11100.000	53.39	54.00	-0.61	60.35	-6.96	Average
2	11100.000	66.85	74.00	-7.15	73.81	-6.96	Peak
3	16650.000	50.85	68.20	-17.35	54.28	-3.43	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :ax40\_TX\_5670MHz  
 Test By :Gary

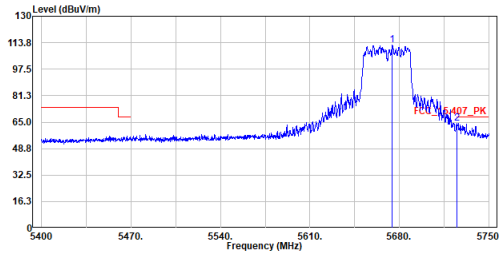

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	Mhz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5674.575	112.45	-----	-----	90.38	22.07	Peak
2	5725.325	64.19	68.20	-4.01	41.93	22.26	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :ax40\_TX\_5670MHz  
 Test By :Gary

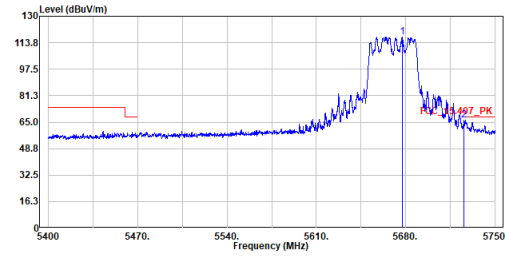

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	Mhz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5677.200	117.35	-----	-----	95.26	22.09	Peak
2	5725.850	66.40	68.20	-1.80	44.13	22.27	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :ax40\_TX\_5670MHz  
 Test By :Gary

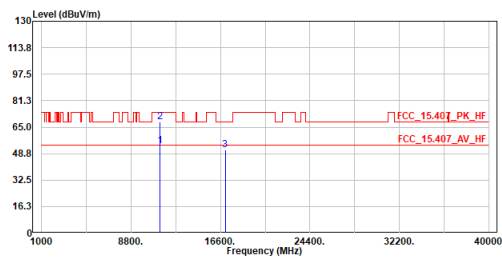

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	Mhz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11340.000	53.30	54.00	-0.70	59.78	-6.48	Average
2	11340.000	68.31	74.00	-5.69	74.79	-6.48	Peak
3	17010.000	51.21	68.20	-16.99	54.85	-3.64	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :ax40\_TX\_5670MHz  
 Test By :Gary

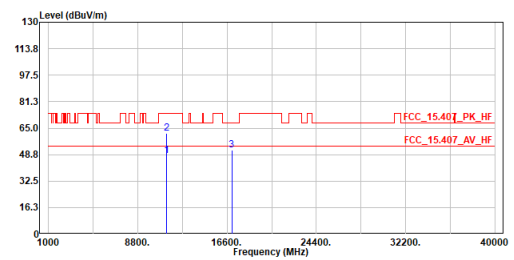

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	Mhz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11340.000	48.21	54.00	-5.79	54.69	-6.48	Average
2	11340.000	61.70	74.00	-12.30	68.18	-6.48	Peak
3	17010.000	51.38	68.20	-16.82	55.02	-3.64	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :ax40\_TX\_5755MHz  
 Test By :Ling

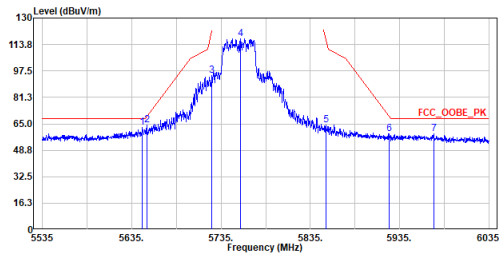

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	Mhz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5647.000	62.67	68.20	-5.53	40.70	21.97	Peak
2	5652.000	64.50	69.69	-5.19	42.52	21.98	Peak
3	5724.750	94.57	121.63	-27.06	72.32	22.25	Peak
4	5756.500	117.36	-----	-----	94.99	22.37	Peak
5	5852.250	64.09	117.07	-52.98	41.37	22.72	Peak
6	5923.000	58.78	69.69	-10.91	35.80	22.98	Peak
7	5973.000	58.76	68.20	-9.44	35.60	23.16	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :ax40\_TX\_5755MHz  
 Test By :Ling

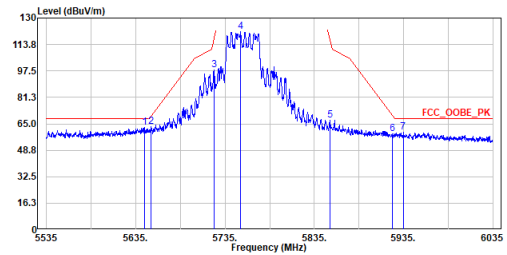

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	Mhz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5645.000	62.62	68.20	-5.58	40.65	21.97	Peak
2	5652.250	63.15	69.87	-6.72	41.17	21.98	Peak
3	5722.750	98.13	117.07	-18.94	75.88	22.25	Peak
4	5752.500	121.45	-----	-----	99.08	22.37	Peak
5	5852.250	67.31	117.07	-49.76	44.59	22.72	Peak
6	5922.250	59.04	70.24	-11.20	36.06	22.98	Peak
7	5934.500	59.67	68.20	-8.53	36.64	23.03	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :ax40\_TX\_5755MHz  
 Test By :Ling

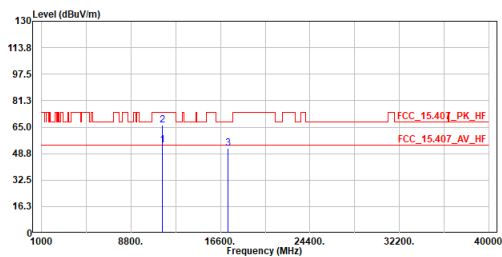

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	Mhz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11510.000	53.82	54.00	-0.18	59.98	-6.16	Average
2	11510.000	66.38	74.00	-7.62	72.54	-6.16	Peak
3	17265.000	51.92	68.20	-16.28	55.20	-3.28	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :ax40\_TX\_5755MHz  
 Test By :Ling

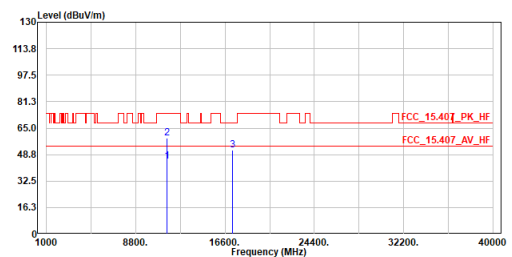

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	Mhz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11510.000	44.87	54.00	-9.13	51.03	-6.16	Average
2	11510.000	58.75	74.00	-15.25	64.91	-6.16	Peak
3	17265.000	51.52	68.20	-16.68	54.80	-3.28	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :ax40\_TX\_5795MHz  
 Test By :Ling

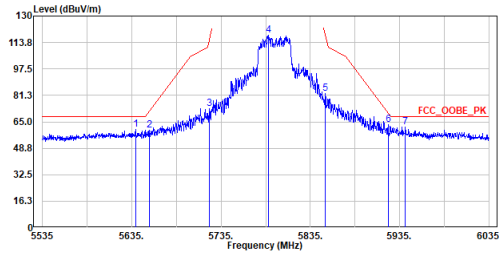

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	Mhz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5639.750	60.17	68.20	-8.03	38.22	21.95	Peak
2	5654.500	59.62	71.54	-11.92	37.61	22.01	Peak
3	5722.000	72.94	115.36	-42.42	50.69	22.25	Peak
4	5787.750	118.08	-----	-----	95.59	22.49	Peak
5	5851.500	82.19	118.78	-36.59	59.47	22.72	Peak
6	5922.000	63.46	70.43	-6.97	40.48	22.98	Peak
7	5941.500	61.95	68.20	-6.25	38.91	23.04	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :ax40\_TX\_5795MHz  
 Test By :Ling

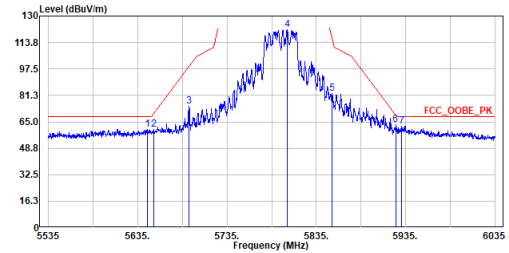

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	Mhz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5645.500	60.37	68.20	-7.83	38.40	21.97	Peak
2	5652.750	60.56	70.24	-9.68	38.56	22.00	Peak
3	5692.250	74.70	99.47	-24.77	52.56	22.14	Peak
4	5802.500	121.78	-----	-----	99.23	22.55	Peak
5	5852.500	82.17	116.50	-34.33	59.44	22.73	Peak
6	5923.750	63.35	69.13	-5.78	40.37	22.98	Peak
7	5930.500	62.38	68.20	-5.82	39.37	23.01	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :ax40\_TX\_5795MHz  
 Test By :Ling

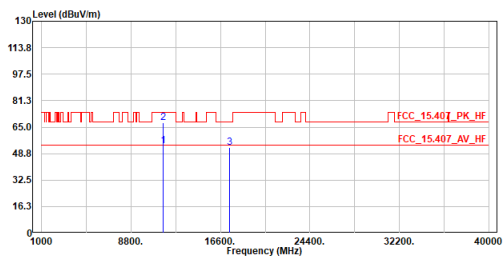

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	Mhz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11590.000	53.54	54.00	-0.46	59.65	-6.11	Average
2	11590.000	67.77	74.00	-6.23	73.88	-6.11	Peak
3	17385.000	52.26	68.20	-15.94	55.37	-3.11	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :ax40\_TX\_5795MHz  
 Test By :Ling

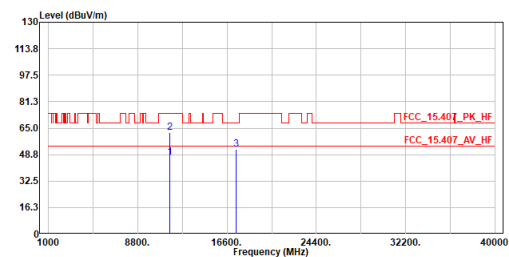

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	Mhz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11590.000	46.89	54.00	-7.11	53.00	-6.11	Average
2	11590.000	62.44	74.00	-11.56	68.55	-6.11	Peak
3	17385.000	51.84	68.20	-16.36	54.95	-3.11	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :ax80\_TX\_5210MHz  
 Test by :Gary Liao

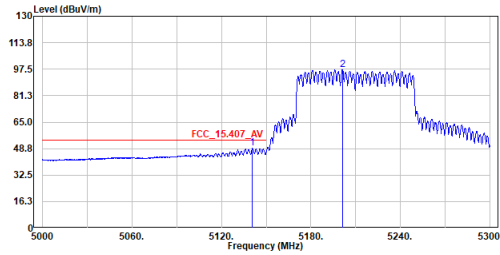

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5140.850	48.83	54.00	-5.17	27.45	21.38	Average
2	5201.150	97.29	-----	-----	75.90	21.39	Average

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :ax80\_TX\_5210MHz  
 Test by :Gary Liao

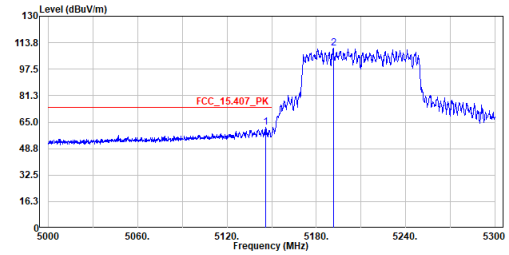

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5145.800	61.72	74.00	-12.28	40.34	21.38	Peak
2	5191.550	110.20	-----	-----	88.82	21.38	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :ax80\_TX\_5210MHz  
 Test by :Gary Liao

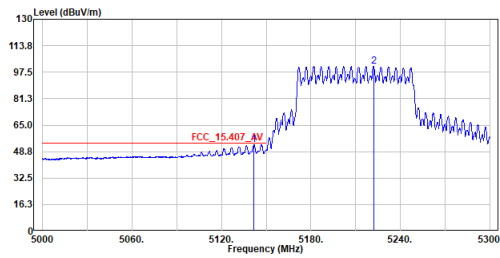

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5141.750	53.14	54.00	-0.86	31.76	21.38	Average
2	5222.000	101.14	-----	-----	79.75	21.39	Average

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :ax80\_TX\_5210MHz  
 Test by :Gary Liao

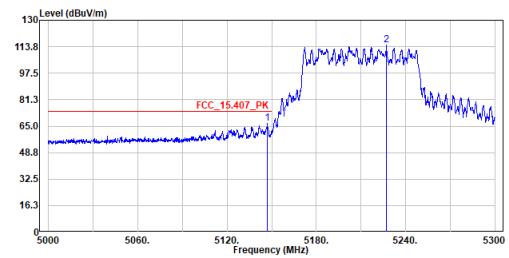

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5147.150	66.67	74.00	-7.33	45.29	21.38	Peak
2	5227.100	114.55	-----	-----	93.16	21.39	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :ax80\_TX\_5210MHz  
 Test By :Ling

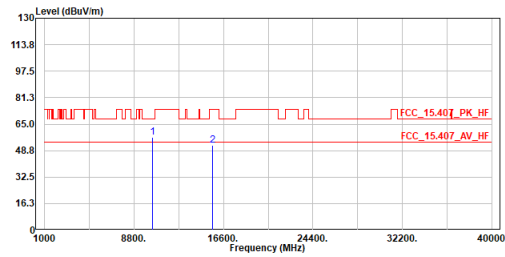

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	10420.000	56.69	68.20	-11.51	64.56	-7.87	Peak
2	15630.000	52.23	74.00	-21.77	55.43	-3.20	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :ax80\_TX\_5210MHz  
 Test By :Ling

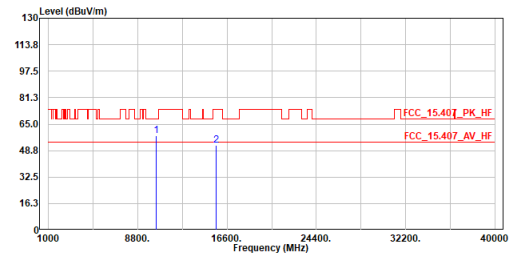

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	10420.000	58.11	68.20	-10.09	65.98	-7.87	Peak
2	15630.000	51.89	74.00	-22.11	55.09	-3.20	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :ax80\_TX\_5290MHz  
 Test By :Ling

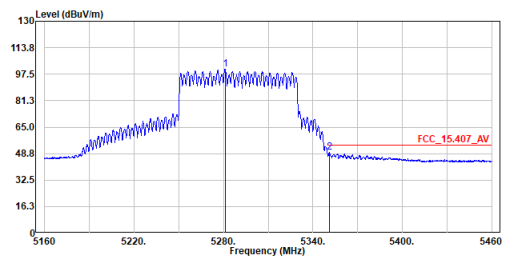

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5281.050	100.62	-----	-----	79.21	21.41	Average
2	5351.250	49.35	54.00	-4.65	27.93	21.42	Average

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.

Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :ax80\_TX\_5290MHz  
 Test By :Ling

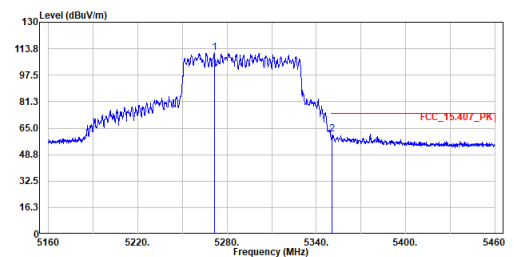


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5271.600	111.42	-----	-----	90.01	21.41	Peak
2	5350.800	61.41	74.00	-12.59	39.99	21.42	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.




Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :ax80\_TX\_5290MHz  
 Test By :Ling

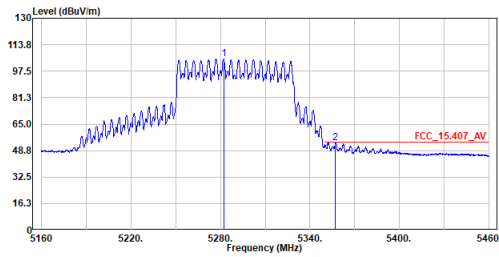

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5282.100	105.22	-----	-----	83.81	21.41	Average
2	5357.250	53.71	54.00	-0.29	32.29	21.42	Average

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :ax80\_TX\_5290MHz  
 Test By :Ling

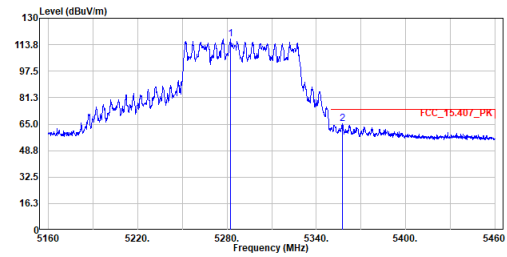

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5282.400	117.32	-----	-----	95.91	21.41	Peak
2	5357.400	65.45	74.00	-8.55	44.03	21.42	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :ax80\_TX\_5290MHz  
 Test By :Ling

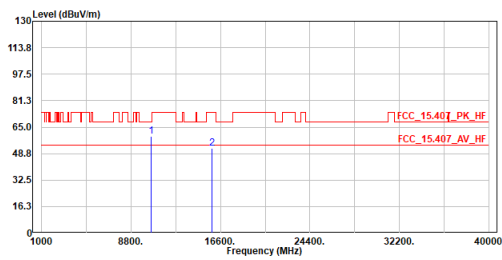

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	10580.000	59.46	68.20	-8.74	67.10	-7.64	Peak
2	15870.000	51.82	74.00	-22.18	54.94	-3.12	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :ax80\_TX\_5290MHz  
 Test by :Ling

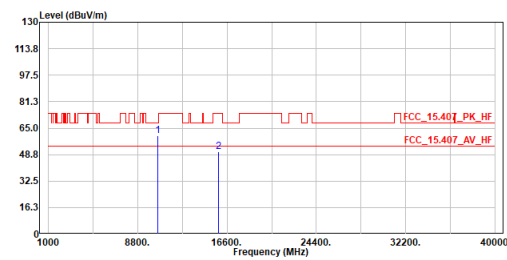

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	10580.000	60.14	68.20	-8.06	67.78	-7.64	Peak
2	15870.000	50.47	74.00	-23.53	53.59	-3.12	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :ax80\_TX\_5530MHz  
 Test By :Gary

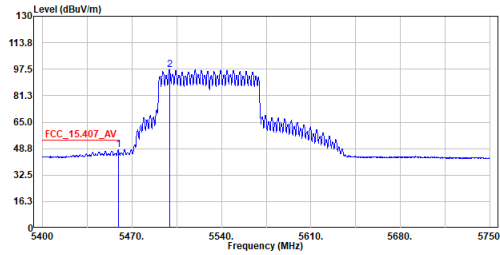

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	Mhz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5459.325	47.85	54.00	-6.15	26.41	21.44	Average
2	5499.225	97.22	-----	-----	75.78	21.44	Average

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :ax80\_TX\_5530MHz  
 Test By :Gary

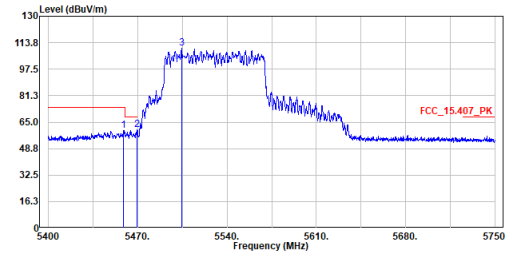

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	Mhz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5458.975	59.93	74.00	-14.07	38.49	21.44	Peak
2	5469.300	60.43	68.20	-7.77	39.00	21.43	Peak
3	5504.475	110.50	-----	-----	89.05	21.45	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :ax80\_TX\_5530MHz  
 Test By :Gary

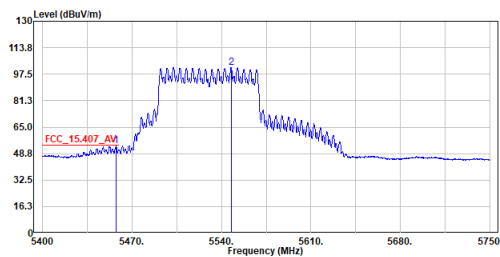

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	Mhz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5457.400	53.55	54.00	-0.45	32.11	21.44	Average
2	5547.525	101.68	-----	-----	80.07	21.61	Average

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :ax80\_TX\_5530MHz  
 Test By :Gary

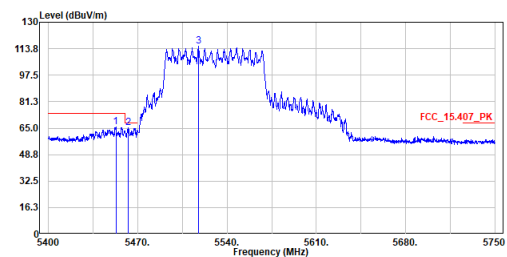

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	Mhz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5452.850	65.66	74.00	-8.34	44.23	21.43	Peak
2	5462.650	65.48	68.20	-2.72	44.05	21.43	Peak
3	5517.600	115.20	-----	-----	93.70	21.50	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :ax80\_TX\_5530MHz  
 Test By :Gary

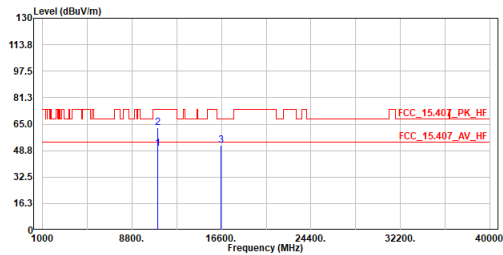

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11060.000	49.92	54.00	-4.08	56.97	-7.05	Average
2	11060.000	62.74	74.00	-11.26	69.79	-7.05	Peak
3	16590.000	51.86	68.20	-16.34	55.25	-3.39	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :ax80\_TX\_5530MHz  
 Test By :Gary

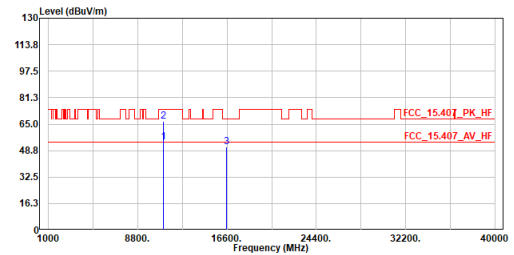

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11060.000	53.85	54.00	-0.15	60.90	-7.05	Average
2	11060.000	66.94	74.00	-7.06	73.99	-7.05	Peak
3	16590.000	51.21	68.20	-16.99	54.60	-3.39	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :ax80\_TX\_5610MHz  
 Test By :Gary

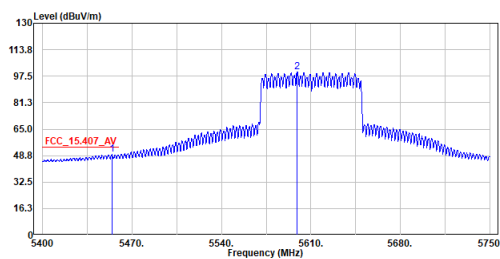

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5454.250	49.36	54.00	-4.64	27.92	21.44	Average
2	5599.150	100.22	-----	-----	78.42	21.80	Average

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :ax80\_TX\_5610MHz  
 Test By :Gary

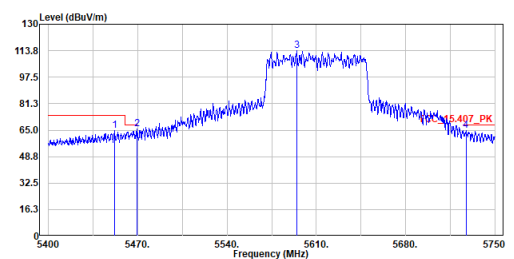

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5451.625	64.57	74.00	-9.43	43.14	21.43	Peak
2	5469.300	65.55	68.20	-2.65	44.12	21.43	Peak
3	5594.775	114.01	-----	-----	92.22	21.79	Peak
4	5727.250	64.94	68.20	-3.26	42.67	22.27	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.

Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :ax80\_TX\_5610MHz  
 Test By :Gary

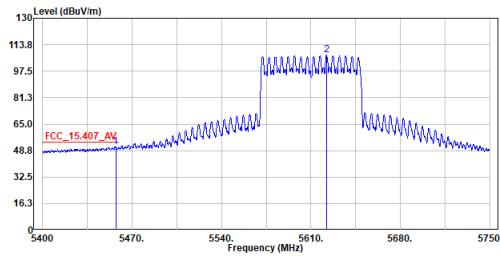


No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	Mhz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5457.225	50.99	54.00	-3.01	29.55	21.44	Average
2	5622.075	107.33	-----	-----	85.44	21.89	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :ax80\_TX\_5610MHz  
 Test By :Gary

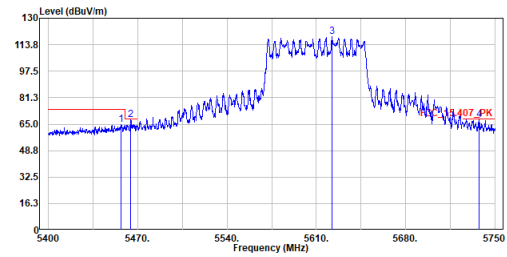


No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	Mhz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5456.700	64.70	74.00	-9.30	43.26	21.44	Peak
2	5464.575	67.55	68.20	-0.65	46.12	21.43	Peak
3	5622.425	118.87	-----	-----	96.98	21.89	Peak
4	5737.400	67.89	68.20	-0.31	45.59	22.30	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :ax80\_TX\_5610MHz  
 Test By :Gary

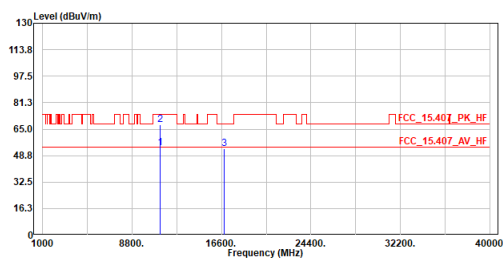


No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	Mhz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11220.000	53.54	54.00	-0.46	60.26	-6.72	Average
2	11220.000	67.92	74.00	-6.08	74.64	-6.72	Peak
3	16830.000	52.96	68.20	-15.24	56.50	-3.54	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :ax80\_TX\_5610MHz  
 Test By :Gary

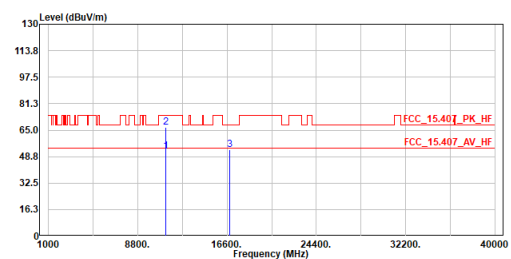


No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	Mhz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11220.000	52.04	54.00	-1.96	58.76	-6.72	Average
2	11220.000	66.76	74.00	-7.24	73.48	-6.72	Peak
3	16830.000	52.85	68.20	-15.35	56.39	-3.54	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :ax80\_TX\_5775MHz  
 Test By :Ling

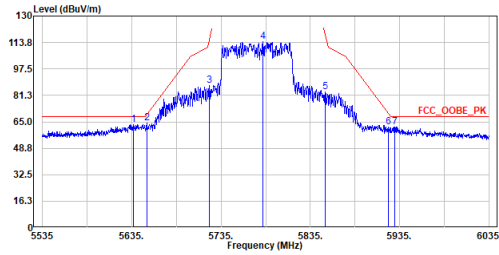

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	Mhz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5637.000	63.50	68.20	-4.70	41.57	21.93	Peak
2	5652.000	64.32	69.69	-5.37	42.34	21.98	Peak
3	5722.000	87.19	115.36	-28.17	64.94	22.25	Peak
4	5781.750	114.40	-----	-----	91.94	22.46	Peak
5	5852.000	83.37	117.64	-34.27	60.65	22.72	Peak
6	5922.250	61.59	70.24	-8.65	38.61	22.98	Peak
7	5929.750	62.02	68.20	-6.18	39.01	23.01	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :ax80\_TX\_5775MHz  
 Test By :Ling

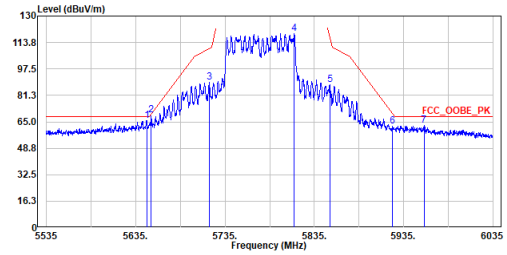

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	Mhz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5647.250	65.82	68.20	-2.38	43.85	21.97	Peak
2	5652.250	69.38	69.87	-0.49	47.40	21.98	Peak
3	5717.250	89.42	110.03	-20.61	67.19	22.23	Peak
4	5812.500	119.07	-----	-----	96.49	22.58	Peak
5	5852.250	87.68	117.07	-29.39	64.96	22.72	Peak
6	5922.500	62.32	70.06	-7.74	39.34	22.98	Peak
7	5957.750	62.92	68.20	-5.28	39.81	23.11	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :ax80\_TX\_5775MHz  
 Test By :Ling

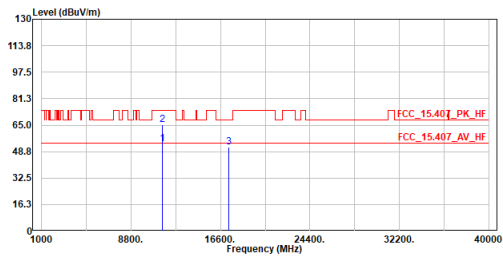

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	Mhz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11550.000	53.69	54.00	-0.31	59.82	-6.13	Average
2	11550.000	65.38	74.00	-8.62	71.51	-6.13	Peak
3	17325.000	51.49	68.20	-16.71	54.69	-3.20	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :ax80\_TX\_5775MHz  
 Test By :Ling

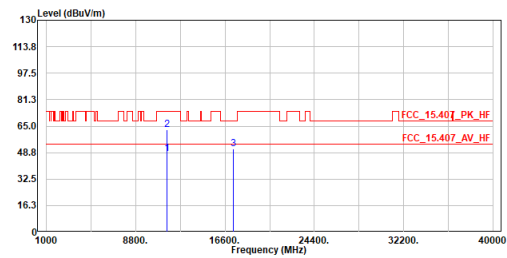

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	Mhz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11550.000	47.97	54.00	-6.03	54.10	-6.13	Average
2	11550.000	62.88	74.00	-11.12	69.01	-6.13	Peak
3	17325.000	51.13	68.20	-17.07	54.33	-3.20	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :ax160\_TX\_5250MHz  
 Test by :Gary Liao

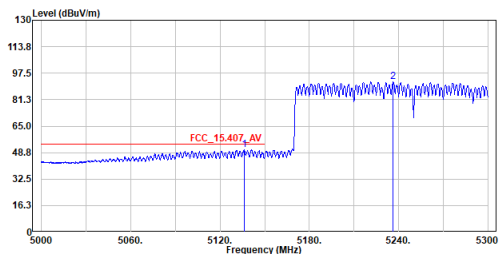

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5136.200	50.76	54.00	-3.24	29.38	21.38	Average
2	5236.250	92.11	-----	-----	70.71	21.40	Average

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :ax160\_TX\_5250MHz  
 Test by :Gary Liao

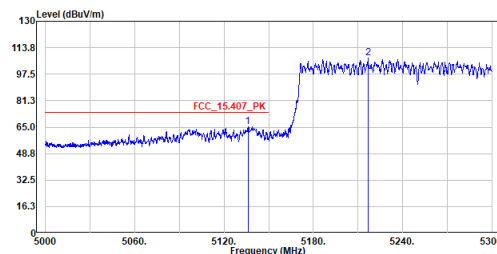

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5136.050	65.28	74.00	-8.72	43.90	21.38	Peak
2	5216.750	107.28	-----	-----	85.89	21.39	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :ax160\_TX\_5250MHz  
 Test by :Gary Liao

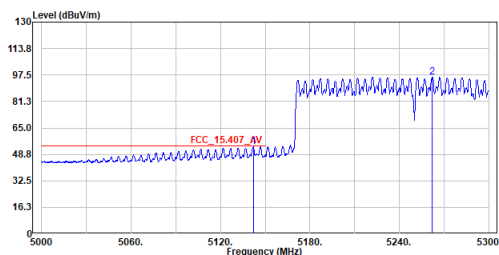

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5142.050	53.30	54.00	-0.70	31.92	21.38	Average
2	5262.200	96.16	-----	-----	74.75	21.41	Average

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :ax160\_TX\_5250MHz  
 Test by :Gary Liao

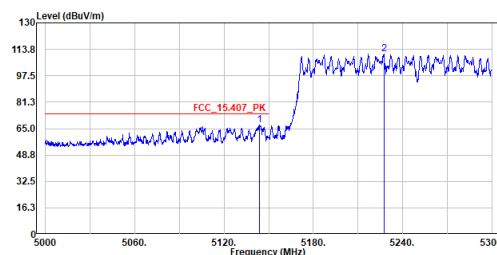

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5143.700	67.07	74.00	-6.93	45.69	21.38	Peak
2	5227.550	111.10	-----	-----	89.71	21.39	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :ax160\_TX\_5250MHz  
 Test By :Ling

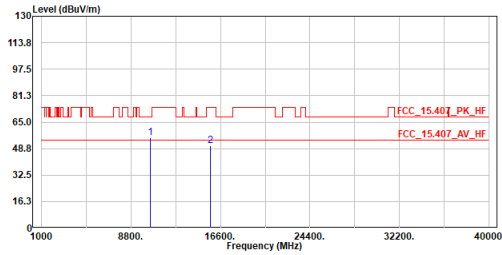

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	10500.000	55.46	68.20	-12.74	63.19	-7.73	Peak
2	15750.000	50.57	74.00	-23.43	53.73	-3.16	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :ax160\_TX\_5250MHz  
 Test By :Ling

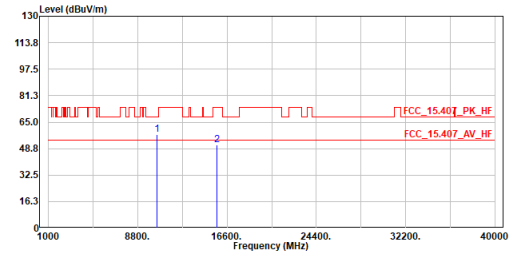

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	10500.000	57.40	68.20	-10.80	65.13	-7.73	Peak
2	15750.000	50.98	74.00	-23.02	54.14	-3.16	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :ax160\_TX\_5570MHz  
 Test By :Gary

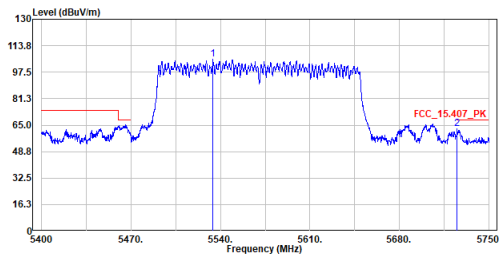

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5534.050	105.28	-----	-----	83.72	21.56	Peak
2	5725.150	62.64	68.20	-5.56	48.38	22.26	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :ax160\_TX\_5570MHz  
 Test By :Gary

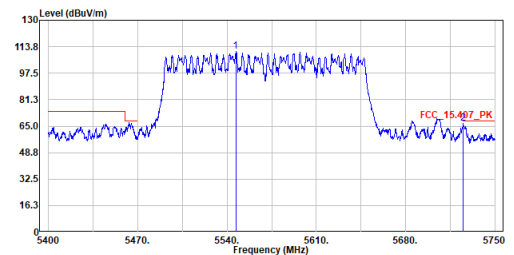

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5546.825	110.68	-----	-----	89.07	21.61	Peak
2	5725.150	66.78	68.20	-1.42	44.52	22.26	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :ax160\_TX\_5570MHz  
 Test By :Gary

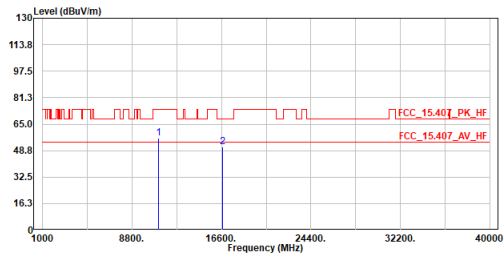

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	Mhz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11140.000	56.21	74.00	-17.79	63.08	-6.87	Peak
2	16710.000	51.05	68.20	-17.15	54.52	-3.47	Peak

- Note:
1. Level = Read Level + Factor
  2. Factor = Antenna Factor + Cable Loss - Preamp Factor
  3. Over Limit = Level - Limit Line
  4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
  5. The other emission levels were very low against the limit.

Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :ax160\_TX\_5570MHz  
 Test By :Gary

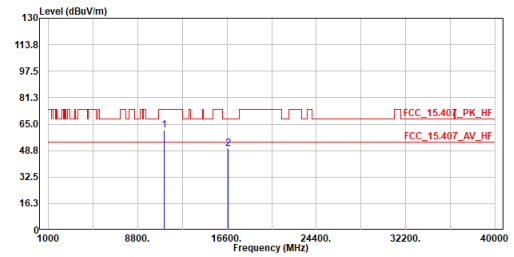

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	Mhz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11140.000	61.08	74.00	-12.92	67.95	-6.87	Peak
2	16710.000	50.08	68.20	-18.12	53.55	-3.47	Peak

- Note:
1. Level = Read Level + Factor
  2. Factor = Antenna Factor + Cable Loss - Preamp Factor
  3. Over Limit = Level - Limit Line
  4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
  5. The other emission levels were very low against the limit.