

TEST REPORT

Client Information:

Applicant: Shanghai BLOZI International Trade Co.,Ltd
Applicant add.: Room 2207A, No. 28 Maji Road, Pudong New District, Shanghai, China
Manufacturer: Shanghai Blozi Intelligence Technology Co., Ltd.
Manufacturer add.: 24, NO.1818, CHENGBEI ROAD, JIADING DISTRICT, SHANGHAI, CHINA

Product Information:

Product Name: AP Station
Model No.: AP2400B
HVIN: AP2400B
Brand Name: BOWTZ
FCC ID: 2A7NT-AP2400B
IC: 28791-AP2400B

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.249
RSS-Gen Issue 5
RSS-210 Issue 10

Prepared By:

Dongguan Yaxu (AiT) Technology Limited

No.22, Jinqianling 3rd Street, Jitigang, Huangjiang, Dongguan,
Guangdong, China

Tel.: +86-769-8202 0499 Fax.: +86-769-8202 0495

Date of Receipt: June 13, 2022 Date of Test: June 13, 2022~ July 14, 2022

Date of Issue: July 15, 2022 Test Result: Pass

This device described above has been tested by Dongguan Yaxu (AiT) Technology Limited and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

Note: This report shall not be reproduced except in full, without the written approval of Dongguan Yaxu (AiT) Technology Limited, this document may be altered or revised by Dongguan Yaxu (AiT) Technology Limited, personal only, and shall be noted in the revision of the document. This test report must not be used by the client to claim product endorsement.

Reviewed by: Simba Huang
Simba Huang

Approved by: Seal.chen
Seal.chen

1 Contents

	Page
COVER PAGE	
1 CONTENTS	2
2 TEST SUMMARY	4
2.1 Statement of the Measurement Uncertainty	4
2.2 Measurement Uncertainty	4
3 TEST FACILITY	5
3.1 Deviation from standard	5
3.2 Abnormalities from standard conditions	5
3.3 Test Location	5
4 GENERAL INFORMATION	6
4.1 Test frequencies	7
4.2 EUT Peripheral List	8
4.3 Test Peripheral List	8
4.4 TEST METHODOLOGY	9
4.5 Description of Test Modes	10
5 EQUIPMENT USED DURING TEST	11
6 TEST RESULTS AND MEASUREMENT DATA	12
6.1 Antenna requirement	12
6.2 20 dB Spectrum Bandwidth Measurement	13
6.3 Radiated Emissions Measurement	17
6.4 Conducted Emissions	30
7 TEST SETUP PHOTO	33
8 EUT CONSTRUCTIONAL DETAILS	33



Revision History

Revision	Issue Date	Revisions	Revised By
000	July 15, 2022	Initial Issue	Seal Chen

2 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	§15.203/RSS-Gen§6.8,RSP-100	Pass
AC Power Line Conducted Emission	§15.207/RSS-Gen§8.8	Pass
Fundamental &Radiated Spurious Emission Measurement	§15.249 (a)/RSS-210 B10, RSS-Gen	Pass
20dB Channel Bandwidth 99% Occupied Bandwidth	§15.249 (a) (d), §15.209/RSS-Gen§6.7	Pass
Band Edge	§15.249 (d),§15.205/ RSS-Gen 8.9 & RSS-Gen 8.10	Pass

Note

1. Test according to ANSI C63.10:2013, RSS-Gen.
2. The measurement uncertainty is not included in the test result.

2.1 Statement of the Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the AiT quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

2.2 Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	0.009MHz-30MHz	3.10dB	(1)
Radiated Emission	30MHz-1GHz	3.75dB	(1)
Radiated Emission	1GHz-18GHz	3.88dB	(1)
Radiated Emission	18GHz-40GHz	3.88dB	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	1.20dB	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

3 Test Facility

The test facility is recognized, certified or accredited by the following organizations:

.CNAS- Registration No: L6177

Dongguan Yaxu (AiT) technology Limited is accredited to ISO/IEC 17025:2017 general Requirements for the competence of testing and calibration laboratories (CNAS-CL01 Accreditation Criteria for the competence of testing and calibration laboratories) on Aug.04, 2020

FCC-Registration No.: 703111 Designation Number: CN1313

Dongguan Yaxu (AiT) technology Limited has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

IC —Registration No.: 6819A CAB identifier: CN0122

The 3m Semi-anechoic chamber of Dongguan Yaxu (AiT) technology Limited has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 6819A

A2LA-Lab Cert. No.: 6317.01

Dongguan Yaxu (AiT) technology Limited has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

3.1 Deviation from standard

None

3.2 Abnormalities from standard conditions

None

3.3 Test Location

Dongguan Yaxu (AiT) Technology Limited

Address: No.22, Jinqianling 3rd Street, Jitigang, Huangjiang,Dongguan, Guangdong, China

Tel.: +86-769-8202 0499

Fax.: +86-769-8202 0495

4 General Information

EUT Name:	AP Station
Model No:	AP2400B
Serial Model:	N/A
Test sample(s) ID:	22061306-1
Sample(s) Status:	Engineer sample
Serial No.:	N/A
Operation frequency:	2402-2481MHz
Channel Number:	80 channels
Modulation Technology:	GFSK
Antenna Type:	FPCB antenna
Antenna gain:	4.0dBi
Hardware version.:	N/A
Software version.:	N/A
Power supply:	DC12V from adapter or power from POE
Model different:	N/A
Note:	For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

4.1 Test frequencies

EUT channels and frequencies list:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	27	2429	54	2456
01	2403	28	2430	55	2457
02	2404	29	2431	56	2458
03	2405	30	2432	57	2459
04	2406	31	2433	58	2460
05	2407	32	2434	59	2461
06	2408	33	2435	60	2462
07	2409	34	2436	61	2463
08	2410	35	2437	62	2464
09	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454	79	2481
26	2428	53	2455	--	--

4.2 EUT Peripheral List

No.	Equipment	Manufacturer	EMC Compliance	Model No.	Serial No.	Power cord	Signal cord
1	N/A	N/A	N/A	N/A	N/A	N/A	N/A

4.3 Test Peripheral List

No.	Equipment	Manufacturer	EMC Compliance	Model No.	Serial No.	Power cord	Signal cord
1	Adapter	IP-COM	N/A	BN031-A 65051	N/A	N/A	N/A
2	SWITCH	Tenda	N/A	TEF1105 P-4-63W	N/A	N/A	N/A

4.4 TEST METHODOLOGY

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

The radiated testing was performed at an antenna-to-EUT distance of 3 meters. All radiated and conducted emissions measurement was performed at Dongguan Yaxu (AiT) Technology Limit.

EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

EUT Exercise

The EUT was operated in the normal operating mode and a continuous transmits mode for other tests.

According to its specifications, the EUT must comply with the requirements of the Section 15.203, 15.205, 15.207, 15.209, 15.249 under the FCC Rules Part 15 Subpart C and RSS-210 Issue 10, RSS-Gen Issue 5.

General Test Procedures

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 6.3 of ANSI C63.10-2013.

4.5 Description of Test Modes

The EUT has been tested under operating condition.

Worst-case mode and channel used for 9 KHz-1000 MHz radiated emissions was determined to be TX(Low Channel).

This test was performed with EUT in X, Y, Z position and the worst case was found when EUT in X position.

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Transmitting mode	Keep the EUT in continuously transmitting mode.		
Test software:	fixed in EUT by manufacturer		
Frequency	2402 MHz	2440 MHz	2481 MHz
Parameters(1Mbps)	Default	Default	Default

Note:

There are four same modules in the product, and only module 1 is the worst in the report.

5 Equipment Used during Test

No	Test Equipment	Manufacturer	Model No	Serial No	Cal. Date	Cal. Due Date
1	Spectrum Analyzer	R&S	FSV40	101470	2021.08.30	2022.08.29
2	EMI Measuring Receiver	R&S	ESR	101160	2021.08.30	2022.08.29
3	Low Noise Pre Amplifier	HP	HP8447E	1937A01855	2021.08.30	2022.08.29
4	Low Noise Pre Amplifier	Tsj	MLA-0120-A02-34	2648A04738	2021.08.30	2022.08.29
5	Passive Loop	ETS	6512	00165355	2020.09.05	2022.09.04
6	TRILOG Super Broadband test Antenna	SCHWARZBECK	VULB9160	9160-3206	2021.08.29	2024.08.28
7	Broadband Horn Antenna	SCHWARZBECK	BBHA9120D	452	2021.08.29	2024.08.28
8	SHF-EHF Horn Antenna 15-40GHz	SCHWARZBECK	BBHA9170	BBHA9170367d	2020.11.24	2023.11.23
9	EMI Test Receiver	R&S	ESCI	100124	2021.08.30	2022.08.29
10	LISN	Kyoritsu	KNW-242	8-837-4	2021.08.30	2022.08.29
11	LISN	R&S	ESH3-Z2	0357.8810.54-101161-S2	2021.08.30	2022.08.29
12	Pro.Temp&Humi.chamber	MENTEK	MHP-150-1C	MAA08112501	2021.08.30	2022.08.29
13	RF Automatic Test system	MW	MW100-RFCB	21033016	2021.08.30	2022.08.29
14	Signal Generator	Agilent	N5182A	MY50143009	2021.08.30	2022.08.29
15	Wideband Radio communication tester	R&S	CMW500	1201.0002K50	2021.08.30	2022.08.29
16	RF Automatic Test system	MW	MW100-RFCB	21033016	2021.08.30	2022.08.29
17	DC power supply	ZHAOXIN	RXN-305D-2	28070002559	N/A	N/A
18	RE Software	EZ	EZ-EMC_RE	Ver.AIT-03A	N/A	N/A
19	CE Software	EZ	EZ-EMC_CE	Ver.AIT-03A	N/A	N/A
20	RF Software	MW	MTS 8310	2.0.0.0	N/A	N/A
21	temporary antenna connector(Note)	NTS	R001	N/A	N/A	N/A

Note: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

6 Test results and Measurement Data

6.1 Antenna requirement

6.1.1 Standard requirement:

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

According to RSS-Gen,

The applicant for equipment certification, as per RSP-100, must provide a list of all antenna types that may be used with the licence-exempt transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna.

Licence-exempt transmitters that have received equipment certification may operate with different types of antennas. However, it is not permissible to exceed the maximum equivalent isotropically radiated power (e.i.r.p.) limits specified in the applicable standard (RSS) for the licence-exempt apparatus.

Testing shall be performed using the highest gain antenna of each combination of licence-exempt transmitter and antenna type, with the transmitter output power set at the maximum level.⁹ When a measurement at the antenna connector is used to determine RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna manufacturer.

6.1.2 EUT Antenna:

The antenna is FPCB antenna, the best case gain of the antenna is 4.0dBi, reference to the appendix II for details

6.2 20 dB Spectrum Bandwidth & 99% Occupied Bandwidth Measurement

6.4.1 Standard requirement:

FCC Part15 C Section part 15.249/15.215(c):

FCC Part15 (15.249) , Subpart C			
Section	Test Item	Frequency Range (MHz)	Result
Part 15.215(c)	Bandwidth	2400-2483.5	PASS

According to RSS-Gen section 6.7: The occupied bandwidth or the “99% emission bandwidth” is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained. The occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSSs.


6.4.2 Measuring Instruments:

Please refer to equipment’s list in this report.

6.4.3 Test Procedures

1. Set resolution bandwidth (RBW) = 1-5% or DTS BW, not to exceed 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

6.4.4 Test Setup Layout

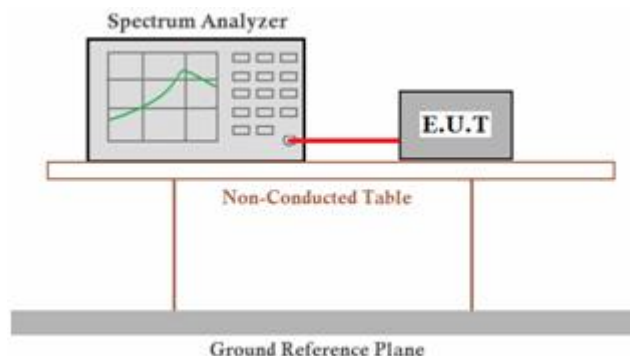

6.4.5 EUT Operation during Test



The EUT was programmed to be in continuously transmitting mode.



6.4.6 Test result



PASS

Note: All antennas(antenna 1-4) have been tested, found worst case at antenna 1, and so only show the test result of antenna 1 in the report.

Frequency (MHz)	-20 dB Bandwidth (MHz)	OCW (MHz)	Limit Bandwidth (MHz)	Verdict
2402	0.31637	0.26637	/	Pass
2440	0.31377	0.26427	/	Pass
2481	0.31097	0.26697	/	Pass

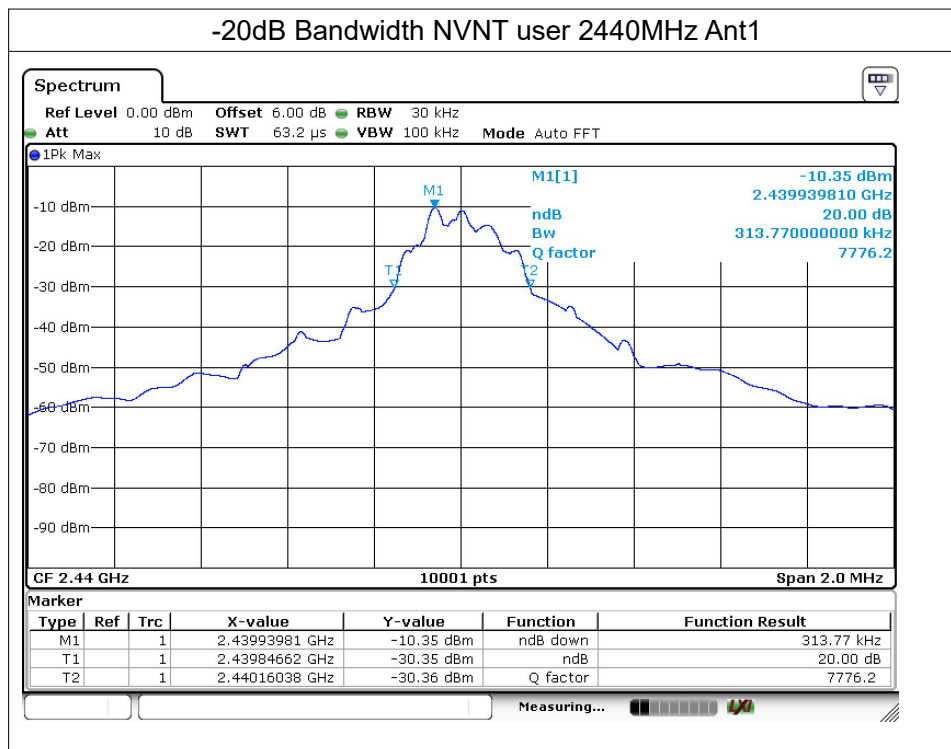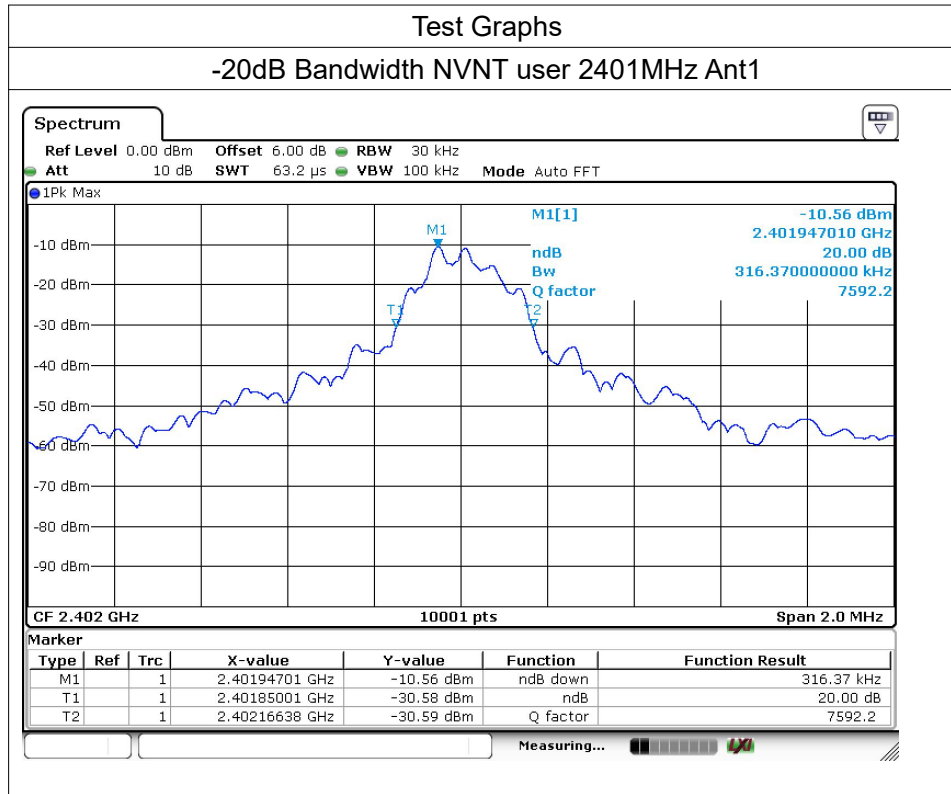

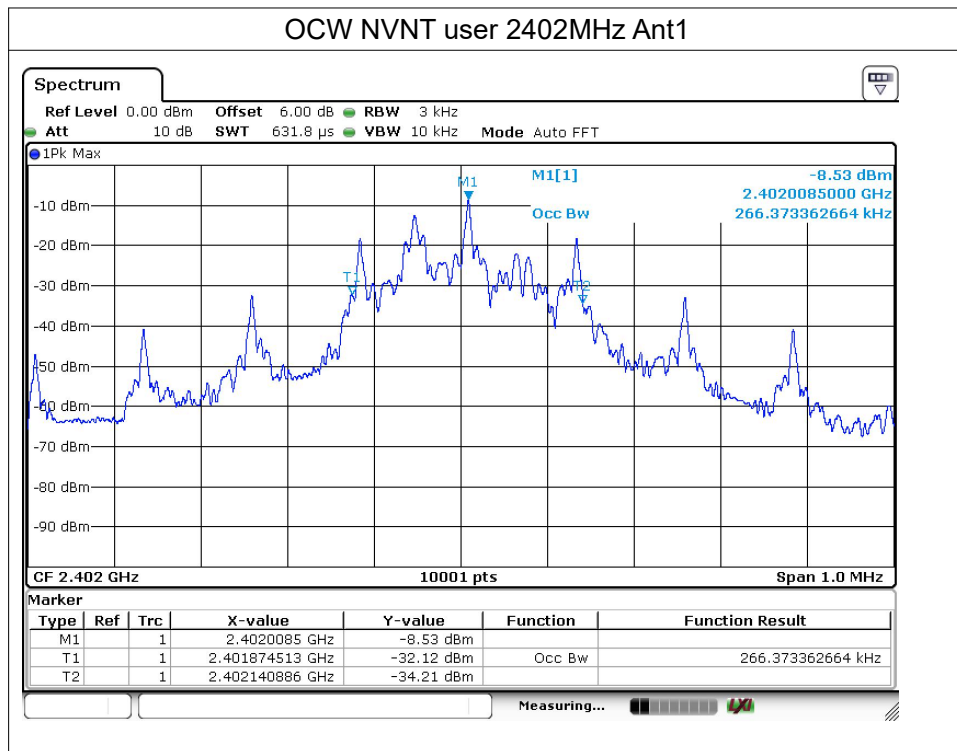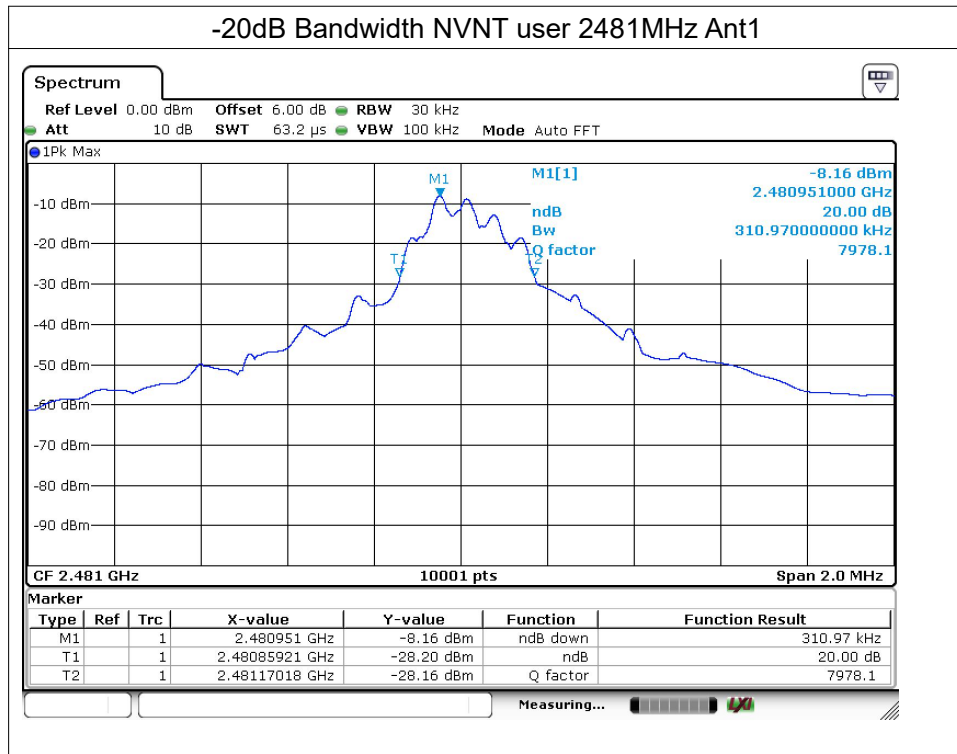

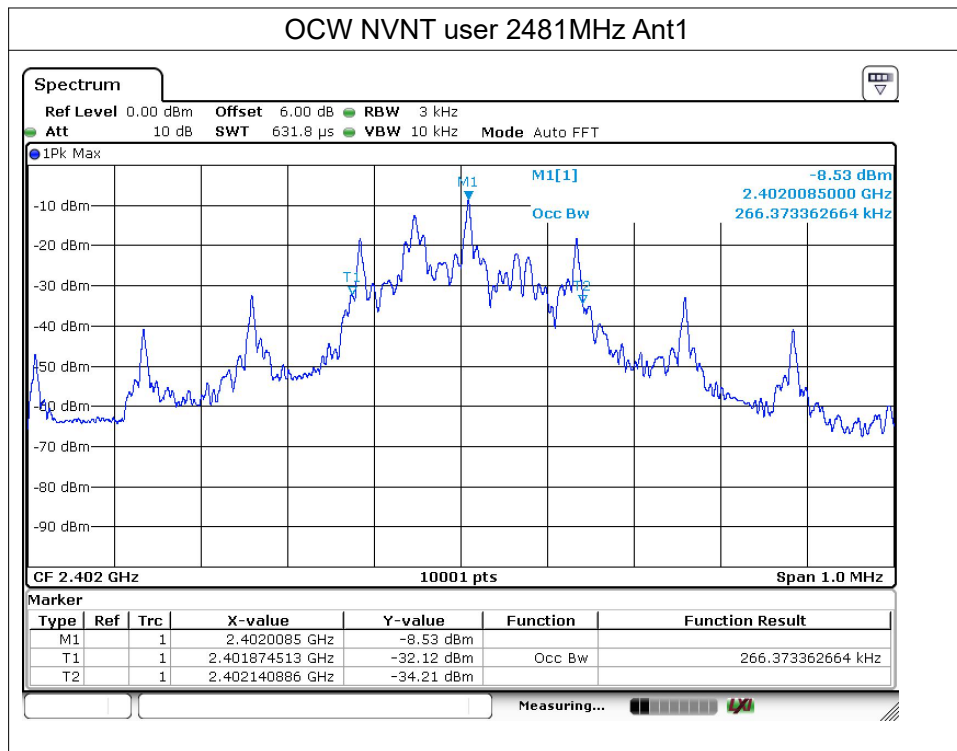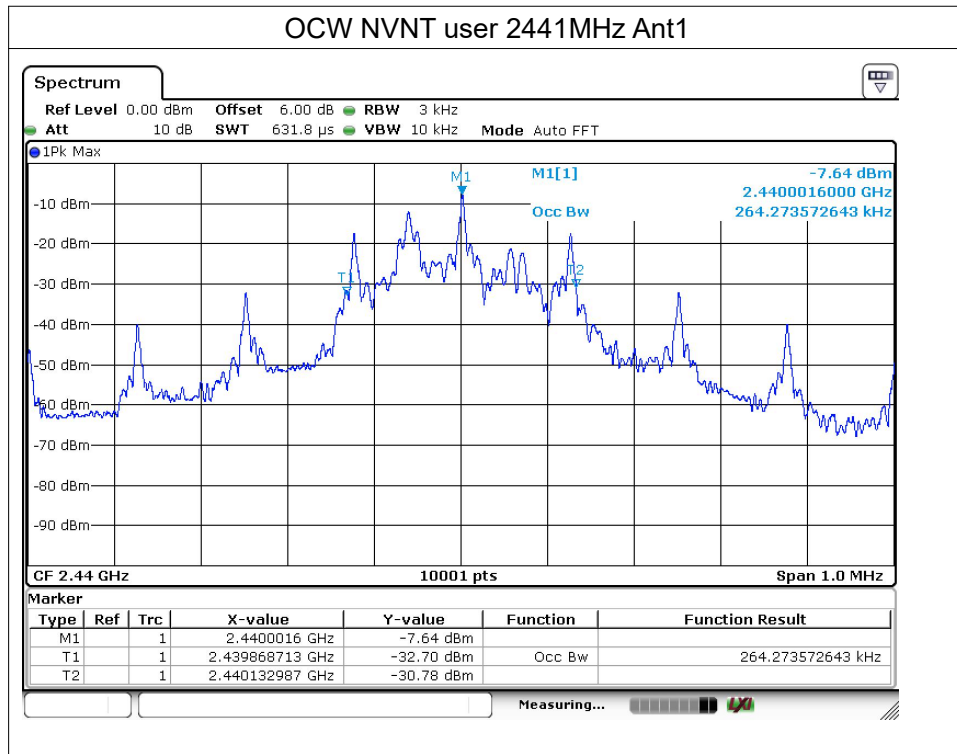

Remark:

- 1). Measured 20dB & 99% Occupied Bandwidth at difference data rate for each mode and recorded worst case for each mode.
- 2). Test results including cable loss;

6.3 Radiated Emissions Measurement

6.8.1 Standard requirement:

FCC Part15 C Section 15.209 & RSS-210 §B.10/RSS-Gen:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

The field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
902-928 MHz	50	500
2400-2483.5 MHz	50	500
5725-5875 MHz	50	500
24.0-24.25 GHz	250	2500

Band-edge Measurements

According to §15.249 (d)Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in § 15.209, whichever is the lesser attenuation

6.8.2 Measuring Instruments and Setting:

Please refer to equipment list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10 th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 1/B kHz for Average
RB / VB (Emission in non-restricted band)	1MHz / 1MHz for Peak, 1 MHz / 1/B kHz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB/VB 200Hz/1KHz for QP/AVG
Start ~ Stop Frequency	150kHz~30MHz / RB/VB 9kHz/30KHz for QP/AVG
Start ~ Stop Frequency	30MHz~1000MHz / RB/VB 120kHz/1MHz for QP

6.8.3 Test Procedures

1) Sequence of testing 9 kHz to 30 MHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 0.8 m height is used.
- If the EUT is a floor standing device, it is placed on the ground.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 1.0 meter.
- At each turntable position the analyzer sweeps with peak detection to find the maximum of all emissions

Final measurement:

- Identified emissions during the premeasurement the software maximizes by rotating the turntable position (0° to 360°) and by rotating the elevation axes (0° to 360°).
- The final measurement will be done in the position (turntable and elevation) causing the highest emissions with QPK detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

2) Sequence of testing 30 MHz to 1 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 to 3 meter.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter.
- The final measurement will be done with QP detector with an EMI receiver.
- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

3) Sequence of testing 1 GHz to 18 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height scan range is 1 meter to 2.5 meter.
- At each turntable position and antenna polarization the analyzer sweeps with peak detection to find the maximum of all emissions.

Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter. This procedure is repeated for both antenna polarizations.
- The final measurement will be done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

4) Sequence of testing above 18 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 1 meter.
- The EUT was set into operation.

Premeasurement:

- The antenna is moved spherical over the EUT in different polarisations of the antenna.

Final measurement:

- The final measurement will be performed at the position and antenna orientation for all detected emissions that were found during the premeasurements with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.


6.8.4 Test Setup Layout



Below 30MHz



Below 1GHz

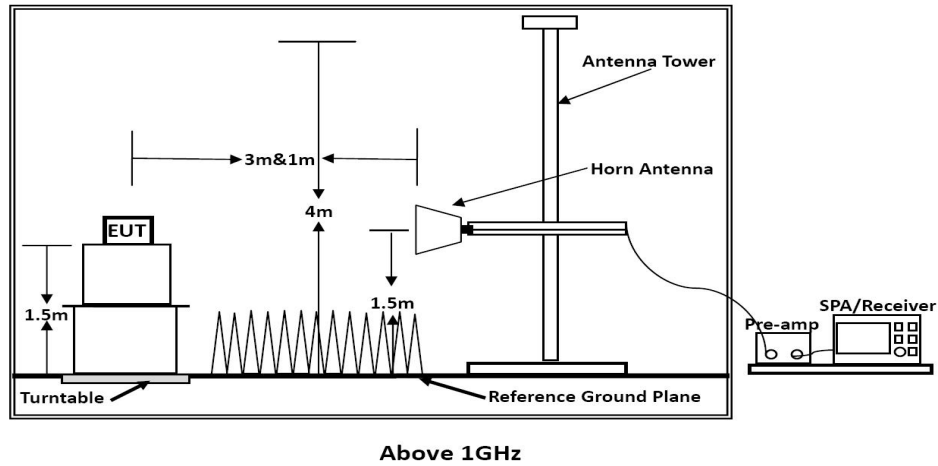

Above 18 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.

Distance extrapolation factor = $20 \log (\text{specific distance [3m]} / \text{test distance [1m]})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

6.8.5 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

6.8.6 Test result

Temperature	25.2°C	Humidity	52.1%
Test Engineer	Simba Huang	Configurations	TX

Remarks:

1. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.
2. All antennas(antenna 1-4) have been tested, found worst case at antenna 1, and so only show the test result of antenna 1 in the report.

6.3.1 Field Strength of the Fundamental Signal

Peak value:

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2402	87.16	-5.68	81.48	114.00	-32.52	Vertical
2402	86.59	-5.68	80.91	114.00	-33.09	Vertical
2440	84.14	-5.36	78.78	114.00	-35.22	Vertical
2440	85.33	-5.36	79.97	114.00	-34.03	Horizontal
2481	85.43	-5.00	80.43	114.00	-33.57	Horizontal
2481	84.98	-5.00	79.98	114.00	-34.02	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2402	72.46	-5.68	66.78	94.00	-27.22	Vertical
2402	75.71	-5.68	70.03	94.00	-23.97	Vertical
2440	73.62	-5.36	68.26	94.00	-25.74	Vertical
2440	77.50	-5.36	72.14	94.00	-21.86	Horizontal
2481	73.18	-5.00	68.18	94.00	-25.82	Horizontal
2481	75.49	-5.00	70.49	94.00	-23.51	Horizontal

Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor

6.3.2 Spurious emissions

■ Results of Radiated Emissions (9 KHz~30MHz)

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Over Limit (dBuV)	Remark
-	-	-	-	See Note

Note:

The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

Results of Radiated Emissions (30MHz~1GHz)

Note:

All antennas (antenna 1-4) have been tested, found worst case at antenna 1, and so only show the test result of antenna 1 in the report.

Pre-scan all test modes, found worst case at GFSK (LCH), and so only show the test result of GFSK (LCH).

Model name:	AP2400B	Test Date :	2022-07-10
Polarization :	Vertical	Test Result:	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail




Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Measurement Result=Reading Level +Correct Factor;

Over Limit= Measurement Result- Limit;

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		62.2128	40.24	-8.10	32.14	40.00	-7.86	QP
2	*	104.1701	44.39	-8.06	36.33	43.50	-7.17	QP
3		147.9214	37.44	-7.55	29.89	43.50	-13.61	QP
4		198.5880	36.73	-6.84	29.89	43.50	-13.61	QP
5		366.8231	28.61	-0.57	28.04	46.00	-17.96	QP
6		801.7863	27.57	6.82	34.39	46.00	-11.61	QP

Model name:	AP2400B	Test Date :	2022-07-10
Polarization :	Horizontal	Test Result:	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

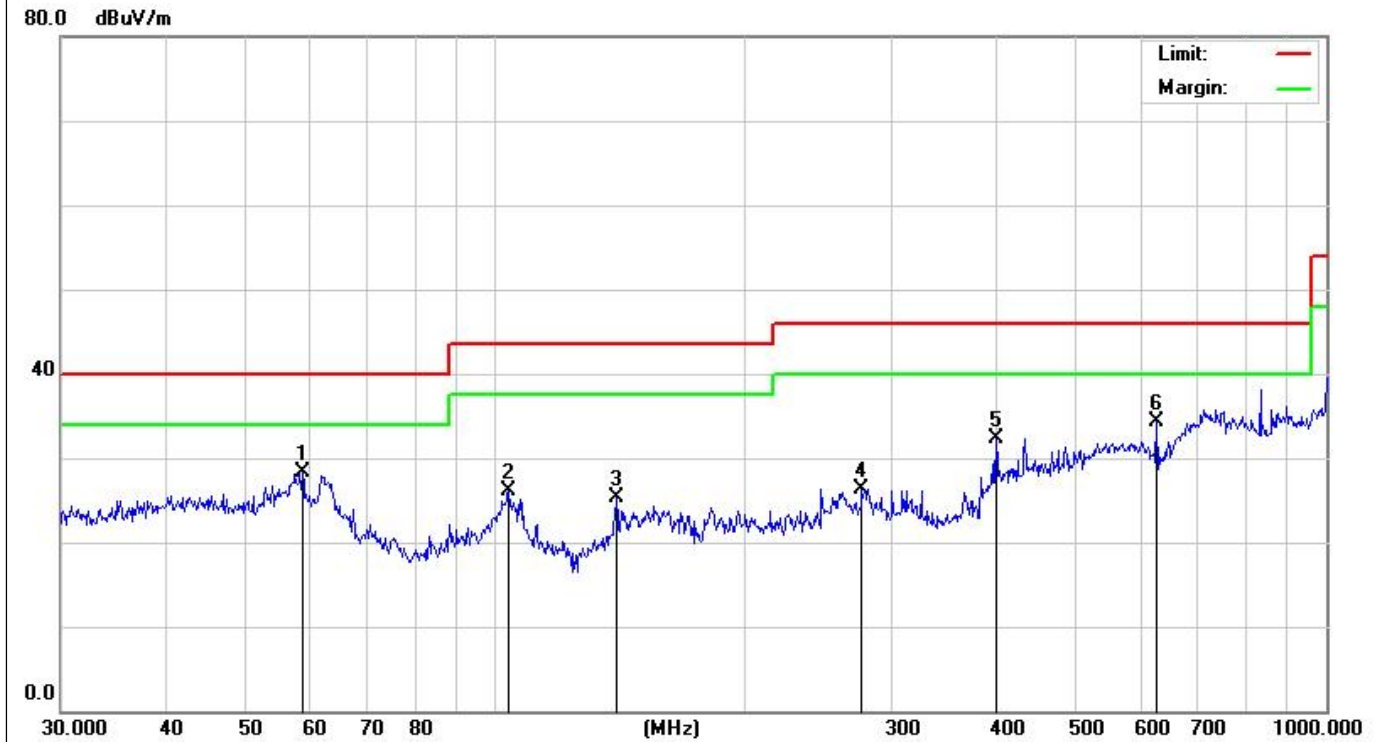

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Measurement Result=Reading Level +Correct Factor;

Over Limit= Measurement Result- Limit;

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	58.6126	34.07	-5.77	28.30	40.00	-11.70	QP
2		103.8055	33.56	-7.46	26.10	43.50	-17.40	QP
3		139.8508	32.35	-7.10	25.25	43.50	-18.25	QP
4		276.1235	32.36	-5.96	26.40	46.00	-19.60	QP
5		400.4319	31.93	0.35	32.28	46.00	-13.72	QP
6		625.0780	31.98	2.26	34.24	46.00	-11.76	QP

Results for Radiated Emissions (1- 26 GHz)

Test channel:	Lowest channel
---------------	----------------

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4804.000	48.36	5.06	53.42	74.00	-20.58	Vertical
7206.000	40.06	7.03	47.09	74.00	-26.91	Vertical
4804.000	36.97	5.06	42.03	74.00	-31.97	Horizontal
7206.000	40.31	7.03	47.34	74.00	-26.66	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4804.000	33.47	5.06	38.53	54.00	-15.47	Vertical
7206.000	29.82	7.03	36.85	54.00	-17.15	Vertical
4804.000	35.61	5.06	40.67	54.00	-13.33	Horizontal
7206.000	32.97	7.03	40.00	54.00	-14.00	Horizontal

Test channel:	Middle channel
---------------	----------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4880.000	47.44	5.14	52.58	74.00	-21.42	Vertical
7320.000	42.36	7.52	49.88	74.00	-24.12	Vertical
4880.000	49.87	5.14	55.01	74.00	-18.99	Horizontal
7320.000	43.05	7.52	50.57	74.00	-23.43	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4880.000	34.57	5.14	39.71	54.00	-14.29	Vertical
7320.000	33.49	7.52	41.01	54.00	-12.99	Vertical
4880.000	37.58	5.14	42.72	54.00	-11.28	Horizontal
7320.000	33.17	7.52	40.69	54.00	-13.31	Horizontal

Test channel:	Highest channel
---------------	-----------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4962.000	48.04	5.22	53.26	74.00	-20.74	Vertical
7443.000	42.97	8.06	51.03	74.00	-22.97	Vertical
4962.000	48.36	5.22	53.58	74.00	-20.42	Horizontal
7443.000	42.05	8.06	50.11	74.00	-23.89	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4962.000	33.41	5.22	38.63	54.00	-15.37	Vertical
7443.000	31.87	8.06	39.93	54.00	-14.07	Vertical
4962.000	34.69	5.22	39.91	54.00	-14.09	Horizontal
7443.000	30.05	8.06	38.11	54.00	-15.89	Horizontal

Remarks:

- 1). Measuring frequencies from 9 KHz - 10th harmonic or 26.5GHz (which is less), No emission found between lowest internal used/generated frequency to 30MHz.
- 2). Radiated emissions measured in frequency range from 9 KHz~10th harmonic or 26.5GHz (which is less) were made with an instrument using Peak detector mode.
- 3). Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4). $\text{Margin} = \text{Final Level} - \text{Limit}$
- 5). $\text{Final Level} = \text{Receiver Read level} + \text{Antenna Factor} + \text{Cable Loss} - \text{Preamplifier Factor}$
- 6). All the modes have been tested and the only shows the worst case GFSK mode

6.3.3 Band-edge Measurements

Note: All antennas (antenna 1-4) have been tested, found worst case at antenna 1, and so only show the test result of antenna 1 in the report.

All of the restriction bands were tested, and only the data of worst case was exhibited.

Test channel:	Lowest channel
---------------	----------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2310.000	44.28	-5.92	38.36	74.00	-35.64	Vertical
2390.000	44.69	-5.79	38.90	74.00	-35.10	Vertical
2310.000	44.35	-5.92	38.43	74.00	-35.57	Horizontal
2390.000	43.28	-5.79	37.49	74.00	-36.51	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2310.000	33.46	-5.92	27.54	54.00	-26.46	Vertical
2390.000	33.74	-5.79	27.95	54.00	-26.05	Vertical
2310.000	32.95	-5.92	27.03	54.00	-26.97	Horizontal
2390.000	32.93	-5.79	27.14	54.00	-26.86	Horizontal

Test channel:	Highest channel
---------------	-----------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2483.500	45.87	-4.98	40.89	74.00	-33.11	Vertical
2500.000	46.39	-4.83	41.56	74.00	-32.44	Vertical
2483.500	46.02	-4.98	41.04	74.00	-32.96	Horizontal
2500.000	47.82	-4.83	42.99	74.00	-31.01	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2483.500	33.14	-4.98	28.16	54.00	-25.84	Vertical
2500.000	33.64	-4.83	28.81	54.00	-25.19	Vertical
2483.500	33.58	-4.98	28.60	54.00	-25.40	Horizontal
2500.000	32.97	-4.83	28.14	54.00	-25.86	Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor

6.4 Conducted Emissions

6.9.1 Standard requirement:

According to §15.207 (a) or RSS-Gen: For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dBμV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

* Decreasing linearly with the logarithm of the frequency

6.9.2 Measuring Instruments and Setting:

Please refer to equipment list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Detector	Peak
Attenuation	Auto
RB / VB (Emission in restricted band)	100KHz/300KHz
RB / VB (Emission in non-restricted band)	100KHz/300KHz

6.9.3 Test Procedures

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz

The spectrum from 9 kHz to 26.5GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

6.9.4 Test Setup Layout



6.9.5 EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

6.9.6 Test result

Note: All antennas (antenna 1-4) have been tested, found worst case at antenna 1, and so only show the test result of antenna 1 in the report.

Pre-scan all test modes, found worst case at GFSK 2402MHz, and so only show the test result of GFSK 2402MHz

Model name:	AP2400B	Test Date :	2022-07-10
Temperature:	25.2° C	Relative Humidity:	52.1%
ATM Pressure:	101 kPa	Test by:	Simba Huang
Phase :	Line	Test Result:	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

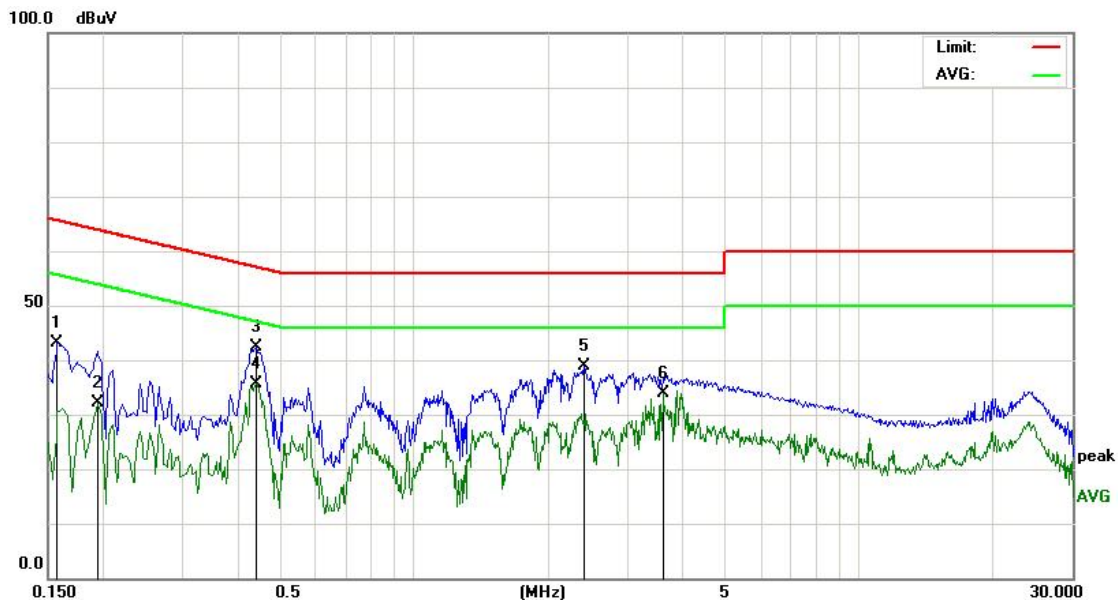


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Measurement Result=Reading Level +Correct Factor;

Over Limit= Measurement Result- Limit;

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector
		MHz	dBuV	dB	dBuV	dBuV	dB	
1		0.1580	31.44	11.75	43.19	65.56	-22.37	QP
2		0.1940	20.96	11.21	32.17	53.86	-21.69	AVG
3		0.4420	32.33	10.08	42.41	57.02	-14.61	QP
4	*	0.4420	25.50	10.08	35.58	47.02	-11.44	AVG
5		2.3980	28.96	10.01	38.97	56.00	-17.03	QP
6		3.6060	23.72	10.04	33.76	46.00	-12.24	AVG

Model name:	AP2400B	Test Date :	2022-07-10
Temperature:	25.2° C	Relative Humidity:	52.1%
ATM Pressure:	101 kPa	Test by:	Simba Huang
Phase :	Neutral	Test Result:	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

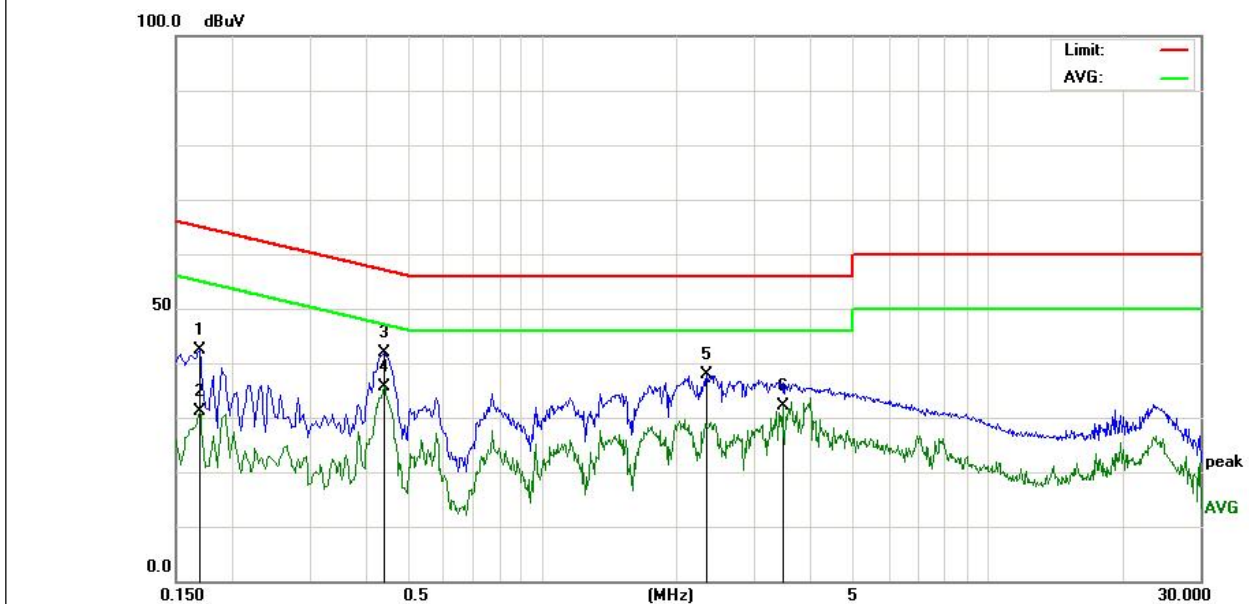

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Measurement Result=Reading Level +Correct Factor;

Over Limit= Measurement Result- Limit;

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1700	30.88	11.55	42.43	64.96	-22.53	QP
2		0.1700	19.61	11.55	31.16	54.96	-23.80	AVG
3		0.4420	31.69	10.08	41.77	57.02	-15.25	QP
4	*	0.4420	25.60	10.08	35.68	47.02	-11.34	AVG
5		2.3380	27.98	10.00	37.98	56.00	-18.02	QP
6		3.4660	22.20	10.04	32.24	46.00	-13.76	AVG

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.

7 Test Setup Photo

Reference to the **appendix Setup photo** for details.

8 EUT Constructional Details

Reference to the appendix **External EUT photo & Internal EUT photo** for details.

-----End-----