


SPECIFICATION AND USER MANUAL

Model NO.	AX251	TYPE	wireless keyboard
MP DATE		DATE	2019.11.05

Photo

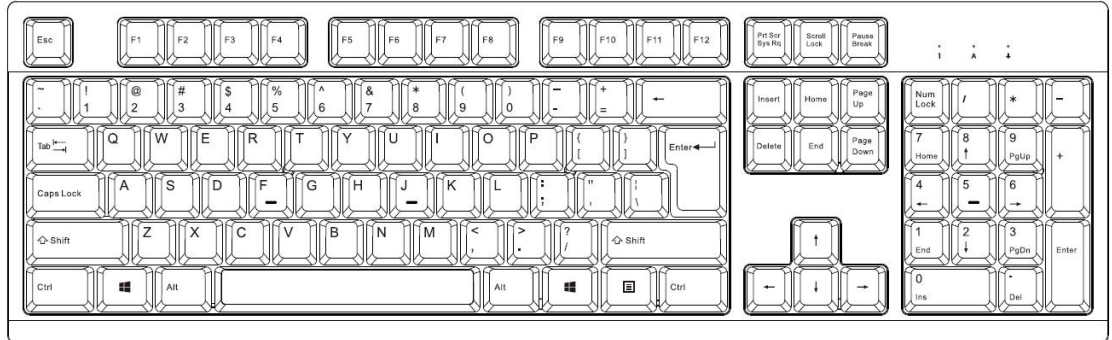

	Item	Specification	Item	Specification
The basic specifications	Keyboard type	wireless keyboard	Key language version	US\UK\BR\KR
	Interface type	USB	Keyboard size (length * width * height)	447*138.8*28.4mm
	Connection mode	wireless	Keyboard net weight (bare)	456g
	Multimedia Keys	With attached multimedia (optional)	DONGLE size (length * width * height)	13.2*14.6*6.5mm
	Battery Type	1 AAA battery	DONGLE Net weight (bare)	2±1g
	Working voltage	1.5V	Working voltage	DC4.5-5.5V
	Operating current	<3mA	Operating current	25mA
	Sleeping current	<0.1mA	Sleeping current	<3mA
	Button type		Interface compatibility	USB1.1/2.0/3.0
	load of key	55g±7g	system compatibility	Windows98/ME/2000/XP/Vista/Win7/Win8/MAC/LINUX/
	Key life	More than 3 million times	ergonomically	Support
	REPLACE BATTERY	have	Support for plug and play	Support
	Low voltage alarm light color	red	Working Distance	10M
Alarm voltage	0.9V			

	Keyboard IC model	2145+006F	DONGLE IC model	846+006F
	IC package	dependend	IC package	dependend
	Operation Temperature	0~45℃	Storage Temperature	-20~+60℃
	Operating humidity	20~90%	Storage humidity	≤93% (40℃)
Feature selling point of complete machine	1	No need to install USB drive plug and play, strong anti-interference ability, distance up to 10 meters.		
	2	Keyboard code matching mode is: install the battery, press "Esc" + "+=" at the same time, the indicator light flashes, insert the receiver, the indicator light goes off, code matching will be successful, keyboard LED will be on for 5 seconds and then off.		
	3	Support ergonomic design		
	4	Key life up to 3 million times.		
	5			

Multimedia instruction

- 1: Fn+F1 Media
- Fn+F2 Volumn-
- Fn+F3 Volumn+
- Fn+F4 Mute
- Fn+F5 PrevTrack
- Fn+F6 NextTrack
- Fn+F7 Play/Pause
- Fn+F8 Stop
- Fn+F9 www Web/Home
- Fn+F10 Mail
- Fn+F11 My Computer
- Fn+F12 www Forward

FCC Caution

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesiredoperation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the

instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

AKUN COMPANY LTD.
