

## DFS Test Report

**Report No.:** RFBECO-WTW-P20100054-2

**FCC ID:** TLZ-CM276NF

**Test Model:** AW-CM276NF

**Received Date:** Dec. 16, 2016

**Issued Date:** Nov. 10, 2020

**Applicant:** AzureWave Technologies, Inc.

**Address:** 8F., No.94, Baozhong Rd. , Xindian Dist., New Taipei City , Taiwan 231

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch  
Hsin Chu Laboratory

**Lab Address:** E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,  
Taiwan

**FCC Registration /  
Designation Number:** 723255 / TW2022



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

## Table of Contents

Release Control Record .....	3
1 Certificate of Conformity .....	4
2 EUT Information .....	5
2. Information of the Testing Laboratories .....	7
Appendix A – Authorization Letter .....	8
Appendix B – Supplementary Report No.: RF161216E08H-2.....	10

### Release Control Record

Issue No.	Description	Date Issued
RFBECO-WTW-P20100054-2	Original release.	Nov. 10, 2020

## 1 Certificate of Conformity

**Product:** IEEE 802.11 2X2 MU-MIMO ac/a/b/g/n Wireless LAN + Bluetooth NGFF Module

**Brand:** AzureWave

**Test Model:** AW-CM276NF

**Sample Status:** ENGINEERING SAMPLE

**Applicant:** AzureWave Technologies, Inc.

**Standards:** FCC Part 15, Subpart E (Section 15.407)

**References Test** KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02

**Guidance:** KDB 905462 D03 Clients Without Radar Detection New Rules v01r02

This report is issued as a supplementary report. This report shall be used combined together with its original report (Report No.: RF161216E08H-2).

**Prepared by :** Phoenix Huang , **Date:** Nov. 10, 2020  
Phoenix Huang / Specialist

**Approved by :** Clark Lin , **Date:** Nov. 10, 2020  
Clark Lin / Technical Manager

## 2 EUT Information

Note:

1. The difference compared with original report (Report No.: RF161216E08H-2) are change applicant, ID, brand name, model name and add new antennas (Model No.: 5-PP005049) and according to the EUT's specifications and the applicant's requirements, there is no need to be re-tested.

2. The antennas provided to the EUT, please refer to the following table:

Original								
Antenna Set.	Brand	Model	Chain No.	Antenna Net. Gain(dBi)	Frequency range (MHz)	Antenna Type	Connector Type	Cable Length
1	MAG.LAYERS	MSA-4008-25GC1-A1	Chain 0(Aux)	2.98	2400~2500	PIFA	i-pex(MHF)	15cm
				5.16	4900~5900			
			Chain 1(Main)	2.98	2400~2500			15cm
				5.16	4900~5900			
2	Bondale	G-RA0K10090176-1436B	Chain 0(Aux)	1.9	2400~2500	Dipole	RP-SMA	120mm
				3.6	4900~5800			
			Chain 1(Main)	1.9	2400~2500			120mm
				3.6	4900~5800			
3	San Jose	UEN-201	Chain 0(Aux)	2.4	2400~2500	Dipole	RP-SMA	120mm
				4.4	4900~5800			
			Chain 1(Main)	2.4	2400~2500			120mm
				4.4	4900~5800			
4	Unictron	H2B1PC1A1C175L	Chain 0(Aux)	1.6	2400-2500	PCB	I-pex	100±5mm
				4.8	5150~5850			
			Chain 1(Main)	1.6	2400-2500			100±5mm
				4.8	5150~5850			
5	LSR	001-0012	Chain 0(Aux)	2	2400-2500	Dipole	RP-SMA	100mm
				2	5150~5850			
			Chain 1(Main)	2	2400-2500			100mm
				2	5150~5850			
6	Laird	MAF94051	Chain 0(Aux)	2.4	2400-2500	Dipole	RP-SMA	100mm
				3.4	5150~5850			
			Chain 1(Main)	2.4	2400-2500			100mm
				3.4	5150~5850			
7	Taoglas	GW.59.3153	Chain 0(Aux)	2.86	2400-2500	Dipole	RP-SMA	100mm
				4.74	5150~5850			
			Chain 1(Main)	2.86	2400-2500			100mm
				4.74	5150~5850			
8	Chang Hong	DA-2458-02-SMR	Chain 0(Aux)	2.85	2400-2500	Dipole	RP-SMA	100mm
				2.17	5150~5850			
			Chain 1(Main)	2.85	2400-2500			100mm
				3.13	5150~5850			
9	Unictron	H2B1PD1A1C385L	Chain 0(Aux)	2.8	2400-2500	PCB	I-pex	100mm
				4.2	5150~5850			
			Chain 1(Main)	2.8	2400-2500			100mm
				4.2	5150~5850			
10	Molex	2042811100	Chain 0(Aux)	2.562	2400-2500	PCB	I-pex	100mm
				3.094	5150~5850			
			Chain 1(Main)	2.562	2400-2500			100mm
				3.094	5150~5850			
11	Molex	1461531100	Chain 0(Aux)	1.829	2400-2500	PCB	I-pex	100mm
				2.485	5150~5850			
			Chain 1(Main)	1.829	2400-2500			100mm
				2.485	5150~5850			
12	MAG.LAYERS	MSA-4008-25GC1-A2	Chain 0(Aux)	2.98	2400-2500	PIFA	i-pex(MHF)	NA
				5.16	5150~5850			
			Chain 1(Main)	2.98	2400-2500			
				5.16	5150~5850			

Newly								
Antenna Set.	Brand	Model	chain no.	Antenna Net Gain(dBi) included cable loss	Frequency range	Antenna Type	Connector Type	Cable Length
13	lynwave	5-PP005049	Chain 0(Aux)	2.7	2400-2500	PCB	IPEX 4L	30mm
				4.4	5150~5850			
			Chain 1(Main)	2.7	2400-2500	PCB	IPEX 4L	30mm
				4.5	5150~5850			

Note: The above Antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

## 2. Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Lin Kou EMC/RF Lab:**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF/Telecom Lab:**

Tel: 886-3-6668565

Fax: 886-3-6668323

**Hwa Ya EMC/RF/Safety Lab:**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

--- END ---

## Appendix A – Authorization Letter





## Authorization

We, Marvell Semiconductor, Inc., as the main report holder authorize our customer AzureWave Technologies, Inc. to copy according to our original one and owing the right to use our technical /test data and make the copy of the test report.

The detail information is mentioned as follows:

Original Product Name : IEEE 802.11 2X2 MU-MIMO ac/a/b/g/n Wireless LAN + Bluetooth NGFF Module

BV Project No.: 161216E08 & relative series projects

Original model(s) : W8997-M1216

Brand: Marvell

Copy to

New Applicant: AzureWave Technologies, Inc.

New Product Name : IEEE 802.11 2X2 MU-MIMO ac/a/b/g/n Wireless LAN + Bluetooth NGFF Module

New model(s) : AW-CM276NF

New Brand: AzureWave


New applicant address : 8F., No.94, Baozhong Rd. , Xindian Dist., New Taipei City , Taiwan 231

Contact person : Patrick Lin

Tel : 02-55995599 \*5580

E-mail : patrick.lin@azurewave.com

Sincerely yours,

  
-----

Ken Wu/Senior Product Marketing Mgr.

Marvell Semiconductor, Inc.

Tel. : 408-222-9417

E-mail : kwu@marvell.com

Date: December 2<sup>nd</sup>, 2019

**Appendix B – Supplementary Report No.: RF161216E08H-2**

## DFS Test Report

**Report No.:** RF161216E08H-2

**FCC ID:** UAY-W8997-M1216

**Test Model:** W8997-M1216

**Received Date:** Dec. 16, 2016

**Test Date:** Jan. 09 to 12, 2017

**Issued Date:** Sep. 16, 2019

**Applicant:** Marvell Semiconductor, Inc.

**Address:** 5488 Marvell Lane, Santa Clara CA95054 USA

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch  
Hsin Chu Laboratory

**Lab Address:** E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,  
Taiwan R.O.C.

**Test Location:** E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,  
Taiwan R.O.C.

**FCC Registration /  
Designation Number:** 723255 / TW2022



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

## Table of Contents

<b>Release Control Record</b> .....	<b>3</b>
<b>1 Certificate of Conformity</b> .....	<b>4</b>
<b>2 EUT Information</b> .....	<b>5</b>
2.1 Operating Frequency Bands and Mode of EUT .....	5
2.2 EUT Software and Firmware Version .....	5
2.3 Description of Available Antennas to the EUT .....	5
2.4 EUT Maximum Conducted Power .....	7
2.5 EUT Maximum EIRP Power .....	8
2.6 Transmit Power Control (TPC) .....	9
2.7 Statement of Manufacturer .....	9
<b>3. U-NII DFS Rule Requirements</b> .....	<b>10</b>
3.1 Working Modes and Required Test Items .....	10
3.2 Test Limits and Radar Signal Parameters .....	11
<b>4. Test &amp; Support Equipment List</b> .....	<b>14</b>
4.1 Test Instruments .....	14
4.2 Description of Support Units .....	14
<b>5. Test Procedure</b> .....	<b>15</b>
5.1 DFS Measurement System .....	15
5.2 Calibration of DFS Detection Threshold Level .....	16
5.3 Deviation from Test Standard .....	17
5.4 Conducted Test Setup Configuration .....	17
5.4.1 Client without Radar Detection Mode .....	17
<b>6. Test Results</b> .....	<b>18</b>
6.1 Summary of Test Results .....	18
6.2 Test Results .....	19
6.2.1 Test Mode: Device Operating In Client without Radar Detection Mode. ....	19
6.2.2 Channel Closing Transmission and Channel Move Time .....	20
6.2.3 Non-Occupancy Period .....	21
6.2.4 Non-Associated Test .....	23
6.2.5 Non- Co-Channel Test .....	23
<b>7. Information of the Testing Laboratories</b> .....	<b>24</b>
<b>8. APPENDIX-A</b> .....	<b>25</b>

### Release Control Record

Issue No.	Description	Date Issued
RF161216E08H-2	Original release.	Sep. 16, 2019

## 1 Certificate of Conformity

**Product:** IEEE 802.11 2X2 MU-MIMO ac/a/b/g/n Wireless LAN + Bluetooth NGFF Module

**Brand:** Marvell

**Test Model:** W8997-M1216

**Sample Status:** ENGINEERING SAMPLE

**Applicant:** Marvell Semiconductor, Inc.

**Test Date:** Jan. 09 to 12, 2017

**Standards:** FCC Part 15, Subpart E (Section 15.407)


KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02

KDB 905462 D03 Clients Without Radar Detection New Rules v01r02

Note: This report is issued as a duplicate report of BV CPS report no.: RF161216E08C-2. The differences compared with the original report are add new antennas. Therefore, there is no addition test has to be performed. All test data are copied from the original test report.

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**Prepared by :**  , **Date:** Sep. 16, 2019  
Claire Kuan / Specialist

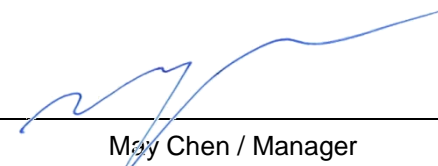**Approved by :**  , **Date:** Sep. 16, 2019  
May Chen / Manager

## 2 EUT Information

### 2.1 Operating Frequency Bands and Mode of EUT

Table 1: Operating Frequency Bands and Mode of EUT

Operational Mode	Operating Frequency Range	
	5250~5350MHz	5470~5725MHz
Client without radar detection and ad hoc function	✓	✓

### 2.2 EUT Software and Firmware Version

Table 2: The EUT Software/Firmware Version

No.	Product	Model No.	Software/Firmware Version
1	IEEE 802.11 2X2 MU-MIMO ac/a/b/g/n Wireless LAN + Bluetooth NGFF Module	W8997-M1216	PCIE8997-16.68.1.p70-C3X16C193-GPL-(FP68)

### 2.3 Description of Available Antennas to the EUT

Table 3: Antenna List

Original								
Antenna Set.	Brand	Model	Chain No.	Antenna Net. Gain(dBi)	Frequency range (MHz)	Antenna Type	Connector Type	Cable Length
1	MAG.LAYERS	MSA-4008-25GC1-A1	Chain 0(Aux)	2.98	2400~2500	PIFA	i-pec(MHF)	15cm
				5.16	4900~5900			
			Chain 1(Main)	2.98	2400~2500			15cm
				5.16	4900~5900			
2	Bondale	G-RA0K10090176-1436B	Chain 0(Aux)	1.9	2400~2500	Dipole	RP-SMA	120mm
				3.6	4900~5800			
			Chain 1(Main)	1.9	2400~2500			120mm
				3.6	4900~5800			
3	San Jose	UEN-201	Chain 0(Aux)	2.4	2400~2500	Dipole	RP-SMA	120mm
				4.4	4900~5800			
			Chain 1(Main)	2.4	2400~2500			120mm
				4.4	4900~5800			
Original								
Antenna Set.	Brand	Model	Chain No.	Antenna Net. Gain(dBi)	Frequency range (MHz)	Antenna Type	Connector Type	Cable Length
4	Unictron	H2B1PC1A1C175L	Chain 0(Aux)	1.6	2400-2500	PCB	I-pec	100±5mm
				4.8	5150~5850			
			Chain 1(Main)	1.6	2400-2500			100±5mm
				4.8	5150~5850			

5	LSR	001-0012	Chain 0(Aux)	2	2400-2500	Dipole	RP-SMA	100mm
				2	5150~5850			
			Chain 1(Main)	2	2400-2500	Dipole	RP-SMA	100mm
				2	5150~5850			
6	Laird	MAF94051	Chain 0(Aux)	2.4	2400-2500	Dipole	RP-SMA	100mm
				3.4	5150~5850			
			Chain 1(Main)	2.4	2400-2500	Dipole	RP-SMA	100mm
				3.4	5150~5850			
7	Taoglas	GW.59.3153	Chain 0(Aux)	2.86	2400-2500	Dipole	RP-SMA	100mm
				4.74	5150~5850			
			Chain 1(Main)	2.86	2400-2500	Dipole	RP-SMA	100mm
				4.74	5150~5850			
8	Chang Hong	DA-2458-02-SMR	Chain 0(Aux)	2.85	2400-2500	Dipole	RP-SMA	100mm
				2.17	5150~5850			
			Chain 1(Main)	2.85	2400-2500	Dipole	RP-SMA	100mm
				3.13	5150~5850			
9	Unictron	H2B1PD1A1C385L	Chain 0(Aux)	2.8	2400-2500	PCB	I-pex	100mm
				4.2	5150~5850			
			Chain 1(Main)	2.8	2400-2500	PCB	I-pex	100mm
				4.2	5150~5850			
10	Molex	2042811100	Chain 0(Aux)	2.562	2400-2500	PCB	I-pex	100mm
				3.094	5150~5850			
			Chain 1(Main)	2.562	2400-2500	PCB	I-pex	100mm
				3.094	5150~5850			
11	Molex	1461531100	Chain 0(Aux)	1.829	2400-2500	PCB	I-pex	100mm
				2.485	5150~5850			
			Chain 1(Main)	1.829	2400-2500	PCB	I-pex	100mm
				2.485	5150~5850			
12	MAG.LAYERS	MSA-4008-25GC1-A2	Chain 0(Aux)	2.98	2400-2500	PIFA	i-pex(MHF)	NA
				5.16	5150~5850			
			Chain 1(Main)	2.98	2400-2500	PIFA	i-pex(MHF)	
				5.16	5150~5850			



## 2.4 EUT Maximum Conducted Power

Table 4: The Measured Conducted Output Power

For Conducted Output Power data was referred to FCC test report (Report No.: RF161216E08H-1)

### 802.11a

FREQUENCY BAND (MHz)	MAX. POWER	
	OUTPUT POWER(mW)	OUTPUT POWER(dBm)
5250~5350	143.229	21.56
5470~5725	123.471	20.92

### 802.11ac (VHT20)

FREQUENCY BAND (MHz)	MAX. POWER	
	OUTPUT POWER(mW)	OUTPUT POWER(dBm)
5250~5350	144.557	21.60
5470~5725	123.091	20.90

### 802.11ac (VHT40)

FREQUENCY BAND (MHz)	MAX. POWER	
	OUTPUT POWER(mW)	OUTPUT POWER(dBm)
5250~5350	97.282	19.88
5470~5725	101.992	20.09

### 802.11ac (VHT80)

FREQUENCY BAND (MHz)	MAX. POWER	
	OUTPUT POWER(mW)	OUTPUT POWER(dBm)
5250~5350	36.353	15.61
5470~5725	56.629	17.53

## 2.5 EUT Maximum EIRP Power

Table 5: The EIRP Output Power List

### 802.11a

FREQUENCY BAND (MHz)	MAX. EIRP POWER	
	OUTPUT POWER(mW)	OUTPUT POWER(dBm)
5250~5350	356.477	25.52
5470~5725	307.302	24.88

### 802.11ac (VHT20)

FREQUENCY BAND (MHz)	MAX. EIRP POWER	
	OUTPUT POWER(mW)	OUTPUT POWER(dBm)
5250~5350	359.782	25.56
5470~5725	306.356	24.86

### 802.11ac (VHT40)

FREQUENCY BAND (MHz)	MAX. EIRP POWER	
	OUTPUT POWER(mW)	OUTPUT POWER(dBm)
5250~5350	242.121	23.84
5470~5725	253.844	24.05

### 802.11ac (VHT80)

FREQUENCY BAND (MHz)	MAX. POWER	
	OUTPUT POWER(mW)	OUTPUT POWER(dBm)
5250~5350	90.477	19.57
5470~5725	140.942	21.49

## 2.6 Transmit Power Control (TPC)

U-NII devices operating in the 5.25-5.35 GHz band and the 5.47-5.725 GHz band shall employ a TPC mechanism. The U-NII device is required to have the capability to operate at least 6 dB below the mean EIRP value of 30 dBm. A TPC mechanism is not required for systems with an e.i.r.p. of less than 500 mW.

TPC	EIRP	FCC 15.407 (h)(1)
	>500mW	The TPC mechanism is required for system with an EIRP of above 500mW
√	<500mW	The TPC mechanism is not required for system with an EIRP of less 500mW

## 2.7 Statement of Manufacturer

Manufacturer statement confirming that information regarding the parameters of the detected Radar Waveforms is not available to the end user. **And the device doesn't have Ad Hoc mode on DFS frequency band.**

### 3. U-NII DFS Rule Requirements

#### 3.1 Working Modes and Required Test Items

The manufacturer shall state whether the UUT is capable of operating as a Master and/or a Client. If the UUT is capable of operating in more than one operating mode then each operating mode shall be tested separately. See tables 6 and 7 for the applicability of DFS requirements for each of the operational modes.

Table 6: Applicability of DFS Requirements Prior To Use a Channel

Requirement	Operational Mode		
	Master	Client without radar detection	Client with radar detection
Non-Occupancy Period	✓	✓ note	✓
DFS Detection Threshold	✓	Not required	✓
Channel Availability Check Time	✓	Not required	Not required
U-NII Detection Bandwidth	✓	Not required	✓

Note: Regarding KDB 905462 D03 Client Without DFS New Rules v01r02 section (b)(5/6), If the client moves with the master, the device is considered compliant if nothing appears in the client non-occupancy period test. For devices that shut down (rather than moving channels), no beacons should appear. An analyzer plot that contains a single 30-minute sweep on the original channel.

Table 7: Applicability of DFS Requirements during Normal Operation

Requirement	Operational Mode	
	Master or Client with radar detection	Client without radar detection
DFS Detection Threshold	✓	Not required
Channel Closing Transmission Time	✓	✓
Channel Move Time	✓	✓
U-NII Detection Bandwidth	✓	Not required

Additional requirements for devices with multiple bandwidth modes	Master or Client with radar detection	Client without radar detection
U-NII Detection Bandwidth and Statistical Performance Check	All BW modes must be tested	Not required
Channel Move Time and Channel Closing Transmission Time	Test using widest BW mode available	Test using the widest BW mode available for the link
All other tests	Any single BW mode	Not required

Note: Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.

### 3.2 Test Limits and Radar Signal Parameters

#### Detection Threshold Values

Table 8: DFS Detection Thresholds for Master Devices And Client Devices With Radar Detection

Maximum Transmit Power	Value (See Notes 1, 2, and 3)
EIRP $\geq$ 200 milliwatt	-64 dBm
EIRP < 200 milliwatt and power spectral density < 10 dBm/MHz	-62 dBm
EIRP < 200 milliwatt that do not meet the power spectral density requirement	-64 dBm

Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.  
 Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.  
 Note3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.

Table 9: DFS Response Requirement Values

Parameter	Value
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds See Note 1.
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
U-NII Detection Bandwidth	Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3

Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.  
 Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.  
 Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

### Parameters of DFS Test Signals

Step intervals of 0.1 microsecond for Pulse Width, 1 microsecond for PRI, 1 MHz for chirp width and 1 for the number of pulses will be utilized for the random determination of specific test waveforms.

Table 10: Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a ----- Test B: 15 unique PRI values randomly selected within the range of 518-3066 μ sec, with a minimum increment of 1 μ sec, excluding PRI values selected in Test A	$\text{Roundup} \left\{ \left( \frac{1}{360} \right) \cdot \left( \frac{19 \cdot 10^6}{\text{PRI}_{\mu\text{sec}}} \right) \right\}$	60%	30
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120
Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.					

Table 11: Long Pulse Radar Test Waveform

Radar Type	Pulse Width (μsec)	Chirp Width (MHz)	PRI (μsec)	Number of Pulses Per Burst	Number of Bursts	Minimum Percentage of Successful Detection	Minimum Number of Trials
5	50-100	5-20	1000-2000	1-3	8-20	80%	30

Three subsets of trials will be performed with a minimum of ten trials per subset. The subset of trials differ in where the Long Pulse Type 5 Signal is tuned in frequency.

- a) the Channel center frequency
- b) tuned frequencies such that 90% of the Long Pulse Type 5 frequency modulation is within the low edge of the UUT Occupied Bandwidth
- c) tuned frequencies such that 90% of the Long Pulse Type 5 frequency modulation is within the high edge of the UUT Occupied Bandwidth

It include 10 trails for every subset, the formula as below,

For subset case 1: the center frequency of the signal generator will remain fixed at the center of the UUT Channel.

For subset case 2: to retain 90% frequency overlap between the radar signal and the UUT Occupied Bandwidth, the center frequency of the signal generator will vary for each of the ten trials in subset case 2. The center frequency of the signal generator for each trial is calculated by:

$$FL+(0.4*Chirp\ Width\ [in\ MHz])$$

For subset case 3: to retain 90% frequency overlap between the radar signal and the UUT Occupied Bandwidth, the center frequency of the signal generator will vary for each of the ten trials in subset case 3. The center frequency of the signal generator for each trial is calculated by:

$$FH-(0.4*Chirp\ Width\ [in\ MHz])$$

Table 12: Frequency Hopping Radar Test Waveform

Radar Type	Pulse Width (μsec)	PRI (μsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Minimum Percentage of Successful Detection	Minimum Number of Trials
6	1	333	9	0.333	300	70%	30

#### 4. Test & Support Equipment List

##### 4.1 Test Instruments

Table 13: Test Instruments List

Description & Manufacturer	Model No.	Brand	Date of Calibration	Due Date of Calibration
Spectrum Analyzer R&S	FSP40	100060	May 11, 2016	May 10, 2017
Vector Signal Generator R&S	SMJ100A	101878	Aug. 15, 2016	Aug. 14, 2017
DFS Control Box	BV-DFS-CB	001	Sep. 18, 2016	Sep. 17, 2017

##### 4.2 Description of Support Units

Table 14: Support Unit Information

No.	Product	Brand	Model No.	FCC ID	SPEC.
1	WIRELESS AC MODULE	D-Link	WMC-AC01	RRK2012060056-1	The maximum EIRP is 27.64 dBm, Antenna Gain is 3.428dBi

**NOTE:** This device was functioned as a  Master  Slave device during the DFS test.

Table 15: Software/Firmware Information

No.	Product	Model No.	Software/Firmware Version
1.	WIRELESS AC MODULE	WMC-AC01	1.00 Wed 06 Mar 2013

Note: This module WMC-AC01 was installed in the DIR-868L AP.




## 5. Test Procedure

### 5.1 DFS Measurement System

A complete DFS Measurement System consists of Radar signal generate system to generating the radar waveforms in Table 10, 11 and 12. The traffic monitoring system is specified to the type of unit under test (UUT).

#### Conducted Setup Configuration of DFS Measurement System

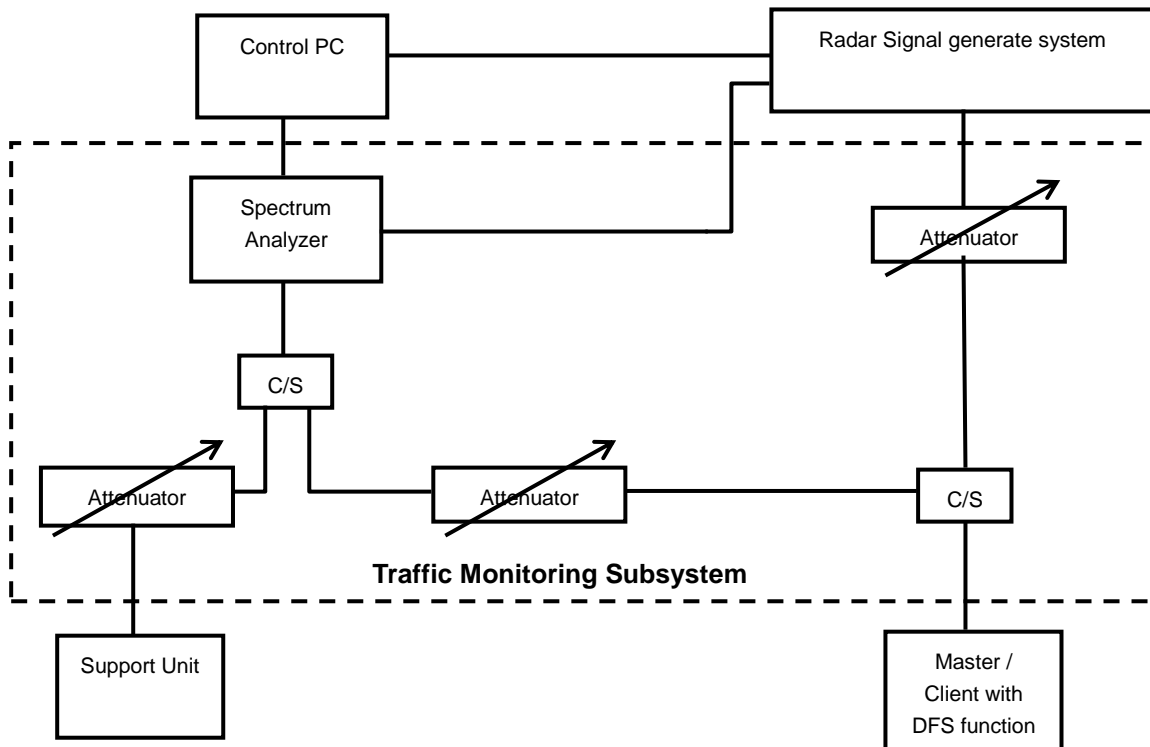

#### Channel Loading


System testing will be performed with channel-loading using means appropriate to the data types that are used by the unlicensed device. The following requirements apply:

a)	The data file must be of a type that is typical for the device (i.e., MPEG-2, MPEG-4, WAV, MP3, MP4, AVI, etc.) and must generally be transmitting in a streaming mode.	
b)	Software to ping the client is permitted to simulate data transfer but must have random ping intervals.	
c)	Timing plots are required with calculations demonstrating a minimum channel loading of approximately 17% or greater.	✓
d)	Unicast or Multicast protocols are preferable but other protocols may be used. The appropriate protocol used must be described in the test procedures.	

## 5.2 Calibration of DFS Detection Threshold Level

The measured channel is 5500 MHz in 20MHz Bandwidth, 5510MHz in 40MHz Bandwidth and 5530MHz in 80MHz. The radar signal was the same as transmitted channels, and injected into the antenna port of AP (master) or Client Device with Radar Detection, measured the channel closing transmission time and channel move time. The Master antenna gain is 3.428dBi and required detection threshold is -59.572dBm (= -64 +1 +3.428). The calibrated conducted detection threshold level is set to -59.572 dBm.

### Conducted Setup Configuration of Calibration of DFS Detection Threshold Level

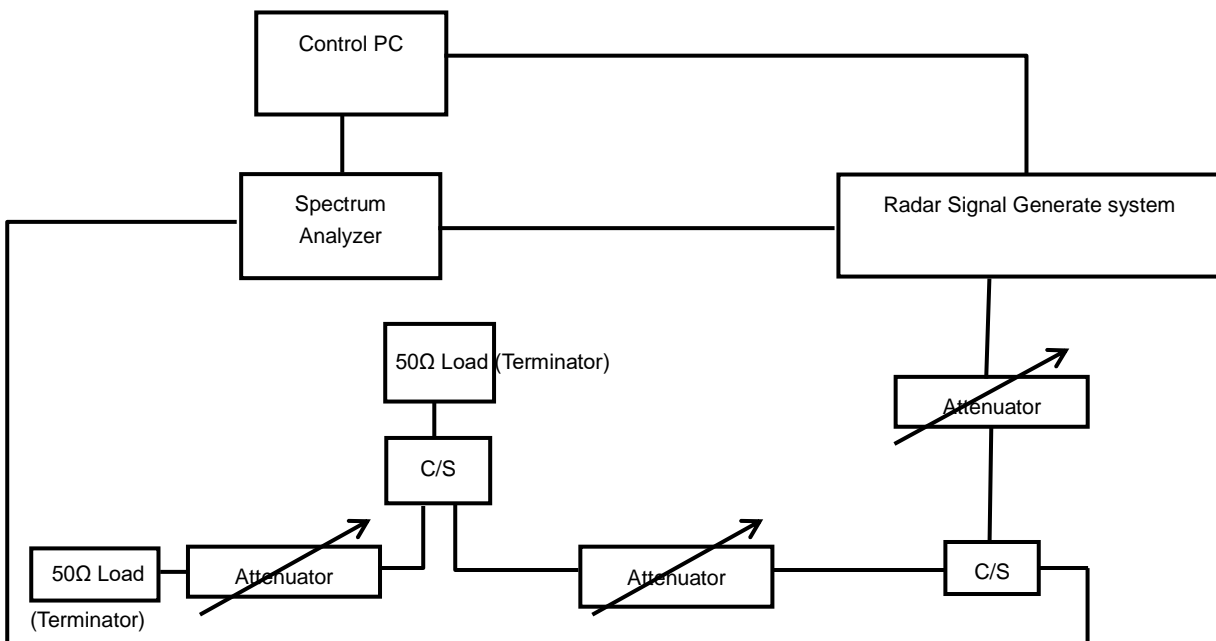


### 5.3 Deviation from Test Standard

No deviation.

### 5.4 Conducted Test Setup Configuration

#### 5.4.1 Client without Radar Detection Mode

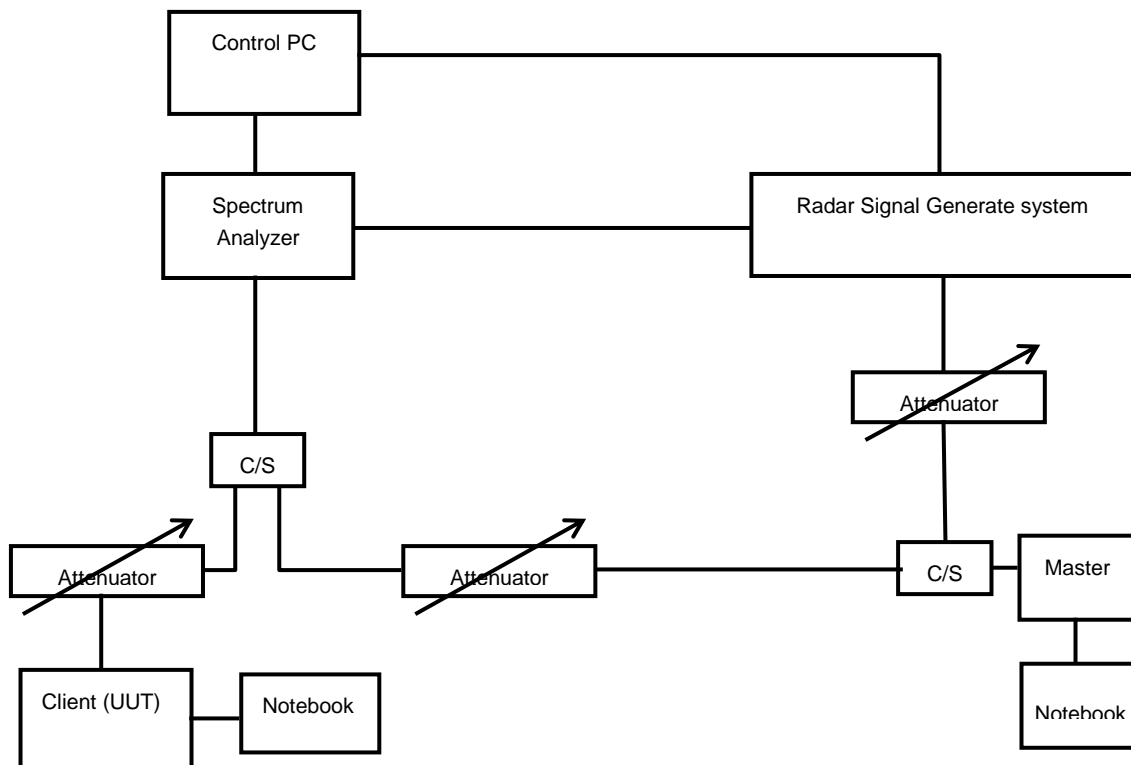

The UUT is a U-NII Device operating in Client mode without radar detection. The radar test signals are injected into the Master Device.

## 6. Test Results

### 6.1 Summary of Test Results

CLAUSE	TEST PARAMETER	REMARKS	PASS/FAIL
15.407	DFS Detection Threshold	Not Applicable	NA
15.407	Channel Availability Check Time	Not Applicable	NA
15.407	Channel Move Time	Applicable	Pass
15.407	Channel Closing Transmission Time	Applicable	Pass
15.407	Non- Occupancy Period	Applicable	Pass
15.407	U-NII Detection Bandwidth	Not Applicable	NA
15.407	Non-associated test	Applicable	Pass
15.407	Non-Co-Channel test	Applicable	Pass

## 6.2 Test Results


### 6.2.1 Test Mode: Device Operating In Client without Radar Detection Mode.

The radar test signals are injected into the Master Device.  
 This test was investigated for different bandwidth (20MHz, 40MHz and 80MHz).  
 The following plots was done on 80MHz as a representative

### DFS Detection Threshold

The Required detection threshold is  $-59.572\text{dBm}$  ( $= -64 + 1 + 3.428$ ).

The conducted radar burst level is set lower than  $-59.572\text{dBm}$ .

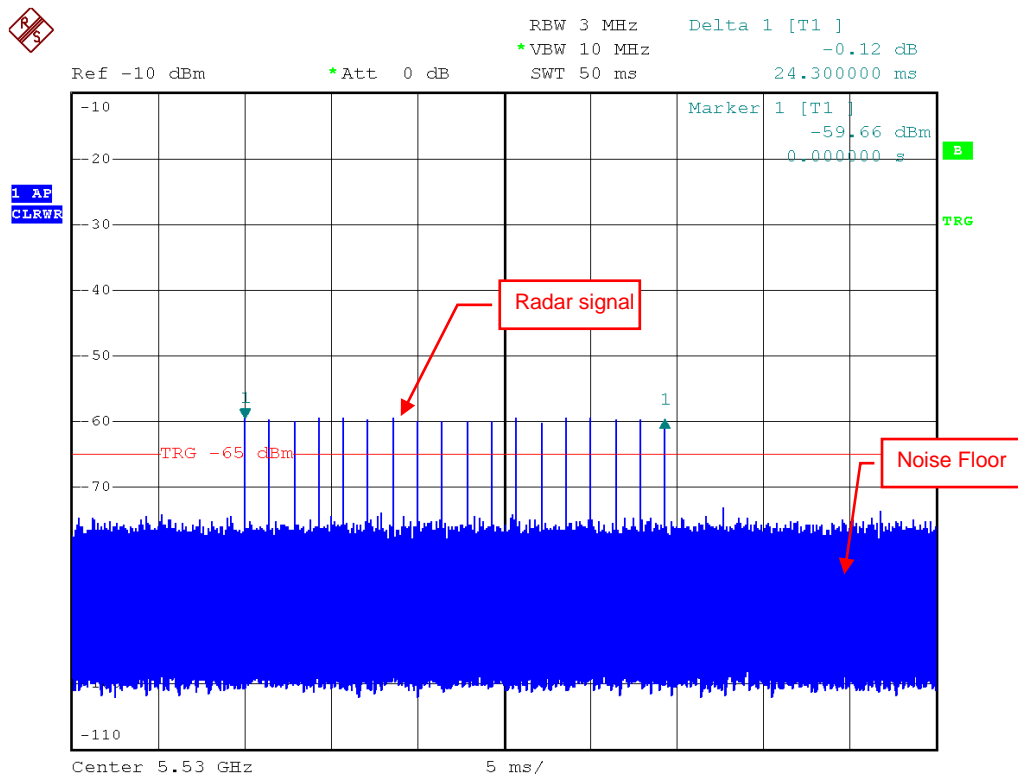


Radar Signal 0

## 6.2.2 Channel Closing Transmission and Channel Move Time

### Radar Signal 0


#### 802.11ac VHT80

#### Channel Closing Transmission Time & Channel Move Time @ CH106 - 5530MHz

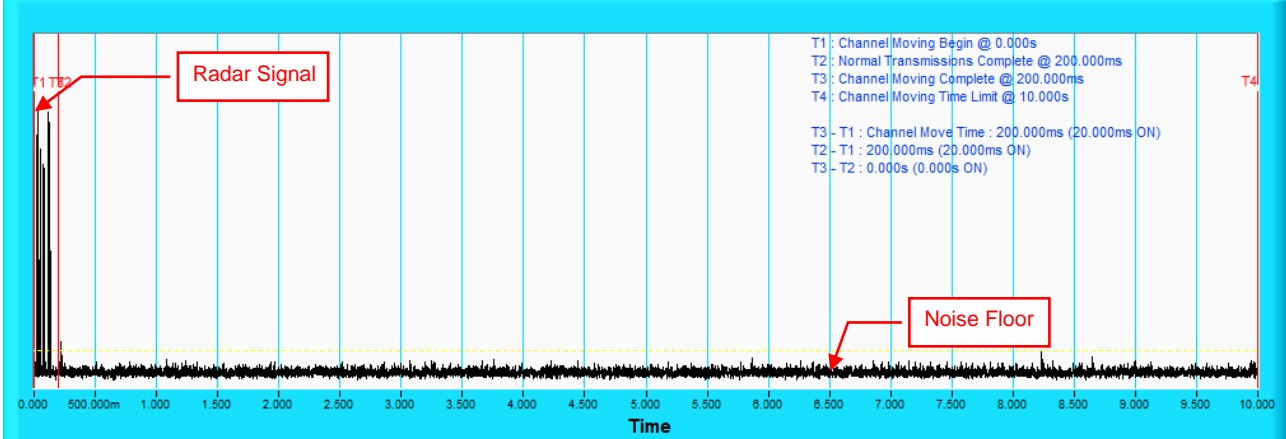

**NOTE:** T1 denotes the start of Channel Move Time upon the end of the last Radar burst. T2 denotes the data transmission time of 200ms from T1. T4 denotes the 10 second from T1 to observe the aggregate duration of transmissions.

#### Channel Closing Transmission Time & Channel Move Time @ CH106 - 5530MHz

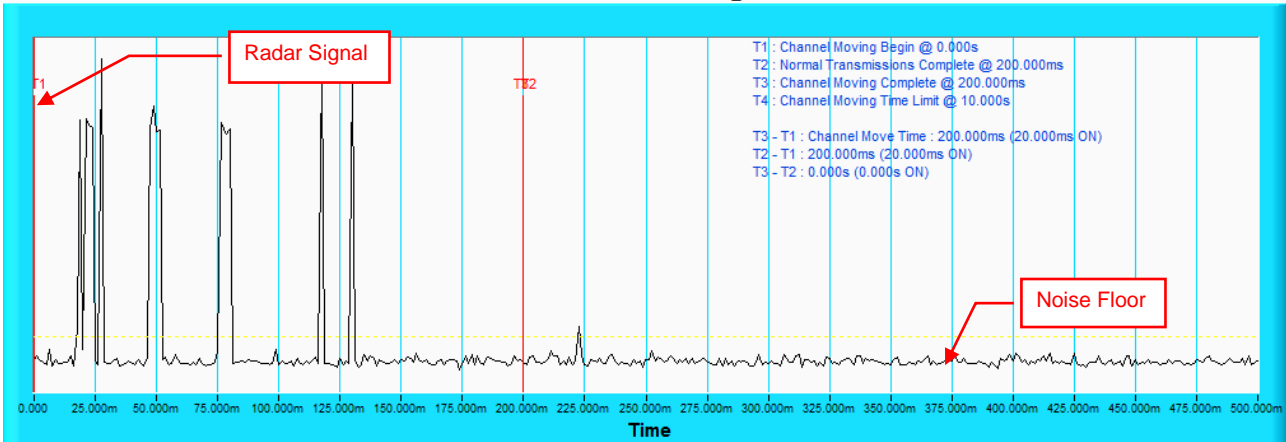


**NOTE:** An expanded plot for the device vacates the channel in the required 500ms.

### 6.2.3 Non-Occupancy Period


#### **ASSOCIATED TEST**

1) Test results demonstrating an associated client link is established with the master on a test frequency.

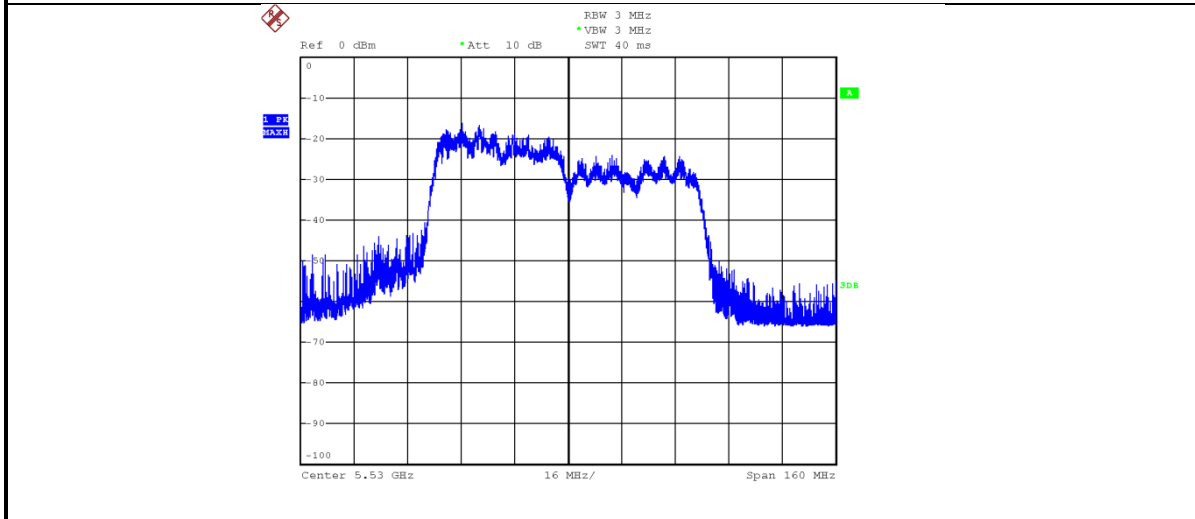


#### **EUT (Client ) links with master on 5530MHz**

2) The client and DFS-certified master device are associated, and system testing will be performed with channel-loading for a non-occupancy period test.

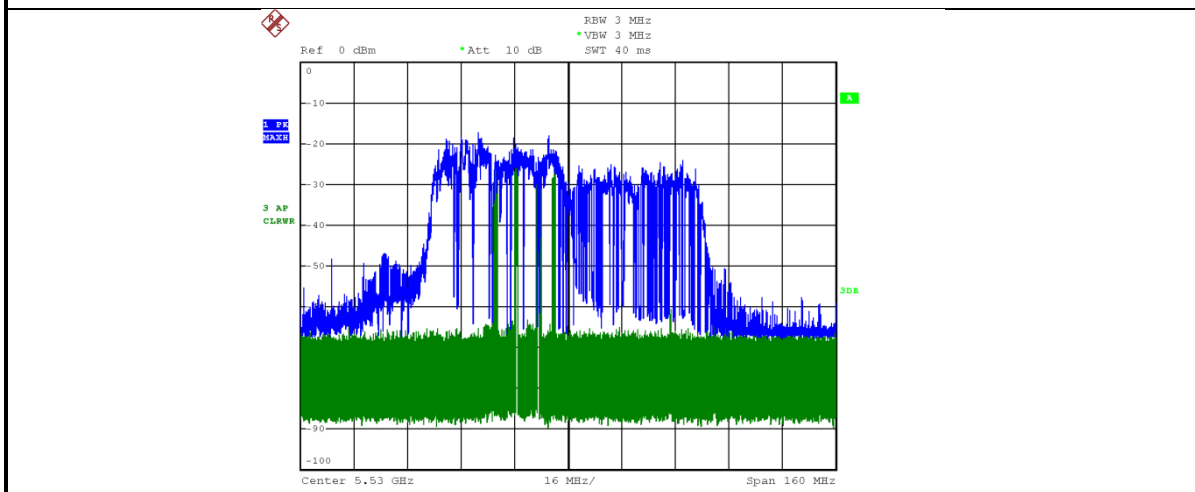

**Client performed with channel-loading via master.**

3). The device transmits one type of radar as specified in the DFS Order.

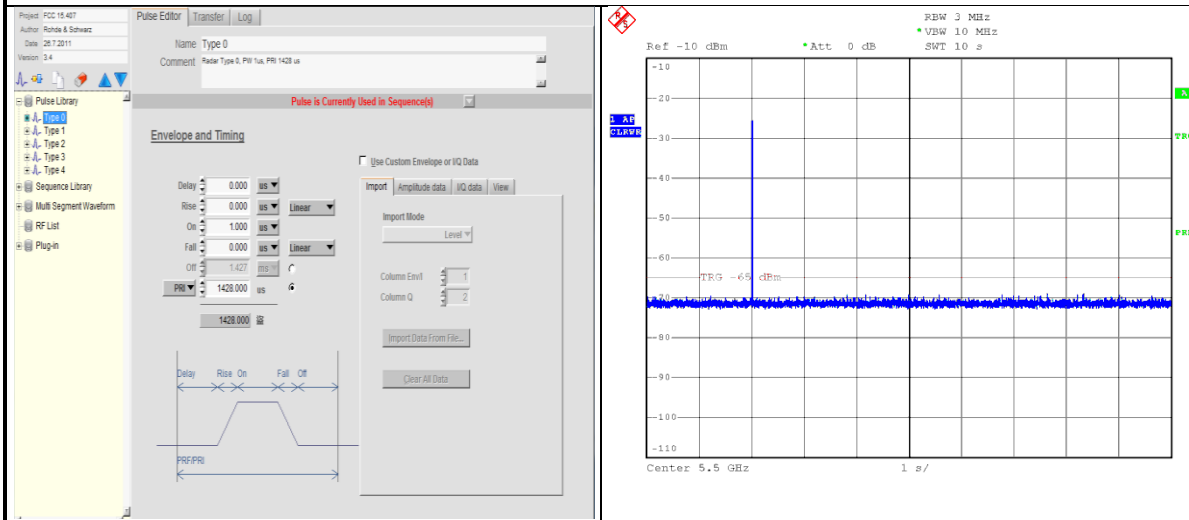


Radar 0 is used to test during DFS testing.

4) The test frequency has been monitored to ensure no transmission of any type has occurred for 30 minutes;

Note: If the client moves with the master, the device is considered compliant if nothing appears in the client non-occupancy period test. For devices that shut down (rather than moving channels), no beacons should appear;

5) An analyzer plot that contains a single 30-minute sweep on the original test frequency.

**Non - Occupancy Period @ CH106 - 5530MHz**

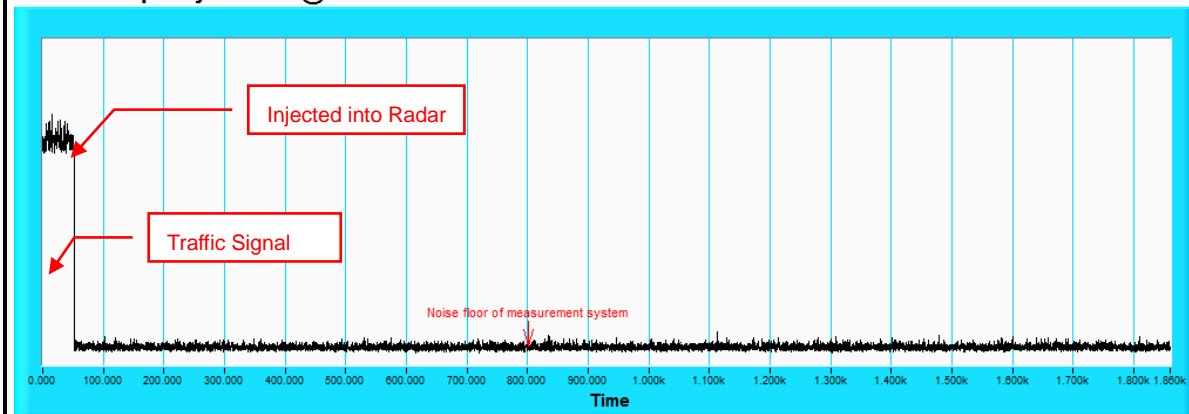




#### 6.2.4 Non-Associated Test

Master was off.

During the 30 minutes observation time, The UUT did not make any transmissions in the DFS band after UUT power up.

##### **Non - Associated Test**

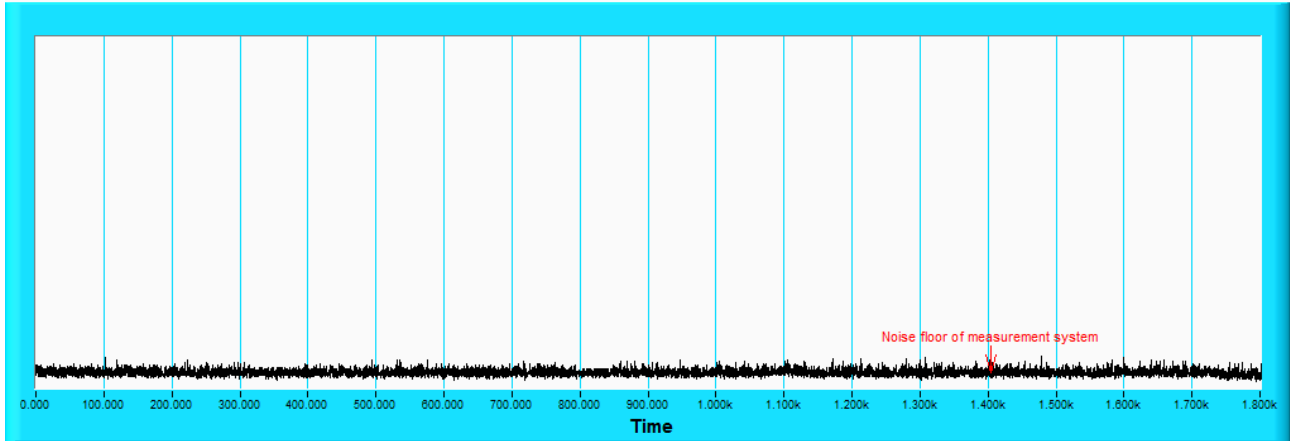

#### 6.2.5 Non- Co-Channel Test

The UUT was investigated after radar was detected the channel and made sure no co-channel operation with radars.

## 7. Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Lin Kou EMC/RF Lab:**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF/Telecom Lab:**

Tel: 886-3-6668565

Fax: 886-3-6668323

**Hwa Ya EMC/RF/Safety Lab:**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)


**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

## 8. APPENDIX-A


### NON BEACON ON DFS BAND

- 1) Test results demonstrating no any beacon on DFS band after power up.
- 2) Observation time is 10min after power up.

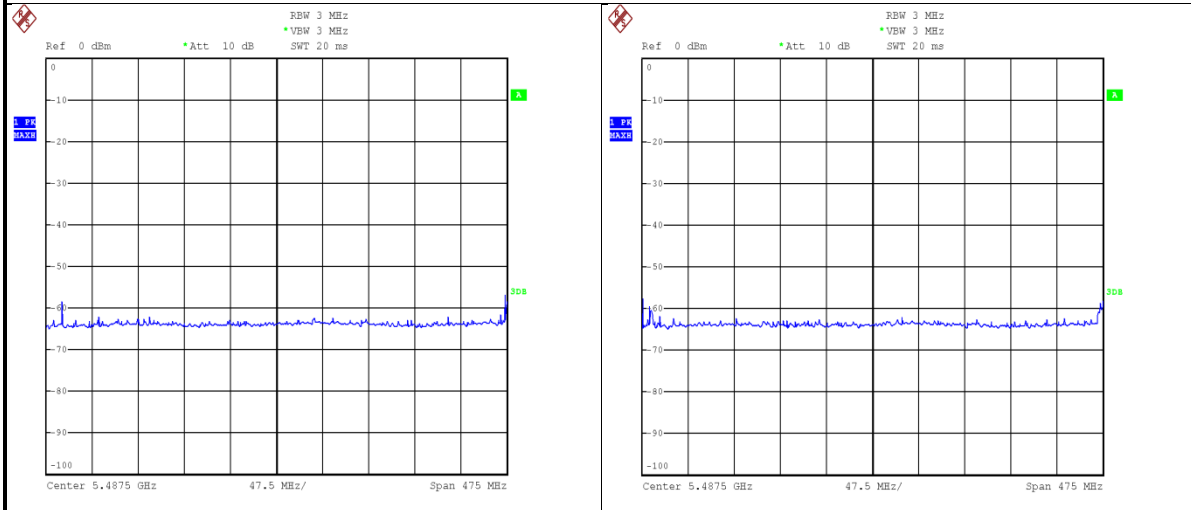

**EUT (Client ) links with master on 802.11ac (VHT20) mode**

**EUT (Client ) links with master on 802.11ac (VHT40) mode**

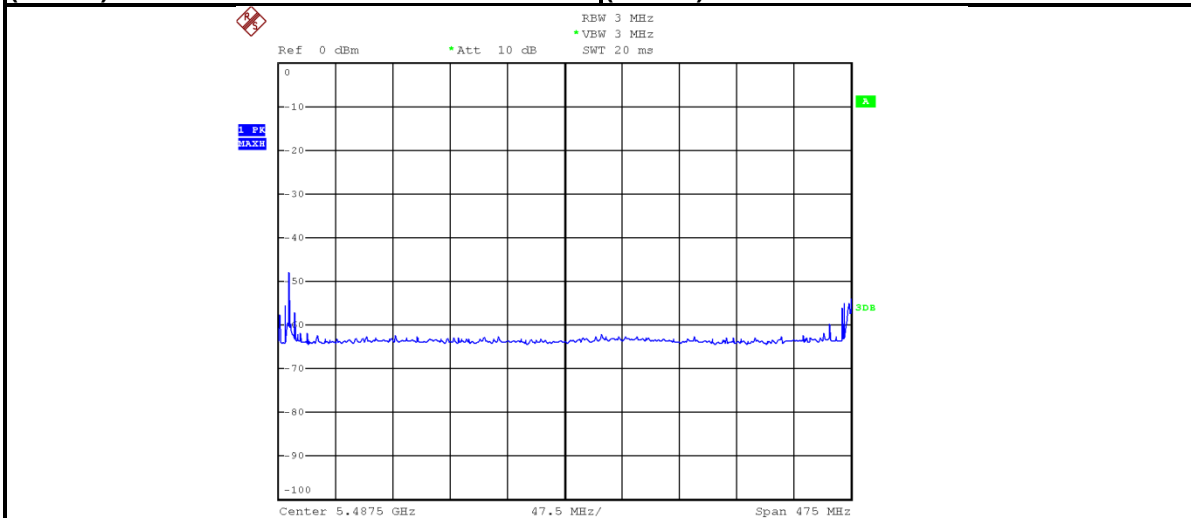

**EUT (Client ) links with master on 802.11ac (VHT80) mode**

--- END ---