



TEST REPORT

Report Number.	90775-23-72-23-PP001	
Date of issue	2023-07-12	
Prepared by (+signature)	Pale	<i>Pale Cai</i>
Reviewer (+signature)	Duke	<i>Duke Chen</i>
Approved by (+signature)	Jason	<i>Jason gao</i>
Testing Laboratory name	SLG-CPC Testlaboratory Co., Ltd.	
Address	No. 11, Wu Song Road, Dongcheng District, Dongguan, Guangdong Province, China 523117	
Applicant's name	Shenzhen View lighting Technology Co.,Ltd	
Address	301, Building d, Xinwei Third Industrial Zone, Xinshi Community, Dalang Street, Longhua District, Shenzhen City	
Manufacturer's name	Shenzhen View lighting Technology Co.,Ltd	
Address	301, Building d, Xinwei Third Industrial Zone, Xinshi Community, Dalang Street, Longhua District, Shenzhen City	
Factory's name	Shenzhen View lighting Technology Co.,Ltd	
Address	301, Building d, Xinwei Third Industrial Zone, Xinshi Community, Dalang Street, Longhua District, Shenzhen City	
Standard(s)	FCC 47 CFR Part 2, Subpart J FCC 47 CFR Part 15, Subpart C	
Test item description	Magic Wand	
Trade Mark	N/A	
Model/Type reference	WRMW-001, WRMW-002, WRMW-003	
FCC ID	2A7OT-WRMW001	
Date of receipt of test item	2023-06-20	
Date (s) of performance of test	2023-06-21 to 2023-07-10	
Summary of Test Results	Pass	

The Summary of Test Results based on a technical opinion belongs to the standard(s).

General disclaimer:

This report shall not be reproduced except in full, without the written approval of SLG-CPC Testlaboratory Co., Ltd. The test results in the report only apply to the tested sample.

Table of Contents

1	EUT TECHNICAL DESCRIPTION	4
2	SUMMARY OF TEST RESULT	5
3	TEST METHODOLOGY	6
3.1	GENERAL DESCRIPTION OF APPLIED STANDARDS	6
3.2	MEASUREMENT EQUIPMENT USED	6
3.3	DESCRIPTION OF TEST MODES	7
4	FACILITIES AND ACCREDITATIONS	7
4.1	FACILITIES	7
4.2	LABORATORY ACCREDITATIONS AND LISTINGS	7
5	TEST SYSTEM UNCERTAINTY	8
6	SETUP OF EQUIPMENT UNDER TEST	9
6.1	RADIO FREQUENCY TEST SETUP 1	9
6.2	RADIO FREQUENCY TEST SETUP 2	9
6.3	CONDUCTED EMISSION TEST SETUP	10
6.4	BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM	11
6.5	SUPPORT EQUIPMENT	11
7	TEST REQUIREMENTS	12
7.1	OCCUPIED BANDWIDTH	12
7.2	RADIATED SPURIOUS EMISSION	14
7.3	TRANSMISSION REQUIREMENT	23
7.4	ANTENNA APPLICATION	25

Modified History

Report No.	Revision Date	Summary
90775-23-72-23-PP001	2023-07-12	Original Version

1 EUT TECHNICAL DESCRIPTION

Characteristics	Description
Product Name:	Magic Wand
Model Number:	WRMW-001, WRMW-002, WRMW-003 (All tests were performed on model WRMW-001)
Device Type:	REMOTE CONTROL
Modulation:	ASK
Operating Frequency Range(s):	433.92MHz
Number of Channels:	1 channel
Antenna Type :	PCB Antenna
Antenna Gain:	4 dBi
Power supply:	DC 3V Battery

Note: for more details, please refer to the User's manual of the EUT.

The EUT has been associated with peripherals pursuant to ANSI C63.10-2013 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation (9 KHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

2 SUMMARY OF TEST RESULT

FCC Part Clause	Test Parameter	Verdict	Remark
15.231(c)	Occupied Bandwidth	PASS	
15.231(b)	Radiated Spurious Emissions	PASS	
15.231(b)	Transmission Requirement	PASS	
15.203	Antenna Requirement	PASS	
15.207(a)	Conducted Emission	PASS	

NOTE1: N/A (Not Applicable) ,EUT powered by battery.

RELATED SUBMITTAL(S) / GRANT(S):

This submittal(s) (test report) is intended for FCC ID: 2A7OT-WRMW001 filing to comply with Section 15.231 of the FCC Part 15, Subpart C Rules

3 TEST METHODOLOGY

3.1 GENERAL DESCRIPTION OF APPLIED STANDARDS

According to its specifications, the EUT must comply with the requirements of the following standards:
 FCC 47 CFR Part 2, Subpart J
 FCC 47 CFR Part 15, Subpart C

3.2 MEASUREMENT EQUIPMENT USED

Equipment	Manufacturer	Model	S/N	Last Cal.	Due Cal.
RF Connected Test					
Vector Signal Generator	Rohde & Schwarz	SMBV100B(6G)	101166	2023/06/04	1 year
Analog Signal Generator	Rohde & Schwarz	SMB100A(40G)	181333	2023/06/02	1 year
Signal Analyzer	Rohde & Schwarz	FSV40	101527	2023/03/29	1 year
Power Analyzer	Rohde & Schwarz	OSP-B157W8	N/A	2023/06/02	1 year
Wideband Radio Communication Tester	R&S	CMW270	101985	2023/06/16	1 year
Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	166898	2023/06/16	1 year
Temperature&Humidity test chamber	ESPEC	VC 4018	/	2023/03/29	1 year
Radiated Emission Test					
EMI Test Receiver	KEYSIGHT	N9010A	MY56070465	2022/12/07	1 year
EMI Test Receiver	Rohde & Schwarz	FSV40	101511	2023/03/29	1 year
Bilog Antenna	Schwarzbeck	VULB 9163	01335	2023/04/21	3 year
Broadband Antenna	Schwarzbeck	9162	139	2022/03/22	3 year
Power Amplifier	EMEC	EM330	060676	2022/12/07	3 year
Cable	Tuyue	F4309	L-400-NmNm-12000	2022/12/07	1 year
Horn Antenna	Schwarzbeck	BBHA9120D	1779	2022/04/21	3 year
Horn Antenna	Schwarzbeck	BBHA9170	00954	2022/09/13	3 year
Power Amplifier	Rohde & Schwarz	SCU-18F	180118	2022/04/21	3 year
Power Amplifier	Rohde & Schwarz	SCU40A	100499	2020/07/21	3 year
Active Loop Antenna	ETS LINDGREN	6512	41623	2022/04/23	3 year
Test Software	Farad	EZ-EMC	Ver.CPC-3A1	/	/
Conducted Emission Test					
LISN	Schwarzbeck	NSLK 8127	8127-892	2023/03/21	1 year
LISN	Schwarzbeck	NSLK 8127	8127-437	2022/08/26	1 year
EMI Test Receiver	R&S	ESR3	102124	2022/12/07	1 year
Triple loop	R&S	HM020	834206/006	2022/12/07	2 year
Pulse Limiter	R&S	ESH3-Z2	357.8810.52	2022/12/07	1 year
Test Software	Farad	EZ-EMC	Ver.CPC-3A1	/	/

3.3 DESCRIPTION OF TEST MODES

The EUT has been tested under its typical operating condition.

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

4 FACILITIES AND ACCREDITATIONS

4.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

No. 11, Wu Song Road, Dongcheng District, Dongguan, Guangdong Province, China 523117

The sites are constructed in conformance with the requirements of ANSI C63.4, ANSI C63.10 and CISPR Publication 32..

4.2 LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

EMC Lab.	: Accredited by ISED, October 04 2021 CAB identifier: CN0126 Company Number: 27767
	Accredited by A2LA, October 04 2021 The Certificate Registration Number is 6325.01
	Accredited by FCC Designation Number: CN1287 Test Firm Registration Number: 394054
Name of Firm Site Location	: SLG-CPC Testlaboratory Co., Ltd. No. 11, Wu Song Road, Dongcheng District, Dongguan, Guangdong Province, China 523117

5 TEST SYSTEM UNCERTAINTY

The following measurement uncertainty levels have been estimated for tests performed on the apparatus:


Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-5}$
Maximum Peak Output Power Test	$\pm 1.0\%$
Conducted Emissions Test	$\pm 3.08\text{dB}$
Radiated Emission Test	$\pm 4.60\text{dB}$
Power Density	$\pm 0.9\%$
Occupied Bandwidth Test	$\pm 2.3\%$
Band Edge Test	$\pm 1.2\%$
Antenna Port Emission	$\pm 3\text{dB}$
Temperature	$\pm 3.2\%$
Humidity	$\pm 2.5\%$

Measurement Uncertainty for a level of Confidence of 95%

6 SETUP OF EQUIPMENT UNDER TEST

6.1 RADIO FREQUENCY TEST SETUP 1

The component's antenna port(s) of the EUT are connected to the measurement instrument per an appropriate attenuator. The EUT is controlled by PC/software to emit the specified signals for the purpose of measurements.



6.2 RADIO FREQUENCY TEST SETUP 2

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).


Below 30MHz:

The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna (loop antenna). The Antenna should be positioned with its plane vertical at the specified distance from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. The center of the loop shall be 1 m above the ground. For certain applications, the loop antenna plane may also need to be positioned horizontally at the specified distance from the EUT.


Above 30MHz:

The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).


(a) Radiated Emission Test Set-Up, Frequency Below 30MHz

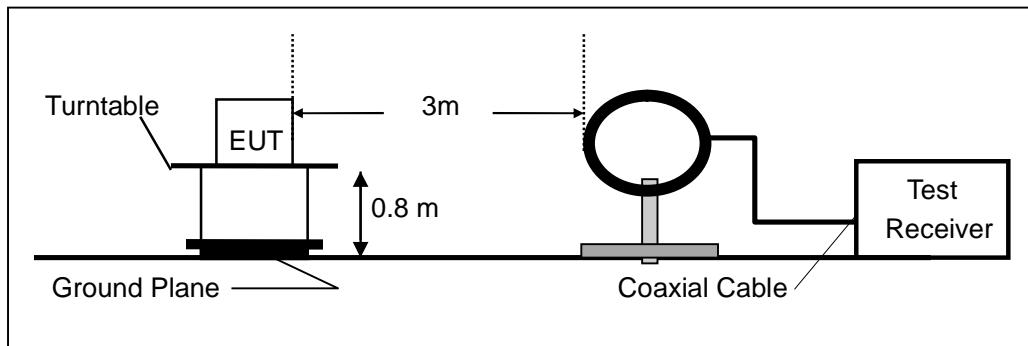

(b) Radiated Emission Test Set-Up, Frequency Below 1000MHz

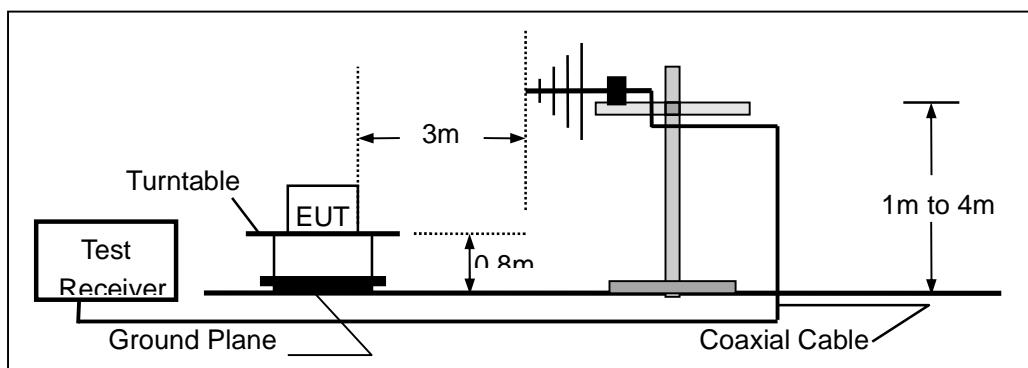

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

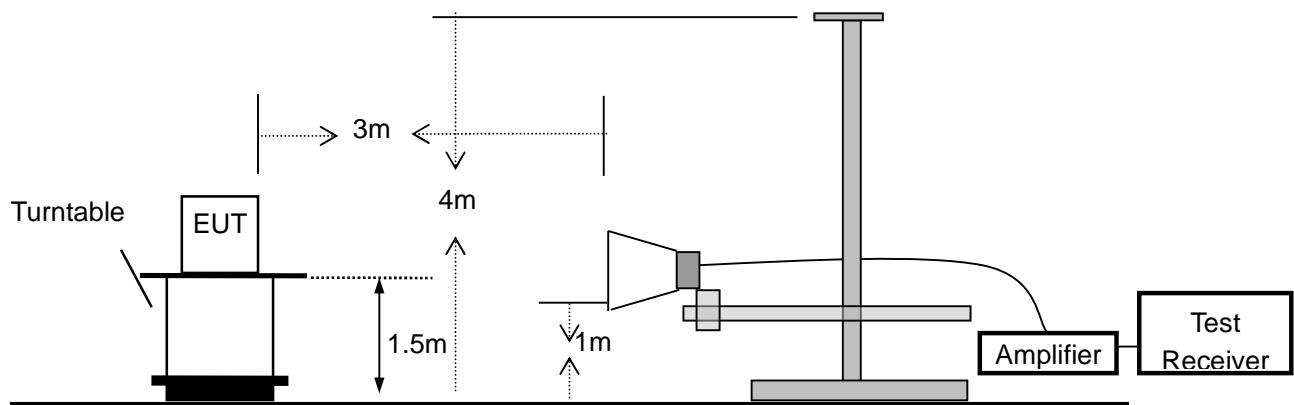


6.3 CONDUCTED EMISSION TEST SETUP


The mains cable of the EUT (maybe per AC/DC Adapter) must be connected to LISN. The LISN shall be placed 0.8 m from the boundary of EUT and bonded to a ground reference plane for LISN mounted on top of the ground reference plane. This distance is between the closest points of the LISN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8m from the LISN.

Ground connections, where required for safety purposes, shall be connected to the reference ground point of the LISN and, where not otherwise provided or specified by the manufacturer, shall be of same length as the mains cable and run parallel to the mains connection at a separation distance of not more than 0.1 m.

According to the requirements in **ANSI C63.10-2013** Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

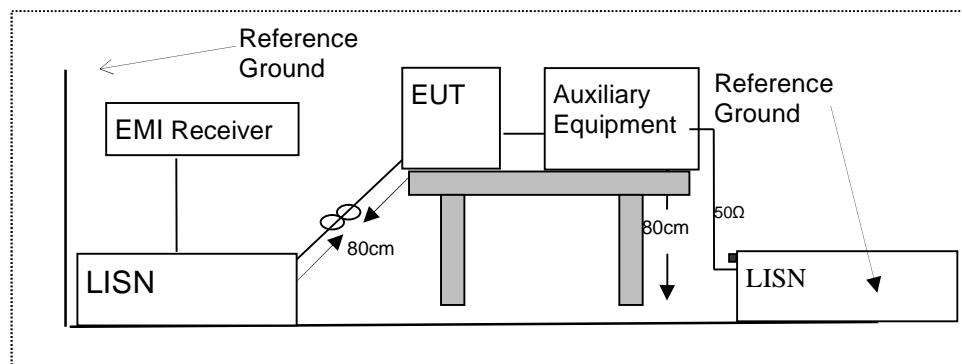

6.4 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM

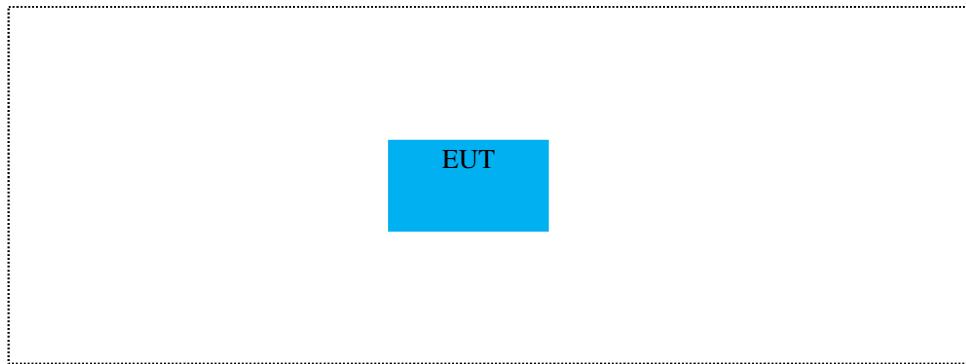

6.5 SUPPORT EQUIPMENT

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1.	N/A	N/A	N/A	N/A	

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

7 TEST REQUIREMENTS

7.1 OCCUPIED BANDWIDTH

7.1.1 Applicable Standard

According to FCC Part 2.1049 and part 15.231(c)

7.1.2 Conformance Limit

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

7.1.3 Test Configuration

Test according to clause 6.1 radio frequency test setup 1

7.1.4 Test Procedure

The EUT was operating in transmit mode and controlled its channel. Printed out the test result from the spectrum by hard copy function.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously

Set RBW = 1% occupied bandwidth (3KHz).

Set the video bandwidth (VBW) =10KHz.

Set Span= approximately 2 to 3 times the occupied bandwidth

Set Detector = Peak.

Set Trace mode = max hold.

Set Sweep = auto couple.

The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 99% down one side of the emission. Reset the markerdelta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 99% bandwidth of the emission.

If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation.

Measure and record the results in the test report.

Test Results


Temperature :	24.3°C	Test Date :	2023-06-25
Humidity :	56.3 %	Test By:	Pale

Modulation Mode	Channel Number	Channel Frequency (MHz)	Measurement Bandwidth (kHz)	Limit (kHz)	Verdict
ASK	0	433.9	0.321	≤1084.8KHz	PASS

Note: N/A (Not Applicable)
 BW=0.25% of the center frequency

Occupied Bandwidth

Channel : 433.9MHz

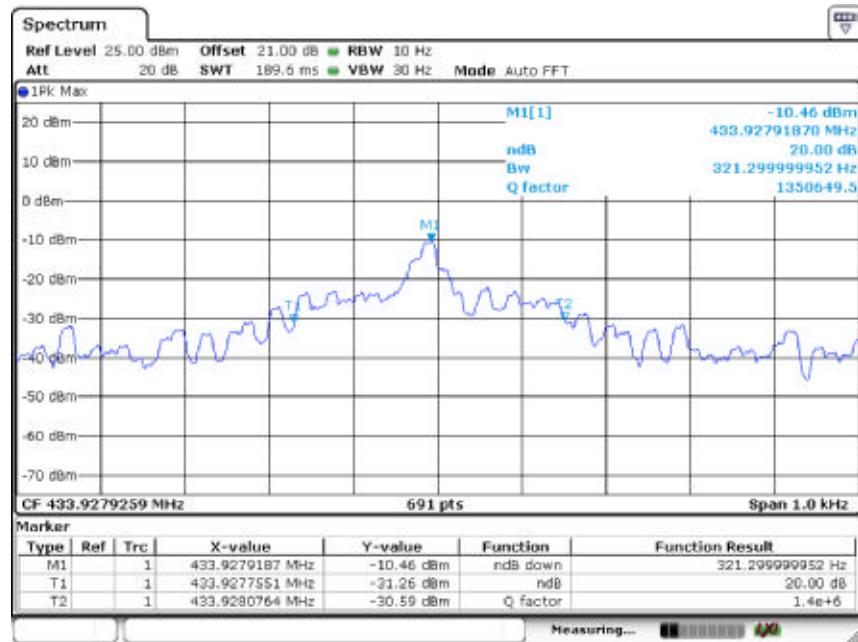

7.2 RADIATED SPURIOUS EMISSION

7.2.1 Applicable Standard

According to FCC Part 15.231(b) and 15.209

7.2.2 Conformance Limit

Intentional radiators may operate at a periodic rate exceeding that specified in paragraph (a) of this section and may be employed for any type of operation, including operation prohibited in paragraph (a) of this section, provided the intentional radiator complies with the provisions of paragraphs (b) through (d) of this section, except the field strength table in paragraph (b) of this section is replaced by the following:

FCC 15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	()

FCC 15.209 Limited

Frequencies (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3
Above 1GHz	74 dBuV/m (PEAK) 54 dBuV/m (AVERAGE)	

15.231 Limited Fundamental Frequency (MHz)	Field Strength of Fundamental (microvolts/meter)	Field Strength of Spurious Emissions (microvolts/meter)
40.66 - 40.70	2,250	225
70 - 130	1,250	125
130 - 174	1,250 to 3,750 **	125 to 375 **
174 - 260	3,750	375
260 - 470	3,750 to 12,500 **	375 to 1,250 **
Above 470	12,500	1,250

** linear interpolations

The field intensity in micro-volts per meter can then be determined by the following equation: $FI(V/m) = 10FI(dBV/m) / 20$ The FCC specified emission limits were calculated according the EUT operating frequency and obtained by following linear interpolation equations:

(a) For fundamental frequency:

$$f_{EUT} : EUT \text{ Operating Frequency Emission Limit (uV/m)} \\ = [f_{EUT}(\text{MHz}) - 260(\text{MHz})] \times \frac{12500(\text{uV/m}) - 3750(\text{uV/m})}{470(\text{MHz}) - 260(\text{MHz})} + 3750(\text{uV/m})$$

(b) For spurious frequencies:

$$f_{EUT} : EUT \text{ Operating Frequency Emission Limit (uV/m)} \\ = [f_{EUT}(\text{MHz}) - 260(\text{MHz})] \times \frac{1250(\text{uV/m}) - 375(\text{uV/m})}{470(\text{MHz}) - 260(\text{MHz})} + 375(\text{uV/m})$$

Other emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20 dB below the level of the fundamental or comply with the radiated emissions limits specified in section 1 5.209(a) limit in the table below has to be followed.

Note:

- (1) The tighter limit applies at the band edges.
- (2) Emission level (dBuV/m)=20log Emission level (uV/m).

FCC Part15 (15.231) , Subpart C		
Fundamental Frequency	Field Strength Of Fundamental	Field Strength of Spurious Emissions
433.9MHz	AV:80.83 dBuV/m at 3m distance	AV:60.83 dBuV/m at 3m distance
	PK:100.83dBuV/m at 3m distance	PK:80.83 dBuV/m at 3m distance

7.2.3 Calculation of Average factor

The average correction factor is computed by analyzing the on time in 100ms over one complete pulse train. Analysis of the remote transmitter on time in one complete pulse train, therefore the average value of fundamental frequency is: Average= Peak Value+20log(Duty Cycle), where the duty factor is calculated from following formula: The duty cycle is simply the on-time divided by the period:


The duration of one cycle=50 ms

Effective period of the cycle=60.58 ms

Duty Cycle=50 ms /60.58 ms=0.83

Therefore, the averaging factor is found by $20\log(0.83)=-1.62$


Please see the test plot below:

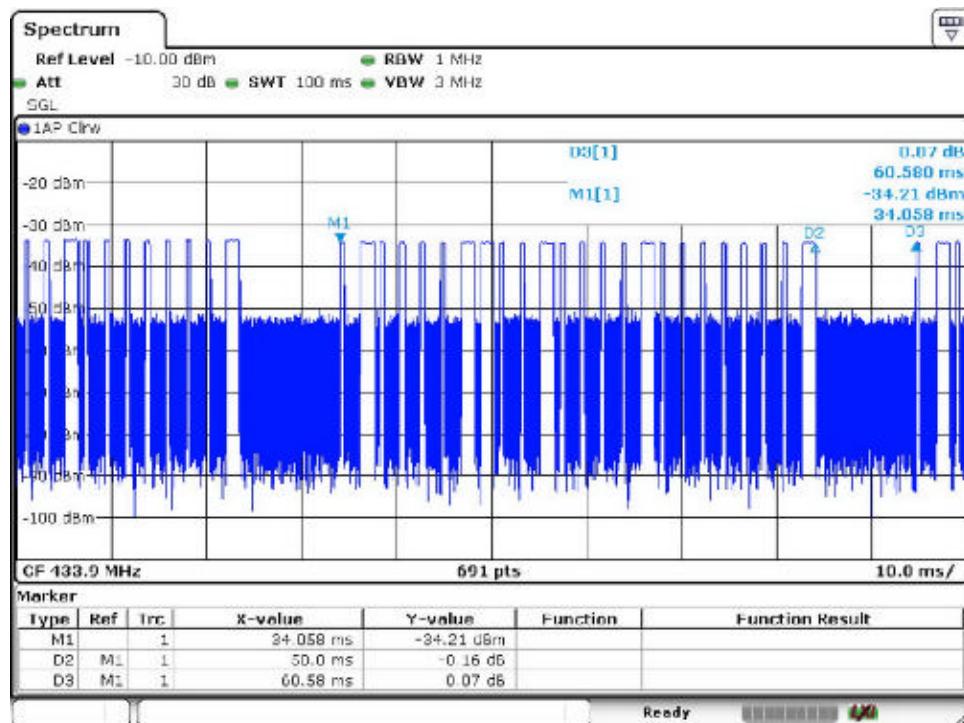

Field Strength of the fundamental signal


Freq. (MHz)	Ant. Pol.	Emission Level(dBuV/m) PK	AV Factor	Emission Level(dBuV/m) AV	Limit 3m(dBuV/m) PK	Margin(dB) PK	Margin(dB) AV
433.926	H	77.21	-1.62	75.59	100.8	80.8	-23.59
433.932	V	75.25	-1.62	73.63	100.8	80.8	-25.55

Fundamental signal-H

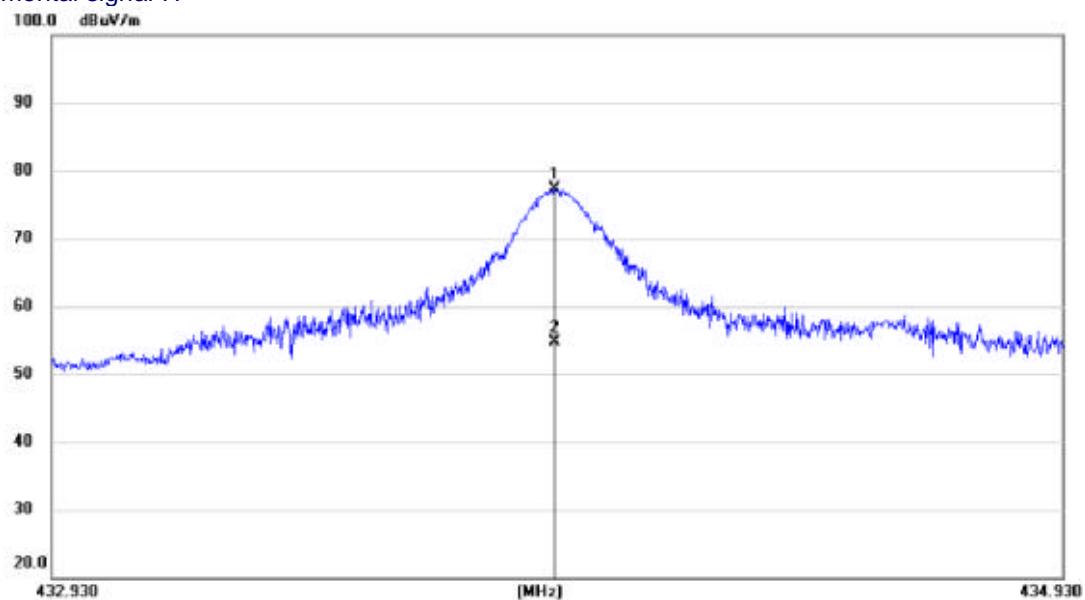

Site	Polarization: <i>Horizontal</i>	Temperature: 23.5 °C
Limit:	Power: Battery	Humidity: 59 %

Fundamental signal-V

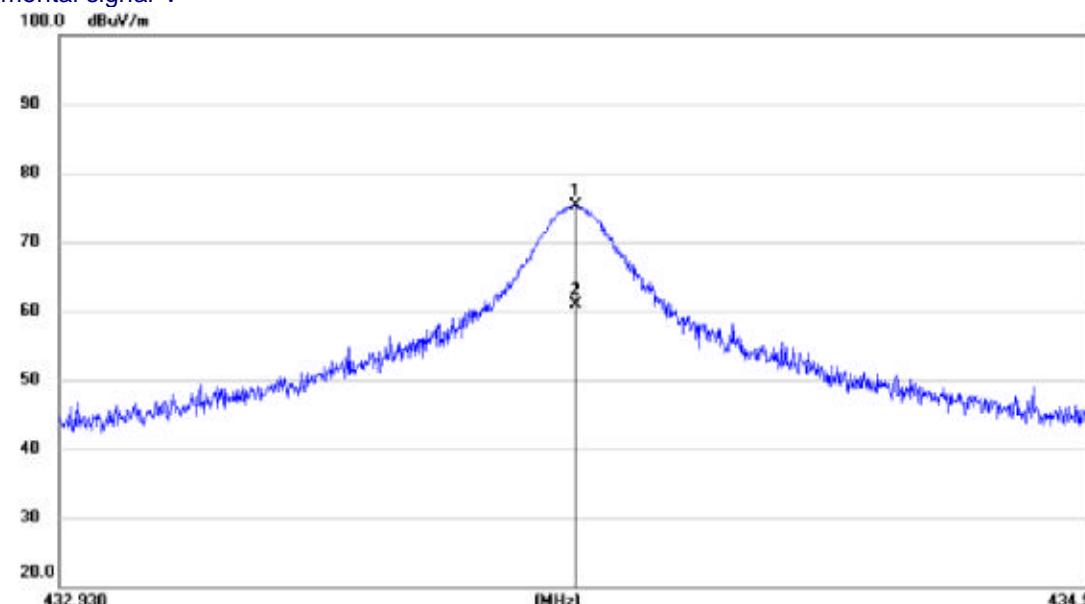

Site	Polarization: <i>Vertical</i>	Temperature: 23.5°C
Limit:	Power: Battery	Humidity: 59 %

7.2.4 Measurement Result

Spurious Emission below 30MHz (9KHz to30MHz)

Modulation:	ASK	Test Date :	2023-06-25
Frequency Range:	9KHz-30MHz	Temperature :	25.3 °C
Test Result:	PASS	Humidity :	54.5 %
Measured Distance:	3m	Test By:	Pale

Freq. (MHz)	Ant. Pol.	Reading Level(dBuV/m)		Correct Factor	Emission Level(dBuV/m)		AVG Fact or	Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV		PK	AV		PK	AV	PK	AV
-	-	-	-	-	-	-	-	-	-	-	-

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor =40log(Specific distance/ test distance)(dB);

Limit line=Specific limits(dBuV) + distance extrapolation factor

7.2.5 Radiated spurious emission below 1GHz

Modulation:	ASK	Test Date :	2023-06-25
Frequency Range:	30-1000MHz	Temperature :	24.3 °C
Test Result:	PASS	Humidity :	54.5 %
Measured Distance:	3m	Test By:	Pale

Note: (1) All Readings are Peak Value.

(2) Correct Factor= Antenna Factor +Cable Loss- Amplifier Gain

(3) Emission Level= Reading Level+Probe Factor +Cable Loss

(4) True Value = Emission Level + Duty Cycle Correction Factor


(5) DF= Duty Cycle Correction Factor

(6) Duty Cycle Correction Factor (dB) = $20\log(\text{Duty cycle})$ = -1.62dB

(7) Peak Margin =Pk emission level-PK limit, AV margin=AV emission Level-AV limit


(8) All the x/y/z orientation has been investigated, and only worst case is presented in this report.

(9) The EUT has been evaluated in xyz orientation, and the worst result have been recorded in the report.

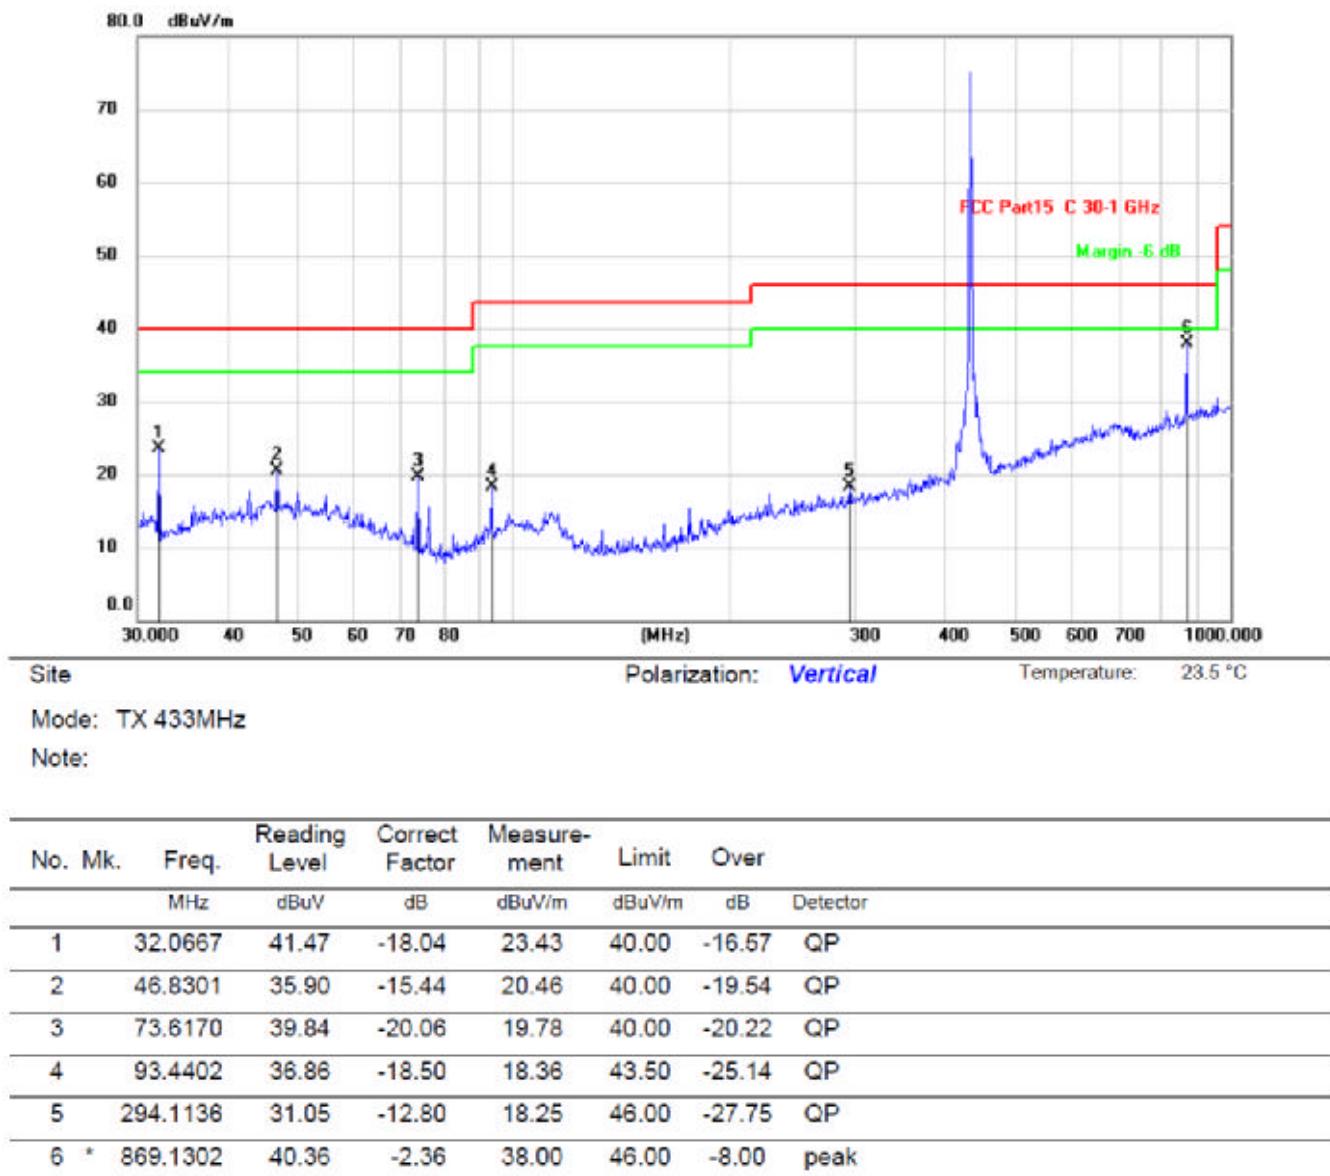

*:Maximum data x:Over limit l:over margin

j:Reference Only

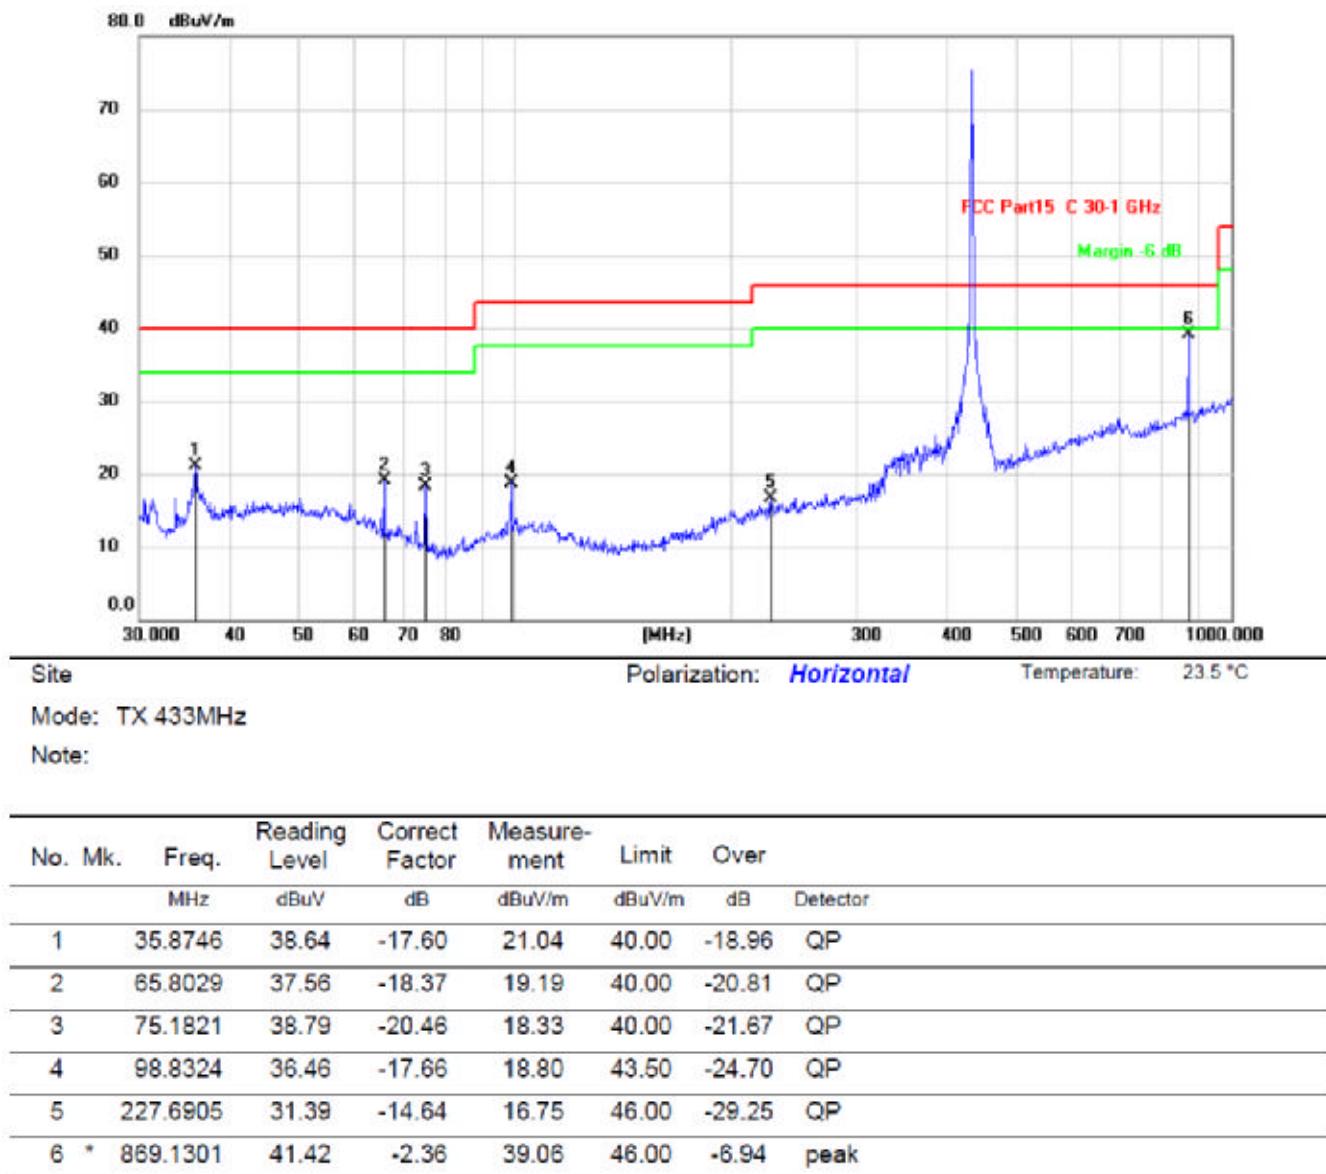

*:Maximum data x:Over limit !:over margin

j:Reference Only

7.2.6 Radiated spurious emission above 1GHz

Modulation:	ASK	Test Date :	2023-06-25
Frequency Range:	1000-6000MHz	Temperature :	22.3 °C
Test Result:	PASS	Humidity :	53.5 %
Measured Distance:	3m	Test By:	Pale

Freq. (MHz)	Ant. Pol.	Reading Level(dBuV/m)	Correct Factor	Emission Level(dBuV/m)		AVG Factor	Limit 3m(dBuV/m)		Margin(dB)	
				PK	AV		PK	AV	PK	AV
1301.35	V	65.66	-20.68	44.98	43.36	-1.62	74.00	54.00	-29.02	-10.64
1735.71	V	61.16	-21.27	39.89	38.27	-1.62	80.83	60.83	-40.94	-22.56
2169.87	V	49.91	-10.12	39.79	38.17	-1.62	80.83	60.83	-41.04	-22.66
2603.59	V	42.15	-7.36	34.79	33.17	-1.62	80.83	60.83	-46.04	-27.66
3038.30	V	43.93	-6.56	37.37	35.75	-1.62	80.83	60.83	-43.46	-25.08
1301.88	H	62.75	-21.10	41.65	40.03	-1.62	74.00	54.00	-32.35	-13.97
1736.69	H	60.59	-19.58	41.01	39.39	-1.62	80.83	60.83	-39.82	-21.44
2169.69	H	50.15	-11.09	39.06	37.44	-1.62	80.83	60.83	-41.77	-23.39
2604.29	H	43.00	-7.61	35.39	33.77	-1.62	80.83	60.83	-45.44	-27.06
3037.65	H	42.66	-6.87	35.79	34.17	-1.62	80.83	60.83	-45.04	-26.66

Note:

- (1) All Readings are Peak Value.
- (2) Correct Factor= Antenna Factor +Cable Loss- Amplifier Gain
- (3) Emission Level= Reading Level+Probe Factor +Cable Loss
- (4) True Value = Emission Level + Duty Cycle Correction Factor
- (5) DF= Duty Cycle Correction Factor
- (6) Duty Cycle Correction Factor (dB) = $20\log(\text{Duty cycle}) = -1.62$
- (7) Peak Margin =Pk emission level-PK limit, AV margin=AV emission Level-AV limit
- (8) All the x/y/z orientation has been investigated, and only worst case is presented in this report.
- (9) The EUT has been evaluated in xyz orientation, and the worst result have been recorded in the report.

7.3 TRANSMISSION REQUIREMENT

7.3.1 Applicable Standard

According to FCC Part 15.231(a)

7.3.2 Conformance Limit

According to FCC Part 15.231(a): A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

7.3.3 Test Configuration

Test according to clause 6.2 radio frequency test setup 2

7.3.4 Test Procedure

The following table is the setting of spectrum analyzer.


Spectrum analyzer	Setting
Attenuation	Auto
Span Frequency	0Hz
RBW	1M
VBW	3M
Detector	Peak
Trace	Max hold
Sweep Time	5S

- The transmitter output (antenna port) was connected to the spectrum analyzer.
- Set RBW of spectrum analyzer to 1MHz and VBW to 1MHz, Set Detector to Peak, Trace to Max Hold.
- Set the span to 0Hz and the sweep time to 10s and record the value.

7.3.5 Test Results

Temperature:	24°C	Test Date:	2023-06-25
Humidity:	53 %	Test By:	Pale
Test mode:	TX Mode		

Frequency.(MHz)	silent period between transmissions	Limit	Verdict
433.92	0.71s	5 seconds	PASS

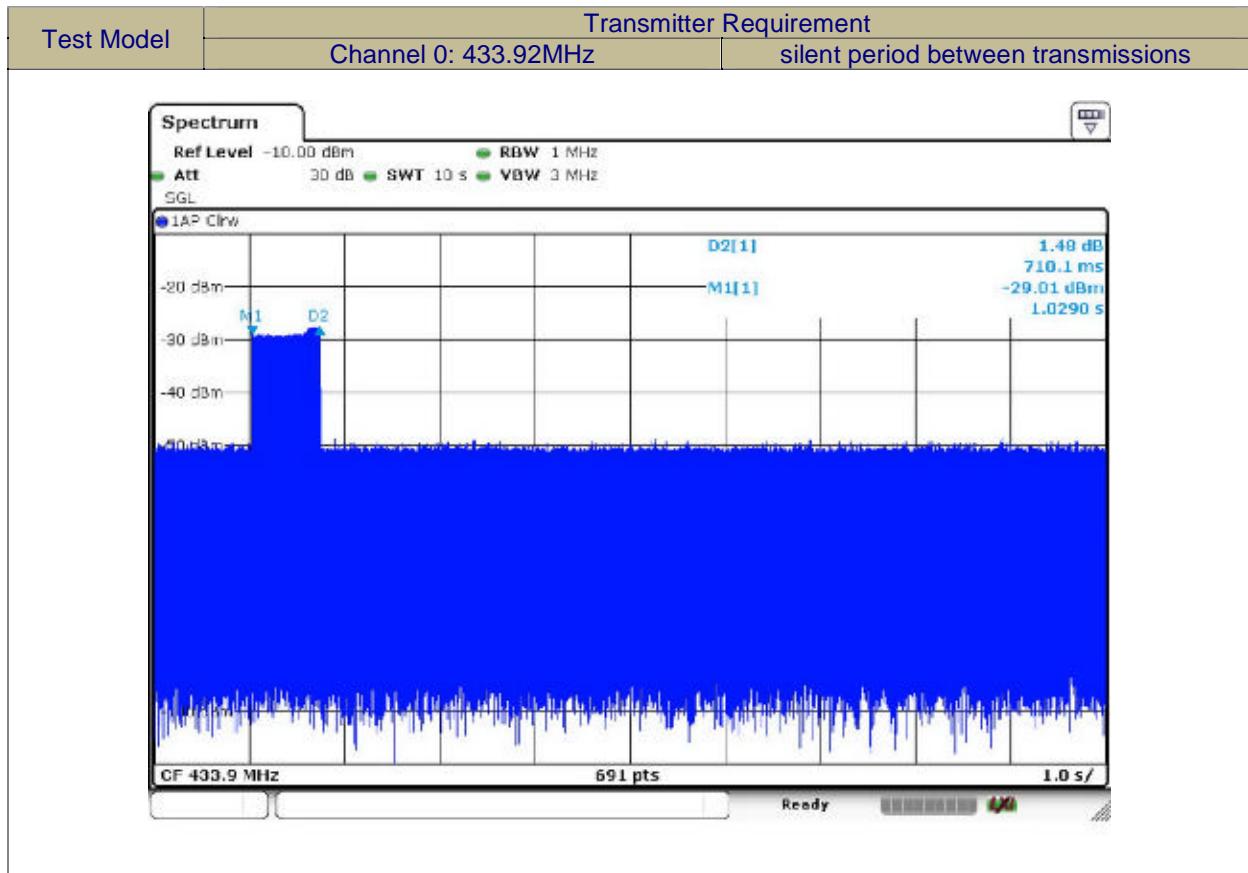

7.4 Antenna Application

7.4.1 Antenna Requirement

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

7.4.2 Result

The EUT's antenna is PCB Antenna, using a permanently attached antenna which is not replaceable. The antenna's gain is 4dBi and meets the requirement.

-----The end-----