



FCC PART 24 TEST REPORT

Part 24 Subpart E

Report Reference No.....: MWR161000106
FCC ID.....: RQQHLT-L55UTM
Compiled by
(position+printed name+signature)..: File administrators Martin Ao
Supervised by
(position+printed name+signature)..: Test Engineer Yuchao Wang
Approved by
(position+printed name+signature)..: Manager Dixon Hao
Date of issue.....: October 24, 2016

Representative Laboratory Name ..: Maxwell International Co., Ltd.
Address: Room 509, Hongfa center building, Baoan District, Shenzhen, Guangdong, China

Testing Laboratory Name Shenzhen CTL Testing Technology Co., Ltd.
Address: Electronic Testing Building, Shahe Road, Xili, Nanshan District, Shenzhen, 518055, P. R. China

Applicant's name.....: HYUNDAI CORPORATION
Address: 140-2, Kye-dong, Chongro-ku, Seoul, South Korea

Test specification
Standard: FCC CFR Title 47 Part 2, Part 24E
EIA/TIA 603-D: 2010
KDB 971168 D01
TRF Originator.....: Maxwell International Co., Ltd.

Maxwell International Co., Ltd. All rights reserved.
This publication may be reproduced in whole or in part for non-commercial purposes as long as the Maxwell International Co., Ltd. as copyright owner and source of the material. Maxwell International Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description Mobile Phone
Trade Mark: HYUNDAI
Manufacturer.....: Shenzhen Rainbow Time Technology Co.,Ltd
Model/Type reference.....: TITAN LTE
Listed Models: N/A
Modulation Type: QPSK, 16QAM
Rating: DC 3.80V
Hardware version: 5101SP_S52
Software version: V1.0
Result.....: **PASS**

TEST REPORT

Test Report No. :	MWR161000106	October. 24, 2016
		Date of issue

Equipment under Test : Mobile Phone

Model /Type : TITAN LTE

Listed Models : N/A

Applicant : **HYUNDAI CORPORATION**

Address : 140-2, Kye-dong, Chongro-ku, Seoul, South Korea

Manufacturer : **Shenzhen Rainbow Time Technology Co.,Ltd**

Address : Room 905, ChangHong Technology Building, Science and Technology Park, Nanshan District, Shenzhen, China

Test Result:	PASS
---------------------	-------------

The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Revision History

Revision	Issue Date	Revisions	Revised By
00	2016-10-24	Initial Issue	Dixon Hao

Contents

1.	<u>SUMMARY</u>	<u>6</u>
1.1.	General Remarks	6
1.2.	Product Description	6
1.3.	Equipment under Test	7
1.4.	Short description of the Equipment under Test (EUT)	7
1.5.	Internal Identification of AE used during the test	7
1.6.	Normal Accessory setting	7
1.7.	EUT configuration	7
1.8.	Related Submittal(s) / Grant (s)	7
1.9.	Modifications	8
1.10.	General Test Conditions/Configurations	8
2.	<u>TEST ENVIRONMENT.....</u>	<u>9</u>
2.1.	Address of the test laboratory	9
2.2.	Test Facility	9
2.3.	Environmental conditions	9
2.4.	Test Description	9
2.5.	Equipments Used during the Test	10
3.	<u>TEST CONDITIONS AND RESULTS.....</u>	<u>11</u>
3.1.	Output Power	11
3.2.	Peak-to-Average Ratio (PAR)	17
3.3.	Occupied Bandwidth and Emission Bandwidth	24
3.4.	Band Edge compliance	31
3.5.	Spurious Emssion on Antenna Port	38
3.6.	Radiated Spurious Emssion	51
3.7.	Frequency Stability under Temperature & Voltage Variations	58
4.	<u>TEST SETUP PHOTOS OF THE EUT</u>	<u>60</u>
5.	<u>EXTERNAL PHOTOS OF THE EUT.....</u>	<u>60</u>
6.	<u>INTERNAL PHOTOS OF THE EUT.....</u>	<u>60</u>

1 TEST STANDARDS

The tests were performed according to following standards:

[FCC Part 24](#) :PUBLIC MOBILE SERVICES

[TIA/EIA 603 D June 2010](#):Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

[47 CFR FCC Part 15 Subpart B](#): - Unintentional Radiators

[FCC Part 2](#): FREQUENCY ALLOCA-TIONS AND RADIO TREATY MAT-TERS; GENERAL RULES AND REG-ULATIONS

[KDB971168 D01: v02r02](#) MEASUREMENT GUIDANCE FOR CERTIFICATION OF LICENSED DIGITAL TRANSMITTERS

[ANSI C63.4:2014](#): Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

2 SUMMARY

2.1 General Remarks

Date of receipt of test sample	:	September 18, 2016
Testing commenced on	:	September 19, 2016
Testing concluded on	:	October 24, 2016

2.2 Product Description

The **HYUNDAI CORPORATION**'s Model: TITAN LTE or the "EUT" as referred to in this report; more general information as follows, for more details, refer to the user's manual of the EUT.

Name of EUT	Mobile Phone
Model Number	TITAN LTE
Modulation Type	GMSK for GSM/GPRS/EDGE, 8-PSK for EDGE only downlink, QPSK for UMTS, QPSK/16QAM for LTE
Antenna Type	Internal
UMTS Operation Frequency Band	Device supported UMTS FDD Band II, FDD Band V
WLAN FCC Operation frequency	IEEE 802.11b:2412-2462MHz IEEE 802.11g:2412-2462MHz IEEE 802.11n HT20:2412-2462MHz IEEE 802.11n HT40:2422-2452MHz
BT FCC Operation frequency	2402MHz-2480MHz
HSDPA Release Version	Release 10
HSUPA Release Version	Release 6
DC-HSUPA Release Version	Not Supported
WCDMA Release Version	R99
WLAN FCC Modulation Type	IEEE 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE 802.11g: OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20: OFDM (64QAM, 16QAM, QPSK,BPSK) IEEE 802.11n HT40: OFDM (64QAM, 16QAM, QPSK,BPSK)
BT Modulation Type	GFSK,8DPSK, π /4DQPSK(BT3.0+EDR),GFSK(BLE)
Hardware version	5101SP_S52
Software version	V1.0
Android version	Android 5.1
GPS function	Supported
WLAN	Supported 802.11b/802.11g/802.11n
Bluetooth	Supported BT 4.0/BT 3.0+EDR
GSM/EDGE/GPRS	Supported GSM/GPRS/EDGE
GSM/EDGE/GPRS Power Class	GSM850:Power Class 4/ PCS1900:Power Class 1
GSM/EDGE/GPRS Operation Frequency	GSM850 :824.2MHz-848.8MHz/PCS1900:1850.2MHz-1909.8MHz
GSM/EDGE/GPRS Operation Frequency Band	GSM850/PCS1900/GPRS850/GPRS1900/EDGE850/EDGE1900
GSM Release Version	R99
GPRS/EDGE Multislot Class	GPRS: Multi-slot Class 12
Extreme temp. Tolerance	-30°C to +50°C
Extreme vol. Limits	3.40VDC to 4.20VDC (nominal: 3.80VDC)
GPRS operation mode	Class B

2.3 Equipment under Test

Power supply system utilised

Power supply voltage	:	<input type="radio"/> 120V / 60 Hz	<input type="radio"/> 115V / 60Hz
		<input type="radio"/> 12 V DC	<input type="radio"/> 24 V DC
		<input checked="" type="radio"/> Other (specified in blank below)	

DC 3.80V

2.4 Short description of the Equipment under Test (EUT)

2.4.1 General Description

TITAN LTE is subscriber equipment in the WCDMA/GSM system. The HSPA/UMTS frequency band is Band I, Band II and Band V; The GSM/GPRS/EDGE frequency band includes GSM850 and GSM900 and DCS1800 and PCS1900, but only Band II, Band V, GSM850 and PCS1900 bands test data included in this report. The Mobile Phone implements such functions as RF signal receiving/transmitting, HSPA/UMTS and GSM/GPRS/EDGE protocol processing, voice, video MMS service, GPS and WIFI etc. Externally it provides micro SD card interface, earphone port (to provide voice service) and SIM card interface. It also provides Bluetooth module to synchronize data between a PC and the phone, or to use the built-in modem of the phone to access the Internet with a PC, or to exchange data with other Bluetooth devices.

NOTE: Unless otherwise noted in the report, the functional boards installed in the units shall be selected from the below list, but not means all the functional boards listed below shall be installed in one unit.

2.5 Internal Identification of AE used during the test

AE ID*	Description
AE1	Battery
AE2	Charger

AE1

Model: DC500

INPUT: AC180-240V~ 50/60Hz 0.15A

OUTPUT: DC 5.0V 1000mA

*AE ID: is used to identify the test sample in the lab internally.

2.6 Normal Accessory setting

Fully charged battery was used during the test.

2.7 EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- supplied by the manufacturer

- supplied by the lab

<input type="radio"/> Power Cable	Length (m) :	/
	Shield :	/
	Detachable :	/
<input type="radio"/> Multimeter	Manufacturer :	/
	Model No. :	/

2.8 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for **FCC ID: RQQLT-L55UTM** filing to comply with FCC Part 24, Rules.

2.9 Modifications

No modifications were implemented to meet testing criteria.

2.10 General Test Conditions/Configurations

2.10.1 Test Environment

Environment Parameter	Selected Values During Tests	
Relative Humidity	Ambient	
Temperature	TN	Ambient
Voltage	VL	3.40V
	VN	3.80V
	VH	4.20V

NOTE: VL=lower extreme test voltage VN=nominal voltage
VH=upper extreme test voltage TN=normal temperature

3 TEST ENVIRONMENT

3.1 Address of the test laboratory

Shenzhen CTL Testing Technology Co., Ltd.

Floor 1-A, Baisha Technology Park, No. 3011, Shahehexi Road, Nanshan, Shenzhen 518055 China
The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 (2003) and CISPR Publication 22.

3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 970318

Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 970318, December 19, 2013.

3.3 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15-35 ° C
Humidity:	30-60 %
Atmospheric pressure:	950-1050mbar

3.4 Test Description

PCS Band (1850-1915MHz paired with 1930-1995MHz)

Test Item	FCC Rule No.	Requirements	Verdict
Effective(Isotropic) Radiated Output Power	§2.1046, §24.232	EIRP ≤ 2W	Pass
Peak-Average Ratio	§2.1046, §24.232	FCC:Limit≤13dB	Pass
Modulation Characteristics	§2.1047	Digital modulation	N/A
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Pass
Band Edges Compliance	§2.1051, §24.238	≤ -13dBm/1%*EBW, In 1MHz bands immediately outside and adjacent to The frequency block.	Pass
Spurious Emission at Antenna Terminals	§2.1051, §24.238	≤-13dBm/1MHz, from 9kHz to10th harmonics but outside authorized Operating frequency ranges.	Pass
Field Strength of Spurious Radiation	§2.1053, §24.238	≤ -13dBm/1MHz.	Pass
Frequency Stability	§2.1055, §24.235	FCC: within authorized frequency block.	Pass

NOTE 1: For the verdict, the "N/A" denotes "not applicable", the "N/T" de notes "not tested".

Remark:

1. The measurement uncertainty is not included in the test result.

3.5 Equipments Used during the Test

Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
Bilog Antenna	Sunol Sciences Corp.	JB1	A061713	2016/06/02	2017/06/01
EMI Test Receiver	R&S	ESCI	103710	2016/06/02	2017/06/01
Spectrum Analyzer	Agilent	N9030A	MY49430428	2016/05/21	2017/05/20
Controller	EM Electronics	Controller EM 1000	N/A	2016/05/21	2017/05/20
Horn Antenna	SCHWARZBECK	BBHA9170D	BBH A9170179	2016/05/19	2017/05/18
Horn Antenna	Sunol Sciences Corp.	DRH-118	A062013	2016/05/19	2017/05/18
EMC Test Software	R&S	ES-K1	N/A	N/A	N/A
EMC Test Software	Audix	E3	N/A	N/A	N/A
Active Loop Antenna	SCHWARZBECK	FMZB1519	1519-037	2016/05/19	2017/05/18
Amplifier	Agilent	8349B	3008A02306	2016/05/19	2017/05/18
Amplifier	Agilent	8447D	2944A10176	2016/05/19	2017/05/18
Temperature/ Humidity Meter	Gangxing	CTH-608	02	2016/05/20	2017/05/19
High-Pass Filter	K&L	9SH10-2700/X12750-O/O	N/A	2016/05/20	2017/05/19
High-Pass Filter	K&L	41H10-1375/U12750-O/O	N/A	2016/05/20	2017/05/19
Coaxial Cables	HUBER+SUHNER	SUCOFLEX 104PEA-10M	10m	2016/06/02	2017/06/01
Coaxial Cables	HUBER+SUHNER	SUCOFLEX 104PEA-3M	3m	2016/06/02	2017/06/01
Coaxial Cables	HUBER+SUHNER	SUCOFLEX 104PEA-3M	3m	2016/06/02	2017/06/01
RF Cable	Megalon	RF-A303	N/A	2016/06/02	2017/06/01
Power Sensor	R&S	NRP-Z4	823.3618.03	2016/06/02	2017/06/01
Power Meter	R&S	NRVS	1020.1809.02	2016/06/02	2017/06/01
System Simulator	R&S	CMW500	A130101034	2016/05/22	2017/05/21

4 TEST CONDITIONS AND RESULTS


4.1 Output Power

4.1.1 Conducted Output Power

TEST APPLICABLE

During the process of testing, the EUT was controlled via R&S Digital Radio Communication tester (CMW500) to ensure max power transmission and proper modulation. This result contains output power and EIRP measurements for the EUT. In all cases, output power is within the specified limits.

TEST CONFIGURATION

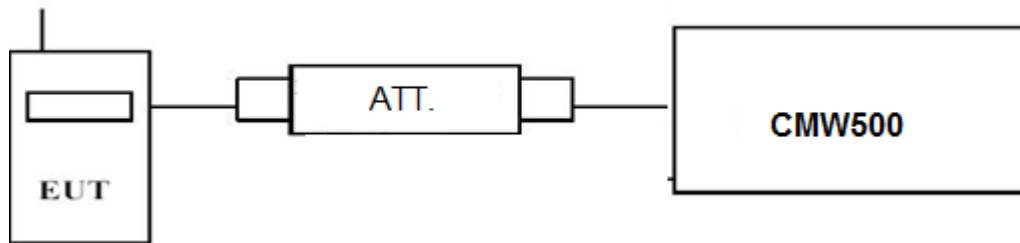

TEST PROCEDURE

Conducted Power Measurement:

- Place the EUT on a bench and set it in transmitting mode.
- Connect a low loss RF cable from the antenna port to a CMW500 by an Att.
- EUT Communicate with CMW500 then selects a channel for testing.
- Add a correction factor to the display CMW500, and then test.

TEST RESULTS

Remark:

- We measured all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 2;
- We measured at both SIM 1 and SIM 2, recorded worst case at SIM 1;

LTE FDD Band 2				
TX Channel Bandwidth	Frequency (MHz)	RB Size/Offset	Burst Average Power [dBm]	
			QPSK	16QAM
1.4 MHz	1850.7	1 RB low	22.44	21.65
		1 RB high	22.28	21.51
		50% RB mid	22.19	21.27
		100% RB	21.21	20.21
	1880.0	1 RB low	22.53	21.81
		1 RB high	22.52	21.80
		50% RB mid	22.51	21.47
		100% RB	21.51	20.48
	1909.3	1 RB low	22.39	21.49
		1 RB high	22.40	21.53
		50% RB mid	22.43	21.35
		100% RB	21.52	20.56
3 MHz	1851.5	1 RB low	21.61	20.96
		1 RB high	21.67	20.97
		50% RB mid	20.72	19.77
		100% RB	21.76	20.70
	1880.0	1 RB low	22.56	21.80
		1 RB high	22.52	21.79
		50% RB mid	21.60	20.54
		100% RB	21.54	20.51
1908.5	1 RB low	22.39	21.58	

		1 RB high	22.04	21.34
		50% RB mid	21.48	20.39
		100% RB	21.43	20.40
5 MHz	1852.5	1 RB low	21.52	20.78
		1 RB high	21.61	20.84
		50% RB mid	21.36	20.24
	1880.0	100% RB	21.27	20.25
		1 RB low	22.66	21.80
		1 RB high	22.56	21.72
	1907.5	50% RB mid	21.59	20.68
		100% RB	21.56	20.58
		1 RB low	22.54	21.63
10 MHz	1855.0	1 RB high	21.98	21.14
		50% RB mid	21.56	20.57
		100% RB	21.97	21.16
	1880.0	1 RB low	22.41	20.63
		1 RB high	21.94	21.42
		50% RB mid	21.05	20.06
	1905.0	100% RB	20.95	20.01
		1 RB low	22.61	21.96
		1 RB high	22.56	21.86
15 MHz	1857.5	50% RB mid	21.59	20.61
		100% RB	21.59	20.62
		1 RB low	21.92	21.10
	1880.0	1 RB high	21.34	20.65
		50% RB mid	21.07	20.03
		100% RB	21.56	20.48
	1902.5	1 RB low	21.41	20.68
		1 RB high	22.41	21.67
		50% RB mid	21.12	20.06
20 MHz	1860.0	100% RB	20.96	19.98
		1 RB low	22.68	21.19
		1 RB high	22.58	21.74
	1880.0	50% RB mid	21.73	20.68
		100% RB	21.74	20.67
		1 RB low	22.23	21.39
	1900.0	1 RB high	21.60	20.92
		50% RB mid	21.26	20.17
		100% RB	21.19	20.08
20 MHz	1860.0	1 RB low	21.45	20.68
		1 RB high	22.70	21.87
		50% RB mid	21.65	20.59
	1880.0	100% RB	21.56	20.63
		1 RB low	22.81	22.09
		1 RB high	22.39	21.69
	1900.0	50% RB mid	21.80	20.84
		100% RB	21.63	20.64
		1 RB low	22.31	21.54
1900.0	1 RB high	21.37	20.70	
	50% RB mid	20.83	19.97	
	100% RB	20.90	20.01	


4.1.2. Radiated Output Power

LIMIT

This is the test for the maximum radiated power from the EUT.

Rule Part 24.232(b) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p.

TEST CONFIGURATION

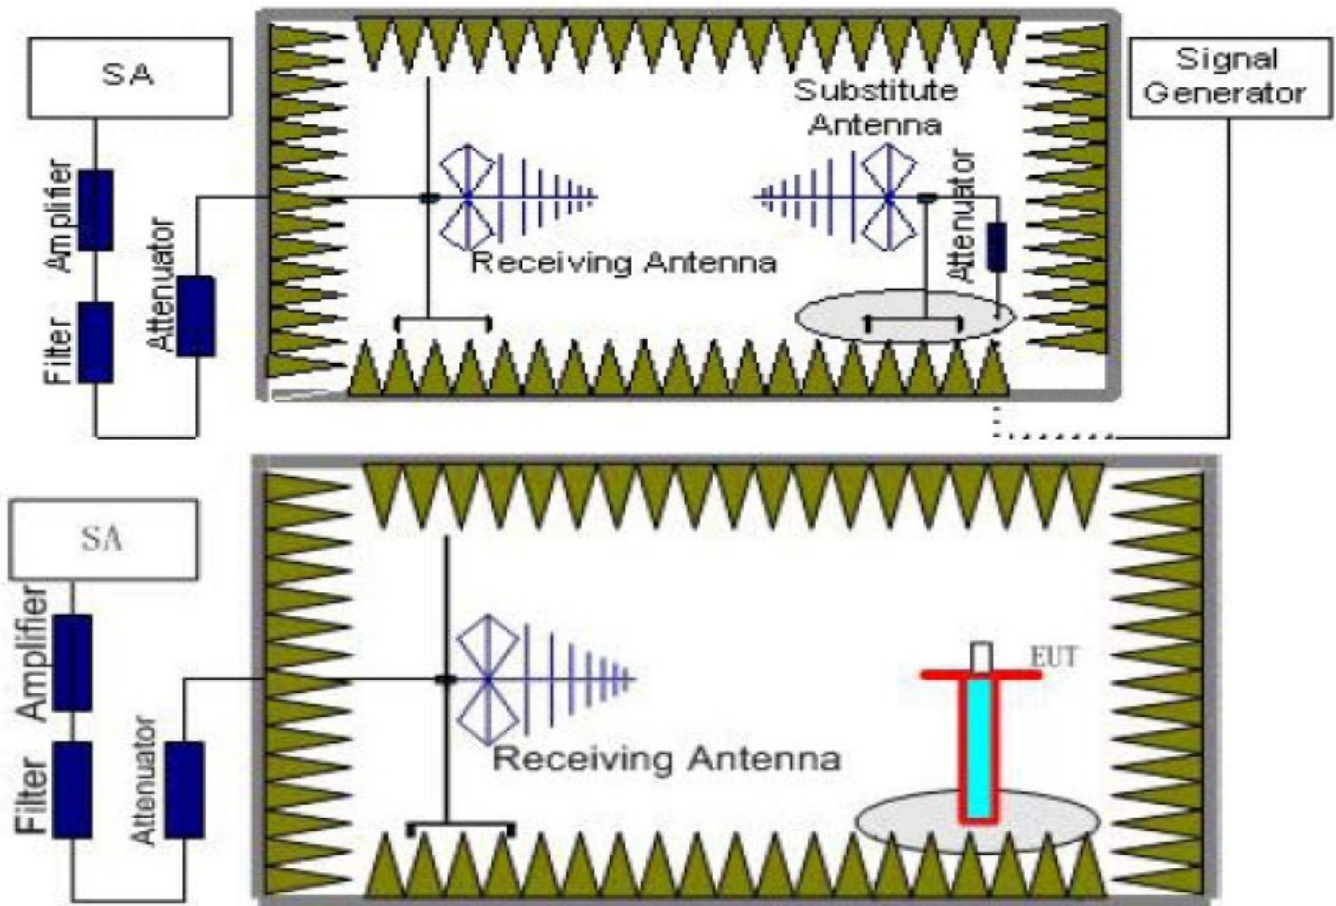

TEST PROCEDURE

1. EUT was placed on a 1.50 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.50m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
3. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz, And the maximum value of the receiver should be recorded as (P_r).
4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

5. An amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (P_{cl}), the Substitution Antenna Gain (G_a) and the Amplifier Gain (P_{Ag}) should be recorded after test.
The measurement results are obtained as described below:
Power(EIRP)= $P_{Mea} - P_{Ag} - P_{cl} + G_a$
We used SMF100A microwave signal generator which signal level can up to 33dBm,so we not used power Amplifier for substitution test; The measurement results are amend as described below:
Power(EIRP)= $P_{Mea} - P_{cl} + G_a$
6. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
7. ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP-2.15dBi.

TEST RESULTS

Radiated Measurement:

Remark:

1. We measured all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 2; recorded worst case for each Channel Bandwidth of LTE FDD Band 2.
2. $EIRP = P_{Mea}(dBm) - P_{cl}(dB) + P_{Ag}(dB) + G_a(dBi)$
3. We measured at SIM 1 as conducted burst average power higher at SIM 1;
4. We measured both Horizontal and Vertical direction, recorded worst case direction.

LTE FDD Band 2_Channel Bandwidth 1.4MHz_QPSK

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	G_a Antenna Gain(dB)	P_{Ag} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1850.7	-21.41	3.41	10.24	33.60	19.02	33.01	13.99	V
1880.0	-20.00	3.49	10.24	33.60	20.35	33.01	12.66	V
1909.3	-20.56	3.55	10.23	33.60	19.72	33.01	13.29	V

LTE FDD Band 2_Channel Bandwidth 3MHz_QPSK

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	G_a Antenna Gain(dB)	P_{Ag} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1851.5	-21.71	3.41	10.24	33.60	19.31	33.01	13.70	V
1880.0	-20.40	3.49	10.24	33.60	19.64	33.01	13.37	V
1908.5	-20.36	3.55	10.23	33.60	19.67	33.01	13.34	V

LTE FDD Band 2_Channel Bandwidth 5MHz_QPSK

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	G_a Antenna Gain(dB)	P_{Ag} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1852.5	-21.66	3.41	10.24	33.60	18.77	33.01	14.24	V
1880.0	-19.79	3.49	10.24	33.60	20.56	33.01	12.45	V
1907.5	-20.36	3.55	10.23	33.60	19.92	33.01	13.09	V

LTE FDD Band 2_Channel Bandwidth 10MHz_QPSK

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	G_a Antenna Gain(dB)	P_{Ag} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1855.0	-21.61	3.41	10.24	33.60	18.82	33.01	14.19	V
1880.0	-20.80	3.49	10.24	33.60	19.55	33.01	13.46	V
1905.0	-20.44	3.55	10.23	33.60	19.84	33.01	13.17	V

LTE FDD Band 2_Channel Bandwidth 15MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1857.5	-21.47	3.41	10.24	33.60	18.96	33.01	14.05	V
1880.0	-20.62	3.49	10.24	33.60	19.73	33.01	13.28	V
1902.5	-20.76	3.55	10.23	33.60	19.52	33.01	13.49	V

LTE FDD Band 2_Channel Bandwidth 20MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1860.0	-20.51	3.41	10.24	33.60	19.92	33.01	13.09	V
1880.0	-20.62	3.49	10.24	33.60	19.73	33.01	13.28	V
1900.0	-21.55	3.55	10.23	33.60	18.73	33.01	14.28	V

LTE FDD Band 2_Channel Bandwidth 1.4MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1850.7	-22.40	3.41	10.24	33.60	18.03	33.01	14.98	V
1880.0	-21.79	3.49	10.24	33.60	18.56	33.01	14.45	V
1909.3	-21.67	3.55	10.23	33.60	18.61	33.01	14.40	V

LTE FDD Band 2_Channel Bandwidth 3MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1851.5	-22.78	3.41	10.24	33.60	17.65	33.01	15.36	V
1880.0	-21.65	3.49	10.24	33.60	18.70	33.01	14.31	V
1908.5	-22.26	3.55	10.23	33.60	18.02	33.01	14.99	V

LTE FDD Band 2_Channel Bandwidth 5MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1852.5	-22.90	3.41	10.24	33.60	17.53	33.01	15.48	V
1880.0	-21.85	3.49	10.24	33.60	18.50	33.01	14.51	V
1907.5	-21.44	3.55	10.23	33.60	18.84	33.01	14.17	V

LTE FDD Band 2_Channel Bandwidth 10MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1855.0	-22.91	3.41	10.24	33.60	17.52	33.01	15.49	V
1880.0	-21.74	3.49	10.24	33.60	18.61	33.01	14.40	V
1905.0	-21.99	3.55	10.23	33.60	18.29	33.01	14.72	V

LTE FDD Band 2_Channel Bandwidth 15MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1857.5	-22.87	3.41	10.24	33.60	17.56	33.01	15.45	V
1880.0	-21.80	3.49	10.24	33.60	18.55	33.01	14.46	V
1902.5	-22.16	3.55	10.23	33.60	18.12	33.01	14.89	V

LTE FDD Band 2_Channel Bandwidth 20MHz_16QAM


Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1860.0	-22.68	3.41	10.24	33.60	17.75	33.01	15.26	V
1880.0	-22.05	3.49	10.24	33.60	18.30	33.01	14.71	V
1900.0	-22.61	3.55	10.23	33.60	17.67	33.01	15.34	V

4.2 Peak-to-Average Ratio (PAR)

LIMIT

The Peak-to-Average Ratio (PAR) of the transmission may not exceed 13 dB.

TEST CONFIGURATION

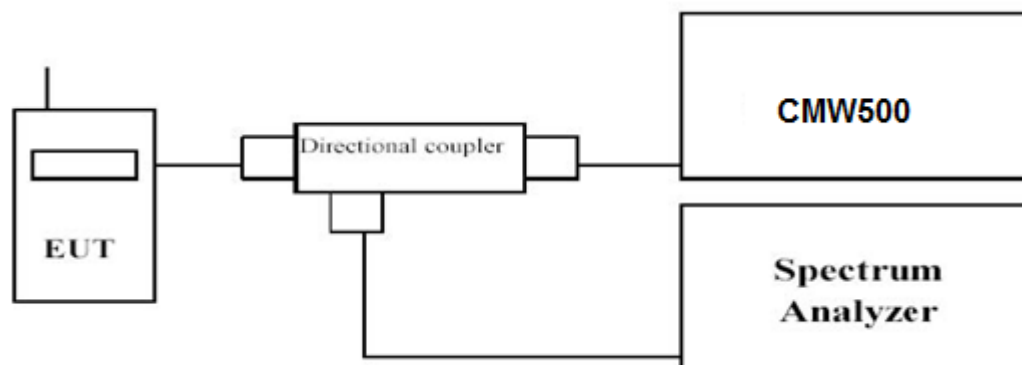

TEST PROCEDURE

1. Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF function;
2. Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
3. Set the number of counts to a value that stabilizes the measured CCDF curve;
4. Set the measurement interval as follows:
 - 1). for continuous transmissions, set to 1 ms,
 - 2). for burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
5. Record the maximum PAPR level associated with a probability of 0.1%.

TEST RESULTS

Remark:

1. We measured all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 2; recorded worst case for each Channel Bandwidth of LTE FDD Band 2.
2. We measured at SIM 1 as conducted burst average power higher at SIM 1;

LTE FDD Band 2				
TX Channel Bandwidth	Frequency (MHz)	RB Size/Offset	PAPR (dB)	
			QPSK	16QAM
1.4 MHz	1850.7	1RB#0	3.48	4.43
	1880.0		3.81	4.79
	1909.3		2.99	3.96
3 MHz	1851.5	1RB#0	3.55	4.49
	1880.0		3.87	4.73
	1908.5		3.20	4.02
5 MHz	1852.5	1RB#0	3.58	4.21
	1880.0		3.65	4.43
	1907.5		3.48	5.95
10 MHz	1855.0	1RB#0	4.88	5.90
	1880.0		4.61	5.89
	1905.0		4.61	5.69
15 MHz	1857.5	1RB#0	5.56	6.50
	1880.0		5.78	6.49
	1902.5		5.56	6.54
20 MHz	1860.0	1RB#0	6.51	7.04
	1880.0		6.40	6.96
	1900.0		6.57	7.20

LTE FDD Band 2 – 1.4 MHz Channel Bandwidth PAPR

QPSK

16QAM


Low Channel



1RB#0

1RB#0

Middle Channel

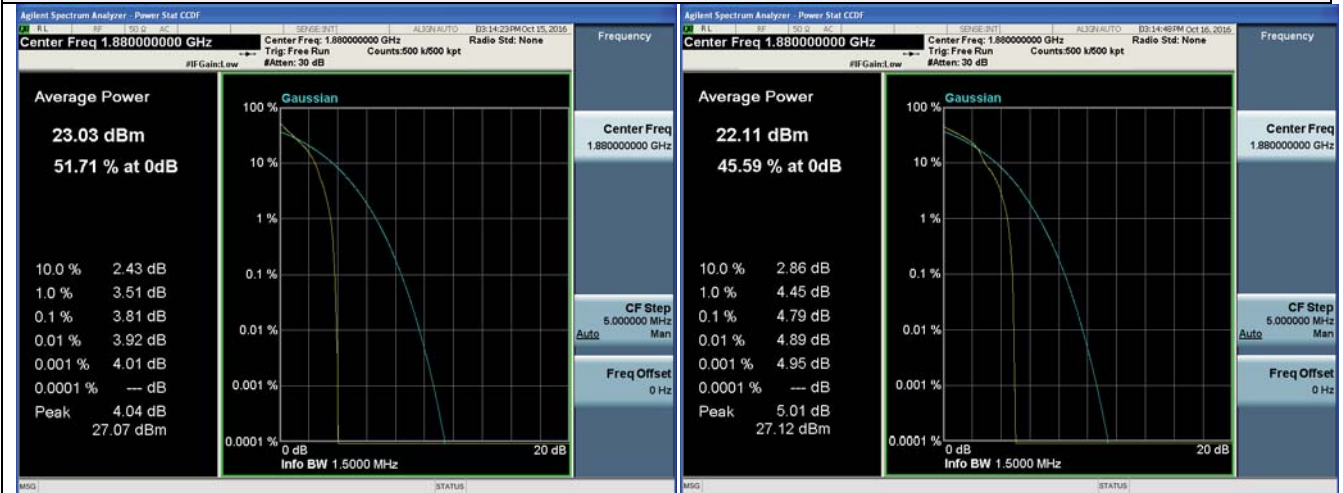

1RB#0

1RB#0

High Channel



1RB#0

1RB#0

LTE FDD Band 2 – 3 MHz Channel Bandwidth PAPR

QPSK

16QAM


Low Channel



1RB#0

1RB#0

Middle Channel

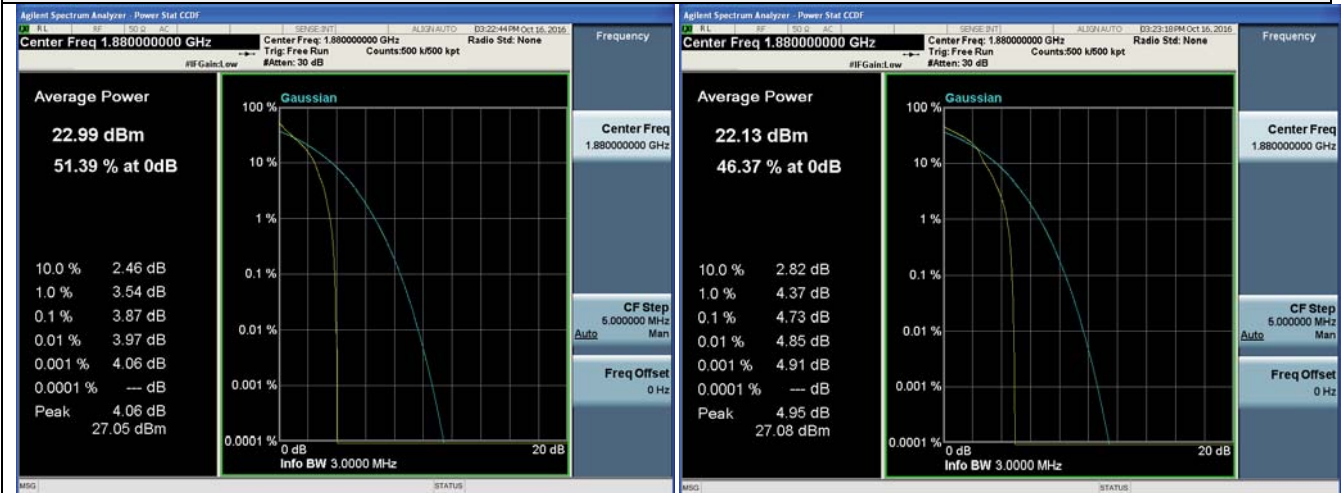

1RB#0

1RB#0

High Channel



1RB#0


1RB#0

LTE FDD Band 2 – 5 MHz Channel Bandwidth PAPR

QPSK

16QAM

Low Channel

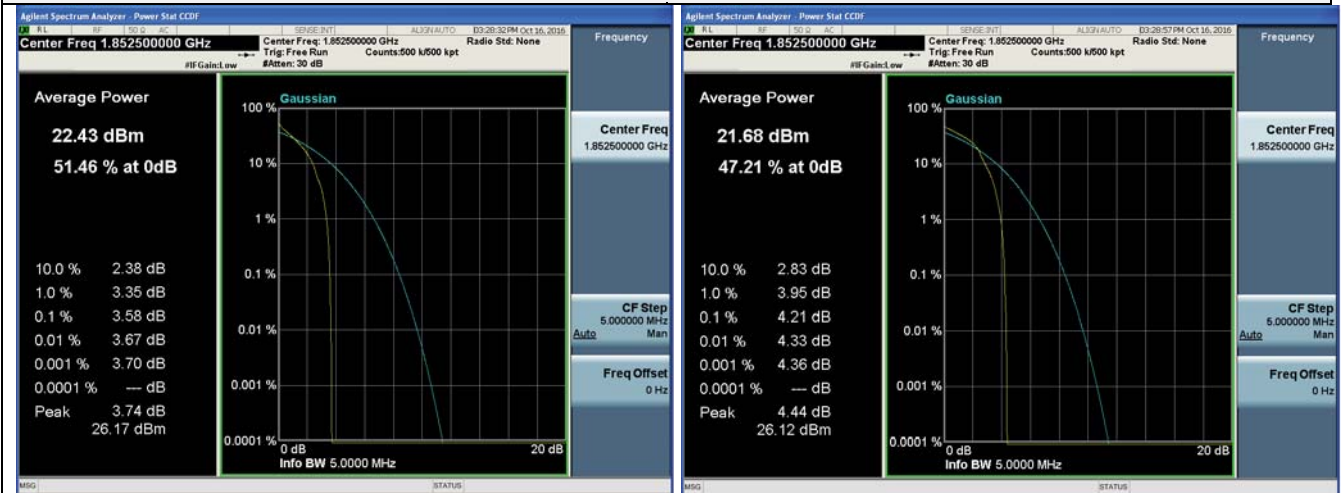

1RB#0

1RB#0



1RB#0

1RB#0

High Channel



1RB#0


1RB#0

LTE FDD Band 2 – 10 MHz Channel Bandwidth PAPR

QPSK

16QAM


Low Channel

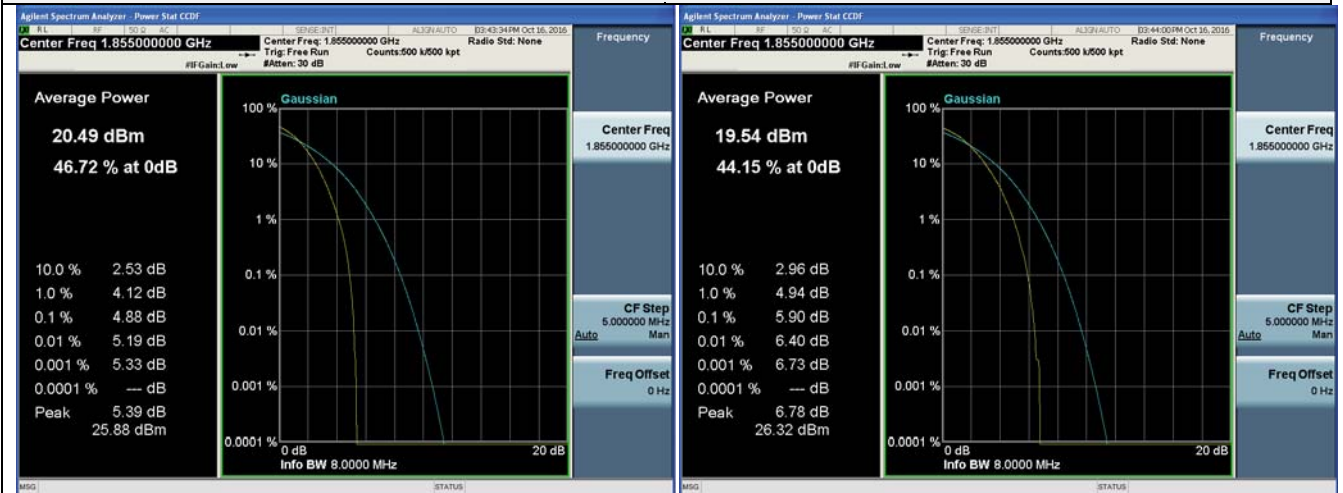

1RB#0

1RB#0


Middle Channel

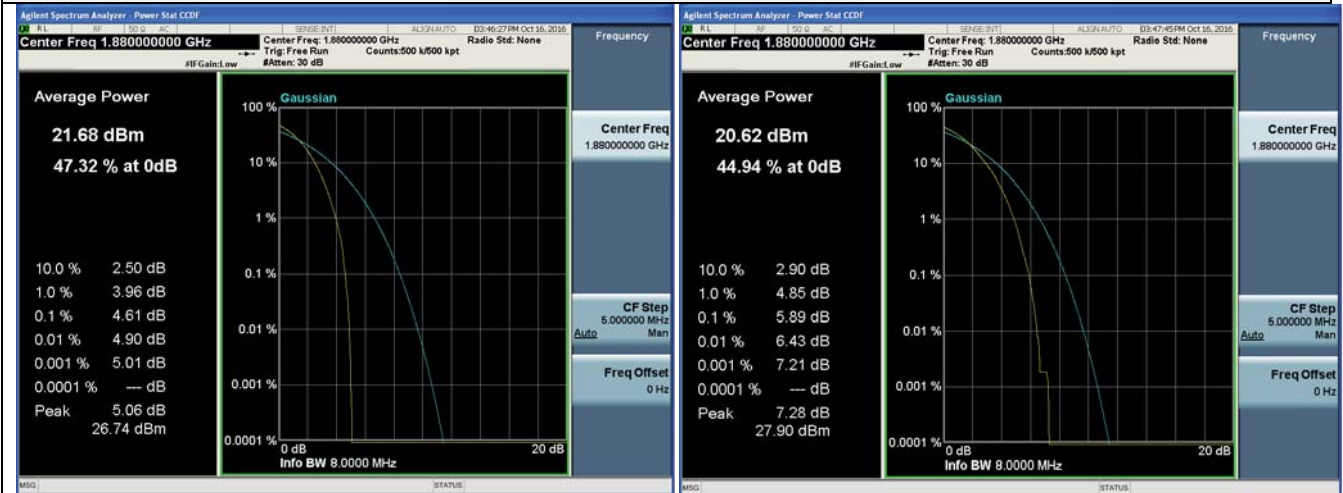

1RB#0

1RB#0

High Channel

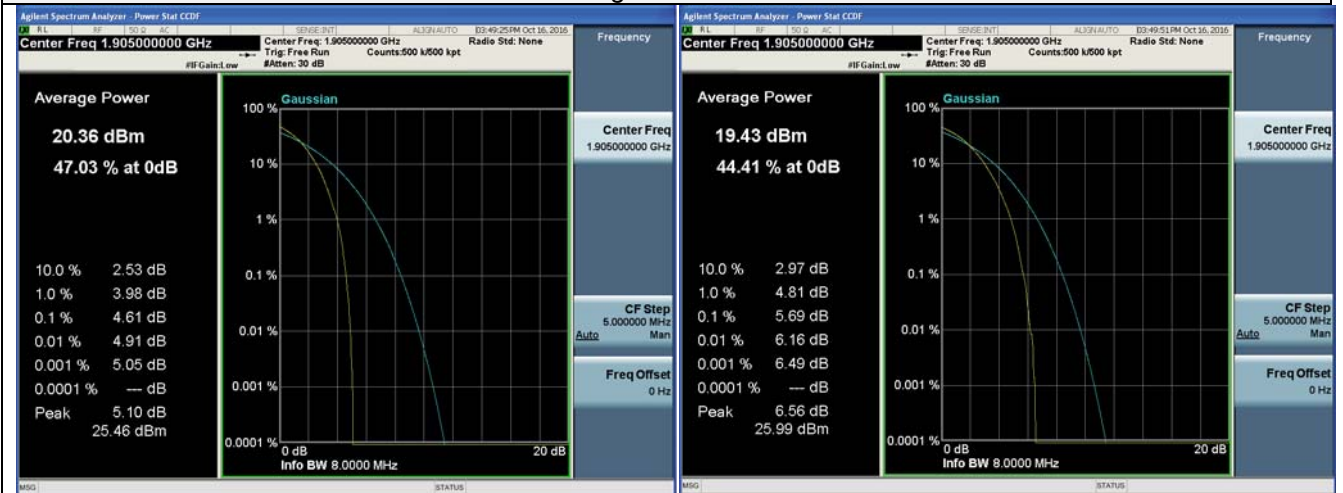

1RB#0

1RB#0

LTE FDD Band 2 – 15 MHz Channel Bandwidth PAPR

QPSK

16QAM

Low Channel



1RB#0

1RB#0

Middle Channel



1RB#0

1RB#0

High Channel



1RB#0

1RB#0

LTE FDD Band 2 – 20 MHz Channel Bandwidth PAPR

QPSK

16QAM

Low Channel



1RB#0

1RB#0


Middle Channel



1RB#0

1RB#0

High Channel

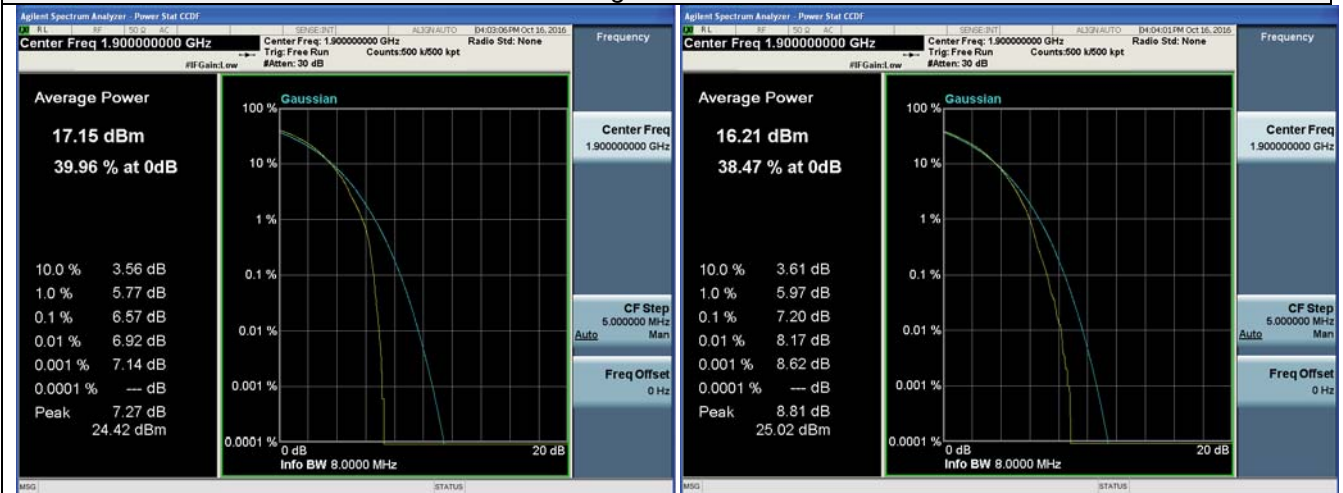

1RB#0


1RB#0

4.3 Occupied Bandwidth and Emission Bandwidth

LIMIT

N/A

TEST CONFIGURATION

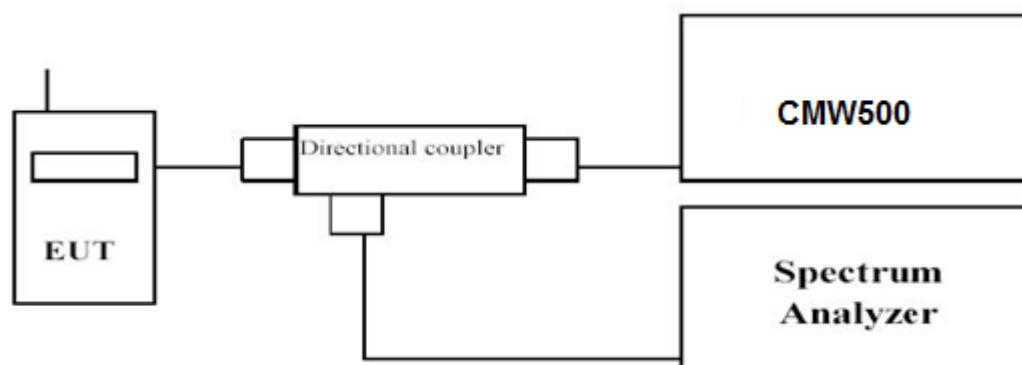

TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at low, middle and high channel in each band. The -26dBc Emission bandwidth was also measured and recorded. Set RBW was set to about 1% of emission BW, VBW \geq 3 times RBW.

-26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.

TEST RESULTS

Remark:

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 2; recorded worst case for each Channel Bandwidth of LTE FDD Band 2.
2. We measured at SIM 1 as conducted burst average power higher at SIM 1;



LTE FDD Band 2						
TX Channel Bandwidth	RB Size/Offset	Frequency (MHz)	-26dBc Emission bandwidth (MHz)		99% Occupied bandwidth (MHz)	
			QPSK	16QAM	QPSK	16QAM
1.4 MHz	6RB#0	1850.7	1.244	1.251	1.0846	1.0905
		1880.0	1.255	1.240	1.8054	1.0899
		1909.3	1.243	1.245	1.0891	1.0894
3 MHz	15RB#0	1851.5	2.911	2.914	2.6979	2.7001
		1880.0	2.903	2.912	2.6968	2.6964
		1908.5	2.918	2.897	2.6991	2.6971
5 MHz	25RB#0	1852.5	4.844	4.836	4.4950	4.5046
		1880.0	4.863	4.901	4.5016	4.5013
		1907.5	4.890	4.870	4.4980	4.5042
10 MHz	50RB#0	1855.0	9.514	9.530	8.9610	8.9728
		1880.0	9.529	9.531	8.9754	8.9501
		1905.0	9.529	9.566	8.9522	8.9648
15 MHz	75RB#0	1857.5	14.24	14.22	13.469	13.467
		1880.0	14.23	14.23	13.450	13.437
		1902.5	14.19	14.24	13.463	13.451
20 MHz	100RB#0	1860.0	18.97	18.98	17.971	17.974
		1880.0	18.96	18.95	17.926	17.918
		1900.0	18.98	18.99	17.971	17.970

LTE FDD Band 2 – 1.4 MHz Channel Bandwidth Occupied Bandwidth and Emission Bandwidth

QPSK

16QAM



Low Channel

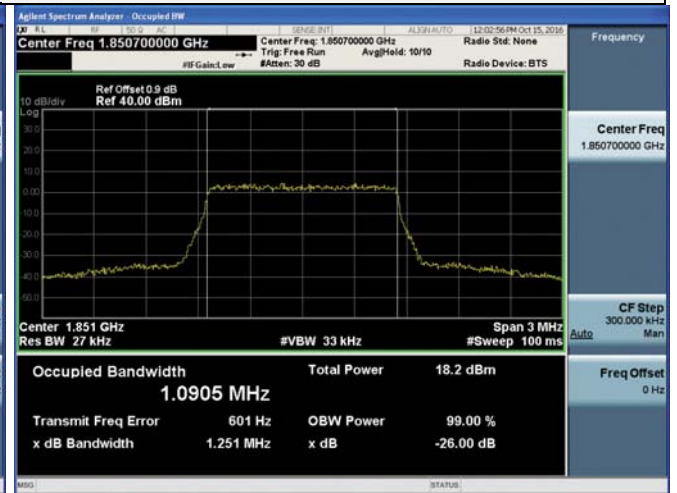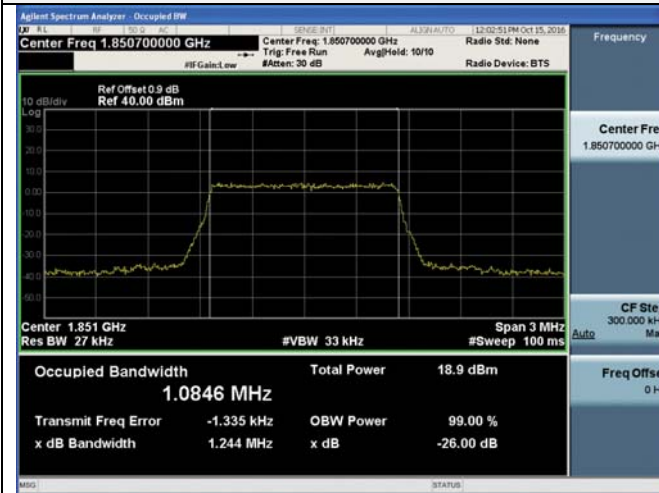

6RB#0

6RB#0

Middle Channel

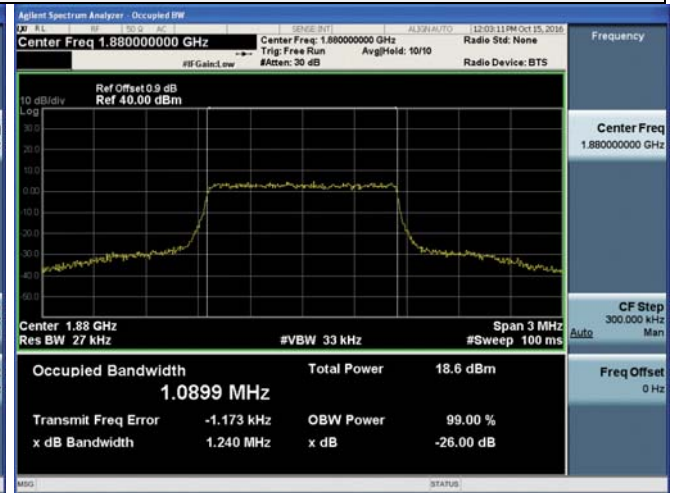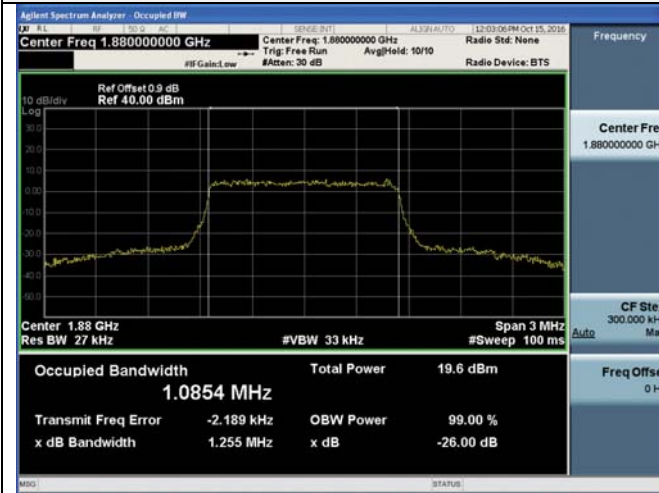

6RB#0

6RB#0

High Channel



6RB#0



6RB#0

LTE FDD Band 2 – 3 MHz Channel Bandwidth Occupied Bandwidth and Emission Bandwidth

QPSK

16QAM



Low Channel

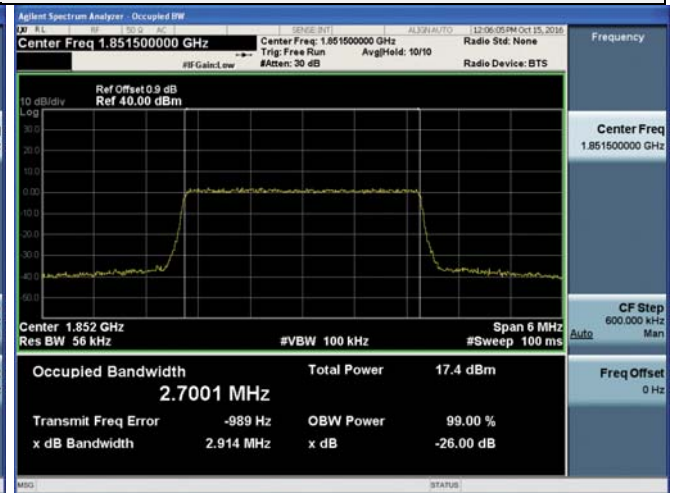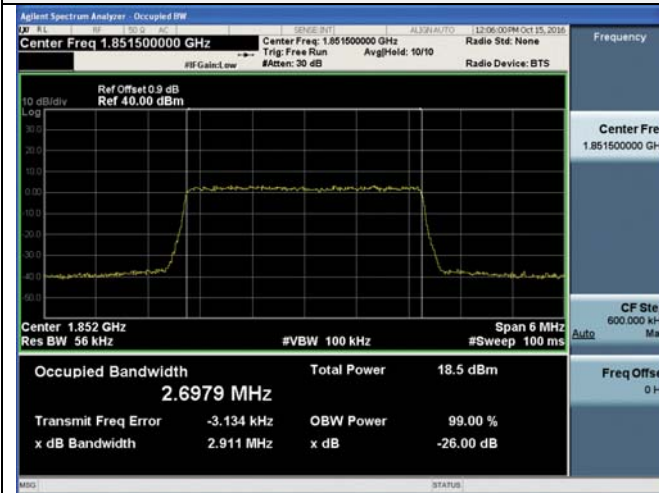

15RB#0

15RB#0



Middle Channel

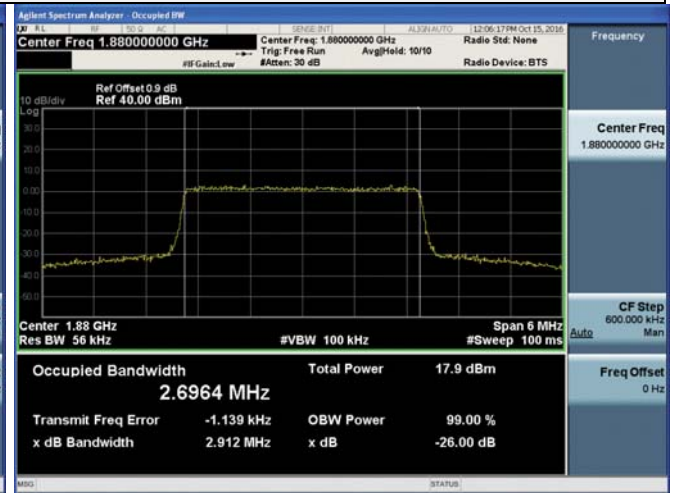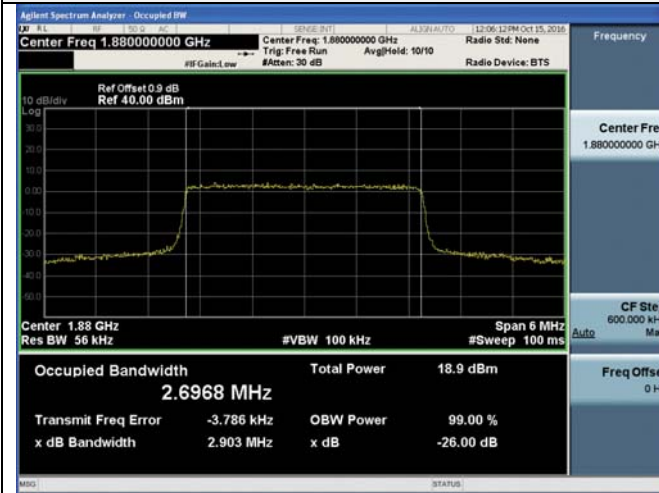

15RB#0

15RB#0

High Channel

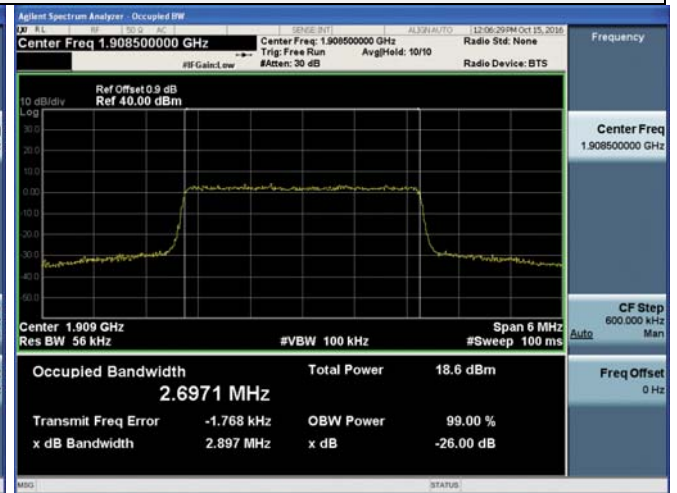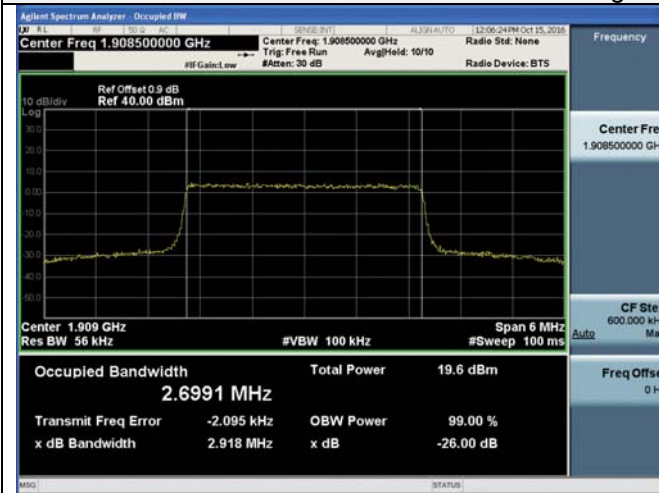

15RB#0



15RB#0

LTE FDD Band 2 – 5 MHz Channel Bandwidth Occupied Bandwidth and Emission Bandwidth

QPSK

16QAM



Low Channel

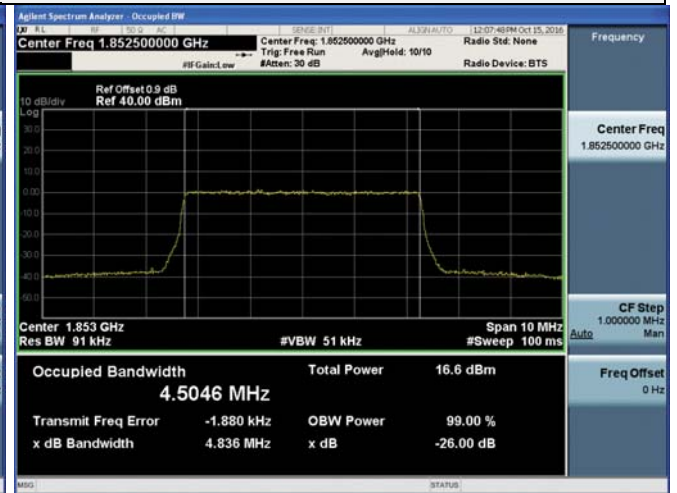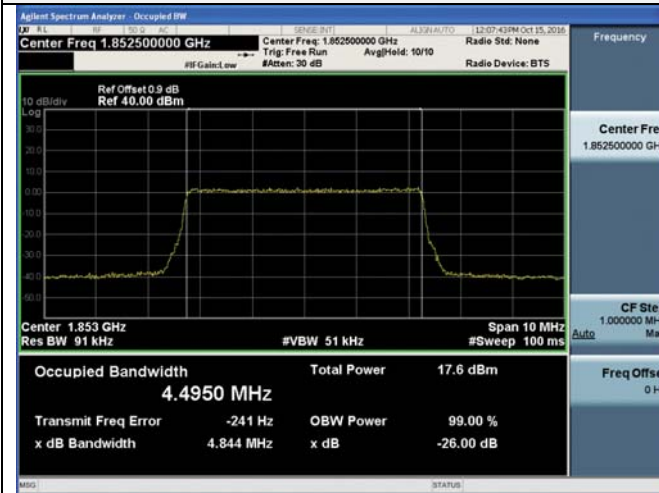

25RB#0

25RB#0



Middle Channel

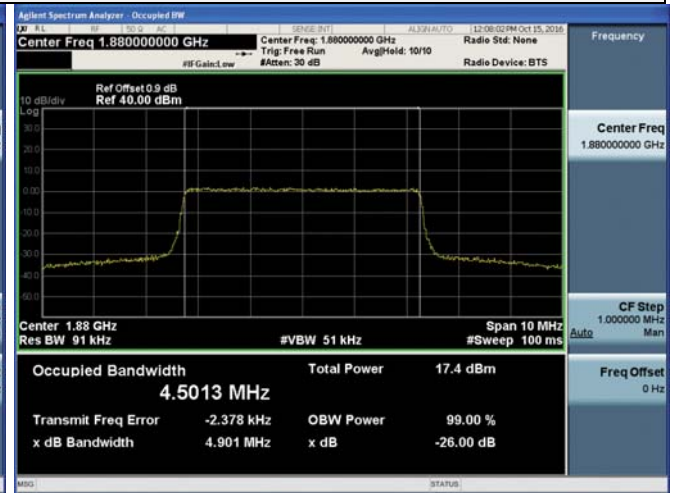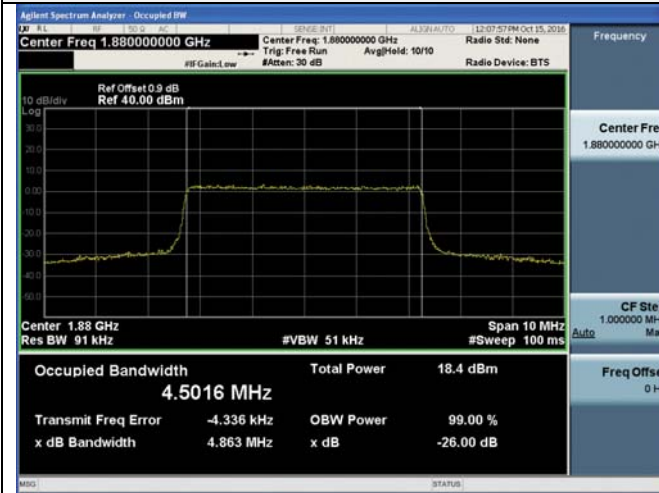

25RB#0

25RB#0

High Channel

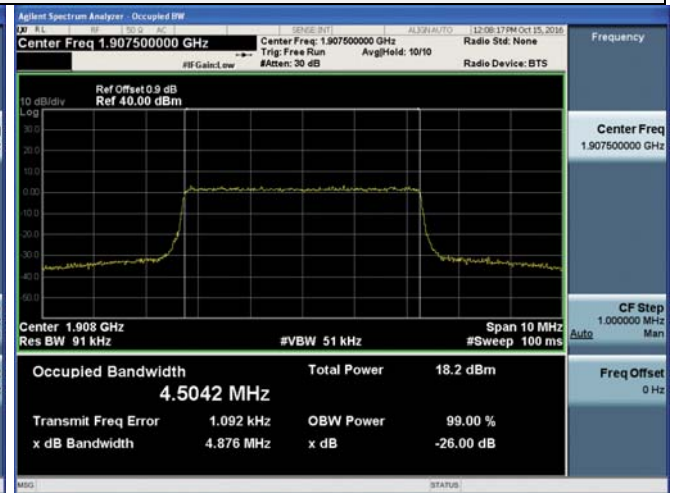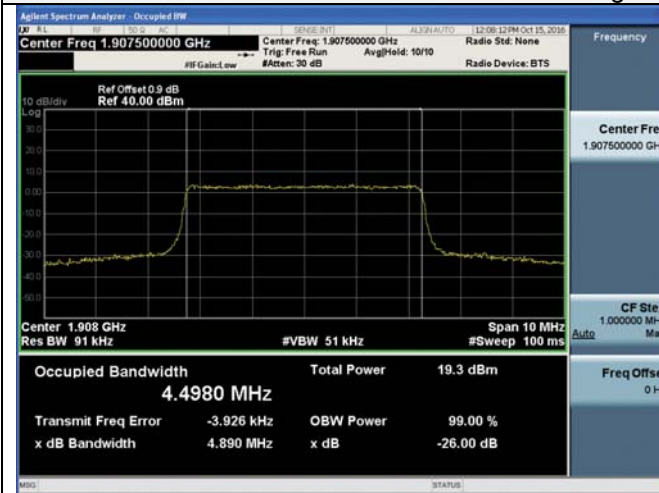

25RB#0



25RB#0

LTE FDD Band 2 – 10 MHz Channel Bandwidth Occupied Bandwidth and Emission Bandwidth

QPSK

16QAM



Low Channel

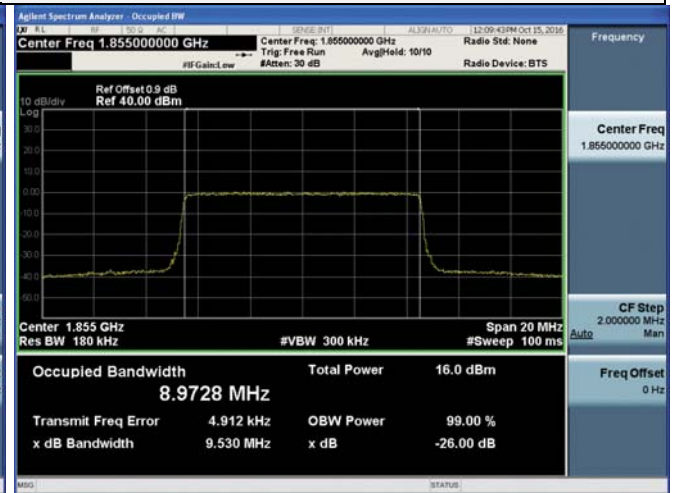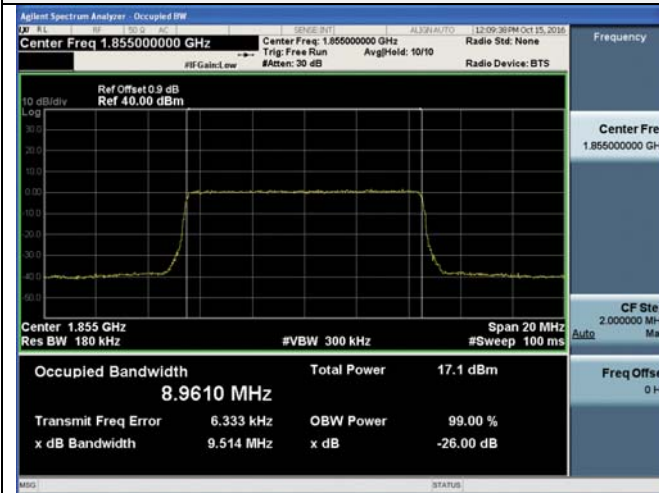

50RB#0

50RB#0



Middle Channel

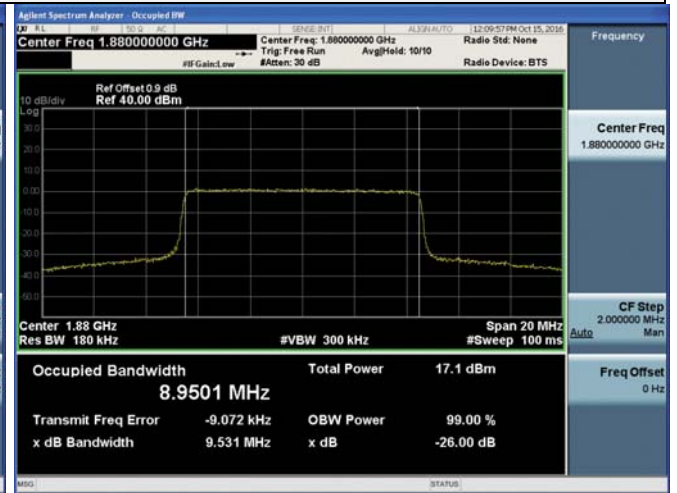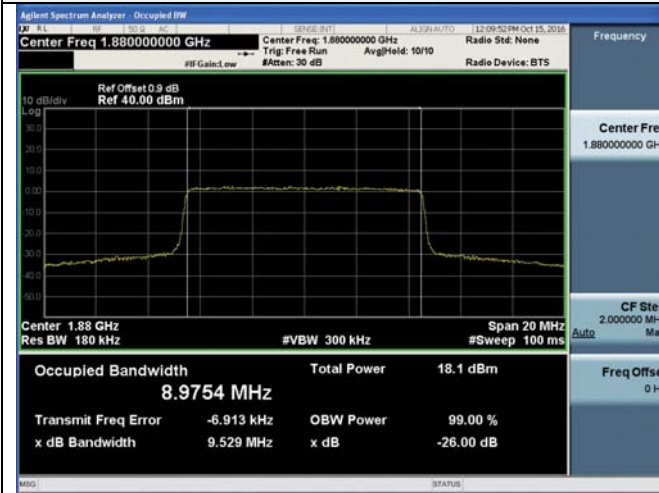

50RB#0

50RB#0

High Channel

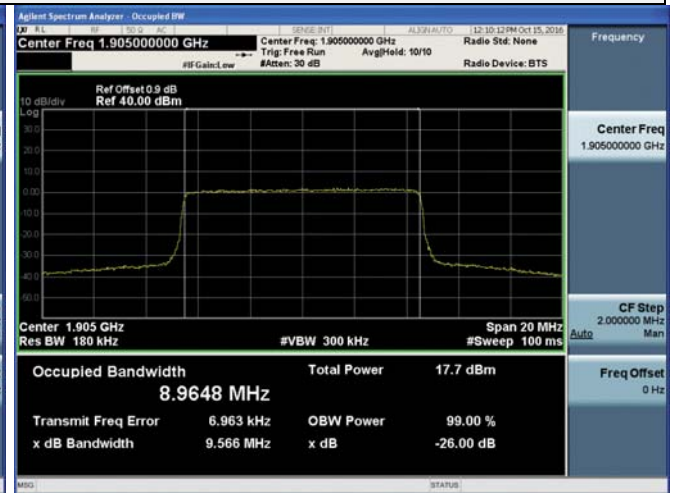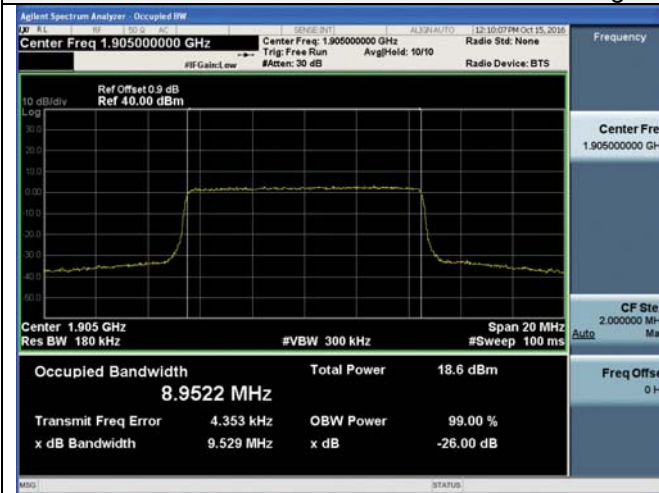

50RB#0



50RB#0

LTE FDD Band 2 – 15 MHz Channel Bandwidth Occupied Bandwidth and Emission Bandwidth

QPSK

16QAM



Low Channel

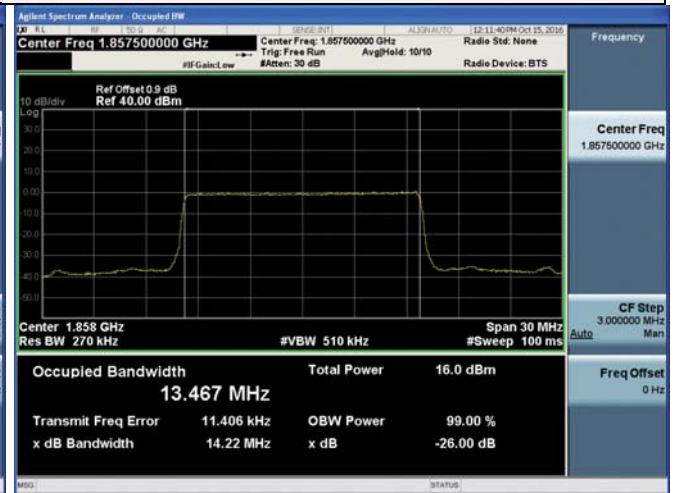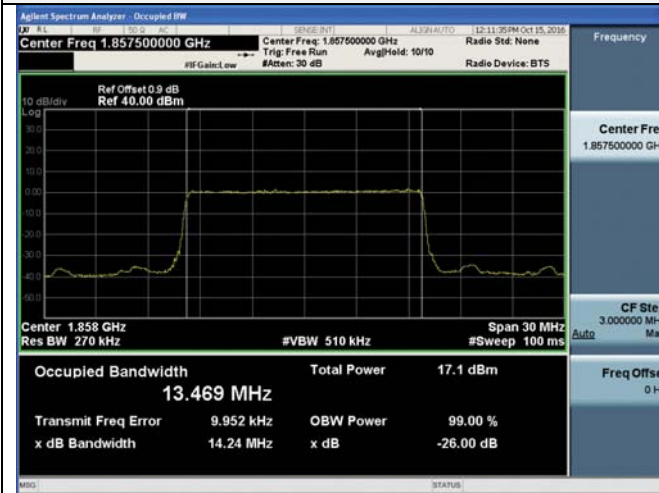

75RB#0

75RB#0



Middle Channel

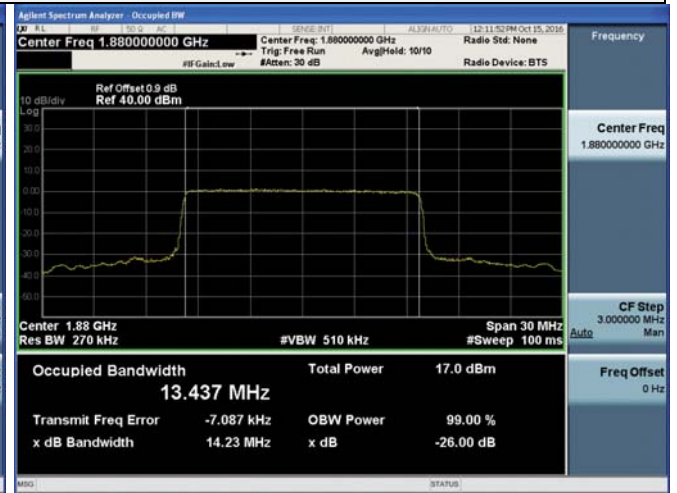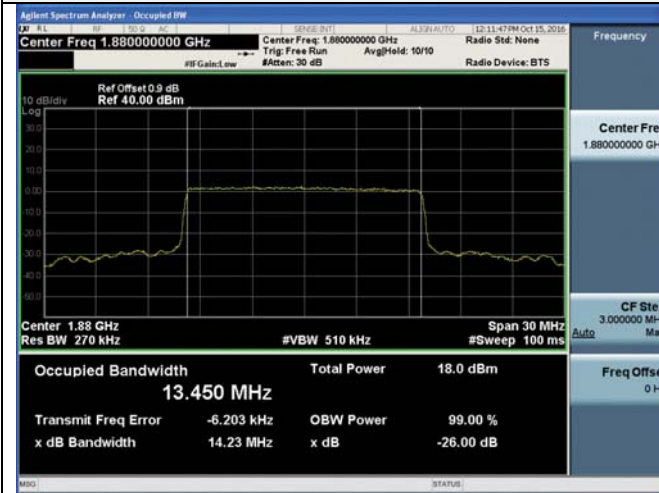

75RB#0

75RB#0

High Channel

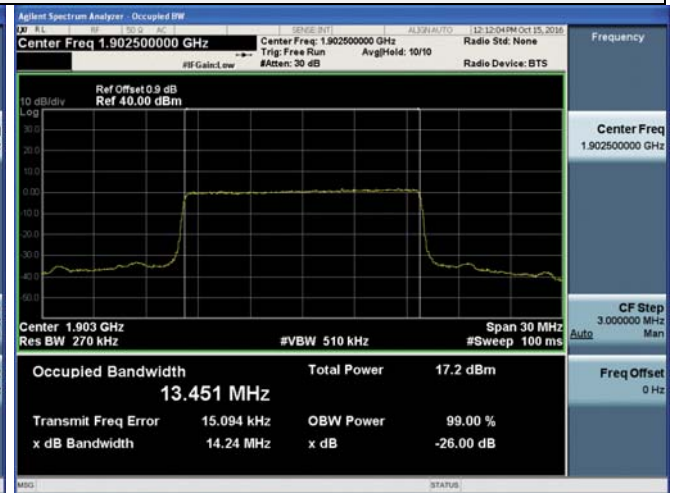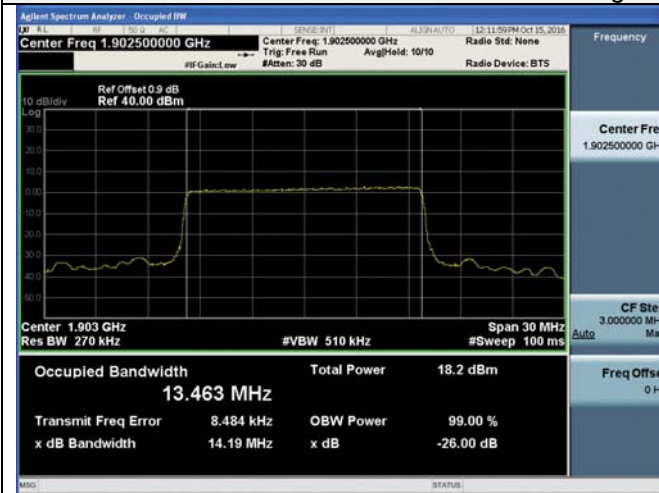

75RB#0



75RB#0

LTE FDD Band 2 – 20 MHz Channel Bandwidth Occupied Bandwidth and Emission Bandwidth

QPSK

16QAM



Low Channel

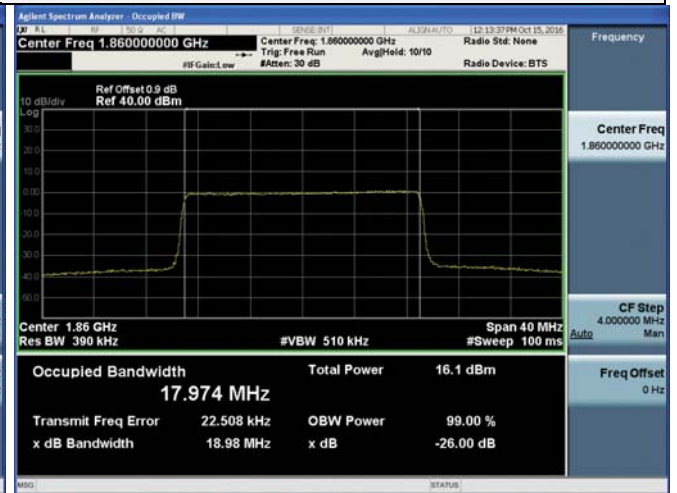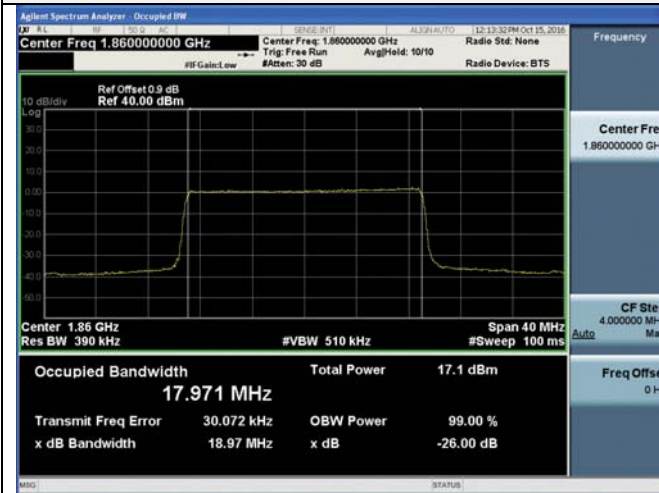

100RB#0

100RB#0



Middle Channel

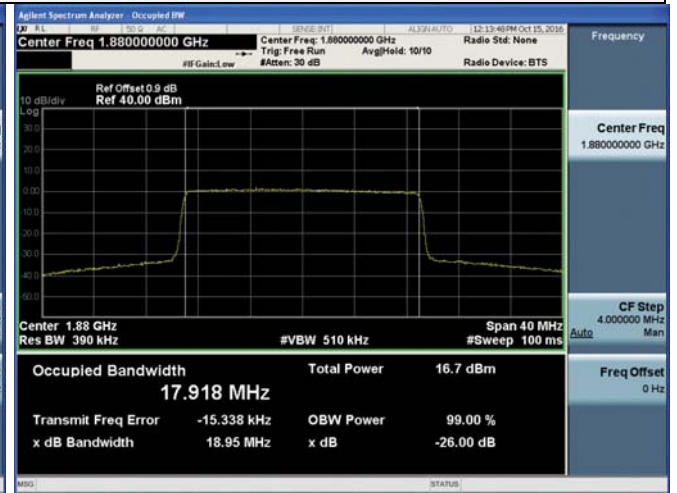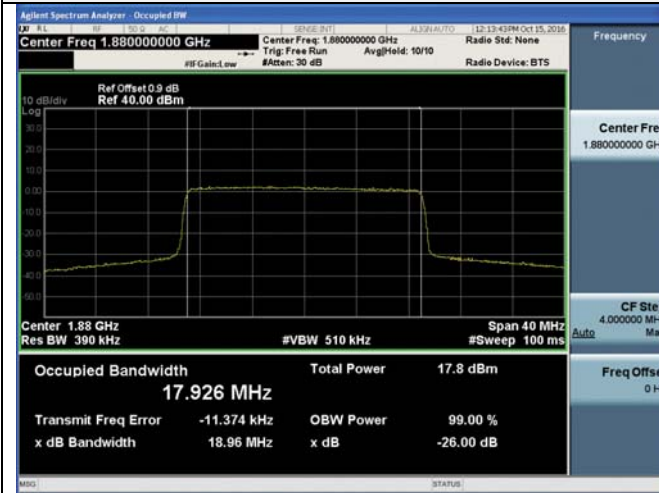

100RB#0

100RB#0

High Channel

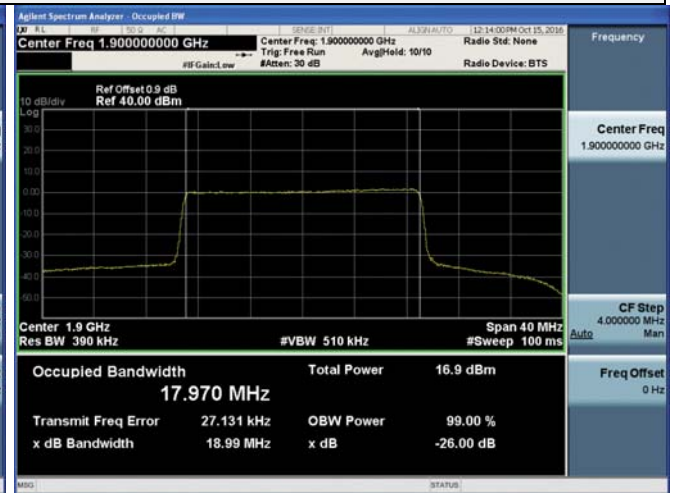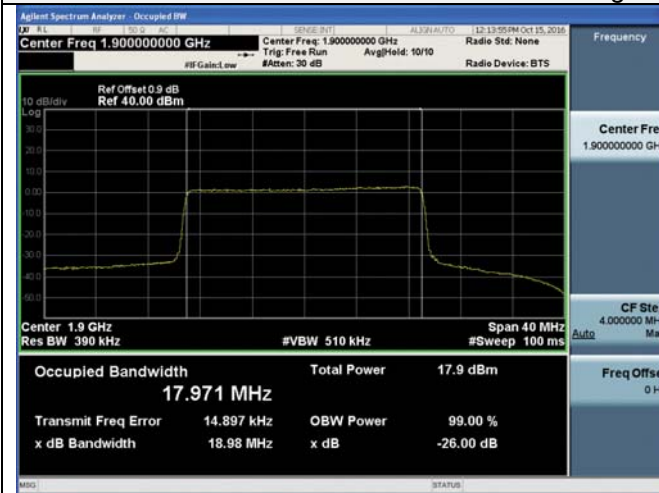

100RB#0


100RB#0

4.4 Band Edge compliance

LIMIT

Per FCC §24.238 the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10\log(P)$ dB.

TEST CONFIGURATION

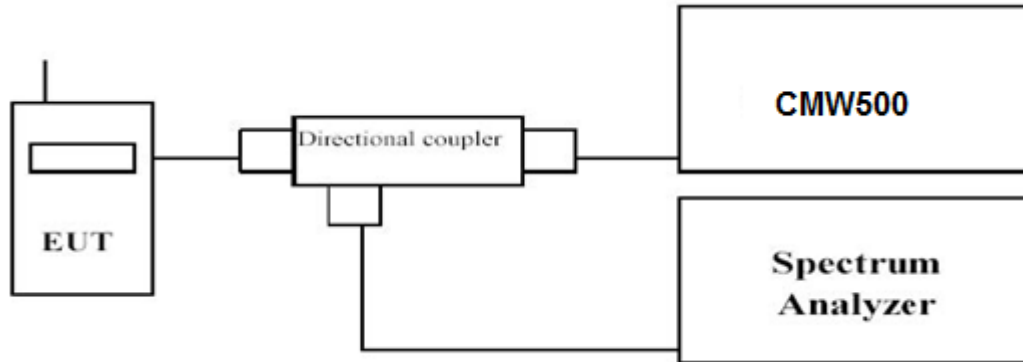

TEST PROCEDURE

1. The transmitter output port was connected to base station.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator, the path loss was compensated to the results for each measurement.
3. Set EUT at maximum power through base station.
4. Select lowest and highest channels for each band and different modulation.
5. Measure Band edge using RMS (Average) detector by spectrum

TEST RESULTS

Remark:

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 2; recorded worst case for each Channel Bandwidth of LTE FDD Band 2.
2. We measured at SIM 1 as conducted burst average power higher at SIM 1;

LTE FDD Band 2 – 1.4 MHz Channel Bandwidth Band Edge Compliance

QPSK

16QAM

Low Channel



6RB#0

6RB#0

High Channel



6RB#0

6RB#0

LTE FDD Band 2 – 3 MHz Channel Bandwidth Band Edge Compliance

QPSK

16QAM

Low Channel



15RB#0

15RB#0

High Channel



15RB#0

15RB#0

LTE FDD Band 2 – 5 MHz Channel Bandwidth Band Edge Compliance

QPSK

16QAM


Low Channel



25RB#0

25RB#0

High Channel

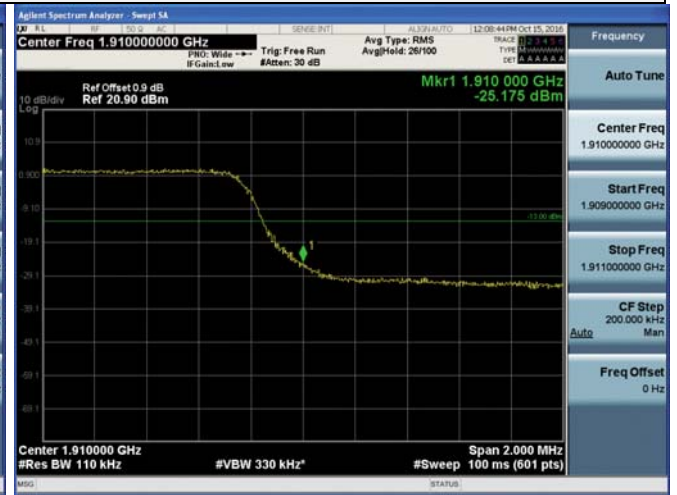

25RB#0

25RB#0

LTE FDD Band 2 – 10 MHz Channel Bandwidth Band Edge Compliance

QPSK

16QAM


Low Channel



50RB#0

50RB#0

High Channel

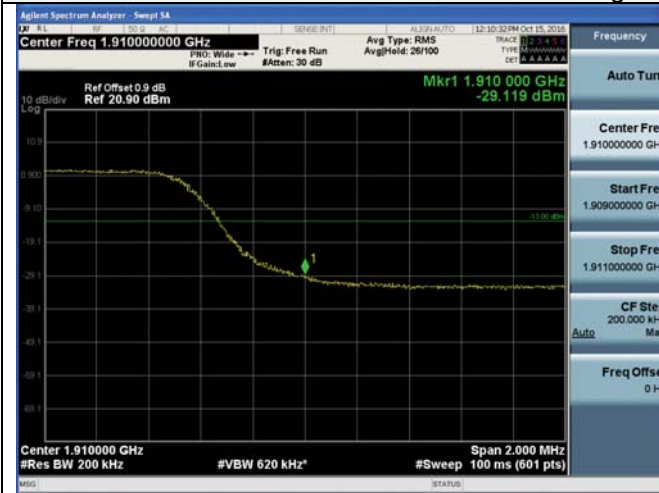

50RB#0

50RB#0

LTE FDD Band 2 – 15 MHz Channel Bandwidth Band Edge Compliance

QPSK

16QAM

Low Channel



75RB#0

75RB#0

High Channel



75RB#0

75RB#0

LTE FDD Band 2 – 20 MHz Channel Bandwidth Band Edge Compliance

QPSK

16QAM


Low Channel



100RB#0

100RB#0

High Channel

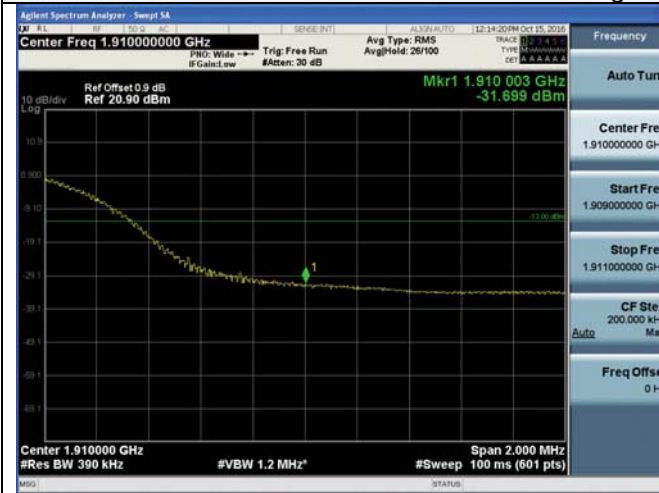

100RB#0


100RB#0

4.5 Spurious Emission on Antenna Port

LIMIT

Per FCC §24.238, the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10\log(P)$ dB.

TEST CONFIGURATION

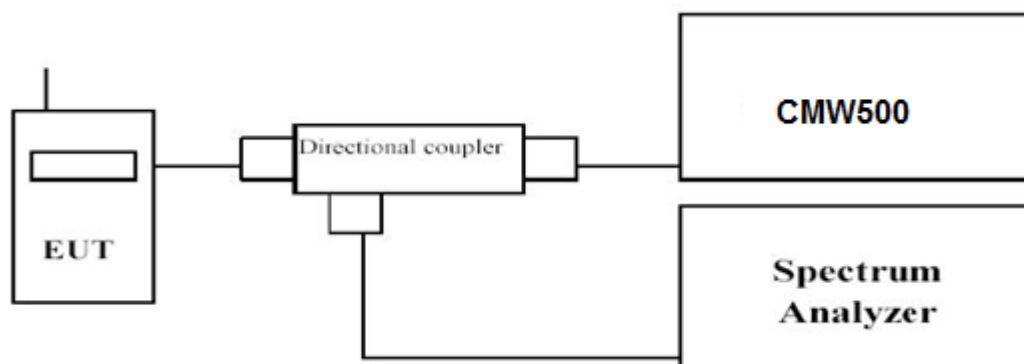

TEST PROCEDURE

The EUT was setup according to EIA/TIA 603D

- Place the EUT on a bench and set it in transmitting mode.
- Connect a low loss RF cable from the antenna port to a spectrum analyzer and CMW500 by a Directional Couple.
- EUT Communicate with CMW500, then select a channel for testing.
- Add a correction factor to the display of spectrum, and then test.
- The resolution bandwidth of the spectrum analyzer was set sufficient scans were taken to show the out of band Emission if any up to 10th harmonic.
- Please refer to following tables for test antenna conducted emissions.



Working Frequency	Sub range (GHz)	RBW	VBW	Sweep time (s)
LTE FDD Band 2	0.000009~0.000015	1KHz	3KHz	Auto
	0.000015~0.03	10KHz	30KHz	Auto
	0.03~4	1 MHz	3 MHz	Auto
	4~26	1 MHz	3 MHz	Auto

TEST RESULTS

Remark:



- We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 2; recorded worst case for each Channel Bandwidth of LTE FDD Band 2.
- We measured at SIM 1 as conducted burst average power higher at SIM 1;
- We measured at both QPSK and 16QAM modulation, recorded worst case at QPSK modulation;

LTE FDD Band 2 – 1.4 MHz Channel Bandwidth Conducted Spurious Emissions
 Low Channel (1RB#0) Middle Channel (1RB#0)

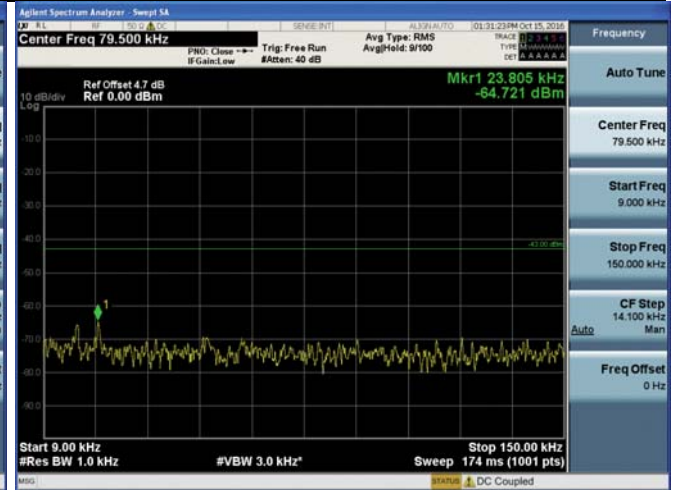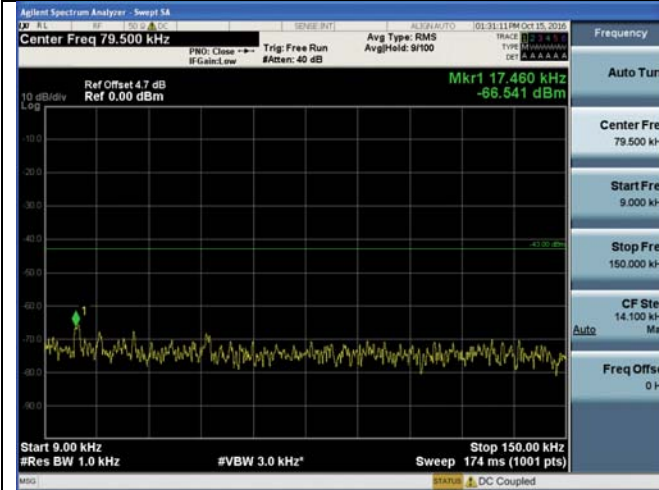


9 KHz – 150 KHz

9 KHz – 150 KHz

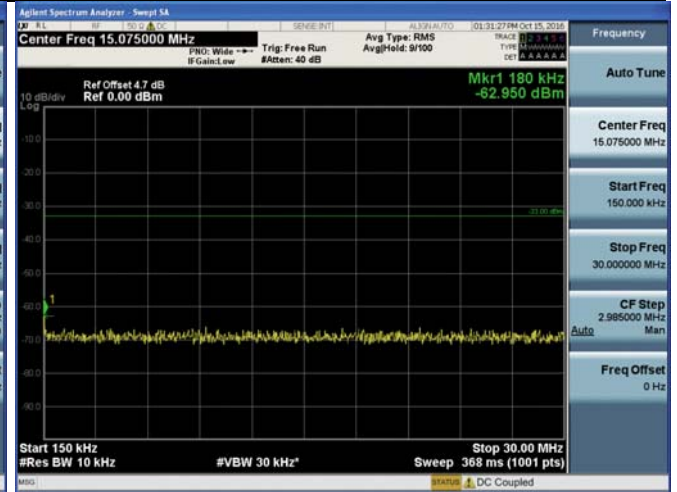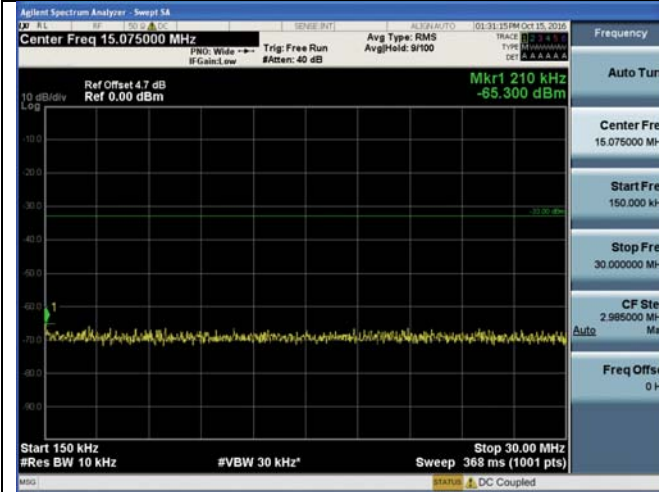

150 KHz – 30 MHz

150 KHz – 30 MHz

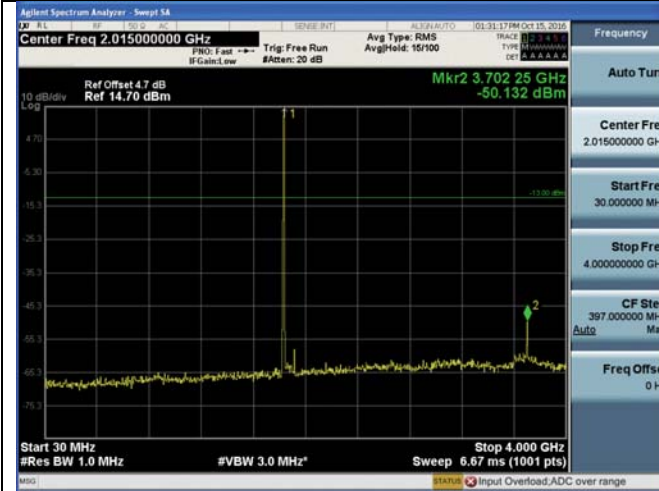

30 MHz – 4 GHz



30 MHz – 4 GHz

LTE FDD Band 2 – 1.4 MHz Channel Bandwidth Conducted Spurious Emissions
 Low Channel (1RB#0) Middle Channel (1RB#0)



4 GHz – 26 GHz
 High Channel (1RB#0)

4 GHz – 26 GHz
 High Channel (1RB#0)

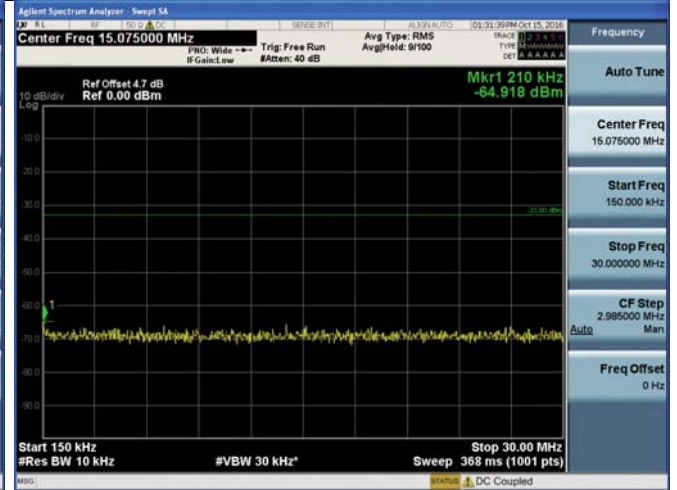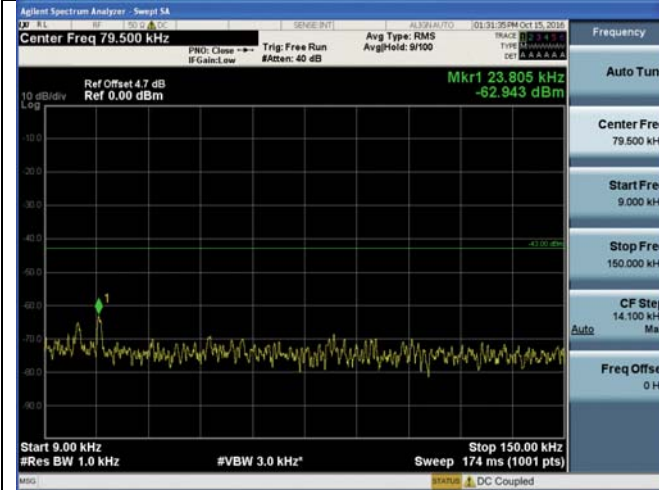

9 kHz – 150 kHz

150 kHz – 30 MHz



30 MHz – 4 GHz

4 GHz – 26 GHz