

FCC RF Test Report (WLAN 5GHz)

Report No.: RF170526E11B-1

FCC ID: RSE-OWA0130

Equipment Name: Technicolor Wi-Fi Video Bridge & Extender

Trade Name: technicolor

Model Number: OWA0130

Received Date: June 05, 2018

Test Date: June 18 to Aug. 15, 2018

Issued Date: Oct. 01, 2018

Applicant: Technicolor Delivery Technologies Belgium

Address: Prins Boudewijnlaan 47, 2650 Edegem Belgium

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory

Lab Address: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan R.O.C.

Test Location: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan R.O.C.

**FCC Registration /
Designation Number:** 723255 / TW2022



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	11
2.2 Modification Record	11
3 General Information	12
3.1 Basic Description of Equipment Under Test (WLAN 5GHz)	12
3.2 Accessories	18
3.3 Feature of Equipment Under Test	18
3.4 Information Provided by the Manufacturer	18
3.5 General Description of Applied Standards	19
3.6 Cabling Attached to the Equipment	20
3.7 Panel Drawing	21
3.8 Transmit Operating Mode	22
3.9 Antenna Requirements	22
3.10 Antenna Information	23
3.11 Table for Carrier Frequency	25
3.12 Table for Test Modes	26
3.13 Parameters of Test Software Setting	30
3.14 On Time and Duty Cycle	33
3.15 Testing Location Information	37
3.16 EUT Diagram and Support Equipment	38
4 Test Types and Results	40
4.1 AC Power Conducted Emissions Measurement	40
4.1.1 Limit	40
4.1.2 Measuring Instruments and Setting	40
4.1.3 Test Procedures	40
4.1.4 Test Setup Layout	41
4.1.5 Test Deviation	41
4.1.6 EUT Operating during Test	42
4.1.7 Test Results of AC Power Conducted Emissions	42
4.2 Occupied Bandwidth and 26dB Bandwidth Measurement	44
4.2.1 Measuring Instruments and Setting	44
4.2.2 Test Procedure	44
4.2.3 Test Setup Layout	45
4.2.4 Test Deviation	45
4.2.5 EUT Operating Conditions	45
4.2.6 Test Results	46
4.3 6dB Bandwidth Measurement	94
4.3.1 Limit	94
4.3.2 Measuring Instruments and Setting	94
4.3.3 Test Procedures	94
4.3.4 Test Setup Layout	94
4.3.5 Test Deviation	95
4.3.6 EUT Operating Conditions	95
4.3.7 Test Results of 6dB Bandwidth	96
4.4 Maximum Conducted Output Power Measurement	106
4.4.1 Limit	106
4.4.2 Measuring Instruments and Setting	106
4.4.3 Test Procedures	107
4.4.4 Test Setup Layout	107
4.4.5 Test Deviation	107
4.4.6 EUT Operating Conditions	107

4.4.7	Test Results of Maximum Conducted Output Power	108
4.5	Power Spectral Density Measurement.....	122
4.5.1	Limit	122
4.5.2	Measuring Instruments and Setting.....	122
4.5.3	Test Procedure	123
4.5.4	Test Setup Layout	123
4.5.5	Test Deviation.....	123
4.5.6	EUT Operating Conditions.....	123
4.5.7	Test Results.....	124
4.6	Radiated Emission and Bandedge Measurement.....	146
4.6.1	Limits of Unwanted emissions in the restricted bands	146
4.6.2	Limits of Unwanted emissions out of the restricted bands	147
4.6.3	Measuring Instruments and Setting.....	148
4.6.4	Test Procedures	149
4.6.5	Test Setup Layout	150
4.6.6	Test Deviation.....	151
4.6.7	EUT Operating Conditions.....	151
4.6.8	Test Results of Radiated Emissions and Bandedge	152
4.7	Frequency Stability Measurement.....	286
4.7.1	Limit	286
4.7.2	Measuring Instruments and Setting.....	286
4.7.3	Test Procedure	286
4.7.4	Test Setup Layout	287
4.7.5	Test Deviation.....	287
4.7.6	EUT Operating Conditions.....	287
4.7.7	Test Results.....	288
5	Test Instruments	291
	Appendix. Information on the Testing Laboratories.....	293

Release Control Record

Issue No.	Description	Date Issued
RF170526E11B-1	Original release.	Oct. 01, 2018

1 Certificate of Conformity

Equipment Name: Technicolor Wi-Fi Video Bridge & Extender
Trade Name: technicolor
Test Model: OWA0130
Sample Status: Product Unit
Applicant: Technicolor Delivery Technologies Belgium
Test Date: June 18 to Aug. 15, 2018
Standards: 47 CFR FCC Part 15, Subpart E (Section 15.407)
ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by : Wendy Wu , **Date:** Oct. 01, 2018
Wendy Wu / Specialist

Approved by : May Chen , **Date:** Oct. 01, 2018
May Chen / Manager

2 Summary of Test Results

Applied Standard: 47 CFR FCC Part 15 Subpart E					
Report Clause	Ref. Std. Clause	Description	Measured	Limit	Result
3.9	15.203	Antenna Requirements	-	-	PASS
4.1	15.407(b)(6)	AC Power Conducted Emissions	Margin is -10.35dB at 0.15391MHz.	-	PASS
4.2	-	99% Occupied Bandwidth & 26dB Bandwidth	99% Occupied Bandwidth 5150-5250MHz: 1S4T CDD Master 11a: 18.72 MHz 11ac (20M):20.16 MHz 11ac (40M):37.92 MHz 11ac (80M):75.48MHz Client 11a: 18.61 MHz 11ac (20M):19.68 MHz 11ac (40M):37.04 MHz 11ac (80M):75.82 MHz 1S4T TxBF Master 11ac (20M):20.04 MHz 11ac (40M):37.44 MHz 11ac (80M):75.48MHz Client 11ac (20M):19.80 MHz 11ac (40M):37.04 MHz 11ac (80M):75.48 MHz 5725-5850MHz: 1S4T CDD Master 11a: 19.68 MHz 11ac (20M):22.09 MHz 11ac (40M):38.96 MHz 11ac (80M):76.32 MHz 1S4T TxBF Master 11ac (20M):20.69 MHz 11ac (40M):38.96 MHz 11ac (80M):76.32 MHz	-	-

Applied Standard: 47 CFR FCC Part 15 Subpart E					
Report Clause	Ref. Std. Clause	Description	Measured	Limit	Result
4.2	-	99% Occupied Bandwidth & 26dB Bandwidth	26dB Bandwidth 5150-5250MHz: 1S4T CDD Master 11a: 22.72 MHz 11ac (20M):24.19 MHz 11ac (40M):43.36 MHz 11ac (80M):82.19 MHz Client 11a: 22.95 MHz 11ac (20M):24.37 MHz 11ac (40M):43.48 MHz 11ac (80M):82.96 MHz 1S4T TxBF Master 11ac (20M):24.36 MHz 11ac (40M):43.49 MHz 11ac (80M):82.19 MHz Client 11ac (20M):24.15 MHz 11ac (40M):43.41 MHz 11ac (80M):82.98 MHz	-	-
4.3	15.407(e)	6dB bandwidth for U-NII-3	5725-5850MHz: 1S4T CDD 11a: 16.39 MHz 11ac (20M):17.65 MHz 11ac (40M):36.43 MHz 11ac (80M):75.41 MHz 1S4T TxBF 11ac (20M):17.65 MHz 11ac (40M):36.43 MHz 11ac (80M):75.41 MHz	≥500kHz	PASS

Applied Standard: 47 CFR FCC Part 15 Subpart E					
Report Clause	Ref. Std. Clause	Description	Measured	Limit	Result
4.4	15.407 (a)(1/2/3)	Maximum Conducted Output Power	5150-5250MHz: Master 11a: 1S4T CDD: 25.93 dBm 11ac (20M): 1S4T CDD: 25.97 dBm 2S4T CDD: 25.94 dBm 4S4T SDM: 25.87 dBm 1S4T TxBF: 25.94 dBm 2S4T TxBF: 25.90 dBm 3S4T TxBF: 25.86 dBm 11ac (40M): 1S4T CDD: 26.34 dBm 2S4T CDD: 26.30 dBm 4S4T SDM: 26.20 dBm 1S4T TxBF: 26.40 dBm 2S4T TxBF: 26.35 dBm 3S4T TxBF: 26.30 dBm 11ac (80M): 1S4T CDD: 18.98 dBm 2S4T CDD: 18.91 dBm 4S4T SDM: 18.83 dBm 1S4T TxBF: 20.05 dBm 2S4T TxBF: 20.00 dBm 3S4T TxBF: 19.94 dBm Client 11a: 1S4T CDD: 22.54 dBm 11ac (20M): 1S4T CDD: 22.58 dBm 2S4T CDD: 22.54 dBm 4S4T SDM: 22.44 dBm 1S4T TxBF: 22.51 dBm 2S4T TxBF: 22.41 dBm 3S4T TxBF: 22.35 dBm 11ac (40M): 1S4T CDD: 21.78 dBm 2S4T CDD: 21.72 dBm 4S4T SDM: 21.50 dBm 1S4T TxBF: 22.67 dBm 2S4T TxBF: 21.61 dBm 3S4T TxBF: 22.59 dBm 11ac (80M): 1S4T CDD: 19.04 dBm 2S4T CDD: 18.97 dBm 4S4T SDM: 18.77 dBm 1S4T TxBF: 18.69 dBm 2S4T TxBF: 18.65 dBm 3S4T TxBF: 19.10 dBm	Power [dBm] 5150-5250MHz:30 5725-5850MHz:30	PASS

Applied Standard: 47 CFR FCC Part 15 Subpart E

Report Clause	Ref. Std. Clause	Description	Measured	Limit	Result
4.4	15.407 (a)(1/2/3)	Maximum Conducted Output Power	5725-5850MHz: Master 11a: 1S4T CDD: 25.87 dBm 11ac (20M): 1S4T CDD: 25.93 dBm 2S4T CDD: 25.90 dBm 4S4T SDM: 25.84 dBm 1S4T TxBF: 25.19 dBm 2S4T TxBF: 25.11 dBm 3S4T TxBF : 25.07 dBm 11ac (40M): 1S4T CDD: 26.25 dBm 2S4T CDD: 26.22 dBm 4S4T SDM: 26.11 dBm 1S4T TxBF: 26.46 dBm 2S4T TxBF: 26.41 dBm 3S4T TxBF: 26.35 dBm 11ac (80M): 1S4T CDD: 25.10 dBm 2S4T CDD: 24.99 dBm 4S4T SDM: 24.86 dBm 1S4T TxBF: 26.13 dBm 2S4T TxBF: 26.08 dBm 3S4T TxBF: 26.03 dBm	Power [dBm] 5150-5250MHz:30 5725-5850MHz:30	PASS

Applied Standard: 47 CFR FCC Part 15 Subpart E					
Report Clause	Ref. Std. Clause	Description	Measured	Limit	Result
4.5	15.407 (a)(1/2/3)	Power Spectral Density	5150-5250MHz: [dBm/MHz] Master 11a: 1S4T CDD: 12.92 11ac (20M): 1S4T CDD: 12.52 1S4T TxBF: 12.52 11ac (40M): 1S4T CDD: 9.80 1S4T TxBF:9.87 11ac (80M): 1S4T CDD: 0.32 1S4T TxBF:1.35 Client 11a: 1S4T CDD: 10.21 11ac (20M): 1S4T CDD: 9.72 1S4T TxBF: 9.72 11ac (40M): 1S4T CDD: 5.93 1S4T TxBF:7.06 11ac (80M): 1S4T CDD: 0.60 1S4T TxBF:1.63 5725-5850MHz: [dBm/500kHz] Master 11a: 1S4T CDD: 6.43 11ac (20M): 1S4T CDD: 5.92 1S4T TxBF: 5.03 11ac (40M): 1S4T CDD: 2.65 1S4T TxBF:2.66 11ac (80M): 1S4T CDD: -0.96 1S4T TxBF:-0.13	5150-5250MHz: 17 [dBm/MHz] 5725-5850MHz: 30 [dBm/500kHz]	PASS
4.6	15.407 (b)(1/2/3/4/6)	Radiated Emissions	Margin is -3.1dB at 10400.00MHz, 17355.00MHz.	-	PASS
		Band Edge	Margin is -1.8dB at 5641.95MHz	-	PASS
4.7	15.407(g)	Frequency Stability	-	Signal shall remain in-band	PASS

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (\pm)
Conducted Emissions at mains ports	150kHz ~ 30MHz	1.84 dB
Radiated Emissions up to 1 GHz	30MHz ~ 1GHz	5.53 dB
Radiated Emissions above 1 GHz	1GHz ~ 6GHz	5.08 dB
	6GHz ~ 18GHz	4.98 dB
	18GHz ~ 40GHz	5.19 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 Basic Description of Equipment Under Test (WLAN 5GHz)

Items	Description		
Equipment Name	Technicolor Wi-Fi Video Bridge & Extender		
Trade Name	technicolor		
Model Number	OWA0130		
FCC ID	RSE-OWA0130		
Power Type	From power adapter		
Antenna	Refer section 3.10		
EUT Stage	<input checked="" type="checkbox"/>	Product Unit	<input type="checkbox"/> Pre-Sample
Operating Band and Conducted Output Power	U-NII-1 5150~5250MHz	<input checked="" type="checkbox"/>	IEEE 802.11a: Master 1S4T CDD Mode: 25.93 dBm Client 1S4T CDD Mode: 22.54 dBm
		<input checked="" type="checkbox"/>	IEEE 802.11ac (20MHz): Master 1S4T CDD Mode: 25.97 dBm 2S4T CDD Mode: 25.94 dBm 4S4T SDM Mode: 25.87 dBm 1S4T TxBF Mode: 25.94 dBm 2S4T TxBF Mode: 25.90 dBm 3S4T TxBF Mode: 25.86 dBm Client 1S4T CDD Mode: 22.58 dBm 2S4T CDD Mode: 22.54 dBm 4S4T SDM Mode: 22.44 dBm 1S4T TxBF Mode: 22.51 dBm 2S4T TxBF Mode: 22.41 dBm 3S4T TxBF Mode: 22.35 dBm
		<input checked="" type="checkbox"/>	IEEE 802.11ac (40MHz): Master 1S4T CDD Mode: 26.34 dBm 2S4T CDD Mode: 26.30 dBm 4S4T SDM Mode: 26.20 dBm 1S4T TxBF Mode: 26.40 dBm 2S4T TxBF Mode: 26.35 dBm 3S4T TxBF Mode: 26.30 dBm Client 1S4T CDD Mode: 21.78 dBm 2S4T CDD Mode: 21.72 dBm 4S4T SDM Mode: 21.50 dBm 1S4T TxBF Mode: 22.67 dBm 2S4T TxBF Mode: 21.61 dBm 3S4T TxBF Mode: 22.59 dBm

Operating Band and Conducted Output Power	U-NII-1 5150~5250MHz	■	IEEE 802.11ac (80MHz): Master 1S4T CDD Mode: 18.98 dBm 2S4T CDD Mode: 18.91 dBm 4S4T SDM Mode: 18.83 dBm 1S4T TxBF Mode: 20.05 dBm 2S4T TxBF Mode: 20.00 dBm 3S4T TxBF Mode: 19.94 dBm Client 1S4T CDD Mode: 19.04 dBm 2S4T CDD Mode: 18.97 dBm 4S4T SDM Mode: 18.77 dBm 1S4T TxBF Mode: 18.69 dBm 2S4T TxBF Mode: 18.65 dBm 3S4T TxBF Mode: 19.10 dBm
	U-NII-2A 5250~5350MHz	<input type="checkbox"/>	IEEE 802.11a:
		<input type="checkbox"/>	IEEE 802.11ac (20MHz) :
		<input type="checkbox"/>	IEEE 802.11ac (40MHz):
		<input type="checkbox"/>	IEEE 802.11ac (80MHz):
	U-NII-2C 5470~ 5725 MHz	<input type="checkbox"/>	IEEE 802.11a:
		<input type="checkbox"/>	IEEE 802.11ac (20MHz):
		<input type="checkbox"/>	IEEE 802.11ac (40MHz):
		<input type="checkbox"/>	IEEE 802.11ac (80MHz):
	U-NII-3 5725~ 5850 MHz	■	IEEE 802.11a: 1S4T CDD Mode: 25.87 dBm
		■	IEEE 802.11ac (20MHz): 1S4T CDD Mode: 25.93 dBm 2S4T CDD Mode: 25.90 dBm 4S4T SDM Mode: 25.84 dBm 1S4T TxBF Mode: 25.19 dBm 2S4T TxBF Mode: 25.11 dBm 3S4T TxBF Mode: 25.07 dBm
		■	IEEE 802.11ac (40MHz): 1S4T CDD Mode: 26.25 dBm 2S4T CDD Mode: 26.22 dBm 4S4T SDM Mode: 26.11 dBm 1S4T TxBF Mode: 26.46 dBm 2S4T TxBF Mode: 26.41 dBm 3S4T TxBF Mode: 26.35 dBm
		■	IEEE 802.11ac (80MHz): 1S4T CDD Mode: 25.10 dBm 2S4T CDD Mode: 24.99 dBm 4S4T SDM Mode: 24.86 dBm 1S4T TxBF Mode: 26.13 dBm 2S4T TxBF Mode: 26.08 dBm 3S4T TxBF Mode: 26.03 dBm
Product Type	For IEEE 802.11a: WLAN (4TX, 4RX) For IEEE 802.11n: WLAN (4TX, 4RX) For IEEE 802.11ac: WLAN (4TX, 4RX)		
Nominal Bandwidth	20MHz / 40MHz / 80MHz		
Modulation	802.11a: OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11n: (BPSK / QPSK / 16QAM / 64QAM) See the below table 802.11ac: (BPSK / QPSK / 16QAM / 64QAM/ 256QAM) See the below table		

Data Rate (Mbps)	11a mode OFDM (6/9/12/18/24/36/48/54) 11n(20MHz) mode (MCS0~MCS31) 11n(40MHz) mode (MCS0~MCS31) 11ac(20MHz) mode (MCS0~MCS9 for NSS1~NSS4) 11ac(40MHz) mode (MCS0~MCS9 for NSS1~NSS4) 11ac(80MHz) mode (MCS0~MCS9 for NSS1~NSS4)		
TPC Function	<input type="checkbox"/>	With TPC	<input checked="" type="checkbox"/> Without TPC
Beam forming Function	<input checked="" type="checkbox"/>	With Beam forming	<input type="checkbox"/> Without Beam forming
DFS Function	<input type="checkbox"/>	5250~5350MHz	
	<input type="checkbox"/>	5470~5725MHz	
	<input type="checkbox"/>	5600~5650MHz	
Off Channel CAC Feature Implemented	<input checked="" type="checkbox"/>	No	
Ad-hoc/Hotspot Mode	<input checked="" type="checkbox"/>	No Ad-hoc/Hotspot operation in 5150 - 5350 MHz and 5470 - 5725 MHz.	
User Access Restrictions	<input checked="" type="checkbox"/>	DFS controls (hardware or software) related to radar detection are NOT accessible to the user.	
I/O Ports	LAN Port x 2 DC JACK x 1		
Hardware Version	Lab2		
Software Version	12.1.4.3.AA		

802.11n Data Rate spec

Standard	INDEX	Data Rate (Mbps)		Standard	INDEX	Data Rate (Mbps)	
		LGI (800ns)	SGL (400ns)			LGI (800ns)	SGL (400ns)
11n 20MHz Nss=1	MCS0	6.5	7.2	11n 40MHz Nss=1	MCS0	13.5	15
	MCS1	13	14.4		MCS1	27	30
	MCS2	19.5	21.7		MCS2	40.5	45
	MCS3	26	28.9		MCS3	54	60
	MCS4	39	43.3		MCS4	81	90
	MCS5	52	57.8		MCS5	108	120
	MCS6	58.5	65		MCS6	121.5	135
	MCS7	65	72.2		MCS7	135	150
11n 20MHz Nss=2	MCS8	13	14.4	11n 40MHz Nss=2	MCS8	27	30
	MCS9	26	28.9		MCS9	54	60
	MCS10	39	43.3		MCS10	81	90
	MCS11	52	57.8		MCS11	108	120
	MCS12	78	86.7		MCS12	162	180
	MCS13	104	115.6		MCS13	216	240
	MCS14	117	130		MCS14	243	270
	MCS15	130	144.4		MCS15	270	300
11n 20MHz Nss=3	MCS16	19.5	21.7	11n 40MHz Nss=3	MCS16	40.5	45
	MCS17	39	43.3		MCS17	81	90
	MCS18	58.5	65		MCS18	121.5	135
	MCS19	78	86.7		MCS19	162	180
	MCS20	117	130		MCS20	243	270
	MCS21	156	173.3		MCS21	324	360
	MCS22	175.5	195		MCS22	364.5	405
	MCS23	195	216.7		MCS23	405	450
11n 20MHz Nss=4	MCS24	26	28.9	11n 40MHz Nss=4	MCS24	54	60
	MCS25	52	57.8		MCS25	108	120
	MCS26	78	86.7		MCS26	162	180
	MCS27	104	115.6		MCS27	216	240
	MCS28	156	173.3		MCS28	324	260
	MCS29	208	231.1		MCS29	432	480
	MCS30	234	260		MCS30	486	540
	MCS31	260	288.9		MCS31	540	600

802.11ac Data Rate spec

Standard	INDEX	Data Rate (Mbps)		Standard	INDEX	Data Rate (Mbps)		Standard	INDEX	Data Rate (Mbps)	
		LGI (800ns)	SGI (400ns)			LGI (800ns)	SGI (400ns)			LGI (800ns)	SGI (400ns)
11ac 20MHz NSS = 1	MCS0	6.5	7.2	11ac 40MHz NSS = 1	MCS0	13.5	15.0	11ac 80MHz NSS = 1	MCS0	29.3	32.5
	MCS1	13.0	14.4		MCS1	27	30.0		MCS1	58.5	65.0
	MCS2	19.5	21.7		MCS2	40.5	45.0		MCS2	87.8	97.5
	MCS3	26	28.9		MCS3	54	60.0		MCS3	117.0	130.0
	MCS4	39	43.3		MCS4	81	90.0		MCS4	175.5	195.0
	MCS5	52	57.8		MCS5	108	120.0		MCS5	234.0	260.0
	MCS6	58.5	65		MCS6	121.5	135.0		MCS6	263.3	292.5
	MCS7	65	72.2		MCS7	135.0	150.0		MCS7	292.5	325.0
	MCS8	78	86.7		MCS8	162.0	180.0		MCS8	351.0	390.0
	MCS9	Note	Note		MCS9	180.0	200.0		MCS9	390.0	433.3

NOTE: MCS 9 is invalid due to mod(NCBPS/NES, DR) not being equal to 0.

Standard	INDEX	Data Rate (Mbps)		Standard	INDEX	Data Rate (Mbps)		Standard	INDEX	Data Rate (Mbps)	
		LGI (800ns)	SGI (400ns)			LGI (800ns)	SGI (400ns)			LGI (800ns)	SGI (400ns)
11ac 20MHz NSS = 2	MCS0	13.0	14.4	11ac 40MHz NSS = 2	MCS0	27.0	30.0	11ac 80MHz NSS = 2	MCS0	58.5	65.0
	MCS1	26.0	28.9		MCS1	54.0	60.0		MCS1	117.0	130.0
	MCS2	39.0	43.3		MCS2	81.0	90.0		MCS2	175.5	195.0
	MCS3	52.0	57.8		MCS3	108.0	120.0		MCS3	234.0	260.0
	MCS4	78.0	86.7		MCS4	162.0	180.0		MCS4	351.0	390.0
	MCS5	104.0	115.6		MCS5	216.0	240.0		MCS5	468.0	520.0
	MCS6	117.0	130.0		MCS6	243.0	270.0		MCS6	526.5	585.0
	MCS7	130.0	144.4		MCS7	270.0	300.0		MCS7	585.0	650.0
	MCS8	156.0	173.3		MCS8	324.0	360.0		MCS8	702.0	780.0
	MCS9	13.0	14.4		MCS9	360.0	400.0		MCS9	780.0	866.7

Standard	INDEX	Data Rate (Mbps)		Standard	INDEX	Data Rate (Mbps)		Standard	INDEX	Data Rate (Mbps)	
		LGI (800ns)	SGI (400ns)			LGI (800ns)	SGI (400ns)			LGI (800ns)	SGI (400ns)
11ac 20MHz NSS = 3	MCS0	19.5	21.7	11ac 40MHz NSS = 3	MCS0	40.5	45.0	11ac 80MHz NSS = 3	MCS0	87.8	97.5
	MCS1	39.0	43.3		MCS1	81.0	90.0		MCS1	175.5	195.0
	MCS2	58.5	65.0		MCS2	121.5	135.0		MCS2	263.3	292.5
	MCS3	78.0	86.7		MCS3	162.0	180.0		MCS3	351.0	190.0
	MCS4	117.0	130		MCS4	243.0	270.0		MCS4	526.5	585.0
	MCS5	156.0	173.3		MCS5	324.0	360.0		MCS5	702.0	780.0
	MCS6	175.5	195.0		MCS6	364.5	405.0		MCS6	Note	Note
	MCS7	195.0	216.7		MCS7	405.0	450.0		MCS7	877.5	975.0
	MCS8	234.0	260.0		MCS8	486.0	540.0		MCS8	1053.0	1170.0
	MCS9	260.0	228.9		MCS9	540.0	600.0		MCS9	1170.0	1300.0

NOTE: MCS 6 is invalid due to mod(NCBPS/NES, DR) not being equal to 0.

Standard	INDEX	Data Rate (Mbps)		Standard	INDEX	Data Rate (Mbps)		Standard	INDEX	Data Rate (Mbps)	
		LGI (800ns)	SGI (400ns)			LGI (800ns)	SGI (400ns)			LGI (800ns)	SGI (400ns)
11ac 20MHz NSS = 4	MCS0	26.0	28.9	11ac 40MHz NSS = 4	MCS0	54.0	60.0	11ac 80MHz NSS = 4	MCS0	117.0	130.0
	MCS1	52.0	57.8		MCS1	108.0	120.0		MCS1	234.0	260.0
	MCS2	78.0	86.7		MCS2	162.0	180.0		MCS2	351.0	390.0
	MCS3	104.0	115.6		MCS3	216.0	240.0		MCS3	468.0	520.0
	MCS4	156.0	173.3		MCS4	324.0	360.0		MCS4	702.0	780.0
	MCS5	208.0	231.1		MCS5	432.0	480.0		MCS5	936.0	1040.0
	MCS6	234.0	260.0		MCS6	486.0	540.0		MCS6	1053.0	1170.0
	MCS7	260.0	288.9		MCS7	540.0	600.0		MCS7	1170.0	1300.0
	MCS8	312.0	346.7		MCS8	648.0	720.0		MCS8	1404.0	1560.0
	MCS9	Note	Note		MCS9	720.0	800.0		MCS9	1560.0	1733.3

NOTE: MCS 9 is invalid due to mod(NCBPS/NES, DR) not being equal to 0.

3.2 Accessories

Power supply:

Power Adaptor	
Brand	AcBel
Model	WAG027
P/N	DSL37647540
Input Power	100-240Vac, 50/60Hz, 0.6A max
Output Power	12Vdc, 1.5A
Cable Length	1.5m

3.3 Feature of Equipment Under Test

Please refer to user manual.

3.4 Information Provided by the Manufacturer

Interface Availability

Interface Model	DC Power	Ethernet LAN 1000Mbps	WLAN IEEE 802.11n (2.4GHz)	WLAN IEEE 802.11n/ac (5GHz)
OWA0130	●(1.5A)	●(2 port)	●	●

●: Equipped

○: Not Equipped

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart E (15.407)

KDB 789033 D02 General UNII Test Procedure New Rules v02r01, 12/14/2017

KDB 662911 D01 Multiple Transmitter Output v02r01, 10/31/2013

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

3.6 Cabling Attached to the Equipment

Cable and Interconnection

Interface	Cable type	Cable length delivered with the modem	"Real life" Cable length that can be attached to this type of interface	Cable length to be used for testing	Internal/ external connection
Ethernet	UTP Cat 5	2 meter	> 10 meter	one 10 meter cables;	Internal
AC power		1.5 meter			External

3.7 Panel Drawing



Label of Power adapter



3.8 Transmit Operating Mode

For 5150~5250MHz & 5725~5850MHz

Transmit Operating Mode						Transmit Multiple Antennas					
<input type="checkbox"/>	Operating mode 1 (single antenna)					<input type="checkbox"/>	1TX				
<input checked="" type="checkbox"/>	Operating mode 2 (multiple antenna, no beam forming)					<input type="checkbox"/>	2TX	<input type="checkbox"/>	3TX	<input checked="" type="checkbox"/>	4TX
<input checked="" type="checkbox"/>	Operating mode 3 (multiple antenna, with beam forming)					<input type="checkbox"/>	2TX	<input type="checkbox"/>	3TX	<input checked="" type="checkbox"/>	4TX
<input checked="" type="checkbox"/>	802.11a	Operating mode	<input type="checkbox"/>	1T	<input type="checkbox"/>	2T	<input type="checkbox"/>	3TX	<input checked="" type="checkbox"/>	4TX	
<input checked="" type="checkbox"/>	802.11n (20MHz)	Operating mode	<input type="checkbox"/>	1T	<input type="checkbox"/>	2T	<input type="checkbox"/>	3TX	<input checked="" type="checkbox"/>	4TX	
<input checked="" type="checkbox"/>	802.11n (40MHz)	Operating mode	<input type="checkbox"/>	1T	<input type="checkbox"/>	2T	<input type="checkbox"/>	3TX	<input checked="" type="checkbox"/>	4TX	
<input checked="" type="checkbox"/>	802.11ac (20MHz)	Operating mode	<input type="checkbox"/>	1T	<input type="checkbox"/>	2T	<input type="checkbox"/>	3TX	<input checked="" type="checkbox"/>	4TX	
<input checked="" type="checkbox"/>	802.11ac (40MHz)	Operating mode	<input type="checkbox"/>	1T	<input type="checkbox"/>	2T	<input type="checkbox"/>	3TX	<input checked="" type="checkbox"/>	4TX	
<input checked="" type="checkbox"/>	802.11ac (80MHz)	Operating mode	<input type="checkbox"/>	1T	<input type="checkbox"/>	2T	<input type="checkbox"/>	3TX	<input checked="" type="checkbox"/>	4TX	

Note:

For IEEE802.11a, 6Mbps~54Mbps: 4TX

For IEEE802.11n 20/40MHz, MCS0~MCS7: 1 Stream 4TX; MCS8~MCS15: 2 Stream 4TX;

MCS16~MCS23: 3 Stream 4TX; MCS24~MCS31: 4 Stream 4TX;

For IEEE802.11ac 20MHz and IEEE802.11ac 40/80MHz, Nss1MCS0~Nss1MCS8: 1 Stream 4TX;

Nss2MCS0~Nss2MCS9: 2 Stream 4TX; Nss3MCS0~Nss3MCS9: 3 Stream 4TX;


Nss4MCS0~Nss4MCS9: 4 Stream 4TX

3.9 Antenna Requirements

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

3.10 Antenna Information

Ant.	Brand	Model Name	Antenna Type	Connector	Cable Length
1	technicolor	--	Printed Antenna	Murata	--
2	technicolor	--	Printed Antenna	Murata	--
3	technicolor	--	Printed Antenna	I-pex	340mm
4	technicolor	--	Printed Antenna	I-pex	150mm

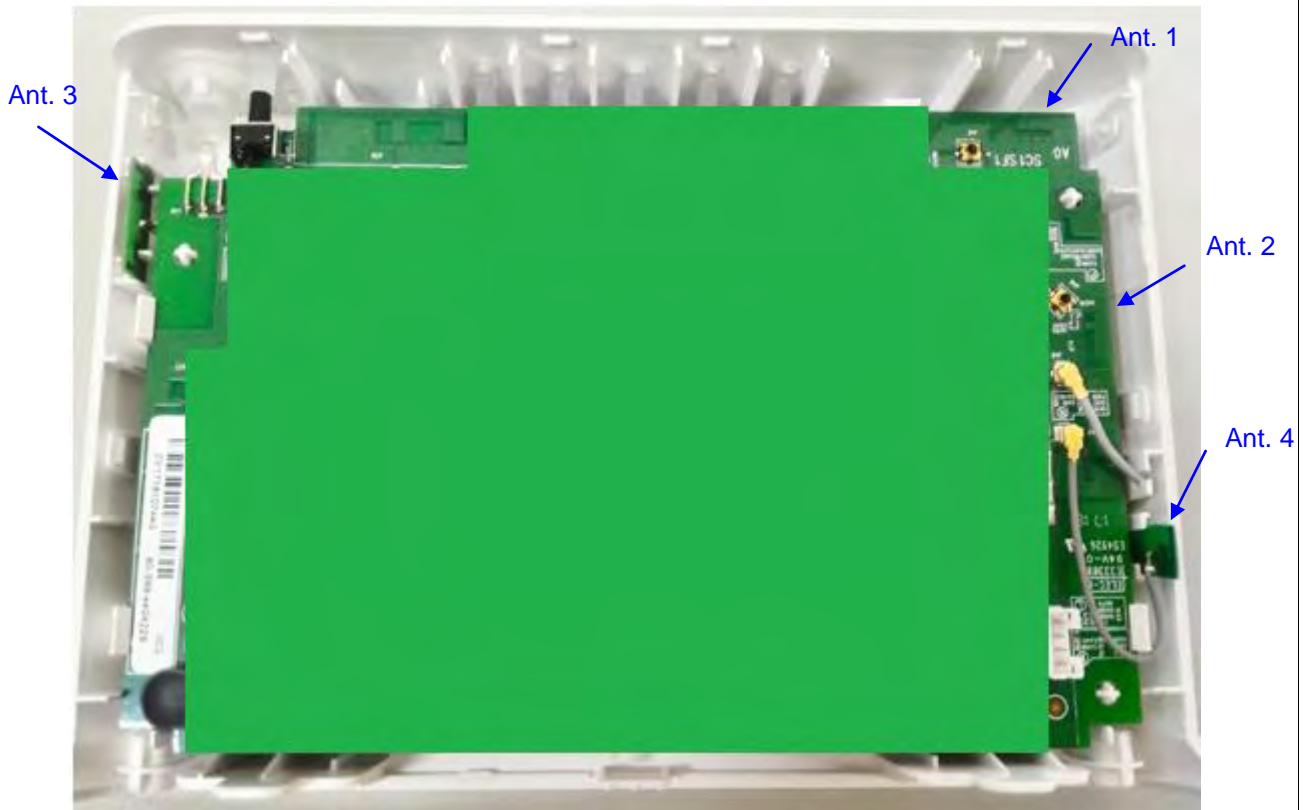

Antenna & Bandwidth

Antenna	1st (TX)			2nd (TX)			3rd (TX)			4th (TX)		
	20 MHz	40 MHz	80 MHz	20 MHz	40 MHz	80 MHz	20 MHz	40 MHz	80 MHz	20 MHz	40 MHz	80 MHz
802.11a	V	X	X	V	X	X	V	X	X	V	X	X
802.11n	V	V	X	V	V	X	V	V	X	V	V	X
802.11ac	V	V	V	V	V	V	V	V	V	V	V	V

Frequency	Antenna Gain (dBi) for CDD/TxBF/SDM mode											
	1 Stream 4 TX for CDD/TxBF mode			2 Stream 4 TX for CDD/TxBF mode			3 Stream 4 TX for TxBF mode			4 Stream 4 TX for SDM mode		
	20 MHz	40 MHz	80 MHz	20 MHz	40 MHz	80 MHz	20 MHz	40 MHz	80 MHz	20 MHz	40 MHz	80 MHz
5180MHz	7.01	-	-	4.04	-	-	2.32	-	-	1.07	-	-
5190MHz	-	7.25	-	-	4.35	-	-	2.64	-	-	1.39	-
5200MHz	6.49	-	-	3.61	-	-	1.92	-	-	0.67	-	-
5210MHz	-	-	6.74	-	-	3.86	-	-	2.16	-	-	0.92
5230MHz	-	7.29	-	-	4.42	-	-	2.71	-	-	1.46	-
5240MHz	6.65	-	-	3.83	-	-	2.23	-	-	1	-	-
5260MHz	6.81	-	-	3.88	-	-	2.2	-	-	0.95	-	-
5270MHz	-	7.89	-	-	5	-	-	3.33	-	-	2.09	-
5290MHz	-	-	7.31	-	-	4.4	-	-	2.72	-	-	1.47
5300MHz	7.75	-	-	4.83	-	-	3.15	-	-	1.9	-	-
5310MHz	-	7.32	-	-	4.47	-	-	2.76	-	-	1.52	-
5320MHz	6.85	-	-	3.94	-	-	2.23	-	-	0.99	-	-
5500MHz	6.74	-	-	4.03	-	-	2.28	-	-	1.03	-	-
5510MHz	-	6.74	-	-	3.99	-	-	2.25	-	-	1.01	-
5530MHz	-	-	6.99	-	-	4.03	-	-	2.29	-	-	1.05
5550MHz	-	7.07	-	-	4.11	-	-	2.35	-	-	1.1	-
5580MHz	8.04	-	-	5.27	-	-	3.54	-	-	2.29	-	-
5670MHz	-	6.49	-	-	3.59	-	-	2.63	-	-	0.72	-
5700MHz	6.87	-	-	4.05	-	-	2.32	-	-	1.07	-	-
5745MHz	7.06	-	-	4.17	-	-	2.5	-	-	1.25	-	-
5755MHz	-	7.87	-	-	5.06	-	-	3.31	-	-	2.06	-
5775MHz	-	-	7.36	-	-	4.48	-	-	3.31	-	-	2.06
5785MHz	6.83	-	-	4.02	-	-	2.29	-	-	1.05	-	-
5795MHz	-	6.43	-	-	3.6	-	-	1.86	-	-	0.61	-
5825MHz	6.45	-	-	3.62	-	-	1.92	-	-	0.7	-	-

Note:

1. Antenna Gain refer to "OWA0130 with shielding antenna table_20161012.xls" files
2. Maximum Correlated Directional Gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}]$ dBi
3. Maximum Uncorrelated Directional Gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10}) / N_{ANT}]$ dBi

3.11 Table for Carrier Frequency

9 channels are provided for 802.11a/ 802.11n (20MHz) / 802.11ac (20MHz):

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5150~5250 MHz	36	5180 MHz	44	5220 MHz
	40	5200 MHz	48	5240 MHz
5725~5850 MHz	149	5745 MHz	161	5805 MHz
	153	5765 MHz	165	5825 MHz
	157	5785 MHz	-	-

4 channels are provided for 802.11n (40MHz) / 802.11ac (40MHz):

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5150~5250 MHz	38	5190 MHz	46	5230 MHz
5725~5850 MHz	151	5755 MHz	159	5795 MHz

2 channels are provided for 802.11ac (80MHz):

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5150~5250 MHz	42	5210 MHz	-	-
5725~5850 MHz	155	5775 MHz	-	-

3.12 Table for Test Modes

Test Items	Mode	Note	Channel	Data Rate	Antenna
AC Power Conducted Emissions	11ac(80MHz)	OFDM/BPSK	155	-	1+2+3+4
Occupied Bandwidth & 26dB Bandwidth	11a	OFDM/BPSK	36/40/48	6Mbps (CDD)	1+2+3+4
	11ac(20MHz)		36/40/48	Nss1 MCS0 (1S4T CDD)	1+2+3+4
				Nss1 MCS0 (1S4T TxBF)	1+2+3+4
	11ac(40MHz)		38/46	Nss1 MCS0 (1S4T CDD)	1+2+3+4
				Nss1 MCS0 (1S4T TxBF)	1+2+3+4
	11ac(80MHz)		42	Nss1 MCS0 (1S4T CDD)	1+2+3+4
				Nss1 MCS0 (1S4T TxBF)	1+2+3+4
	6dB bandwidth (for U-NII-3)		11a	OFDM/BPSK	149/157/165
11ac(20MHz)		149/157/165	Nss1 MCS0 (1S4T CDD)		1+2+3+4
			Nss1 MCS0 (1S4T TxBF)		1+2+3+4
11ac(40MHz)		151/159	Nss1 MCS0 (1S4T CDD)		1+2+3+4
			Nss1 MCS0 (1S4T TxBF)		1+2+3+4
11ac(80MHz)		155	Nss1 MCS0 (1S4T CDD)		1+2+3+4
			Nss1 MCS0 (1S4T TxBF)		1+2+3+4

Test Items	Mode	Note	Channel	Data Rate	Antenna
Maximum Conducted Output Power (Average)	11a	OFDM/BPSK	36/40/48 149/157/165	6Mbps (CDD)	1+2+3+4
	11ac(20MHz)		Nss1 MCS0 (1S4T CDD)	1+2+3+4	
			Nss2 MCS0 (2S4T CDD)	1+2+3+4	
			Nss4 MCS0 (4S4T SDM)	1+2+3+4	
			Nss1 MCS0 (1S4T TxBF)	1+2+3+4	
			Nss2 MCS0 (2S4T TxBF)	1+2+3+4	
			Nss3 MCS0 (3S4T TxBF)	1+2+3+4	
	11ac(40MHz)		Nss1 MCS0 (1S4T CDD)	1+2+3+4	
			Nss2 MCS0 (2S4T CDD)	1+2+3+4	
			Nss4 MCS0 (4S4T SDM)	1+2+3+4	
			Nss1 MCS0 (1S4T TxBF)	1+2+3+4	
			Nss2 MCS0 (2S4T TxBF)	1+2+3+4	
			Nss3 MCS0 (3S4T TxBF)	1+2+3+4	
	11ac(80MHz)		Nss1 MCS0 (1S4T CDD)	1+2+3+4	
			Nss2 MCS0 (2S4T CDD)	1+2+3+4	
			Nss4 MCS0 (4S4T SDM)	1+2+3+4	
			Nss1 MCS0 (1S4T TxBF)	1+2+3+4	
			Nss2 MCS0 (2S4T TxBF)	1+2+3+4	
			Nss3 MCS0 (3S4T TxBF)	1+2+3+4	

Test Items	Mode	Note	Channel	Data Rate	Antenna
Power Spectral Density	11a	OFDM/BPSK	36/40/48 149/157/165	6Mbps (CDD)	1+2+3+4
	11ac(20MHz)		36/40/48 149/157/165	Nss1 MCS0 (1S4T CDD)	1+2+3+4
				Nss1 MCS0 (1S4T TxBF)	1+2+3+4
	11ac(40MHz)		38/46 151/159	Nss1 MCS0 (1S4T CDD)	1+2+3+4
				Nss1 MCS0 (1S4T TxBF)	1+2+3+4
	11ac(80MHz)		42 155	Nss1 MCS0 (1S4T CDD)	1+2+3+4
				Nss1 MCS0 (1S4T TxBF)	1+2+3+4
	Unwanted Emission in the restricted bands Above 1GHz (Radiated)		11a	OFDM/BPSK	36/40/48 149/157/165
11ac(20MHz)		36/40/48 149/157/165	Nss1 MCS0 (1S4T CDD)		1+2+3+4
			Nss1 MCS0 (1S4T TxBF)		1+2+3+4
11ac(40MHz)		38/46 151/159	Nss1 MCS0 (1S4T CDD)		1+2+3+4
			Nss1 MCS0 (1S4T TxBF)		1+2+3+4
11ac(80MHz)		42 155	Nss1 MCS0 (1S4T CDD)		1+2+3+4
			Nss1 MCS0 (1S4T TxBF)		1+2+3+4
Unwanted Emission out of the restricted bands (Conducted)		11a	OFDM/BPSK		36/40/48 149/157/165
	11ac(20MHz)	36/40/48 149/157/165		Nss1 MCS0 (1S4T CDD)	1+2+3+4
				Nss1 MCS0 (1S4T TxBF)	1+2+3+4
	11ac(40MHz)	38/46 151/159		Nss1 MCS0 (1S4T CDD)	1+2+3+4
				Nss1 MCS0 (1S4T TxBF)	1+2+3+4
	11ac(80MHz)	42 155		Nss1 MCS0 (1S4T CDD)	1+2+3+4
				Nss1 MCS0 (1S4T TxBF)	1+2+3+4

Test Items	Mode	Note	Channel	Data Rate	Antenna
Radiated Emissions Below 1GHz(Radiated)	11a	OFDM/BPSK	157	6Mbps (CDD)	1+2+3+4
	11ac(20MHz)		157	Nss1 MCS0 (1S4T CDD)	1+2+3+4
				Nss1 MCS0 (1S4T TxBF)	1+2+3+4
	11ac(40MHz)		151	Nss1 MCS0 (1S4T CDD)	1+2+3+4
				Nss1 MCS0 (1S4T TxBF)	1+2+3+4
	11ac(80MHz)		155	Nss1 MCS0 (1S4T CDD)	1+2+3+4
				Nss1 MCS0 (1S4T TxBF)	1+2+3+4
Frequency Stability	11ac(20MHz)	Un-modulation	36	-	1+2+3+4
	11ac(40MHz)		38	-	1+2+3+4
	11ac(80MHz)		42	-	1+2+3+4

Note:

1. The device with multiple operating mode, measurements on the middle channel were tested to determine the worst case mode. (Each modulation family were tested in band edge, spurious emission and in band PSD after investigate worst case mode)

3.13 Parameters of Test Software Setting

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

The Power Setting Parameter - Master					
Test Software Version	12.1.4.3.AA				
Worst Modulation Mode	Number of Transmit Chains (NTX)	Frequency (MHz)	Maximum Output Power(dBm)	Power Setting	Data Rate / MCS
802.11a (CDD)	1 stream 4TX	5180	25.20	Default(20)	6Mbps
802.11a (CDD)	1 stream 4TX	5200	25.93	Default(21)	6Mbps
802.11a (CDD)	1 stream 4TX	5240	25.88	Default(21)	6Mbps
802.11a (CDD)	1 stream 4TX	5745	25.87	Default(21)	6Mbps
802.11a (CDD)	1 stream 4TX	5785	25.66	Default(21)	6Mbps
802.11a (CDD)	1 stream 4TX	5825	25.56	Default(21)	6Mbps
802.11ac 20MHz (CDD)	1 stream 4TX	5180	24.33	Default(19)	Nss1MCS0 (6.5)
802.11ac 20MHz (CDD)	1 stream 4TX	5200	25.93	Default(21)	Nss1MCS0 (6.5)
802.11ac 20MHz (CDD)	1 stream 4TX	5240	25.97	Default(21)	Nss1MCS0 (6.5)
802.11ac 20MHz (CDD)	1 stream 4TX	5745	25.93	Default(21)	Nss1MCS0 (6.5)
802.11ac 20MHz (CDD)	1 stream 4TX	5785	25.80	Default(21)	Nss1MCS0 (6.5)
802.11ac 20MHz (CDD)	1 stream 4TX	5825	25.70	Default(21)	Nss1MCS0 (6.5)
802.11ac 20MHz (CDD)	2 stream 4TX	5180	24.30	Default(19)	Nss2MCS0 (13)
802.11ac 20MHz (CDD)	2 stream 4TX	5200	25.88	Default(21)	Nss2MCS0 (13)
802.11ac 20MHz (CDD)	2 stream 4TX	5240	25.94	Default(21)	Nss2MCS0 (13)
802.11ac 20MHz (CDD)	2 stream 4TX	5745	25.90	Default(21)	Nss2MCS0 (13)
802.11ac 20MHz (CDD)	2 stream 4TX	5785	25.78	Default(21)	Nss2MCS0 (13)
802.11ac 20MHz (CDD)	2 stream 4TX	5825	25.67	Default(21)	Nss2MCS0 (13)
802.11ac 20MHz (SDM)	4 stream 4TX	5180	24.23	Default(19)	Nss4MCS0 (26)
802.11ac 20MHz (SDM)	4 stream 4TX	5200	25.83	Default(21)	Nss4MCS0 (26)
802.11ac 20MHz (SDM)	4 stream 4TX	5240	25.87	Default(21)	Nss4MCS0 (26)
802.11ac 20MHz (SDM)	4 stream 4TX	5745	25.84	Default(21)	Nss4MCS0 (26)
802.11ac 20MHz (SDM)	4 stream 4TX	5785	25.73	Default(21)	Nss4MCS0 (26)
802.11ac 20MHz (SDM)	4 stream 4TX	5825	25.60	Default(21)	Nss4MCS0 (26)
802.11ac 20MHz (TxBF)	1 stream 4TX	5180	25.91	Default(21)	Nss1MCS0 (6.5)
802.11ac 20MHz (TxBF)	1 stream 4TX	5200	25.94	Default(21)	Nss1MCS0 (6.5)
802.11ac 20MHz (TxBF)	1 stream 4TX	5240	25.79	Default(21)	Nss1MCS0 (6.5)
802.11ac 20MHz (TxBF)	1 stream 4TX	5745	25.19	Default(20)	Nss1MCS0 (6.5)
802.11ac 20MHz (TxBF)	1 stream 4TX	5785	25.06	Default(20)	Nss1MCS0 (6.5)
802.11ac 20MHz (TxBF)	1 stream 4TX	5825	24.86	Default(20)	Nss1MCS0 (6.5)
802.11ac 20MHz (TxBF)	2 stream 4TX	5180	25.87	Default(21)	Nss2MCS0 (13)
802.11ac 20MHz (TxBF)	2 stream 4TX	5200	25.90	Default(21)	Nss2MCS0 (13)
802.11ac 20MHz (TxBF)	2 stream 4TX	5240	25.76	Default(21)	Nss2MCS0 (13)
802.11ac 20MHz (TxBF)	2 stream 4TX	5745	25.11	Default(20)	Nss2MCS0 (13)
802.11ac 20MHz (TxBF)	2 stream 4TX	5785	24.97	Default(20)	Nss2MCS0 (13)
802.11ac 20MHz (TxBF)	2 stream 4TX	5825	24.80	Default(20)	Nss2MCS0 (13)

Worst Modulation Mode	Number of Transmit Chains (NTX)	Frequency (MHz)	Maximum Output Power(dBm)	Power Setting	Data Rate / MCS
802.11ac 20MHz (TxBF)	3 stream 4TX	5180	25.84	Default(21)	Nss3MCS0 (40.5)
802.11ac 20MHz (TxBF)	3 stream 4TX	5200	25.86	Default(21)	Nss3MCS0 (40.5)
802.11ac 20MHz (TxBF)	3 stream 4TX	5240	25.73	Default(21)	Nss3MCS0 (40.5)
802.11ac 20MHz (TxBF)	3 stream 4TX	5745	25.07	Default(20)	Nss3MCS0 (40.5)
802.11ac 20MHz (TxBF)	3 stream 4TX	5785	24.93	Default(20)	Nss3MCS0 (40.5)
802.11ac 20MHz (TxBF)	3 stream 4TX	5825	24.80	Default(20)	Nss3MCS0 (40.5)
802.11ac 40MHz (CDD)	1 stream 4TX	5190	21.18	Default(15)	Nss1MCS0 (13.5)
802.11ac 40MHz (CDD)	1 stream 4TX	5230	26.34	Default(21)	Nss1MCS0 (13.5)
802.11ac 40MHz (CDD)	1 stream 4TX	5755	26.25	Default(21)	Nss1MCS0 (13.5)
802.11ac 40MHz (CDD)	1 stream 4TX	5795	26.18	Default(21)	Nss1MCS0 (13.5)
802.11ac 40MHz (CDD)	2 stream 4TX	5190	21.15	Default(15)	Nss2MCS0 (27)
802.11ac 40MHz (CDD)	2 stream 4TX	5230	26.30	Default(21)	Nss2MCS0 (27)
802.11ac 40MHz (CDD)	2 stream 4TX	5755	26.22	Default(21)	Nss2MCS0 (27)
802.11ac 40MHz (CDD)	2 stream 4TX	5795	26.15	Default(21)	Nss2MCS0 (27)
802.11ac 40MHz (SDM)	4 stream 4TX	5190	21.07	Default(15)	Nss4MCS0 (54)
802.11ac 40MHz (SDM)	4 stream 4TX	5230	26.20	Default(21)	Nss4MCS0 (54)
802.11ac 40MHz (SDM)	4 stream 4TX	5755	26.11	Default(21)	Nss4MCS0 (54)
802.11ac 40MHz (SDM)	4 stream 4TX	5795	26.04	Default(21)	Nss4MCS0 (54)
802.11ac 40MHz (TxBF)	1 stream 4TX	5190	20.27	Default(14)	Nss1MCS0 (13.5)
802.11ac 40MHz (TxBF)	1 stream 4TX	5230	26.40	Default(21)	Nss1MCS0 (13.5)
802.11ac 40MHz (TxBF)	1 stream 4TX	5755	26.46	Default(21)	Nss1MCS0 (13.5)
802.11ac 40MHz (TxBF)	1 stream 4TX	5795	26.39	Default(21)	Nss1MCS0 (13.5)
802.11ac 40MHz (TxBF)	2 stream 4TX	5190	20.23	Default(14)	Nss2MCS0 (27)
802.11ac 40MHz (TxBF)	2 stream 4TX	5230	26.35	Default(21)	Nss2MCS0 (27)
802.11ac 40MHz (TxBF)	2 stream 4TX	5755	26.41	Default(21)	Nss2MCS0 (27)
802.11ac 40MHz (TxBF)	2 stream 4TX	5795	26.33	Default(21)	Nss2MCS0 (27)
802.11ac 40MHz (TxBF)	3 stream 4TX	5190	20.14	Default(14)	Nss3MCS0 (40.5)
802.11ac 40MHz (TxBF)	3 stream 4TX	5230	26.30	Default(21)	Nss3MCS0 (40.5)
802.11ac 40MHz (TxBF)	3 stream 4TX	5755	26.35	Default(21)	Nss3MCS0 (40.5)
802.11ac 40MHz (TxBF)	3 stream 4TX	5795	26.26	Default(21)	Nss3MCS0 (40.5)
802.11ac 80MHz (CDD)	1 stream 4TX	5210	18.98	Default(13)	Nss1MCS0 (29.3)
802.11ac 80MHz (CDD)	1 stream 4TX	5775	25.10	Default(20)	Nss1MCS0 (29.3)
802.11ac 80MHz (CDD)	2 stream 4TX	5210	18.91	Default(13)	Nss2MCS0 (58.5)
802.11ac 80MHz (CDD)	2 stream 4TX	5775	24.99	Default(20)	Nss2MCS0 (58.5)
802.11ac 80MHz (SDM)	4 stream 4TX	5210	18.83	Default(13)	Nss4MCS0 (117)
802.11ac 80MHz (SDM)	4 stream 4TX	5775	24.86	Default(20)	Nss4MCS0 (117)
802.11ac 80MHz (TxBF)	1 stream 4TX	5210	20.05	Default(14)	Nss1MCS0 (29.3)
802.11ac 80MHz (TxBF)	1 stream 4TX	5775	26.13	Default(21)	Nss1MCS0 (29.3)
802.11ac 80MHz (TxBF)	2 stream 4TX	5210	20.00	Default(14)	Nss2MCS0 (58.5)
802.11ac 80MHz (TxBF)	2 stream 4TX	5775	26.08	Default(21)	Nss2MCS0 (58.5)
802.11ac 80MHz (TxBF)	3 stream 4TX	5210	19.94	Default(14)	Nss3MCS0 (87.8)
802.11ac 80MHz (TxBF)	3 stream 4TX	5775	26.03	Default(21)	Nss3MCS0 (87.8)

The Power Setting Parameter - Client

Test Software Version	12.1.4.3.AA				
Worst Modulation Mode	Number of Transmit Chains (NTX)	Frequency (MHz)	Maximum Output Power(dBm)	Power Setting	Data Rate / MCS
802.11a (CDD)	1 stream 4TX	5180	21.52	Default(16)	6Mbps
802.11a (CDD)	1 stream 4TX	5200	22.54	Default(17)	6Mbps
802.11a (CDD)	1 stream 4TX	5240	22.39	Default(17)	6Mbps
802.11ac 20MHz (CDD)	1 stream 4TX	5180	21.52	Default(16)	Nss1MCS0 (6.5)
802.11ac 20MHz (CDD)	1 stream 4TX	5200	22.58	Default(17)	Nss1MCS0 (6.5)
802.11ac 20MHz (CDD)	1 stream 4TX	5240	22.48	Default(17)	Nss1MCS0 (6.5)
802.11ac 20MHz (CDD)	2 stream 4TX	5180	21.47	Default(16)	Nss2MCS0 (13)
802.11ac 20MHz (CDD)	2 stream 4TX	5200	22.54	Default(17)	Nss2MCS0 (13)
802.11ac 20MHz (CDD)	2 stream 4TX	5240	22.42	Default(17)	Nss2MCS0 (13)
802.11ac 20MHz (SDM)	4 stream 4TX	5180	21.38	Default(16)	Nss4MCS0 (26)
802.11ac 20MHz (SDM)	4 stream 4TX	5200	22.44	Default(17)	Nss4MCS0 (26)
802.11ac 20MHz (SDM)	4 stream 4TX	5240	22.34	Default(17)	Nss4MCS0 (26)
802.11ac 20MHz (TxBF)	1 stream 4TX	5180	21.63	Default(16)	Nss1MCS0 (6.5)
802.11ac 20MHz (TxBF)	1 stream 4TX	5200	22.48	Default(17)	Nss1MCS0 (6.5)
802.11ac 20MHz (TxBF)	1 stream 4TX	5240	22.51	Default(17)	Nss1MCS0 (6.5)
802.11ac 20MHz (TxBF)	2 stream 4TX	5180	21.55	Default(16)	Nss2MCS0 (13)
802.11ac 20MHz (TxBF)	2 stream 4TX	5200	22.41	Default(17)	Nss2MCS0 (13)
802.11ac 20MHz (TxBF)	2 stream 4TX	5240	22.41	Default(17)	Nss2MCS0 (13)
802.11ac 20MHz (TxBF)	3 stream 4TX	5180	21.48	Default(16)	Nss3MCS0 (40.5)
802.11ac 20MHz (TxBF)	3 stream 4TX	5200	22.35	Default(17)	Nss3MCS0 (40.5)
802.11ac 20MHz (TxBF)	3 stream 4TX	5240	22.34	Default(17)	Nss3MCS0 (40.5)
802.11ac 40MHz (CDD)	1 stream 4TX	5190	21.18	Default(15)	Nss1MCS0 (13.5)
802.11ac 40MHz (CDD)	1 stream 4TX	5230	21.78	Default(16)	Nss1MCS0 (13.5)
802.11ac 40MHz (CDD)	2 stream 4TX	5190	21.12	Default(15)	Nss2MCS0 (27)
802.11ac 40MHz (CDD)	2 stream 4TX	5230	21.72	Default(16)	Nss2MCS0 (27)
802.11ac 40MHz (SDM)	4 stream 4TX	5190	20.95	Default(15)	Nss4MCS0 (54)
802.11ac 40MHz (SDM)	4 stream 4TX	5230	21.50	Default(16)	Nss4MCS0 (54)
802.11ac 40MHz (TxBF)	1 stream 4TX	5190	19.87	Default(15)	Nss1MCS0 (13.5)
802.11ac 40MHz (TxBF)	1 stream 4TX	5230	22.67	Default(16)	Nss1MCS0 (13.5)
802.11ac 40MHz (TxBF)	2 stream 4TX	5190	20.86	Default(14)	Nss2MCS0 (27)
802.11ac 40MHz (TxBF)	2 stream 4TX	5230	21.61	Default(17)	Nss2MCS0 (27)
802.11ac 40MHz (TxBF)	3 stream 4TX	5190	19.78	Default(14)	Nss3MCS0 (40.5)
802.11ac 40MHz (TxBF)	3 stream 4TX	5230	22.59	Default(17)	Nss3MCS0 (40.5)
802.11ac 80MHz (CDD)	1 stream 4TX	5210	19.04	Default(13)	Nss1MCS0 (29.3)
802.11ac 80MHz (CDD)	2 stream 4TX	5210	18.97	Default(13)	Nss2MCS0 (58.5)
802.11ac 80MHz (SDM)	4 stream 4TX	5210	18.77	Default(13)	Nss4MCS0 (117)
802.11ac 80MHz (TxBF)	1 stream 4TX	5210	18.69	Default(13)	Nss1MCS0 (29.3)
802.11ac 80MHz (TxBF)	2 stream 4TX	5210	18.65	Default(14)	Nss2MCS0 (58.5)
802.11ac 80MHz (TxBF)	3 stream 4TX	5210	19.10	Default(14)	Nss3MCS0 (87.8)


3.14 On Time and Duty Cycle

Mode	On Time (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/T Minimum VBW (kHz)
11a 1S4T CDD	1.362	1.496	91	0.41	1
11ac (20MHz) 1S4T CDD	4.98	5.05	98.6	-	-
11ac (20MHz) 2S4T CDD	4.98	5.05	98.6	-	-
11ac (20MHz) 4S4T SDM	4.98	5.05	98.6	-	-
11ac (20MHz) 1S4T TxBF	4.98	5.05	98.6	-	-
11ac (20MHz) 2S4T TxBF	4.98	5.05	98.6	-	-
11ac (20MHz) 3S4T TxBF	4.98	5.05	98.6	-	-
11ac (40MHz) 1S4T CDD	5.968	6.048	98.7	-	-
11ac (40MHz) 2S4T CDD	5.968	6.048	98.7	-	-
11ac (40MHz) 4S4T SDM	5.968	6.048	98.7	-	-
11ac (40MHz) 1S4T TxBF	5.968	6.048	98.7	-	-
11ac (40MHz) 2S4T TxBF	5.968	6.048	98.7	-	-
11ac (40MHz) 3S4T TxBF	5.968	6.048	98.7	-	-
11ac (80MHz) 1S4T CDD	2.778	2.831	98.1	-	-
11ac (80MHz) 2S4T CDD	2.778	2.831	98.1	-	-
11ac (80MHz) 4S4T SDM	2.778	2.831	98.1	-	-
11ac (80MHz) 1S4T TxBF	2.778	2.831	98.1	-	-
11ac (80MHz) 2S4T TxBF	2.778	2.831	98.1	-	-
11ac (80MHz) 3S4T TxBF	2.778	2.831	98.1	-	-


Note:

1. Power measurement using sweep trigger and gating of the power meter, duty factor is not required.
2. Duty cycle > 98%, duty factor is not required.


11a 1S4T CDD

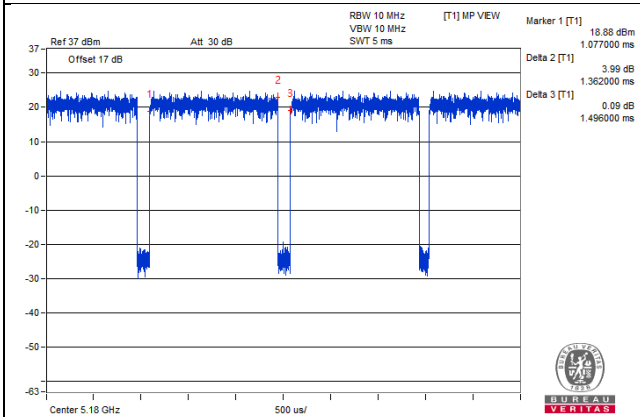


11ac (20MHz) 1S4T CDD

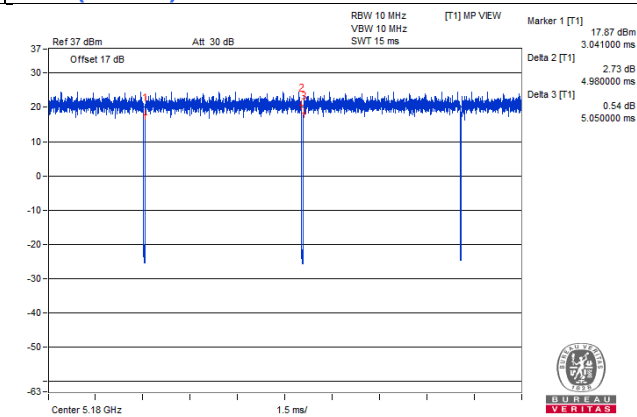


11ac (20MHz) 2S4T CDD

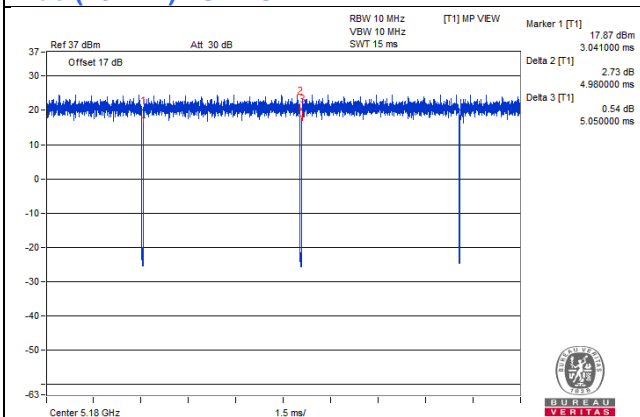


11ac (20MHz) 4S4T SDM

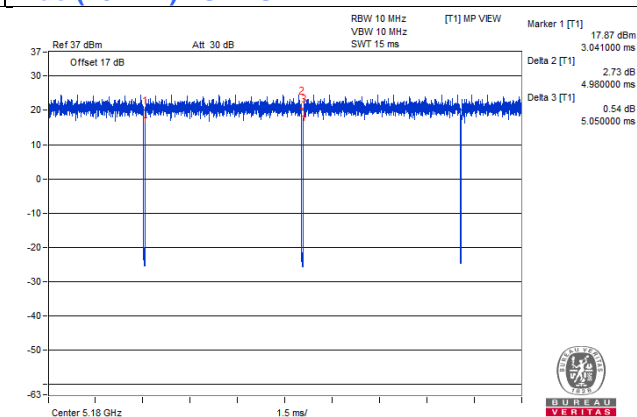


11ac (20MHz) 1S4T TxBF

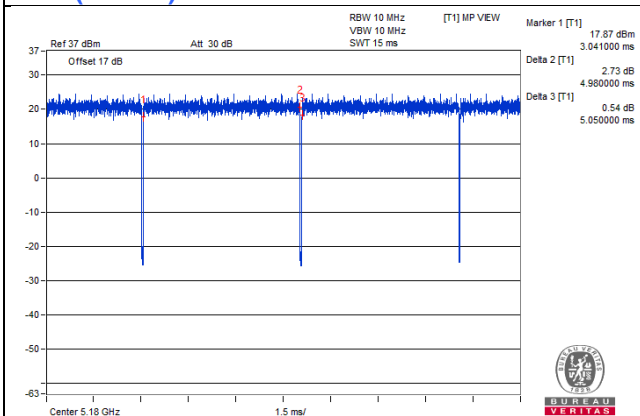


11ac (20MHz) 2S4T TxBF

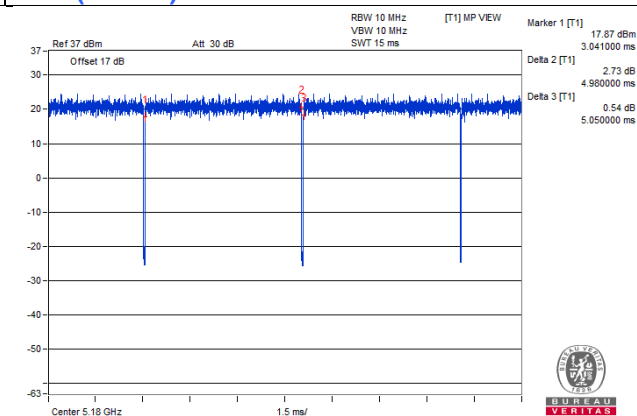


11ac (20MHz) 3S4T TxBF

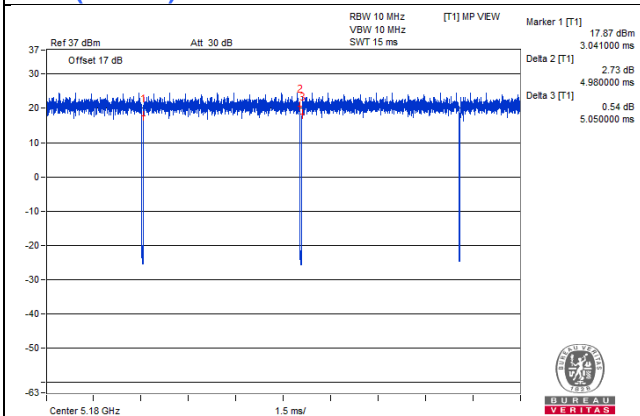


11ac (40MHz) 1S4T CDD

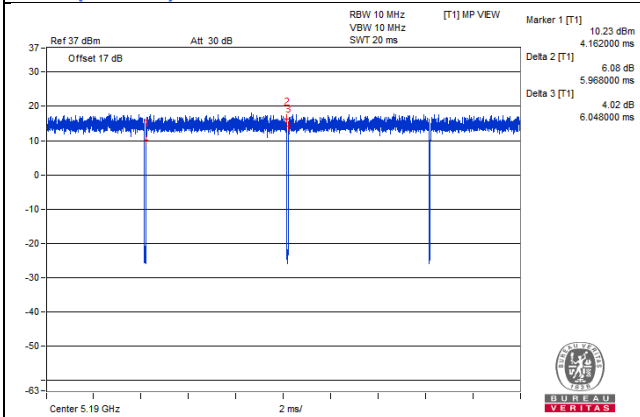


11ac (40MHz) 2S4T CDD

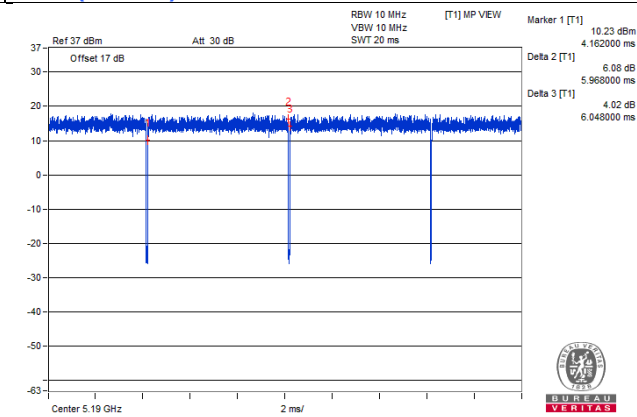


11ac (40MHz) 4S4T SDM

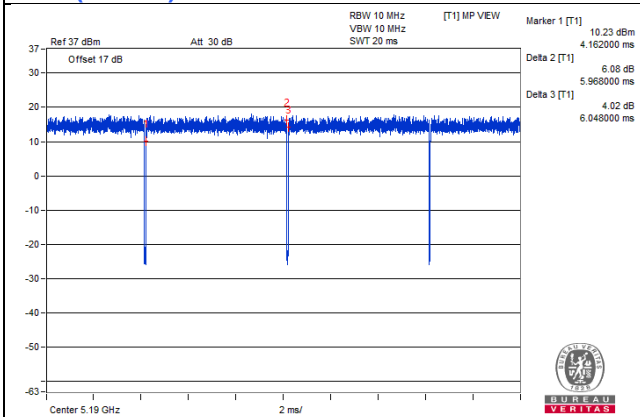


11ac (40MHz) 1S4T TxBF

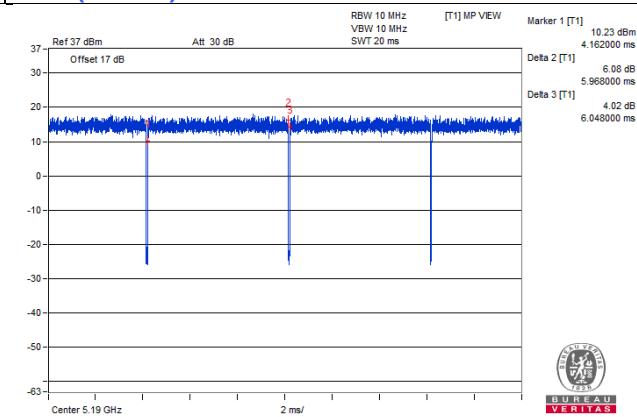


11ac (40MHz) 2S4T TxBF

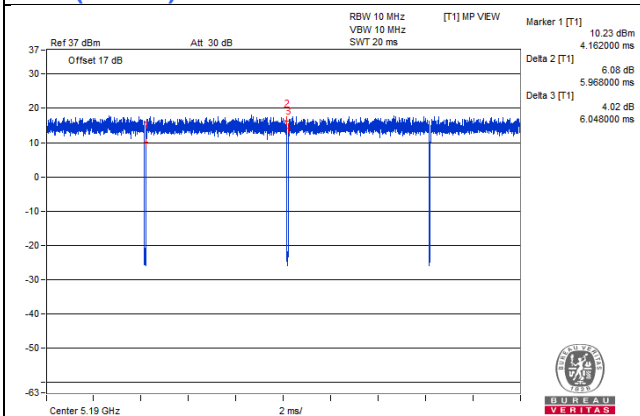


11ac (40MHz) 3S4T TxBF

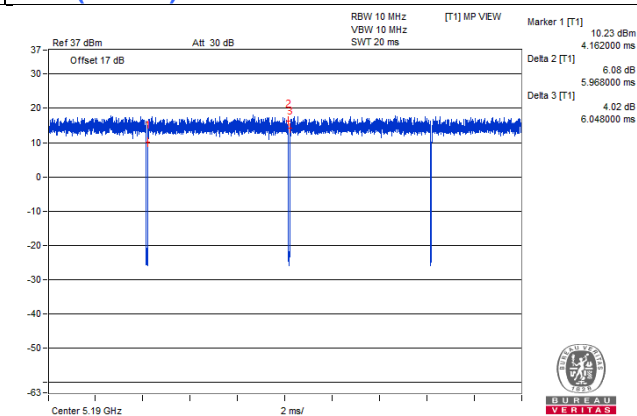


11ac (80MHz) 1S4T CDD

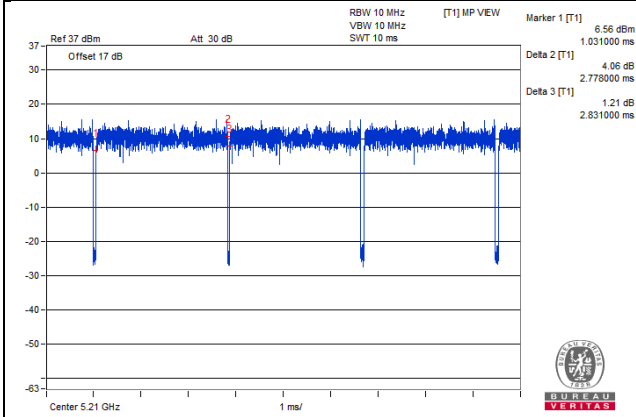


11ac (80MHz) 2S4T CDD

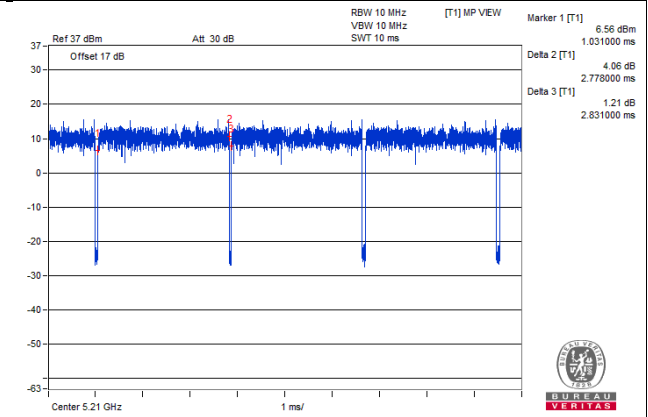


11ac (80MHz) 4S4T SDM

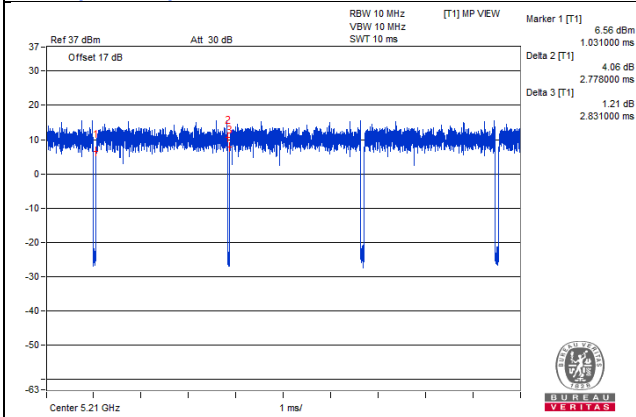


11ac (80MHz) 1S4T TxBF

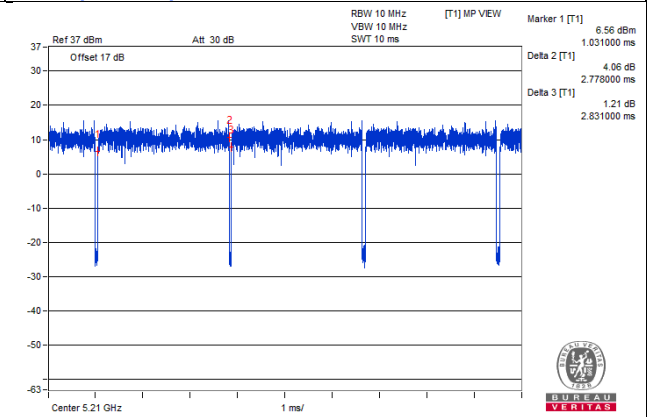

11ac (80MHz) 2S4T TxBF

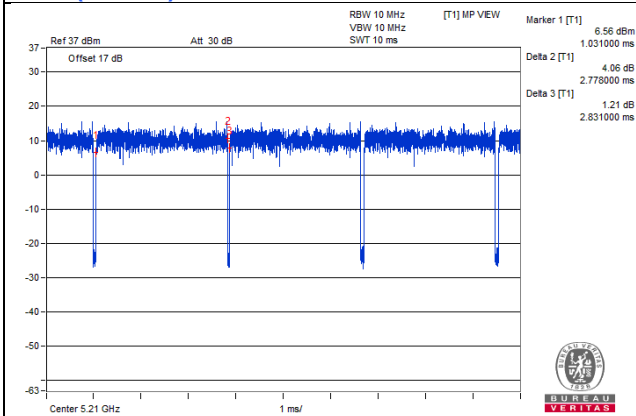

11ac (80MHz) 3S4T TxBF

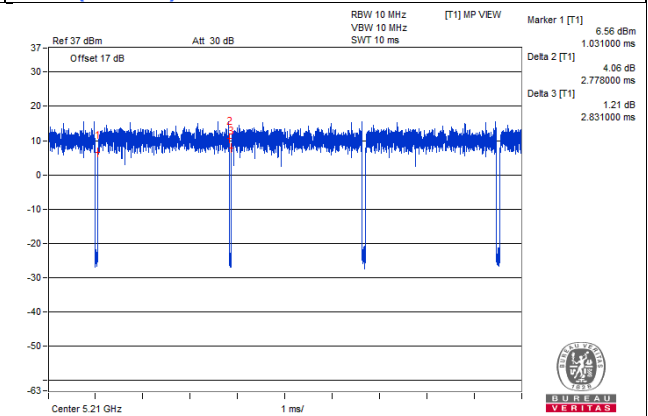

3.15 Testing Location Information

Test Site Location				
Address	(1) E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300, Taiwan R.O.C.			
TEL	886-3-6668565			
FAX	886-3-6668323			
Test Site No.	Site Category	Location	IC Reg. No.	VCCI Reg. No
Conduction 1	Conduction	Hsinchu	-	-
Chamber 3	966 Chamber	Hsinchu	20331-1	-
Oven 2	Oven	Hsinchu	-	-

3.16 EUT Diagram and Support Equipment

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Laptop	DELL	E6420	B92T3R1	FCC DoC	Provided by Lab

Note:

- All power cords of the above support units are non-shielded (1.8m).

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	RJ-45 Cable	1	10	No	0	Provided by Lab
2.	DC Cable	1	1.5	No	0	Supplied by client

EUT Diagram

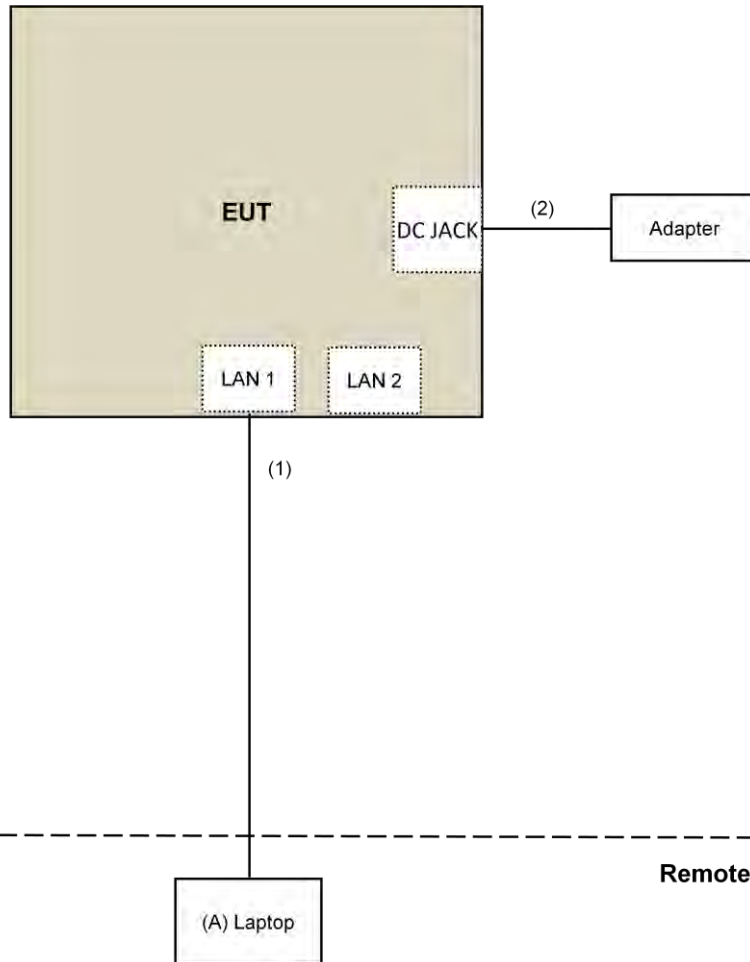

4 Test Types and Results

4.1 AC Power Conducted Emissions Measurement

4.1.1 Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

4.1.2 Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.1.3 Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 kHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

4.1.4 Test Setup Layout

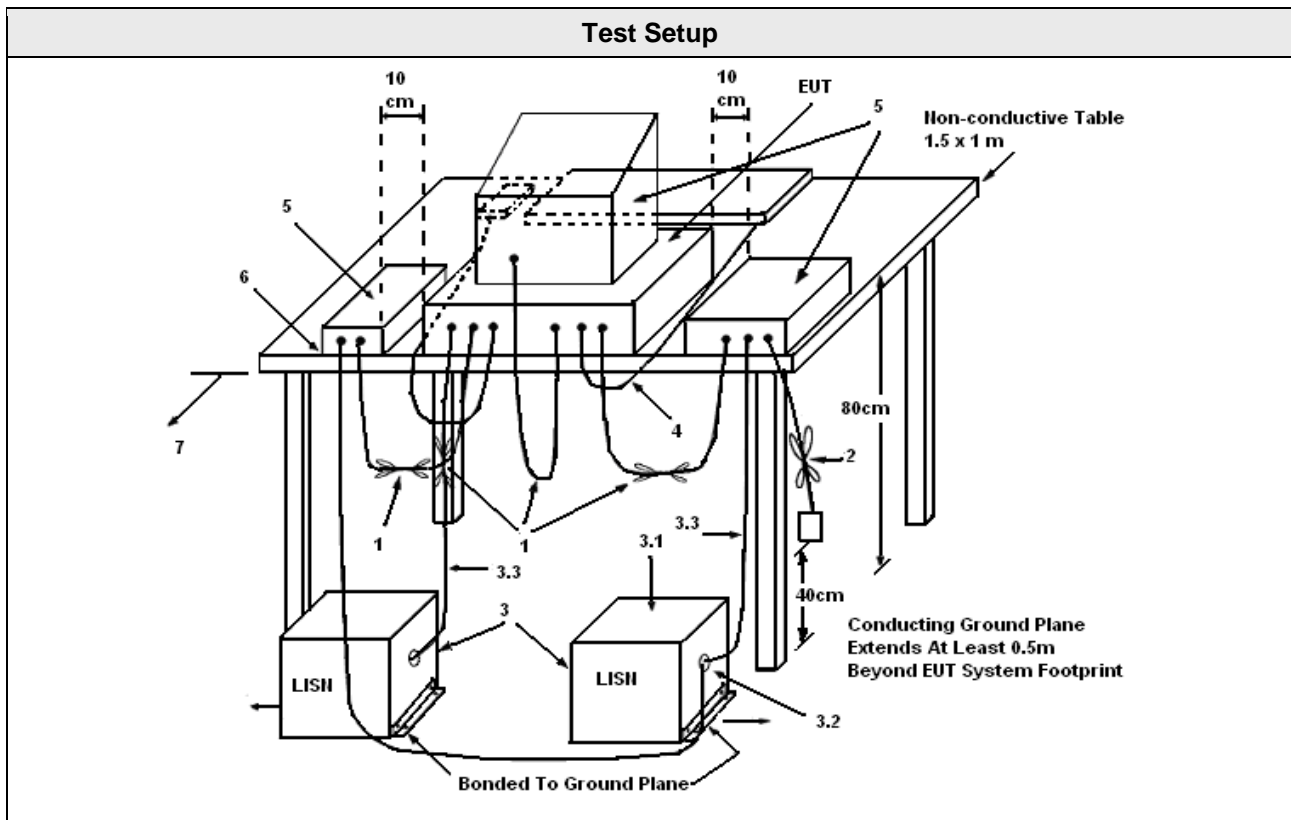

1. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
2. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
3. EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω . LISN can be placed on top of, or immediately beneath, reference ground plane.
4. All other equipment powered from additional LISN(s).
5. Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
6. LISN at least 80 cm from nearest part of EUT chassis.
7. Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
8. Non-EUT components of EUT system being tested.
9. Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
10. Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

4.1.5 Test Deviation

There are no deviations with the original standard.

4.1.6 EUT Operating during Test

The EUT was placed on the test table and programmed in normal function.


4.1.7 Test Results of AC Power Conducted Emissions

Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Input Power	120Vac, 60Hz	Environmental Conditions	25°C, 75%RH
Tested by	Andy Ho		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16172	10.05	44.01	31.13	54.06	41.18	65.38	55.38	-11.32	-14.20
2	0.19687	10.07	36.36	21.62	46.43	31.69	63.74	53.74	-17.31	-22.05
3	0.30234	10.10	27.27	14.85	37.37	24.95	60.18	50.18	-22.81	-25.23
4	0.59531	10.14	27.94	20.86	38.08	31.00	56.00	46.00	-17.92	-15.00
5	9.83984	10.70	18.65	11.71	29.35	22.41	60.00	50.00	-30.65	-27.59
6	22.30469	11.43	22.38	17.18	33.81	28.61	60.00	50.00	-26.19	-21.39

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

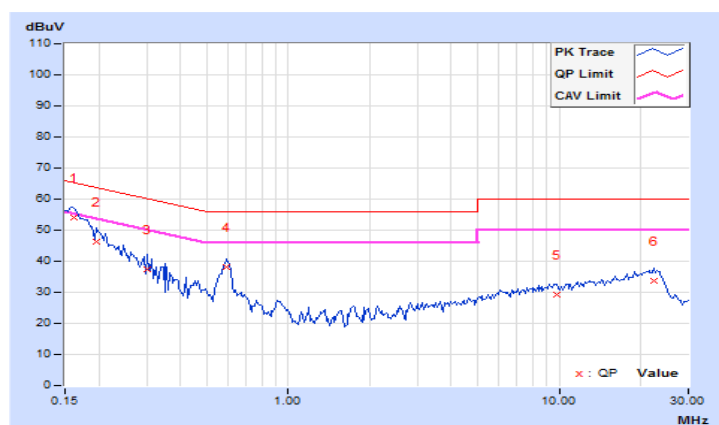


Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Input Power	120Vac, 60Hz	Environmental Conditions	25°C, 75%RH
Tested by	Andy Ho		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15391	9.96	45.48	31.37	55.44	41.33	65.79	55.79	-10.35	-14.46
2	0.18906	9.97	38.78	22.94	48.75	32.91	64.08	54.08	-15.33	-21.17
3	0.59141	10.03	26.89	19.58	36.92	29.61	56.00	46.00	-19.08	-16.39
4	0.94297	10.04	12.97	2.24	23.01	12.28	56.00	46.00	-32.99	-33.72
5	11.22266	10.62	19.15	12.47	29.77	23.09	60.00	50.00	-30.23	-26.91
6	23.12891	11.20	23.31	18.16	34.51	29.36	60.00	50.00	-25.49	-20.64

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

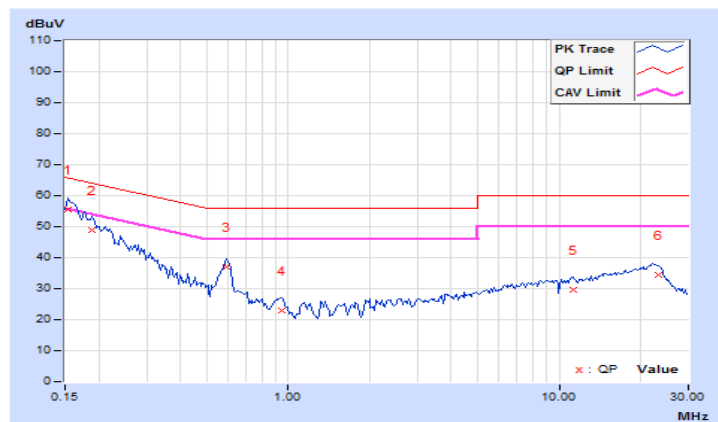

4.2 Occupied Bandwidth and 26dB Bandwidth Measurement

4.2.1 Measuring Instruments and Setting


The following table is the setting of the Spectrum Analyzer.

99% Occupied Bandwidth	
Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	1.5 times to 5.0 times the OBW
RBW	1% to 5% of the anticipated emission bandwidth
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max hold
Sweep Time	Auto
26dB Bandwidth	
Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> 26dB Bandwidth
RBW	Approximately 1% of the emission bandwidth.
VBW	> RBW
Detector	Peak
Trace	Max hold
Sweep Time	Auto

4.2.2 Test Procedure

- 1 The transmitter output (antenna port) was connected to the spectrum analyzer.
- 2 Test was performed in accordance with Measurement of Digital Transmission Systems Operating under 789033 D02 General UNII Test Procedures New Rules v02r01, in section "Emission bandwidth (C)(1)" & "99 Percent Occupied Bandwidth"(D). 05/02/2017.
- 3 When measuring Emission bandwidth with multiple antenna systems, add every result of the values by mathematic formula.

4.2.3 Test Setup Layout

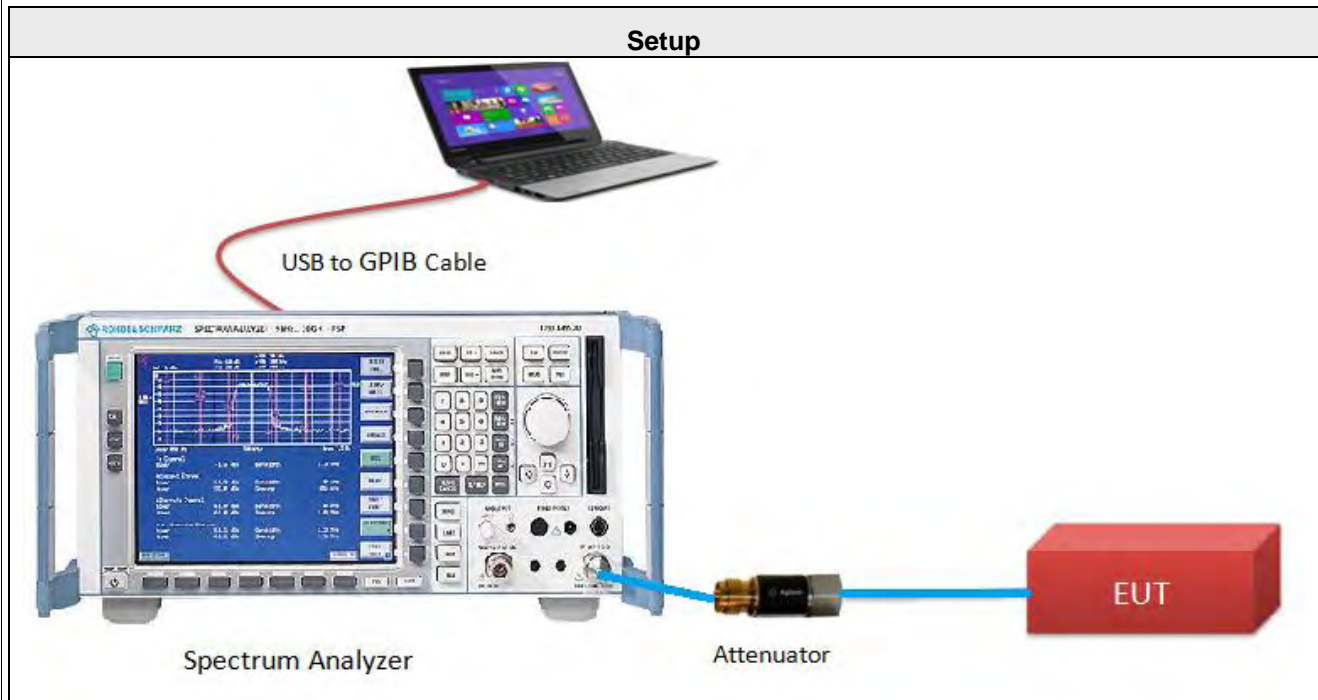

4.2.4 Test Deviation

There are no deviations with the original standard.

4.2.5 EUT Operating Conditions

The EUT was programmed to be in continuously transmitting mode.

4.2.6 Test Results

Temperature	25°C	Humidity	60%
Test Engineer	Robert Cheng		

Master Mode

11a 1S4T CDD

CHANNEL	FREQUENCY (MHz)	26dB Bandwidth (MHz)			
		CHAIN 1	CHAIN 2	CHAIN 3	CHAIN 4
36	5180	23.69	23.41	22.74	23.48
40	5200	25.39	25.50	22.72	24.64
48	5240	27.40	24.84	22.73	23.58

11ac (20MHz) 1S4T CDD

CHANNEL	FREQUENCY (MHz)	26dB Bandwidth (MHz)			
		CHAIN 1	CHAIN 2	CHAIN 3	CHAIN 4
36	5180	25.35	25.11	24.24	24.19
40	5200	28.21	26.73	24.55	25.66
48	5240	30.81	26.13	24.78	25.72

11ac (20MHz) 1S4T TxBF

CHANNEL	FREQUENCY (MHz)	26dB Bandwidth (MHz)			
		CHAIN 1	CHAIN 2	CHAIN 3	CHAIN 4
36	5180	29.59	26.08	24.36	25.41
40	5200	29.66	26.19	24.59	25.41
48	5240	31.68	26.30	24.70	24.78

11ac (40MHz) 1S4T CDD

CHANNEL	FREQUENCY (MHz)	26dB Bandwidth (MHz)			
		CHAIN 1	CHAIN 2	CHAIN 3	CHAIN 4
38	5190	44.57	43.87	44.07	43.36
46	5230	73.85	60.80	46.09	58.99

11ac (40MHz) 1S4T TxBF

CHANNEL	FREQUENCY (MHz)	26dB Bandwidth (MHz)			
		CHAIN 1	CHAIN 2	CHAIN 3	CHAIN 4
38	5190	44.49	43.69	43.64	43.49
46	5230	70.18	69.96	44.74	50.45

11ac (80MHz) 1S4T CDD


CHANNEL	FREQUENCY (MHz)	26dB Bandwidth (MHz)			
		CHAIN 1	CHAIN 2	CHAIN 3	CHAIN 4
42	5210	84.33	83.09	83.23	82.63

11ac (80MHz) 1S4T TxBF


CHANNEL	FREQUENCY (MHz)	26dB Bandwidth (MHz)			
		CHAIN 1	CHAIN 2	CHAIN 3	CHAIN 4
42	5210	84.31	83.17	83.41	82.19

26dB BANDWIDTH SPECTRUM PLOT


11a 1S4T CDD CH36 Chain1

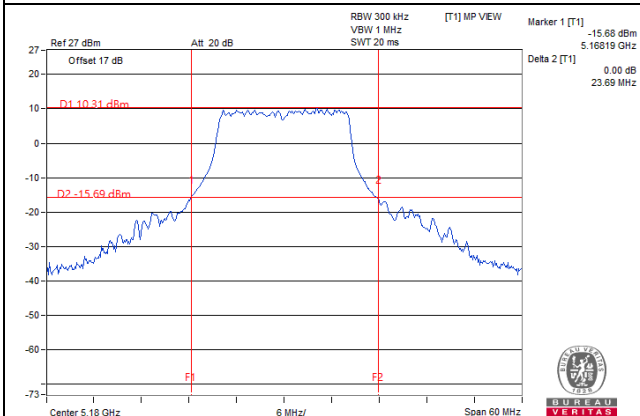


11a 1S4T CDD CH40 Chain1

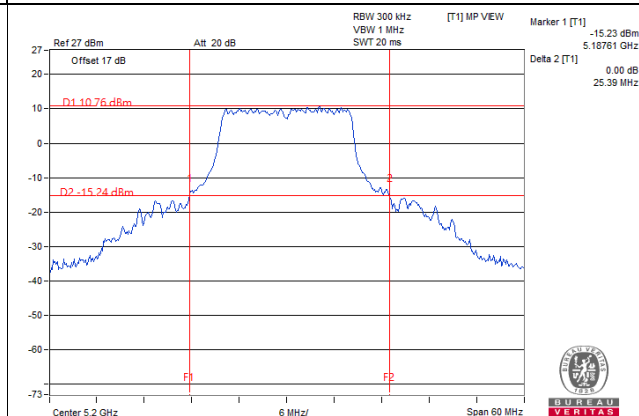


11a 1S4T CDD CH36 Chain2

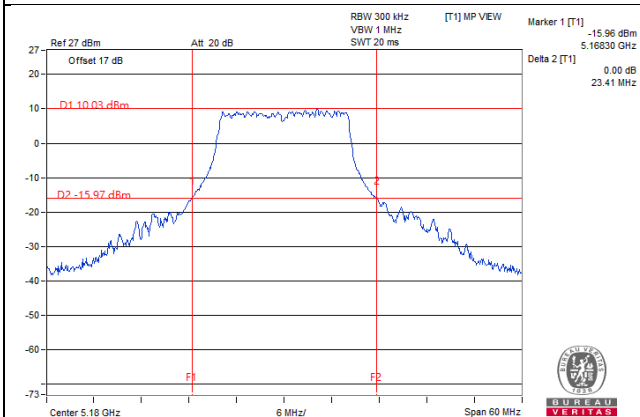


11a 1S4T CDD CH40 Chain2

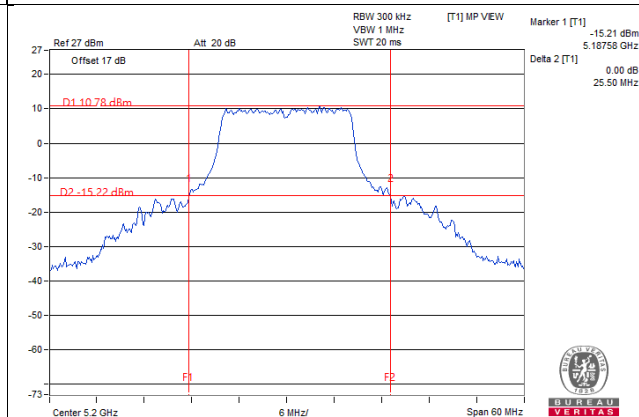


11a 1S4T CDD CH36 Chain3

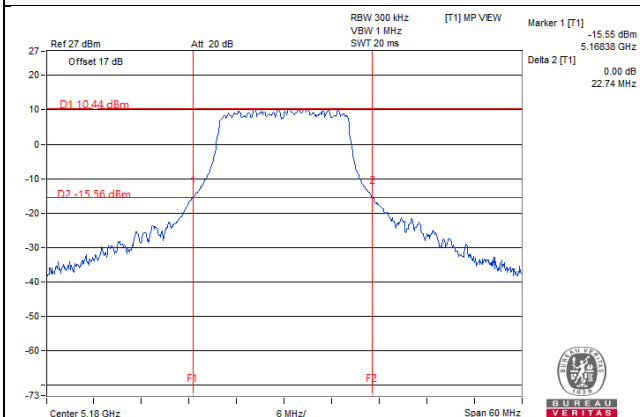


11a 1S4T CDD CH40 Chain3

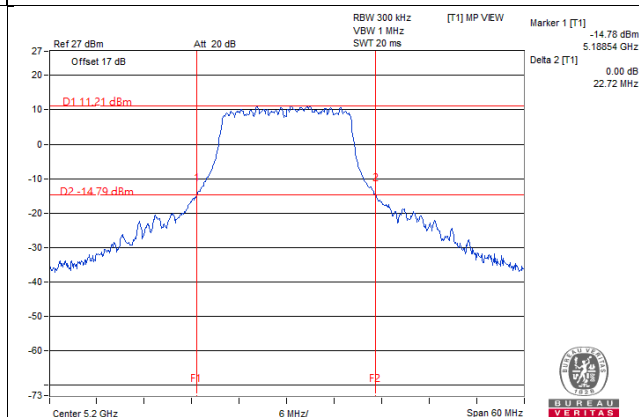

11a 1S4T CDD CH36 Chain4

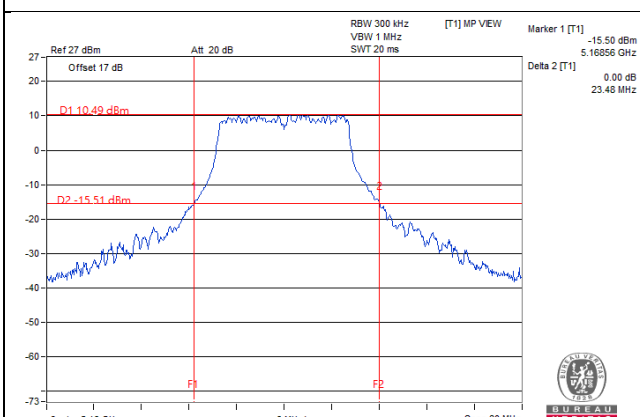


11a 1S4T CDD CH40 Chain4

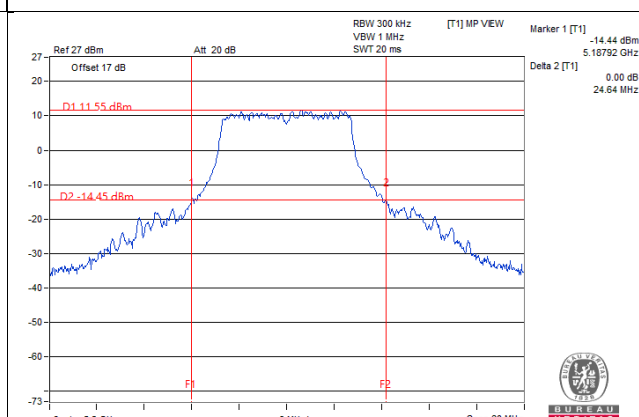


26dB BANDWIDTH SPECTRUM PLOT


11a 1S4T CDD CH48 Chain1

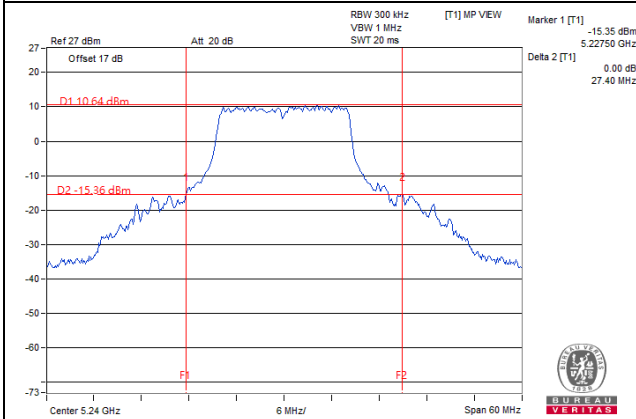


11a 1S4T CDD CH48 Chain2

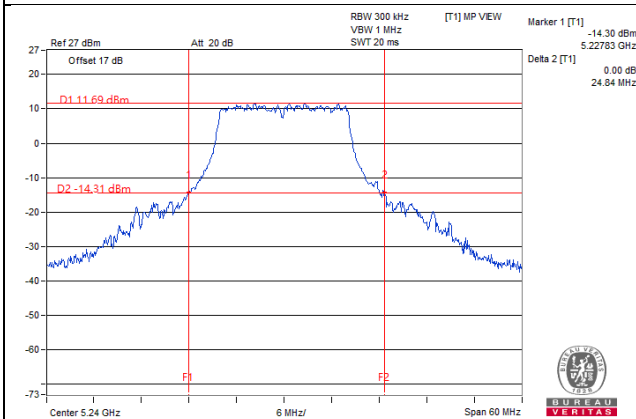

11a 1S4T CDD CH48 Chain3

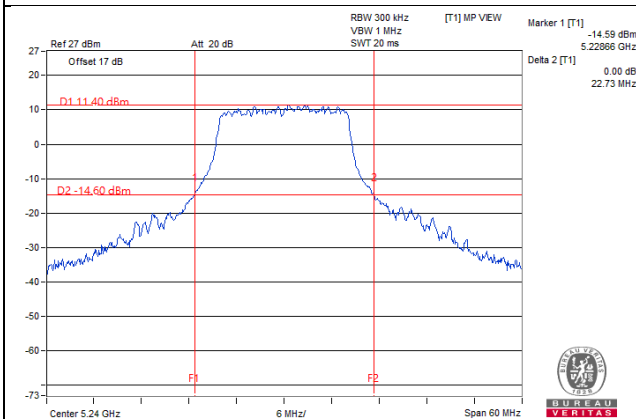


11a 1S4T CDD CH48 Chain4

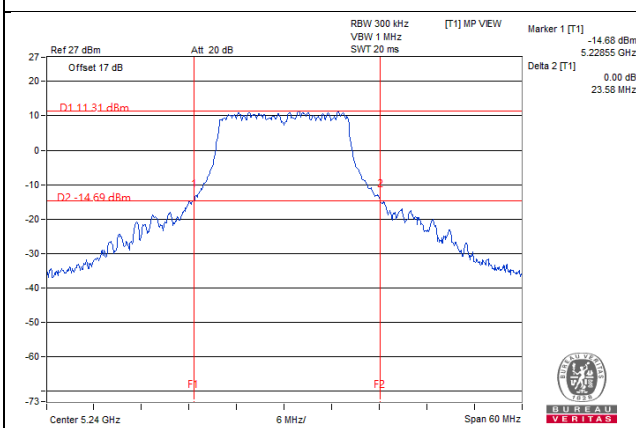


26dB BANDWIDTH SPECTRUM PLOT


11ac (20MHz) 1S4T CDD CH36 Chain1

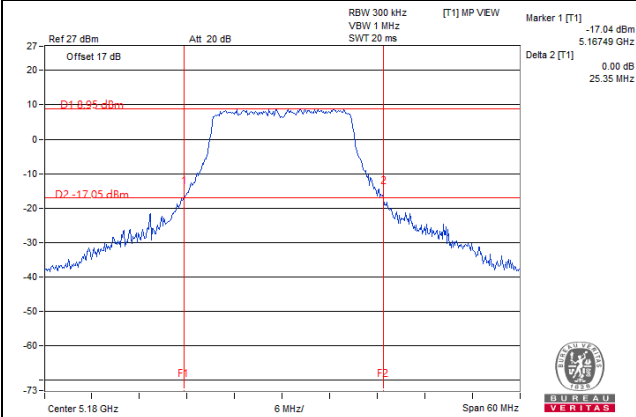


11ac (20MHz) 1S4T CDD CH40 Chain1

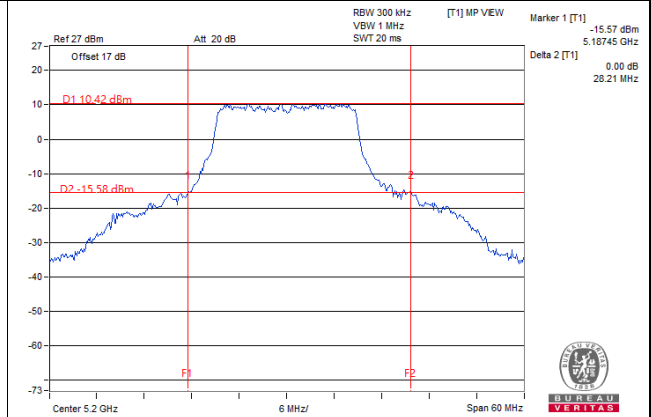


11ac (20MHz) 1S4T CDD CH36 Chain2

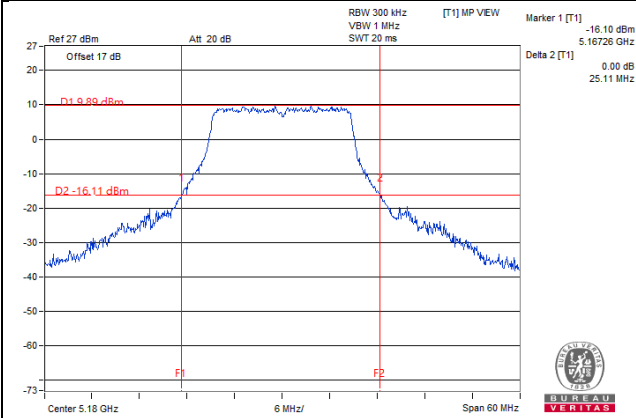


11ac (20MHz) 1S4T CDD CH40 Chain2

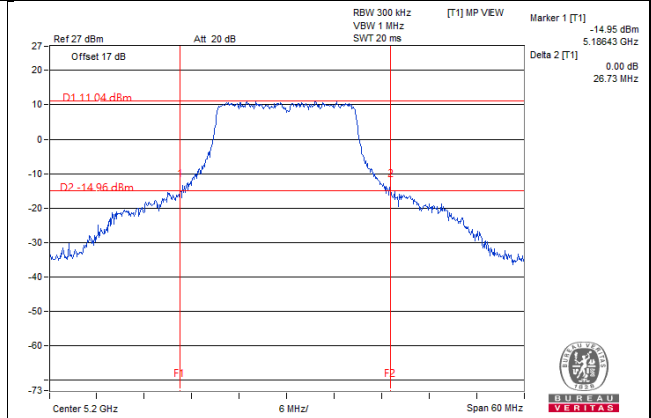


11ac (20MHz) 1S4T CDD CH36 Chain3

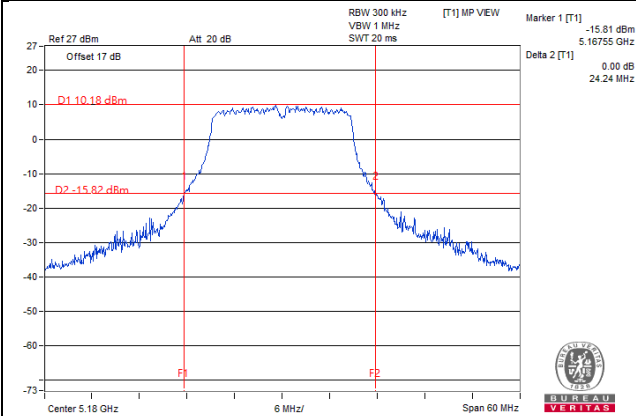


11ac (20MHz) 1S4T CDD CH40 Chain3

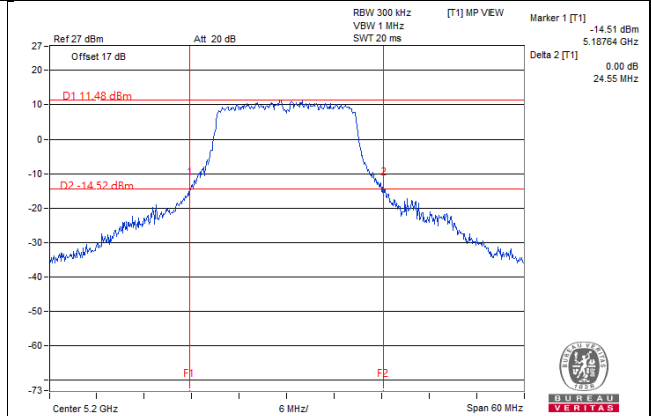

11ac (20MHz) 1S4T CDD CH36 Chain4

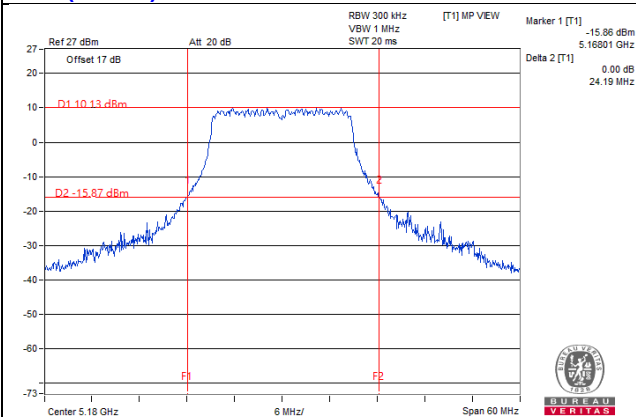


11ac (20MHz) 1S4T CDD CH40 Chain4

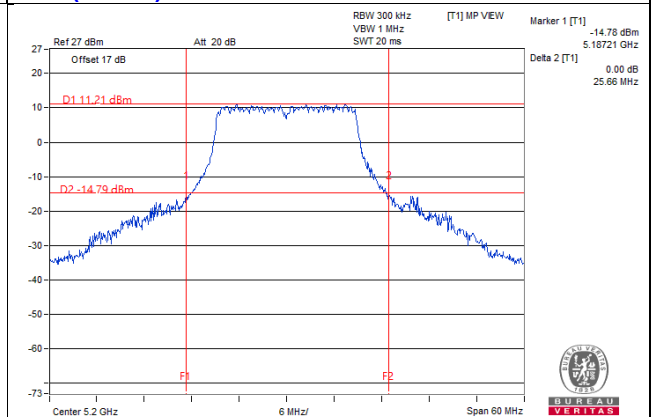


26dB BANDWIDTH SPECTRUM PLOT


11ac (20MHz) 1S4T CDD CH48 Chain1

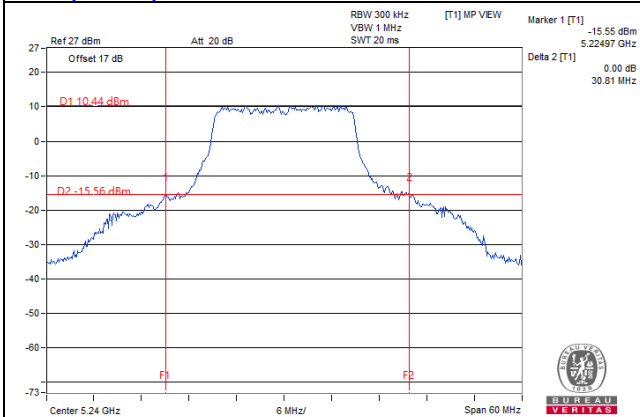


11ac (20MHz) 1S4T TxBF CH36 Chain1

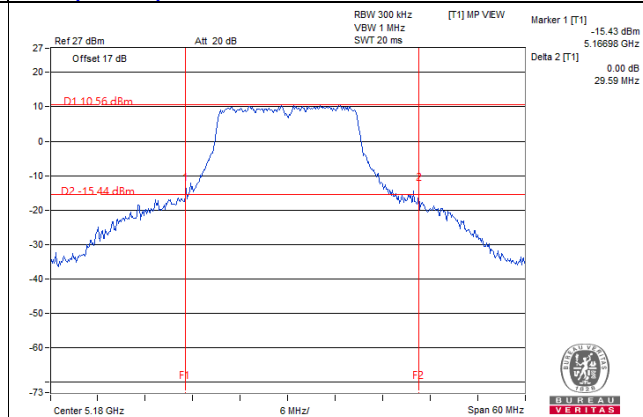


11ac (20MHz) 1S4T CDD CH48 Chain2

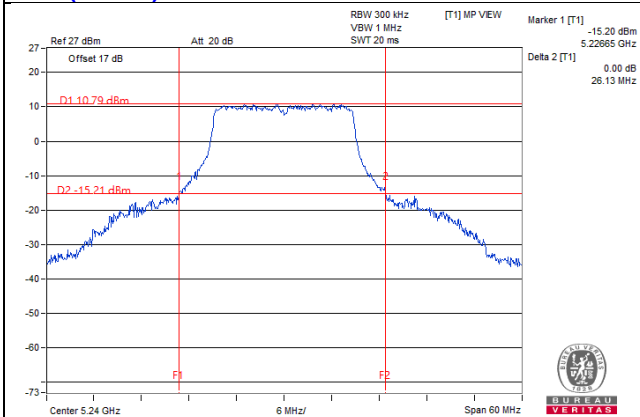


11ac (20MHz) 1S4T TxBF CH36 Chain2

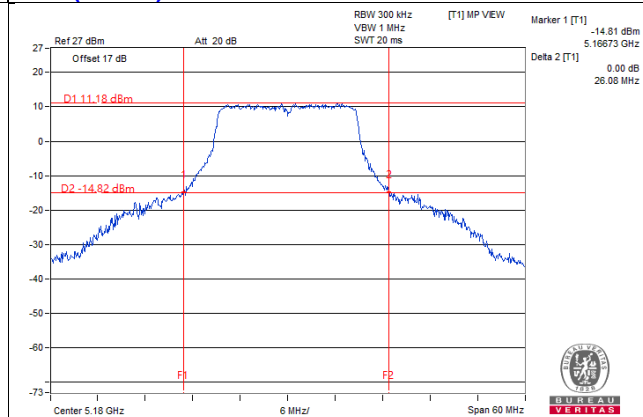


11ac (20MHz) 1S4T CDD CH48 Chain3

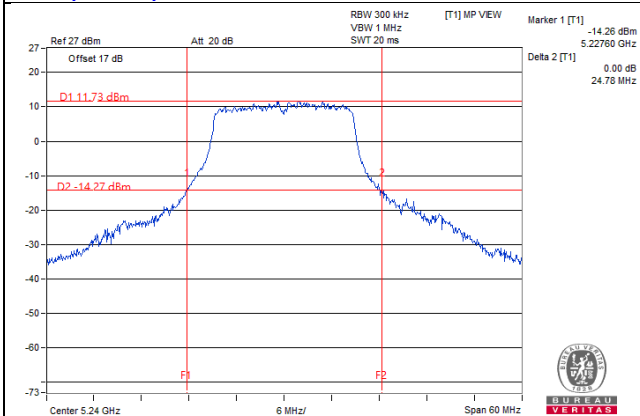


11ac (20MHz) 1S4T TxBF CH36 Chain3

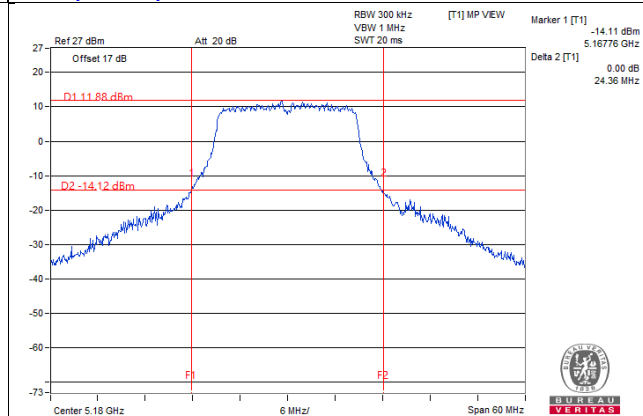

11ac (20MHz) 1S4T CDD CH48 Chain4

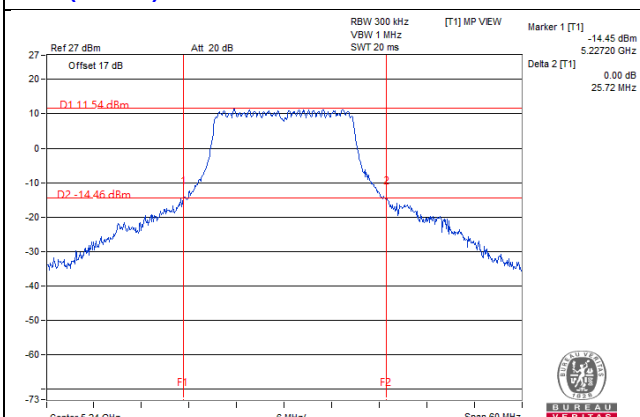


11ac (20MHz) 1S4T TxBF CH36 Chain4

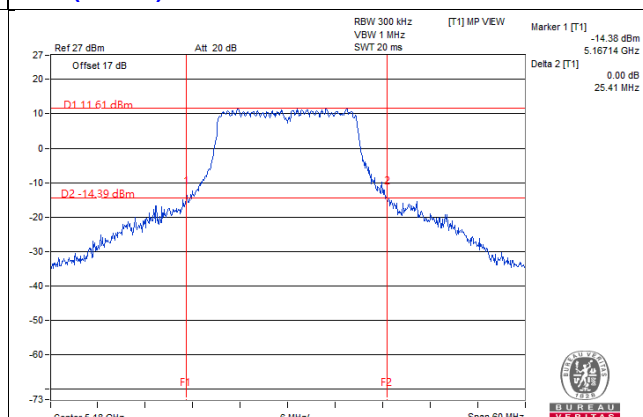


26dB BANDWIDTH SPECTRUM PLOT


11ac (20MHz) 1S4T TxBF CH40 Chain1

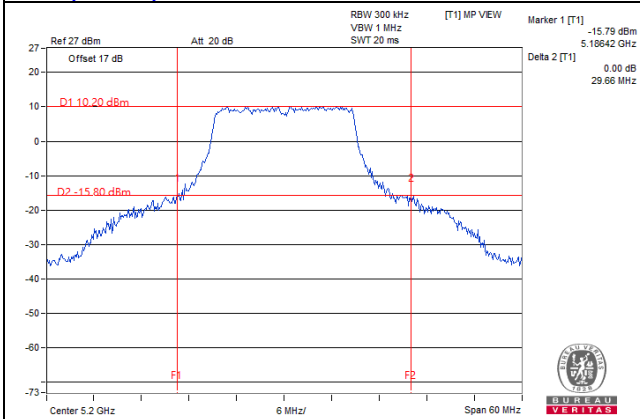


11ac (20MHz) 1S4T TxBF CH48 Chain1

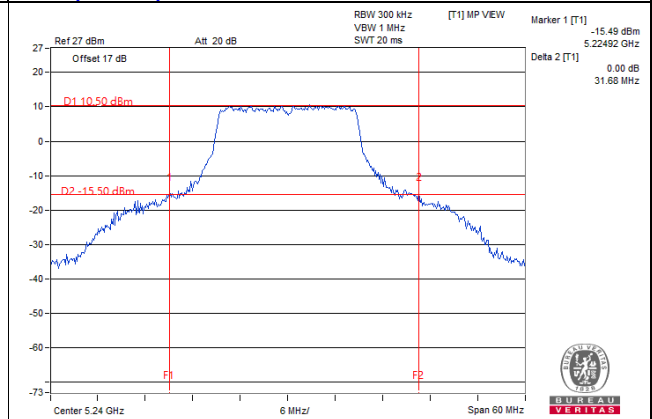


11ac (20MHz) 1S4T TxBF CH40 Chain2

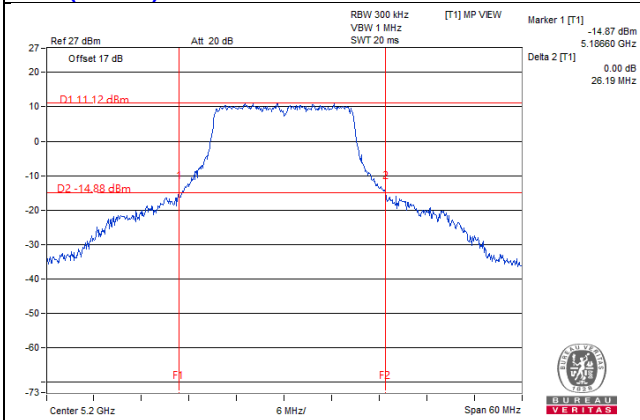


11ac (20MHz) 1S4T TxBF CH48 Chain2

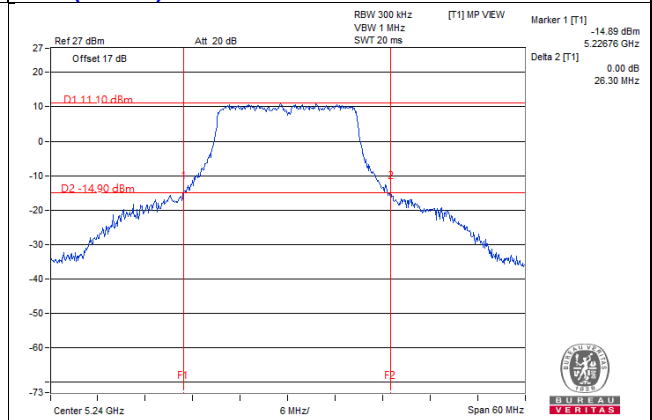


11ac (20MHz) 1S4T TxBF CH40 Chain3

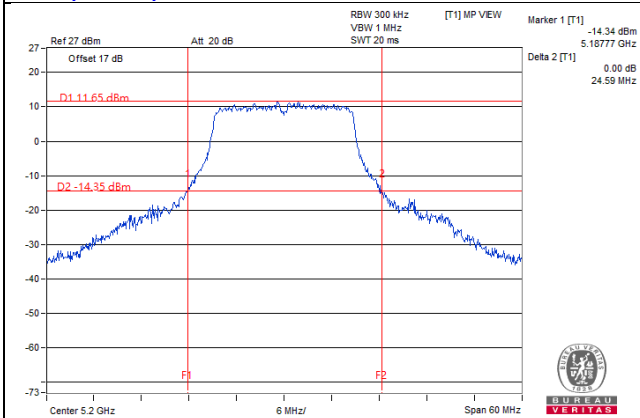


11ac (20MHz) 1S4T TxBF CH48 Chain3

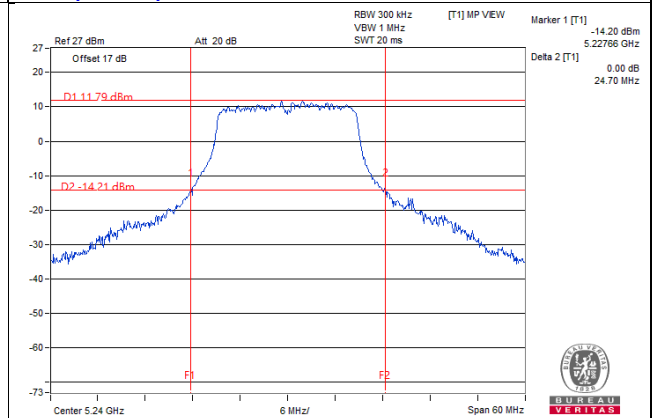

11ac (20MHz) 1S4T TxBF CH40 Chain4

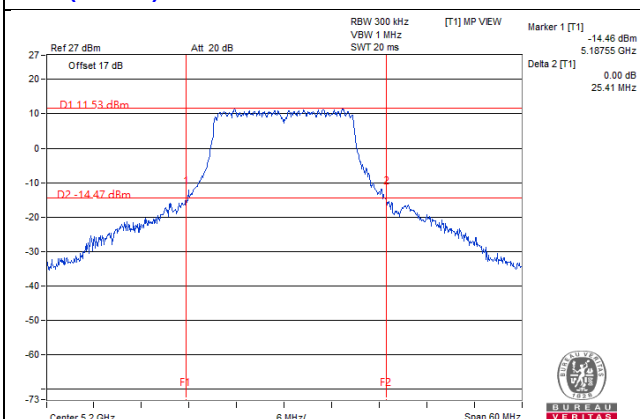


11ac (20MHz) 1S4T TxBF CH48 Chain4

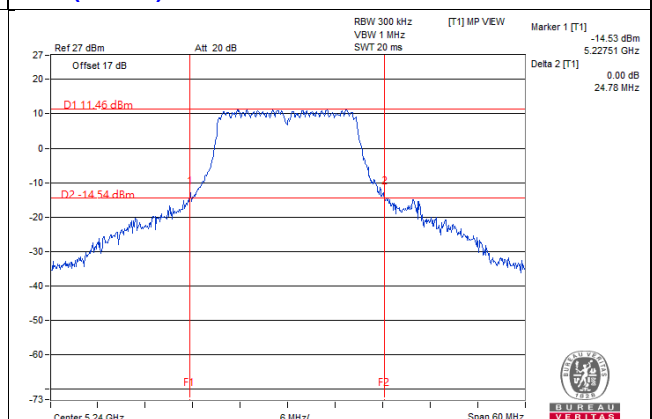


26dB BANDWIDTH SPECTRUM PLOT


11ac (40MHz) 1S4T CDD CH38 Chain1

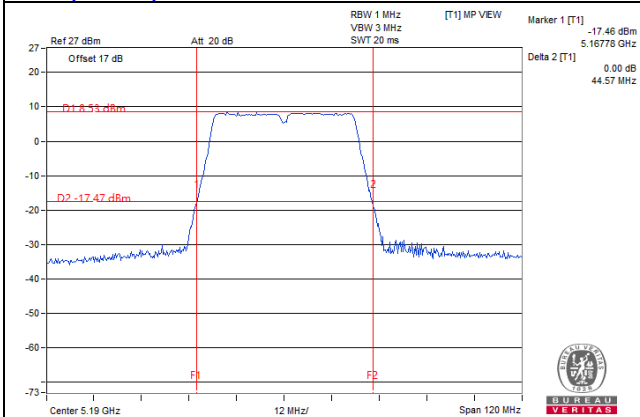


11ac (40MHz) 1S4T CDD CH46 Chain1

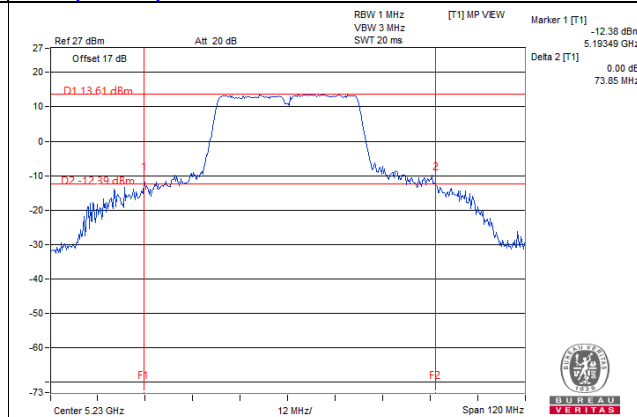


11ac (40MHz) 1S4T CDD CH38 Chain2

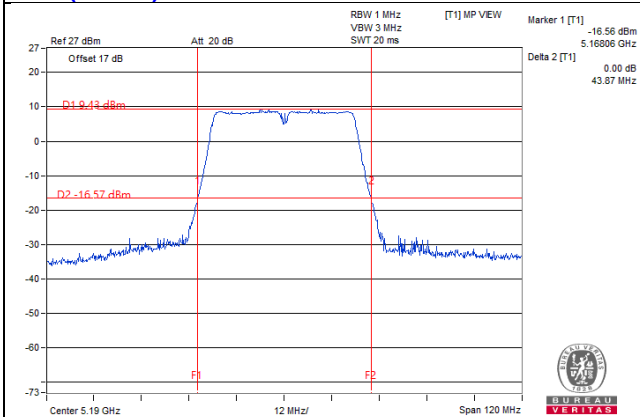


11ac (40MHz) 1S4T CDD CH46 Chain2

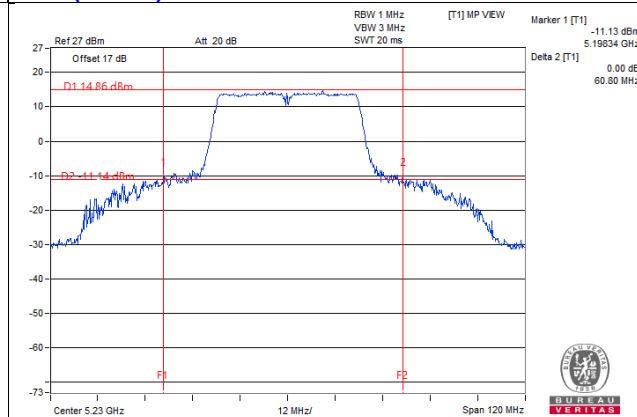


11ac (40MHz) 1S4T CDD CH38 Chain3

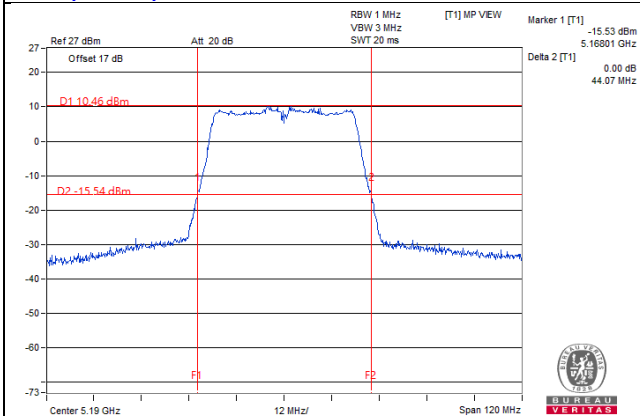


11ac (40MHz) 1S4T CDD CH46 Chain3

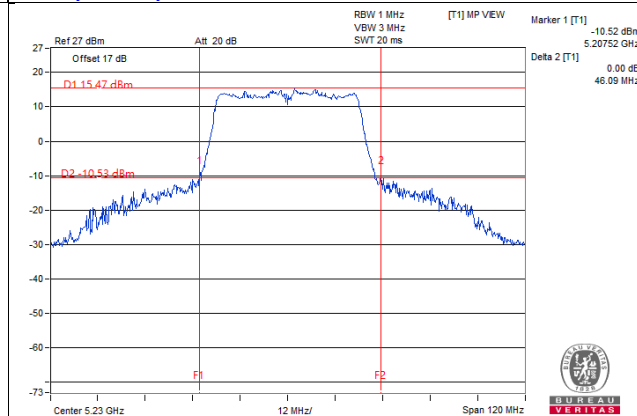

11ac (40MHz) 1S4T CDD CH38 Chain4

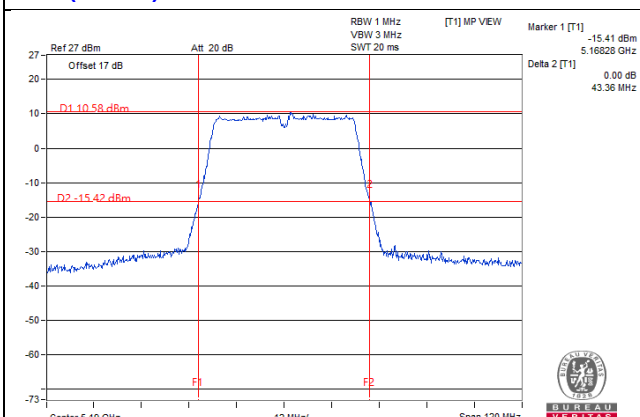


11ac (40MHz) 1S4T CDD CH46 Chain4

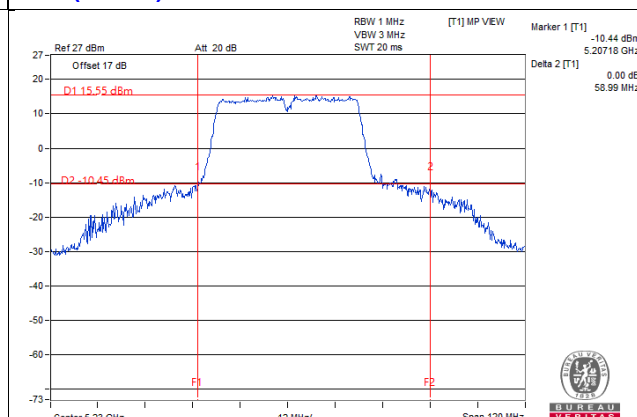


26dB BANDWIDTH SPECTRUM PLOT


11ac (40MHz) 1S4T TxBF CH38 Chain1

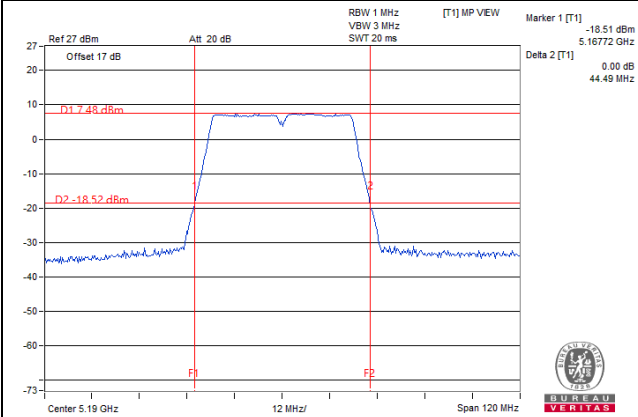


11ac (40MHz) 1S4T TxBF CH46 Chain1

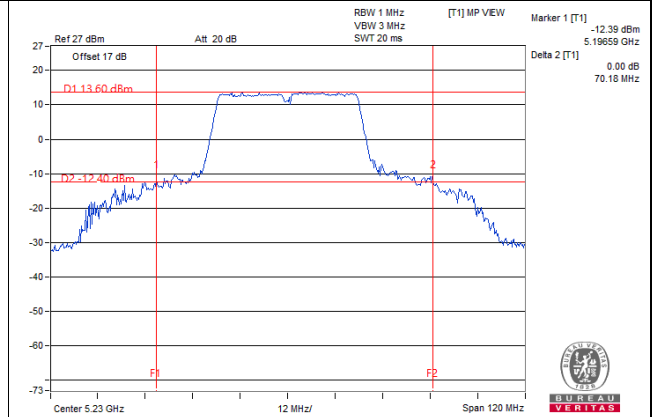


11ac (40MHz) 1S4T TxBF CH38 Chain2

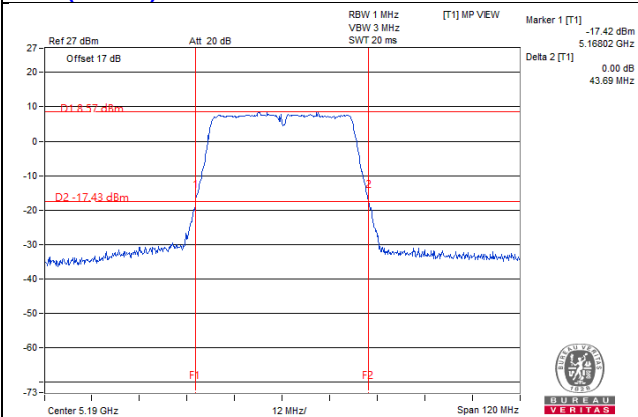


11ac (40MHz) 1S4T TxBF CH46 Chain2

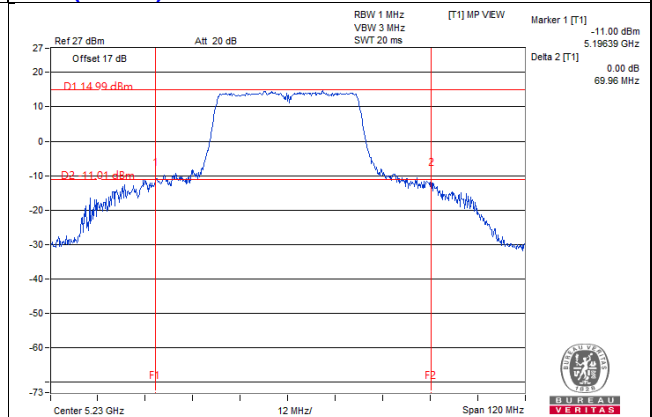


11ac (40MHz) 1S4T TxBF CH38 Chain3

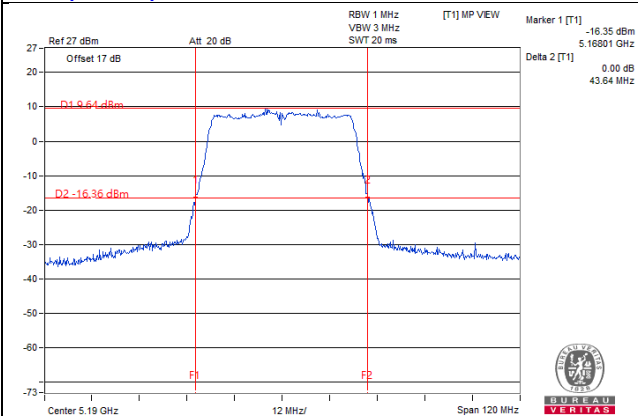


11ac (40MHz) 1S4T TxBF CH46 Chain3

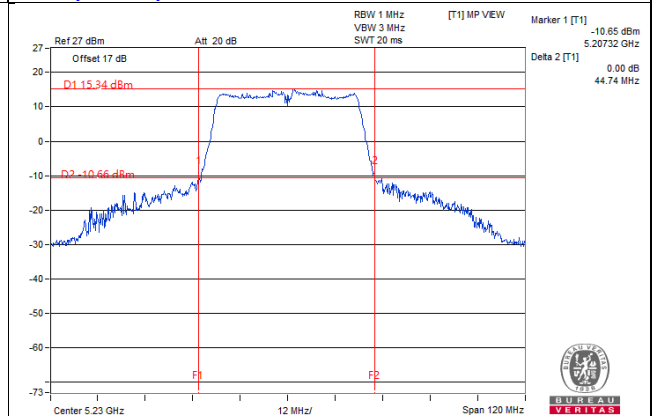

11ac (40MHz) 1S4T TxBF CH38 Chain4

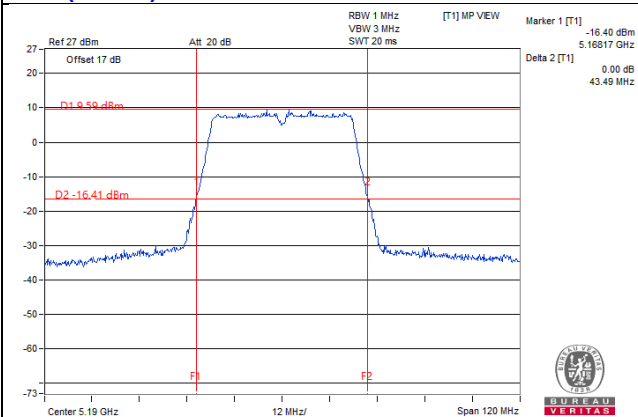


11ac (40MHz) 1S4T TxBF CH46 Chain4

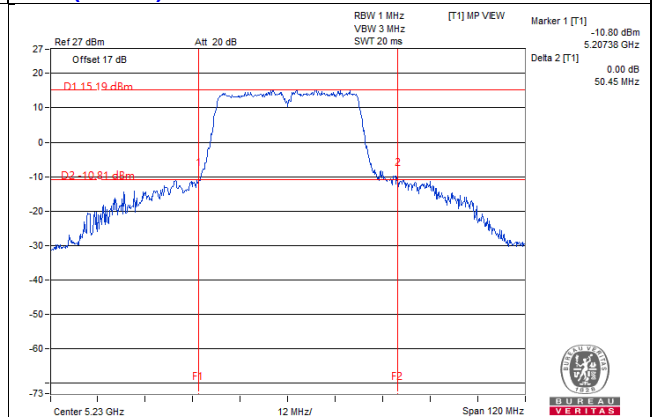


26dB BANDWIDTH SPECTRUM PLOT


11ac (80MHz) 1S4T CDD CH42 Chain1

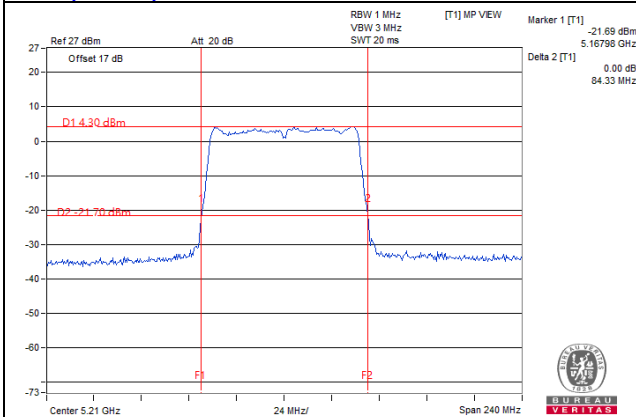


11ac (80MHz) 1S4T TxBF CH42 Chain1

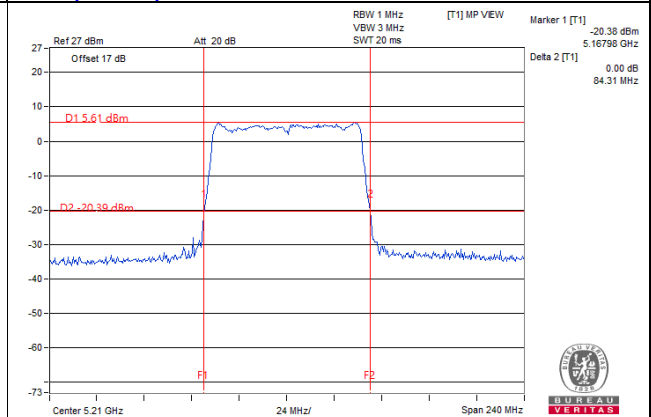


11ac (80MHz) 1S4T CDD CH42 Chain2

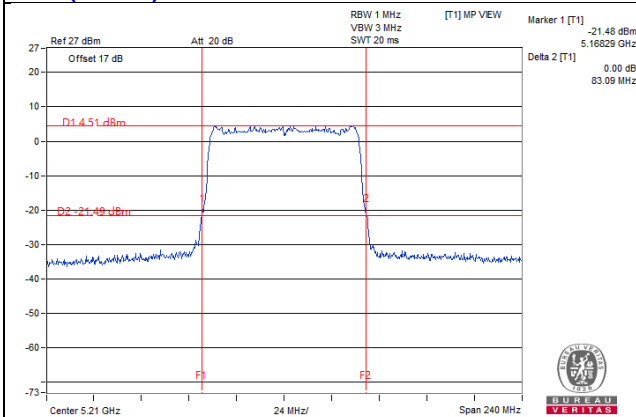


11ac (80MHz) 1S4T TxBF CH42 Chain2

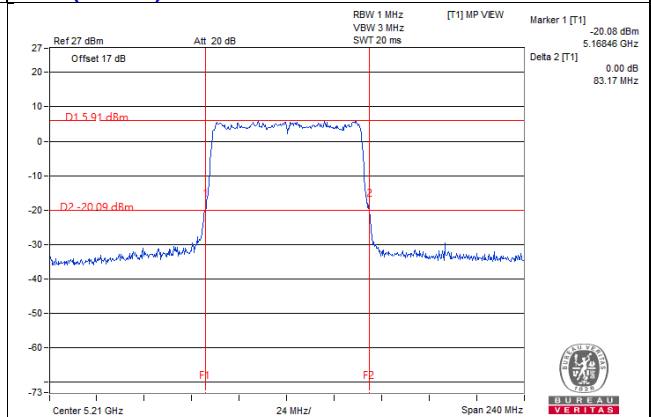


11ac (80MHz) 1S4T CDD CH42 Chain3

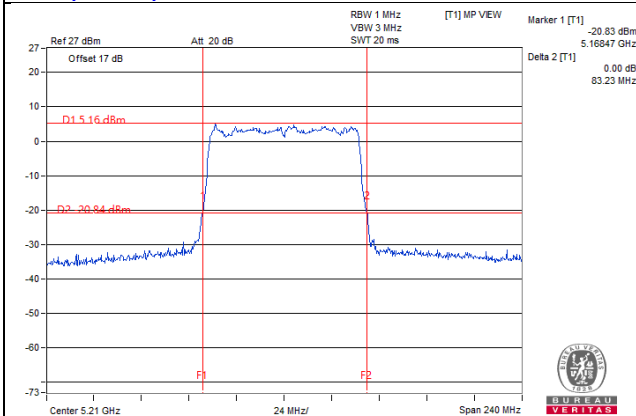


11ac (80MHz) 1S4T TxBF CH42 Chain3

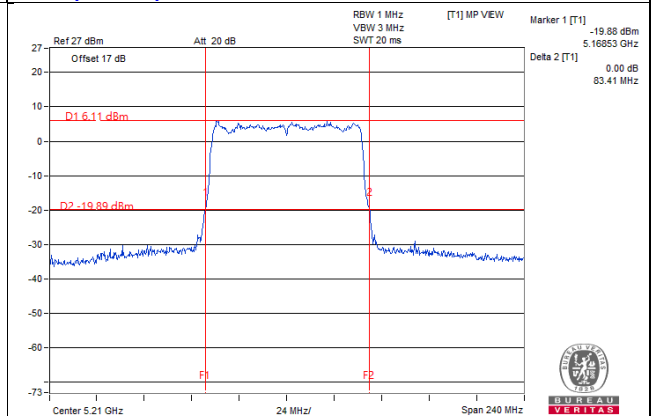

11ac (80MHz) 1S4T CDD CH42 Chain4

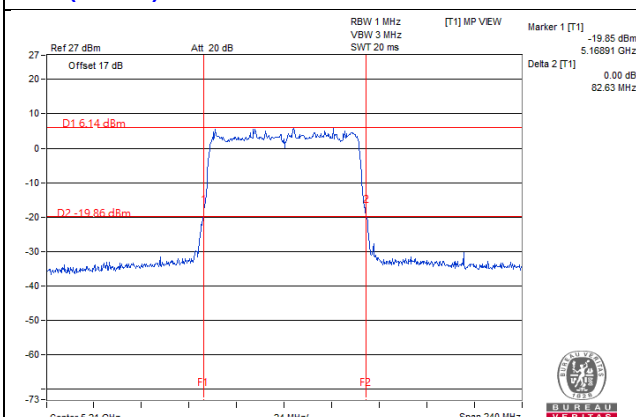

11ac (80MHz) 1S4T TxBF CH42 Chain4

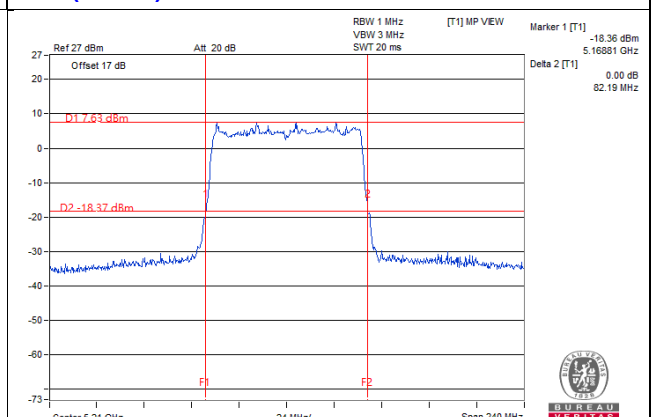

Client Mode

11a 1S4T CDD

CHANNEL	FREQUENCY (MHz)	26dB Bandwidth (MHz)			
		CHAIN 1	CHAIN 2	CHAIN 3	CHAIN 4
36	5180	23.59	23.58	23.69	23.54
40	5200	22.95	23.58	23.59	23.56
48	5240	22.97	23.56	23.60	23.59

11ac (20MHz) 1S4T CDD

CHANNEL	FREQUENCY (MHz)	26dB Bandwidth (MHz)			
		CHAIN 1	CHAIN 2	CHAIN 3	CHAIN 4
36	5180	25.13	25.06	24.92	24.66
40	5200	25.26	24.70	24.66	24.37
48	5240	25.24	24.81	24.69	24.51

11ac (20MHz) 1S4T TxBF

CHANNEL	FREQUENCY (MHz)	26dB Bandwidth (MHz)			
		CHAIN 1	CHAIN 2	CHAIN 3	CHAIN 4
36	5180	25.07	24.87	24.48	24.78
40	5200	25.11	24.75	24.15	24.72
48	5240	25.16	24.97	24.58	24.65

11ac (40MHz) 1S4T CDD

CHANNEL	FREQUENCY (MHz)	26dB Bandwidth (MHz)			
		CHAIN 1	CHAIN 2	CHAIN 3	CHAIN 4
38	5190	44.67	44.02	43.95	43.48
46	5230	44.25	44.16	43.94	43.66

11ac (40MHz) 1S4T TxBF

CHANNEL	FREQUENCY (MHz)	26dB Bandwidth (MHz)			
		CHAIN 1	CHAIN 2	CHAIN 3	CHAIN 4
38	5190	44.84	43.77	44.10	43.82
46	5230	44.61	44.05	43.80	43.41

11ac (80MHz) 1S4T CDD


CHANNEL	FREQUENCY (MHz)	26dB Bandwidth (MHz)			
		CHAIN 1	CHAIN 2	CHAIN 3	CHAIN 4
42	5210	83.97	83.18	83.21	82.96

11ac (80MHz) 1S4T TxBF


CHANNEL	FREQUENCY (MHz)	26dB Bandwidth (MHz)			
		CHAIN 1	CHAIN 2	CHAIN 3	CHAIN 4
42	5210	83.72	83.10	83.37	82.98

26dB BANDWIDTH SPECTRUM PLOT


11a 1S4T CDD CH36 Chain1

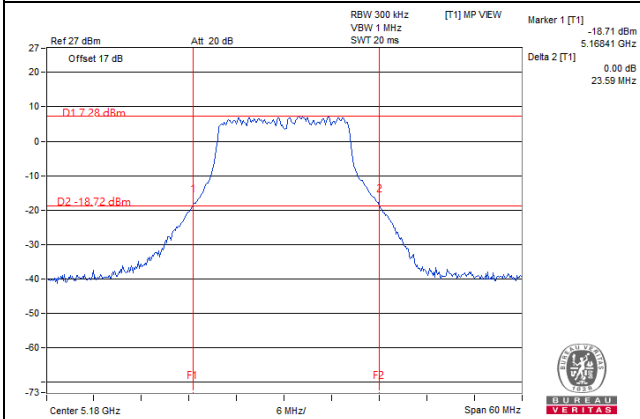


11a 1S4T CDD CH40 Chain1

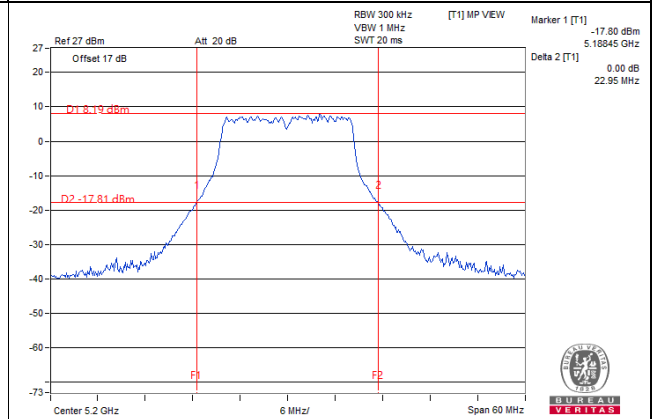


11a 1S4T CDD CH36 Chain2

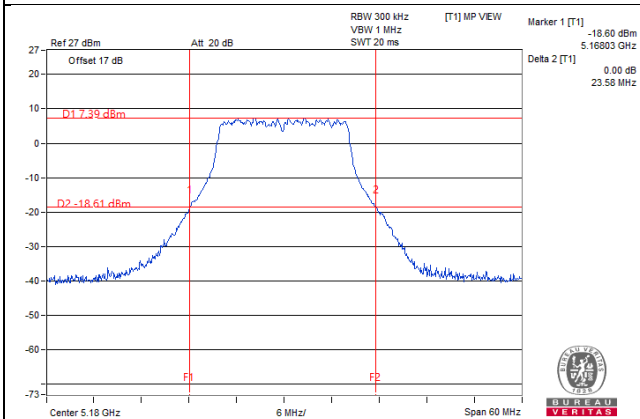


11a 1S4T CDD CH40 Chain2

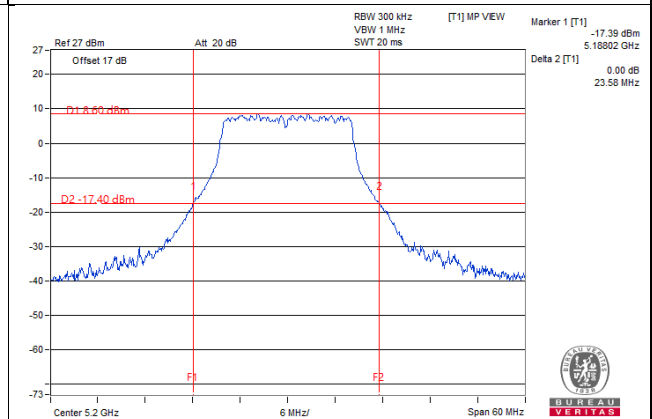


11a 1S4T CDD CH36 Chain3

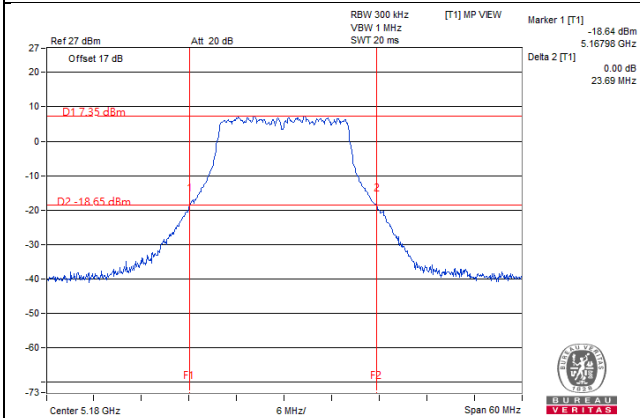


11a 1S4T CDD CH40 Chain3

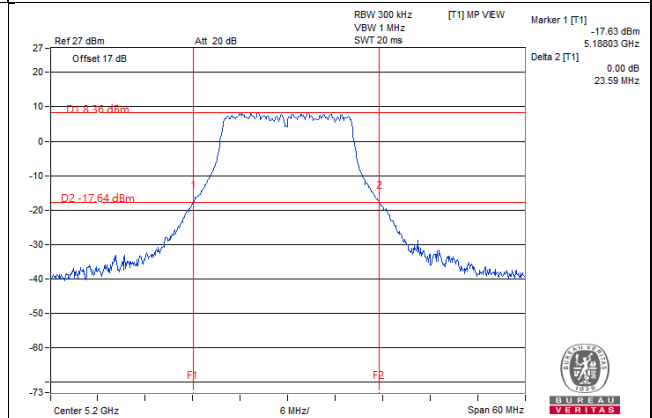

11a 1S4T CDD CH36 Chain4

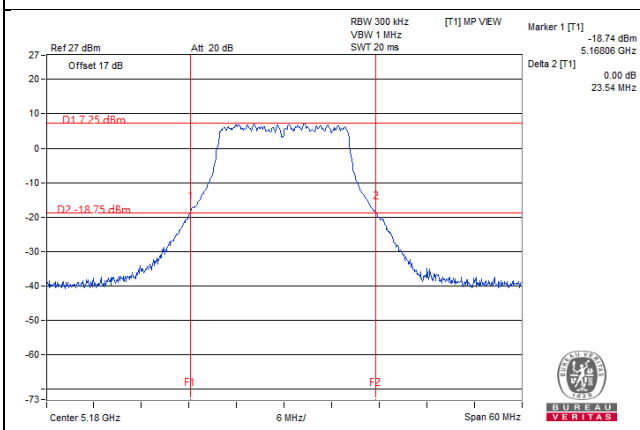


11a 1S4T CDD CH40 Chain4

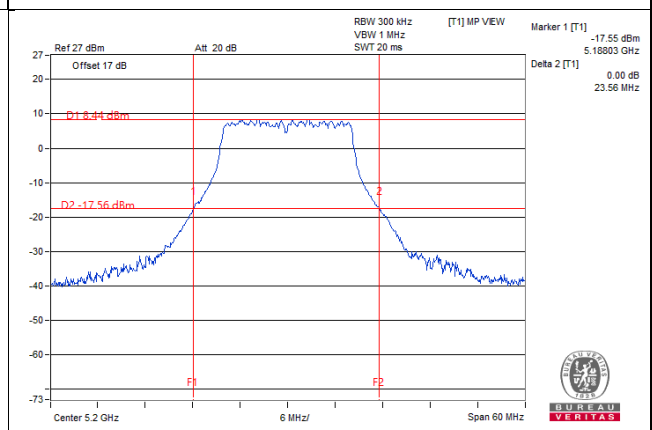


26dB BANDWIDTH SPECTRUM PLOT


11a 1S4T CDD CH48 Chain1

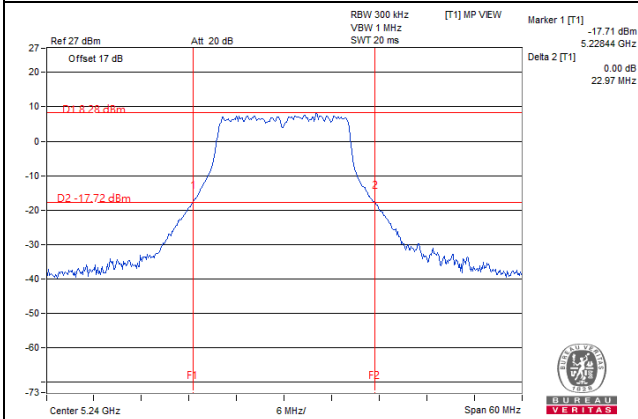


11a 1S4T CDD CH48 Chain2

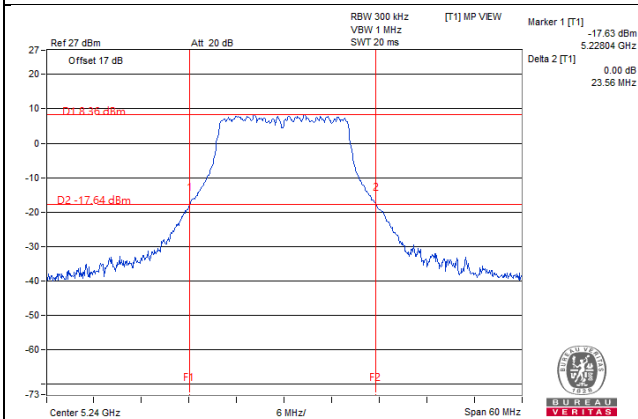

11a 1S4T CDD CH48 Chain3

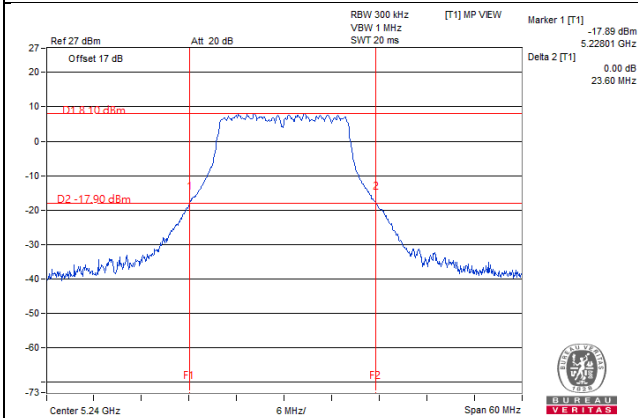


11a 1S4T CDD CH48 Chain4

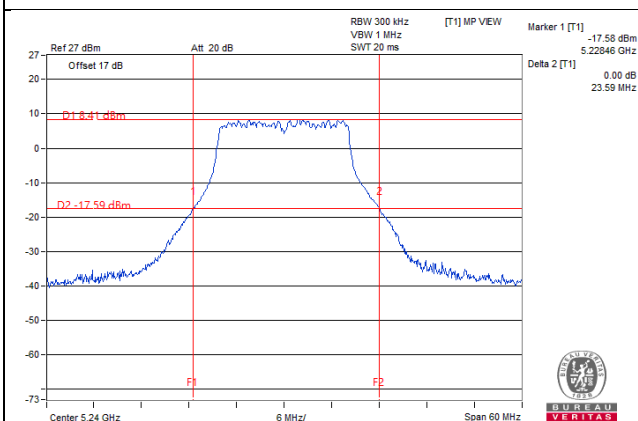


26dB BANDWIDTH SPECTRUM PLOT


11ac (20MHz) 1S4T CDD CH36 Chain1

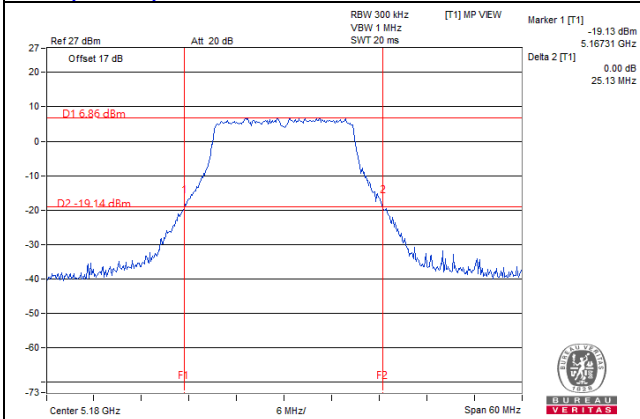


11ac (20MHz) 1S4T CDD CH40 Chain1

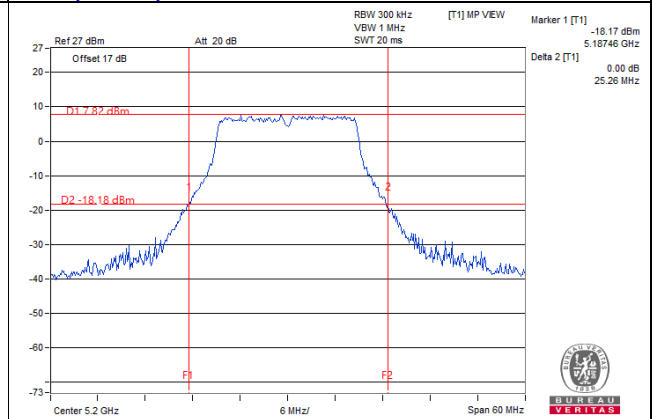


11ac (20MHz) 1S4T CDD CH36 Chain2

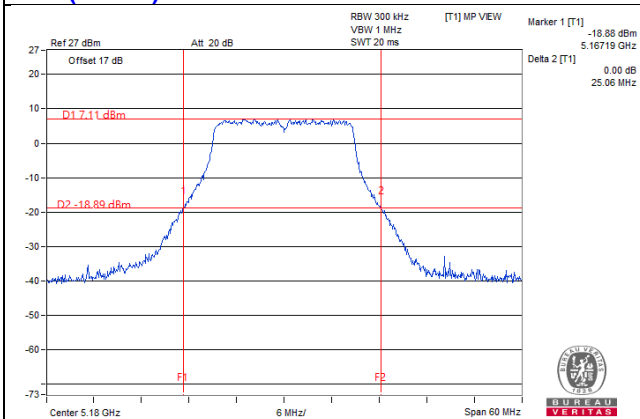


11ac (20MHz) 1S4T CDD CH40 Chain2

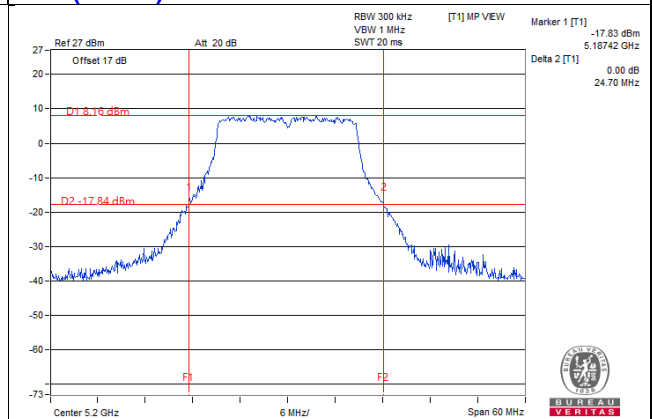


11ac (20MHz) 1S4T CDD CH36 Chain3

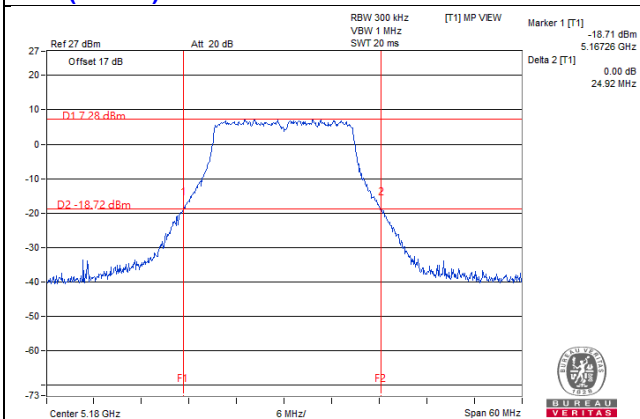


11ac (20MHz) 1S4T CDD CH40 Chain3

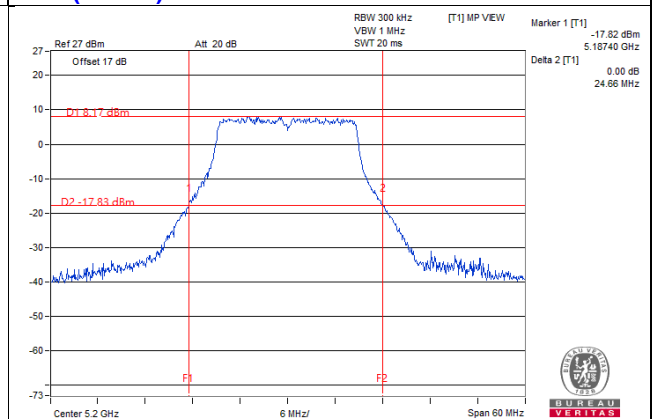

11ac (20MHz) 1S4T CDD CH36 Chain4

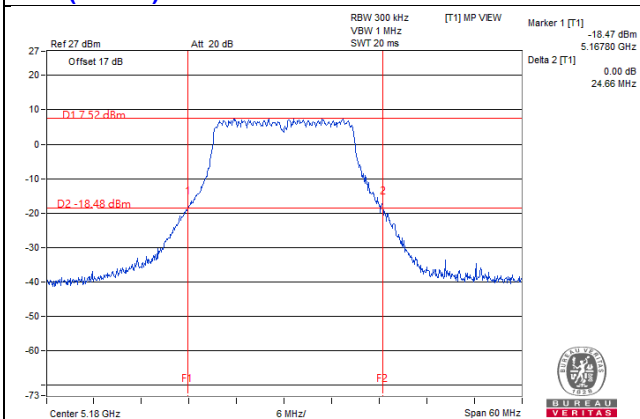


11ac (20MHz) 1S4T CDD CH40 Chain4

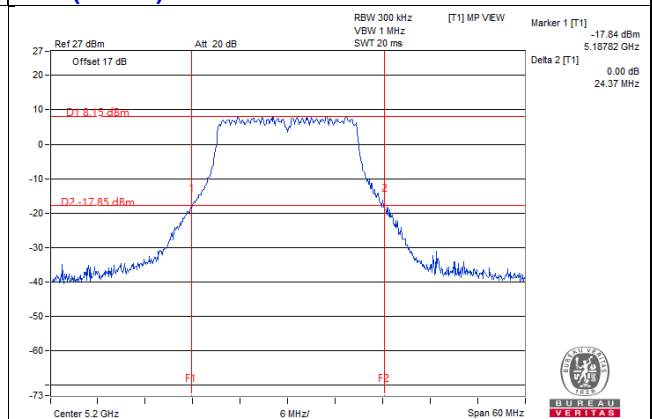


26dB BANDWIDTH SPECTRUM PLOT


11ac (20MHz) 1S4T CDD CH48 Chain1

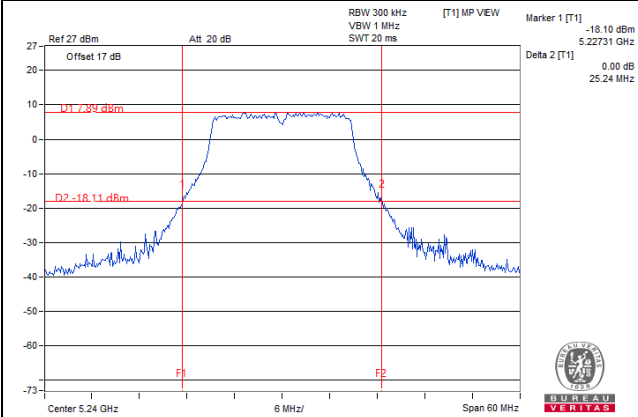


11ac (20MHz) 1S4T TxBF CH36 Chain1

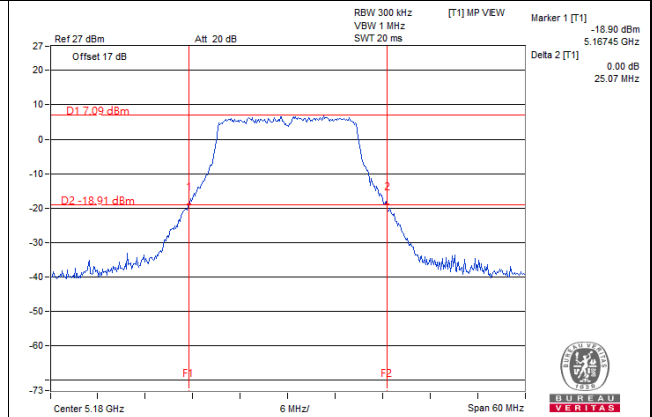


11ac (20MHz) 1S4T CDD CH48 Chain2

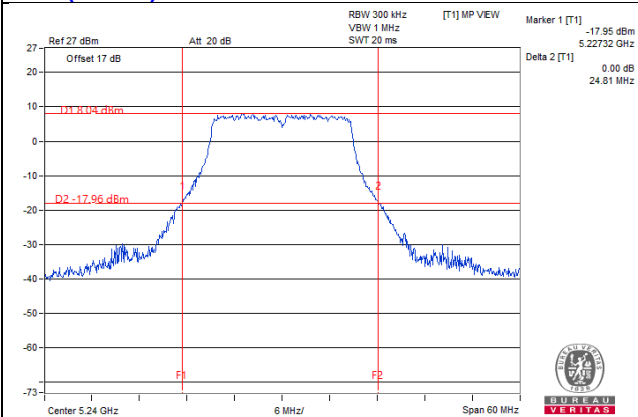


11ac (20MHz) 1S4T TxBF CH36 Chain2

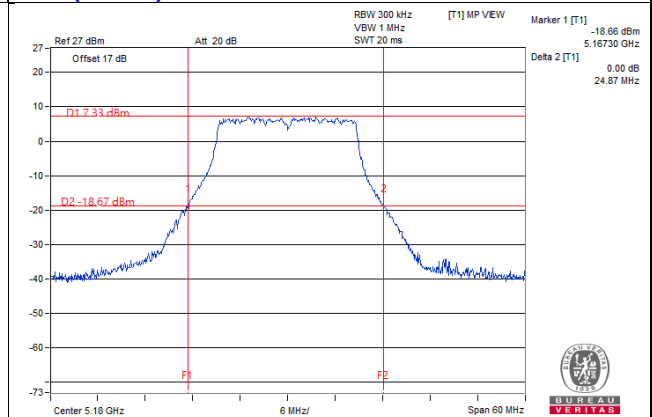


11ac (20MHz) 1S4T CDD CH48 Chain3

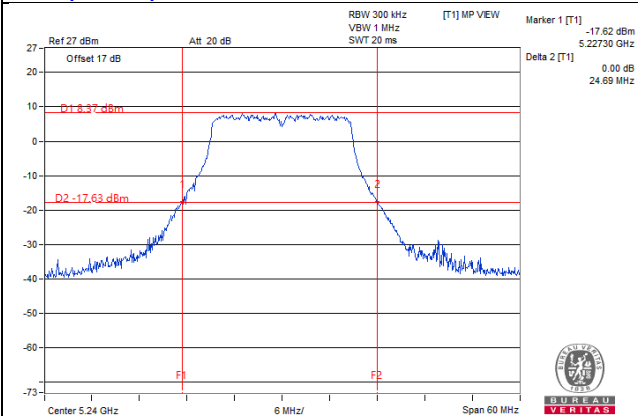


11ac (20MHz) 1S4T TxBF CH36 Chain3

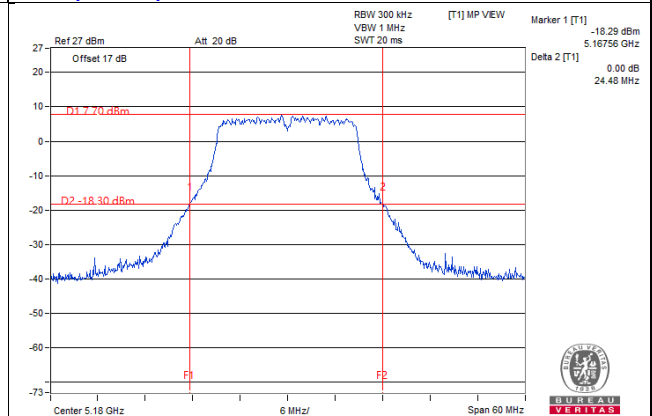

11ac (20MHz) 1S4T CDD CH48 Chain4

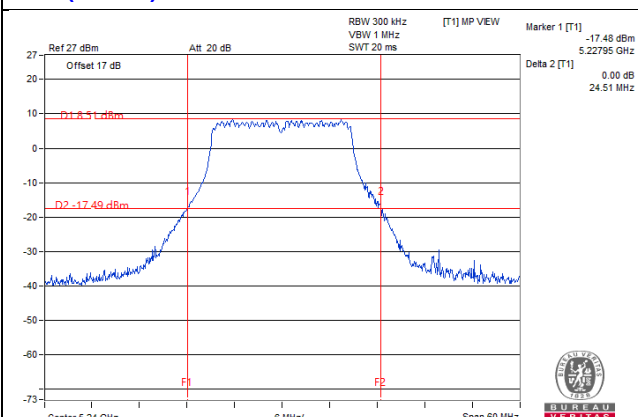


11ac (20MHz) 1S4T TxBF CH36 Chain4

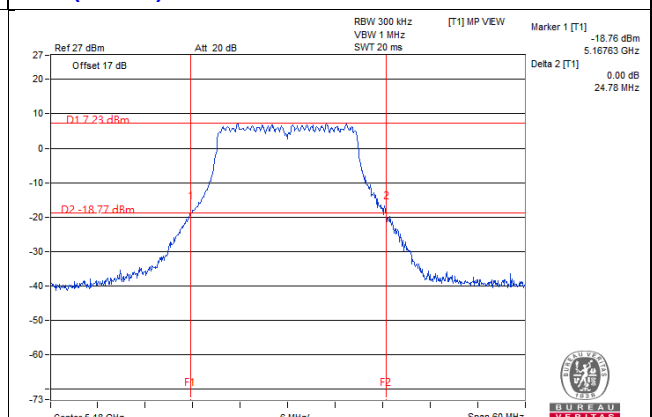


26dB BANDWIDTH SPECTRUM PLOT


11ac (20MHz) 1S4T TxBF CH40 Chain1

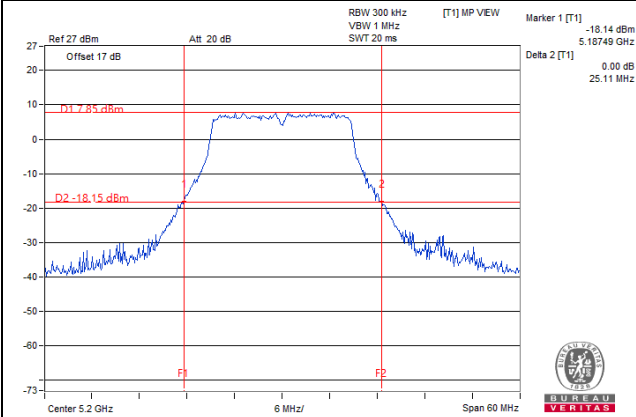


11ac (20MHz) 1S4T TxBF CH48 Chain1

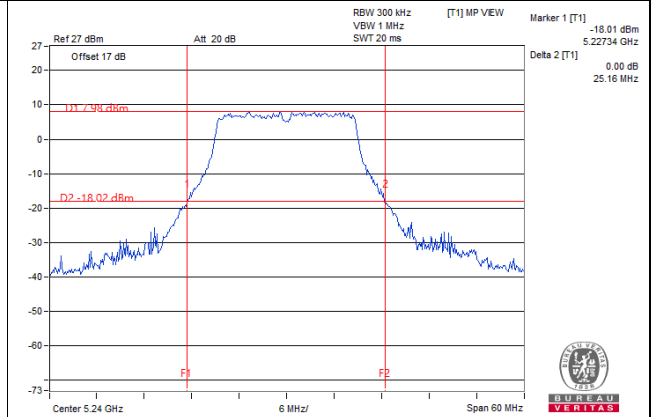


11ac (20MHz) 1S4T TxBF CH40 Chain2

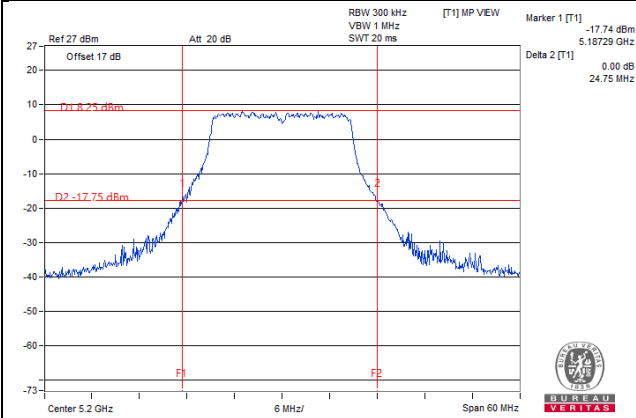


11ac (20MHz) 1S4T TxBF CH48 Chain2

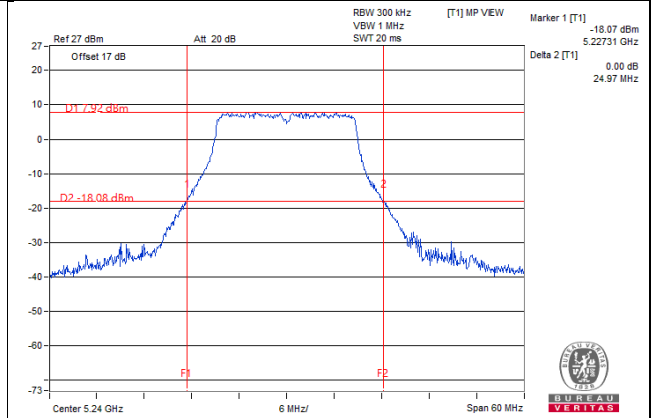


11ac (20MHz) 1S4T TxBF CH40 Chain3

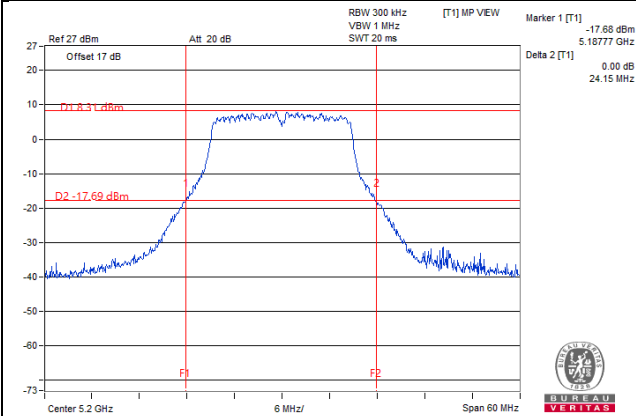


11ac (20MHz) 1S4T TxBF CH48 Chain3

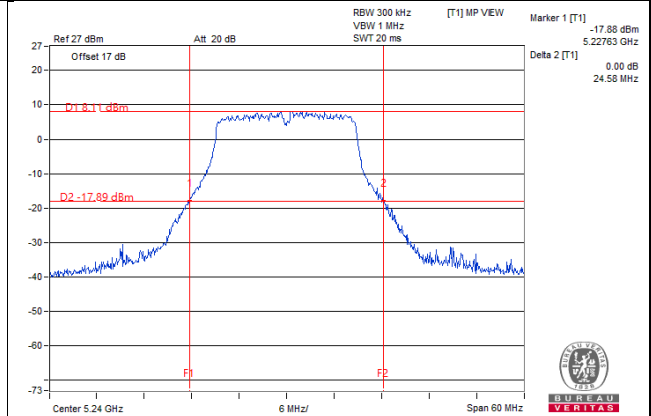

11ac (20MHz) 1S4T TxBF CH40 Chain4

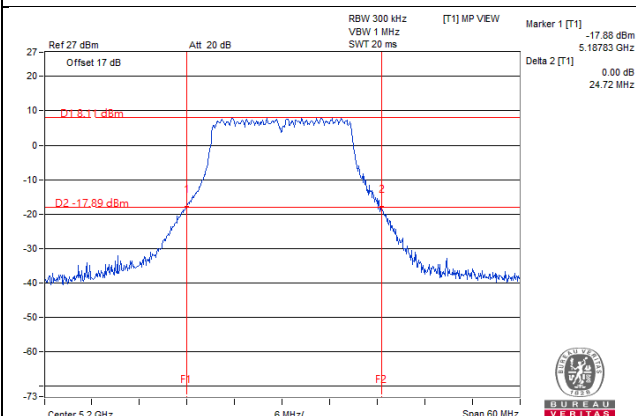


11ac (20MHz) 1S4T TxBF CH48 Chain4

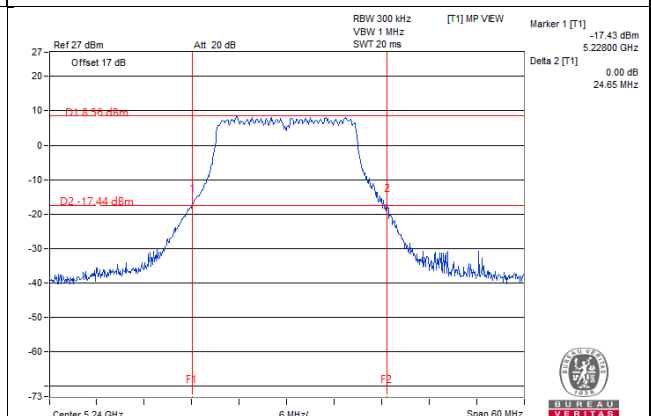


26dB BANDWIDTH SPECTRUM PLOT


11ac (40MHz) 1S4T CDD CH38 Chain1

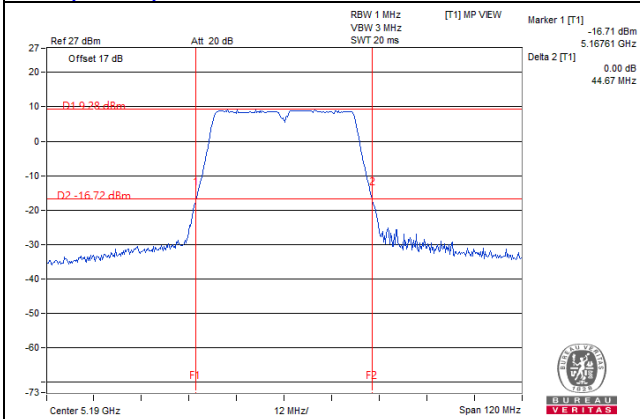


11ac (40MHz) 1S4T CDD CH46 Chain1

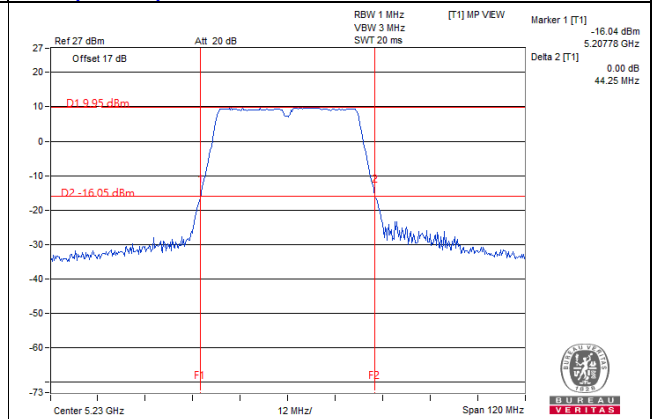


11ac (40MHz) 1S4T CDD CH38 Chain2

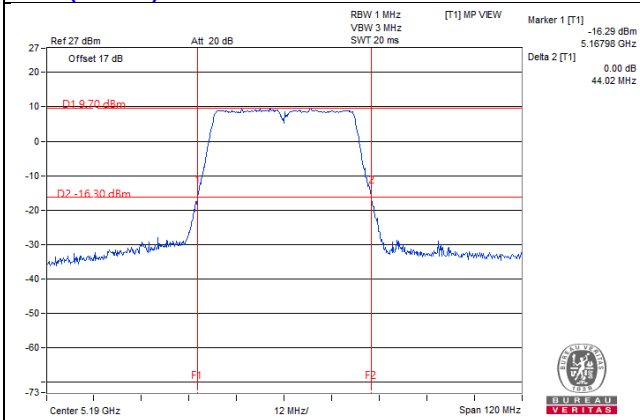


11ac (40MHz) 1S4T CDD CH46 Chain2

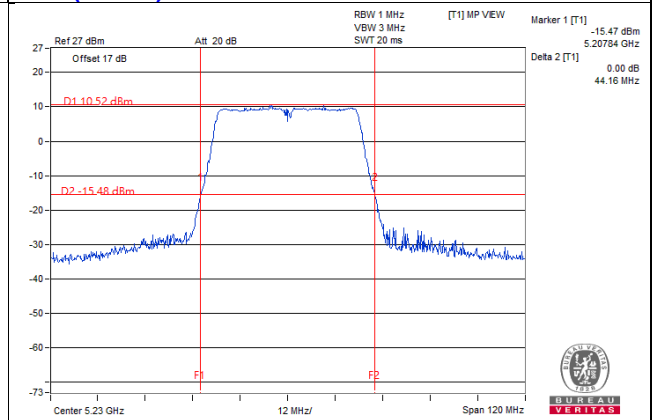


11ac (40MHz) 1S4T CDD CH38 Chain3

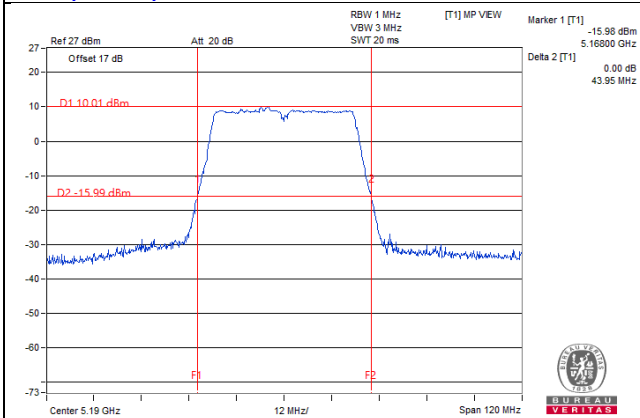


11ac (40MHz) 1S4T CDD CH46 Chain3

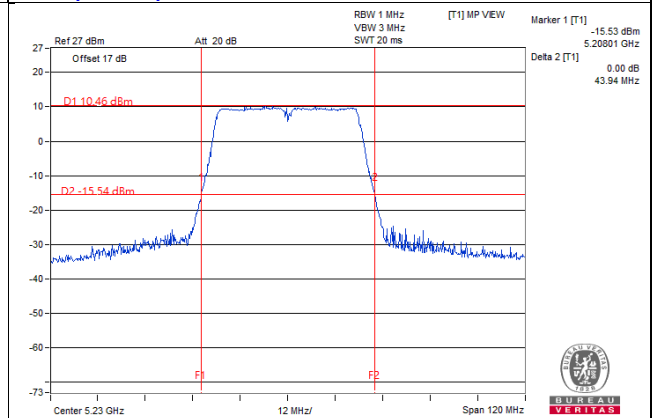

11ac (40MHz) 1S4T CDD CH38 Chain4

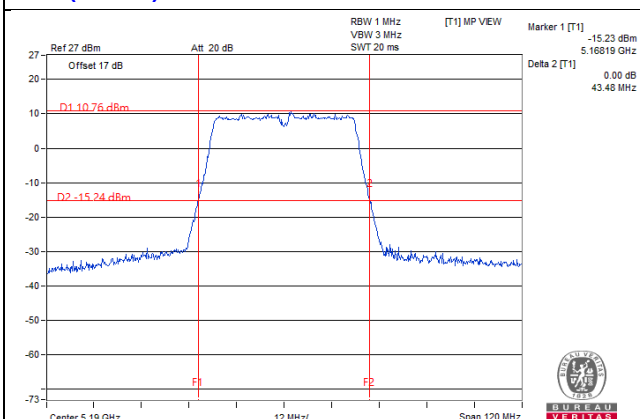


11ac (40MHz) 1S4T CDD CH46 Chain4

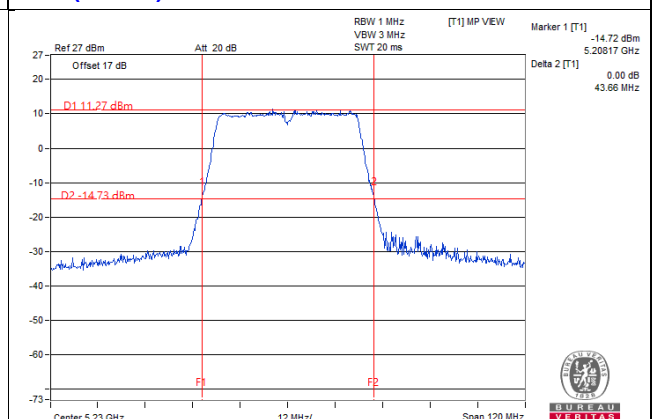


26dB BANDWIDTH SPECTRUM PLOT


11ac (40MHz) 1S4T TxBF CH38 Chain1

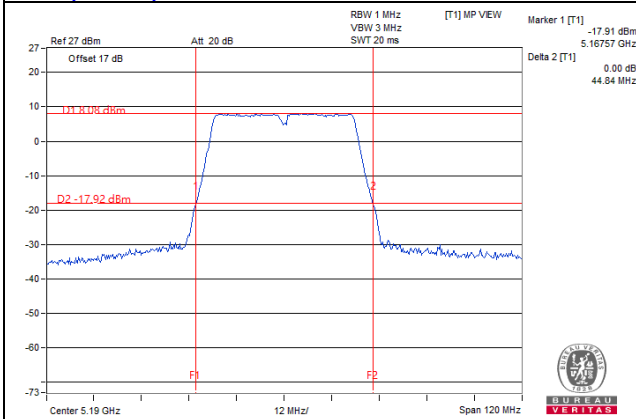


11ac (40MHz) 1S4T TxBF CH46 Chain1

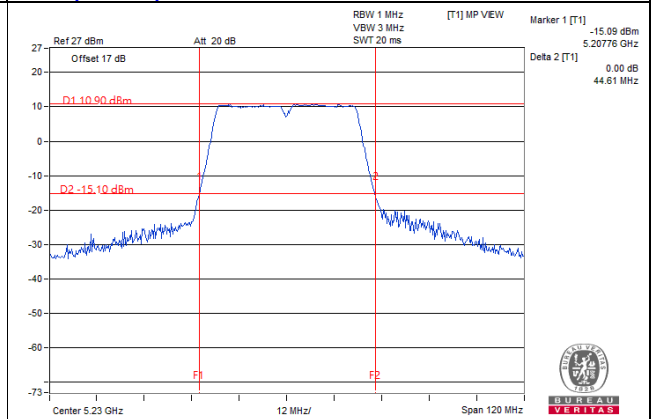


11ac (40MHz) 1S4T TxBF CH38 Chain2

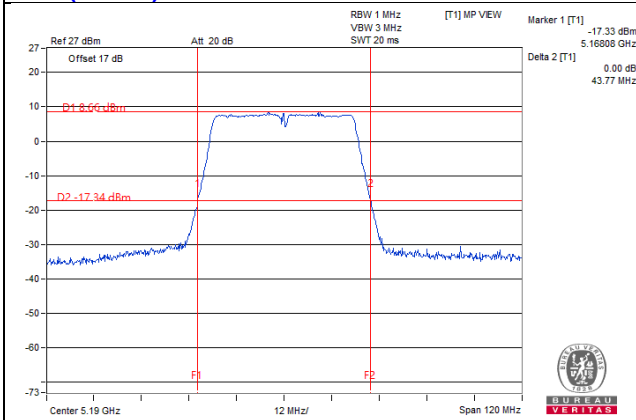


11ac (40MHz) 1S4T TxBF CH46 Chain2

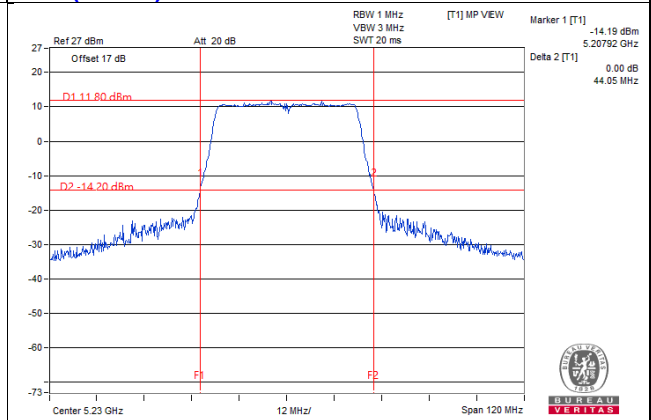


11ac (40MHz) 1S4T TxBF CH38 Chain3

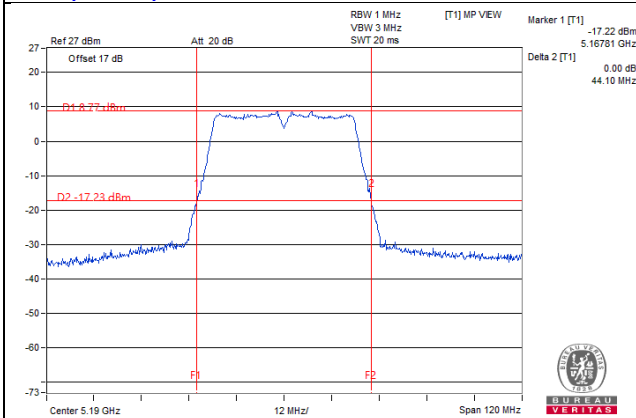


11ac (40MHz) 1S4T TxBF CH46 Chain3

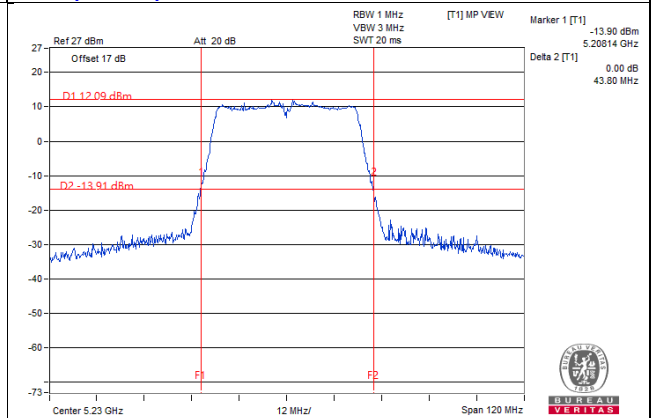

11ac (40MHz) 1S4T TxBF CH38 Chain4

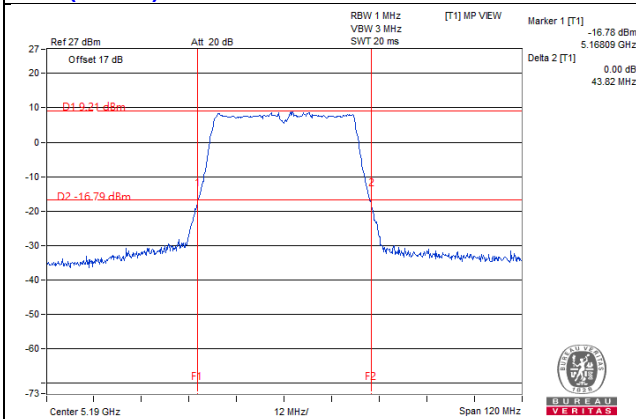


11ac (40MHz) 1S4T TxBF CH46 Chain4

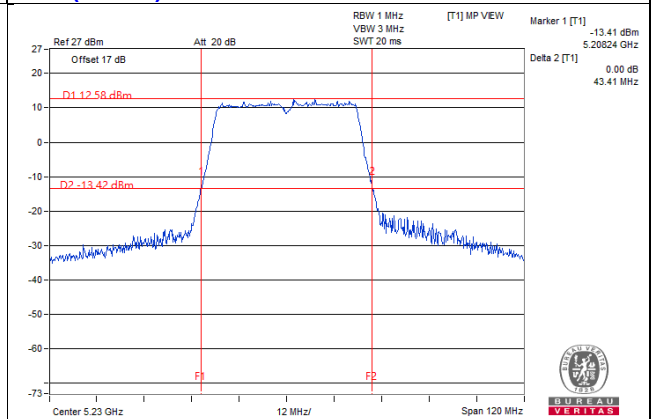


26dB BANDWIDTH SPECTRUM PLOT


11ac (80MHz) 1S4T CDD CH42 Chain1

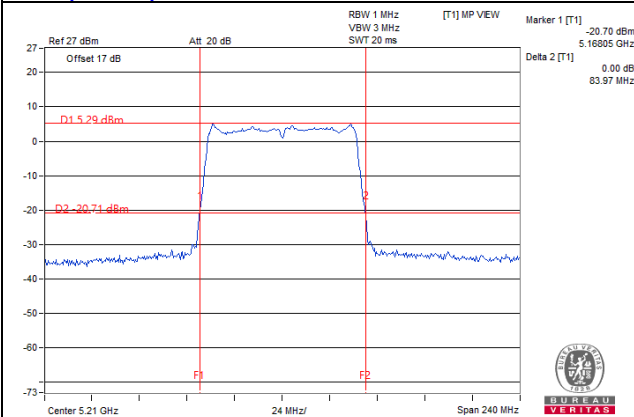


11ac (80MHz) 1S4T TxBF CH42 Chain1

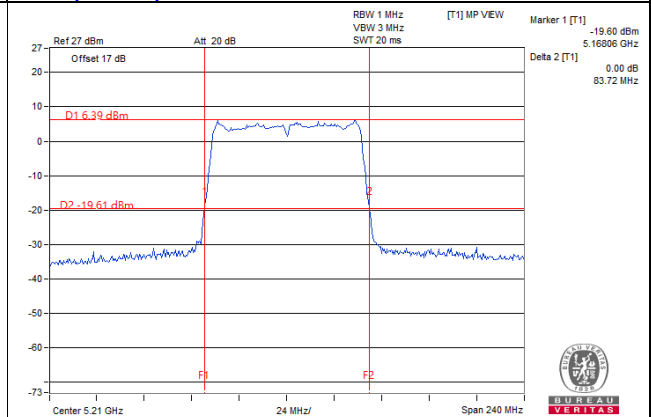


11ac (80MHz) 1S4T CDD CH42 Chain2

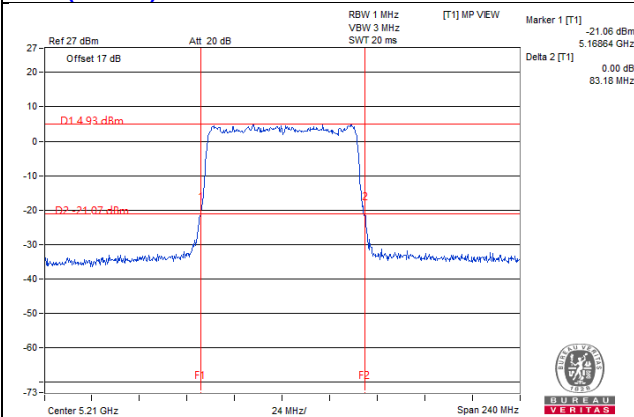


11ac (80MHz) 1S4T TxBF CH42 Chain2

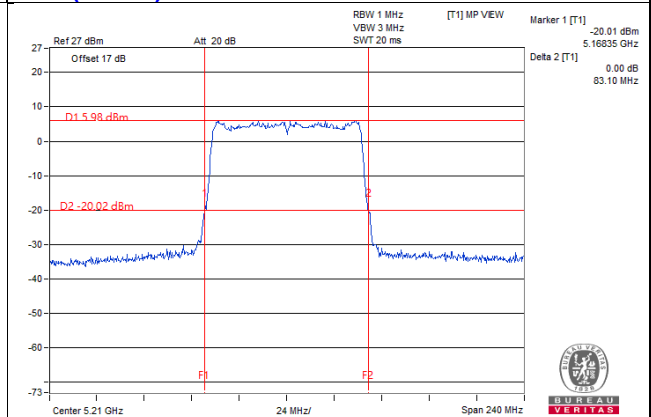


11ac (80MHz) 1S4T CDD CH42 Chain3

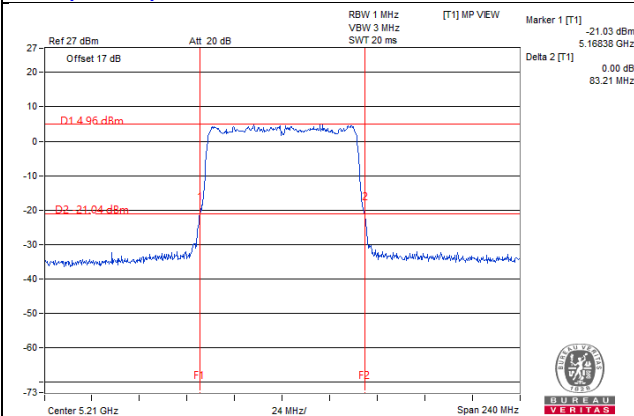


11ac (80MHz) 1S4T TxBF CH42 Chain3

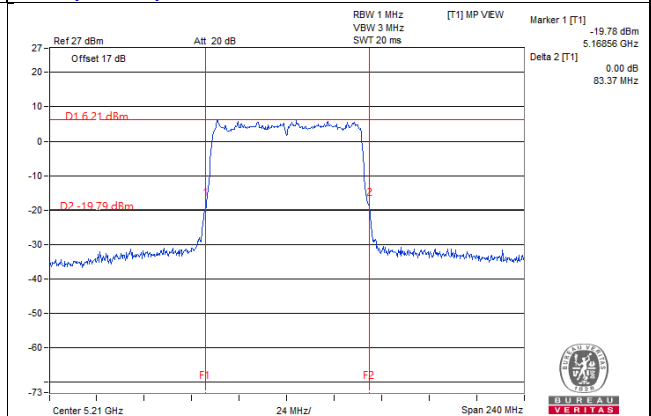

11ac (80MHz) 1S4T CDD CH42 Chain4

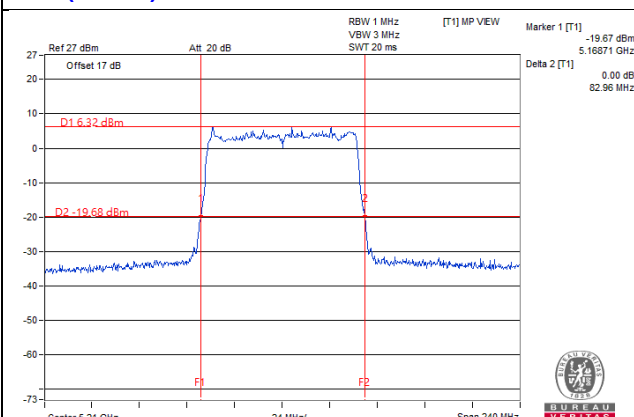

11ac (80MHz) 1S4T TxBF CH42 Chain4

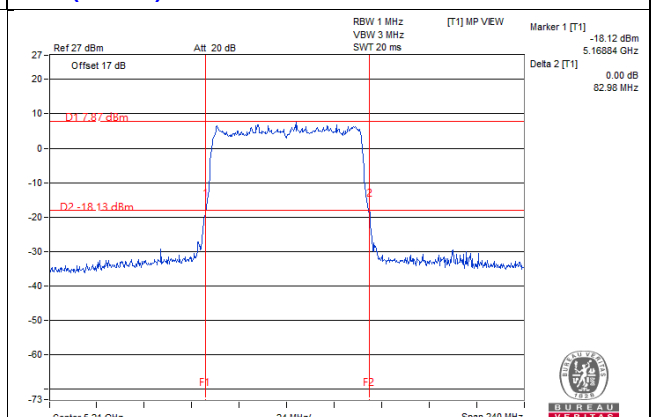

Master Mode

11a 1S4T CDD

CHANNEL	FREQUENCY (MHz)	99% Occupied Bandwidth (MHz)			
		CHAIN 1	CHAIN 2	CHAIN 3	CHAIN 4
36	5180	18.24	18.43	18.09	18.52
40	5200	18.72	18.72	18.18	18.61
48	5240	17.04	17.04	16.87	17.04
149	5745	18.95	19.56	18.79	18.87
157	5785	19.2	19.68	18.87	18.78
165	5825	18.79	19.57	18.61	18.6

11ac (20MHz) 1S4T CDD

CHANNEL	FREQUENCY (MHz)	99% Occupied Bandwidth (MHz)			
		CHAIN 1	CHAIN 2	CHAIN 3	CHAIN 4
36	5180	19.56	19.48	19.22	19.48
40	5200	20.16	20	19.31	19.57
48	5240	18.48	18.34	18.09	18.17
149	5745	20.7	22.09	20.08	19.91
157	5785	20.76	21.22	19.83	19.74
165	5825	20.4	20.96	19.74	19.56

11ac (20MHz) 1S4T TxBF

CHANNEL	FREQUENCY (MHz)	99% Occupied Bandwidth (MHz)			
		CHAIN 1	CHAIN 2	CHAIN 3	CHAIN 4
36	5180	19.92	19.92	19.48	19.48
40	5200	20.04	19.91	19.4	19.48
48	5240	18.48	18.34	18.09	18.17
149	5745	20.34	20.69	19.92	19.66
157	5785	20.28	20.43	19.74	19.57
165	5825	20.08	20.18	19.74	19.48

11ac (40MHz) 1S4T CDD

CHANNEL	FREQUENCY (MHz)	99% Occupied Bandwidth (MHz)			
		CHAIN 1	CHAIN 2	CHAIN 3	CHAIN 4
38	5190	37.92	37.04	36.86	36.86
46	5230	37.44	37.39	37.04	36.86
151	5755	38.4	38.95	37.56	37.56
159	5795	38.16	38.26	37.22	37.22

11ac (40MHz) 1S4T TxBF

CHANNEL	FREQUENCY (MHz)	99% Occupied Bandwidth (MHz)			
		CHAIN 1	CHAIN 2	CHAIN 3	CHAIN 4
38	5190	37.2	36.86	37.04	36.86
46	5230	37.44	37.22	37.04	37.04
151	5755	38.64	38.96	37.57	37.39
159	5795	38.16	38.43	37.39	37.22

11ac (80MHz) 1S4T CDD


CHANNEL	FREQUENCY (MHz)	99% Occupied Bandwidth (MHz)			
		CHAIN 1	CHAIN 2	CHAIN 3	CHAIN 4
42	5210	75.36	75.48	75.48	75.48
155	5775	75.84	75.83	75.48	75.48

11ac (80MHz) 1S4T TxBF


CHANNEL	FREQUENCY (MHz)	99% Occupied Bandwidth (MHz)			
		CHAIN 1	CHAIN 2	CHAIN 3	CHAIN 4
42	5210	75.36	75.48	75.48	75.14
155	5775	76.32	76.17	75.48	75.82

99% OCCUPIED BANDWIDTH SPECTRUM PLOT


11a 1S4T CDD CH36 Chain1

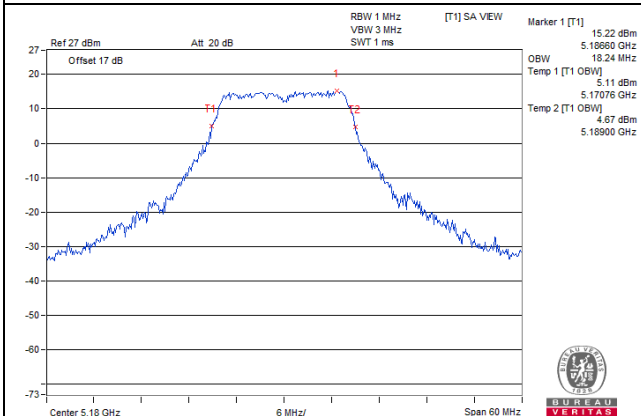


11a 1S4T CDD CH40 Chain1

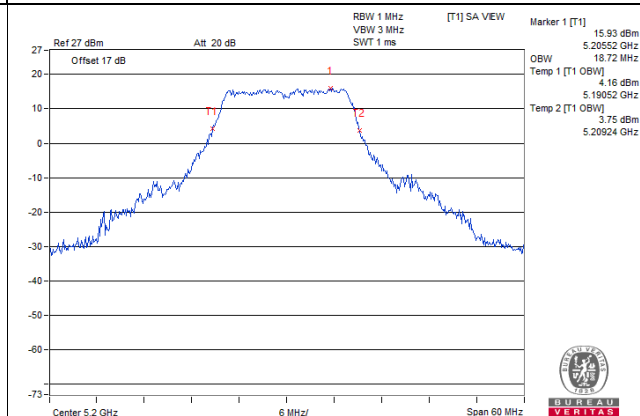


11a 1S4T CDD CH36 Chain2

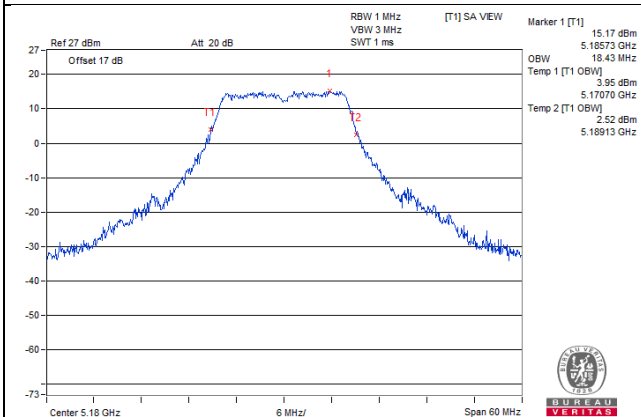


11a 1S4T CDD CH40 Chain2

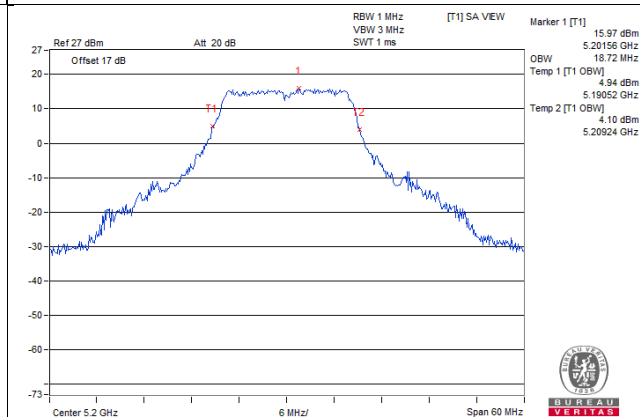


11a 1S4T CDD CH36 Chain3

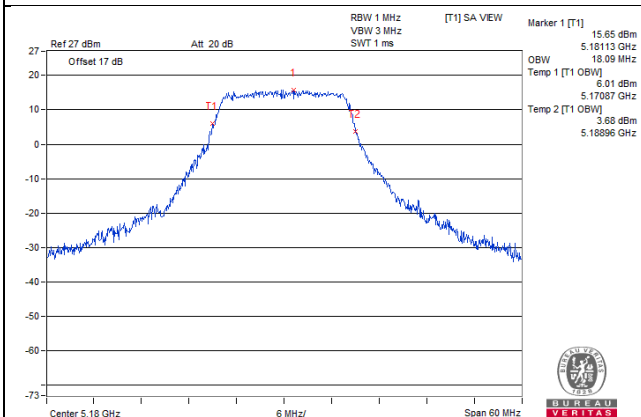


11a 1S4T CDD CH40 Chain3

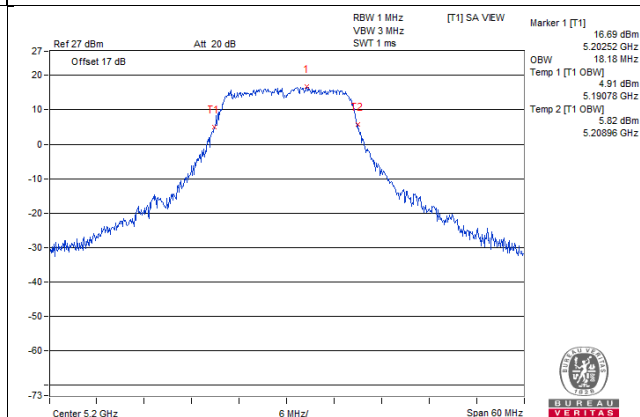

11a 1S4T CDD CH36 Chain4

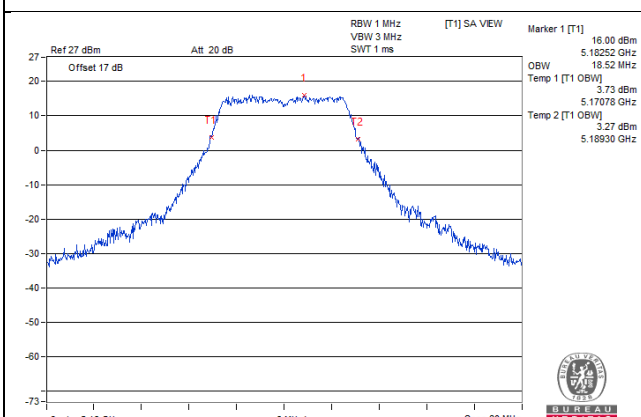


11a 1S4T CDD CH40 Chain4

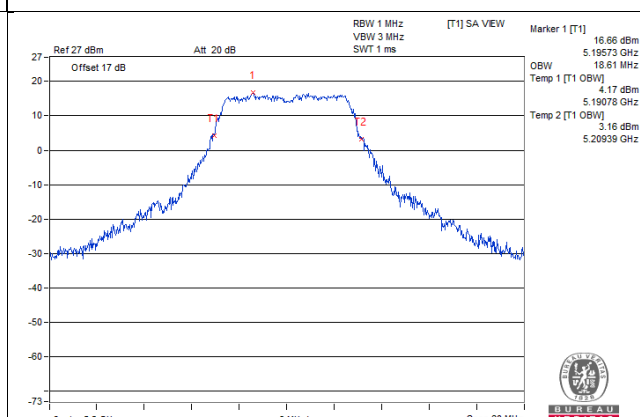


99% OCCUPIED BANDWIDTH SPECTRUM PLOT


11a 1S4T CDD CH48 Chain1

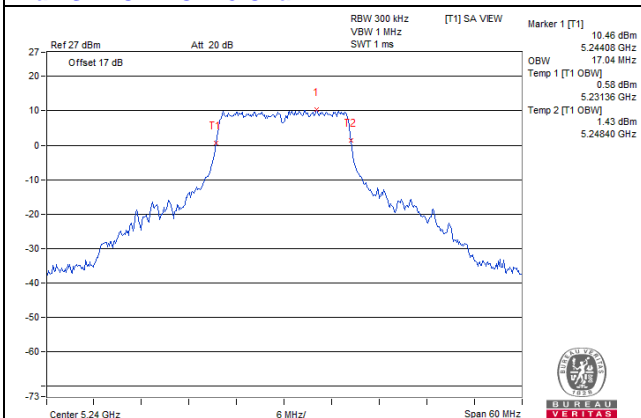


11a 1S4T CDD CH149 Chain1

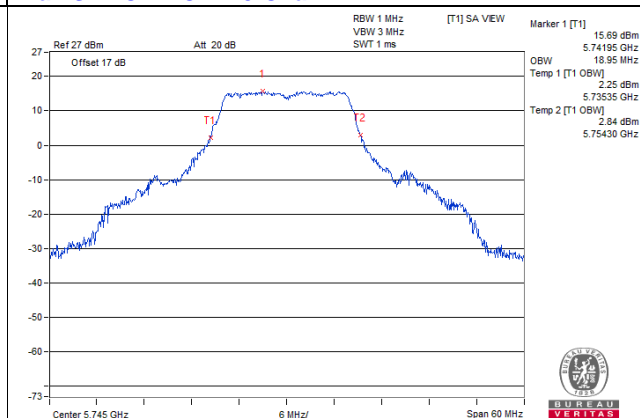


11a 1S4T CDD CH48 Chain2

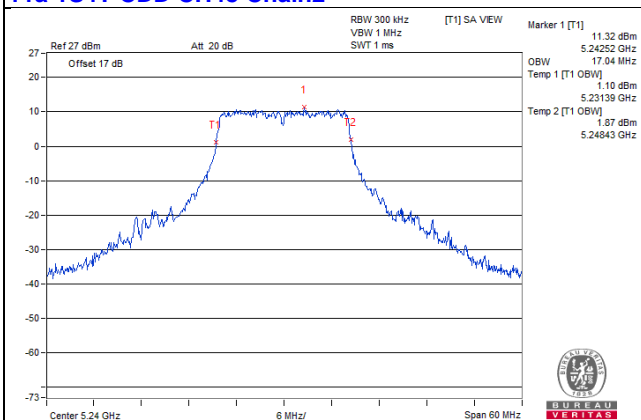


11a 1S4T CDD CH149 Chain2

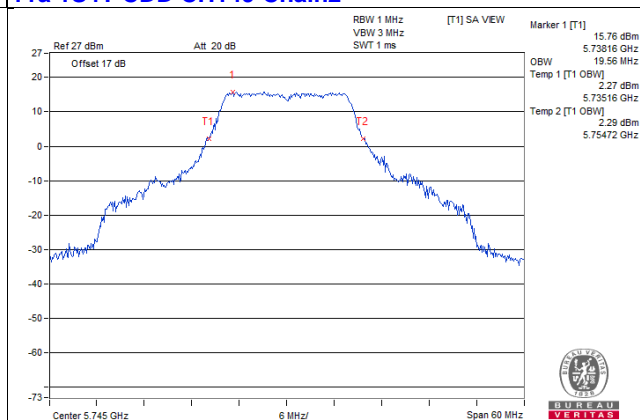


11a 1S4T CDD CH48 Chain3

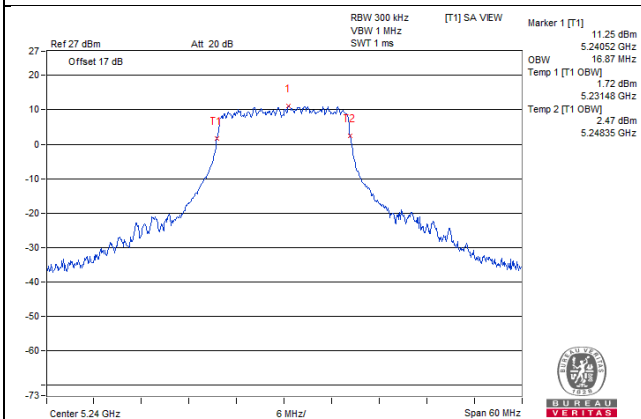


11a 1S4T CDD CH149 Chain3

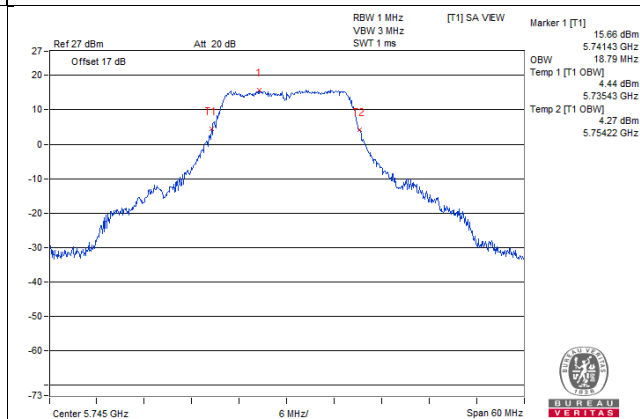

11a 1S4T CDD CH48 Chain4

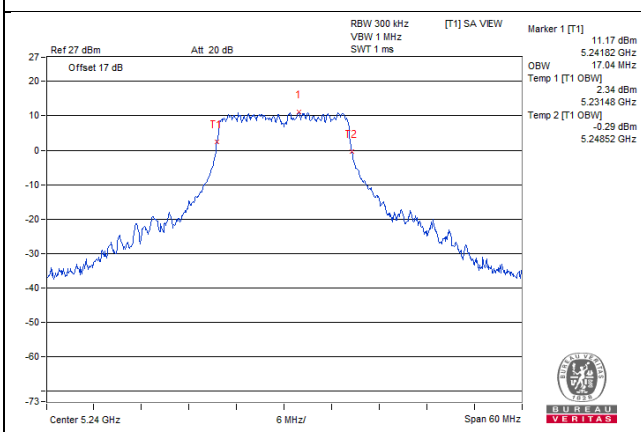


11a 1S4T CDD CH149 Chain4

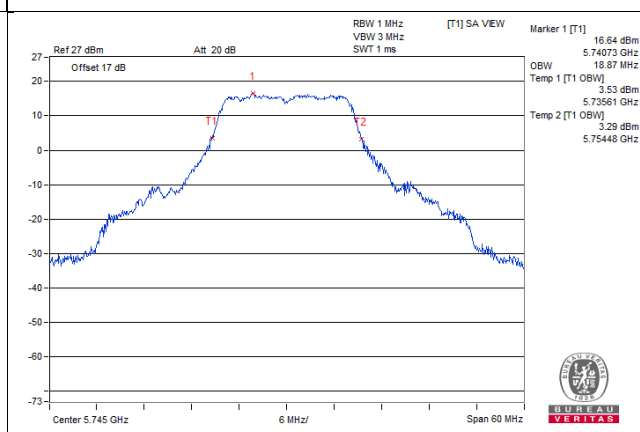


99% OCCUPIED BANDWIDTH SPECTRUM PLOT


11a 1S4T CDD CH157 Chain1

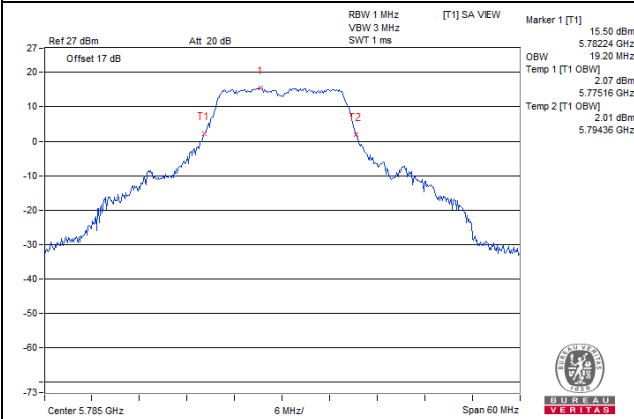


11a 1S4T CDD CH165 Chain1

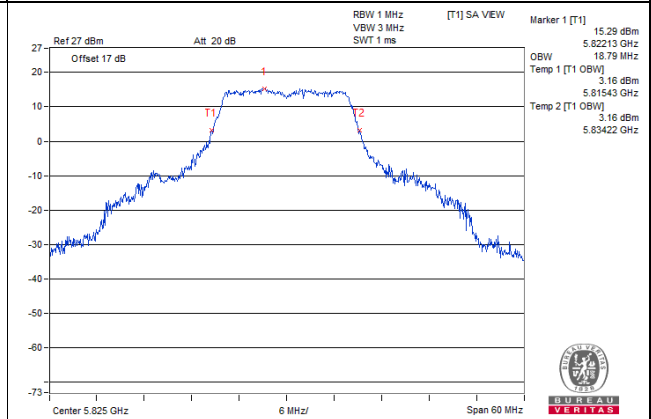


11a 1S4T CDD CH157 Chain2

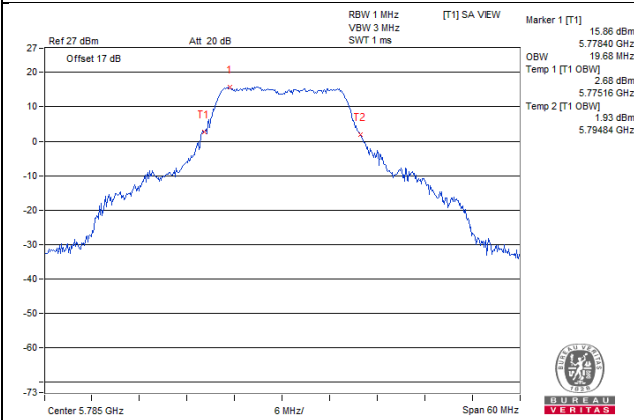


11a 1S4T CDD CH165 Chain2

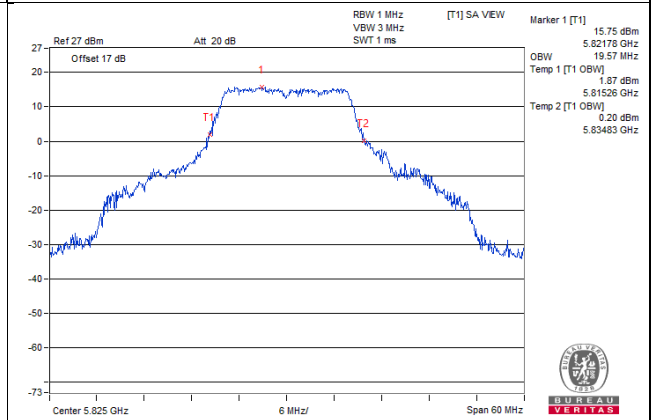


11a 1S4T CDD CH157 Chain3

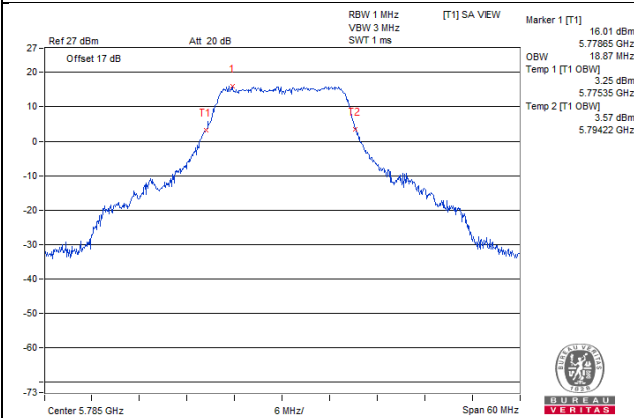


11a 1S4T CDD CH165 Chain3

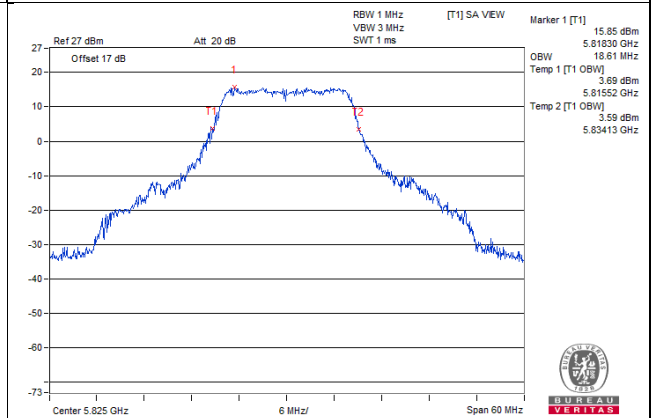

11a 1S4T CDD CH157 Chain4

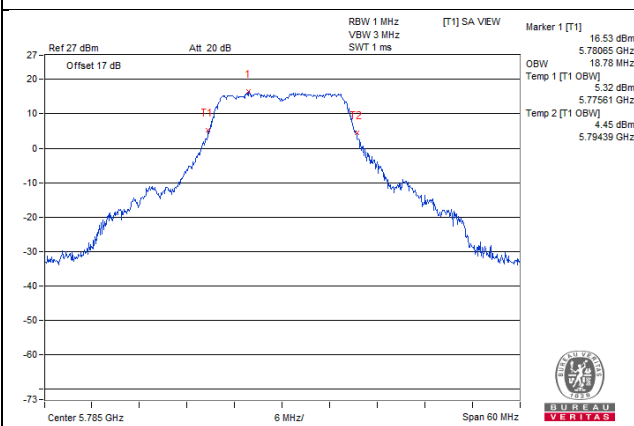


11a 1S4T CDD CH165 Chain4

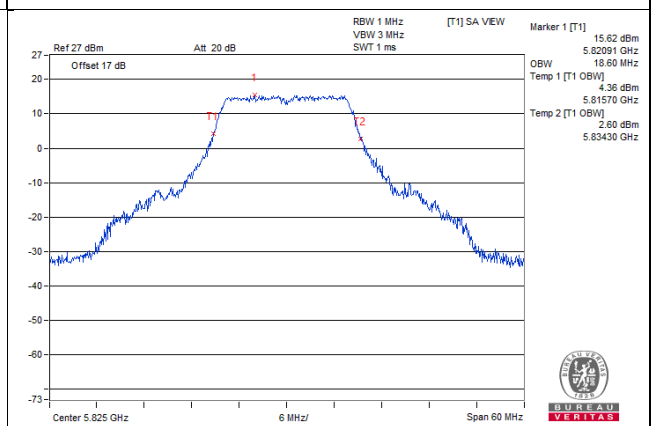


99% OCCUPIED BANDWIDTH SPECTRUM PLOT


11ac (20MHz) 1S4T CDD CH36 Chain1

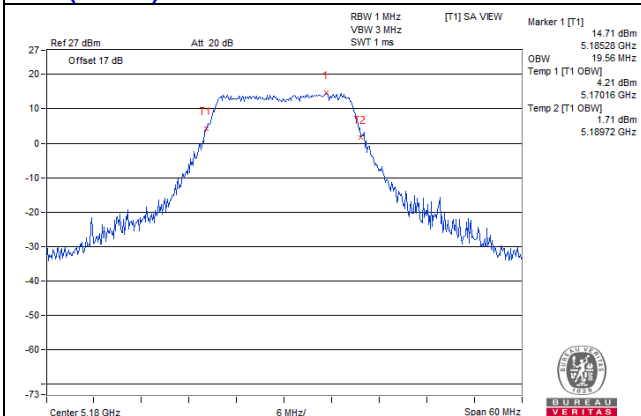


11ac (20MHz) 1S4T CDD CH40 Chain1

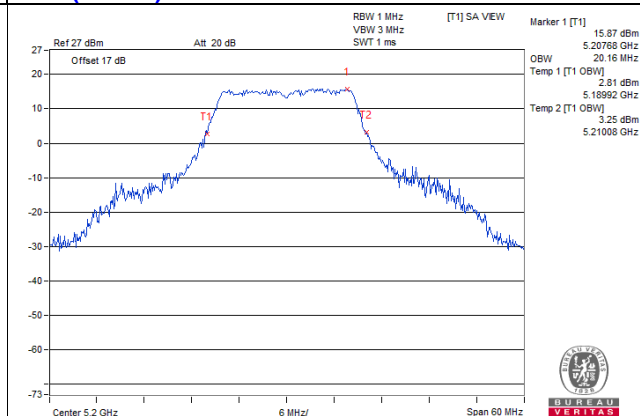


11ac (20MHz) 1S4T CDD CH36 Chain2

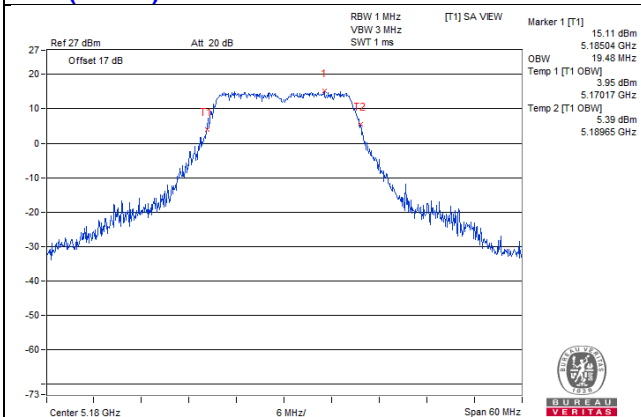


11ac (20MHz) 1S4T CDD CH40 Chain2

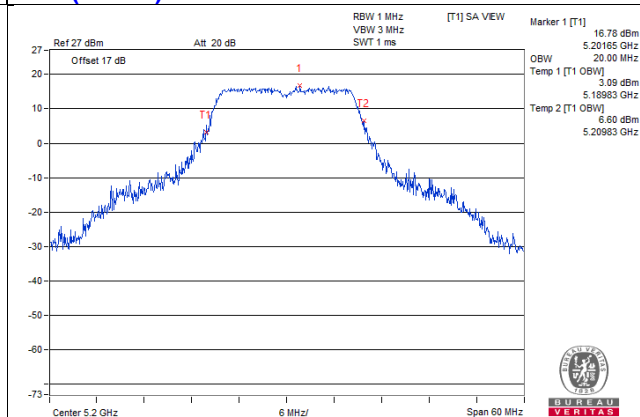


11ac (20MHz) 1S4T CDD CH36 Chain3

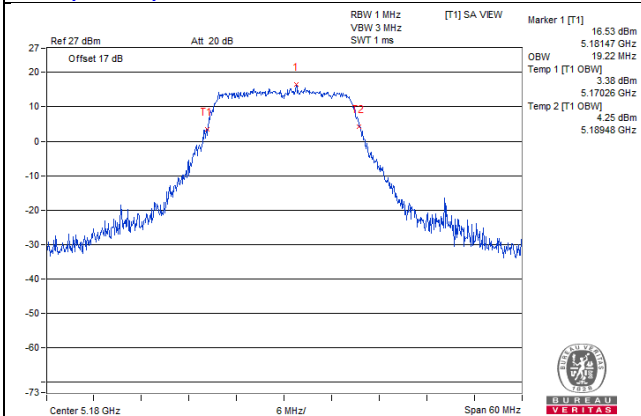


11ac (20MHz) 1S4T CDD CH40 Chain3

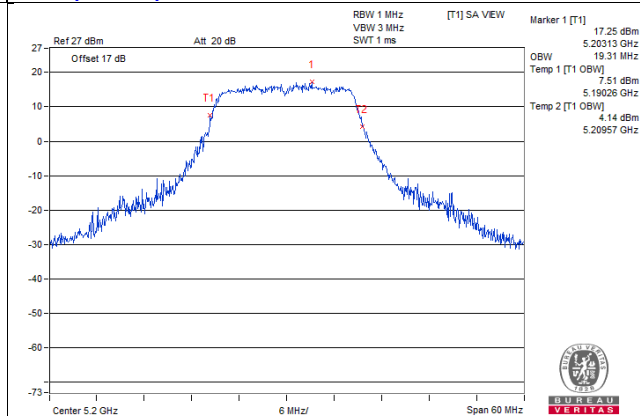

11ac (20MHz) 1S4T CDD CH36 Chain4

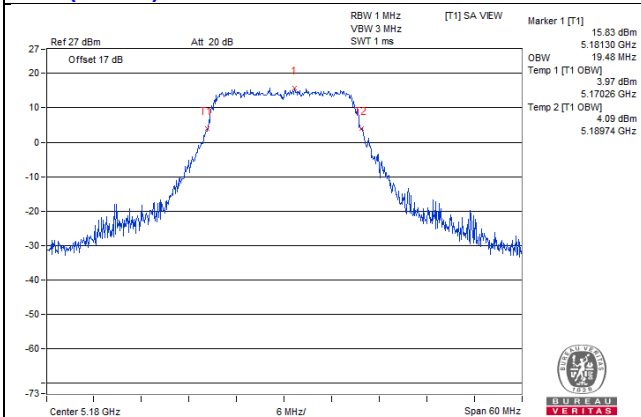


11ac (20MHz) 1S4T CDD CH40 Chain4

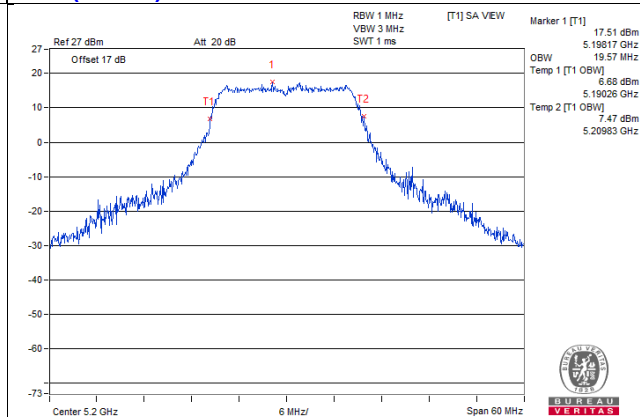


99% OCCUPIED BANDWIDTH SPECTRUM PLOT


11ac (20MHz) 1S4T CDD CH48 Chain1

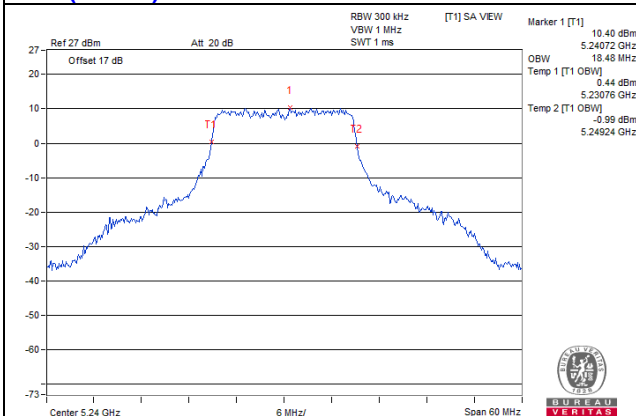


11ac (20MHz) 1S4T CDD CH149 Chain1

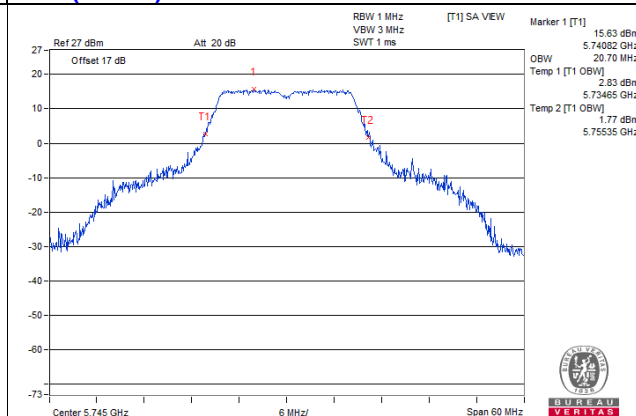


11ac (20MHz) 1S4T CDD CH48 Chain2

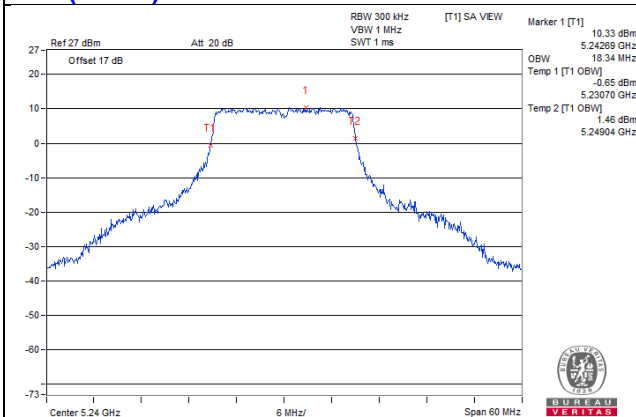


11ac (20MHz) 1S4T CDD CH149 Chain2

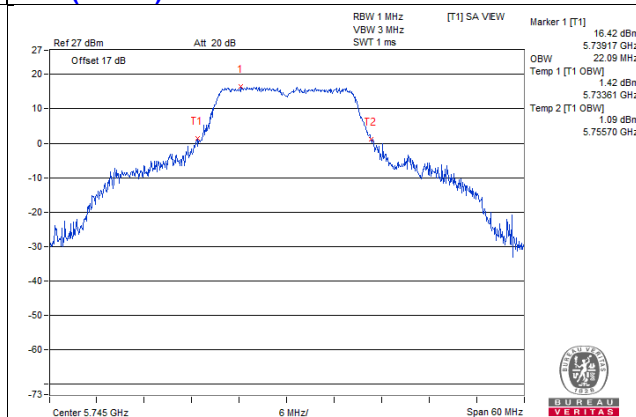


11ac (20MHz) 1S4T CDD CH48Chain3

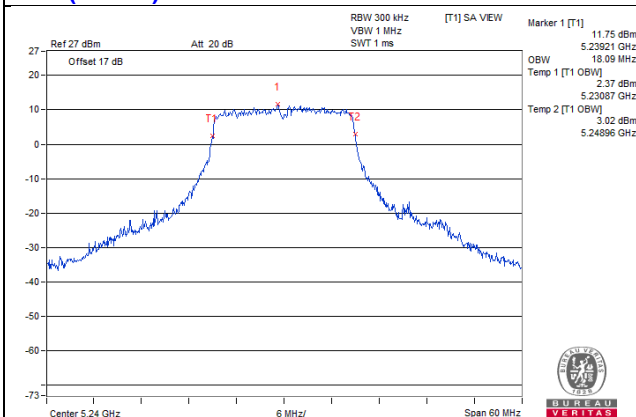


11ac (20MHz) 1S4T CDD CH149 Chain3

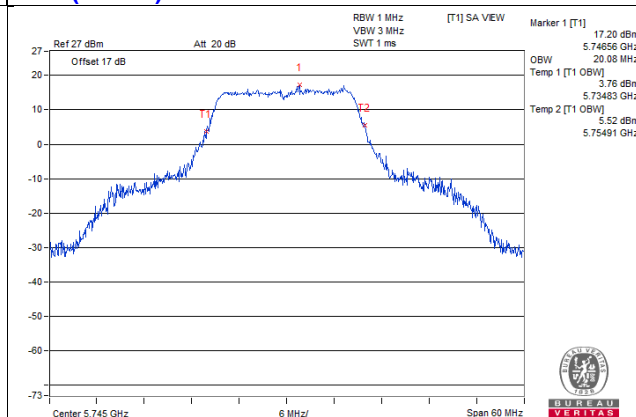

11ac (20MHz) 1S4T CDD CH48 Chain4

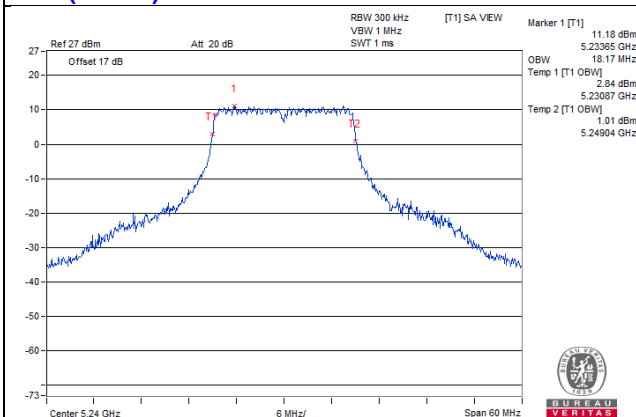


11ac (20MHz) 1S4T CDD CH149 Chain4

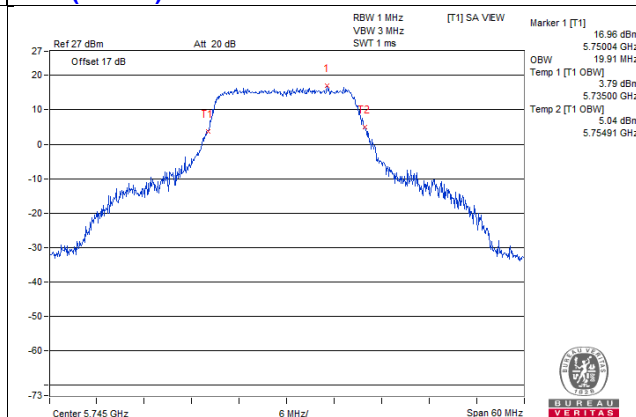


99% OCCUPIED BANDWIDTH SPECTRUM PLOT


11ac (20MHz) 1S4T CDD CH157 Chain1

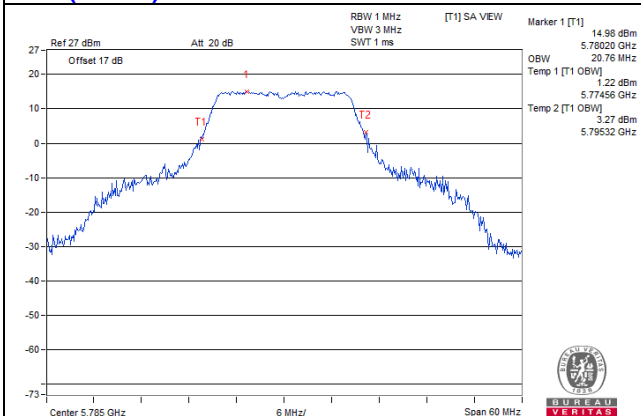


11ac (20MHz) 1S4T CDD CH165 Chain1

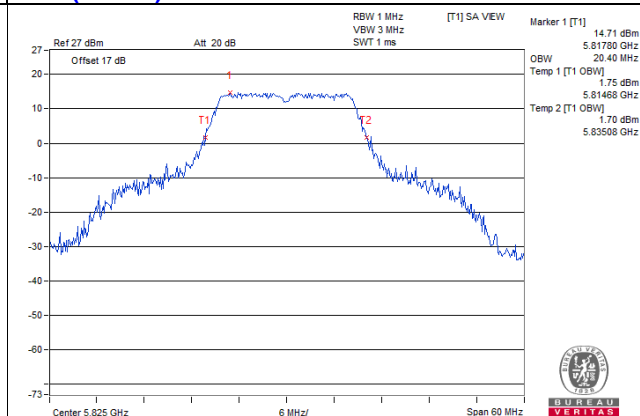


11ac (20MHz) 1S4T CDD CH157 Chain2

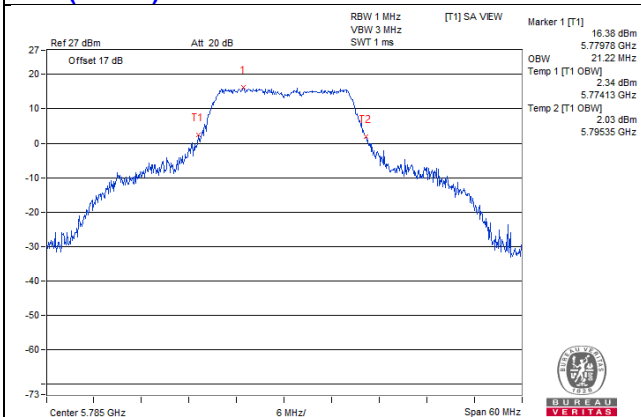


11ac (20MHz) 1S4T CDD CH165 Chain2

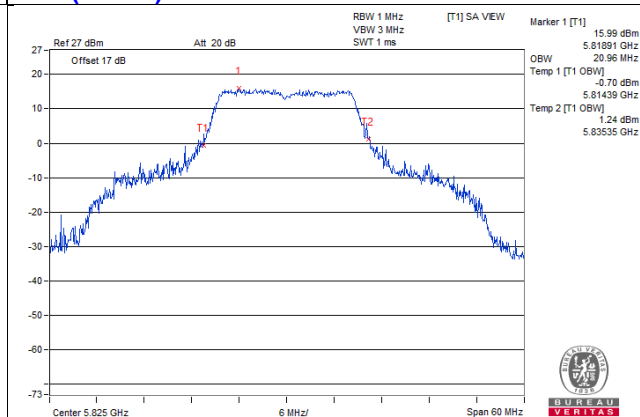


11ac (20MHz) 1S4T CDD CH157 Chain3

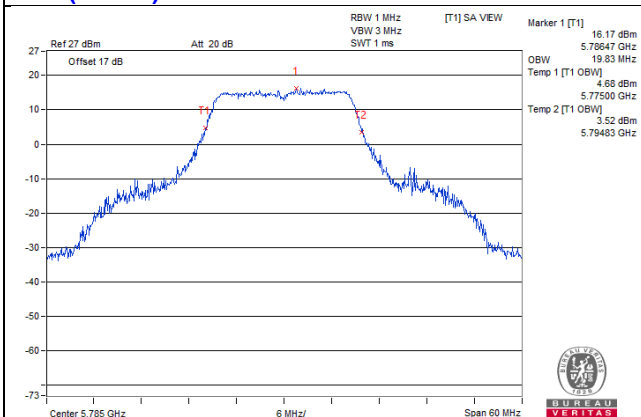


11ac (20MHz) 1S4T CDD CH165 Chain3

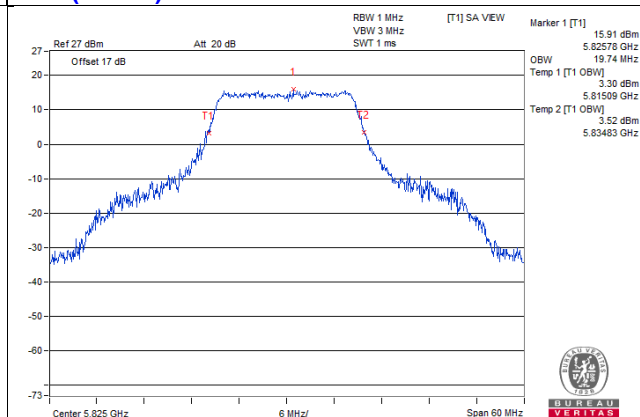

11ac (20MHz) 1S4T CDD CH157 Chain4

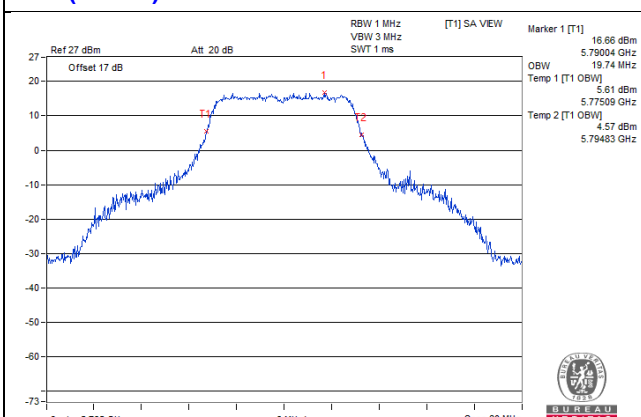


11ac (20MHz) 1S4T CDD CH165 Chain3

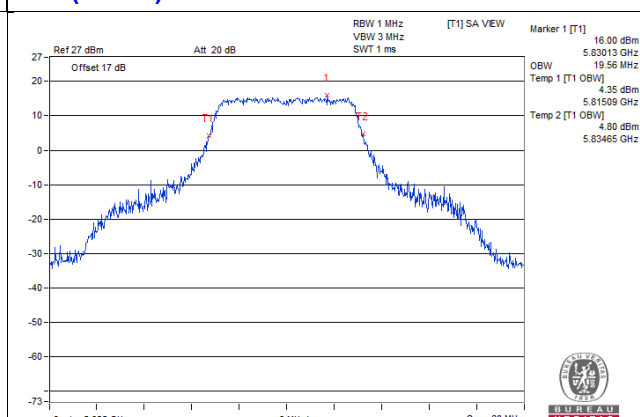


99% OCCUPIED BANDWIDTH SPECTRUM PLOT


11ac (20MHz) 1S4T TxBF CH36 Chain1

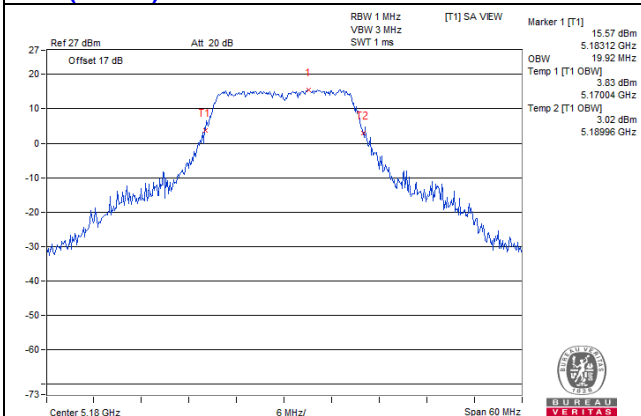


11ac (20MHz) 1S4T TxBF CH40 Chain1

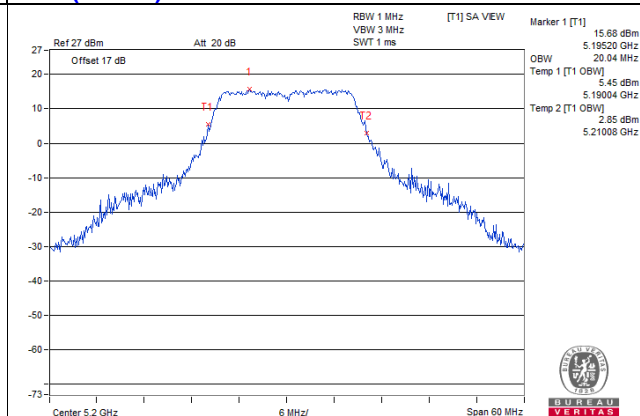


11ac (20MHz) 1S4T TxBF CH36 Chain2

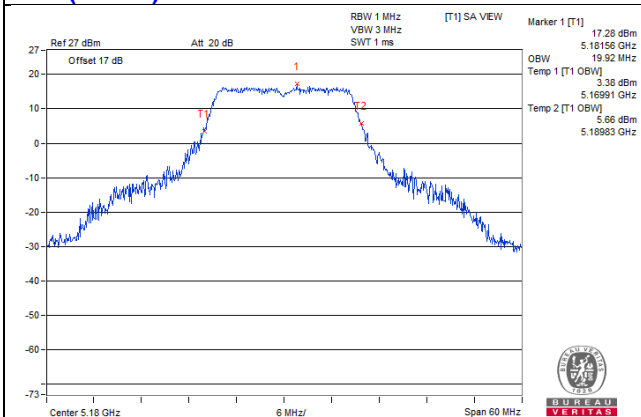


11ac (20MHz) 1S4T TxBF CH40 Chain2

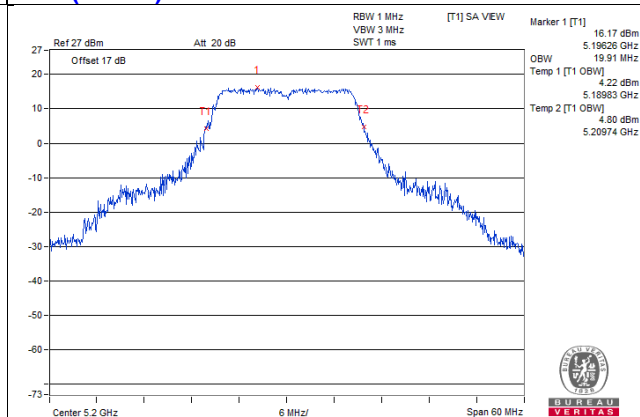


11ac (20MHz) 1S4T TxBF CH36 Chain3

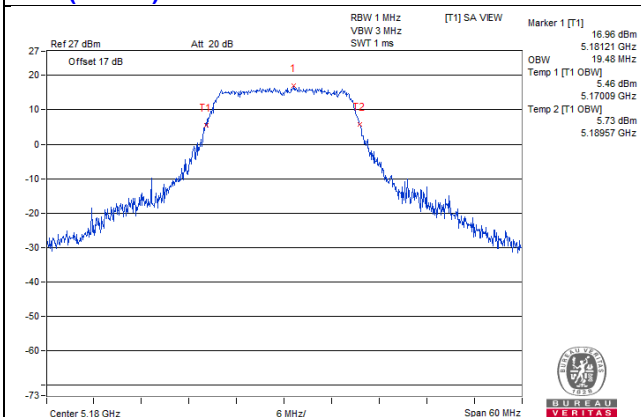


11ac (20MHz) 1S4T TxBF CH40 Chain3

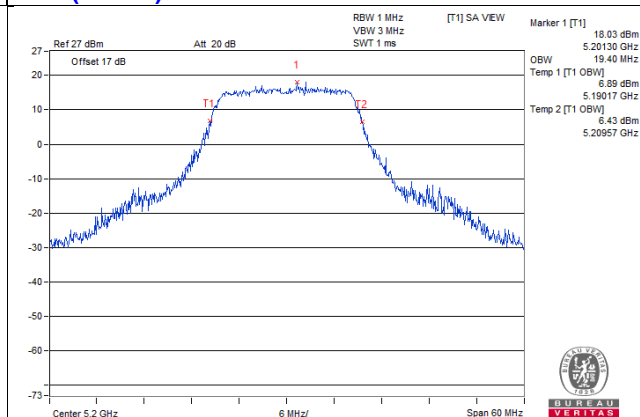

11ac (20MHz) 1S4T TxBF CH36 Chain4

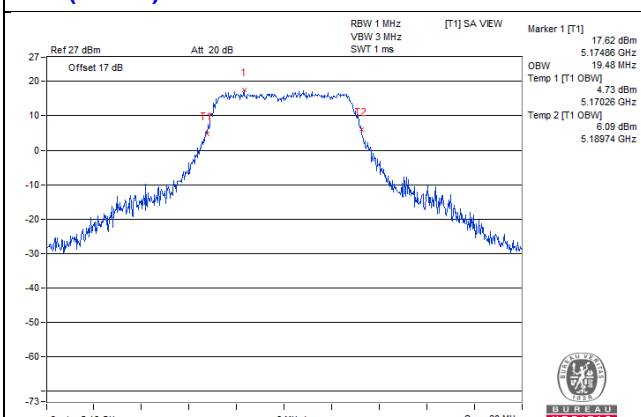


11ac (20MHz) 1S4T TxBF CH40 Chain4

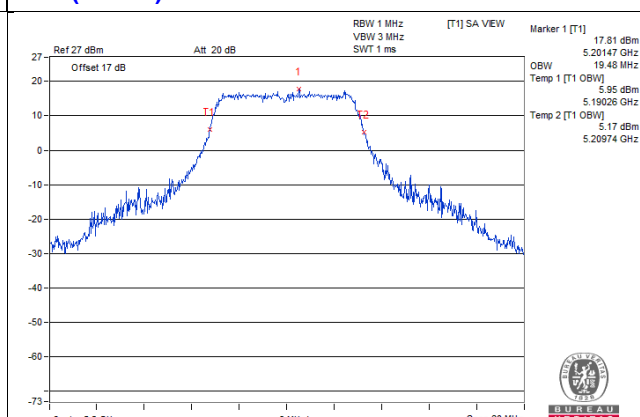


99% OCCUPIED BANDWIDTH SPECTRUM PLOT


11ac (20MHz) 1S4T TxBF CH48 Chain1

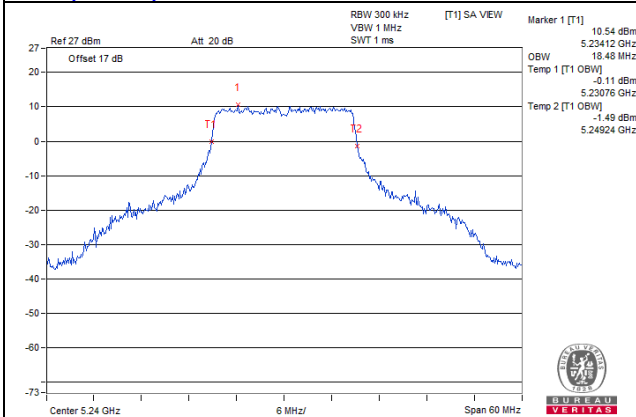


11ac (20MHz) 1S4T TxBF CH149 Chain1

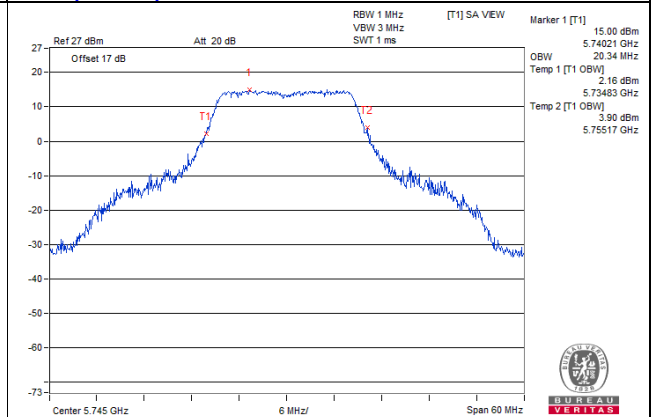


11ac (20MHz) 1S4T TxBF CH48 Chain2

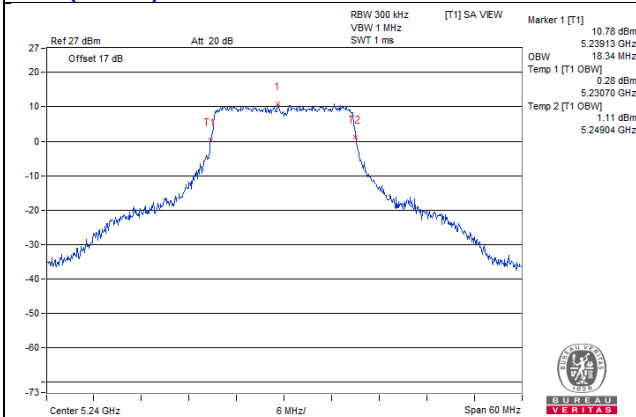


11ac (20MHz) 1S4T TxBF CH149 Chain2

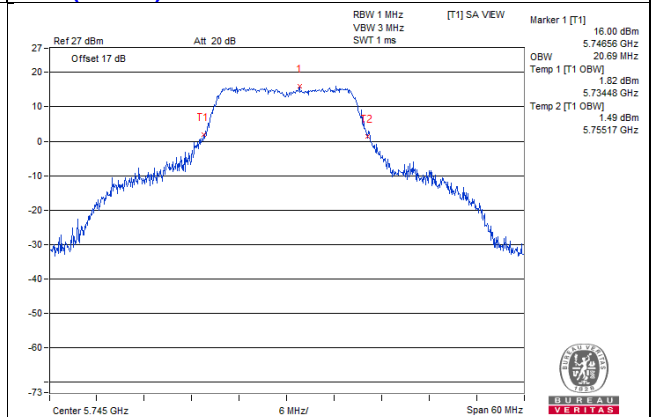


11ac (20MHz) 1S4T TxBF CH48 Chain3

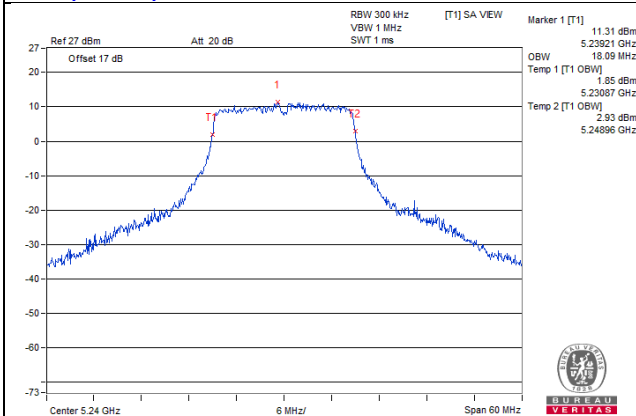


11ac (20MHz) 1S4T TxBF CH149 Chain3

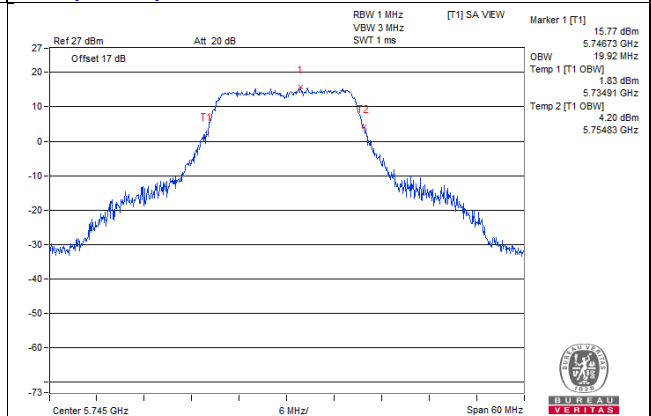

11ac (20MHz) 1S4T TxBF CH48 Chain4

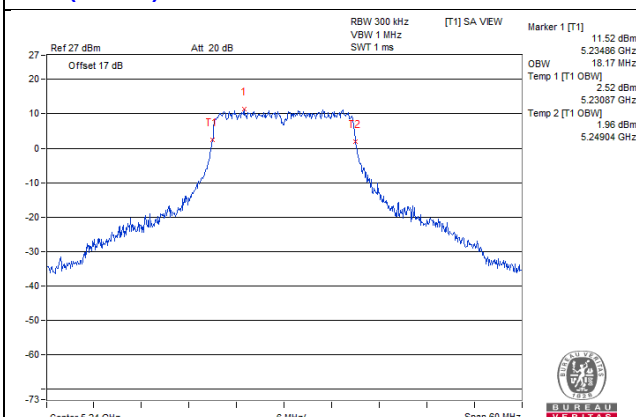


11ac (20MHz) 1S4T TxBF CH149 Chain4

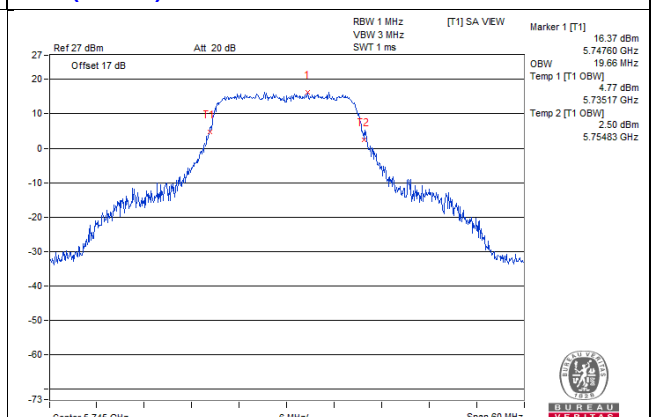


99% OCCUPIED BANDWIDTH SPECTRUM PLOT


11ac (20MHz) 1S4T TxBF CH157 Chain1

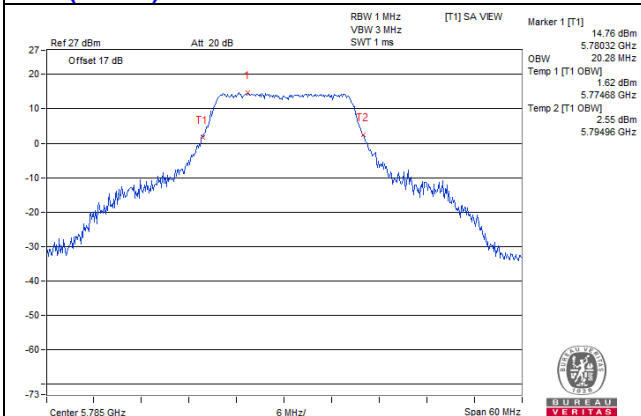


11ac (20MHz) 1S4T TxBF CH165 Chain1

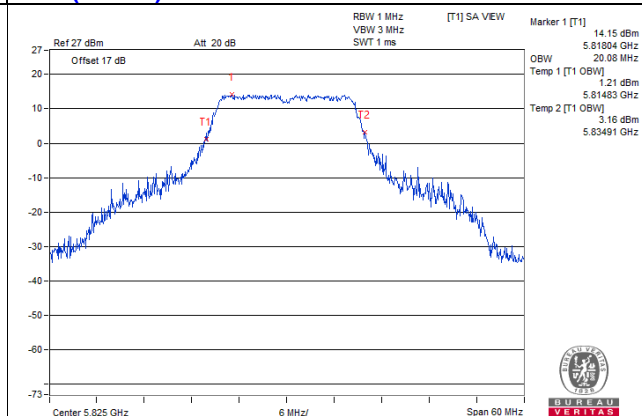


11ac (20MHz) 1S4T TxBF CH157 Chain2

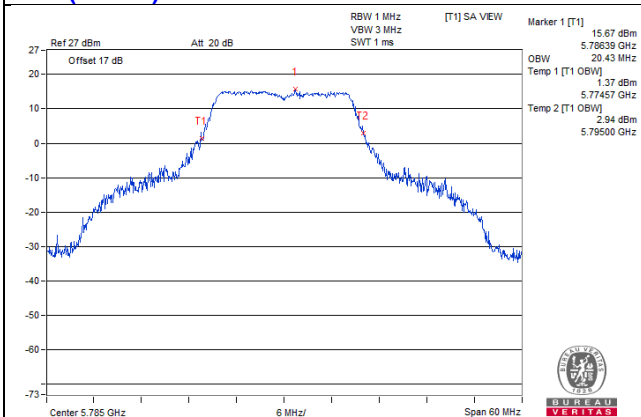


11ac (20MHz) 1S4T TxBF CH165 Chain2

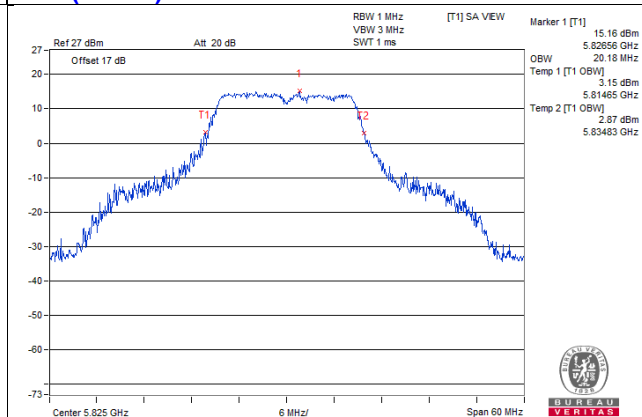


11ac (20MHz) 1S4T TxBF CH157 Chain3

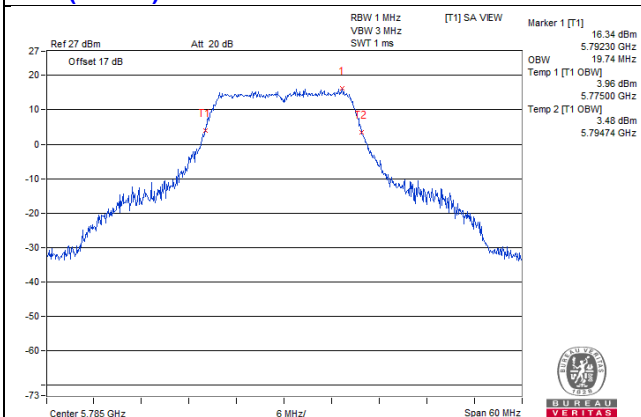


11ac (20MHz) 1S4T TxBF CH165 Chain3

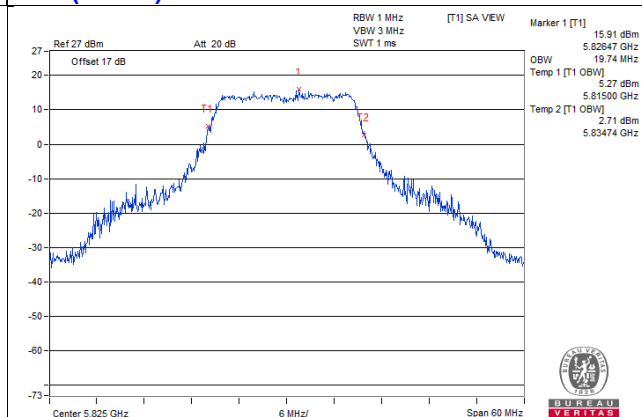

11ac (20MHz) 1S4T TxBF CH157 Chain4

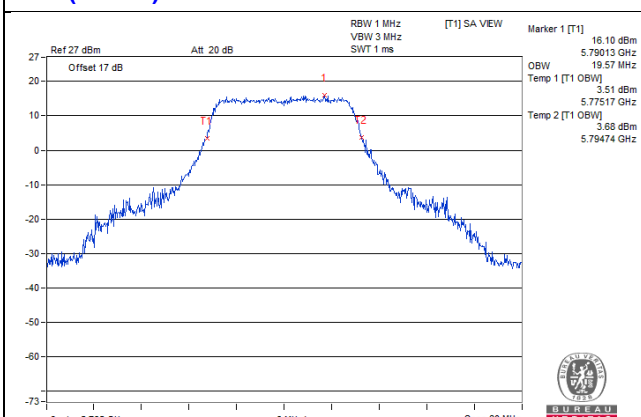


11ac (20MHz) 1S4T TxBF CH165 Chain4

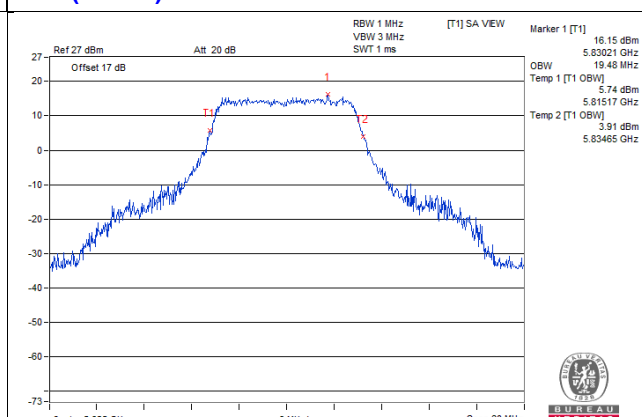


99% OCCUPIED BANDWIDTH SPECTRUM PLOT


11ac (40MHz) 1S4T CDD CH38 Chain1

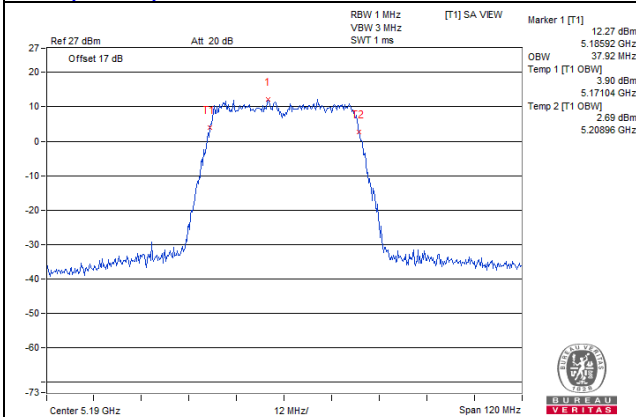


11ac (40MHz) 1S4T CDD CH46 Chain1

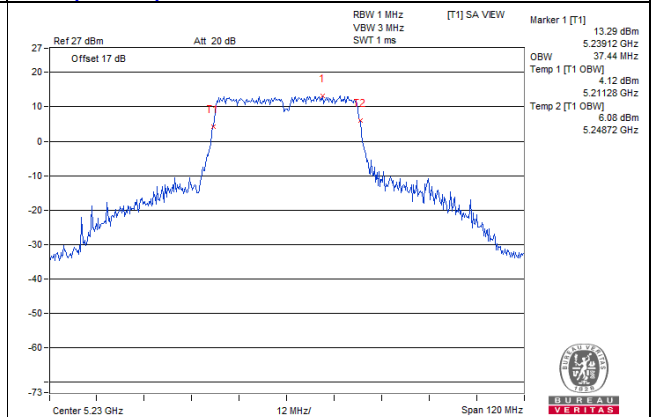


11ac (40MHz) 1S4T CDD CH38 Chain2

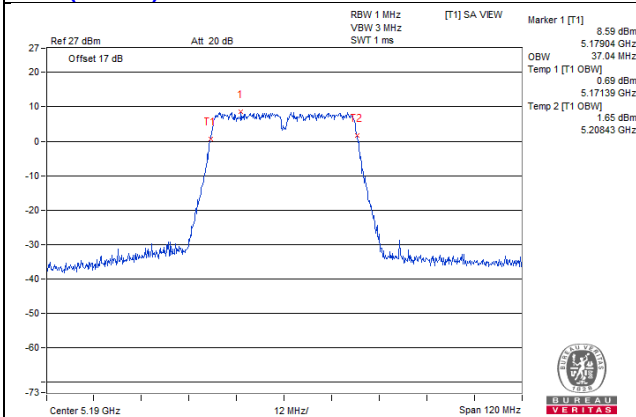


11ac (40MHz) 1S4T CDD CH46 Chain2

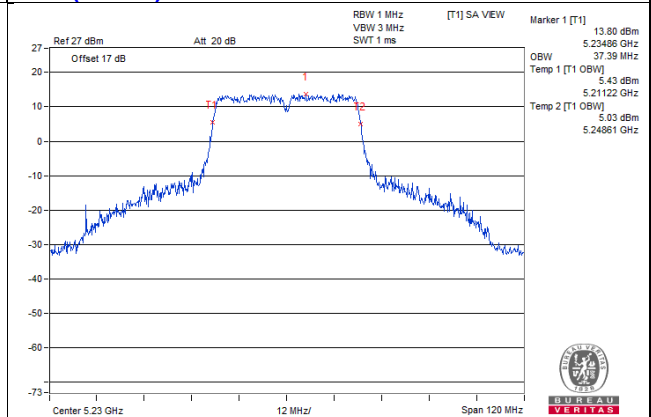


11ac (40MHz) 1S4T CDD CH38 Chain3

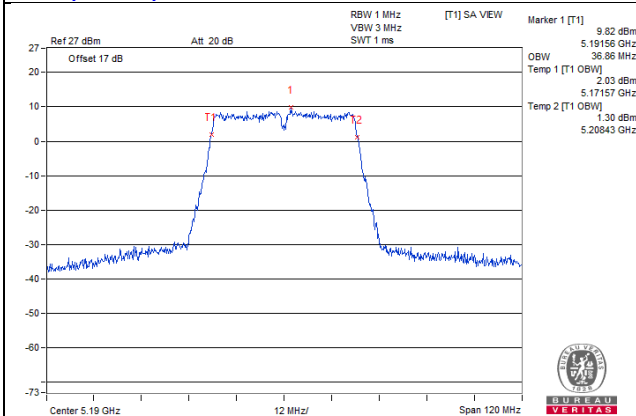


11ac (40MHz) 1S4T CDD CH46 Chain3

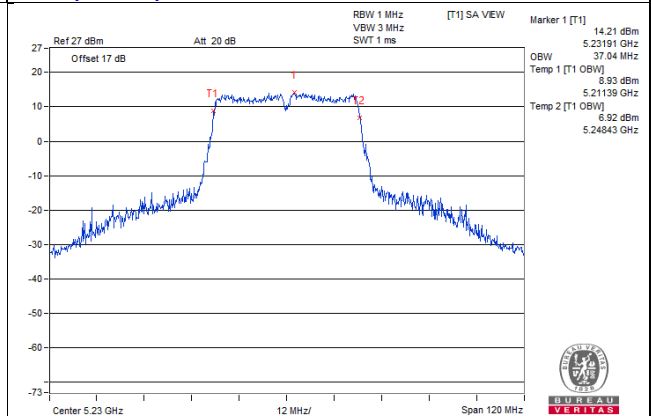

11ac (40MHz) 1S4T CDD CH38 Chain4

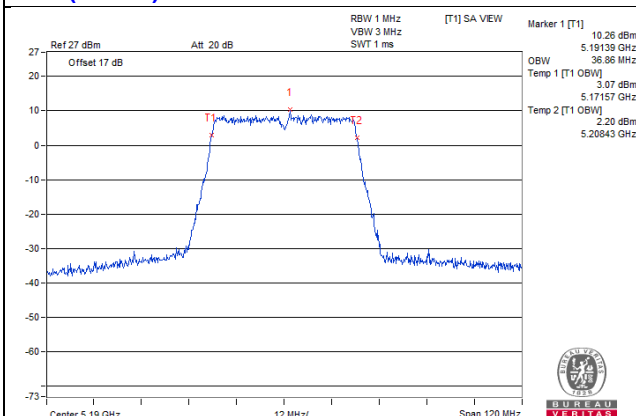


11ac (40MHz) 1S4T CDD CH46 Chain4

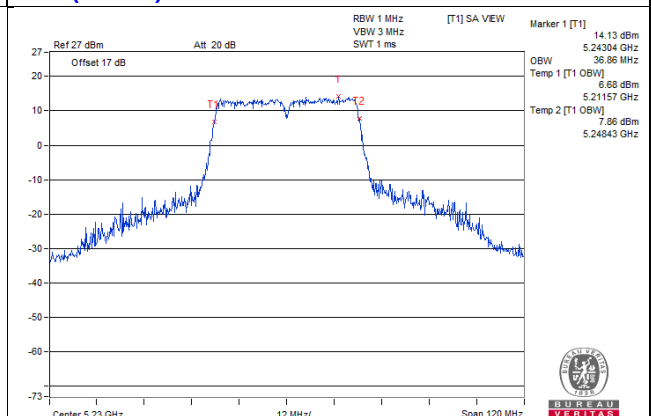


99% OCCUPIED BANDWIDTH SPECTRUM PLOT


11ac (40MHz) 1S4T CDD CH151 Chain1

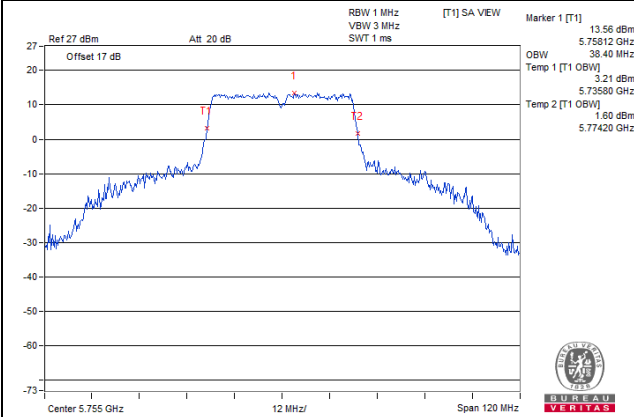


11ac (40MHz) 1S4T CDD CH159 Chain1

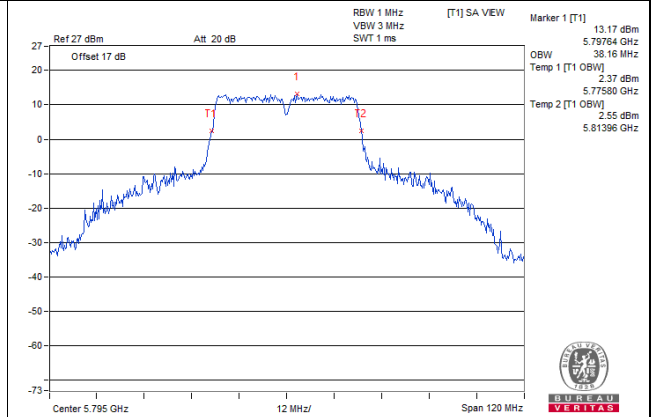


11ac (40MHz) 1S4T CDD CH151 Chain2

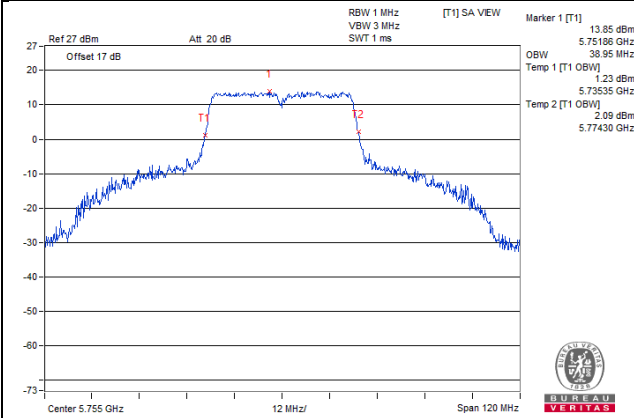


11ac (40MHz) 1S4T CDD CH159 Chain2

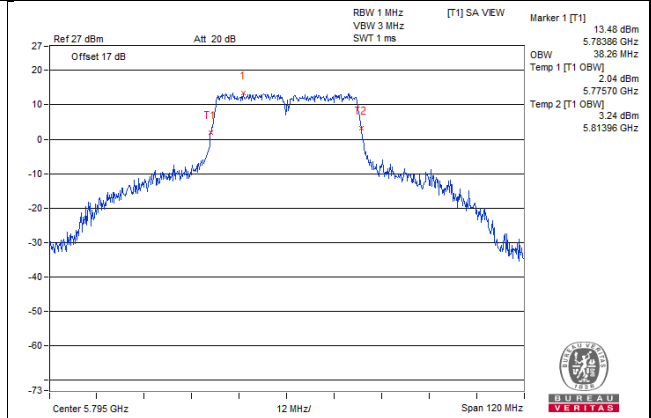


11ac (40MHz) 1S4T CDD CH151 Chain3

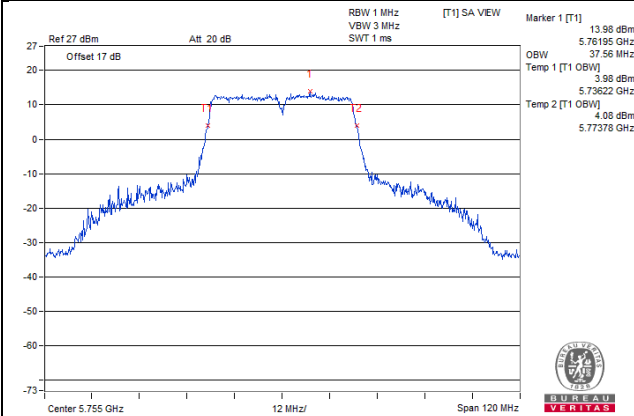


11ac (40MHz) 1S4T CDD CH159 Chain3

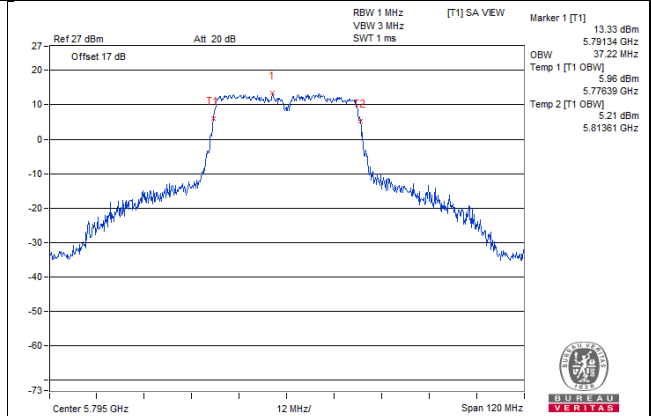

11ac (40MHz) 1S4T CDD CH151 Chain4

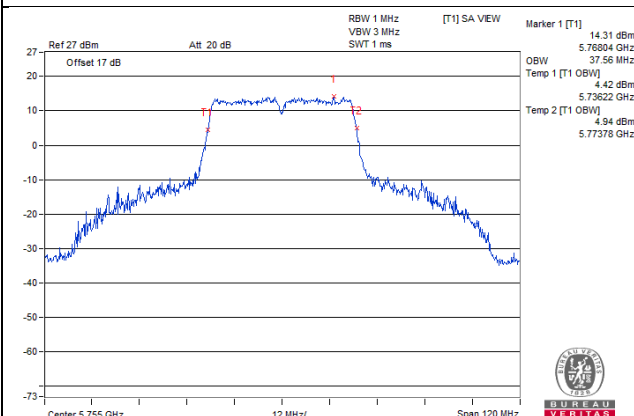


11ac (40MHz) 1S4T CDD CH159 Chain4

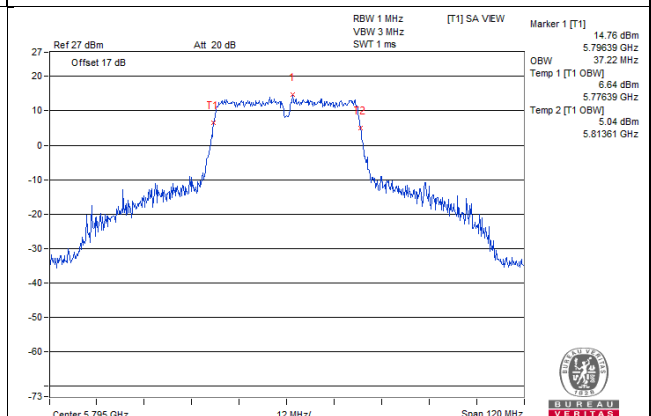


99% OCCUPIED BANDWIDTH SPECTRUM PLOT


11ac (40MHz) 1S4T TxBF CH38 Chain1

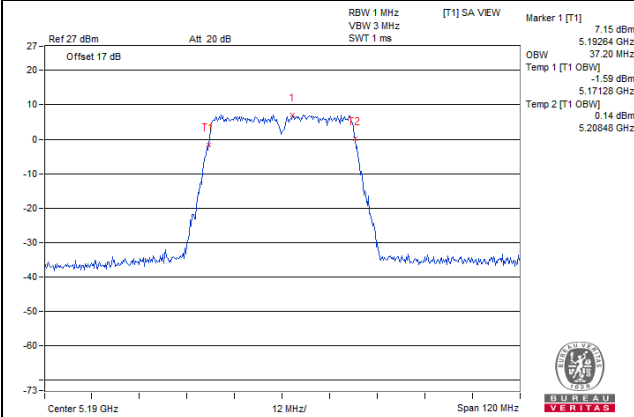


11ac (40MHz) 1S4T TxBF CH46 Chain1

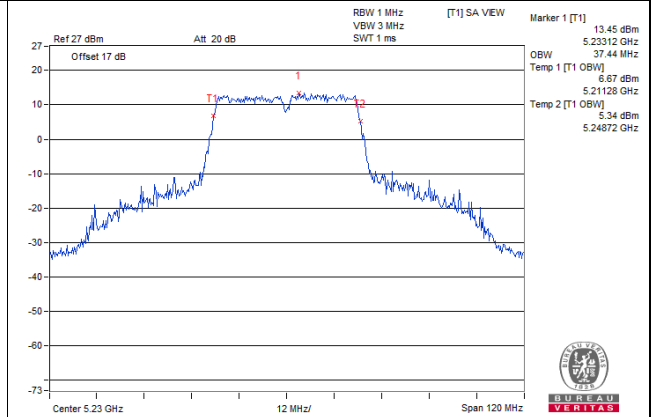


11ac (40MHz) 1S4T TxBF CH38 Chain2

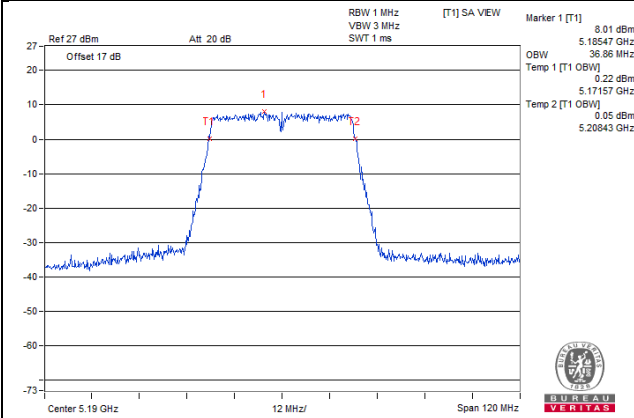


11ac (40MHz) 1S4T TxBF CH46 Chain2

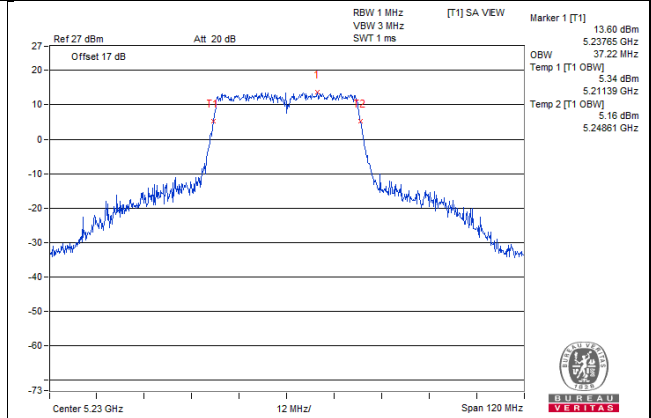


11ac (40MHz) 1S4T TxBF CH38 Chain3

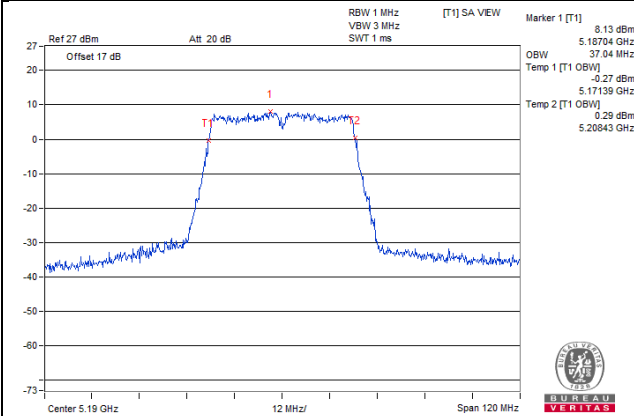


11ac (40MHz) 1S4T TxBF CH46 Chain3

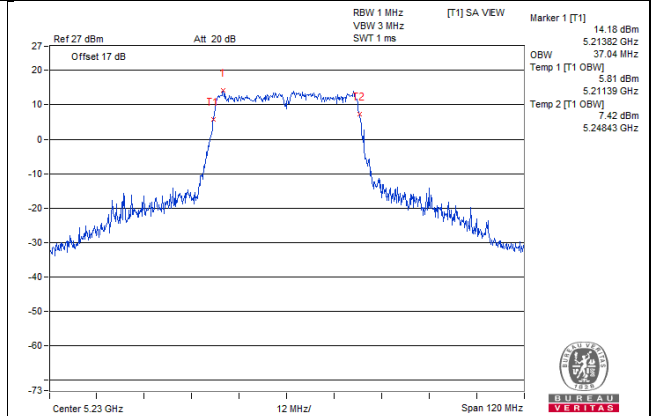

11ac (40MHz) 1S4T TxBF CH38 Chain4

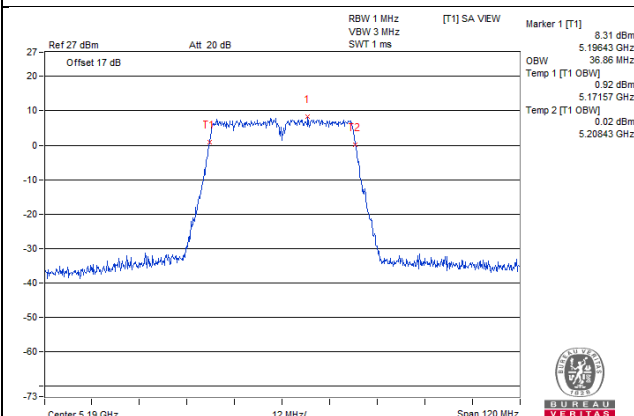


11ac (40MHz) 1S4T TxBF CH46 Chain4

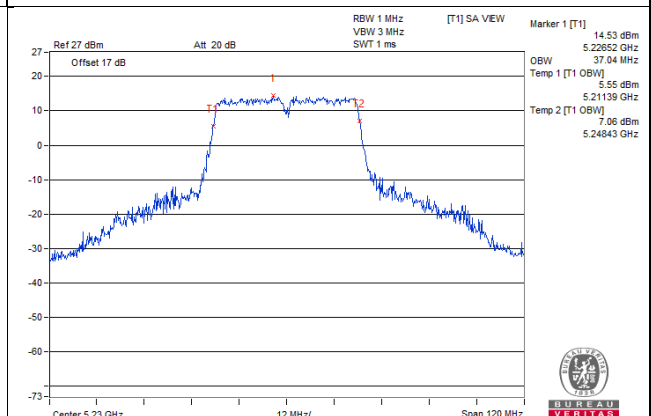


99% OCCUPIED BANDWIDTH SPECTRUM PLOT


11ac (40MHz) 1S4T TxBF CH151 Chain1

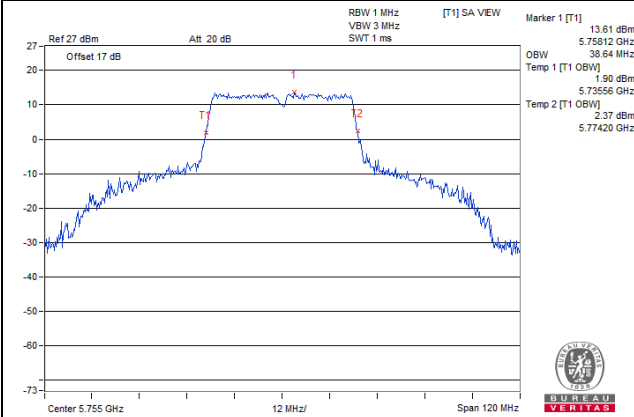


11ac (40MHz) 1S4T TxBF CH159 Chain1

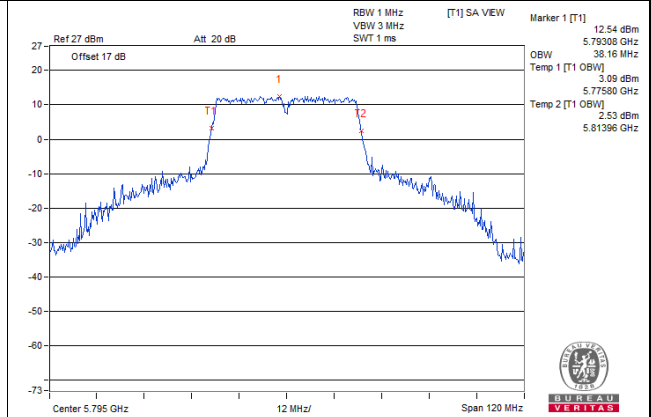


11ac (40MHz) 1S4T TxBF CH151 Chain2

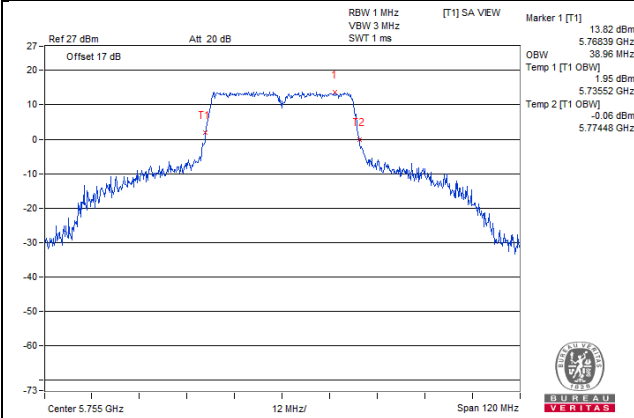


11ac (40MHz) 1S4T TxBF CH159 Chain2

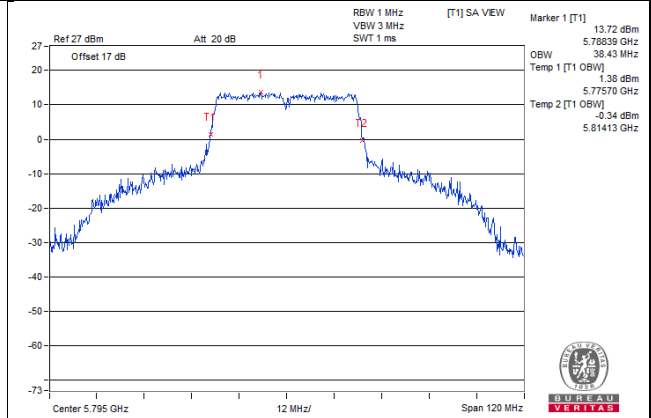


11ac (40MHz) 1S4T TxBF CH151 Chain3

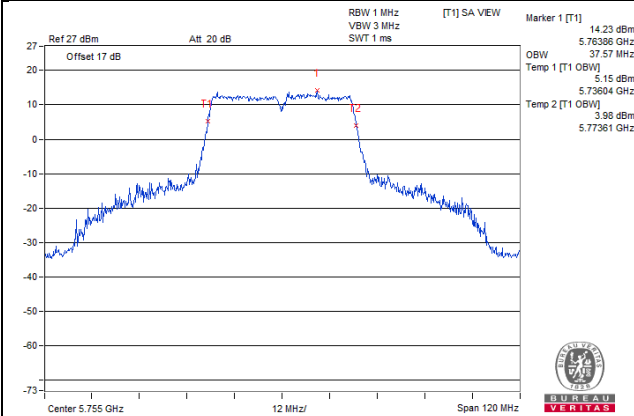


11ac (40MHz) 1S4T TxBF CH159 Chain3

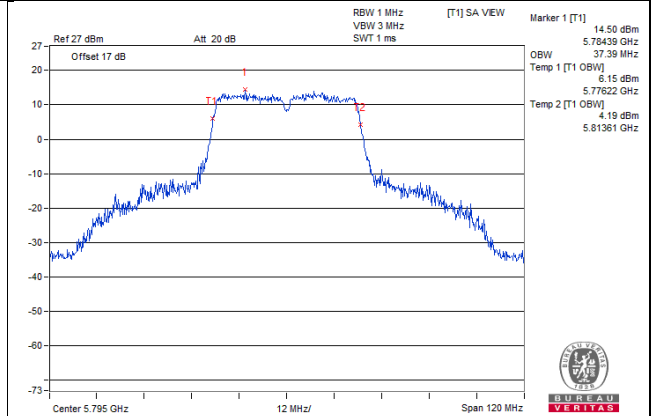

11ac (40MHz) 1S4T TxBF CH151 Chain4

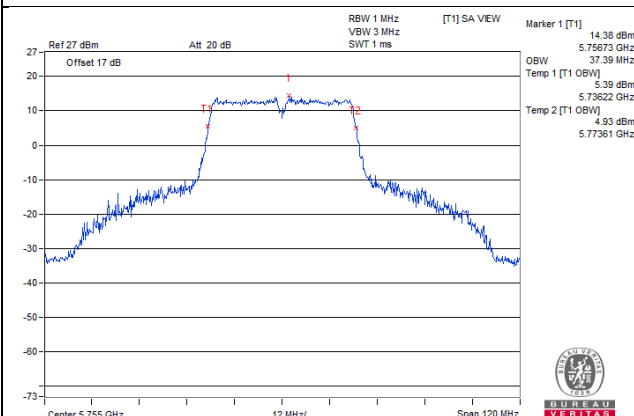


11ac (40MHz) 1S4T TxBF CH159 Chain4

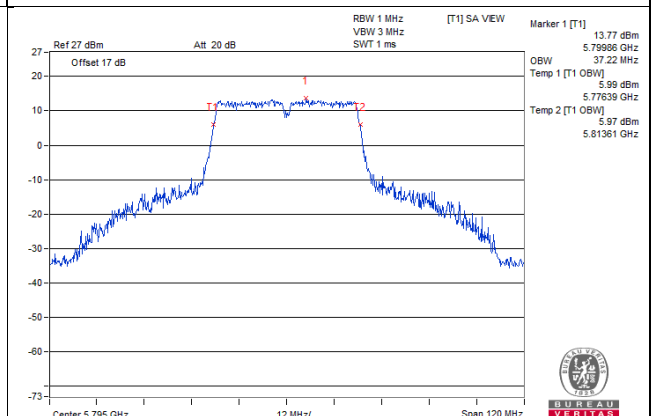


99% OCCUPIED BANDWIDTH SPECTRUM PLOT


11ac (80MHz) 1S4T CDD CH42 Chain1

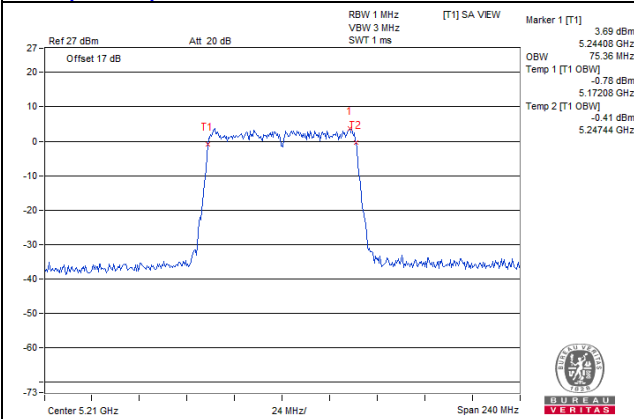


11ac (80MHz) 1S4T CDD CH155 Chain1

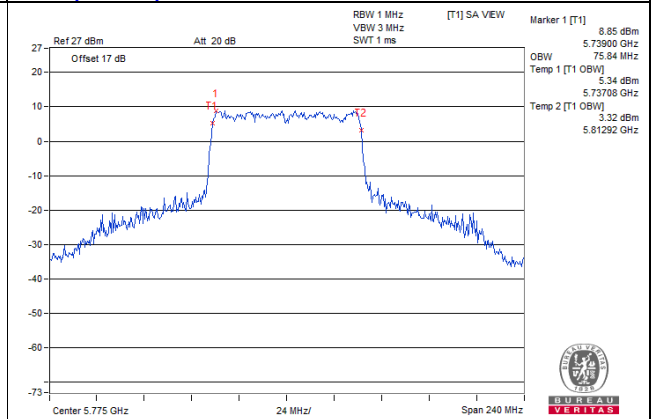


11ac (80MHz) 1S4T CDD CH42 Chain2

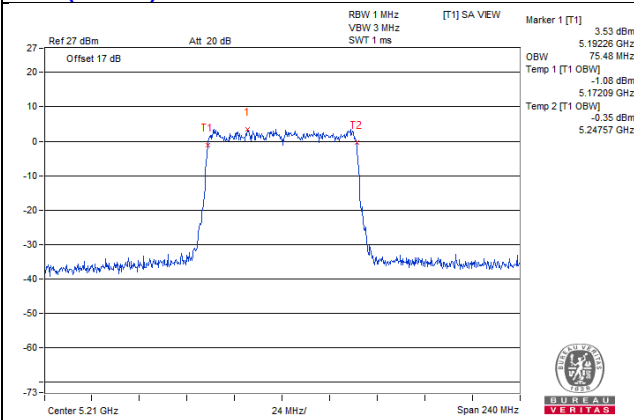


11ac (80MHz) 1S4T CDD CH155 Chain2

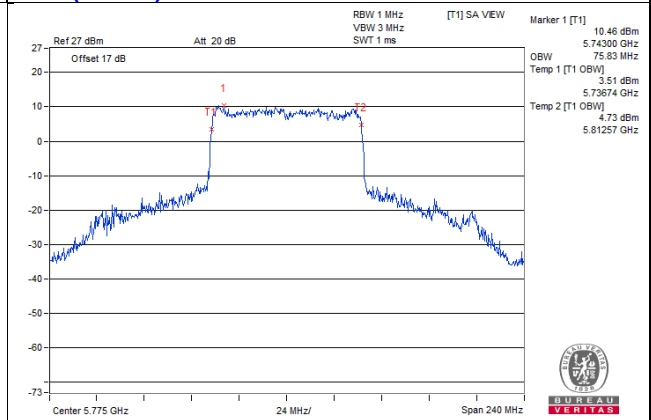


11ac (80MHz) 1S4T CDD CH42 Chain3

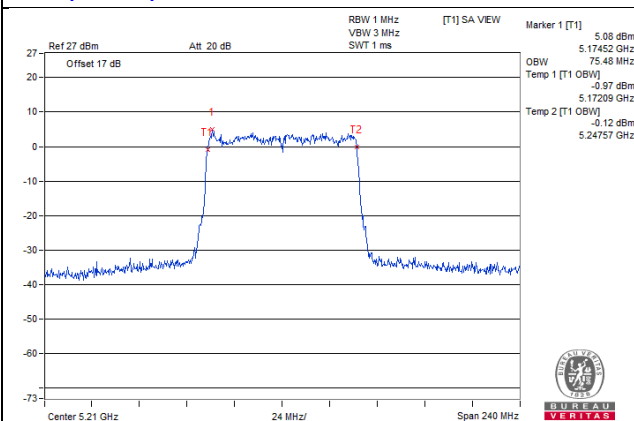


11ac (80MHz) 1S4T CDD CH155 Chain3

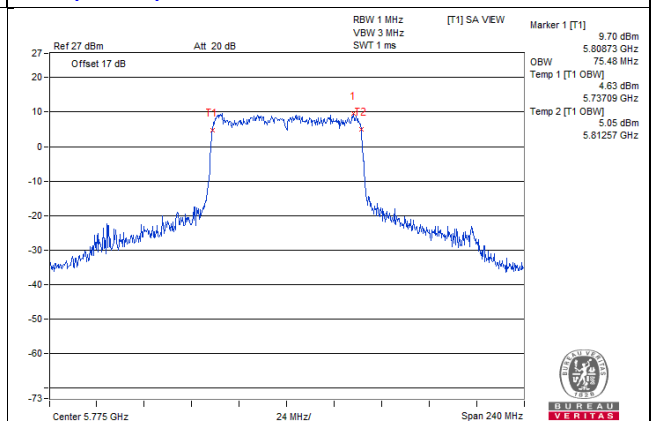

11ac (80MHz) 1S4T CDD CH42 Chain4

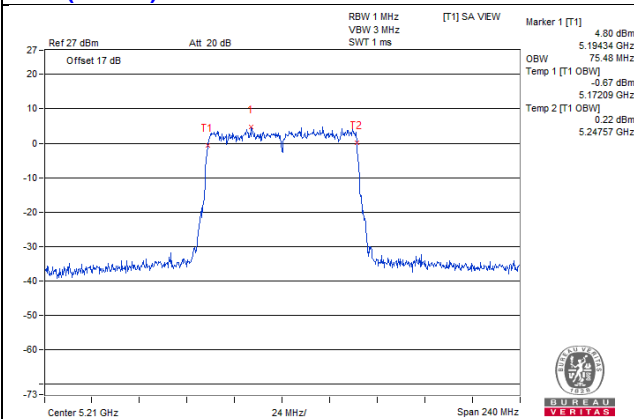


11ac (80MHz) 1S4T CDD CH155 Chain4

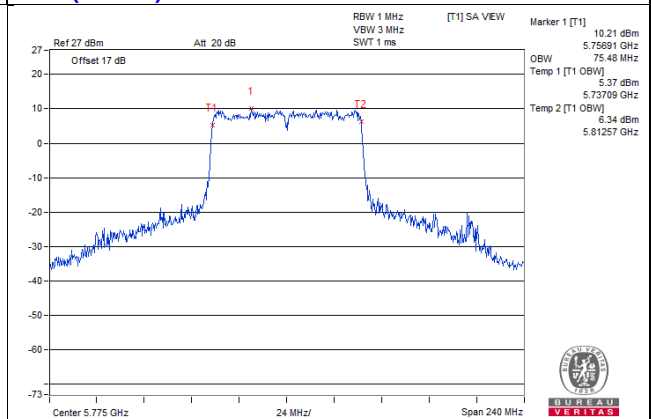


99% OCCUPIED BANDWIDTH SPECTRUM PLOT


11ac (80MHz) 1S4T TxBF CH42 Chain1

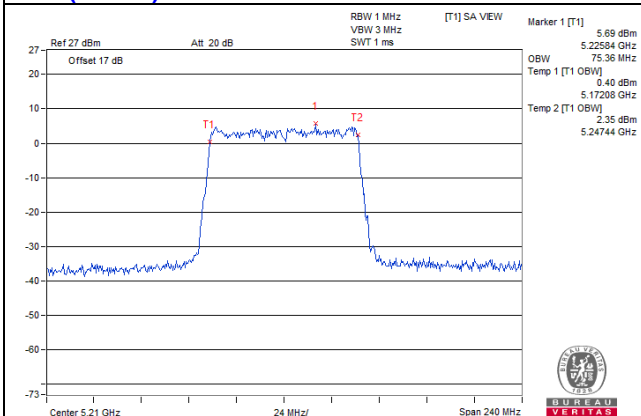


11ac (80MHz) 1S4T TxBF CH155 Chain1

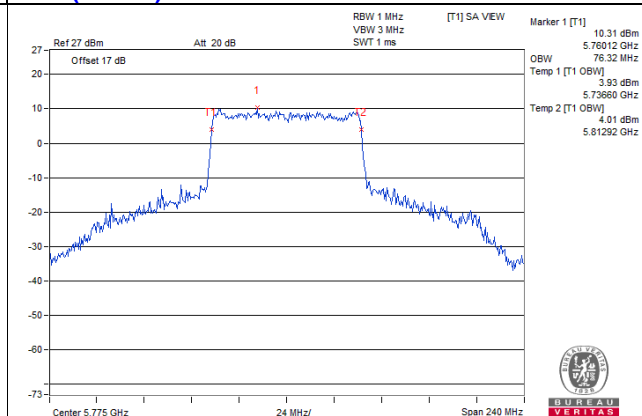


11ac (80MHz) 1S4T TxBF CH42 Chain2

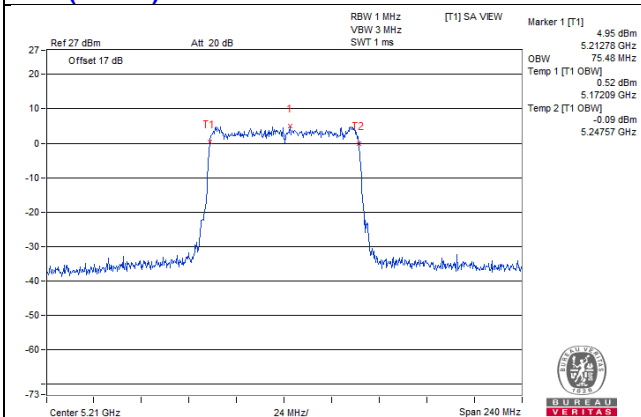


11ac (80MHz) 1S4T TxBF CH155 Chain2

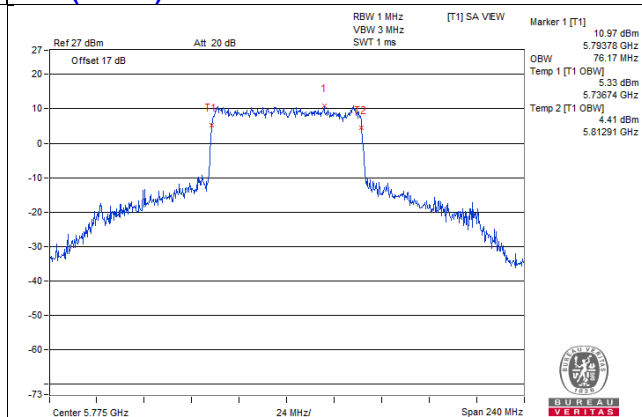


11ac (80MHz) 1S4T TxBF CH42 Chain3

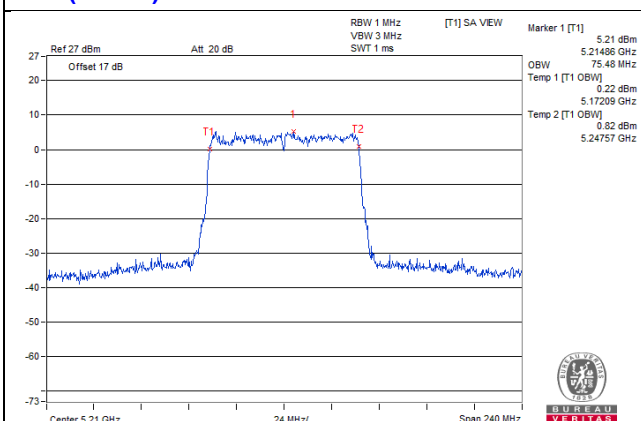


11ac (80MHz) 1S4T TxBF CH155 Chain3

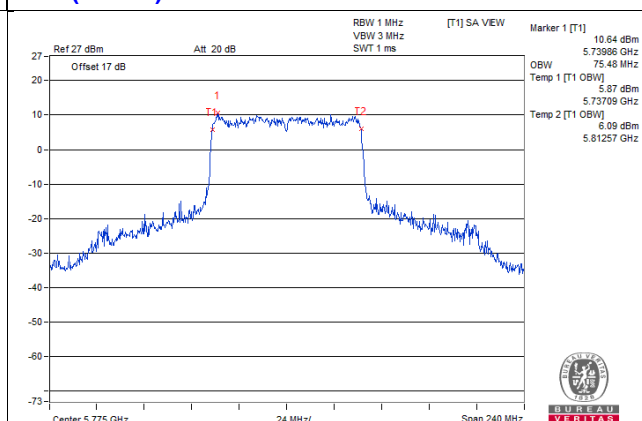

11ac (80MHz) 1S4T TxBF CH42 Chain4

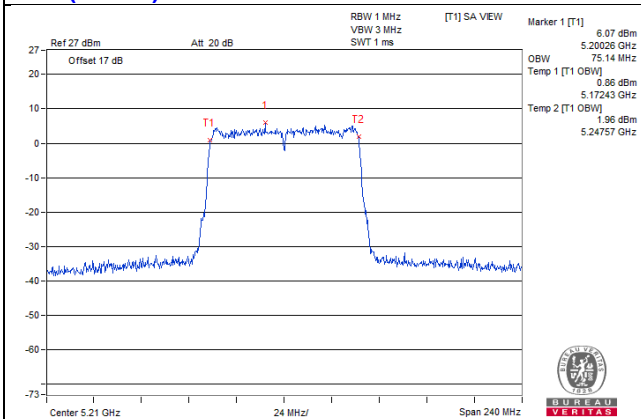

11ac (80MHz) 1S4T TxBF CH155 Chain4

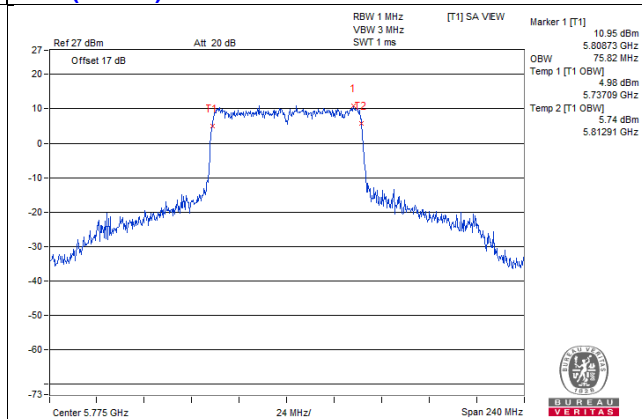

Client Mode

11a 1S4T CDD

CHANNEL	FREQUENCY (MHz)	99% Occupied Bandwidth (MHz)			
		CHAIN 1	CHAIN 2	CHAIN 3	CHAIN 4
36	5180	18.48	18.52	18.43	18.43
40	5200	18.36	18.61	18.52	18.61
48	5240	16.92	16.96	16.96	16.95

11ac (20MHz) 1S4T CDD

CHANNEL	FREQUENCY (MHz)	99% Occupied Bandwidth (MHz)			
		CHAIN 1	CHAIN 2	CHAIN 3	CHAIN 4
36	5180	19.68	19.40	19.40	19.22
40	5200	19.68	19.48	19.57	19.39
48	5240	18.36	18.18	18.26	18.00

11ac (20MHz) 1S4T TxBF

CHANNEL	FREQUENCY (MHz)	99% Occupied Bandwidth (MHz)			
		CHAIN 1	CHAIN 2	CHAIN 3	CHAIN 4
36	5180	19.56	19.48	19.39	19.31
40	5200	19.80	19.40	19.31	19.31
48	5240	18.36	18.18	18.00	18.00

11ac (40MHz) 1S4T CDD

CHANNEL	FREQUENCY (MHz)	99% Occupied Bandwidth (MHz)			
		CHAIN 1	CHAIN 2	CHAIN 3	CHAIN 4
38	5190	36.72	37.04	37.04	36.86
46	5230	36.96	36.86	37.04	36.69

11ac (40MHz) 1S4T TxBF

CHANNEL	FREQUENCY (MHz)	99% Occupied Bandwidth (MHz)			
		CHAIN 1	CHAIN 2	CHAIN 3	CHAIN 4
38	5190	36.96	37.04	37.04	37.04
46	5230	36.96	37.04	37.04	36.69

11ac (80MHz) 1S4T CDD


CHANNEL	FREQUENCY (MHz)	99% Occupied Bandwidth (MHz)			
		CHAIN 1	CHAIN 2	CHAIN 3	CHAIN 4
42	5210	75.36	75.48	75.48	75.82

11ac (80MHz) 1S4T TxBF


CHANNEL	FREQUENCY (MHz)	99% Occupied Bandwidth (MHz)			
		CHAIN 1	CHAIN 2	CHAIN 3	CHAIN 4
42	5210	75.36	75.48	75.48	75.48

99% OCCUPIED BANDWIDTH SPECTRUM PLOT


11a 1S4T CDD CH36 Chain1

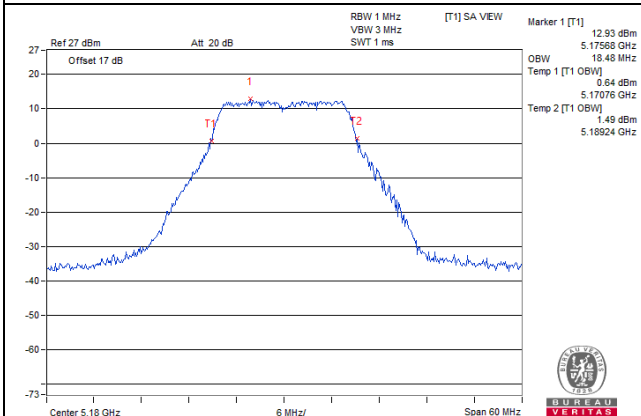


11a 1S4T CDD CH40 Chain1

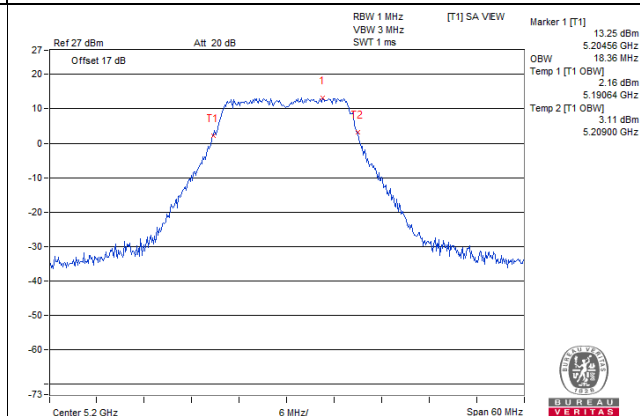


11a 1S4T CDD CH36 Chain2

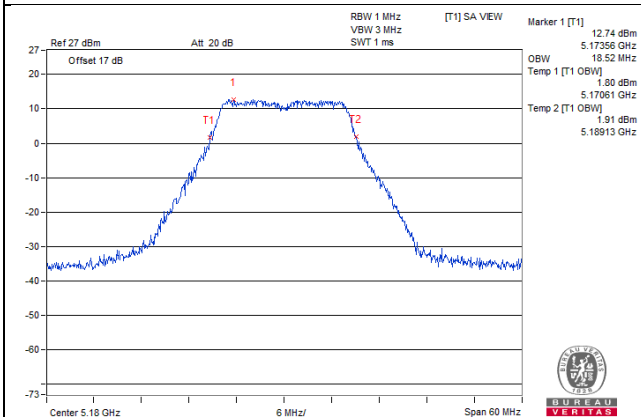


11a 1S4T CDD CH40 Chain2

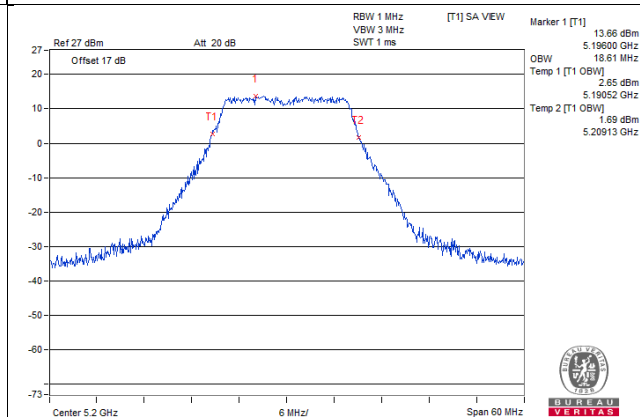


11a 1S4T CDD CH36 Chain3

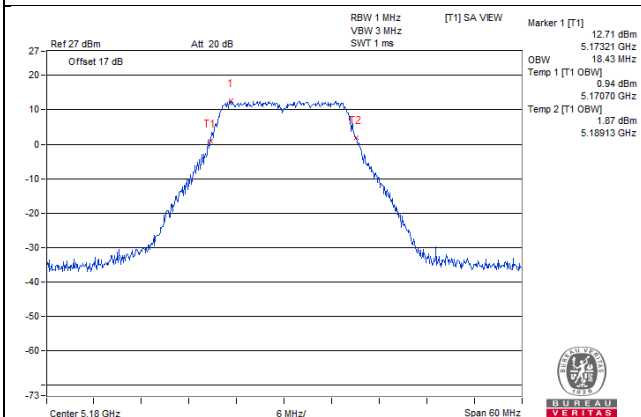


11a 1S4T CDD CH40 Chain3

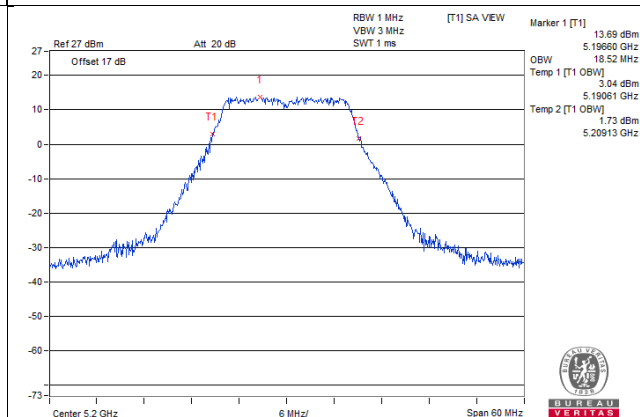

11a 1S4T CDD CH36 Chain4

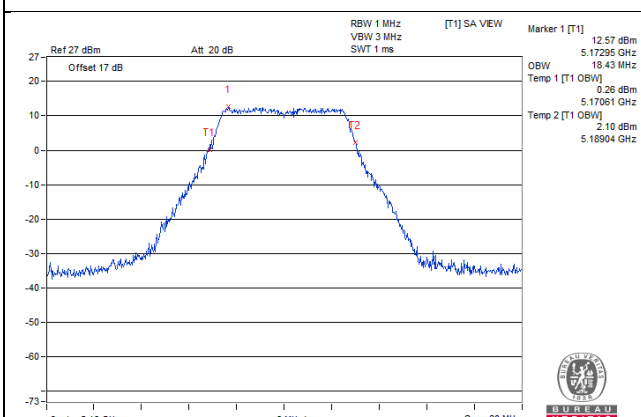


11a 1S4T CDD CH40 Chain4

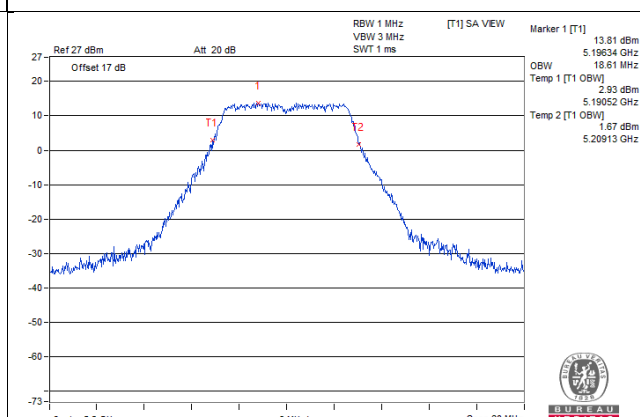


99% OCCUPIED BANDWIDTH SPECTRUM PLOT


11a 1S4T CDD CH48 Chain1

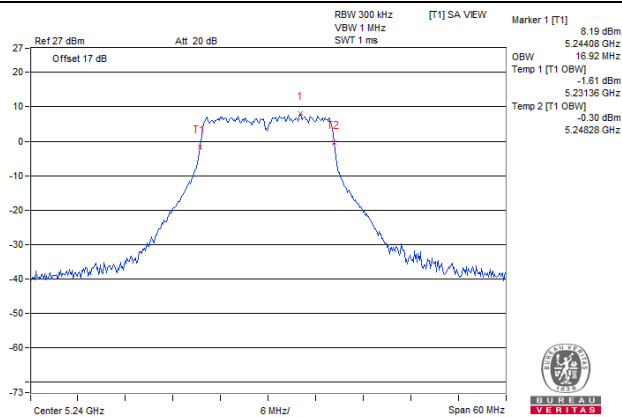


11a 1S4T CDD CH48 Chain2

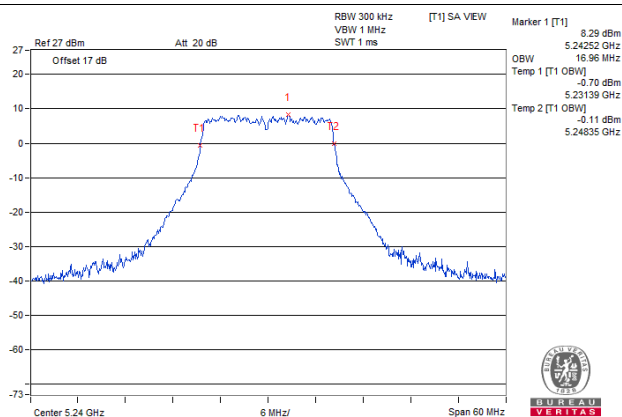

11a 1S4T CDD CH48 Chain3

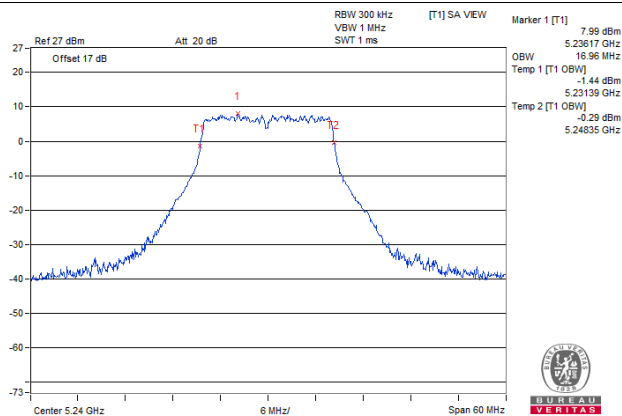


11a 1S4T CDD CH48 Chain4

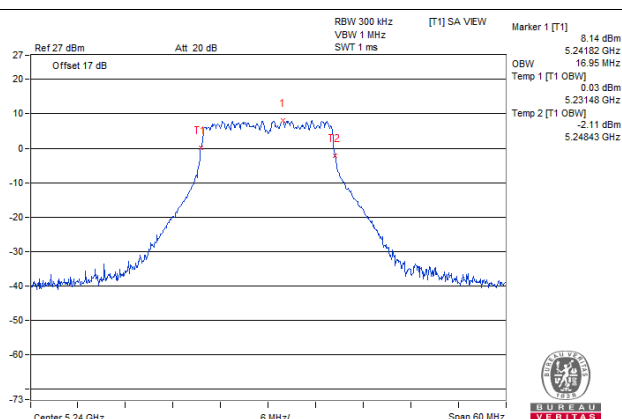


99% OCCUPIED BANDWIDTH SPECTRUM PLOT


11ac (20MHz) 1S4T CDD CH36 Chain1

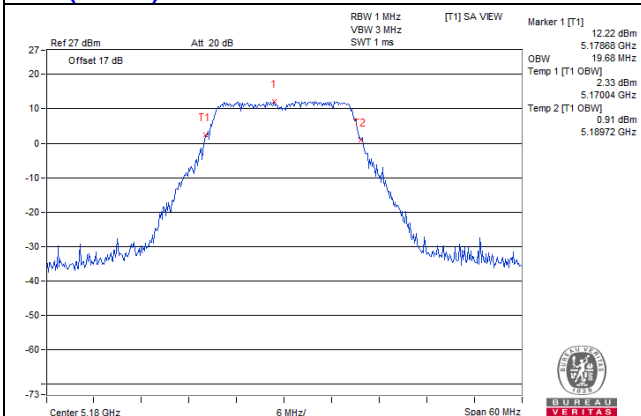


11ac (20MHz) 1S4T CDD CH40 Chain1

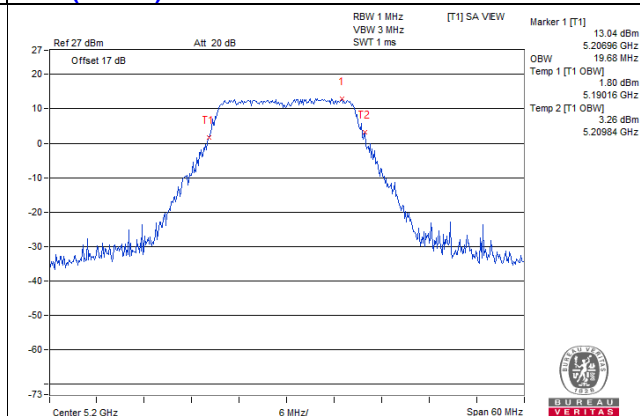


11ac (20MHz) 1S4T CDD CH36 Chain2

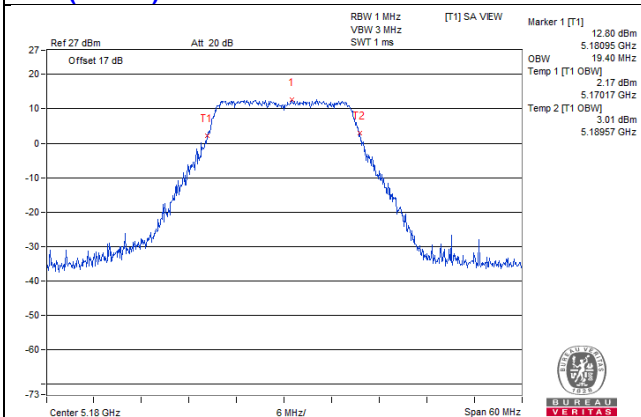


11ac (20MHz) 1S4T CDD CH40 Chain2

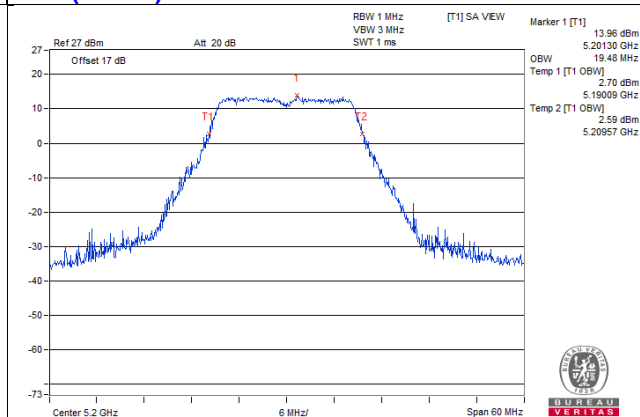


11ac (20MHz) 1S4T CDD CH36 Chain3

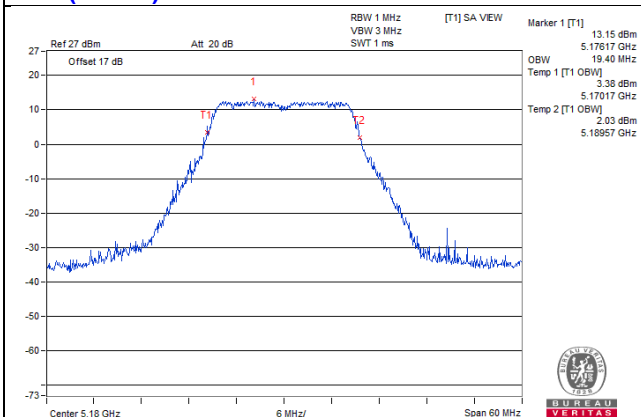


11ac (20MHz) 1S4T CDD CH40 Chain3

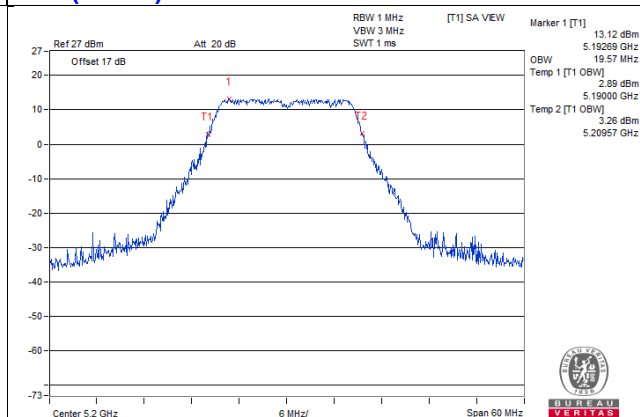

11ac (20MHz) 1S4T CDD CH36 Chain4

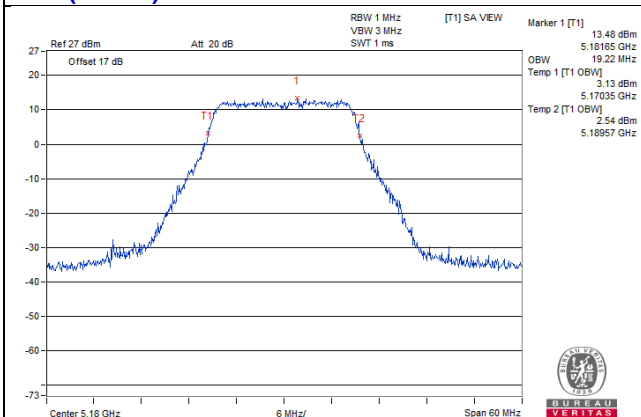


11ac (20MHz) 1S4T CDD CH40 Chain4

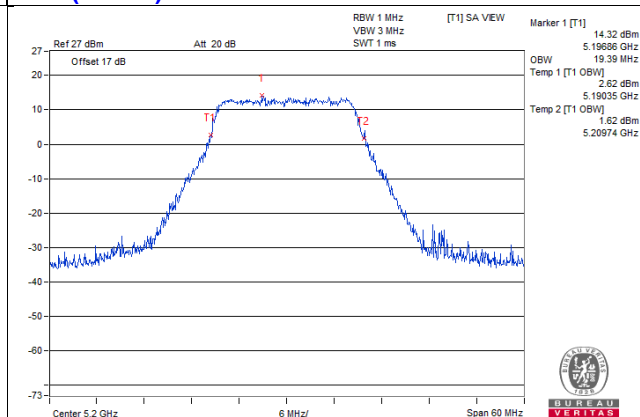


99% OCCUPIED BANDWIDTH SPECTRUM PLOT


11ac (20MHz) 1S4T CDD CH48 Chain1

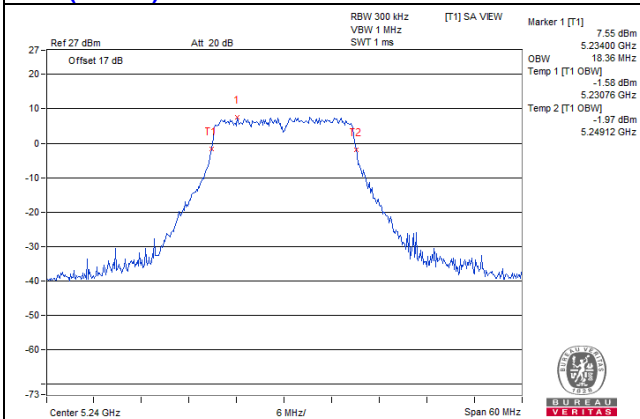


11ac (20MHz) 1S4T CDD CH48 Chain2

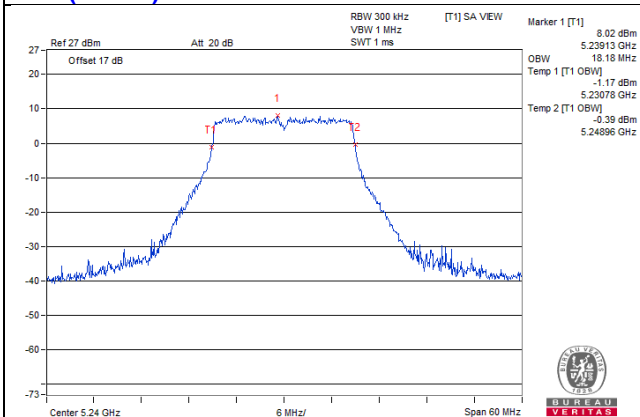

11ac (20MHz) 1S4T CDD CH48Chain3

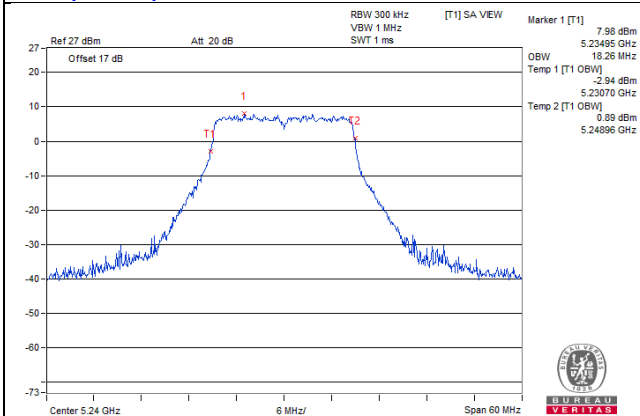


11ac (20MHz) 1S4T CDD CH48 Chain4

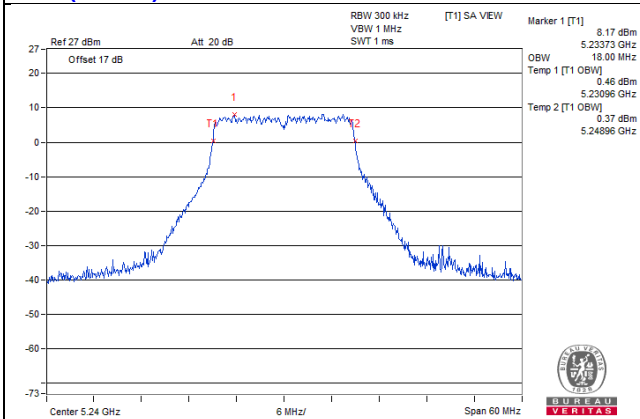


99% OCCUPIED BANDWIDTH SPECTRUM PLOT


11ac (20MHz) 1S4T TxBF CH36 Chain1

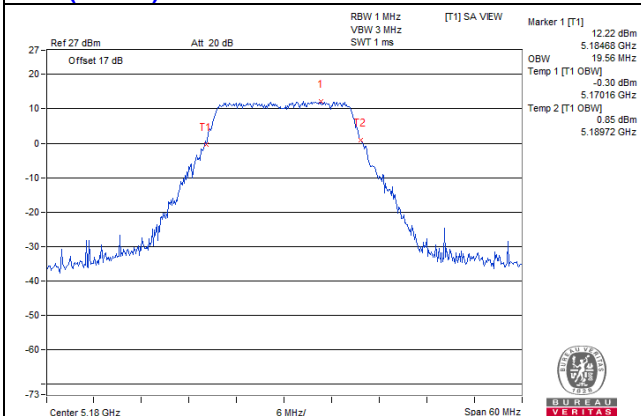


11ac (20MHz) 1S4T TxBF CH40 Chain1

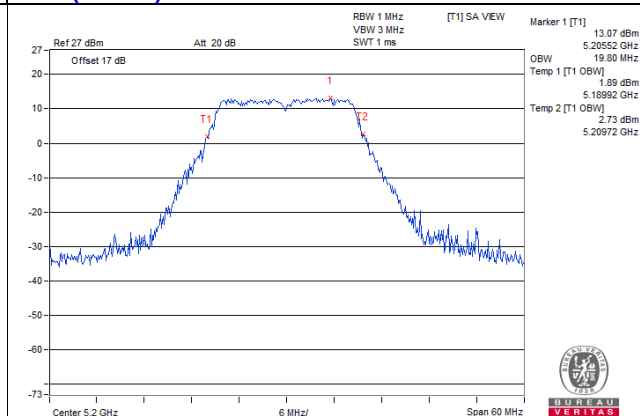


11ac (20MHz) 1S4T TxBF CH36 Chain2

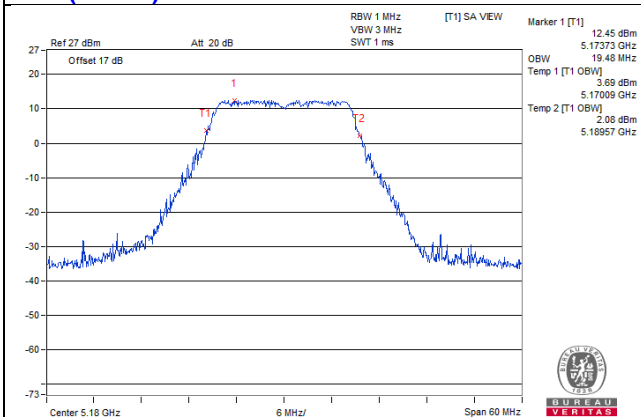


11ac (20MHz) 1S4T TxBF CH40 Chain2

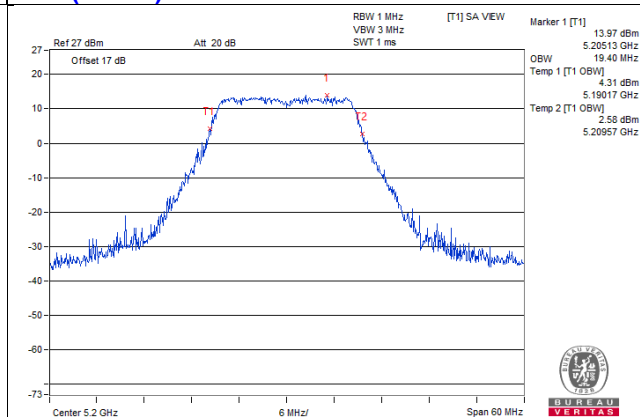


11ac (20MHz) 1S4T TxBF CH36 Chain3

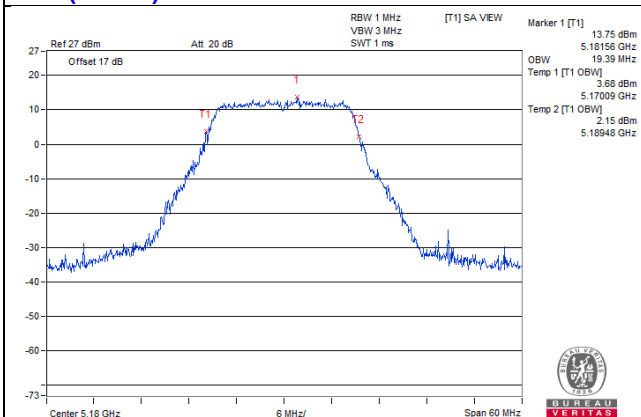


11ac (20MHz) 1S4T TxBF CH40 Chain3

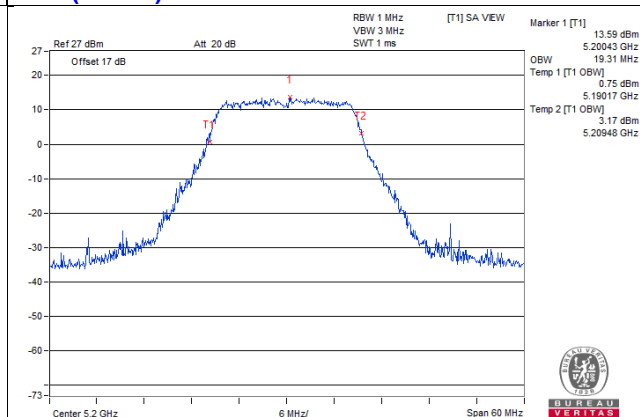

11ac (20MHz) 1S4T TxBF CH36 Chain4

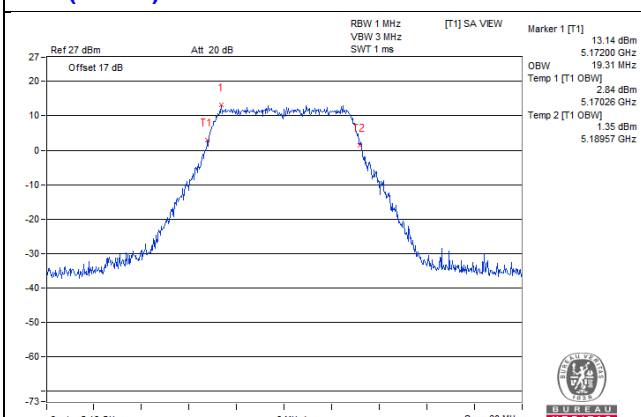


11ac (20MHz) 1S4T TxBF CH40 Chain4

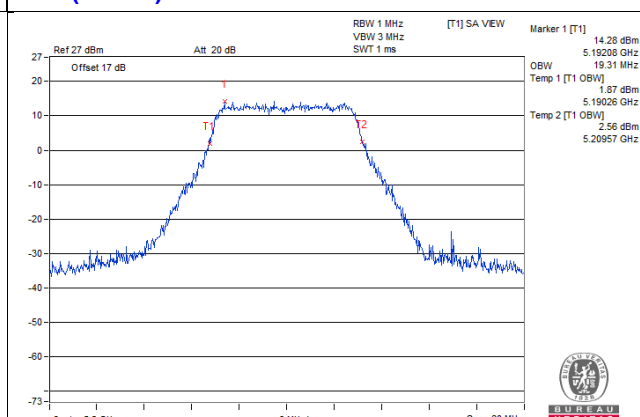


99% OCCUPIED BANDWIDTH SPECTRUM PLOT


11ac (20MHz) 1S4T TxBF CH48 Chain1

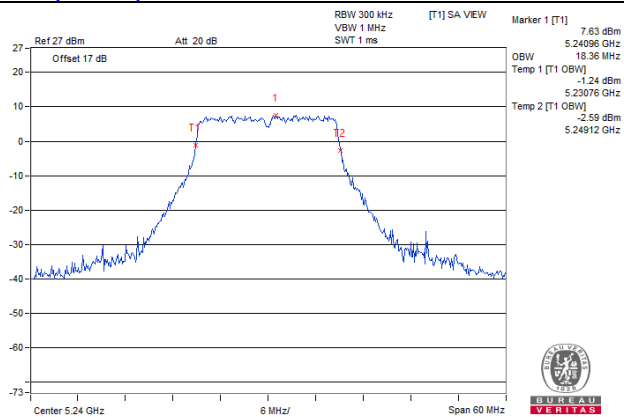


11ac (20MHz) 1S4T TxBF CH48 Chain2

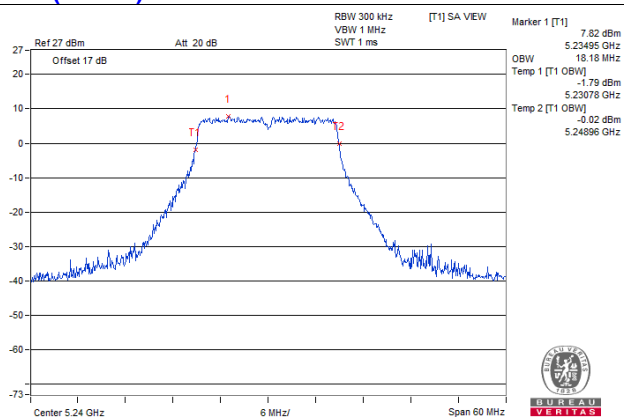

11ac (20MHz) 1S4T TxBF CH48 Chain3

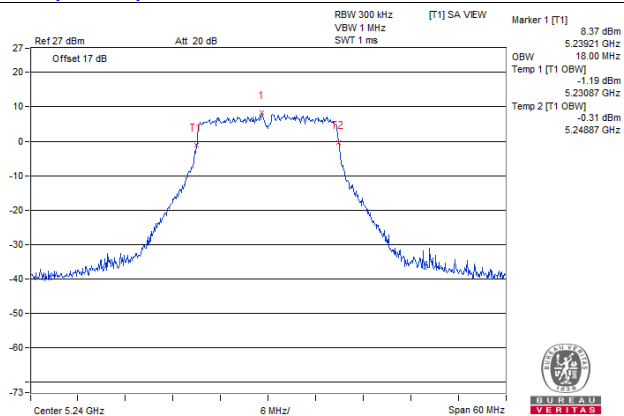


11ac (20MHz) 1S4T TxBF CH48 Chain4

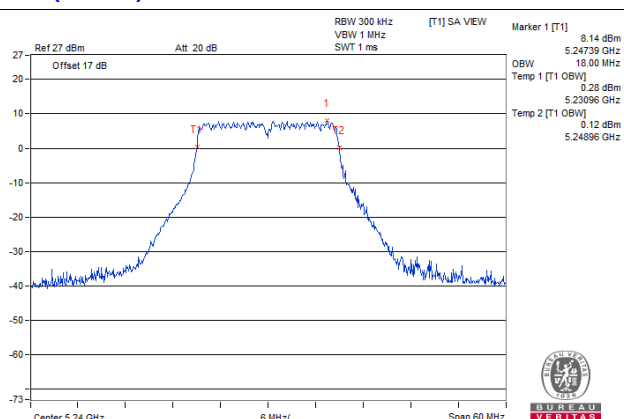


99% OCCUPIED BANDWIDTH SPECTRUM PLOT


11ac (40MHz) 1S4T CDD CH38 Chain1

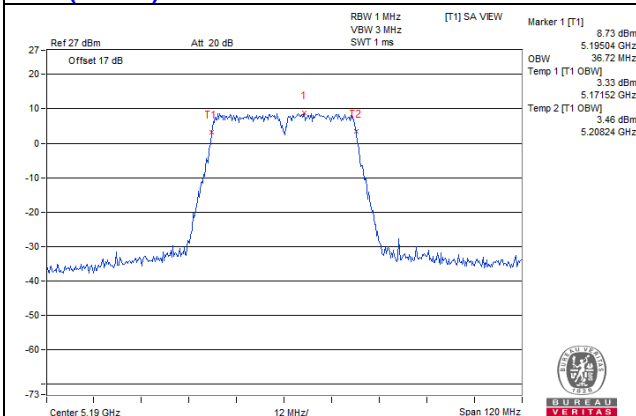


11ac (40MHz) 1S4T CDD CH46 Chain1

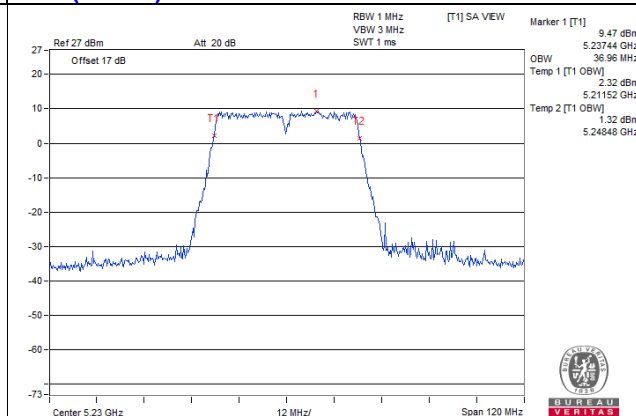


11ac (40MHz) 1S4T CDD CH38 Chain2

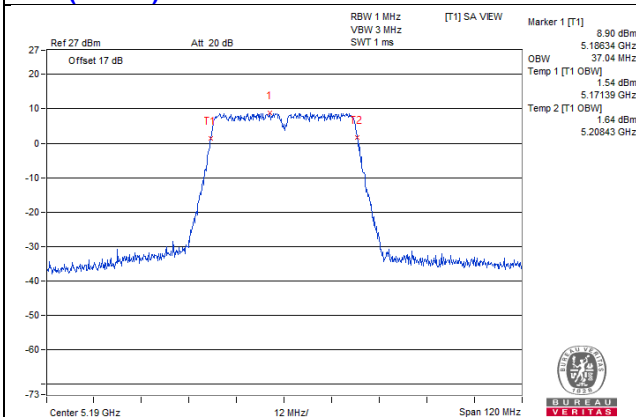


11ac (40MHz) 1S4T CDD CH46 Chain2

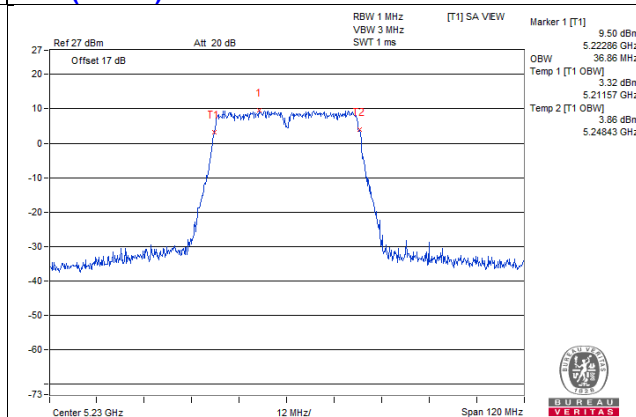


11ac (40MHz) 1S4T CDD CH38 Chain3

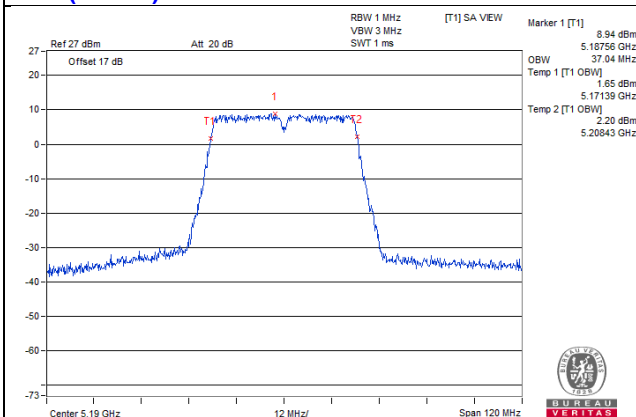


11ac (40MHz) 1S4T CDD CH46 Chain3

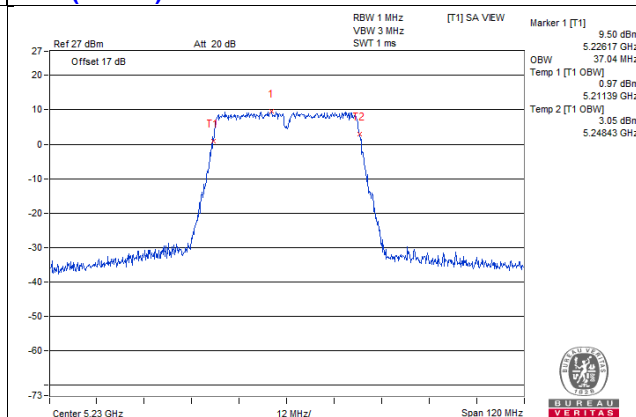

11ac (40MHz) 1S4T CDD CH38 Chain4

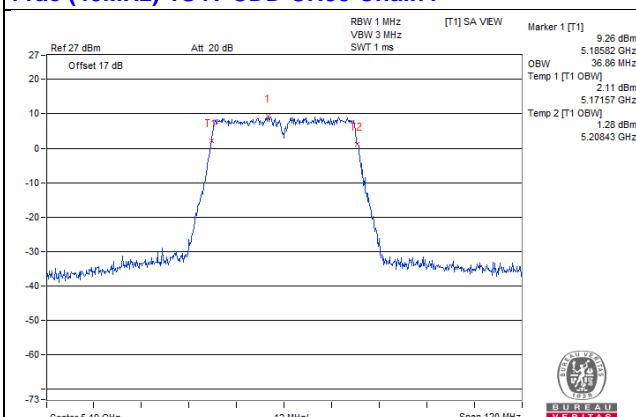


11ac (40MHz) 1S4T CDD CH46 Chain4

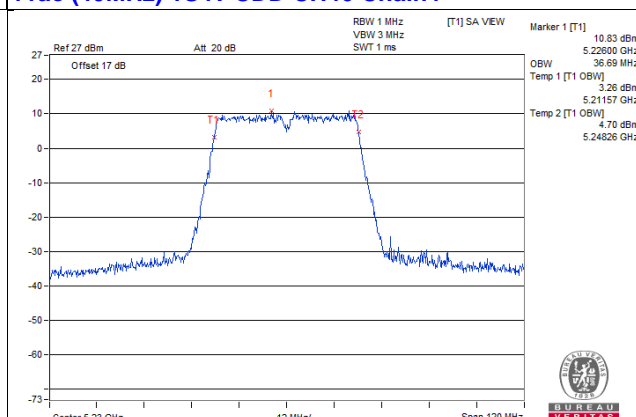


99% OCCUPIED BANDWIDTH SPECTRUM PLOT


11ac (40MHz) 1S4T TxBF CH38 Chain1

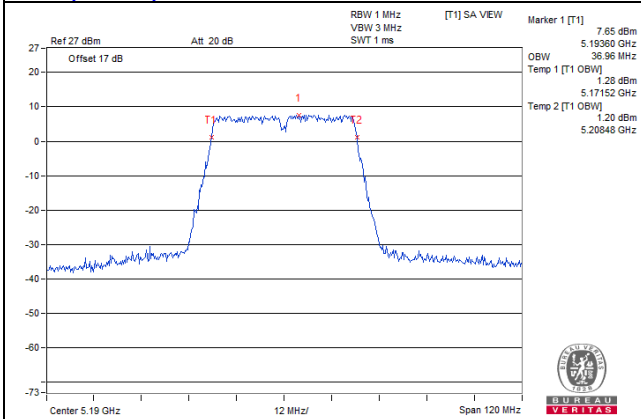


11ac (40MHz) 1S4T TxBF CH46 Chain1

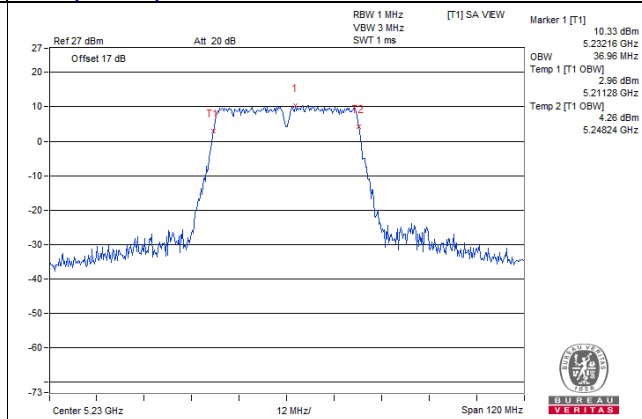


11ac (40MHz) 1S4T TxBF CH38 Chain2

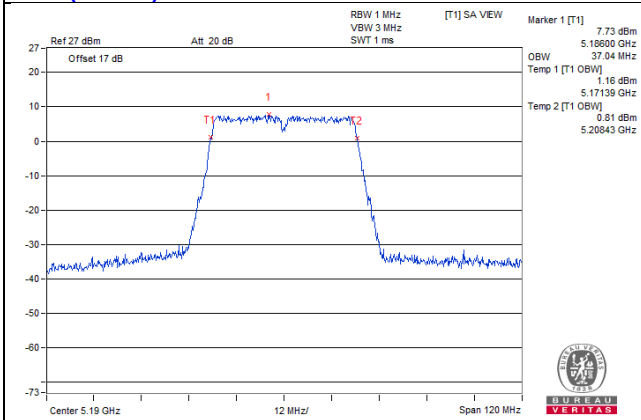


11ac (40MHz) 1S4T TxBF CH46 Chain2

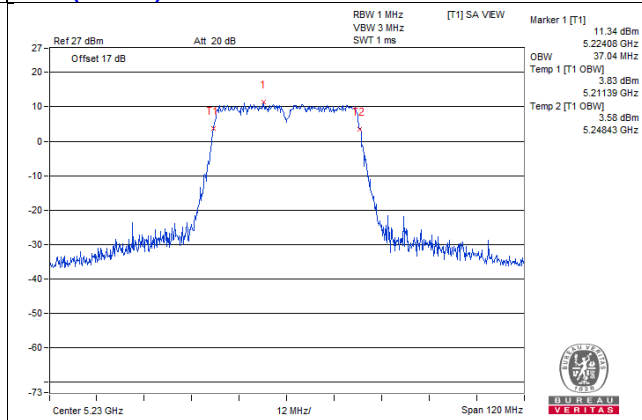


11ac (40MHz) 1S4T TxBF CH38 Chain3

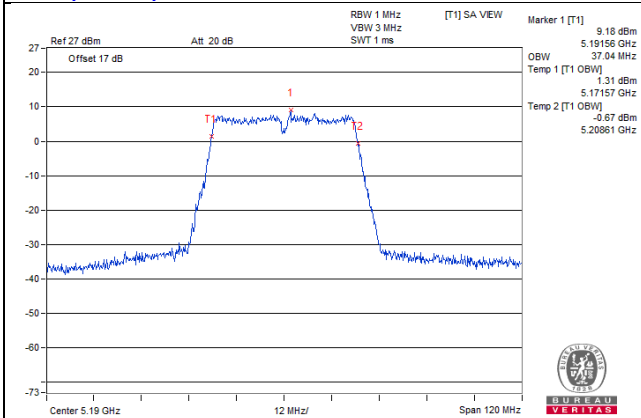


11ac (40MHz) 1S4T TxBF CH46 Chain3

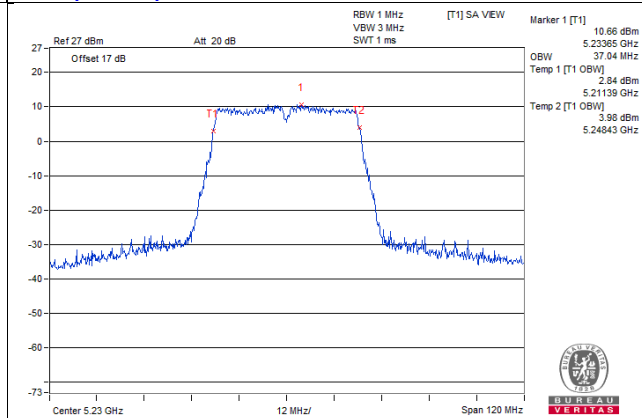

11ac (40MHz) 1S4T TxBF CH38 Chain4

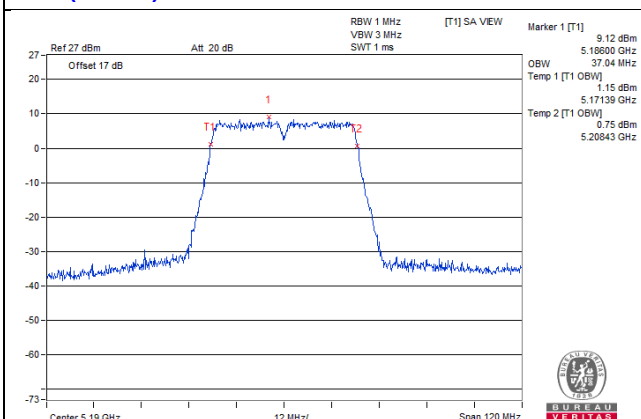


11ac (40MHz) 1S4T TxBF CH46 Chain4

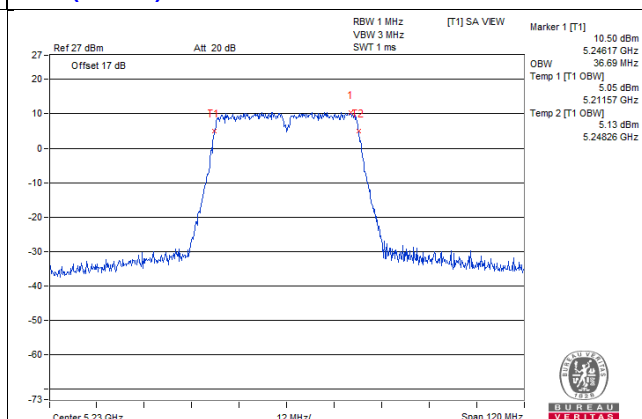


99% OCCUPIED BANDWIDTH SPECTRUM PLOT


11ac (80MHz) 1S4T CDD CH42 Chain1

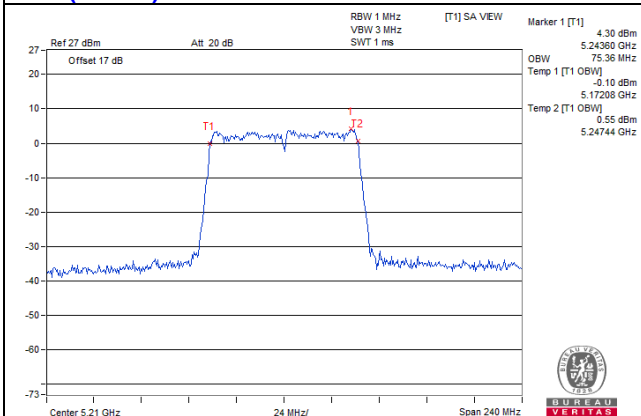


11ac (80MHz) 1S4T TxBF CH42 Chain1

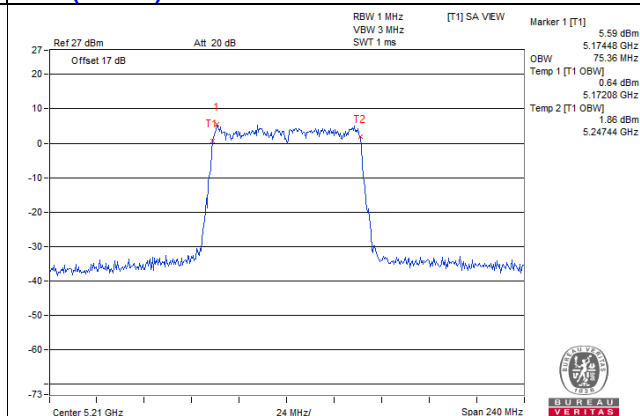


11ac (80MHz) 1S4T CDD CH42 Chain2

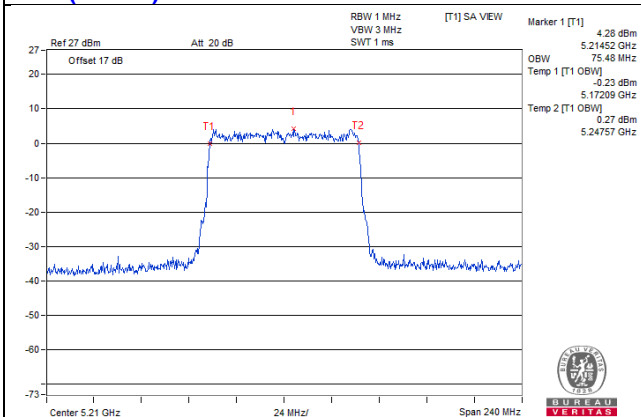


11ac (80MHz) 1S4T TxBF CH42 Chain2

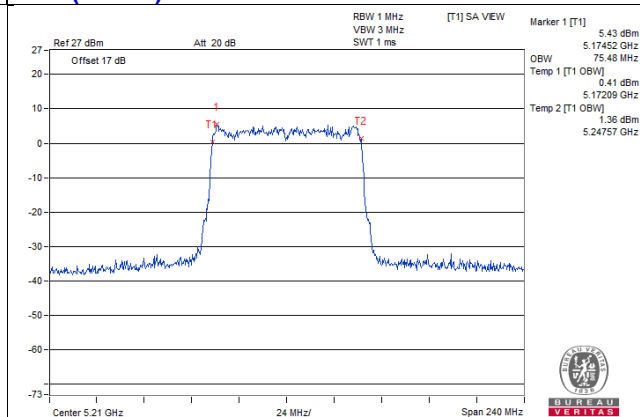


11ac (80MHz) 1S4T CDD CH42 Chain3

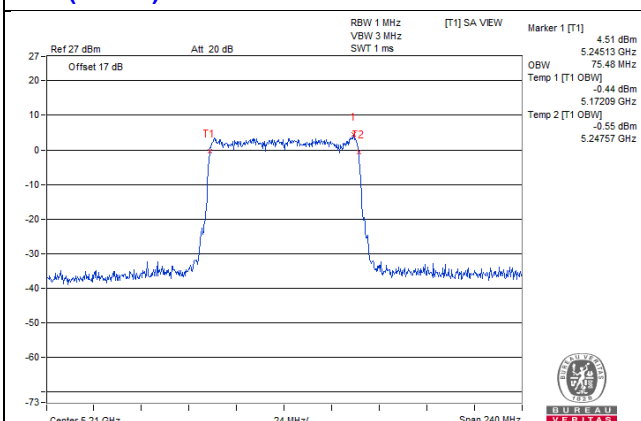


11ac (80MHz) 1S4T TxBF CH42 Chain3

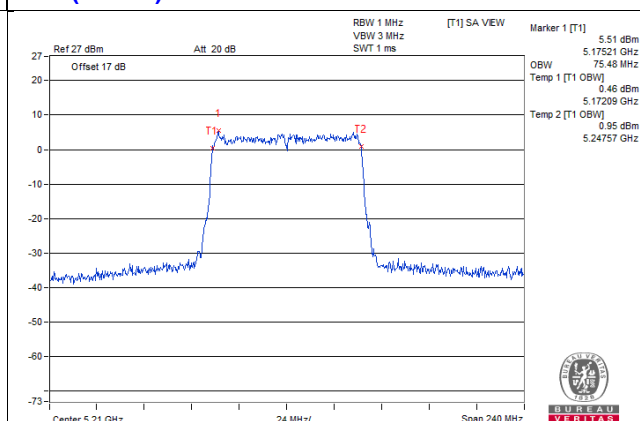

11ac (80MHz) 1S4T CDD CH42 Chain4

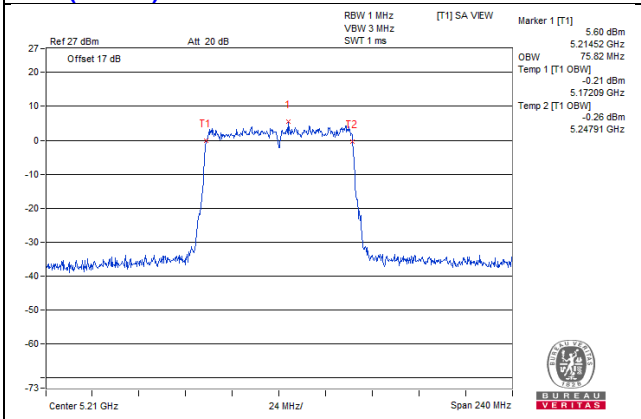

11ac (80MHz) 1S4T TxBF CH42 Chain4

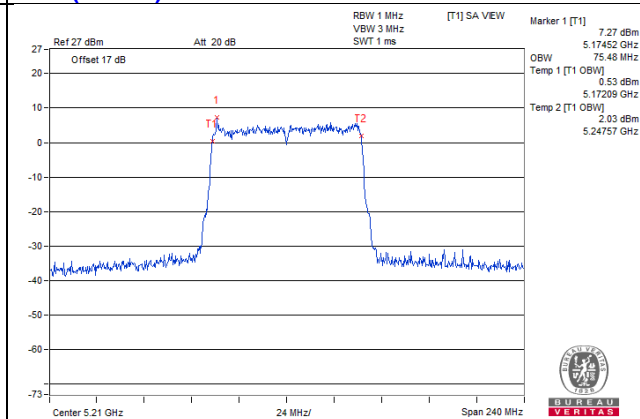

4.3 6dB Bandwidth Measurement

4.3.1 Limit

For digital modulation systems, the minimum 6dB bandwidth shall be at least 500 kHz

4.3.2 Measuring Instruments and Setting


The following table is the setting of the Spectrum Analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RBW	100KHz
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto couple

4.3.3 Test Procedures

- 1 The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
- 2 Test was performed in accordance with Measurement of Digital Transmission Systems Operating under 789033 D02 General UNII Test Procedures New Rules v02r01, in section “Emission bandwidth (C)(2)”, 05/02/2017
- 3 Measured the spectrum width with power higher than 6dB account by this measurement.

4.3.4 Test Setup Layout

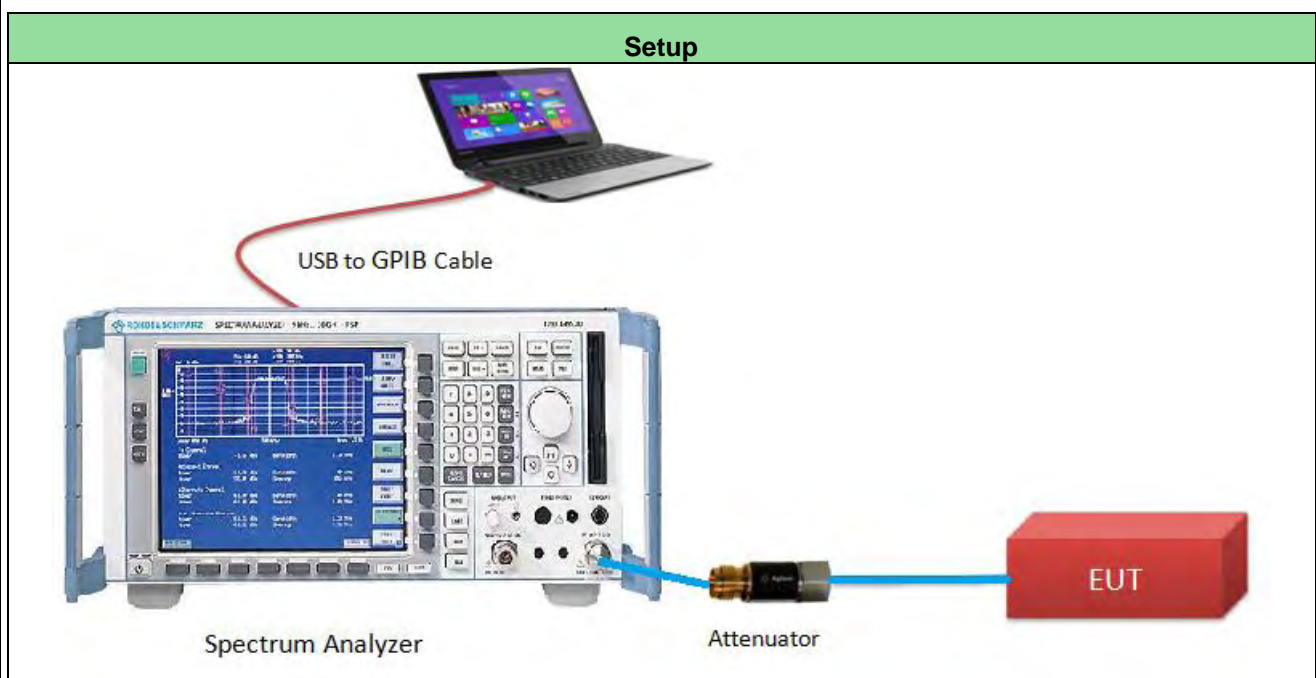

4.3.5 Test Deviation

There are no deviations with the original standard.

4.3.6 EUT Operating Conditions

The EUT was programmed to be in continuously transmitting mode.

4.3.7 Test Results of 6dB Bandwidth

Temperature	25°C	Humidity	60%
Test Engineer	Robert Cheng		

11a 1S4T CDD

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)				MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 1	CHAIN 2	CHAIN 3	CHAIN 4		
149	5745	16.39	16.43	16.41	16.4	0.5	PASS
157	5785	16.42	16.43	16.41	16.4	0.5	PASS
165	5825	16.39	16.41	16.41	16.41	0.5	PASS

11ac (20MHz) 1S4T CDD

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)				MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 1	CHAIN 2	CHAIN 3	CHAIN 4		
149	5745	17.67	17.66	17.68	17.65	0.5	PASS
157	5785	17.67	17.65	17.66	17.66	0.5	PASS
165	5825	17.68	17.66	17.7	17.66	0.5	PASS

11ac (20MHz) 1S4T TxBF

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)				MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 1	CHAIN 2	CHAIN 3	CHAIN 4		
149	5745	17.66	17.66	17.65	17.69	0.5	PASS
157	5785	17.7	17.68	17.68	17.68	0.5	PASS
165	5825	17.65	17.66	17.66	17.66	0.5	PASS

11ac (40MHz) 1S4T CDD

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)				MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 1	CHAIN 2	CHAIN 3	CHAIN 4		
151	5755	36.47	36.46	36.45	36.45	0.5	PASS
159	5795	36.52	36.45	36.43	36.44	0.5	PASS

11ac (40MHz) 1S4T TxBF

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)				MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 1	CHAIN 2	CHAIN 3	CHAIN 4		
151	5755	36.48	36.44	36.44	36.45	0.5	PASS
159	5795	36.47	36.43	36.43	36.45	0.5	PASS

11ac (80MHz) 1S4T CDD


CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)				MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 1	CHAIN 2	CHAIN 3	CHAIN 4		
155	5775	75.49	75.45	75.45	75.41	0.5	PASS

11ac (80MHz) 1S4T TxBF


CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)				MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 1	CHAIN 2	CHAIN 3	CHAIN 4		
155	5775	75.5	75.44	75.44	75.41	0.5	PASS

6dB BANDWIDTH SPECTRUM PLOT


11a 1S4T CDD CH149 Chain1

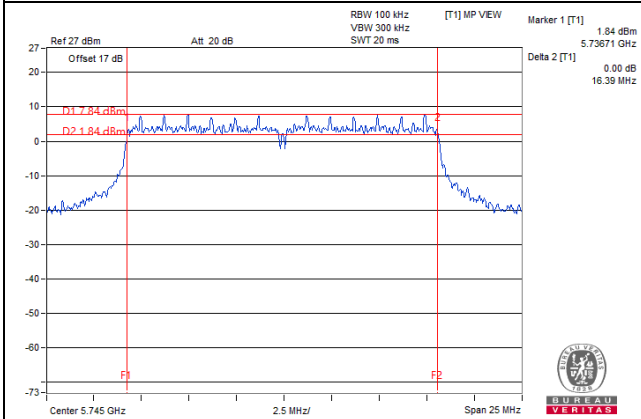


11a 1S4T CDD CH157 Chain1

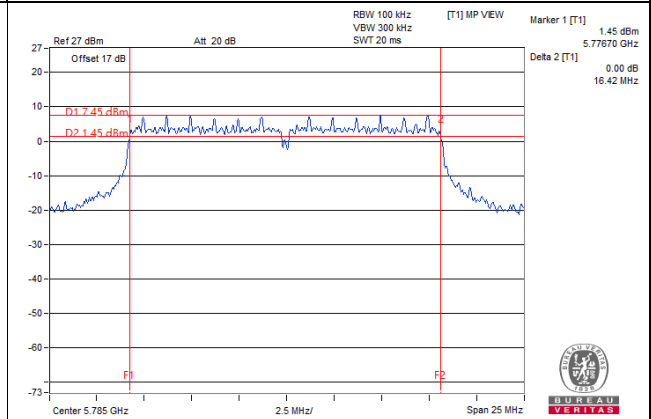


11a 1S4T CDD CH149 Chain2

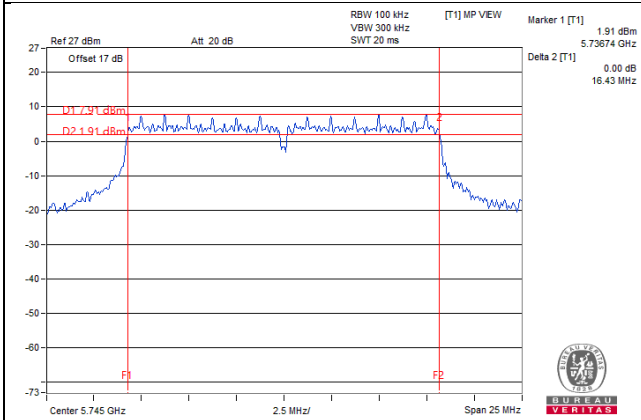


11a 1S4T CDD CH157 Chain2

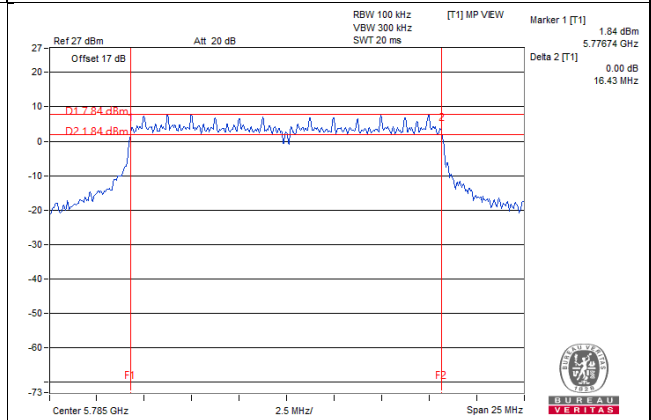


11a 1S4T CDD CH149 Chain3

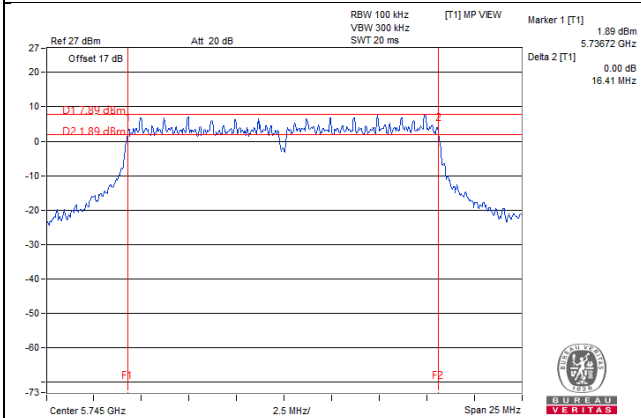


11a 1S4T CDD CH157 Chain3

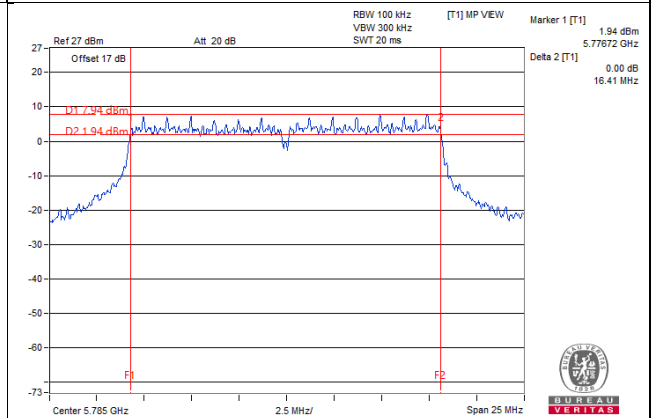

11a 1S4T CDD CH149 Chain4

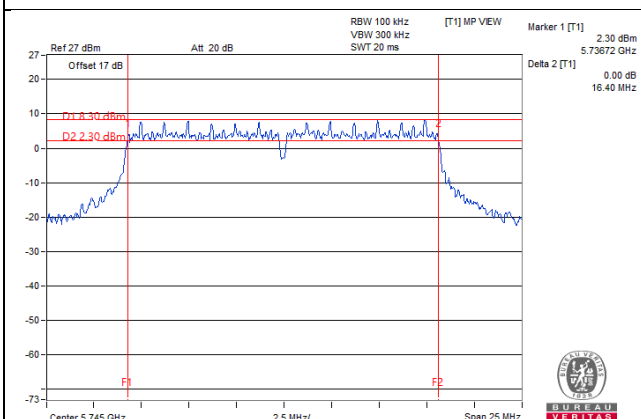


11a 1S4T CDD CH157 Chain4

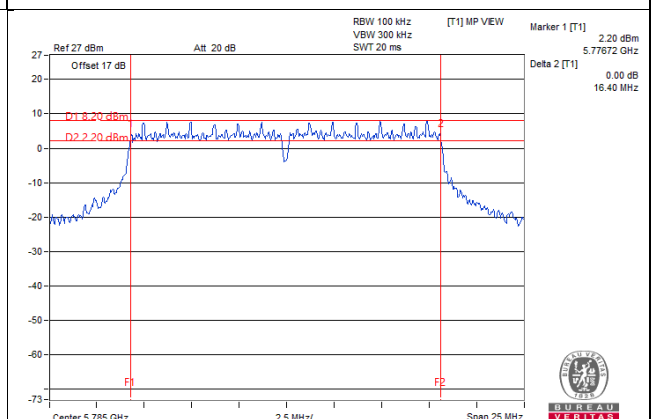


6dB BANDWIDTH SPECTRUM PLOT


11a 1S4T CDD CH165 Chain1

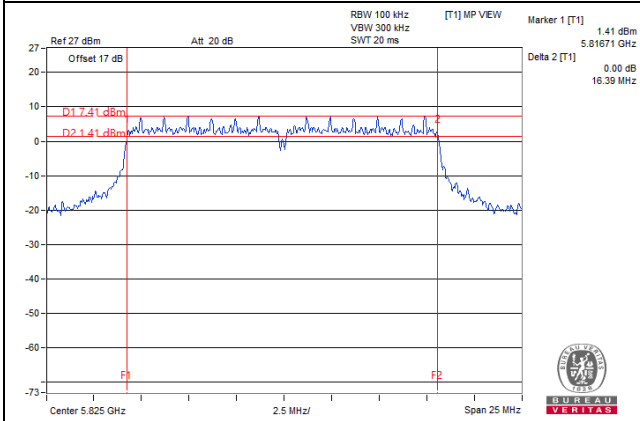


11a 1S4T CDD CH165 Chain2

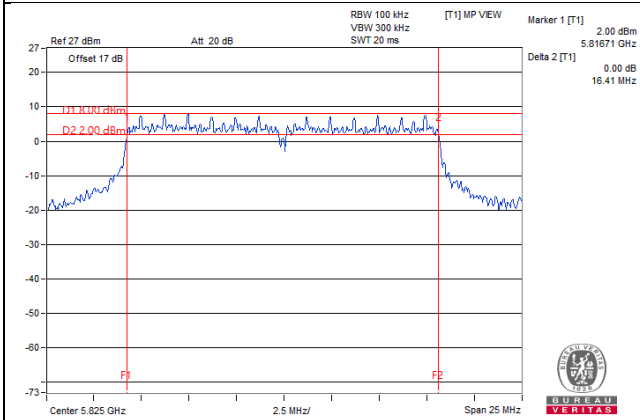

11a 1S4T CDD CH165 Chain3

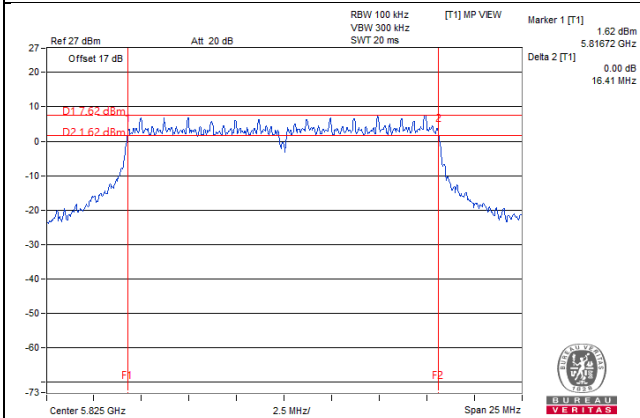


11a 1S4T CDD CH165 Chain4

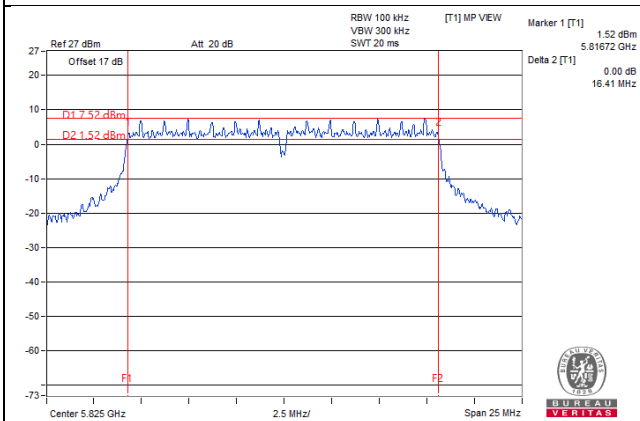


6dB BANDWIDTH SPECTRUM PLOT


11ac (20MHz) 1S4T CDD CH149 Chain1

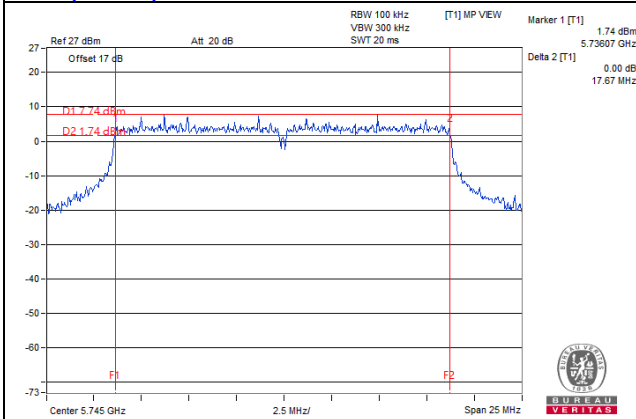


11ac (20MHz) 1S4T CDD CH157 Chain1

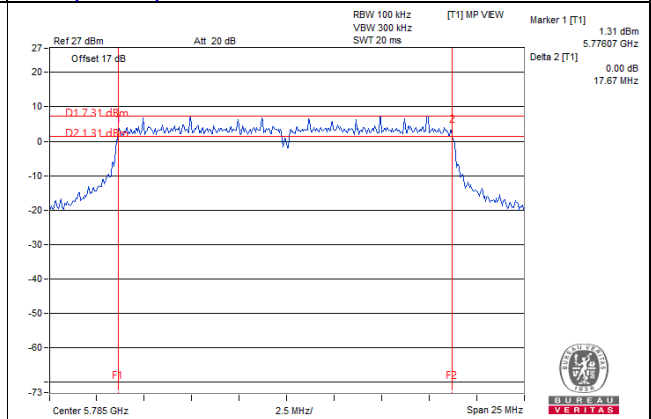


11ac (20MHz) 1S4T CDD CH149 Chain2

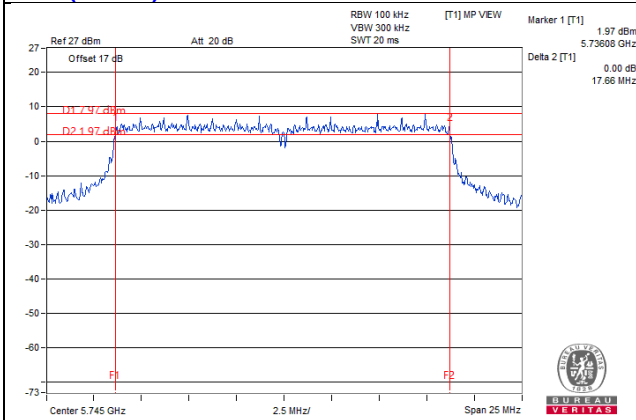


11ac (20MHz) 1S4T CDD CH157 Chain2

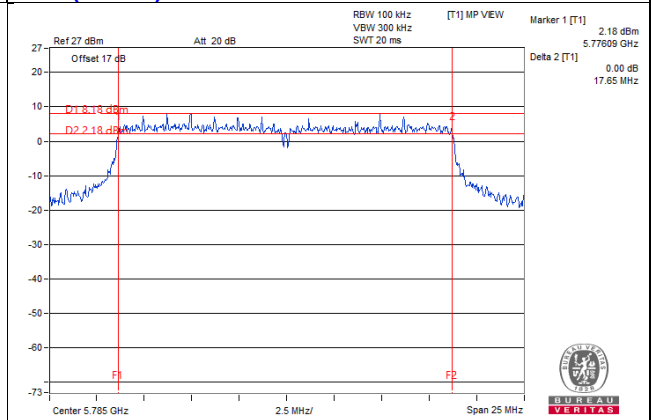


11ac (20MHz) 1S4T CDD CH149 Chain3

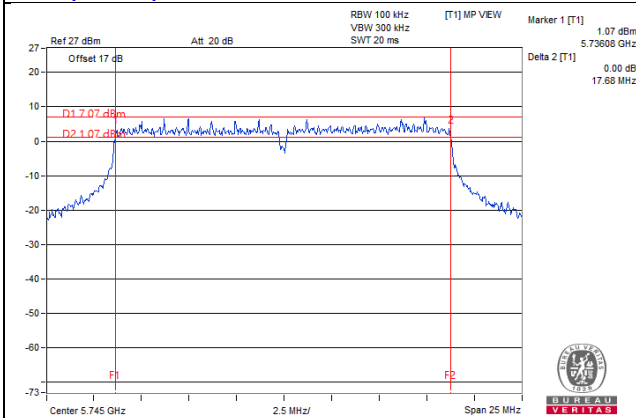


11ac (20MHz) 1S4T CDD CH157 Chain3

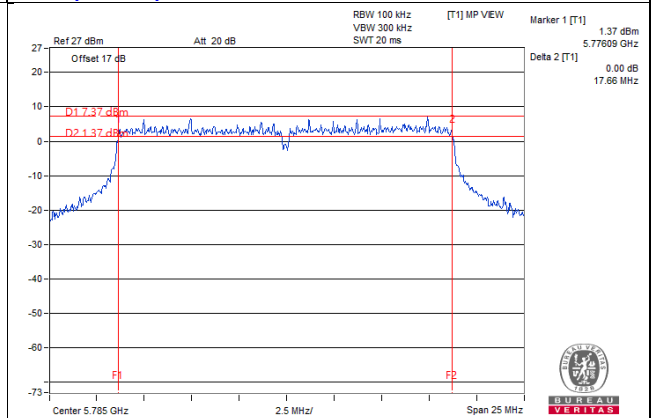

11ac (20MHz) 1S4T CDD CH149 Chain4

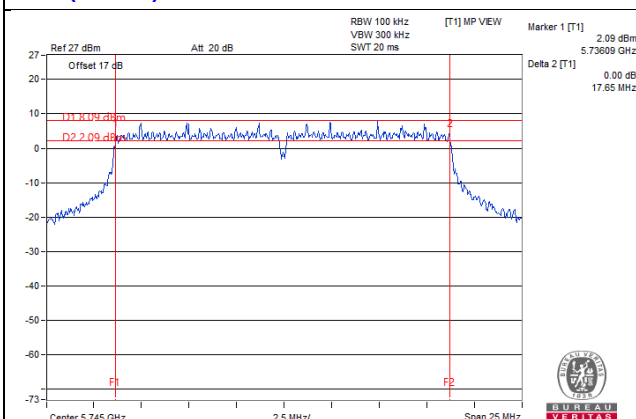


11ac (20MHz) 1S4T CDD CH157 Chain4

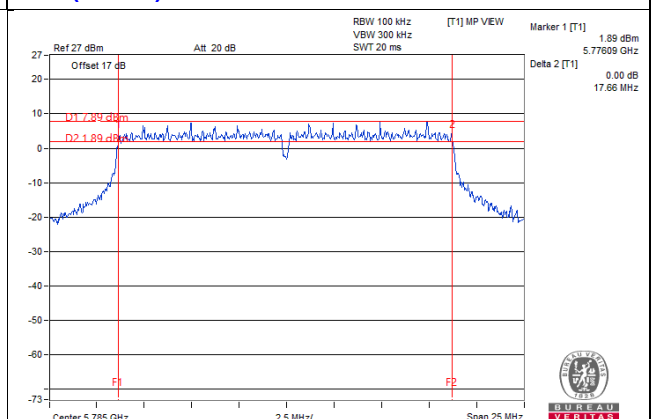


6dB BANDWIDTH SPECTRUM PLOT


11ac (20MHz) 1S4T CDD CH165 Chain1

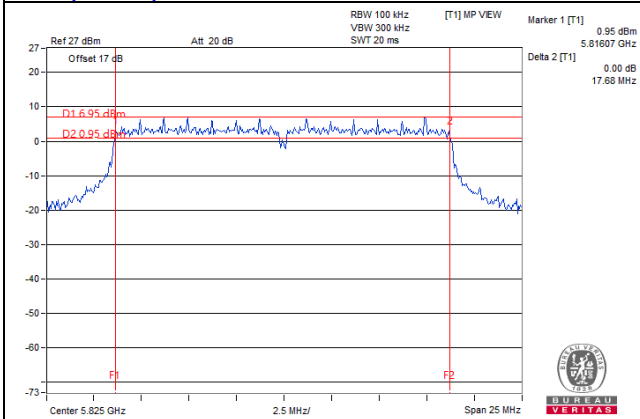


11ac (20MHz) 1S4T TxBF CH149 Chain1

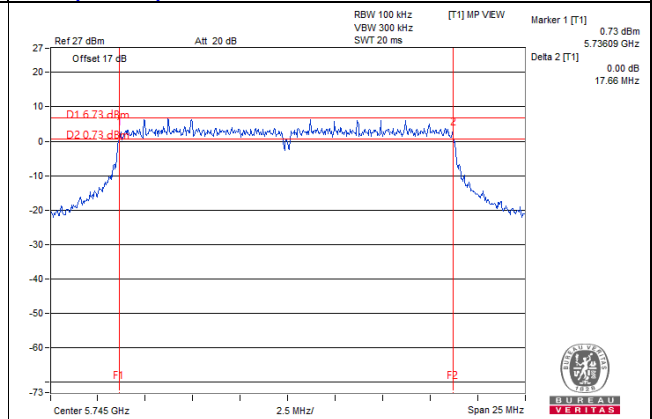


11ac (20MHz) 1S4T CDD CH165 Chain2

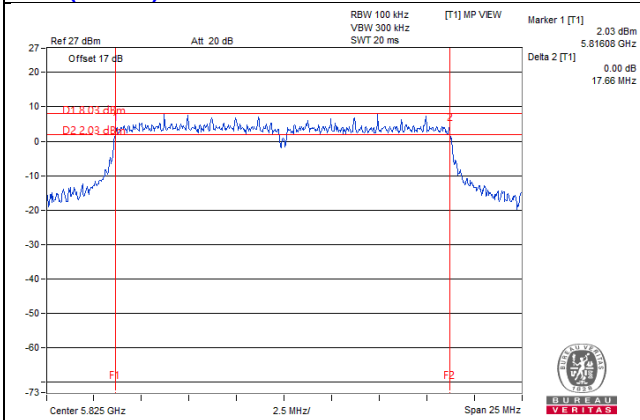


11ac (20MHz) 1S4T TxBF CH149 Chain2

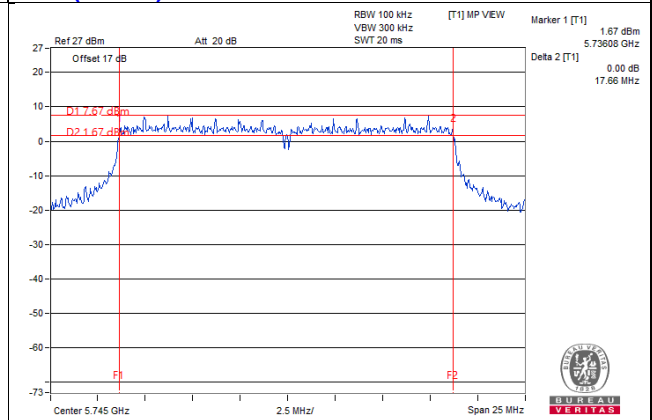


11ac (20MHz) 1S4T CDD CH165 Chain3

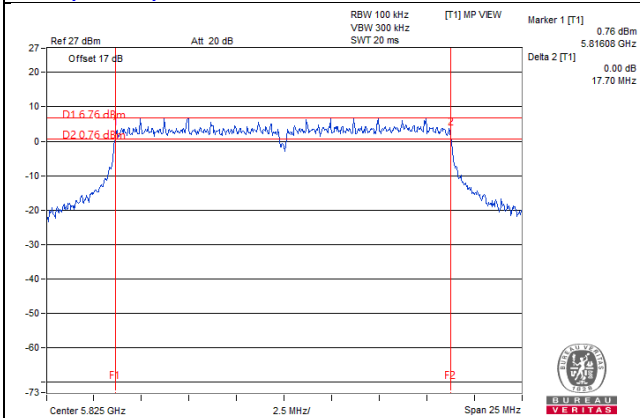


11ac (20MHz) 1S4T TxBF CH149 Chain3

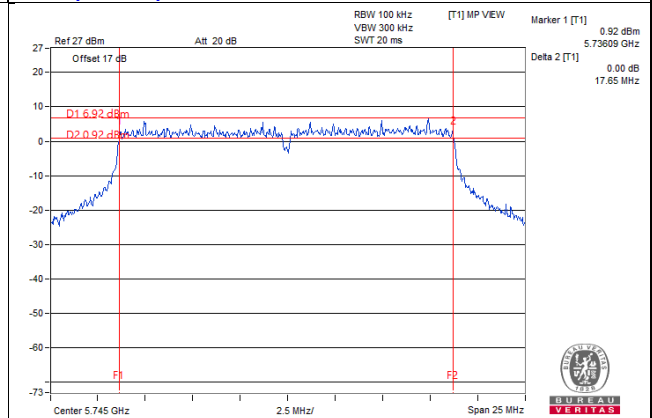

11ac (20MHz) 1S4T CDD CH165 Chain4

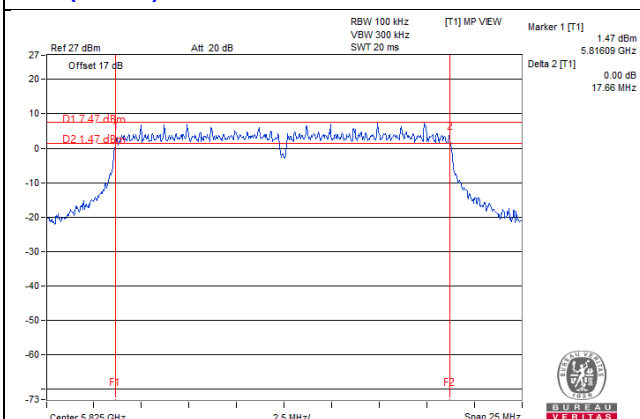


11ac (20MHz) 1S4T TxBF CH149 Chain4

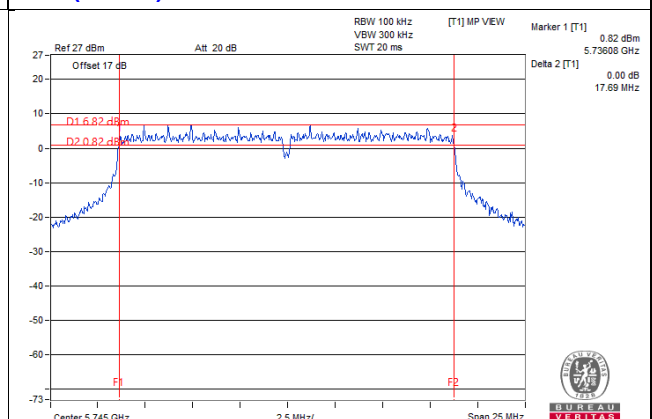


6dB BANDWIDTH SPECTRUM PLOT


11ac (20MHz) 1S4T TxBF CH157 Chain1

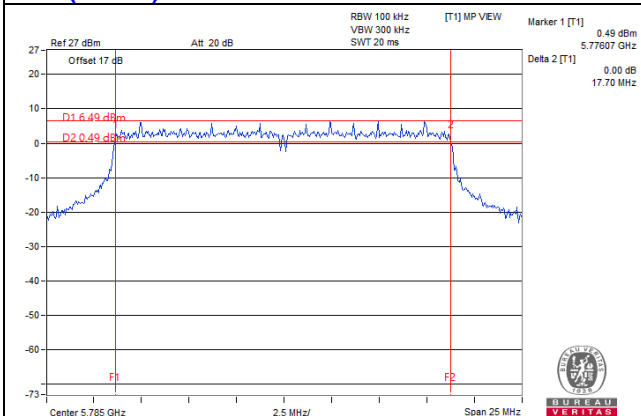


11ac (20MHz) 1S4T TxBF CH165 Chain1

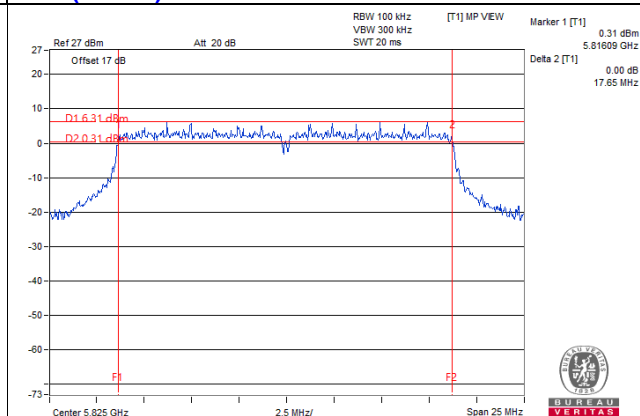


11ac (20MHz) 1S4T TxBF CH157 Chain2

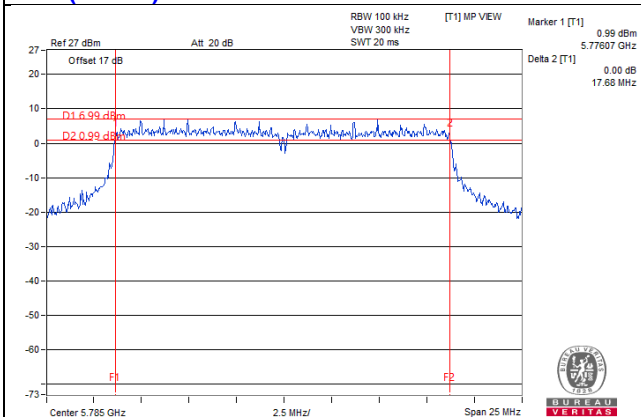


11ac (20MHz) 1S4T TxBF CH165 Chain2

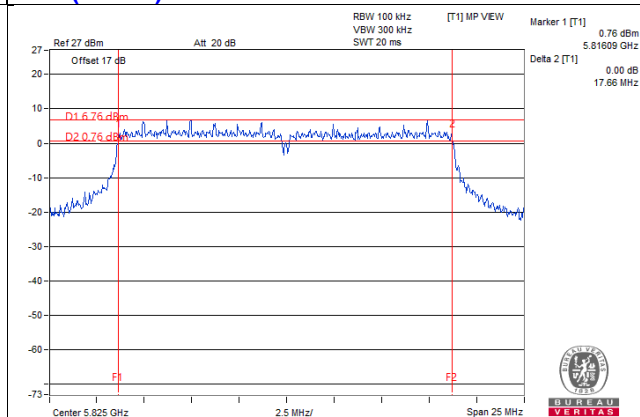


11ac (20MHz) 1S4T TxBF CH157 Chain3

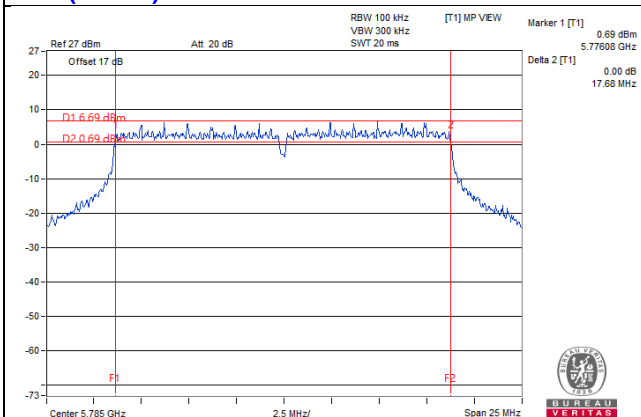


11ac (20MHz) 1S4T TxBF CH165 Chain3

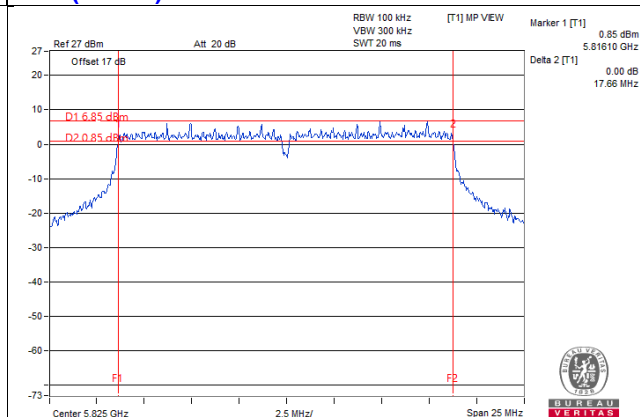

11ac (20MHz) 1S4T TxBF CH157 Chain4

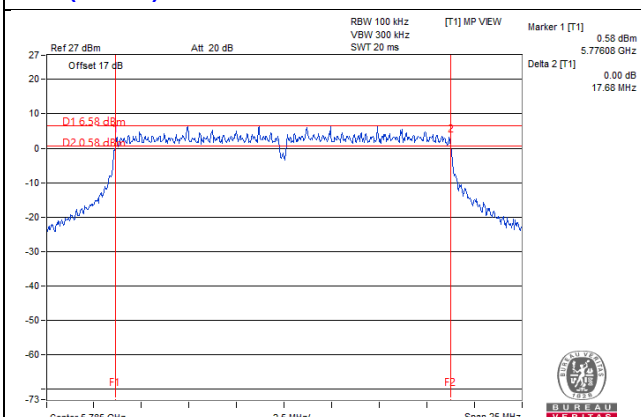


11ac (20MHz) 1S4T TxBF CH165 Chain4

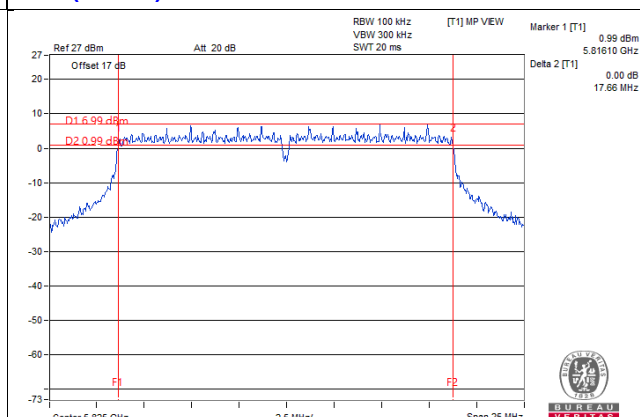


6dB BANDWIDTH SPECTRUM PLOT


11ac (40MHz) 1S4T CDD CH151 Chain1

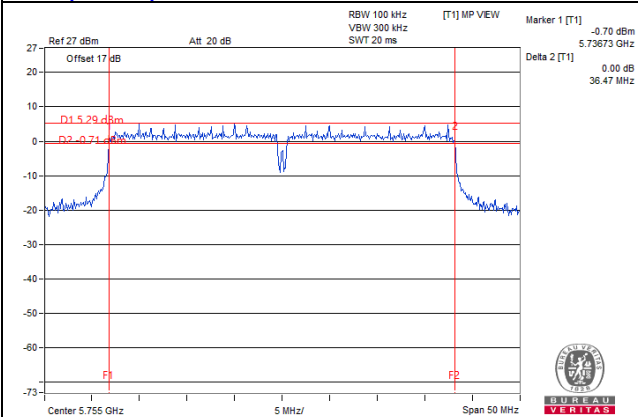


11ac (40MHz) 1S4T CDD CH159 Chain1

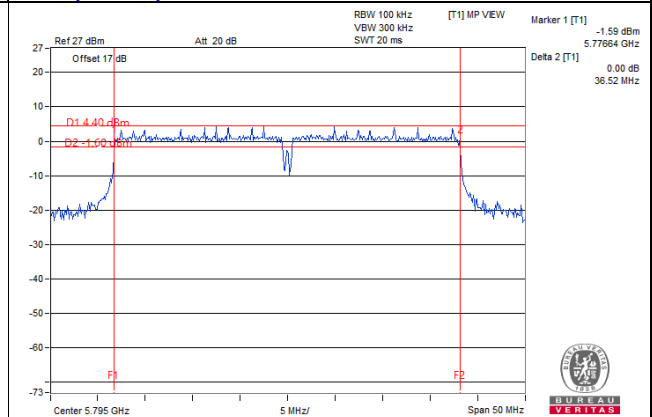


11ac (40MHz) 1S4T CDD CH151 Chain2

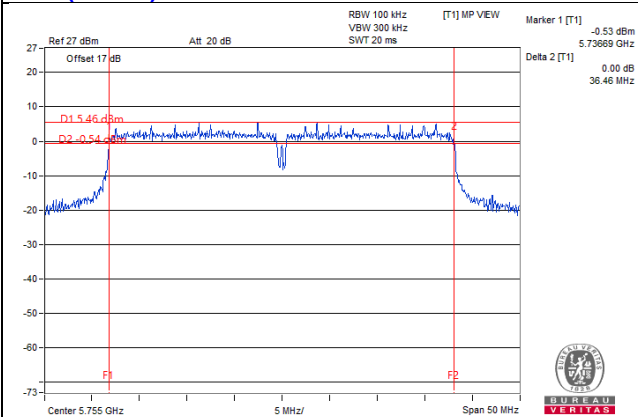


11ac (40MHz) 1S4T CDD CH159 Chain2

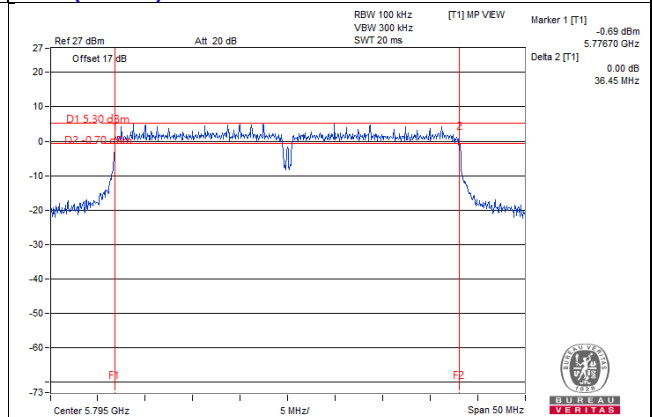


11ac (40MHz) 1S4T CDD CH151 Chain3

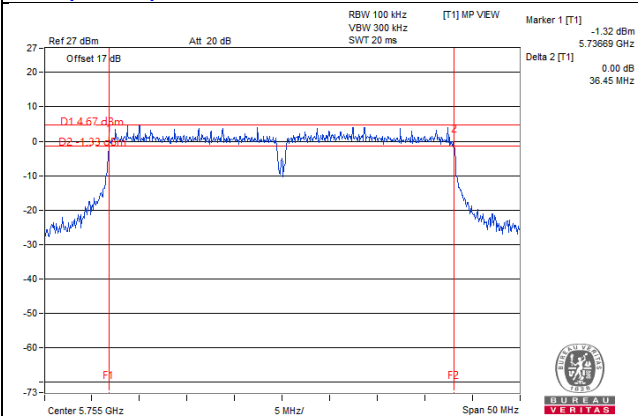


11ac (40MHz) 1S4T CDD CH159 Chain3

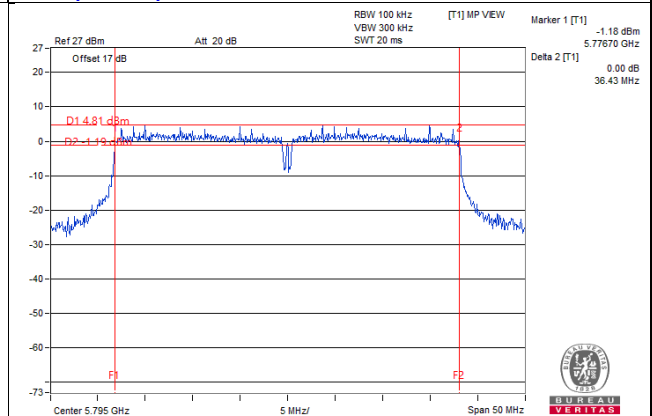

11ac (40MHz) 1S4T CDD CH151 Chain4

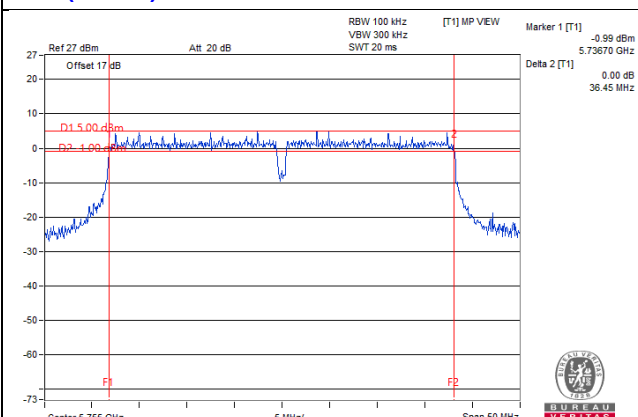


11ac (40MHz) 1S4T CDD CH159 Chain4

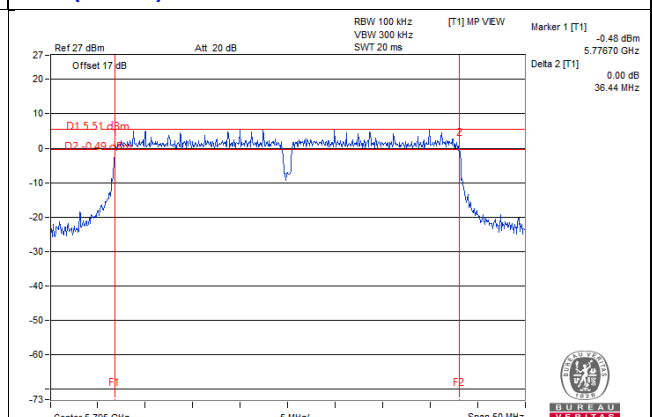


6dB BANDWIDTH SPECTRUM PLOT


11ac (40MHz) 1S4T TxBF CH151 Chain1

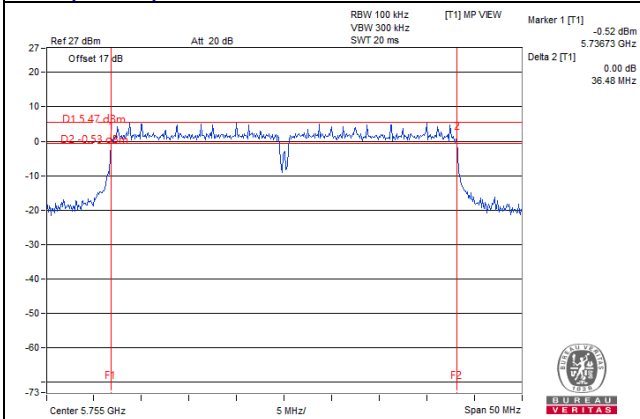


11ac (40MHz) 1S4T TxBF CH159 Chain1

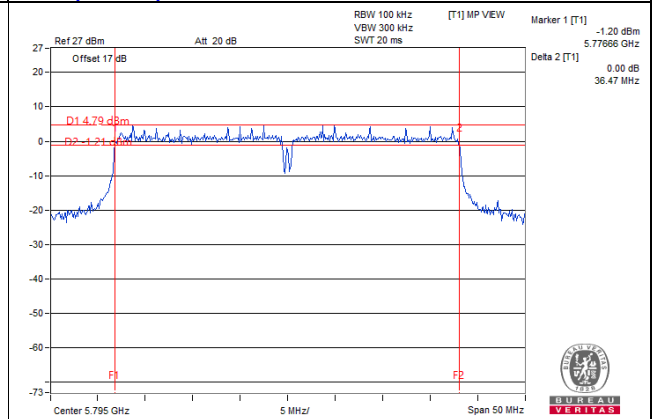


11ac (40MHz) 1S4T TxBF CH151 Chain2

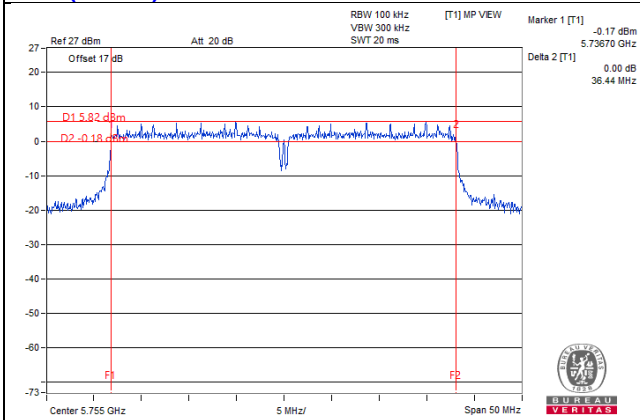


11ac (40MHz) 1S4T TxBF CH159 Chain2

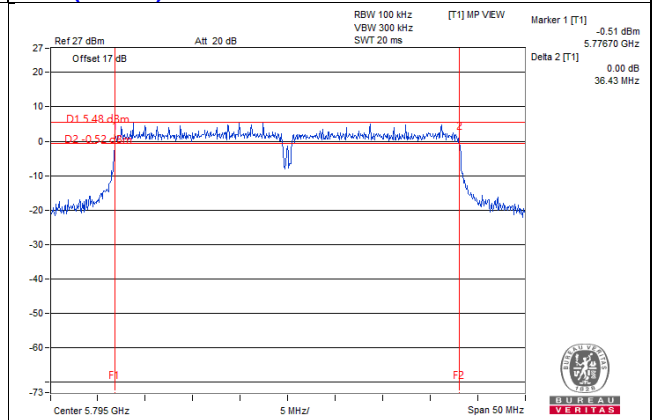


11ac (40MHz) 1S4T TxBF CH151 Chain3

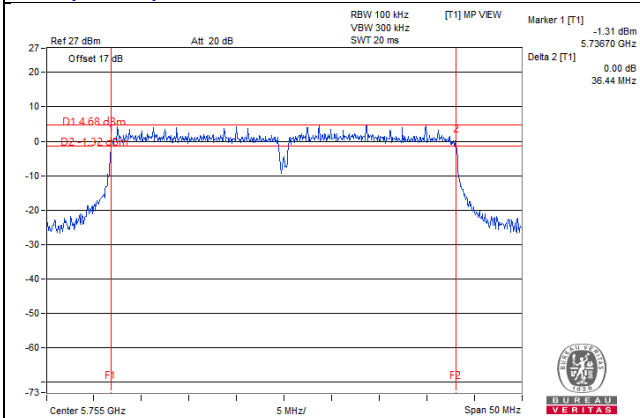


11ac (40MHz) 1S4T TxBF CH159 Chain3

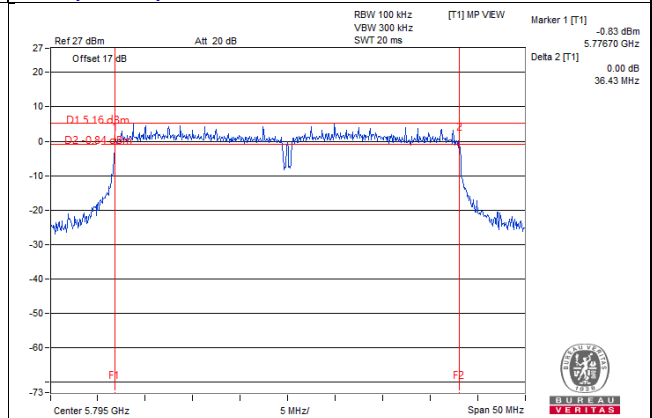

11ac (40MHz) 1S4T TxBF CH151 Chain4

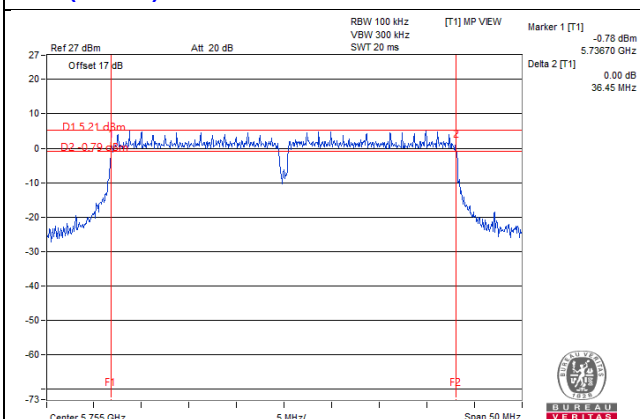


11ac (40MHz) 1S4T TxBF CH159 Chain4

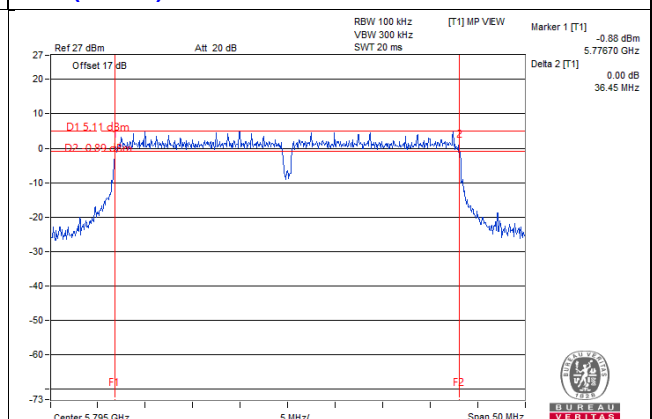


6dB BANDWIDTH SPECTRUM PLOT


11ac (80MHz) 1S4T CDD CH155 Chain1

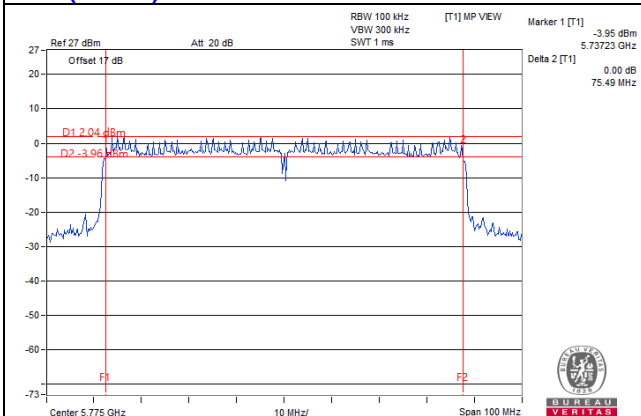


11ac (80MHz) 1S4T TxBF CH155 Chain1

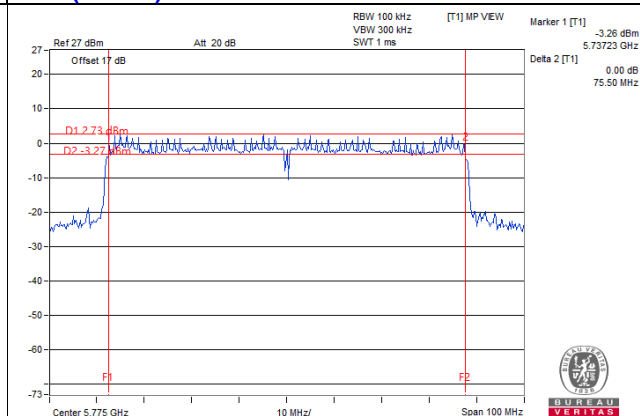


11ac (80MHz) 1S4T CDD CH155 Chain2

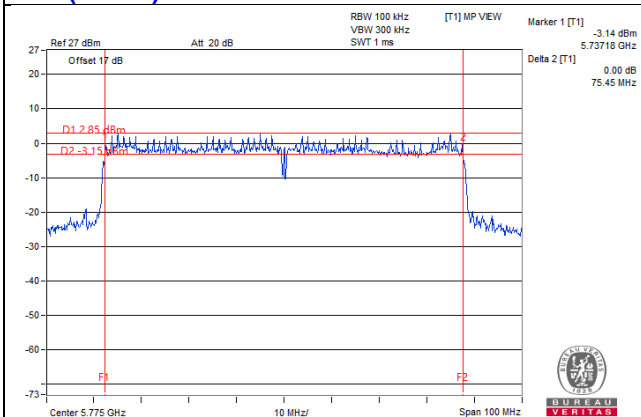


11ac (80MHz) 1S4T TxBF CH155 Chain2

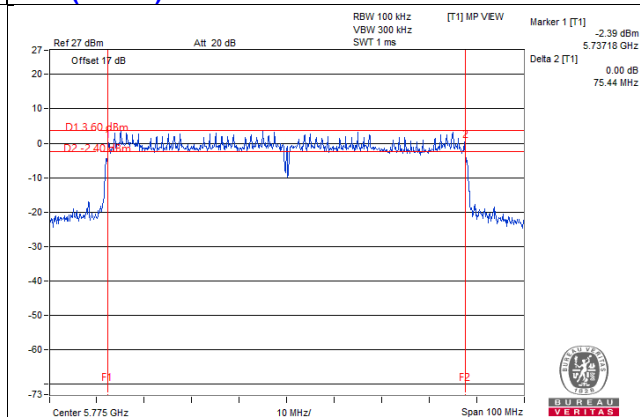


11ac (80MHz) 1S4T CDD CH155 Chain3

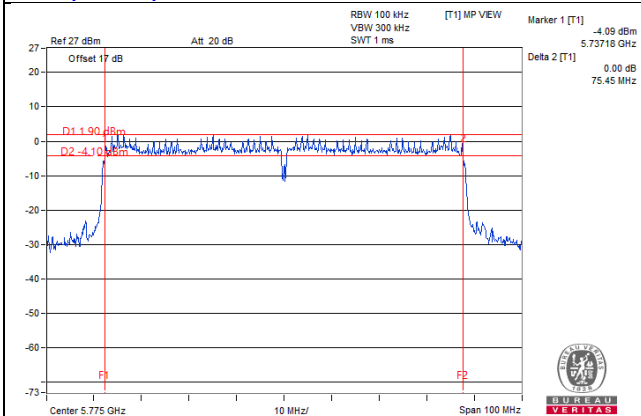


11ac (80MHz) 1S4T TxBF CH155 Chain3

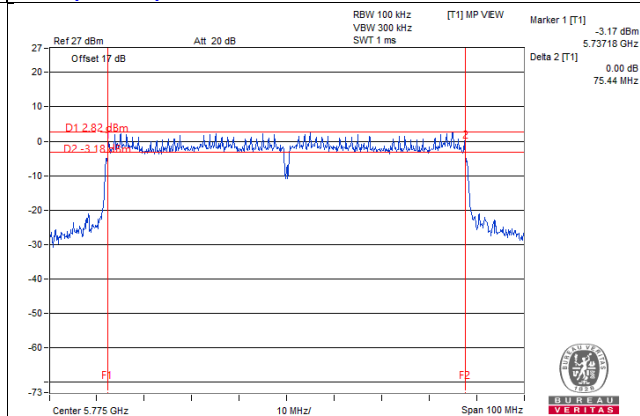

11ac (80MHz) 1S4T CDD CH155 Chain4

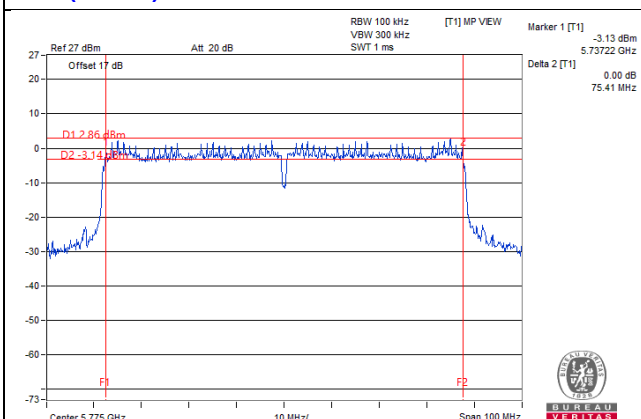

11ac (80MHz) 1S4T TxBF CH155 Chain4

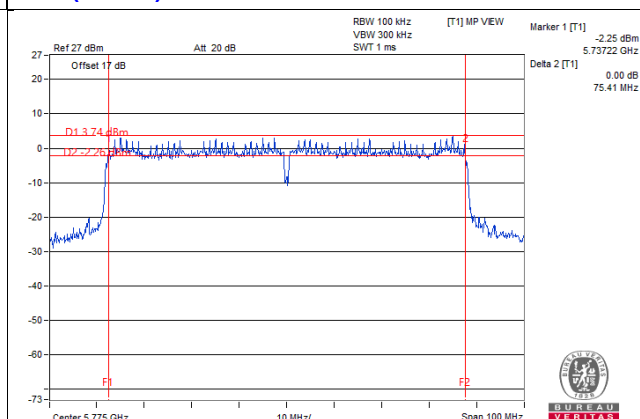

4.4 Maximum Conducted Output Power Measurement

4.4.1 Limit

Operation Band	EUT Category		Limit
U-NII-1		Outdoor Access Point	1 Watt (30 dBm) (Max. e.i.r.p \leq 125mW(21 dBm) at any elevation angle above 30 degrees as measured from the horizon)
		Fixed point-to-point Access Point	1 Watt (30 dBm)
	√	Indoor Access Point	1 Watt (30 dBm)
	√	Client device	250mW (24 dBm)
U-NII-2A			250mW (24 dBm) or 11 dBm+10 log B*
U-NII-2C			250mW (24 dBm) or 11 dBm+10 log B*
U-NII-3	√		1 Watt (30 dBm)

*B is the 26 dB emission bandwidth in megahertz

Per KDB 662911 Method of conducted output power measurement on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;

Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less for 20-MHz channel widths with $N_{ANT} \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.

4.4.2 Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Filter No.	Auto
Measurement time	8ns
Power Sensor	MA2411B

4.4.3 Test Procedures

- 1 Test was performed in accordance with Measurement of Digital Transmission Systems Operating under 789033 D02 General UNII Test Procedures New Rules v02r01, in section “Maximum conducted output power Method (3)”, 05/02/2017
- 2 The average power sensor was used on the output port of the EUT. A power meter was used to read the response of the average power sensor and enable the trigger function to get the all on time transmission. Record the average power level.
- 3 When measuring maximum conducted output power with multiple antenna systems, add every result of the values by mathematic formula.

4.4.4 Test Setup Layout

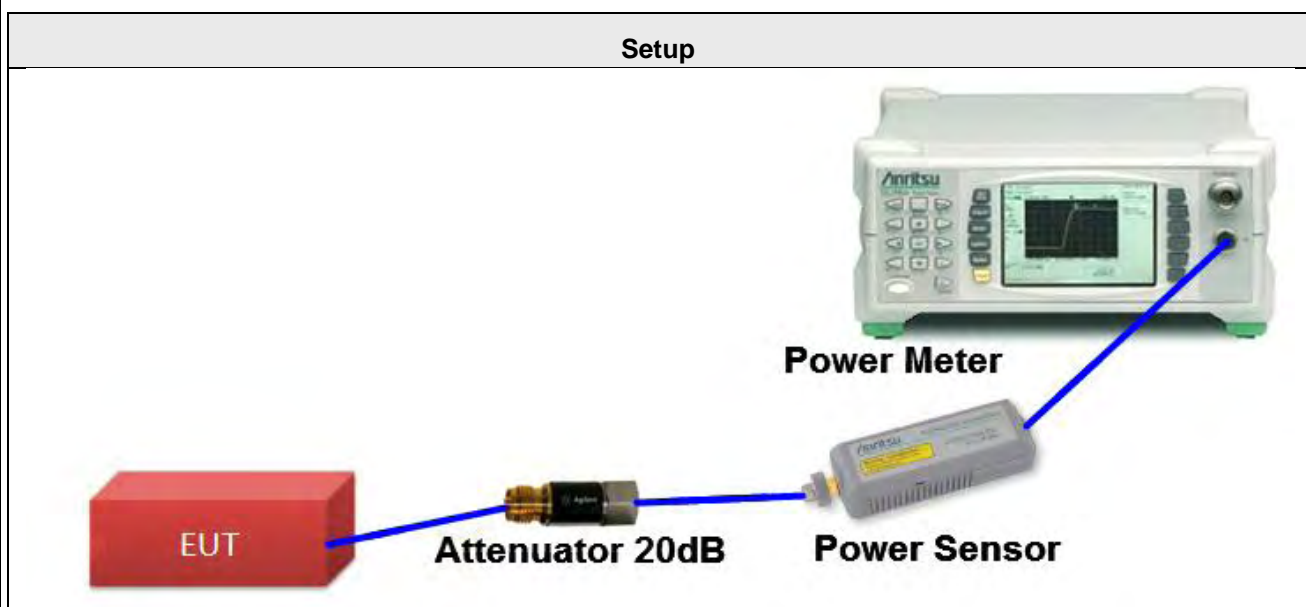

4.4.5 Test Deviation

There are no deviations with the original standard.

4.4.6 EUT Operating Conditions

The EUT was programmed to be in continuously transmitting mode.

4.4.7 Test Results of Maximum Conducted Output Power

Temperature	25°C	Humidity	60%
Test Engineer	Robert Cheng		

Master Mode

11a 1S4T CDD

Channel	Frequency	Conducted Power (dBm)				Total Conducted Power (dBm)	Directional Gain(dBi)	MAX. Limit (dBm)	Result
		Chain1	Chain2	Chain3	Chain4				
36	5180 MHz	19.32	19.25	19.18	18.97	25.20	7.01	28.99	PASS
40	5200 MHz	19.85	19.83	19.93	20.04	25.93	6.49	29.51	PASS
48	5240 MHz	19.93	19.89	19.95	19.66	25.88	6.65	29.35	PASS
149	5745 MHz	19.76	19.88	19.84	19.91	25.87	7.06	28.94	PASS
157	5785 MHz	19.61	19.76	19.63	19.57	25.66	6.83	29.17	PASS
165	5825 MHz	19.51	19.52	19.58	19.55	25.56	6.45	29.55	PASS

- Note: 1. For 5180MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/4]$ = 7.01dBi > 6dBi, so the power limit shall be reduced to 30-(7.01-6) = 28.99dBm.
2. For 5200MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/4]$ = 6.49dBi > 6dBi, so the power limit shall be reduced to 30-(6.49-6) = 29.51dBm.
3. For 5240MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/4]$ = 6.65dBi > 6dBi, so the power limit shall be reduced to 30-(6.65-6) = 29.35dBm.
4. For 5745MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/4]$ = 7.06dBi > 6dBi, so the power limit shall be reduced to 30-(7.06-6) = 28.94dBm.
5. For 5785MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/4]$ = 6.83dBi > 6dBi, so the power limit shall be reduced to 30-(6.83-6) = 29.17dBm.
6. For 5825MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/4]$ = 6.45dBi > 6dBi, so the power limit shall be reduced to 30-(6.45-6) = 29.55dBm.

11ac (20MHz) 1S4T CDD

Channel	Frequency	Conducted Power (dBm)				Total Conducted Power (dBm)	Directional Gain(dBi)	MAX. Limit (dBm)	Result
		Chain1	Chain2	Chain3	Chain4				
36	5180 MHz	18.41	18.33	18.39	18.12	24.33	7.01	28.99	PASS
40	5200 MHz	19.82	19.98	19.94	19.89	25.93	6.49	29.51	PASS
48	5240 MHz	19.78	19.93	20.02	20.06	25.97	6.65	29.35	PASS
149	5745 MHz	19.69	20.05	19.86	20.02	25.93	7.06	28.94	PASS
157	5785 MHz	19.58	19.91	19.77	19.86	25.80	6.83	29.17	PASS
165	5825 MHz	19.55	19.75	19.75	19.65	25.70	6.45	29.55	PASS

- Note: 1. For 5180MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/4] = 7.01\text{dBi} > 6\text{dBi}$, so the power limit shall be reduced to $30-(7.01-6) = 28.99\text{dBm}$.
2. For 5200MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/4] = 6.49\text{dBi} > 6\text{dBi}$, so the power limit shall be reduced to $30-(6.49-6) = 29.51\text{dBm}$.
3. For 5240MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/4] = 6.65\text{dBi} > 6\text{dBi}$, so the power limit shall be reduced to $30-(6.65-6) = 29.35\text{dBm}$.
4. For 5745MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/4] = 7.06\text{dBi} > 6\text{dBi}$, so the power limit shall be reduced to $30-(7.06-6) = 28.94\text{dBm}$.
5. For 5785MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/4] = 6.83\text{dBi} > 6\text{dBi}$, so the power limit shall be reduced to $30-(6.83-6) = 29.17\text{dBm}$.
6. For 5825MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/4] = 6.45\text{dBi} > 6\text{dBi}$, so the power limit shall be reduced to $30-(6.45-6) = 29.55\text{dBm}$.

11ac (20MHz) 2S4T CDD

Channel	Frequency	Conducted Power (dBm)				Total Conducted Power (dBm)	Directional Gain(dBi)	MAX. Limit (dBm)	Result
		Chain1	Chain2	Chain3	Chain4				
36	5180 MHz	18.39	18.29	18.35	18.09	24.30	4.04	30.00	PASS
40	5200 MHz	19.8	19.85	19.92	19.86	25.88	3.61	30.00	PASS
48	5240 MHz	19.75	19.91	19.99	20.02	25.94	3.83	30.00	PASS
149	5745 MHz	19.65	20.03	19.84	19.98	25.90	4.17	30.00	PASS
157	5785 MHz	19.56	19.89	19.74	19.85	25.78	4.02	30.00	PASS
165	5825 MHz	19.53	19.73	19.72	19.62	25.67	3.62	30.00	PASS

11ac (20MHz) 4S4T SDM

Channel	Frequency	Conducted Power (dBm)				Total Conducted Power (dBm)	Directional Gain(dBi)	MAX. Limit (dBm)	Result
		Chain1	Chain2	Chain3	Chain4				
36	5180 MHz	18.35	18.19	18.28	18.02	24.23	1.07	30.00	PASS
40	5200 MHz	19.76	19.79	19.86	19.81	25.83	0.67	30.00	PASS
48	5240 MHz	19.68	19.86	19.91	19.95	25.87	1.00	30.00	PASS
149	5745 MHz	19.59	19.96	19.78	19.94	25.84	1.25	30.00	PASS
157	5785 MHz	19.53	19.85	19.65	19.79	25.73	1.05	30.00	PASS
165	5825 MHz	19.51	19.64	19.63	19.55	25.60	0.70	30.00	PASS

11ac (20MHz) 1S4T TxBF

Channel	Frequency	Conducted Power (dBm)				Total Conducted Power (dBm)	Directional Gain(dBi)	MAX. Limit (dBm)	Result
		Chain1	Chain2	Chain3	Chain4				
36	5180 MHz	20.13	20.1	19.64	19.65	25.91	7.01	28.99	PASS
40	5200 MHz	20.12	20.04	19.83	19.68	25.94	6.49	29.51	PASS
48	5240 MHz	19.82	19.83	19.77	19.67	25.79	6.65	29.35	PASS
149	5745 MHz	19.13	19.41	18.91	19.21	25.19	7.06	28.94	PASS
157	5785 MHz	19.02	19.15	18.97	19.02	25.06	6.83	29.17	PASS
165	5825 MHz	18.74	19.06	18.95	18.61	24.86	6.45	29.55	PASS

- Note: 1. For 5180MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/4] = 7.01\text{dBi} > 6\text{dBi}$, so the power limit shall be reduced to $30-(7.01-6) = 28.99\text{dBm}$.
2. For 5200MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/4] = 6.49\text{dBi} > 6\text{dBi}$, so the power limit shall be reduced to $30-(6.49-6) = 29.51\text{dBm}$.
3. For 5240MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/4] = 6.65\text{dBi} > 6\text{dBi}$, so the power limit shall be reduced to $30-(6.65-6) = 29.35\text{dBm}$.
4. For 5745MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/4] = 7.06\text{dBi} > 6\text{dBi}$, so the power limit shall be reduced to $30-(7.06-6) = 28.94\text{dBm}$.
5. For 5785MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/4] = 6.83\text{dBi} > 6\text{dBi}$, so the power limit shall be reduced to $30-(6.83-6) = 29.17\text{dBm}$.
6. For 5825MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/4] = 6.45\text{dBi} > 6\text{dBi}$, so the power limit shall be reduced to $30-(6.45-6) = 29.55\text{dBm}$.

11ac (20MHz) 2S4T TxBF

Channel	Frequency	Conducted Power (dBm)				Total Conducted Power (dBm)	Directional Gain(dBi)	MAX. Limit (dBm)	Result
		Chain1	Chain2	Chain3	Chain4				
36	5180 MHz	20.11	20.02	19.62	19.62	25.87	4.04	30.00	PASS
40	5200 MHz	20.08	19.98	19.8	19.66	25.90	3.61	30.00	PASS
48	5240 MHz	19.77	19.79	19.74	19.65	25.76	3.83	30.00	PASS
149	5745 MHz	19.03	19.38	18.75	19.18	25.11	4.17	30.00	PASS
157	5785 MHz	18.94	19.08	18.91	18.87	24.97	4.02	30.00	PASS
165	5825 MHz	18.69	19.02	18.89	18.52	24.80	3.62	30.00	PASS

11ac (20MHz) 3S4T TxBF

Channel	Frequency	Conducted Power (dBm)				Total Conducted Power (dBm)	Directional Gain(dBi)	MAX. Limit (dBm)	Result
		Chain1	Chain2	Chain3	Chain4				
36	5180 MHz	20.08	19.99	19.6	19.59	25.84	2.32	30.00	PASS
40	5200 MHz	20.01	19.94	19.78	19.61	25.86	1.92	30.00	PASS
48	5240 MHz	19.75	19.76	19.71	19.63	25.73	2.23	30.00	PASS
149	5745 MHz	18.98	19.32	18.71	19.15	25.07	2.50	30.00	PASS
157	5785 MHz	18.91	19.01	18.88	18.82	24.93	2.29	30.00	PASS
165	5825 MHz	18.65	18.96	18.84	18.67	24.80	1.92	30.00	PASS

11ac (40MHz) 1S4T CDD

Channel	Frequency	Conducted Power (dBm)				Total Conducted Power (dBm)	Directional Gain(dBi)	MAX. Limit (dBm)	Result
		Chain1	Chain2	Chain3	Chain4				
38	5190 MHz	15.12	15.25	15.24	15.01	21.18	7.25	28.75	PASS
46	5230 MHz	20.21	20.23	20.33	20.51	26.34	7.29	28.71	PASS
151	5755 MHz	20.03	20.46	20.24	20.17	26.25	7.87	28.13	PASS
159	5795 MHz	20.02	20.37	20.28	19.96	26.18	6.43	29.57	PASS

- Note: 1. For 5190MHz: Directional gain = $10 \log[(10^{G^1/20} + 10^{G^2/20} + \dots + 10^{G^N/20})^2/4] = 7.25\text{dBi} > 6\text{dBi}$, so the power limit shall be reduced to $30-(7.25-6) = 28.75\text{dBm}$.
2. For 5230MHz: Directional gain = $10 \log[(10^{G^1/20} + 10^{G^2/20} + \dots + 10^{G^N/20})^2/4] = 7.29\text{dBi} > 6\text{dBi}$, so the power limit shall be reduced to $30-(7.29-6) = 28.71\text{dBm}$.
3. For 5755MHz: Directional gain = $10 \log[(10^{G^1/20} + 10^{G^2/20} + \dots + 10^{G^N/20})^2/4] = 7.87\text{dBi} > 6\text{dBi}$, so the power limit shall be reduced to $30-(7.87-6) = 28.13\text{dBm}$.
4. For 5795MHz: Directional gain = $10 \log[(10^{G^1/20} + 10^{G^2/20} + \dots + 10^{G^N/20})^2/4] = 6.43\text{dBi} > 6\text{dBi}$, so the power limit shall be reduced to $30-(6.43-6) = 29.57\text{dBm}$.

11ac (40MHz) 2S4T CDD

Channel	Frequency	Conducted Power (dBm)				Total Conducted Power (dBm)	Directional Gain(dBi)	MAX. Limit (dBm)	Result
		Chain1	Chain2	Chain3	Chain4				
38	5190 MHz	15.08	15.23	15.21	14.98	21.15	4.35	30.00	PASS
46	5230 MHz	20.18	20.18	20.28	20.48	26.30	4.42	30.00	PASS
151	5755 MHz	20.01	20.42	20.21	20.13	26.22	5.06	30.00	PASS
159	5795 MHz	19.98	20.35	20.25	19.93	26.15	3.60	30.00	PASS

11ac (40MHz) 4S4T SDM

Channel	Frequency	Conducted Power (dBm)				Total Conducted Power (dBm)	Directional Gain(dBi)	MAX. Limit (dBm)	Result
		Chain1	Chain2	Chain3	Chain4				
38	5190 MHz	15.01	15.12	15.14	14.92	21.07	1.39	30.00	PASS
46	5230 MHz	20.05	20.08	20.21	20.38	26.20	1.46	30.00	PASS
151	5755 MHz	19.92	20.31	20.08	20.02	26.11	2.06	30.00	PASS
159	5795 MHz	19.85	20.22	20.15	19.86	26.04	0.61	30.00	PASS

11ac (40MHz) 1S4T TxBF

Channel	Frequency	Conducted Power (dBm)				Total Conducted Power (dBm)	Directional Gain(dBi)	MAX. Limit (dBm)	Result
		Chain1	Chain2	Chain3	Chain4				
38	5190 MHz	14.62	14.12	14.38	13.82	20.27	7.25	28.75	PASS
46	5230 MHz	20.51	19.95	20.56	20.46	26.40	7.29	28.71	PASS
151	5755 MHz	20.35	20.89	20.21	20.27	26.46	7.87	28.13	PASS
159	5795 MHz	20.32	20.42	20.45	20.27	26.39	6.43	29.57	PASS

- Note: 1. For 5190MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/4] = 7.25\text{dBi} > 6\text{dBi}$, so the power limit shall be reduced to $30-(7.25-6) = 28.75\text{dBm}$.
2. For 5230MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/4] = 7.29\text{dBi} > 6\text{dBi}$, so the power limit shall be reduced to $30-(7.29-6) = 28.71\text{dBm}$.
3. For 5755MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/4] = 7.87\text{dBi} > 6\text{dBi}$, so the power limit shall be reduced to $30-(7.87-6) = 28.13\text{dBm}$.
4. For 5795MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/4] = 6.43\text{dBi} > 6\text{dBi}$, so the power limit shall be reduced to $30-(6.43-6) = 29.57\text{dBm}$.

11ac (40MHz) 2S4T TxBF

Channel	Frequency	Conducted Power (dBm)				Total Conducted Power (dBm)	Directional Gain(dBi)	MAX. Limit (dBm)	Result
		Chain1	Chain2	Chain3	Chain4				
38	5190 MHz	14.58	14.07	14.35	13.78	20.23	4.35	30.00	PASS
46	5230 MHz	20.45	19.92	20.48	20.43	26.35	4.42	30.00	PASS
151	5755 MHz	20.31	20.85	20.17	20.21	26.41	5.06	30.00	PASS
159	5795 MHz	20.28	20.36	20.41	20.18	26.33	3.60	30.00	PASS

11ac (40MHz) 3S4T TxBF

Channel	Frequency	Conducted Power (dBm)				Total Conducted Power (dBm)	Directional Gain(dBi)	MAX. Limit (dBm)	Result
		Chain1	Chain2	Chain3	Chain4				
38	5190 MHz	14.39	14.02	14.31	13.72	20.14	2.64	30.00	PASS
46	5230 MHz	20.41	19.88	20.43	20.36	26.30	2.71	30.00	PASS
151	5755 MHz	20.27	20.75	20.11	20.15	26.35	3.31	30.00	PASS
159	5795 MHz	20.15	20.31	20.36	20.13	26.26	1.86	30.00	PASS

11ac (80MHz) 1S4T CDD

Channel	Frequency	Conducted Power (dBm)				Total Conducted Power (dBm)	Directional Gain(dBi)	MAX. Limit (dBm)	Result
		Chain1	Chain2	Chain3	Chain4				
42	5210	13.15	12.99	12.96	12.71	18.98	6.74	29.26	PASS
155	5775	19.01	19.13	19.14	19.03	25.10	7.36	28.64	PASS

Note: 1. For 5210MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/4]$ = 6.74dBi > 6dBi, so the power limit shall be reduced to $30-(6.74-6) = 29.26$ dBm.
 2. For 5775MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/4]$ = 7.36dBi > 6dBi, so the power limit shall be reduced to $30-(7.36-6) = 28.64$ dBm.

11ac (80MHz) 2S4T CDD

Channel	Frequency	Conducted Power (dBm)				Total Conducted Power (dBm)	Directional Gain(dBi)	MAX. Limit (dBm)	Result
		Chain1	Chain2	Chain3	Chain4				
42	5210	13.08	12.94	12.88	12.65	18.91	3.86	30.00	PASS
155	5775	18.85	19.05	19.09	18.88	24.99	4.48	30.00	PASS

11ac (80MHz) 4S4T SDM

Channel	Frequency	Conducted Power (dBm)				Total Conducted Power (dBm)	Directional Gain(dBi)	MAX. Limit (dBm)	Result
		Chain1	Chain2	Chain3	Chain4				
42	5210	12.99	12.85	12.81	12.58	18.83	0.92	30.00	PASS
155	5775	18.72	18.87	18.99	18.79	24.86	2.06	30.00	PASS

11ac (80MHz) 1S4T TxBF

Channel	Frequency	Conducted Power (dBm)				Total Conducted Power (dBm)	Directional Gain(dBi)	MAX. Limit (dBm)	Result
		Chain1	Chain2	Chain3	Chain4				
42	5210	14.05	14.14	14.28	13.62	20.05	6.74	29.26	PASS
155	5775	19.94	20.43	20.12	19.92	26.13	7.36	28.64	PASS

Note: 1. For 5210MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/4] = 6.74\text{dBi} > 6\text{dBi}$, so the power limit shall be reduced to $30-(6.74-6) = 29.26\text{dBm}$.
 2. For 5775MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/4] = 7.36\text{dBi} > 6\text{dBi}$, so the power limit shall be reduced to $30-(7.36-6) = 28.64\text{dBm}$.

11ac (80MHz) 2S4T TxBF

Channel	Frequency	Conducted Power (dBm)				Total Conducted Power (dBm)	Directional Gain(dBi)	MAX. Limit (dBm)	Result
		Chain1	Chain2	Chain3	Chain4				
42	5210	13.99	14.06	14.25	13.58	20.00	3.86	30.00	PASS
155	5775	19.89	20.38	20.08	19.88	26.08	4.48	30.00	PASS

11ac (80MHz) 3S4T TxBF

Channel	Frequency	Conducted Power (dBm)				Total Conducted Power (dBm)	Directional Gain(dBi)	MAX. Limit (dBm)	Result
		Chain1	Chain2	Chain3	Chain4				
42	5210	13.96	14.01	14.21	13.45	19.94	2.16	30.00	PASS
155	5775	19.85	20.32	20.03	19.81	26.03	3.31	30.00	PASS

Client Mode

11a 1S4T CDD

Channel	Frequency	Conducted Power (dBm)				Total Conducted Power (dBm)	Directional Gain(dBi)	MAX. Limit (dBm)	Result
		Chain1	Chain2	Chain3	Chain4				
36	5180 MHz	15.51	15.81	15.13	15.52	21.52	7.01	22.99	PASS
40	5200 MHz	16.52	16.74	16.26	16.54	22.54	6.49	23.51	PASS
48	5240 MHz	16.44	16.31	16.17	16.55	22.39	6.65	23.35	PASS

- Note: 1. For 5180MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/4] = 7.01\text{dBi} > 6\text{dBi}$, so the power limit shall be reduced to $24-(7.01-6) = 22.99\text{dBm}$.
 2. For 5200MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/4] = 6.49\text{dBi} > 6\text{dBi}$, so the power limit shall be reduced to $24-(6.49-6) = 23.51\text{dBm}$.
 3. For 5240MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/4] = 6.65\text{dBi} > 6\text{dBi}$, so the power limit shall be reduced to $24-(6.65-6) = 23.35\text{dBm}$.

11ac (20MHz) 1S4T CDD

Channel	Frequency	Conducted Power (dBm)				Total Conducted Power (dBm)	Directional Gain(dBi)	MAX. Limit (dBm)	Result
		Chain1	Chain2	Chain3	Chain4				
36	5180 MHz	15.74	15.51	15.12	15.62	21.52	7.01	22.99	PASS
40	5200 MHz	16.44	16.67	16.63	16.48	22.58	6.49	23.51	PASS
48	5240 MHz	16.32	16.52	16.45	16.53	22.48	6.65	23.35	PASS

- Note: 1. For 5180MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/4] = 7.01\text{dBi} > 6\text{dBi}$, so the power limit shall be reduced to $24-(7.01-6) = 22.99\text{dBm}$.
 2. For 5200MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/4] = 6.49\text{dBi} > 6\text{dBi}$, so the power limit shall be reduced to $24-(6.49-6) = 23.51\text{dBm}$.
 3. For 5240MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/4] = 6.65\text{dBi} > 6\text{dBi}$, so the power limit shall be reduced to $24-(6.65-6) = 23.35\text{dBm}$.

11ac (20MHz) 2S4T CDD

Channel	Frequency	Conducted Power (dBm)				Total Conducted Power (dBm)	Directional Gain(dBi)	MAX. Limit (dBm)	Result
		Chain1	Chain2	Chain3	Chain4				
36	5180 MHz	15.71	15.47	15.04	15.56	21.47	4.04	24.00	PASS
40	5200 MHz	16.42	16.63	16.57	16.44	22.54	3.61	24.00	PASS
48	5240 MHz	16.28	16.45	16.41	16.47	22.42	3.83	24.00	PASS

11ac (20MHz) 4S4T SDM

Channel	Frequency	Conducted Power (dBm)				Total Conducted Power (dBm)	Directional Gain(dBi)	MAX. Limit (dBm)	Result
		Chain1	Chain2	Chain3	Chain4				
36	5180 MHz	15.62	15.38	14.98	15.45	21.38	1.07	24.00	PASS
40	5200 MHz	16.33	16.54	16.47	16.34	22.44	0.67	24.00	PASS
48	5240 MHz	16.21	16.37	16.32	16.38	22.34	1.00	24.00	PASS

11ac (20MHz) 1S4T TxBF

Channel	Frequency	Conducted Power (dBm)				Total Conducted Power (dBm)	Directional Gain(dBi)	MAX. Limit (dBm)	Result
		Chain1	Chain2	Chain3	Chain4				
36	5180 MHz	16.07	16.02	15.18	15.05	21.63	7.01	22.99	PASS
40	5200 MHz	16.78	16.48	16.32	16.25	22.48	6.49	23.51	PASS
48	5240 MHz	16.84	16.82	16.09	16.16	22.51	6.65	23.35	PASS

- Note: 1. For 5180MHz: Directional gain = $10 \log[(10^{G^1/20} + 10^{G^2/20} + \dots + 10^{G^N/20})^2/4]$ = 7.01dBi > 6dBi, so the power limit shall be reduced to 24-(7.01-6) = 22.99dBm.
2. For 5200MHz: Directional gain = $10 \log[(10^{G^1/20} + 10^{G^2/20} + \dots + 10^{G^N/20})^2/4]$ = 6.49dBi > 6dBi, so the power limit shall be reduced to 24-(6.49-6) = 23.51dBm.
3. For 5240MHz: Directional gain = $10 \log[(10^{G^1/20} + 10^{G^2/20} + \dots + 10^{G^N/20})^2/4]$ = 6.65dBi > 6dBi, so the power limit shall be reduced to 24-(6.65-6) = 23.35dBm.

11ac (20MHz) 2S4T TxBF

Channel	Frequency	Conducted Power (dBm)				Total Conducted Power (dBm)	Directional Gain(dBi)	MAX. Limit (dBm)	Result
		Chain1	Chain2	Chain3	Chain4				
36	5180 MHz	15.95	15.98	15.11	14.98	21.55	4.04	24.00	PASS
40	5200 MHz	16.67	16.42	16.25	16.19	22.41	3.61	24.00	PASS
48	5240 MHz	16.71	16.74	15.92	16.11	22.41	3.83	24.00	PASS

11ac (20MHz) 3S4T TxBF

Channel	Frequency	Conducted Power (dBm)				Total Conducted Power (dBm)	Directional Gain(dBi)	MAX. Limit (dBm)	Result
		Chain1	Chain2	Chain3	Chain4				
36	5180 MHz	15.88	15.92	15.04	14.91	21.48	2.32	24.00	PASS
40	5200 MHz	16.61	16.37	16.18	16.15	22.35	1.92	24.00	PASS
48	5240 MHz	16.65	16.65	15.84	16.06	22.34	2.23	24.00	PASS

11ac (40MHz) 1S4T CDD

Channel	Frequency	Conducted Power (dBm)				Total Conducted Power (dBm)	Directional Gain(dBi)	MAX. Limit (dBm)	Result
		Chain1	Chain2	Chain3	Chain4				
38	5190 MHz	15.33	15.42	14.99	14.86	21.18	7.25	22.75	PASS
46	5230 MHz	15.93	16.03	15.48	15.56	21.78	7.29	22.71	PASS

Note: 1. For 5190MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/4]$ = 7.25dBi > 6dBi, so the power limit shall be reduced to $24-(7.25-6) = 22.75$ dBm.
 2. For 5230MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/4]$ = 7.29dBi > 6dBi, so the power limit shall be reduced to $24-(7.29-6) = 22.71$ dBm.

11ac (40MHz) 2S4T CDD

Channel	Frequency	Conducted Power (dBm)				Total Conducted Power (dBm)	Directional Gain(dBi)	MAX. Limit (dBm)	Result
		Chain1	Chain2	Chain3	Chain4				
38	5190 MHz	15.28	15.36	14.93	14.82	21.12	4.35	24.00	PASS
46	5230 MHz	15.87	15.95	15.43	15.51	21.72	4.42	24.00	PASS

11ac (40MHz) 4S4T SDM

Channel	Frequency	Conducted Power (dBm)				Total Conducted Power (dBm)	Directional Gain(dBi)	MAX. Limit (dBm)	Result
		Chain1	Chain2	Chain3	Chain4				
38	5190 MHz	15.12	15.21	14.71	14.65	20.95	1.39	24.00	PASS
46	5230 MHz	15.68	15.73	15.21	15.27	21.50	1.46	24.00	PASS

11ac (40MHz) 1S4T TxBF

Channel	Frequency	Conducted Power (dBm)				Total Conducted Power (dBm)	Directional Gain(dBi)	MAX. Limit (dBm)	Result
		Chain1	Chain2	Chain3	Chain4				
38	5190 MHz	14.16	13.99	13.87	13.32	19.87	7.25	22.75	PASS
46	5230 MHz	16.84	16.77	16.45	16.54	22.67	7.29	22.71	PASS

Note: 1. For 5190MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/4]$ = 7.25dBi > 6dBi, so the power limit shall be reduced to $24-(7.25-6) = 22.75$ dBm.
 2. For 5230MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/4]$ = 7.29dBi > 6dBi, so the power limit shall be reduced to $24-(7.29-6) = 22.71$ dBm.

11ac (40MHz) 2S4T TxBF

Channel	Frequency	Conducted Power (dBm)				Total Conducted Power (dBm)	Directional Gain(dBi)	MAX. Limit (dBm)	Result
		Chain1	Chain2	Chain3	Chain4				
38	5190 MHz	15.06	15.13	14.62	14.52	20.86	4.35	24.00	PASS
46	5230 MHz	15.62	15.61	15.59	15.53	21.61	4.42	24.00	PASS

11ac (40MHz) 3S4T TxBF

Channel	Frequency	Conducted Power (dBm)				Total Conducted Power (dBm)	Directional Gain(dBi)	MAX. Limit (dBm)	Result
		Chain1	Chain2	Chain3	Chain4				
38	5190 MHz	14.05	13.86	13.82	13.25	19.78	2.64	24.00	PASS
46	5230 MHz	16.72	16.72	16.36	16.48	22.59	2.71	24.00	PASS

11ac (80MHz) 1S4T CDD

Channel	Frequency	Conducted Power (dBm)				Total Conducted Power (dBm)	Directional Gain(dBi)	MAX. Limit (dBm)	Result
		Chain1	Chain2	Chain3	Chain4				
42	5210	13.04	13.13	12.79	13.09	19.04	6.74	23.26	PASS

Note: 1. For 5210MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/4] = 6.74\text{dBi} > 6\text{dBi}$, so the power limit shall be reduced to $24 - (6.74 - 6) = 23.26\text{dBm}$.

11ac (80MHz) 2S4T CDD

Channel	Frequency	Conducted Power (dBm)				Total Conducted Power (dBm)	Directional Gain(dBi)	MAX. Limit (dBm)	Result
		Chain1	Chain2	Chain3	Chain4				
42	5210	12.99	13.04	12.73	13.02	18.97	3.86	24.00	PASS

11ac (80MHz) 4S4T SDM

Channel	Frequency	Conducted Power (dBm)				Total Conducted Power (dBm)	Directional Gain(dBi)	MAX. Limit (dBm)	Result
		Chain1	Chain2	Chain3	Chain4				
42	5210	12.75	12.81	12.58	12.84	18.77	0.92	24.00	PASS

11ac (80MHz) 1S4T TxBF

Channel	Frequency	Conducted Power (dBm)				Total Conducted Power (dBm)	Directional Gain(dBi)	MAX. Limit (dBm)	Result
		Chain1	Chain2	Chain3	Chain4				
42	5210	12.69	12.73	12.51	12.76	18.69	6.74	29.26	PASS

Note: 1. For 5210MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/4] = 6.74\text{dBi} > 6\text{dBi}$, so the power limit shall be reduced to $24 - (6.74 - 6) = 29.26\text{dBm}$.

11ac (80MHz) 2S4T TxBF

Channel	Frequency	Conducted Power (dBm)				Total Conducted Power (dBm)	Directional Gain(dBi)	MAX. Limit (dBm)	Result
		Chain1	Chain2	Chain3	Chain4				
42	5210	12.62	12.65	12.57	12.68	18.65	3.86	24.00	PASS

11ac (80MHz) 3S4T TxBF

Channel	Frequency	Conducted Power (dBm)				Total Conducted Power (dBm)	Directional Gain(dBi)	MAX. Limit (dBm)	Result
		Chain1	Chain2	Chain3	Chain4				
42	5210	12.55	12.58	14.35	12.55	19.10	2.16	24.00	PASS

4.5 Power Spectral Density Measurement

4.5.1 Limit

Operation Band	EUT Category		Limit
U-NII-1		Outdoor Access Point	17dBm/ MHz
		Fixed point-to-point Access Point	
	√	Indoor Access Point	
	√	Client device	11dBm/ MHz
U-NII-2A			11dBm/ MHz
U-NII-2C			11dBm/ MHz
U-NII-3	√		30dBm/ 500kHz (27.78 dBm/300kHz)

Note: $22.78\text{dBm}/300\text{kHz} = 30\text{dBm}/500\text{kHz} - 10\log\left(\frac{500\text{kHz}}{300\text{kHz}}\right)$

4.5.2 Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter Setting	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	1 MHz
VBW	≥ 3 MHz
Detector	RMS
Trace	Average
Sweep Time	Auto, trigger set to "free run"
Trace average	100 times


For U-NII-3 band:

Spectrum Parameter Setting	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	300kHz
VBW	≥ 3 RBW
Detector	RMS
Trace	Average
Sweep Time	Auto, trigger set to "free run"
Trace average	100 times

4.5.3 Test Procedure

- 1 The transmitter output (antenna port) was connected RF switch to the spectrum analyzer.
- 2 For U-NII-1, U-NII-2A & U-NII-2C Bands, PSD Measure was performed in accordance with 789033 D02 General UNII Test Procedures New Rules v02r01, in section “Maximum conducted output power (E)(2)(d) Method SA-2”, 05/02/2017.
- 3 For U-NII-3 Band, PSD Measure was performed in accordance with 789033 D02 General UNII Test Procedures New Rules v02r01, in section “Maximum Power Spectral Density (F)(5)”, 05/02/2017
- 4 Multiple antenna systems was performed in accordance 662911 D01 Multiple Transmitter Output v02r01 in-Band Power Spectral Density (PSD) Measurements (a) Measure and sum the spectra across the outputs (bin-by-bin summing).
- 5 When measuring first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3 and so on up to the Nth output to obtain the value for the first frequency bin of the summed spectrum.
- 6 The summed spectrum value for each of the other frequency bins is computed in the same way.

4.5.4 Test Setup Layout

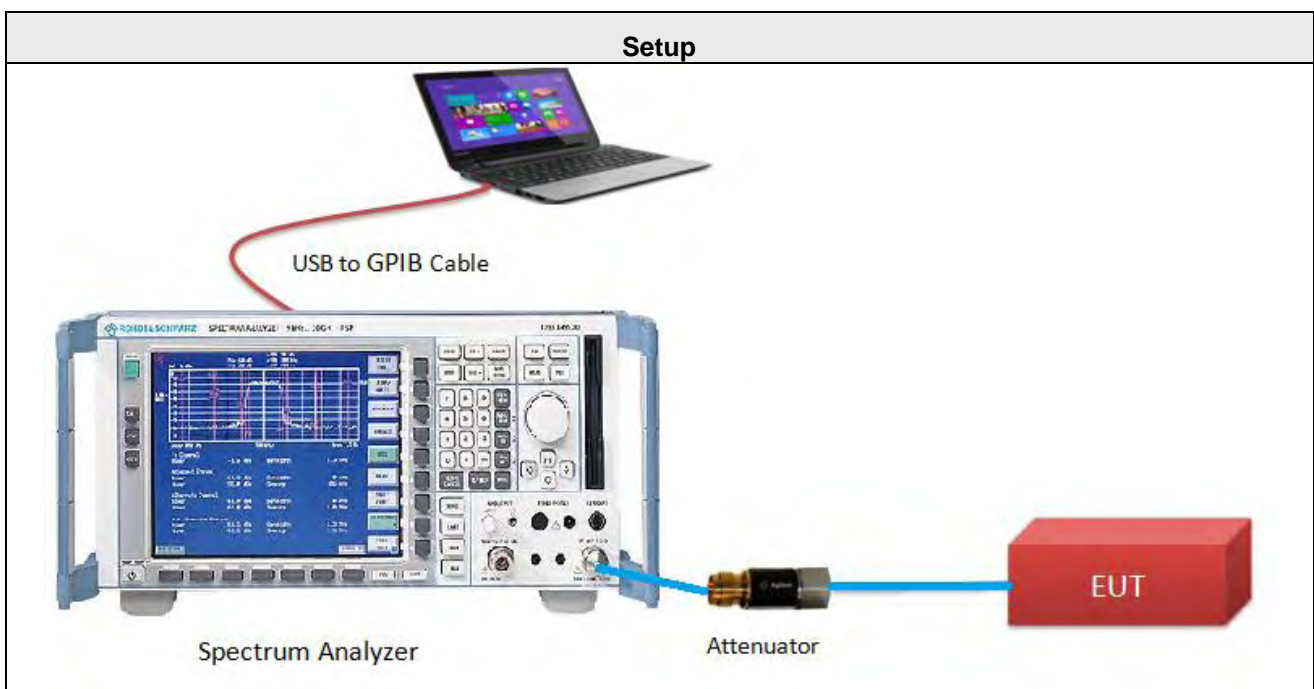

4.5.5 Test Deviation

There are no deviations with the original standard.

4.5.6 EUT Operating Conditions

The EUT was programmed to be in continuously transmitting mode.

4.5.7 Test Results

Temperature	25°C	Humidity	60%
Test Engineer	Robert Cheng		

Master Mode

11a 1S4T CDD

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)	Duty Factor (dB)	Total PSD with duty factor (dBm/MHz)	Directional Gain(dBi)	MAX. Limit (dBm/MHz)	Result
36	5180	11.57	0.41	11.98	7.01	15.99	Pass
40	5200	12.43	0.41	12.84	6.49	16.51	Pass
48	5240	12.51	0.41	12.92	6.65	16.35	Pass

- Note:
1. Total PSD (dBm/MHz) = PSD(dBm/MHz) + Duty Factor (dB)
 2. For 5180MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/4] = 7.01\text{dBi} > 6\text{dBi}$, therefore the limit shall be reduced to $17-(7.01-6) = 15.99\text{dBm}$.
 3. For 5200MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/4] = 6.49\text{dBi} > 6\text{dBi}$, therefore the limit shall be reduced to $17-(6.49-6) = 16.51\text{dBm}$.
 4. For 5240MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/4] = 6.65\text{dBi} > 6\text{dBi}$, therefore the limit shall be reduced to $17-(6.65-6) = 16.35\text{dBm}$.

Chan.	Chan. Freq. (MHz)	Total PSD (dBm/300kHz)	Duty Factor (dB)	Total PSD with Duty Factor (dBm/300kHz)	Total PSD with Duty Factor (dBm/500kHz)	Directional Gain(dBi)	MAX. Limit (dBm/500kHz)	Result
149	5745	3.80	0.41	4.21	6.43	7.06	28.94	Pass
157	5785	3.79	0.41	4.20	6.42	6.83	29.17	Pass
165	5825	3.49	0.41	3.90	6.12	6.45	29.55	Pass

- Note:
1. Total PSD (dBm/500kHz) = PSD(dBm/300kHz) + 2.22dB+ Duty Factor (dB)
 2. For 5745MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/4] = 7.06\text{dBi} > 6\text{dBi}$, therefore the limit shall be reduced to $30-(7.06-6) = 28.94\text{dBm}$.
 3. For 5785MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/4] = 6.83\text{dBi} > 6\text{dBi}$, therefore the limit shall be reduced to $30-(6.83-6) = 29.17\text{dBm}$.
 4. For 5825MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/4] = 6.45\text{dBi} > 6\text{dBi}$, therefore the limit shall be reduced to $30-(6.45-6) = 29.55\text{dBm}$.

11ac (20MHz) 1S4T CDD

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)	Duty Factor (dB)	Total PSD with duty factor (dBm/MHz)	Directional Gain(dBi)	MAX. Limit (dBm/MHz)	Result
36	5180	10.84	0.00	10.84	7.01	15.99	Pass
40	5200	12.39	0.00	12.39	6.49	16.51	Pass
48	5240	12.52	0.00	12.52	6.65	16.35	Pass

- Note:
- Total PSD (dBm/MHz) = PSD(dBm/MHz) + Duty Factor (dB)
 - For 5180MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/4] = 7.01\text{dBi} > 6\text{dBi}$, therefore the limit shall be reduced to $17-(7.01-6) = 15.99\text{dBm}$.
 - For 5200MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/4] = 6.49\text{dBi} > 6\text{dBi}$, therefore the limit shall be reduced to $17-(6.49-6) = 16.51\text{dBm}$.
 - For 5240MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/4] = 6.65\text{dBi} > 6\text{dBi}$, therefore the limit shall be reduced to $17-(6.65-6) = 16.35\text{dBm}$.

Chan.	Chan. Freq. (MHz)	Total PSD (dBm/300kHz)	Duty Factor (dB)	Total PSD with Duty Factor (dBm/300kHz)	Total PSD with Duty Factor (dBm/500kHz)	Directional Gain(dBi)	MAX. Limit (dBm/500kHz)	Result
149	5745	3.70	0.00	3.70	5.92	7.06	28.94	Pass
157	5785	3.55	0.00	3.55	5.77	6.83	29.17	Pass
165	5825	3.26	0.00	3.26	5.48	6.45	29.55	Pass

- Note:
- Total PSD (dBm/500kHz) = PSD(dBm/300kHz) + 2.22dB+ Duty Factor (dB)
 - For 5745MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/4] = 7.06\text{dBi} > 6\text{dBi}$, therefore the limit shall be reduced to $30-(7.06-6) = 28.94\text{dBm}$.
 - For 5785MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/4] = 6.83\text{dBi} > 6\text{dBi}$, therefore the limit shall be reduced to $30-(6.83-6) = 29.17\text{dBm}$.
 - For 5825MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/4] = 6.45\text{dBi} > 6\text{dBi}$, therefore the limit shall be reduced to $30-(6.45-6) = 29.55\text{dBm}$.

11ac (20MHz) 1S4T TxBF

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)	Duty Factor (dB)	Total PSD with duty factor (dBm/MHz)	Directional Gain(dBi)	MAX. Limit (dBm/MHz)	Result
36	5180	12.28	0.00	12.28	7.01	15.99	Pass
40	5200	12.28	0.00	12.28	6.49	16.51	Pass
48	5240	12.52	0.00	12.52	6.65	16.35	Pass

- Note:
- Total PSD (dBm/MHz) = PSD(dBm/MHz) + Duty Factor (dB)
 - For 5180MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/4] = 7.01\text{dBi} > 6\text{dBi}$, therefore the limit shall be reduced to $17-(7.01-6) = 15.99\text{dBm}$.
 - For 5200MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/4] = 6.49\text{dBi} > 6\text{dBi}$, therefore the limit shall be reduced to $17-(6.49-6) = 16.51\text{dBm}$.
 - For 5240MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/4] = 6.65\text{dBi} > 6\text{dBi}$, therefore the limit shall be reduced to $17-(6.65-6) = 16.35\text{dBm}$.

Chan.	Chan. Freq. (MHz)	Total PSD (dBm/300kHz)	Duty Factor (dB)	Total PSD with Duty Factor (dBm/300kHz)	Total PSD with Duty Factor (dBm/500kHz)	Directional Gain(dBi)	MAX. Limit (dBm/500kHz)	Result
149	5745	2.81	0.00	2.81	5.03	7.06	28.94	Pass
157	5785	2.78	0.00	2.78	5.00	6.83	29.17	Pass
165	5825	2.54	0.00	2.54	4.76	6.45	29.55	Pass

- Note:
- Total PSD (dBm/500kHz) = PSD(dBm/300kHz) + 2.22dB+ Duty Factor (dB)
 - For 5745MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/4] = 7.06\text{dBi} > 6\text{dBi}$, therefore the limit shall be reduced to $30-(7.06-6) = 28.94\text{dBm}$.
 - For 5785MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/4] = 6.83\text{dBi} > 6\text{dBi}$, therefore the limit shall be reduced to $30-(6.83-6) = 29.17\text{dBm}$.
 - For 5825MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/4] = 6.45\text{dBi} > 6\text{dBi}$, therefore the limit shall be reduced to $30-(6.45-6) = 29.55\text{dBm}$.

11ac (40MHz) 1S4T CDD

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)	Duty Factor (dB)	Total PSD with duty factor (dBm/MHz)	Directional Gain(dBi)	MAX. Limit (dBm/MHz)	Result
38	5190	4.55	0.00	4.55	7.25	15.75	Pass
46	5230	9.80	0.00	9.80	7.29	15.71	Pass

- Note:
- Total PSD (dBm/MHz) = PSD(dBm/MHz) + Duty Factor (dB)
 - For 5190MHz: Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/4] = 7.25\text{dBi} > 6\text{dBi}$, therefore the limit shall be reduced to $17-(7.25-6) = 15.75\text{dBm}$.
 - For 5230MHz: Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/4] = 7.29\text{dBi} > 6\text{dBi}$, therefore the limit shall be reduced to $17-(7.29-6) = 15.71\text{dBm}$.

Chan.	Chan. Freq. (MHz)	Total PSD (dBm/300kHz)	Duty Factor (dB)	Total PSD with Duty Factor (dBm/300kHz)	Total PSD with Duty Factor (dBm/500kHz)	Directional Gain(dBi)	MAX. Limit (dBm/500kHz)	Result
151	5755	0.43	0.00	0.43	2.65	7.87	28.13	Pass
159	5795	0.26	0.00	0.26	2.48	6.43	29.57	Pass

- Note:
- Total PSD (dBm/500kHz) = PSD(dBm/300kHz) + 2.22dB+ Duty Factor (dB)
 - For 5755MHz: Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/4] = 7.87\text{dBi} > 6\text{dBi}$, therefore the limit shall be reduced to $30-(7.87-6) = 28.13\text{dBm}$.
 - For 5795MHz: Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/4] = 6.43\text{dBi} > 6\text{dBi}$, therefore the limit shall be reduced to $30-(6.43-6) = 29.57\text{dBm}$.

11ac (40MHz) 1S4T TxBF

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)	Duty Factor (dB)	Total PSD with duty factor (dBm/MHz)	Directional Gain(dBi)	MAX. Limit (dBm/MHz)	Result
38	5190	3.54	0.00	3.54	7.25	15.75	Pass
46	5230	9.87	0.00	9.87	7.29	15.71	Pass

- Note:
- Total PSD (dBm/MHz) = PSD(dBm/MHz) + Duty Factor (dB)
 - For 5190MHz: Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/4] = 7.25\text{dBi} > 6\text{dBi}$, therefore the limit shall be reduced to $17-(7.25-6) = 15.75\text{dBm}$.
 - For 5230MHz: Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/4] = 7.29\text{dBi} > 6\text{dBi}$, therefore the limit shall be reduced to $17-(7.29-6) = 15.71\text{dBm}$.

Chan.	Chan. Freq. (MHz)	Total PSD (dBm/300kHz)	Duty Factor (dB)	Total PSD with Duty Factor (dBm/300kHz)	Total PSD with Duty Factor (dBm/500kHz)	Directional Gain(dBi)	MAX. Limit (dBm/500kHz)	Result
151	5755	0.44	0.00	0.44	2.66	7.87	28.13	Pass
159	5795	0.27	0.00	0.27	2.49	6.43	29.57	Pass

- Note:
- Total PSD (dBm/500kHz) = PSD(dBm/300kHz) + 2.22dB+ Duty Factor (dB)
 - For 5755MHz: Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/4] = 7.87\text{dBi} > 6\text{dBi}$, therefore the limit shall be reduced to $30-(7.87-6) = 28.13\text{dBm}$.
 - For 5795MHz: Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/4] = 6.43\text{dBi} > 6\text{dBi}$, therefore the limit shall be reduced to $30-(6.43-6) = 29.57\text{dBm}$.

11ac (80MHz) 1S4T CDD

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)	Duty Factor (dB)	Total PSD with duty factor (dBm/MHz)	Directional Gain(dBi)	MAX. Limit (dBm/MHz)	Result
42	5210	0.32	0.00	0.32	6.74	16.26	Pass

- Note:
1. Total PSD (dBm/MHz) = PSD(dBm/MHz) + Duty Factor (dB)
 2. For 5210MHz: Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/4] = 1.09\text{dBi} > 6\text{dBi}$, therefore the limit shall be reduced to $17-(6.74-6) = 16.26\text{dBm}$.

Chan.	Chan. Freq. (MHz)	Total PSD (dBm/300kHz)	Duty Factor (dB)	Total PSD with Duty Factor (dBm/300kHz)	Total PSD with Duty Factor (dBm/500kHz)	Directional Gain(dBi)	MAX. Limit (dBm/500kHz)	Result
155	5775	-3.18	0.00	-3.18	-0.96	7.36	28.64	Pass

- Note:
1. Total PSD (dBm/500kHz) = PSD(dBm/300kHz) + 2.22dB+ Duty Factor (dB)
 2. For 5775MHz: Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/4] = 7.36\text{dBi} > 6\text{dBi}$, therefore the limit shall be reduced to $30-(7.36-6) = 28.64\text{dBm}$.

11ac (80MHz) 1S4T TxBF

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)	Duty Factor (dB)	Total PSD with duty factor (dBm/MHz)	Directional Gain(dBi)	MAX. Limit (dBm/MHz)	Result
42	5210	1.35	0.00	1.35	6.74	16.26	Pass


- Note:
- Total PSD (dBm/MHz) = PSD(dBm/MHz) + Duty Factor (dB)
 - For 5210MHz: Directional gain = $10 \log[(10^{G^1/10} + 10^{G^2/10} + \dots + 10^{G^N/10})/4] = 1.09\text{dBi} > 6\text{dBi}$, therefore the limit shall be reduced to $17-(6.74-6) = 16.26\text{dBm}$.

Chan.	Chan. Freq. (MHz)	Total PSD (dBm/300kHz)	Duty Factor (dB)	Total PSD with Duty Factor (dBm/300kHz)	Total PSD with Duty Factor (dBm/500kHz)	Directional Gain(dBi)	MAX. Limit (dBm/500kHz)	Result
155	5775	-2.35	0.00	-2.35	-0.13	7.36	28.64	Pass


- Note:
- Total PSD (dBm/500kHz) = PSD(dBm/300kHz) + 2.22dB+ Duty Factor (dB)
 - For 5775MHz: Directional gain = $10 \log[(10^{G^1/10} + 10^{G^2/10} + \dots + 10^{G^N/10})/4] = 7.36\text{dBi} > 6\text{dBi}$, therefore the limit shall be reduced to $30-(7.36-6) = 28.64\text{dBm}$.

PSD SPECTRUM PLOT


11a 1S4T CDD CH36

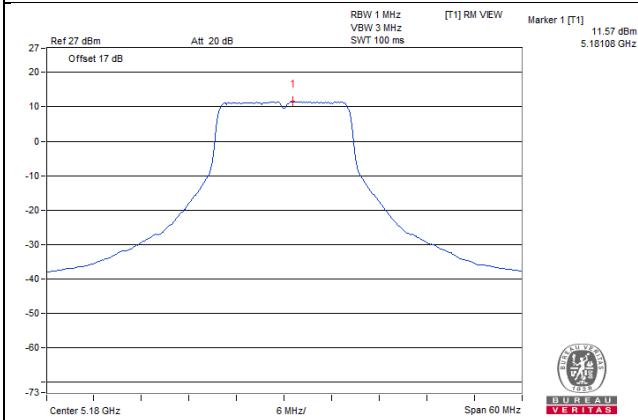


11a 1S4T CDD CH149

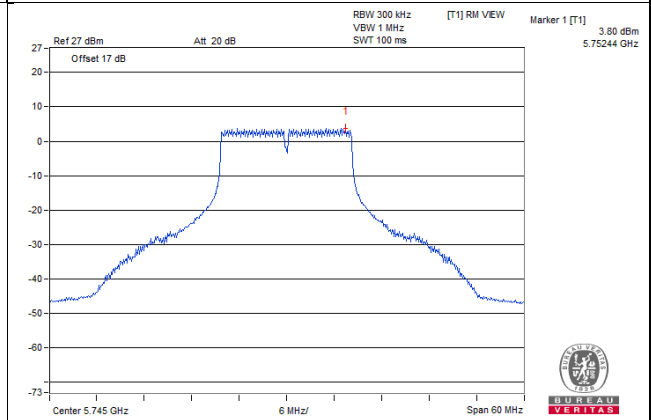


11a 1S4T CDD CH40

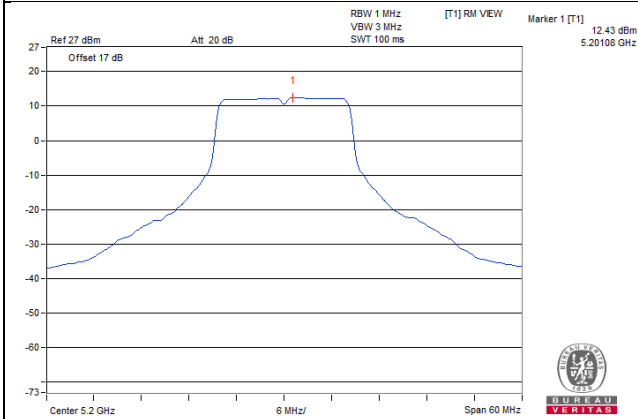


11a 1S4T CDD CH157

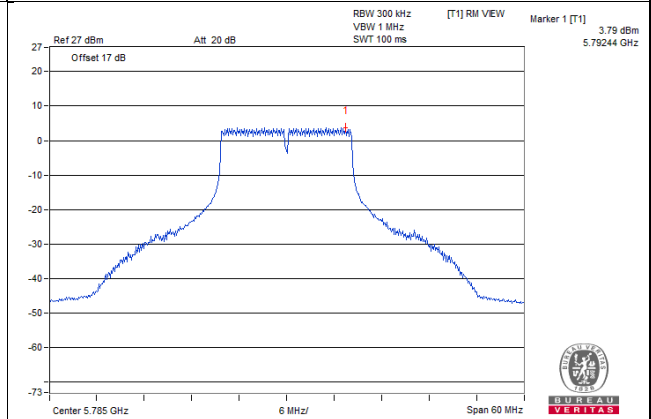

11a 1S4T CDD CH48

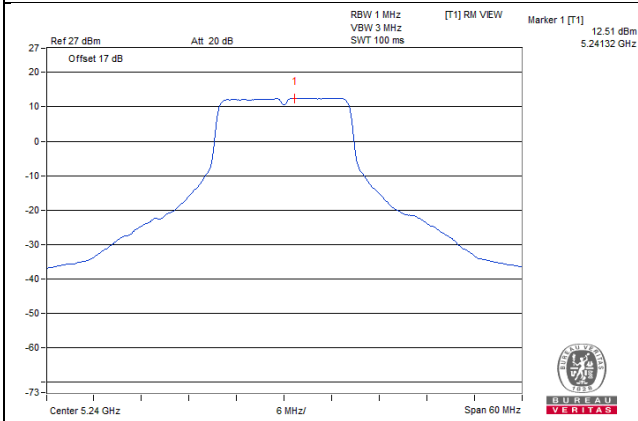


11a 1S4T CDD CH165

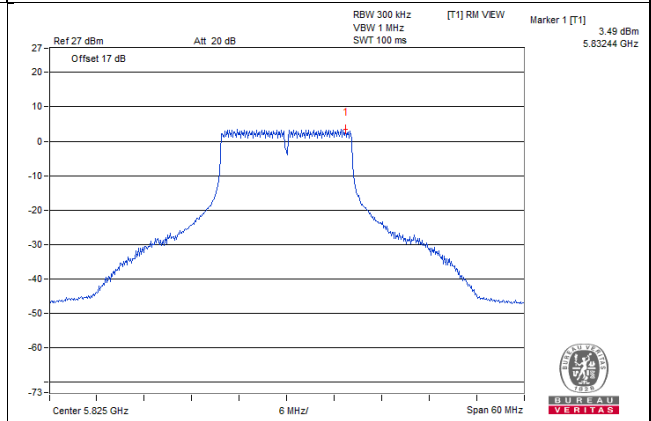


PSD SPECTRUM PLOT


11ac (20MHz) 1S4T CDD CH36

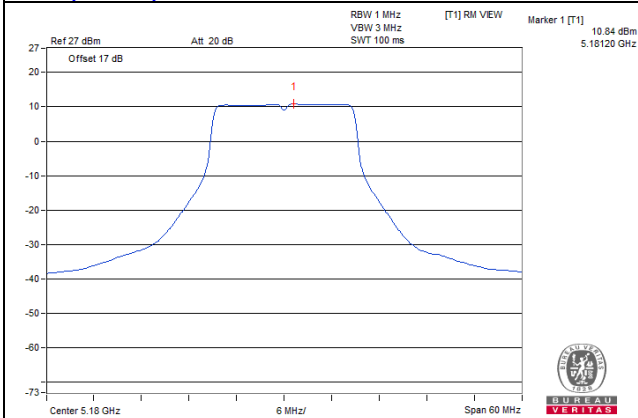


11ac (20MHz) 1S4T CDD CH149

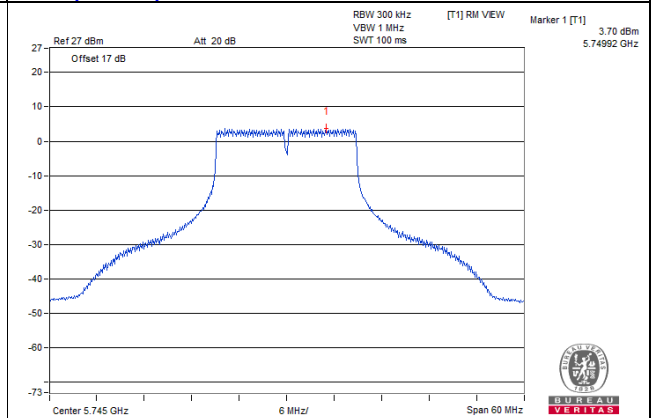


11ac (20MHz) 1S4T CDD CH40

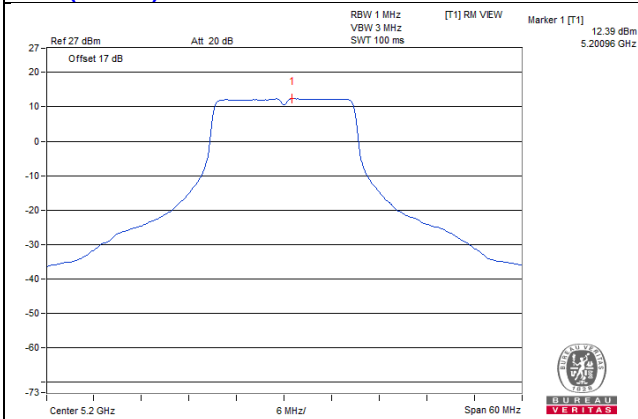


11ac (20MHz) 1S4T CDD CH157

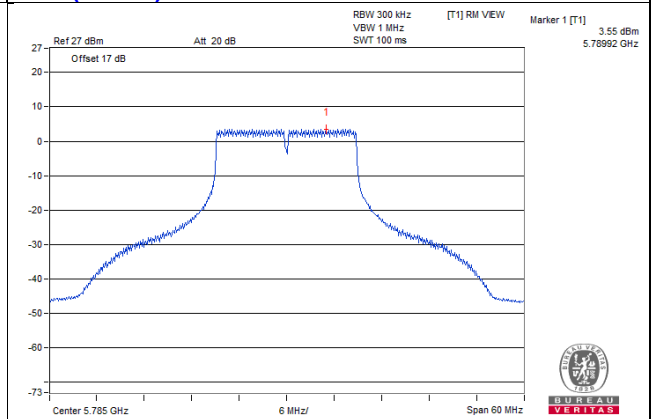

11ac (20MHz) 1S4T CDD CH48

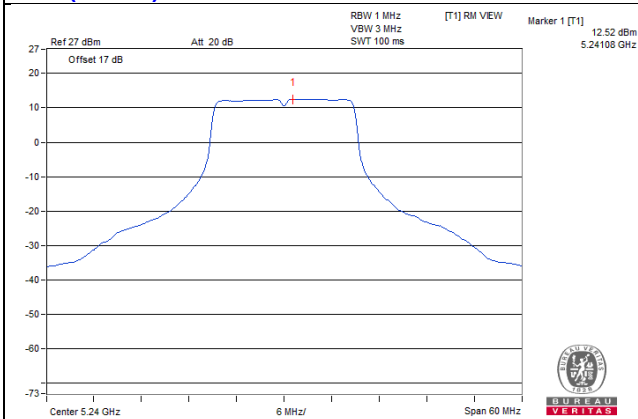


11ac (20MHz) 1S4T CDD CH165

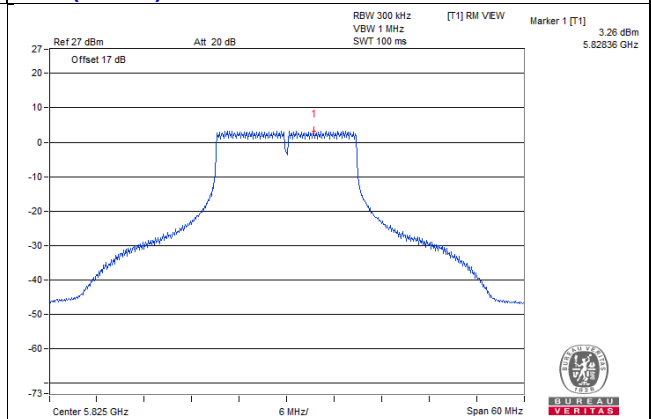


PSD SPECTRUM PLOT


11ac (20MHz) 1S4T TXBF CH36

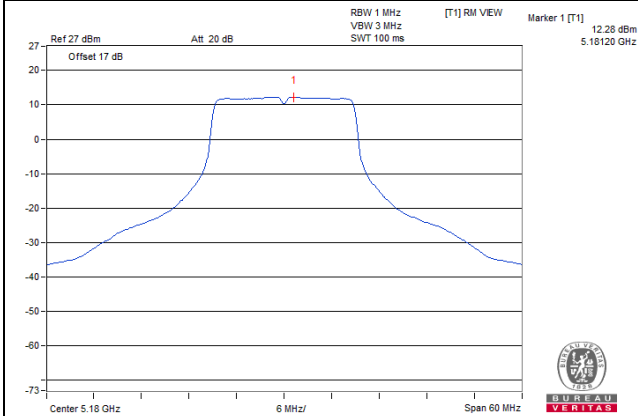


11ac (20MHz) 1S4T TXBF CH149

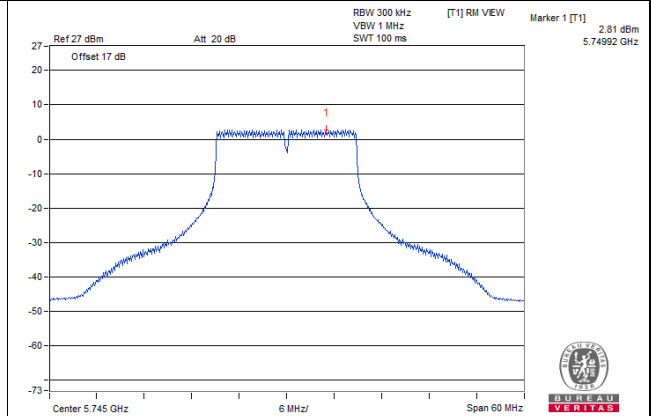


11ac (20MHz) 1S4T TXBF CH40

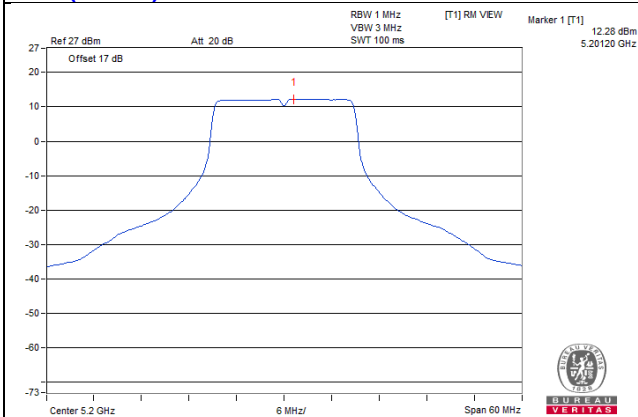


11ac (20MHz) 1S4T TXBF CH157

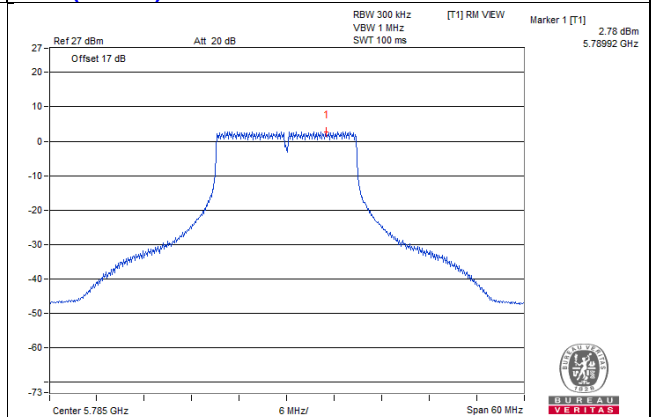

11ac (20MHz) 1S4T TXBF CH48

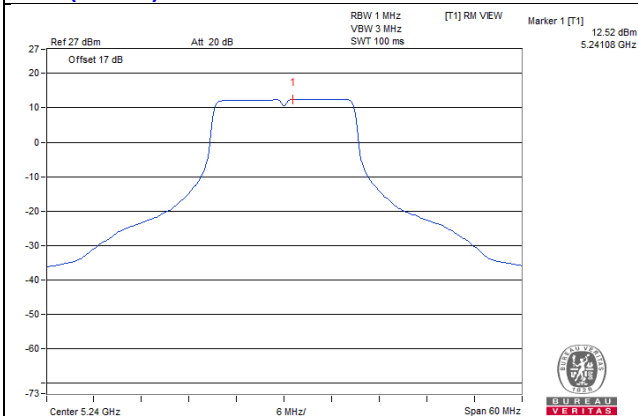


11ac (20MHz) 1S4T TXBF CH165

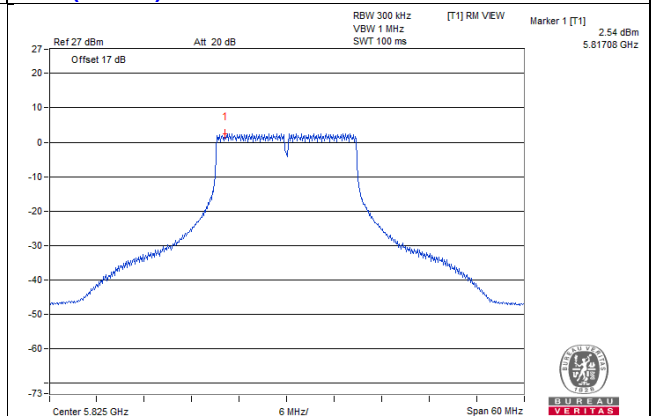


PSD SPECTRUM PLOT


11ac (40MHz) 1S4T CDD CH38

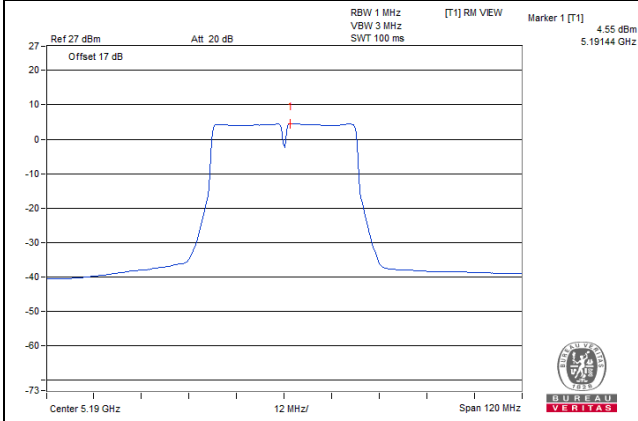


11ac (40MHz) 1S4T CDD CH151

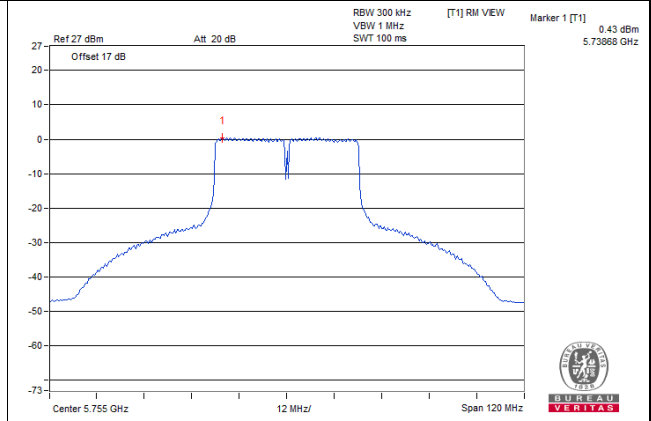

11ac (40MHz) 1S4T CDD CH46

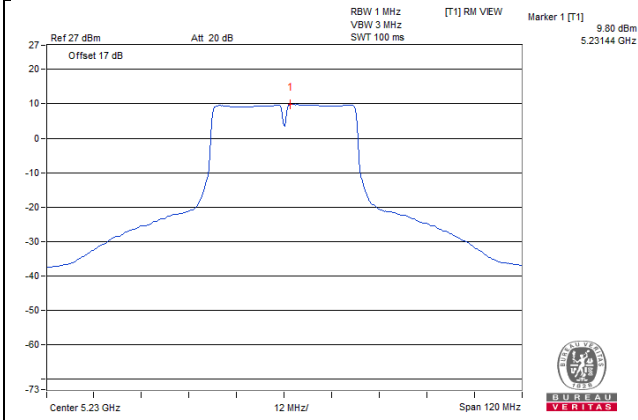


11ac (40MHz) 1S4T CDD CH159

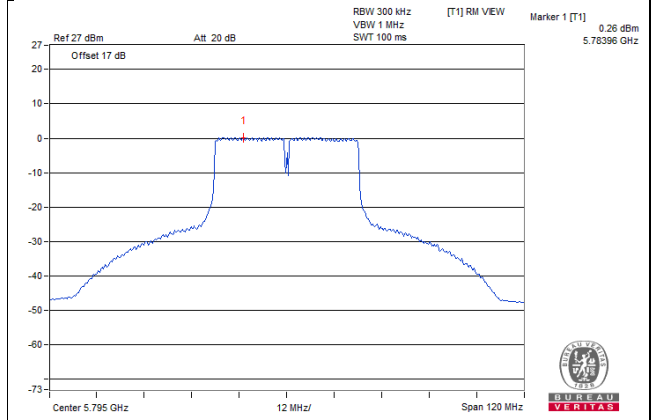


PSD SPECTRUM PLOT


11ac (40MHz) 1S4T TXBF CH38

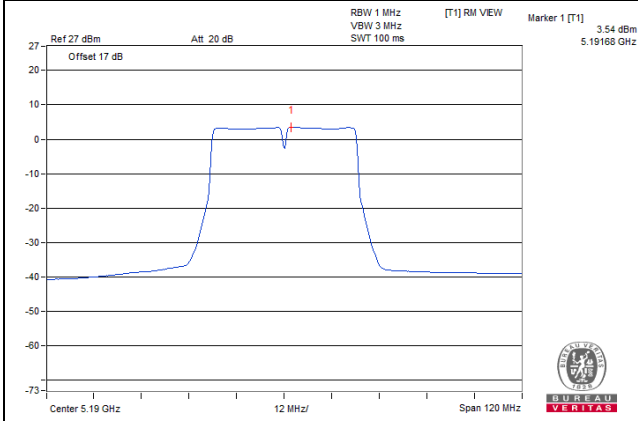


11ac (40MHz) 1S4T TXBF CH151

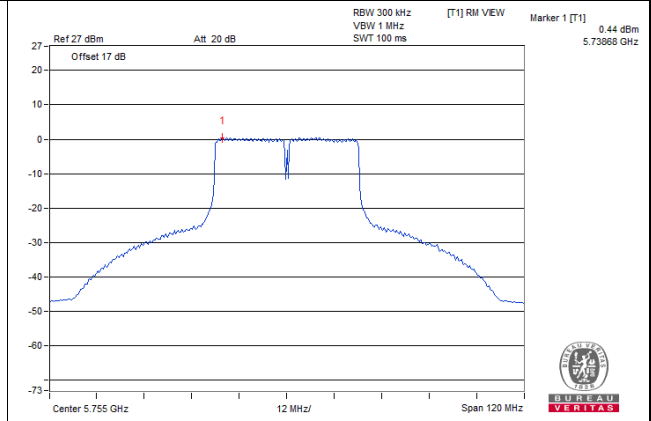

11ac (40MHz) 1S4T TXBF CH46

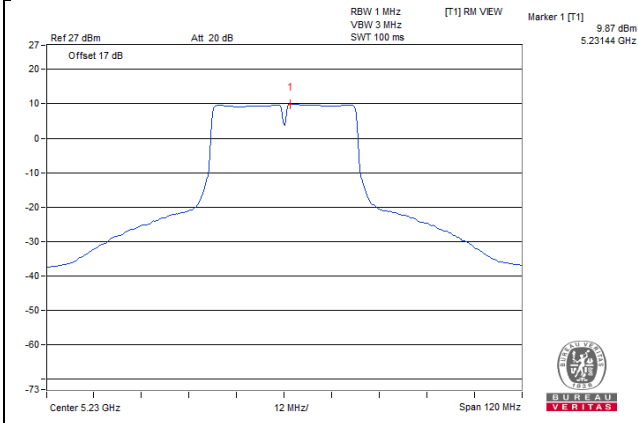


11ac (40MHz) 1S4T TXBF CH159

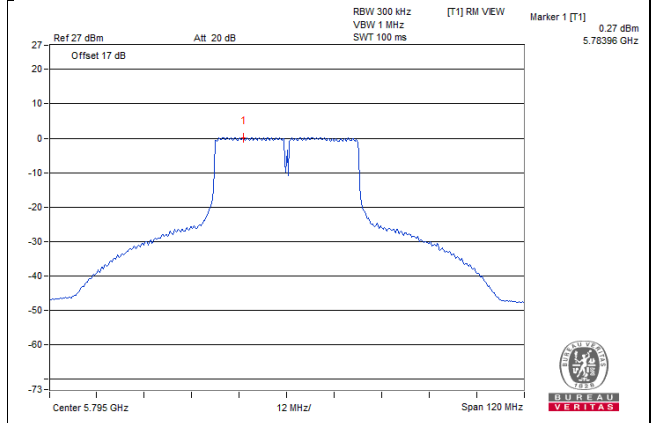


PSD SPECTRUM PLOT


11ac (80MHz) 1S4T CDD CH42

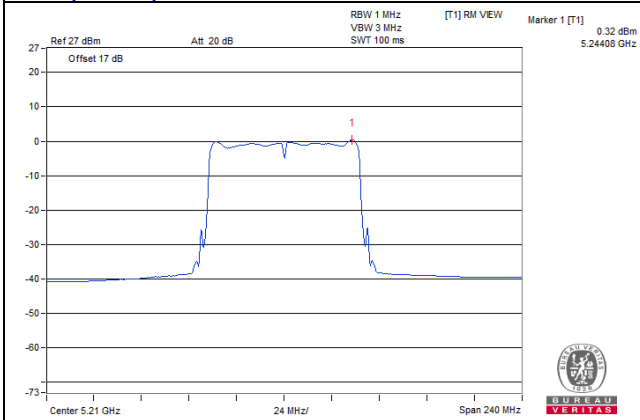


11ac (80MHz) 1S4T CDD CH155

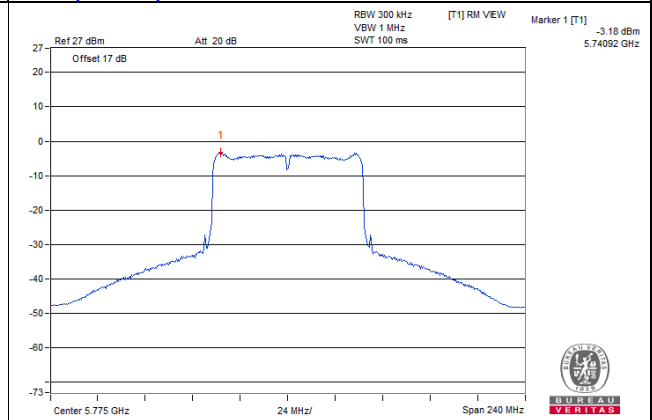

11ac (80MHz) 1S4T TXBF CH42

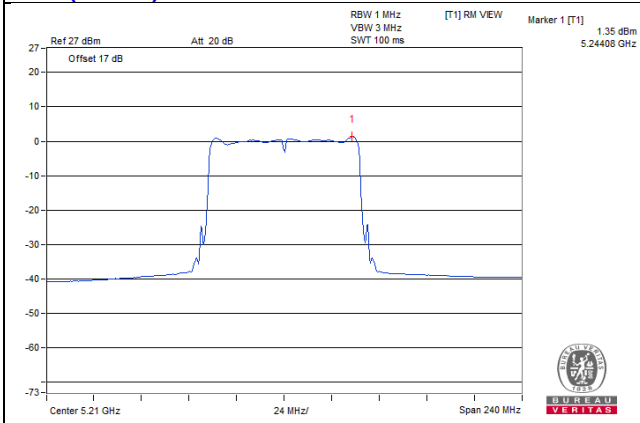

11ac (80MHz) 1S4T TXBF CH155

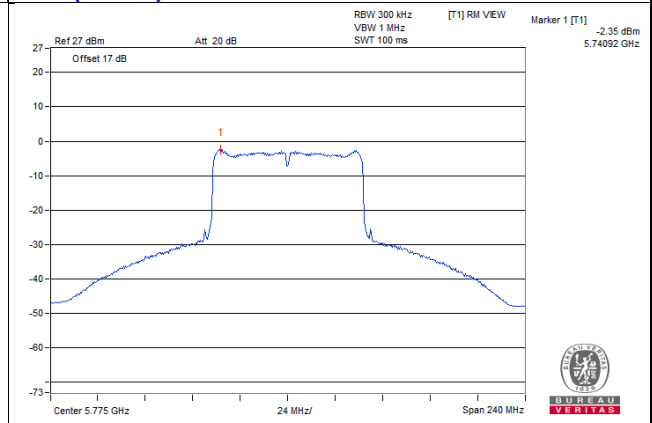

Client Mode

11a 1S4T CDD

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)	Duty Factor (dB)	Total PSD with duty factor (dBm/MHz)	Directional Gain(dBi)	MAX. Limit (dBm/MHz)	Result
36	5180	8.33	0.41	8.74	7.01	9.99	Pass
40	5200	9.70	0.41	10.11	6.49	10.51	Pass
48	5240	9.81	0.41	10.22	6.65	10.35	Pass

- Note:
- Total PSD (dBm/MHz) = PSD(dBm/MHz) + Duty Factor (dB)
 - For 5180MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/4]$ = 7.01dBi > 6dBi, therefore the limit shall be reduced to 11-(7.01-6) = 9.99dBm.
 - For 5200MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/4]$ = 6.49dBi > 6dBi, therefore the limit shall be reduced to 11-(6.49-6) = 10.51dBm.
 - For 5240MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/4]$ = 6.65dBi > 6dBi, therefore the limit shall be reduced to 11-(6.65-6) = 10.35dBm.

11ac (20MHz) 1S4T CDD

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)	Duty Factor (dB)	Total PSD with duty factor (dBm/MHz)	Directional Gain(dBi)	MAX. Limit (dBm/MHz)	Result
36	5180	8.72	0.00	8.72	7.01	9.99	Pass
40	5200	9.61	0.00	9.61	6.49	10.51	Pass
48	5240	9.72	0.00	9.72	6.65	10.35	Pass

- Note:
- Total PSD (dBm/MHz) = PSD(dBm/MHz) + Duty Factor (dB)
 - For 5180MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/4]$ = 7.01dBi > 6dBi, therefore the limit shall be reduced to 11-(7.01-6) = 9.99dBm.
 - For 5200MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/4]$ = 6.49dBi > 6dBi, therefore the limit shall be reduced to 11-(6.49-6) = 10.51dBm.
 - For 5240MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/4]$ = 6.65dBi > 6dBi, therefore the limit shall be reduced to 11-(6.65-6) = 10.35dBm.

11ac (20MHz) 1S4T TxBF

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)	Duty Factor (dB)	Total PSD with duty factor (dBm/MHz)	Directional Gain(dBi)	MAX. Limit (dBm/MHz)	Result
36	5180	8.89	0.00	8.89	7.01	9.99	Pass
40	5200	9.70	0.00	9.70	6.49	10.51	Pass
48	5240	9.72	0.00	9.72	6.65	10.35	Pass

- Note:
- Total PSD (dBm/MHz) = PSD(dBm/MHz) + Duty Factor (dB)
 - For 5180MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/4] = 7.01\text{dBi} > 6\text{dBi}$, therefore the limit shall be reduced to $11-(7.01-6) = 9.99\text{dBm}$.
 - For 5200MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/4] = 6.49\text{dBi} > 6\text{dBi}$, therefore the limit shall be reduced to $11-(6.49-6) = 10.51\text{dBm}$.
 - For 5240MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/4] = 6.65\text{dBi} > 6\text{dBi}$, therefore the limit shall be reduced to $11-(6.65-6) = 10.35\text{dBm}$.

11ac (40MHz) 1S4T CDD

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)	Duty Factor (dB)	Total PSD with duty factor (dBm/MHz)	Directional Gain(dBi)	MAX. Limit (dBm/MHz)	Result
38	5190	5.20	0.00	5.20	7.25	9.75	Pass
46	5230	5.93	0.00	5.93	7.29	9.71	Pass

- Note:
- Total PSD (dBm/MHz) = PSD(dBm/MHz) + Duty Factor (dB)
 - For 5190MHz: Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/4] = 7.25\text{dBi} > 6\text{dBi}$, therefore the limit shall be reduced to $11-(7.25-6) = 9.75\text{dBm}$.
 - For 5230MHz: Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/4] = 7.29\text{dBi} > 6\text{dBi}$, therefore the limit shall be reduced to $11-(7.29-6) = 9.71\text{dBm}$.

11ac (40MHz) 1S4T TxBF

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)	Duty Factor (dB)	Total PSD with duty factor (dBm/MHz)	Directional Gain(dBi)	MAX. Limit (dBm/MHz)	Result
38	5190	4.15	0.00	4.15	7.25	9.75	Pass
46	5230	7.06	0.00	7.06	7.29	9.71	Pass

- Note:
- Total PSD (dBm/MHz) = PSD(dBm/MHz) + Duty Factor (dB)
 - For 5190MHz: Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/4] = 7.25\text{dBi} > 6\text{dBi}$, therefore the limit shall be reduced to $11-(7.25-6) = 9.75\text{dBm}$.
 - For 5230MHz: Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/4] = 7.29\text{dBi} > 6\text{dBi}$, therefore the limit shall be reduced to $11-(7.29-6) = 9.71\text{dBm}$.

11ac (80MHz) 1S4T CDD

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)	Duty Factor (dB)	Total PSD with duty factor (dBm/MHz)	Directional Gain(dBi)	MAX. Limit (dBm/MHz)	Result
42	5210	0.60	0.00	0.60	6.74	10.26	Pass

- Note:
- Total PSD (dBm/MHz) = PSD(dBm/MHz) + Duty Factor (dB)
 - For 5210MHz: Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/4] = 6.74\text{dBi} > 6\text{dBi}$, therefore the limit shall be reduced to $11-(6.74-6) = 10.26\text{dBm}$.


11ac (80MHz) 1S4T TxBF

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)	Duty Factor (dB)	Total PSD with duty factor (dBm/MHz)	Directional Gain(dBi)	MAX. Limit (dBm/MHz)	Result
42	5210	1.63	0.00	1.63	6.74	10.26	Pass


- Note:
- Total PSD (dBm/MHz) = PSD(dBm/MHz) + Duty Factor (dB)
 - For 5210MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/4] = 6.74\text{dBi} > 6\text{dBi}$, therefore the limit shall be reduced to $11-(6.74-6) = 10.26\text{dBm}$.

PSD SPECTRUM PLOT


11a 1S4T CDD CH36

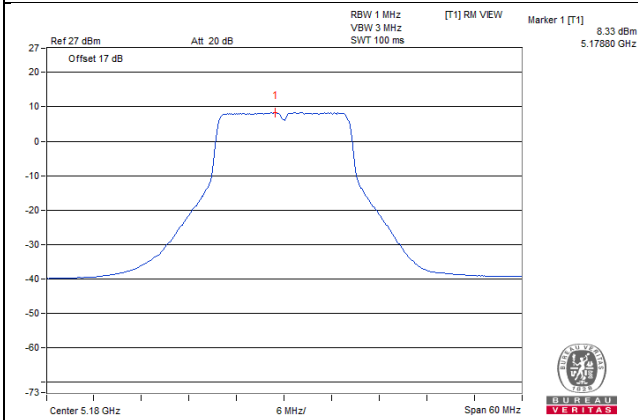

11a 1S4T CDD CH40

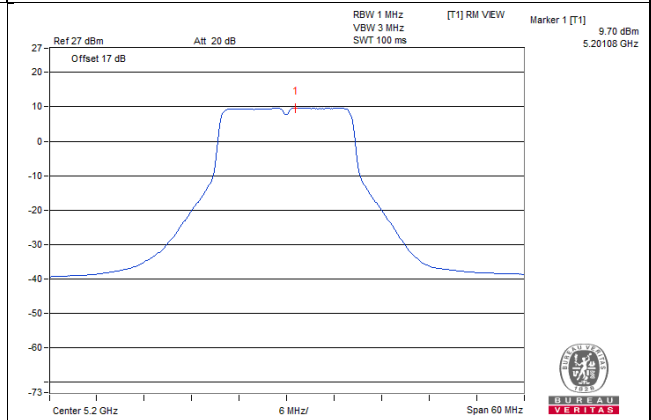


11a 1S4T CDD CH48

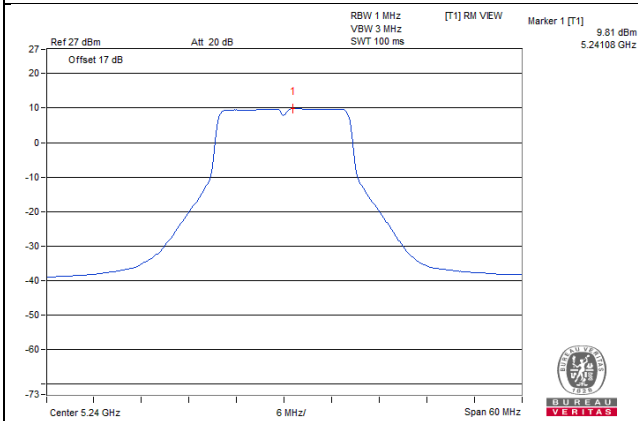


PSD SPECTRUM PLOT


11ac (20MHz) 1S4T CDD CH36

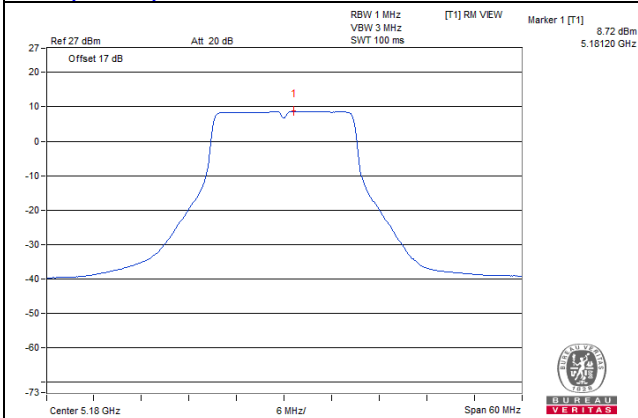

11ac (20MHz) 1S4T CDD CH40

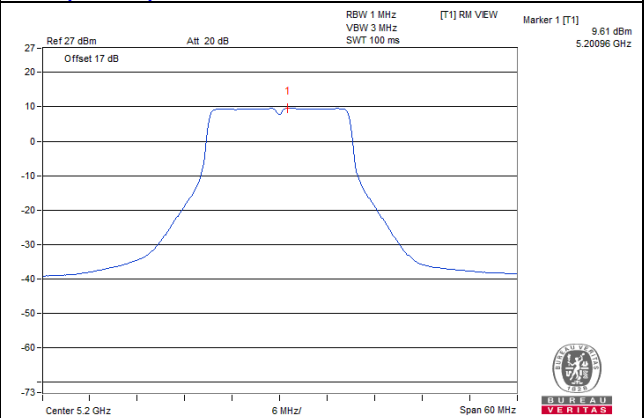


11ac (20MHz) 1S4T CDD CH48

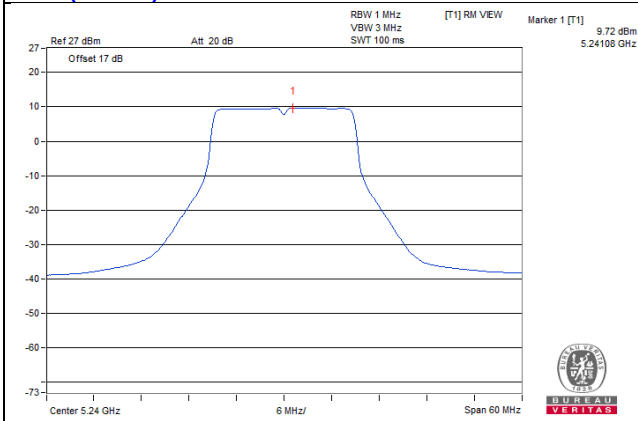


PSD SPECTRUM PLOT


11ac (20MHz) 1S4T TXBF CH36

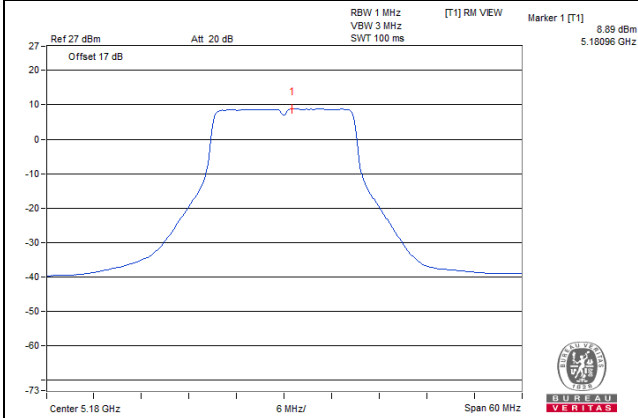

11ac (20MHz) 1S4T TXBF CH40

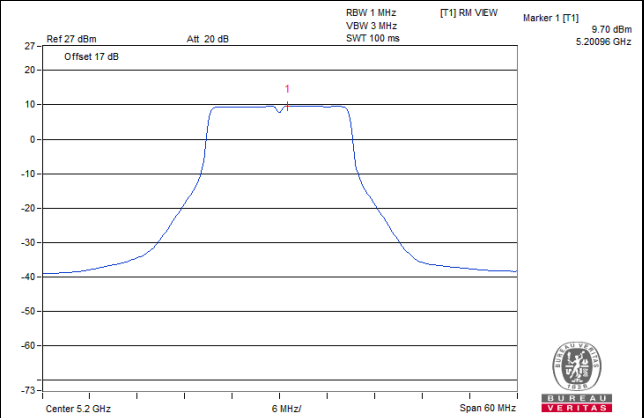


11ac (20MHz) 1S4T TXBF CH48

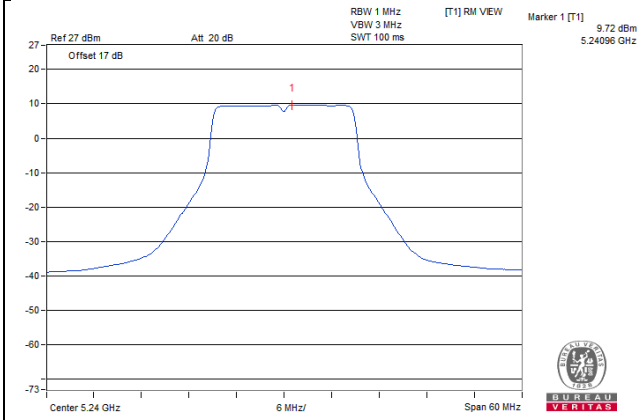


PSD SPECTRUM PLOT


11ac (40MHz) 1S4T CDD CH38

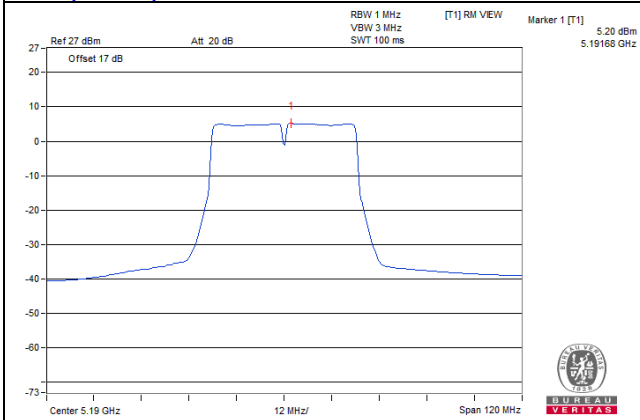


11ac (40MHz) 1S4T CDD CH46

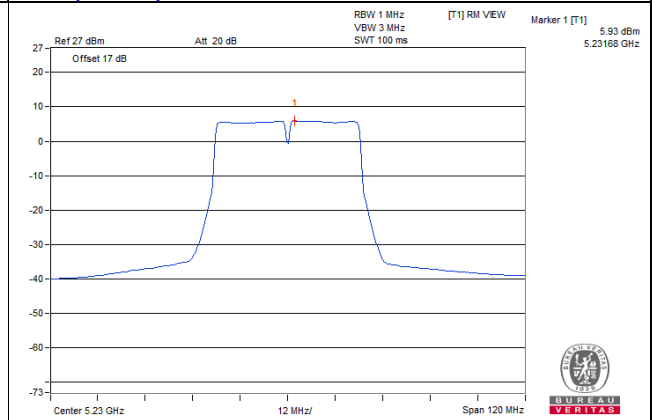

11ac (40MHz) 1S4T TXBF CH38

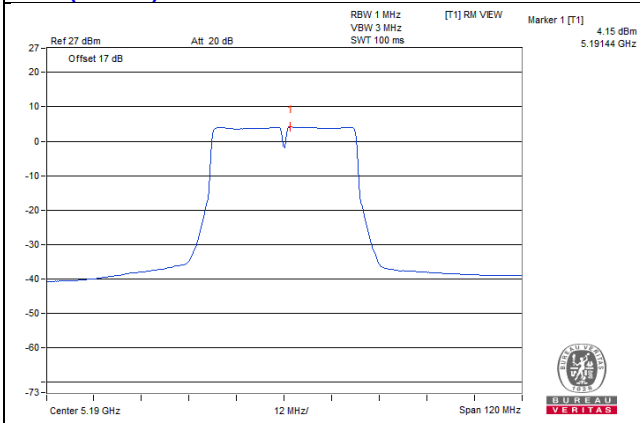


11ac (40MHz) 1S4T TXBF CH46

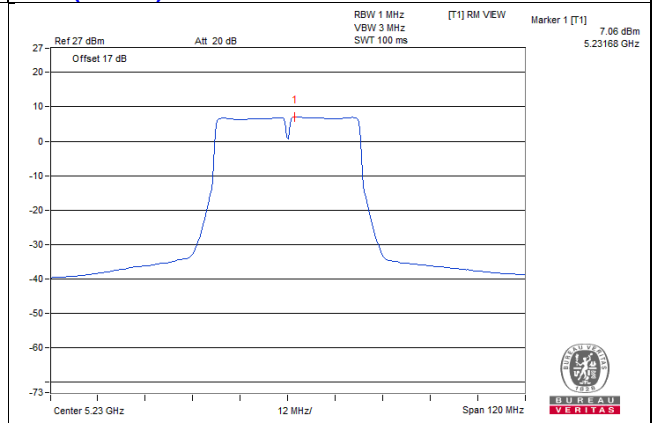

PSD SPECTRUM PLOT

11ac (80MHz) 1S4T CDD CH42

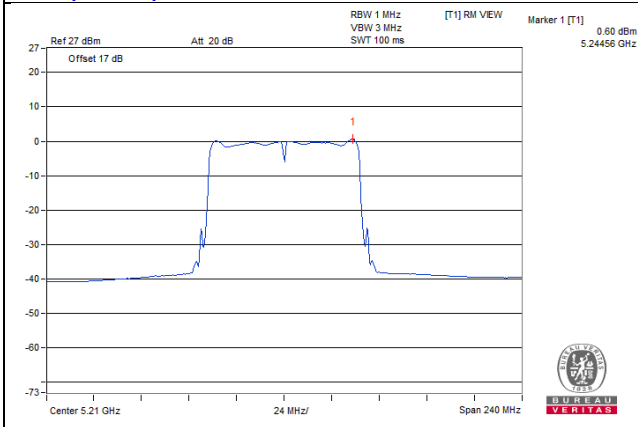

1ac (80MHz) 1S4T TXBF CH42

