

1 Explanation of MSCL

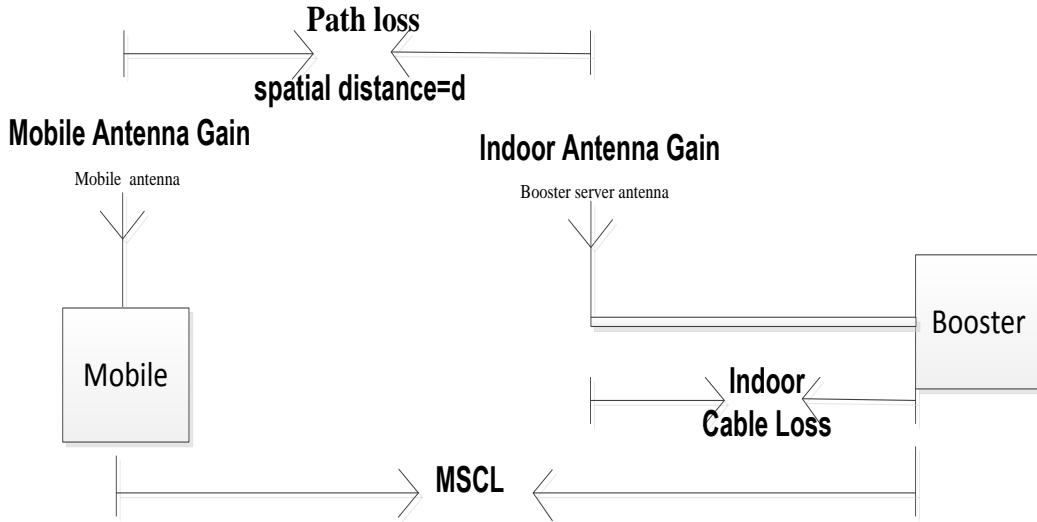


Figure 1

$$\text{MSCL} = \text{Path loss} + \text{Indoor Cable Loss} - \text{Mobile Antenna Gain} - \text{Indoor Antenna Gain} \dots\dots \textcircled{1}$$

1.1 Decibel version of free-space propagation loss equation

$$\text{Path loss (dB)} = 20L_g f + 20L_g d + 32.45 \dots\dots \textcircled{2} \quad \text{or} \quad \text{Path loss (dB)} = 20L_g f + 20L_g D - 27.55 \dots\dots \textcircled{3}$$

f (MHz), d (km), D(m) , d=1000D

1.1.1 Operation Frequency

At PCS (1850-19150MHz) f =1850MHz

At Cellular (824-849MHz) f =824 MHz

At AWS (1710-1755MHz) f =1710 MHz

At LTE(698-716MHz) f =698 MHz

At LTE(776-787MHz) f =776 MHz

1.1.2 Minimum Separation Distances for MSCL base on FCC new rule D (m)

Minimum Separation Distances for MSCL Calculation or Measurements D(m)	
Indoor server antenna types	Minimum separation distances D (m)
Ceiling Mounted (i.e., Dome-type) Antennas	2.0
Wall Mounted (i.e., Panel or other type) Antennas	1.0 or 2.0*
Table Top Antennas	1.0

* Note:

Wall Mounted (i.e., Panel or other type) Antennas: Alternatively, if a manufacturer clearly specifies a minimum separation distance to consumer devices in the installation manual or other user documentation provided with the booster, a reasonable minimum separation distance could be up to 6 feet (or 2 meters) horizontally removed from the antenna. In this case, the user would be required to ensure this minimum separation distance for all CMRS devices authorized for use with this booster.

1.2 Mobile Antenna Gain

Mobile Antenna Gain=0dBi

1.3 Indoor Cable Loss And Indoor Antenna Gain

Indoor Cable Loss and Indoor Antenna Gain are listed in the separate submitted file of Fusion2Go V2.0 Antenna Kitting .

1.4 Polarity Loss


Polarity Loss dB = $10\log \left(\frac{E1}{E2} \right)^2$ dB = PL dB

PL dB= $10\log \left(\frac{E1^2}{(E1\sin(45\text{deg}))^2} \right)$ dB = $20\log \left(\frac{1}{\sin(45\text{deg})} \right)$ dB = 3.01dB

Where:

E1 = Maximum Possible Magnitude of the Electric Field from the Mobile Device.

E2 = Magnitude of the electric field from the Mobile device with a 45deg polarity mismatch = $E1\sin(\theta)$.

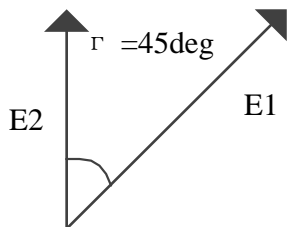

2 MSCL Calculations

Vehicle Kit1

Fusion2Go V2.0 Vehicle Kit1						
Outdoor						
Outdoor Antenna and Cable	Gain					
	At LTE-A (698-716MHz) (dB)	At LTE-V (776-787MHz) (dB)	At 800MHz (dB)	At 1900MHz (dB)	At 1700MHz (dB)	At 2100MHz (dB)
SC200W SC174-10FT (10Feet)	-2.3	-2.3	-2.3	-5.8	-3.98	-5.96
Indoor						
Indoor Antenna and Cable	Gain					
	At LTE-A and LTE-V (698-787MHz) (dB)	At 800MHz (dB)	At 1900MHz (dB)	At 1700MHz (dB)	At 2100MHz (dB)	At 2100MHz (dB)
SC110W SC174-10FT (10Feet)	-2.7	-3.2	-5.8	-3.98	-5.96	

Path loss=20Lgf+20LgD-27.56				
Operation Frequency (MHz)	f (MHz)	D (m)	Constant (dB)	Path loss (dB)
PCS(1850-1910)	1850	0.6	27.56	33.3
Cellular(824-849)	824	0.6	27.56	26.3
LTE(698-716)	698	0.6	27.56	24.9
LTE(776-787)	776	0.6	27.56	25.8
AWS(1710-1755)	1710	0.6	27.56	32.7
MSCL				
Operation Frequency (MHz)	Path loss (dB)	Indoor Antenna Gain and Cable Loss (dB)	Polarity Loss (dB)	MSCL (dB)
PCS(1850-1910)	33.3	-5.8	3	42.1
Cellular(824-849)	26.3	-3.2	3	32.5
LTE(698-716)	24.9	-2.7	3	30.6
LTE(776-787)	25.8	-2.7	3	31.5
AWS(1710-1755)	32.7	-3.98	3	39.6



Vehicle Kit2

Fusion2Go V2.0 Vehicle Kit2						
Outdoor						
Outdoor Antenna and Cable	Gain					
	At LTE-A (698-716MHz) (dB)	At LTE-V (776-787MHz) (dB)	At 800MHz (dB)	At 1900MHz (dB)	At 1700MHz (dB)	At 2100MHz (dB)
SC208W SC174- 12.5FT (12.5Feet)	-3.16	-5.15	-5.65	-2.85	-3.34	NG
Indoor						
Indoor Antenna and Cable	Gain					
	At LTE-A and LTE-V (698-787MHz) (dB)	At 800MHz (dB)	At 1900MHz (dB)	At 1700MHz (dB)	At 2100MHz (dB)	
SC110W SC174- 10FT (10Feet)	-2.7	-3.2	-5.8	-3.98	-5.96	

Path loss=20Lgf+20LgD-27.56				
Operation Frequency (MHz)	f (MHz)	D (m)	Constant (dB)	Path loss (dB)
PCS(1850-1910)	1850	0.6	27.56	33.3
Cellular(824-849)	824	0.6	27.56	26.3
LTE(698-716)	698	0.6	27.56	24.9
LTE(776-787)	776	0.6	27.56	25.8
AWS(1710-1755)	1710	0.6	27.56	32.7
MSCL				
Operation Frequency (MHz)	Path loss (dB)	Indoor Antenna Gain and Cable Loss (dB)	Polarity Loss (dB)	MSCL (dB)
PCS(1850-1910)	33.3	-5.8	3	42.1
Cellular(824-849)	26.3	-3.2	3	32.5
LTE(698-716)	24.9	-2.7	3	30.6
LTE(776-787)	25.8	-2.7	3	31.5
AWS(1710-1755)	32.7	-3.98	3	39.6



Marine-1 Kit

Fusion2Go V2.0 Marine-1 Kit						
Outdoor						
Outdoor Antenna and Cable	Gain					
	At LTE-A (698-716MHz) (dB)	At LTE-V (776-787MHz) (dB)	At 800MHz (dB)	At 1900MHz (dB)	At 1700MHz (dB)	At 2100MHz (dB)
SC288W or Galaxy 5412-P SC240-40FN(40Feet)	-0.52	-0.52	-0.98	-2.52	-2.12	-2.92
Indoor						
Indoor Antenna and Cable	Gain					
	At LTE-A and LTE-V (698-787MHz) (dB)	At 800MHz (dB)	At 1900MHz (dB)	At 1700MHz (dB)	At 2100MHz (dB)	At 2100MHz (dB)
SC248W SC240-20FN(20Feet)	4.94	4.71	6.44	6.64	6.24	6.24

SC248W is a Wall Mounted Antennas

Path loss=20Lgf+20LgD-27.56				
Operation Frequency (MHz)	f (MHz)	D (m)	Constant (dB)	Path loss (dB)
PCS(1850-1910)	1850	1.5	27.56	41.3
Cellular(824-849)	824	1.5	27.56	34.3
LTE(698-716)	698	1.5	27.56	32.8
LTE(776-787)	776	1.5	27.56	33.8
AWS(1710-1755)	1710	1.5	27.56	40.6
MSCL				
Operation Frequency (MHz)	Path loss (dB)	Indoor Antenna Gain and Cable Loss (dB)	Polarity Loss (dB)	MSCL (dB)
PCS(1850-1910)	41.3	6.44	3	37.9
Cellular(824-849)	34.3	4.71	3	32.6
LTE(698-716)	32.8	4.94	3	30.9
LTE(776-787)	33.8	4.94	3	31.8
AWS(1710-1755)	40.6	6.64	3	37.0



Marine-2 Kit

Fusion2Go V2.0 Marine-2 Kit						
Outdoor						
Outdoor Antenna and Cable	Gain					
	At LTE-A (698-716MHz) (dB)	At LTE-V (776-787MHz) (dB)	At 800MHz (dB)	At 1900MHz (dB)	At 1700MHz (dB)	At 2100MHz (dB)
SC288W or Galaxy 5412-P SC240-40FN (40Feet)	-0.52	-0.52	-0.98	-2.52	-2.12	-2.92
Indoor						
Indoor Antenna and Cable	Gain					
	At LTE-A and LTE-V (698-787MHz) (dB)	At 800MHz (dB)	At 1900MHz (dB)	At 1700MHz (dB)	At 2100MHz (dB)	At 2100MHz (dB)
SC302W SC240-20FN (20Feet)	0.44	0.71	1.44	0.64	1.24	

Path loss=20Lgf+20LgD-27.56				
Operation Frequency (MHz)	f (MHz)	D (m)	Constant (dB)	Path loss (dB)
PCS(1850-1910)	1850	1	27.56	37.8
Cellular(824-849)	824	1	27.56	30.8
LTE(698-716)	698	1	27.56	29.3
LTE(776-787)	776	1	27.56	30.2
AWS(1710-1755)	1710	1	27.56	37.1
MSCL				
Operation Frequency (MHz)	Path loss (dB)	Indoor Antenna Gain and Cable Loss (dB)	Polarity Loss (dB)	MSCL (dB)
PCS(1850-1910)	37.8	1.44	3	39.3
Cellular(824-849)	30.8	0.71	3	33.0
LTE(698-716)	29.3	0.44	3	31.9
LTE(776-787)	30.2	0.44	3	32.8
AWS(1710-1755)	37.1	0.64	3	39.5



Desk top RV-1 Kit

Fusion2Go V2.0 Desk top RV-1 Kit						
Outdoor						
Outdoor Antenna and Cable	Gain					
	At LTE-A (698-716MHz) (dB)	At LTE-V (776-787MHz) (dB)	At 800MHz (dB)	At 1900MHz (dB)	At 1700MHz (dB)	At 2100MHz (dB)
SC288W SC240- 40FN(40Feet)	-0.52	-0.52	-0.98	-2.52	-2.12	-2.92
Indoor						
Indoor Antenna and Cable	Gain					
	At LTE-A and LTE-V (698-787MHz) (dB)	At 800MHz (dB)	At 1900MHz (dB)	At 1700MHz (dB)	At 2100MHz (dB)	At 2100MHz (dB)
SC120W	1.2	1.2	3	3	3	3

Path loss=20Lgf+20LgD-27.56				
Operation Frequency (MHz)	f (MHz)	D (m)	Constant (dB)	Path loss (dB)
PCS(1850-1910)	1850	1	27.56	37.8
Cellular(824-849)	824	1	27.56	30.8
LTE(698-716)	698	1	27.56	29.3
LTE(776-787)	776	1	27.56	30.2
AWS(1710-1755)	1710	1	27.56	37.1
MSCL				
Operation Frequency (MHz)	Path loss (dB)	Indoor Antenna Gain and Cable Loss (dB)	Polarity Loss (dB)	MSCL (dB)
PCS(1850-1910)	37.8	3	3	37.8
Cellular(824-849)	30.8	1.2	3	32.6
LTE(698-716)	29.3	1.2	3	31.1
LTE(776-787)	30.2	1.2	3	32.0
AWS(1710-1755)	37.1	3	3	37.1



Desk top RV-2 Kit

Fusion2Go V2.0 Desk top RV-2 Kit						
Outdoor						
Outdoor Antenna and Cable	Gain					
	At LTE-A (698-716MHz) (dB)	At LTE-V (776-787MHz) (dB)	At 800MHz (dB)	At 1900MHz (dB)	At 1700MHz (dB)	At 2100MHz (dB)
SC288W SC240-40FN(40Feet)	-0.52	-0.52	-0.98	-2.52	-2.12	-2.92
Indoor						
Indoor Antenna and Cable	Gain					
	At LTE-A and LTE-V (698-787MHz) (dB)	At 800MHz (dB)	At 1900MHz (dB)	At 1700MHz (dB)	At 2100MHz (dB)	At 2100MHz (dB)
SC302W SC240-20FN(20Feet)	0.44	0.71	1.44	0.64	1.24	

Path loss=20Lgf+20LgD-27.56				
Operation Frequency (MHz)	f (MHz)	D (m)	Constant (dB)	Path loss (dB)
PCS(1850-1910)	1850	1	27.56	37.8
Cellular(824-849)	824	1	27.56	30.8
LTE(698-716)	698	1	27.56	29.3
LTE(776-787)	776	1	27.56	30.2
AWS(1710-1755)	1710	1	27.56	37.1
MSCL				
Operation Frequency (MHz)	Path loss (dB)	Indoor Antenna Gain and Cable Loss (dB)	Polarity Loss (dB)	MSCL (dB)
PCS(1850-1910)	37.8	1.44	3	39.3
Cellular(824-849)	30.8	0.71	3	33.0
LTE(698-716)	29.3	0.44	3	31.9
LTE(776-787)	30.2	0.44	3	32.8
AWS(1710-1755)	37.1	0.64	3	39.5

