


USER MANUAL FOR
WIRELESS MOUSE
(MODEL: RZ01-0299)
WHICH ALSO CONSIST OF
A USB DONGLE (MODEL:
DGRFG6)

23 MAY 2020

WHAT'S INSIDE

Wireless Mouse (Model: RZ01-0299)

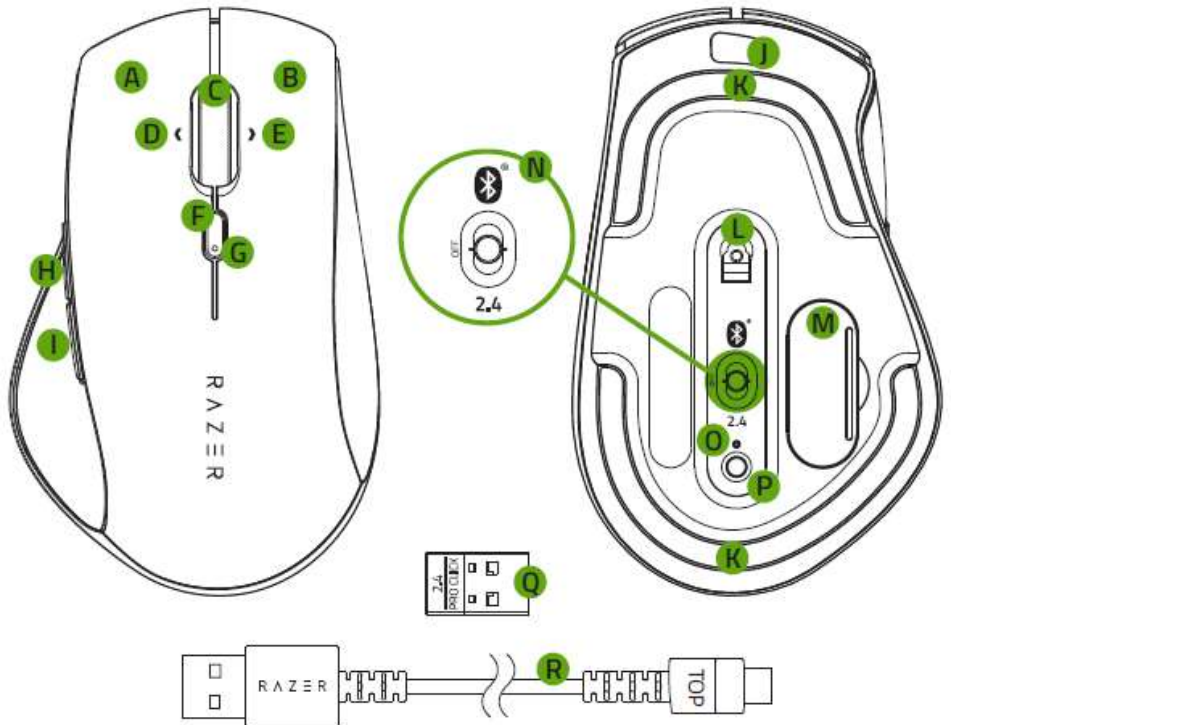

- A. Left mouse button
- B. Right mouse button
- C. Scroll wheel
- D. Left tilt-click
- E. Right tilt-click
- F. Cycle DPI stage up button
- G. Status indicator
- H. Mouse button 5
- I. Mouse button 4
- J. Micro-USB port
- K. Ultraslick mouse feet
- L. 5G optical sensor
- M. USB dongle compartment
- N. Slider switch
 - Bluetooth mode
 - Power off mode
 - 2.4GHz mode
- O. Pairing indicator
- P. Pair/switch button
- Q. 2.4GHz Wireless USB dongle
- R. USB cable

i DPI stages are as follows: 800, 1800 (default), 3200, 5000, and 10000. The DPI stages can be customized using Razer Synapse 3.

WHAT'S NEEDED


PRODUCT REQUIREMENTS

- PC with a free USB port or Bluetooth connectivity

LET'S GET YOU COVERED

You've got a great device in your hands complete with a 2-year limited warranty coverage. Now maximize its potential and score exclusive Razer benefits by registering at razerid.razer.com

*Your product's serial number
can be found here.*

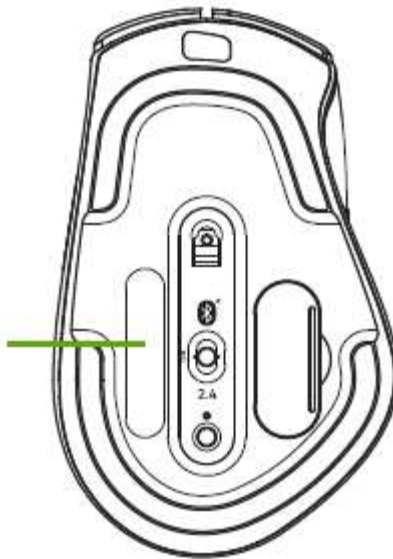


Got a question? Ask the Razer Support Team at support.razer.com

GETTING STARTED

CHARGING YOUR RAZER RZ01-0299

Plug the USB cable from your computer's USB port to your Razer RZ01-0299.

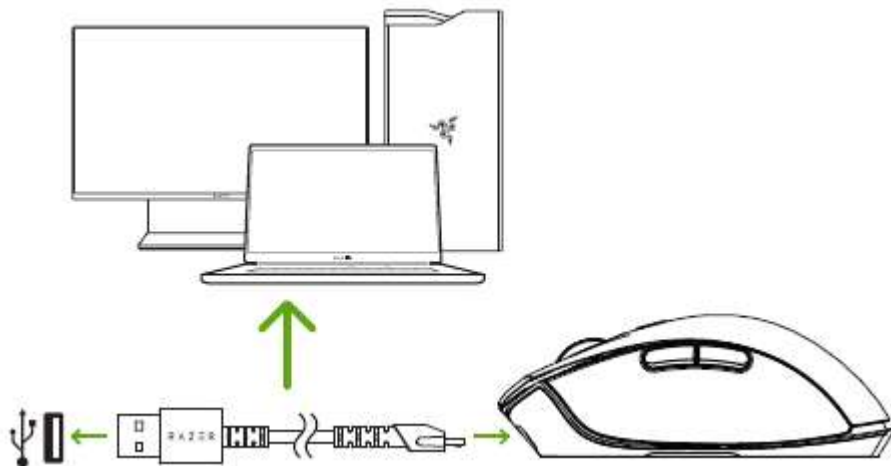



i This connection also acts as the WIRED MODE for your device.




For best results, please fully charge your Razer RZ01-0299 before using it for the first time. A depleted battery will be fully charged in approximately 4 hours. If the Razer RZ01-0299 has not been used for an extended period, you may need to recharge it before use.

The Razer RZ01-0299 requires a USB connection that can supply sufficient power to charge the battery. The battery charging process of the Razer RZ01-0299 may be affected if connected to a non-powered USB hub or non-powered USB ports found on certain keyboards and other peripherals. When in doubt, it's preferable to connect the Razer RZ01-0299 directly to the USB port of your computer.

CHARGING INDICATOR


While plugged in, the Razer RZ01-0299's status indicator will display its current battery level (as shown below).

Battery level	Color	Effect
<25%	Red 	Breathing
26-50%	Orange 	Breathing





51-75%	Yellow		Breathing
76-99%	Green		Breathing
100%	Green		Static

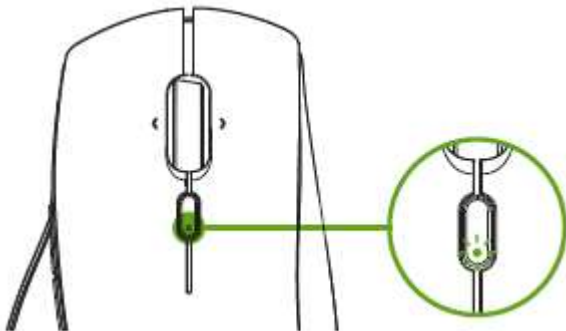LOW POWER INDICATOR

The Razer RZ01-0299's status indicator will blink red twice in repeated intervals to indicate that the battery's power is less than 5%. This lighting sequence will repeat until the battery is drained or the mouse is connected to the PC via the charging cable.




You can also check the Razer RZ01-0299's battery level by moving the slider switch from power off to either Bluetooth or 2.4Ghz mode. The status indicator will light up in the color according to the mouse's current power level (as shown below).


Battery level	Color
<25%	Red 
26-50%	Orange 
51-75%	Yellow 
76-100%	Green 

CONNECTING THE RAZER RZ01-0299 VIA 2.4 GHz MODE


1. Remove the compartment cover of the Razer RZ01-0299 and pull out the wireless USB dongle.

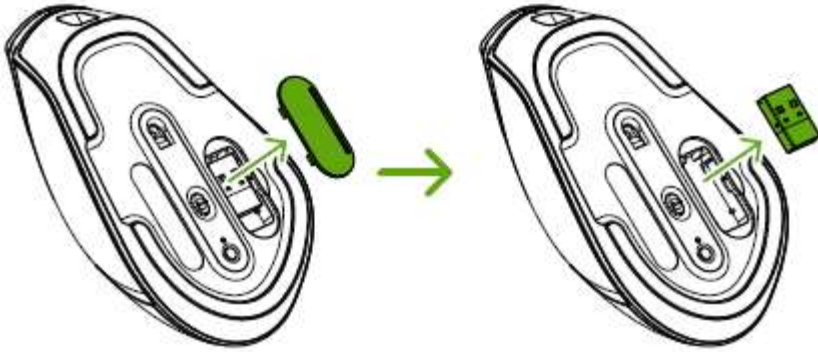


2. Close the compartment cover and connect the wireless USB dongle to the USB port of your computer.

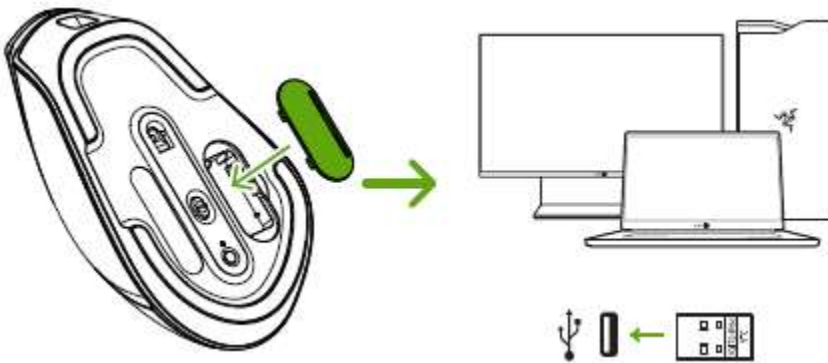

3. Switch the slider to 2.4 GHz mode. The pairing indicator will start blinking rapidly.

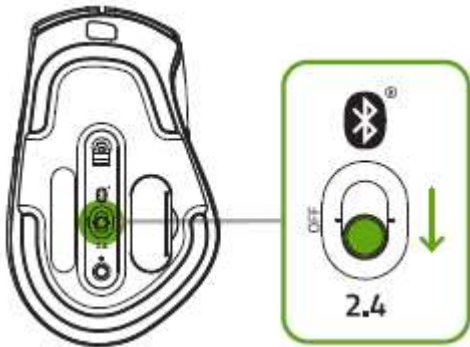

4. Wait until the mouse automatically pairs with the wireless USB dongle. When paired, the pairing indicator will change to static white for 3 seconds before turning off.

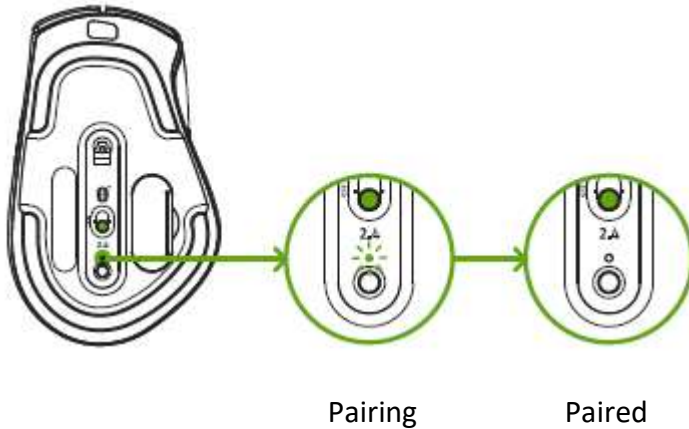


i Keep the pairing devices within close proximity of each other for a faster and more stable connection.



Congratulations, your Razer RZ01-0299 is now ready to use in 2.4 GHz mode.


CONNECTING THE RAZER RZ01-0299 VIA BLUETOOTH MODE

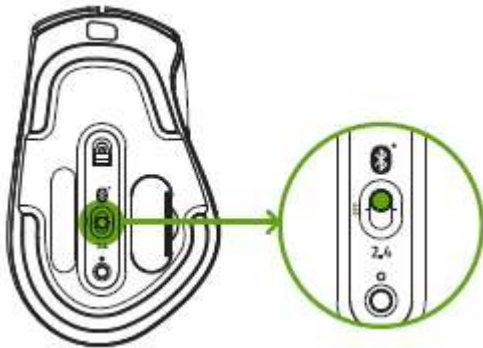1. Switch the slider to Bluetooth mode (*).



2. Select a slot for your Bluetooth device by tapping the pair/switch button. You can pair up to 3 Bluetooth devices on your Razer RZ01-0299.

Slot	Color
1 (Default)	Blue 
2	Green 

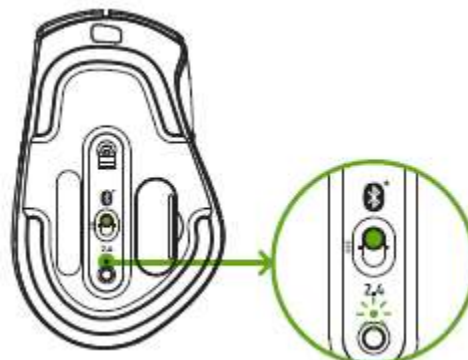


3

Yellow




3. Press and hold the pair/switch button for 3 seconds. The pairing indicator will blink twice in repeated intervals to show that the device is in pairing mode.

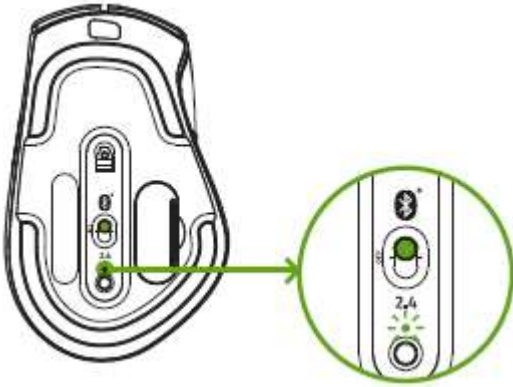

Pairing

4. Activate Bluetooth on your device and search for “Razer RZ01-0299” from the list of devices found.

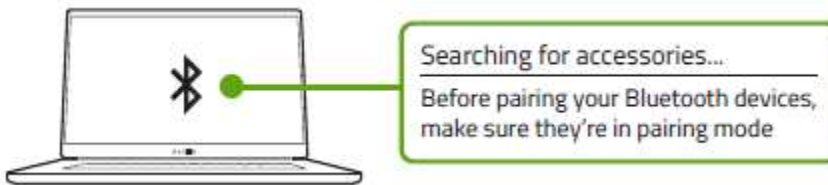

5. Wait until both devices are paired. When paired, the pairing indicator will change to static for 3 seconds before turning off.



Paired

i Keep the pairing devices within close proximity of each other for faster and more stable connection.

Once both devices have been paired, your Razer RZ01-0299 will automatically reconnect to the device whenever it is in Bluetooth mode and the device is within range.



Download the Razer Synapse installer from [razer.com/synapse](https://www.razer.com/synapse) or find out more about your brand-new mouse at support.razer.com

SAFETY AND MAINTENANCE

SAFETY GUIDELINES

In order to achieve maximum safety while using your Razer RZ01-0299, we suggest that you adopt the following guidelines:

Should you have trouble operating the device properly and troubleshooting does not work, unplug the device and contact the Razer hotline or go to support.razer.com for assistance.

Do not take apart the device (doing so will void your warranty) and do not attempt to operate it under abnormal current loads.

Keep the device away from liquid, humidity or moisture. Operate the device only within the specific temperature range of 0°C (32°F) to 40°C (104°F). Should the temperature exceed this range, unplug and/or switch off the device in order to let the temperature stabilize to an optimal level.

COMFORT

Research has shown that long periods of repetitive motion, improper positioning of your computer peripherals, incorrect body position, and poor habits may be associated with physical discomfort and injury to nerves, tendons, and muscles. Below are some guidelines to avoid injury and ensure optimum comfort while using your Razer RZ01-0299.

- Position your keyboard and monitor directly in front of you with your mouse next to it. Place your elbows next to your side, not too far away and your keyboard within easy reach.
- Adjust the height of your chair and table so that the keyboard and mouse are at or below elbow-height.
- Keep your feet well supported, posture straight and your shoulders relaxed.
- During gameplay, relax your wrist and keep it straight. If you do the same tasks with your hands repeatedly, try not to bend, extend or twist your hands for long periods.
- Do not rest your wrists on hard surfaces for long periods. Use a wrist rest to support your wrist while gaming.
- Customize the keys on your keyboard to suit your style of gaming in order to minimize repetitive or awkward motions while gaming.
- Do not sit in the same position all day. Get up, step away from your desk and do exercises to stretch your arms, shoulders, neck and legs.

If you should experience any physical discomfort while using your mouse, such as pain, numbness, or tingling in your hands, wrists, elbows, shoulders, neck or back, please consult a qualified medical doctor immediately.

MAINTENANCE AND USE

The Razer RZ01-0299 requires minimum maintenance to keep it in optimum condition. Once a month we recommend you unplug the device from the computer and clean it using a soft cloth or cotton swab with a bit of warm water to prevent dirt buildup. Do not use soap or harsh cleaning agents.

To get the ultimate experience in movement and control, we highly recommend a premium mouse mat from Razer. Some surfaces will cause undue wear on the feet requiring constant care and eventual replacement.

Do note that the sensor of the Razer RZ01-0299 is 'tuned' or optimized especially for the Razer mouse mats. This means that the sensor has been tested extensively to confirm that the Razer RZ01-0299 reads and tracks best on Razer mouse mats.

LEGALESE

COPYRIGHT AND INTELLECTUAL RAZER PROPERTY INFORMATION

©2020 Razer Inc. All rights reserved. Razer, the triple-headed snake logo, Razer logo, “For Gamers. By Gamers.”, and “Powered by Razer Chroma” logo are trademarks or registered trademarks of Razer Inc. and/or affiliated companies in the United States or other countries. All other trademarks and trade names are the property of their respective owners and other company and product names mentioned herein may be trademarks of their respective companies.

Windows and the Windows logo are trademarks of the Microsoft group of companies.

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc., and any use of such marks by Razer is under license.

Razer Inc. (“Razer”) may have copyright, trademarks, trade secrets, patents, patent applications, or other intellectual property rights (whether registered or unregistered) concerning the product in this guide. Furnishing of this guide does not give you a license to any such copyright, trademark, patent or other intellectual property right. The RZ01-0299 (the “Product”) may differ from pictures whether on packaging or otherwise. Razer assumes no responsibility for such differences or for any errors that may appear. Information contained herein is subject to change without notice.

LIMITED PRODUCT WARRANTY

For the latest and current terms of the Limited Product Warranty, please visit [razer.com/warranty](https://www.razer.com/warranty).

LIMITATION OF LIABILITY

Razer shall in no event be liable for any lost profits, loss of information or data, special, incidental, indirect, punitive or consequential or incidental damages, arising in any way out of distribution of, sale of, resale of, use of, or inability to use the product. In no event shall Razer’s liability exceed the retail purchase price of the product.

GENERAL

These terms shall be governed by and construed under the laws of the jurisdiction in which the product was purchased. If any term herein is held to be invalid or unenforceable, then such term (in so far as it is invalid or unenforceable) shall be given no effect and deemed to be excluded without invalidating any of the remaining terms. Razer reserves the right to amend any term at any time without notice.

FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

—Reorient or relocate the receiving antenna.

—Increase the separation between the equipment and receiver.

—Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

—Consult the dealer or an experienced radio/TV technician for help.

FCC Radiation Exposure Statement

This device complies with FCC radiation exposure limits set forth for an uncontrolled environment and it also complies with Part 15 of the FCC RF Rules. This equipment must not be co-located or operating in conjunction with any other antenna or transmitter. End-users and installers must be provide with antenna installation instructions and consider removing the no-collocation statement.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Caution!

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Canada Statement

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:


- (1) This device may not cause interference.
- (2) This device must accept any interference, including interference that may cause undesired operation of the device.

L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

- 1) L'appareil ne doit pas produire de brouillage;
- 2) L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

The device meets the exemption from the routine evaluation limits in section 2.5 of RSS 102 and compliance with RSS-102 RF exposure, users can obtain Canadian information on RF exposure and compliance.

Le dispositif rencontre l'exemption des limites courantes d'évaluation dans la section 2.5 de RSS 102 et la conformité à l'exposition de RSS-102 rf, utilisateurs peut obtenir l'information canadienne sur l'exposition et la conformité de rf.

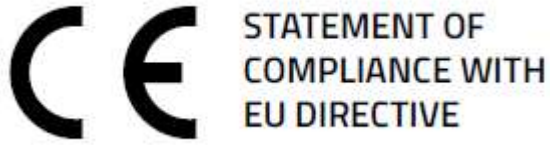

STATEMENT OF COMPLIANCE WITH EU DIRECTIVE

Razer (Europe) GmbH, declares that this Razer Wireless Mouse (Wireless mouse: RZ01-0299, USB Dongle: DGRFG6) is in compliance with the essential requirements and other relevant provisions of Directive 2014/53/EU.

Wireless Mouse:

Radio Frequency: 2.4Ghz SRD
Operating Frequency: 2403-2479Mhz
Max Output power: ≤ 8 dBm
SW version: 1.0

Radio Frequency: Bluetooth LE
Operating Frequency: 2402-2480Mhz
Max Output power: ≤ 8 dBm
SW version: 1.0

USB Dongle:

Radio Frequency: 2.4Ghz SRD
Operating Frequency: 2403-2479Mhz
Max Output power: ≤ 8 dBm
SW version: 1.0

The full Declaration of Conformity can be requested via the following: Company:

Company: Razer (Europe) GmbH
Address: Essener Bogen 23, 22419 Hamburg, Germany
E-mail: compliance@razer.com
Internet address: <https://www.razer.com>

