


Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz


Horizontal

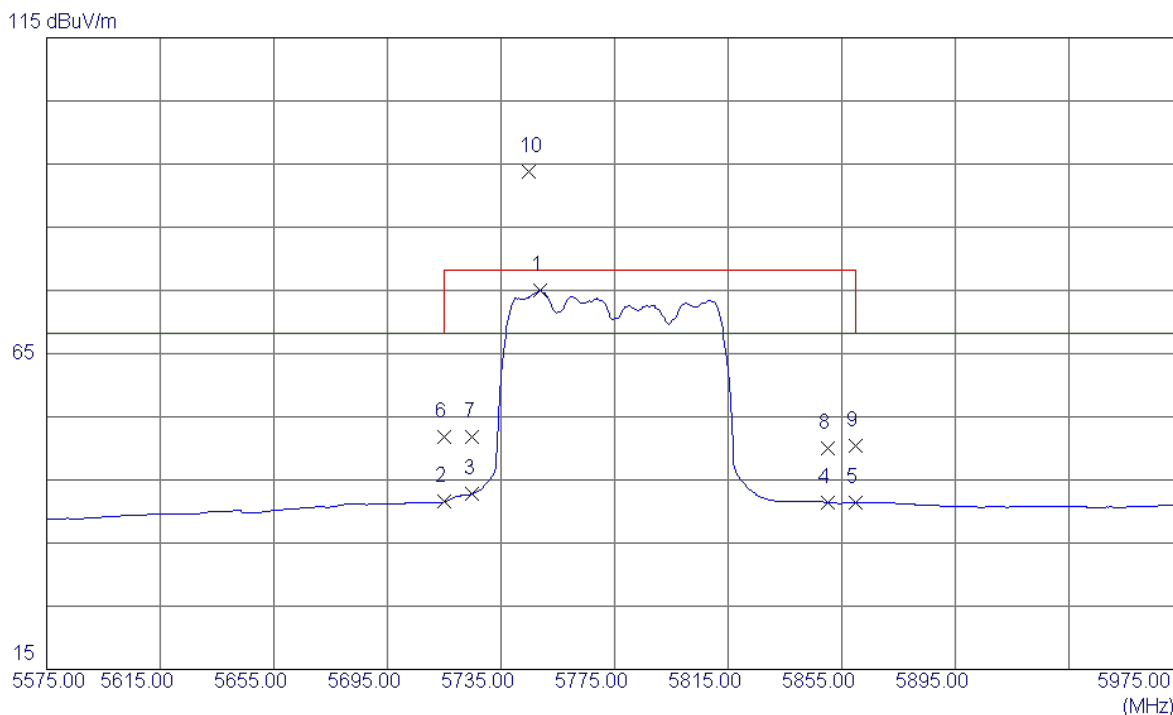

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5748.6000	34.24	40.71	74.95	68.30	6.65	AVG	No Limit
2	5715.0000	1.02	40.54	41.56	68.30	-26.74	AVG	
3	5725.0000	2.25	40.59	42.84	68.30	-25.46	AVG	
4	5850.0000	0.19	41.23	41.42	68.30	-26.88	AVG	
5	5860.0000	0.12	41.28	41.40	68.30	-26.90	AVG	
6	5715.0000	11.34	40.54	51.88	68.30	-16.42	Peak	
7	5725.0000	11.29	40.59	51.88	78.30	-26.42	Peak	
8	5850.0000	8.83	41.23	50.06	78.30	-28.24	Peak	
9	5860.0000	9.20	41.28	50.48	78.30	-27.82	Peak	
10	5744.6000	53.11	40.69	93.80	78.30	15.50	Peak	No Limit


Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz

Horizontal

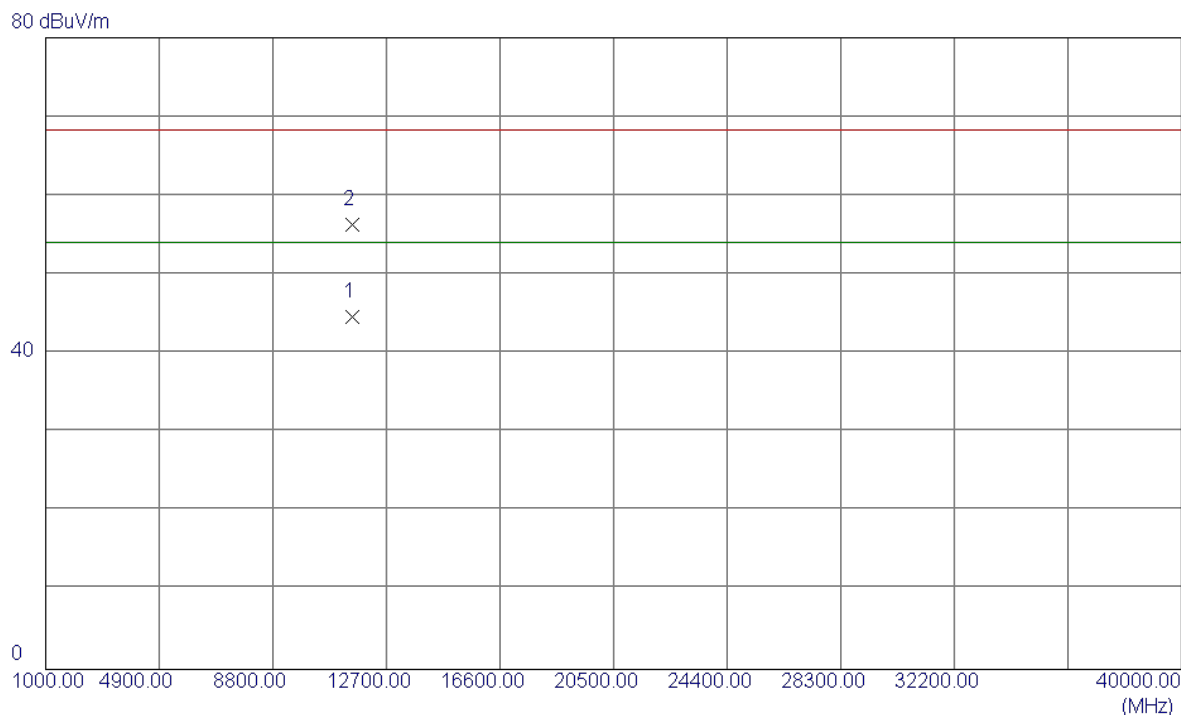

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11549.6800	27.65	17.01	44.66	54.00	-9.34	AVG	
2	11550.1700	39.28	17.01	56.29	68.30	-12.01	Peak	

TX A Mode_DUTY CYCLE

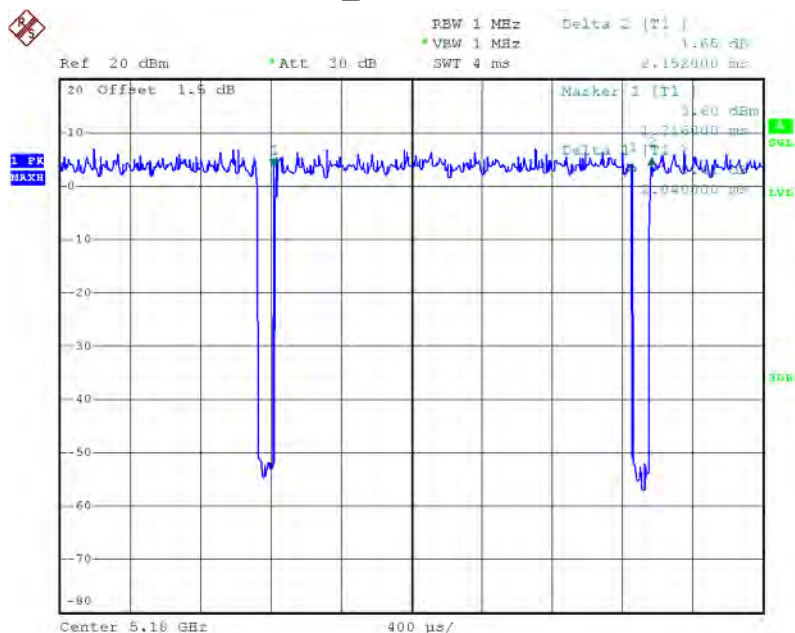

Date: 22.DEC.2015 19:00:19

Duty cycle: TX DUTYMHZ

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$

T_{ON} : 2.04 msec

T_{Total} : 2.15 msec

Duty cycle: 94.88%

$$\text{Duty Factor} = 10 \log(1/\text{Duty cycle})$$


Duty Factor = 0.23

Note: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is less than 98 %, so, the output power and power density should be calculated as

Output Power = Measured power + Duty factor

Power Spectral Density = Measured density + Duty factor

TX N20 Mode_DUTY CYCLE

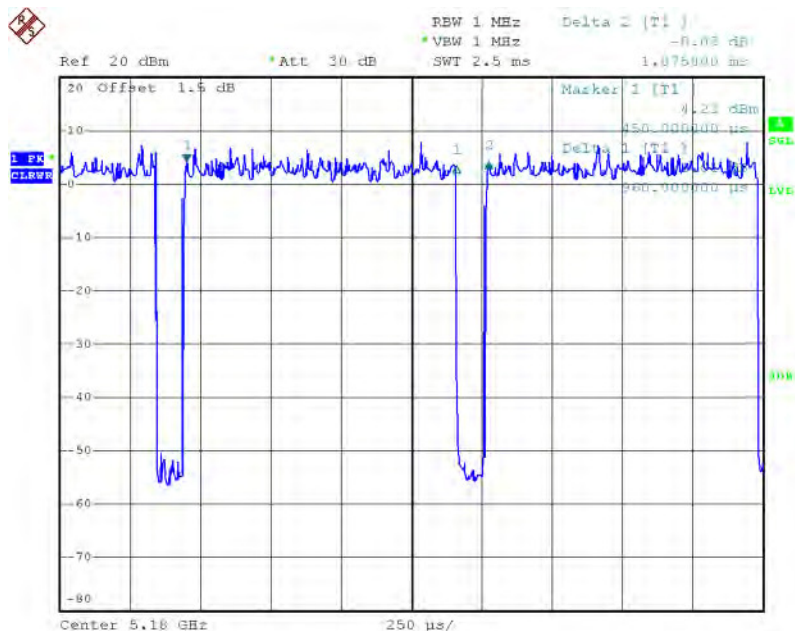

Date: 22.DEC.2015 19:10:20

Duty cycle: TX DUTYMHZ

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$

T_{ON} : 0.96 msec

T_{Total} : 1.08 msec

Duty cycle: 88.89%

$$\text{Duty Factor} = 10 \log(1/\text{Duty cycle})$$


Duty Factor = 0.51

Note: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is less than 98 %, so, the output power and power density should be calculated as

Output Power = Measured power + Duty factor

Power Spectral Density = Measured density + Duty factor

TX N40 Mode_DUTY CYCLE

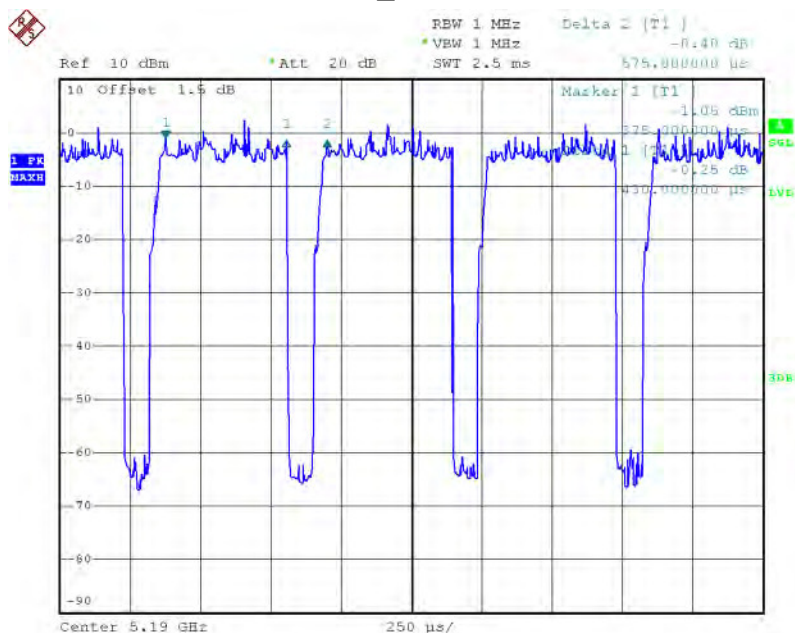

Date: 21.DEC.2015 22:13:15

Duty cycle: TX DUTYMHZ

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$

T_{ON} : 0.43 msec

T_{Total} : 0.57 msec

Duty cycle: 75.44%

$$\text{Duty Factor} = 10 \log(1/\text{Duty cycle})$$


Duty Factor = 1.22

Note: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is less than 98 %, so, the output power and power density should be calculated as

$$\text{Output Power} = \text{Measured power} + \text{Duty factor}$$

$$\text{Power Spectral Density} = \text{Measured density} + \text{Duty factor}$$

TX AC20 Mode_DUTY CYCLE

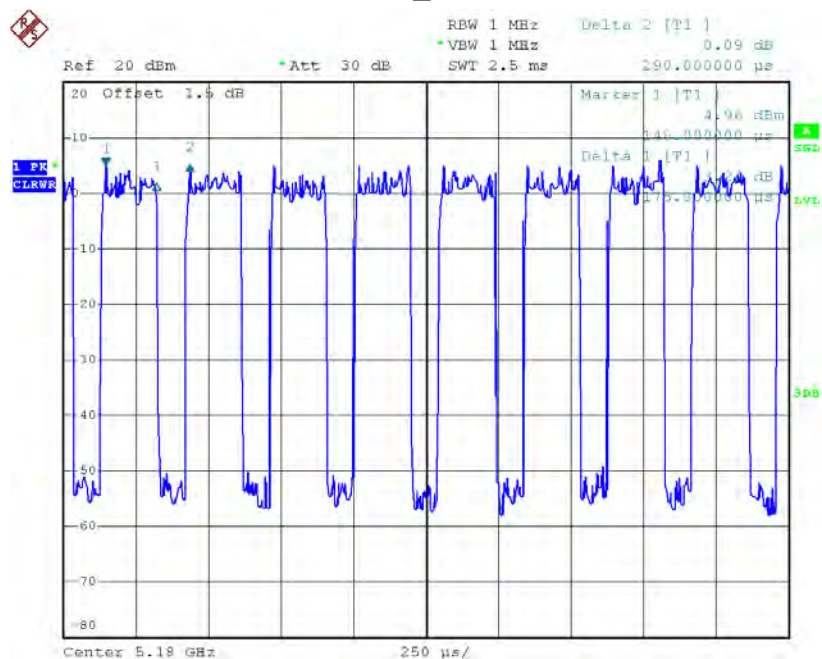

Date: 22.DEC.2015 19:01:28

Duty cycle: TX DUTYMHZ

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$

T_{ON} : 0.18 msec

T_{Total} : 0.29 msec

Duty cycle: 62.07%

$$\text{Duty Factor} = 10 \log(1/\text{Duty cycle})$$


Duty Factor = 2.07

Note: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is less than 98 %, so, the output power and power density should be calculated as

Output Power = Measured power + Duty factor

Power Spectral Density = Measured density + Duty factor

TX AC40 Mode_DUTY CYCLE

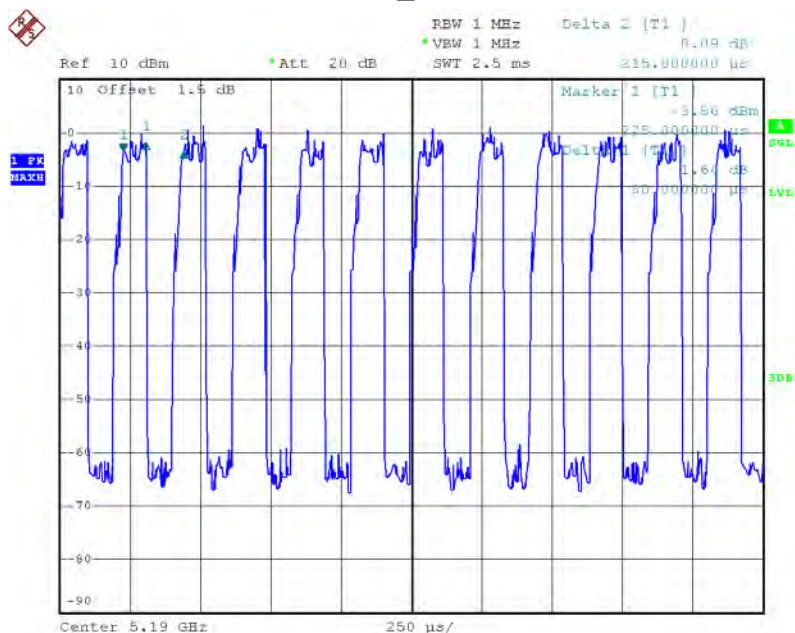

Date: 21.DEC.2015 22:23:48

Duty cycle: TX DUTYMHZ

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$

T_{ON} : 0.08 msec

T_{Total} : 0.22 msec

Duty cycle: 36.36%

$$\text{Duty Factor} = 10 \log(1/\text{Duty cycle})$$

Duty Factor = 4.39

Note: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is less than 98 %, so, the output power and power density should be calculated as

Output Power = Measured power + Duty factor


Power Spectral Density = Measured density + Duty factor

ATTACHMENT E - BANDWIDTH

Test Mode: UNII-1/TX A Mode_CH36/CH40/CH48


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH36	5180	20.19	16.40
CH40	5200	20.31	16.40
CH48	5240	20.25	16.40

TX CH36

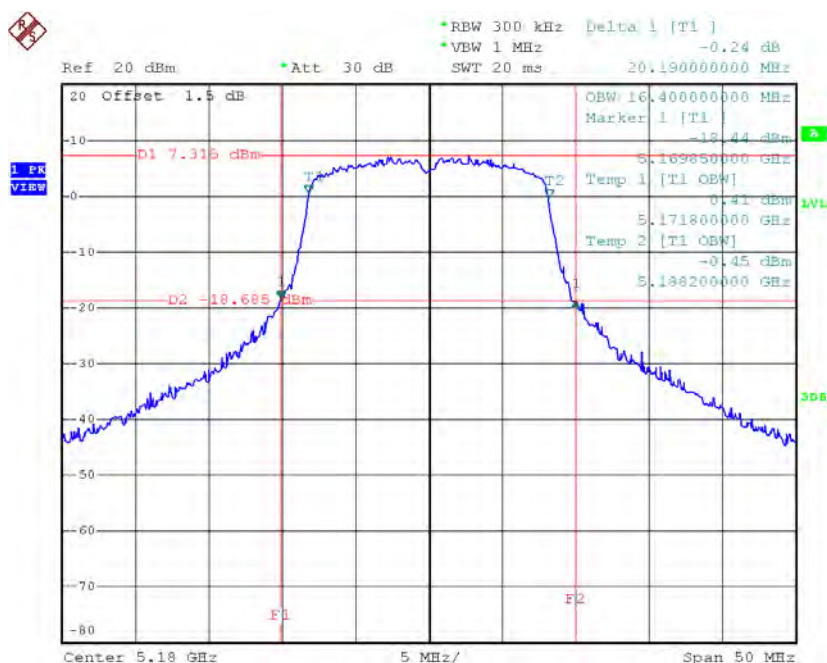


Date: 21.DEC.2015 18:51:45

TX CH40

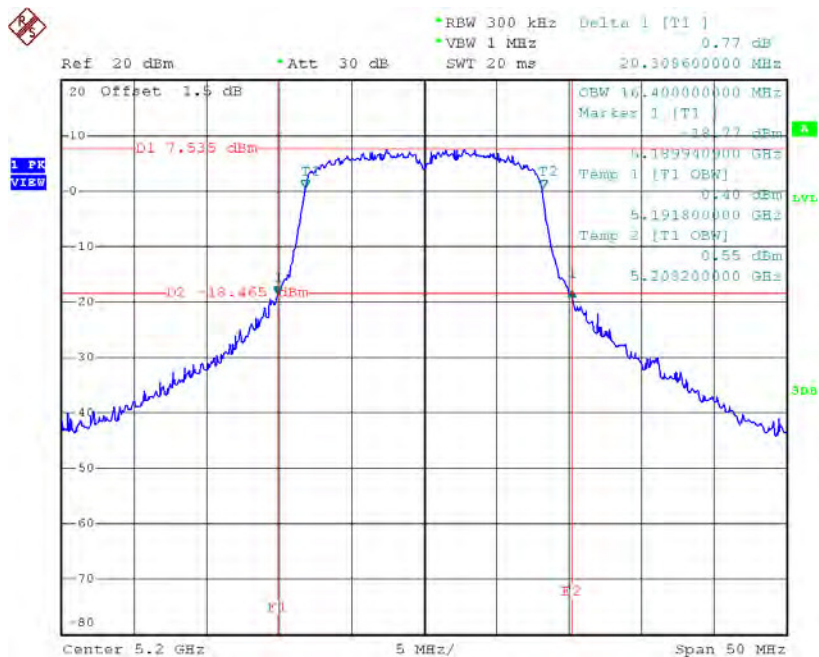

Date: 21.DEC.2015 18:54:44

TX CH48

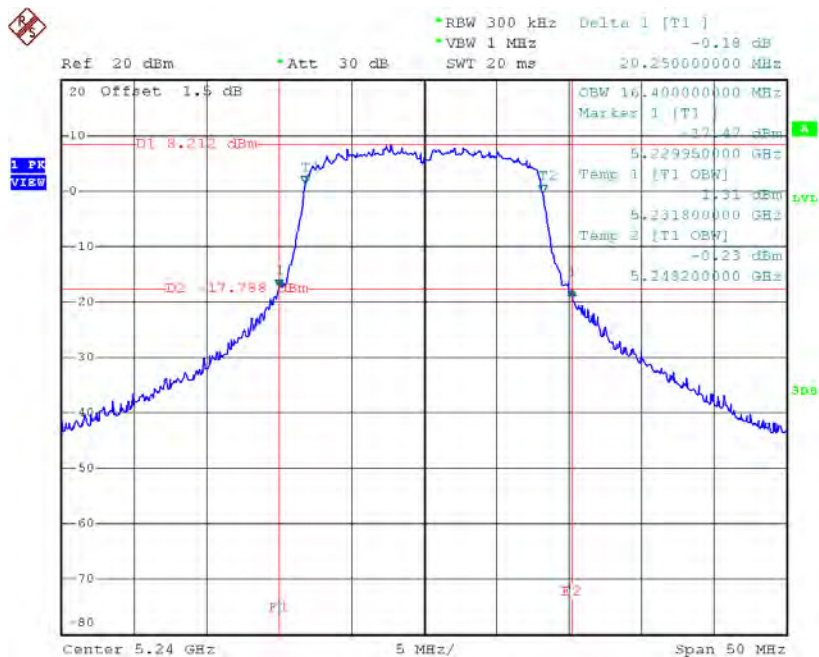


Date: 21.DEC.2015 18:56:06

Test Mode: UNII-1/TX N20 Mode_CH36/CH40/CH48


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH36	5180	20.79	17.50
CH40	5200	20.70	17.60
CH48	5240	20.69	17.50

TX CH36

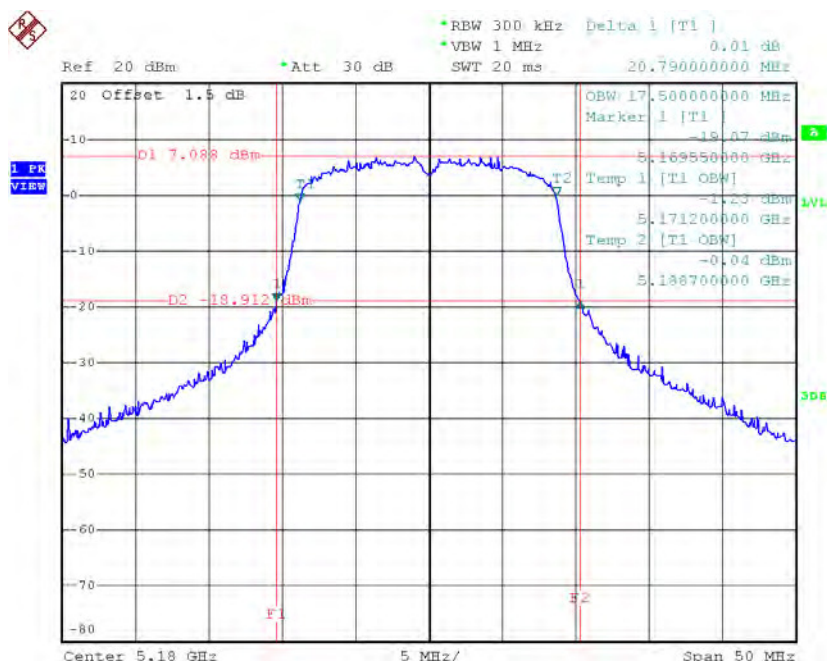


Date: 21.DEC.2015 19:10:35

TX CH40

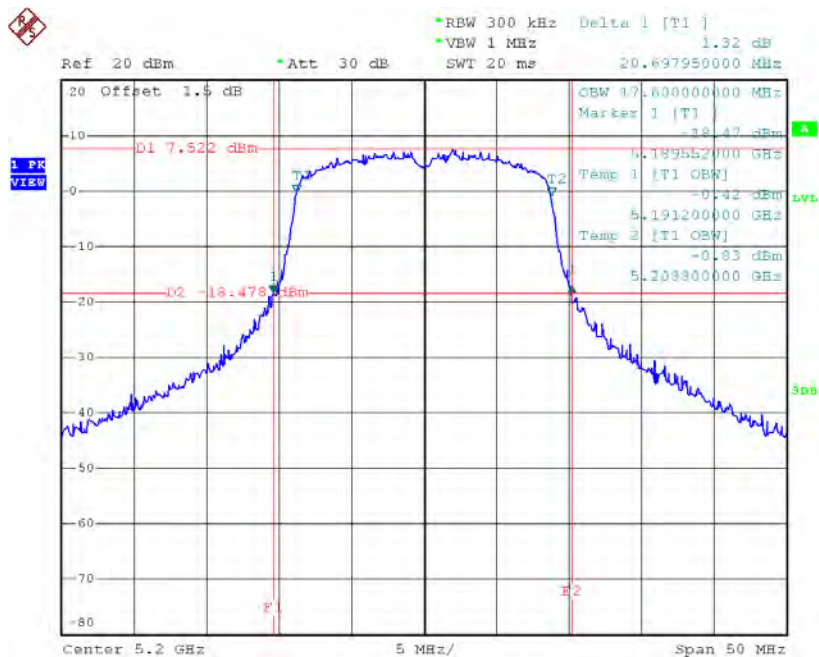

Date: 21.DEC.2015 19:11:36

TX CH48

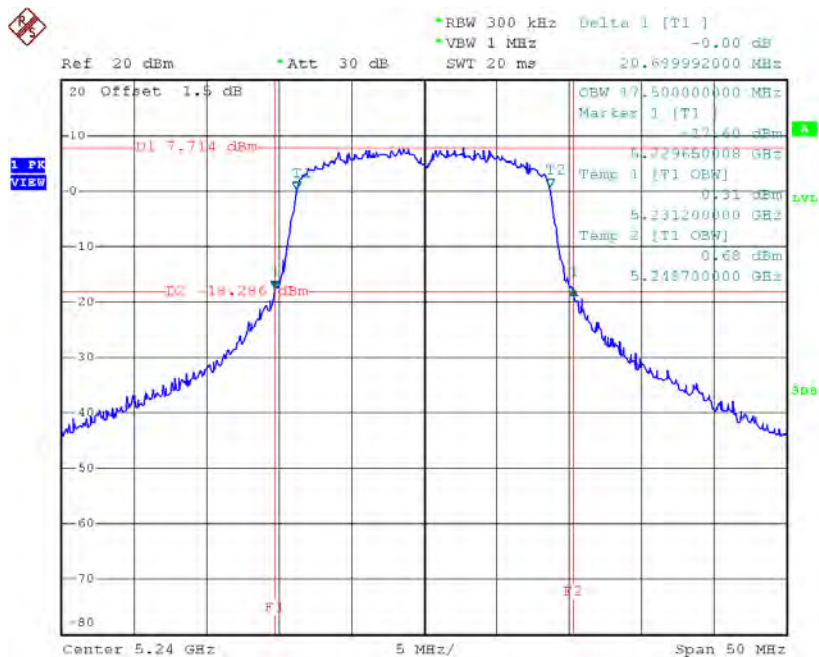


Date: 21.DEC.2015 19:12:25

Test Mode: UNII-1/TX N40 Mode_CH38/CH46


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH38	5190	40.40	36.00
CH46	5230	40.40	36.00

TX CH38

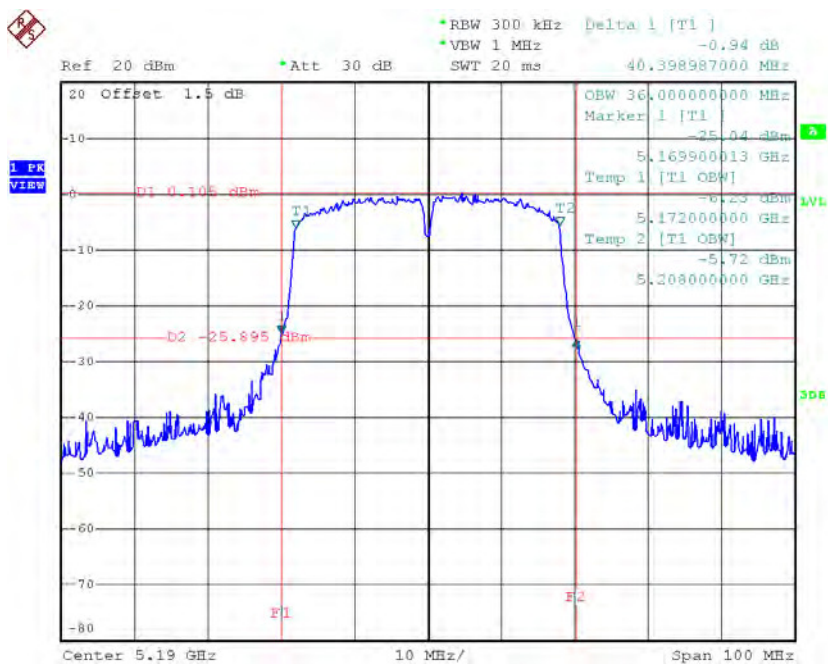

Date: 21.DEC.2015 21:16:40


TX CH46

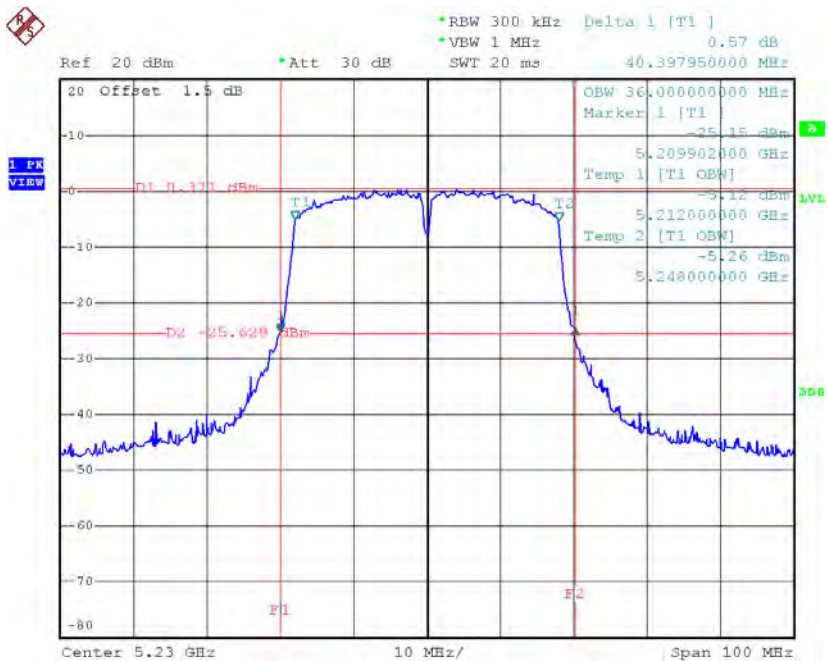

Date: 21.DEC.2015 21:17:46


Test Mode: UNII-2A/TX A Mode_CH52/CH60/CH64

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH52	5260	19.99	16.40
CH60	5300	20.05	16.50
CH64	5320	19.75	16.50

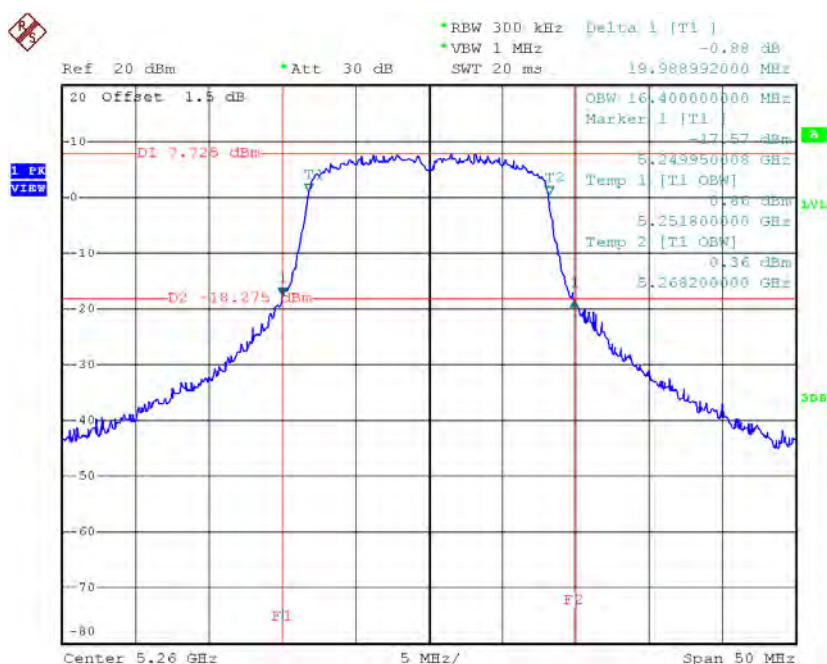TX CH52


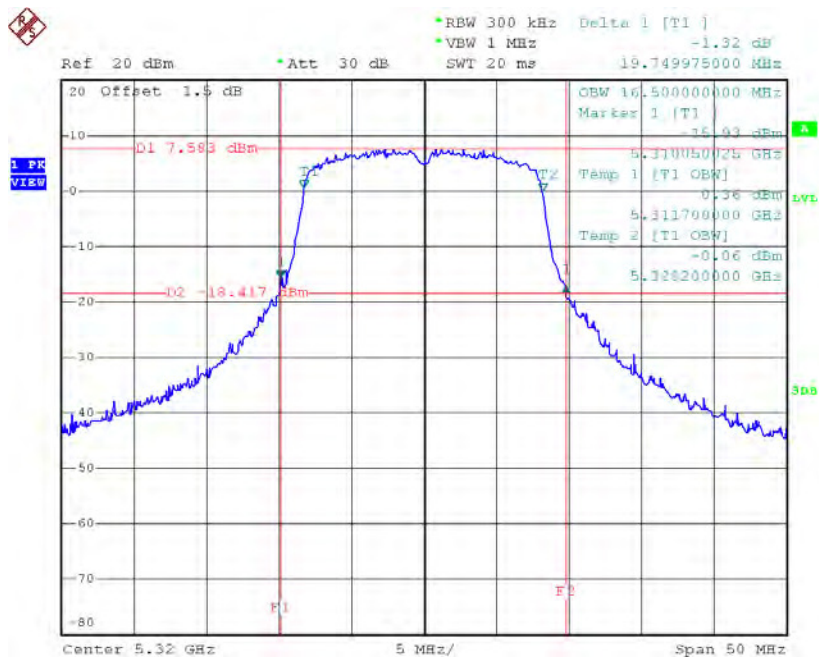
Date: 21.DEC.2015 18:57:19

TX CH60

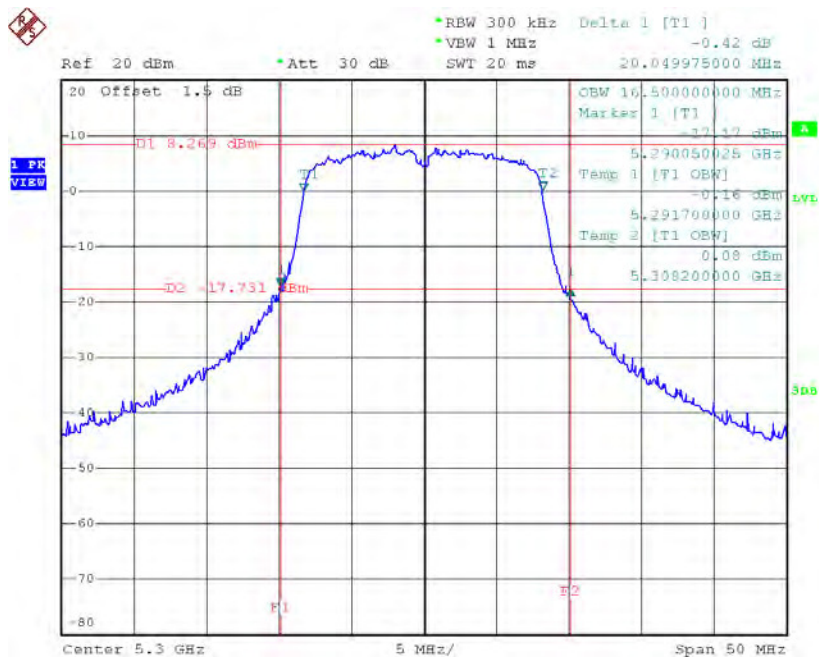

Date: 21.DEC.2015 18:59:02

TX CH64




Date: 21.DEC.2015 18:59:49

Test Mode: UNII-2A/TX N20 Mode_CH52/CH60/CH64


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH52	5260	20.69	17.50
CH60	5300	20.66	17.50
CH64	5320	20.80	17.50

TX CH52

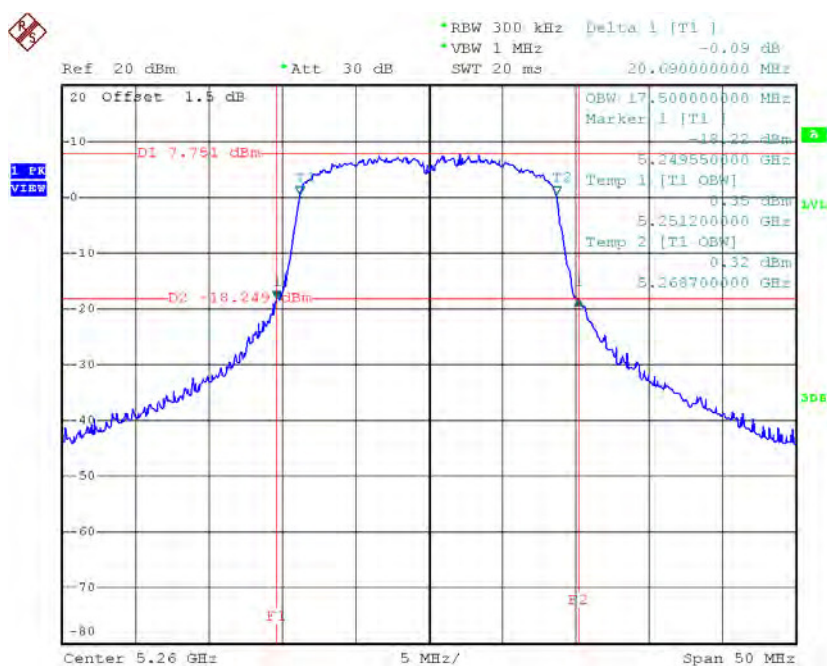


Date: 21.DEC.2015 19:13:35

TX CH60

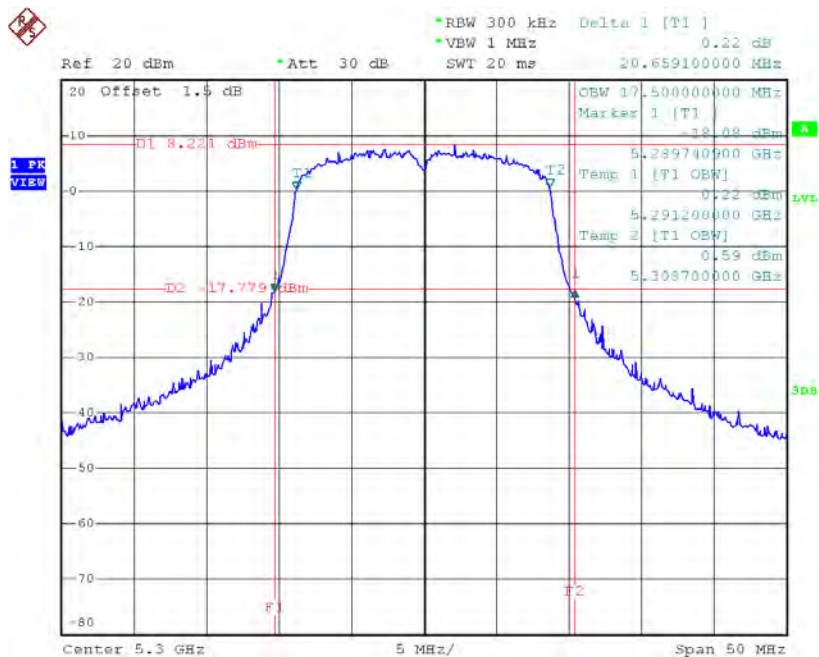

Date: 21.DEC.2015 19:14:39

TX CH64

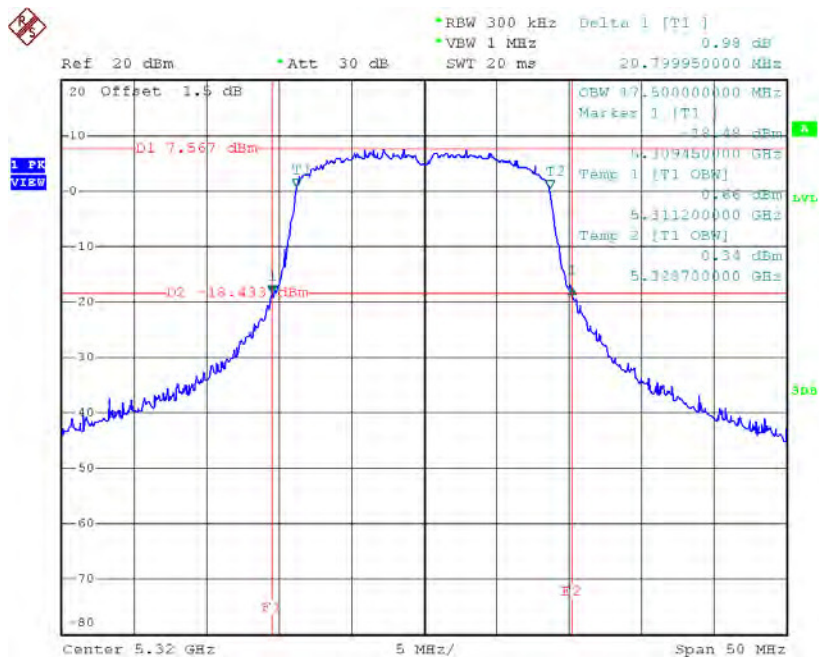


Date: 21.DEC.2015 19:15:26

Test Mode: UNII-2A/TX N40 Mode_CH54/CH62


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH54	5270	40.80	36.00
CH62	5310	40.40	36.00

TX CH54

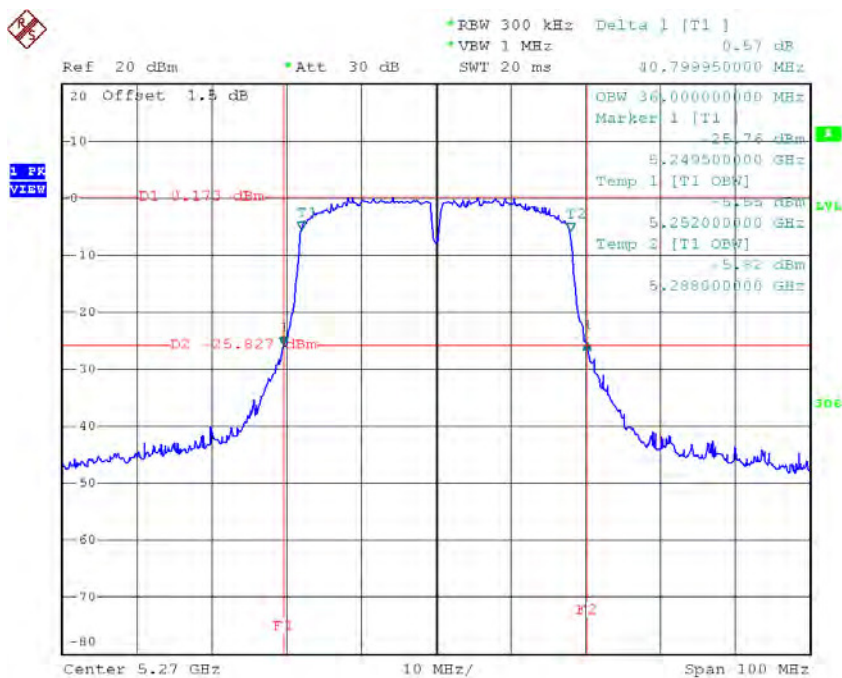

Date: 21.DEC.2015 21:18:51

TX CH62

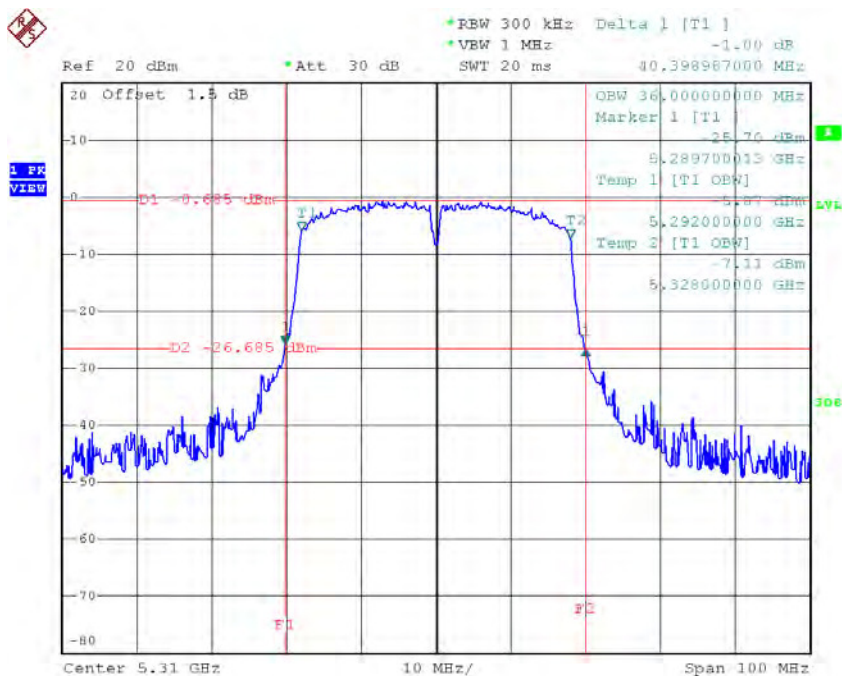


Date: 22.DEC.2015 18:37:08

Test Mode: UNII-2C/TX A Mode_CH100/CH116/CH140


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH100	5500	20.59	16.40
CH116	5580	21.39	16.50
CH140	5700	20.59	16.40

TX CH100

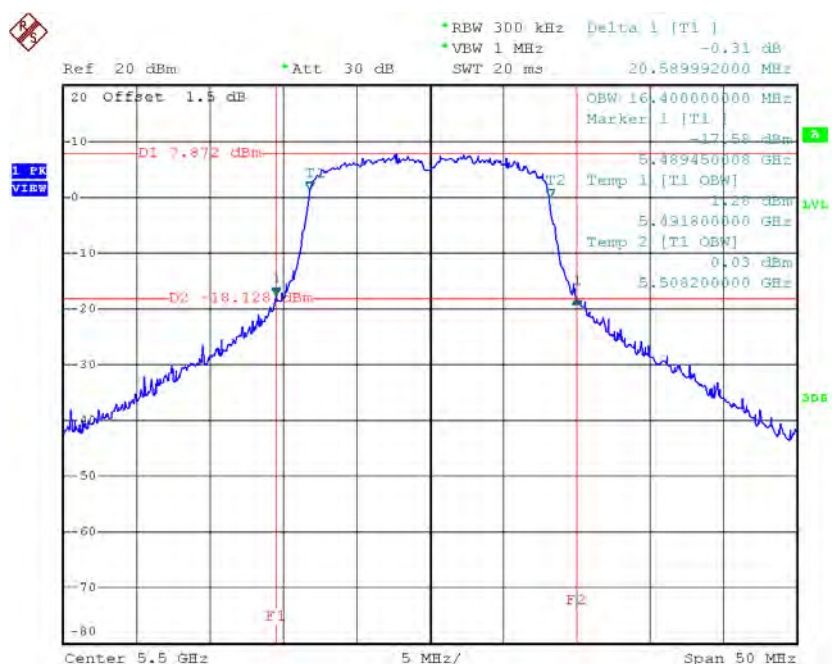


Date: 21.DEC.2015 19:00:48

TX CH116

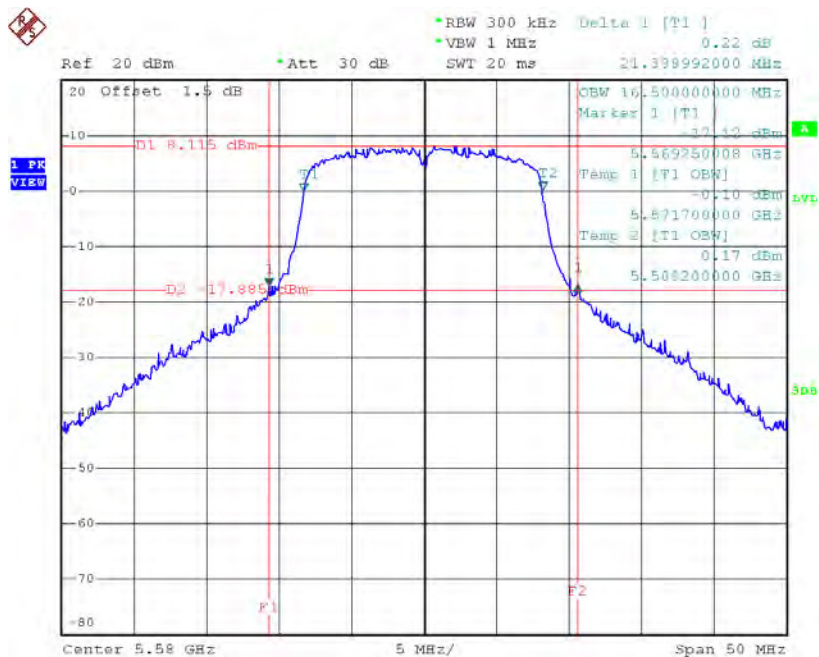

Date: 21.DEC.2015 19:01:46

TX CH140

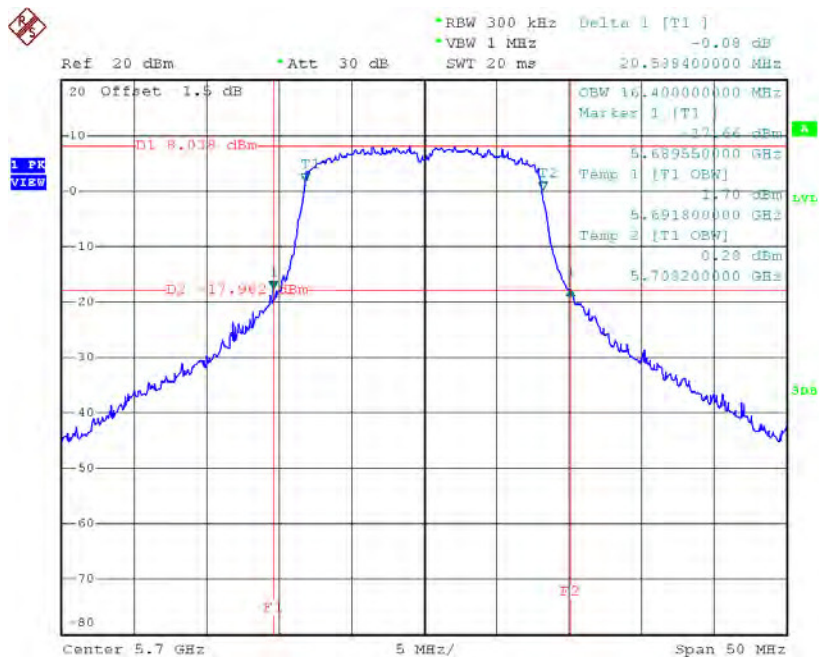


Date: 21.DEC.2015 19:02:38

Test Mode: UNII-2C/TX N20 Mode_CH100/CH116/CH140


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH100	5500	21.19	17.50
CH116	5580	20.79	17.50
CH140	5700	20.99	17.50

TX CH100

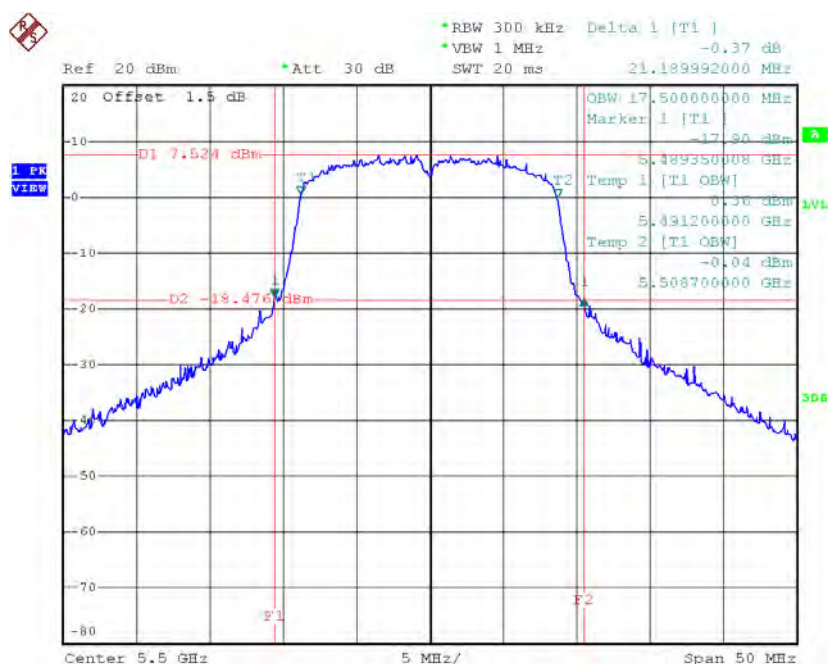


Date: 21.DEC.2015 19:16:36

TX CH116

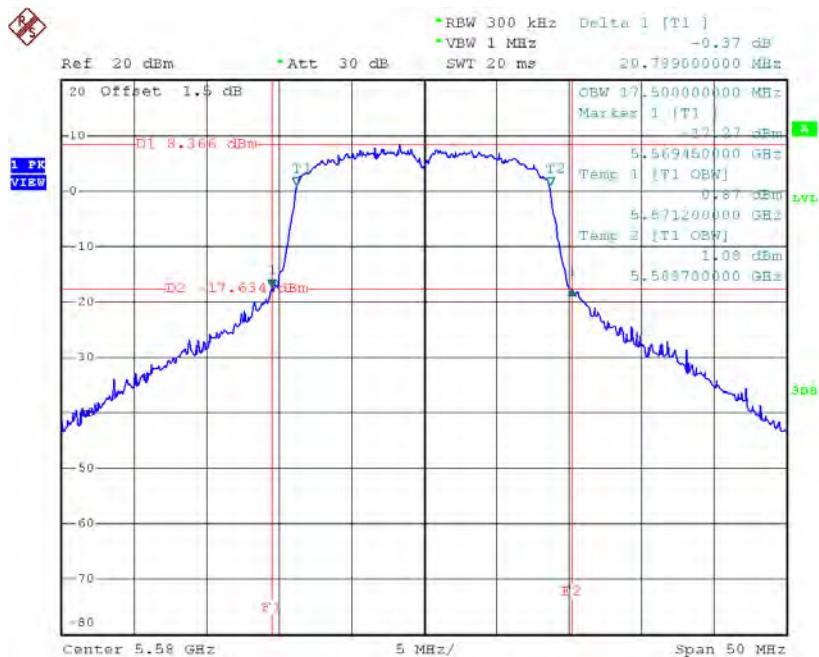

Date: 21.DEC.2015 19:17:38

TX CH140

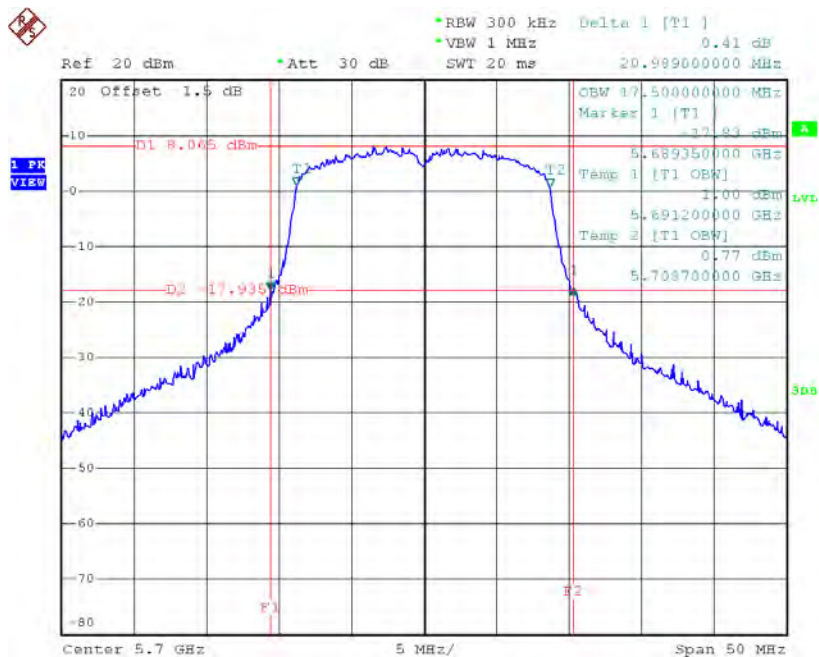


Date: 21.DEC.2015 19:18:27

Test Mode: UNII-2C/TX N40 Mode_CH102/CH110/CH134


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH102	5510	40.30	36.00
CH110	5550	40.10	36.00
CH134	5670	40.11	36.00

TX CH102

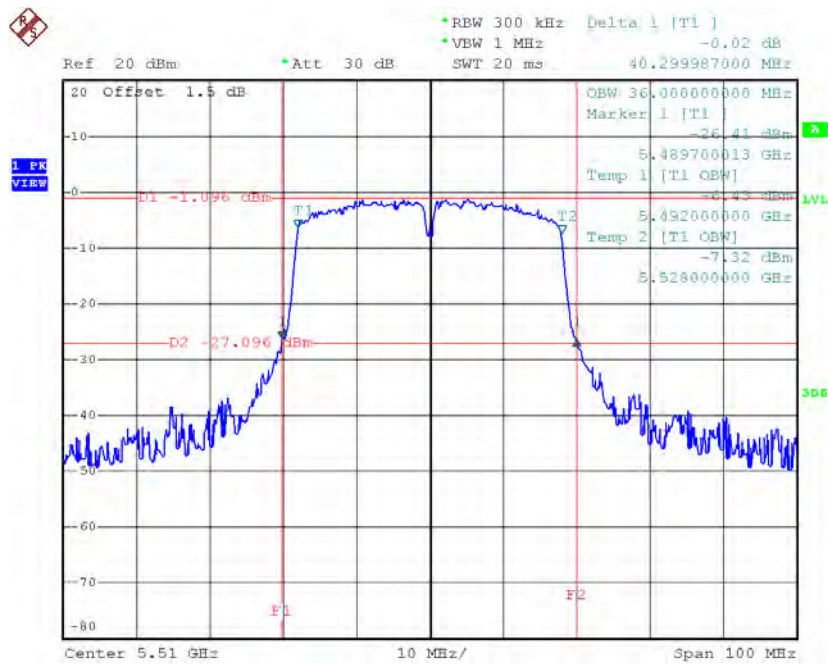


Date: 21.DEC.2015 21:21:10

TX CH110

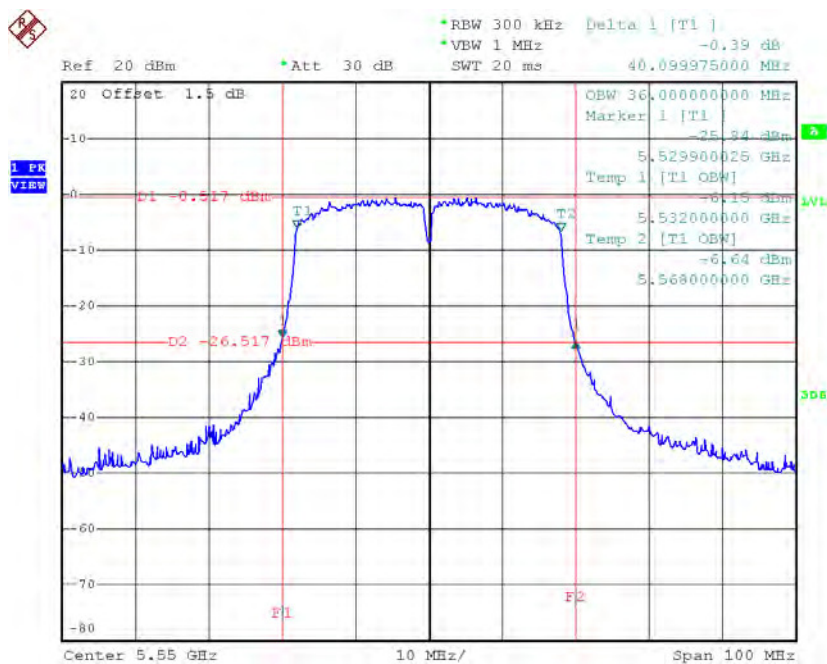

Date: 21.DEC.2015 21:22:07

TX CH134

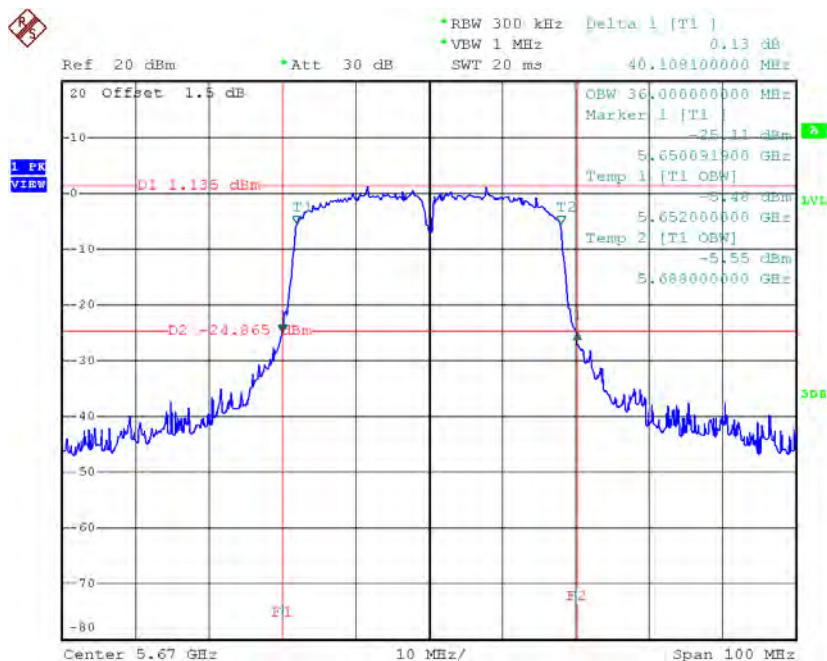


Date: 21.DEC.2015 21:23:18

Test Mode: UNII-3/ TX A Mode_CH149/CH157/CH165


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH149	5745	15.05	16.30	>=500
CH157	5785	15.40	16.40	>=500
CH165	5825	15.50	16.30	>=500

TX CH 149

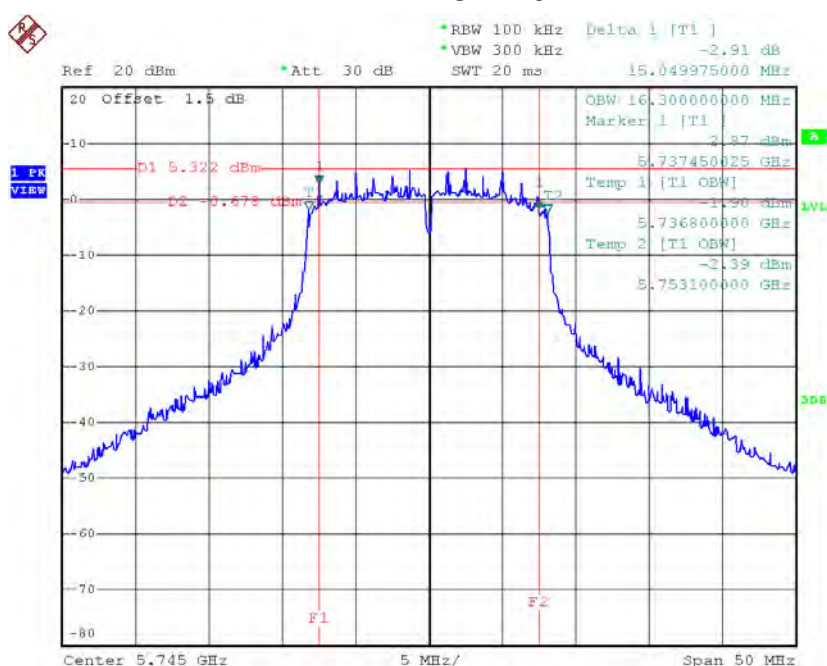


Date: 21.DEC.2015 19:03:47

TX CH 157

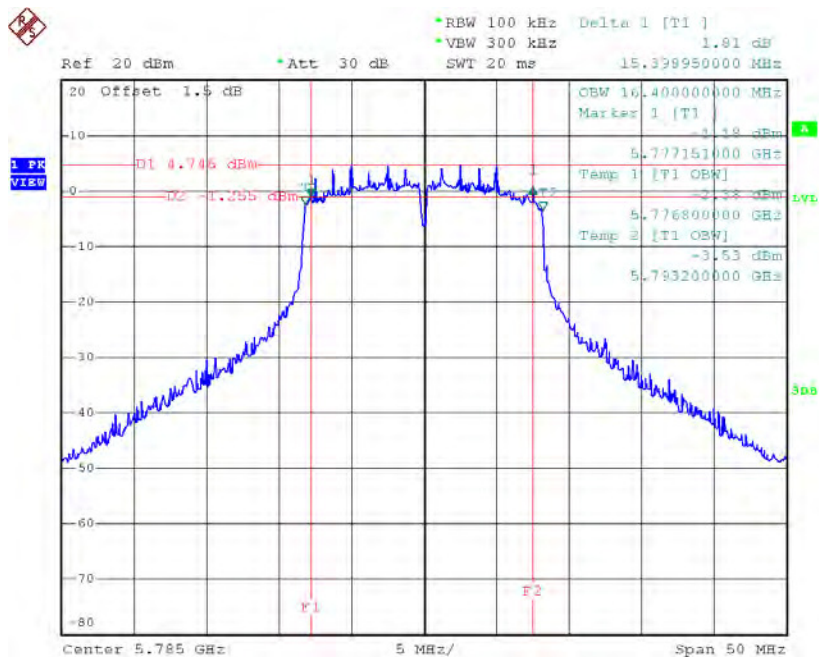

Date: 21.DEC.2015 19:06:17


TX CH 165

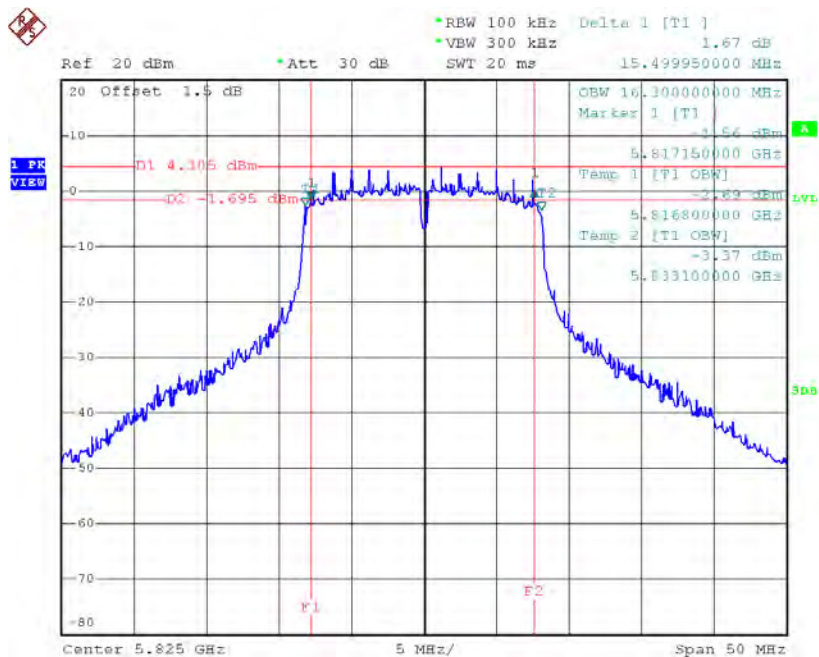

Date: 21.DEC.2015 19:07:08


Test Mode: UNII-3/ TX N20 Mode_CH149/CH157/CH165

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH149	5745	14.55	17.40	>=500
CH157	5785	15.20	17.50	>=500
CH165	5825	15.20	17.50	>=500

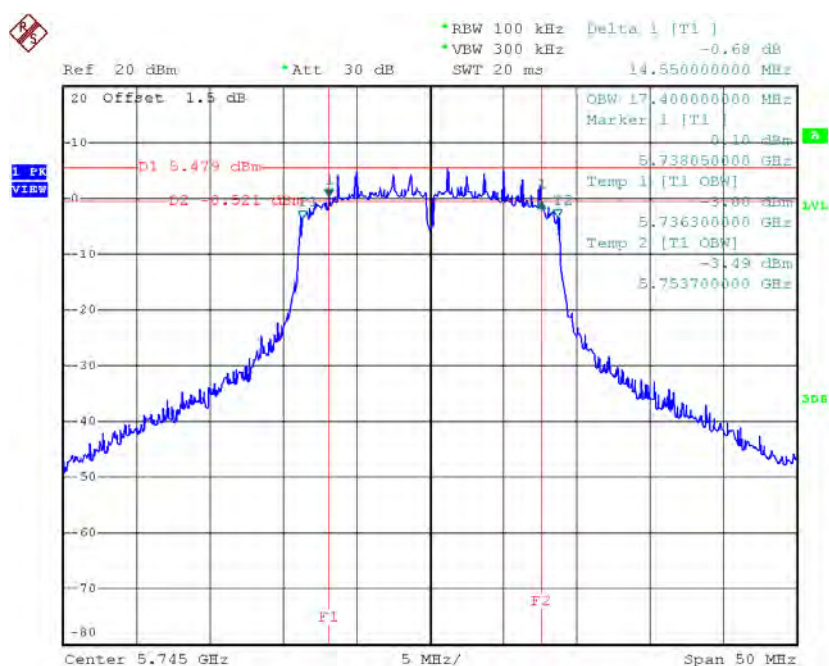TX CH 149


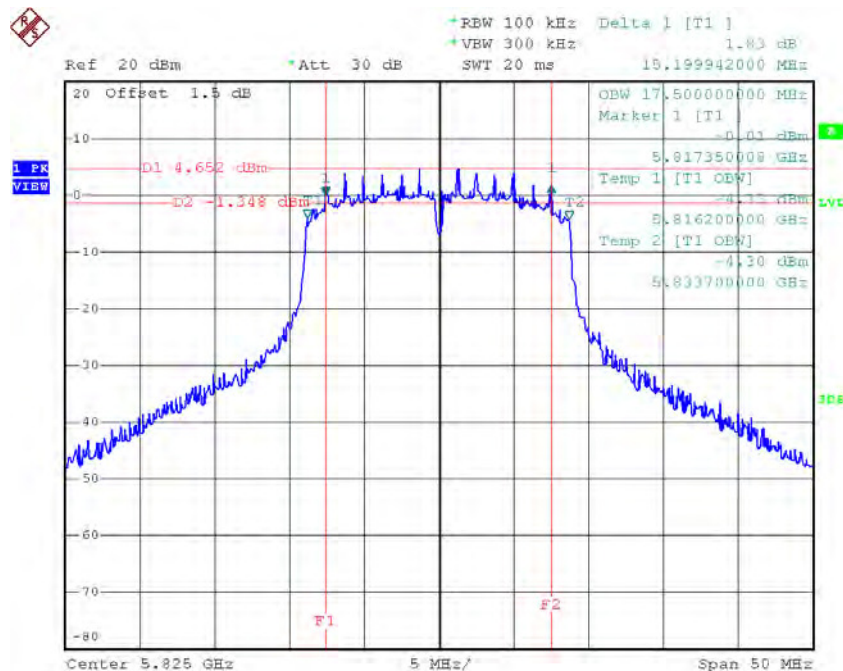
Date: 21.DEC.2015 19:19:39

TX CH 157

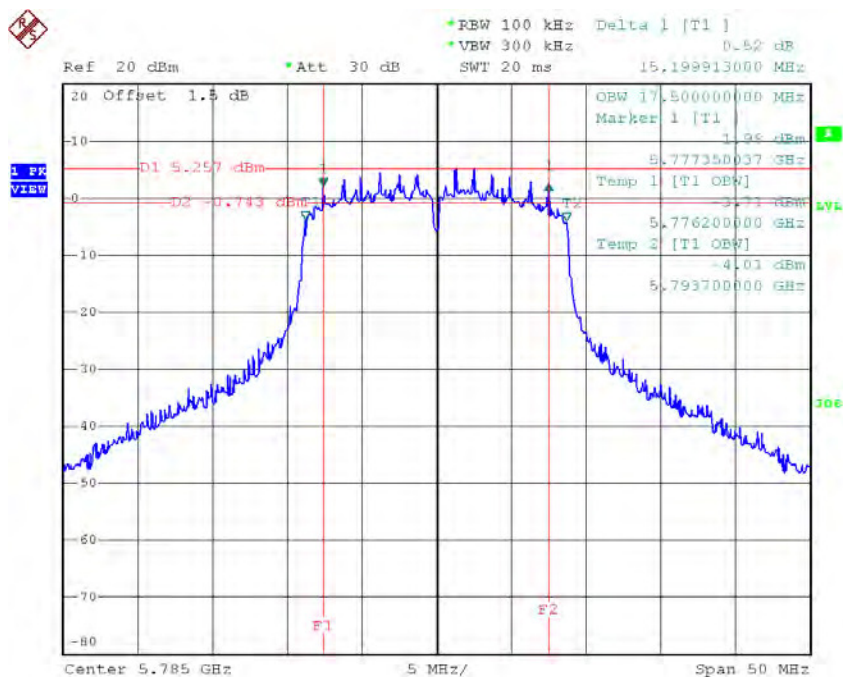

Date: 21.DEC.2015 19:21:30

TX CH 165




Date: 21.DEC.2015 19:22:20

Test Mode: UNII-3/ TX N40 Mode_CH151/CH159


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH151	5755	35.30	36.00	>=500
CH159	5795	35.30	35.80	>=500

TX CH 151

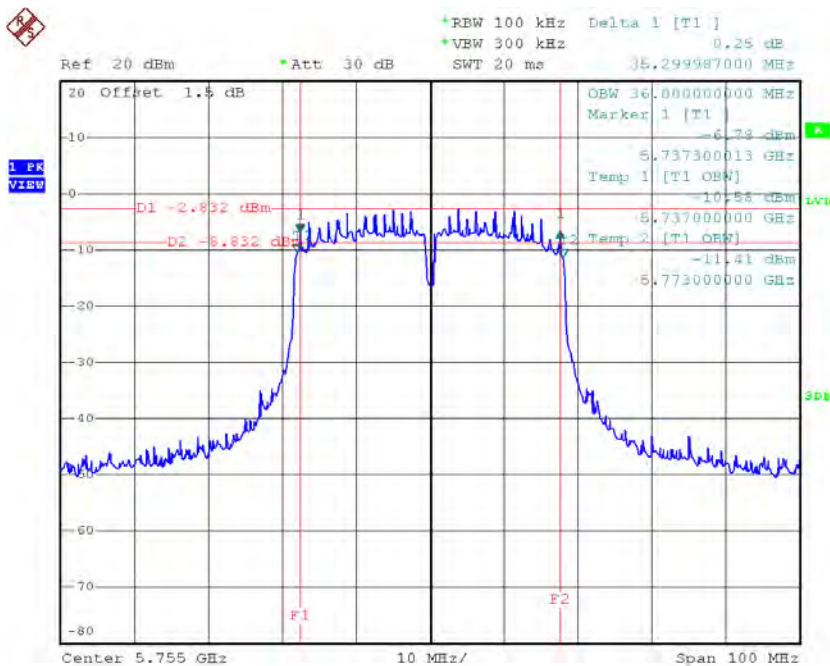

Date: 21.DEC.2015 21:24:43

TX CH 159

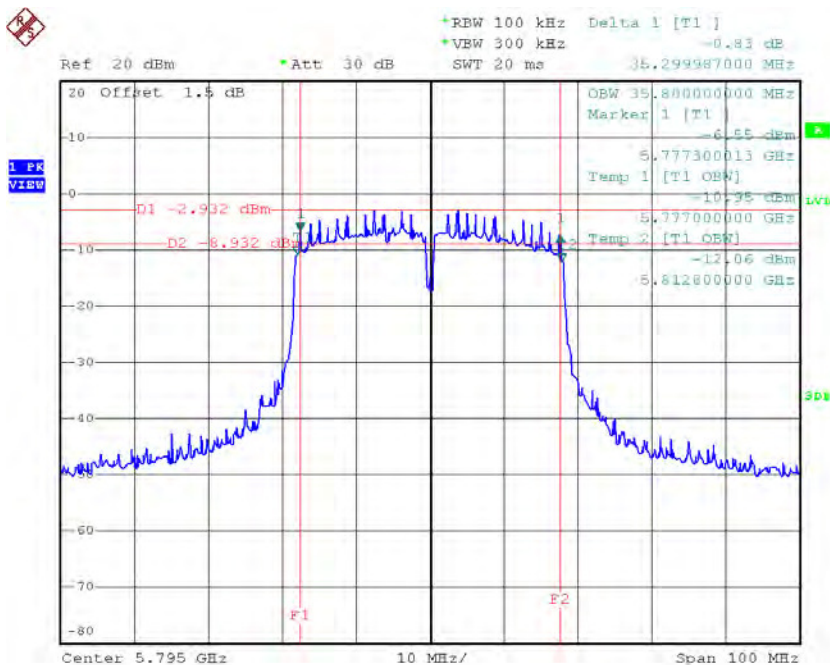


Date: 21.DEC.2015 21:25:44

Test Mode: UNII-1/TX AC20 Mode_CH36/CH40/CH48


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH36	5180	22.39	18.00
CH40	5200	22.60	18.00
CH48	5240	22.49	18.10

TX CH36

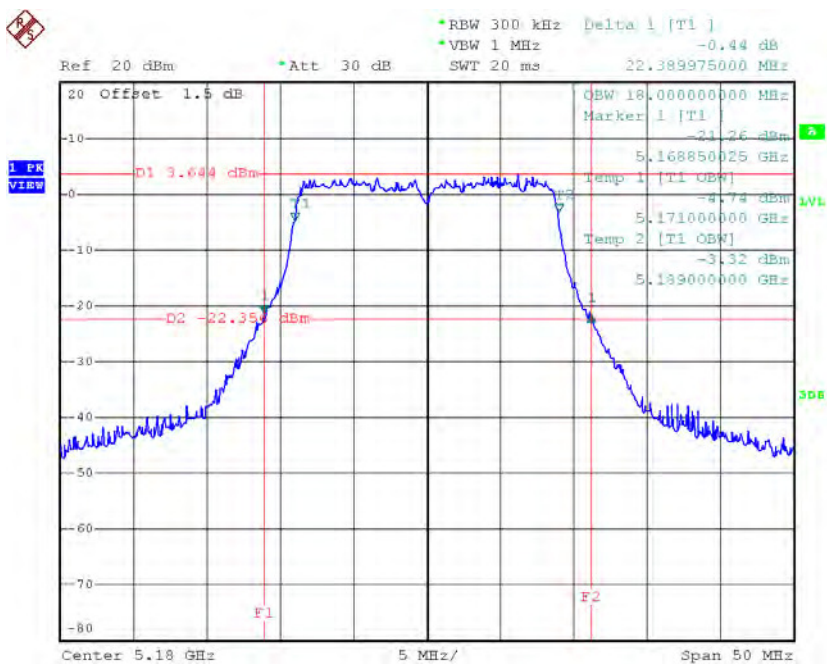


Date: 21.DEC.2015 19:24:01

TX CH40

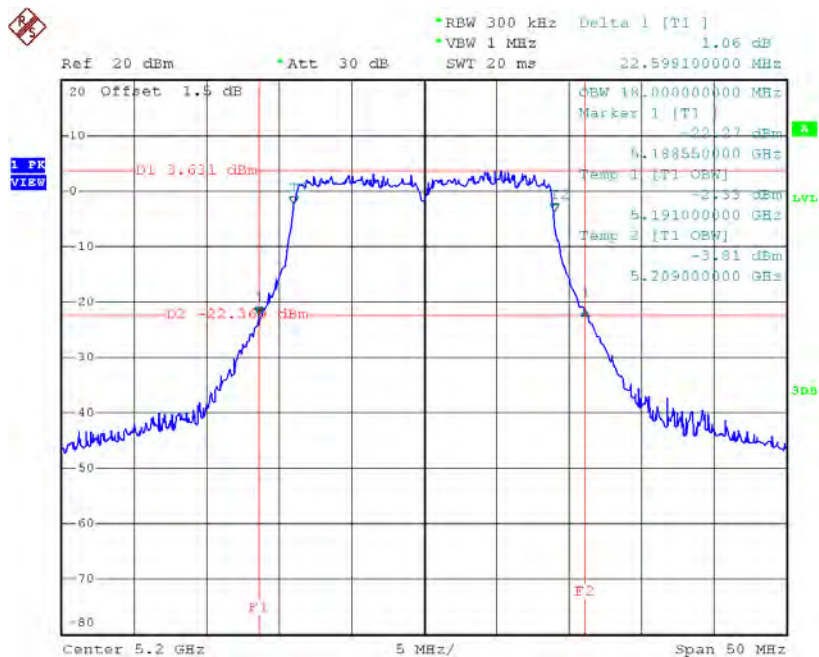

Date: 21.DEC.2015 19:25:00

TX CH48

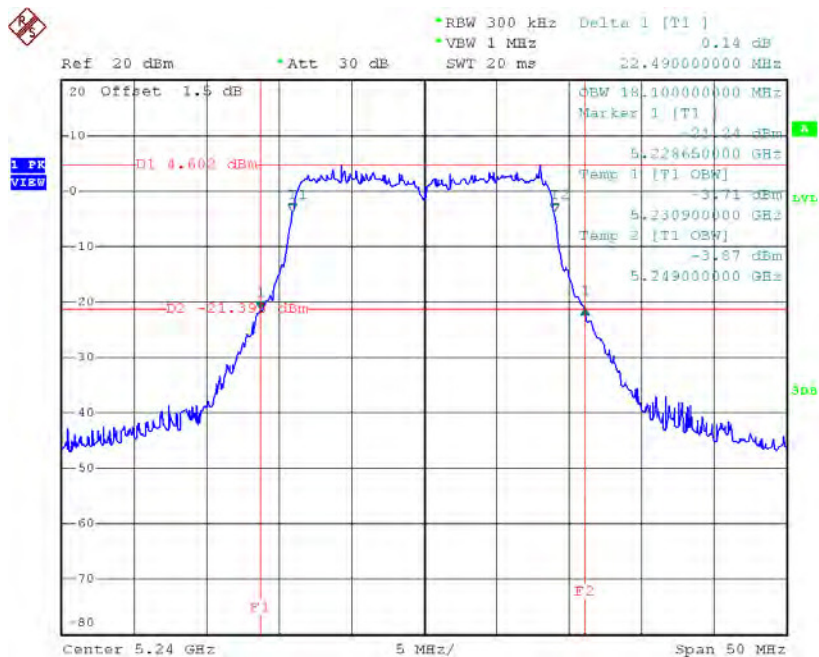


Date: 21.DEC.2015 19:25:48

Test Mode: UNII-1/TX AC40 Mode_CH38/CH46


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH38	5190	43.30	36.40
CH46	5230	43.10	36.40

TX CH38

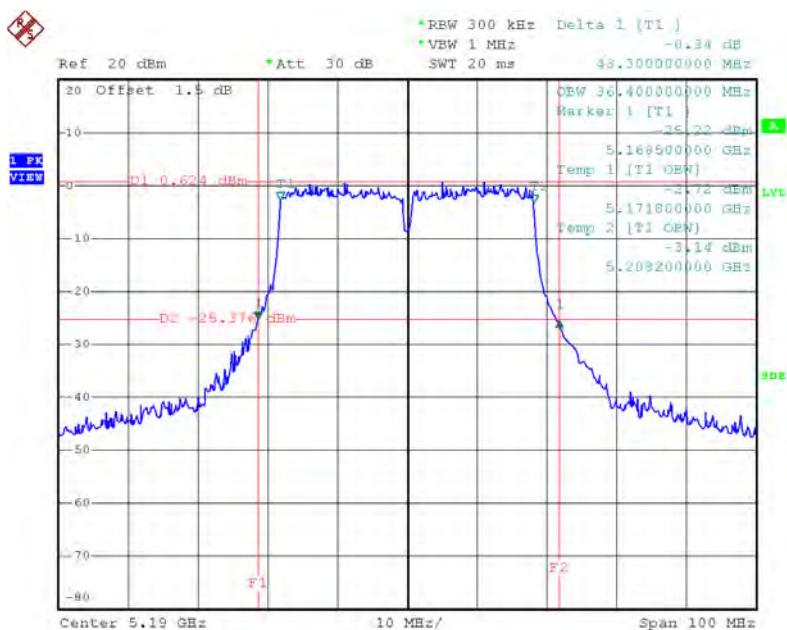

Date: 21.DEC.2015 20:07:17

TX CH46

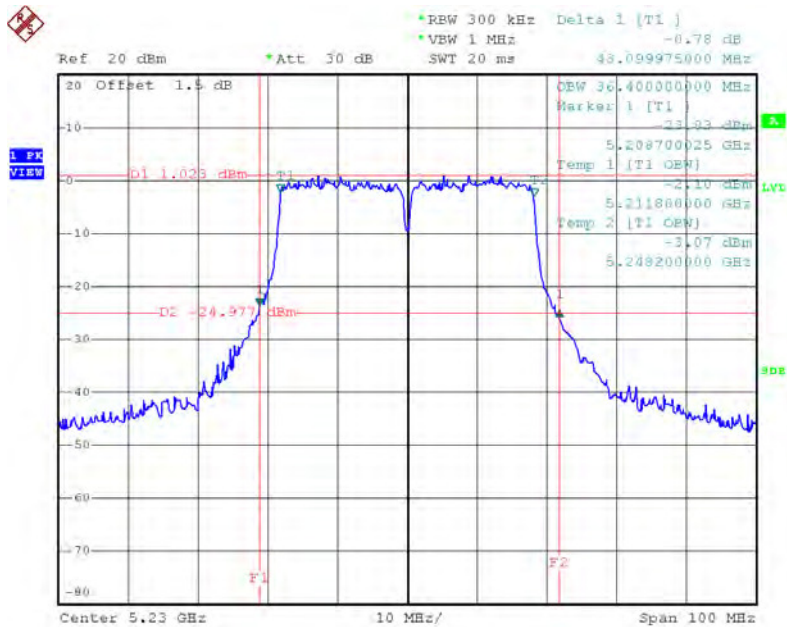


Date: 21.DEC.2015 20:10:56

Test Mode: UNII-1/TX AC80 Mode_CH42

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH42	5210	85.59	76.00

TX CH42

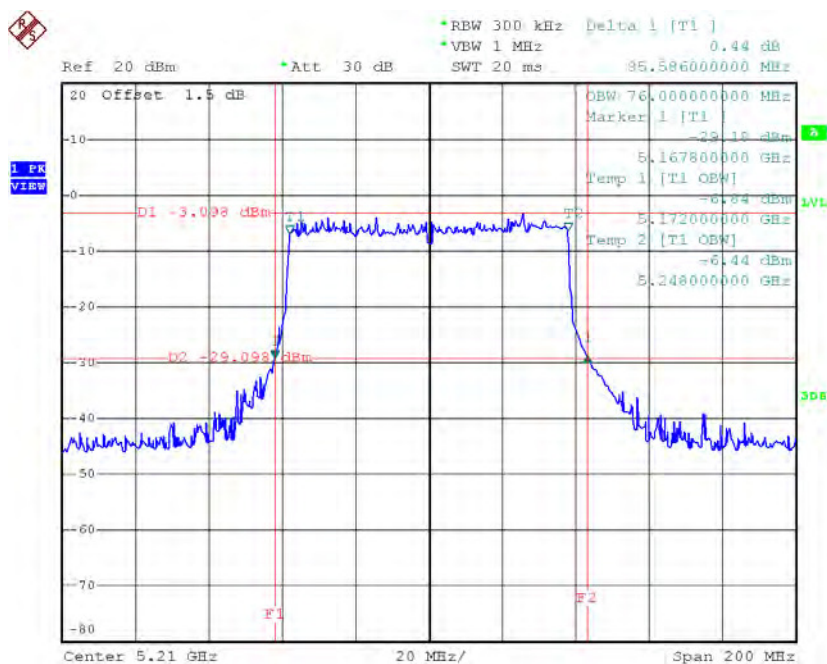


Date: 22.DEC.2015 18:27:05

Test Mode: UNII-2A/TX AC20 Mode_CH52/CH60/CH64


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH52	5260	22.31	18.00
CH60	5300	22.75	18.10
CH64	5320	22.60	18.00

TX CH52

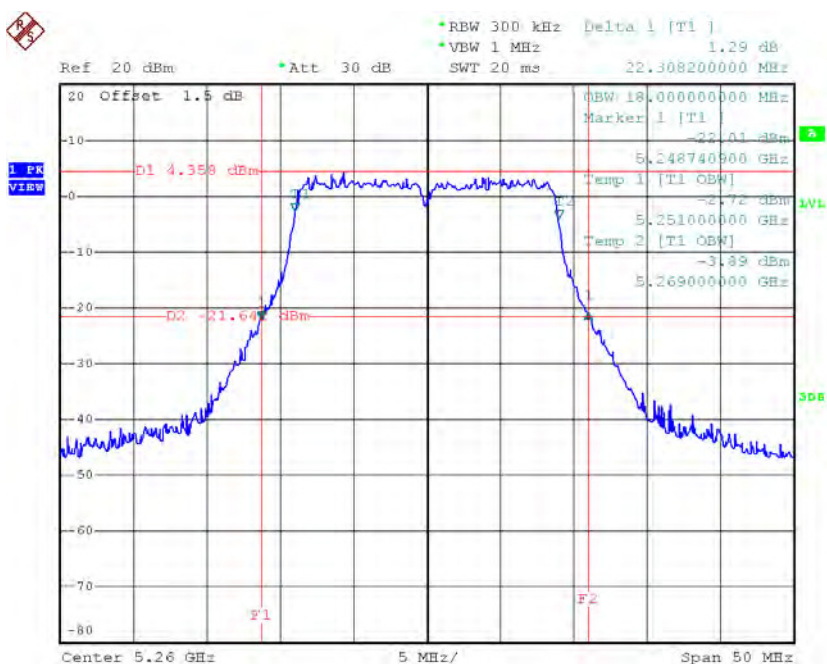


Date: 21.DEC.2015 19:26:48

TX CH60

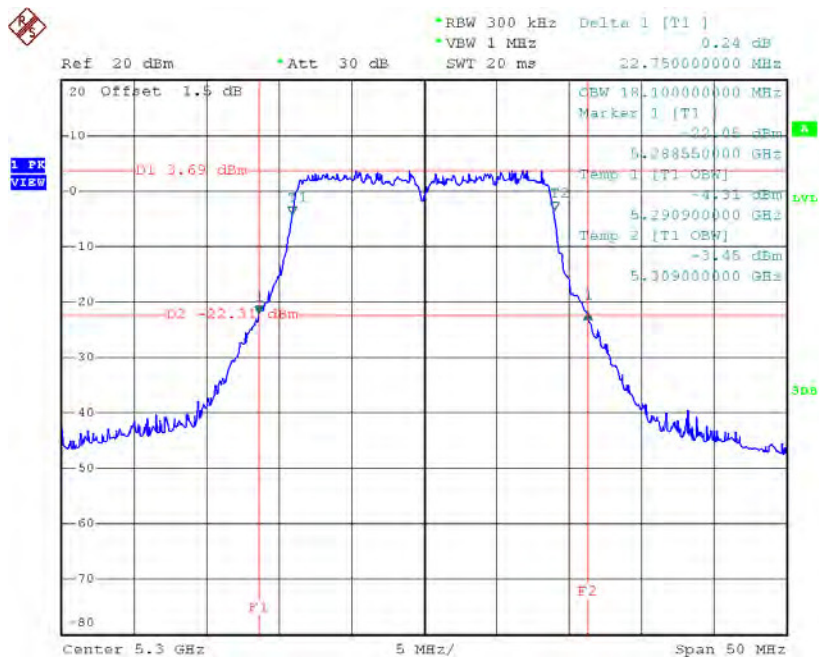

Date: 21.DEC.2015 19:27:40

TX CH64

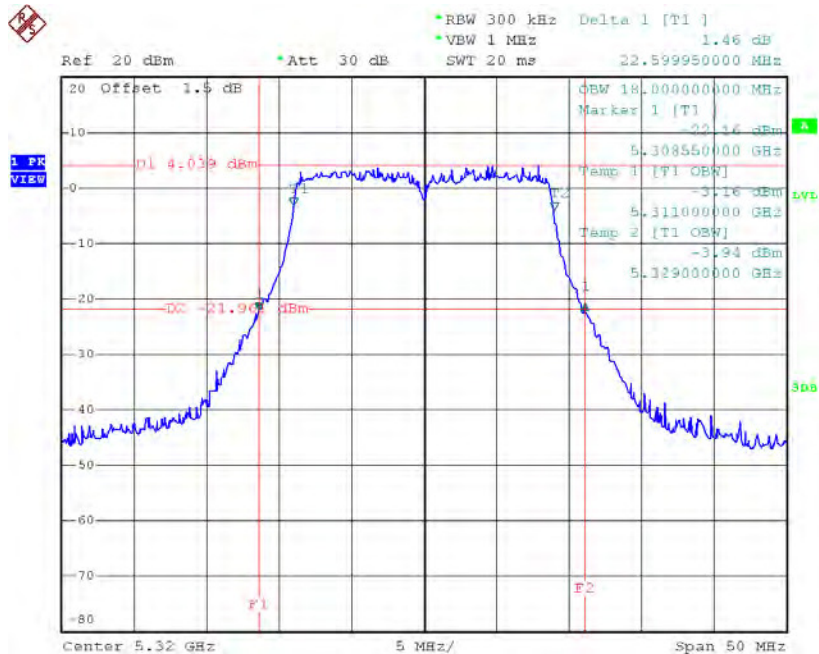


Date: 21.DEC.2015 19:28:25

Test Mode: UNII-2A/TX AC40 Mode_CH54/CH62


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH54	5270	42.79	36.40
CH62	5310	42.90	36.60

TX CH54

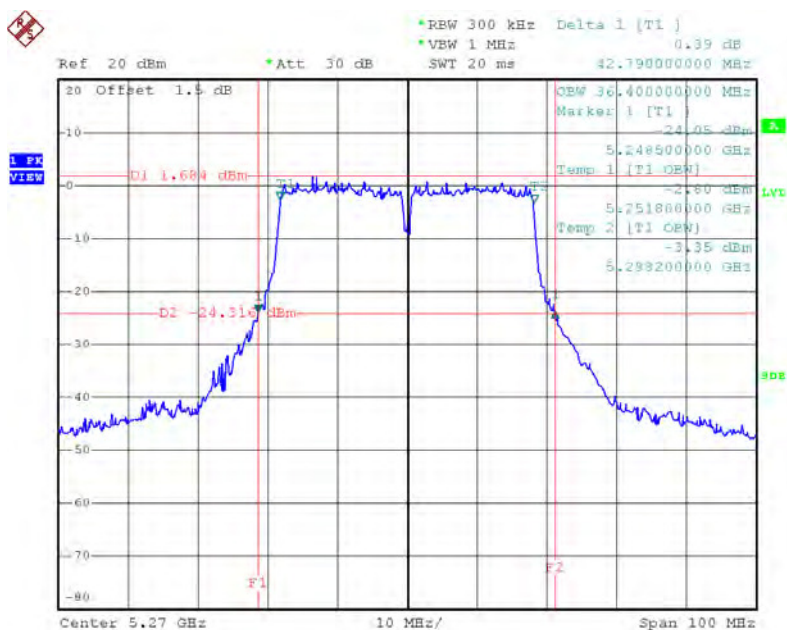

Date: 21.DEC.2015 20:13:02

TX CH62

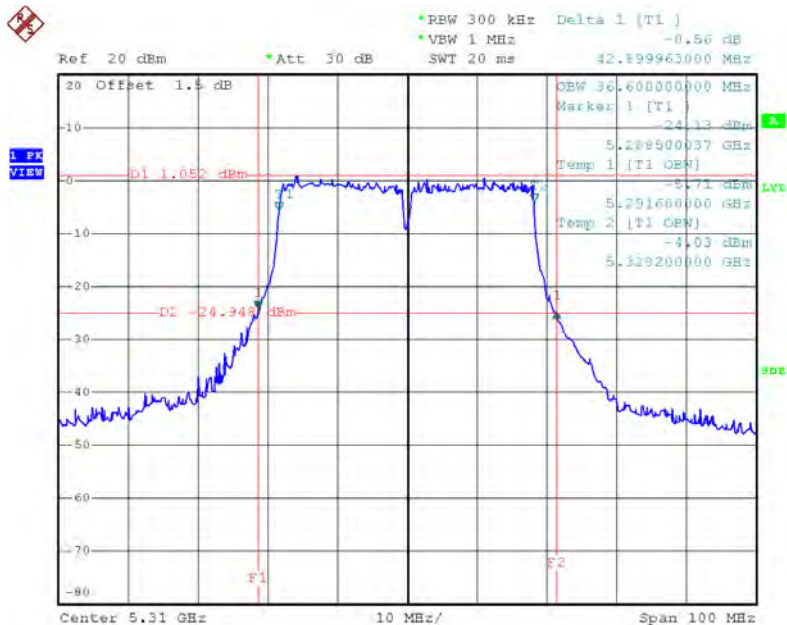


Date: 21.DEC.2015 20:14:06

Test Mode: UNII-2A/TX AC80 Mode_CH58

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH58	5290	87.40	76.00

TX CH58

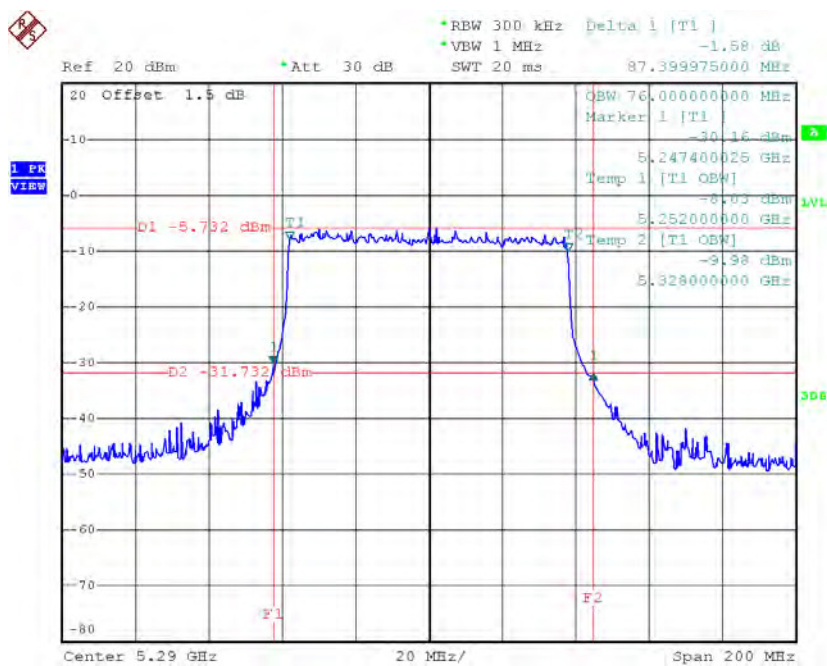


Date: 22.DEC.2015 18:28:41

Test Mode: UNII-2C/TX AC20 Mode_CH100/CH116/CH140


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH100	5500	22.59	18.10
CH116	5580	22.89	18.10
CH140	5700	22.85	18.00

TX CH100

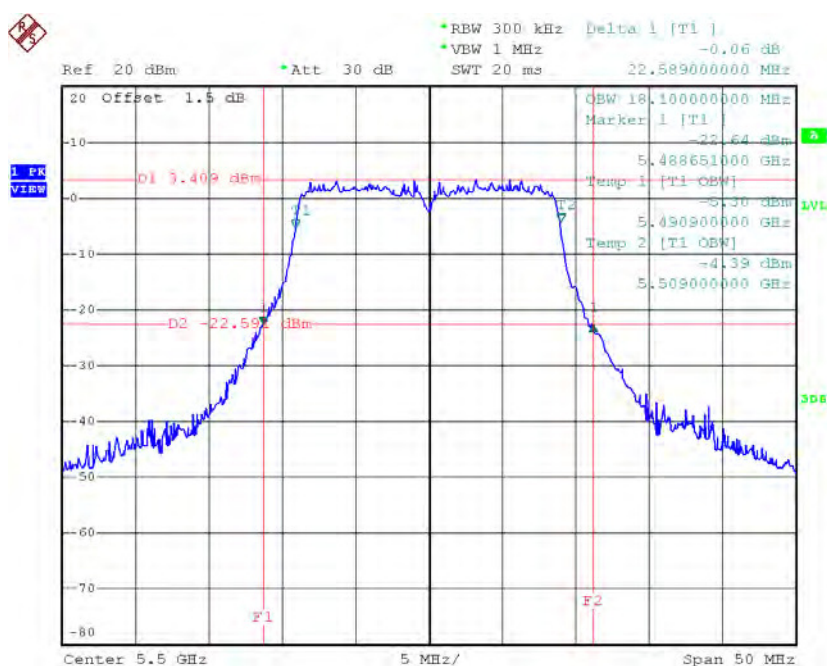


Date: 21.DEC.2015 19:29:18

TX CH116

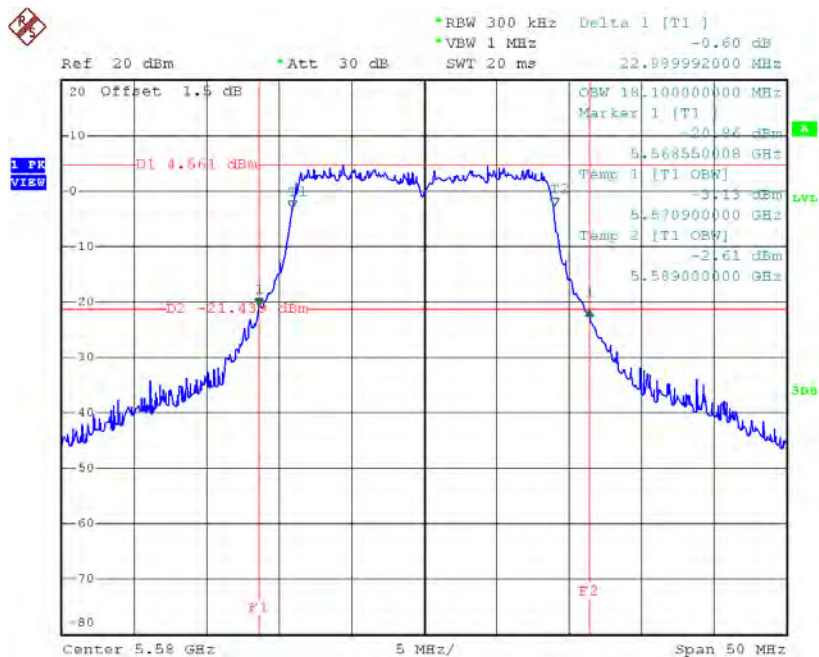

Date: 21.DEC.2015 19:30:11

TX CH140

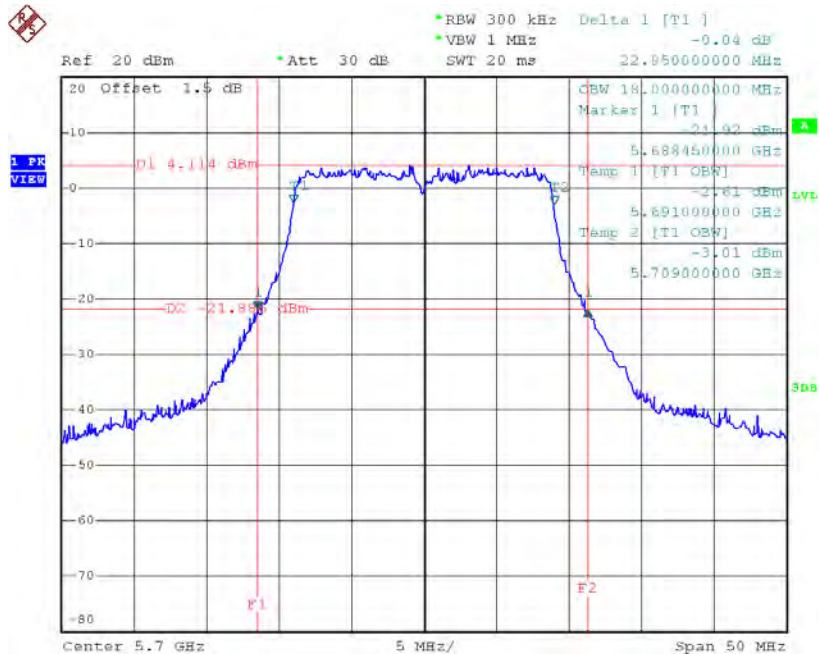


Date: 21.DEC.2015 19:30:56

Test Mode: UNII-2C/TX AC40 Mode_CH102/CH110/CH134


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH102	5510	43.20	36.40
CH110	5550	42.40	36.40
CH134	5670	43.19	36.40

TX CH102

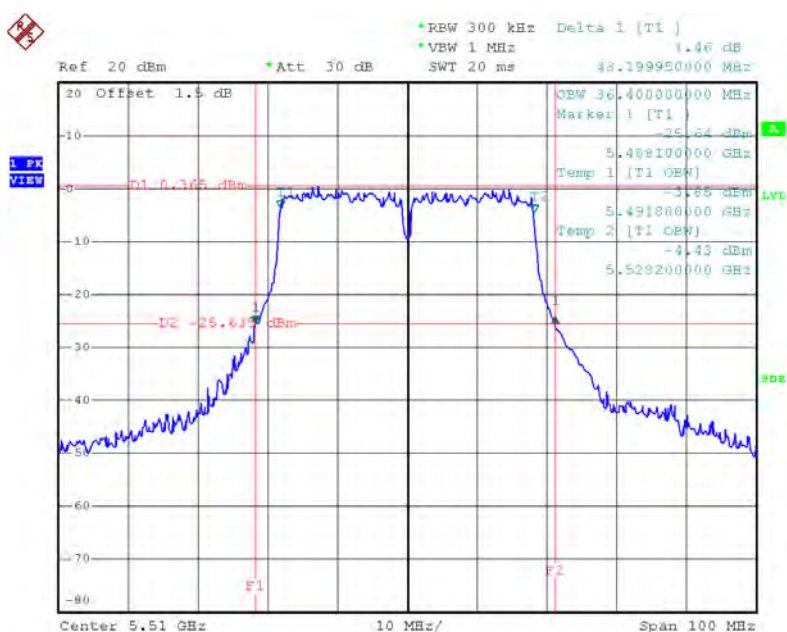


Date: 21.DEC.2015 20:15:10

TX CH110

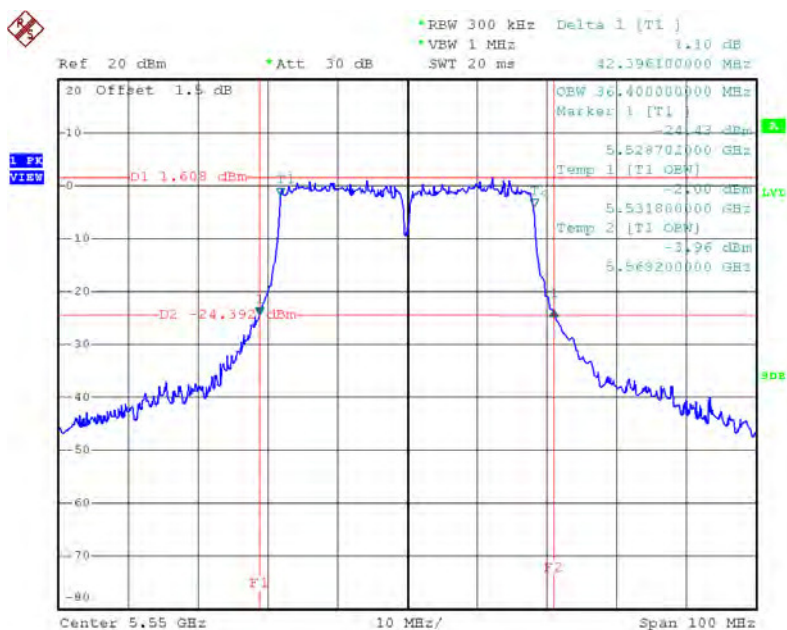

Date: 21.DEC.2015 20:16:53

TX CH134

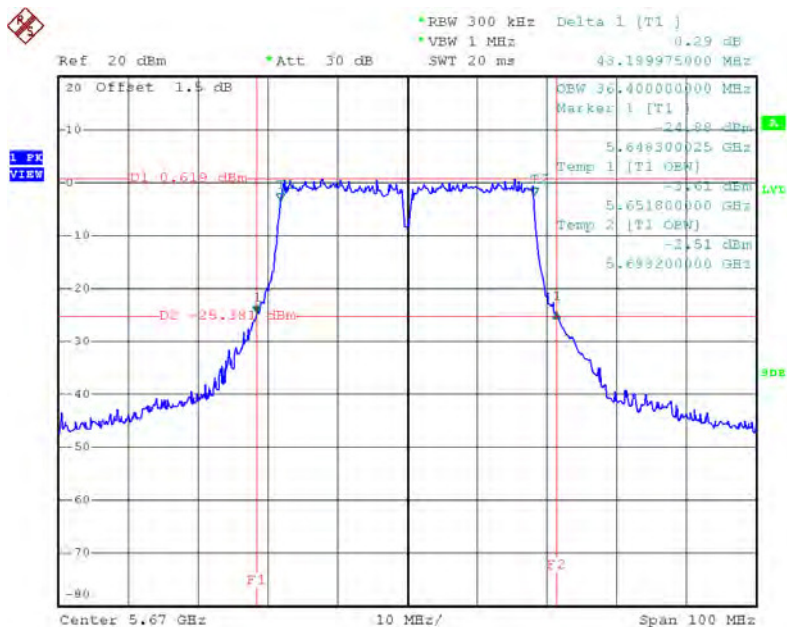


Date: 21.DEC.2015 20:18:19

Test Mode: UNII-2C/TX AC80 Mode_CH106/CH122


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH106	5530	86.00	76.00
CH122	5610	87.19	76.40

TX CH106

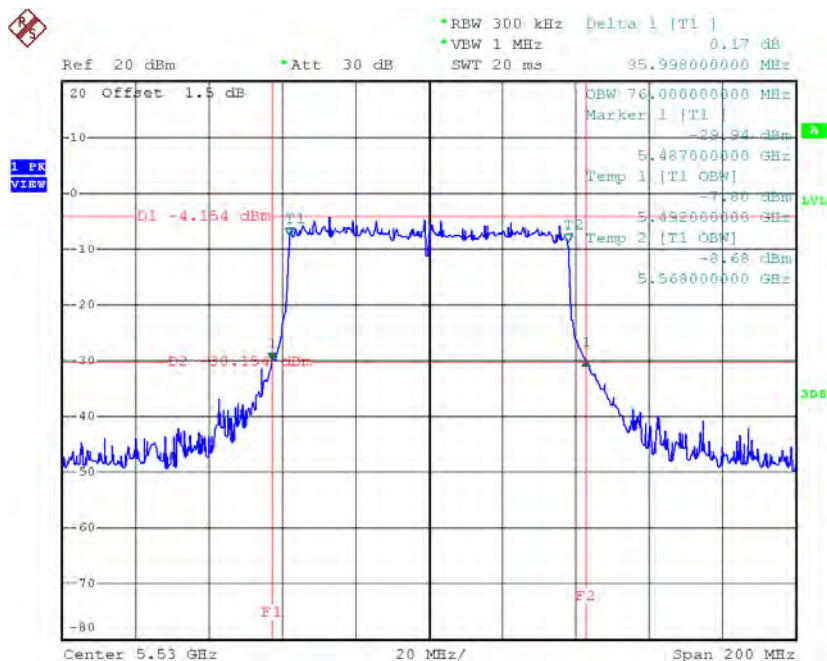

Date: 22.DEC.2015 18:30:15


TX CH122

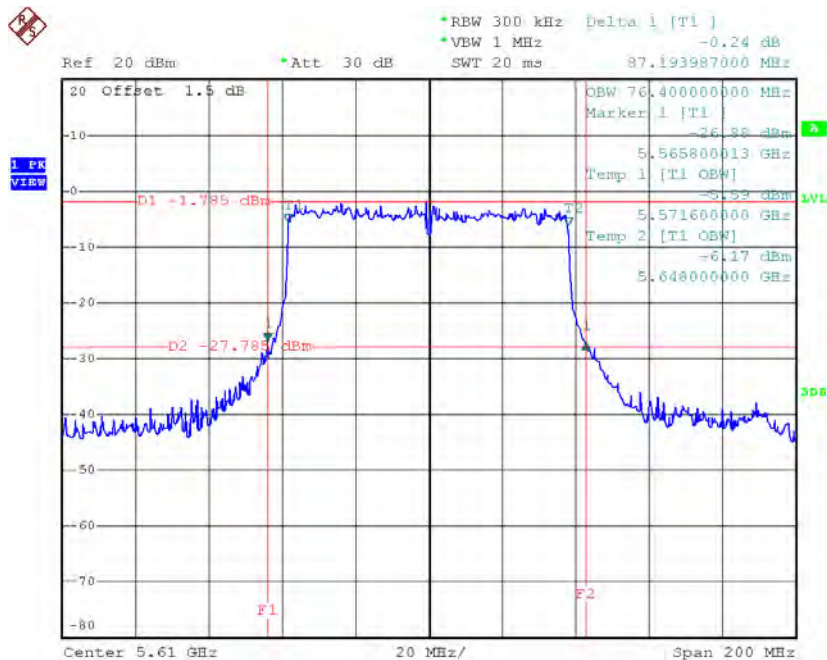

Date: 22.DEC.2015 18:31:58


Test Mode: UNII-3/ TX AC20 Mode_ CH149/CH157/CH165

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH149	5745	17.71	17.70	>=500
CH157	5785	17.75	17.70	>=500
CH165	5825	17.75	17.70	>=500

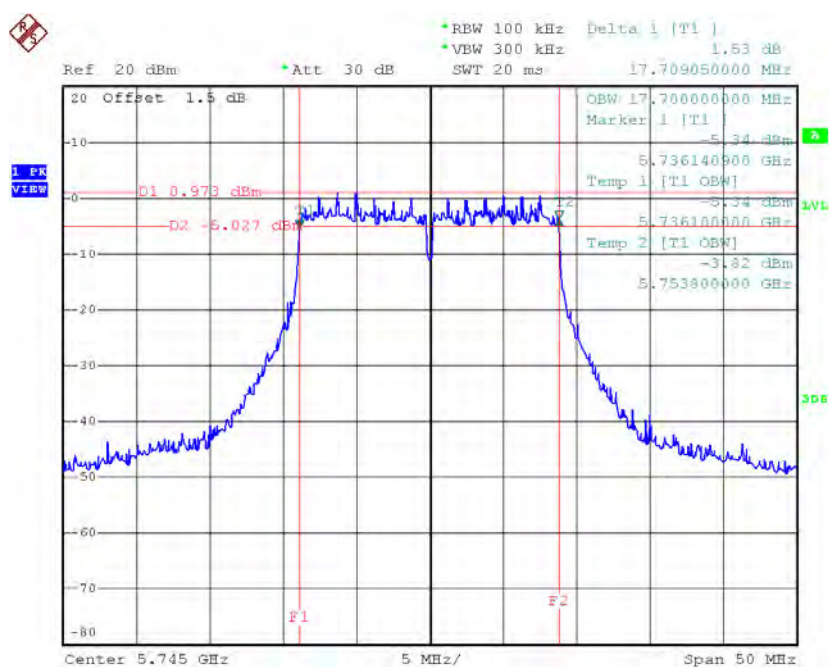TX CH 149


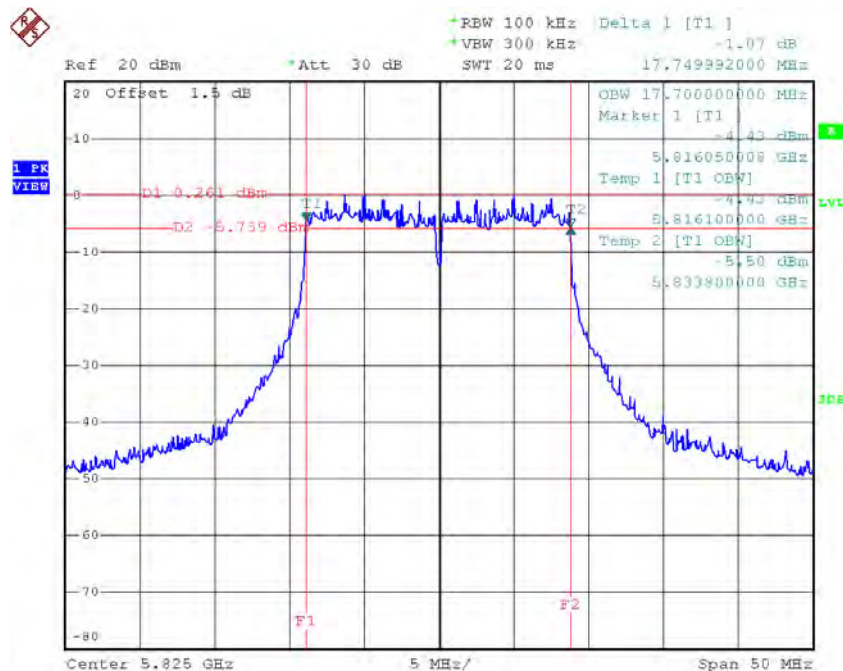
Date: 21.DEC.2015 19:31:53

TX CH 157

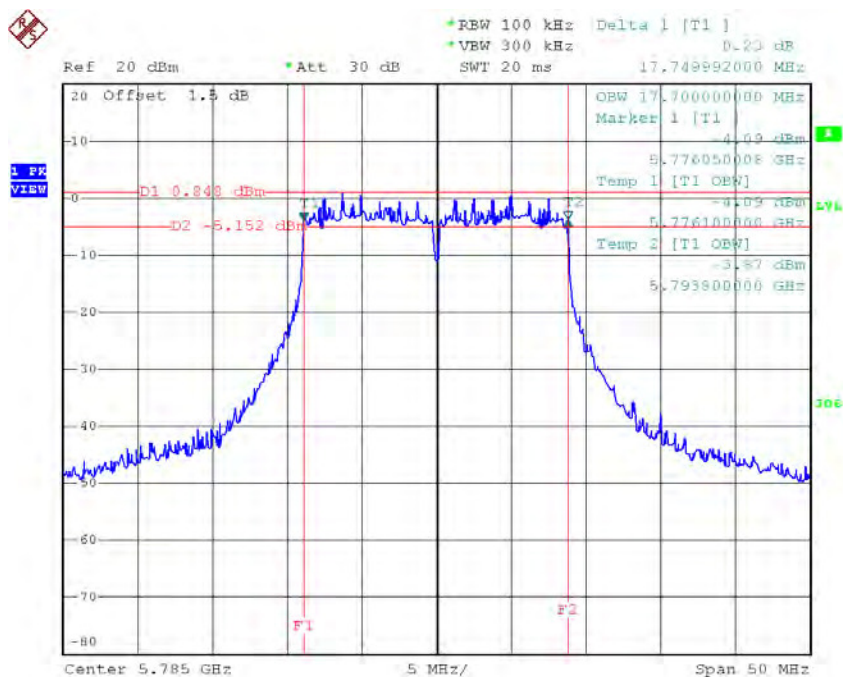

Date: 21.DEC.2015 19:32:49

TX CH 165




Date: 21.DEC.2015 19:33:37

Test Mode: UNII-3/ TX AC40 Mode_CH151/CH159


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH151	5755	36.80	36.40	>=500
CH159	5795	36.50	36.40	>=500

TX CH 151

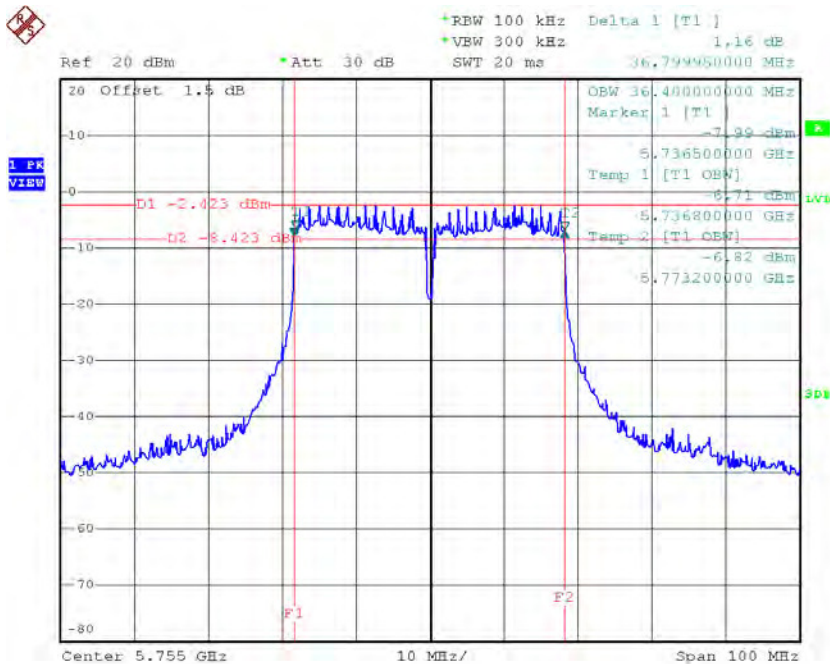

Date: 21.DEC.2015 20:19:28

TX CH 159

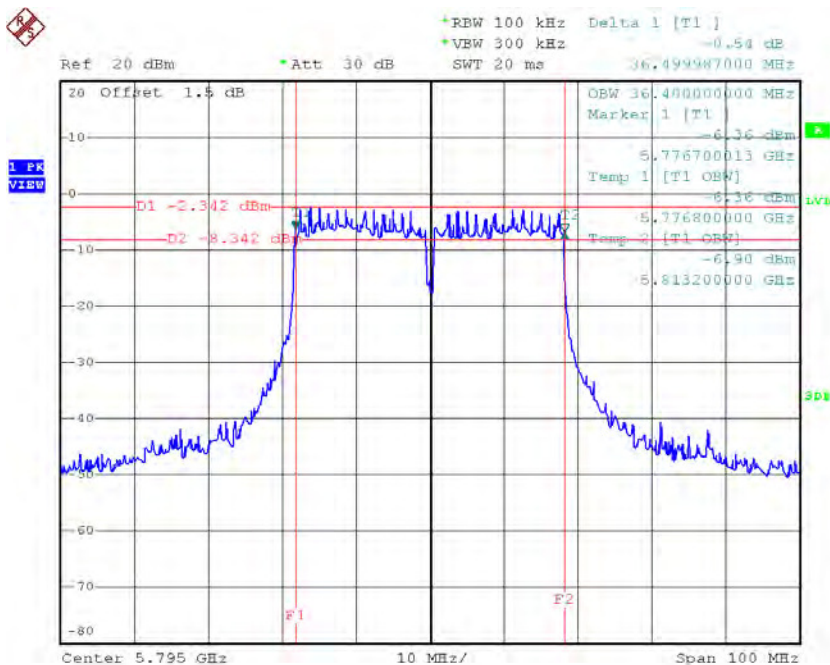


Date: 21.DEC.2015 20:20:32

Test Mode: UNII-3/ TX AC80 Mode_CH155

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH155	5775	76.40	76.00	>=500

TX CH 155

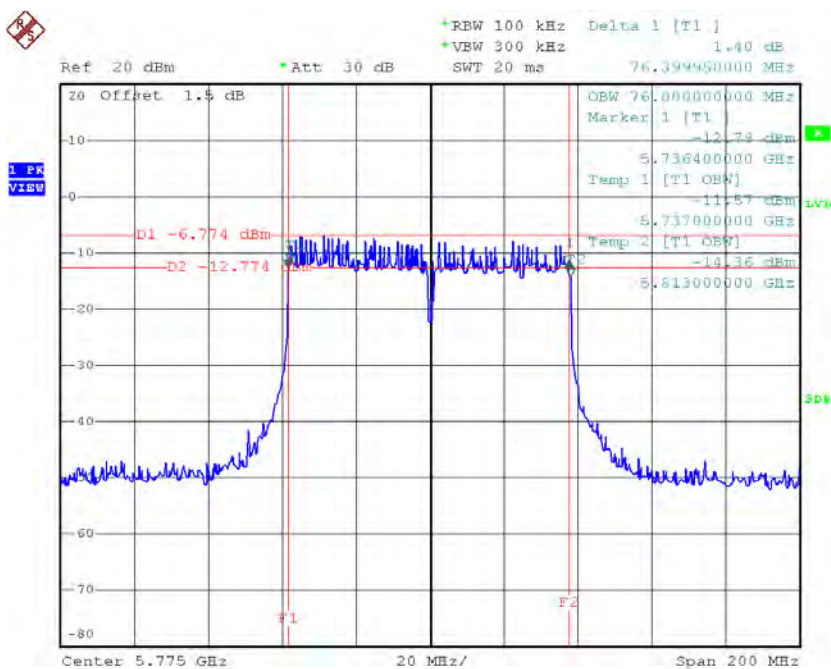

Date: 22.DEC.2015 18:33:17

ATTACHMENT F - MAXIMUM OUTPUT POWER

Test Mode: UNII-1/TX A Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	12.97	0.23	13.20	24.00	0.25
CH40	5200	12.72	0.23	12.95	24.00	0.25
CH48	5240	12.83	0.23	13.06	24.00	0.25

Test Mode: UNII-1/TX A Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	12.85	0.23	13.08	24.00	0.25
CH40	5200	12.76	0.23	12.99	24.00	0.25
CH48	5240	12.77	0.23	13.00	24.00	0.25

Test Mode: UNII-1/TX A Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	16.15	24.00	0.25
CH40	5200	15.98	24.00	0.25
CH48	5240	16.04	24.00	0.25

Test Mode: UNII-1/TX N20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	12.36	0.51	12.87	24.00	0.25
CH40	5200	12.13	0.51	12.64	24.00	0.25
CH48	5240	12.64	0.51	13.15	24.00	0.25

Test Mode: UNII-1/TX N20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	12.33	0.51	12.84	24.00	0.25
CH40	5200	12.28	0.51	12.79	24.00	0.25
CH48	5240	12.28	0.51	12.79	24.00	0.25

Test Mode: UNII-1/TX N20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	15.87	24.00	0.25
CH40	5200	15.73	24.00	0.25
CH48	5240	15.98	24.00	0.25

Test Mode: UNII-1/TX N40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	11.62	1.22	12.84	24.00	0.25
CH46	5230	11.24	1.22	12.46	24.00	0.25

Test Mode: UNII-1/TX N40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	11.54	1.22	12.76	24.00	0.25
CH46	5230	11.42	1.22	12.64	24.00	0.25

Test Mode: UNII-1/TX N40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	15.81	24.00	0.25
CH46	5230	15.56	24.00	0.25

Test Mode: UNII-2A/TX A Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	12.31	0.23	12.54	24.00	0.25
CH60	5300	12.12	0.23	12.35	24.00	0.25
CH64	5320	12.09	0.23	12.32	24.00	0.25

Test Mode: UNII-2A/TX A Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	12.48	0.23	12.71	24.00	0.25
CH60	5300	12.39	0.23	12.62	24.00	0.25
CH64	5320	12.38	0.23	12.61	24.00	0.25

Test Mode: UNII-2A/TX A Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	15.64	24.00	0.25
CH60	5300	15.50	24.00	0.25
CH64	5320	15.48	24.00	0.25

Test Mode: UNII-2A/TX N20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	12.54	0.51	13.05	24.00	0.25
CH60	5300	12.07	0.51	12.58	24.00	0.25
CH64	5320	12.28	0.51	12.79	24.00	0.25

Test Mode: UNII-2A/TX N20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	12.58	0.51	13.09	24.00	0.25
CH60	5300	12.39	0.51	12.90	24.00	0.25
CH64	5320	12.54	0.51	13.05	24.00	0.25

Test Mode: UNII-2A/TX N20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	16.08	24.00	0.25
CH60	5300	15.75	24.00	0.25
CH64	5320	15.93	24.00	0.25

Test Mode: UNII-2A/TX N40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	11.42	1.22	12.64	24.00	0.25
CH62	5310	11.48	1.22	12.70	24.00	0.25

Test Mode: UNII-2A/TX N40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	11.58	1.22	12.80	24.00	0.25
CH62	5310	11.98	1.22	13.20	24.00	0.25

Test Mode: UNII-2A/TX N40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	15.73	24.00	0.25
CH62	5310	15.97	24.00	0.25

Test Mode: UNII-2C/TX A Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	12.87	0.23	13.10	24.00	0.25
CH116	5580	12.95	0.23	13.18	24.00	0.25
CH140	5700	12.64	0.23	12.87	24.00	0.25

Test Mode: UNII-2C/TX A Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	12.46	0.23	12.69	24.00	0.25
CH116	5580	12.56	0.23	12.79	24.00	0.25
CH140	5700	12.54	0.23	12.77	24.00	0.25

Test Mode: UNII-2C/TX A Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	15.91	24.00	0.25
CH116	5580	16.00	24.00	0.25
CH140	5700	15.83	24.00	0.25

Test Mode: UNII-2C/TX N20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	12.67	0.51	13.18	24.00	0.25
CH116	5580	12.35	0.51	12.86	24.00	0.25
CH140	5700	11.93	0.51	12.44	24.00	0.25

Test Mode: UNII-2C/TX N20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	12.91	0.51	13.42	24.00	0.25
CH116	5580	12.60	0.51	13.11	24.00	0.25
CH140	5700	12.12	0.51	12.63	24.00	0.25

Test Mode: UNII-2C/TX N20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	16.31	24.00	0.25
CH116	5580	16.00	24.00	0.25
CH140	5700	15.55	24.00	0.25

Test Mode: UNII-2C/TX N40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	11.19	1.22	12.41	24.00	0.25
CH110	5550	11.02	1.22	12.24	24.00	0.25
CH134	5670	11.86	1.22	13.08	24.00	0.25

Test Mode: UNII-2C/TX N40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	11.21	1.22	12.43	24.00	0.25
CH110	5550	11.26	1.22	12.48	24.00	0.25
CH134	5670	11.78	1.22	13.00	24.00	0.25

Test Mode: UNII-2C/TX N40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	15.43	24.00	0.25
CH110	5550	15.37	24.00	0.25
CH134	5670	16.05	24.00	0.25

Test Mode: UNII-3/ TX A Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	12.47	0.23	12.70	30.00	1.00
CH157	5785	12.52	0.23	12.75	30.00	1.00
CH165	5825	12.53	0.23	12.76	30.00	1.00

Test Mode: UNII-3/ TX A Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	12.34	0.23	12.57	30.00	1.00
CH157	5785	12.01	0.23	12.24	30.00	1.00
CH165	5825	12.53	0.23	12.76	30.00	1.00

Test Mode: UNII-3/ TX A Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	15.65	30.00	1.00
CH157	5785	15.51	30.00	1.00
CH165	5825	15.77	30.00	1.00

Test Mode: UNII-3/TX N20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	12.32	0.51	12.83	30.00	1.00
CH157	5785	12.36	0.51	12.87	30.00	1.00
CH165	5825	12.23	0.51	12.74	30.00	1.00

Test Mode: UNII-3/TX N20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	11.96	0.51	12.47	30.00	1.00
CH157	5785	11.85	0.51	12.36	30.00	1.00
CH165	5825	11.94	0.51	12.45	30.00	1.00

Test Mode: UNII-3/TX N20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	15.66	30.00	1.00
CH157	5785	15.63	30.00	1.00
CH165	5825	15.61	30.00	1.00

Test Mode: UNII-3/ TX N40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	11.97	1.22	13.19	30.00	1.00
CH159	5795	11.76	1.22	12.98	30.00	1.00

Test Mode: UNII-3/ TX N40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	10.26	1.22	11.48	30.00	1.00
CH159	5795	10.27	1.22	11.49	30.00	1.00

Test Mode: UNII-3/ TX N40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	15.43	30.00	1.00
CH159	5795	15.31	30.00	1.00

Test Mode: UNII-1/TX AC20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	10.74	2.07	12.81	24.00	0.25
CH40	5200	10.76	2.07	12.83	24.00	0.25
CH48	5240	10.62	2.07	12.69	24.00	0.25

Test Mode: UNII-1/TX AC20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	10.77	2.07	12.84	24.00	0.25
CH40	5200	10.52	2.07	12.59	24.00	0.25
CH48	5240	10.63	2.07	12.70	24.00	0.25

Test Mode: UNII-1/TX AC20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	15.84	24.00	0.25
CH40	5200	15.72	24.00	0.25
CH48	5240	15.71	24.00	0.25

Test Mode: UNII-1/TX AC40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	8.42	4.39	12.81	24.00	0.25
CH46	5230	8.36	4.39	12.75	24.00	0.25

Test Mode: UNII-1/TX AC40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	8.67	4.39	13.06	24.00	0.25
CH46	5230	8.76	4.39	13.15	24.00	0.25

Test Mode: UNII-1/TX AC40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	15.95	24.00	0.25
CH46	5230	15.97	24.00	0.25

Test Mode: UNII-1/TX AC80 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	6.12	4.52	10.64	24.00	0.25

Test Mode: UNII-1/TX AC80 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	6.23	4.52	10.75	24.00	0.25

Test Mode: UNII-1/TX AC80 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	13.71	24.00	0.25

Test Mode: UNII-2A/TX AC20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	10.58	2.07	12.65	24.00	0.25
CH60	5300	10.67	2.07	12.74	24.00	0.25
CH64	5320	10.61	2.07	12.68	24.00	0.25

Test Mode: UNII-2A/TX AC20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	10.81	2.07	12.88	24.00	0.25
CH60	5300	10.84	2.07	12.91	24.00	0.25
CH64	5320	10.79	2.07	12.86	24.00	0.25

Test Mode: UNII-2A/TX AC20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	15.78	24.00	0.25
CH60	5300	15.84	24.00	0.25
CH64	5320	15.78	24.00	0.25

Test Mode: UNII-2A/TX AC40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	8.23	4.39	12.62	24.00	0.25
CH62	5310	8.35	4.39	12.74	24.00	0.25

Test Mode: UNII-2A/TX AC40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	8.71	4.39	13.10	24.00	0.25
CH62	5310	8.78	4.39	13.17	24.00	0.25

Test Mode: UNII-2A/TX AC40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	15.88	24.00	0.25
CH62	5310	15.97	24.00	0.25

Test Mode: UNII-2A/TX AC80 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH58	5290	6.05	4.52	10.57	24.00	0.25

Test Mode: UNII-2A/TX AC80 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH58	5290	6.26	4.52	10.78	24.00	0.25

Test Mode: UNII-2A/TX AC80 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH58	5290	13.69	24.00	0.25

Test Mode: UNII-2C/TX AC20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	10.46	2.07	12.53	24.00	0.25
CH116	5580	10.67	2.07	12.74	24.00	0.25
CH140	5700	10.51	2.07	12.58	24.00	0.25

Test Mode: UNII-2C/TX AC20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	10.74	2.07	12.81	24.00	0.25
CH116	5580	10.82	2.07	12.89	24.00	0.25
CH140	5700	10.64	2.07	12.71	24.00	0.25

Test Mode: UNII-2C/TX AC20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	15.68	24.00	0.25
CH116	5580	15.83	24.00	0.25
CH140	5700	15.66	24.00	0.25

Test Mode: UNII-2C/TX AC40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	8.24	4.39	12.63	24.00	0.25
CH110	5550	8.13	4.39	12.52	24.00	0.25
CH134	5670	8.45	4.39	12.84	24.00	0.25

Test Mode: UNII-2C/TX AC40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	8.61	4.39	13.00	24.00	0.25
CH110	5550	8.24	4.39	12.63	24.00	0.25
CH134	5670	8.67	4.39	13.06	24.00	0.25

Test Mode: UNII-2C/TX AC40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	15.83	24.00	0.25
CH110	5550	15.59	24.00	0.25
CH134	5670	15.97	24.00	0.25

Test Mode: UNII-2C/TX AC80 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH106	5530	6.35	4.52	10.87	24.00	0.25
CH122	5610	6.28	4.52	10.80	24.00	0.25

Test Mode: UNII-2C/TX AC80 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH106	5530	6.31	4.52	10.83	24.00	0.25
CH122	5610	6.32	4.52	10.84	24.00	0.25

Test Mode: UNII-2C/TX AC80 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH106	5530	13.86	24.00	0.25
CH122	5610	13.83	24.00	0.25

Test Mode: UNII-3/TX AC20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	10.34	2.07	12.41	30.00	1.00
CH157	5785	10.48	2.07	12.55	30.00	1.00
CH165	5825	10.53	2.07	12.60	30.00	1.00

Test Mode: UNII-3/TX AC20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	10.67	2.07	12.74	30.00	1.00
CH157	5785	10.69	2.07	12.76	30.00	1.00
CH165	5825	10.73	2.07	12.80	30.00	1.00

Test Mode: UNII-3/TX AC20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	15.59	30.00	1.00
CH157	5785	15.67	30.00	1.00
CH165	5825	15.71	30.00	1.00

Test Mode: UNII-3/TX AC40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	8.38	4.39	12.77	30.00	1.00
CH159	5795	8.19	4.39	12.58	30.00	1.00

Test Mode: UNII-3/TX AC40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	8.74	4.39	13.13	30.00	1.00
CH159	5795	8.61	4.39	13.00	30.00	1.00

Test Mode: UNII-3/TX AC40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	15.97	30.00	1.00
CH159	5795	15.81	30.00	1.00

Test Mode: UNII-3/TX AC80 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH155	5775	6.01	4.52	10.53	30.00	1.00

Test Mode: UNII-3/TX AC80 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH155	5775	6.17	4.52	10.69	30.00	1.00


Test Mode: UNII-3/TX AC80 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH155	5775	13.62	30.00	1.00

ATTACHMENT G - ANTENNA CONDUCTED SPURIOUS EMISSION


Test Mode: UNII-1/TX A Mode_ANT 1

TX mode CH36

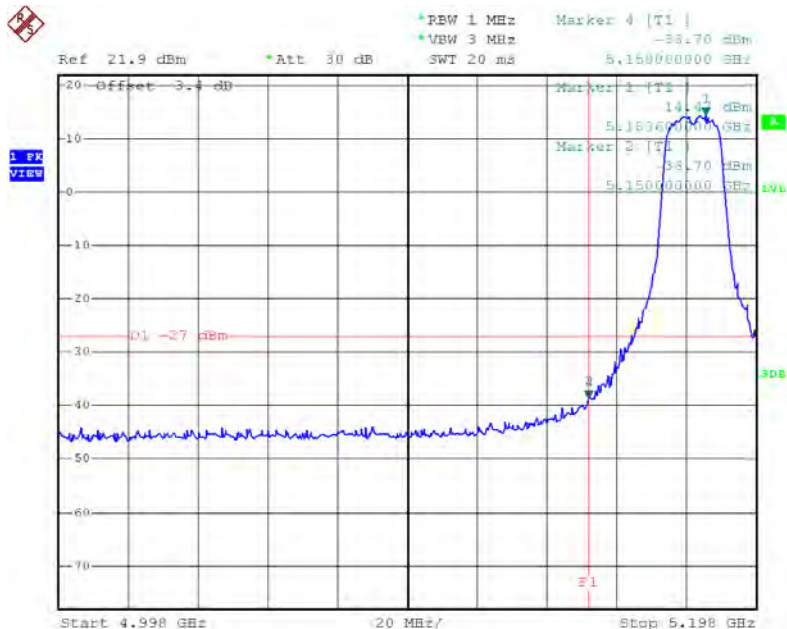

Date: 21.DEC.2015 18:52:02


TX mode CH48

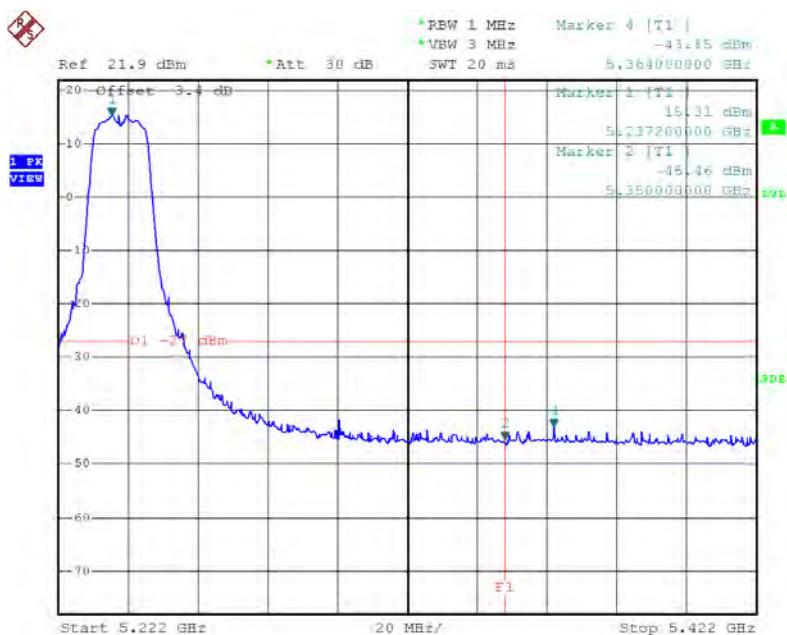

Date: 21.DEC.2015 18:56:24


Test Mode: UNII-1/TX A Mode_ANT 2

TX mode CH36

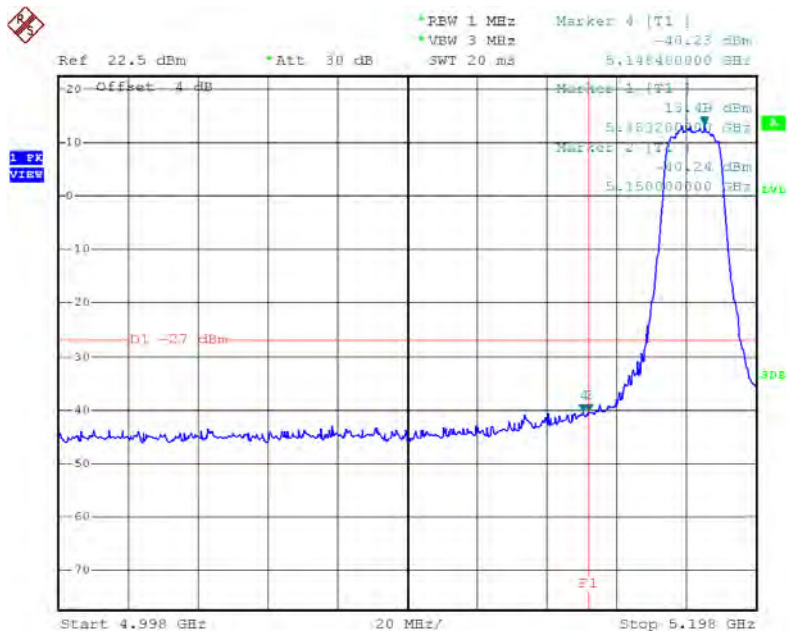

Date: 21.DEC.2015 21:34:22


TX mode CH48

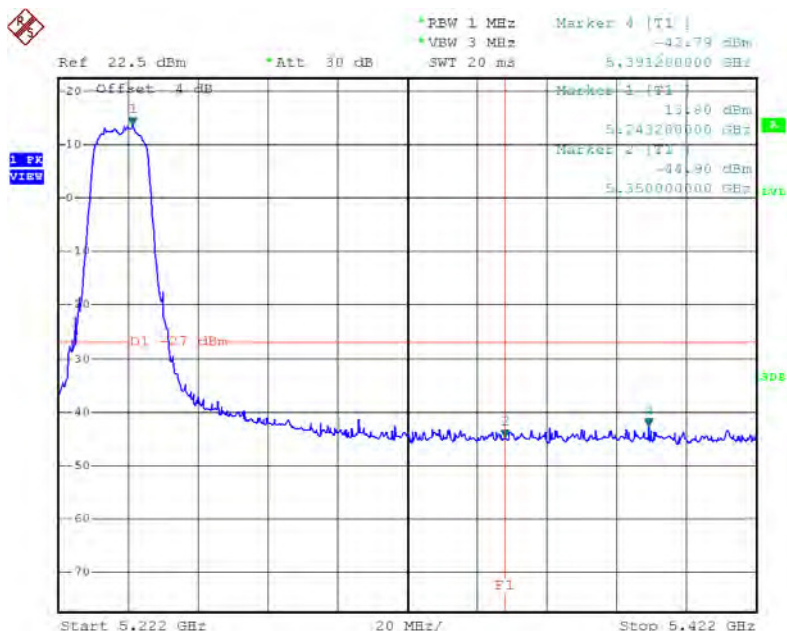

Date: 21.DEC.2015 21:36:14


Test Mode: UNII-1/TX N20 Mode_ANT 1

TX mode CH36

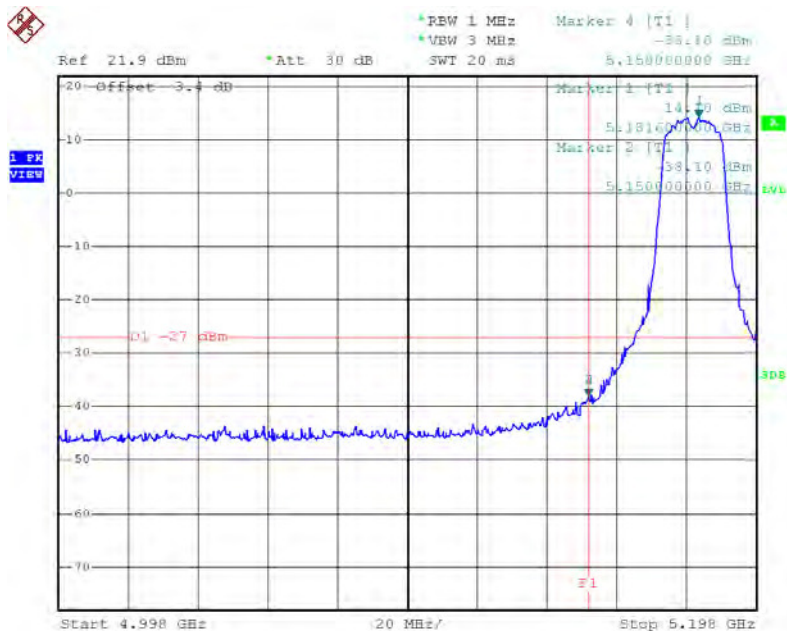

Date: 21.DEC.2015 19:10:53


TX mode CH48

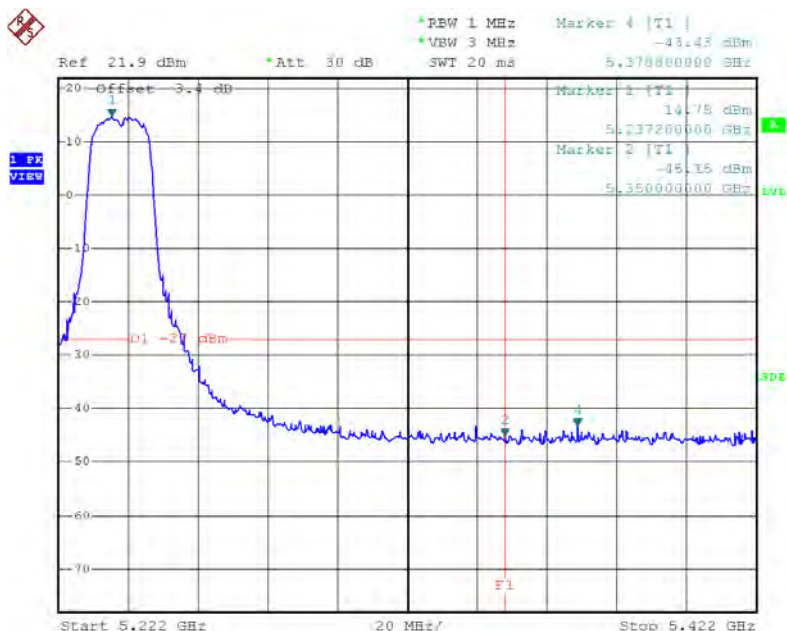

Date: 21.DEC.2015 19:12:43


Test Mode: UNII-1/TX N20 Mode_ANT 2

TX mode CH36

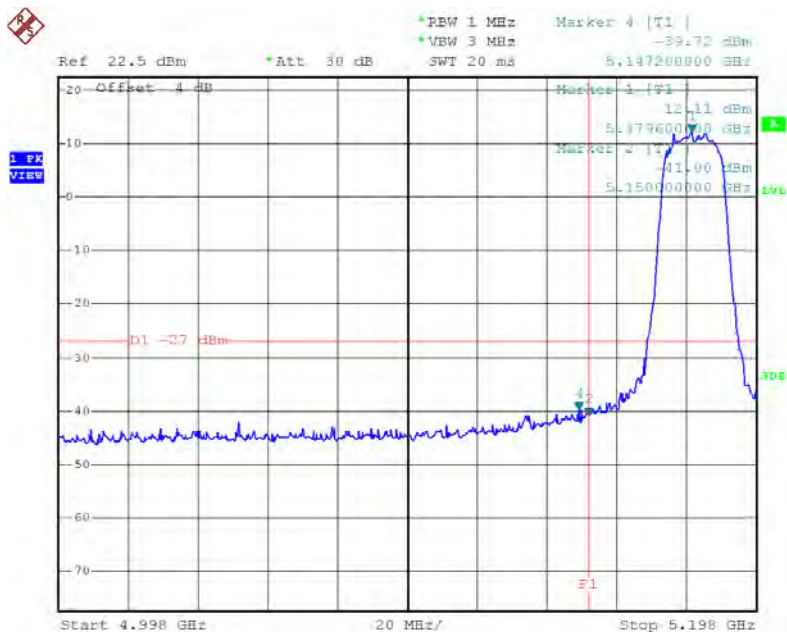

Date: 21.DEC.2015 21:48:08


TX mode CH48

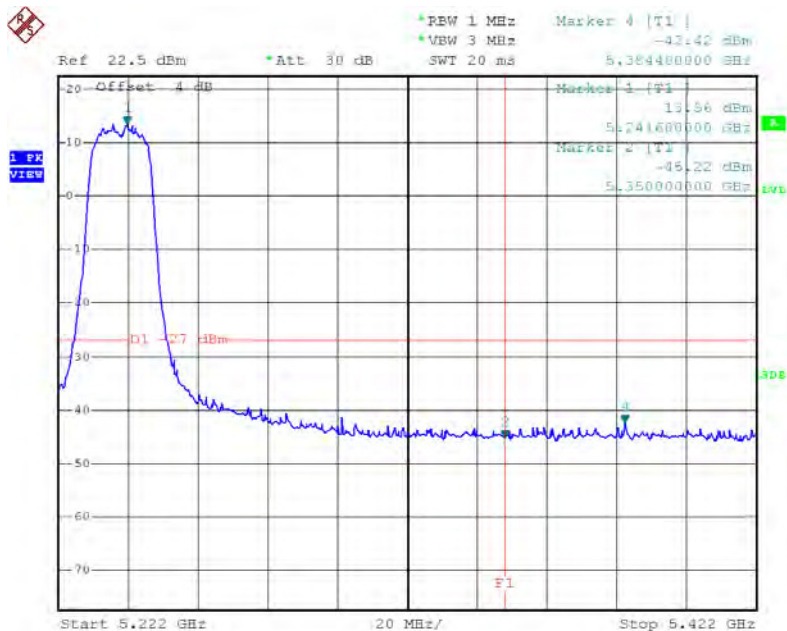

Date: 21.DEC.2015 21:49:59


Test Mode: UNII-1/TX N40 Mode_ANT 1

TX mode CH38

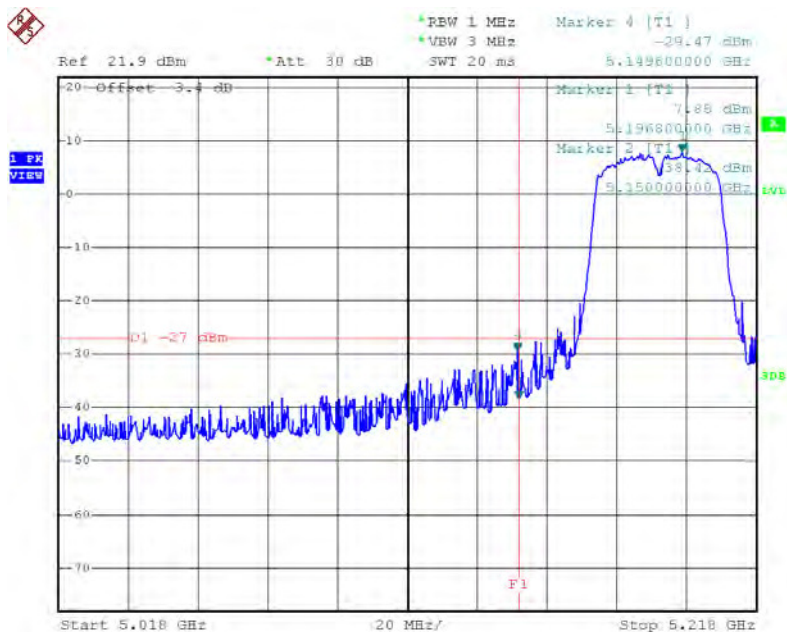

Date: 21.DEC.2015 21:16:58


TX mode CH46

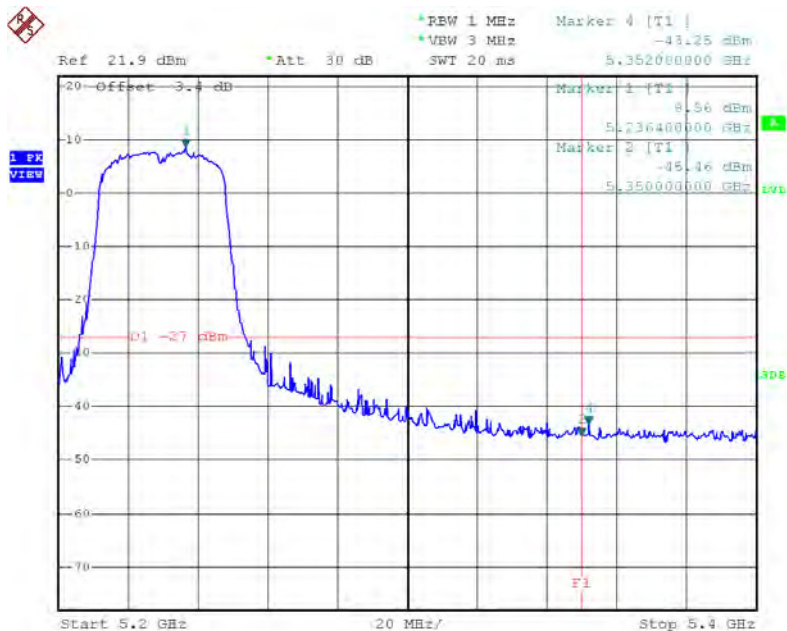

Date: 21.DEC.2015 21:18:03


Test Mode: UNII-1/TX N40 Mode_ANT 2

TX mode CH38

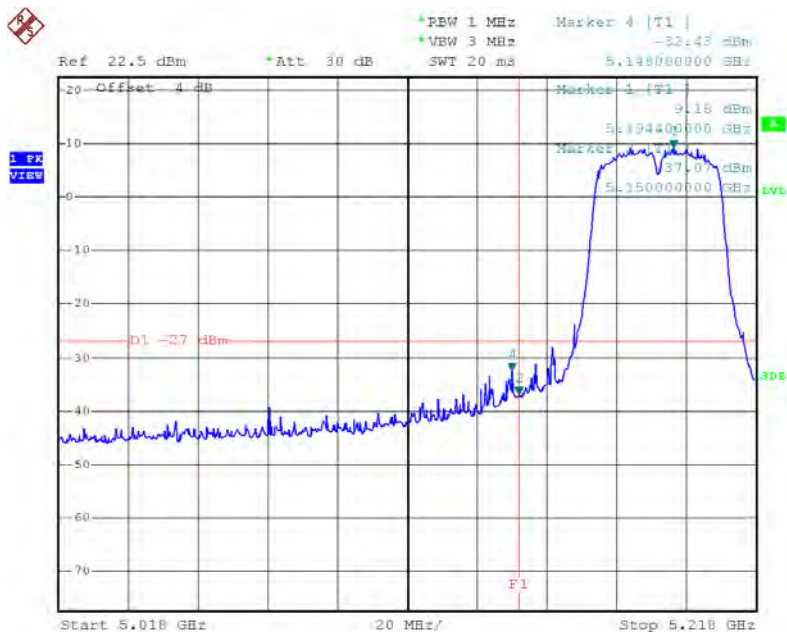

Date: 21.DEC.2015 22:13:09


TX mode CH46

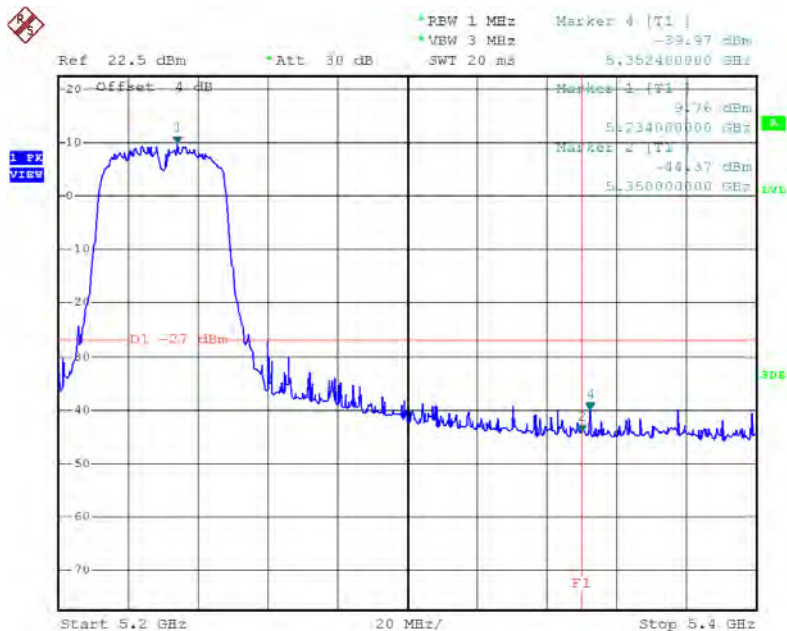

Date: 21.DEC.2015 22:14:10


Test Mode: UNII-2A/TX A Mode_ANT 1

TX mode CH52

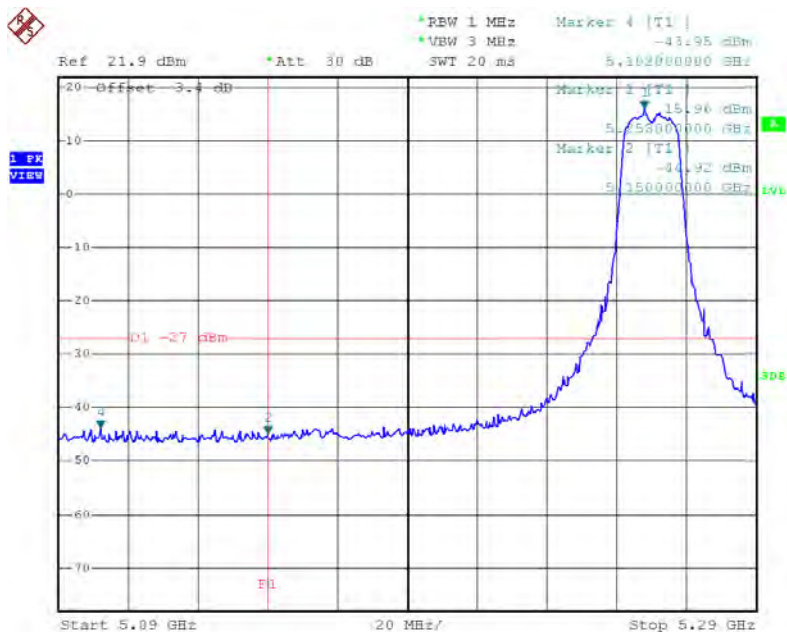

Date: 21.DEC.2015 18:57:36


TX mode CH64

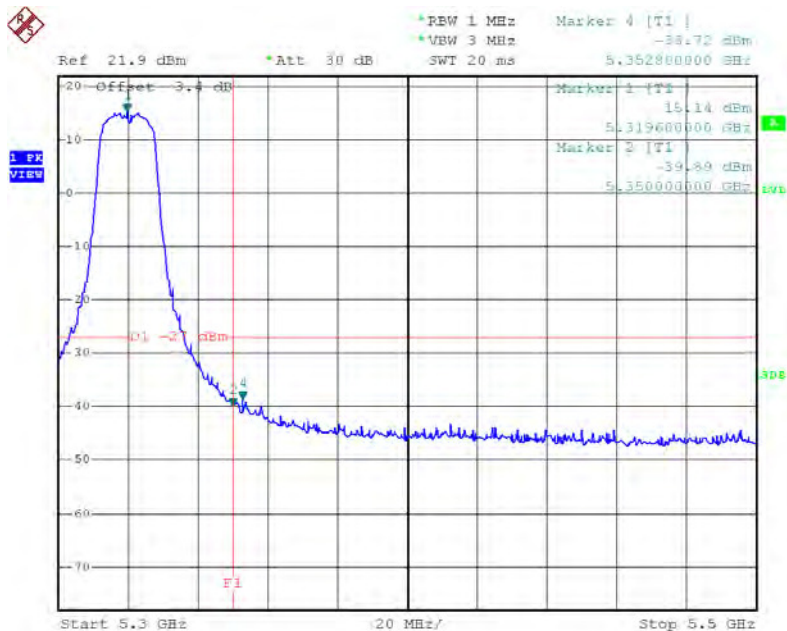

Date: 21.DEC.2015 19:00:06


Test Mode: UNII-2A/TX A Mode_ANT 2

TX mode CH52

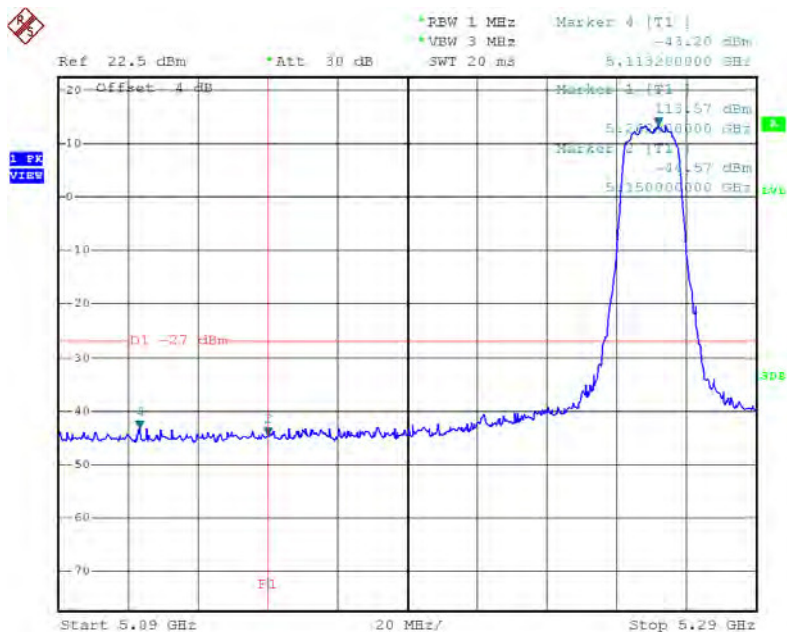

Date: 21.DEC.2015 21:37:15


TX mode CH64

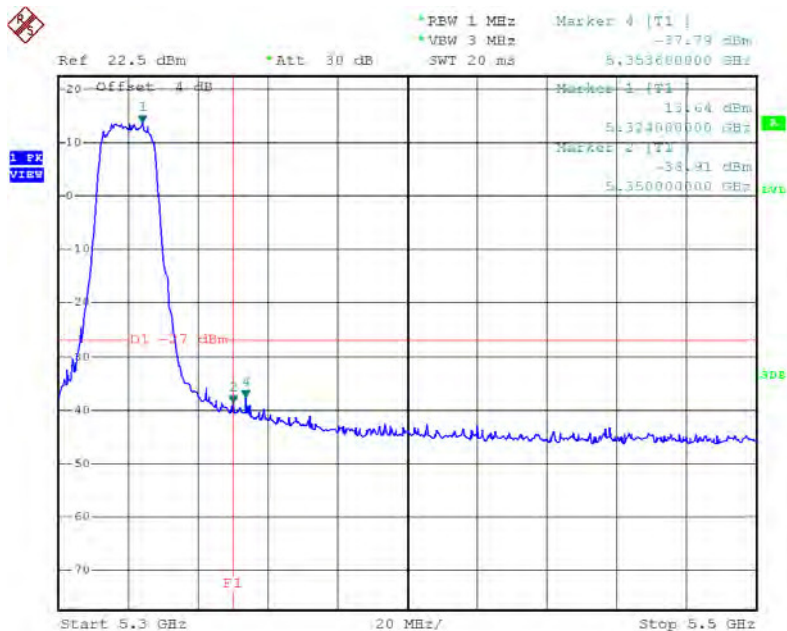

Date: 21.DEC.2015 21:38:59


Test Mode: UNII-2A/TX N20 Mode_ANT 1

TX mode CH52

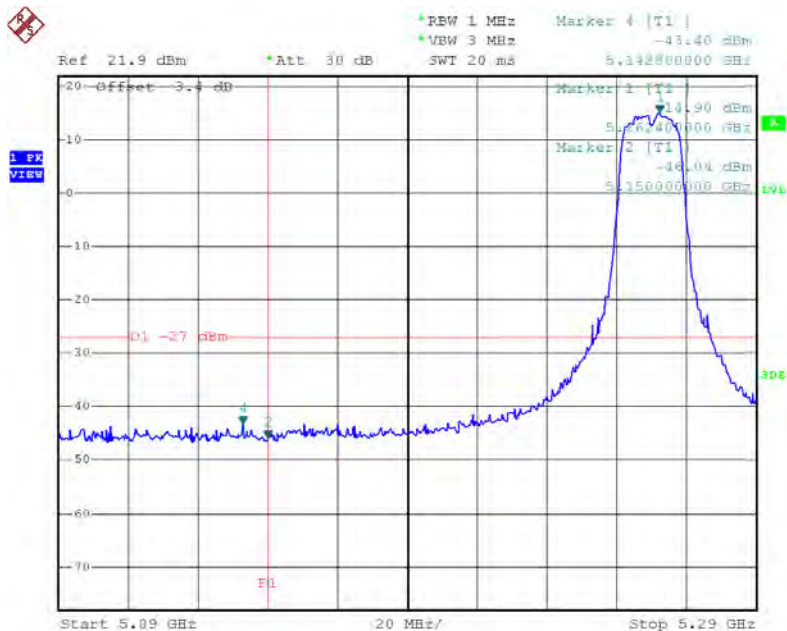

Date: 21.DEC.2015 19:13:53


TX mode CH64

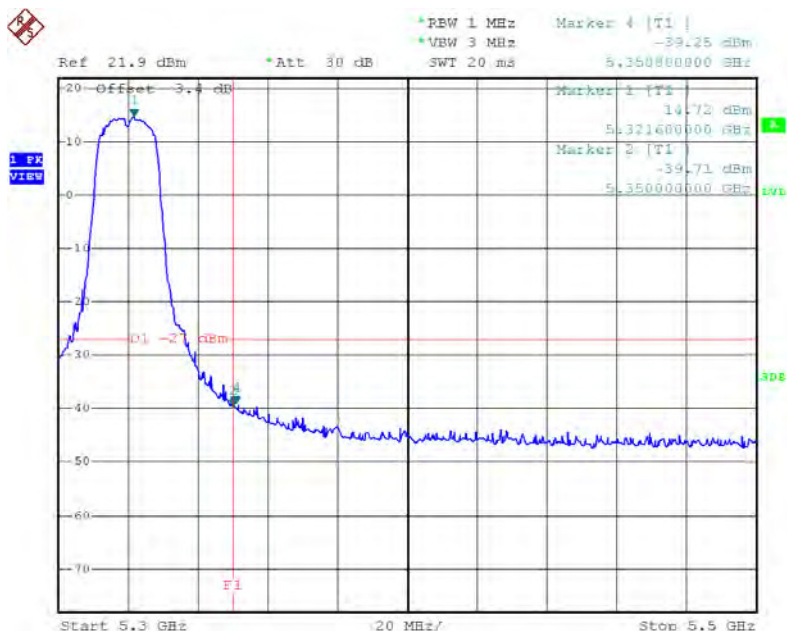

Date: 21.DEC.2015 19:15:43


Test Mode: UNII-2A/TX N20 Mode_ANT 2

TX mode CH52

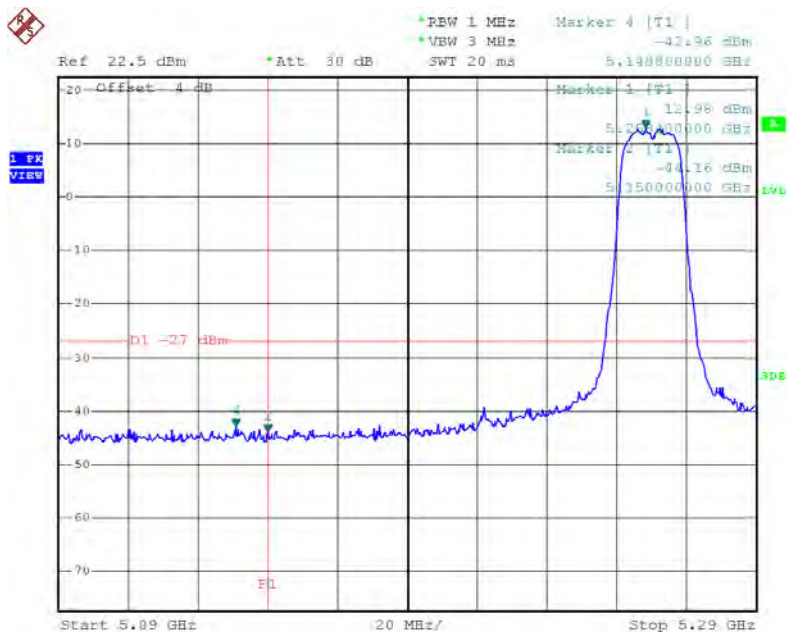

Date: 21.DEC.2015 21:50:52


TX mode CH64

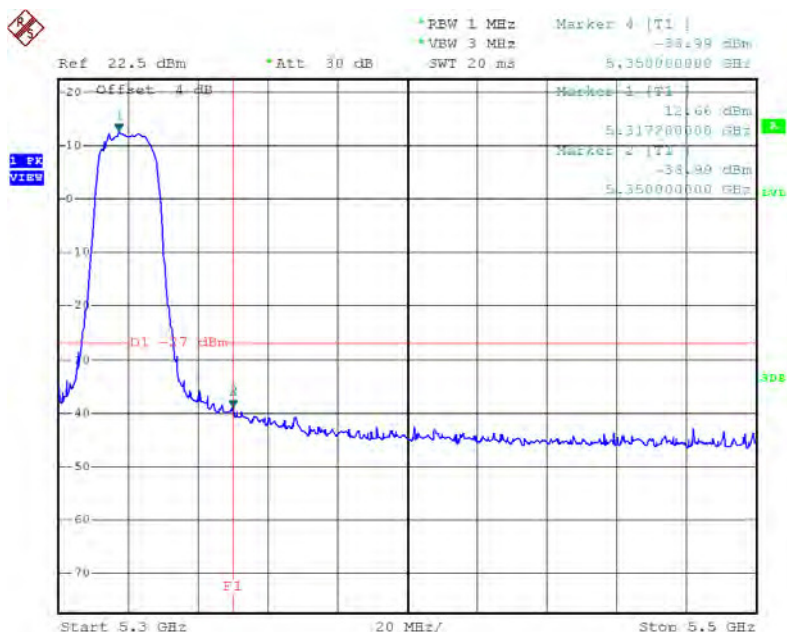

Date: 21.DEC.2015 21:53:58


Test Mode: UNII-2A/TX N40 Mode_ANT 1

TX mode CH54

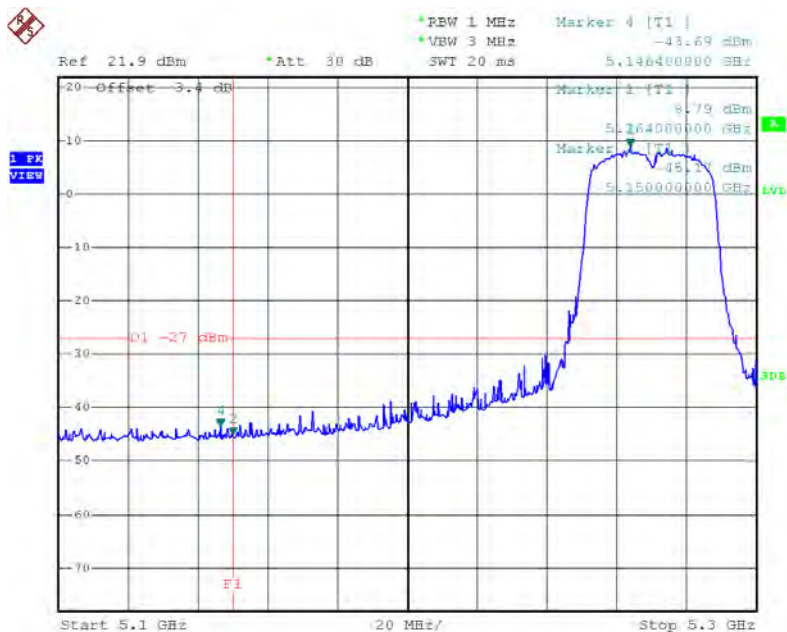

Date: 21.DEC.2015 21:19:08


TX mode CH62

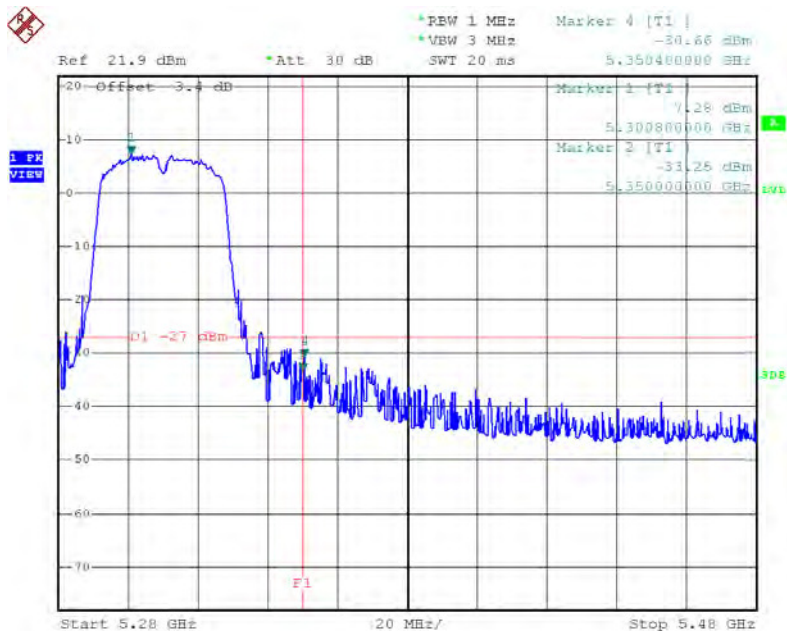

Date: 22.DEC.2015 18:37:28


Test Mode: UNII-2A/TX N40 Mode_ANT 2

TX mode CH54

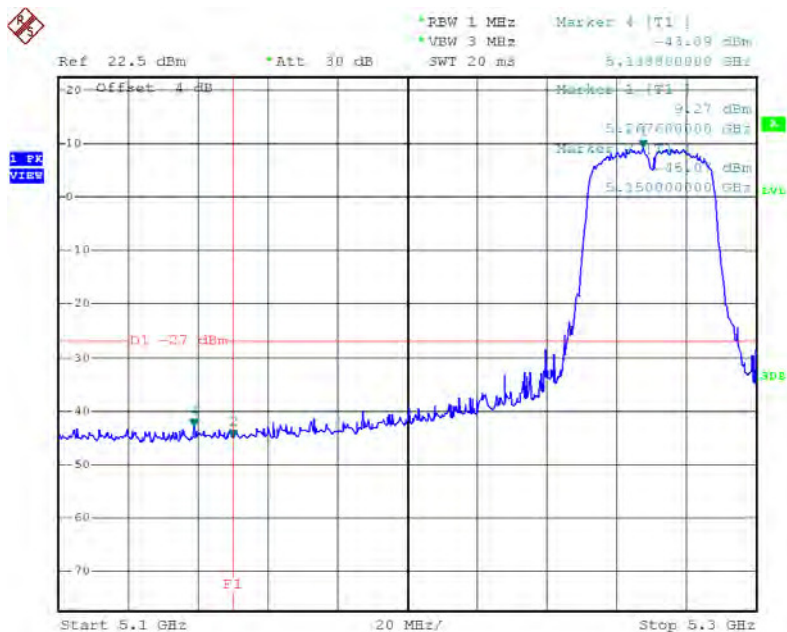

Date: 21.DEC.2015 22:15:02


TX mode CH62

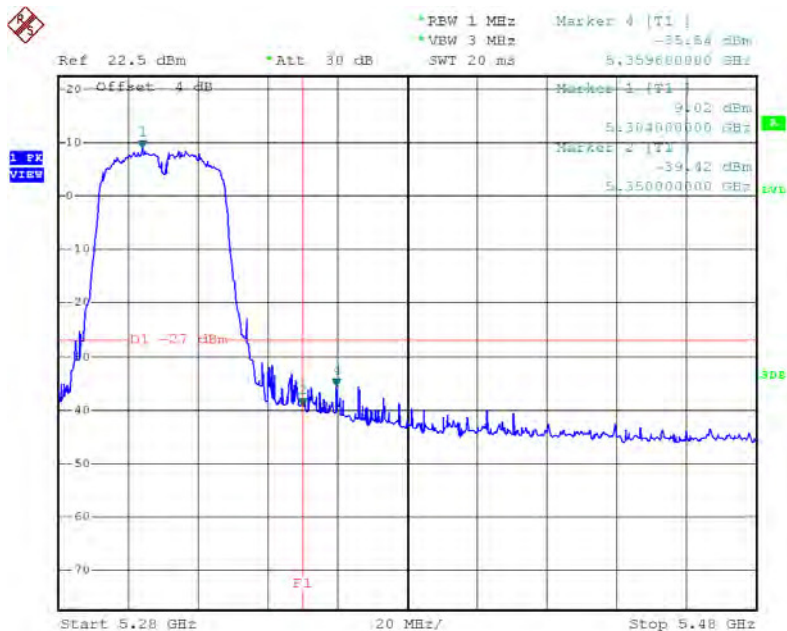

Date: 22.DEC.2015 18:44:21


Test Mode: UNII-2C/TX A Mode_ANT 1

TX mode CH100

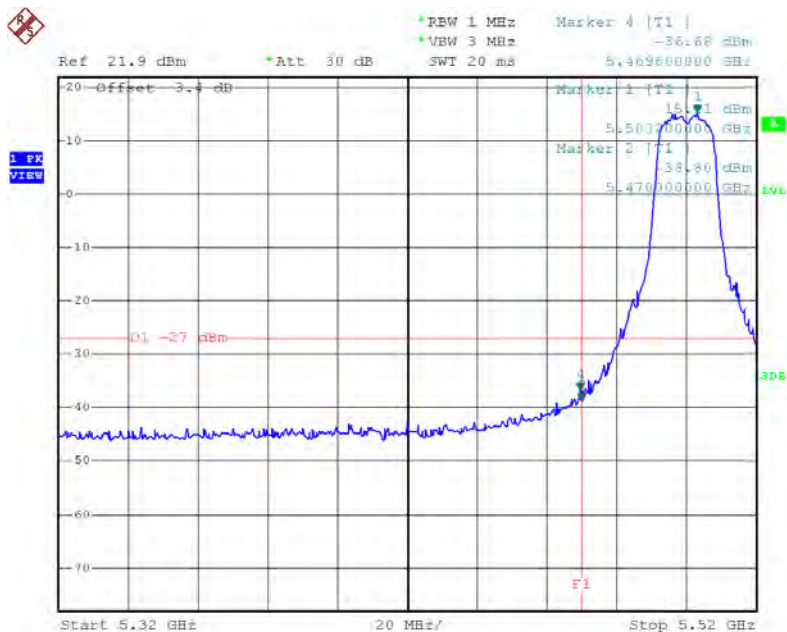

Date: 21.DEC.2015 19:01:05


TX mode CH140

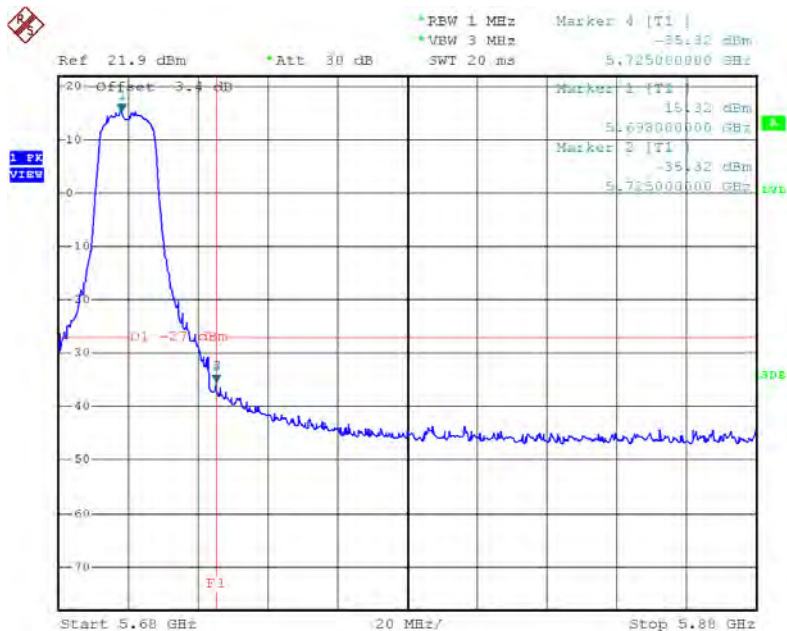

Date: 21.DEC.2015 19:02:55


Test Mode: UNII-2C/TX A Mode_ANT 2

TX mode CH100

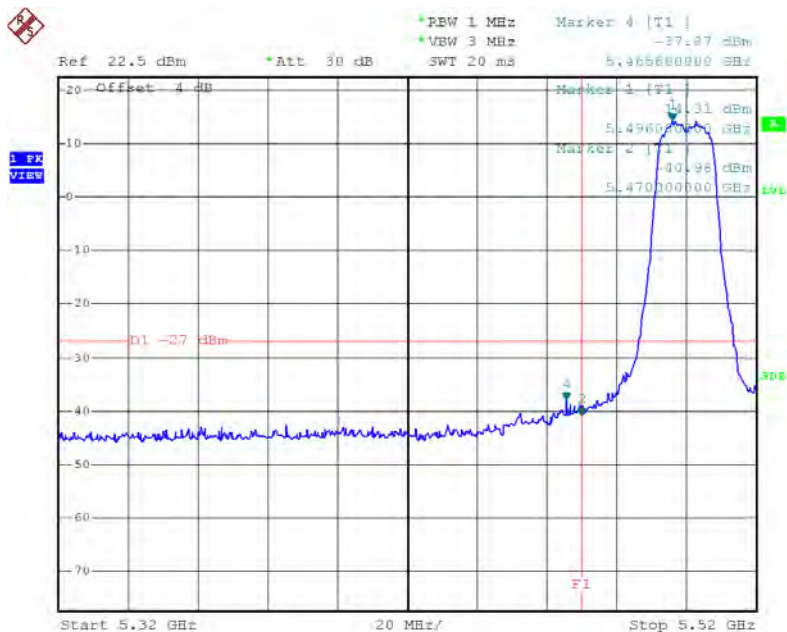

Date: 21.DEC.2015 21:40:12


TX mode CH140

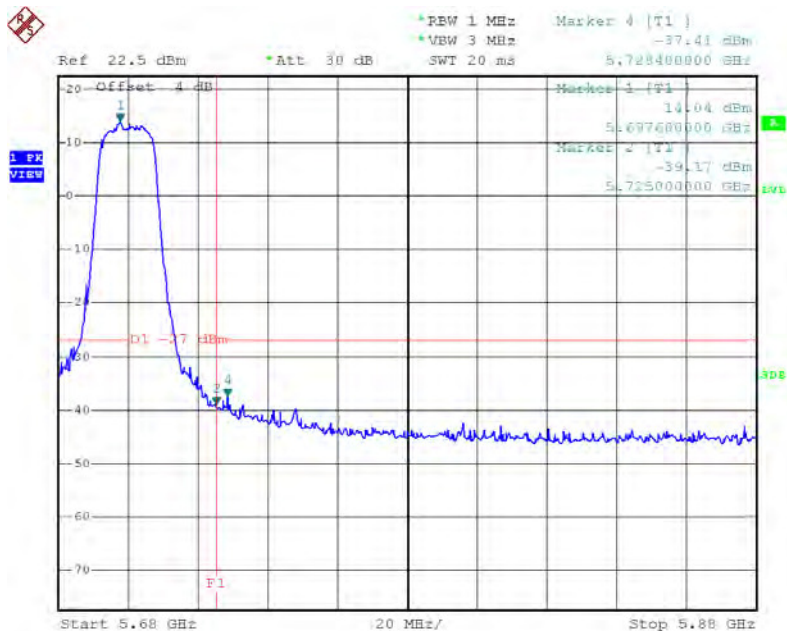

Date: 21.DEC.2015 21:43:11


Test Mode: UNII-2C/TX N20 Mode_ANT 1

TX mode CH100

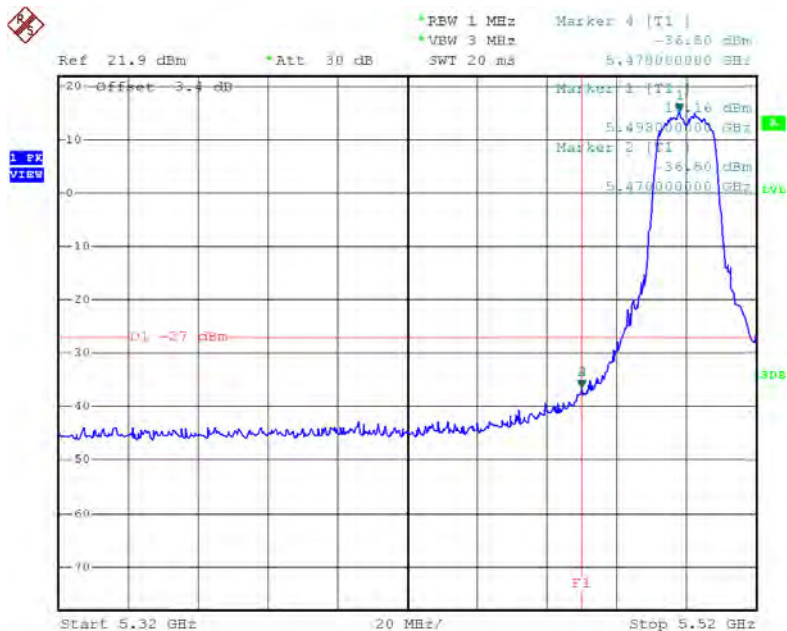

Date: 21.DEC.2015 19:16:54


TX mode CH140

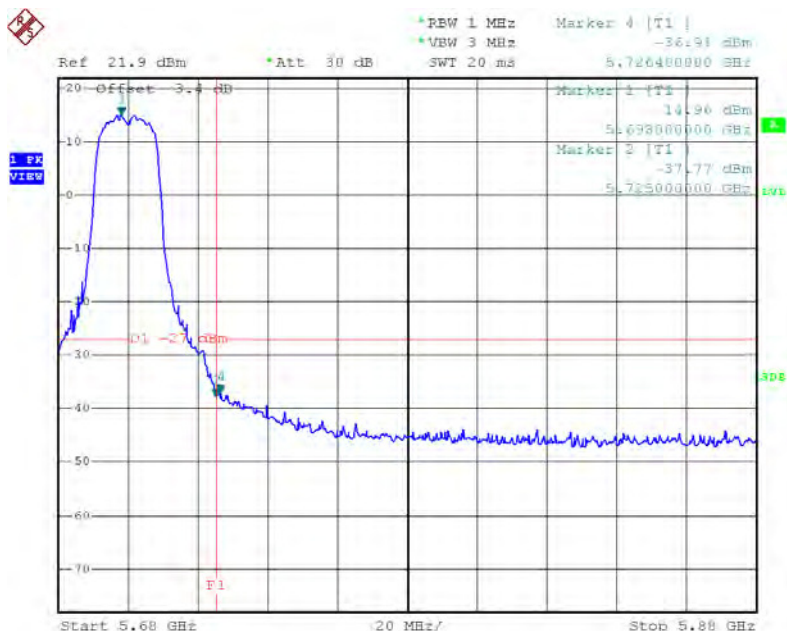

Date: 21.DEC.2015 19:18:44


Test Mode: UNII-2C/TX N20 Mode_ANT 2

TX mode CH100

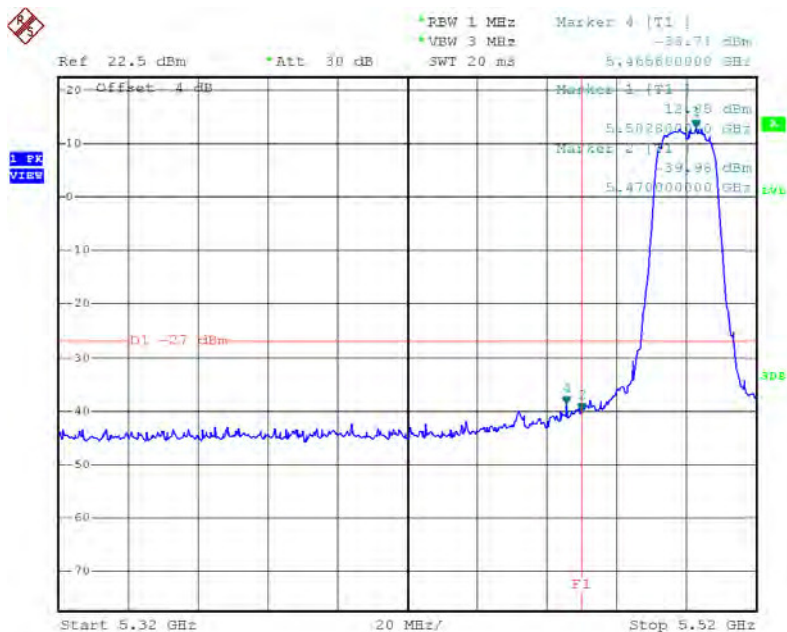

Date: 21.DEC.2015 21:54:54


TX mode CH140

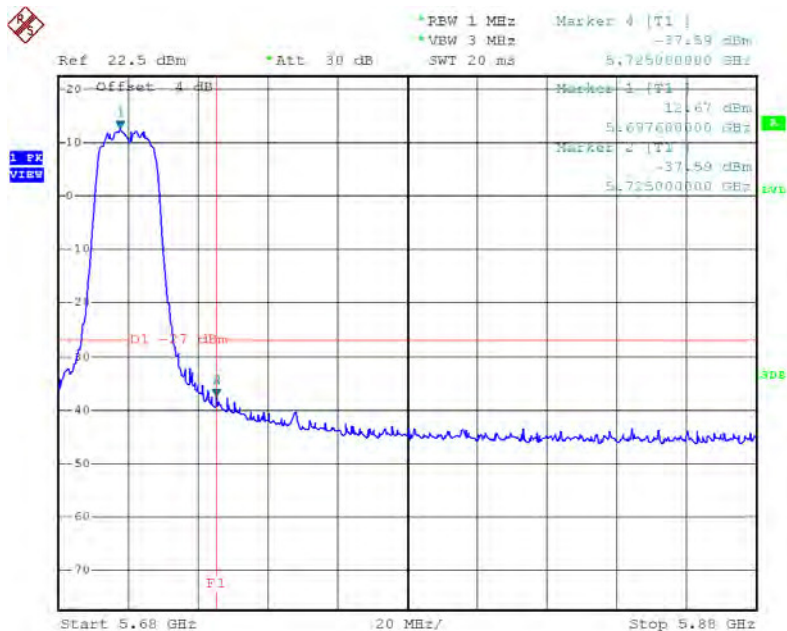

Date: 21.DEC.2015 21:56:36


Test Mode: UNII-2C/TX N40 Mode_ANT 1

TX mode CH102

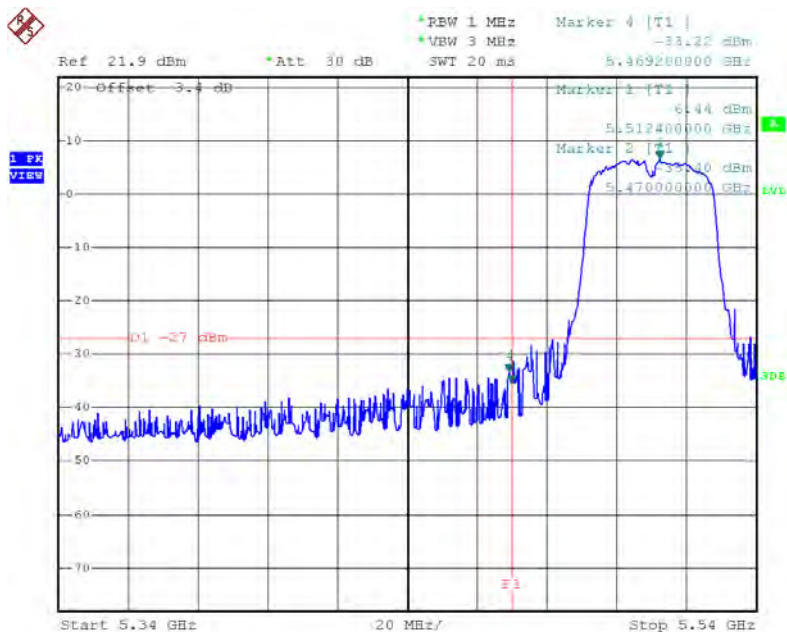

Date: 21.DEC.2015 21:21:28


TX mode CH134

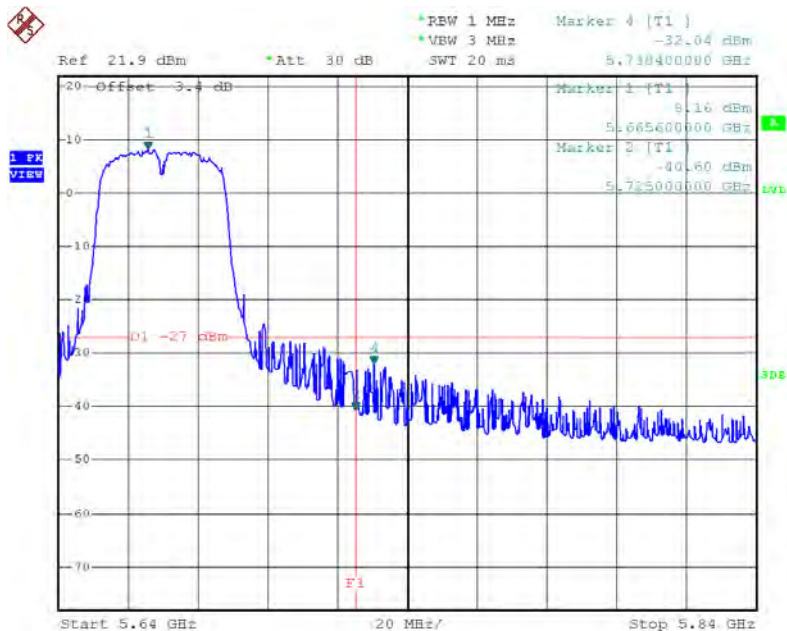

Date: 21.DEC.2015 21:23:36


Test Mode: UNII-2C/TX N40 Mode_ANT 2

TX mode CH102

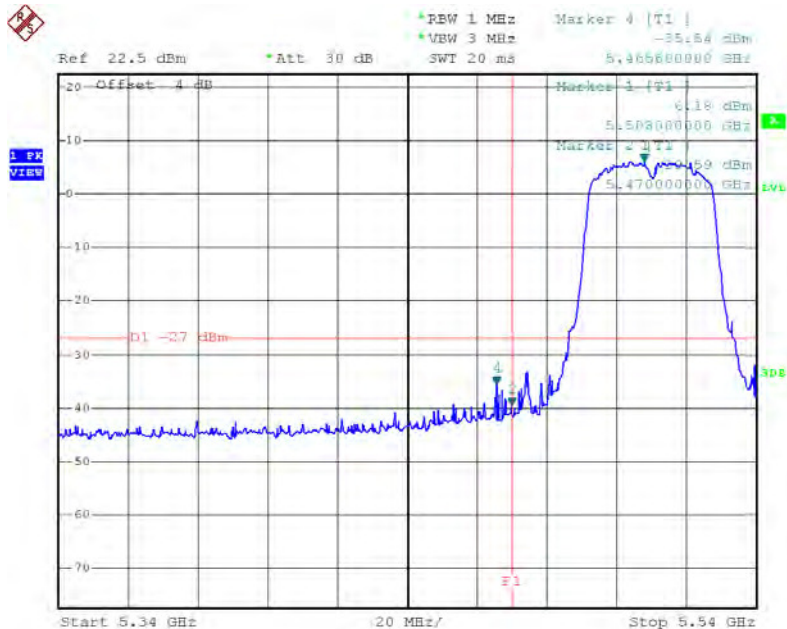

Date: 22.DEC.2015 18:52:35


TX mode CH134

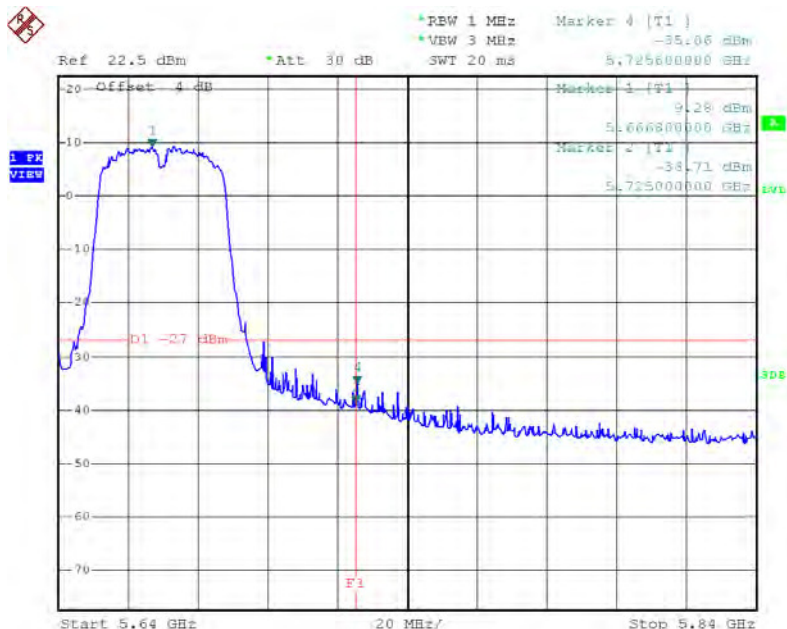

Date: 21.DEC.2015 22:19:25


Test Mode: UNII-3/TX A Mode_ANT 1

TX A Mode CH149

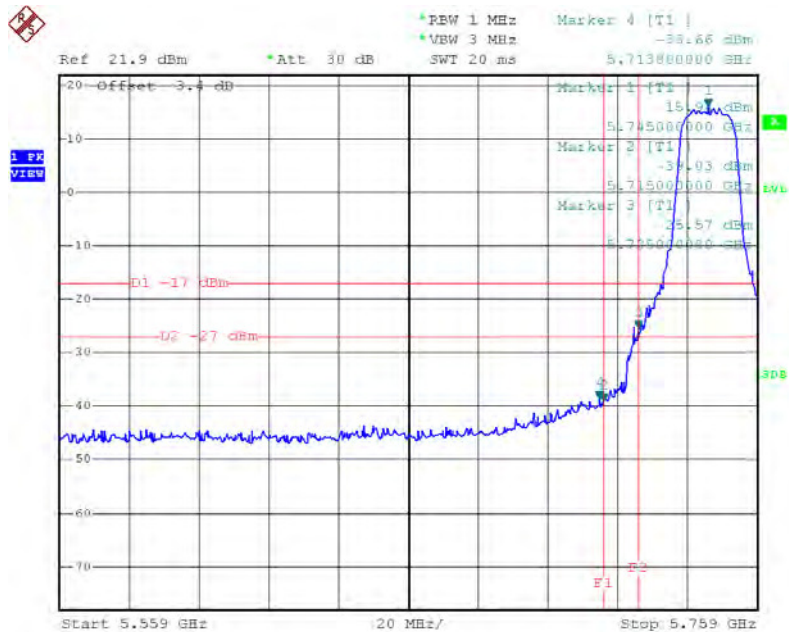

Date: 21.DEC.2015 19:03:55


TX A Mode CH165

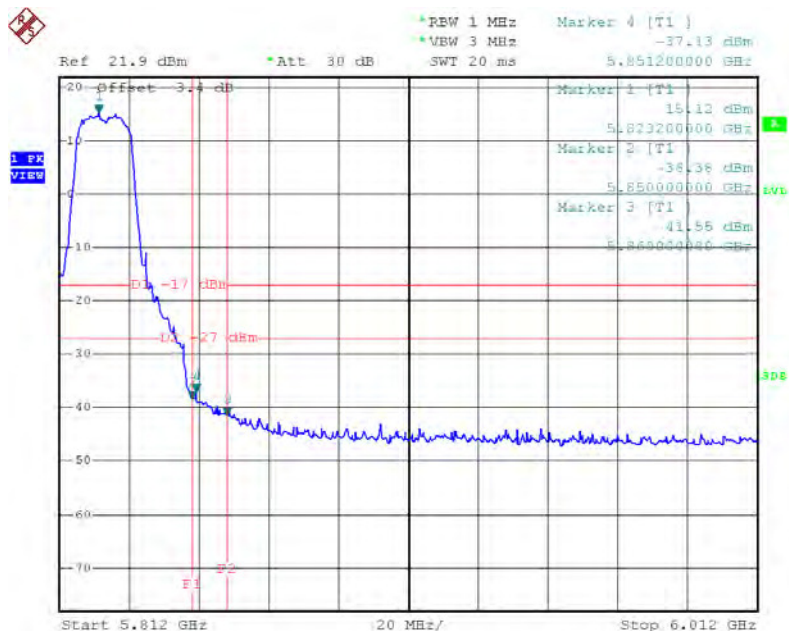

Date: 21.DEC.2015 19:07:25


Test Mode: UNII-3/TX A Mode_ANT 2

TX A Mode CH149

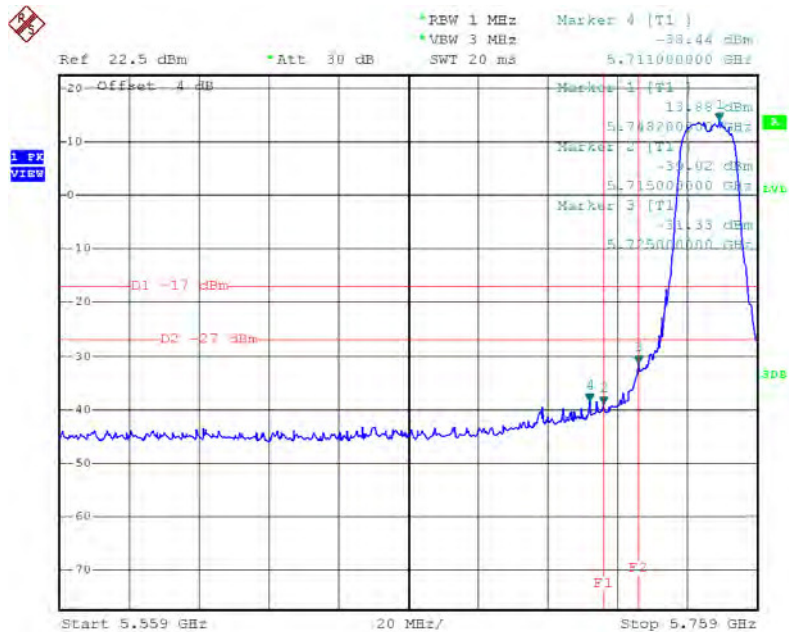

Date: 21.DEC.2015 21:44:12


TX A Mode CH165

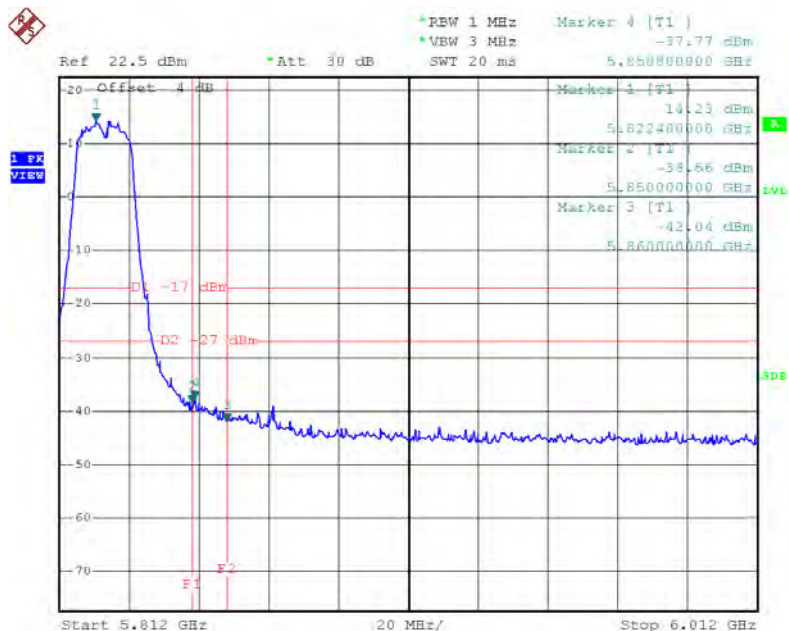

Date: 21.DEC.2015 21:46:05


Test Mode: UNII-3/TX N20 Mode_ANT 1

TX HT20 mode CH149

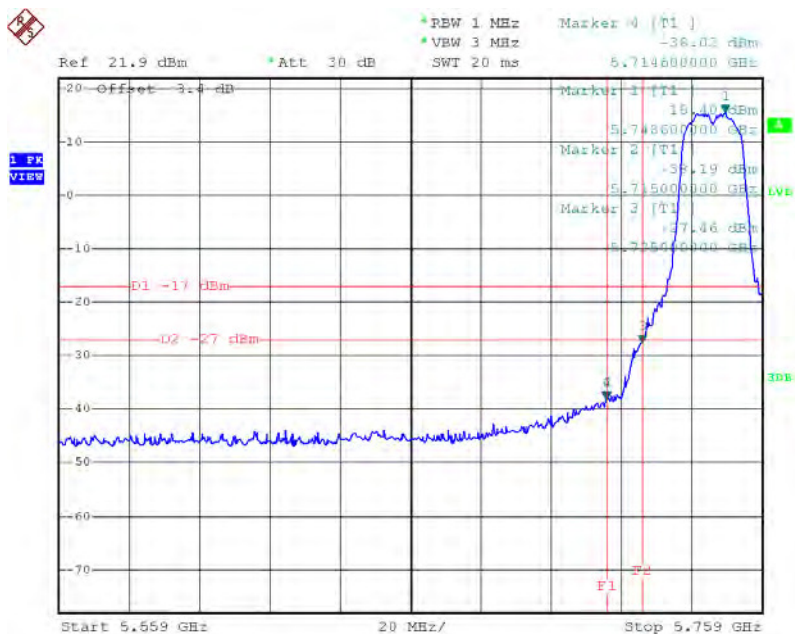

Date: 21.DEC.2015 19:19:57


TX HT20 mode CH165

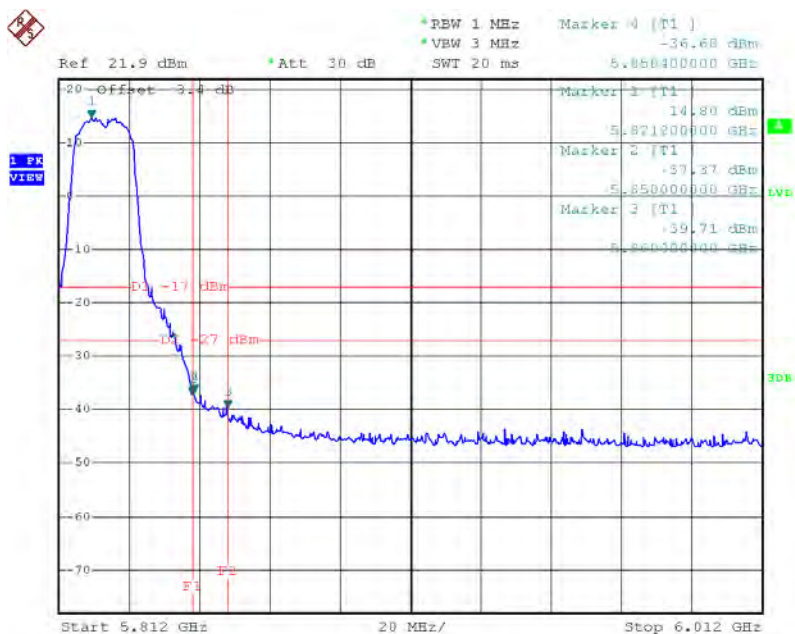

Date: 21.DEC.2015 19:22:38


Test Mode: UNII-3/TX N20 Mode_ANT 2

TX HT20 mode CH149

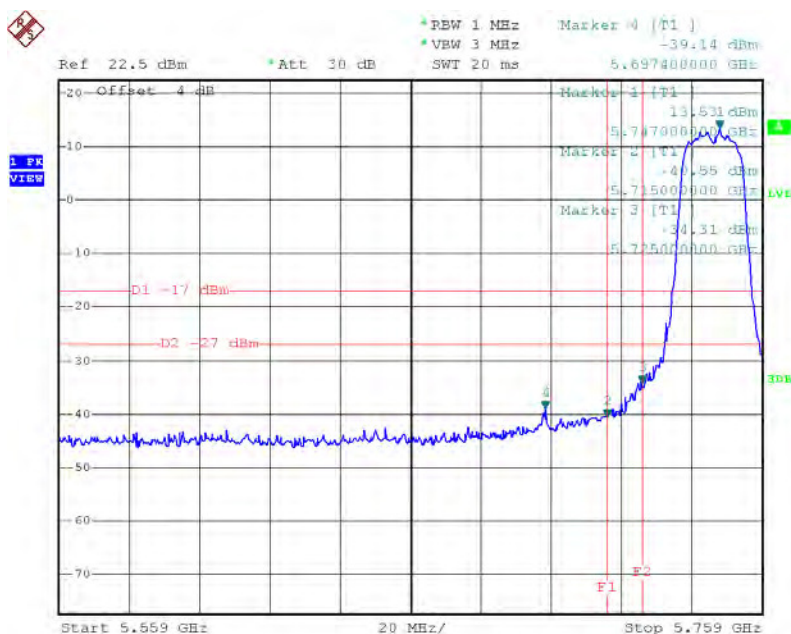

Date: 21.DEC.2015 21:57:35


X HT20 mode CH165

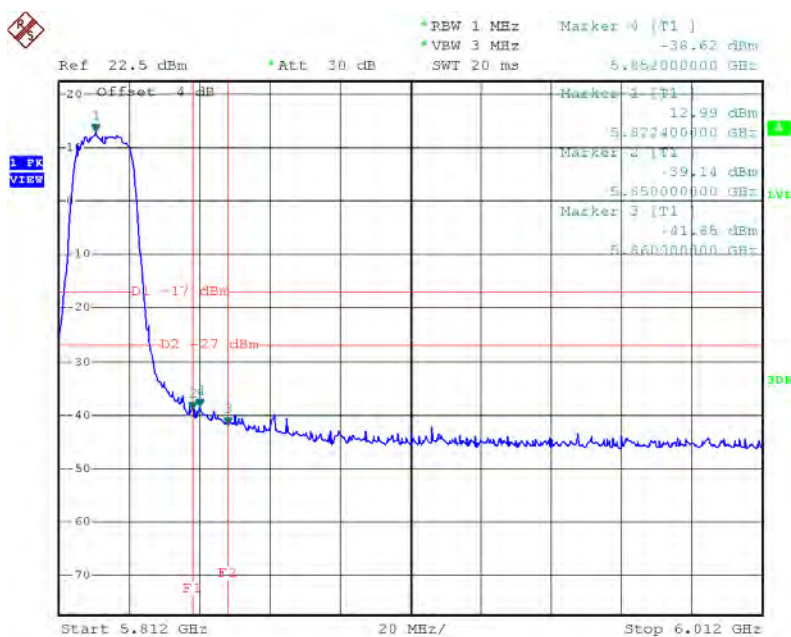

Date: 21.DEC.2015 21:59:24


Test Mode: UNII-3/TX N40 Mode_ANT 1

UNII-3/TX HT40 mode CH151

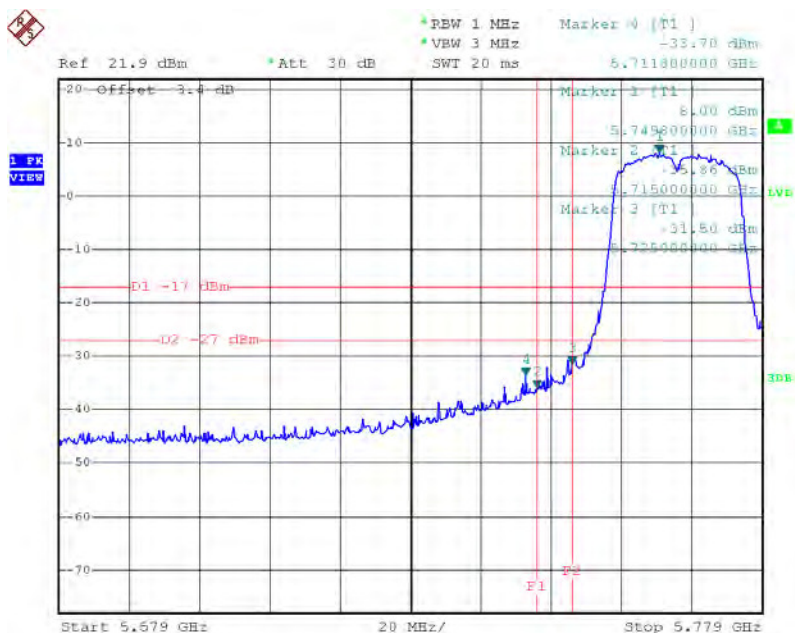

Date: 21.DEC.2015 21:25:00


UNII-3/TX HT40 mode CH159

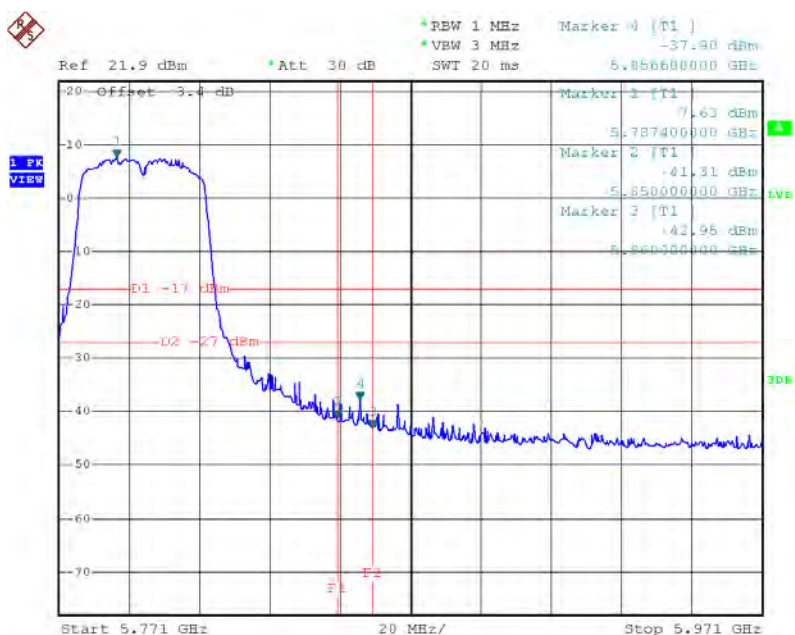

Date: 21.DEC.2015 21:26:02


Test Mode: UNII-3/TX N40 Mode_ANT 2

TX HT40 mode CH151

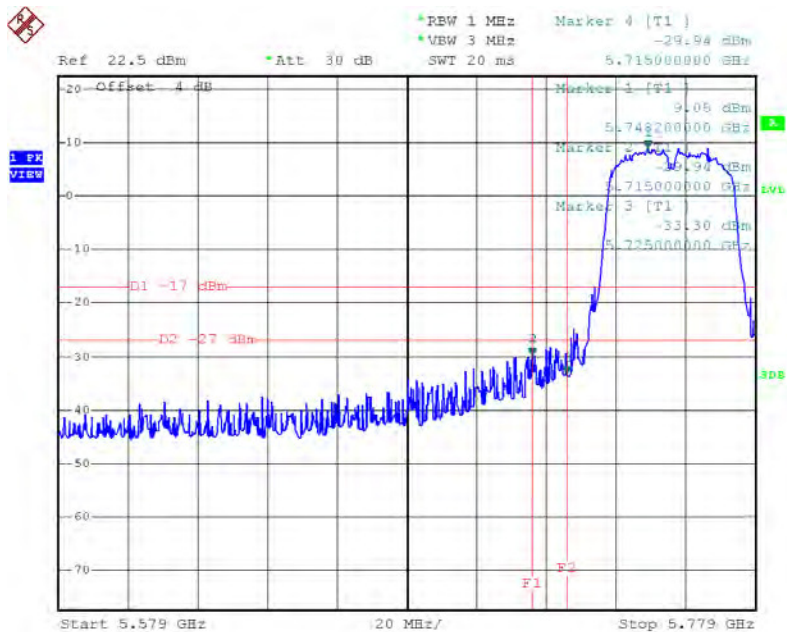

Date: 22.DEC.2015 18:54:34


HT40 mode CH159

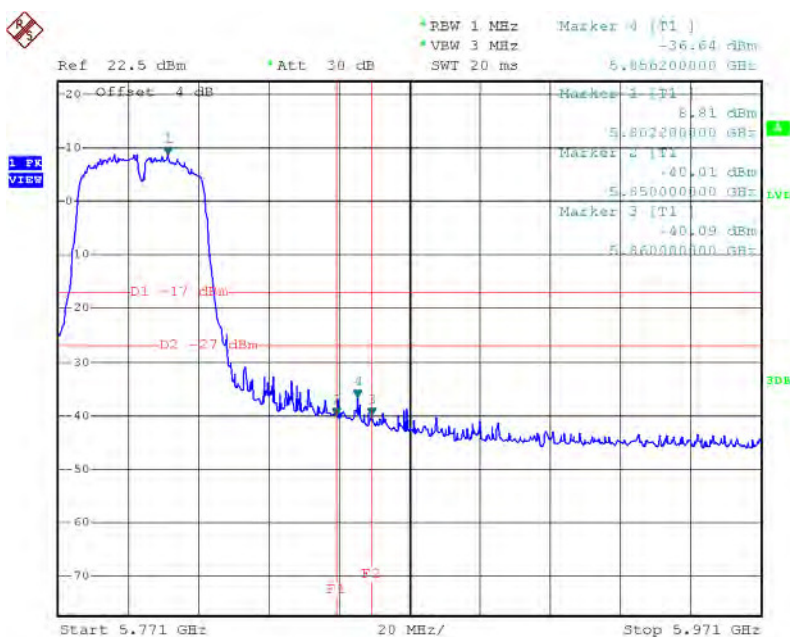

Date: 21.DEC.2015 22:21:51


Test Mode: UNII-1/TX AC20 Mode_ANT 2

TX mode CH36

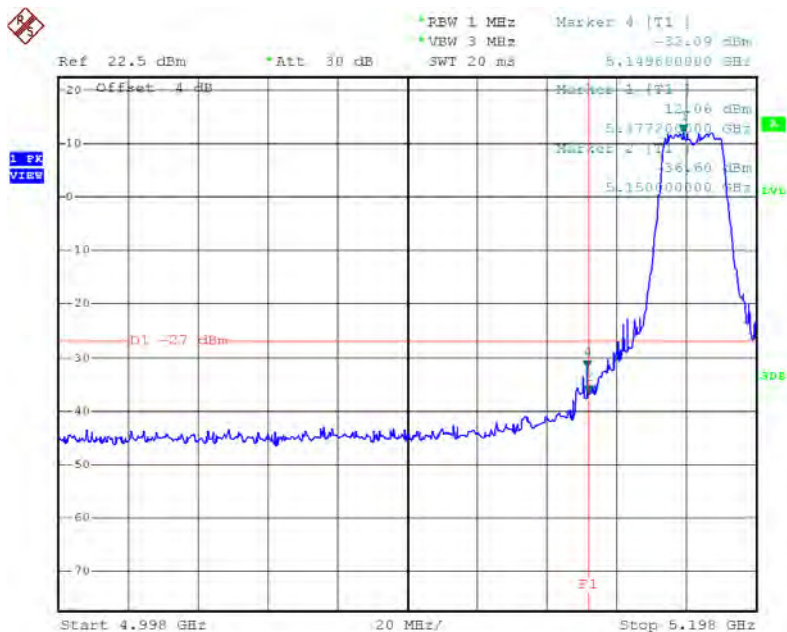

Date: 21.DEC.2015 22:01:14


TX mode CH48

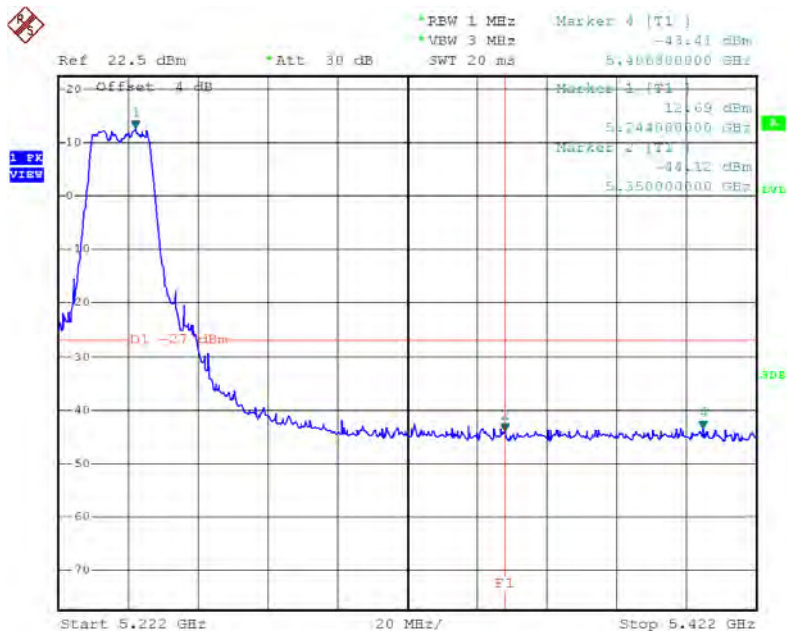

Date: 21.DEC.2015 22:03:10


Test Mode: UNII-1/TX AC40 Mode_ANT 1

TX mode CH38

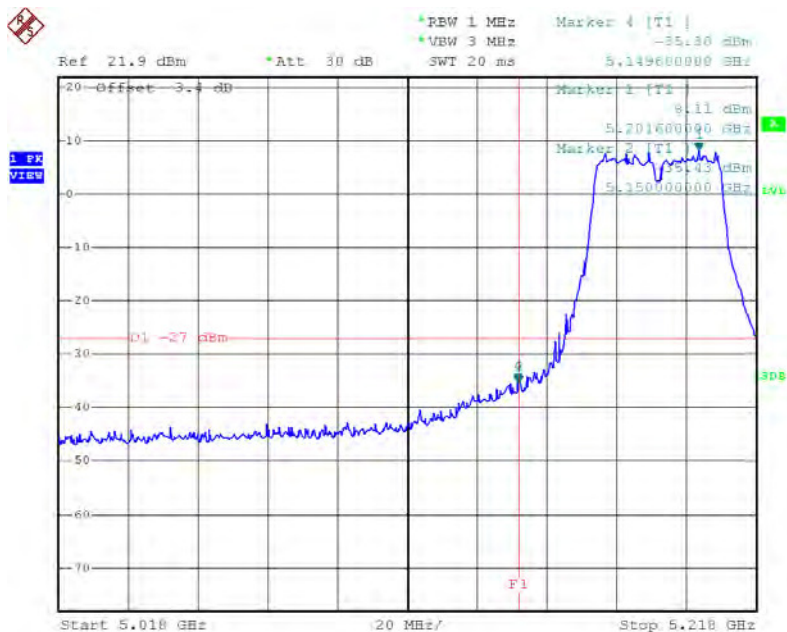

Date: 21.DEC.2015 20:07:35


TX mode CH46

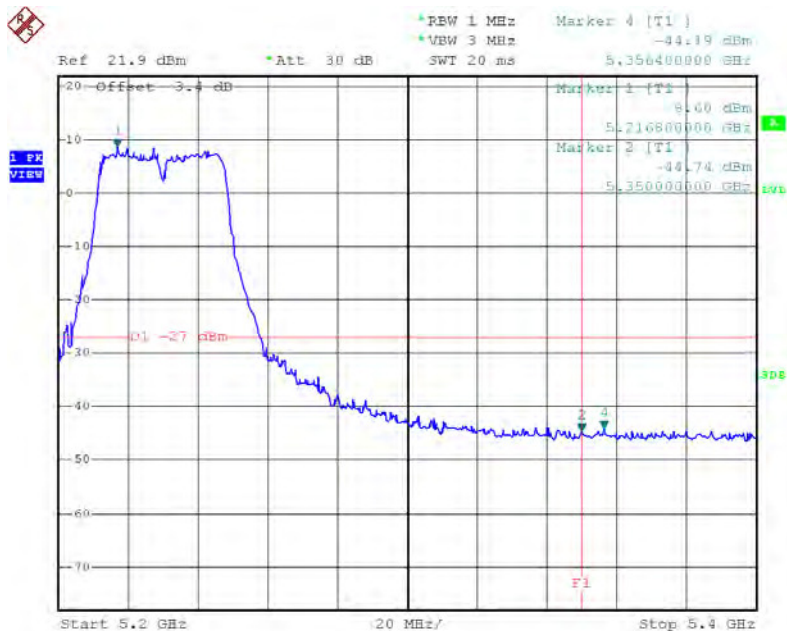

Date: 21.DEC.2015 20:11:13


Test Mode: UNII-1/TX AC40 Mode_ANT 2

TX mode CH38

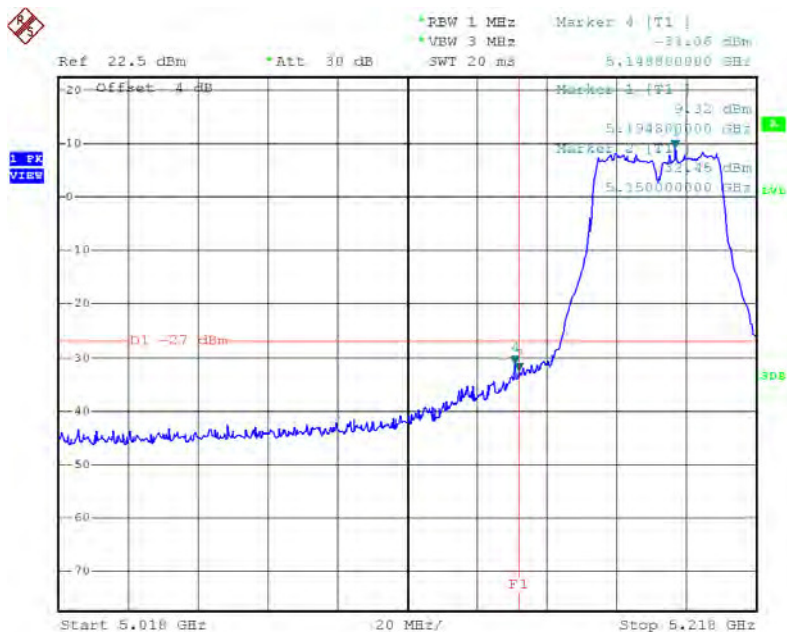

Date: 22.DEC.2015 18:57:06


TX mode CH46

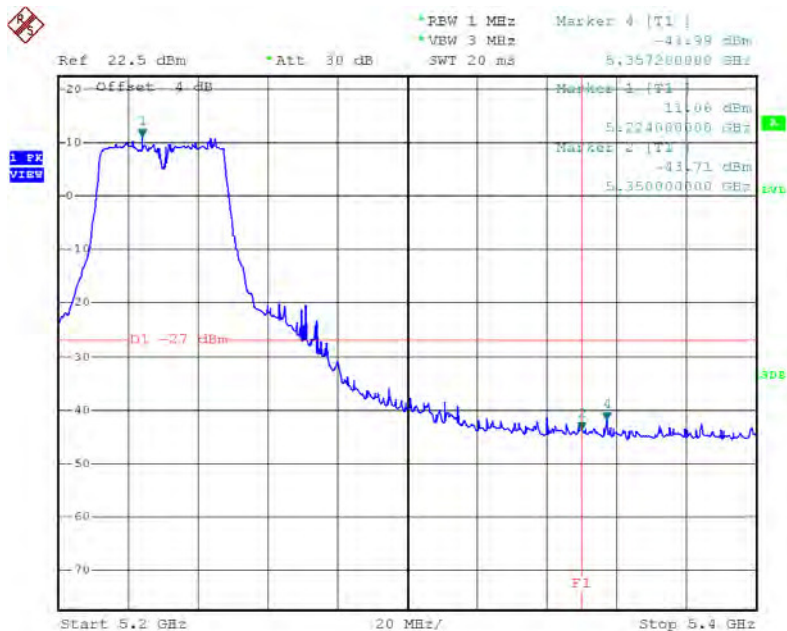


Date: 21.DEC.2015 22:24:53

Test Mode: UNII-1/TX AC80 Mode_ANT 1

TX mode CH42

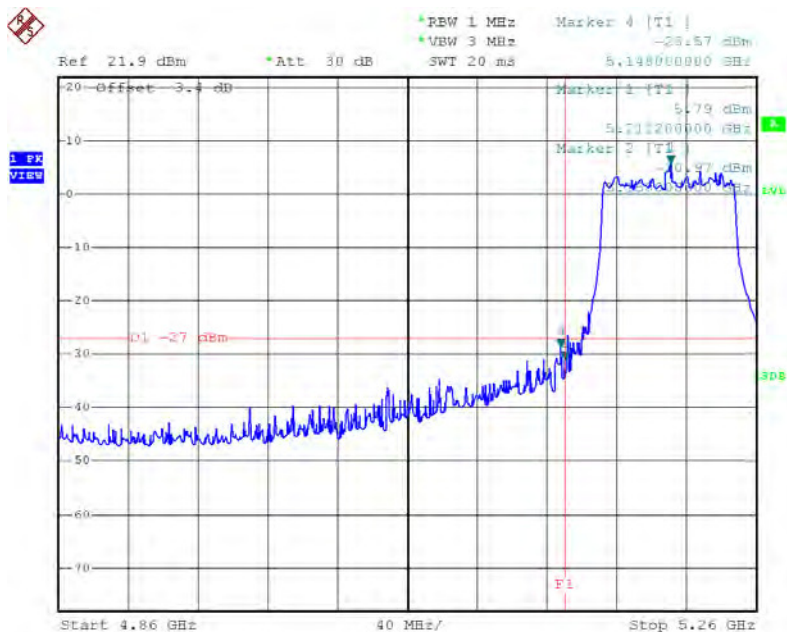


Date: 22.DEC.2015 18:27:27

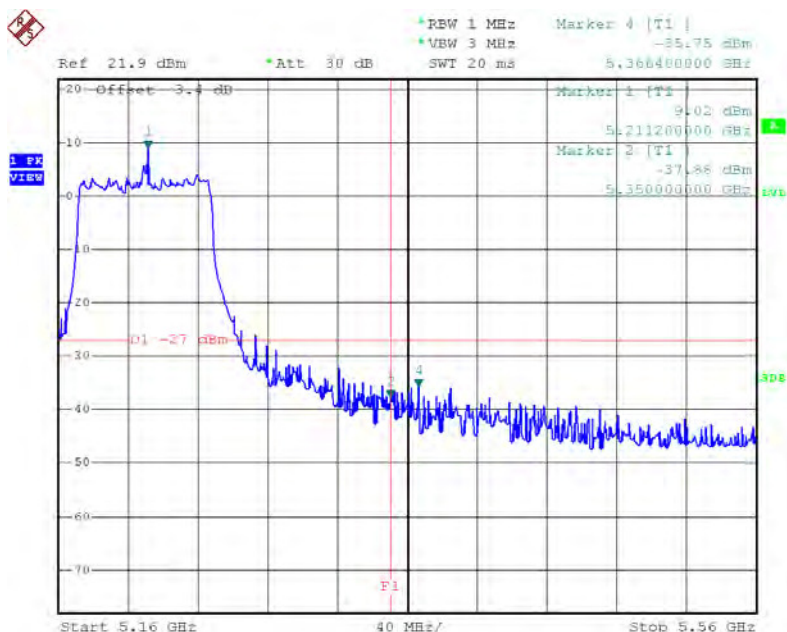


Date: 22.DEC.2015 18:27:36

Test Mode: UNII-1/TX AC80 Mode_ANT 2

TX mode CH42

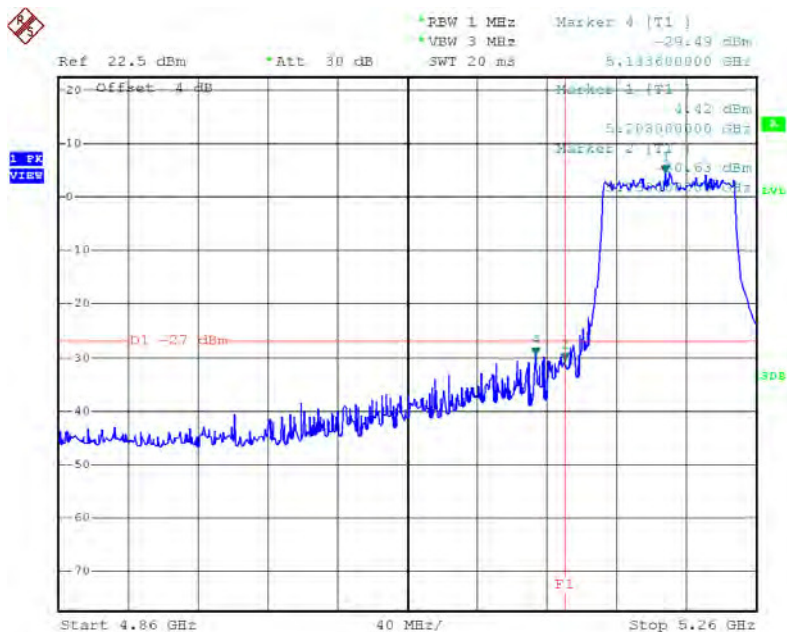


Date: 22.DEC.2015 18:14:21

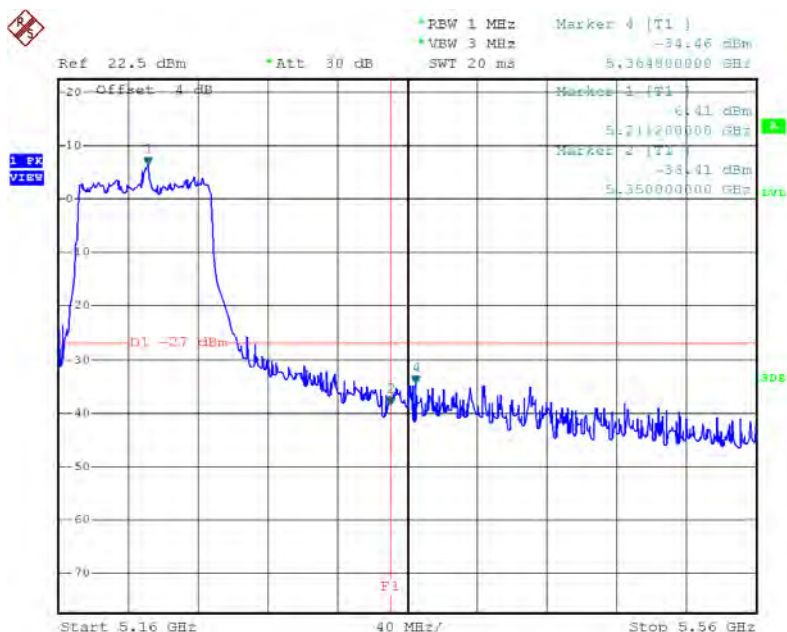

Date: 22.DEC.2015 18:14:29


Test Mode: UNII-2A/TX AC20 Mode_ANT 1

TX mode CH52

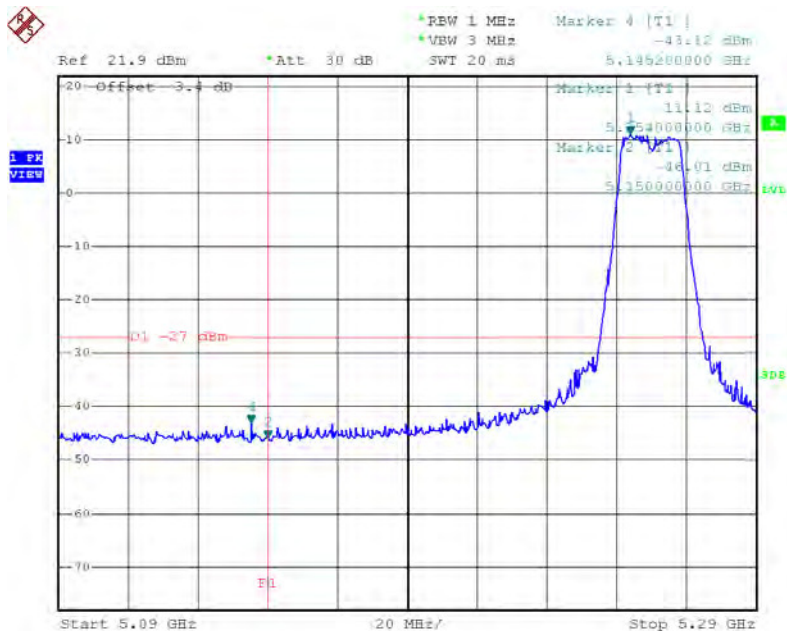

Date: 21.DEC.2015 19:27:05


TX mode CH64

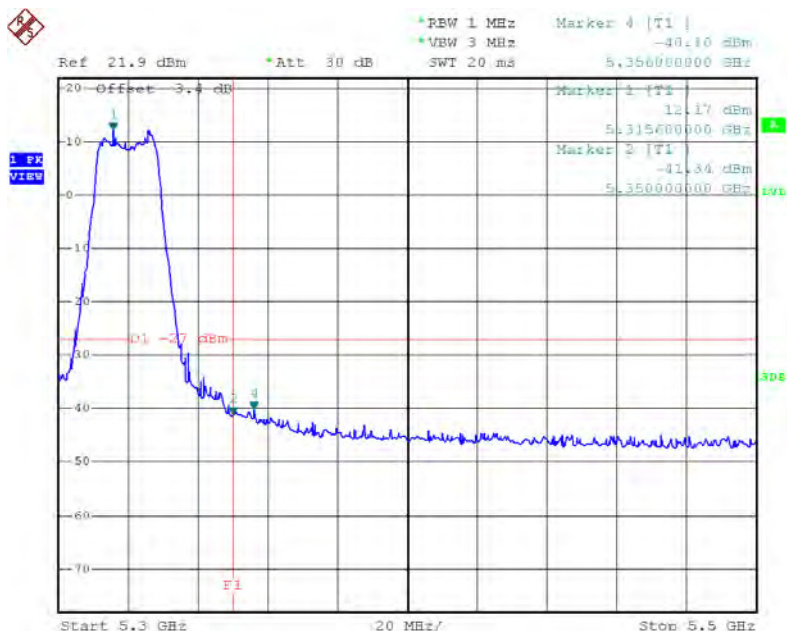

Date: 21.DEC.2015 19:28:43


Test Mode: UNII-2A/TX AC20 Mode_ANT 2

TX mode CH52

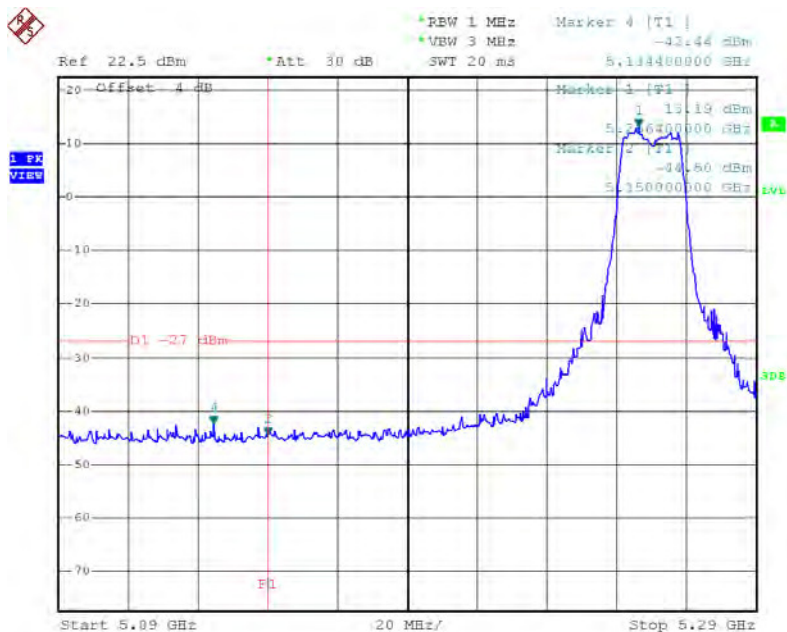

Date: 21.DEC.2015 22:04:00


TX mode CH64

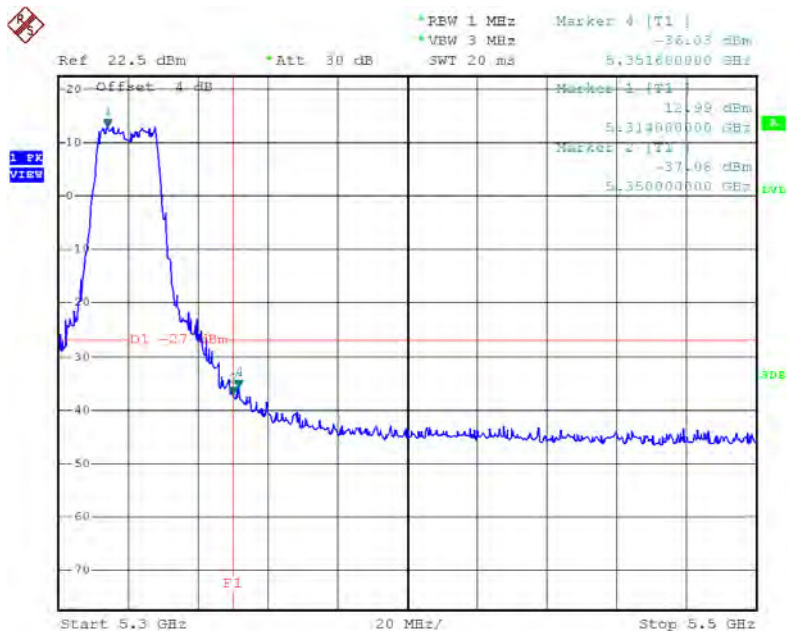

Date: 21.DEC.2015 22:05:45


Test Mode: UNII-2A/TX AC40 Mode_ANT 1

TX mode CH54

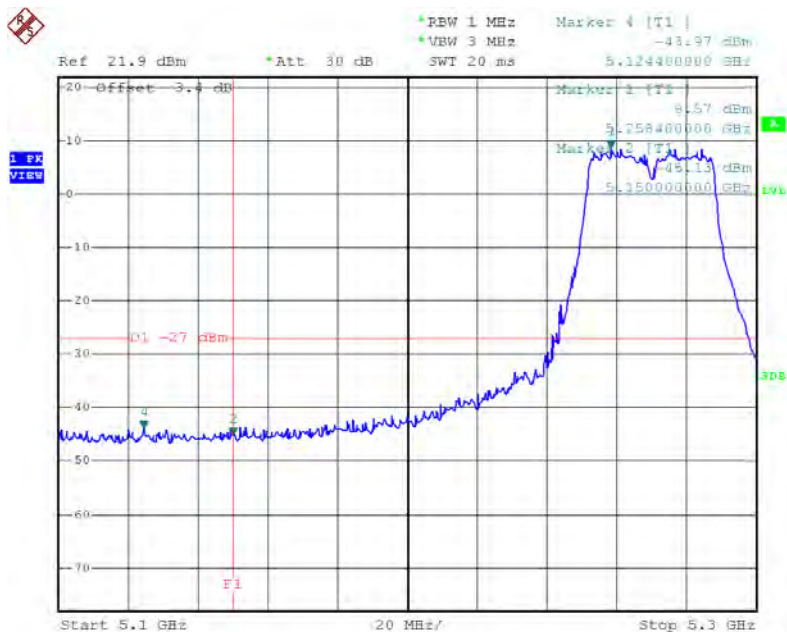

Date: 21.DEC.2015 20:13:19


TX mode CH62

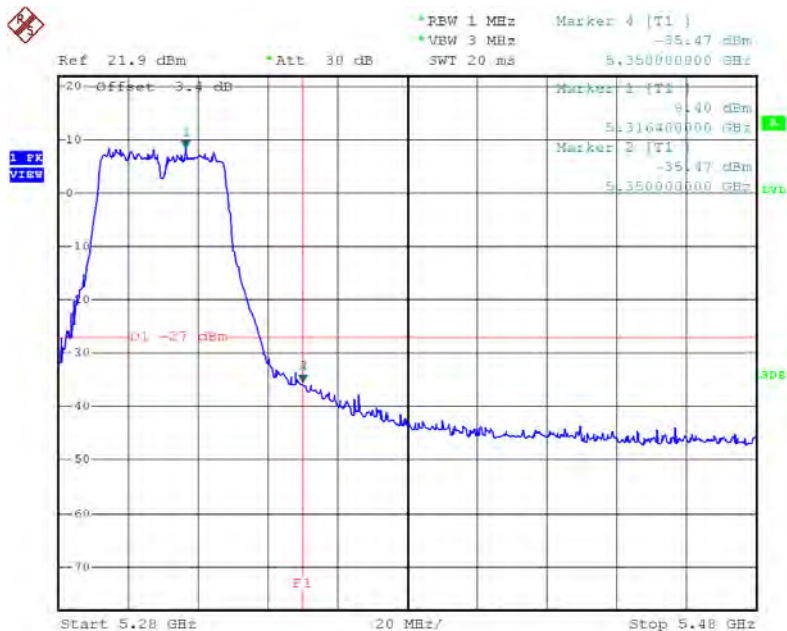

Date: 21.DEC.2015 20:14:24


Test Mode: UNII-2A/TX AC40 Mode_ANT 2

TX mode CH54

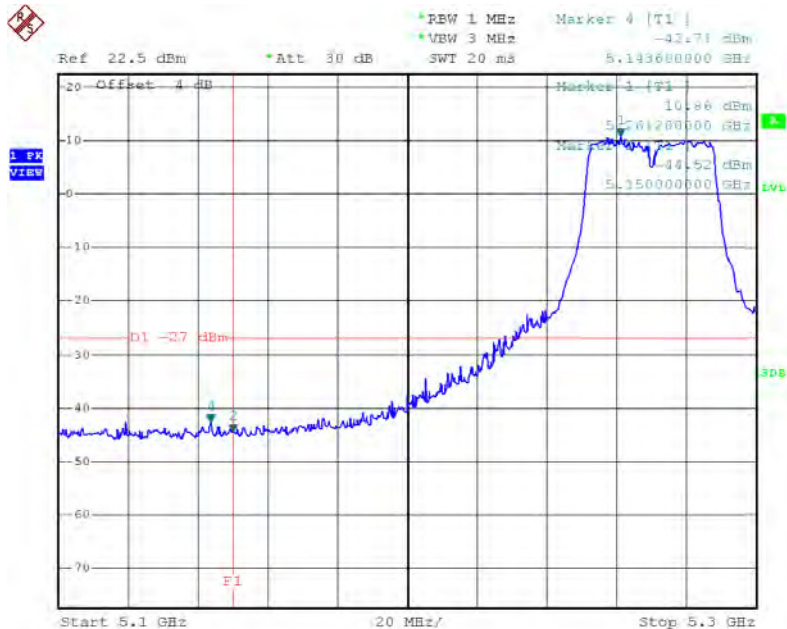

Date: 21.DEC.2015 22:25:51


TX mode CH62

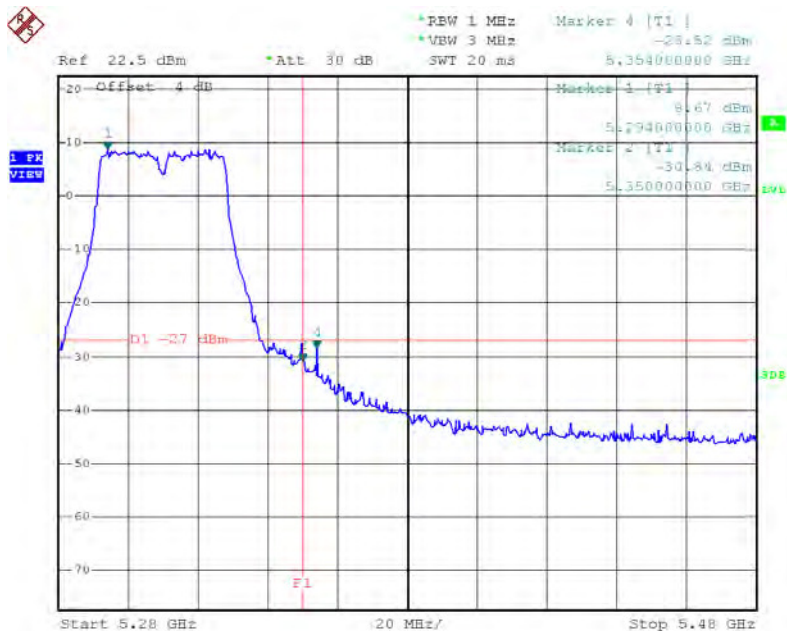


Date: 22.DEC.2015 18:58:14

Test Mode: UNII-2A/TX AC80 Mode_ANT 1

TX mode CH58

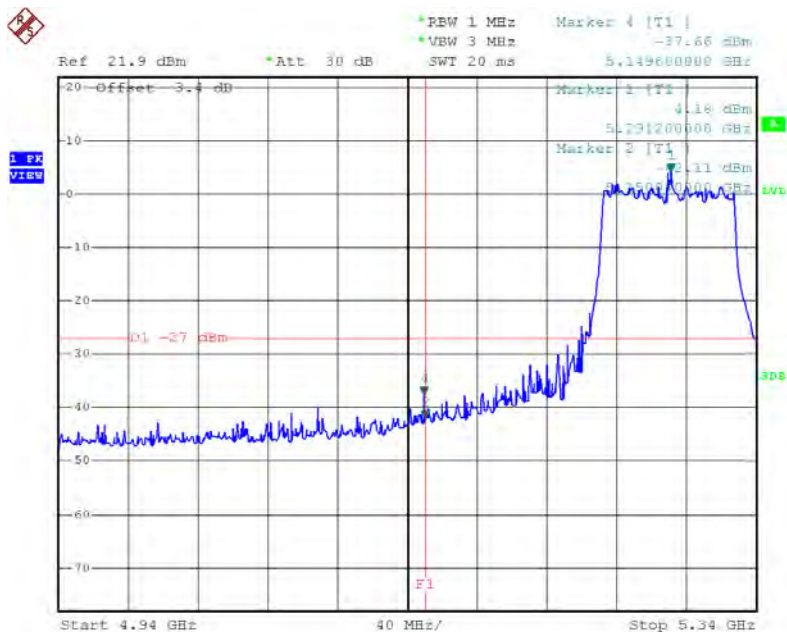


Date: 22.DEC.2015 18:29:03

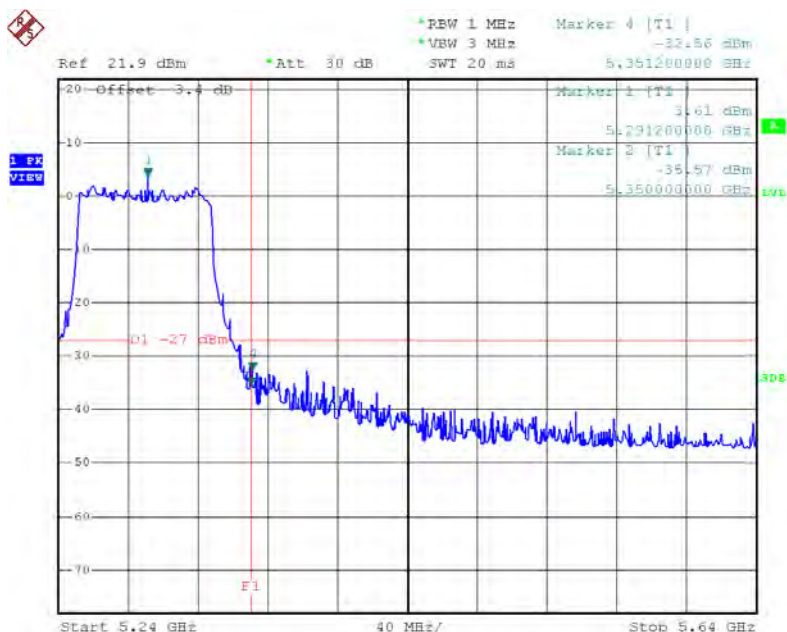


Date: 22.DEC.2015 18:29:11

Test Mode: UNII-2A/TX AC80 Mode_ANT 2

TX mode CH58

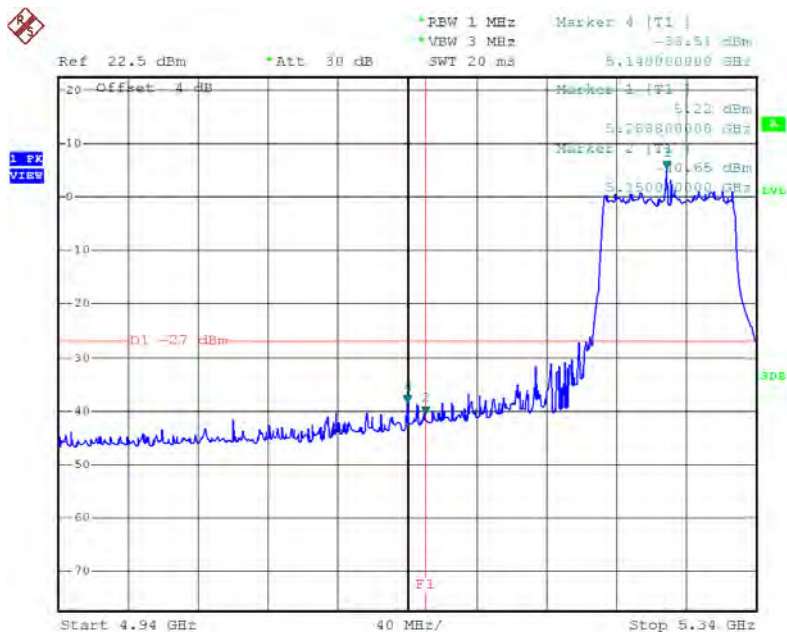


Date: 22.DEC.2015 18:24:03

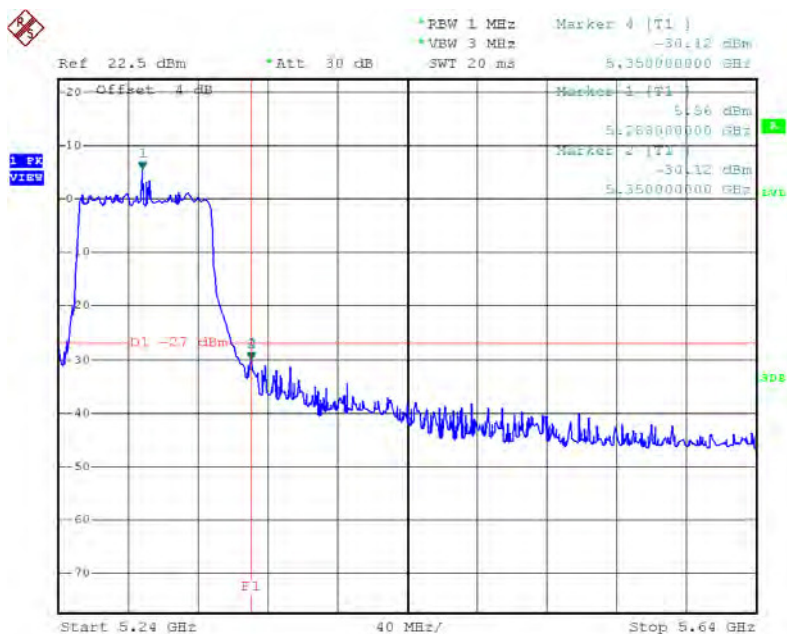

Date: 22.DEC.2015 18:24:11


Test Mode: UNII-2C/TX AC20 Mode_ANT 1

TX mode CH100

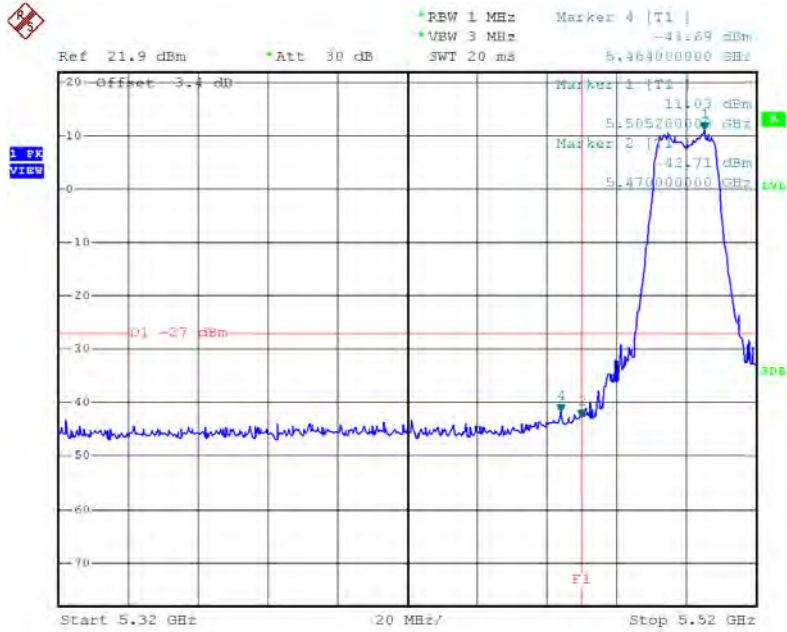

Date: 21.DEC.2015 19:29:35


TX mode CH140

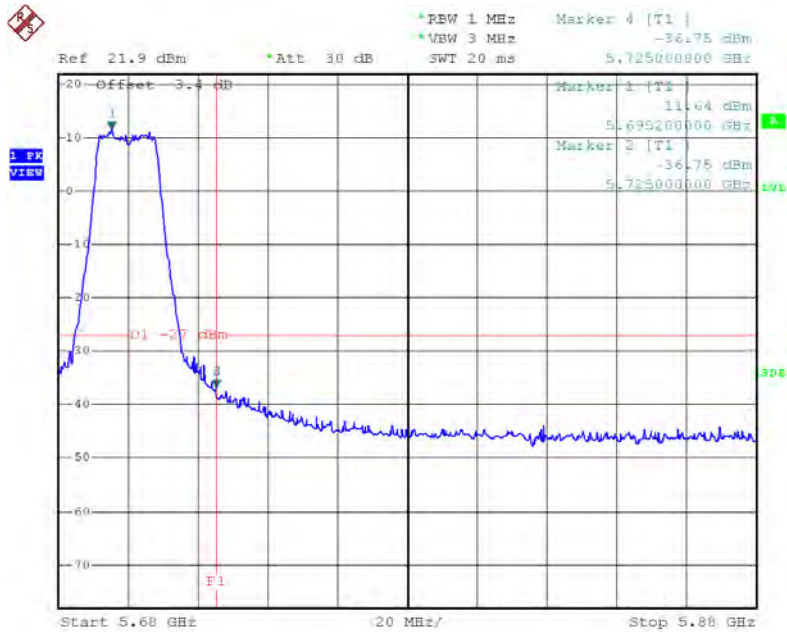

Date: 21.DEC.2015 19:31:13


Test Mode: UNII-2C/TX AC20 Mode_ANT 2

TX mode CH100

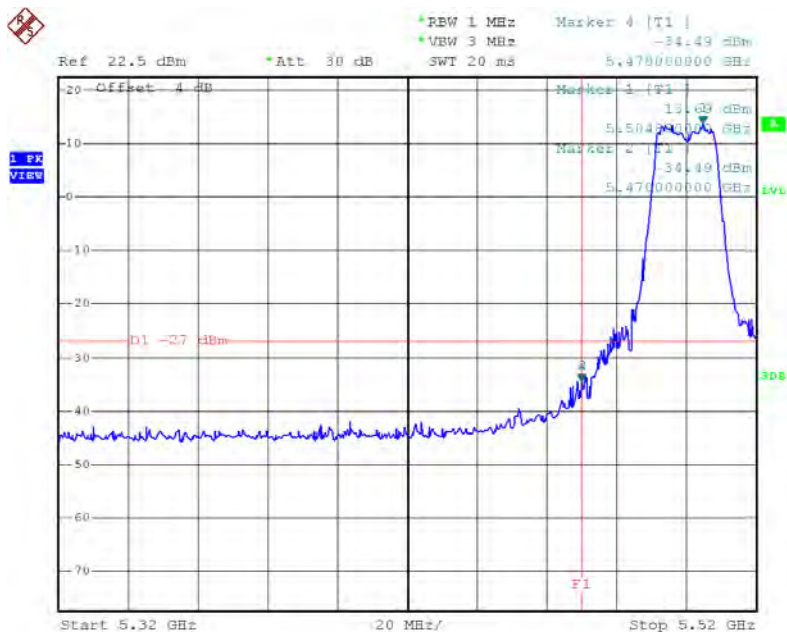

Date: 21.DEC.2015 22:06:38


TX mode CH140

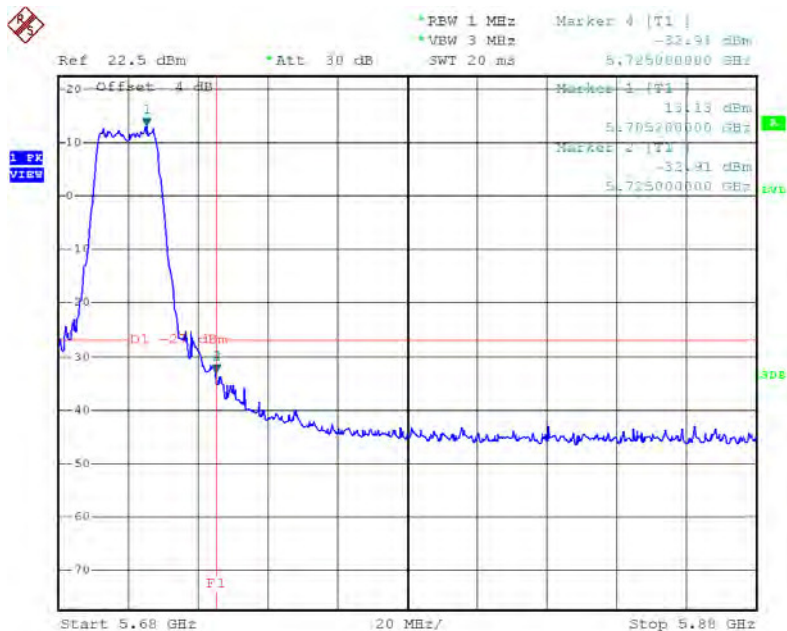

Date: 21.DEC.2015 22:08:18


Test Mode: UNII-2C/TX AC40 Mode_ANT 1

TX mode CH102

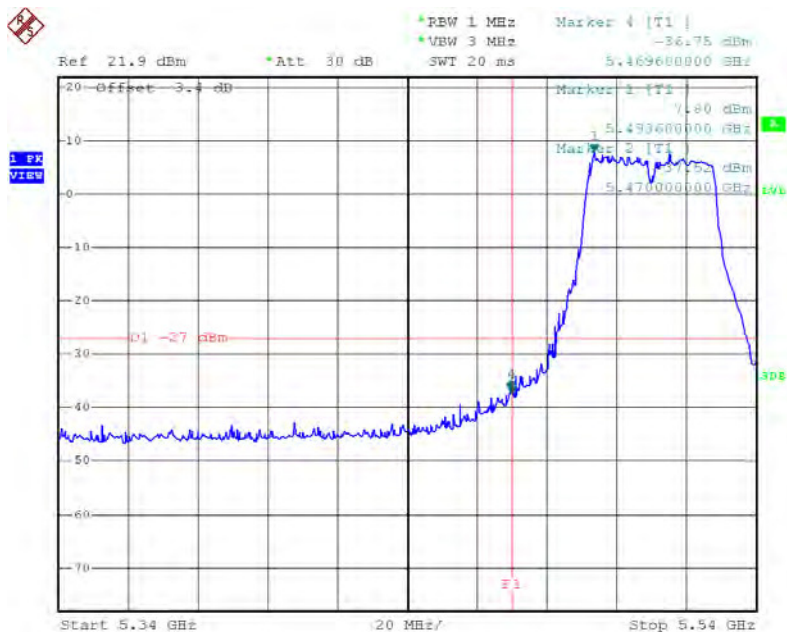

Date: 21.DEC.2015 20:15:27


TX mode CH134

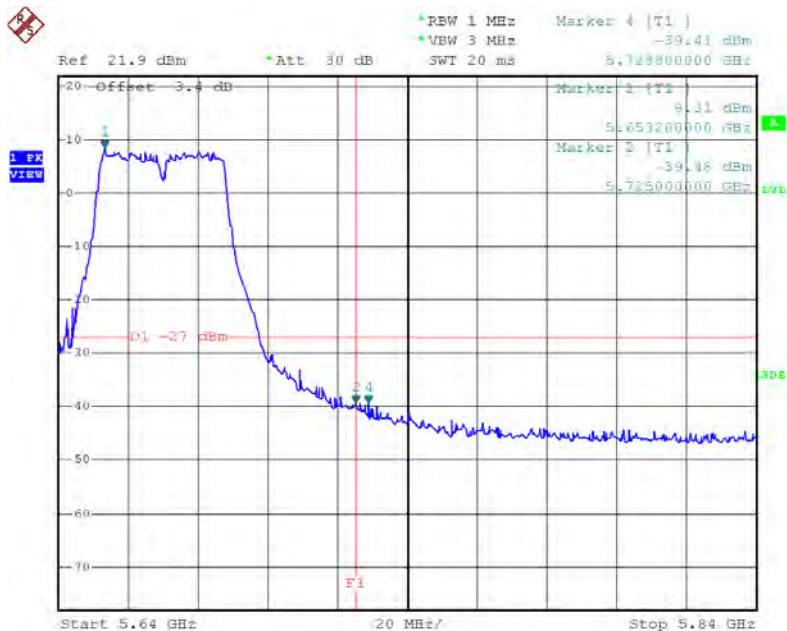

Date: 21.DEC.2015 20:18:36


Test Mode: UNII-2C/TX AC40 Mode_ANT 2

TX mode CH102

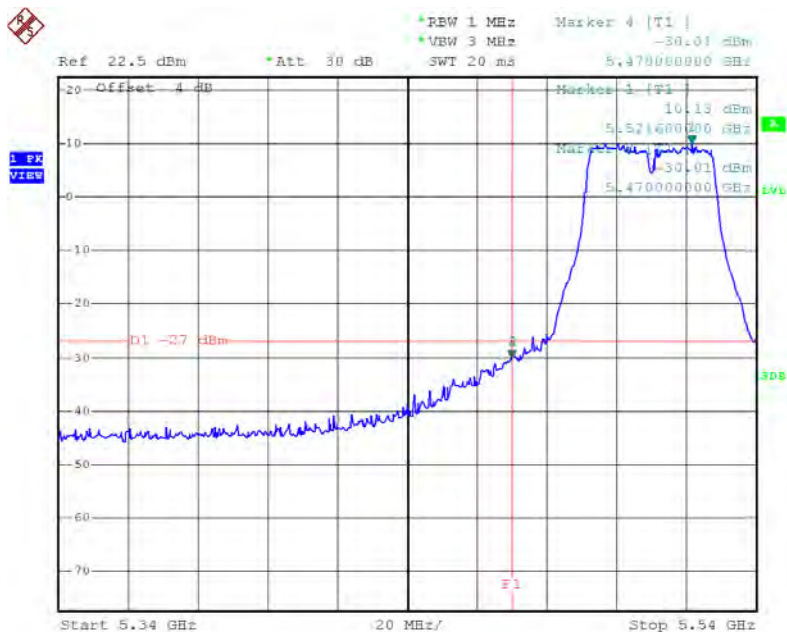

Date: 21.DEC.2015 22:28:06


TX mode CH134

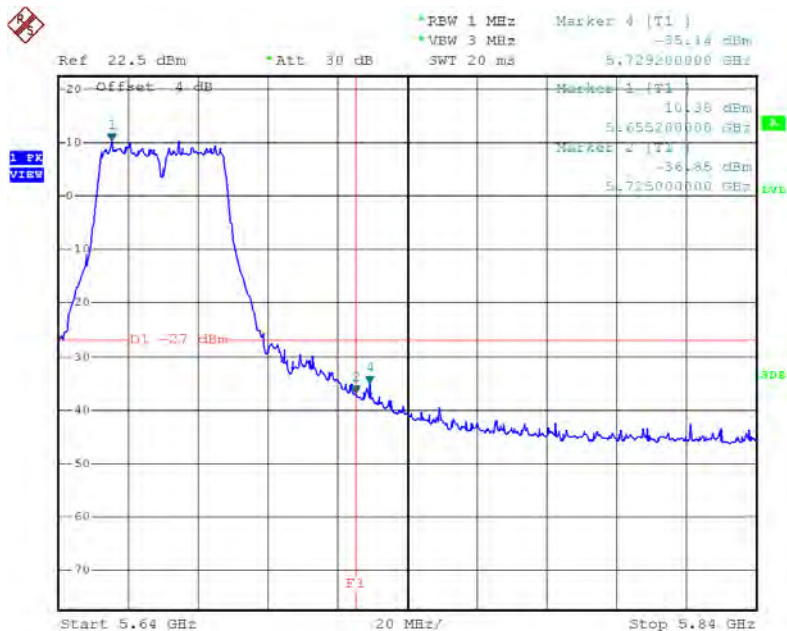

Date: 21.DEC.2015 22:31:14


Test Mode: UNII-2C/TX AC80 Mode_ANT 1

TX mode CH106

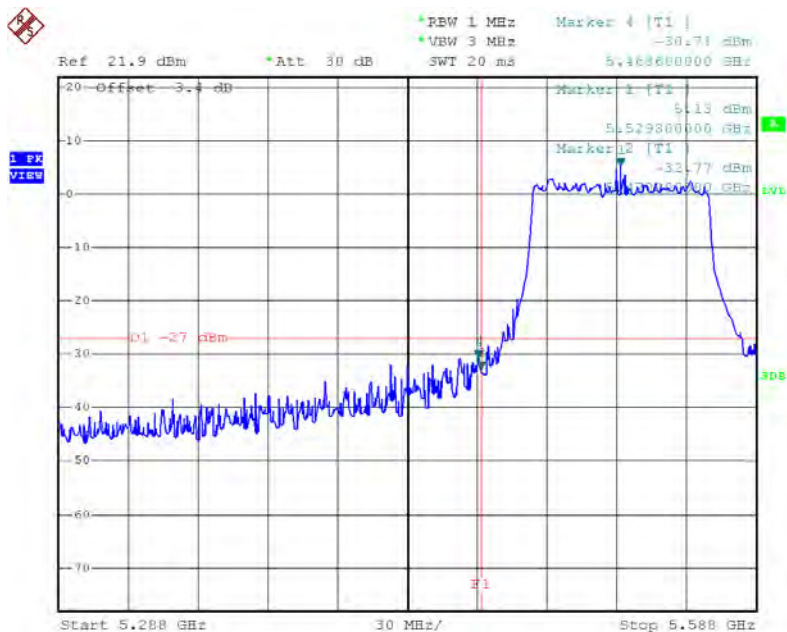

Date: 22.DEC.2015 18:30:37


TX mode CH122

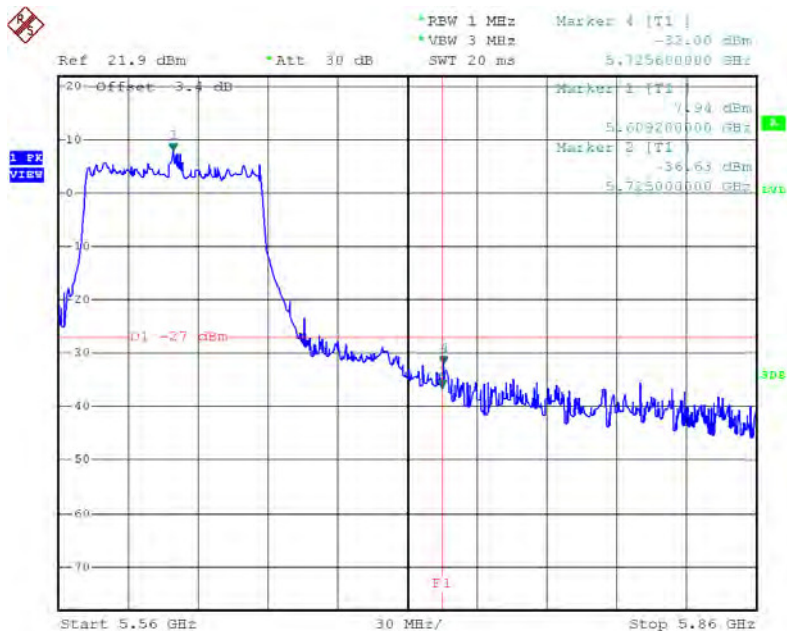

Date: 22.DEC.2015 18:32:20


Test Mode: UNII-2C/TX AC80 Mode_ANT 2

TX mode CH106

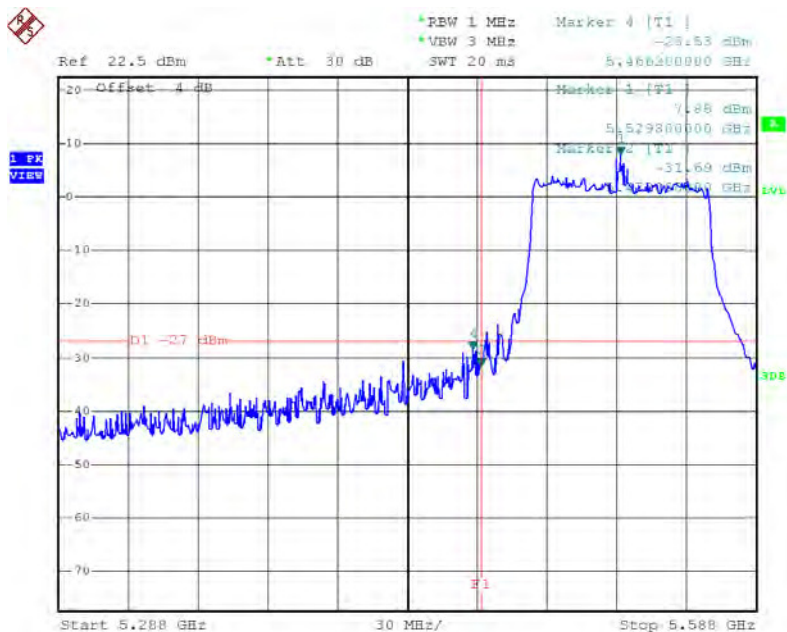

Date: 22.DEC.2015 18:17:25


TX mode CH122

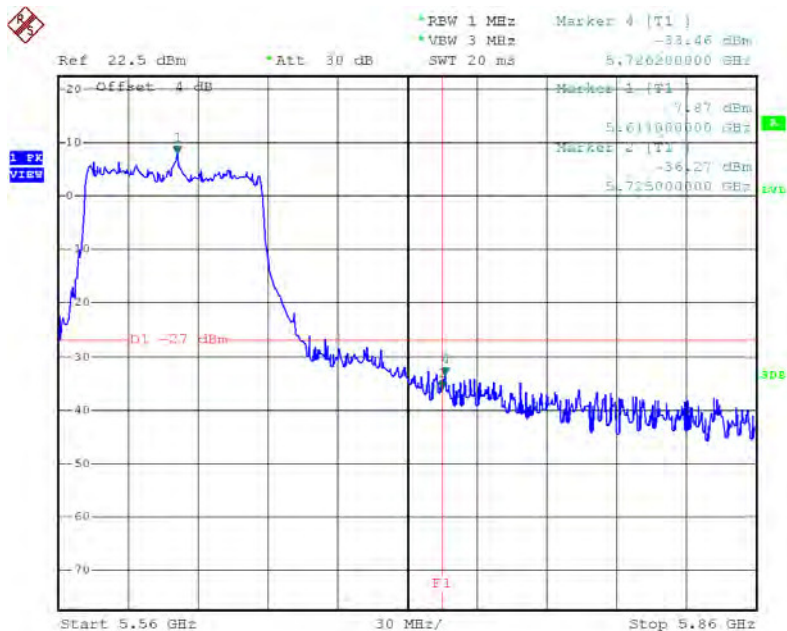

Date: 22.DEC.2015 18:18:54


Test Mode: UNII-3/TX AC20 Mode_ANT 1

TX AC HT20 mode CH149

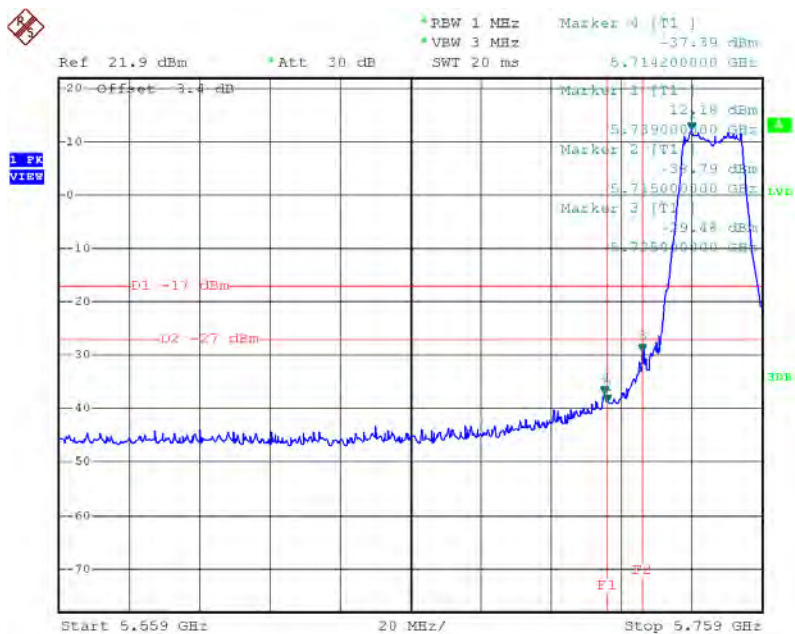

Date: 21.DEC.2015 19:32:11


TX AC HT20 mode CH165

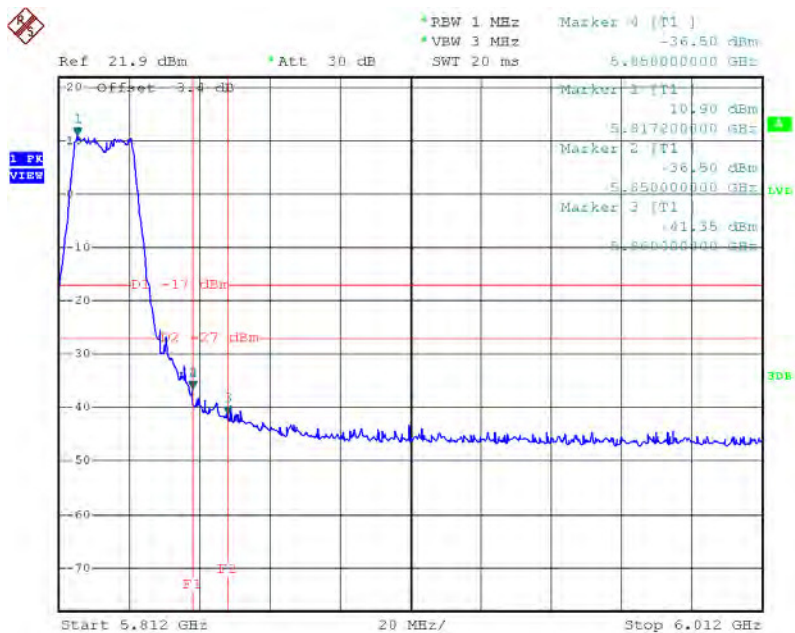

Date: 21.DEC.2015 19:33:55


Test Mode: UNII-3/TX AC20 Mode_ANT 2

TX AC HT20 mode CH149

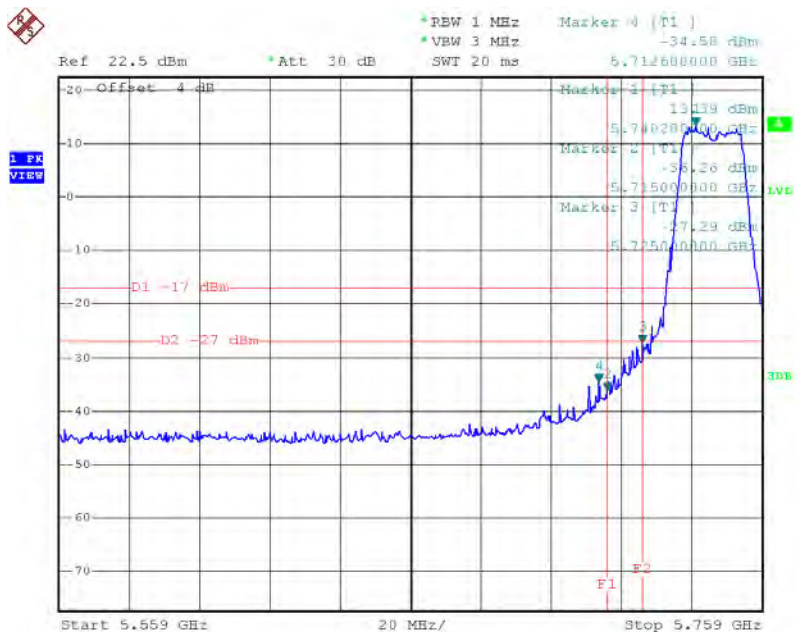

Date: 21.DEC.2015 22:09:14


TX AC HT20 mode CH165

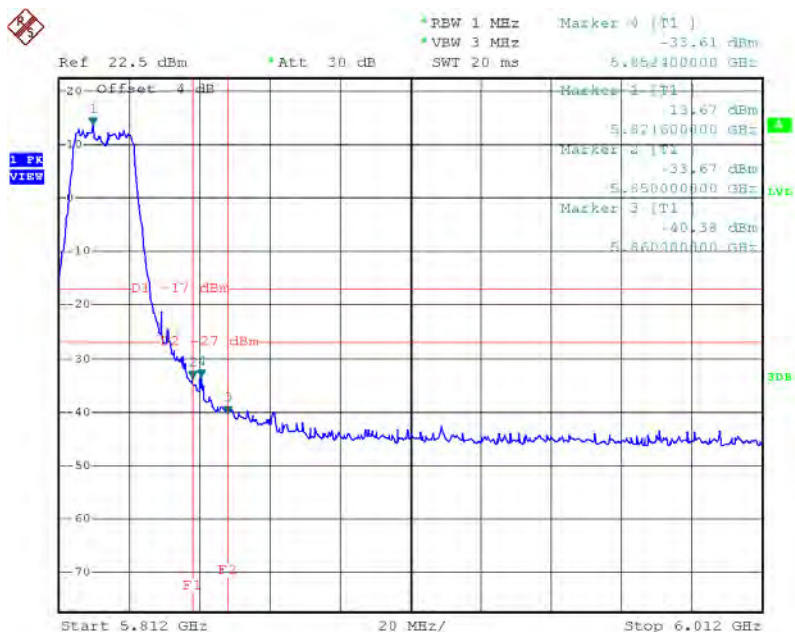

Date: 21.DEC.2015 22:11:13


Test Mode: UNII-3/TX AC40 Mode_ANT 1

TX AC HT40 mode CH151

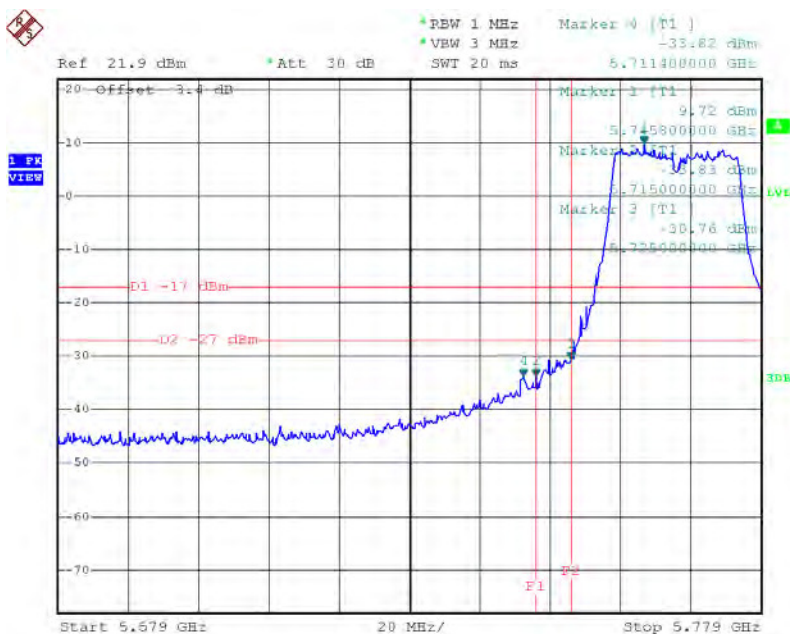

Date: 21.DEC.2015 20:19:45


TX AC HT40 mode CH159

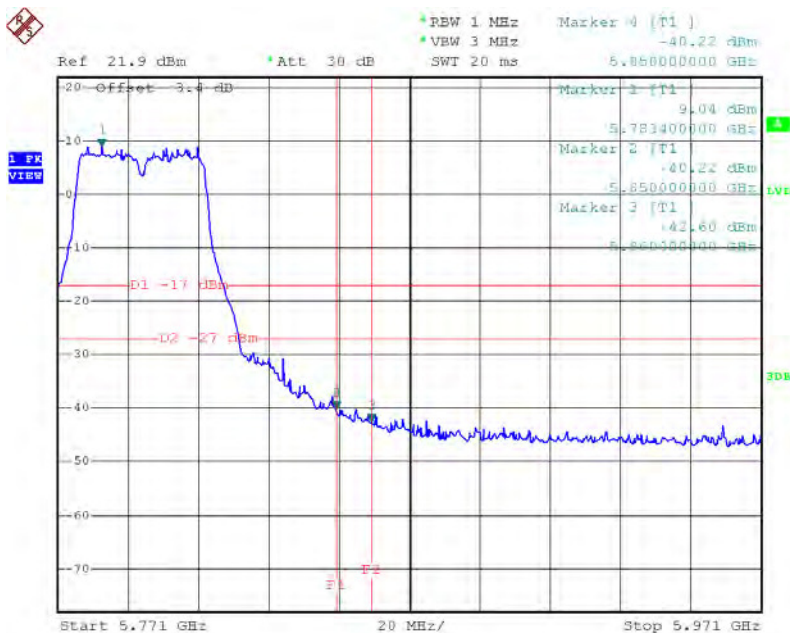

Date: 21.DEC.2015 20:20:49


Test Mode: UNII-3/TX AC40 Mode_ANT 2

TX AC HT40 mode CH151

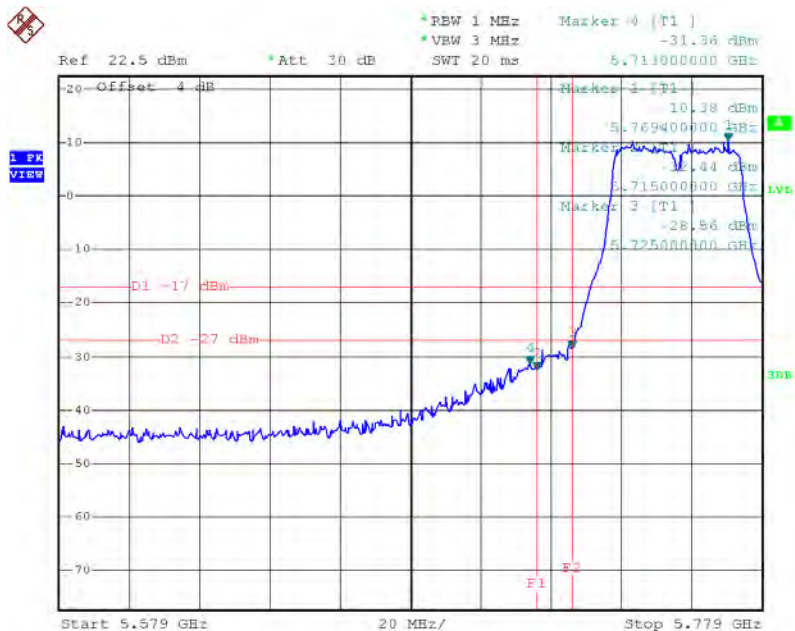

Date: 21.DEC.2015 22:32:16


TX AC HT40 mode CH159

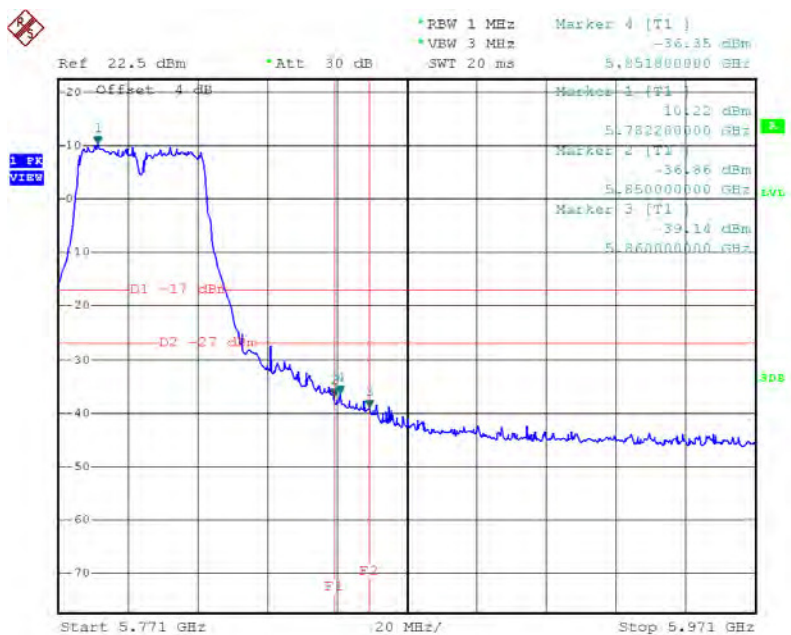


Date: 21.DEC.2015 22:33:12

Test Mode: UNII-3/TX AC80 Mode_ANT 1

TX AC HT80 mode CH155

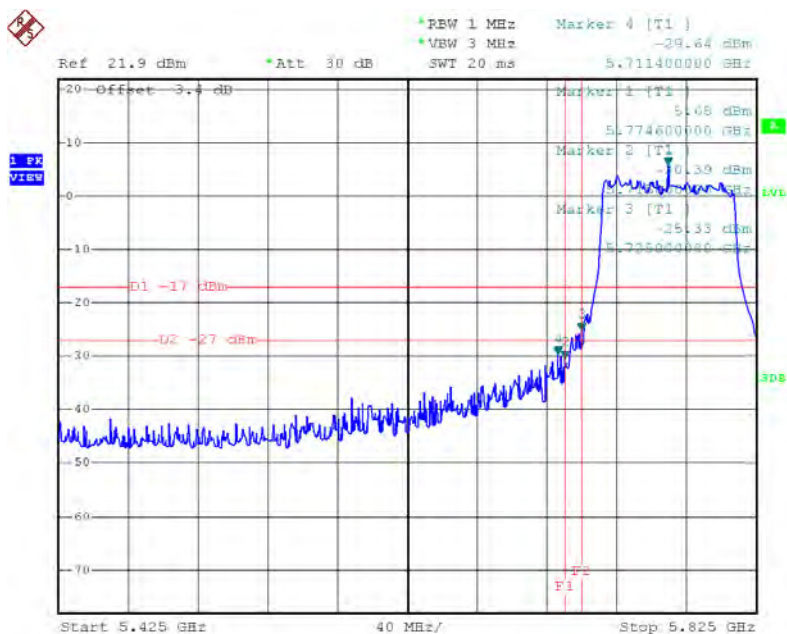


Date: 22.DEC.2015 18:33:39

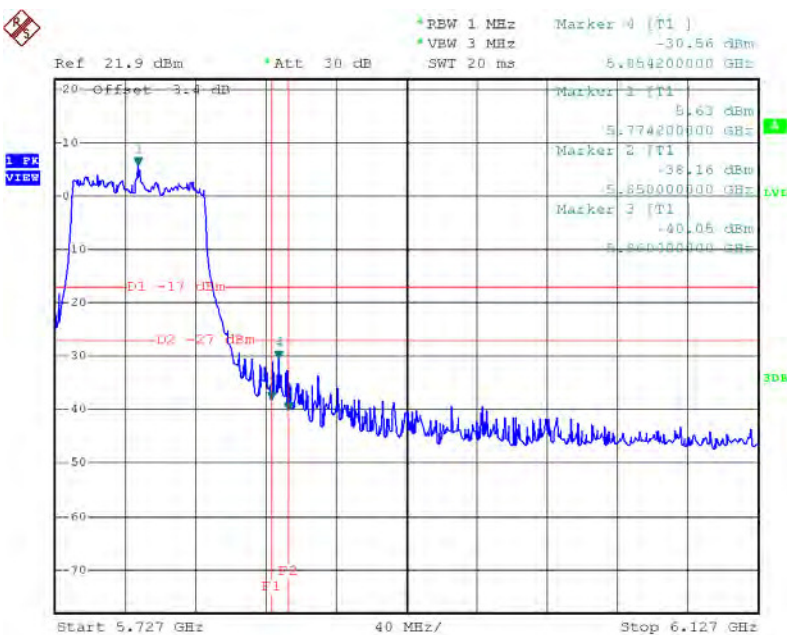


Date: 22.DEC.2015 18:33:48

Test Mode: UNII-3/TX AC80 Mode_ANT 2

TX AC HT80 mode CH155

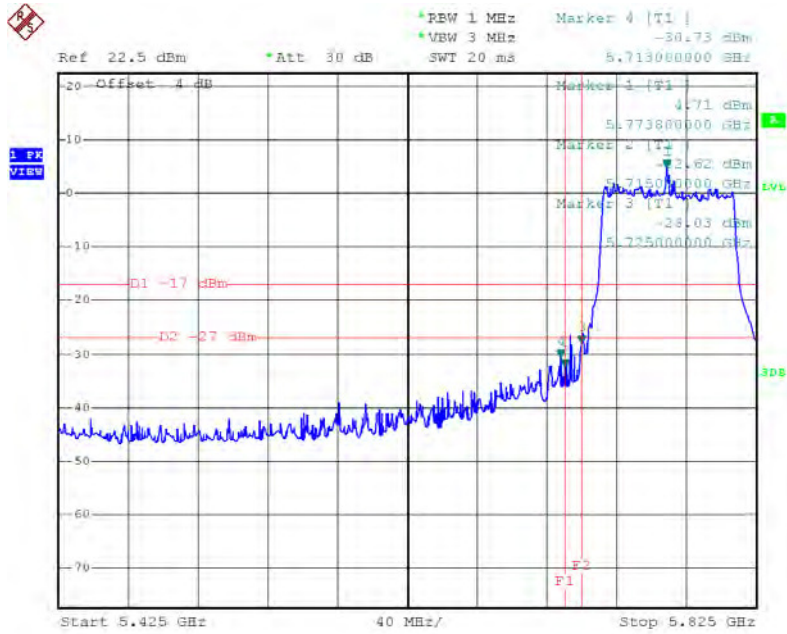

Date: 22.DEC.2015 18:22:56

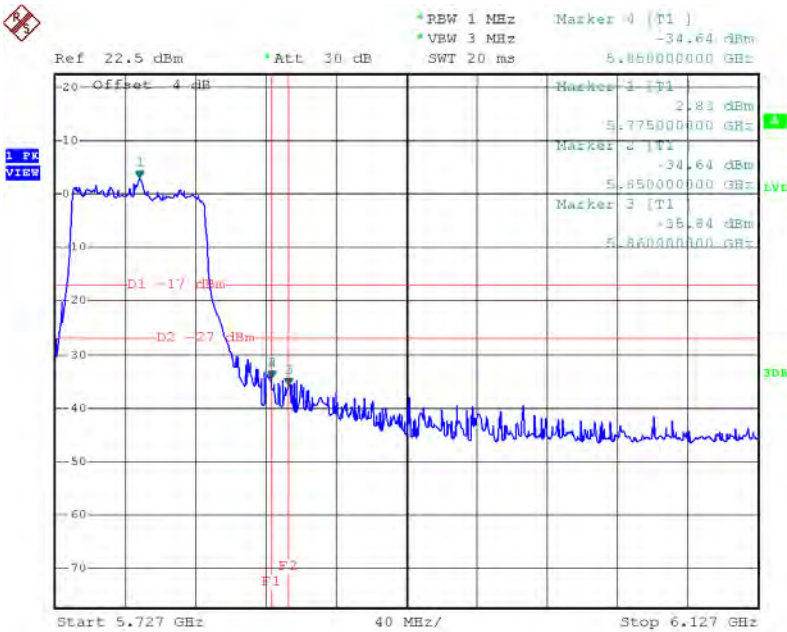


Date: 22.DEC.2015 18:23:04

ATTACHMENT H - POWER SPECTRAL DENSITY


Test Mode: UNII-1/ TX A Mode_CH36/CH40/CH48_ANT 1

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH36	5180	1.98	0.23	2.21	11.00
CH40	5200	2.25	0.23	2.48	11.00
CH48	5240	2.63	0.23	2.86	11.00

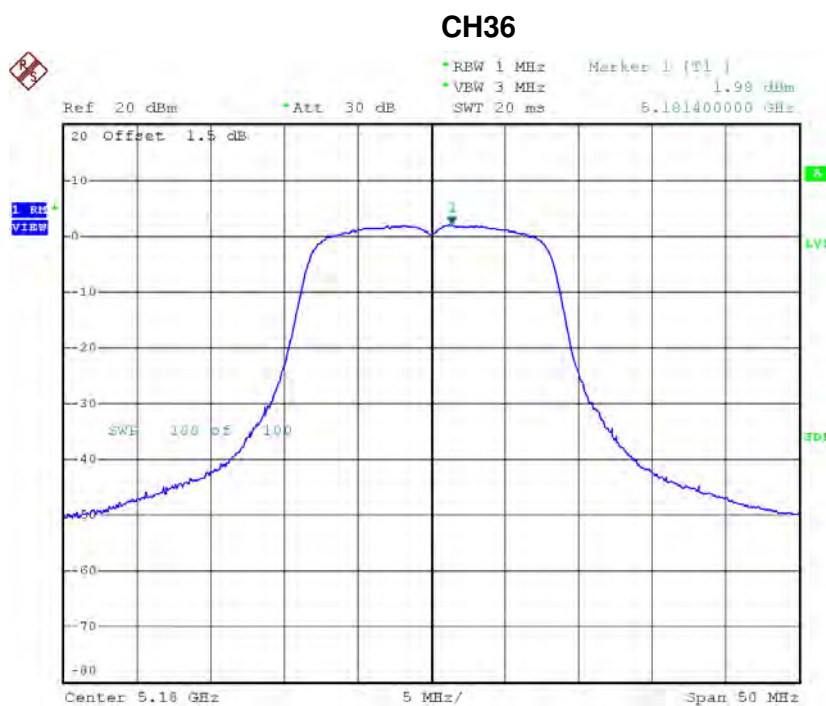


Date: 23.DEC.2015 11:59:29

CH40

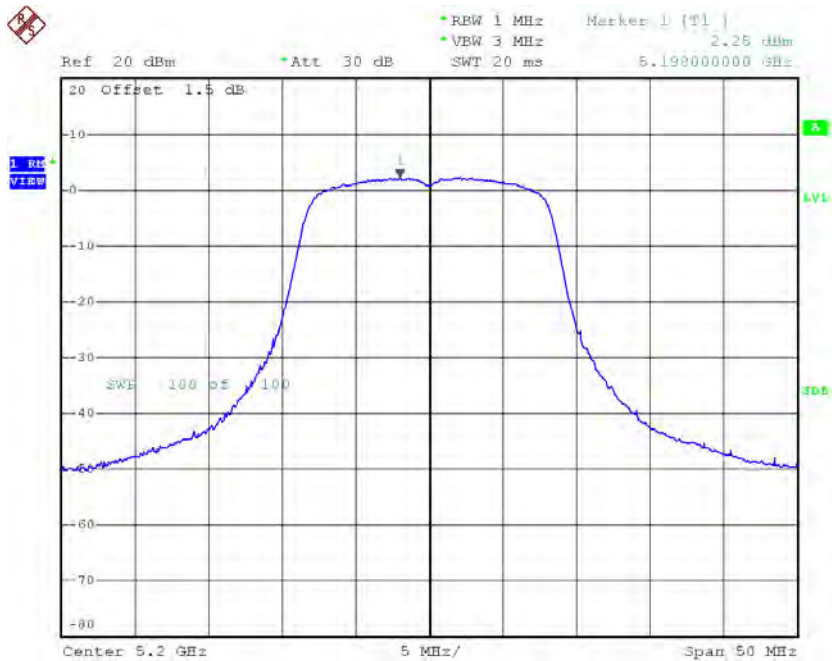

Date: 23.DEC.2015 11:59:46


CH48

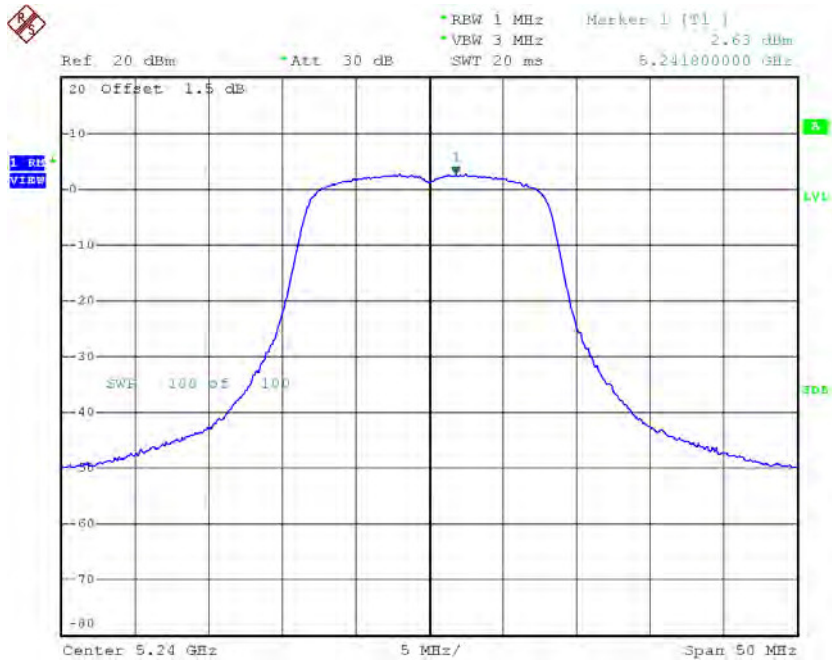


Date: 23.DEC.2015 12:00:04

Test Mode: UNII-1/ TX A Mode_CH36/CH40/CH48_ANT 2


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH36	5180	2.62	0.23	2.85	11.00
CH40	5200	2.85	0.23	3.08	11.00
CH48	5240	2.59	0.23	2.82	11.00

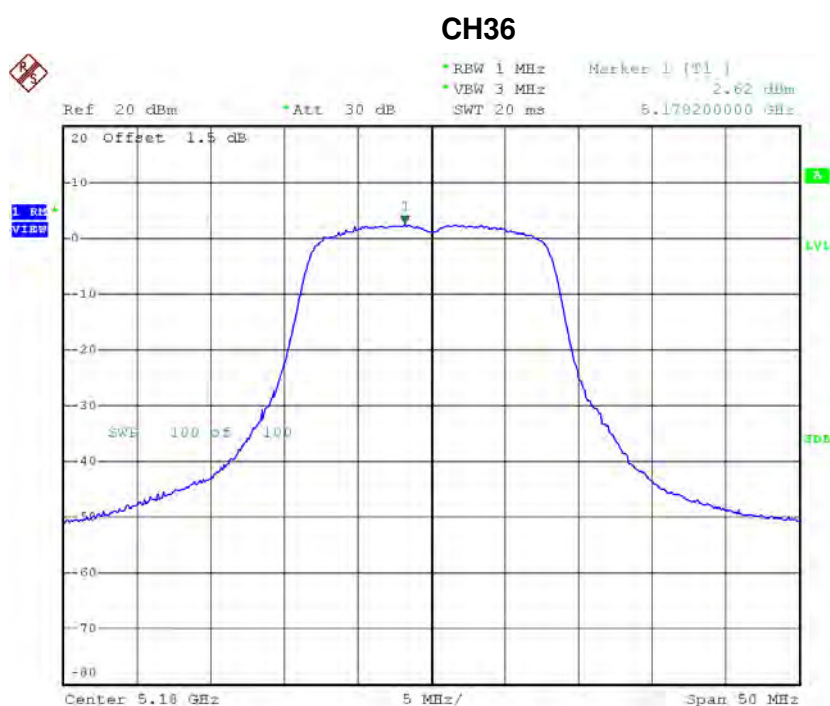

Date: 21.DEC.2015 21:34:15

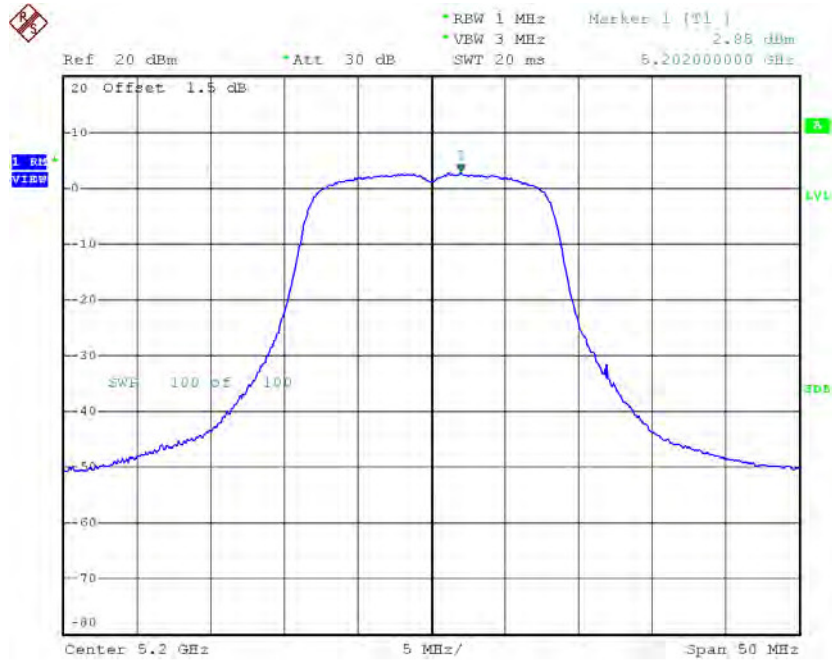CH40

Date: 21.DEC.2015 21:35:17

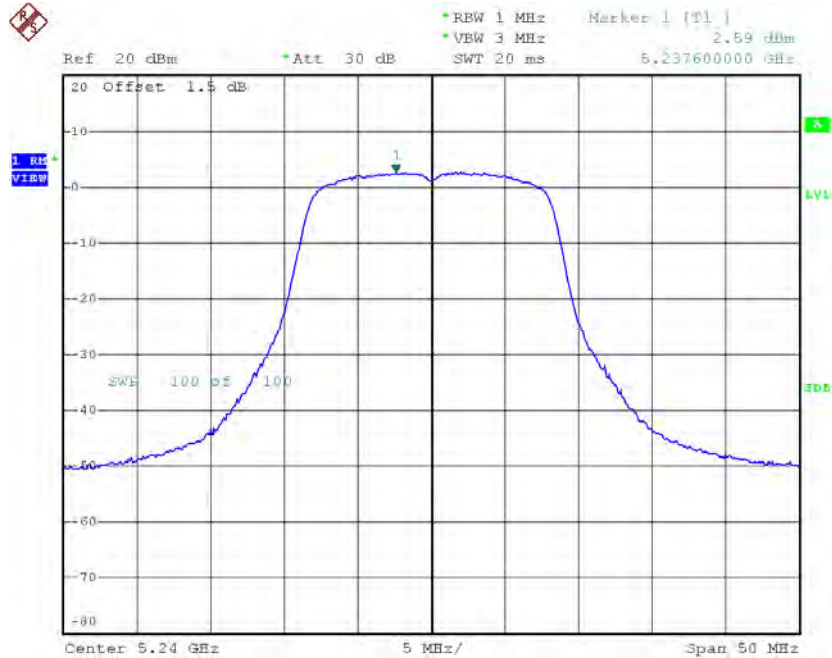CH48


Date: 21.DEC.2015 21:36:06

Test Mode: UNII-1/ TX A Mode_CH36/CH40/CH48_Total


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH36	5180	5.55	11.00
CH40	5200	5.80	11.00
CH48	5240	5.85	11.00

Test Mode: UNII-1/TX N20 Mode_CH36/CH40/CH48_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH36	5180	0.61	0.51	1.12	11.00
CH40	5200	0.99	0.51	1.50	11.00
CH48	5240	2.44	0.51	2.95	11.00

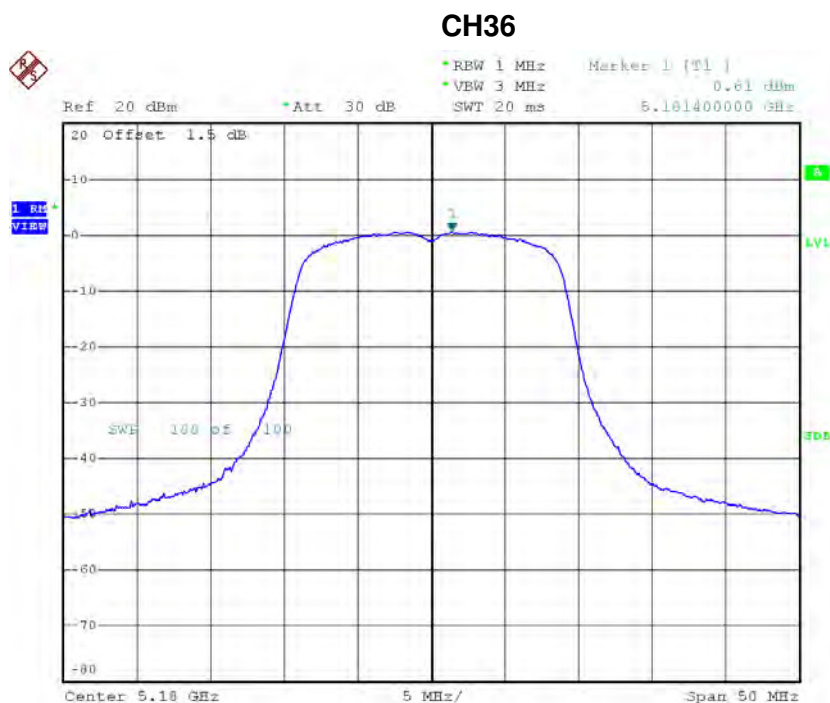

Date: 23.DEC.2015 12:08:54

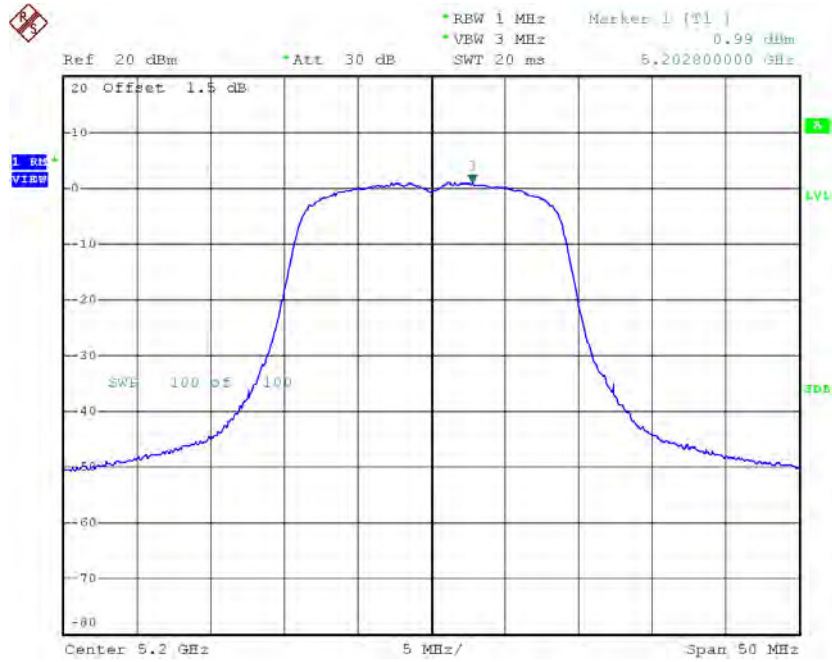CH40

Date: 23.DEC.2015 12:09:12

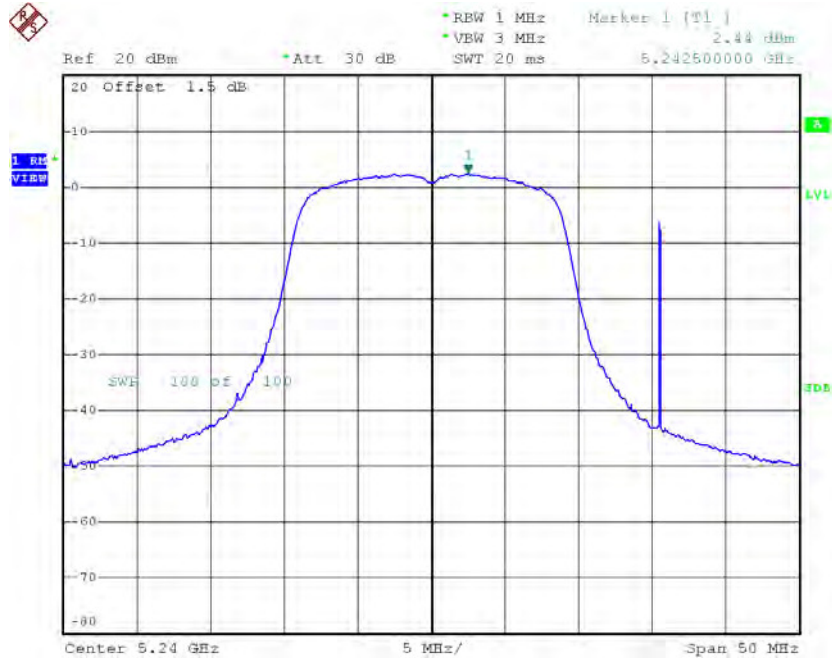
CH48

Date: 23.DEC.2015 12:09:33


Test Mode: UNII-1/TX N20 Mode_CH36/CH40/CH48_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH36	5180	1.44	0.51	1.95	11.00
CH40	5200	1.49	0.51	2.00	11.00
CH48	5240	2.67	0.51	3.18	11.00


CH36

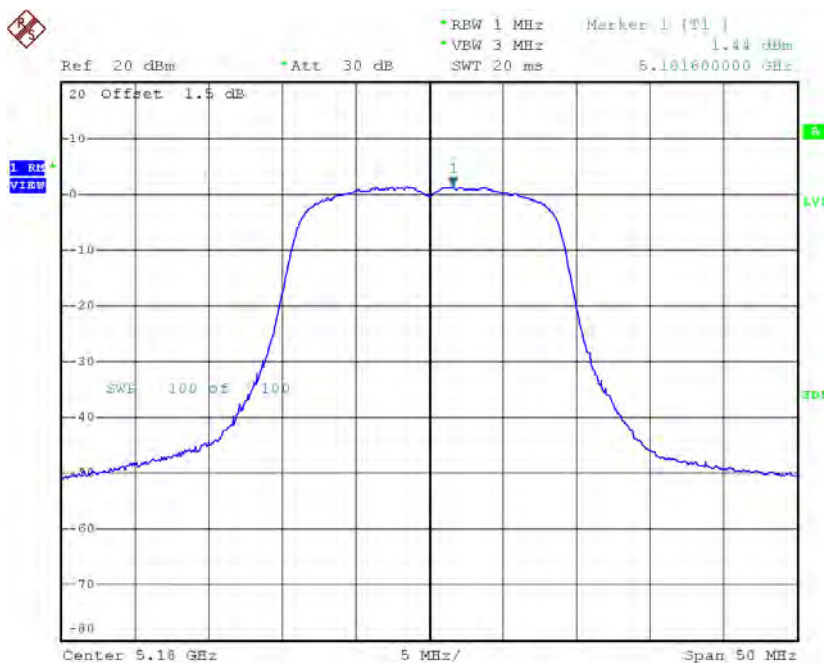

Date: 21.DEC.2015 21:48:00

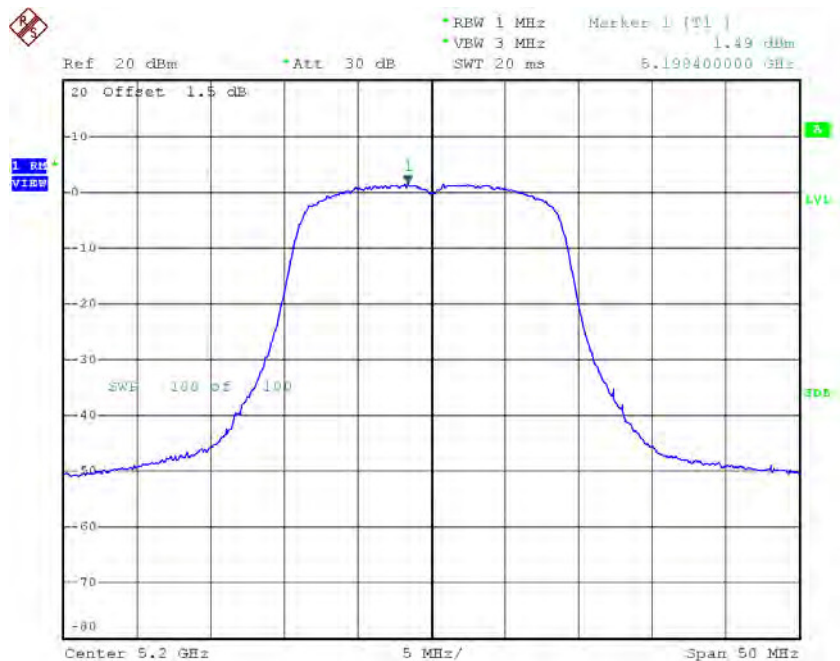CH40

Date: 21.DEC.2015 21:49:02

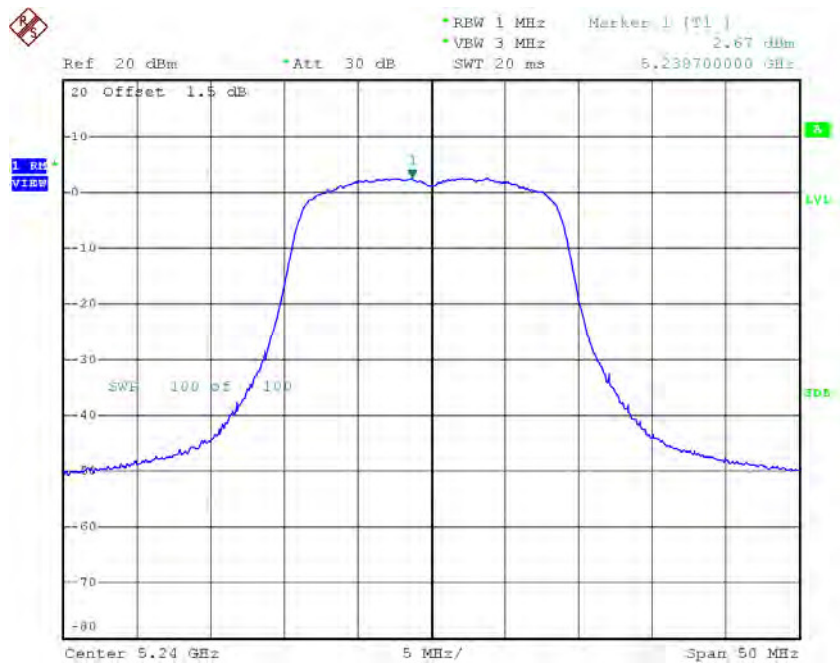CH48

Date: 21.DEC.2015 21:49:51


Test Mode: UNII-1/TX N20 Mode_CH36/CH40/CH48_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH36	5180	4.57	11.00
CH40	5200	4.77	11.00
CH48	5240	6.08	11.00

Test Mode: UNII-1/TX N40 Mode_CH38/CH46_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH38	5190	-2.63	1.22	-1.41	11.00
CH46	5230	-1.90	1.22	-0.68	11.00

CH38

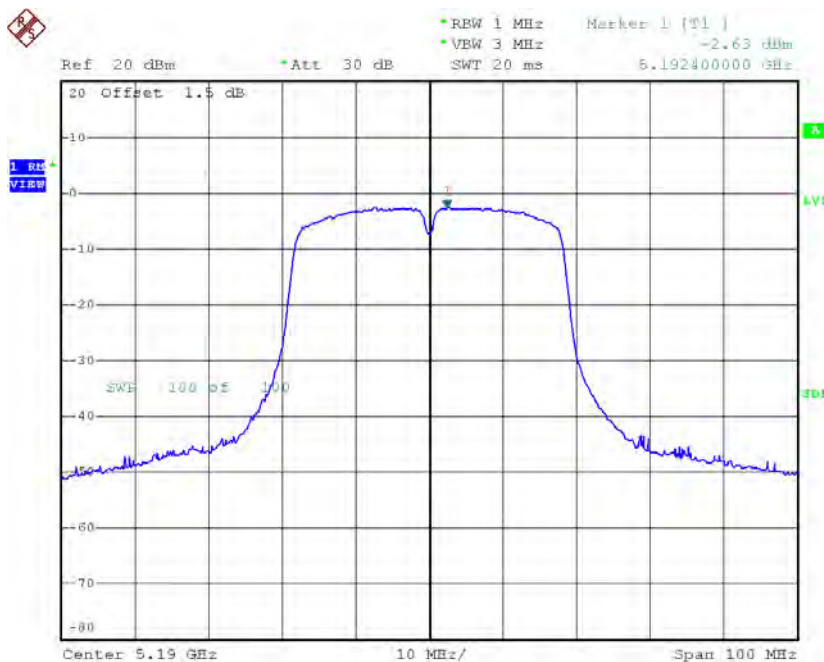

Date: 21.DEC.2015 21:16:49


CH46

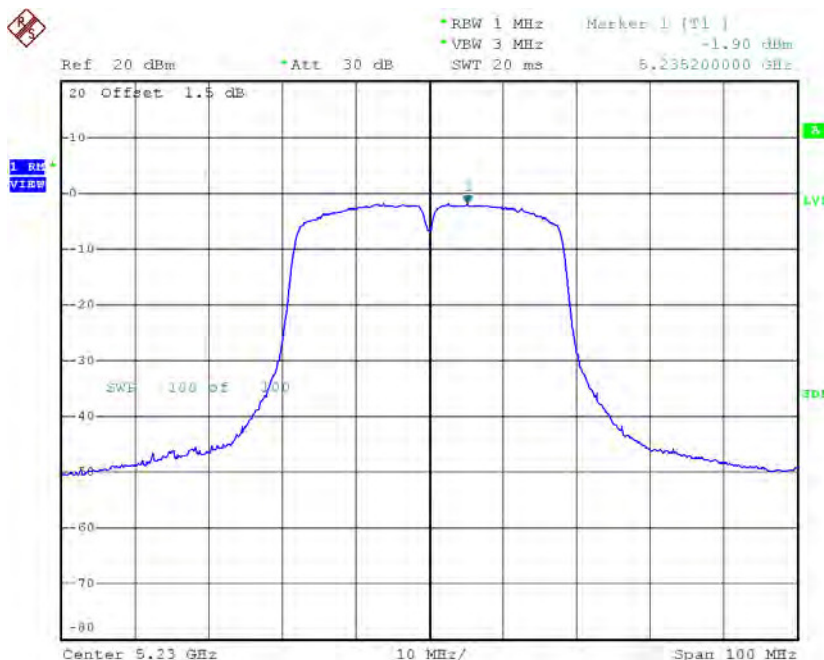


Date: 21.DEC.2015 21:17:55

Test Mode: UNII-1/TX N40 Mode_CH38/CH46_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH38	5190	-1.85	1.22	-0.63	11.00
CH46	5230	-1.63	1.22	-0.41	11.00

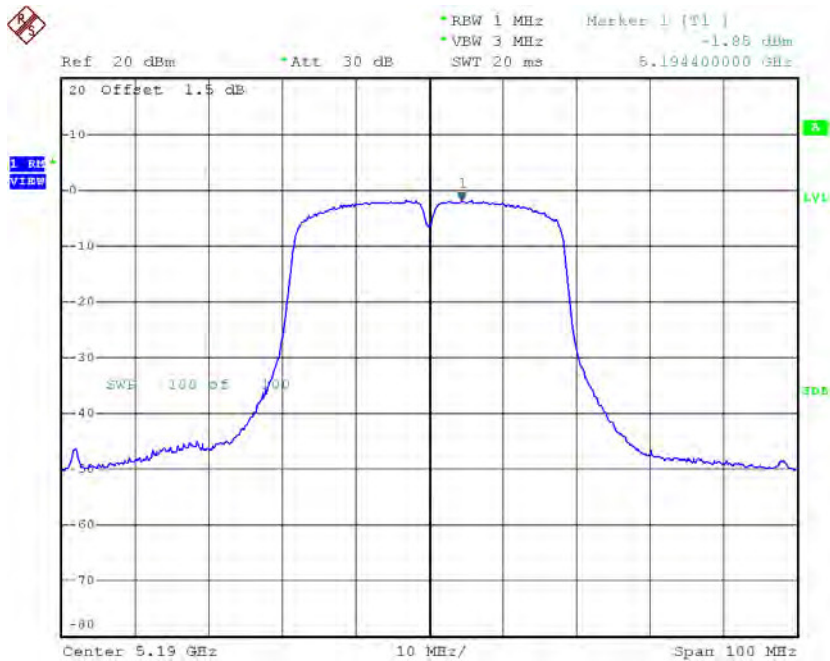CH38

Date: 21.DEC.2015 22:13:02

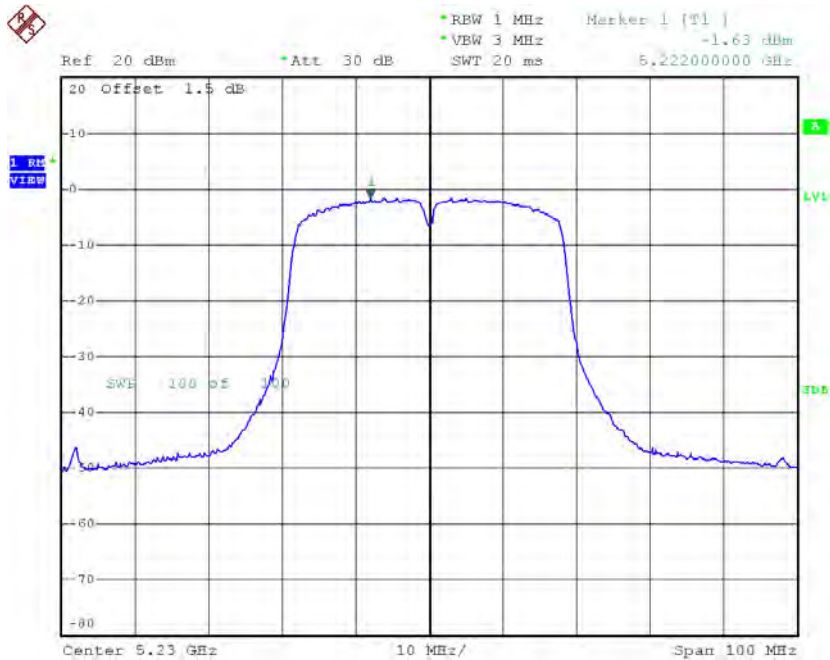CH46


Date: 21.DEC.2015 22:14:02

Test Mode: UNII-1/TX N40 Mode_CH38/CH46_Total


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH38	5190	2.01	11.00
CH46	5230	2.47	11.00

Test Mode: UNII-2A/ TX A Mode_CH52/CH60/CH64_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	2.63	0.23	2.86	11.00
CH60	5300	2.62	0.23	2.85	11.00
CH64	5320	2.34	0.23	2.57	11.00

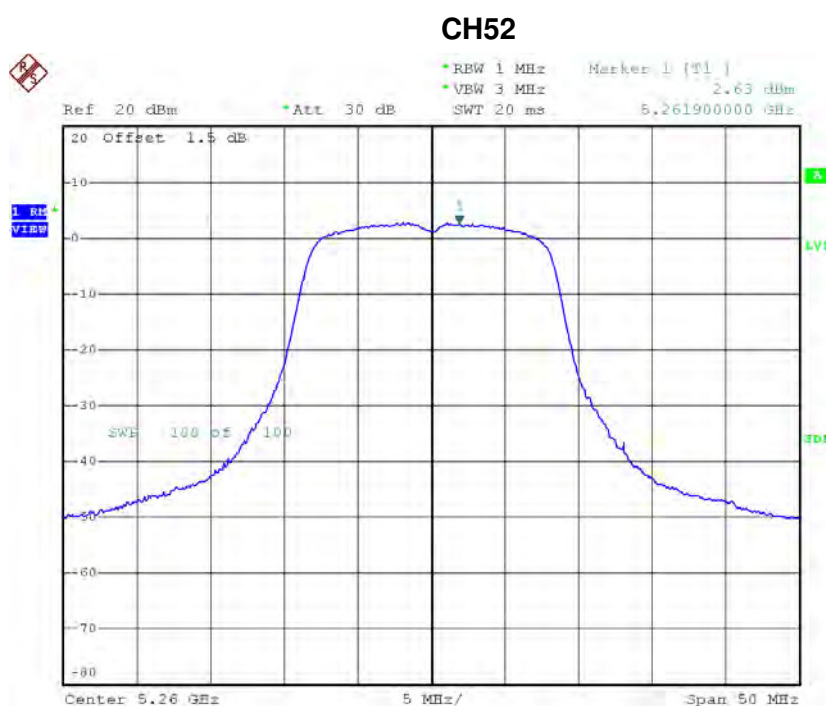

Date: 23.DEC.2015 12:00:24

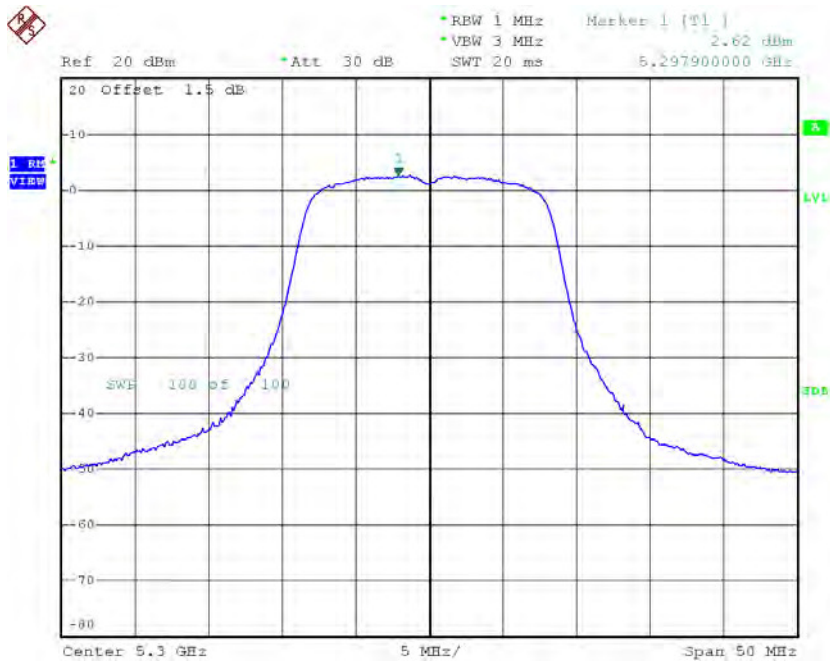CH60


Date: 23.DEC.2015 12:00:40

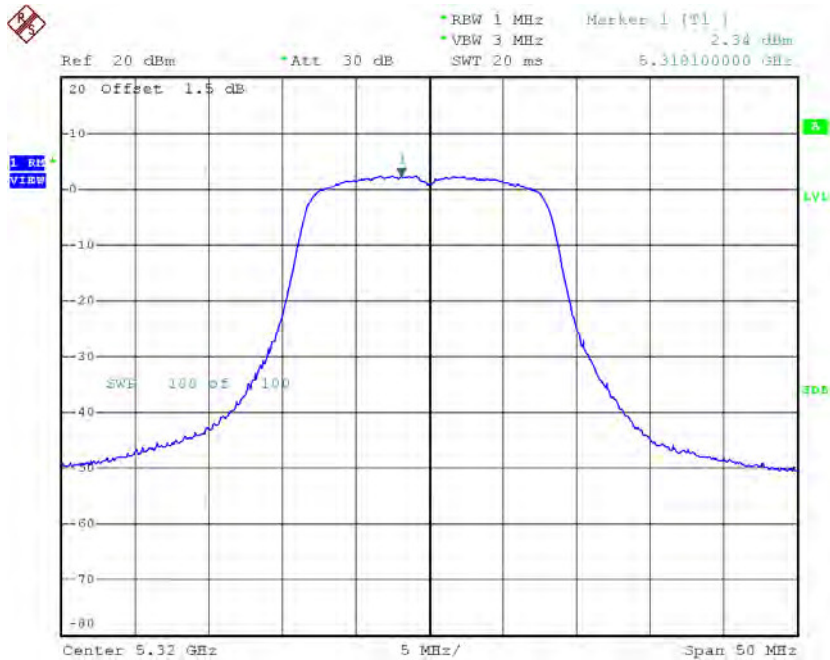CH64

Date: 23.DEC.2015 12:01:13


Test Mode: UNII-2A/ TX A Mode_CH52/CH60/CH64_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	2.58	0.23	2.81	11.00
CH60	5300	3.24	0.23	3.47	11.00
CH64	5320	3.21	0.23	3.44	11.00

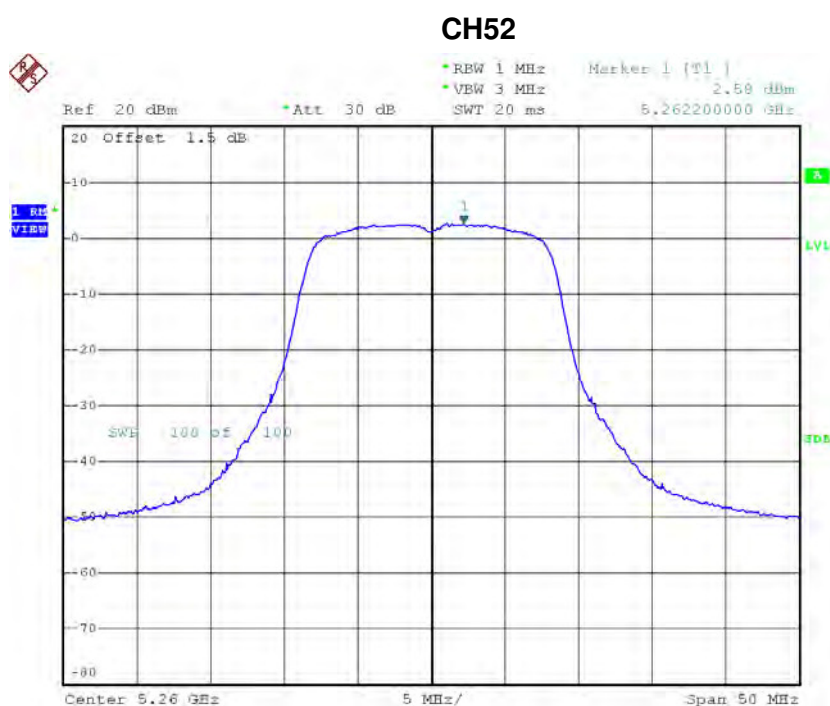


Date: 21.DEC.2015 21:37:08

CH60

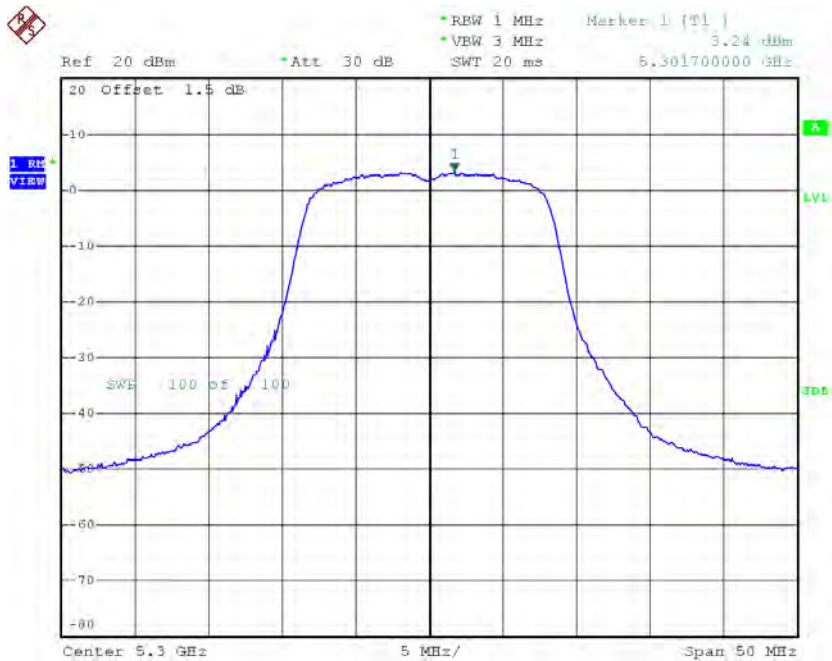

Date: 21.DEC.2015 21:38:01

CH64

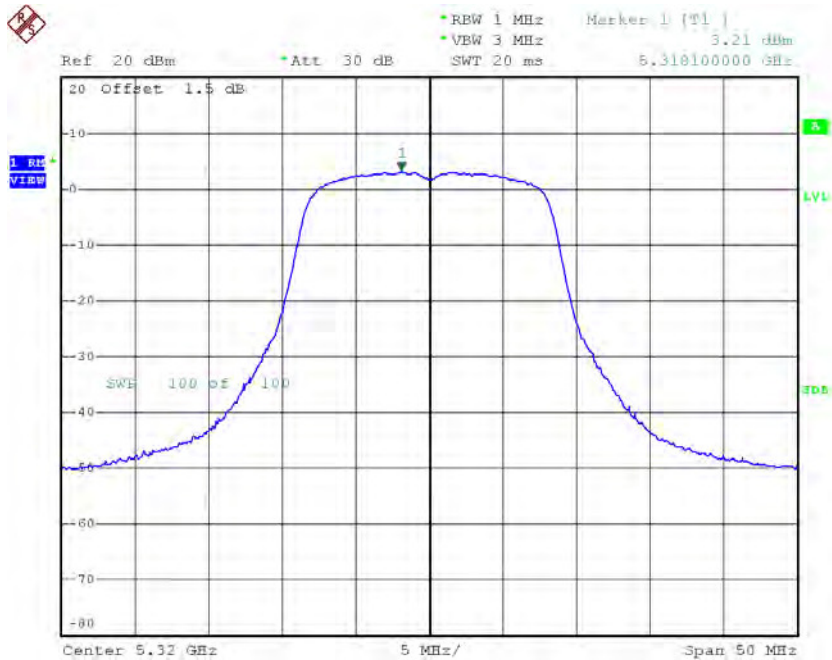

Date: 21.DEC.2015 21:38:51


Test Mode: UNII-2A/ TX A Mode_CH52/CH60/CH64_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	5.85	11.00
CH60	5300	6.18	11.00
CH64	5320	6.04	11.00

Test Mode: UNII-2A/TX N20 Mode_CH52/CH60/CH64_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	2.46	0.51	2.97	11.00
CH60	5300	1.25	0.51	1.76	11.00
CH64	5320	1.22	0.51	1.73	11.00

CH52

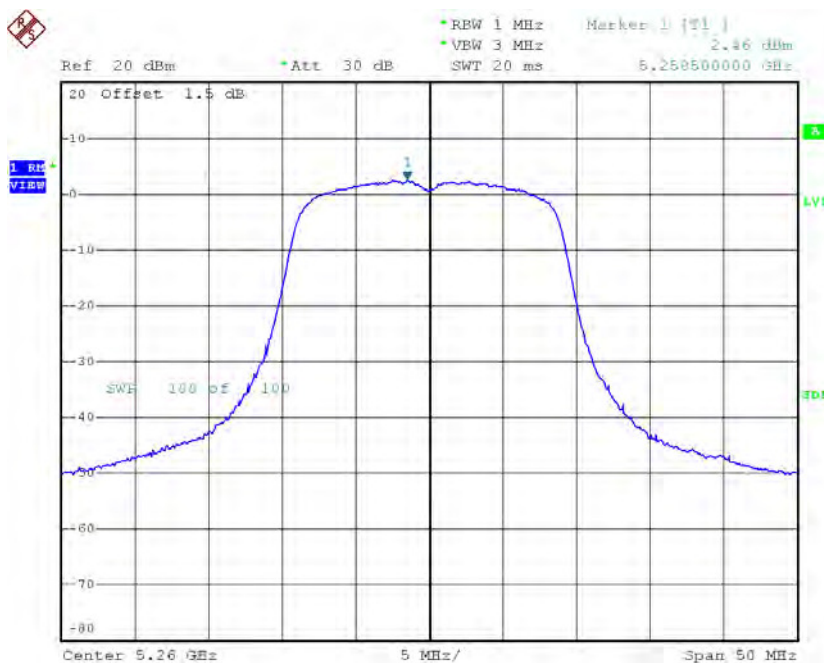


Date: 23.DEC.2015 12:09:59

CH60

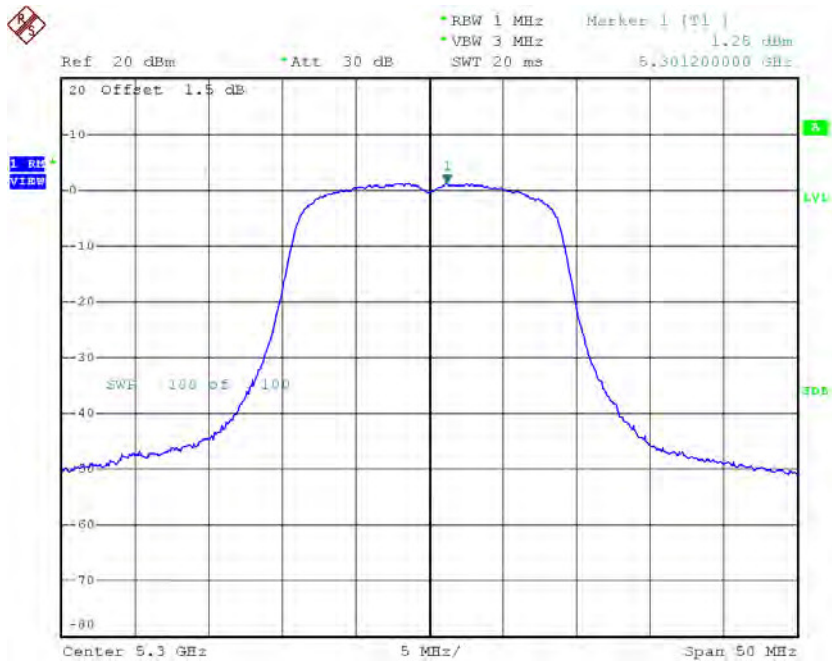

Date: 23.DEC.2015 12:10:28

CH64

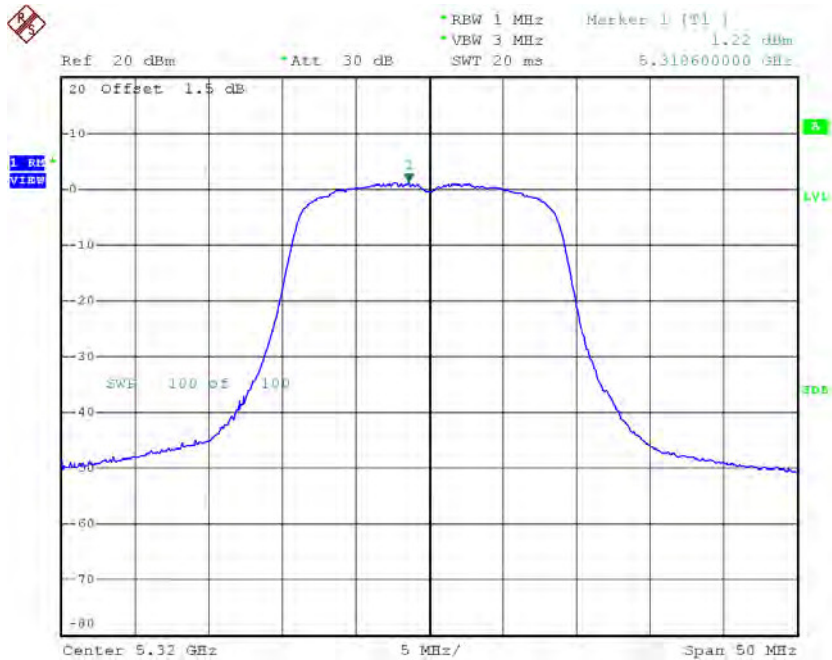


Date: 23.DEC.2015 12:10:48

Test Mode: UNII-2A/TX N20 Mode_CH52/CH60/CH64_ANT 2


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	2.48	0.51	2.99	11.00
CH60	5300	2.03	0.51	2.54	11.00
CH64	5320	2.22	0.51	2.73	11.00

CH52

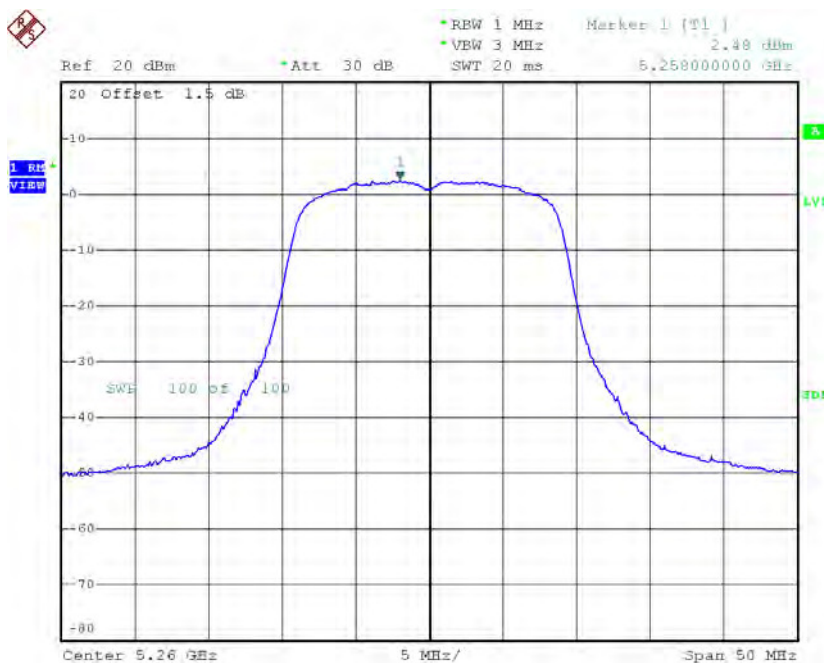


Date: 21.DEC.2015 21:50:44

CH60

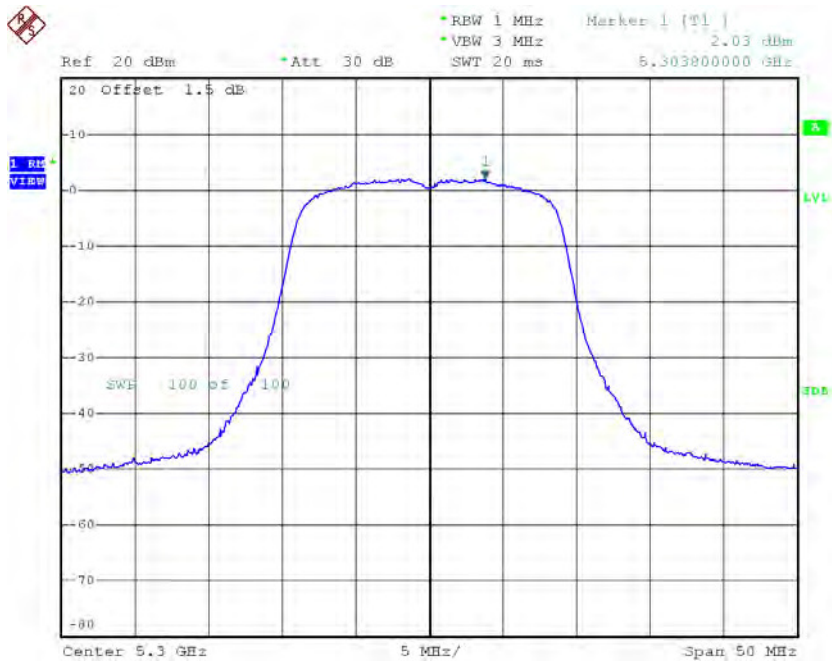

Date: 21.DEC.2015 21:51:42

CH64

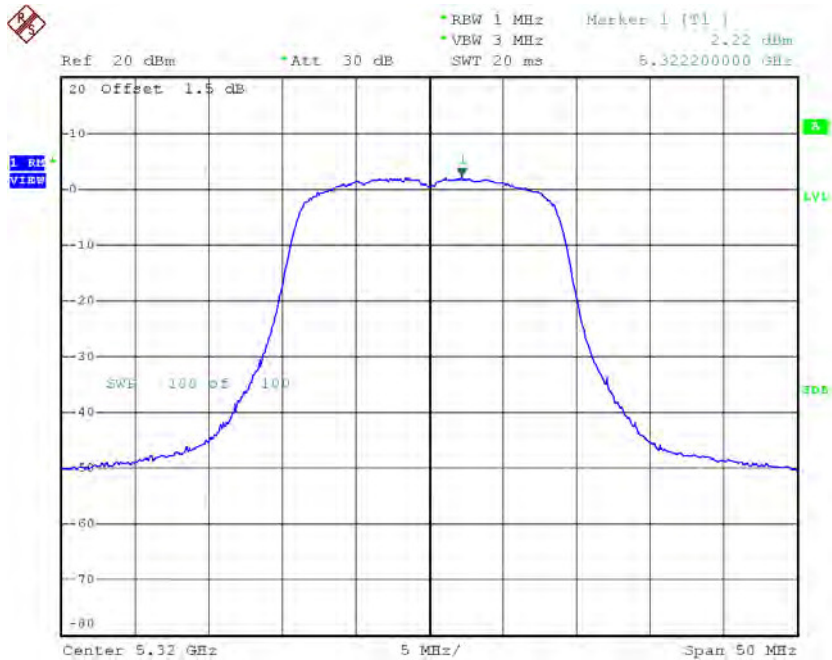

Date: 21.DEC.2015 21:53:21


Test Mode: UNII-2A/TX N20 Mode_CH52/CH60/CH64_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	5.99	11.00
CH60	5300	5.18	11.00
CH64	5320	5.27	11.00

Test Mode: UNII-2A/TX N40 Mode_CH54/CH62_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH54	5270	-1.84	1.22	-0.62	11.00
CH62	5310	-3.03	1.22	-1.81	11.00

CH54

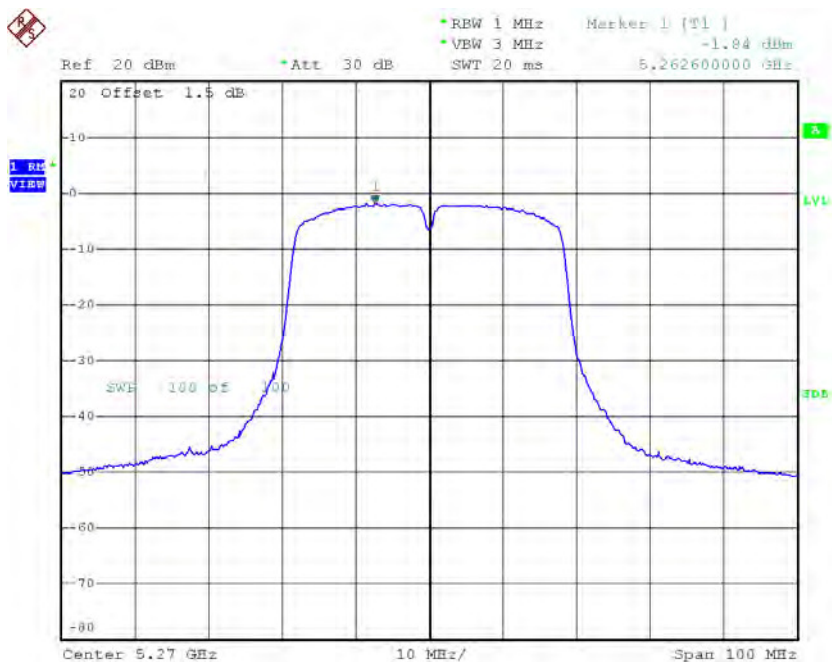

Date: 21.DEC.2015 21:19:00

CH62

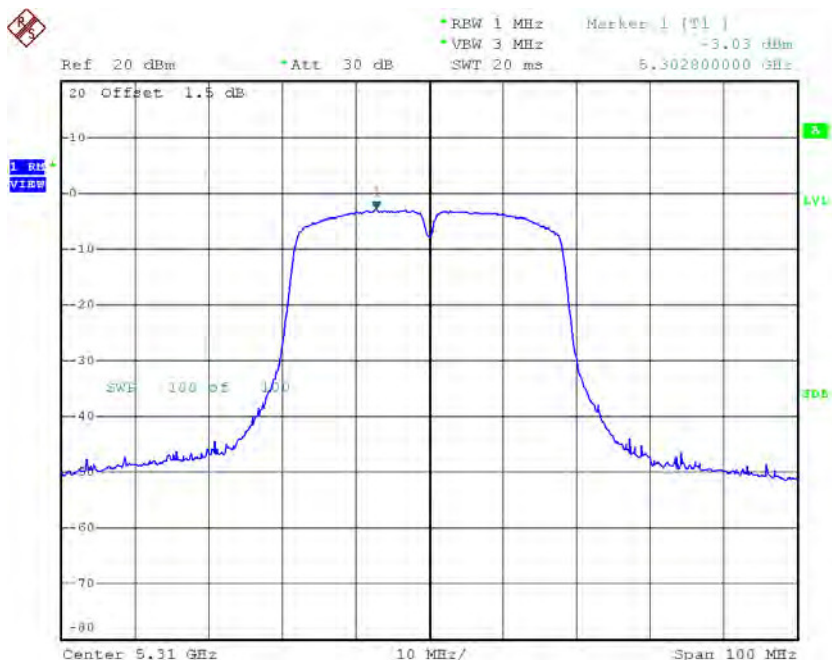


Date: 22.DEC.2015 18:37:18

Test Mode: UNII-2A/TX N40 Mode_CH54/CH62_ANT 2


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH54	5270	-1.57	1.22	-0.35	11.00
CH62	5310	-2.32	1.22	-1.10	11.00

CH54

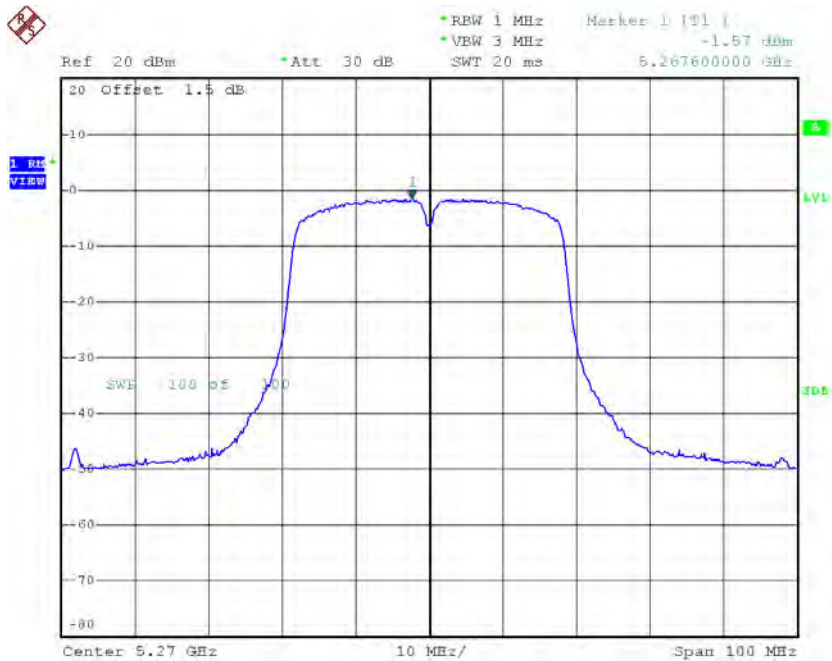

Date: 21.DEC.2015 22:14:54

CH62

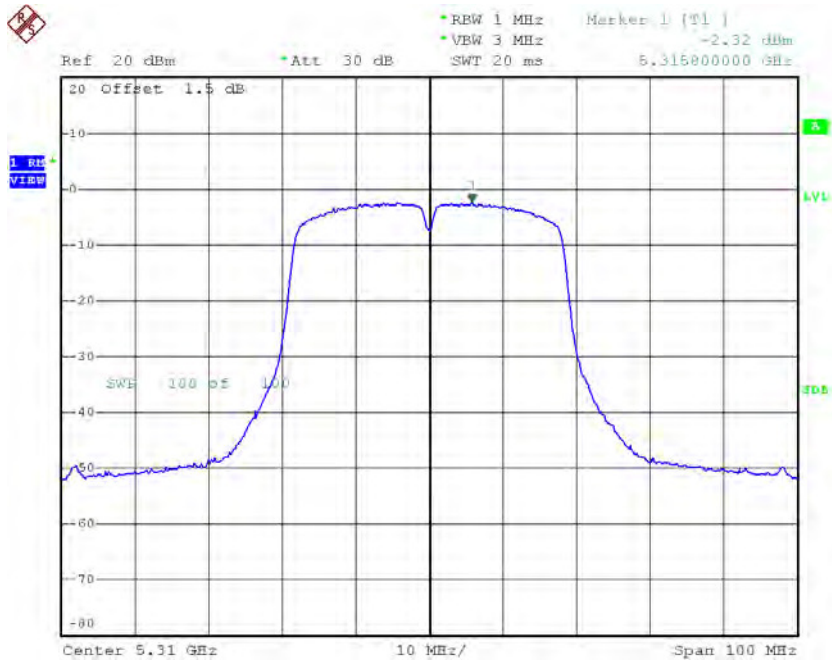


Date: 22.DEC.2015 18:44:13

Test Mode: UNII-2A/TX N40 Mode_CH54/CH62_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH54	5270	2.53	11.00
CH62	5310	1.57	11.00


Test Mode: UNII-2C/ TX A Mode_CH100/CH116/CH140_ANT 1

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH100	5500	2.00	0.23	2.23	11.00
CH116	5580	2.75	0.23	2.98	11.00
CH140	5700	2.68	0.23	2.91	11.00

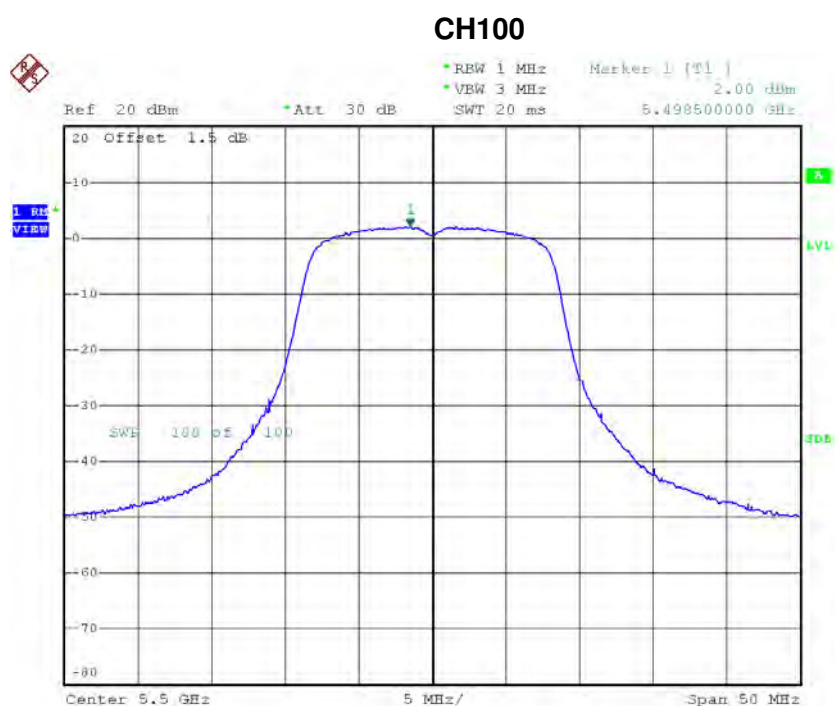


Date: 23.DEC.2015 12:01:30

CH116

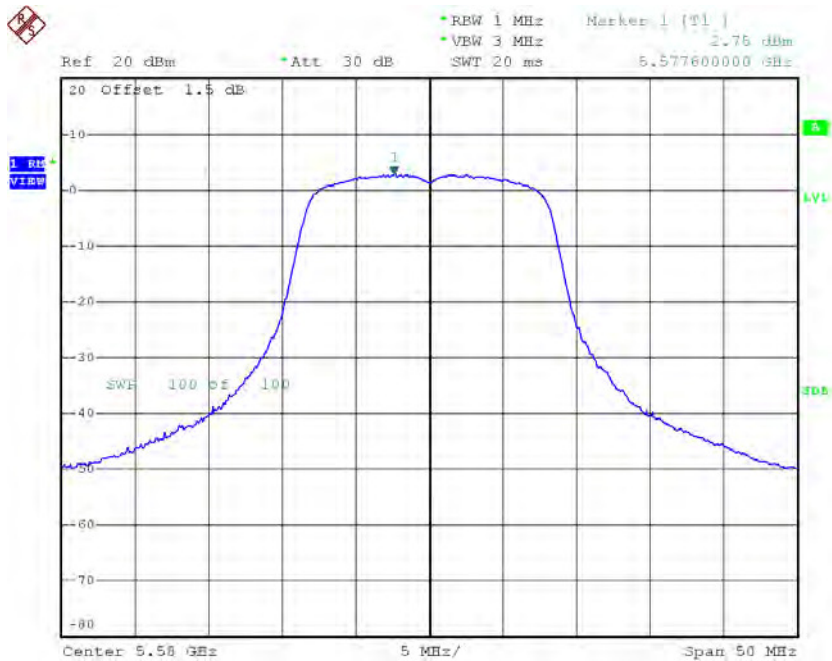

Date: 23.DEC.2015 12:01:51

CH140

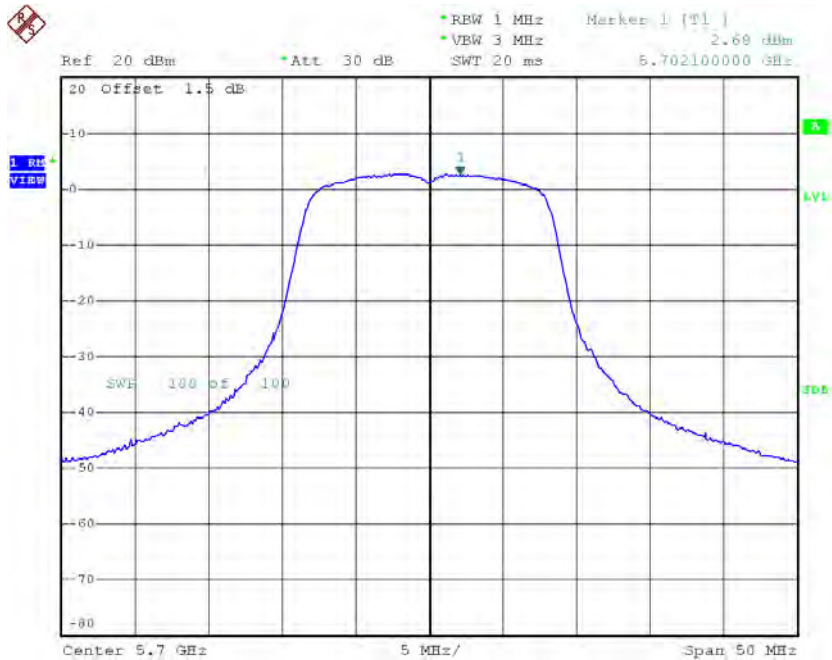


Date: 23.DEC.2015 12:02:32

Test Mode: UNII-2C/ TX A Mode_CH100/CH116/CH140_ANT 2


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH100	5500	3.55	0.23	3.78	11.00
CH116	5580	3.36	0.23	3.59	11.00
CH140	5700	3.09	0.23	3.32	11.00

CH100

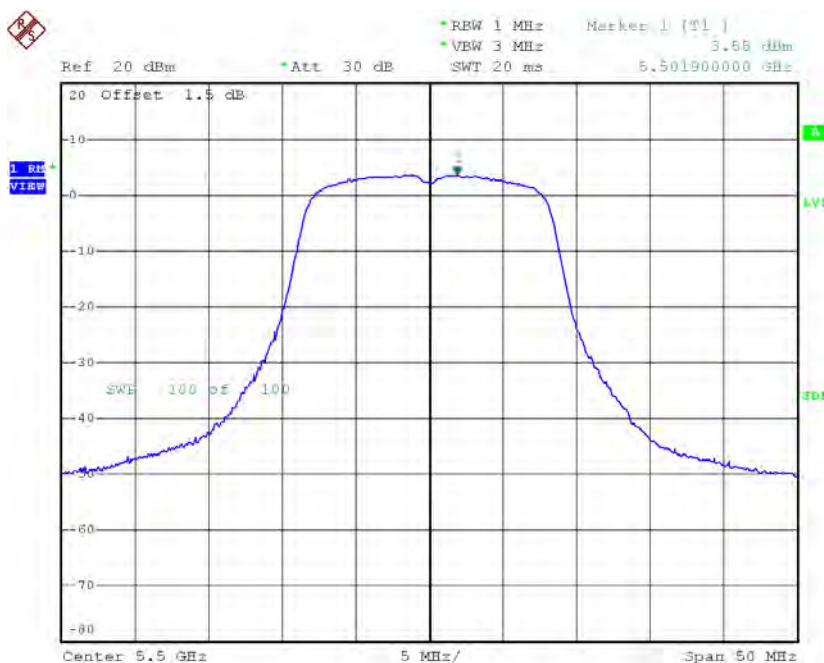


Date: 21.DEC.2015 21:40:05

CH116

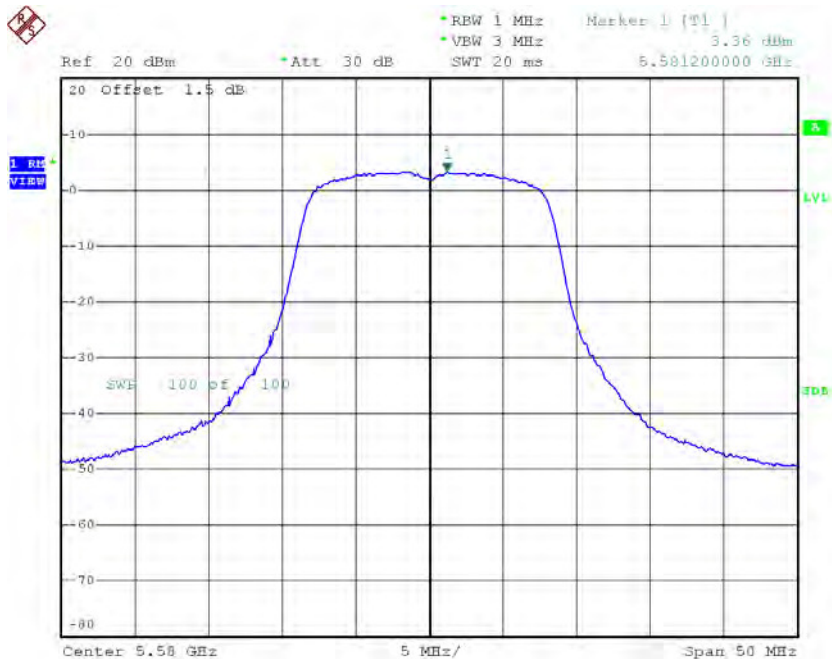

Date: 21.DEC.2015 21:42:13

CH140

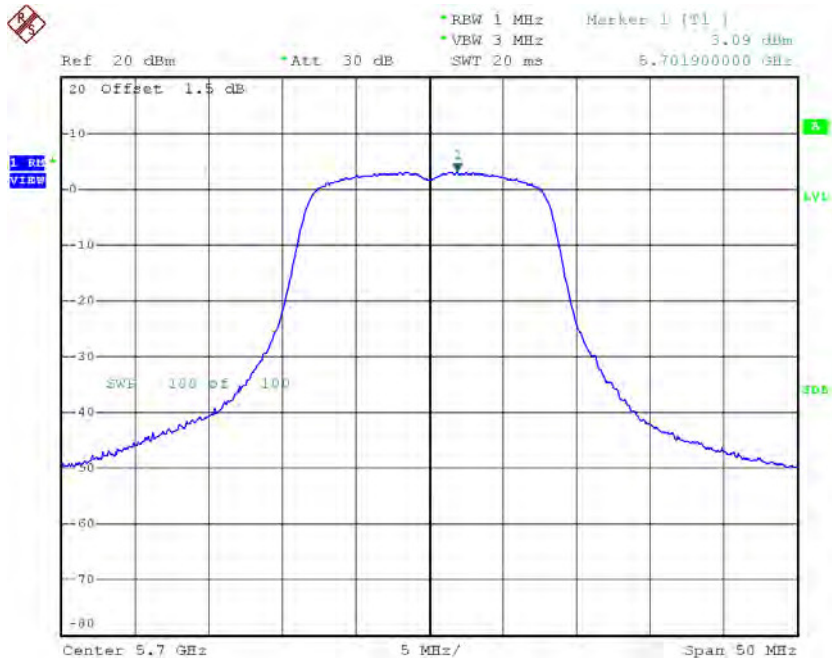

Date: 21.DEC.2015 21:43:03


Test Mode: UNII-2C/ TX A Mode_CH100/CH116/CH140_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH100	5500	6.08	11.00
CH116	5580	6.31	11.00
CH140	5700	6.13	11.00

Test Mode: UNII-2C/TX N20 Mode_CH100/CH116/CH140_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH100	5500	0.93	0.51	1.44	11.00
CH116	5580	1.61	0.51	2.12	11.00
CH140	5700	1.44	0.51	1.95	11.00

CH100

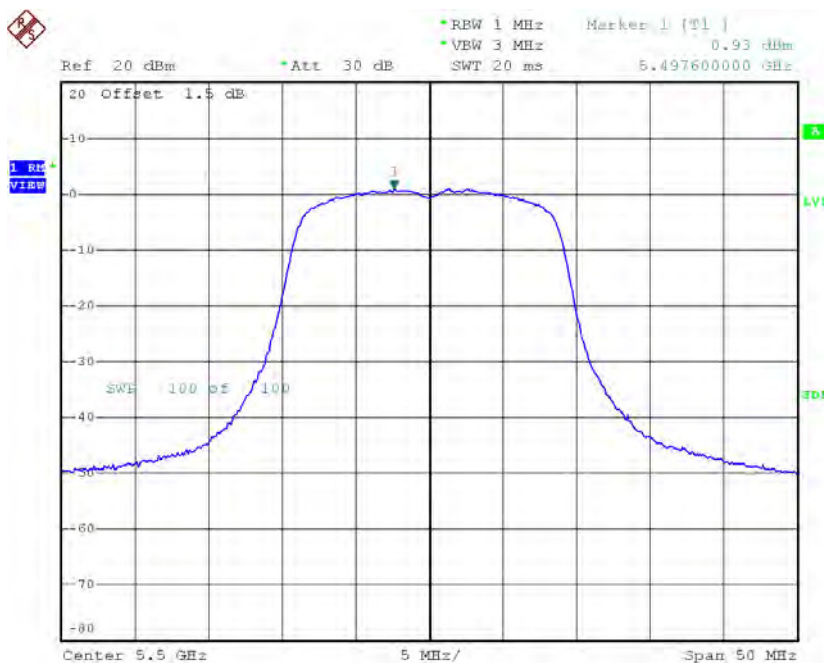


Date: 23.DEC.2015 12:11:08

CH116

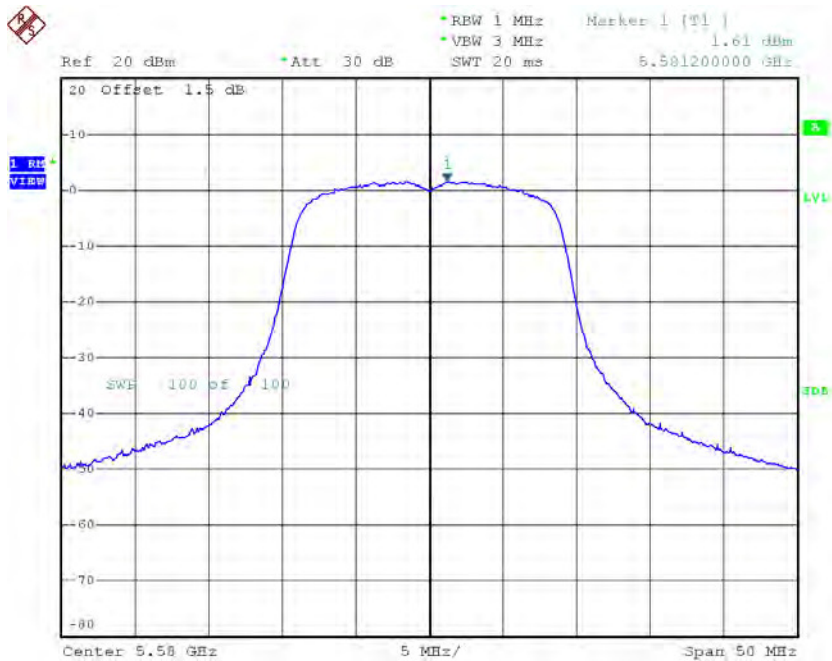

Date: 23.DEC.2015 12:11:44

CH140

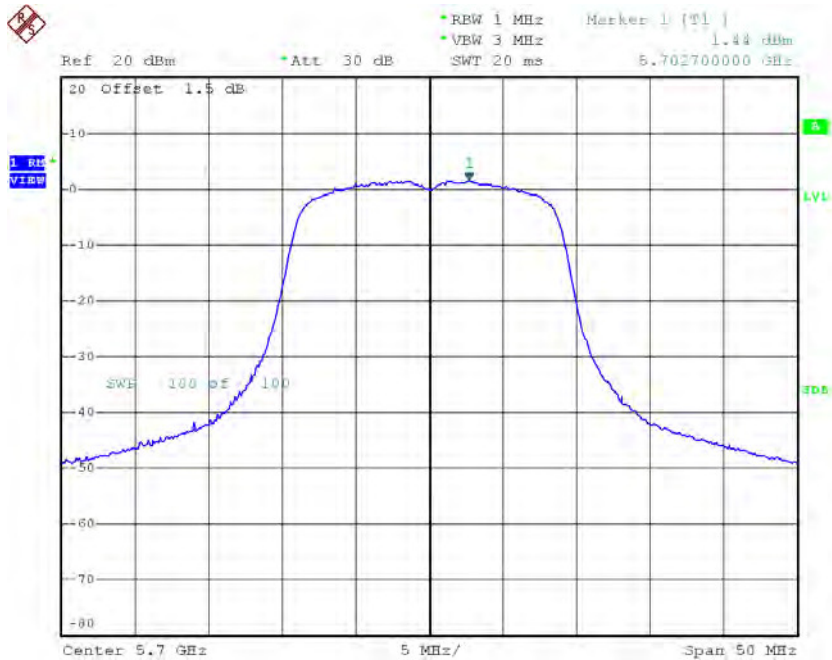


Date: 23.DEC.2015 12:12:09

Test Mode: UNII-2C/TX N20 Mode_CH100/CH116/CH140_ANT 2


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH100	5500	2.50	0.51	3.01	11.00
CH116	5580	2.52	0.51	3.03	11.00
CH140	5700	1.94	0.51	2.45	11.00

CH100

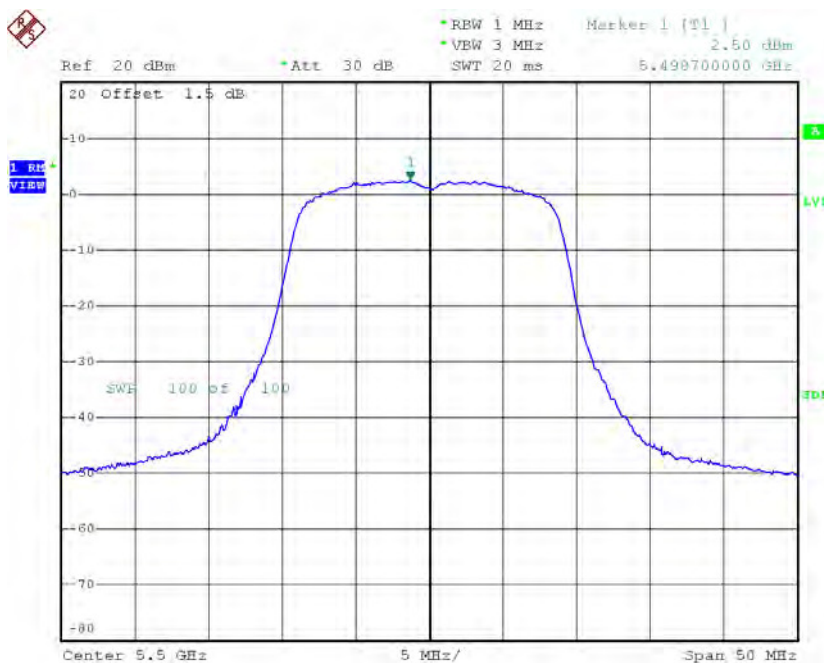


Date: 21.DEC.2015 21:54:46

CH116

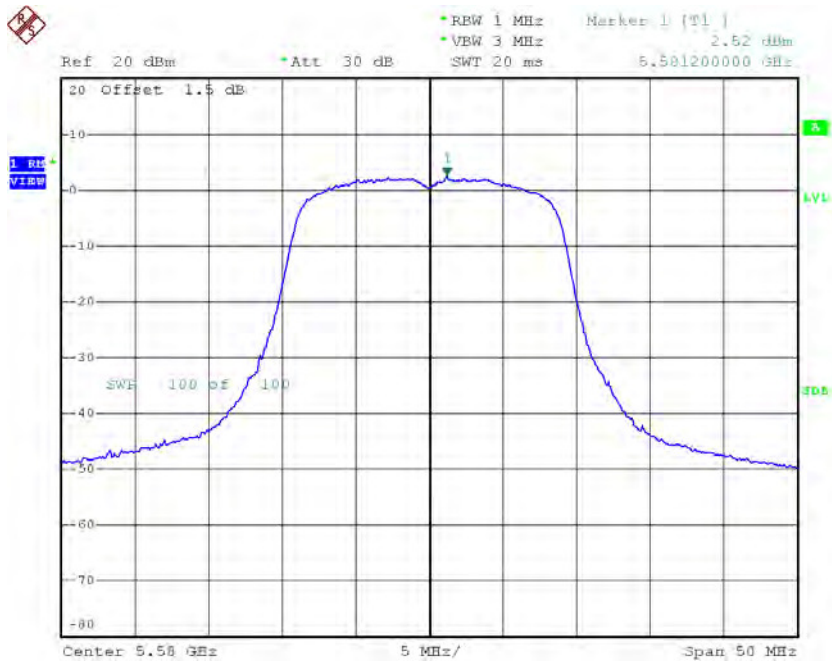

Date: 21.DEC.2015 21:55:38

CH140

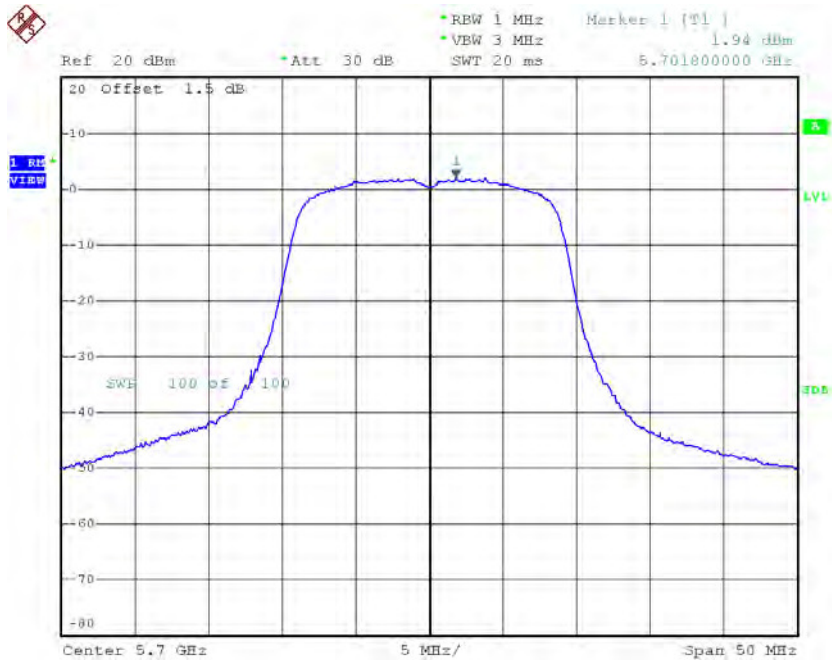

Date: 21.DEC.2015 21:56:28


Test Mode: UNII-2C/TX N20 Mode_CH100/CH116/CH140_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH100	5500	5.31	11.00
CH116	5580	5.61	11.00
CH140	5700	5.22	11.00


Test Mode: UNII-2C/TX N40 Mode_CH102/CH110/CH134_ANT 1

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH102	5510	-3.48	1.22	-2.26	11.00
CH110	5550	-3.05	1.22	-1.83	11.00
CH134	5670	-1.95	1.22	-0.73	11.00


CH102

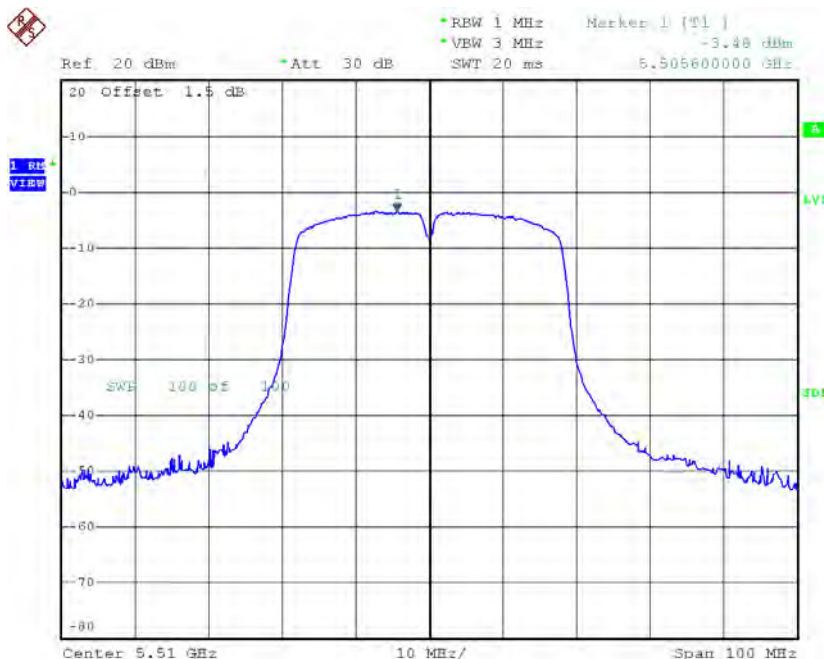

Date: 21.DEC.2015 21:21:19

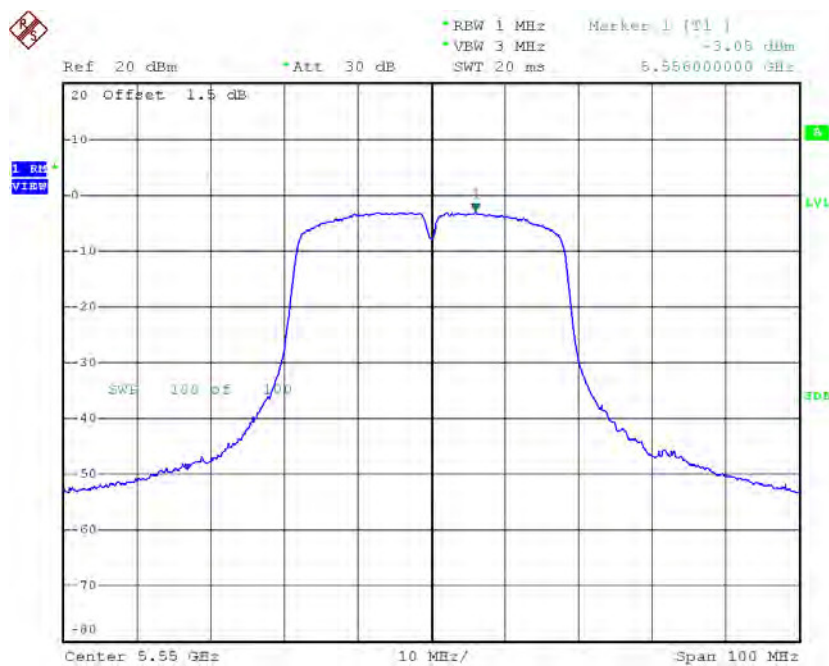CH110

Date: 21.DEC.2015 21:22:17

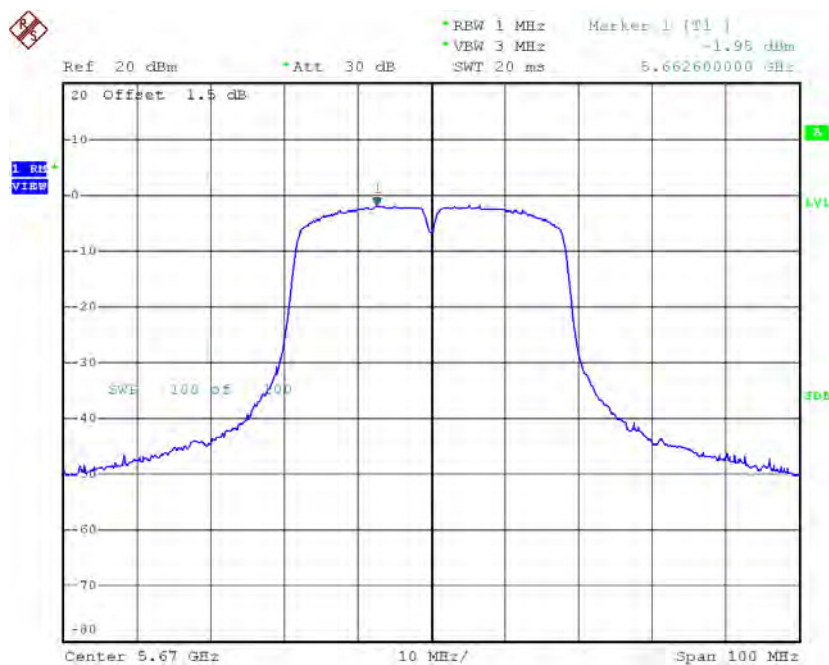
CH134

Date: 21.DEC.2015 21:23:27

Test Mode: UNII-2C/TX N40 Mode_CH102/CH110/CH134_ANT 2


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH102	5510	-3.02	1.22	-1.80	11.00
CH110	5550	-1.85	1.22	-0.63	11.00
CH134	5670	-1.50	1.22	-0.28	11.00

CH102

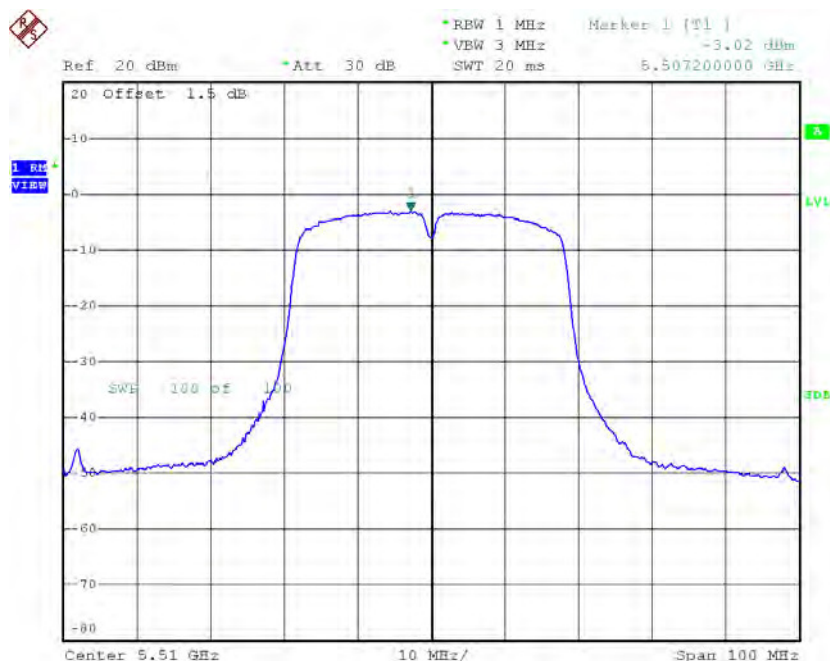


Date: 22.DEC.2015 18:45:47

CH110

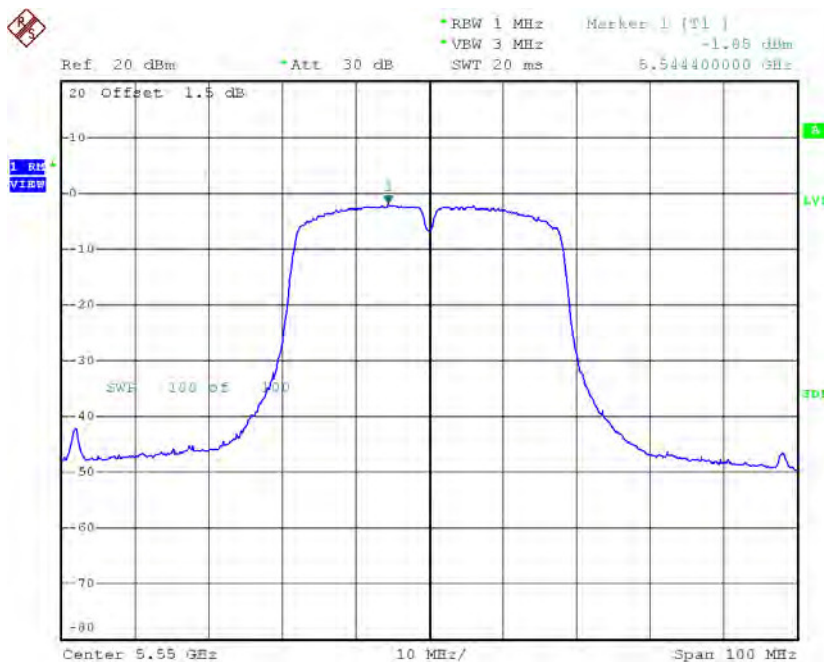

Date: 21.DEC.2015 22:18:21

CH134

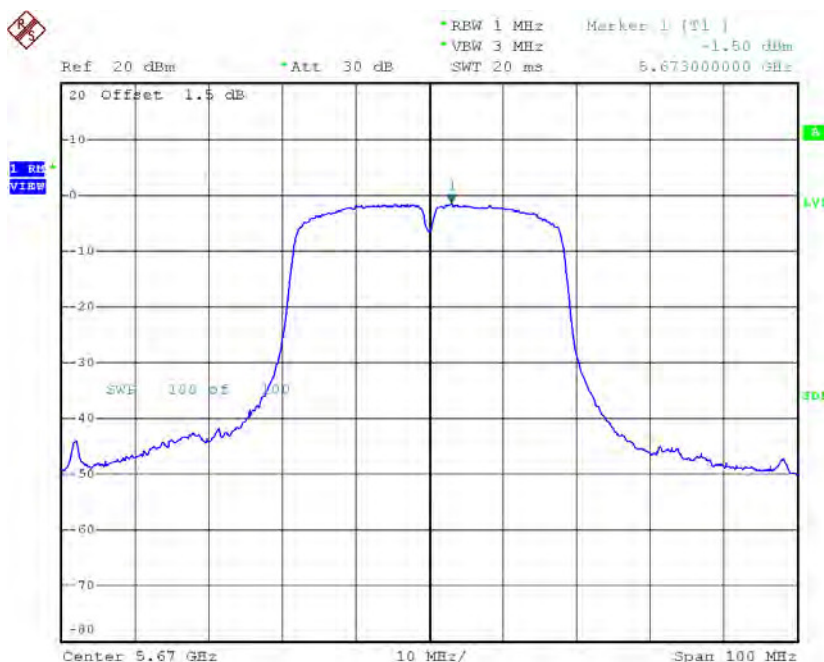

Date: 21.DEC.2015 22:19:17


Test Mode: UNII-2C/TX N40 Mode_CH102/CH110/CH134_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH102	5510	0.99	11.00
CH110	5550	1.82	11.00
CH134	5670	2.51	11.00

Test Mode: UNII-3/TX A Mode_CH149/CH157/CH165_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor (dBm/500kHz)	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH149	5745	0.04	0.23	0.27	30.00
CH157	5785	-0.03	0.23	0.20	30.00
CH165	5825	-0.70	0.23	-0.47	30.00

TX CH149

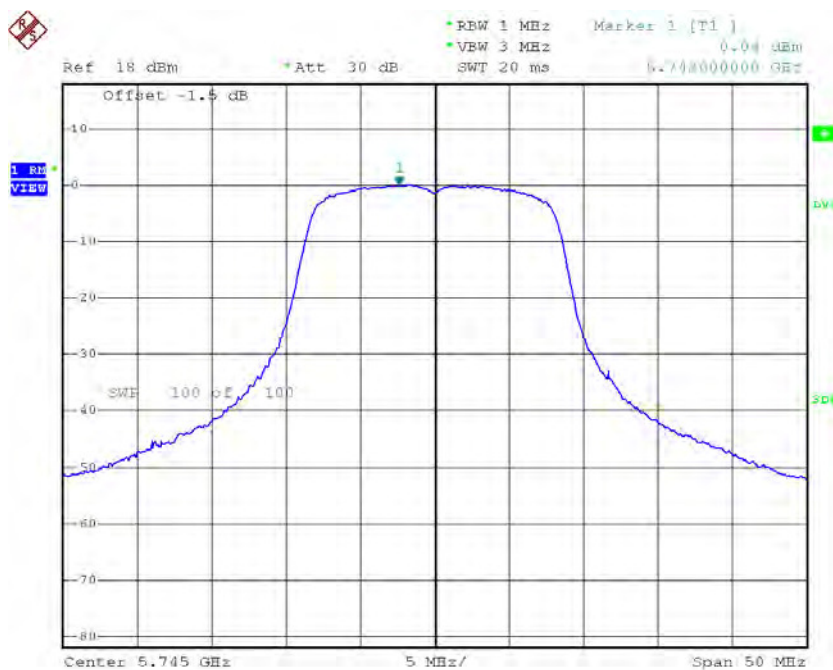


Date: 23.DEC.2015 12:02:52

TX CH157

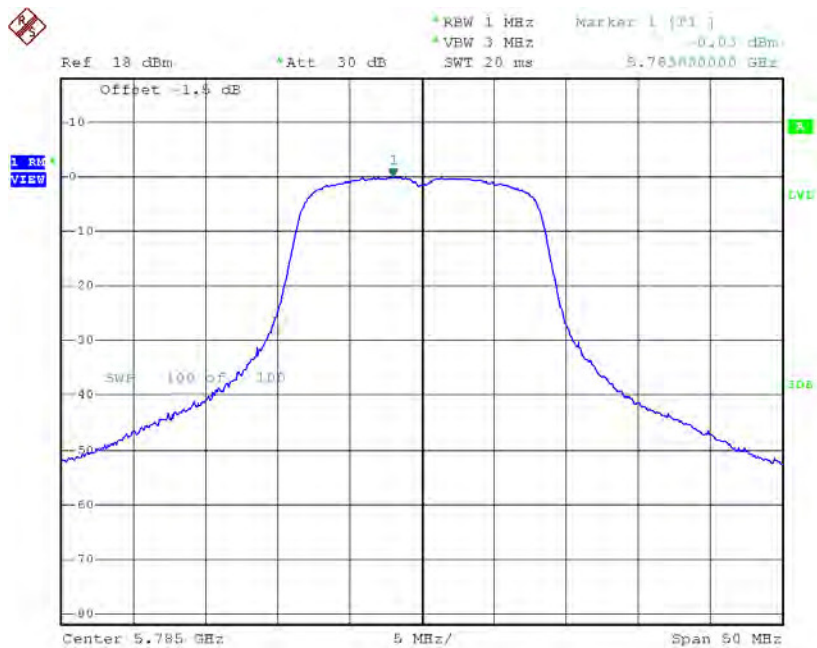

Date: 23.DEC.2015 12:03:12

TX CH165

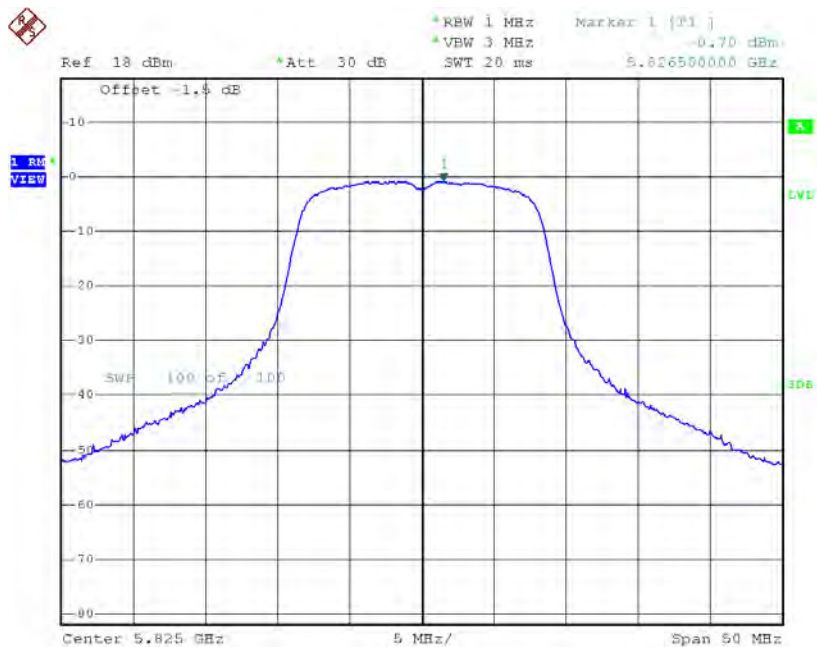


Date: 23.DEC.2015 12:03:32

Test Mode: UNII-3/TX A Mode_CH149/CH157/CH165_ANT 2


Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor (dBm/500kHz)	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH149	5745	0.35	0.23	0.58	30.00
CH157	5785	0.31	0.23	0.54	30.00
CH165	5825	0.00	0.23	0.23	30.00

TX CH149

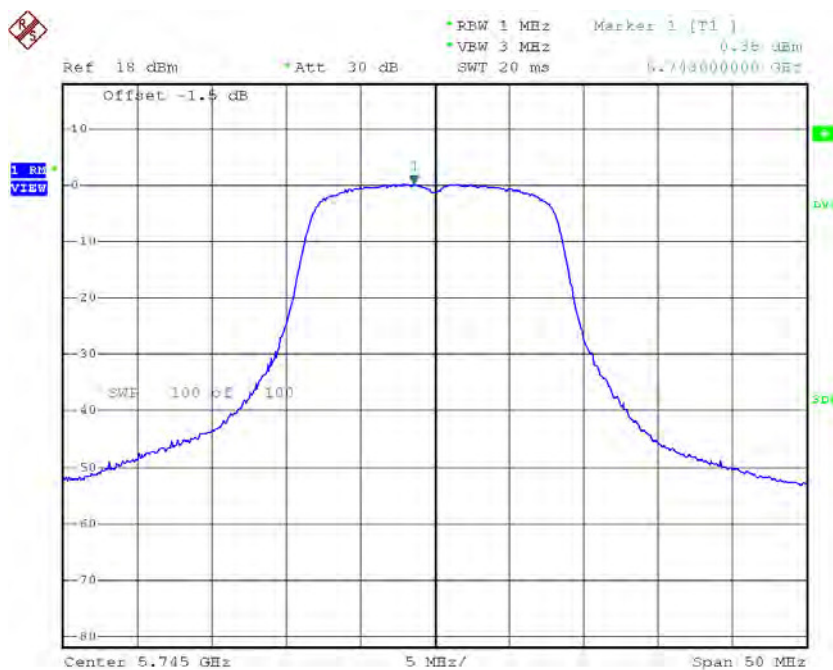


Date: 21.DEC.2015 21:43:30

TX CH157

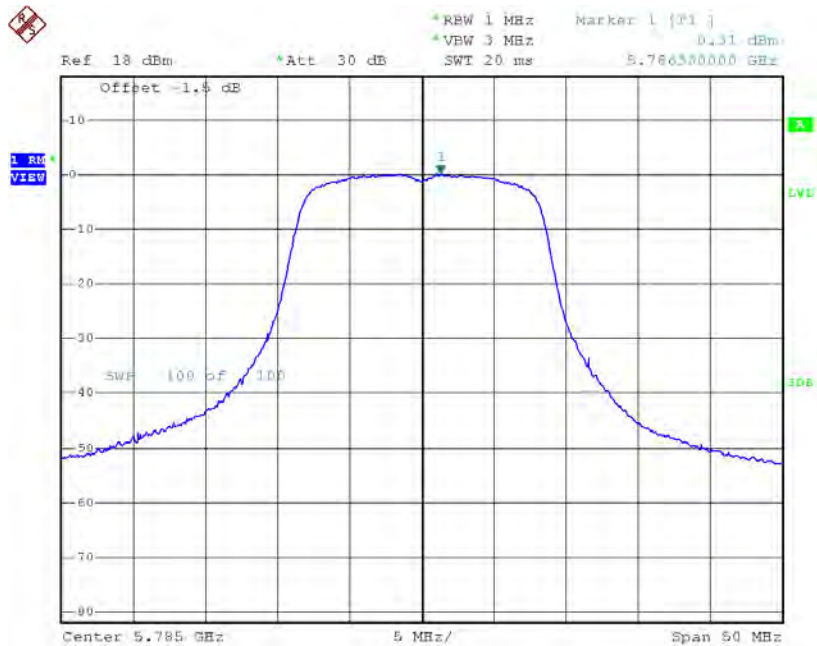

Date: 21.DEC.2015 21:45:06

TX CH165

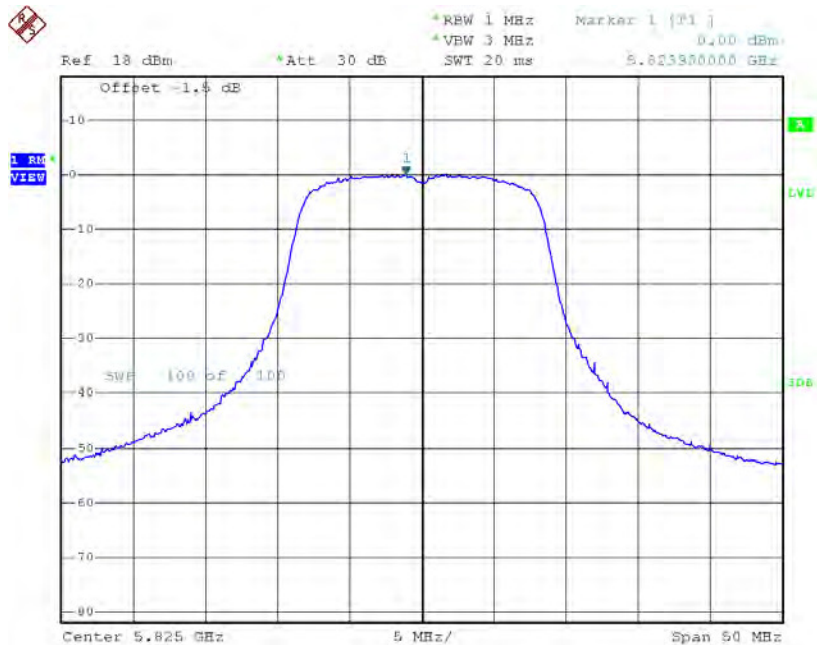

Date: 21.DEC.2015 21:45:57


Test Mode: UNII-3/TX A Mode_CH149/CH157/CH165_Total

Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Limit (dBm/500kHz)
CH149	5745	3.44	30.00
CH157	5785	3.38	30.00
CH165	5825	2.90	30.00

Test Mode: UNII-3/ TX N20 Mode_CH149/CH157/CH165_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor (dBm/500kHz)	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH149	5745	-1.09	0.51	-0.58	30.00
CH157	5785	-1.05	0.51	-0.54	30.00
CH165	5825	-1.98	0.51	-1.47	30.00

TX CH149

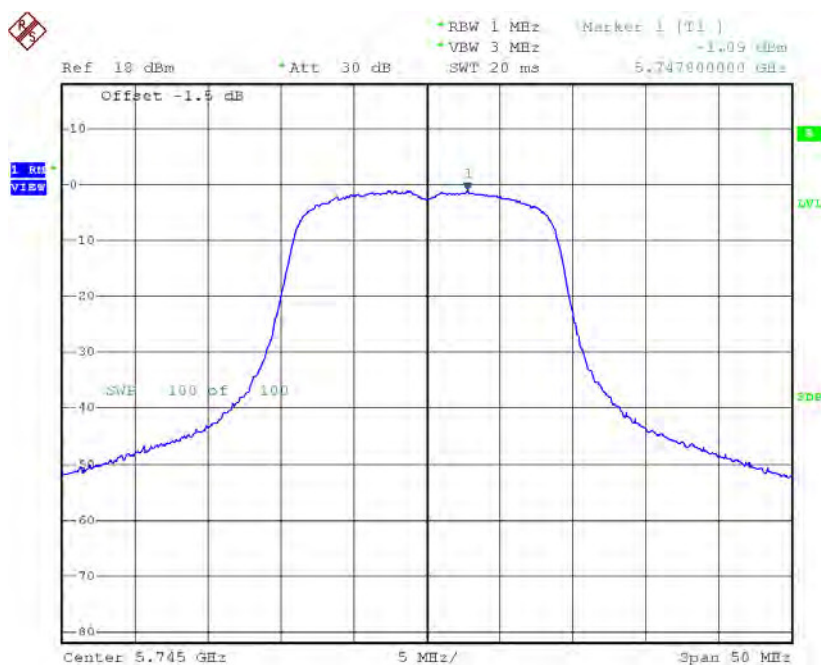


Date: 23.DEC.2015 12:12:28

TX CH157

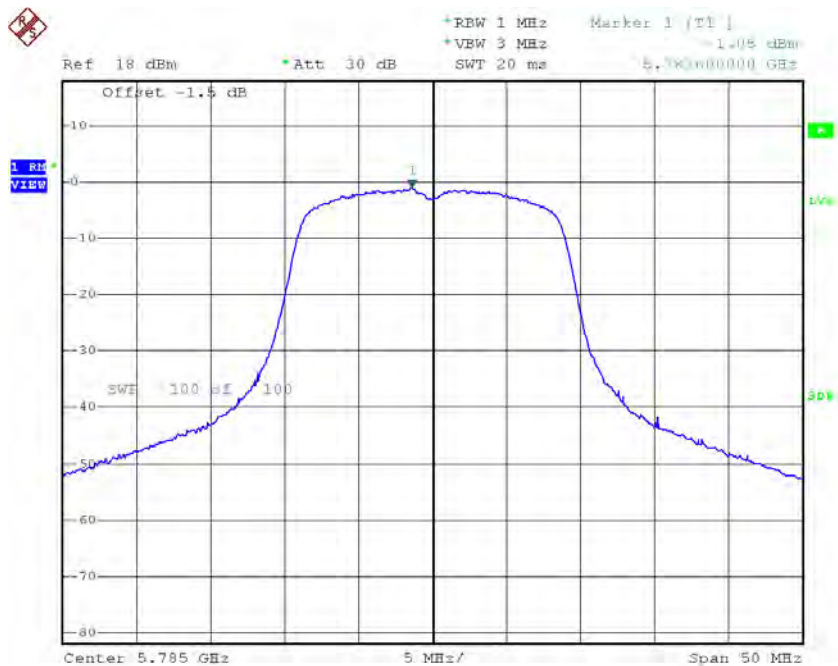

Date: 23.DEC.2015 12:12:59

TX CH165

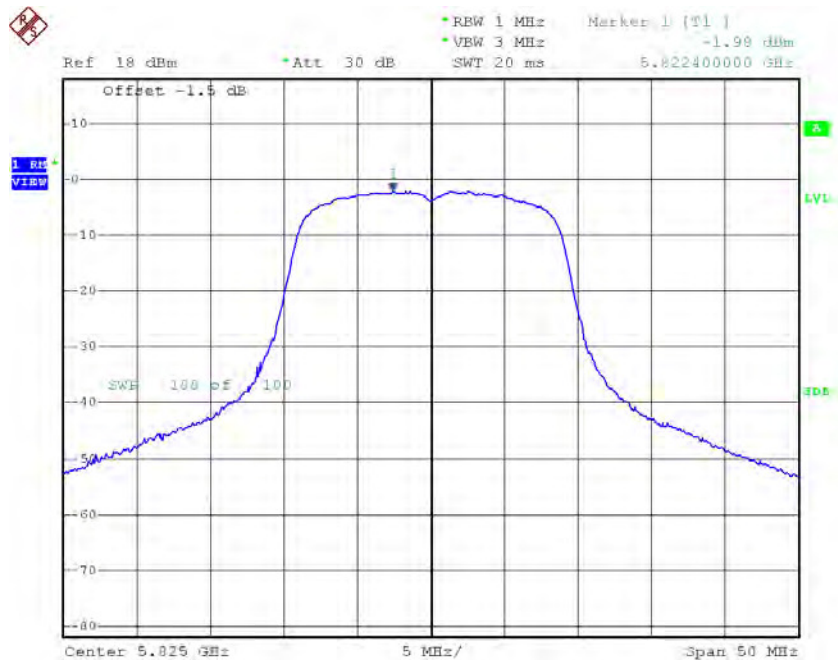


Date: 23.DEC.2015 12:13:16

Test Mode: UNII-3/ TX N20 Mode_CH149/CH157/CH165_ANT 2


Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor (dBm/500kHz)	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH149	5745	-0.89	0.51	-0.38	30.00
CH157	5785	-0.81	0.51	-0.30	30.00
CH165	5825	-1.13	0.51	-0.62	30.00

TX CH149

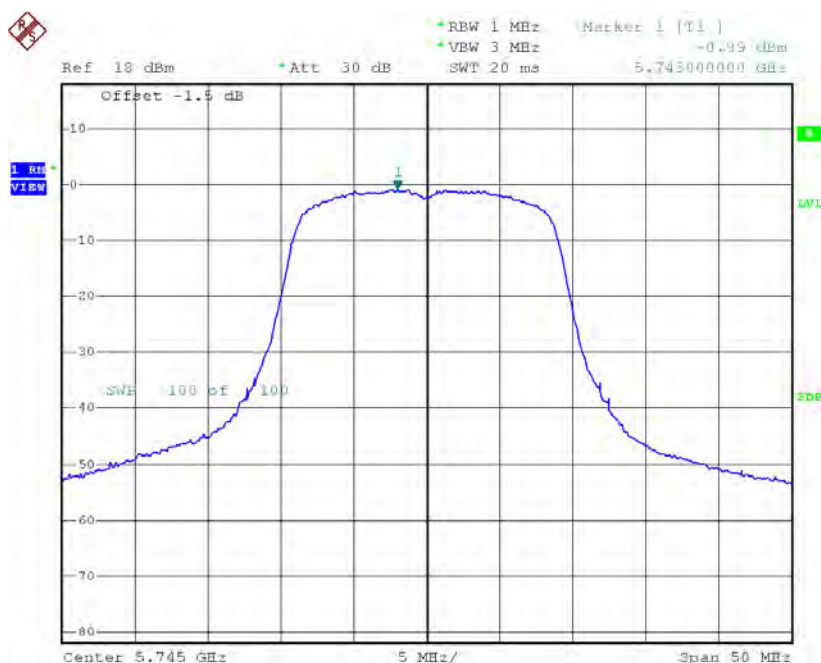


Date: 21.DEC.2015 21:57:27

TX CH157

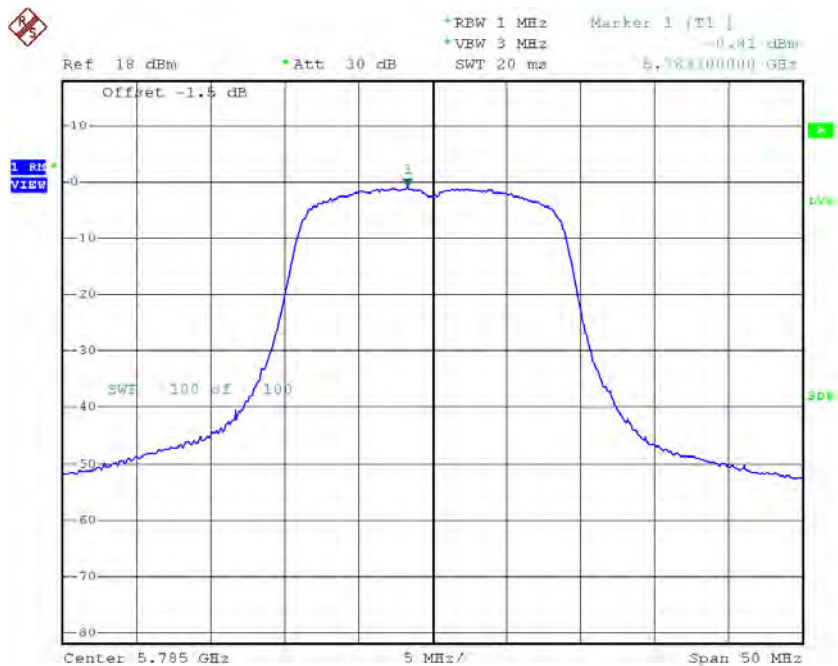

Date: 21.DEC.2015 21:58:24

TX CH165

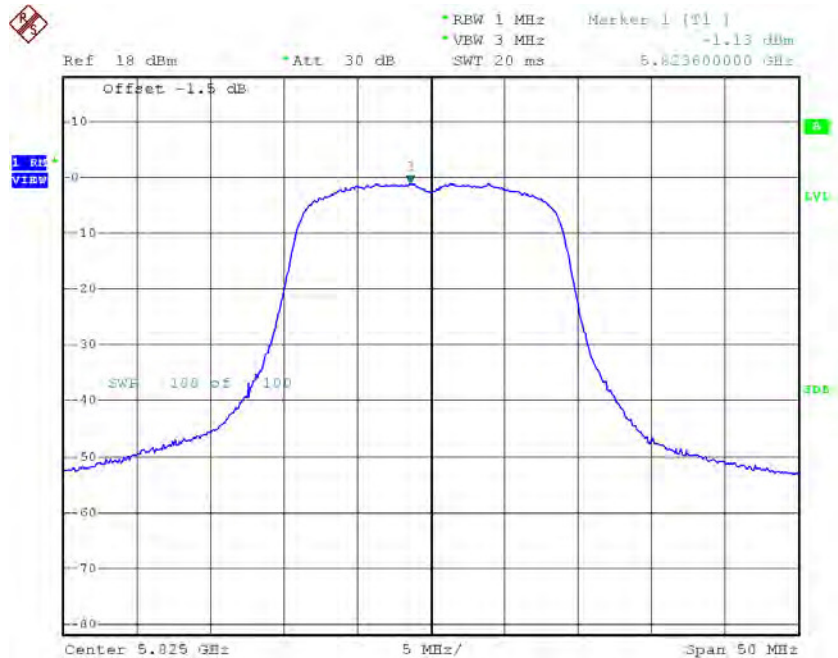

Date: 21.DEC.2015 21:59:16

Test Mode: UNII-3/ TX N20 Mode_CH149/CH157/CH165_Total


Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Limit (dBm/500kHz)
CH149	5745	2.53	30.00
CH157	5785	2.59	30.00
CH165	5825	1.99	30.00

Test Mode: UNII-3/ TX N40 Mode_CH151/CH159_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor (dBm/500kHz)	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH151	5755	-5.04	1.22	-3.82	30.00
CH159	5795	-5.25	1.22	-4.03	30.00

Test Mode: UNII-3/ TX N40 Mode_CH151/CH159_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor (dBm/500kHz)	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH151	5755	-5.02	1.22	-3.80	30.00
CH159	5795	-5.11	1.22	-3.89	30.00

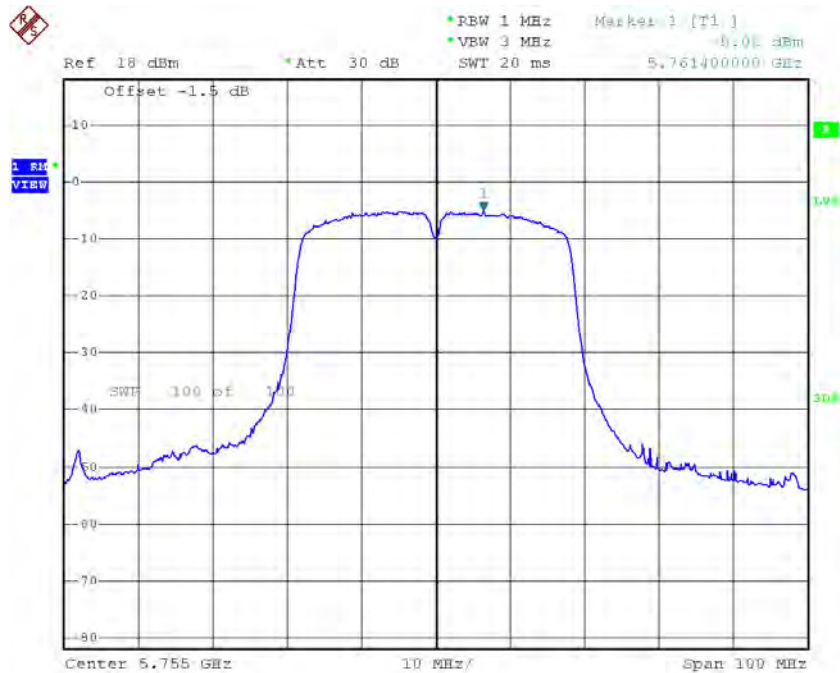TX CH151

Date: 22.DEC.2015 18:54:24

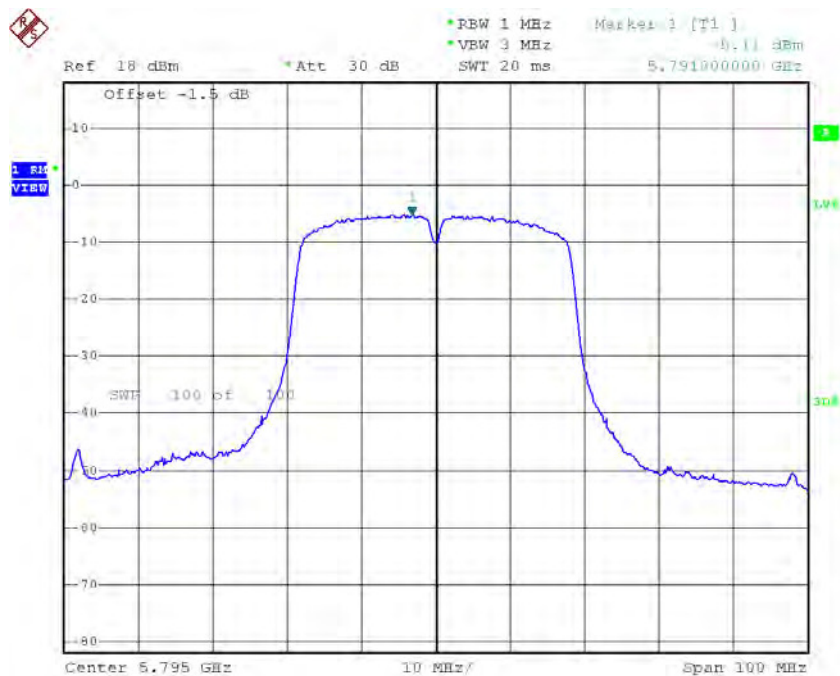TX CH159

Date: 21.DEC.2015 22:21:43

Test Mode: UNII-3/ TX N40 Mode_CH151/CH159_Total

Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Limit (dBm/500kHz)
CH151	5755	-0.80	30.00
CH159	5795	-0.95	30.00


Test Mode: UNII-1/TX AC20 Mode_CH36/CH40/CH48_ANT 1

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH36	5180	0.30	2.07	2.37	11.00
CH40	5200	0.89	2.07	2.96	11.00
CH48	5240	1.34	2.07	3.41	11.00




Date: 21.DEC.2015 19:24:11

CH40

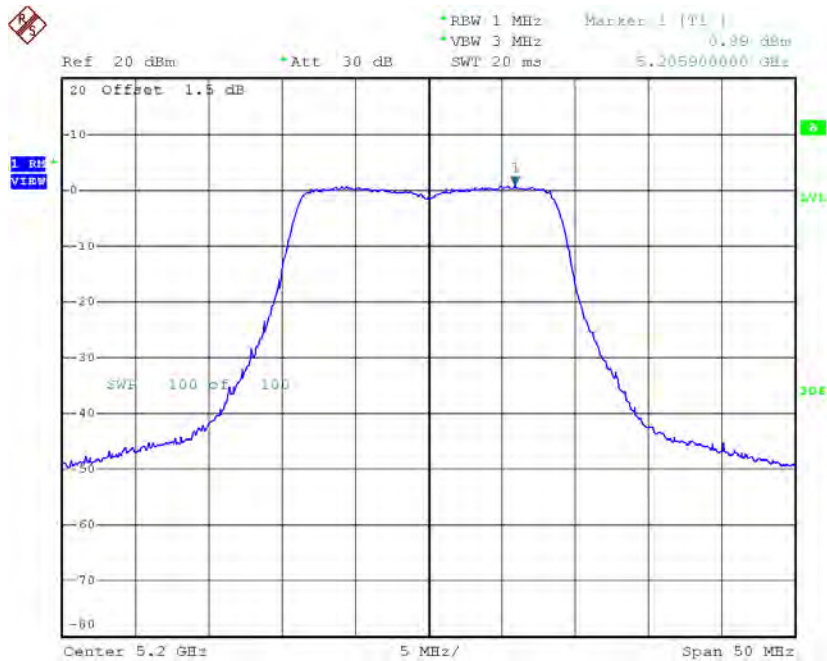

Date: 21.DEC.2015 19:25:09


CH48

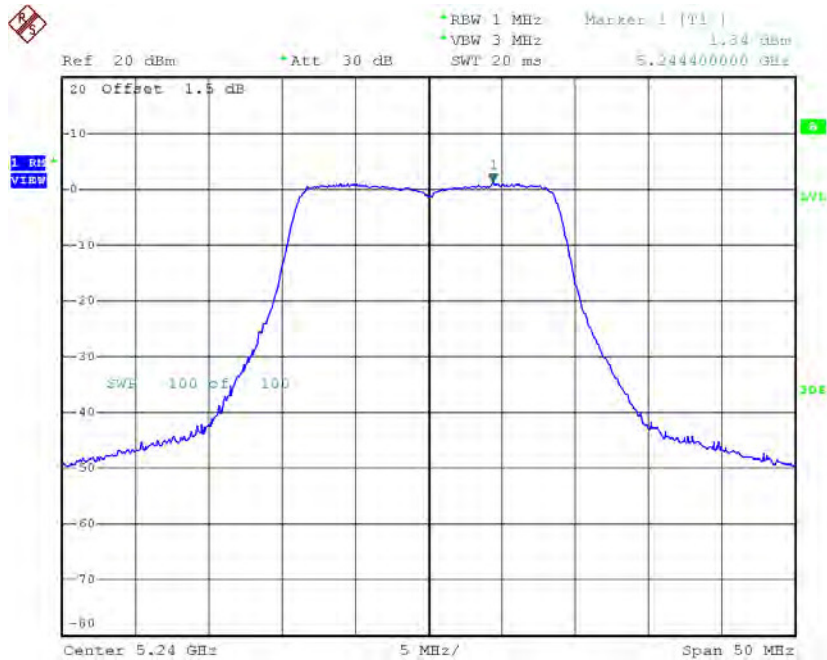

Date: 21.DEC.2015 19:25:58


Test Mode: UNII-1/TX AC20 Mode_CH36/CH40/CH48_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH36	5180	1.94	2.07	4.01	11.00
CH40	5200	2.18	2.07	4.25	11.00
CH48	5240	2.55	2.07	4.62	11.00

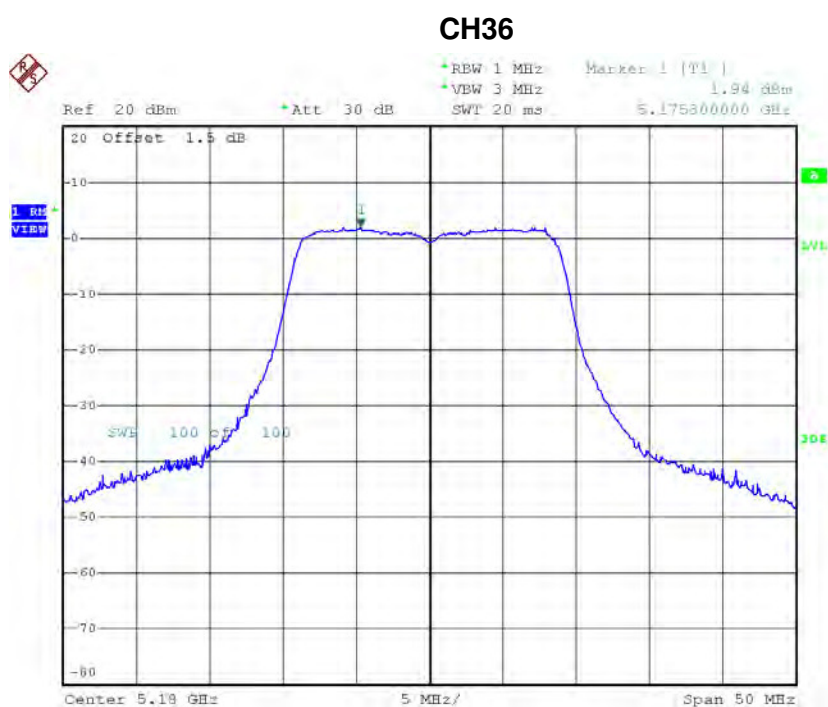


Date: 21.DEC.2015 22:01:07

CH40

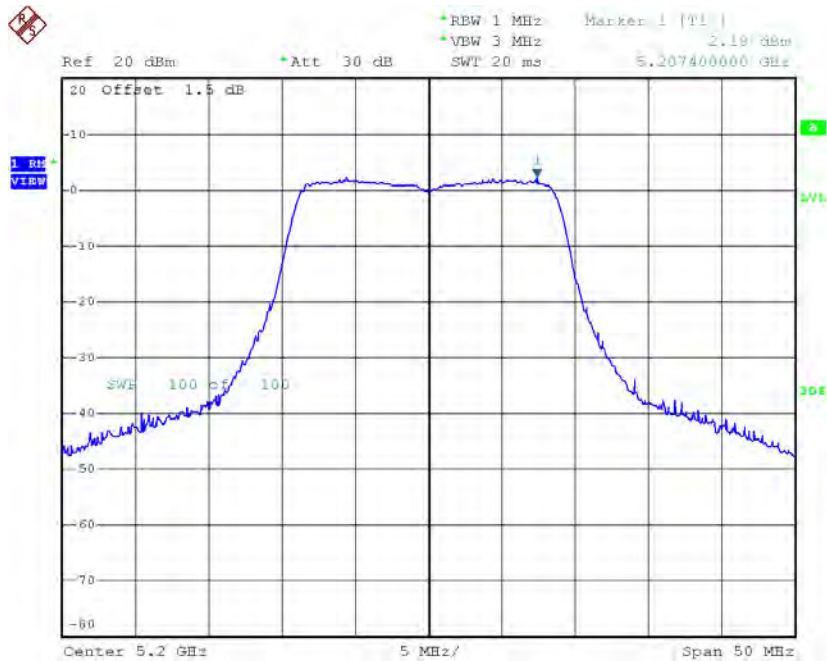

Date: 21.DEC.2015 22:02:14

CH48

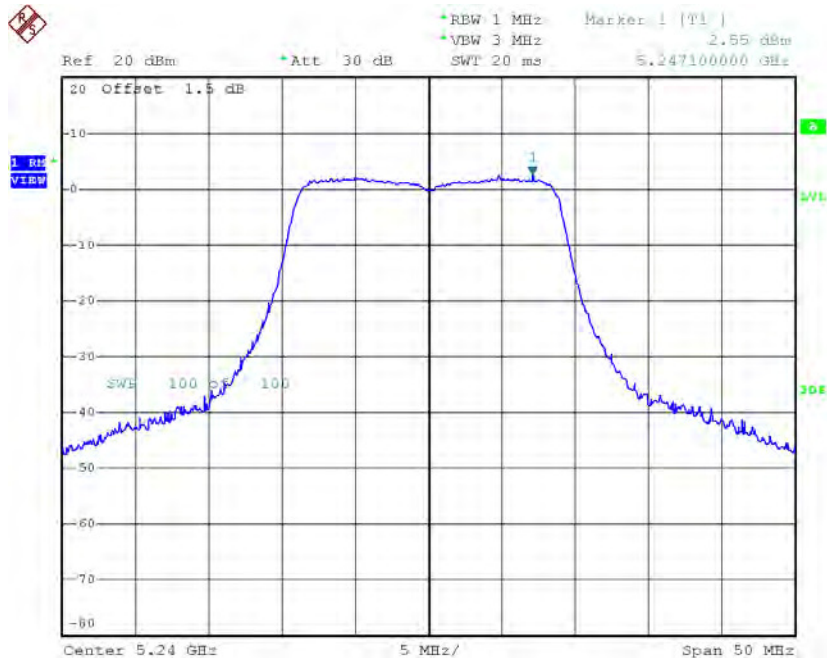

Date: 21.DEC.2015 22:03:02


Test Mode: UNII-1/TX AC20 Mode_CH36/CH40/CH48_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH36	5180	6.28	11.00
CH40	5200	6.66	11.00
CH48	5240	7.07	11.00

Test Mode: UNII-1/TX AC40 Mode_CH38/CH46_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH38	5190	-2.33	4.39	2.06	11.00
CH46	5230	-1.75	4.39	2.64	11.00

CH38

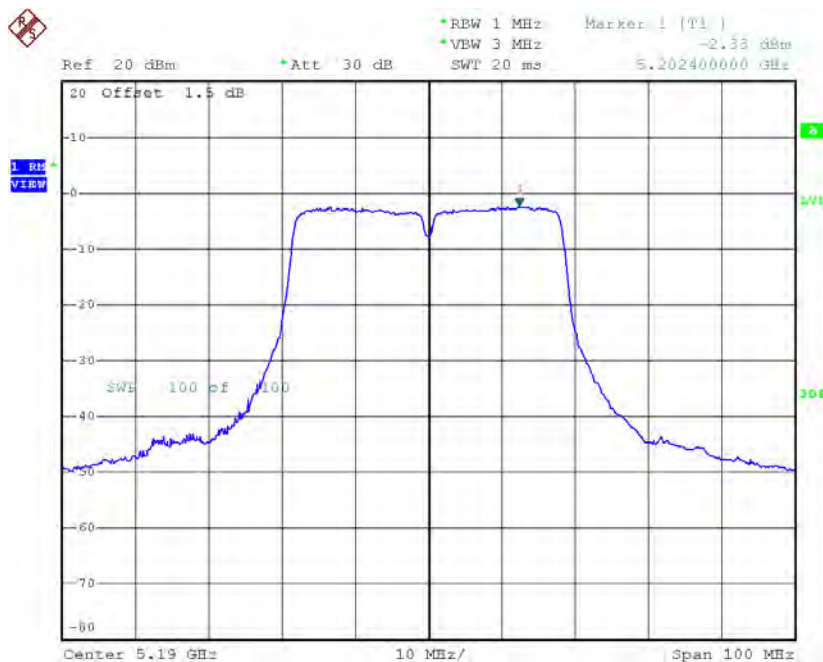

Date: 21.DEC.2015 20:07:27

CH46

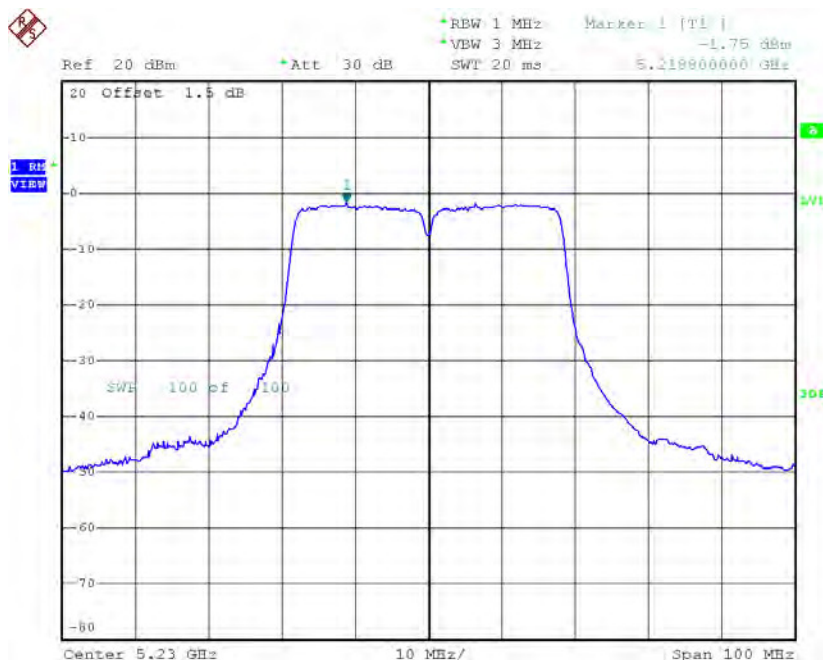


Date: 21.DEC.2015 20:11:06

Test Mode: UNII-1/TX AC40 Mode_CH38/CH46_ANT 2


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH38	5190	-2.08	4.39	2.31	11.00
CH46	5230	0.00	4.39	4.39	11.00

CH38

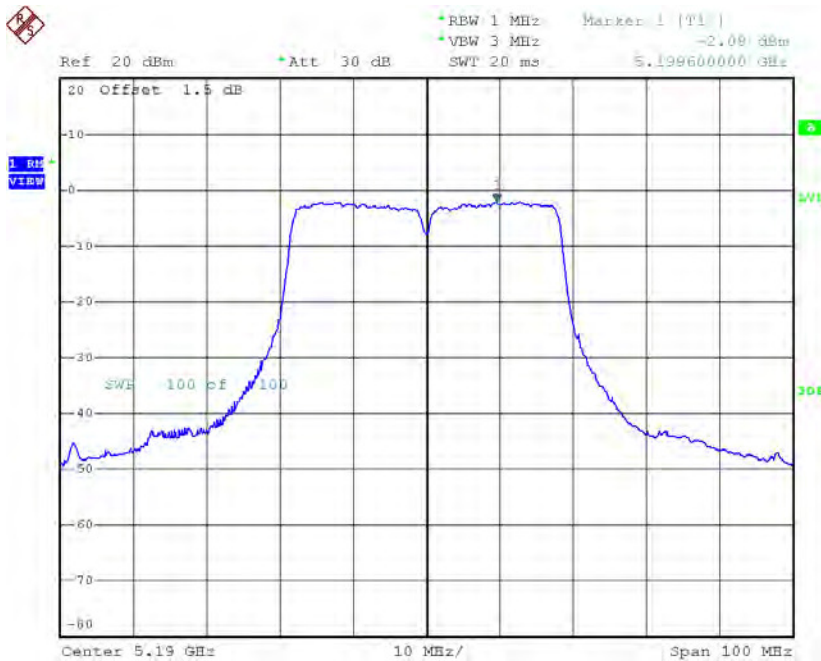

Date: 22.DEC.2015 18:56:58

CH46

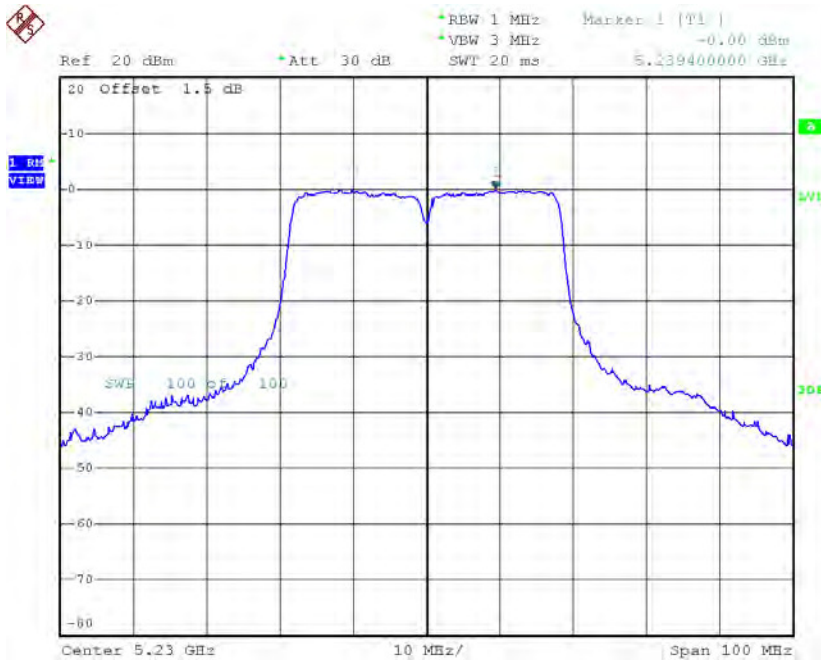

Date: 21.DEC.2015 22:24:45


Test Mode: UNII-1/TX AC40 Mode_CH38/CH46_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH38	5190	5.20	11.00
CH46	5230	6.61	11.00

Test Mode: UNII-1/TX AC80 Mode_CH42_ANT 1

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH42	5210	-5.95	4.52	-1.43	11.00

CH42

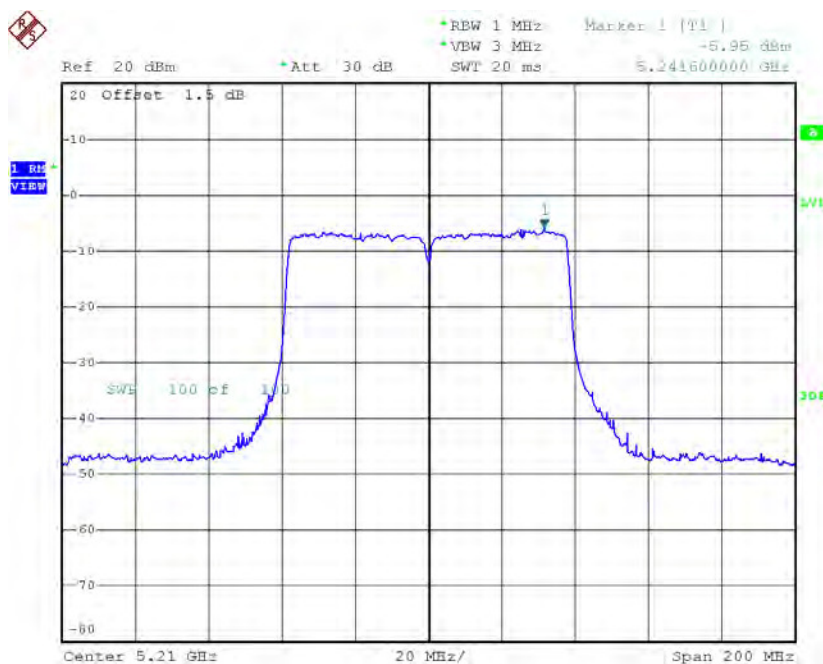


Date: 22.DEC.2015 18:27:18

Test Mode: UNII-1/TX AC80 Mode_CH42_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH42	5210	-6.56	4.52	-2.04	11.00

CH42

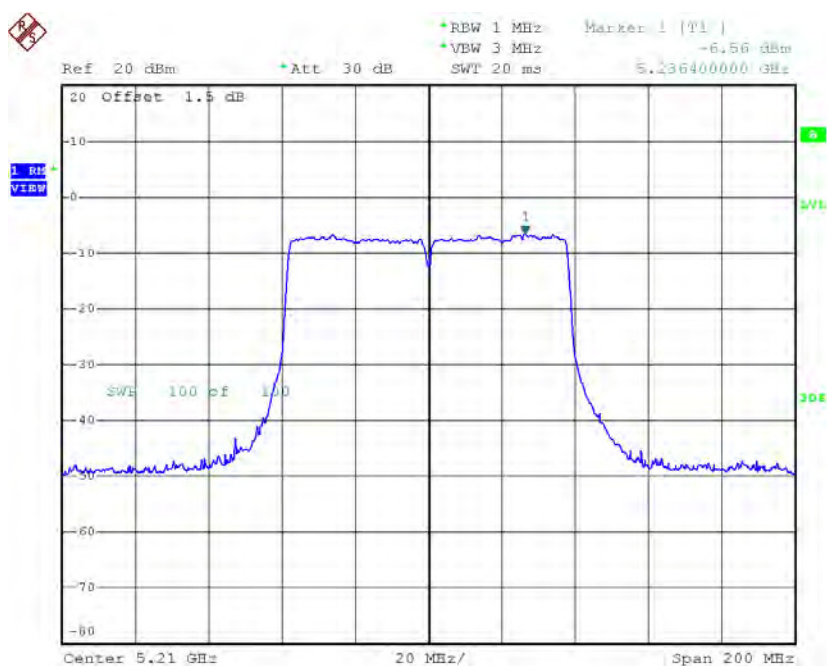


Date: 22.DEC.2015 18:14:12

Test Mode: UNII-1/TX AC80 Mode_CH42_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH42	5210	1.29	11.00


Test Mode: UNII-2A/TX AC20 Mode_CH52/CH60/CH64_ANT 1

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	1.12	2.07	3.19	11.00
CH60	5300	1.21	2.07	3.28	11.00
CH64	5320	1.26	2.07	3.33	11.00

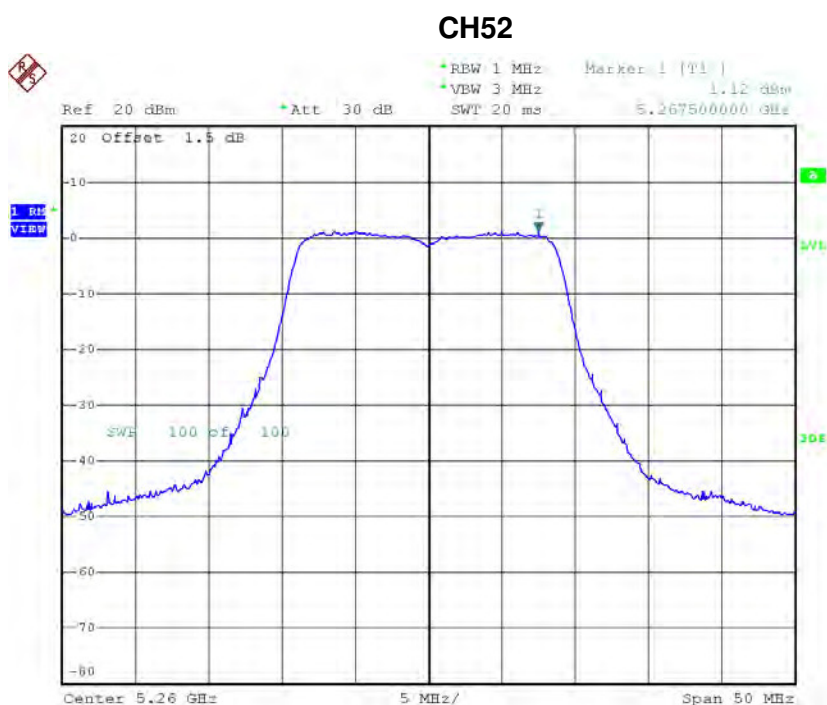


Date: 21.DEC.2015 19:26:57

CH60

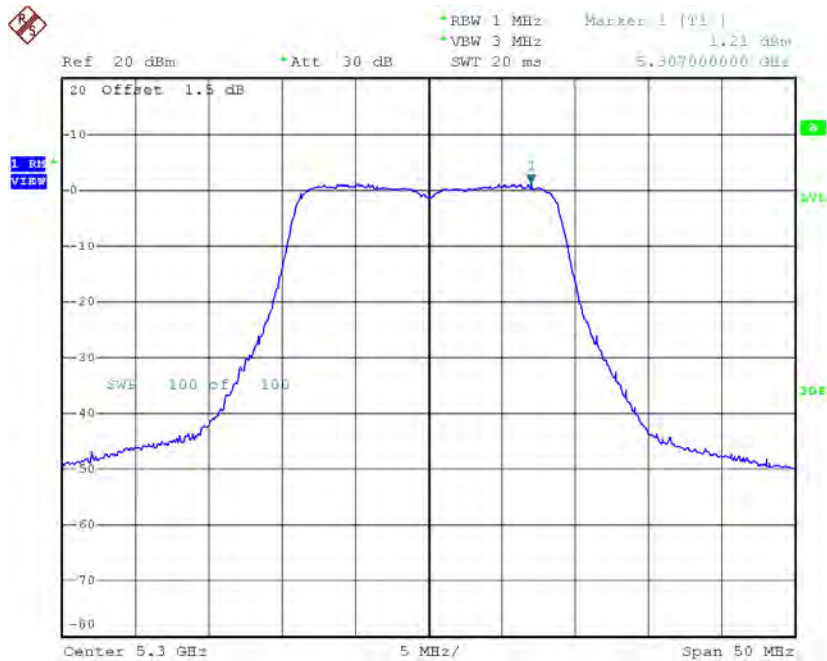

Date: 21.DEC.2015 19:27:49


CH64

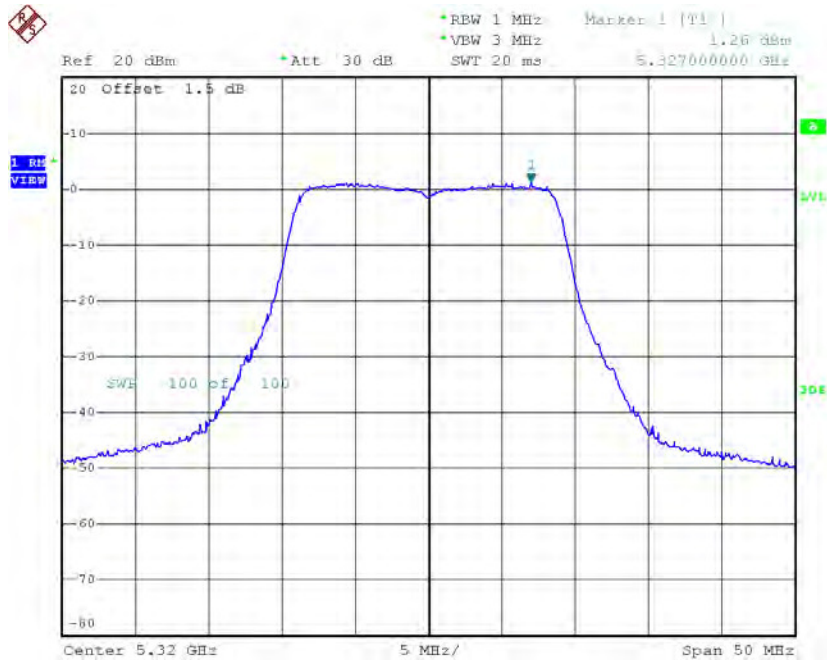

Date: 21.DEC.2015 19:28:35


Test Mode: UNII-2A/TX AC20 Mode_CH52/CH60/CH64_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	1.99	2.07	4.06	11.00
CH60	5300	2.54	2.07	4.61	11.00
CH64	5320	2.44	2.07	4.51	11.00

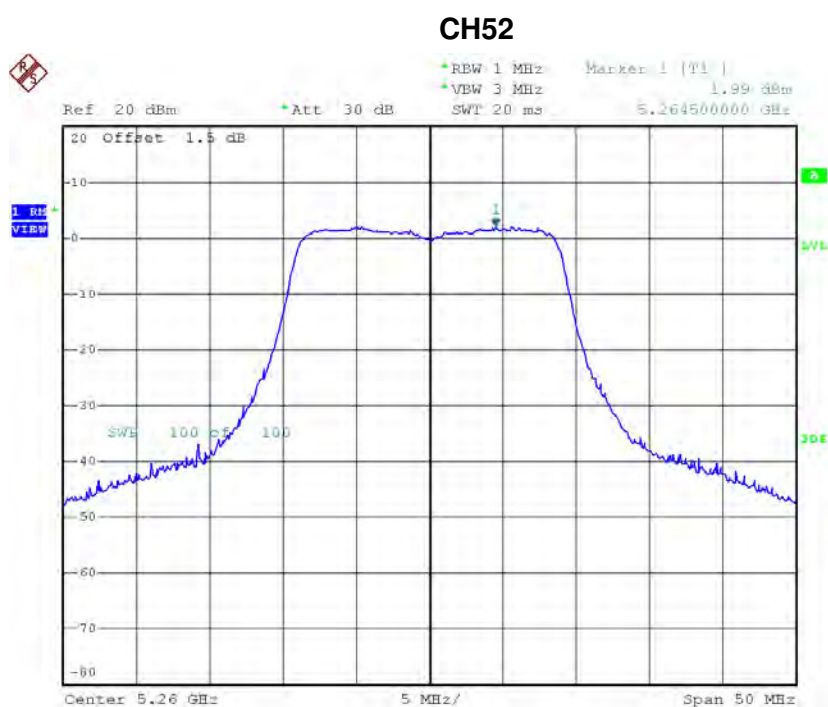


Date: 21.DEC.2015 22:03:52

CH60

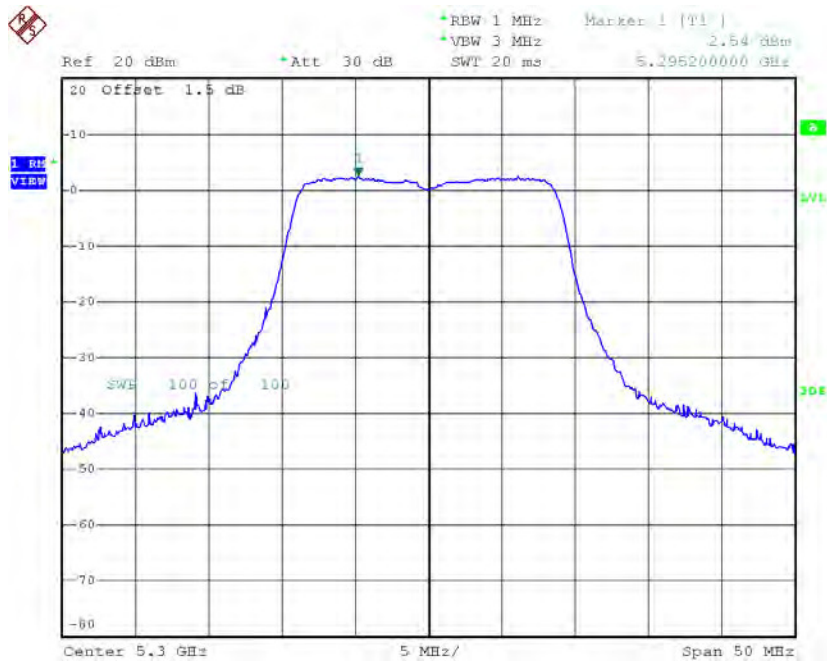

Date: 21.DEC.2015 22:04:52

CH64

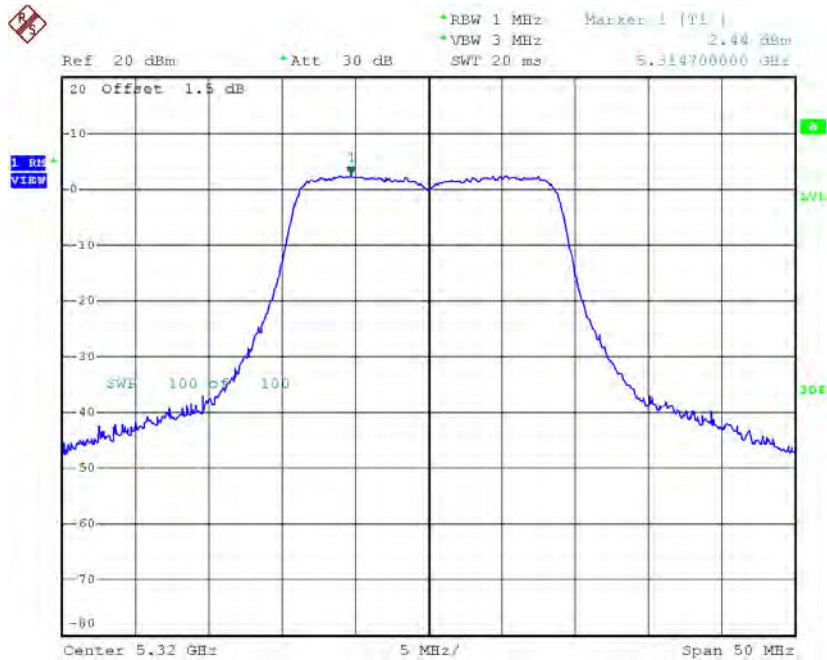

Date: 21.DEC.2015 22:05:38


Test Mode: UNII-2A/TX AC20 Mode_CH52/CH60/CH64_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	6.66	11.00
CH60	5300	7.01	11.00
CH64	5320	6.97	11.00

Test Mode: UNII-2A/TX AC40 Mode_CH54/CH62_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH54	5270	-1.55	4.39	2.84	11.00
CH62	5310	-1.49	4.39	2.90	11.00

CH54

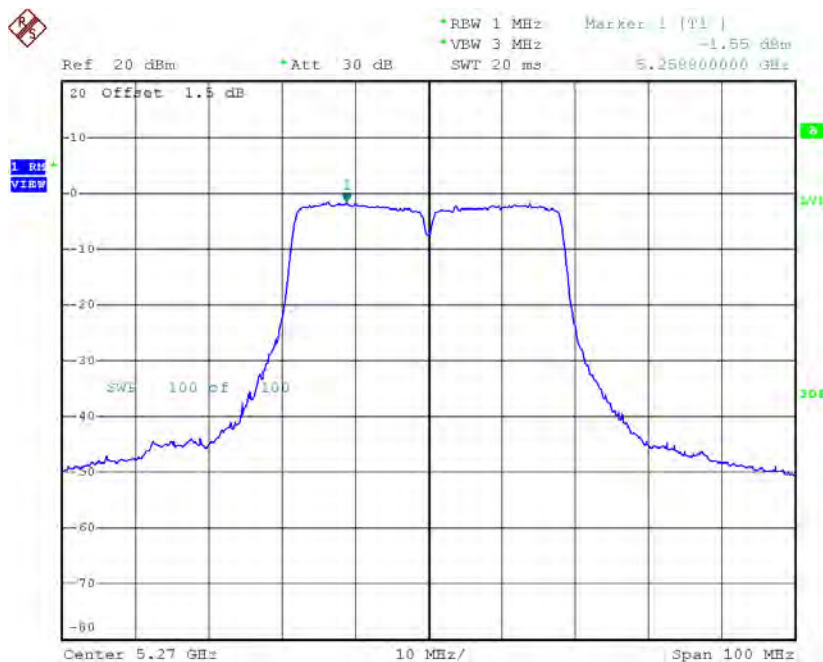

Date: 21.DEC.2015 20:13:11

CH62

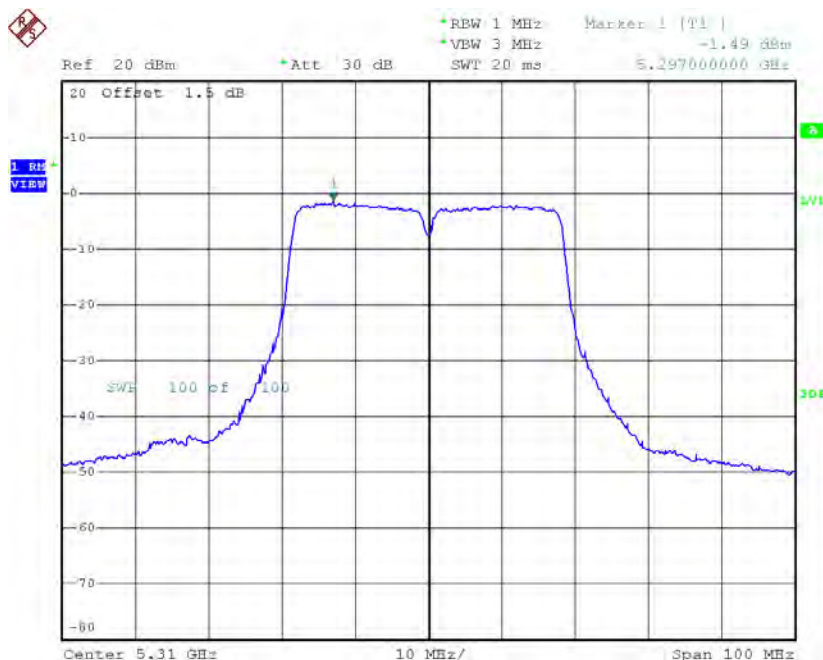


Date: 21.DEC.2015 20:14:16

Test Mode: UNII-2A/TX AC40 Mode_CH54/CH62_ANT 2


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH54	5270	-0.14	4.39	4.25	11.00
CH62	5310	-1.76	4.39	2.63	11.00

CH54

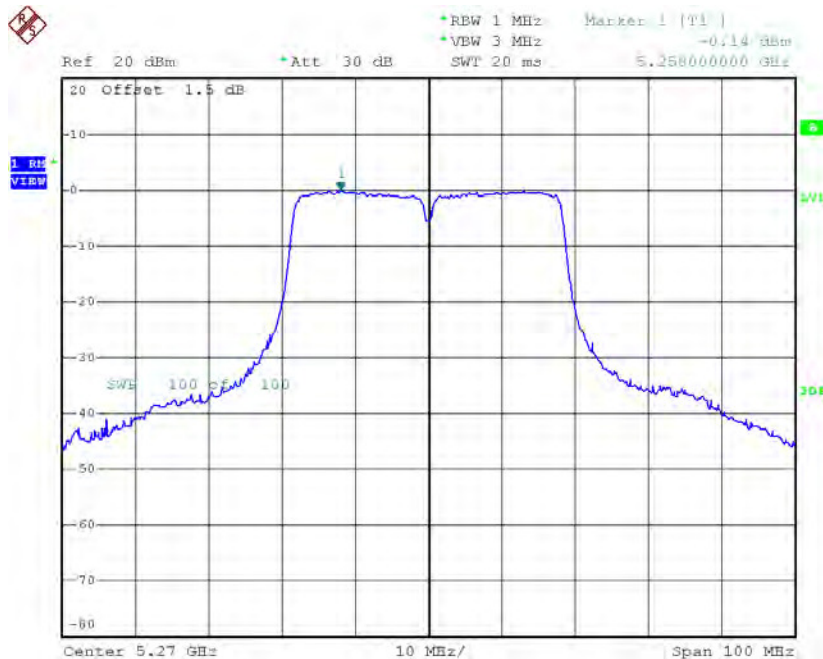

Date: 21.DEC.2015 22:25:43

CH62

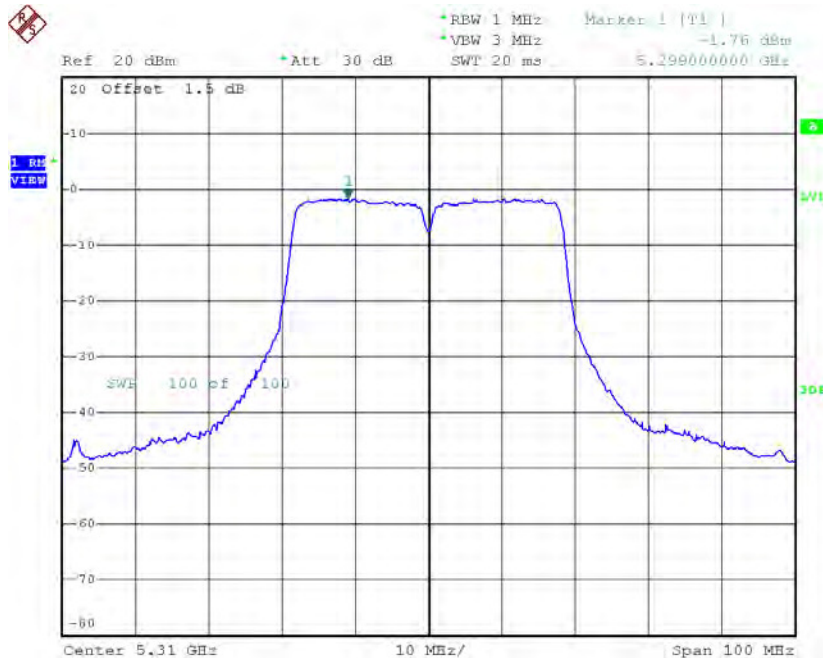

Date: 22.DEC.2015 18:58:05

Test Mode: UNII-2A/TX AC40 Mode_CH54/CH62_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH54	5270	6.61	11.00
CH62	5310	5.78	11.00

Test Mode: UNII-2A/TX AC80 Mode_CH58_ANT 1

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH58	5290	-8.29	4.52	-3.77	11.00



Date: 22.DEC.2015 18:28:54

Test Mode: UNII-2A/TX AC80 Mode_CH58_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH58	5290	-7.40	4.52	-2.88	11.00




Date: 22.DEC.2015 18:15:38

Test Mode: UNII-2A/TX AC80 Mode_CH58_Total


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH58	5290	-0.29	11.00

Test Mode: UNII-2C/TX AC20 Mode_CH100/CH116/CH140_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH100	5500	0.44	2.07	2.51	11.00
CH116	5580	1.68	2.07	3.75	11.00
CH140	5700	1.34	2.07	3.41	11.00

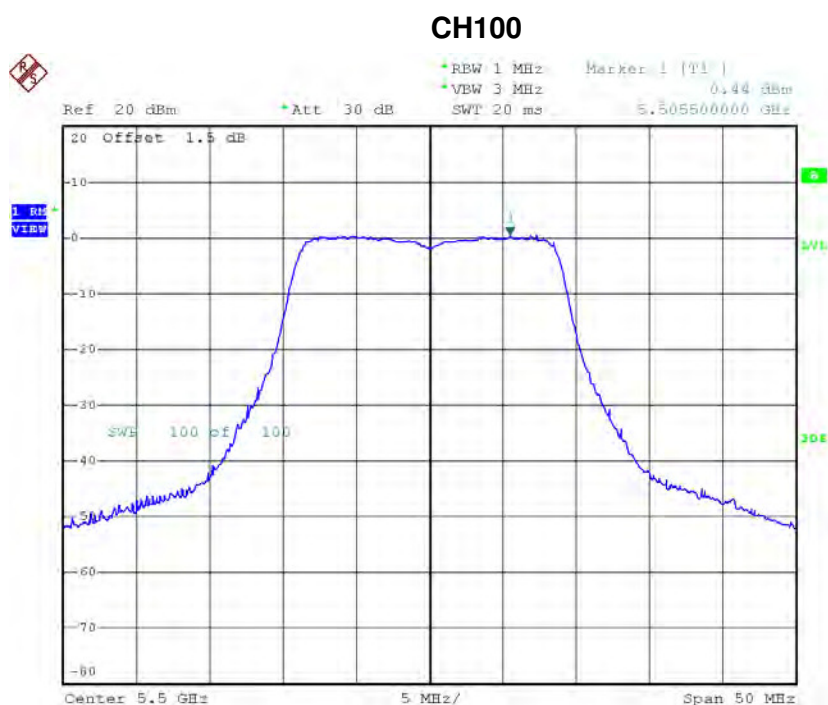

Date: 21.DEC.2015 19:29:27

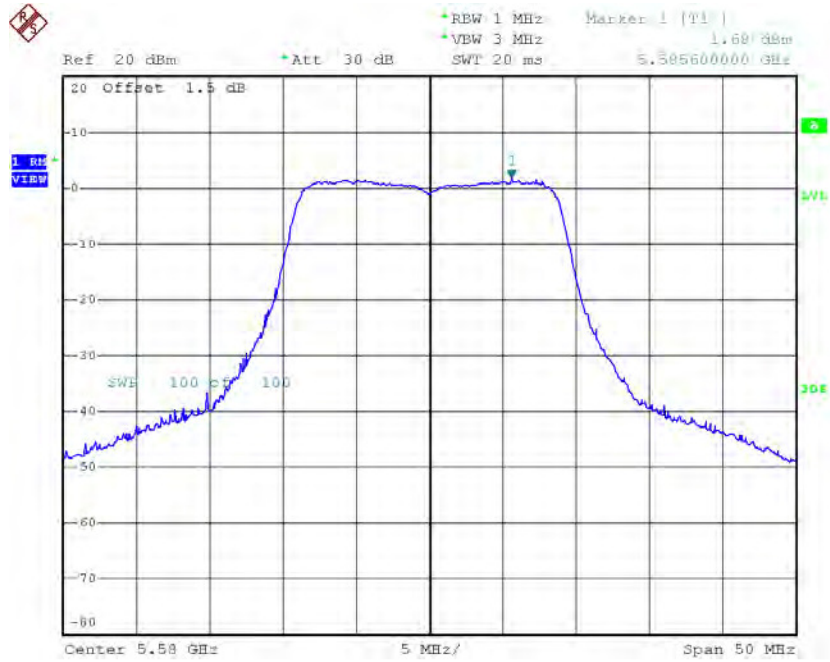CH116


Date: 21.DEC.2015 19:30:21

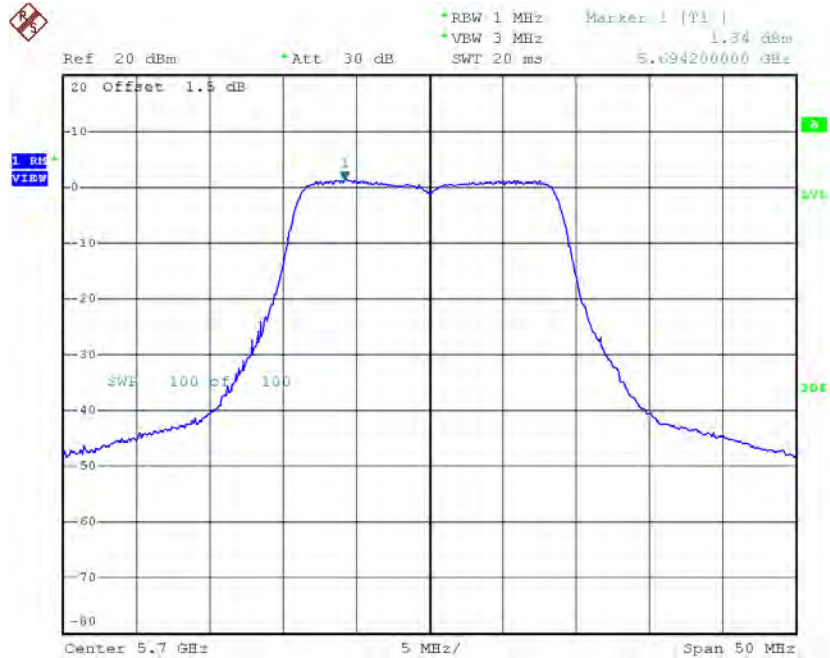CH140

Date: 21.DEC.2015 19:31:06


Test Mode: UNII-2C/TX AC20 Mode_CH100/CH116/CH140_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH100	5500	2.99	2.07	5.06	11.00
CH116	5580	2.82	2.07	4.89	11.00
CH140	5700	2.63	2.07	4.70	11.00

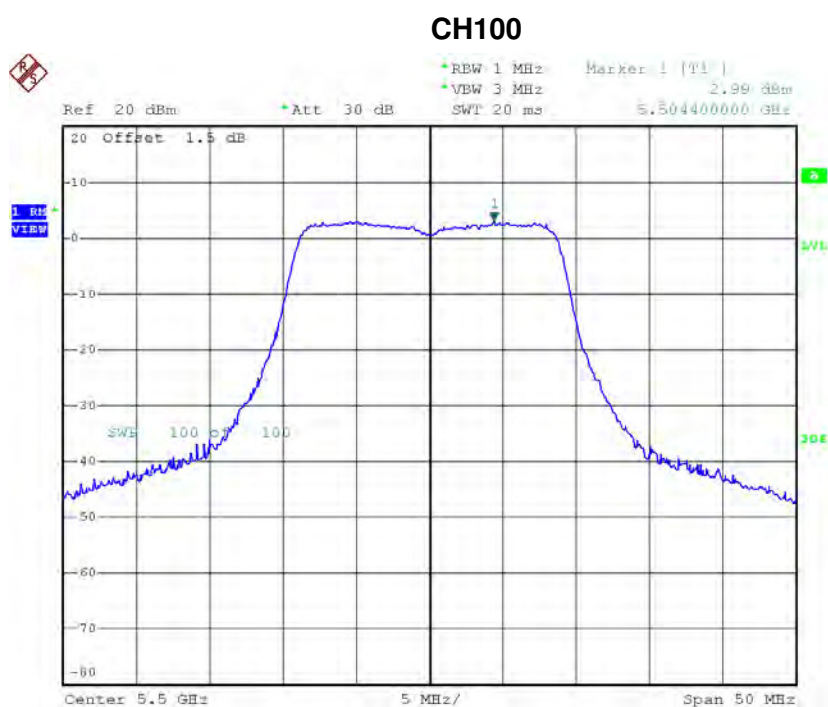


Date: 21.DEC.2015 22:06:30

CH116

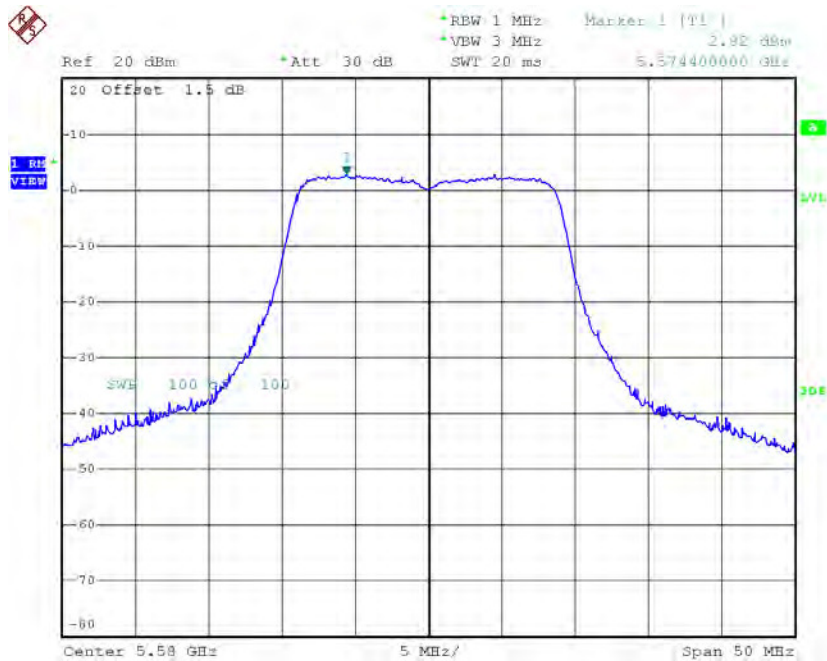

Date: 21.DEC.2015 22:07:22

CH140

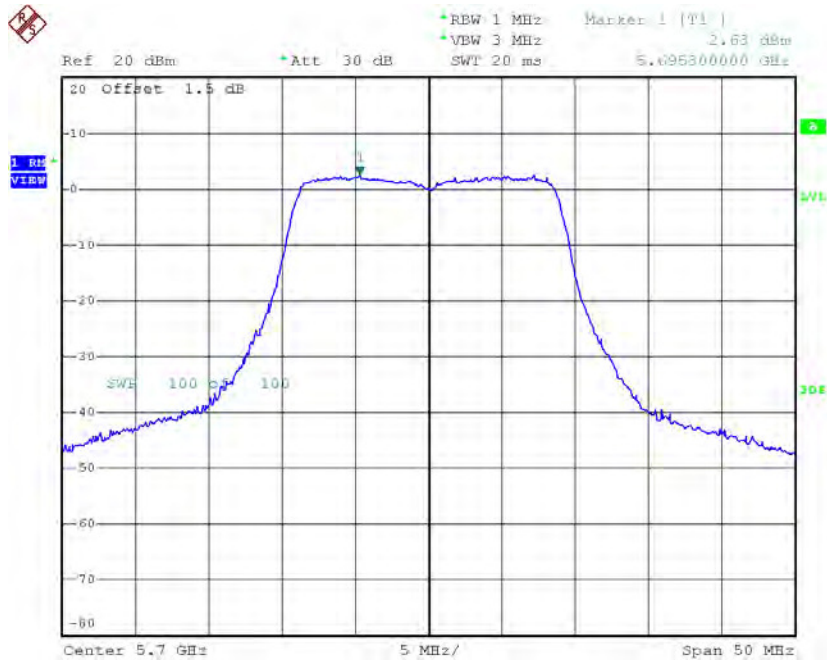

Date: 21.DEC.2015 22:08:10

Test Mode: UNII-2C/TX AC20 Mode_CH100/CH116/CH140_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH100	5500	6.98	11.00
CH116	5580	7.37	11.00
CH140	5700	7.11	11.00

Test Mode: UNII-2C/TX AC40 Mode_CH102/CH110/CH134_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH102	5510	-2.41	4.39	1.98	11.00
CH110	5550	-1.37	4.39	3.02	11.00
CH134	5670	-1.82	4.39	2.57	11.00

CH102




Date: 21.DEC.2015 20:15:20

CH110

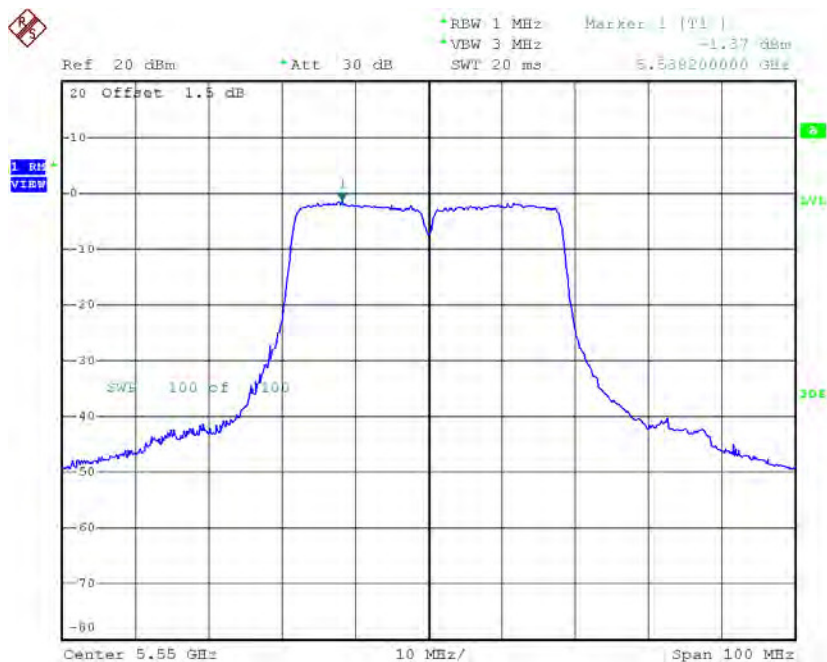

Date: 21.DEC.2015 20:17:03

CH134

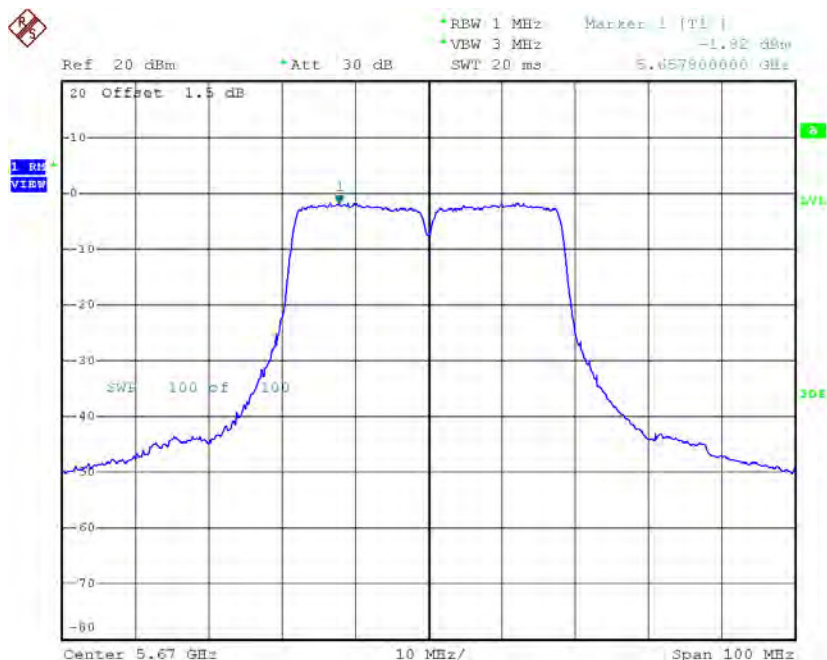


Date: 21.DEC.2015 20:18:29


Test Mode: UNII-2C/TX AC40 Mode_CH102/CH110/CH134_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH102	5510	-0.25	4.39	4.14	11.00
CH110	5550	-0.44	4.39	3.95	11.00
CH134	5670	-1.17	4.39	3.22	11.00


CH102

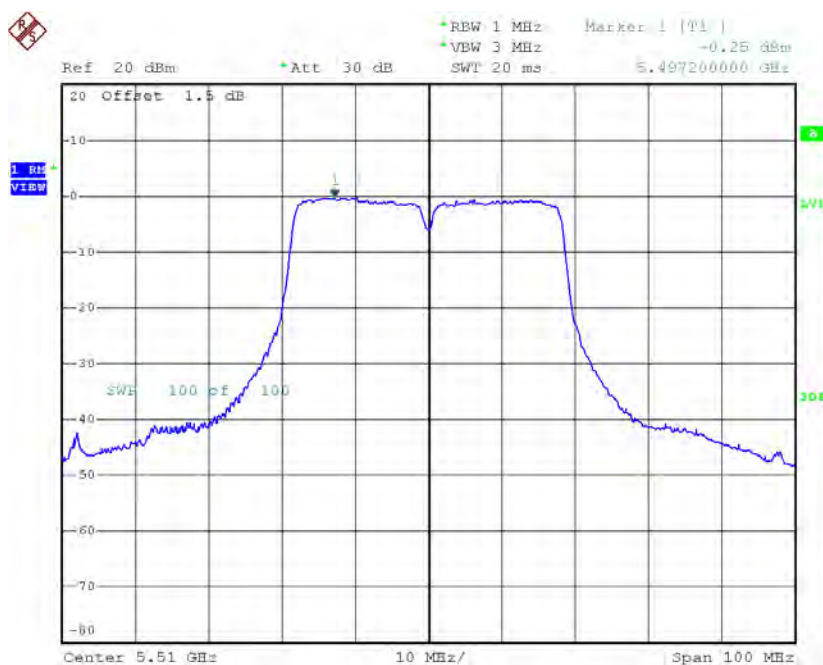

Date: 21.DEC.2015 22:27:59

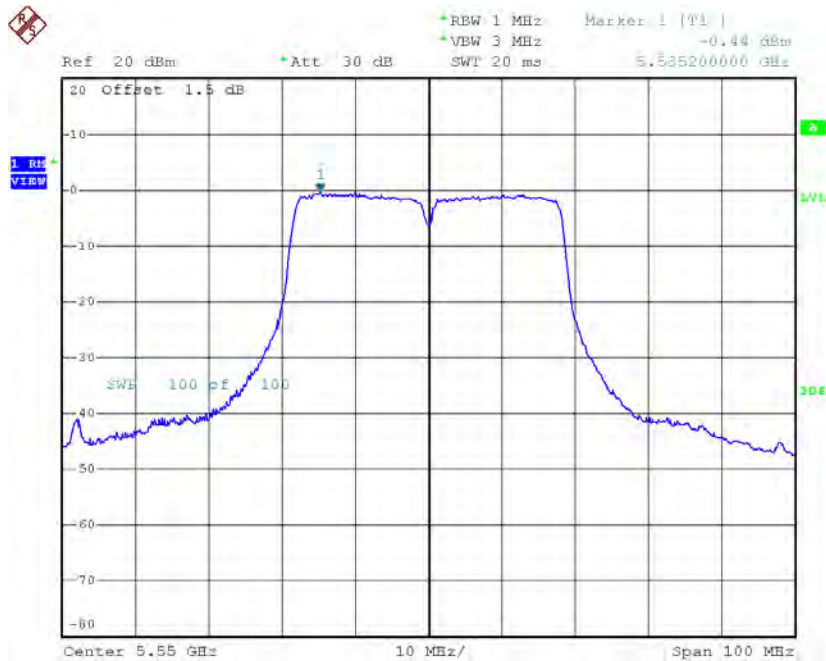CH110

Date: 21.DEC.2015 22:30:13

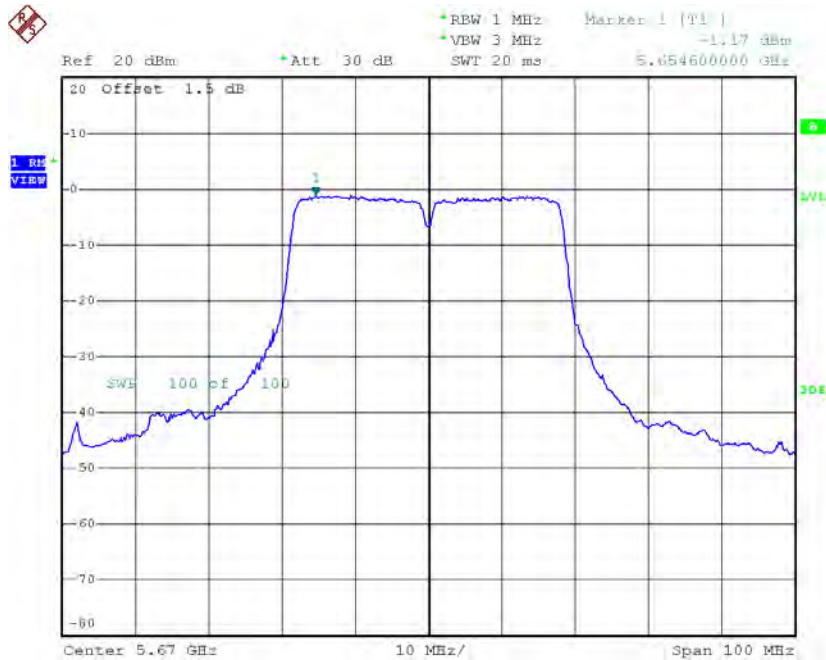CH134

Date: 21.DEC.2015 22:31:06


Test Mode: UNII-2C/TX AC40 Mode_CH102/CH110/CH134_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH102	5510	6.20	11.00
CH110	5550	6.52	11.00
CH134	5670	5.92	11.00

Test Mode: UNII-2C/TX AC80 Mode_CH106/CH122_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH106	5530	-7.45	4.52	-2.93	11.00
CH122	5610	-4.54	4.52	-0.02	11.00

CH106

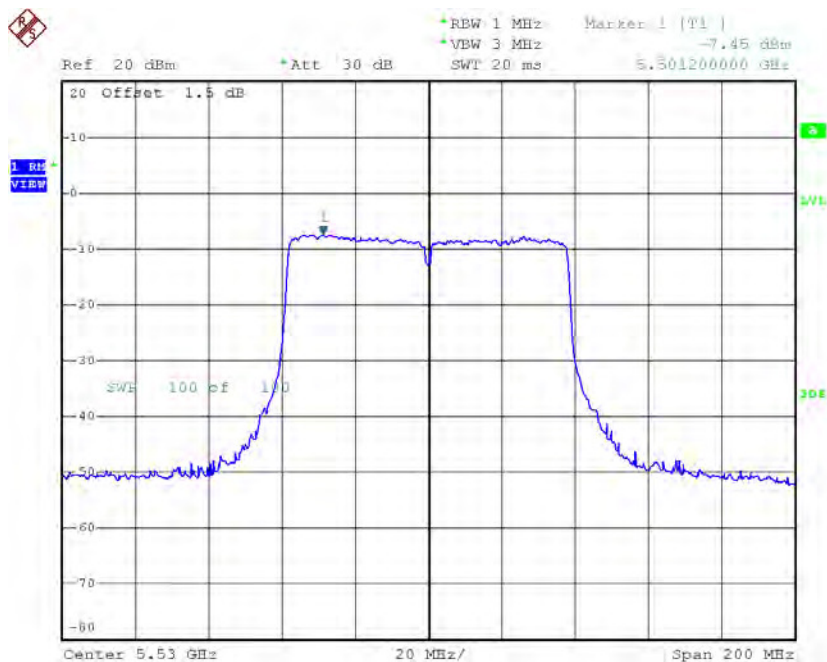

Date: 22.DEC.2015 18:30:28

CH122

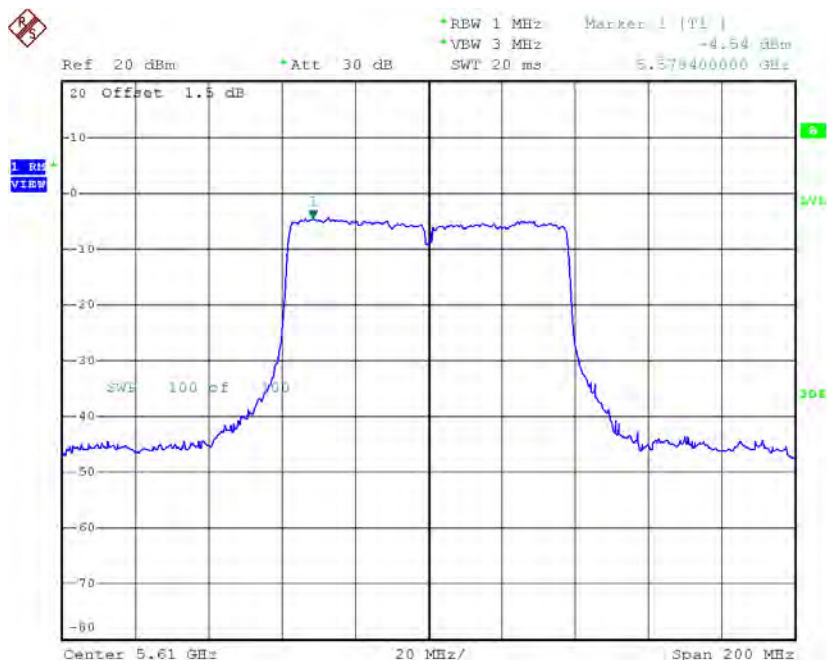


Date: 22.DEC.2015 18:32:11

Test Mode: UNII-2C/TX AC80 Mode_CH106/CH122_ANT 2


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH106	5530	-6.57	4.52	-2.05	11.00
CH122	5610	-4.58	4.52	-0.06	11.00

CH106

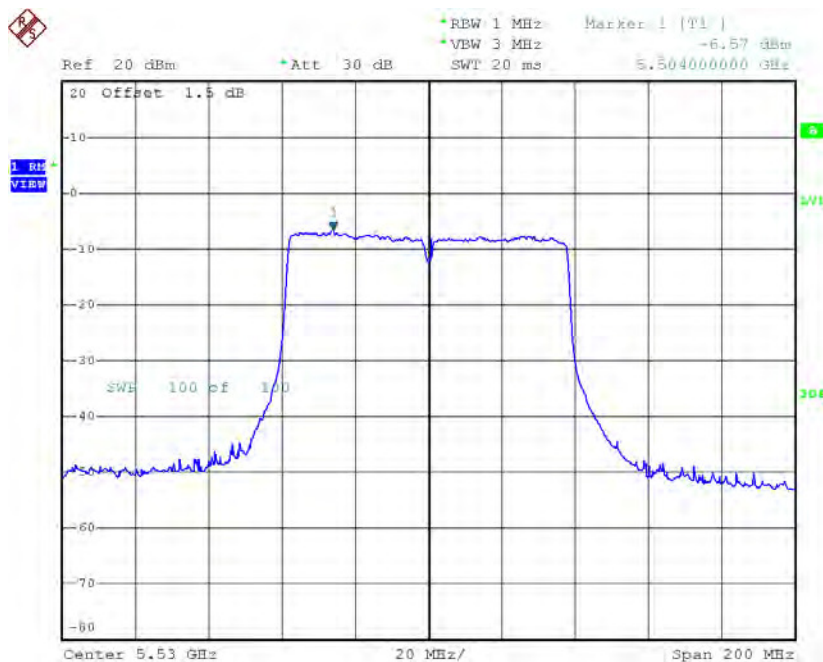

Date: 22.DEC.2015 18:17:17

CH122

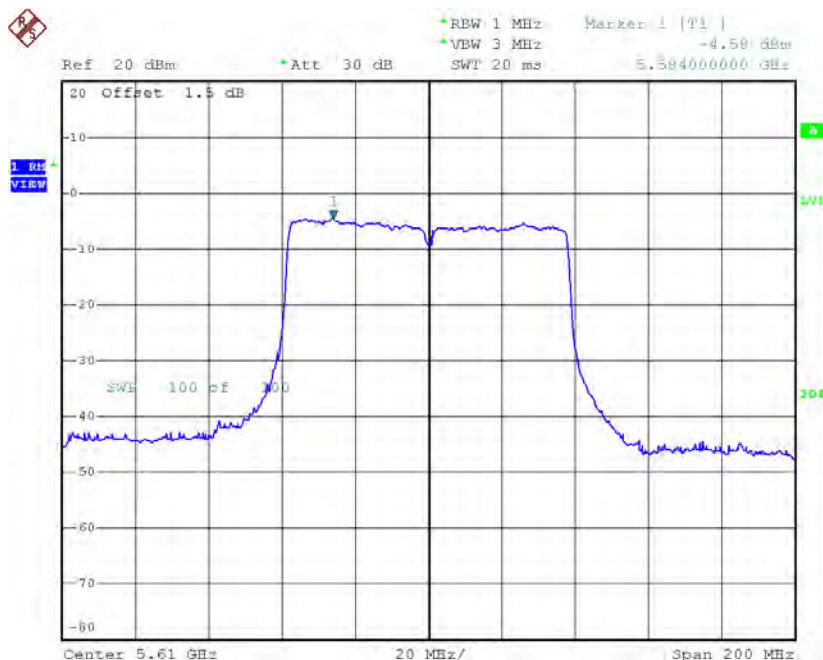

Date: 22.DEC.2015 18:18:45


Test Mode: UNII-2C/TX AC80 Mode_CH106/CH122_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH106	5530	0.54	11.00
CH122	5610	2.97	11.00

Test Mode: UNII-3/ TX AC20 Mode_CH149/CH157/CH165_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor (dBm/500kHz)	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH149	5745	-0.90	2.07	1.17	30.00
CH157	5785	-1.16	2.07	0.91	30.00
CH165	5825	-1.81	2.07	0.26	30.00

TX CH149

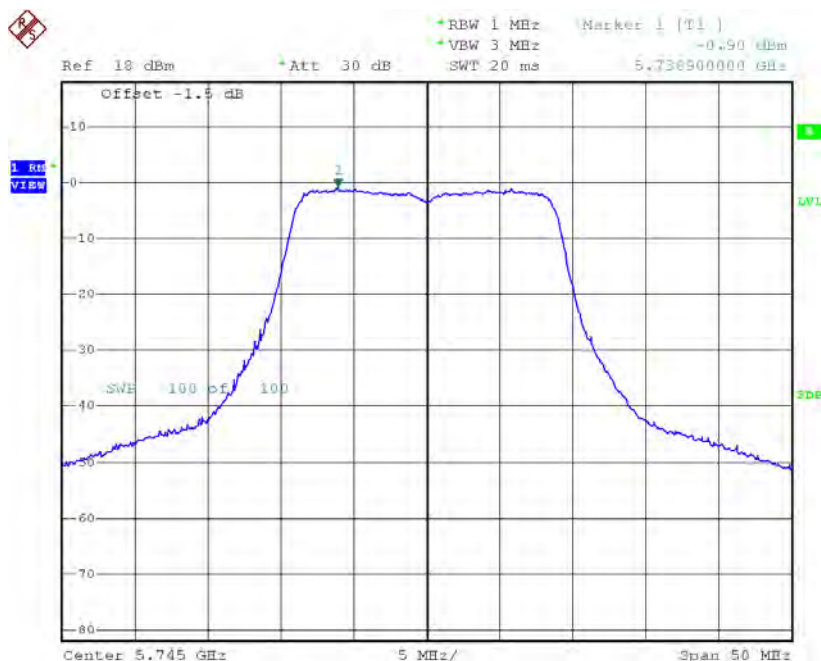


Date: 21.DEC.2015 19:32:03

TX CH157

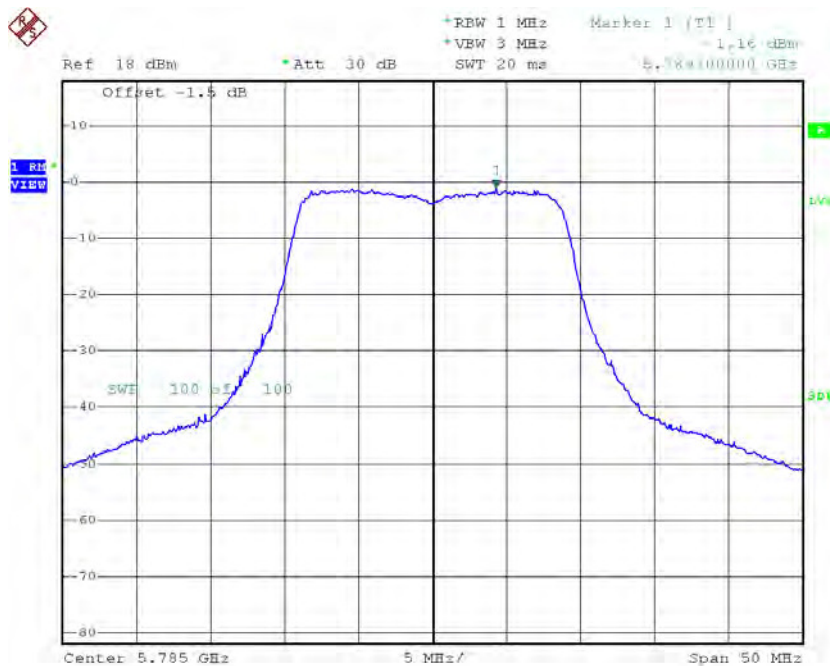

Date: 21.DEC.2015 19:32:58

TX CH165

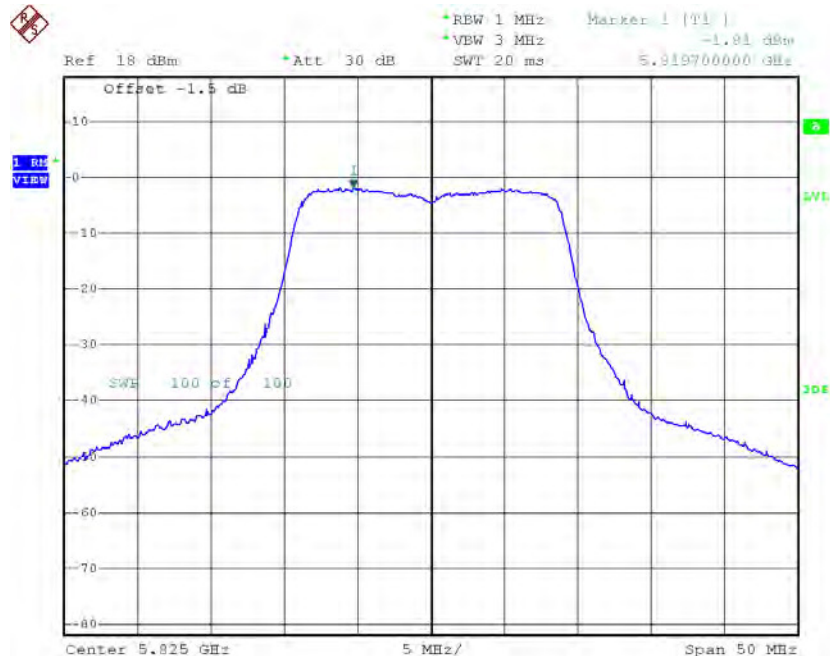


Date: 21.DEC.2015 19:33:47

Test Mode: UNII-3/ TX AC20 Mode_CH149/CH157/CH165_ANT 2


Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor (dBm/500kHz)	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH149	5745	-0.30	2.07	1.77	30.00
CH157	5785	-0.33	2.07	1.74	30.00
CH165	5825	-0.59	2.07	1.48	30.00

TX CH149

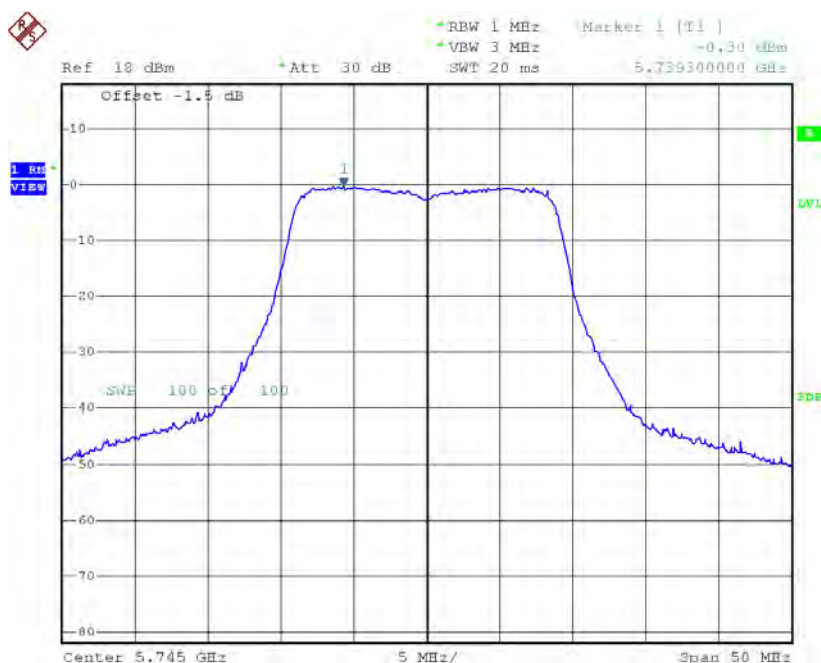


Date: 21.DEC.2015 22:09:06

TX CH157

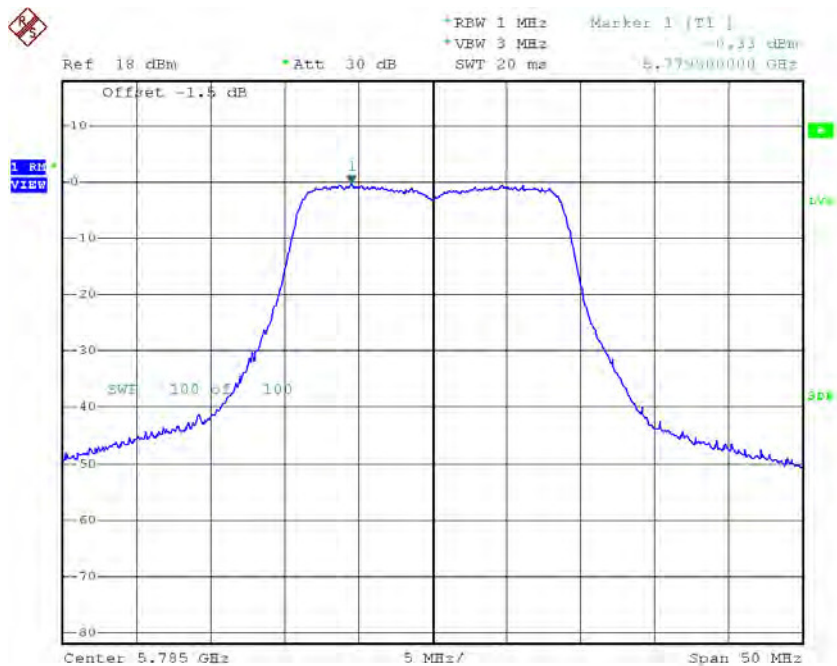

Date: 21.DEC.2015 22:10:09

TX CH165

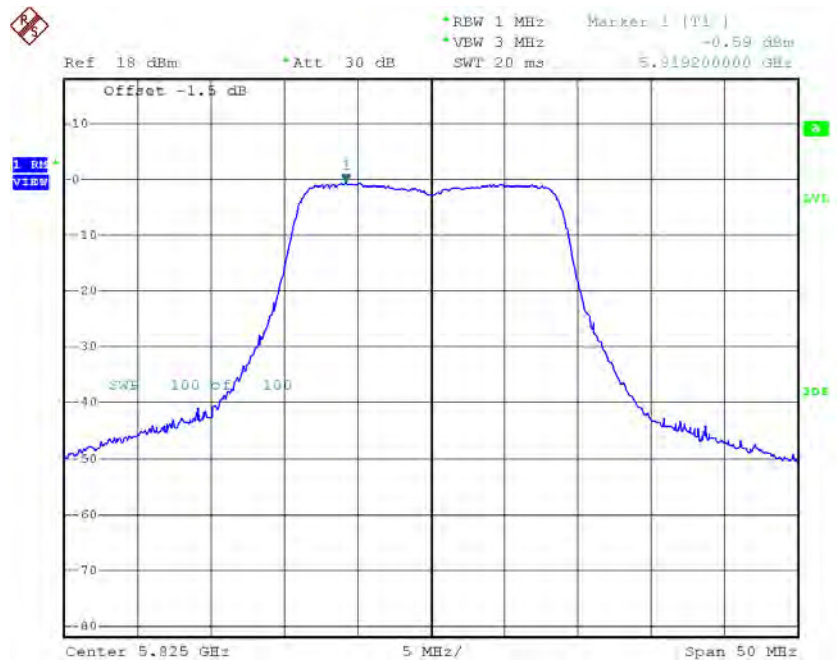

Date: 21.DEC.2015 22:11:05


Test Mode: UNII-3/ TX AC20 Mode_CH149/CH157/CH165_Total

Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Limit (dBm/500kHz)
CH149	5745	4.49	30.00
CH157	5785	4.36	30.00
CH165	5825	3.92	30.00

Test Mode: UNII-3/ TX AC40 Mode_CH151/CH159_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor (dBm/500kHz)	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH151	5755	-4.02	4.39	0.37	30.00
CH159	5795	-4.27	4.39	0.12	30.00

TX CH151

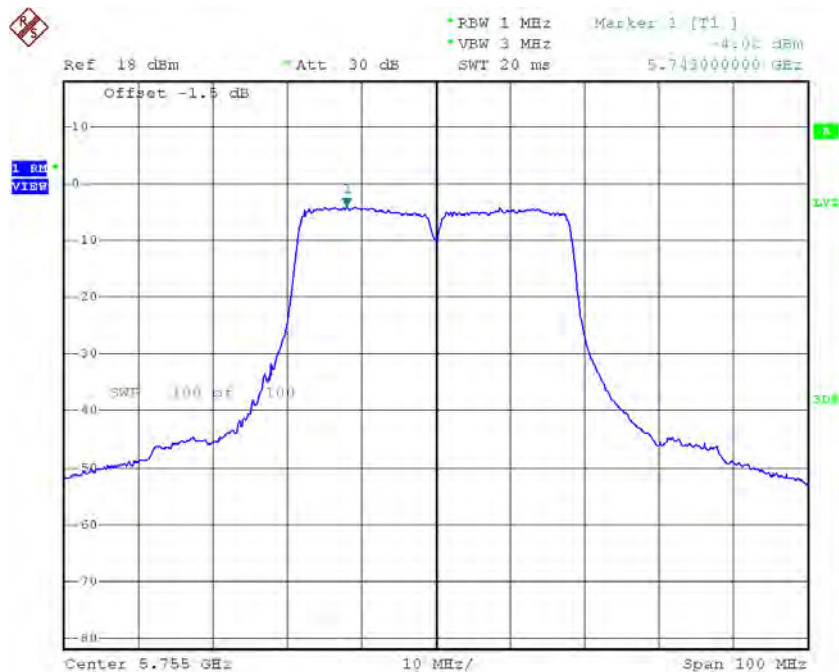

Date: 21.DEC.2015 20:19:37


TX CH159

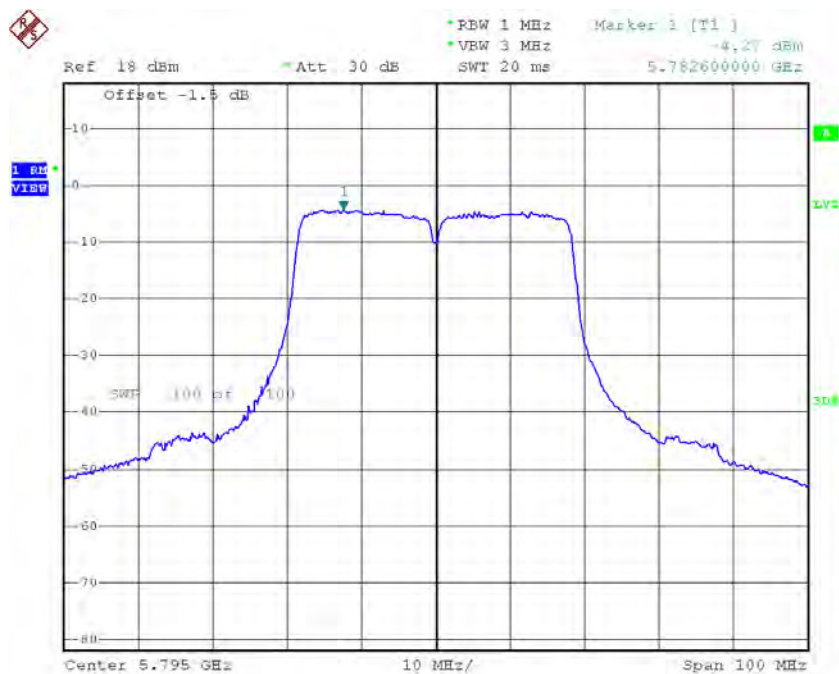


Date: 21.DEC.2015 20:20:42

Test Mode: UNII-3/ TX AC40 Mode_CH151/CH159_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor (dBm/500kHz)	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH151	5755	-3.41	4.39	0.98	30.00
CH159	5795	-3.34	4.39	1.05	30.00

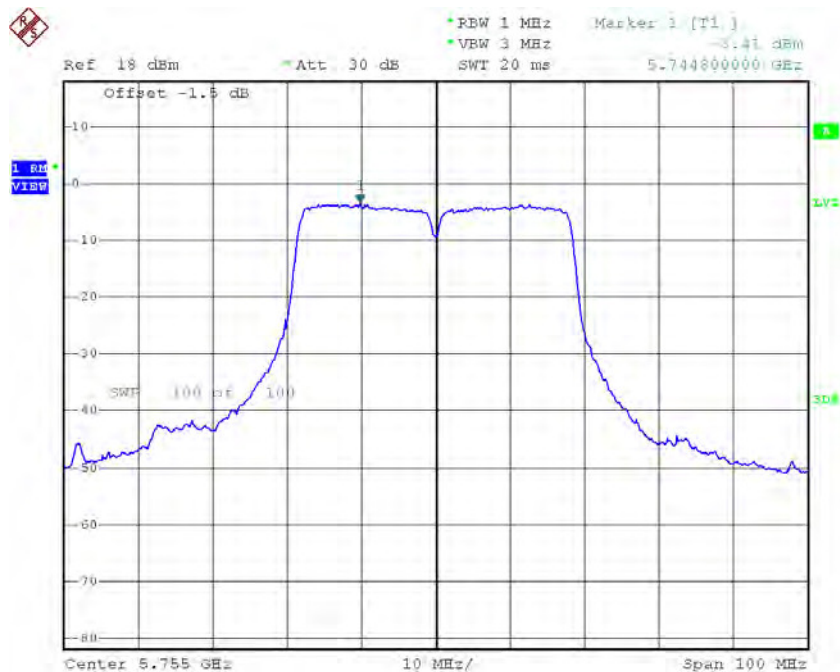TX CH151

Date: 21.DEC.2015 22:32:08

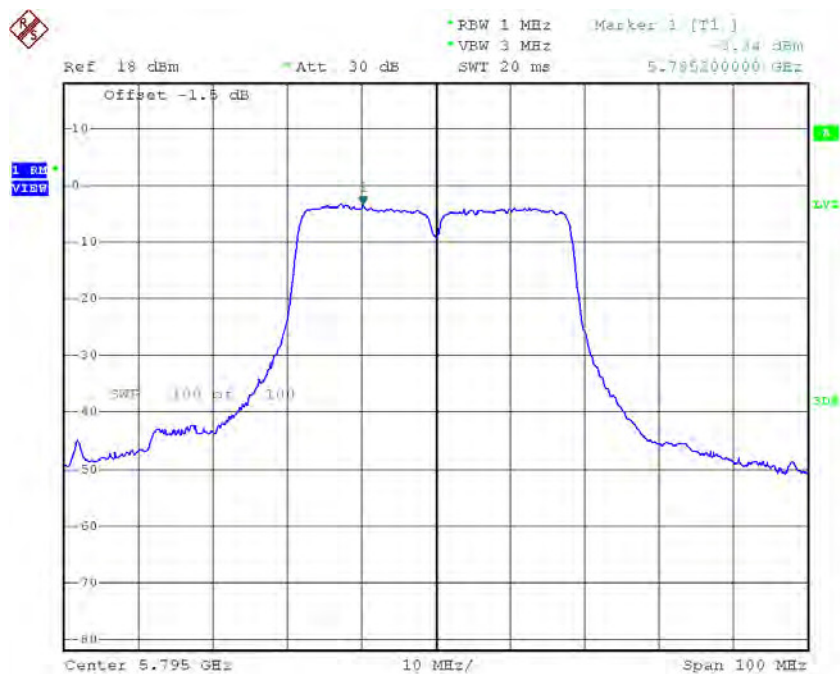TX CH159

Date: 21.DEC.2015 22:33:04


Test Mode: UNII-3/ TX AC40 Mode_CH151/CH159_Total

Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Limit (dBm/500kHz)
CH151	5755	3.70	30.00
CH159	5795	3.62	30.00

Test Mode: UNII-3/ TX AC80 Mode_CH155_ANT 1

Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor (dBm/500kHz)	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH155	5775	-9.40	4.52	-4.88	30.00

TX CH155

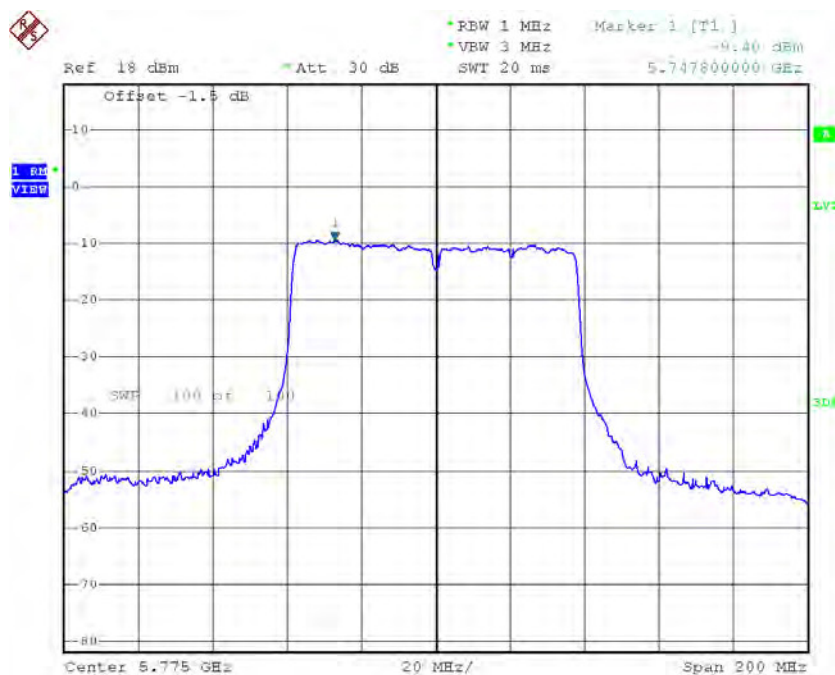


Date: 22.DEC.2015 18:33:31

Test Mode: UNII-3/ TX AC80 Mode_CH155_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor (dBm/500kHz)	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH155	5775	-9.74	4.52	-5.22	30.00

TX CH155

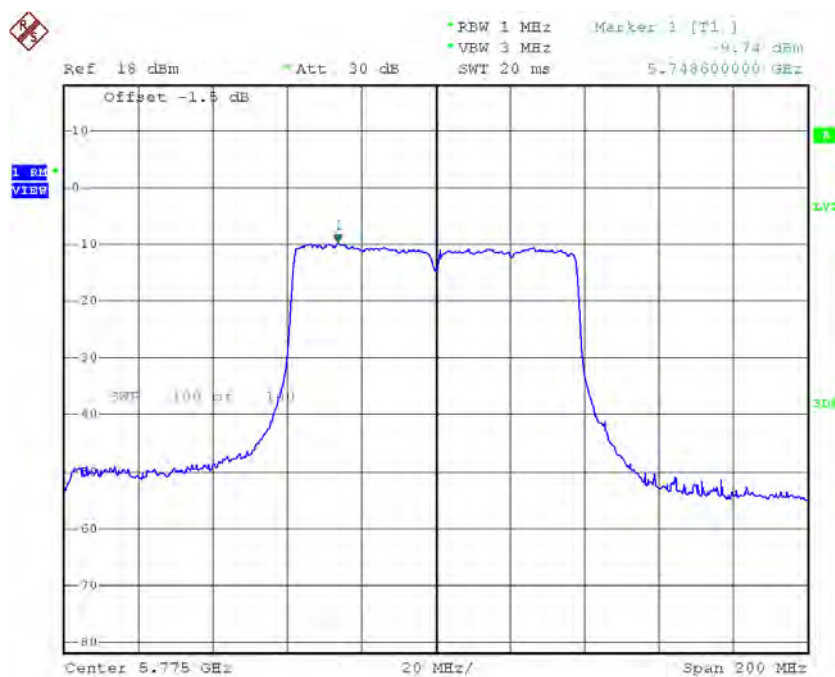

Date: 22.DEC.2015 18:22:02

Test Mode: UNII-3/ TX AC80 Mode_CH155_Total

Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Limit (dBm/500kHz)
CH155	5775	-2.04	30.00

ATTACHMENT I - FREQUENCY STABILITY

Test Mode:	UNII-1
-------------------	---------------

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5180.0000
132	5179.9550
120	5179.9750
108	5179.9750
Max. Deviation (MHz)	0.0450
Max. Deviation (ppm)	8.6873

Temperature vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(°C)	5180.0000
0	5179.9750
5	5179.9399
15	5179.9550
25	5179.9399
35	5179.9800
40	5179.9600
Max. Deviation (MHz)	0.0601
Max. Deviation (ppm)	11.6023

Test Mode:	UNII-2A
-------------------	----------------

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5260.0000
132	5259.9600
120	5259.9750
108	5259.9548
Max. Deviation (MHz)	0.0452
Max. Deviation (ppm)	8.5932

Temperature vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(°C)	5260.0000
0	5259.9750
5	5259.9750
15	5259.9750
25	5259.9902
35	5259.9750
40	5259.9800
Max. Deviation (MHz)	0.0250
Max. Deviation (ppm)	4.7529

Test Mode:	UNII-2C
-------------------	----------------

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5500.0000
132	5499.9550
120	5499.9599
108	5499.9799
Max. Deviation (MHz)	0.0450
Max. Deviation (ppm)	8.1818

Temperature vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(°C)	5500.0000
0	5499.9750
5	5499.9600
15	5499.9550
25	5499.9750
35	5499.9550
40	5499.9800
Max. Deviation (MHz)	0.0450
Max. Deviation (ppm)	8.1818

Test Mode:	UNII-3
-------------------	---------------

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5745.0000
132	5744.9550
120	5744.9600
108	5744.9702
Max. Deviation (MHz)	0.0450
Max. Deviation (ppm)	7.8329

Temperature vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(°C)	5745.0000
0	5744.9750
5	5744.9750
15	5744.9950
25	5744.9600
35	5744.9800
40	5744.9599
Max. Deviation (MHz)	0.0401
Max. Deviation (ppm)	6.9800