


Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5310MHz

**Horizontal**

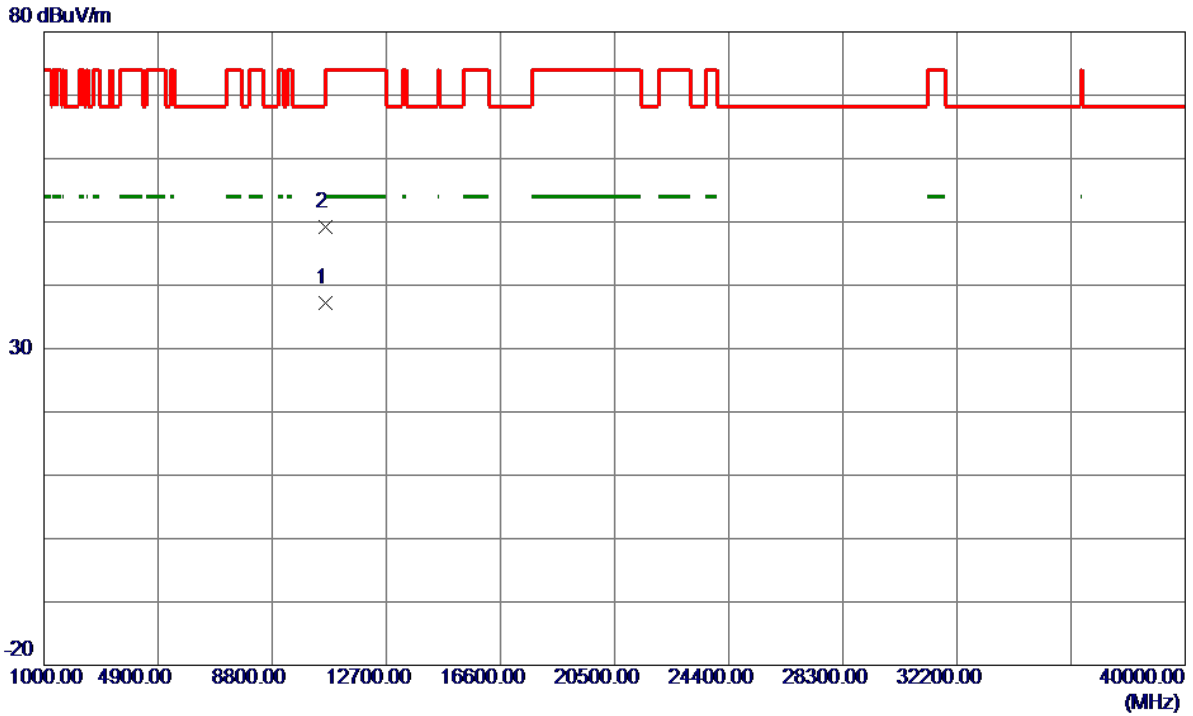


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10619.3810	25.21	11.98	37.19	54.00	-16.81	AVG	
2	10620.2230	37.19	11.98	49.17	74.00	-24.83	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC80 Mode 5290MHz

**Vertical**


130 dBuV/m

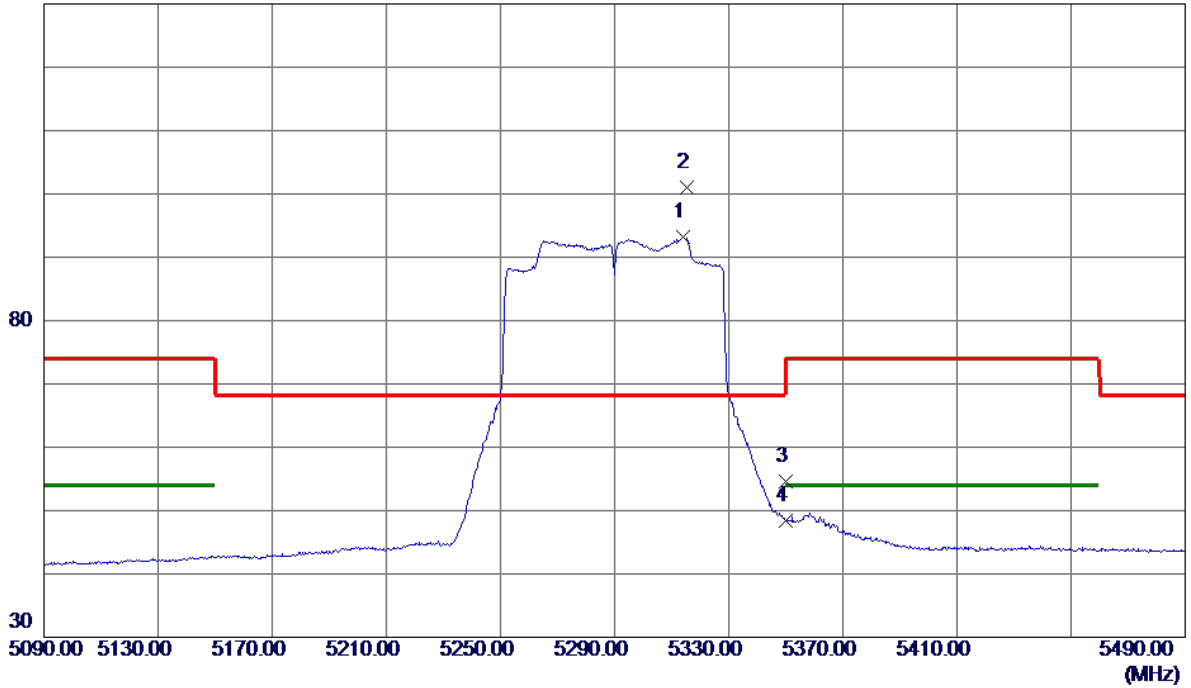

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5314.2000	78.48	14.77	93.25	999.00	-905.75	AVG	No Limit
2 *	5315.2000	86.14	14.77	100.91	68.30	32.61	Peak	No Limit
3	5350.0000	39.69	14.86	54.55	74.00	-19.45	Peak	
4	5350.0000	33.49	14.86	48.35	999.00	-950.65	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC80 Mode 5290MHz

**Vertical**

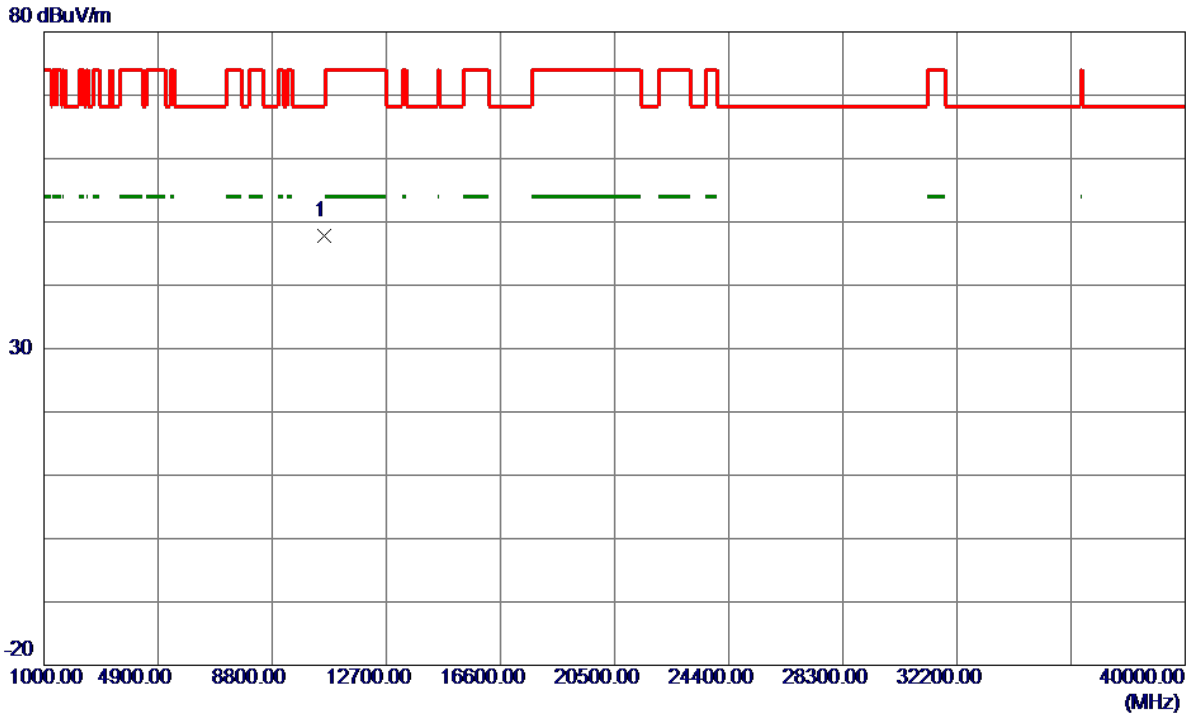


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10589.0400	35.88	11.97	47.85	68.30	-20.45	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC80 Mode 5290MHz

**Horizontal**


130 dBuV/m

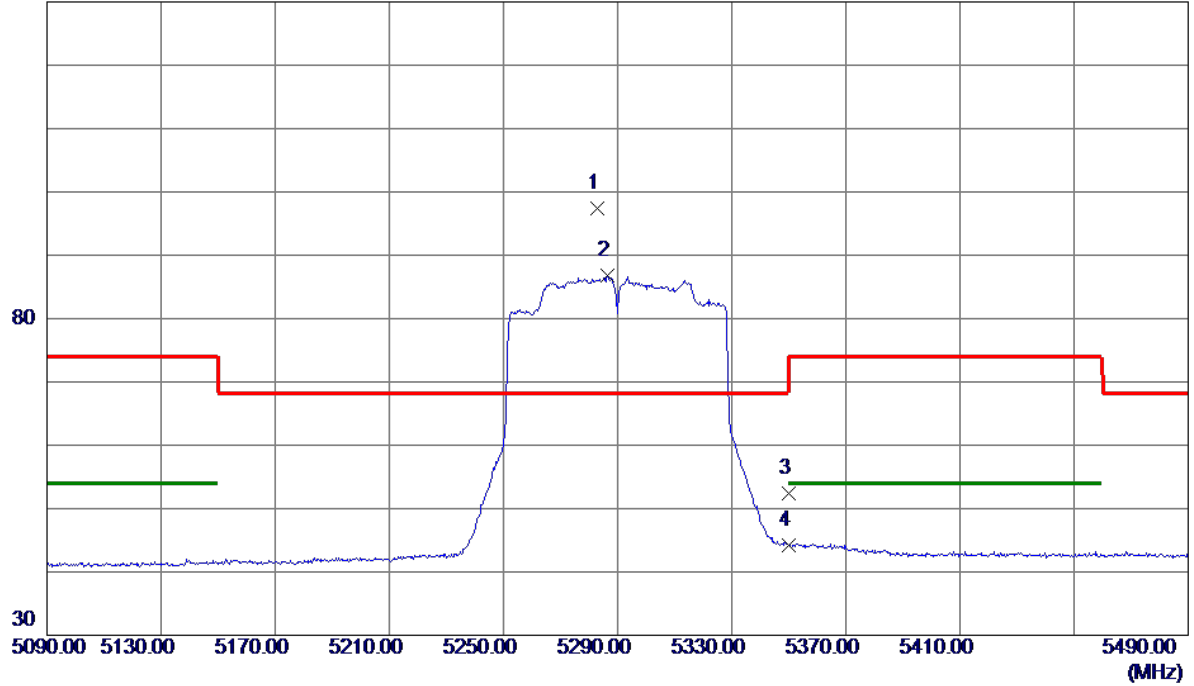

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5283.0000	82.67	14.69	97.36	68.30	29.06	Peak	No Limit
2	5286.6000	72.06	14.70	86.76	999.00	-912.24	AVG	No Limit
3	5350.0000	37.54	14.86	52.40	74.00	-21.60	Peak	
4	5350.0000	29.42	14.86	44.28	999.00	-954.72	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC80 Mode 5290MHz

**Horizontal**

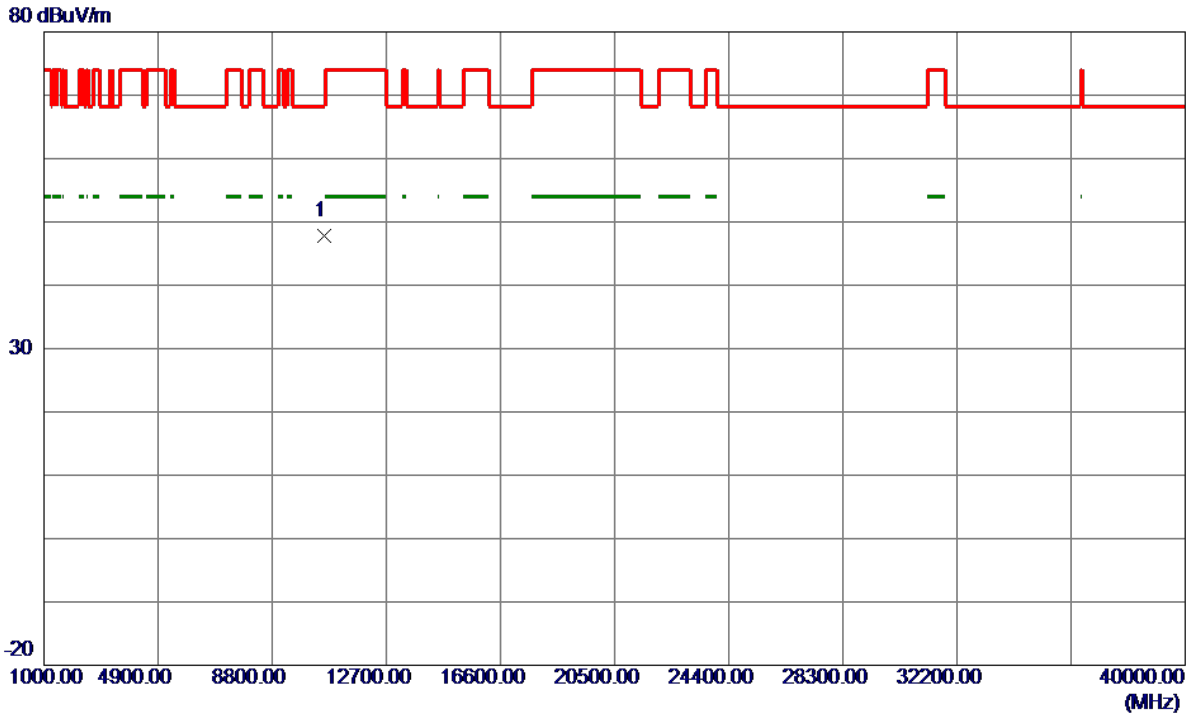


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10582.5700	35.76	11.97	47.73	68.30	-20.57	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5500 MHz

**Vertical**


130 dBuV/m

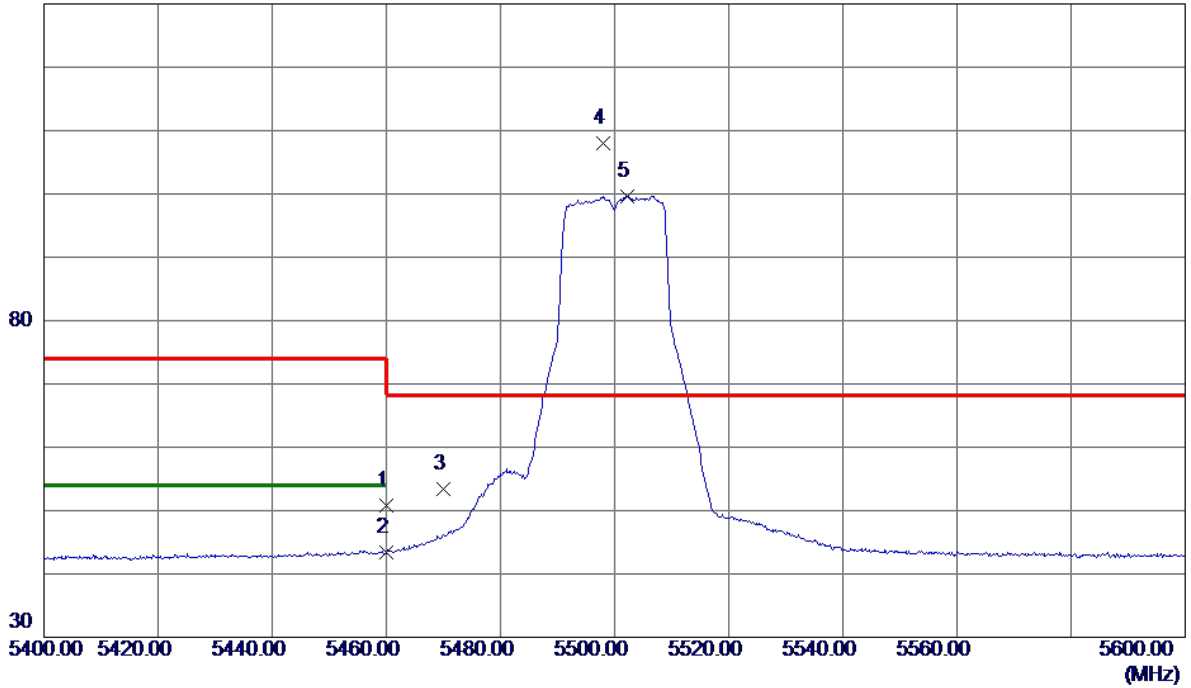

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	35.59	15.14	50.73	74.00	-23.27	Peak	
2	5460.0000	28.18	15.14	43.32	54.00	-10.68	AVG	
3	5470.0000	38.21	15.17	53.38	68.30	-14.92	Peak	
4 *	5498.1000	92.77	15.24	108.01	68.30	39.71	Peak	No Limit
5	5502.2000	84.40	15.25	99.65	999.00	-899.35	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5500 MHz

**Vertical**

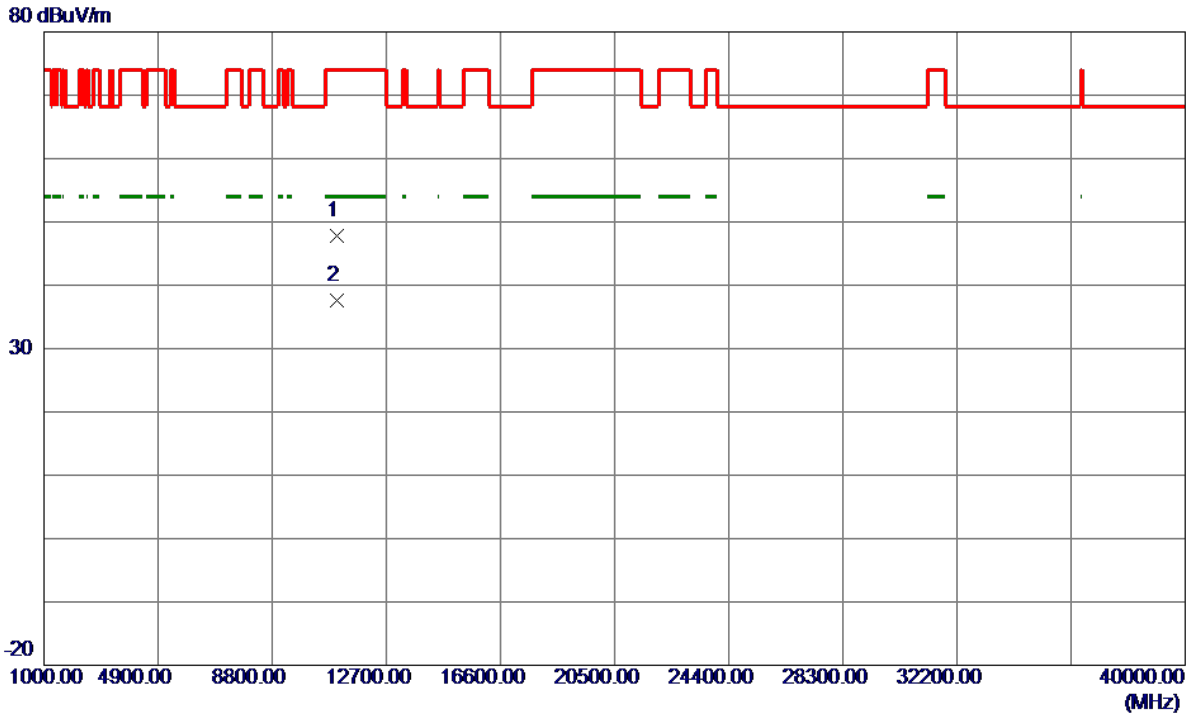


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10999.4450	35.62	12.12	47.74	74.00	-26.26	Peak	
2 *	10999.9950	25.46	12.12	37.58	54.00	-16.42	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5500 MHz

**Horizontal**

130 dBuV/m

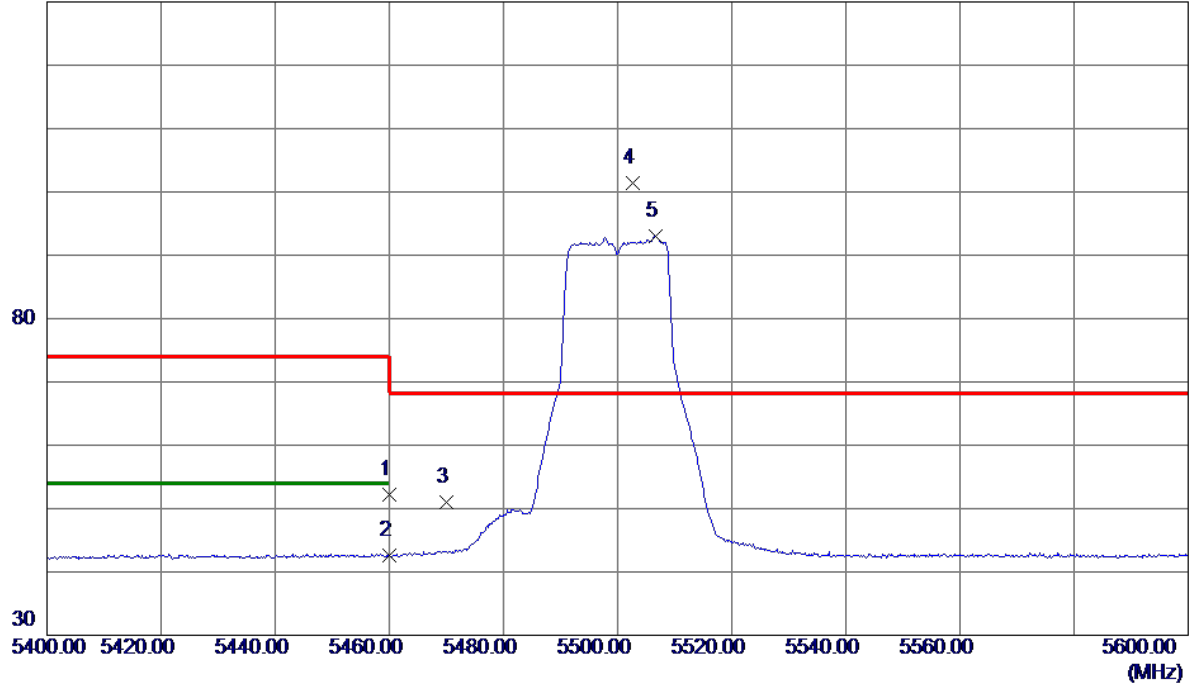


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	37.02	15.14	52.16	74.00	-21.84	Peak	
2	5460.0000	27.48	15.14	42.62	54.00	-11.38	AVG	
3	5470.0000	35.84	15.17	51.01	68.30	-17.29	Peak	
4 *	5502.7000	86.10	15.25	101.35	68.30	33.05	Peak	No Limit
5	5506.6000	77.78	15.27	93.05	999.00	-905.95	AVG	No Limit



Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5500 MHz

**Horizontal**

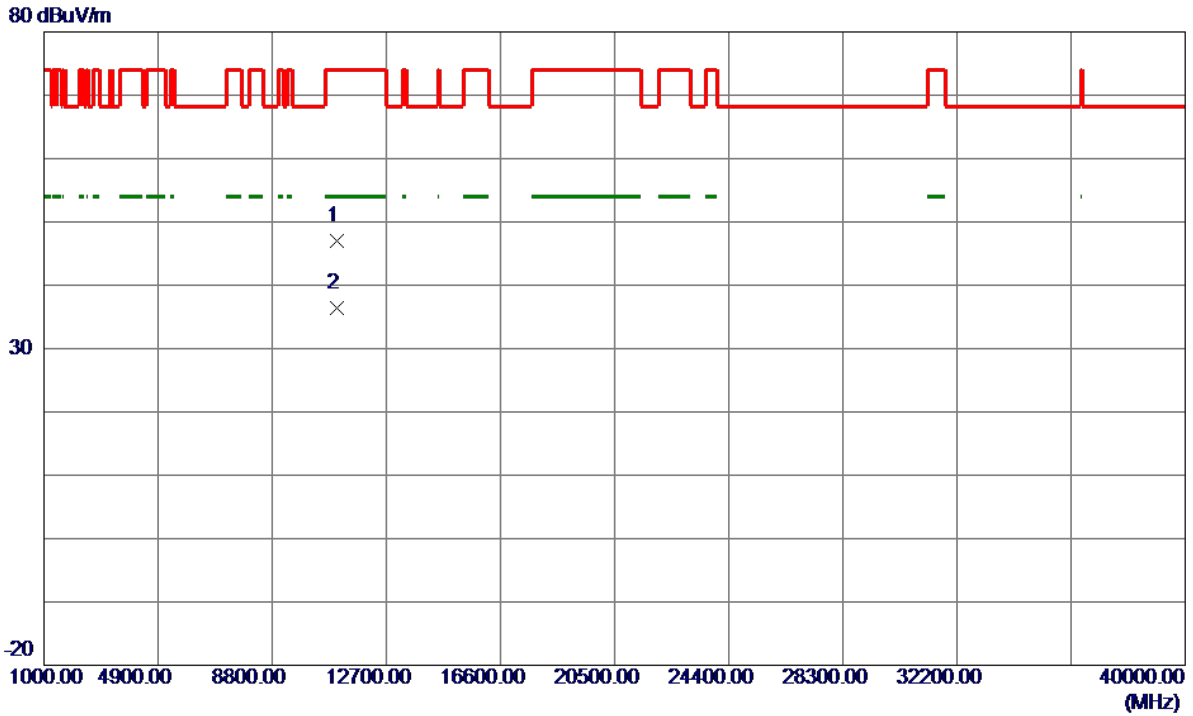


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10998.9000	34.92	12.12	47.04	74.00	-26.96	Peak	
2 *	11001.0800	24.32	12.12	36.44	54.00	-17.56	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5580 MHz

**Vertical**


130 dBuV/m

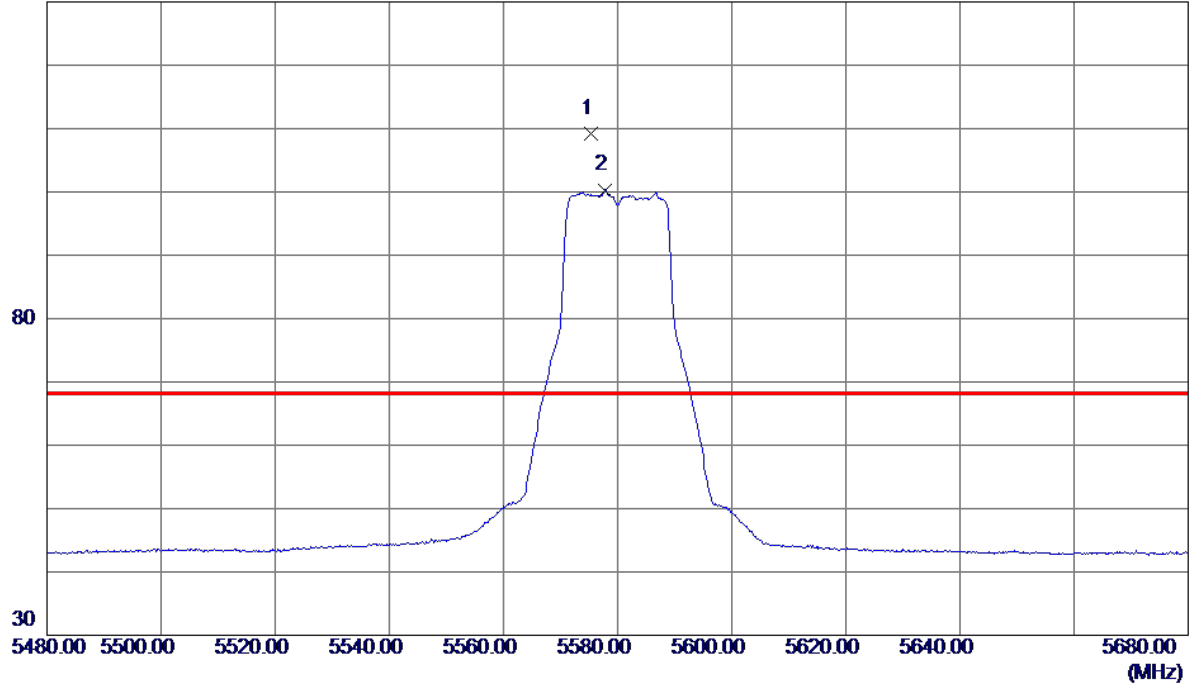

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5575.4000	93.70	15.48	109.18	68.30	40.88	Peak	No Limit
2	5577.8000	84.81	15.49	100.30	999.00	-898.70	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5580 MHz

**Vertical**

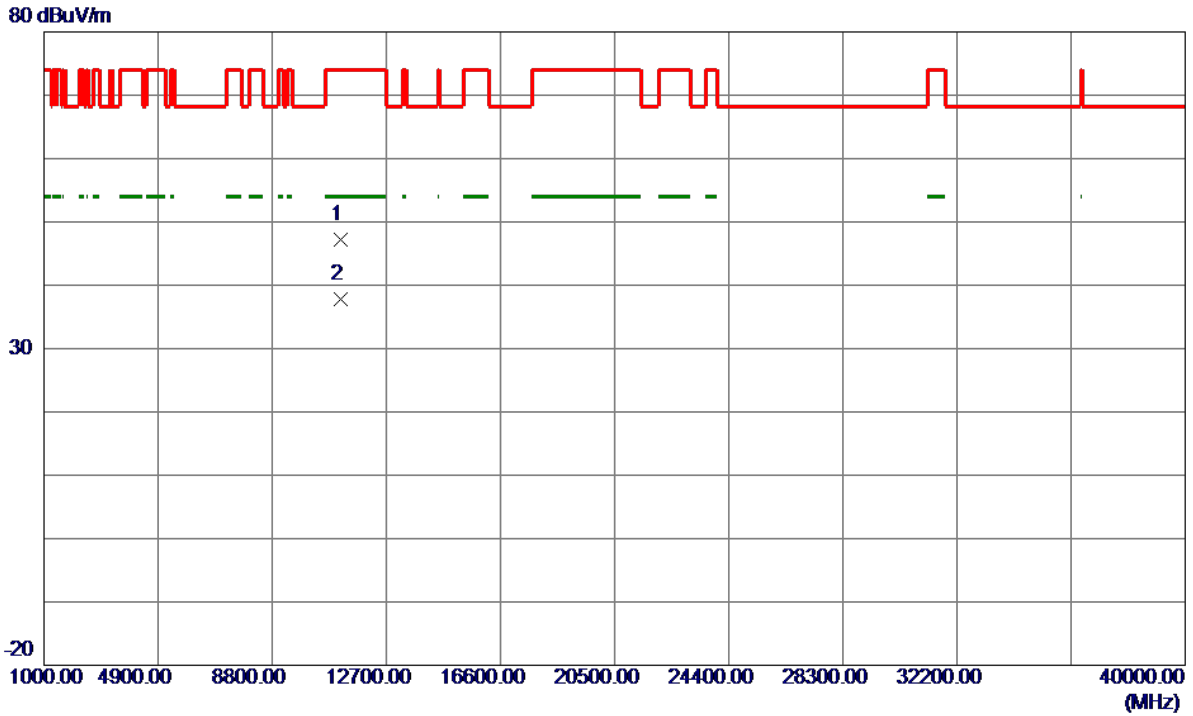


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11157.9650	35.01	12.23	47.24	74.00	-26.76	Peak	
2 *	11159.9200	25.52	12.23	37.75	54.00	-16.25	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5580 MHz

**Horizontal**


130 dBuV/m

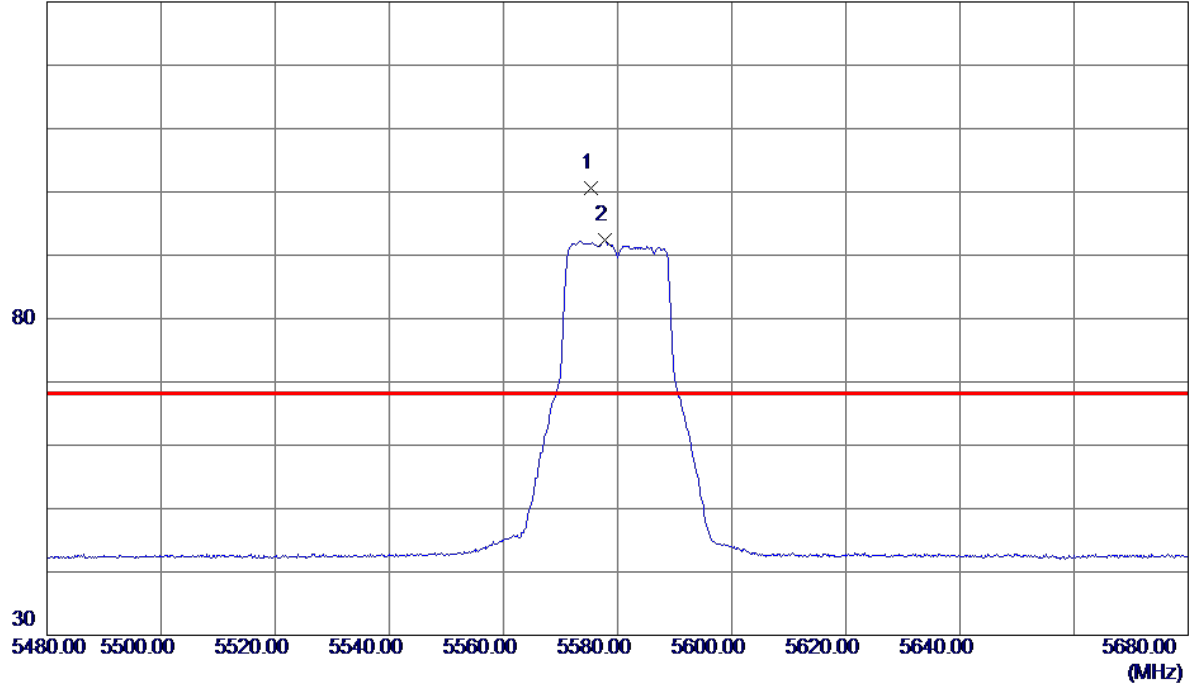

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5575.3000	85.05	15.48	100.53	68.30	32.23	Peak	No Limit
2	5577.7000	76.99	15.49	92.48	999.00	-906.52	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5580 MHz

**Horizontal**

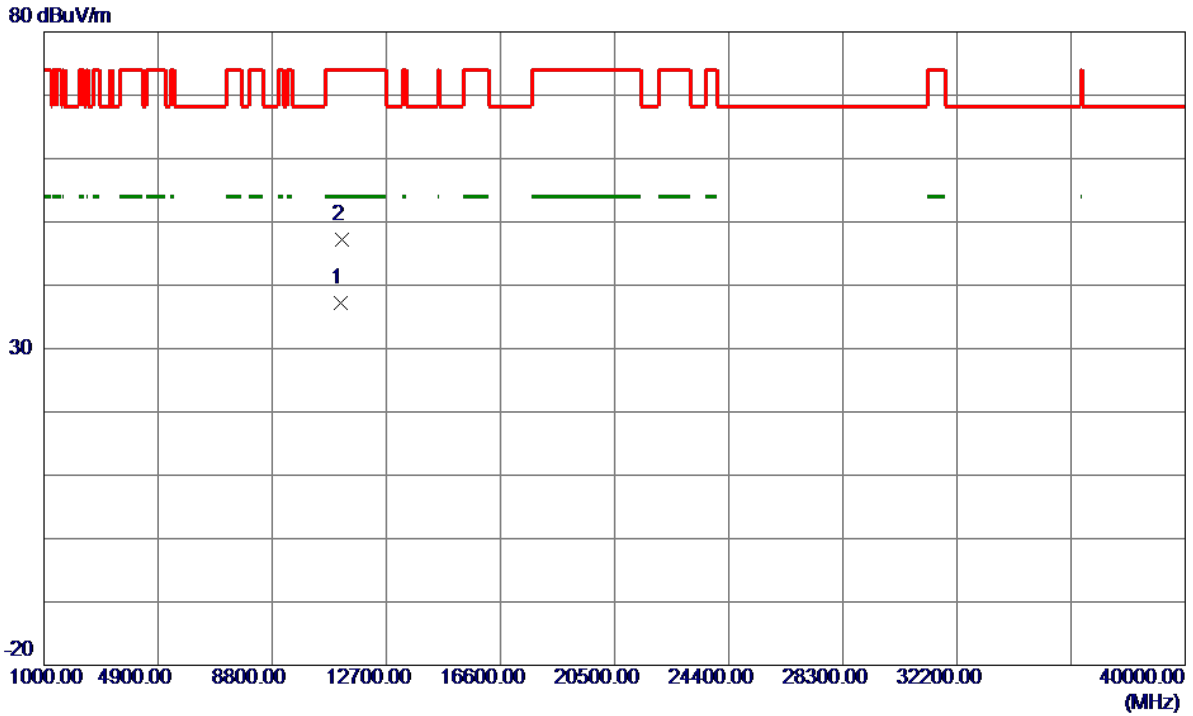


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11160.0250	24.90	12.23	37.13	54.00	-16.87	AVG	
2	11163.7600	35.01	12.24	47.25	74.00	-26.75	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5700 MHz

**Vertical**


130 dBuV/m

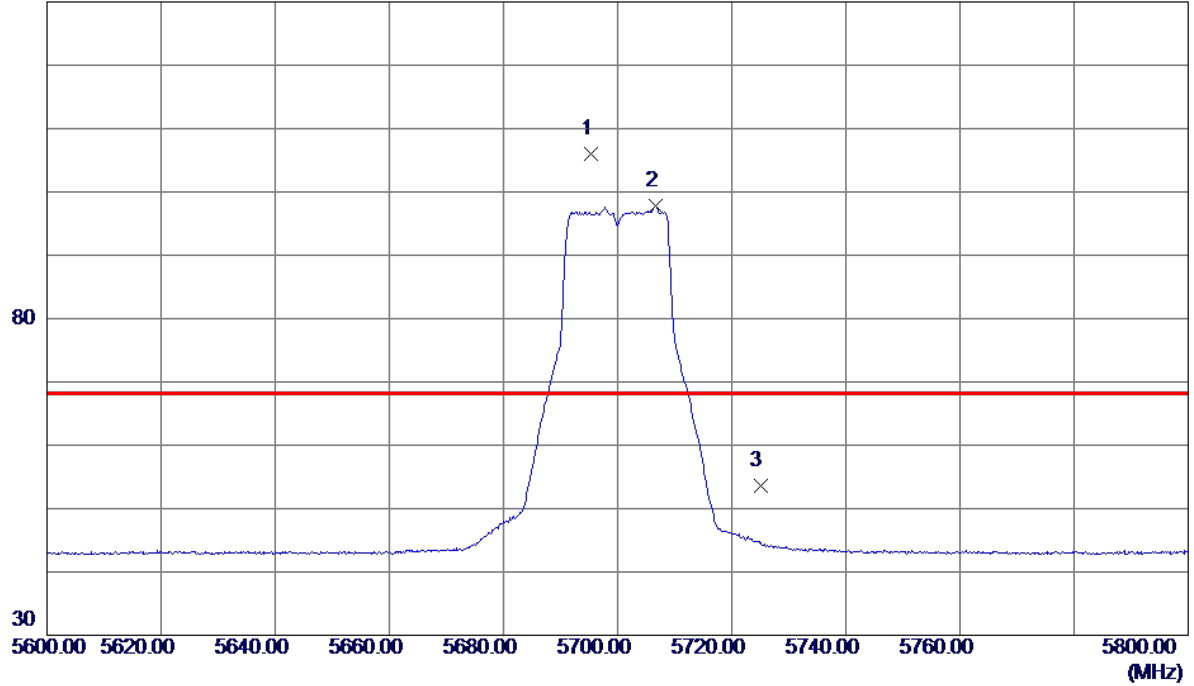

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5695.3000	90.23	15.86	106.09	68.30	37.79	Peak	No Limit
2	5706.7000	81.84	15.90	97.74	999.00	-901.26	AVG	No Limit
3	5725.0000	37.71	15.96	53.67	68.30	-14.63	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5700 MHz

**Vertical**

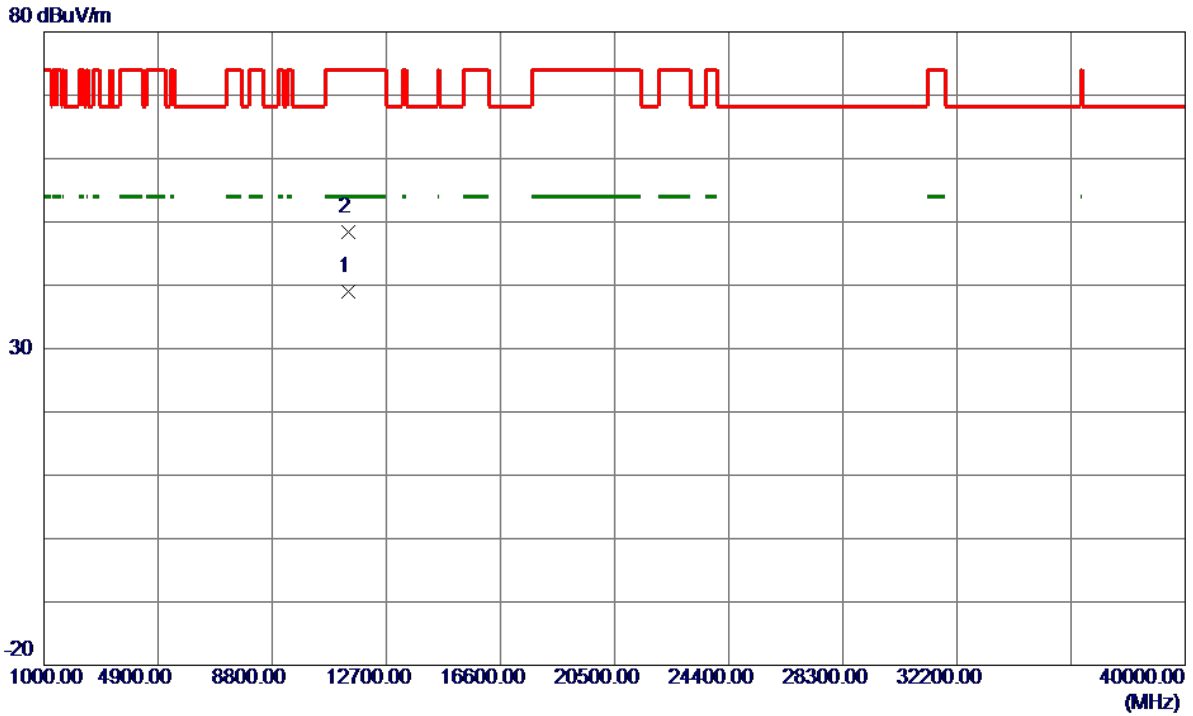


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11399.9550	26.61	12.40	39.01	54.00	-14.99	AVG	
2	11400.2650	36.06	12.40	48.46	74.00	-25.54	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5700 MHz

**Horizontal**

130 dBuV/m

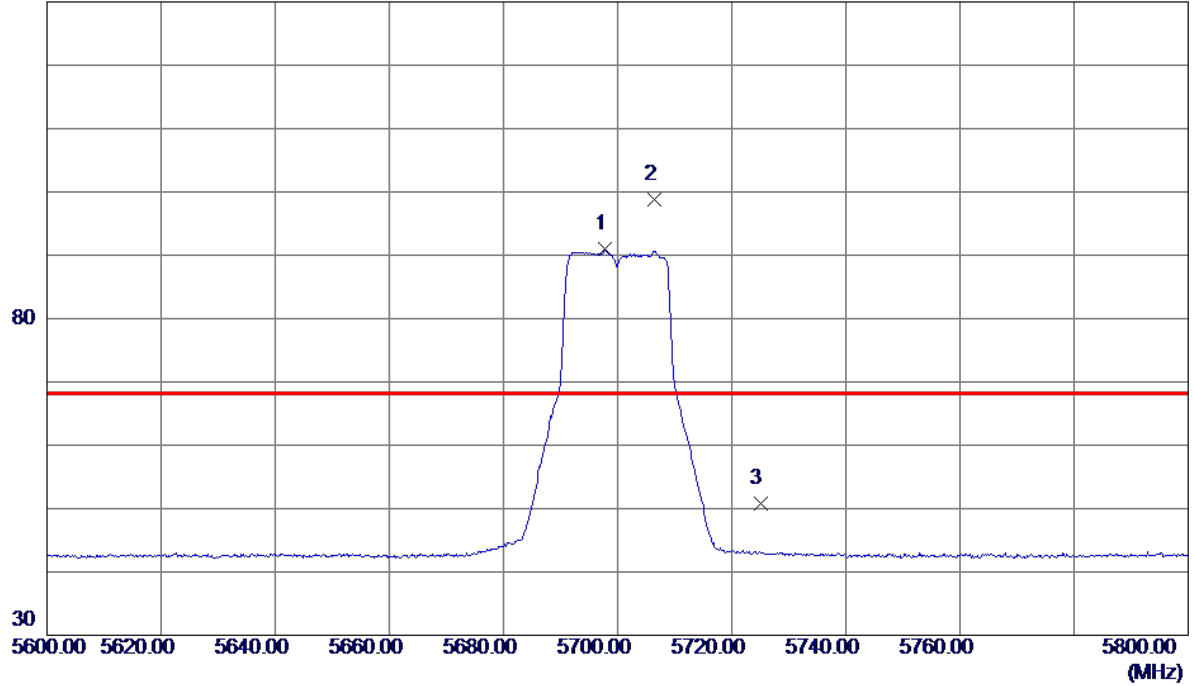

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5697.8000	75.16	15.87	91.03	999.00	-907.97	AVG	No Limit
2 *	5706.5000	82.87	15.90	98.77	68.30	30.47	Peak	No Limit
3	5725.0000	34.85	15.96	50.81	68.30	-17.49	Peak	



Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5700 MHz

**Horizontal**




No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11395.1500	36.00	12.40	48.40	74.00	-25.60	Peak	
2 *	11399.9950	24.58	12.40	36.98	54.00	-17.02	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5510MHz

**Vertical**


130 dBuV/m

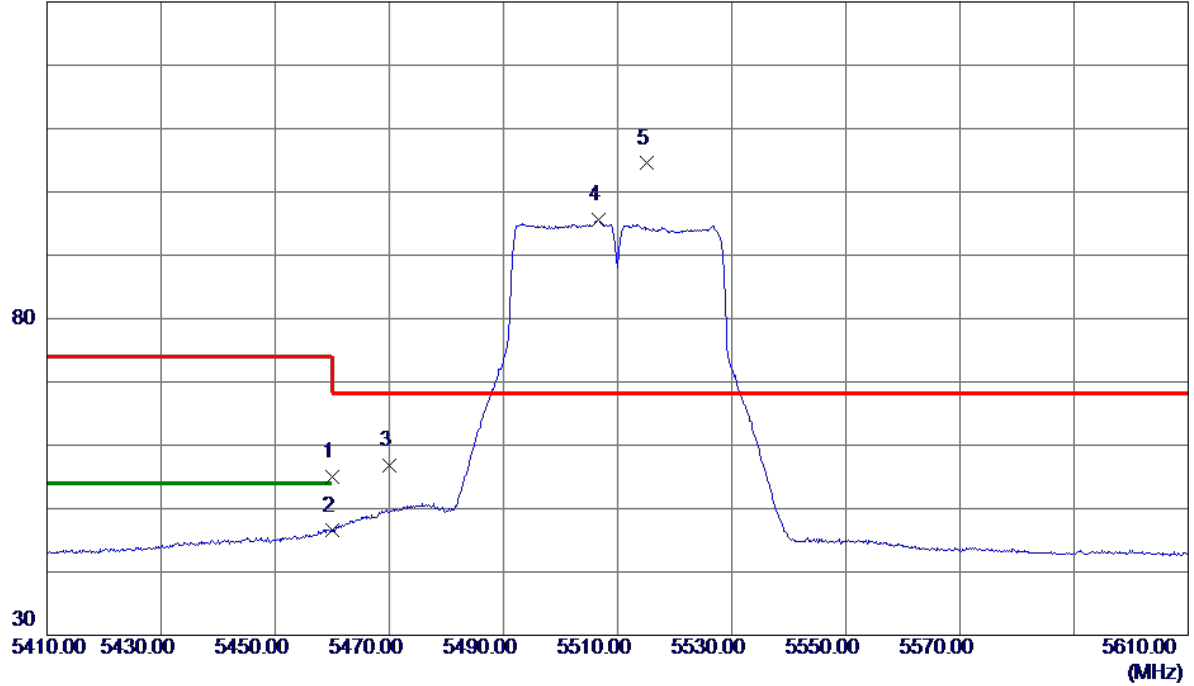

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	39.77	15.14	54.91	74.00	-19.09	Peak	
2	5460.0000	31.36	15.14	46.50	54.00	-7.50	AVG	
3	5470.0000	41.69	15.17	56.86	68.30	-11.44	Peak	
4	5506.7000	80.39	15.27	95.66	999.00	-903.34	AVG	No Limit
5 *	5515.1000	89.21	15.29	104.50	68.30	36.20	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5510MHz

**Vertical**

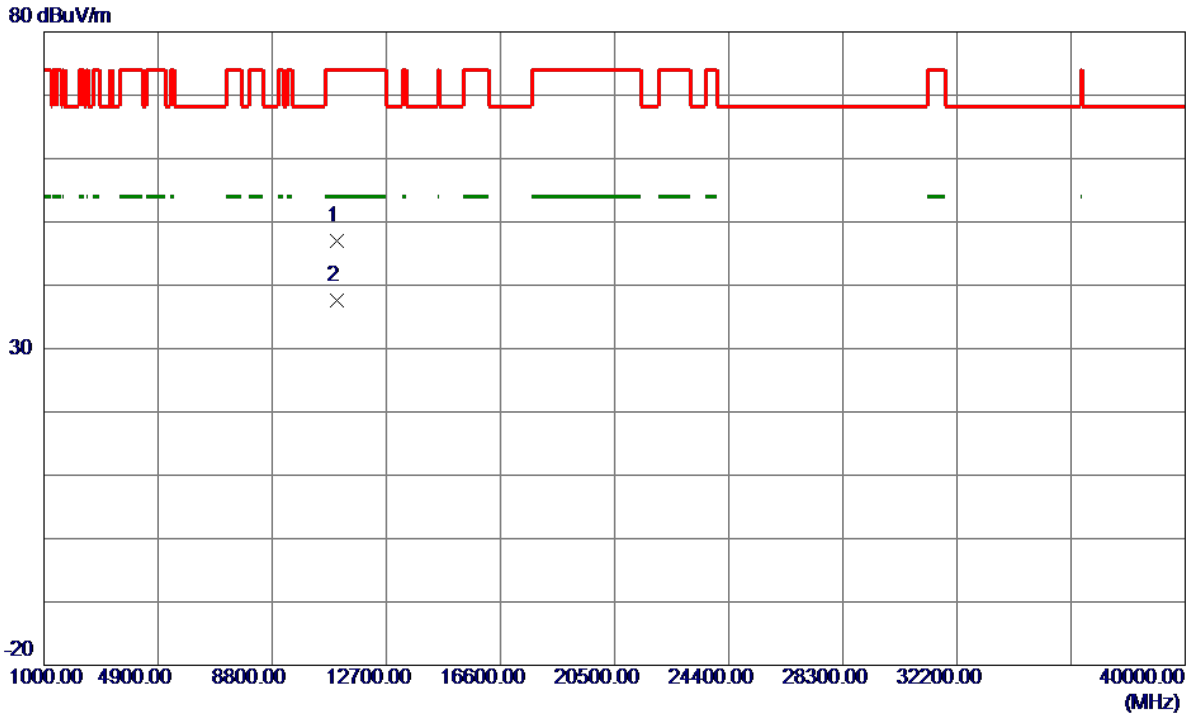


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11017.2900	34.92	12.13	47.05	74.00	-26.95	Peak	
2 *	11020.0450	25.43	12.13	37.56	54.00	-16.44	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5510MHz

**Horizontal**


130 dBuV/m

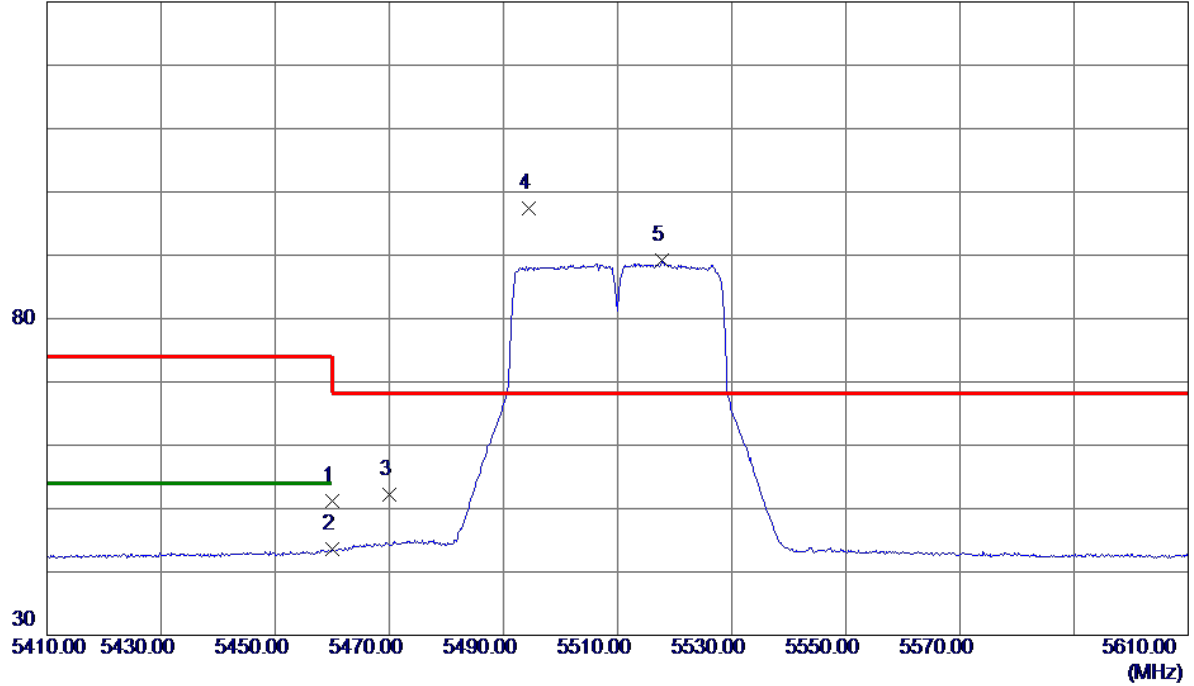

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	36.02	15.14	51.16	74.00	-22.84	Peak	
2	5460.0000	28.38	15.14	43.52	54.00	-10.48	AVG	
3	5470.0000	37.01	15.17	52.18	68.30	-16.12	Peak	
4 *	5494.4000	82.12	15.23	97.35	68.30	29.05	Peak	No Limit
5	5517.8000	73.96	15.30	89.26	999.00	-909.74	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5510MHz

**Horizontal**

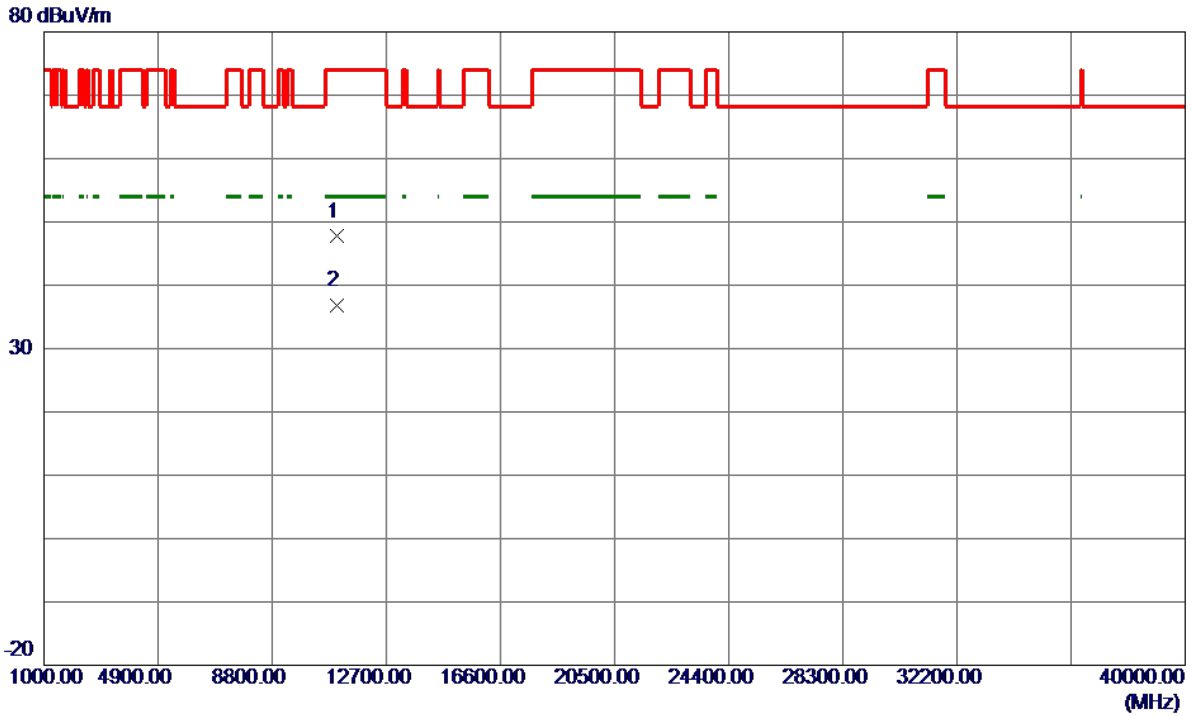


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11018.2300	35.57	12.13	47.70	74.00	-26.30	Peak	
2 *	11019.9550	24.60	12.13	36.73	54.00	-17.27	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5550MHz

**Vertical**


130 dBuV/m

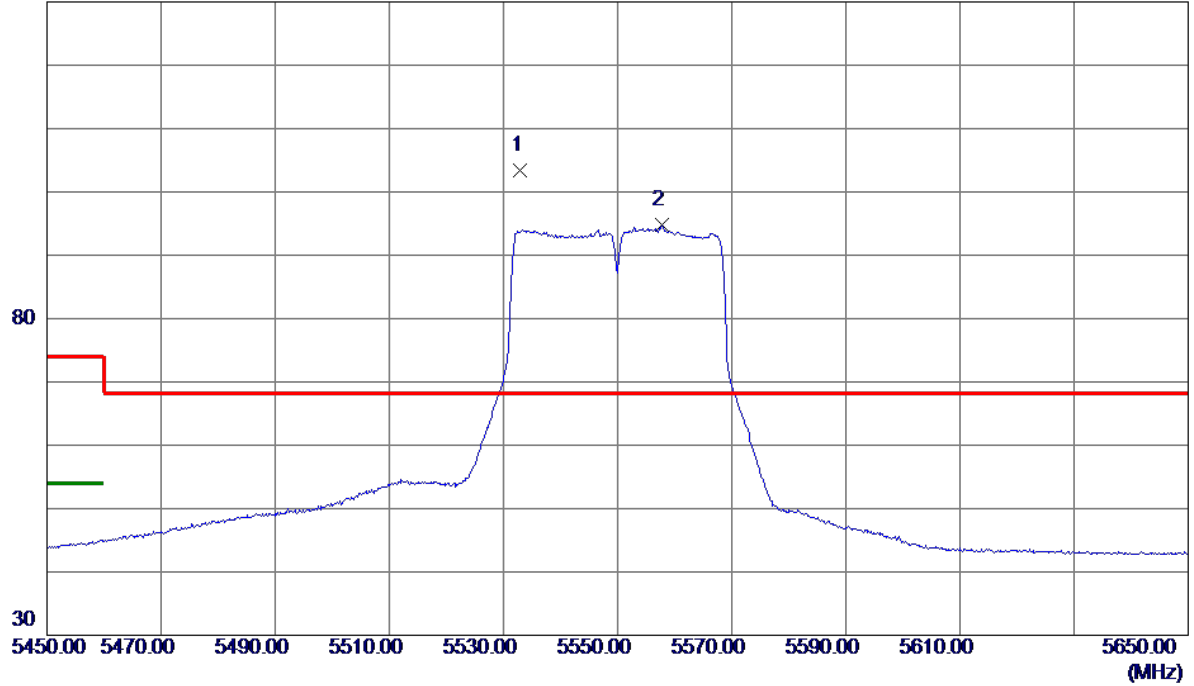

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5533.0000	88.01	15.35	103.36	68.30	35.06	Peak	No Limit
2	5557.7000	79.31	15.43	94.74	999.00	-904.26	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5550MHz


**Vertical**

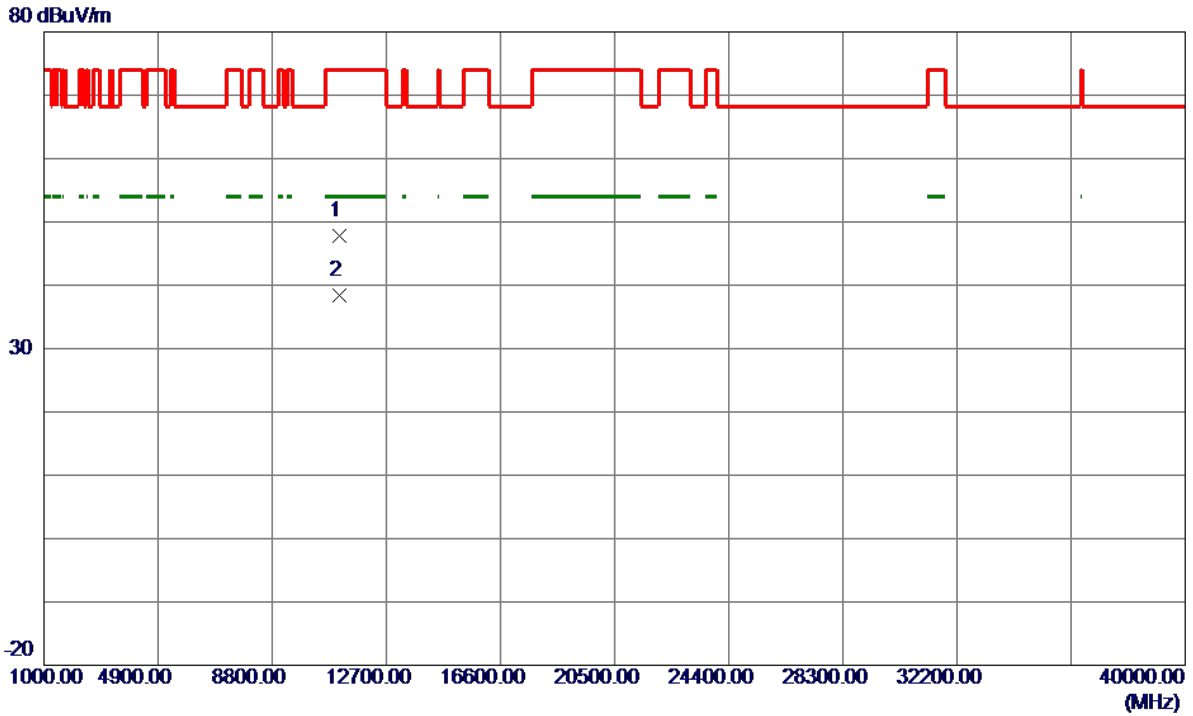

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11097.4550	35.60	12.19	47.79	74.00	-26.21	Peak	
2 *	11099.9850	26.15	12.19	38.34	54.00	-15.66	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5550MHz

**Horizontal**

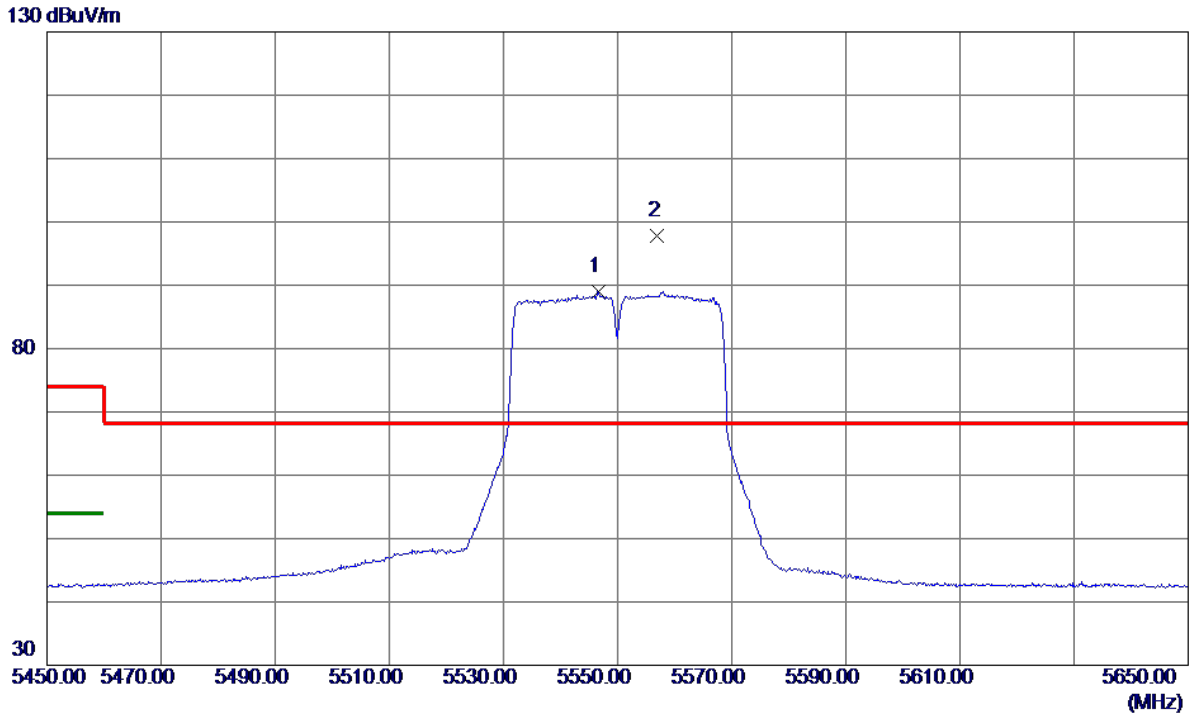


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5546.6000	73.65	15.39	89.04	999.00	-909.96	AVG	No Limit
2 *	5557.0000	82.32	15.43	97.75	68.30	29.45	Peak	No Limit



Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5550MHz

**Horizontal**

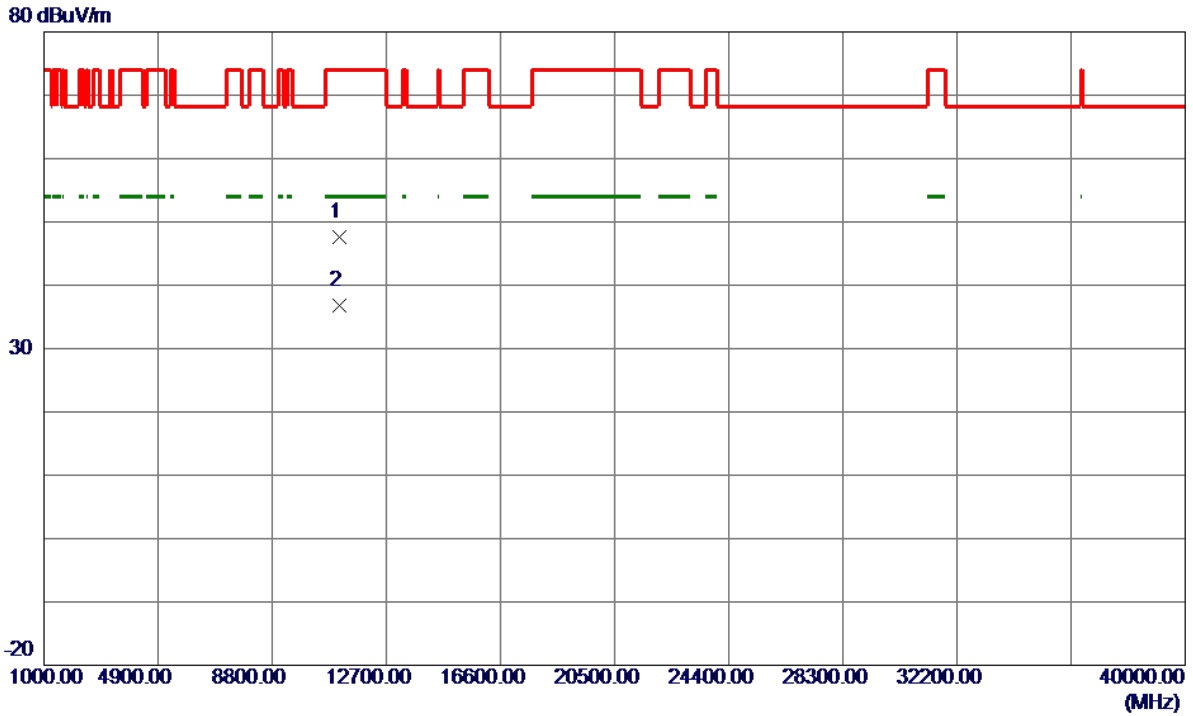


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11099.9500	35.46	12.19	47.65	74.00	-26.35	Peak	
2 *	11100.0850	24.61	12.19	36.80	54.00	-17.20	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5670MHz

**Vertical**


130 dBuV/m

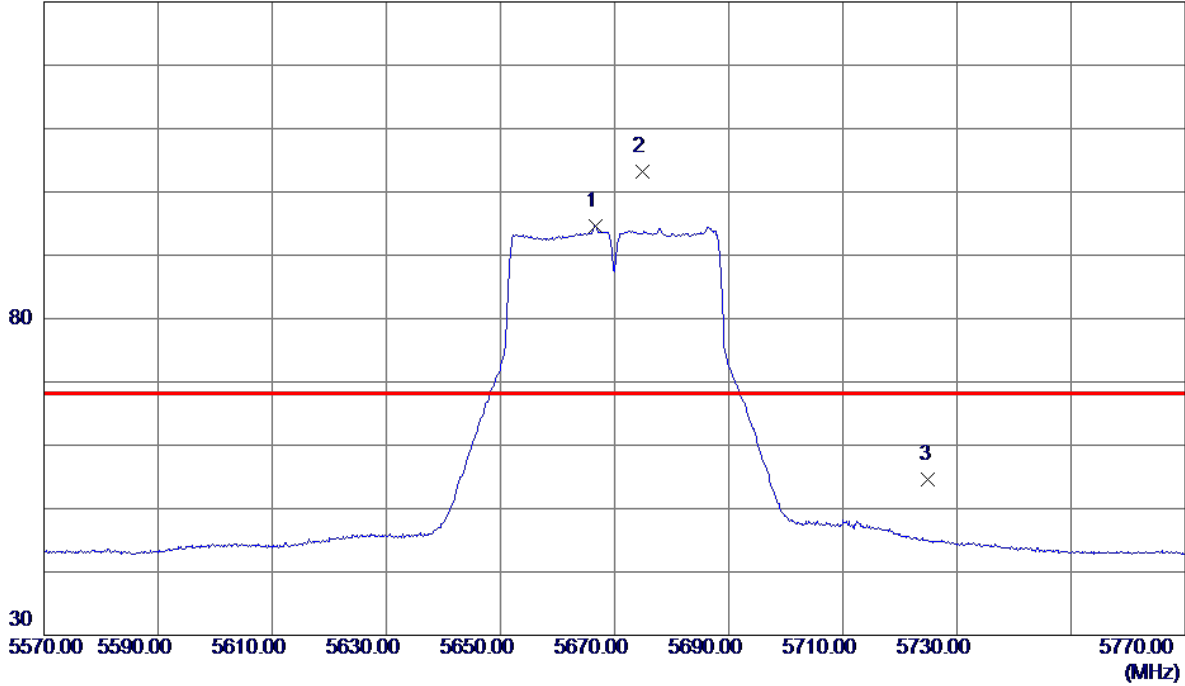

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5666.6000	78.87	15.77	94.64	999.00	-904.36	AVG	No Limit
2 *	5674.9000	87.36	15.80	103.16	68.30	34.86	Peak	No Limit
3	5725.0000	38.61	15.96	54.57	68.30	-13.73	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5670MHz

**Vertical**

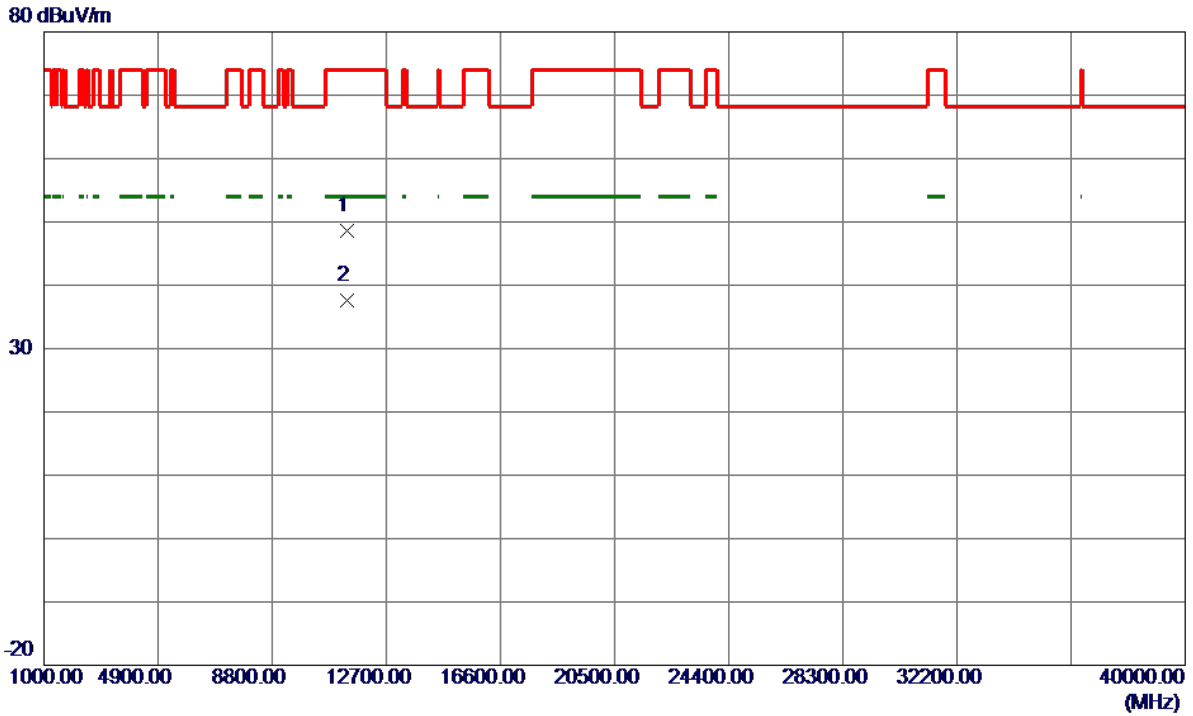


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11340.0000	36.28	12.36	48.64	74.00	-25.36	Peak	
2 *	11340.0150	25.23	12.36	37.59	54.00	-16.41	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5670MHz

**Horizontal**


130 dBuV/m

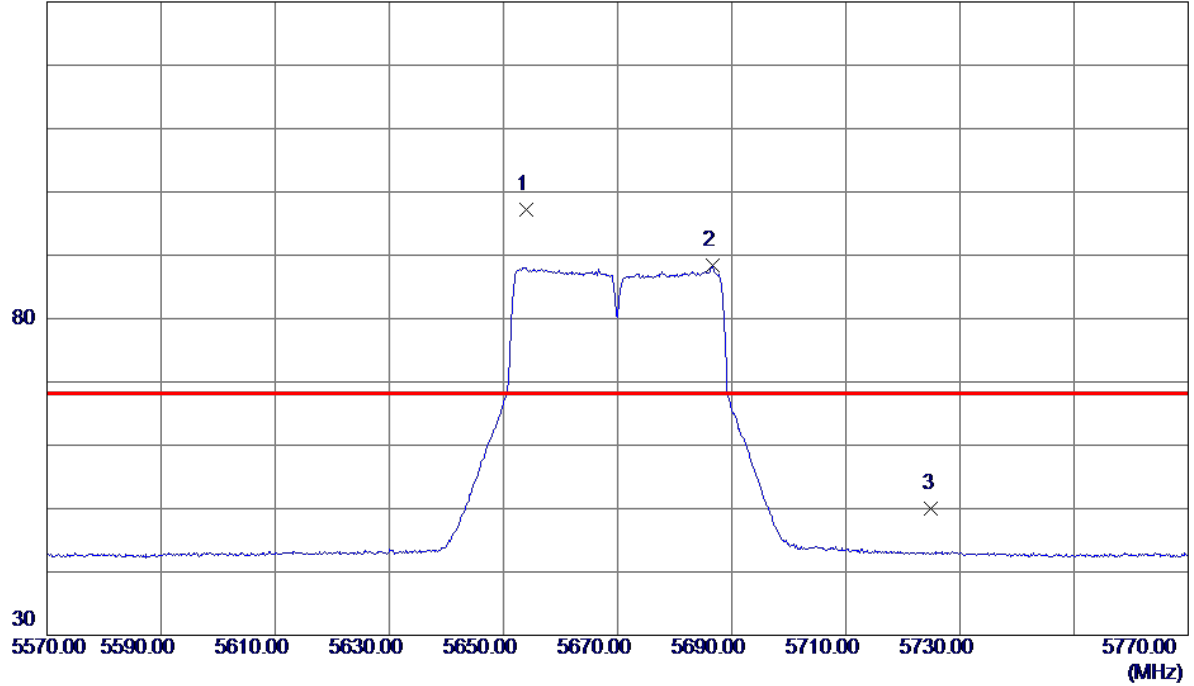

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5654.1000	81.53	15.73	97.26	68.30	28.96	Peak	No Limit
2	5686.6000	72.51	15.84	88.35	999.00	-910.65	AVG	No Limit
3	5725.0000	33.95	15.96	49.91	68.30	-18.39	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5670MHz

**Horizontal**

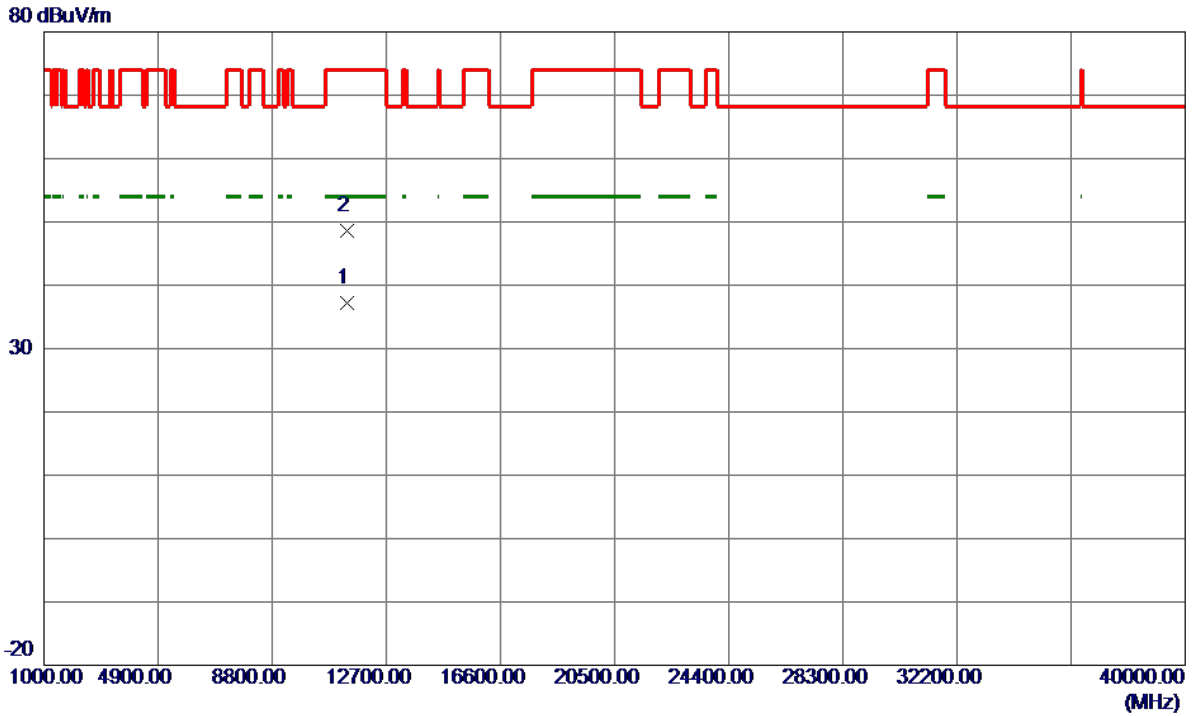


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11335.7500	24.80	12.36	37.16	54.00	-16.84	AVG	
2	11344.1300	36.15	12.36	48.51	74.00	-25.49	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5530MHz

**Vertical**


130 dBuV/m

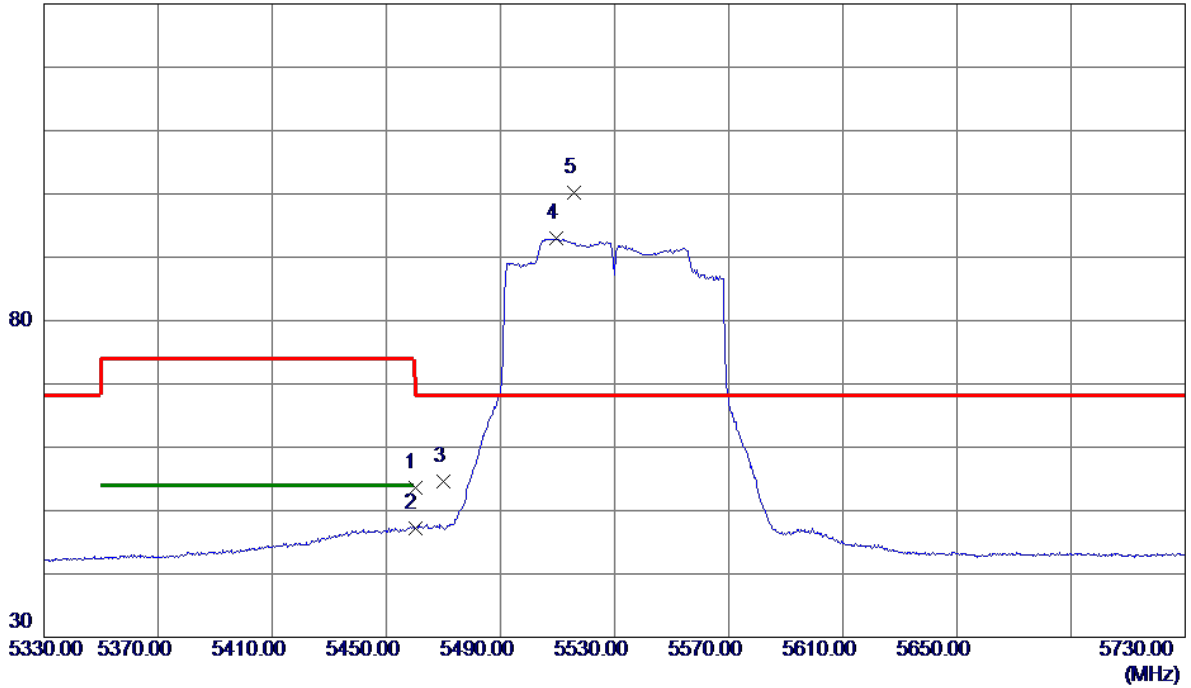

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	38.42	15.14	53.56	74.00	-20.44	Peak	
2	5460.0000	32.13	15.14	47.27	54.00	-6.73	AVG	
3	5470.0000	39.43	15.17	54.60	68.30	-13.70	Peak	
4	5509.6000	77.62	15.28	92.90	999.00	-906.10	AVG	No Limit
5 *	5515.6000	84.99	15.29	100.28	68.30	31.98	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5530MHz

**Vertical**

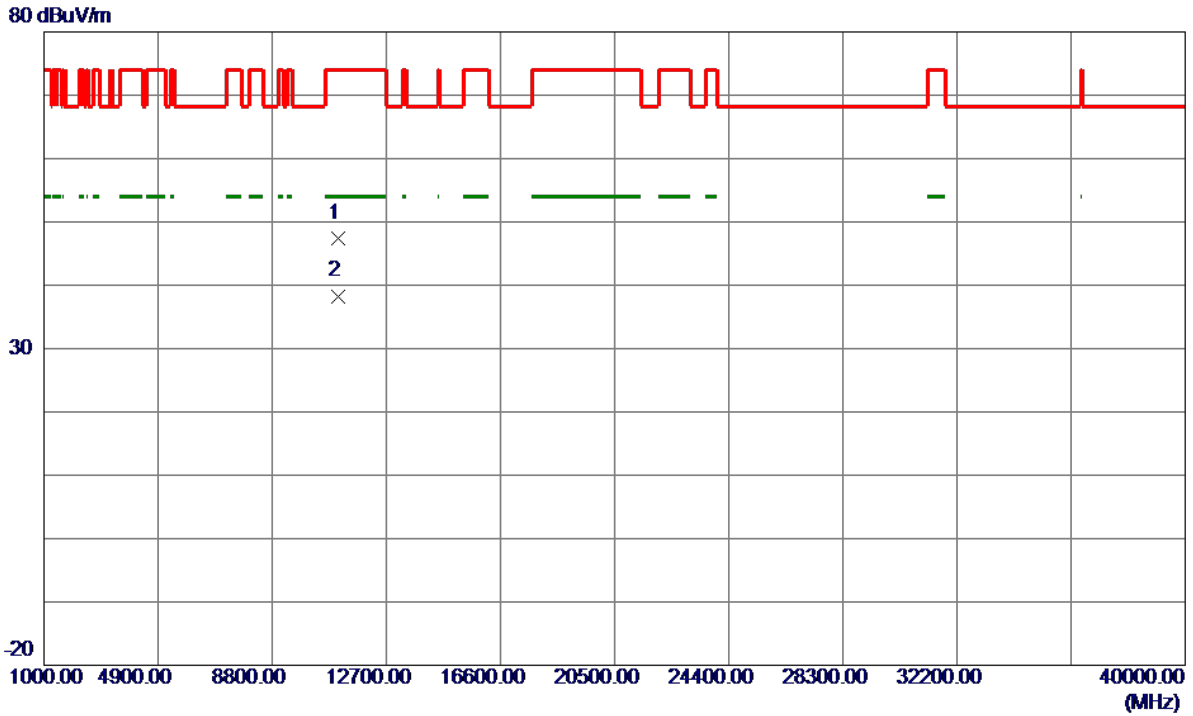


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11059.8750	35.28	12.16	47.44	74.00	-26.56	Peak	
2 *	11059.9650	26.14	12.16	38.30	54.00	-15.70	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5530MHz

**Horizontal**

130 dBuV/m

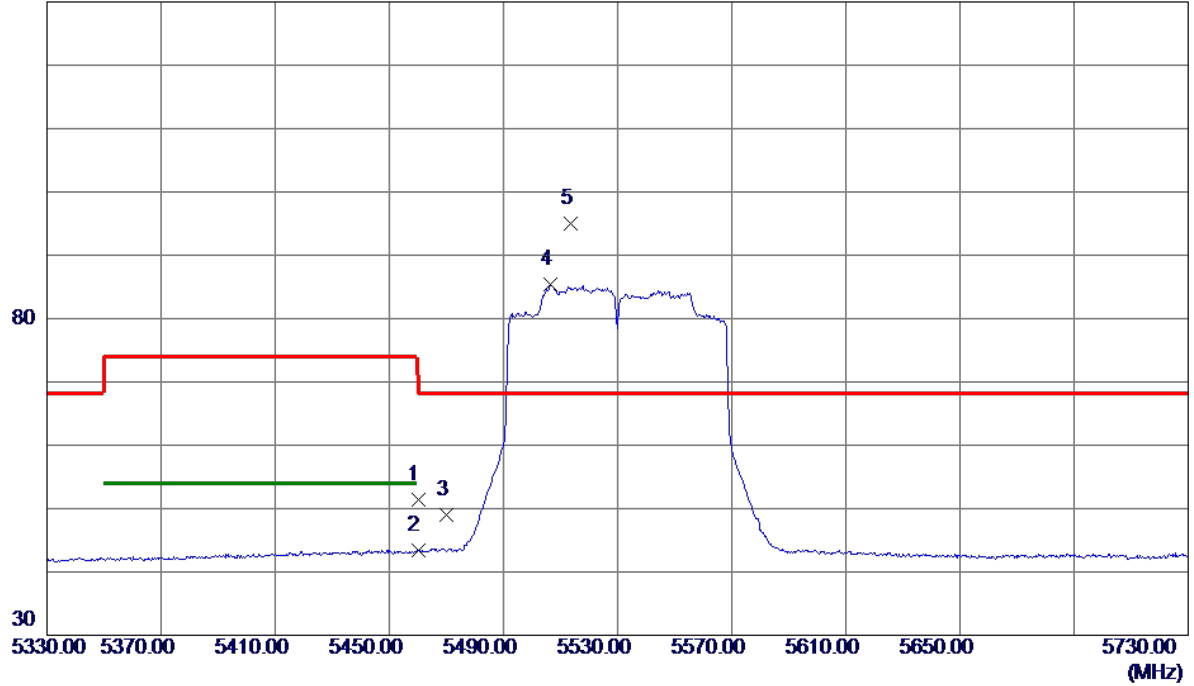


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	36.25	15.14	51.39	74.00	-22.61	Peak	
2	5460.0000	28.25	15.14	43.39	54.00	-10.61	AVG	
3	5470.0000	33.78	15.17	48.95	68.30	-19.35	Peak	
4	5506.6000	70.19	15.27	85.46	999.00	-913.54	AVG	No Limit
5 *	5513.6000	79.81	15.29	95.10	68.30	26.80	Peak	No Limit



Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5530MHz

**Horizontal**

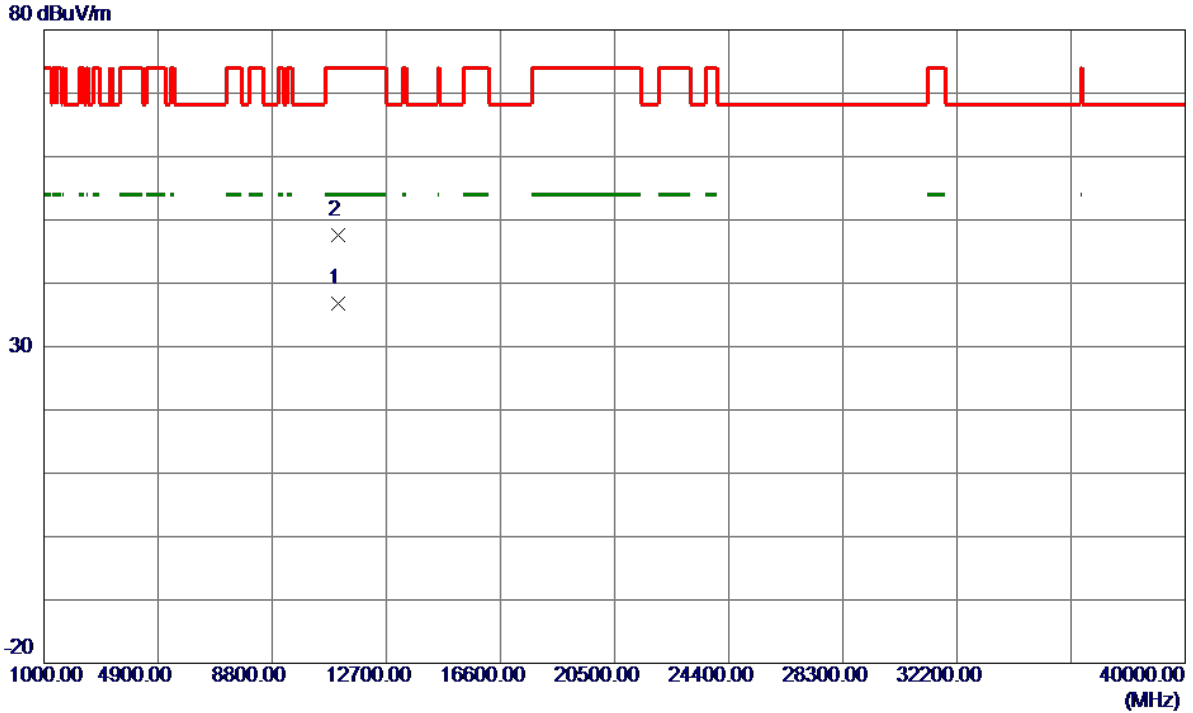


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11059.9000	24.70	12.16	36.86	54.00	-17.14	AVG	
2	11060.2900	35.36	12.16	47.52	74.00	-26.48	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5610MHz

**Vertical**


130 dBuV/m

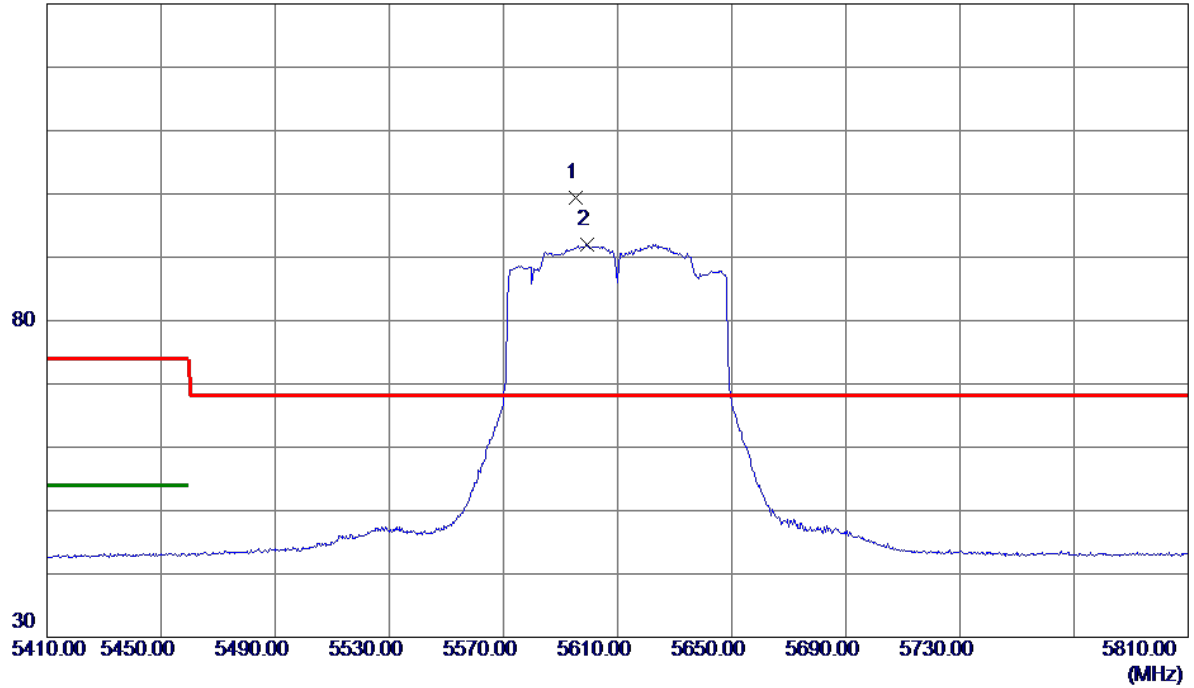

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5595.4000	83.88	15.55	99.43	68.30	31.13	Peak	No Limit
2	5599.4000	76.51	15.56	92.07	999.00	-906.93	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5610MHz

**Vertical**

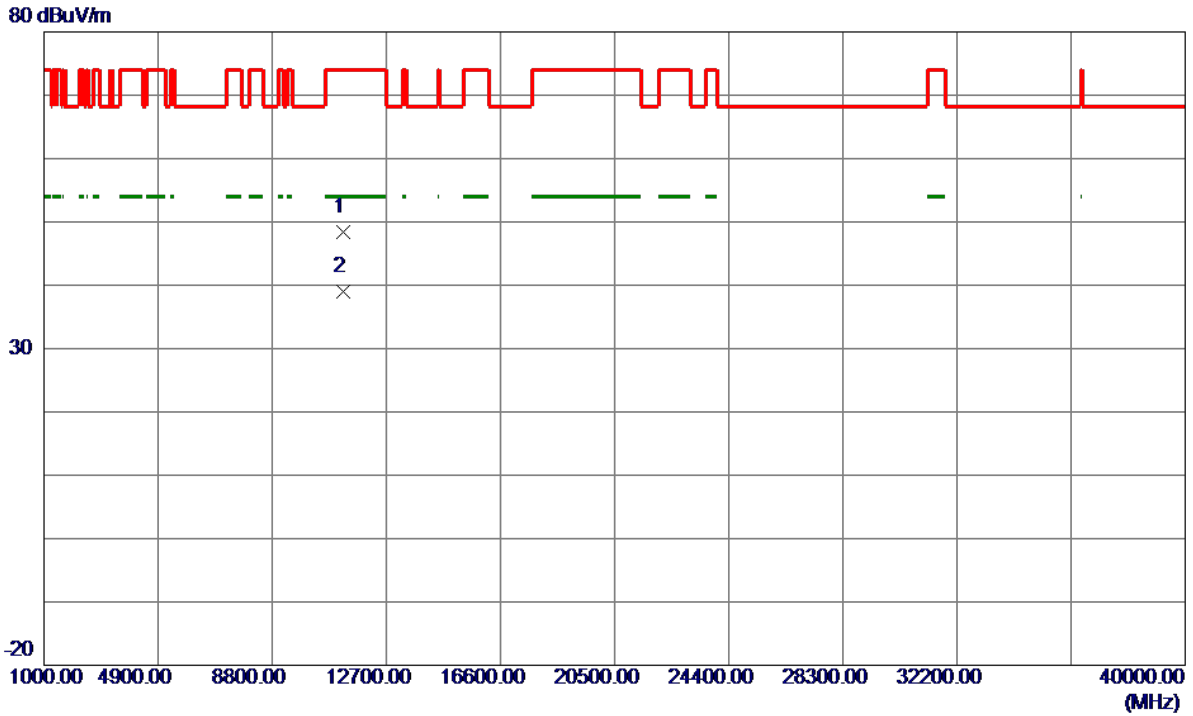


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11219.8400	36.13	12.28	48.41	74.00	-25.59	Peak	
2 *	11219.9150	26.72	12.28	39.00	54.00	-15.00	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5610MHz

**Horizontal**


130 dBuV/m

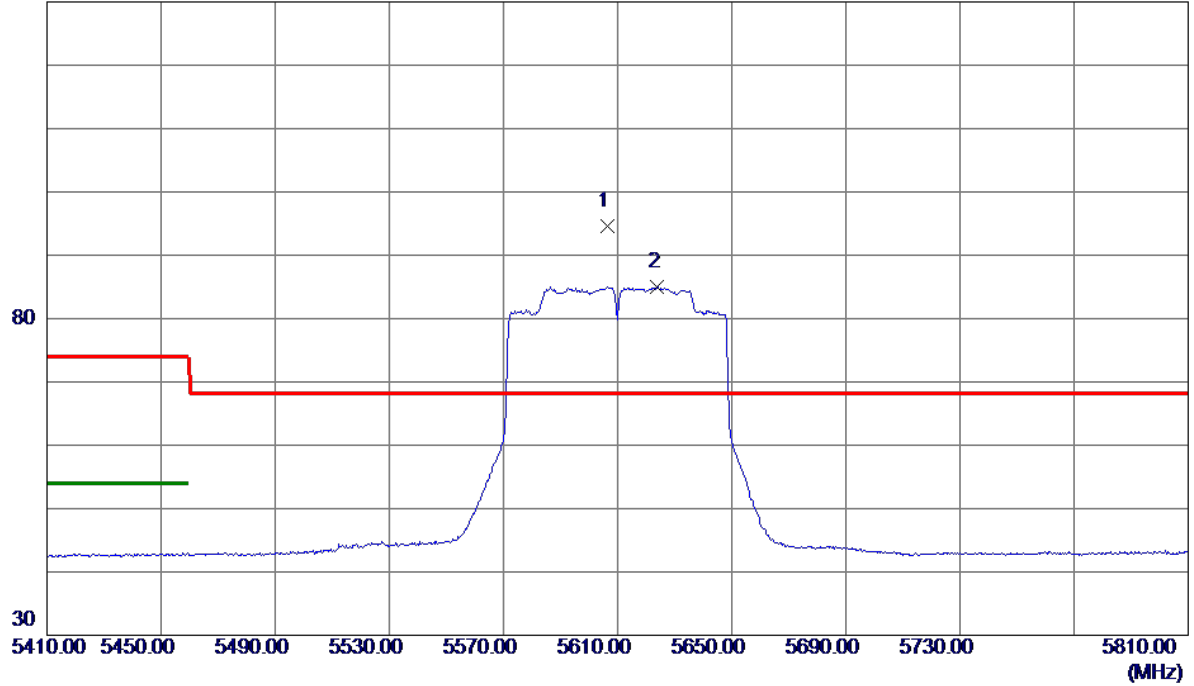

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5606.6000	78.93	15.58	94.51	68.30	26.21	Peak	No Limit
2	5624.0000	69.38	15.64	85.02	999.00	-913.98	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5610MHz


**Horizontal**

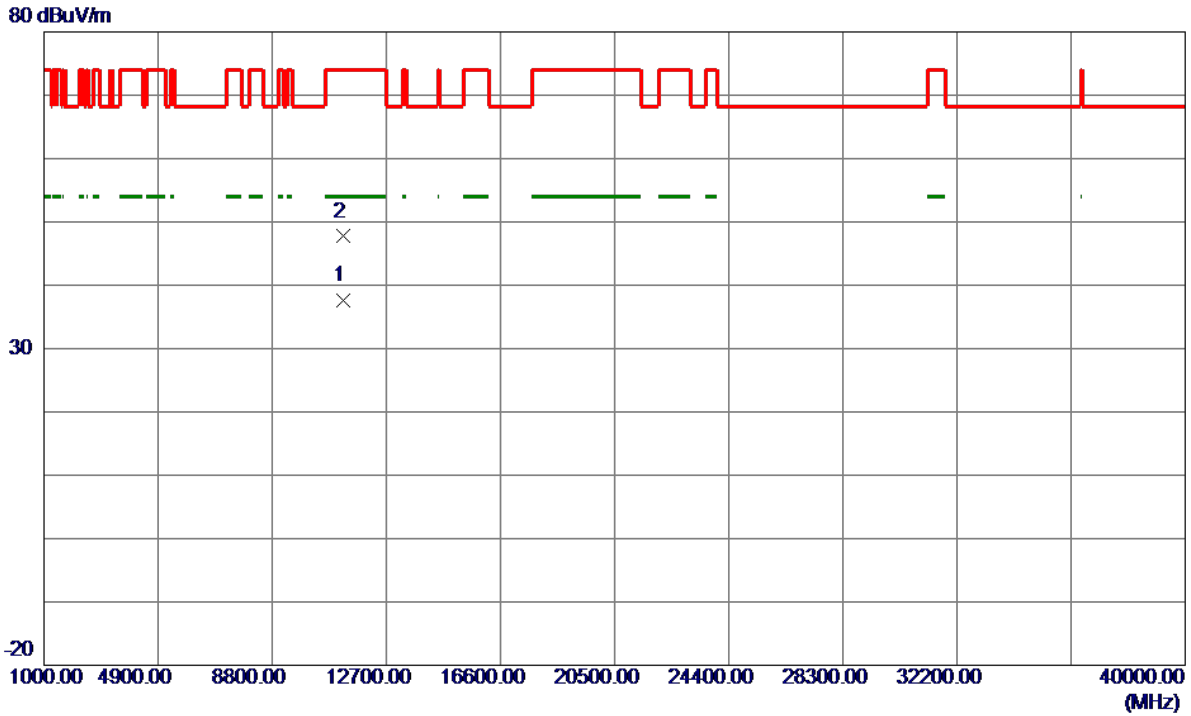

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11220.0250	25.26	12.28	37.54	54.00	-16.46	AVG	
2	11224.9300	35.42	12.28	47.70	74.00	-26.30	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC160 Mode 5570MHz


### Vertical

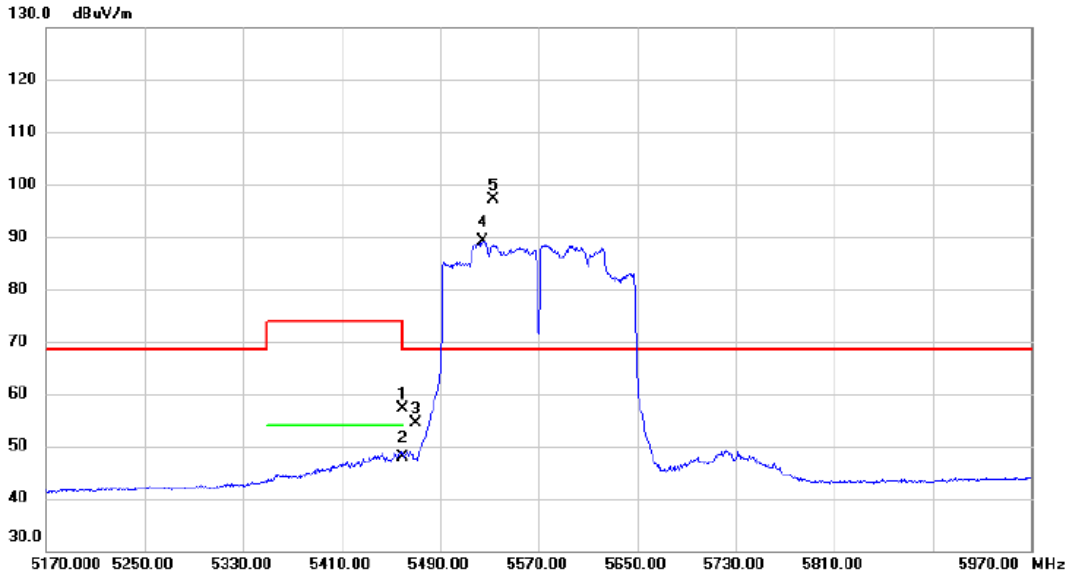

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.000	41.87	15.15	57.02	74.00	-16.98	peak	
2	5460.000	32.73	15.15	47.88	54.00	-6.12	AVG	
3	5470.000	39.26	15.17	54.43	68.30	-13.87	peak	
4 X	5525.200	73.76	15.32	89.08	68.30	20.78	AVG	No Limit
5 *	5533.200	81.68	15.34	97.02	68.30	28.72	peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC160 Mode 5570MHz


**Vertical**

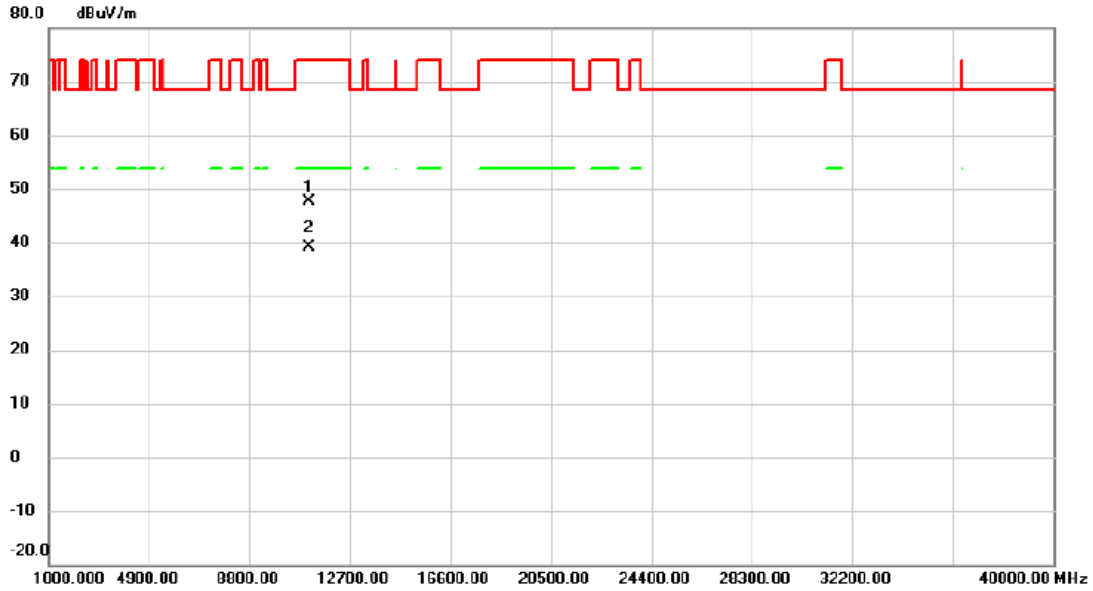

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11139.820	35.45	12.22	47.67	74.00	-26.33	peak	
2	*	11139.985	26.87	12.22	39.09	54.00	-14.91	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC160 Mode 5570MHz

### Horizontal

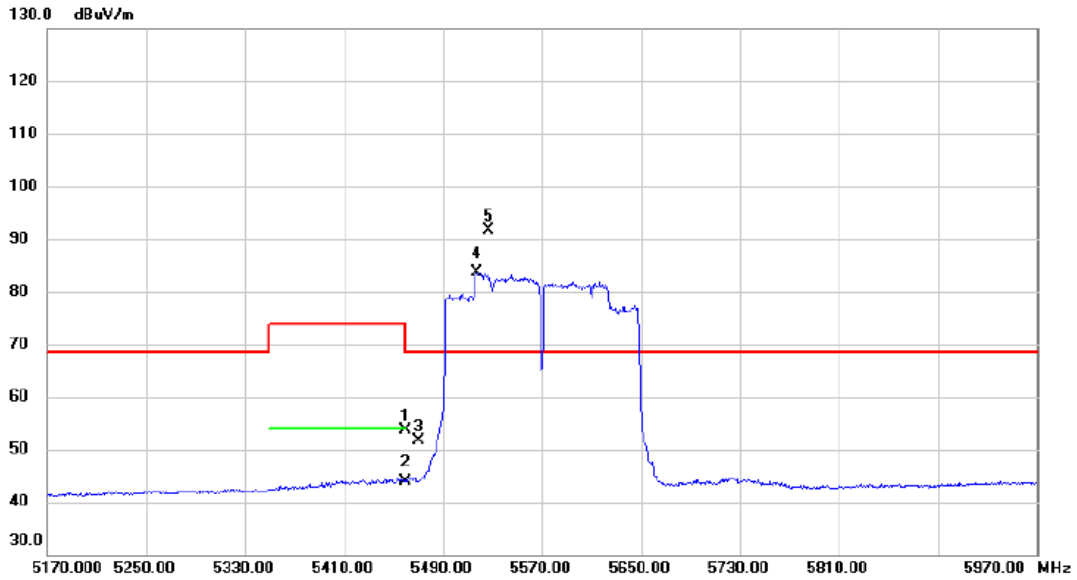


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	38.37	15.15	53.52	74.00	-20.48	peak	
2		5460.000	28.73	15.15	43.88	54.00	-10.12	AVG	
3		5470.000	36.39	15.17	51.56	68.30	-16.74	peak	
4	X	5517.200	68.28	15.30	83.58	68.30	15.28	AVG	No Limit
5	*	5526.400	76.22	15.32	91.54	68.30	23.24	peak	No Limit



Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC160 Mode 5570MHz


**Horizontal**

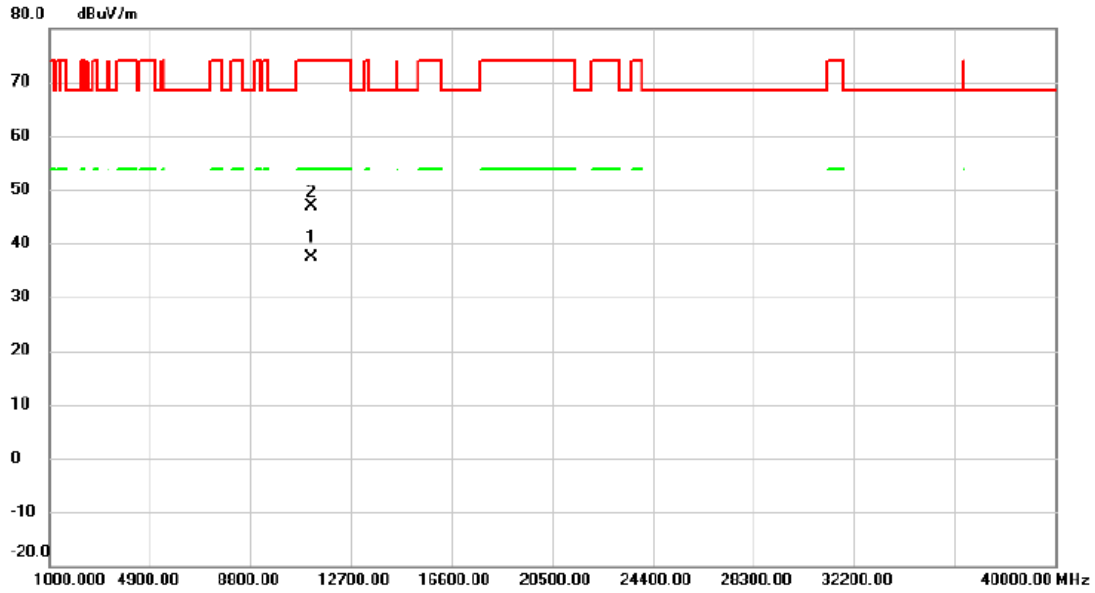

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11140.045	25.18	12.22	37.40	54.00	-16.60	AVG	
2		11141.590	34.77	12.22	46.99	74.00	-27.01	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5745 MHz


**Vertical**

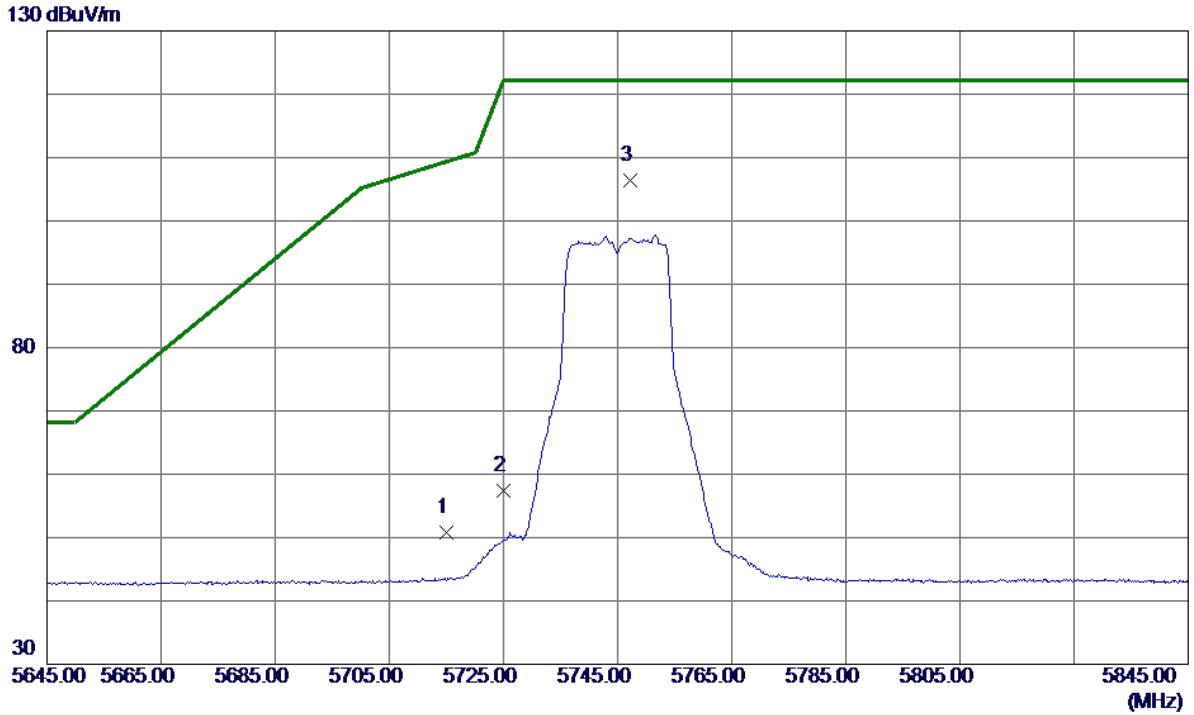

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	34.78	15.93	50.71	109.40	-58.69	Peak	
2	5725.0000	41.42	15.96	57.38	122.20	-64.82	Peak	
3 *	5747.3000	90.45	16.03	106.48	122.20	-15.72	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5745 MHz

**Vertical**

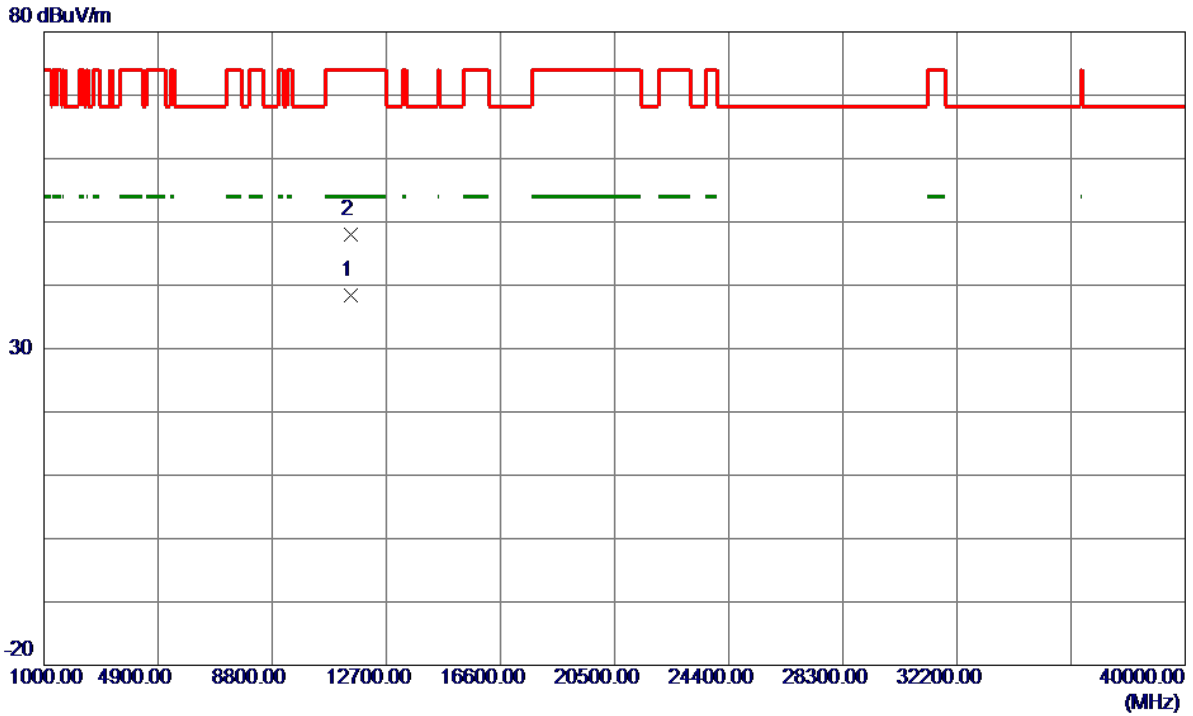


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11490.1150	25.90	12.47	38.37	54.00	-15.63	AVG	
2	11490.1650	35.59	12.47	48.06	74.00	-25.94	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5745 MHz

**Horizontal**


130 dBuV/m

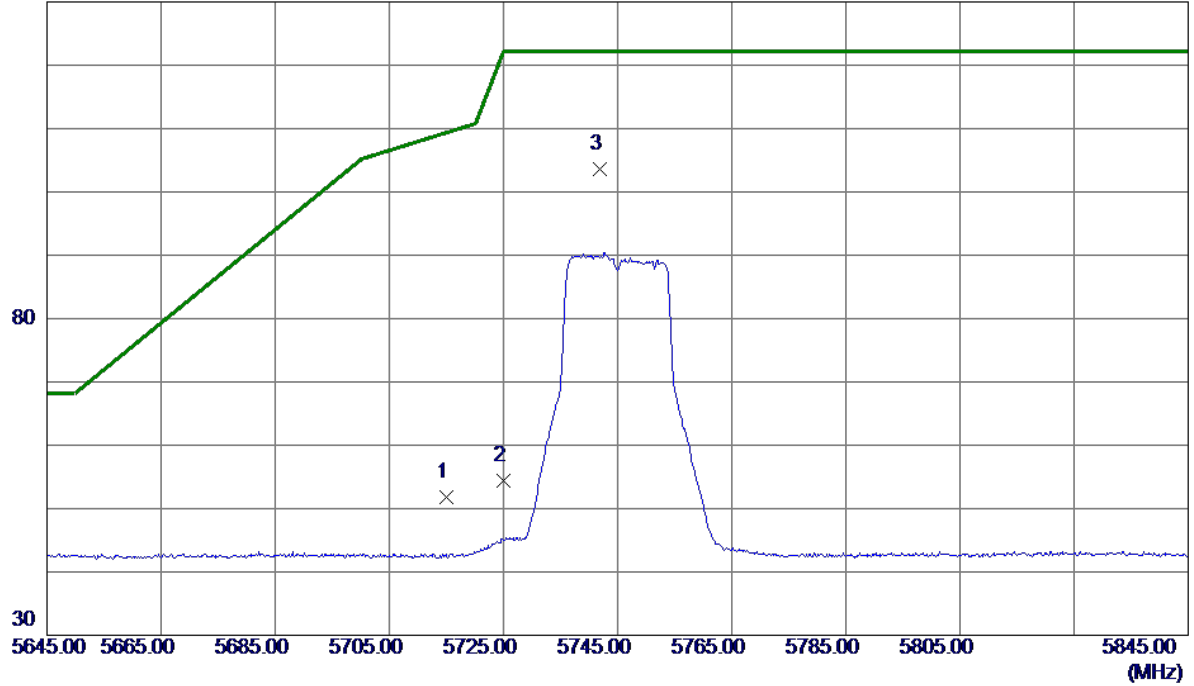

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	35.85	15.93	51.78	109.40	-57.62	Peak	
2	5725.0000	38.41	15.96	54.37	122.20	-67.83	Peak	
3 *	5741.9000	87.62	16.01	103.63	122.20	-18.57	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5745 MHz


**Horizontal**

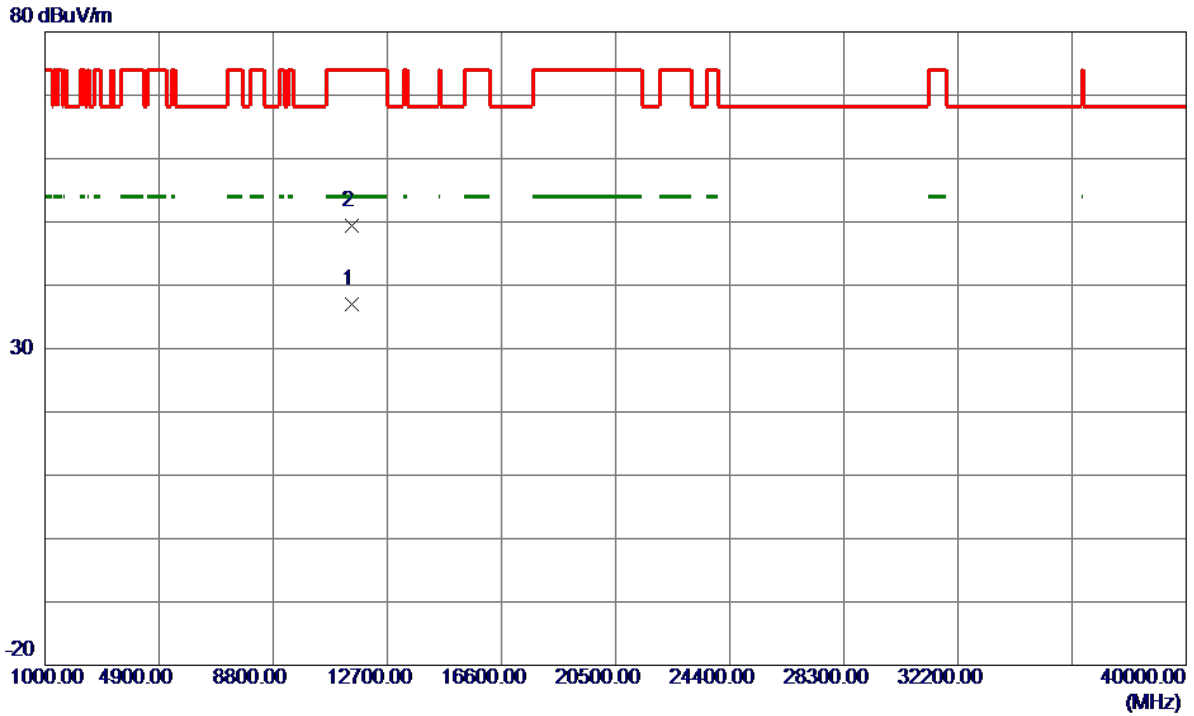

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11489.3400	24.54	12.47	37.01	54.00	-16.99	AVG	
2	11493.9700	36.91	12.47	49.38	74.00	-24.62	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5785 MHz


**Vertical**

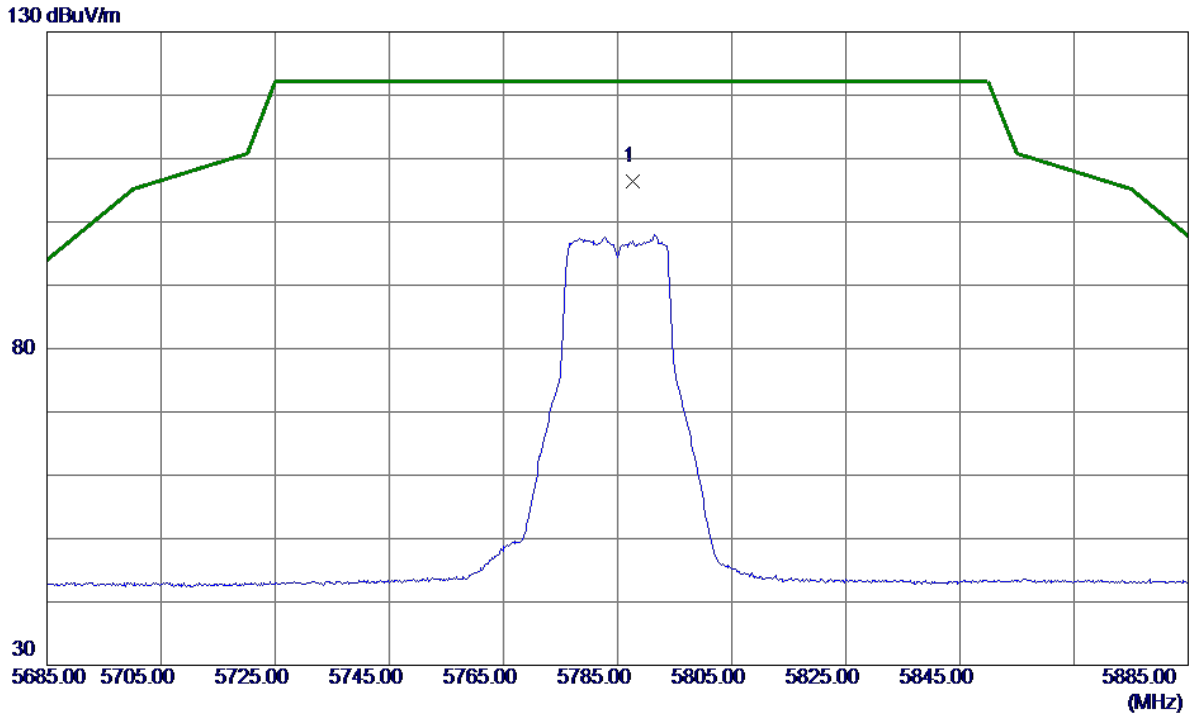

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5787.6000	90.26	16.16	106.42	122.20	-15.78	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5785 MHz


**Vertical**

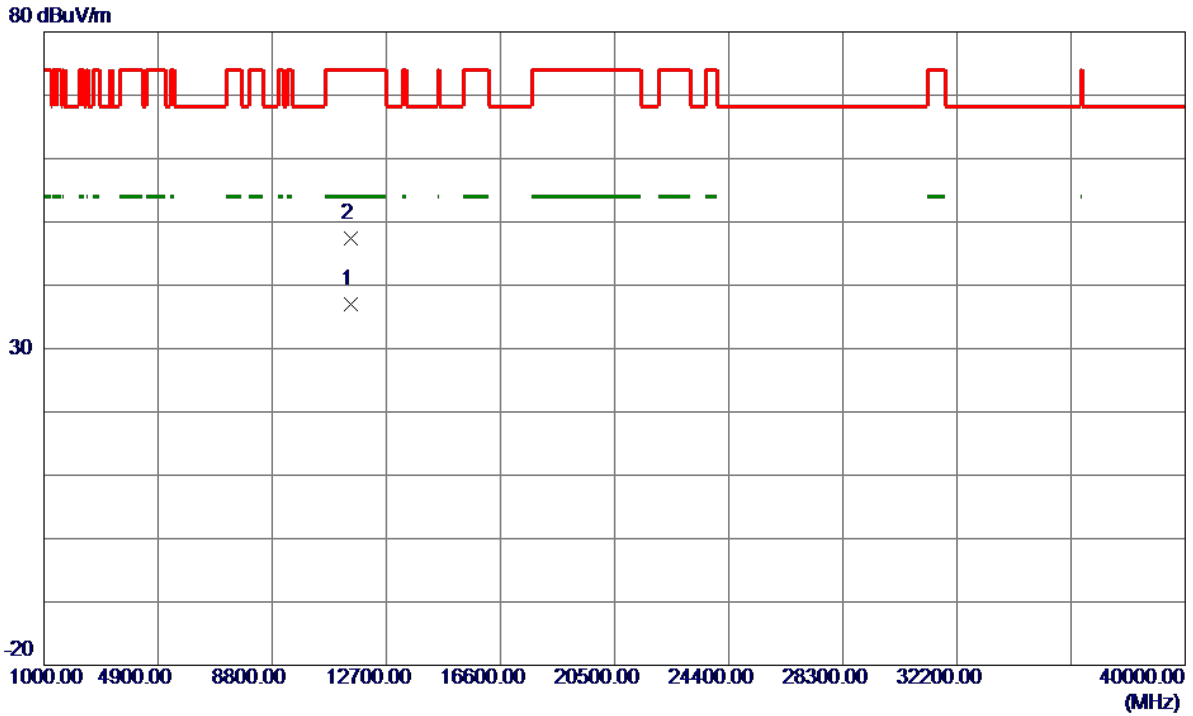

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11485.3949	24.52	12.46	36.98	54.00	-17.02	AVG	
2	11487.2950	34.88	12.47	47.35	74.00	-26.65	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5785 MHz

**Horizontal**

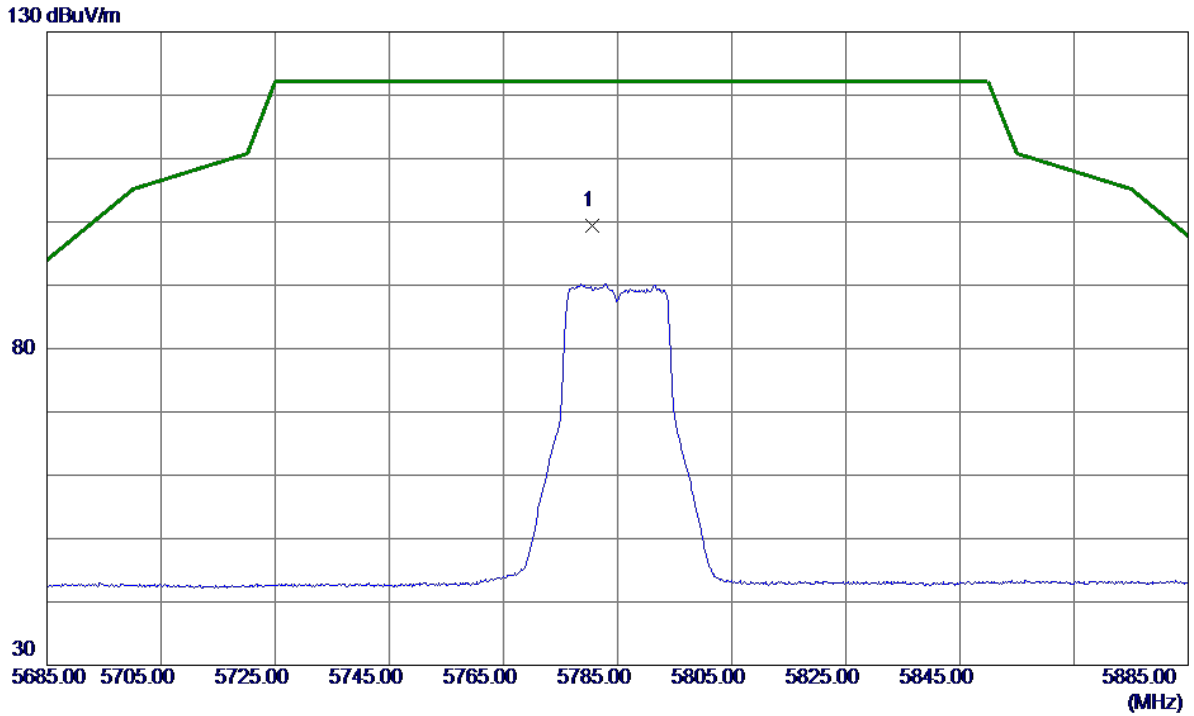


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5780.5000	83.32	16.13	99.45	122.20	-22.75	Peak	No Limit



Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5785 MHz

**Horizontal**

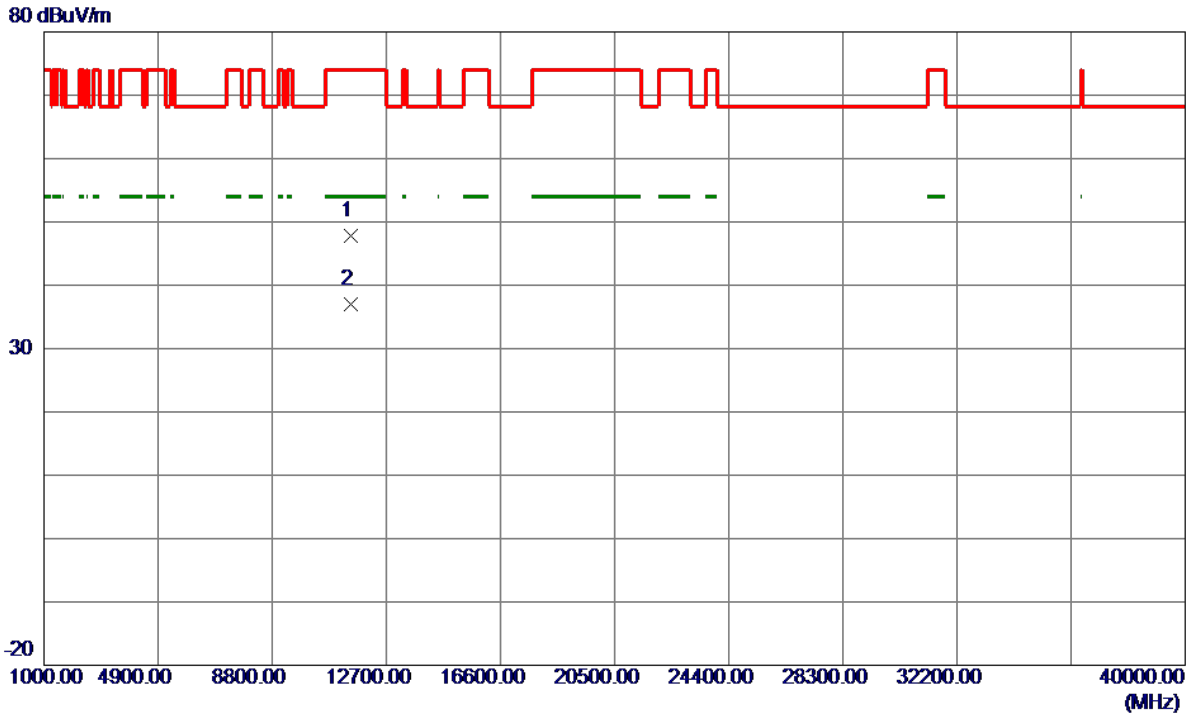


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11487.3150	35.28	12.47	47.75	74.00	-26.25	Peak	
2 *	11488.3550	24.44	12.47	36.91	54.00	-17.09	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5825 MHz

**Vertical**


130 dBuV/m

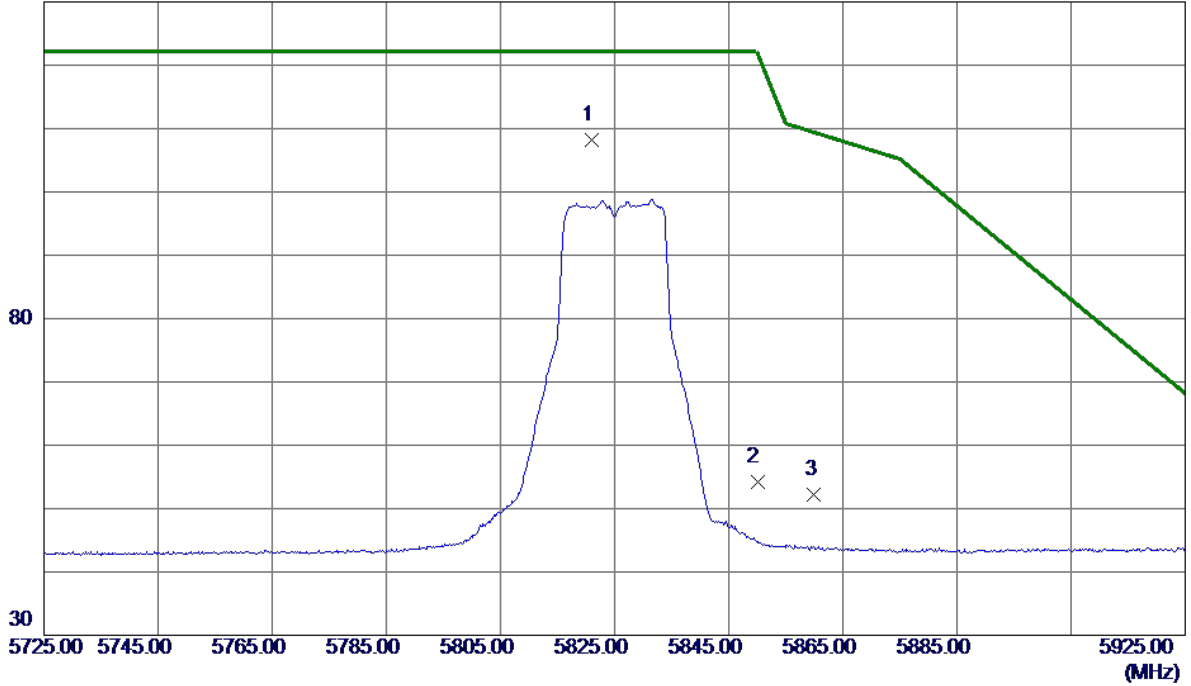

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5821.0000	91.90	16.26	108.16	122.20	-14.04	Peak	No Limit
2	5850.0000	37.89	16.35	54.24	122.20	-67.96	Peak	
3	5860.0000	35.81	16.39	52.20	109.40	-57.20	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5825 MHz


**Vertical**

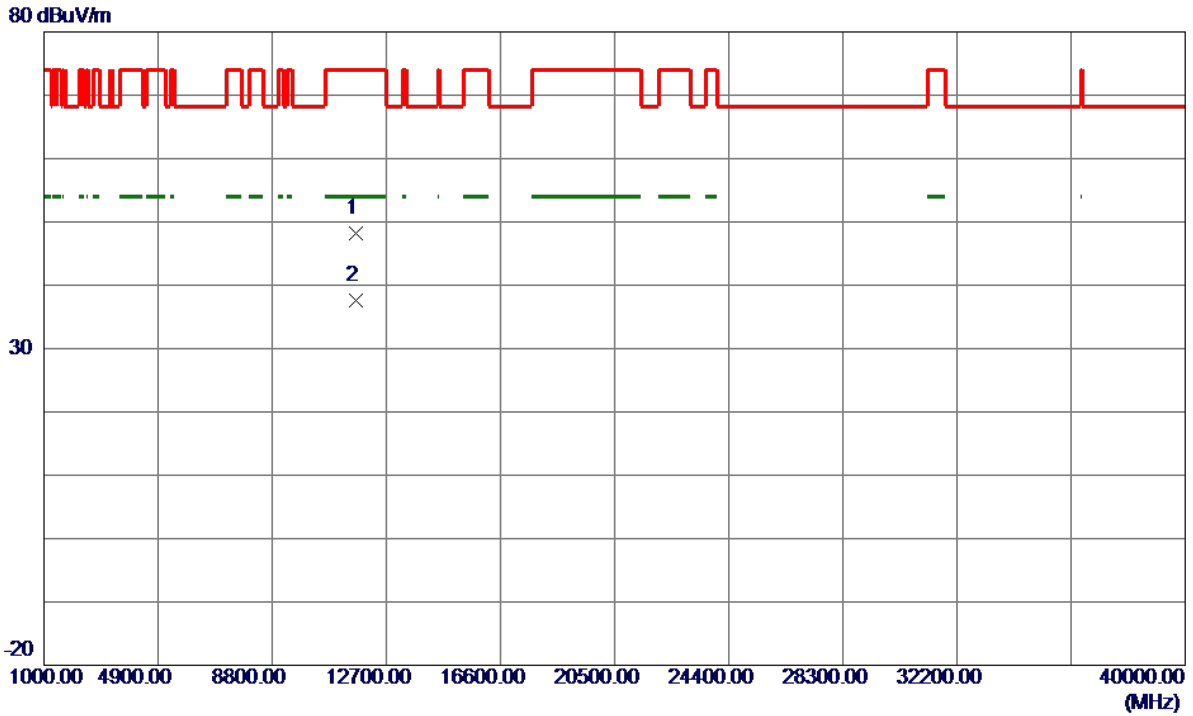

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11649.6449	35.67	12.57	48.24	74.00	-25.76	Peak	
2 *	11650.0350	24.97	12.57	37.54	54.00	-16.46	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5825 MHz


**Horizontal**

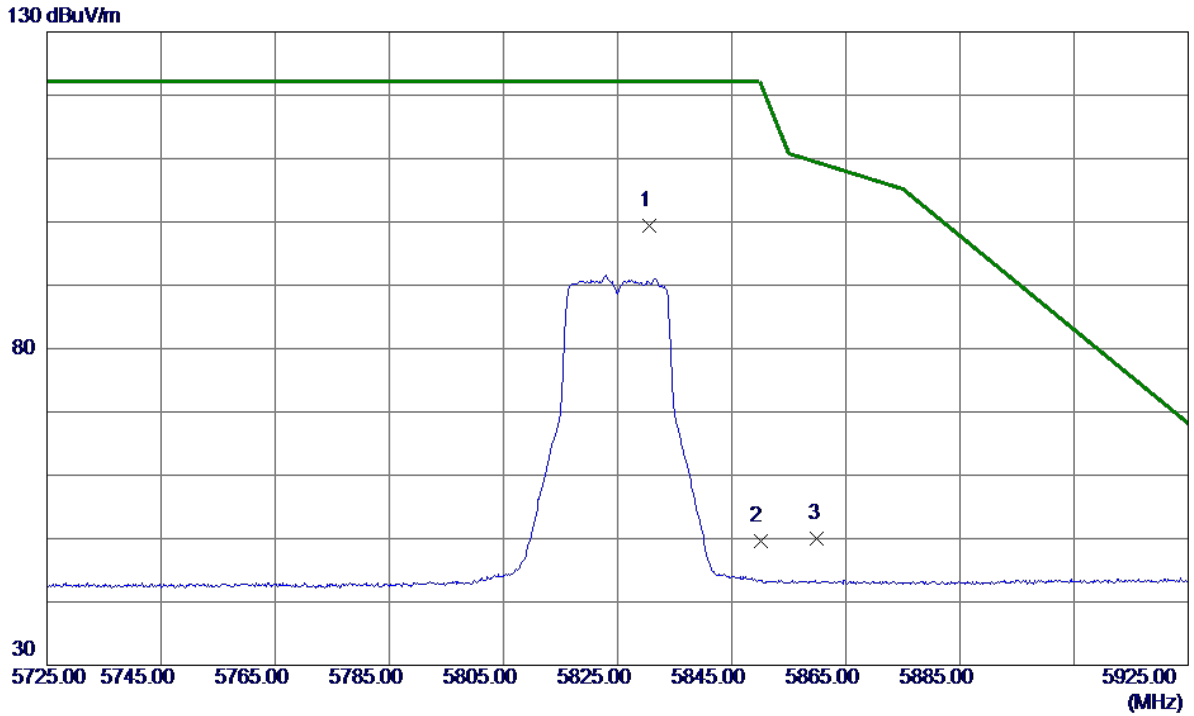

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5830.6000	83.16	16.29	99.45	122.20	-22.75	Peak	No Limit
2	5850.0000	33.19	16.35	49.54	122.20	-72.66	Peak	
3	5860.0000	33.62	16.39	50.01	109.40	-59.39	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5825 MHz


**Horizontal**

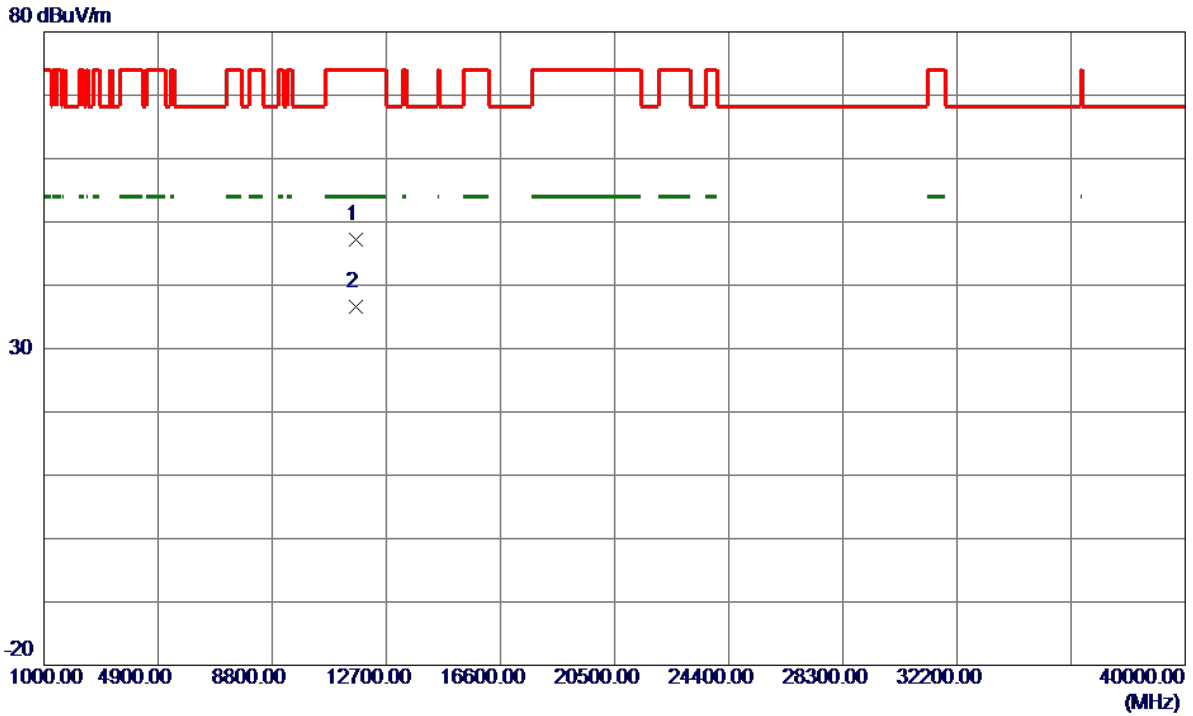

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11649.6800	34.66	12.57	47.23	74.00	-26.77	Peak	
2 *	11654.9000	24.12	12.57	36.69	54.00	-17.31	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5755MHz


**Vertical**

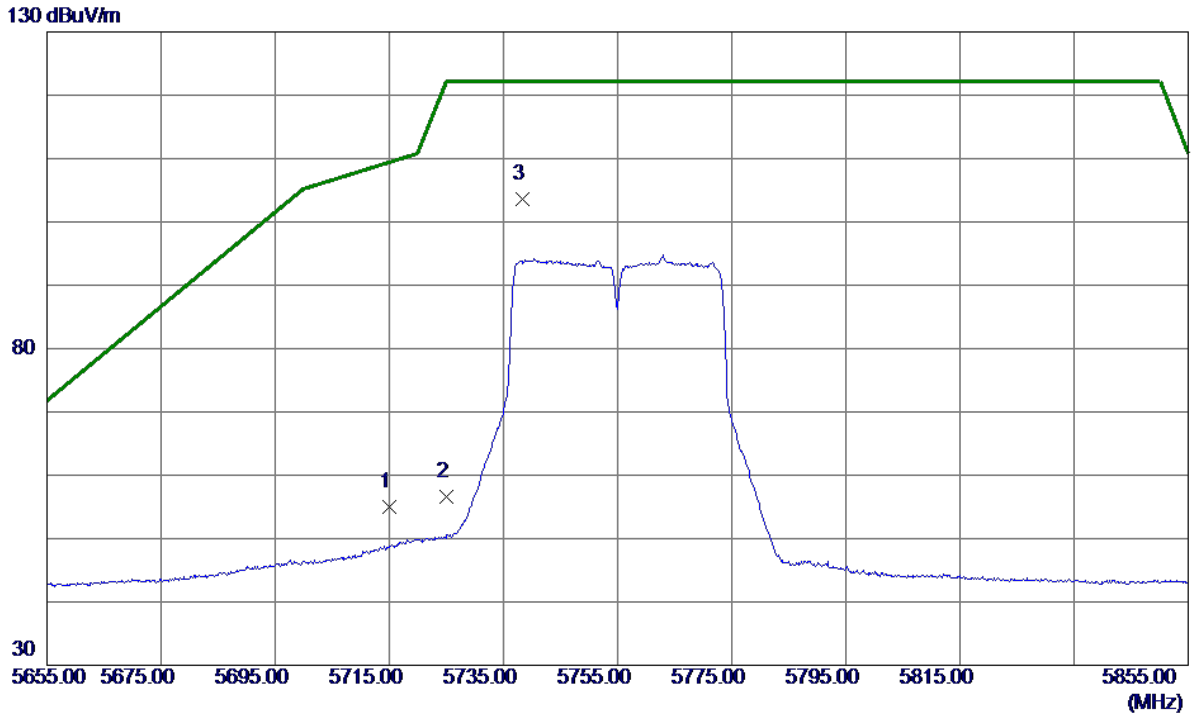

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	39.04	15.93	54.97	109.40	-54.43	Peak	
2	5725.0000	40.68	15.96	56.64	122.20	-65.56	Peak	
3 *	5738.3000	87.69	16.00	103.69	122.20	-18.51	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5755MHz

**Vertical**

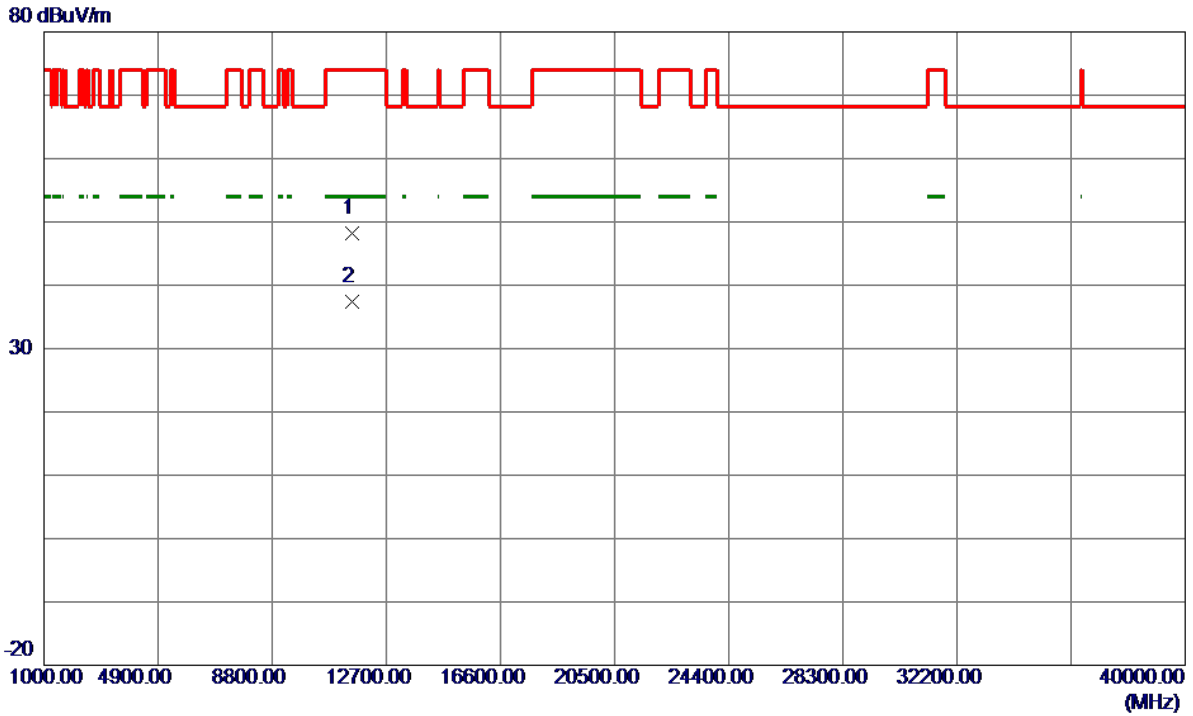


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11509.8900	35.66	12.48	48.14	74.00	-25.86	Peak	
2 *	11509.9400	24.93	12.48	37.41	54.00	-16.59	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5755MHz

**Horizontal**

130 dBuV/m

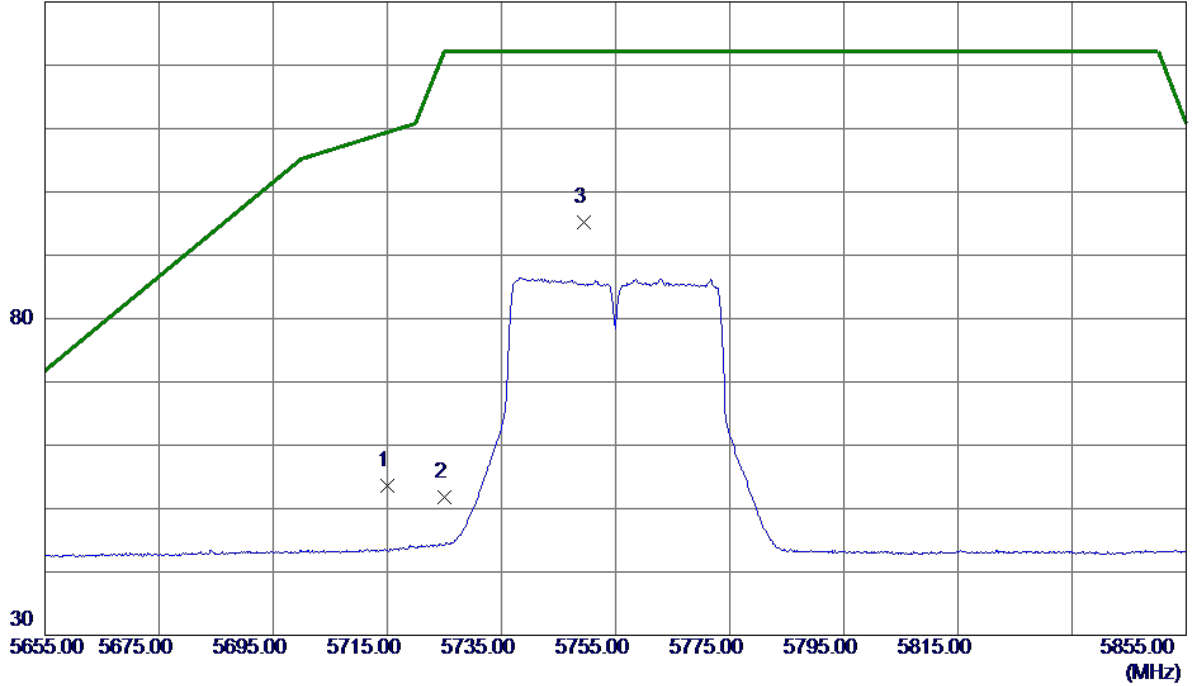


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	37.71	15.93	53.64	109.40	-55.76	Peak	
2	5725.0000	35.87	15.96	51.83	122.20	-70.37	Peak	
3 *	5749.4000	79.21	16.04	95.25	122.20	-26.95	Peak	No Limit



Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5755MHz


**Horizontal**

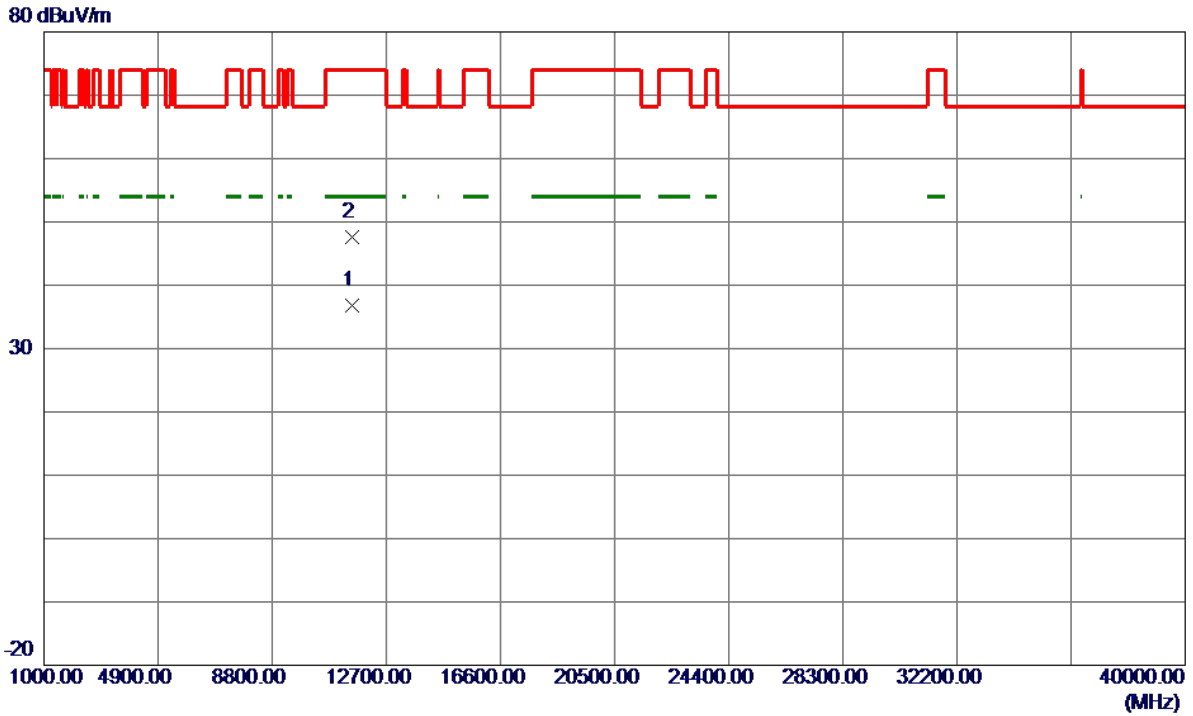

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11510.8050	24.29	12.48	36.77	54.00	-17.23	AVG	
2	11512.6400	35.11	12.48	47.59	74.00	-26.41	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5795MHz


**Vertical**

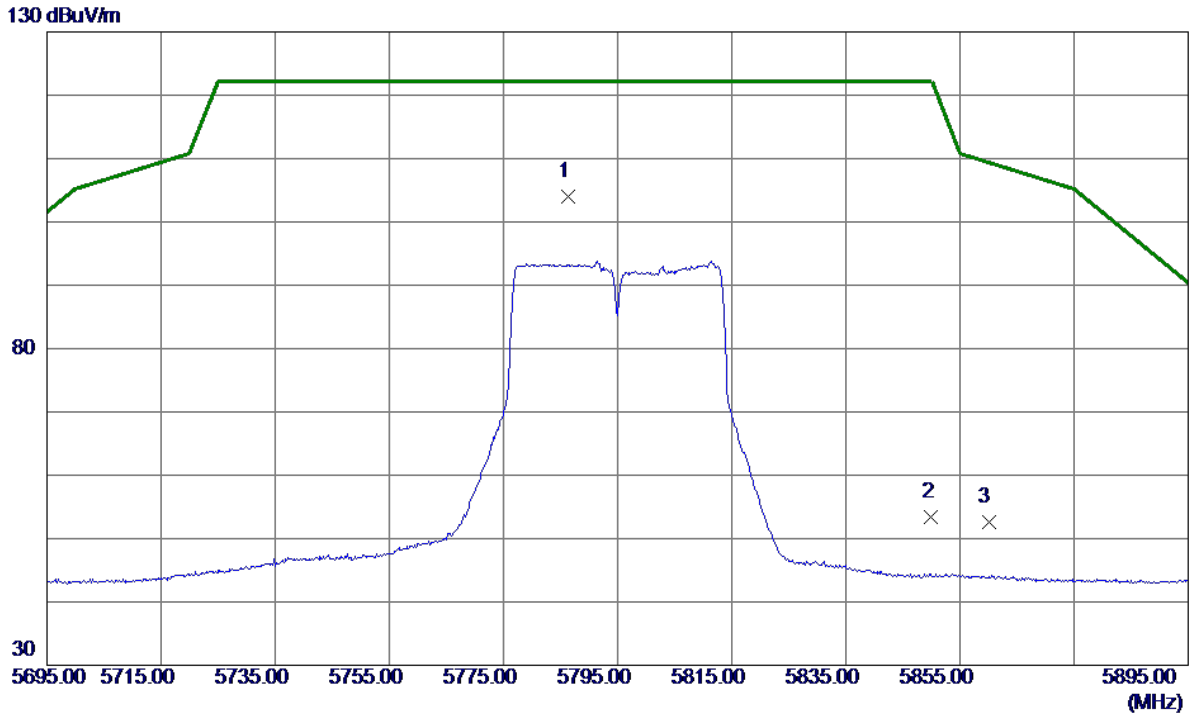

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5786.3000	87.94	16.15	104.09	122.20	-18.11	Peak	No Limit
2	5850.0000	37.07	16.35	53.42	122.20	-68.78	Peak	
3	5860.0000	36.12	16.39	52.51	109.40	-56.89	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5795MHz


**Vertical**

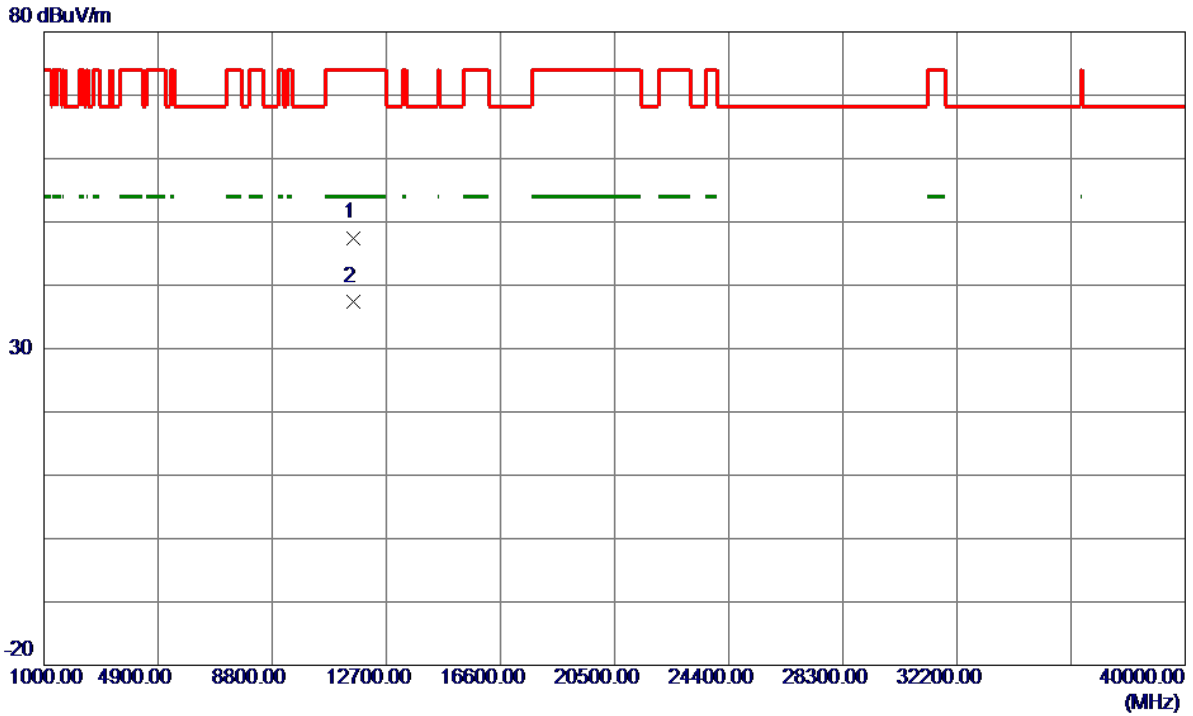

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11586.4850	34.97	12.53	47.50	74.00	-26.50	Peak	
2 *	11589.8900	24.92	12.53	37.45	54.00	-16.55	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5795MHz

**Horizontal**

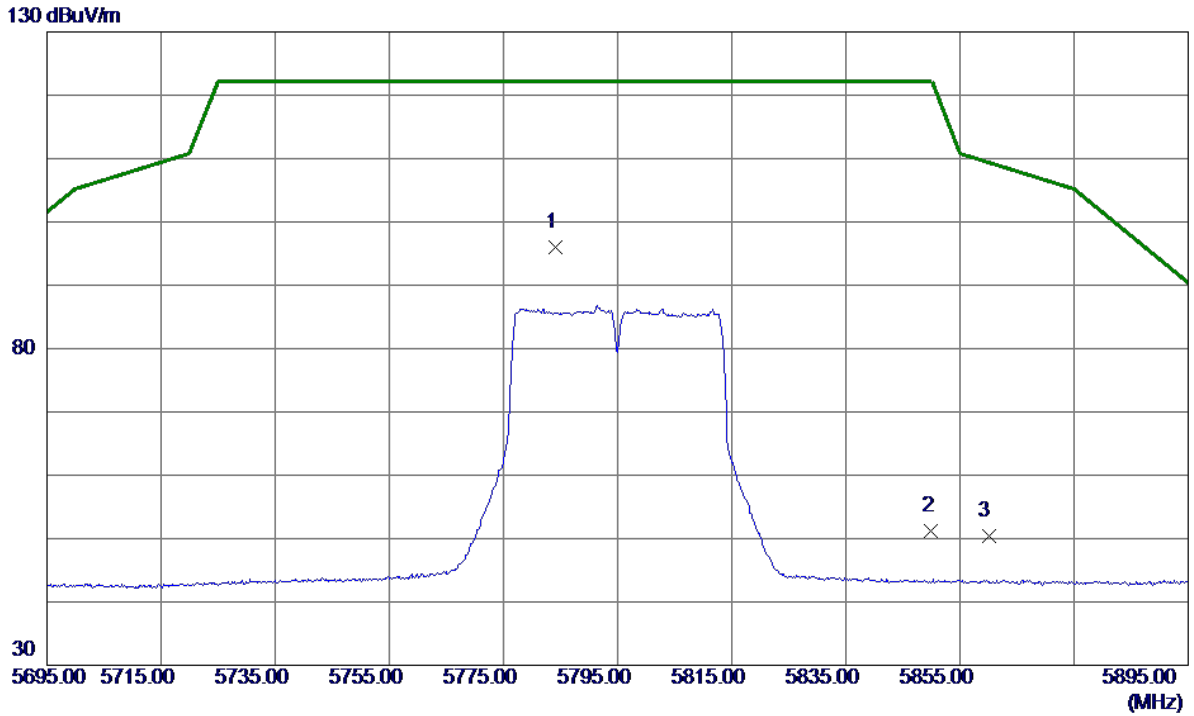

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5784.2000	79.76	16.15	95.91	122.20	-26.29	Peak	No Limit
2	5850.0000	34.78	16.35	51.13	122.20	-71.07	Peak	
3	5860.0000	34.10	16.39	50.49	109.40	-58.91	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5795MHz

**Horizontal**




No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11587.6250	24.05	12.53	36.58	54.00	-17.42	AVG	
2	11590.8550	34.80	12.53	47.33	74.00	-26.67	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz

**Vertical**


130 dBuV/m

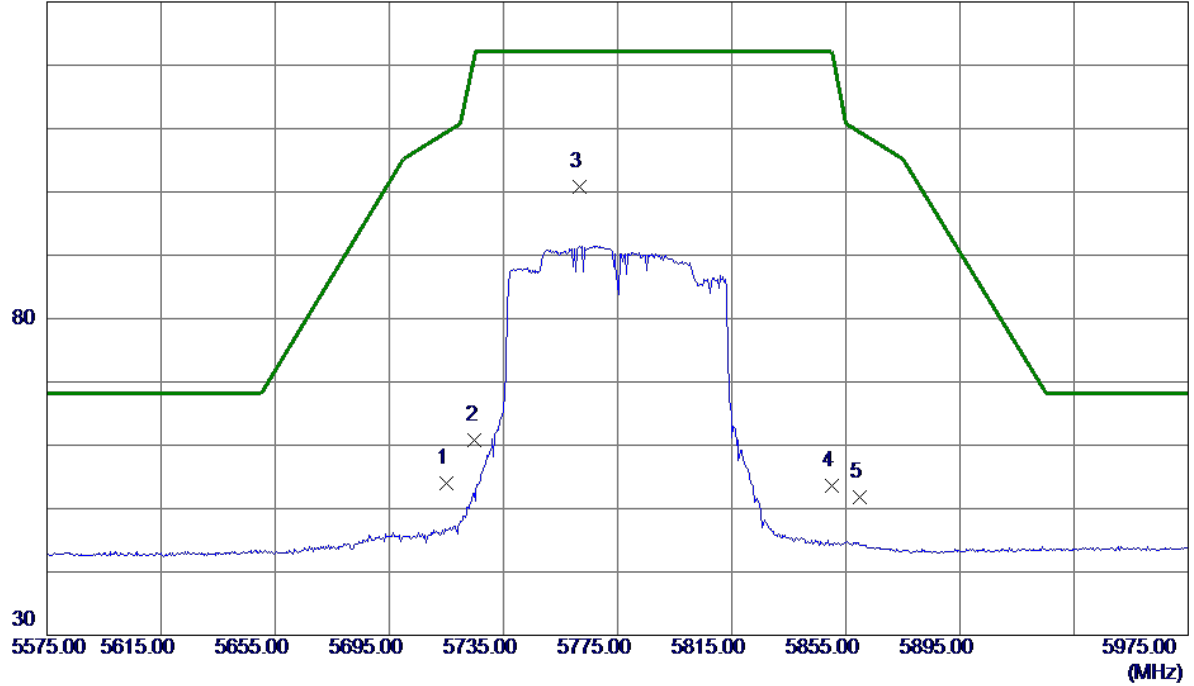

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	38.12	15.93	54.05	109.40	-55.35	Peak	
2	5725.0000	44.84	15.96	60.80	122.20	-61.40	Peak	
3 *	5761.8000	84.78	16.07	100.85	122.20	-21.35	Peak	No Limit
4	5850.0000	37.24	16.35	53.59	122.20	-68.61	Peak	
5	5860.0000	35.49	16.39	51.88	109.40	-57.52	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz


**Vertical**

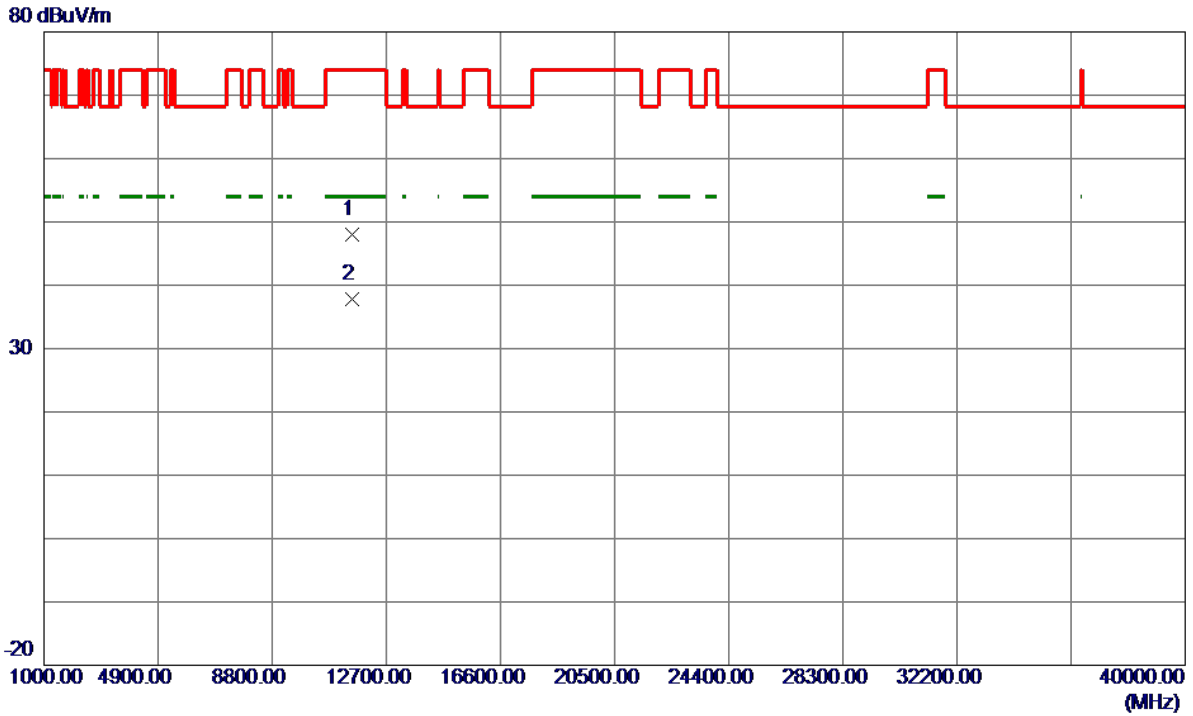

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11548.7350	35.51	12.50	48.01	74.00	-25.99	Peak	
2 *	11549.9600	25.26	12.51	37.77	54.00	-16.23	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz

**Horizontal**

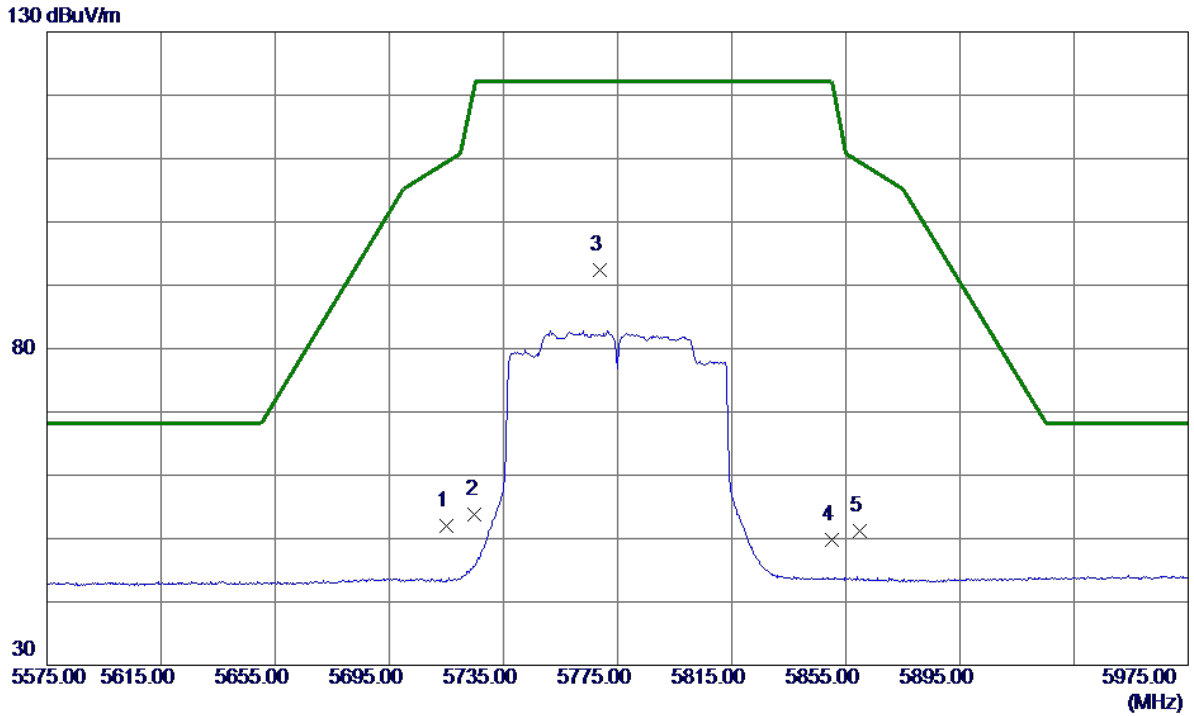

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	36.09	15.93	52.02	109.40	-57.38	Peak	
2	5725.0000	37.75	15.96	53.71	122.20	-68.49	Peak	
3 *	5768.8000	76.33	16.10	92.43	122.20	-29.77	Peak	No Limit
4	5850.0000	33.40	16.35	49.75	122.20	-72.45	Peak	
5	5860.0000	34.78	16.39	51.17	109.40	-58.23	Peak	



Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz

**Horizontal**



No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11549.9400	24.49	12.51	37.00	54.00	-17.00	AVG	
2	11550.1400	35.24	12.51	47.75	74.00	-26.25	Peak	

### TX A Mode\_DUTY CYCLE

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$


$T_{\text{ON}}$ : 2.048 msec

$T_{\text{Total}}$ : 2.104 msec

Duty cycle: 97.34%

$$\text{Duty Factor} = 10 \log(1/\text{Duty cycle})$$

Duty Factor = 0.12

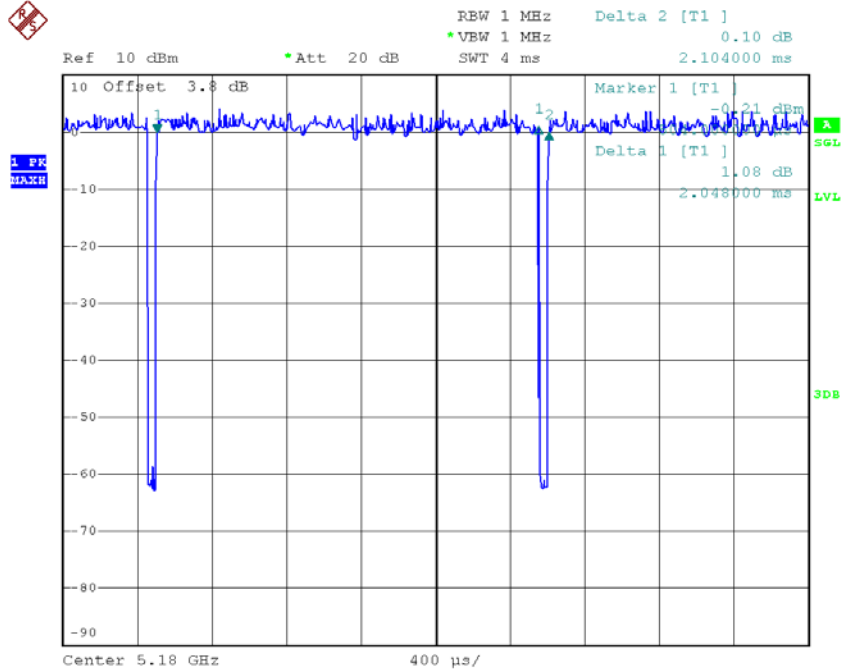

Date: 30.SEP.2018 13:43:35

Note: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle < 98 %, so, the output power and power density should be calculated as

$$\text{Output Power} = \text{Measured power} + \text{Duty factor}$$

$$\text{Power Spectral Density} = \text{Measured density} + \text{Duty factor}$$

### TX N20 Mode\_DUTY CYCLE

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$


$T_{\text{ON}}$ : 1.904 msec

$T_{\text{Total}}$ : 1.960 msec

Duty cycle: 97.14%

$$\text{Duty Factor} = 10 \log(1/\text{Duty cycle})$$

Duty Factor = 0.13

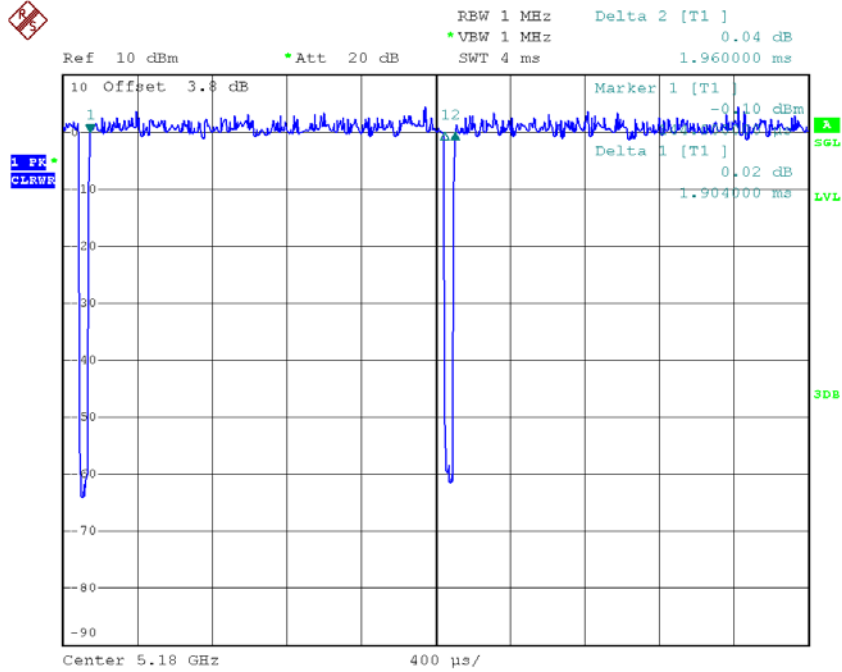

Date: 30.SEP.2018 13:44:09

Note: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle < 98 %, so, the output power and power density should be calculated as

$$\text{Output Power} = \text{Measured power} + \text{Duty factor}$$

$$\text{Power Spectral Density} = \text{Measured density} + \text{Duty factor}$$

**TX N40 Mode\_DUTY CYCLE**

Duty cycle =  $T_{ON} / T_{Total}$


$T_{ON}$ : 0.910 msec

$T_{Total}$ : 0.985 msec

Duty cycle: 92.39%

Duty Factor =  $10 \log(1/\text{Duty cycle})$

Duty Factor = 0.34

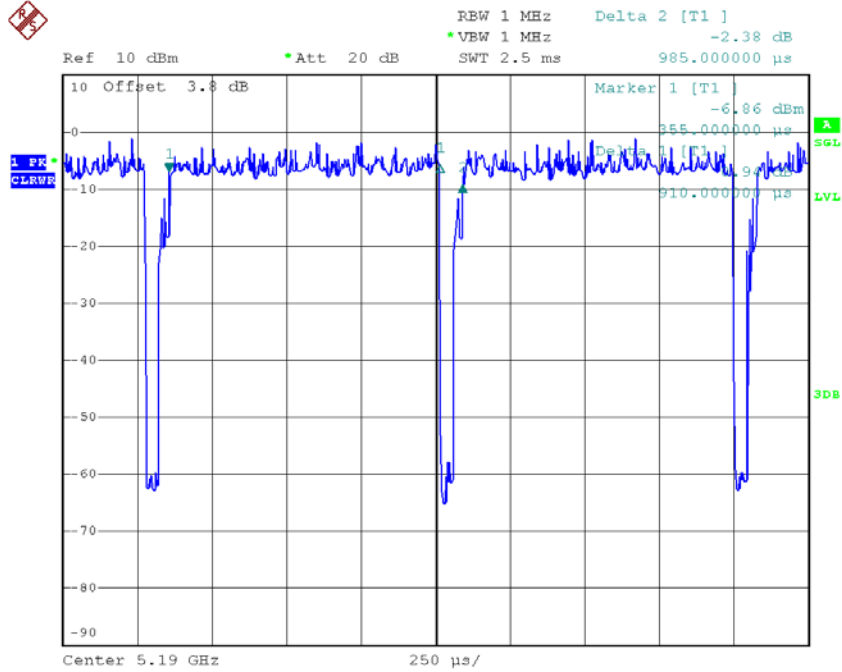

Date: 30.SEP.2018 13:45:32

Note: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle < 98 %, so, the output power and power density should be calculated as

Output Power = Measured power + Duty factor

Power Spectral Density = Measured density + Duty factor

### TX AC20 Mode\_DUTY CYCLE

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$


$T_{\text{ON}}$ : 0.980 msec

$T_{\text{Total}}$ : 1.035 msec

Duty cycle: 94.69%

$$\text{Duty Factor} = 10 \log(1/\text{Duty cycle})$$

Duty Factor = 0.24

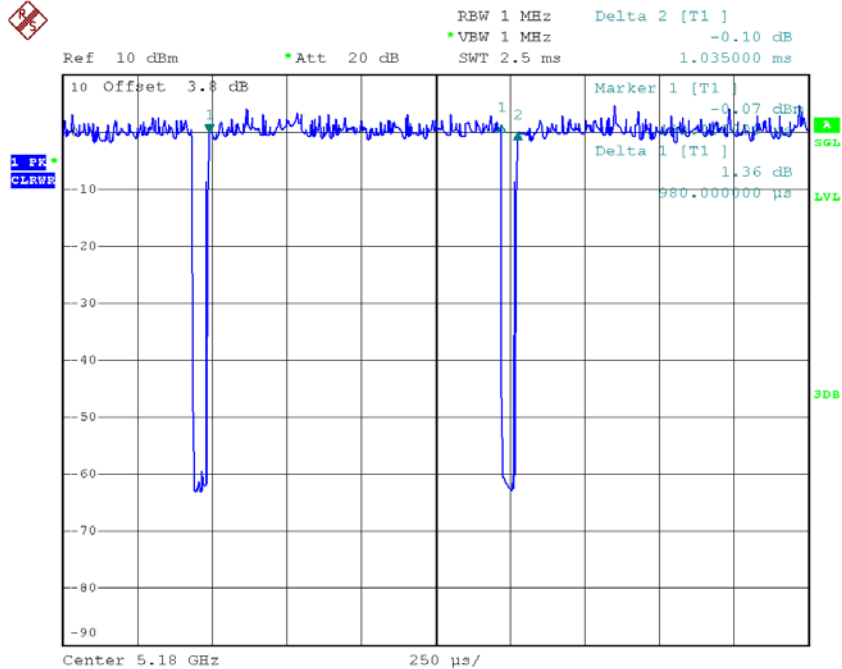

Date: 30.SEP.2018 13:44:37

Note: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle < 98 %, so, the output power and power density should be calculated as

$$\text{Output Power} = \text{Measured power} + \text{Duty factor}$$

$$\text{Power Spectral Density} = \text{Measured density} + \text{Duty factor}$$

**TX AC40 Mode\_DUTY CYCLE**

Duty cycle =  $T_{ON} / T_{Total}$


$T_{ON}$ : 0.465 msec

$T_{Total}$ : 0.545 msec

Duty cycle: 85.32%

Duty Factor =  $10 \log(1/Duty\ cycle)$

Duty Factor = 0.69

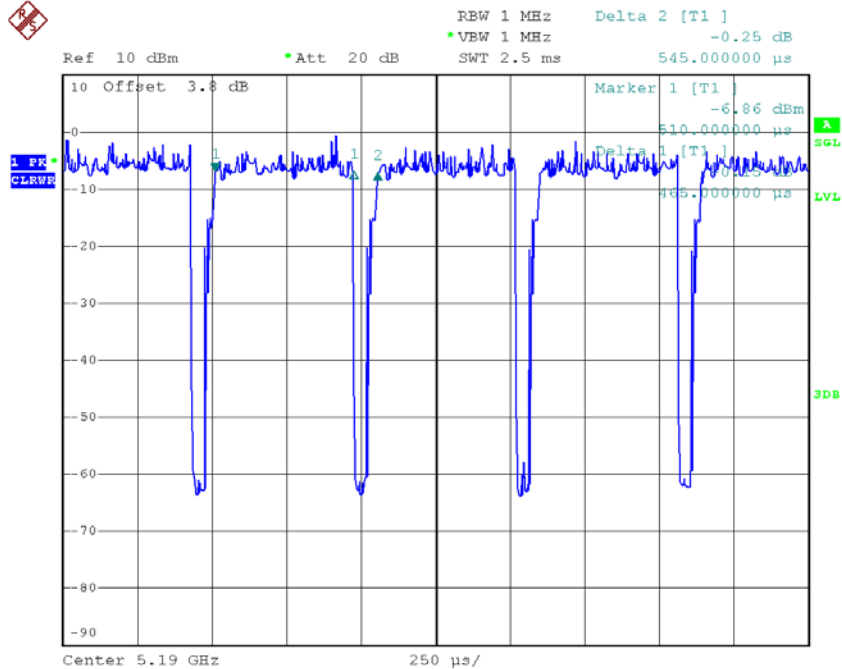

Date: 30.SEP.2018 13:46:10

Note: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle < 98 %, so, the output power and power density should be calculated as

Output Power = Measured power + Duty factor

Power Spectral Density = Measured density + Duty factor

### TX AC80 Mode\_DUTY CYCLE

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$


$T_{\text{ON}}$ : 0.225 msec

$T_{\text{Total}}$ : 0.305 msec

Duty cycle: 73.77%

$$\text{Duty Factor} = 10 \log(1/\text{Duty cycle})$$

Duty Factor = 1.32

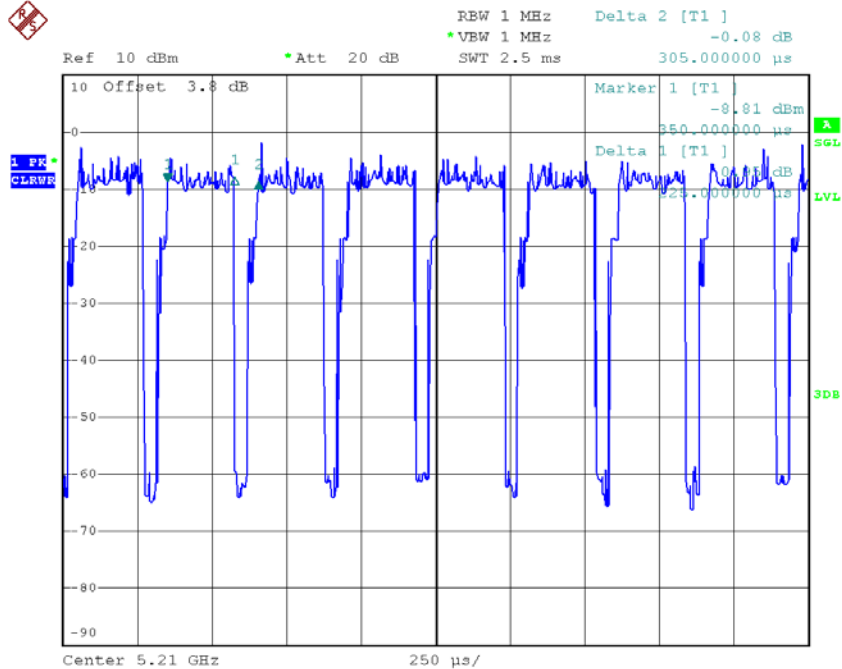

Date: 30.SEP.2018 13:46:32

Note: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle < 98 %, so, the output power and power density should be calculated as

$$\text{Output Power} = \text{Measured power} + \text{Duty factor}$$

$$\text{Power Spectral Density} = \text{Measured density} + \text{Duty factor}$$

### TX AC160 Mode\_DUTY CYCLE

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$


$T_{\text{ON}}$ : 0.155 msec

$T_{\text{Total}}$ : 0.195 msec

Duty cycle: 79.48%

$$\text{Duty Factor} = 10 \log(1/\text{Duty cycle})$$

Duty Factor = 1.00

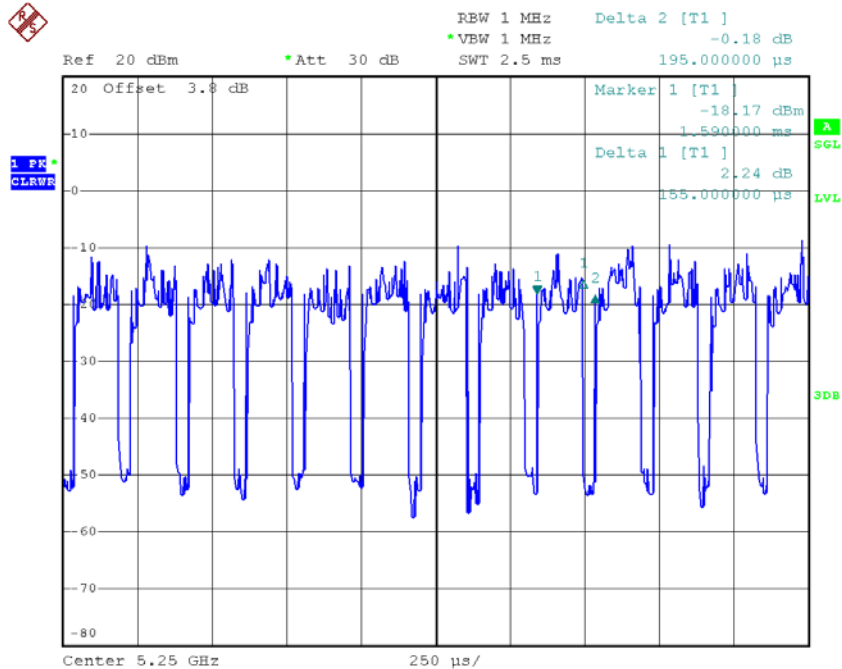

Date: 12.OCT.2018 22:01:39

Note: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle < 98 %, so, the output power and power density should be calculated as

$$\text{Output Power} = \text{Measured power} + \text{Duty factor}$$


$$\text{Power Spectral Density} = \text{Measured density} + \text{Duty factor}$$



## APPENDIX E - BANDWIDTH


**Test Mode: UNII-1/TX A Mode\_CH36/CH40/CH48**

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH36	5180	24.90	17.20
CH40	5200	24.69	17.20
CH48	5240	24.40	17.20

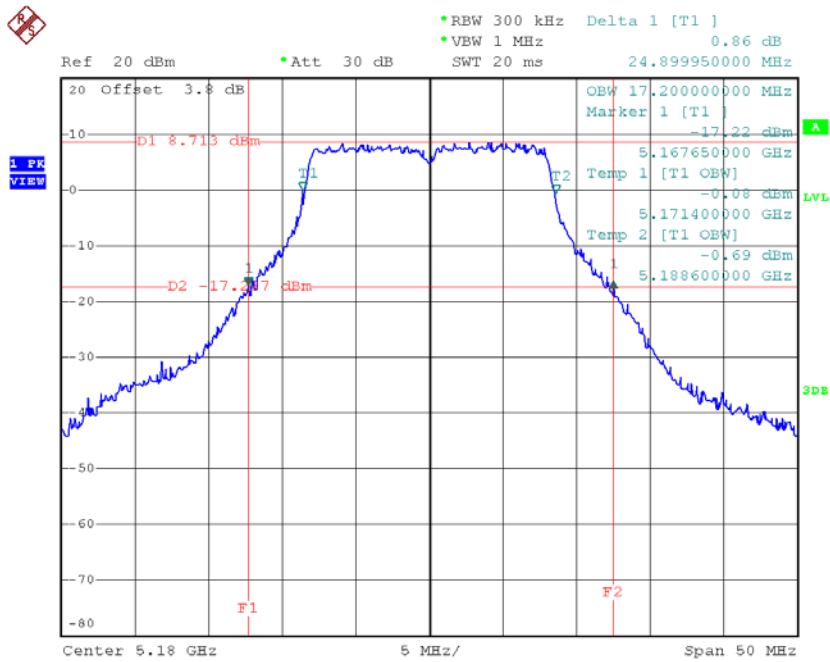**TX CH36**


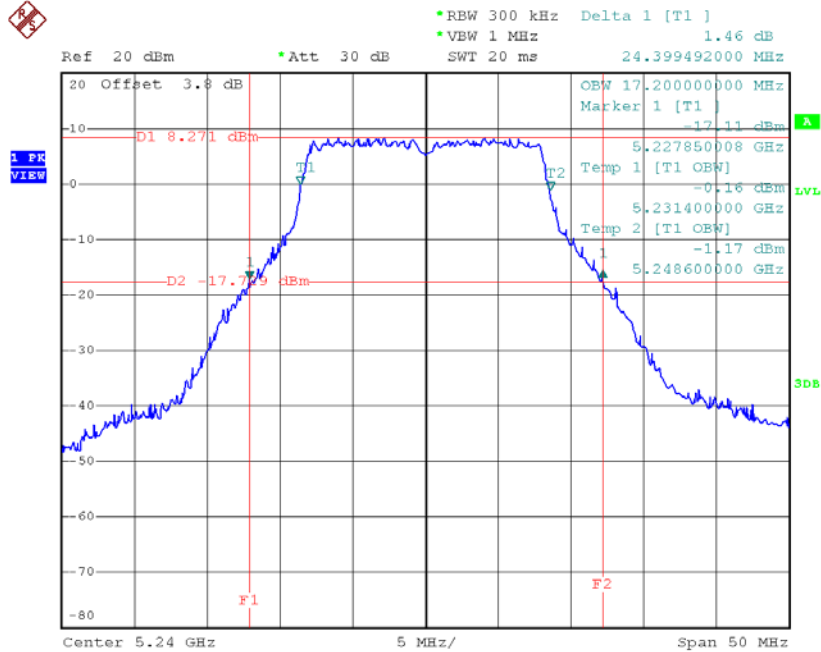
Date: 16.OCT.2018 09:19:30

**TX CH40**

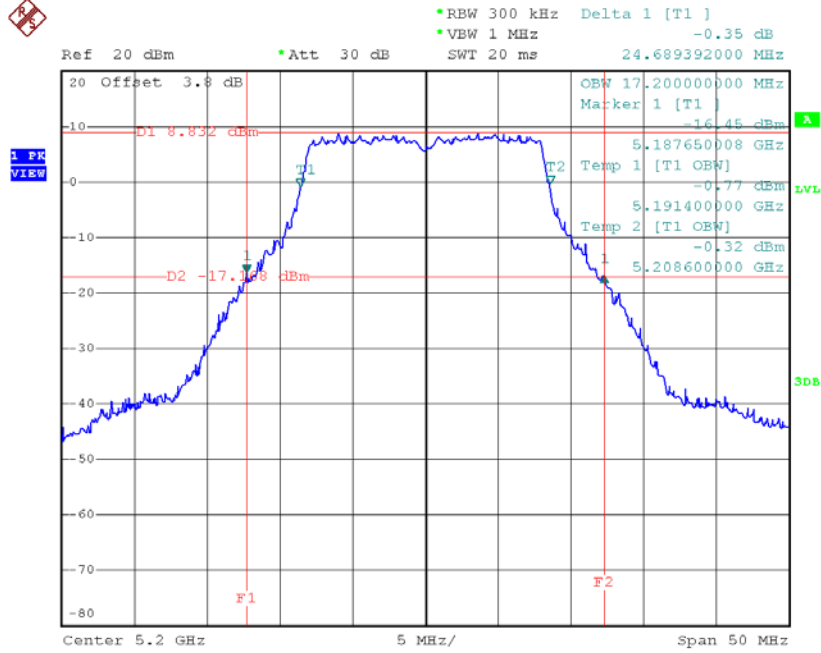

Date: 16.OCT.2018 09:20:24


**TX CH48**



Date: 16.OCT.2018 09:21:39


**Test Mode: UNII-1/TX N20 Mode\_CH36/CH40/CH48**

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH36	5180	25.30	18.20
CH40	5200	25.05	18.20
CH48	5240	24.79	18.20

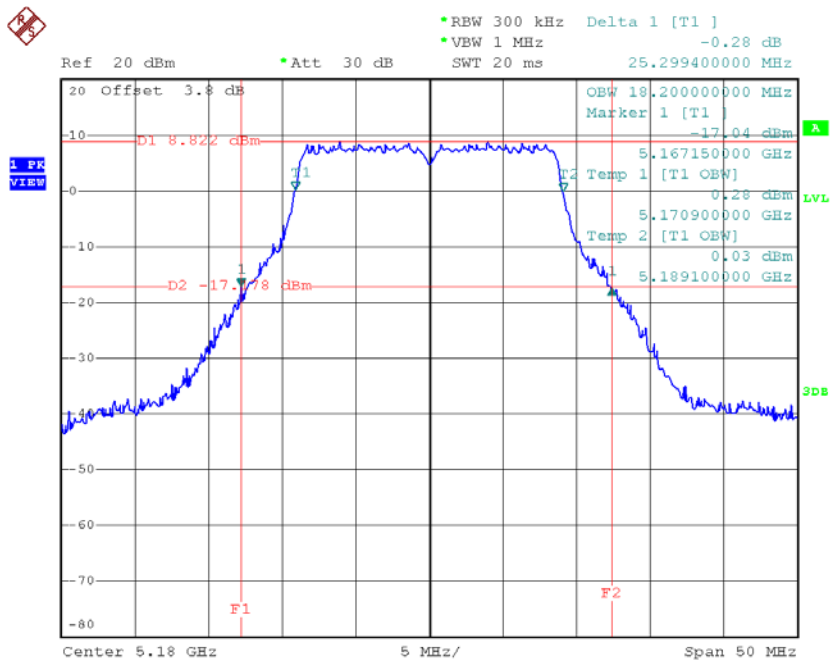**TX CH36**


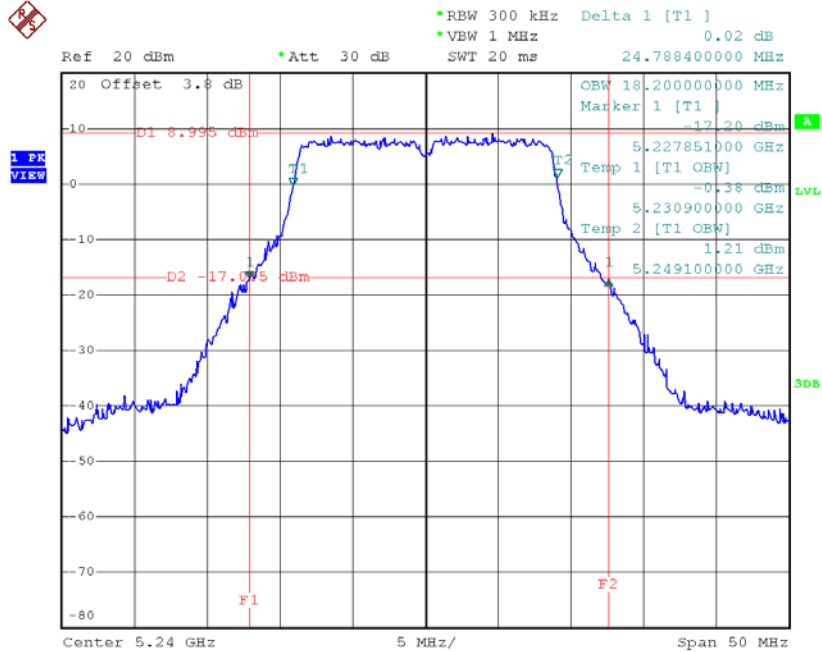
Date: 16.OCT.2018 09:47:38

**TX CH40**

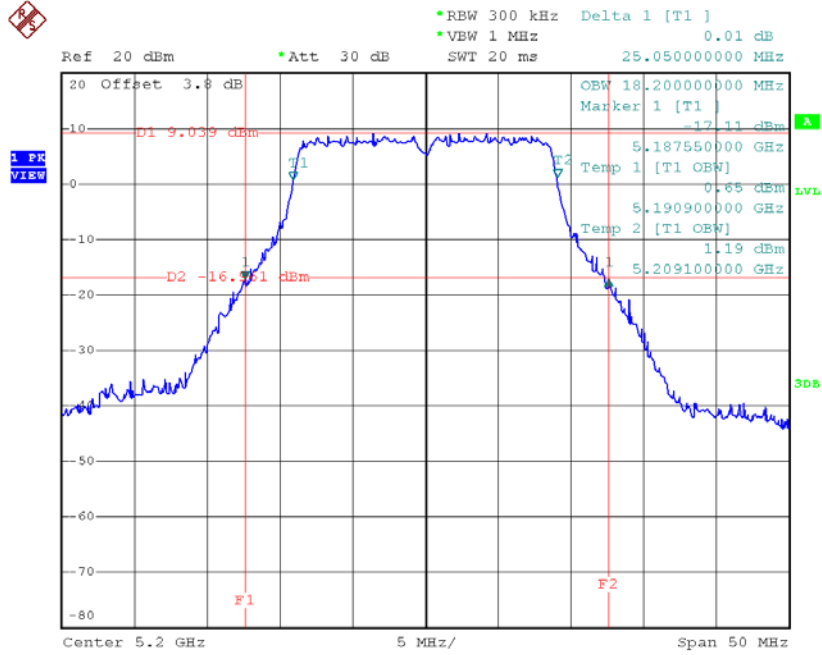

Date: 16.OCT.2018 09:48:30

**TX CH48**




Date: 16.OCT.2018 09:49:22

**Test Mode: UNII-1/TX N40 Mode\_CH38/CH46**


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH38	5190	45.50	37.20
CH46	5230	44.50	37.20

**TX CH38**

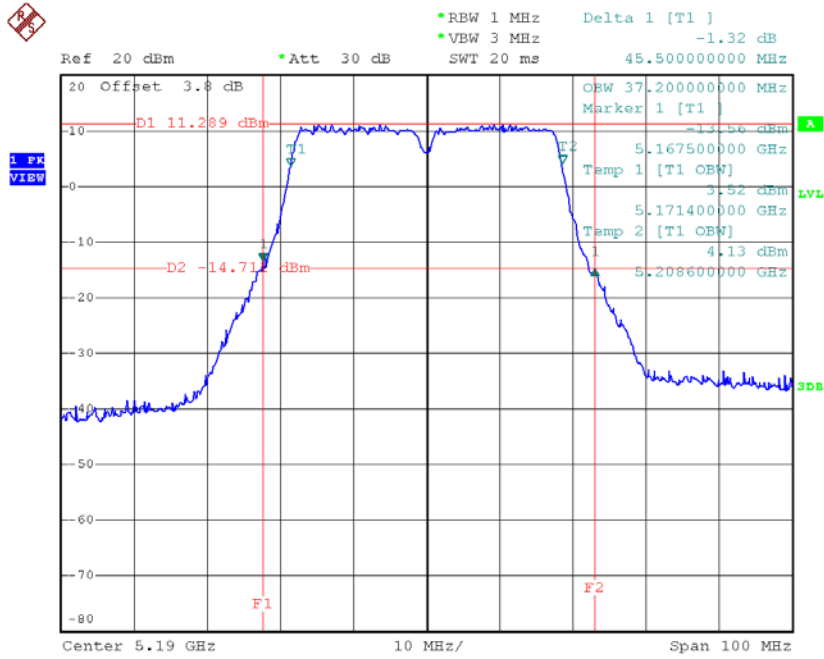

Date: 16.OCT.2018 10:19:34

**TX CH46**

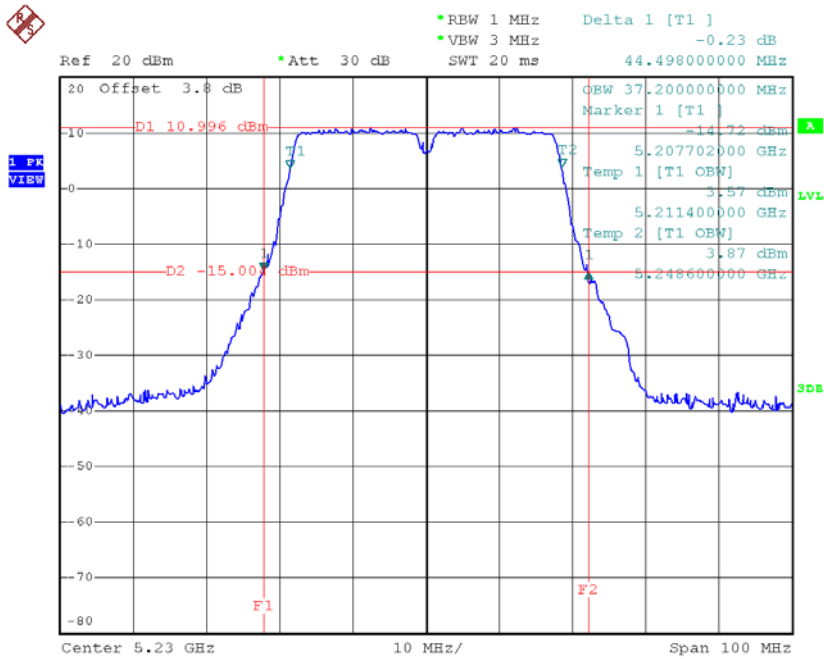


Date: 16.OCT.2018 10:20:39

**Test Mode: UNII-2A/TX A Mode\_CH52/CH60/CH64**

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH52	5260	24.95	17.30
CH60	5300	24.59	17.20
CH64	5320	24.50	17.20

Note:


The maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10log B, where B is the 26dB Bandwidth in megahertz.

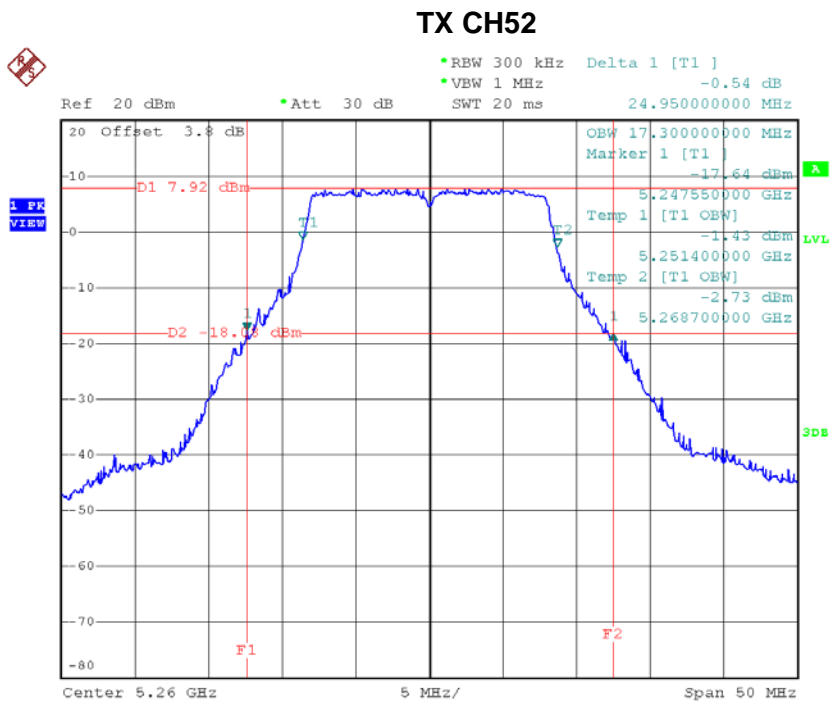

Date: 16.OCT.2018 09:22:42




**TX CH60**

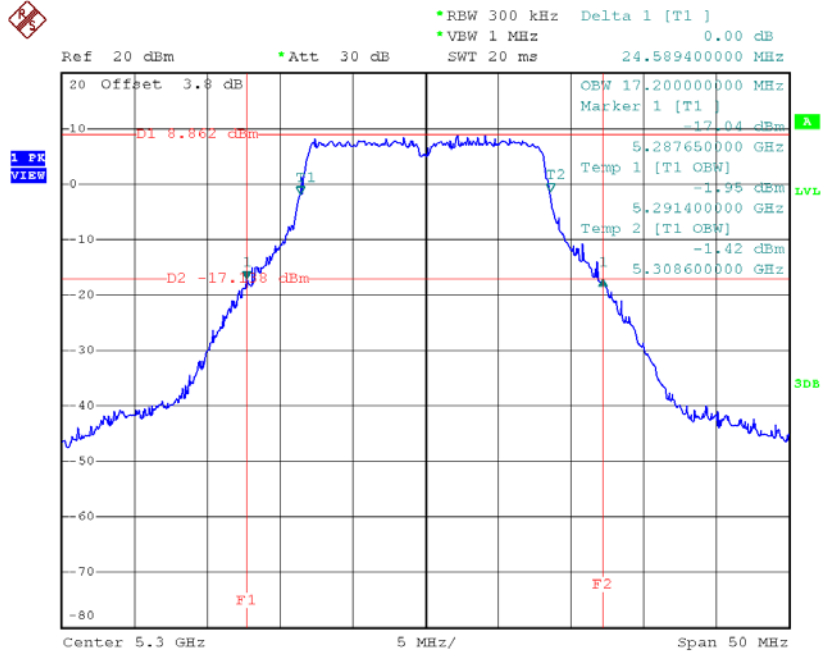

Date: 16.OCT.2018 09:25:38

**TX CH64**

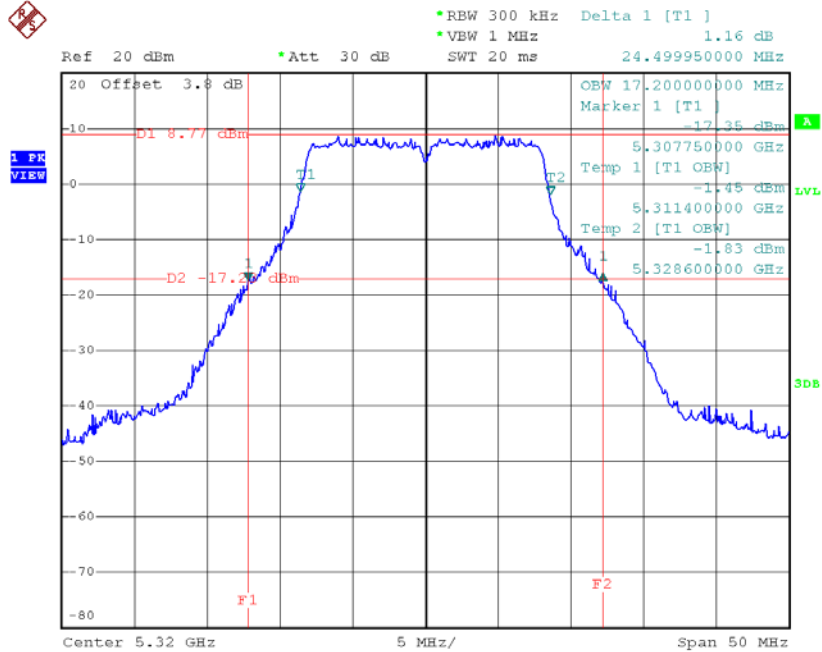


Date: 16.OCT.2018 09:27:29

**Test Mode: UNII-2A/TX N20 Mode\_CH52/CH60/CH64**

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH52	5260	24.50	18.20
CH60	5300	24.95	18.20
CH64	5320	24.59	18.20


Note:

The maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10log B, where B is the 26dB Bandwidth in megahertz.

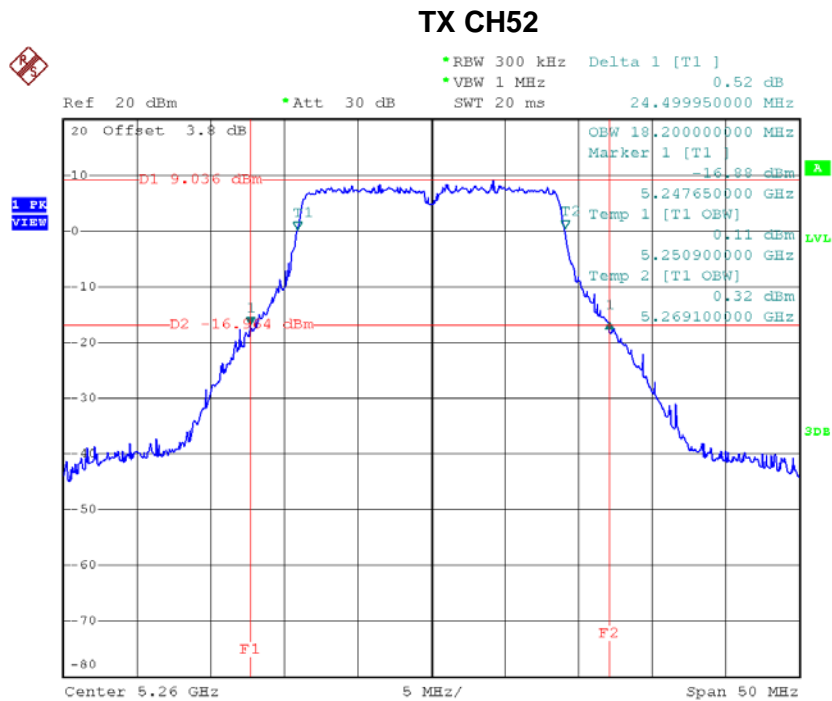


Date: 16.OCT.2018 09:50:27

**TX CH60**

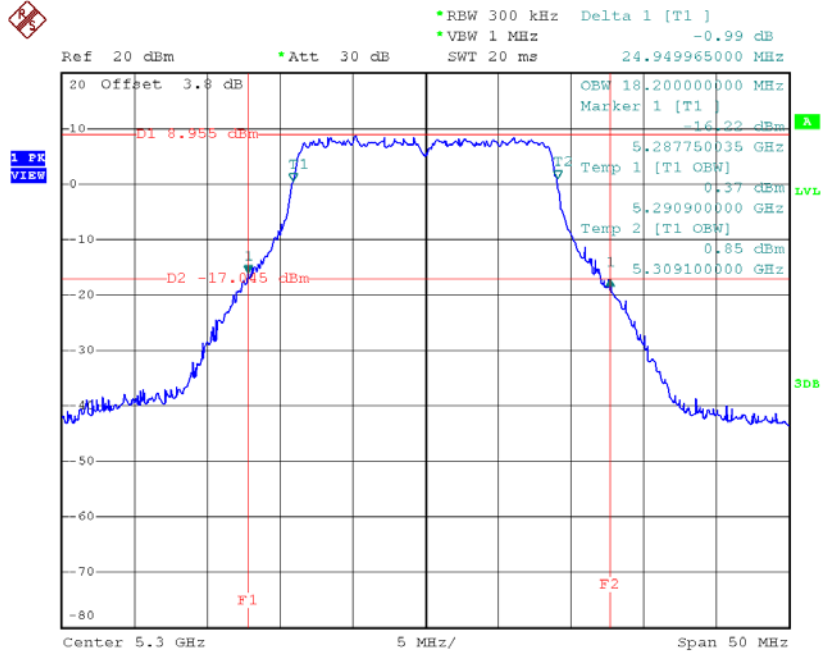

Date: 16.OCT.2018 09:52:02

**TX CH64**

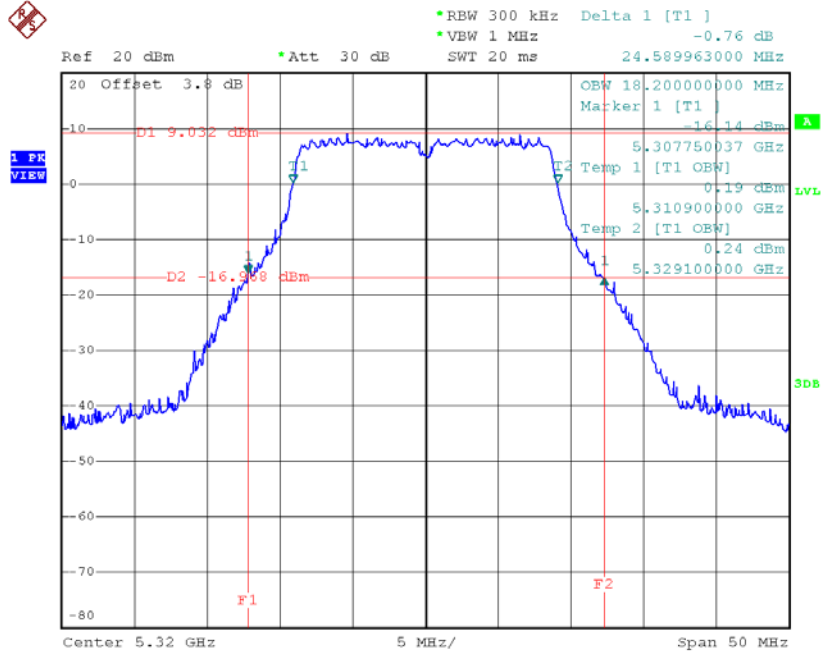

Date: 16.OCT.2018 09:53:22


**Test Mode: UNII-2A/TX N40 Mode\_CH54/CH62**

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH54	5270	44.78	37.20
CH62	5310	44.90	37.20

**Note:**


The maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10\log B$ , where B is the 26dB Bandwidth in megahertz.

**TX CH54**

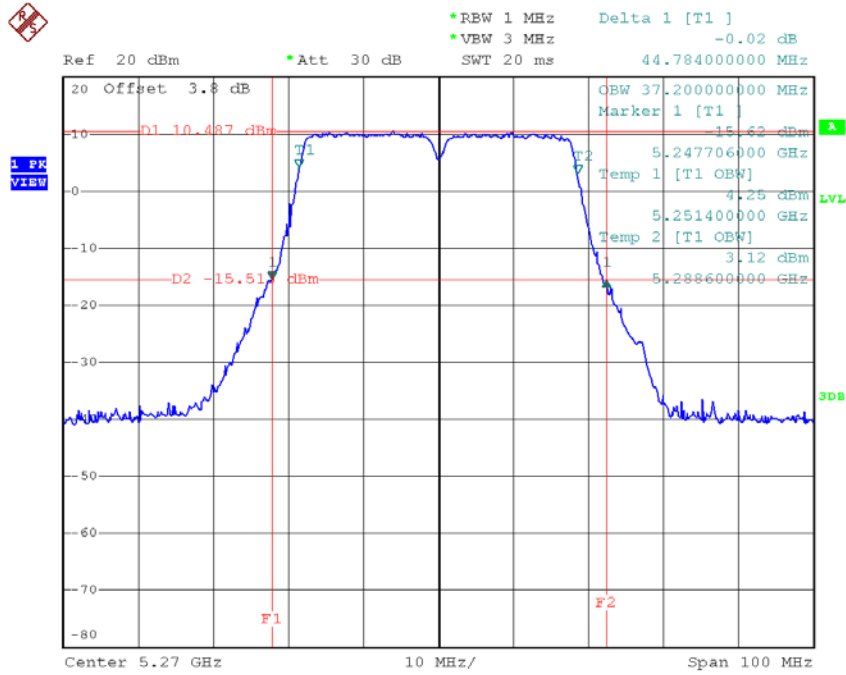

Date: 16.OCT.2018 10:21:38

**TX CH62**

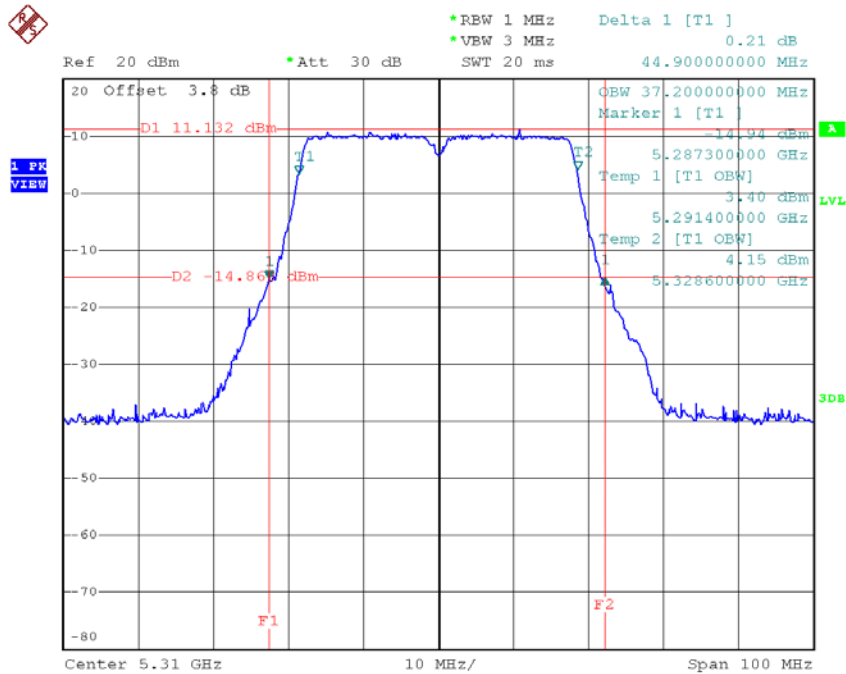

Date: 16.OCT.2018 10:22:40


**Test Mode: UNII-2C/TX A Mode\_CH100/CH116/CH140**

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH100	5500	24.55	17.20
CH116	5580	23.60	17.10
CH140	5700	24.49	17.30

Note:


The maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10log B, where B is the 26dB Bandwidth in megahertz.

### TX CH100

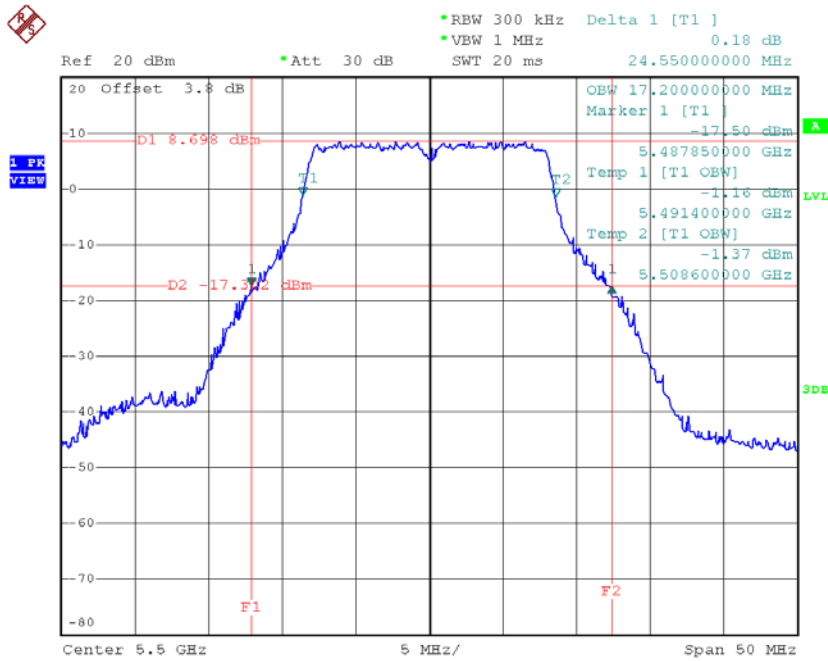


Date: 16.OCT.2018 09:36:15

**TX CH116**

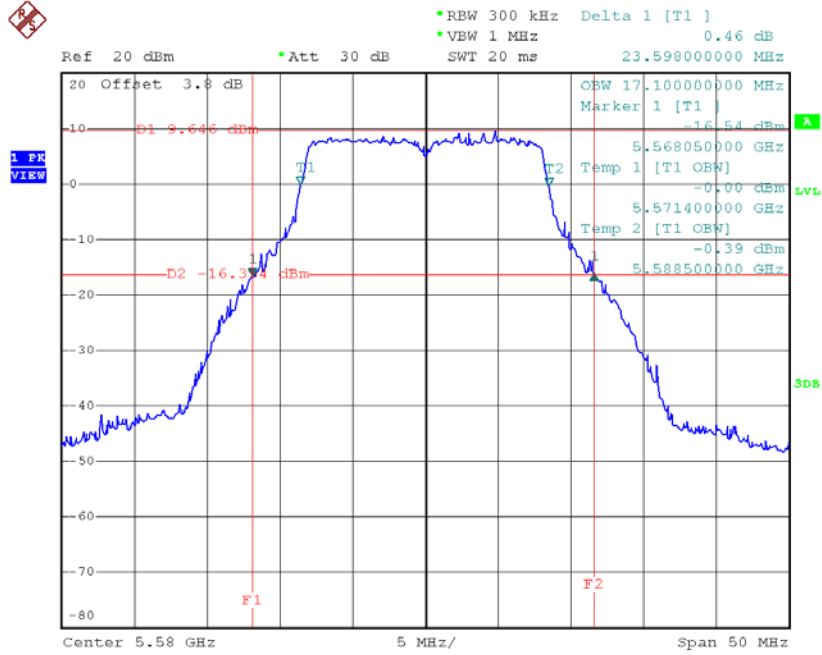

Date: 16.OCT.2018 09:38:35

**TX CH140**

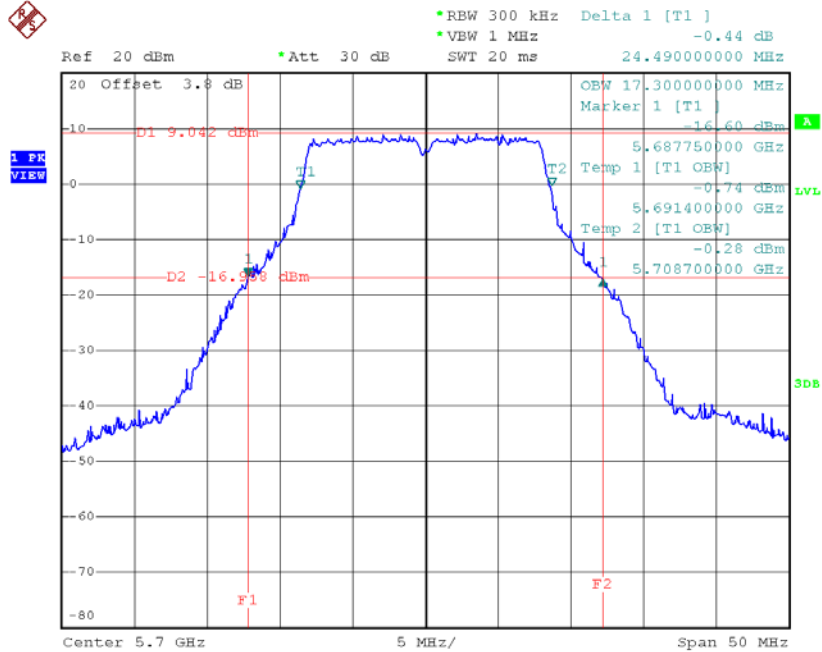


Date: 16.OCT.2018 09:40:32

**Test Mode: UNII-2C/TX N20 Mode\_CH100/CH116/CH140**

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH100	5500	24.80	18.20
CH116	5580	24.19	18.20
CH140	5700	24.75	18.20

**Note:**


The maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10log B, where B is the 26dB Bandwidth in megahertz.

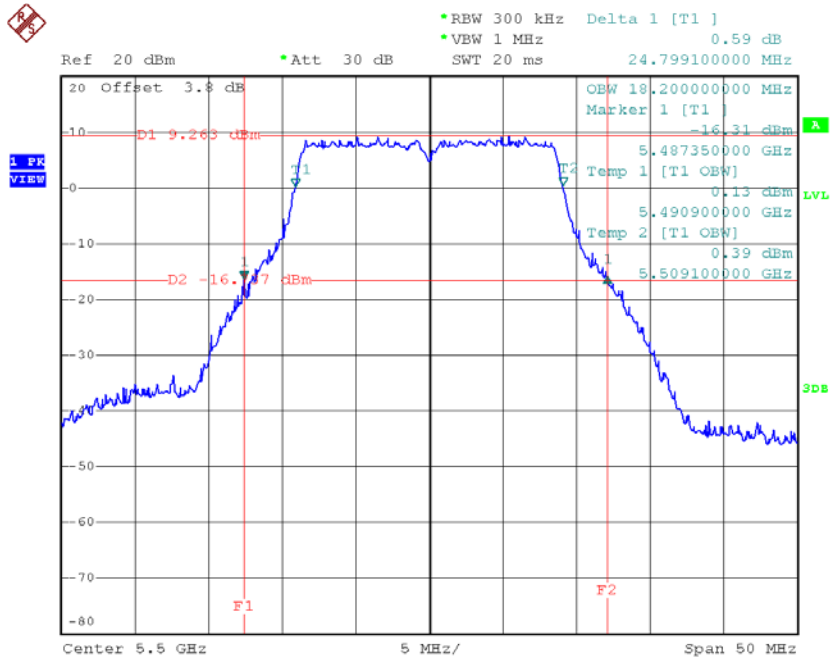**TX CH100**


Date: 16.OCT.2018 09:54:32




**TX CH116**

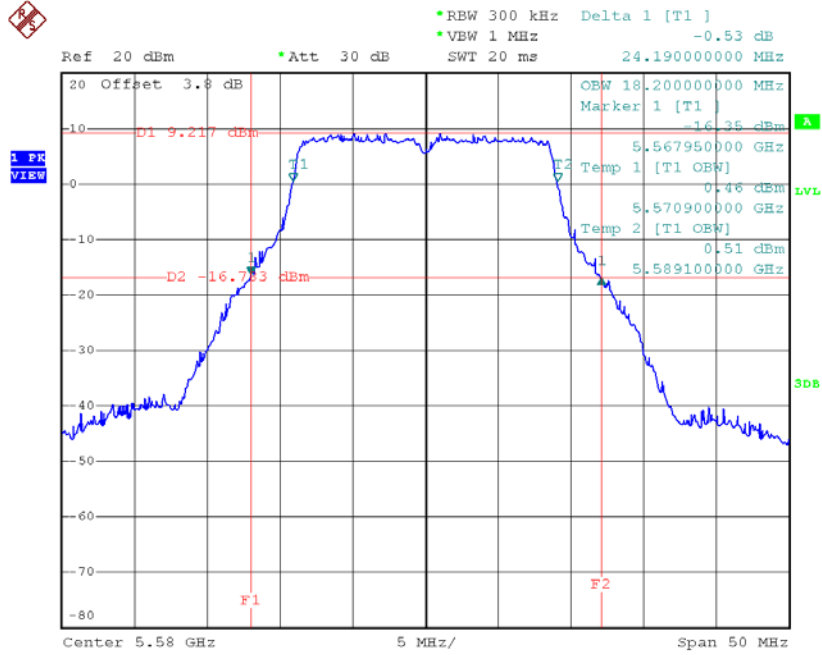

Date: 16.OCT.2018 09:55:35

**TX CH140**

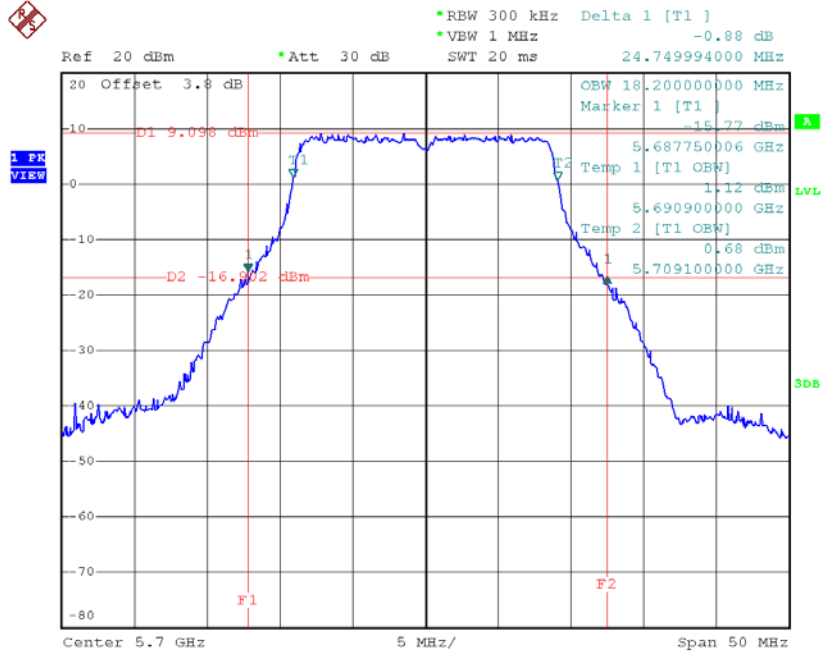


Date: 16.OCT.2018 09:56:47

**Test Mode: UNII-2C/TX N40 Mode\_CH102/CH110/CH134**

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH102	5510	45.19	37.20
CH110	5550	44.01	37.20
CH134	5670	45.70	37.20


Note:

The maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10log B, where B is the 26dB Bandwidth in megahertz.

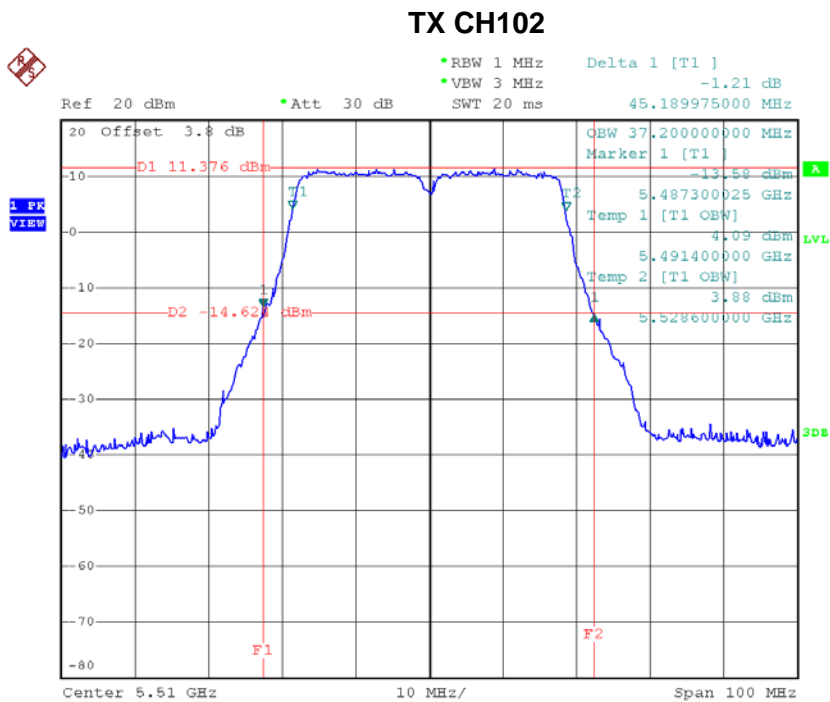


Date: 16.OCT.2018 10:23:50

**TX CH110**

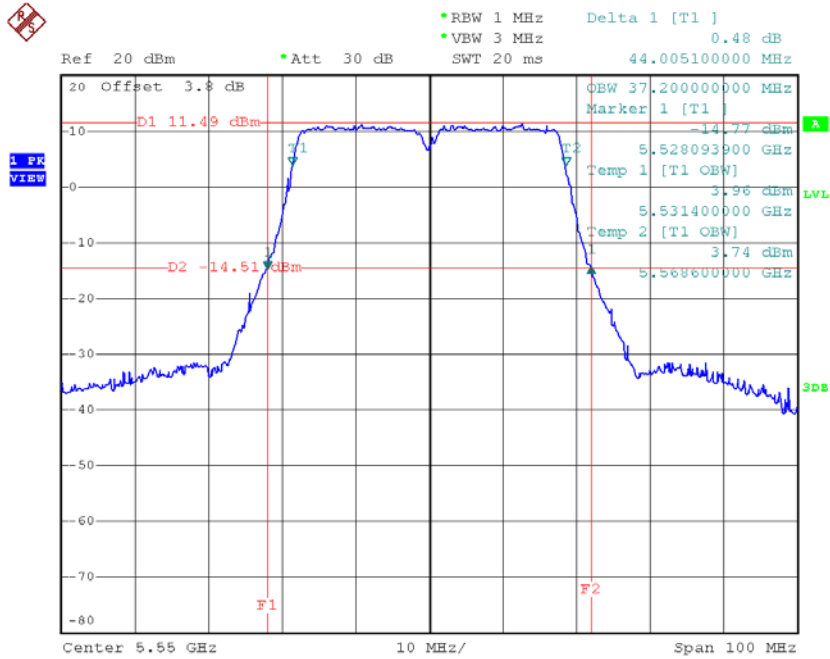

Date: 16.OCT.2018 10:24:49

**TX CH134**

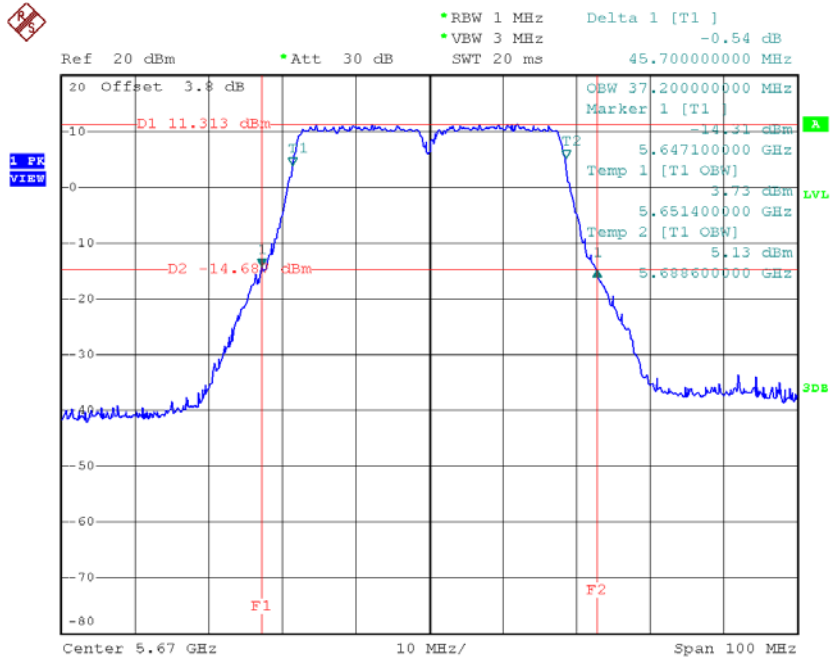


Date: 16.OCT.2018 10:25:47

**Test Mode: UNII-3/ TX A Mode\_CH149/CH157/CH165**


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH149	5745	16.45	16.60	>=500
CH157	5785	16.45	16.60	>=500
CH165	5825	16.45	16.60	>=500

**TX CH 149**

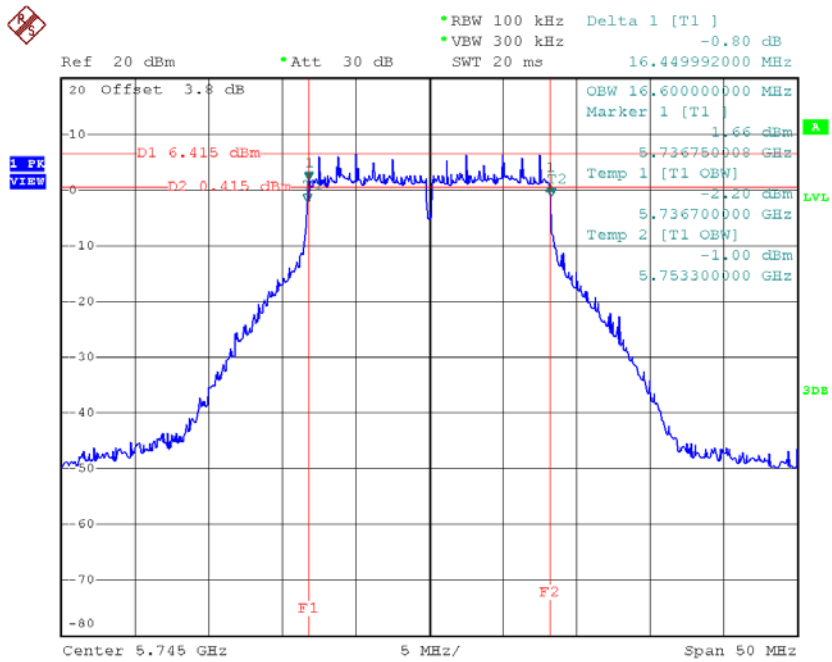


Date: 16.OCT.2018 09:41:47

TX CH 157

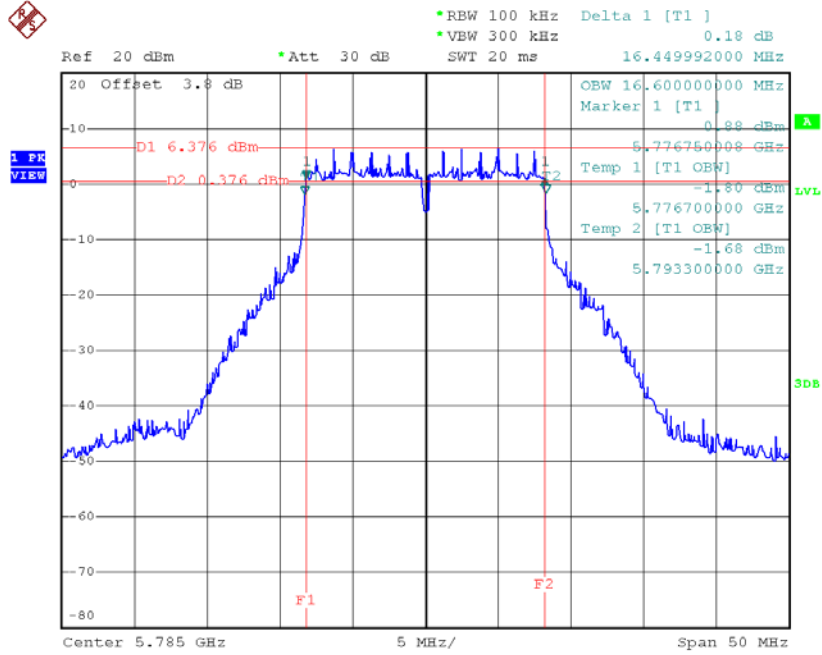

Date: 16.OCT.2018 09:43:05


TX CH 165

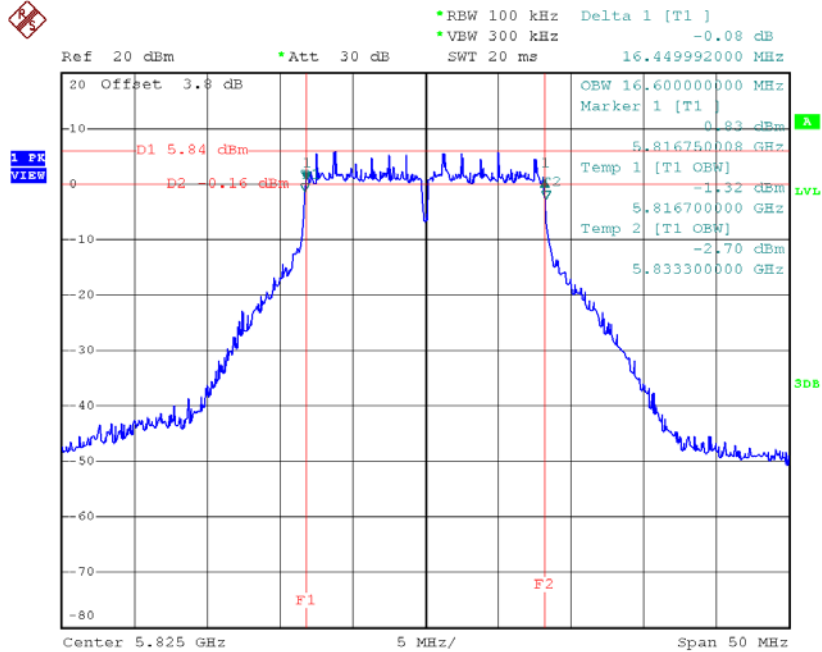

Date: 16.OCT.2018 09:44:46


**Test Mode: UNII-3/ TX N20 Mode\_CH149/CH157/CH165**

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH149	5745	17.65	17.80	>=500
CH157	5785	17.65	17.80	>=500
CH165	5825	17.65	17.80	>=500

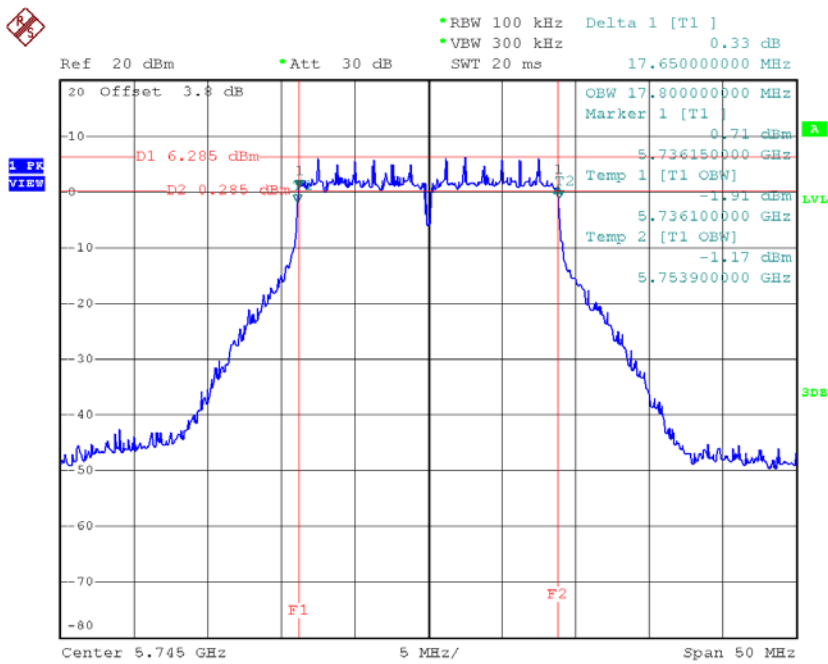**TX CH 149**


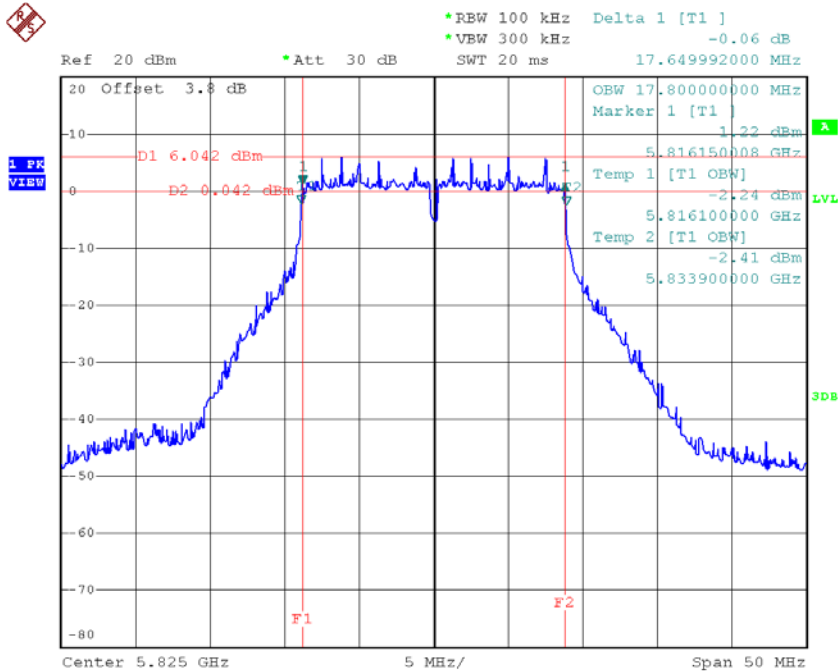
Date: 16.OCT.2018 09:58:03

**TX CH 157**

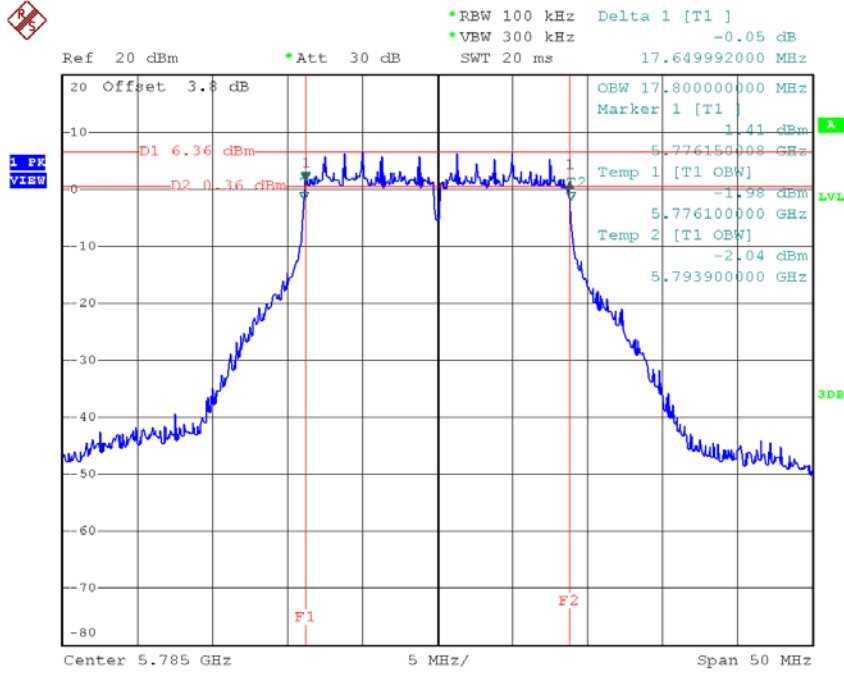

Date: 16.OCT.2018 09:59:24

**TX CH 165**




Date: 16.OCT.2018 10:00:42

**Test Mode: UNII-3/ TX N40 Mode\_CH151/CH159**

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH151	5755	36.50	36.40	>=500
CH159	5795	36.50	36.40	>=500




**TX CH 151**

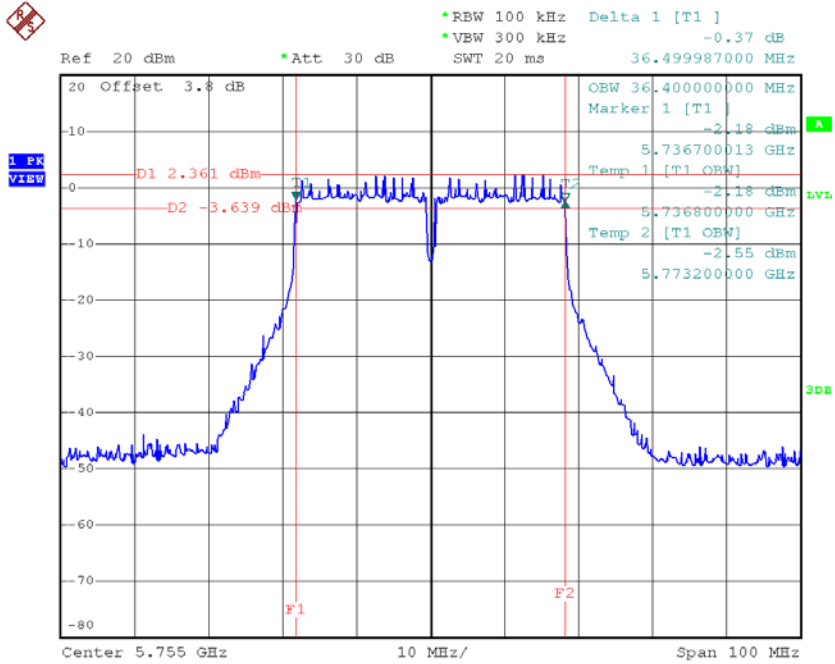

Date: 16.OCT.2018 10:26:59

**TX CH 159**

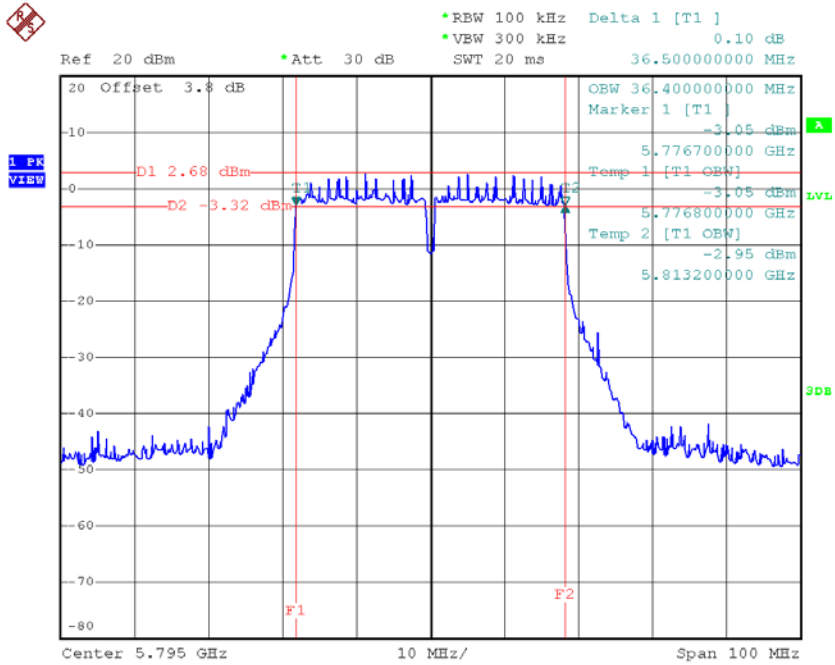


Date: 16.OCT.2018 10:27:59

**Test Mode: UNII-1/TX AC20 Mode\_CH36/CH40/CH48**


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH36	5180	24.69	18.20
CH40	5200	24.75	18.30
CH48	5240	25.29	18.20

**TX CH36**

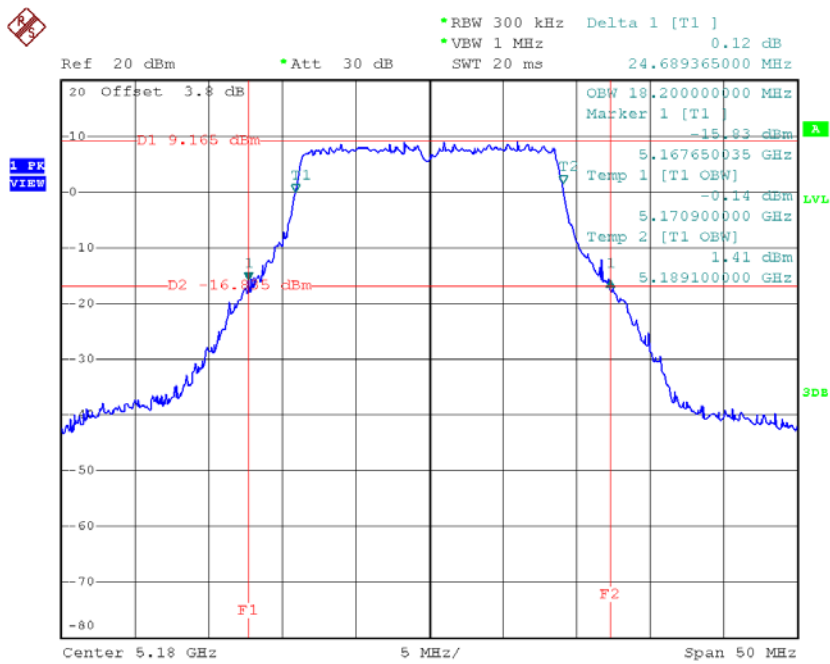


Date: 16.OCT.2018 10:03:04

**TX CH40**

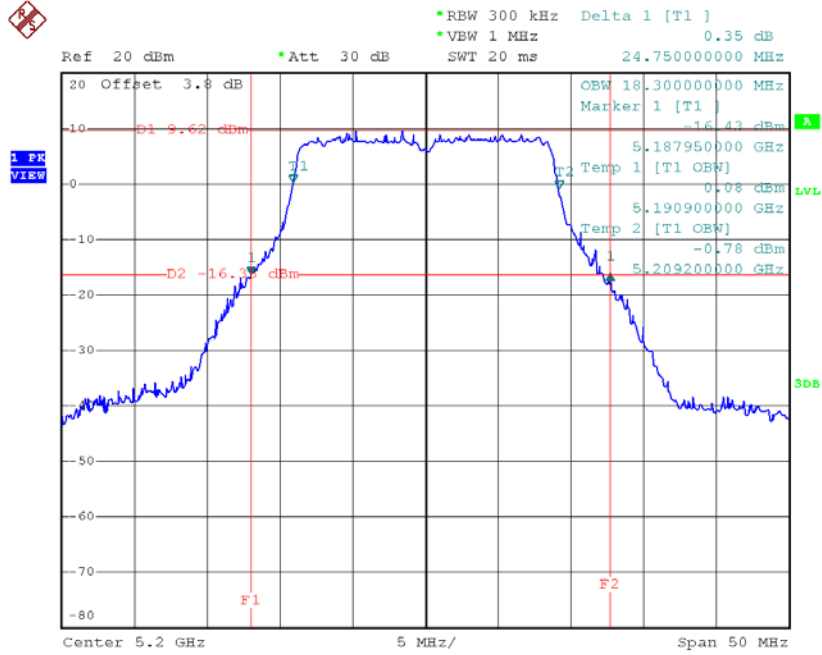

Date: 16.OCT.2018 10:04:03

**TX CH48**

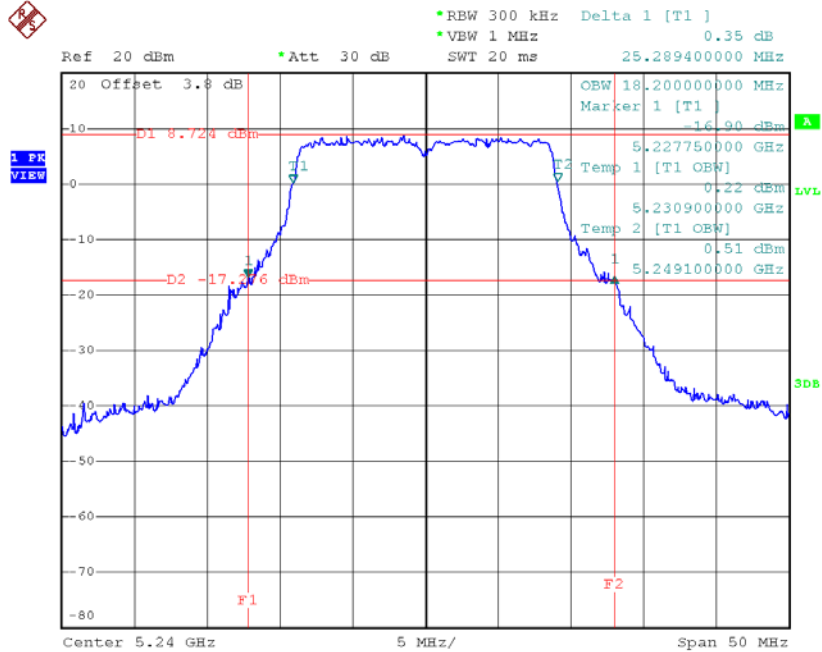


Date: 16.OCT.2018 10:05:01

**Test Mode: UNII-1/TX AC40 Mode\_CH38/CH46**


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH38	5190	45.42	37.20
CH46	5230	44.50	37.20

**TX CH38**

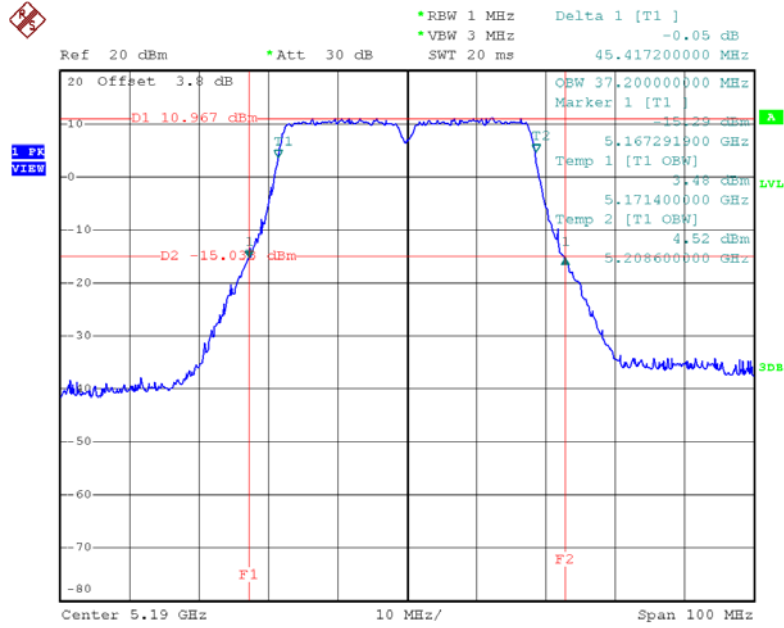

Date: 16.OCT.2018 10:29:12

**TX CH46**

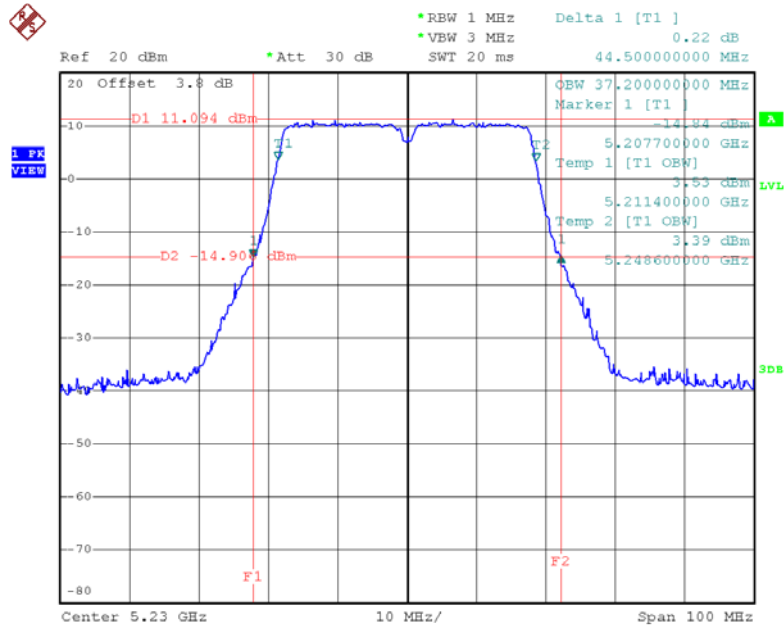


Date: 16.OCT.2018 10:30:08

**Test Mode: UNII-1/TX AC80 Mode\_CH42**

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH42	5210	84.60	75.20

**TX CH42**

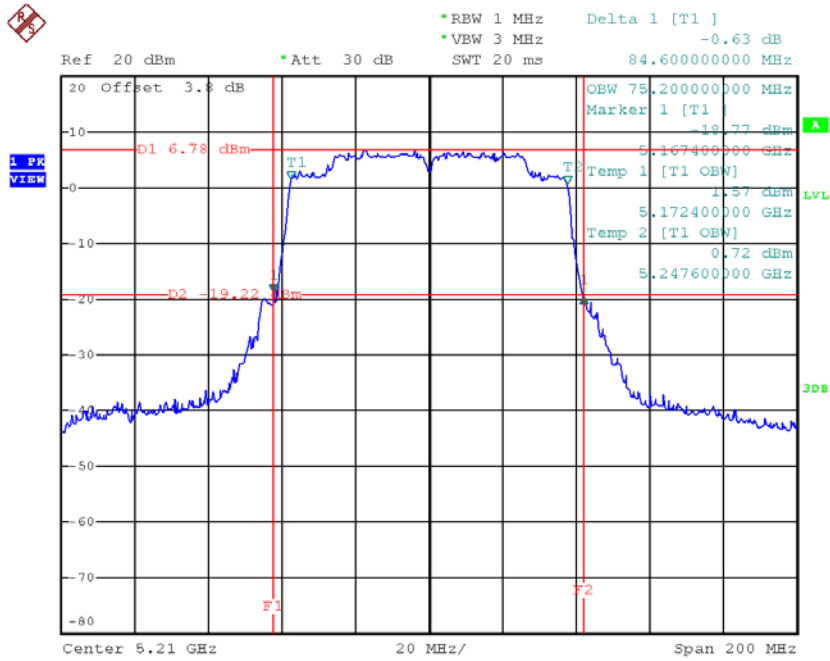


Date: 16.OCT.2018 22:24:10

**Test Mode: UNII-1/TX AC160 Mode\_CH50**

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH50	5250	164.48	153.60

**TX CH50**

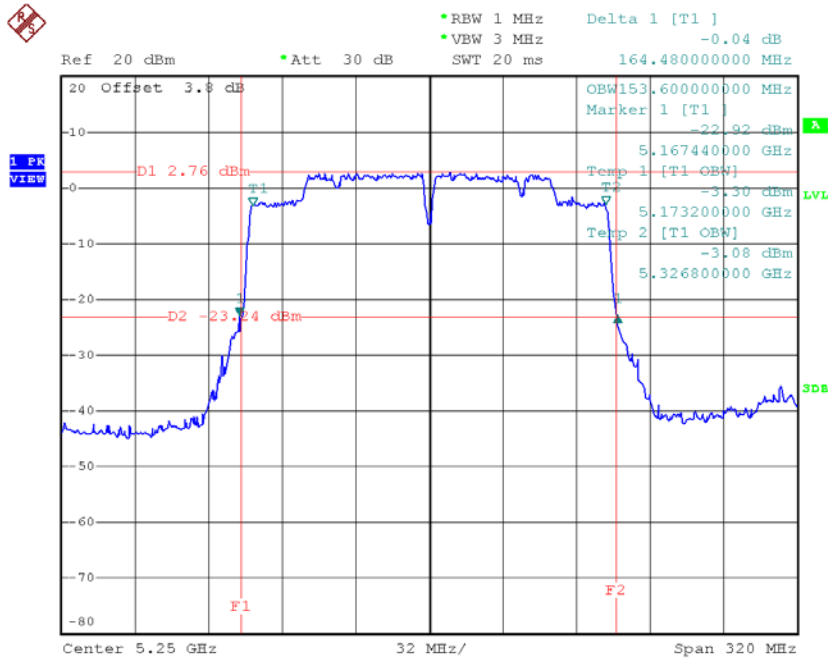


Date: 12.OCT.2018 21:56:59

**Test Mode: UNII-2A/TX AC20 Mode\_CH52/CH60/CH64**

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH52	5260	25.29	18.20
CH60	5300	24.45	18.20
CH64	5320	25.19	18.20

Note:


The maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10log B, where B is the 26dB Bandwidth in megahertz.

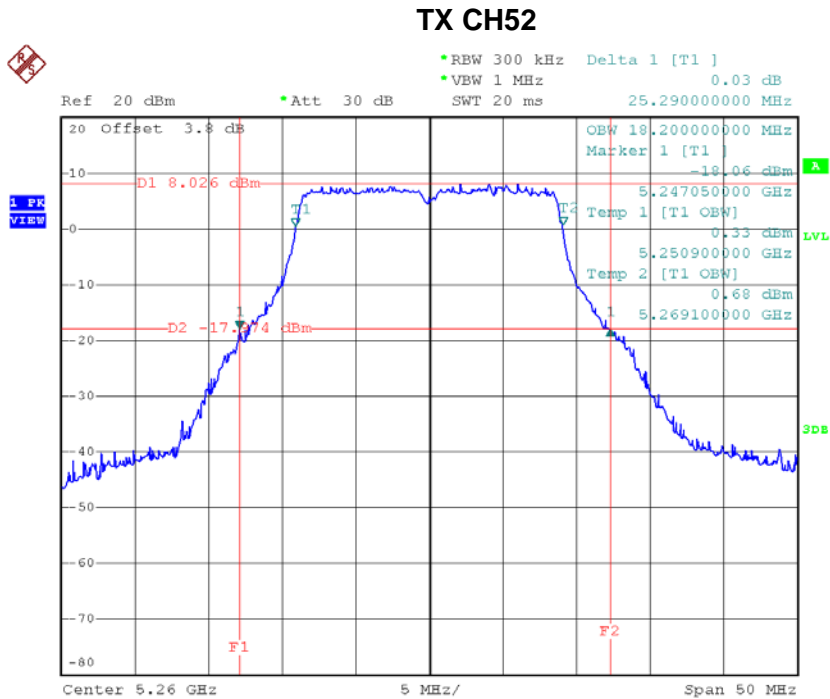

Date: 16.OCT.2018 10:06:02




**TX CH60**

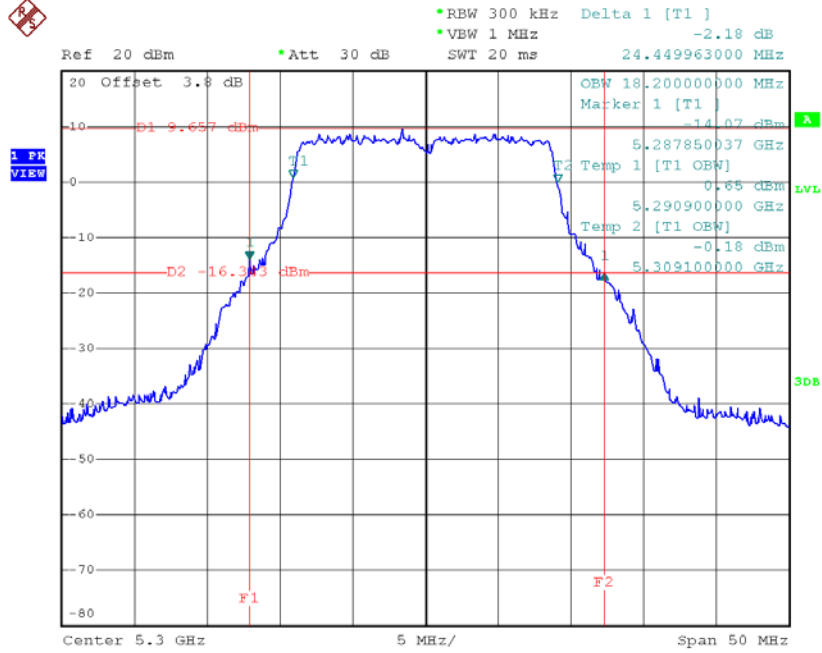

Date: 16.OCT.2018 10:07:08

**TX CH64**

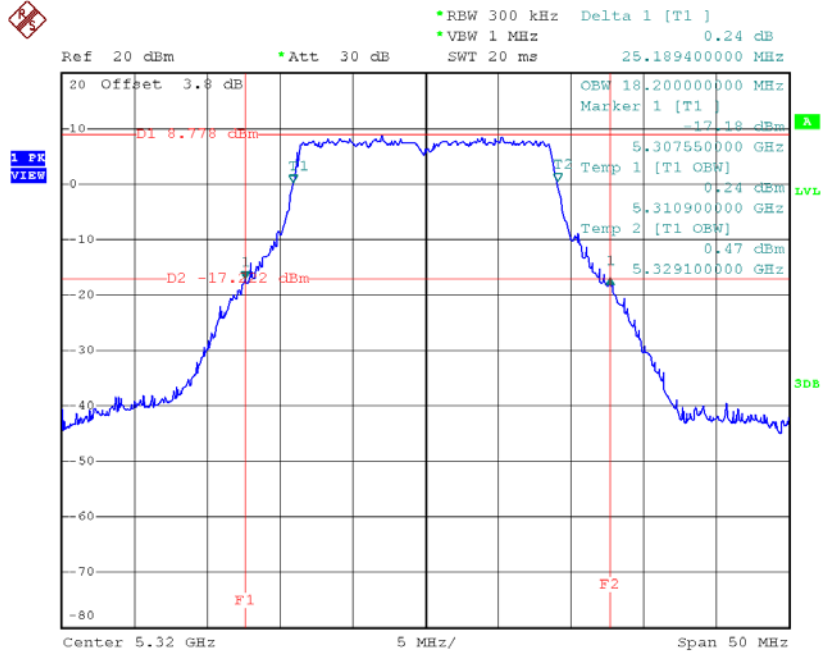

Date: 16.OCT.2018 10:08:07


**Test Mode: UNII-2A/TX AC40 Mode\_CH54/CH62**

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH54	5270	44.70	37.20
CH62	5310	44.99	37.20

**Note:**


The maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10\log B$ , where B is the 26dB Bandwidth in megahertz.

**TX CH54**

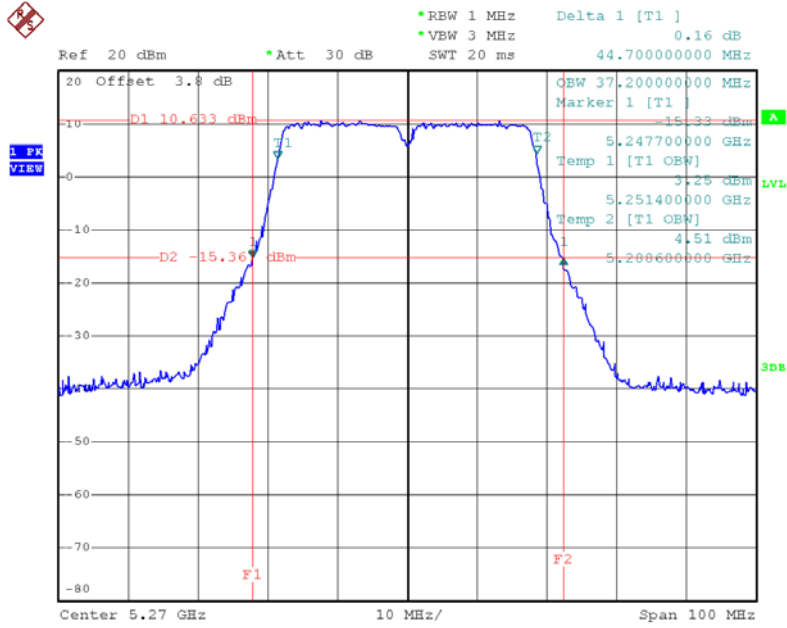

Date: 16.OCT.2018 10:31:06

**TX CH62**

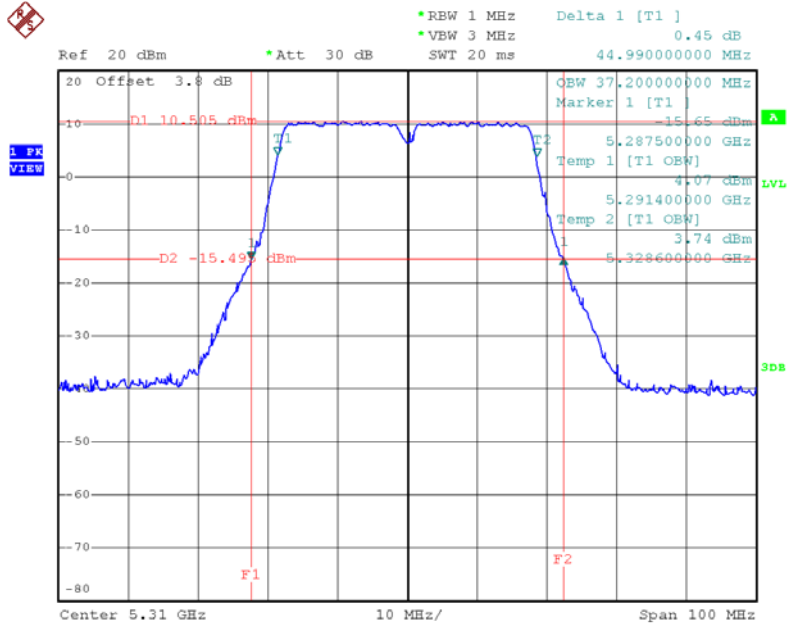


Date: 16.OCT.2018 10:32:02

**Test Mode: UNII-2A/TX AC80 Mode\_CH58**

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH58	5290	88.40	75.20

**Note:**

The maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10log B, where B is the 26dB Bandwidth in megahertz.

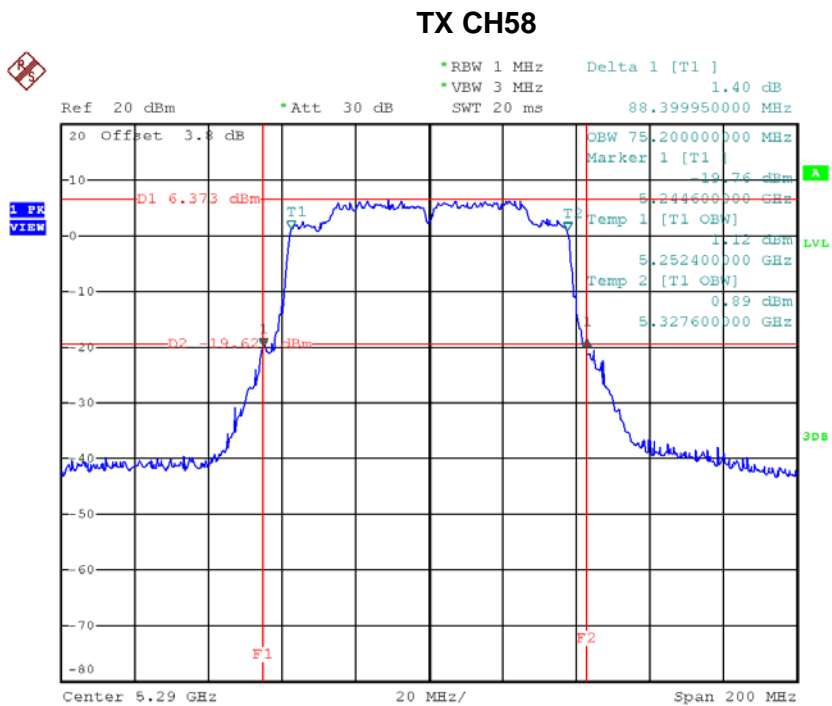


Date: 16.OCT.2018 22:26:20

**Test Mode: UNII-2C/TX AC20 Mode\_CH100/CH116/CH140**

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH100	5500	24.10	18.20
CH116	5580	24.60	18.20
CH140	5700	24.40	18.20


Note:

The maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10log B, where B is the 26dB Bandwidth in megahertz.

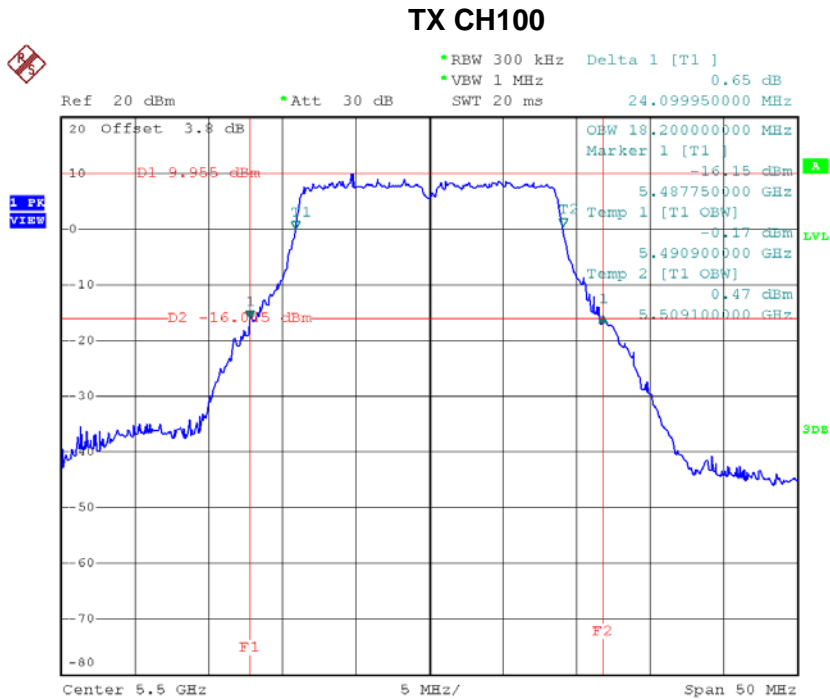


Date: 16.OCT.2018 10:11:25

**TX CH116**

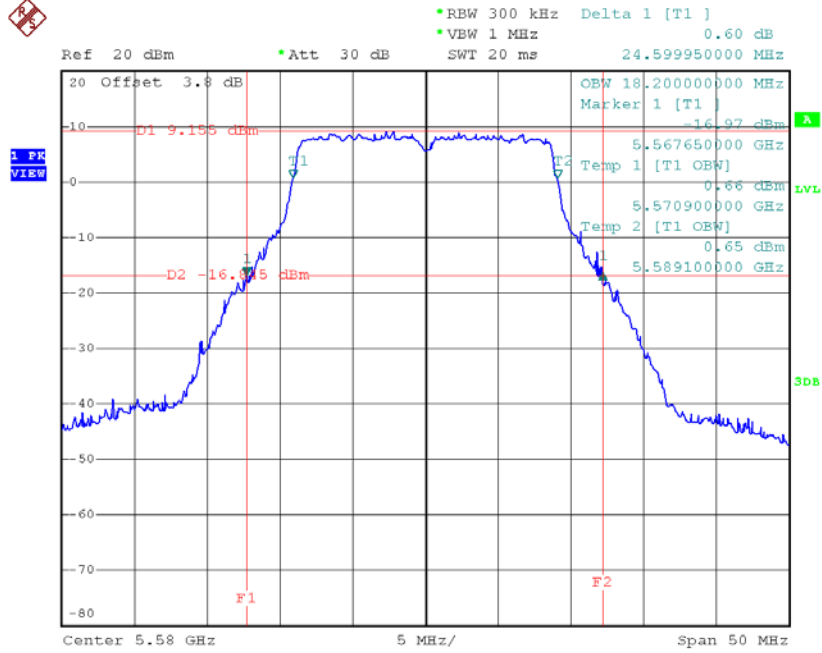

Date: 16.OCT.2018 10:12:36

**TX CH140**

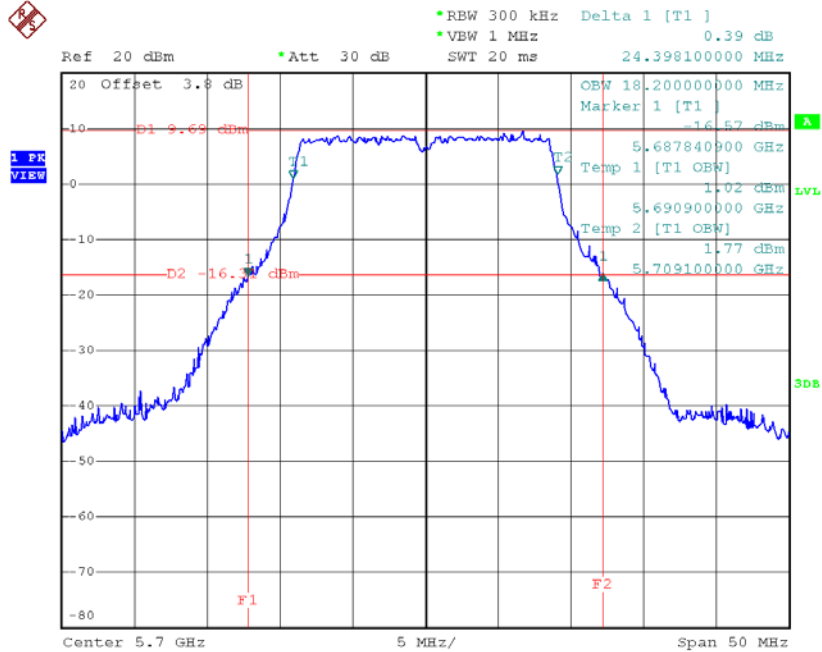


Date: 16.OCT.2018 10:13:38

**Test Mode: UNII-2C/TX AC40 Mode\_CH102/CH110/CH134**

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH102	5510	45.20	37.00
CH110	5550	44.19	37.20
CH134	5670	45.20	37.20


Note:

The maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10log B, where B is the 26dB Bandwidth in megahertz.

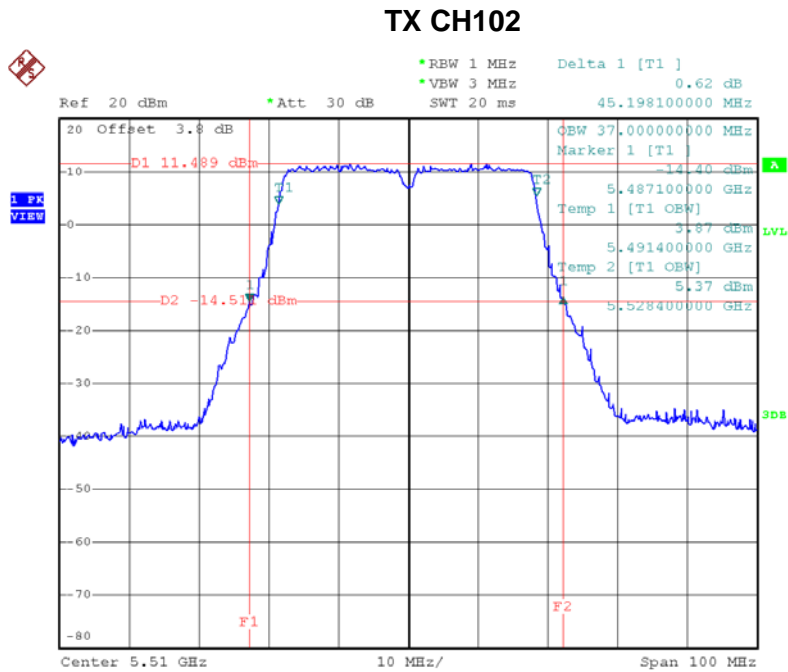


Date: 16.OCT.2018 10:33:01

**TX CH110**

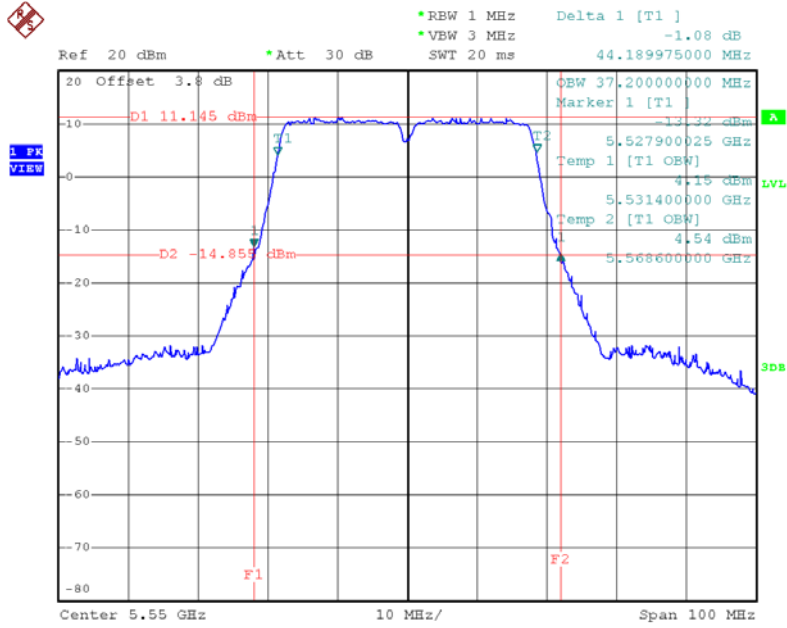

Date: 16.OCT.2018 10:33:59

**TX CH134**

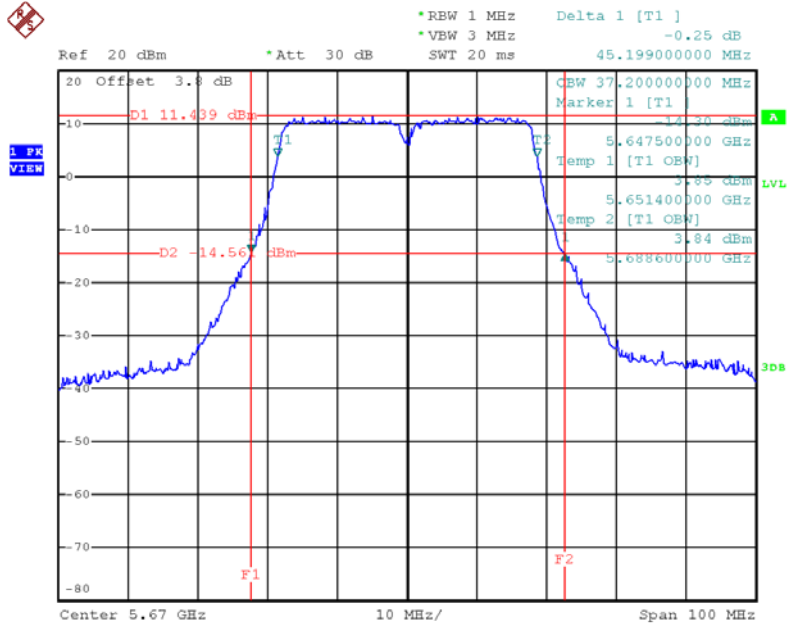

Date: 16.OCT.2018 22:18:07




**Test Mode: UNII-2C/TX AC80 Mode\_CH106/CH122**

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH106	5530	86.60	75.20
CH122	5610	84.80	75.20

Note:


The maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10log B, where B is the 26dB Bandwidth in megahertz.

**TX CH106**

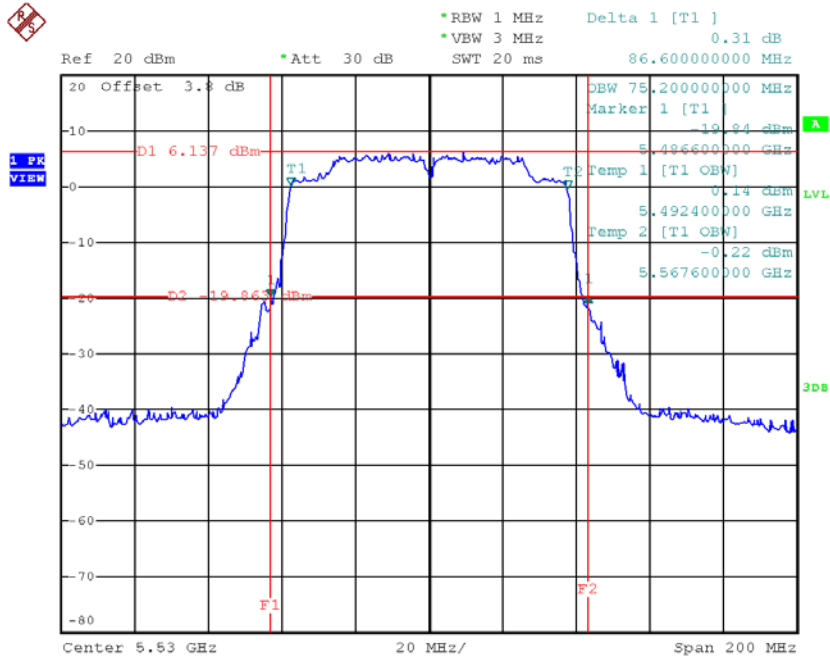

Date: 16.OCT.2018 22:27:50

**TX CH122**

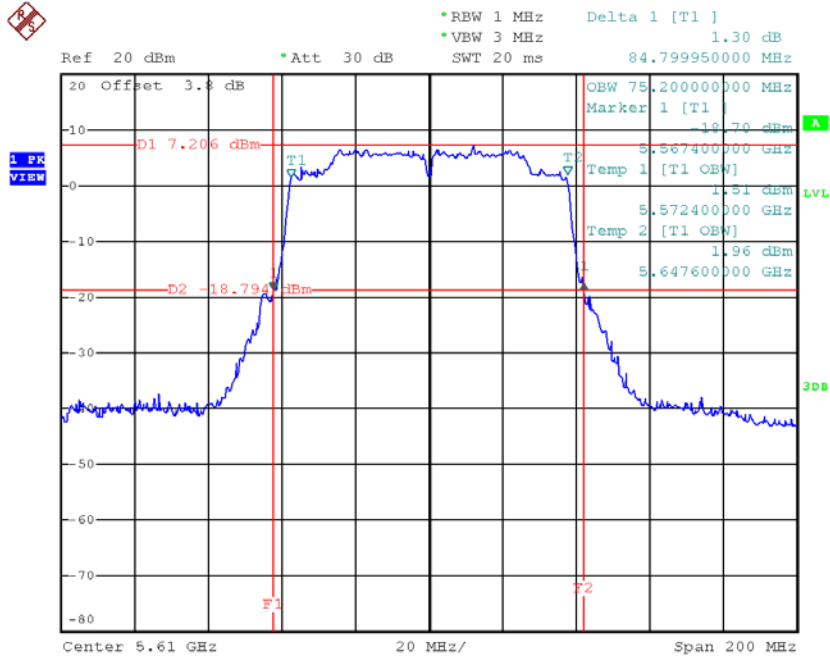

Date: 16.OCT.2018 22:29:52


**Test Mode: UNII-2C/TX AC160 Mode\_CH114**

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH114	5570	163.84	153.60

Note:

The maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10log B, where B is the 26dB Bandwidth in megahertz.

### TX CH114

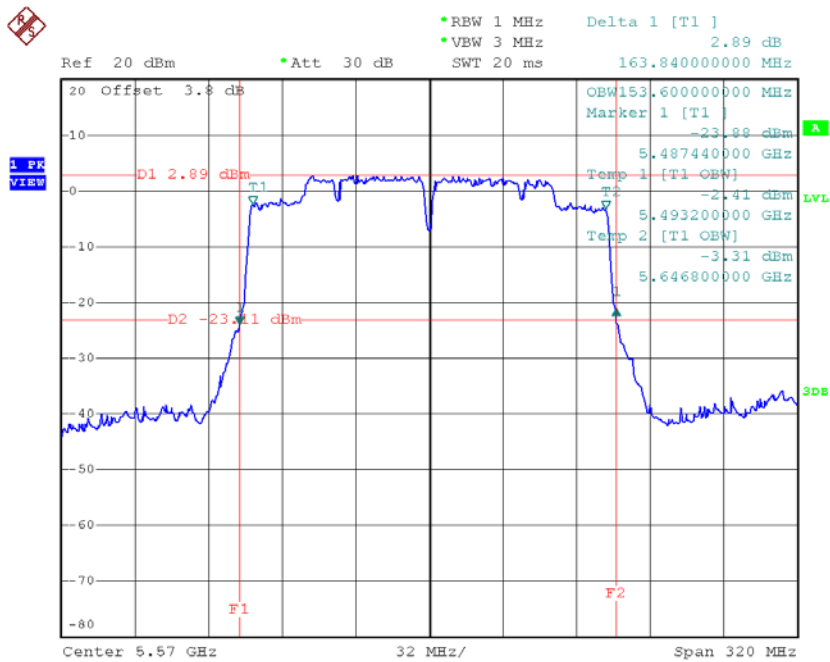

Date: 12.OCT.2018 21:58:05