


Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5240 MHz

Horizontal


130 dBuV/m

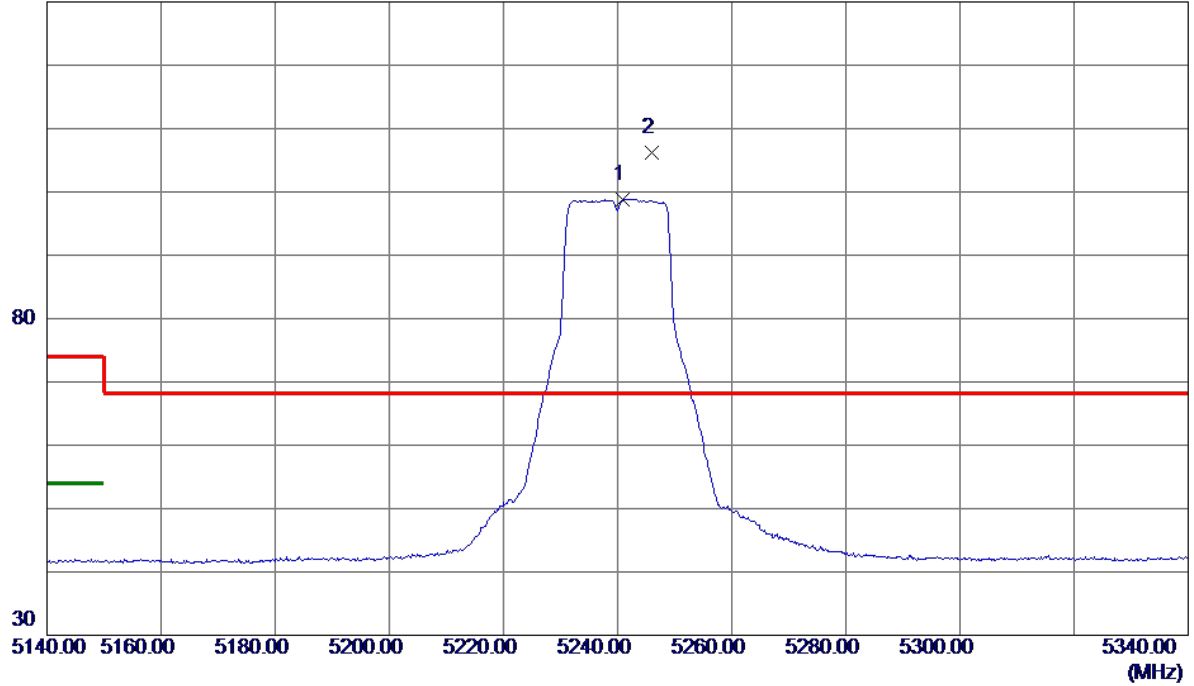

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5240.9000	84.29	14.58	98.87	999.00	-900.13	AVG	No Limit
2 *	5245.9000	91.66	14.59	106.25	68.30	37.95	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5240 MHz

Horizontal

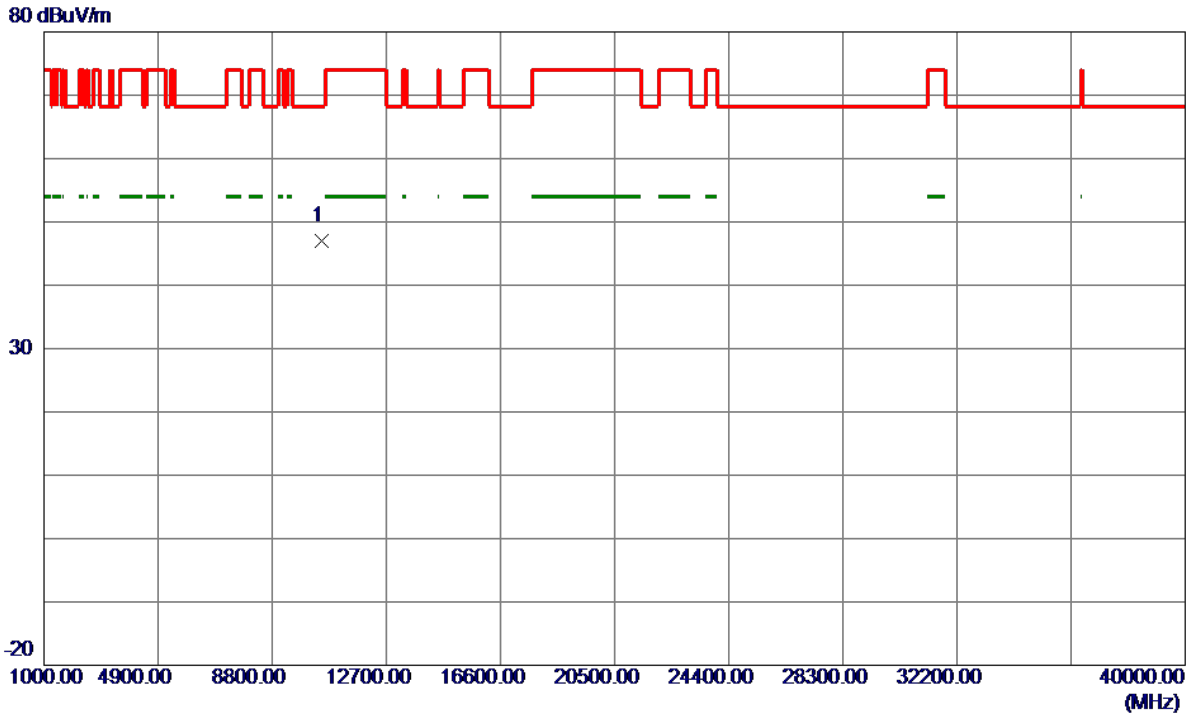


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10474.4900	35.12	11.89	47.01	68.30	-21.29	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5190MHz

Vertical


130 dBuV/m

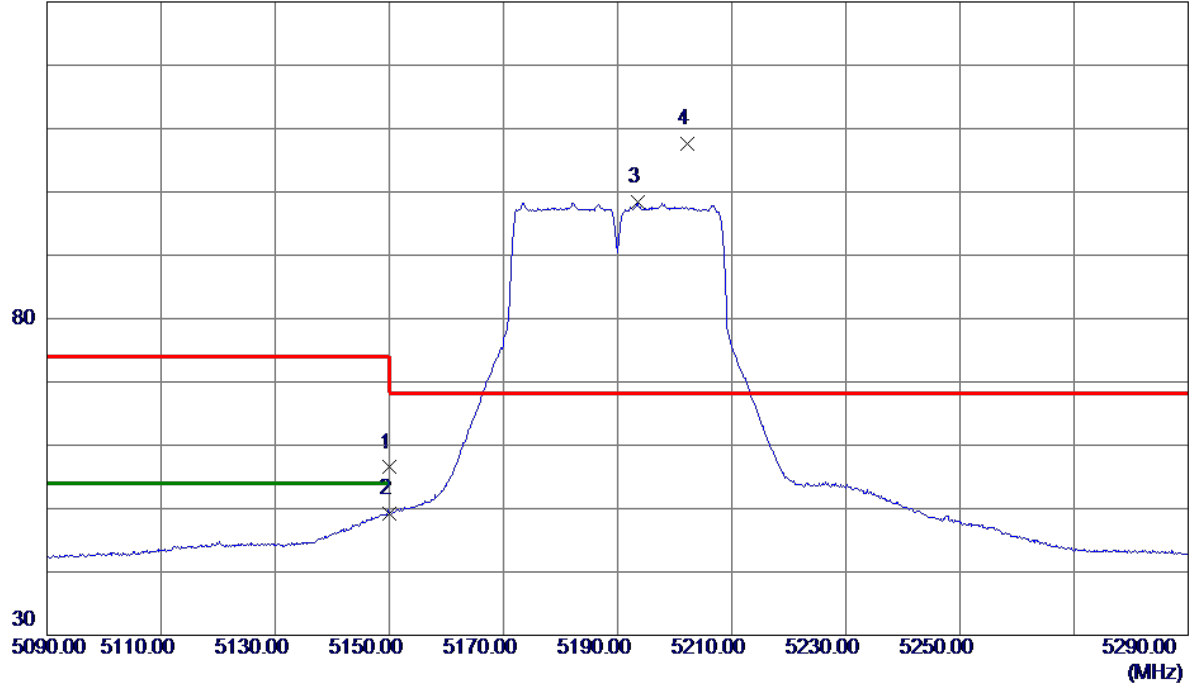

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	42.15	14.35	56.50	74.00	-17.50	Peak	
2	5150.0000	34.94	14.35	49.29	54.00	-4.71	AVG	
3	5193.5000	83.91	14.46	98.37	999.00	-900.63	AVG	No Limit
4 *	5202.3000	93.10	14.48	107.58	68.30	39.28	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5190MHz

Vertical

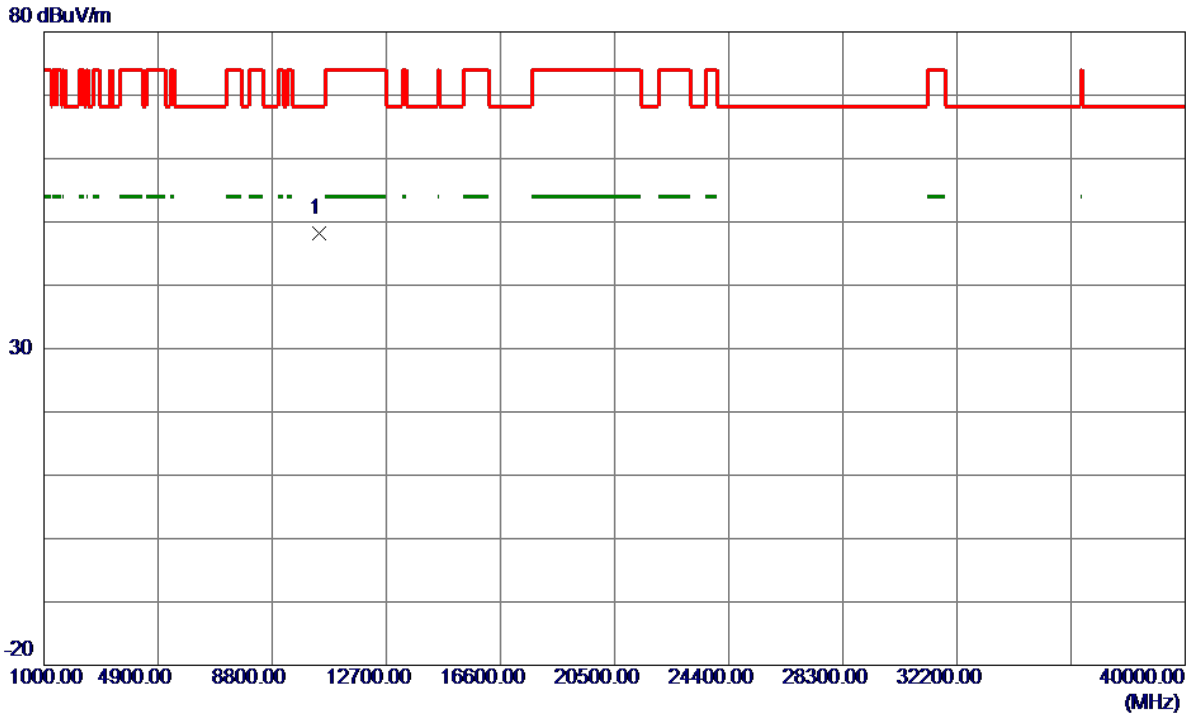


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10388.5400	36.39	11.75	48.14	68.30	-20.16	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5190MHz

Horizontal


130 dBuV/m

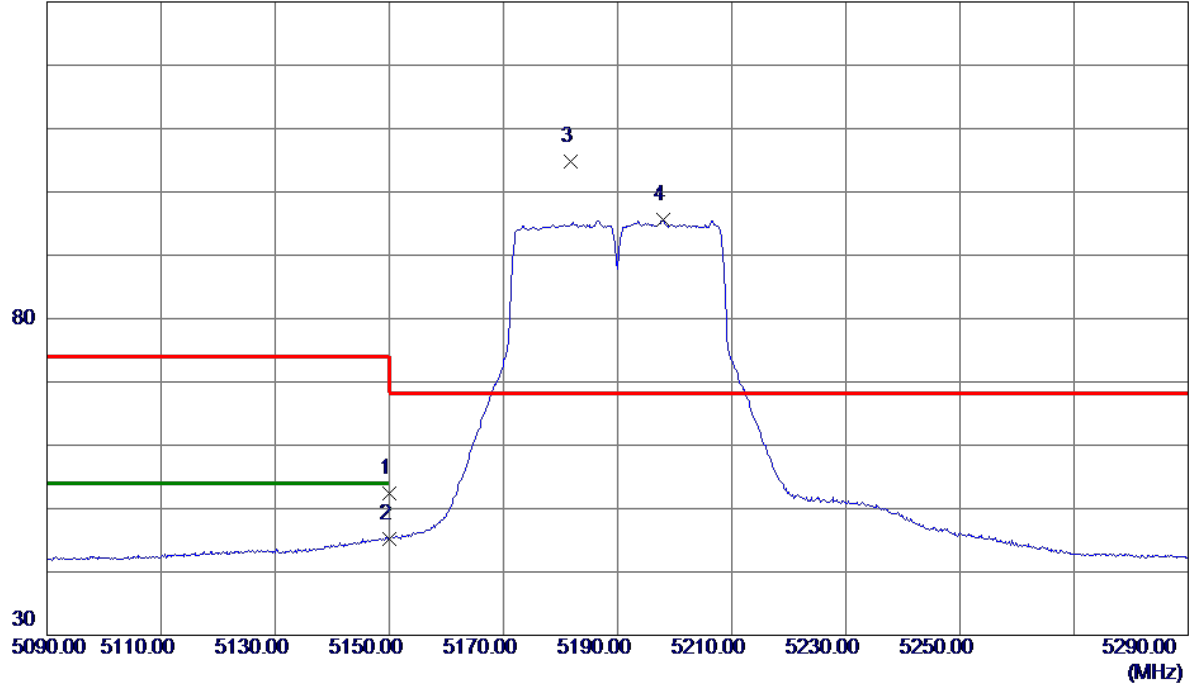

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	37.99	14.35	52.34	74.00	-21.66	Peak	
2	5150.0000	30.78	14.35	45.13	54.00	-8.87	AVG	
3 *	5181.7000	90.43	14.43	104.86	68.30	36.56	Peak	No Limit
4	5197.9000	81.16	14.47	95.63	999.00	-903.37	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5190MHz

Horizontal

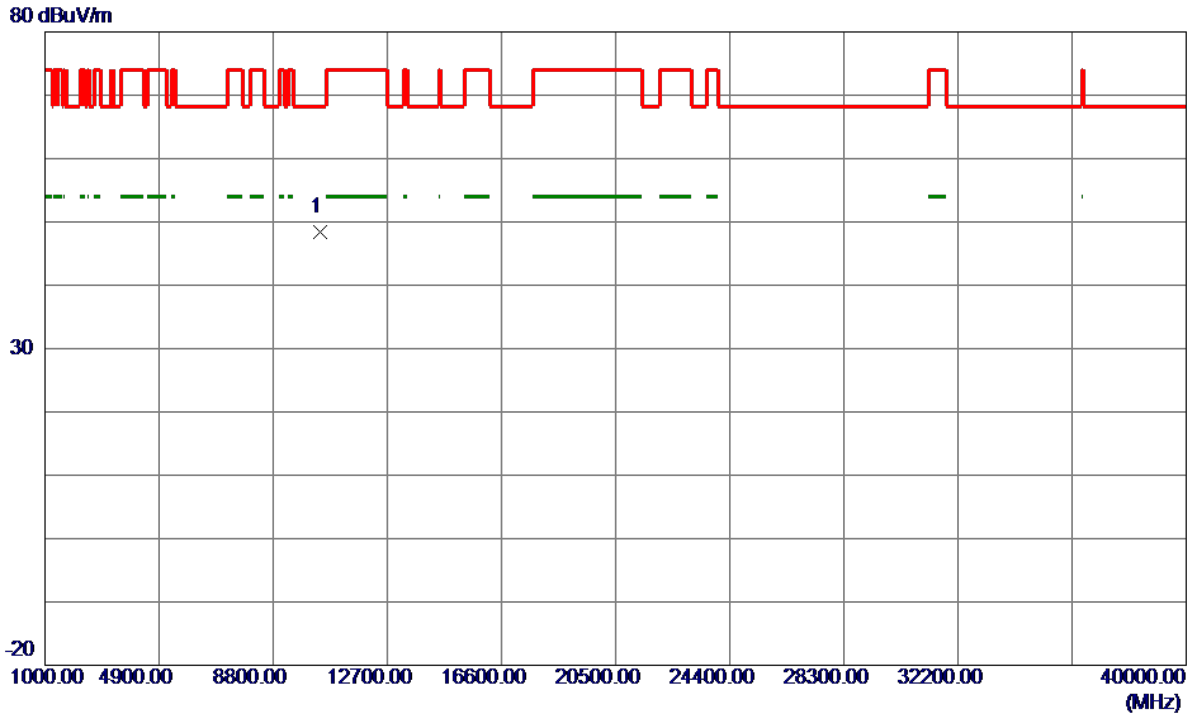


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10383.7600	36.66	11.74	48.40	68.30	-19.90	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5230MHz

Vertical


130 dBuV/m

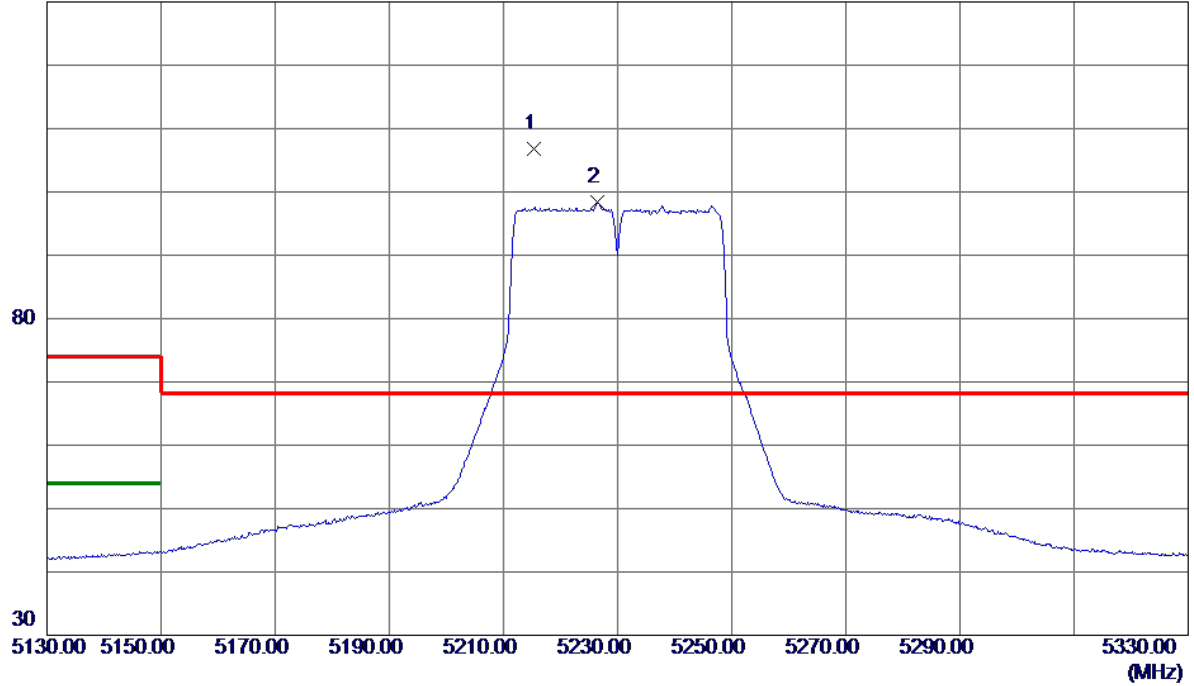

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5215.4000	92.32	14.51	106.83	68.30	38.53	Peak	No Limit
2	5226.4000	83.82	14.54	98.36	999.00	-900.64	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5230MHz

Vertical

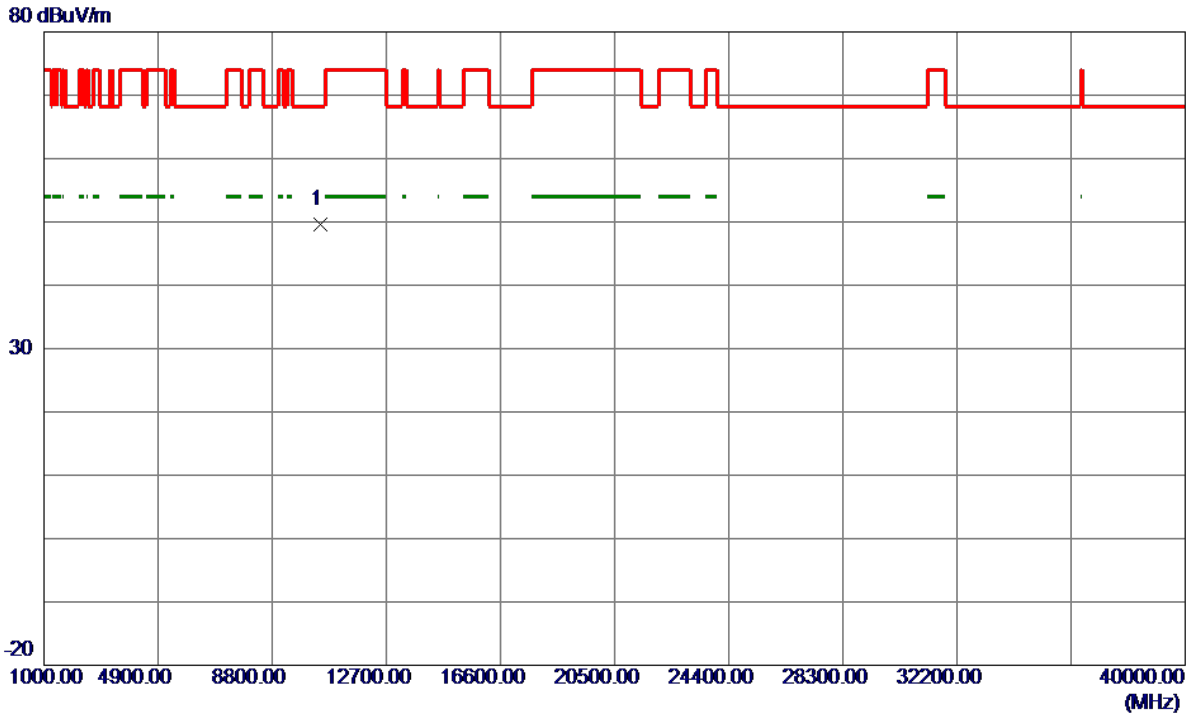


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10463.8300	37.72	11.87	49.59	68.30	-18.71	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5230MHz

Horizontal


130 dBuV/m

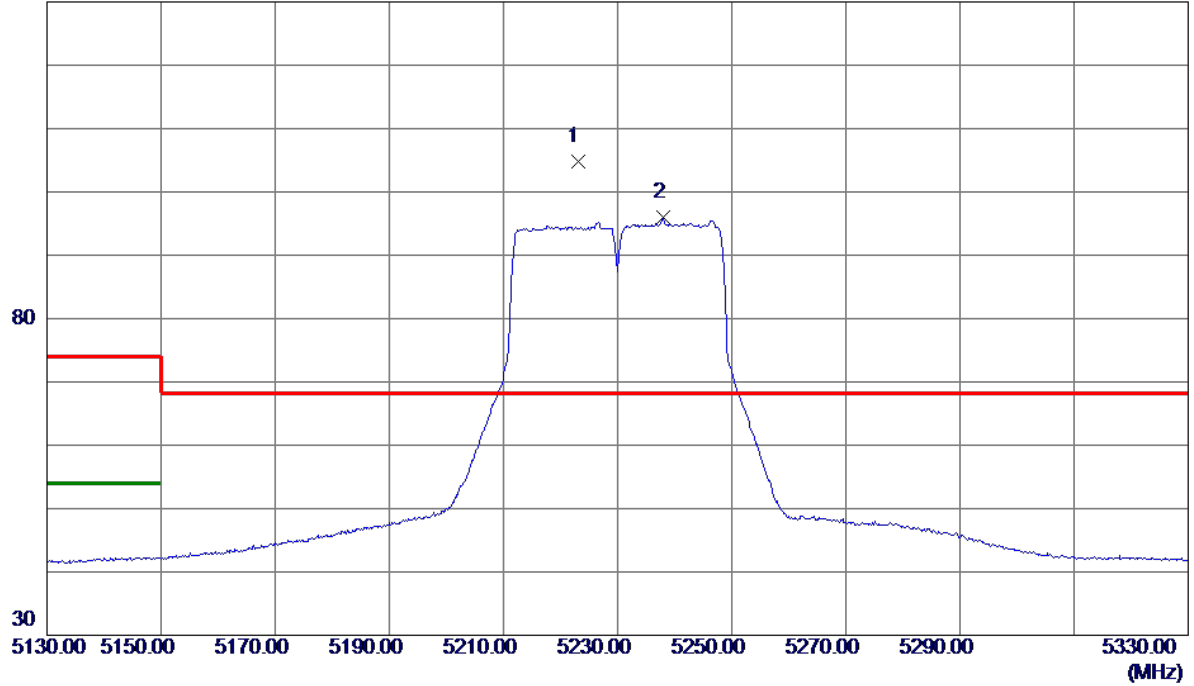

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5223.0000	90.28	14.53	104.81	68.30	36.51	Peak	No Limit
2	5237.9000	81.35	14.57	95.92	999.00	-903.08	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5230MHz

Horizontal

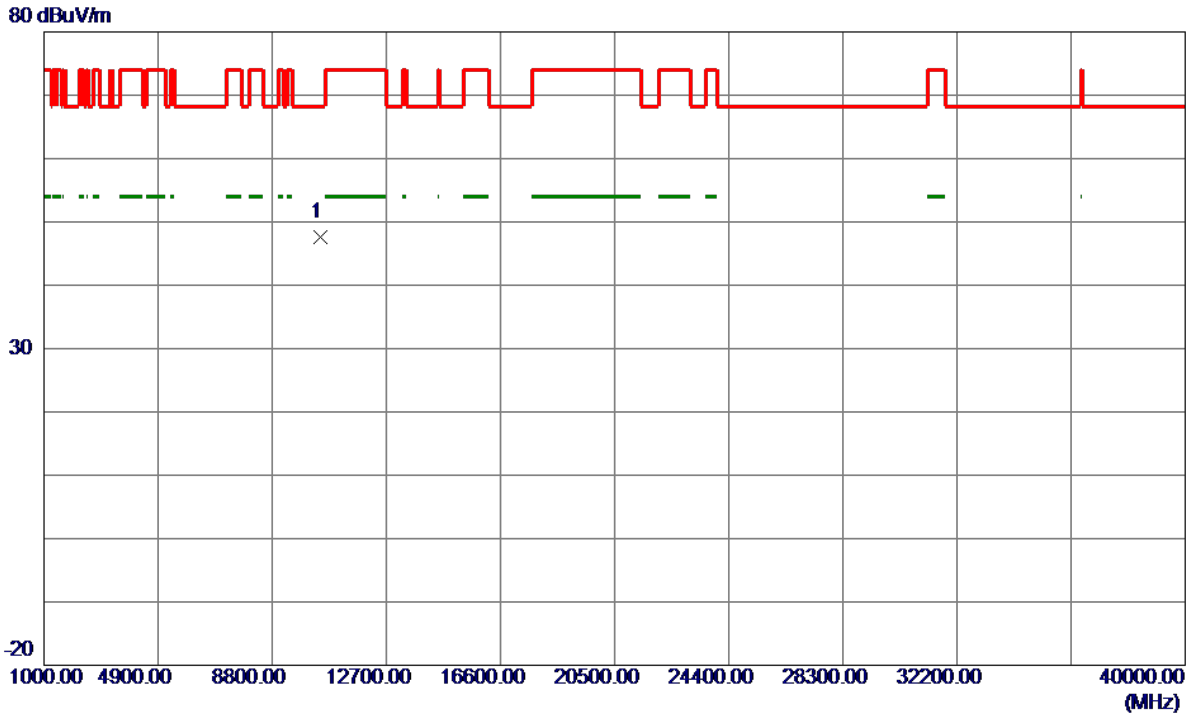

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10462.9100	35.65	11.87	47.52	68.30	-20.78	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz

Vertical


130 dBuV/m



No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	43.11	14.35	57.46	74.00	-16.54	Peak	
2	5150.0000	34.26	14.35	48.61	54.00	-5.39	AVG	
3 *	5206.8000	89.06	14.49	103.55	68.30	35.25	Peak	No Limit
4	5233.4000	79.50	14.56	94.06	999.00	-904.94	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz

Vertical

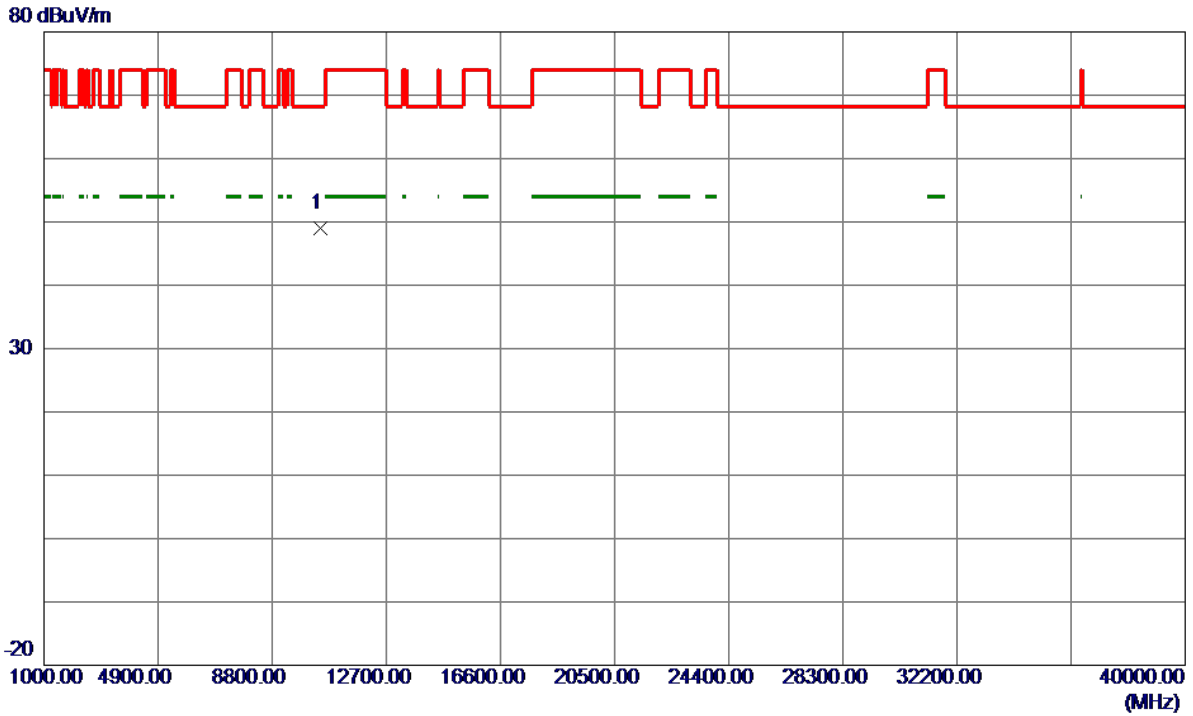


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10425.4500	37.28	11.81	49.09	68.30	-19.21	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz

Horizontal


130 dBuV/m

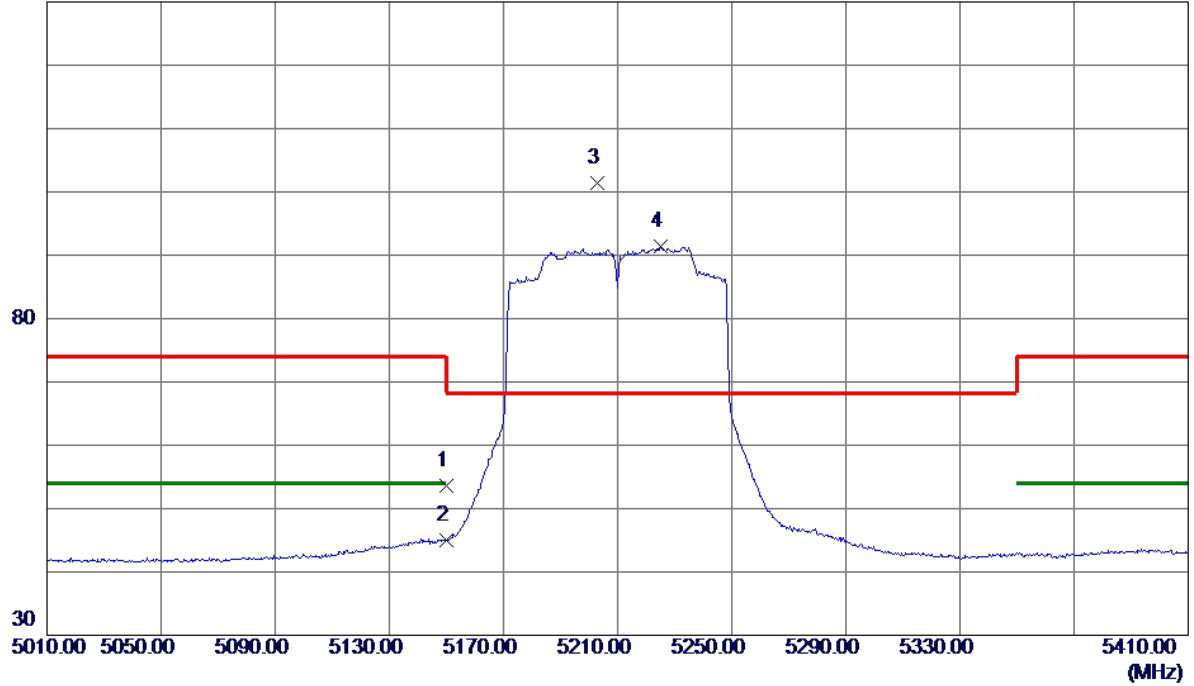

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	39.25	14.35	53.60	74.00	-20.40	Peak	
2	5150.0000	30.58	14.35	44.93	54.00	-9.07	AVG	
3 *	5202.8000	87.01	14.48	101.49	68.30	33.19	Peak	No Limit
4	5225.0000	76.80	14.54	91.34	999.00	-907.66	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz


Horizontal

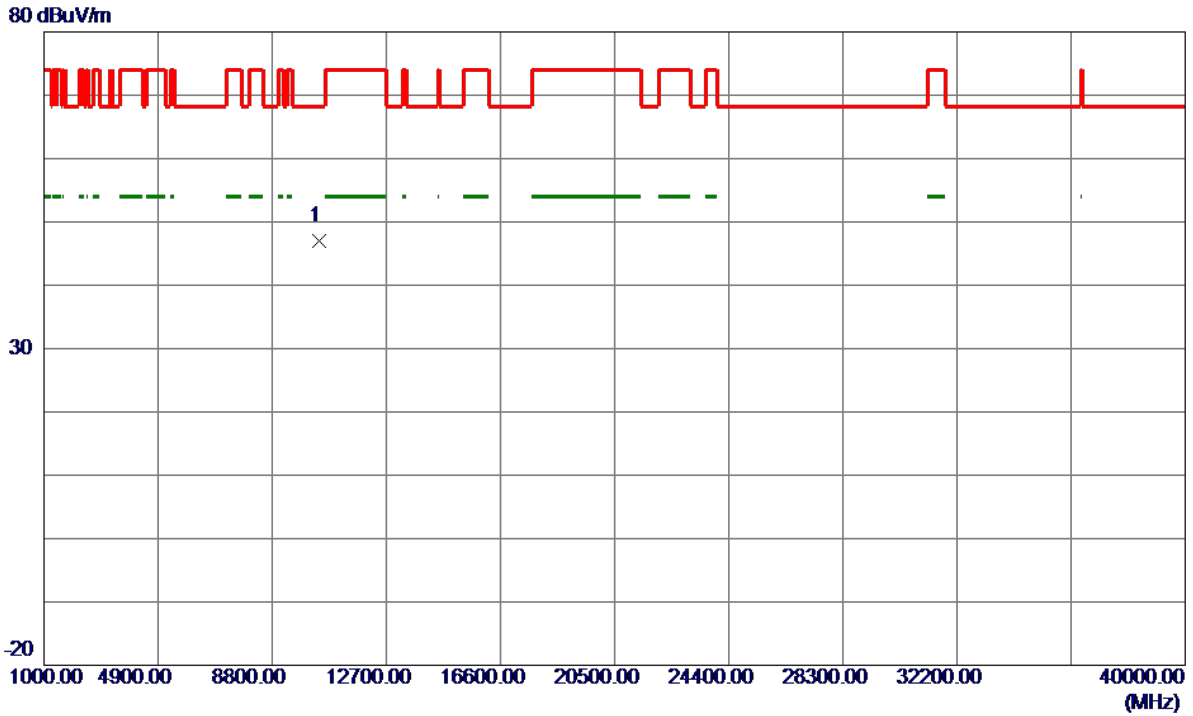

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10410.0700	35.30	11.78	47.08	68.30	-21.22	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC160 Mode 5250MHz


Vertical

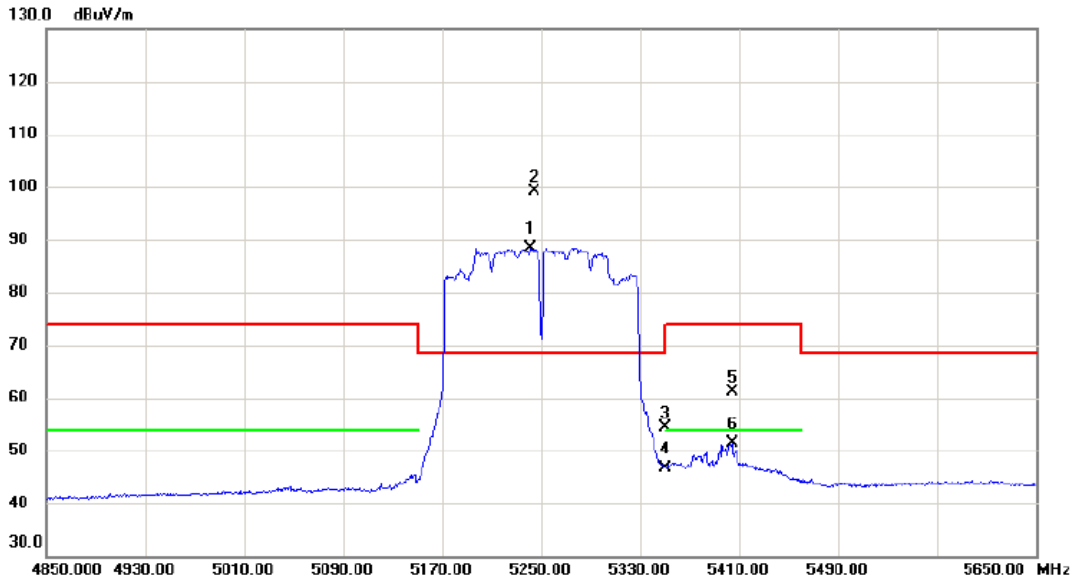

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5241.200	73.89	14.58	88.47	68.30	20.17	AVG	No Limit
2	*	5244.000	84.46	14.59	99.05	68.30	30.75	peak	No Limit
3		5350.000	39.62	14.86	54.48	74.00	-19.52	peak	
4		5350.000	31.66	14.86	46.52	54.00	-7.48	AVG	
5		5403.600	46.02	15.00	61.02	74.00	-12.98	peak	
6		5403.600	36.38	15.00	51.38	54.00	-2.62	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC160 Mode 5250MHz


Vertical

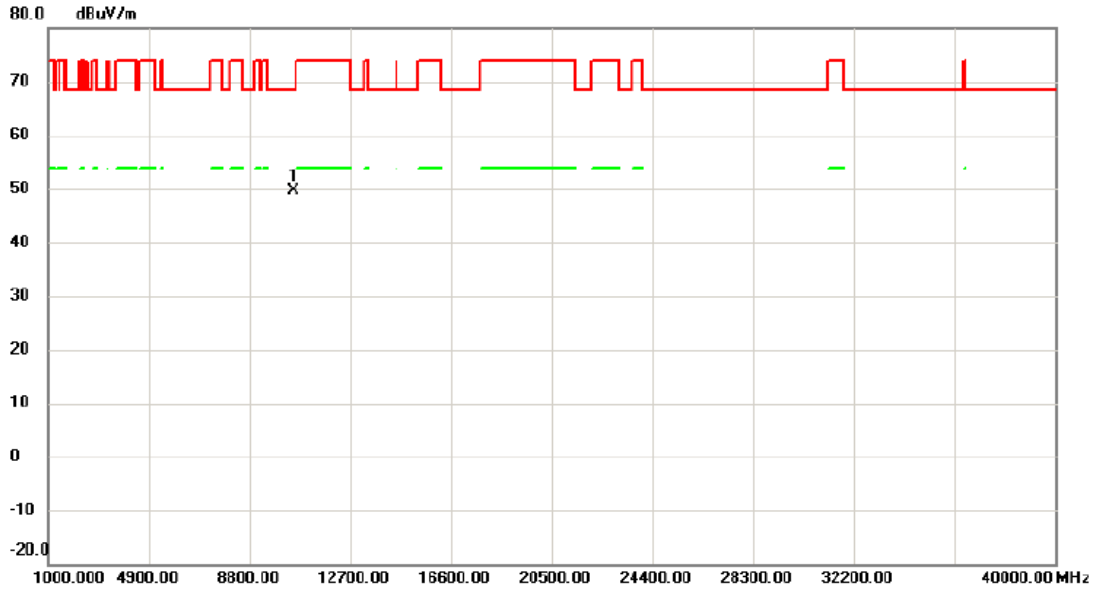

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10493.980	37.77	11.92	49.69	68.30	-18.61	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC160 Mode 5250MHz


Horizontal

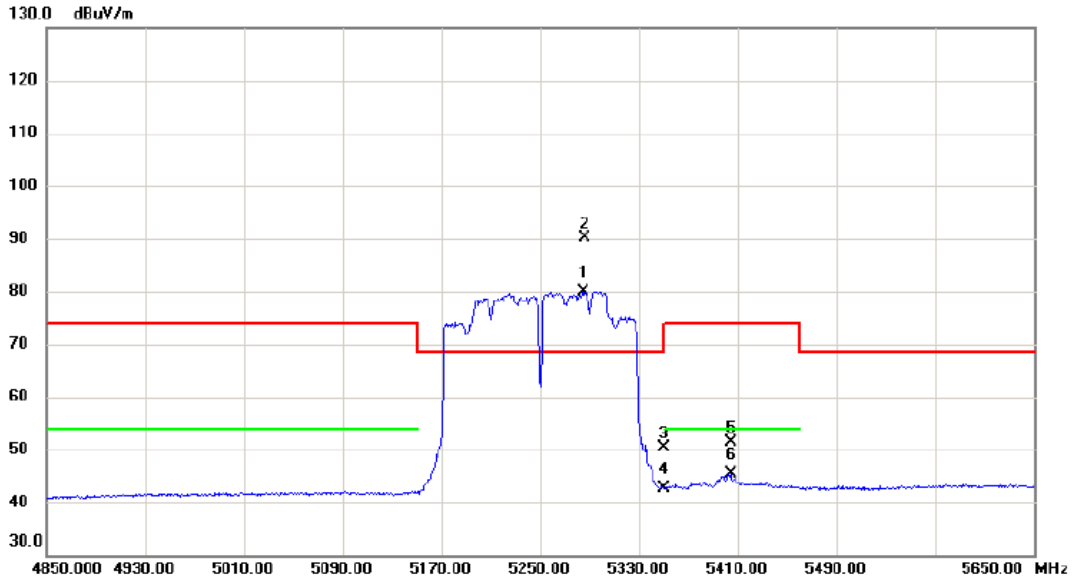

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5284.800	65.19	14.70	79.89	68.30	11.59	AVG	No Limit
2	*	5286.000	75.47	14.70	90.17	68.30	21.87	peak	No Limit
3		5350.000	35.40	14.86	50.26	74.00	-23.74	peak	
4		5350.000	27.79	14.86	42.65	54.00	-11.35	AVG	
5		5403.600	36.45	15.00	51.45	74.00	-22.55	peak	
6		5403.600	30.39	15.00	45.39	54.00	-8.61	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC160 Mode 5250MHz


Horizontal

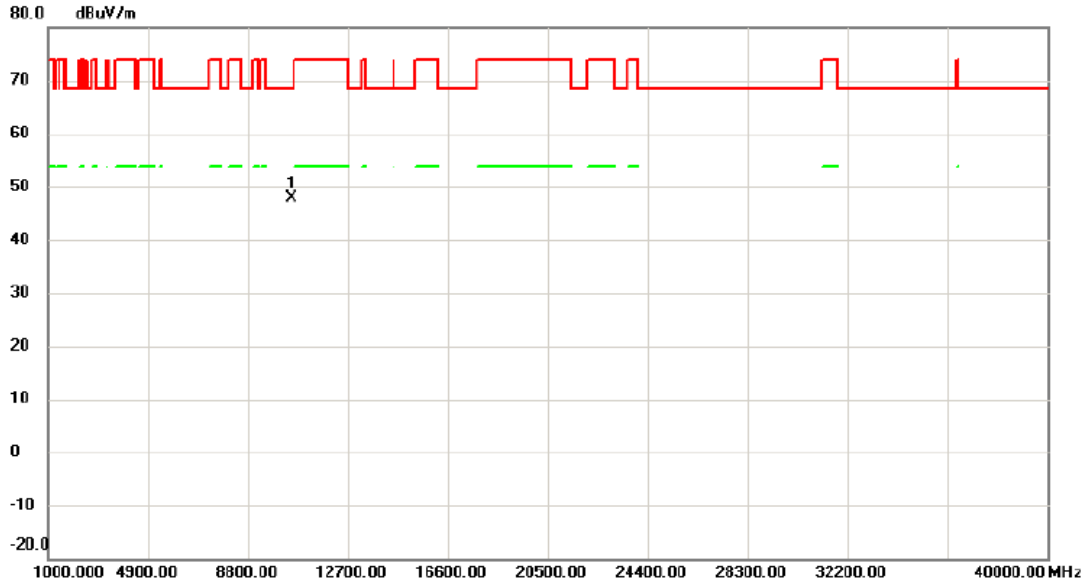

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10499.340	35.95	11.93	47.88	68.30	-20.42	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5260 MHz


Vertical

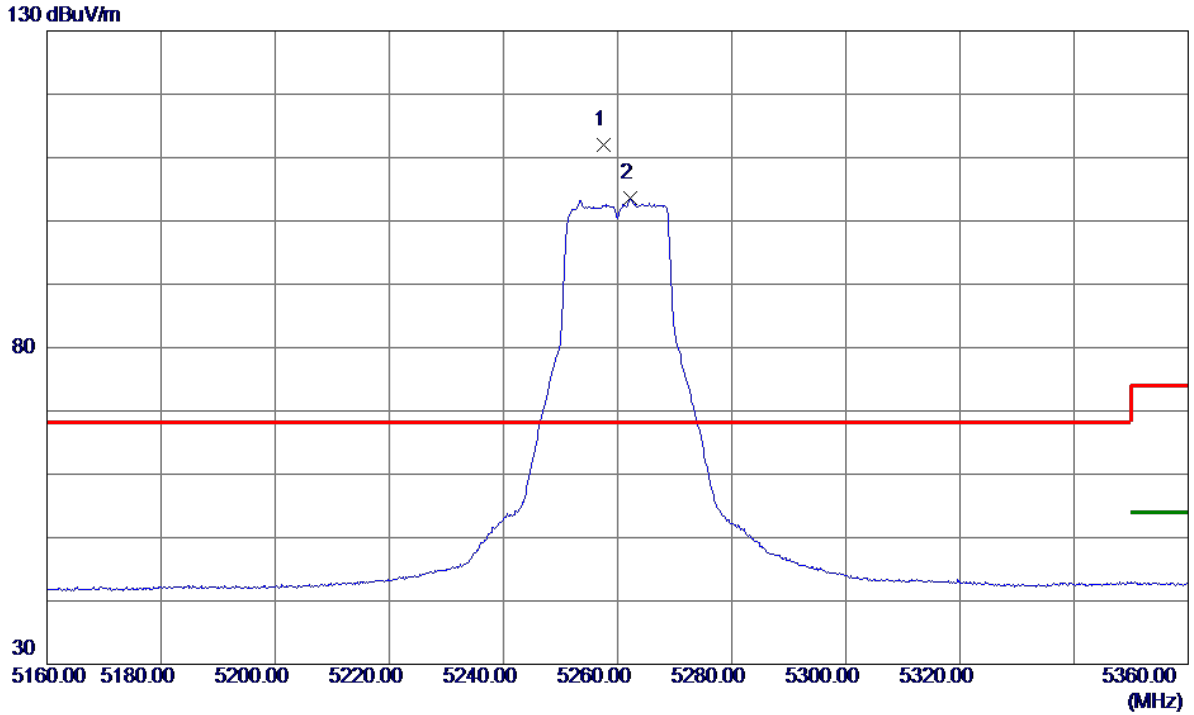

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5257.5000	97.44	14.62	112.06	68.30	43.76	Peak	No Limit
2	5262.2000	88.95	14.63	103.58	999.00	-895.42	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5260 MHz


Vertical

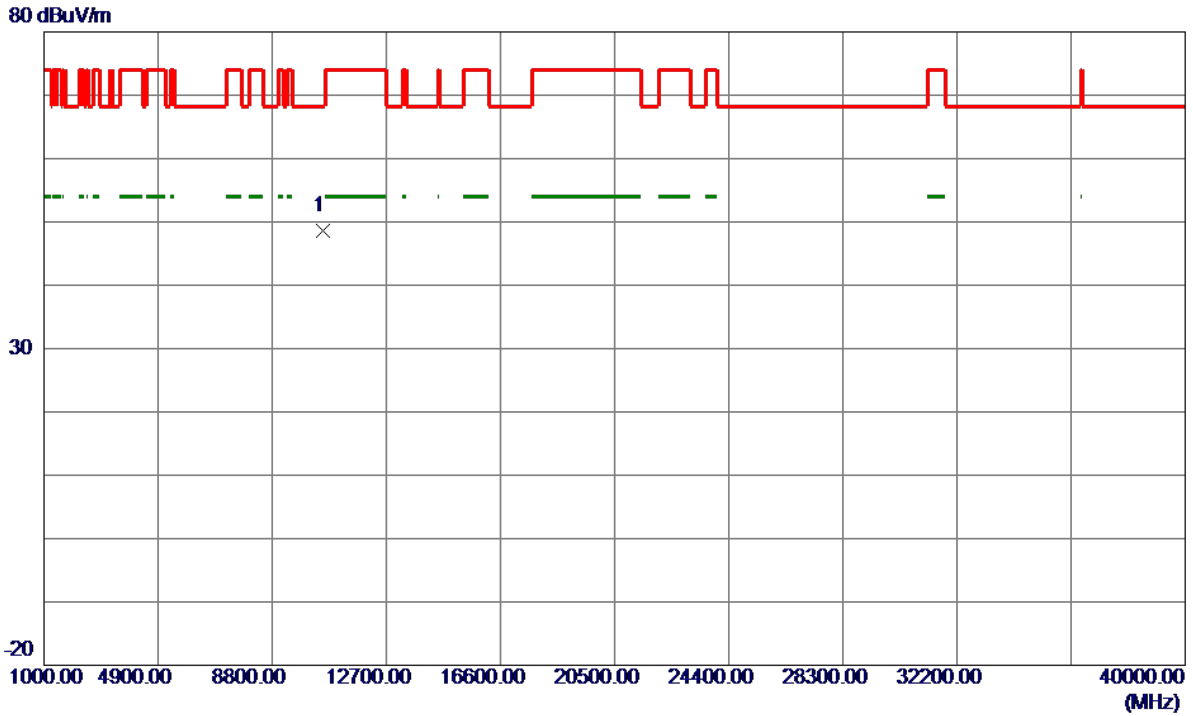

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10515.3000	36.75	11.94	48.69	68.30	-19.61	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5260 MHz


Horizontal

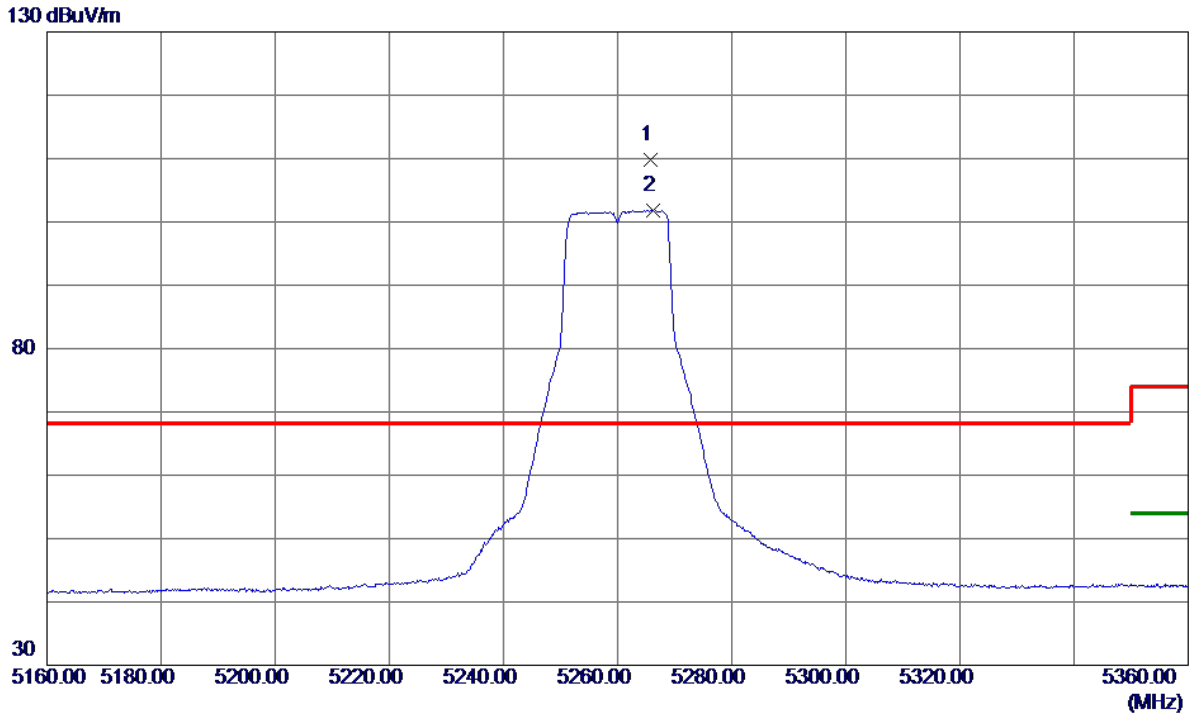

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5265.7000	95.15	14.64	109.79	68.30	41.49	Peak	No Limit
2	5266.3000	87.20	14.64	101.84	999.00	-897.16	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5260 MHz

Horizontal

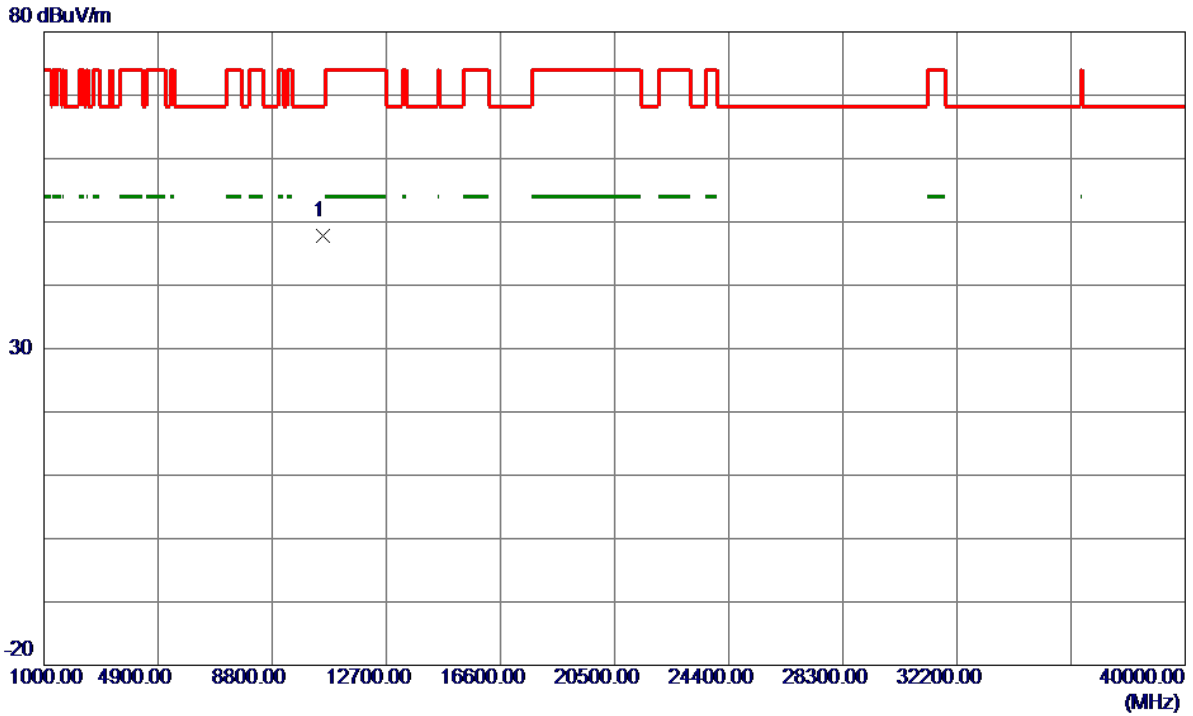


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10521.2500	35.83	11.94	47.77	68.30	-20.53	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5300 MHz

Vertical


130 dBuV/m

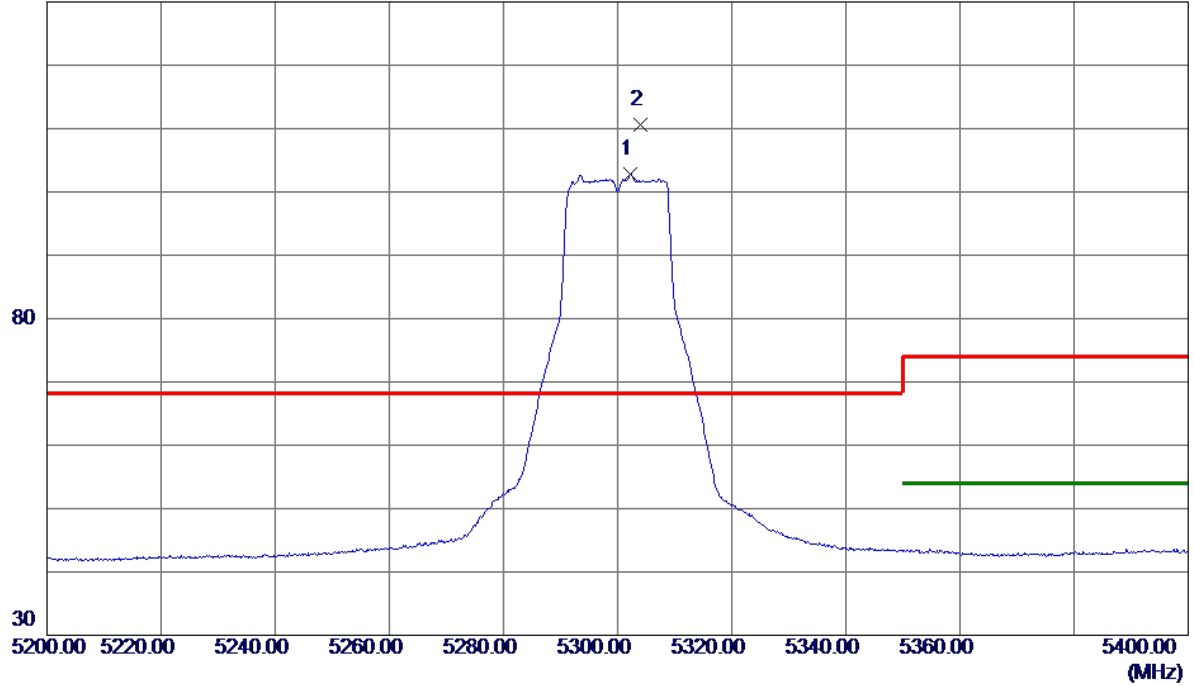

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5302.3000	88.03	14.74	102.77	999.00	-896.23	AVG	No Limit
2 *	5303.9000	95.94	14.74	110.68	68.30	42.38	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5300 MHz

Vertical

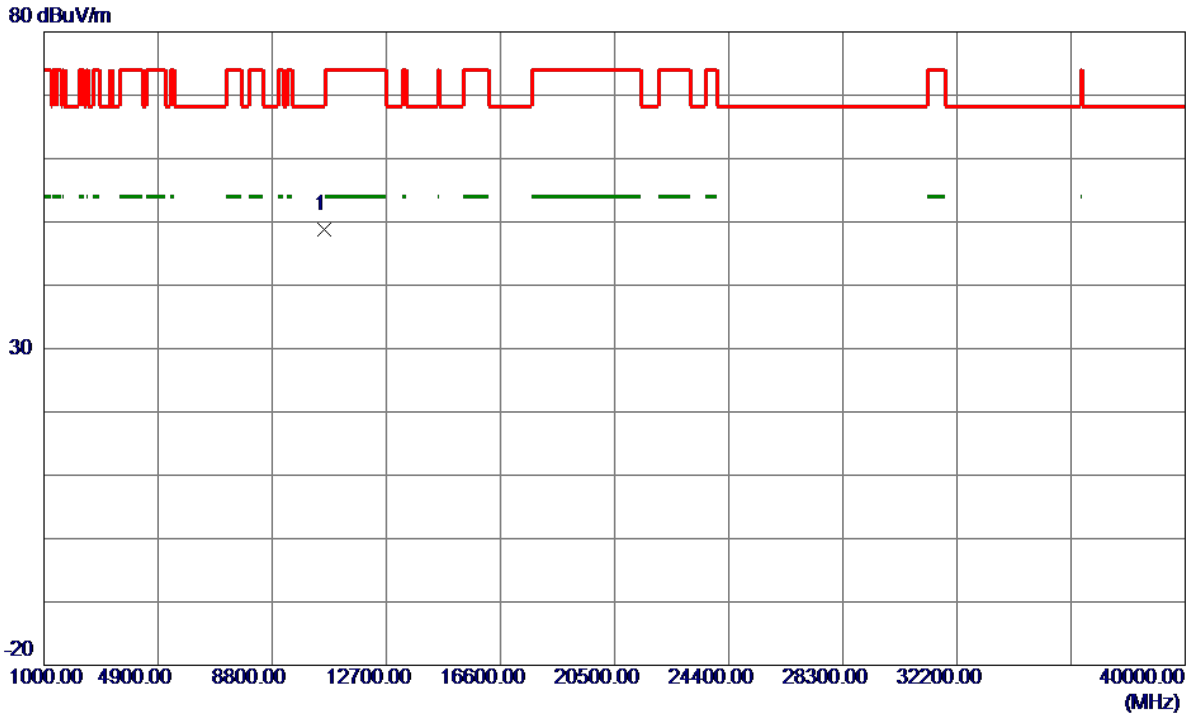


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10590.3300	36.77	11.97	48.74	68.30	-19.56	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5300 MHz

Horizontal


130 dBuV/m

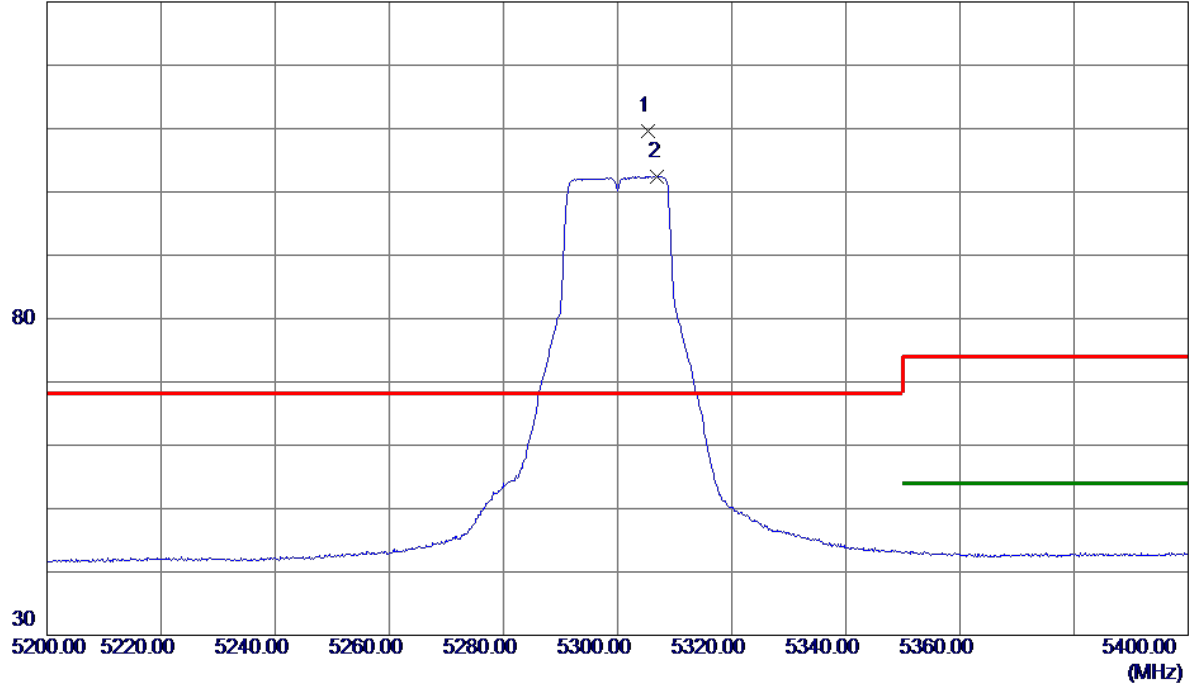

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5305.4000	94.78	14.74	109.52	68.30	41.22	Peak	No Limit
2	5307.0000	87.64	14.75	102.39	999.00	-896.61	AVG	No Limit


Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5300 MHz

Horizontal

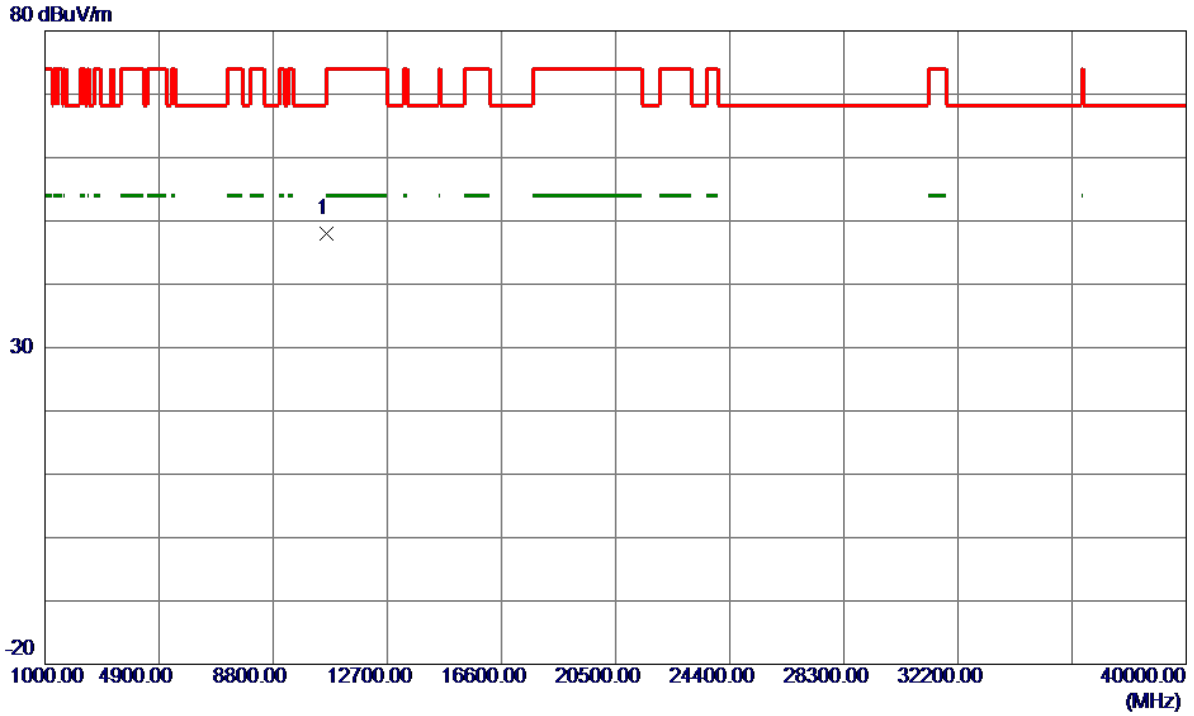

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10601.3099	35.99	11.97	47.96	74.00	-26.04	Peak	


Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5320 MHz

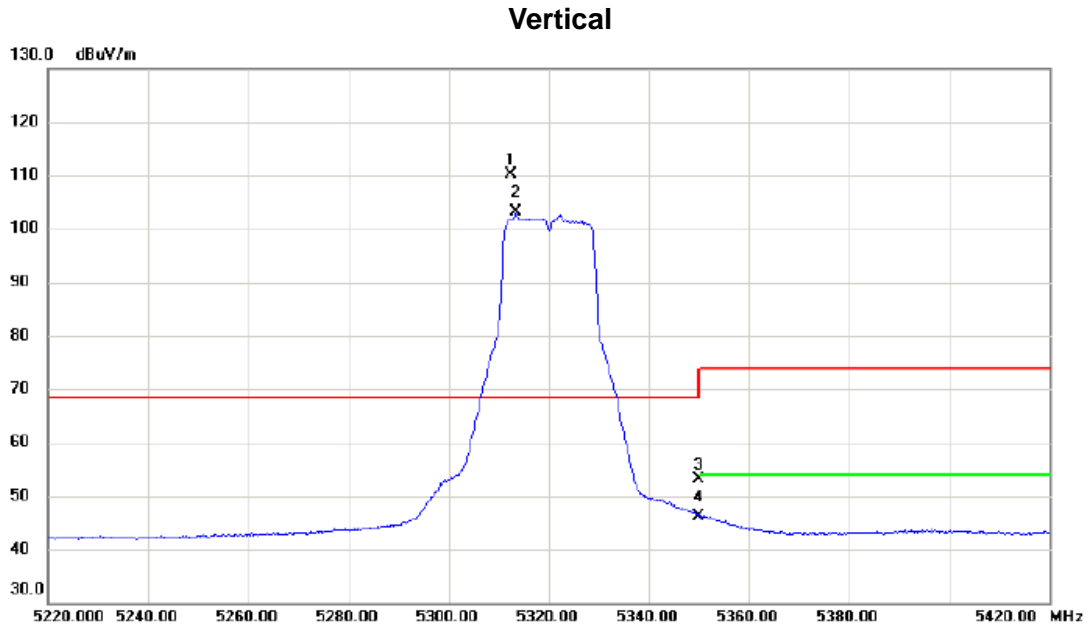

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5312.400	95.42	14.75	110.17	68.30	41.87	peak	No Limit
2	X	5313.400	88.47	14.76	103.23	68.30	34.93	AVG	No Limit
3		5350.000	38.29	14.86	53.15	74.00	-20.85	peak	
4		5350.000	31.35	14.86	46.21	54.00	-7.79	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5320 MHz


Vertical

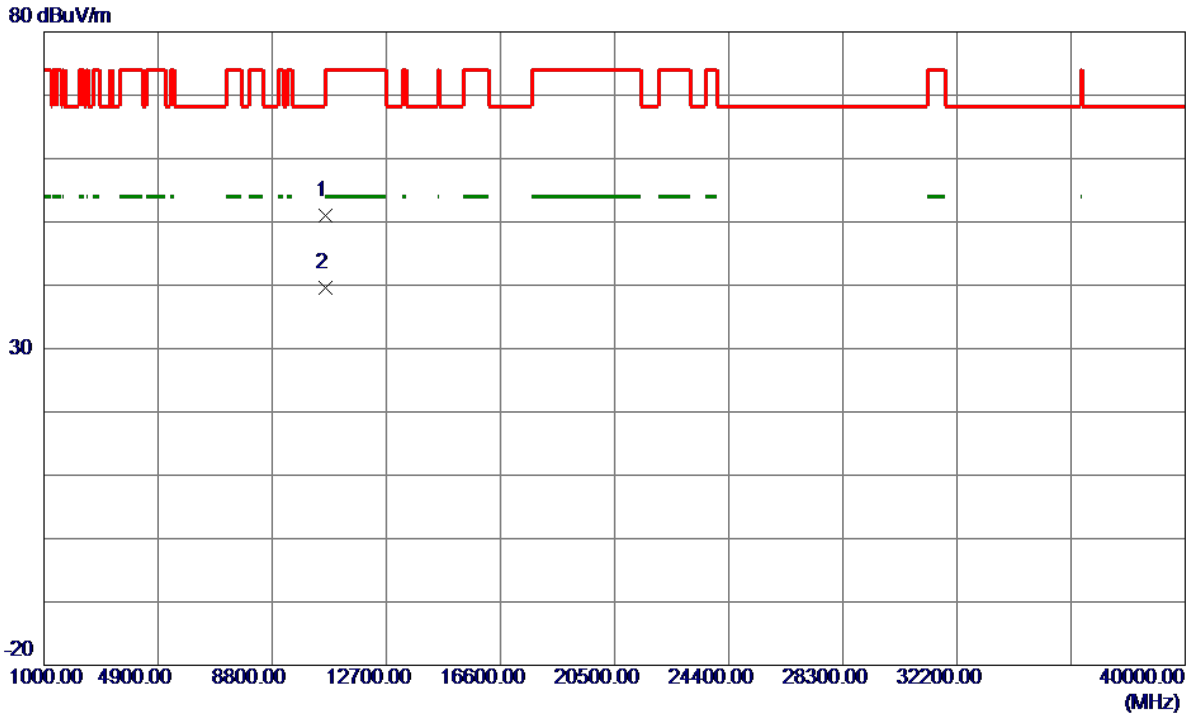

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10637.7500	39.04	11.99	51.03	74.00	-22.97	Peak	
2 *	10639.1600	27.64	11.99	39.63	54.00	-14.37	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5320 MHz


Horizontal

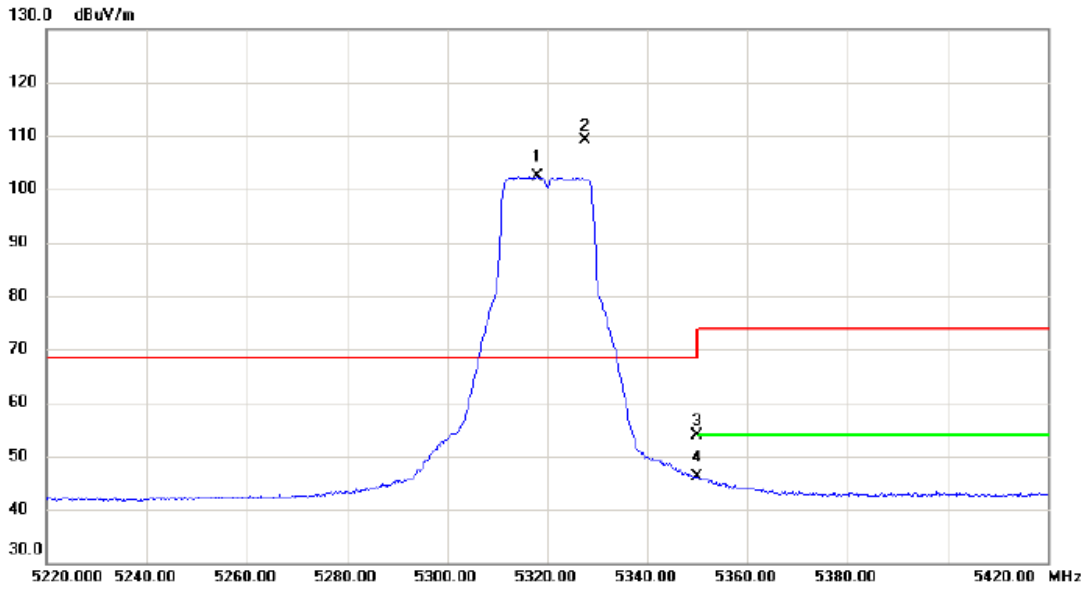

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5317.900	87.56	14.78	102.34	68.30	34.04	AVG	No Limit
2	*	5327.600	94.42	14.80	109.22	68.30	40.92	peak	No Limit
3		5350.000	38.95	14.86	53.81	74.00	-20.19	peak	
4		5350.000	31.15	14.86	46.01	54.00	-7.99	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5320 MHz

Horizontal

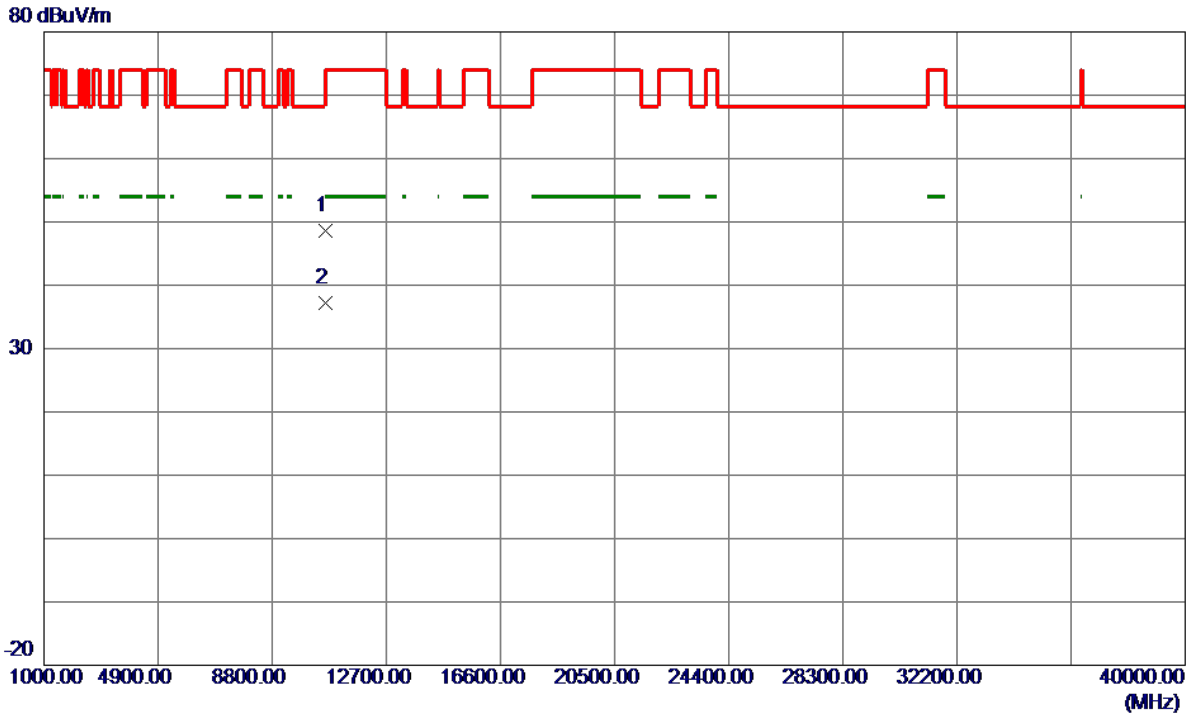


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10631.3200	36.58	11.98	48.56	74.00	-25.44	Peak	
2 *	10637.2800	25.16	11.99	37.15	54.00	-16.85	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5270MHz

Vertical


130 dBuV/m

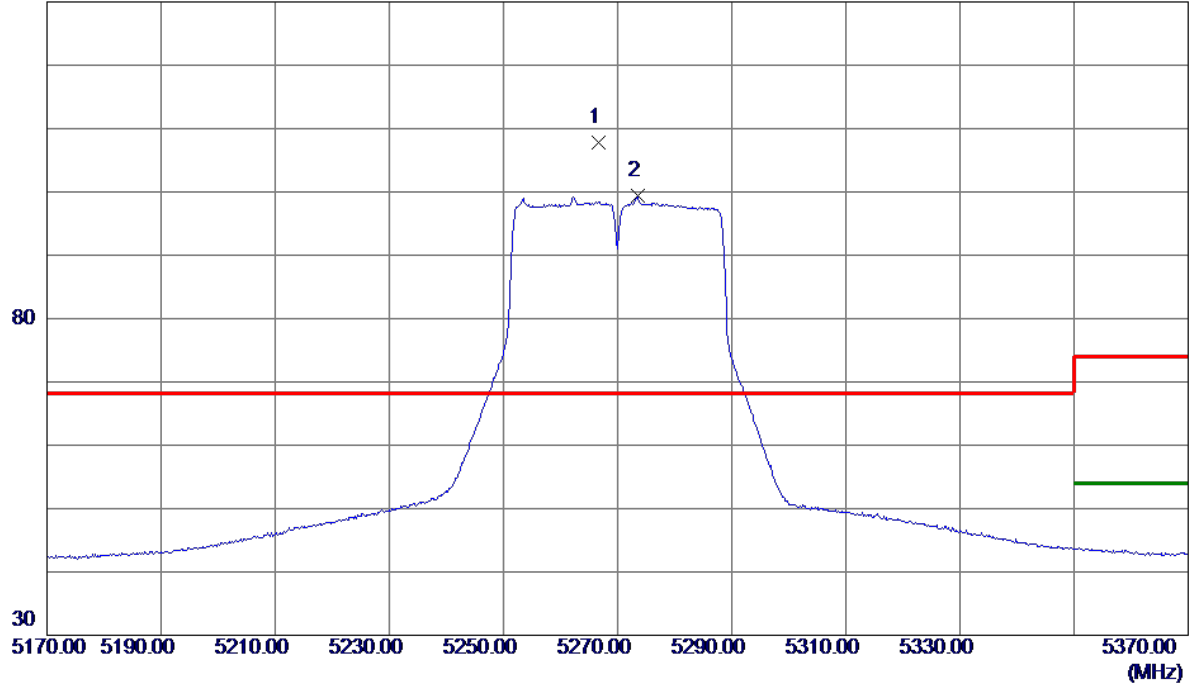

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5266.6000	93.20	14.65	107.85	68.30	39.55	Peak	No Limit
2	5273.5000	84.74	14.66	99.40	999.00	-899.60	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5270MHz

Vertical

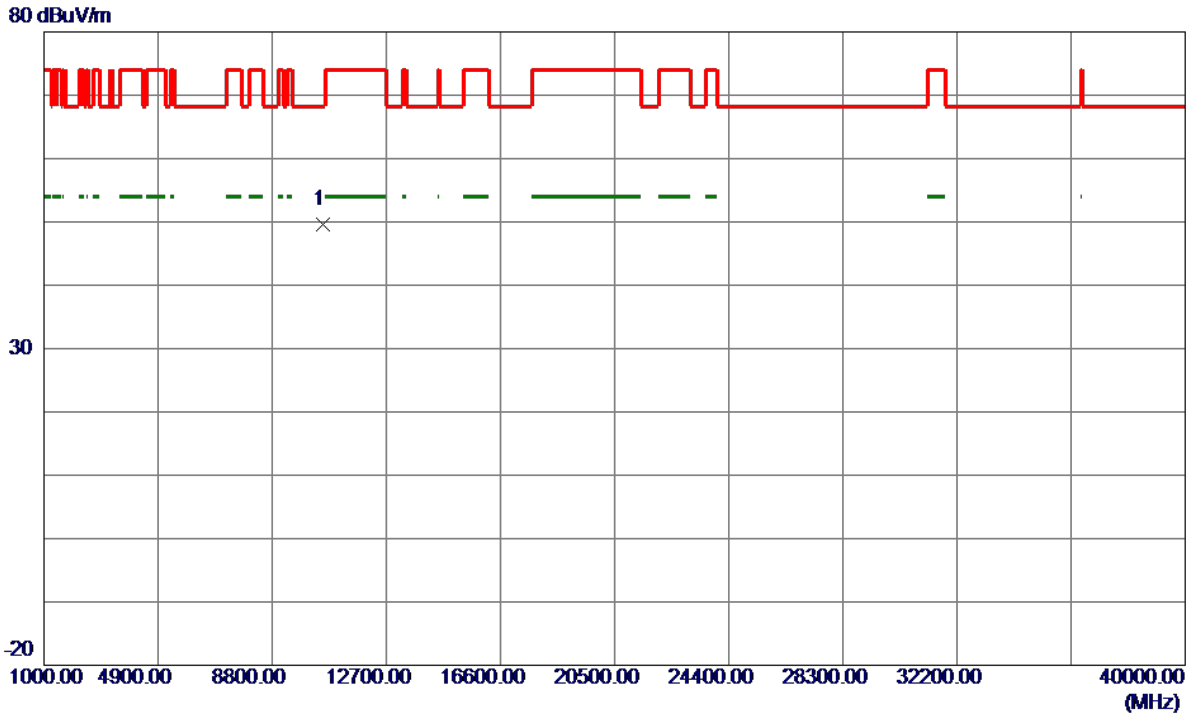


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10544.5900	37.59	11.95	49.54	68.30	-18.76	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5270MHz

Horizontal


130 dBuV/m

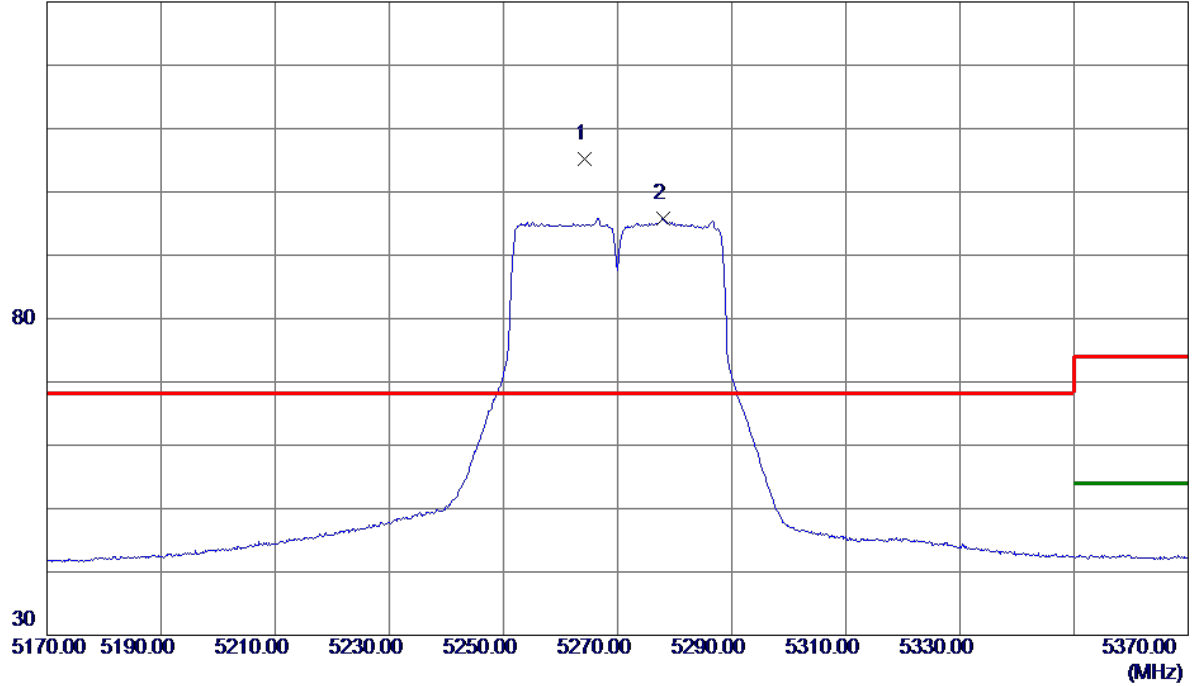

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5264.3000	90.50	14.64	105.14	68.30	36.84	Peak	No Limit
2	5278.0000	81.19	14.67	95.86	999.00	-903.14	AVG	No Limit


Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5270MHz

Horizontal

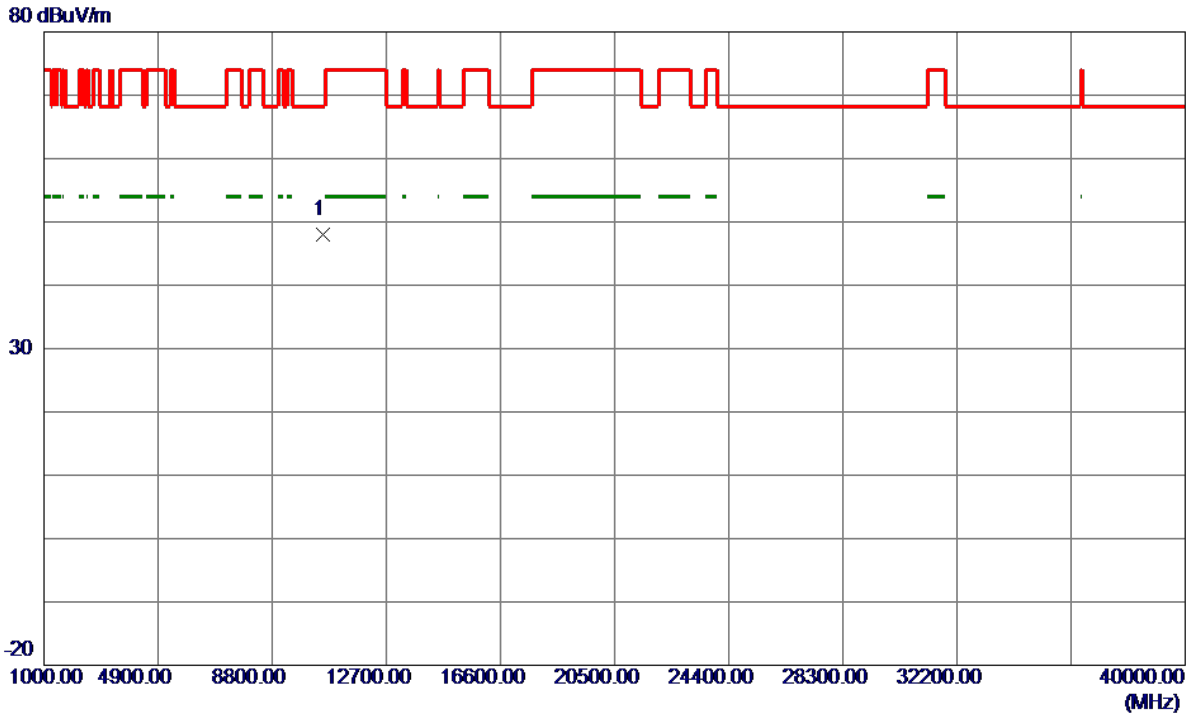

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10549.4400	36.13	11.95	48.08	68.30	-20.22	Peak	


Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5310MHz

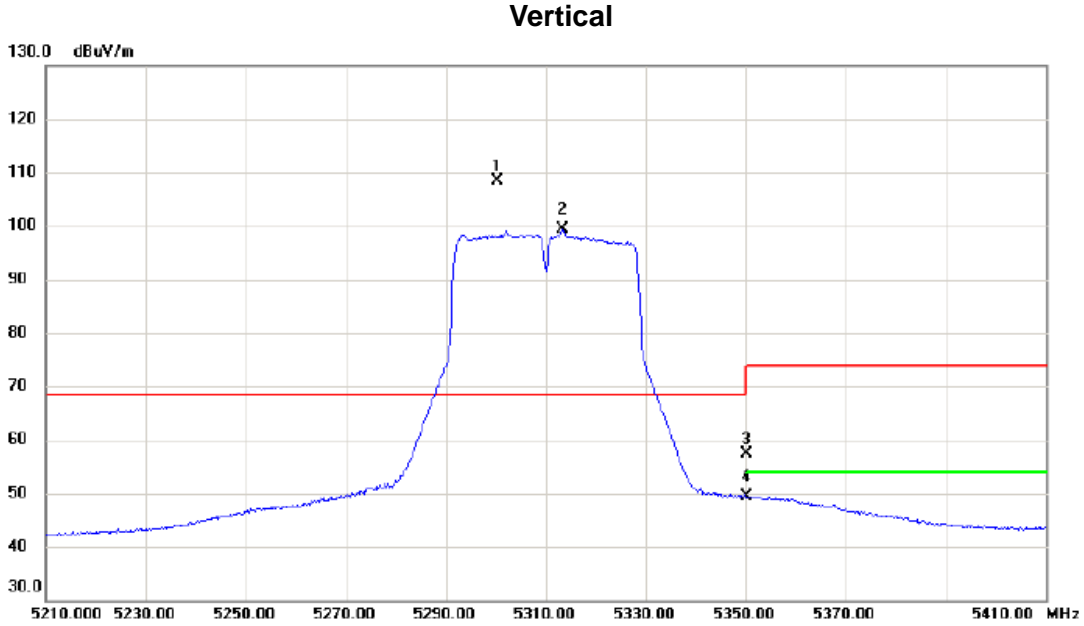

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	5300.200	93.61	14.73	108.34	68.30	40.04	peak	No Limit
2	X	5313.300	84.50	14.76	99.26	68.30	30.96	AVG	No Limit
3		5350.000	42.51	14.86	57.37	74.00	-16.63	peak	
4		5350.000	34.54	14.86	49.40	54.00	-4.60	AVG	


Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5310MHz

Vertical

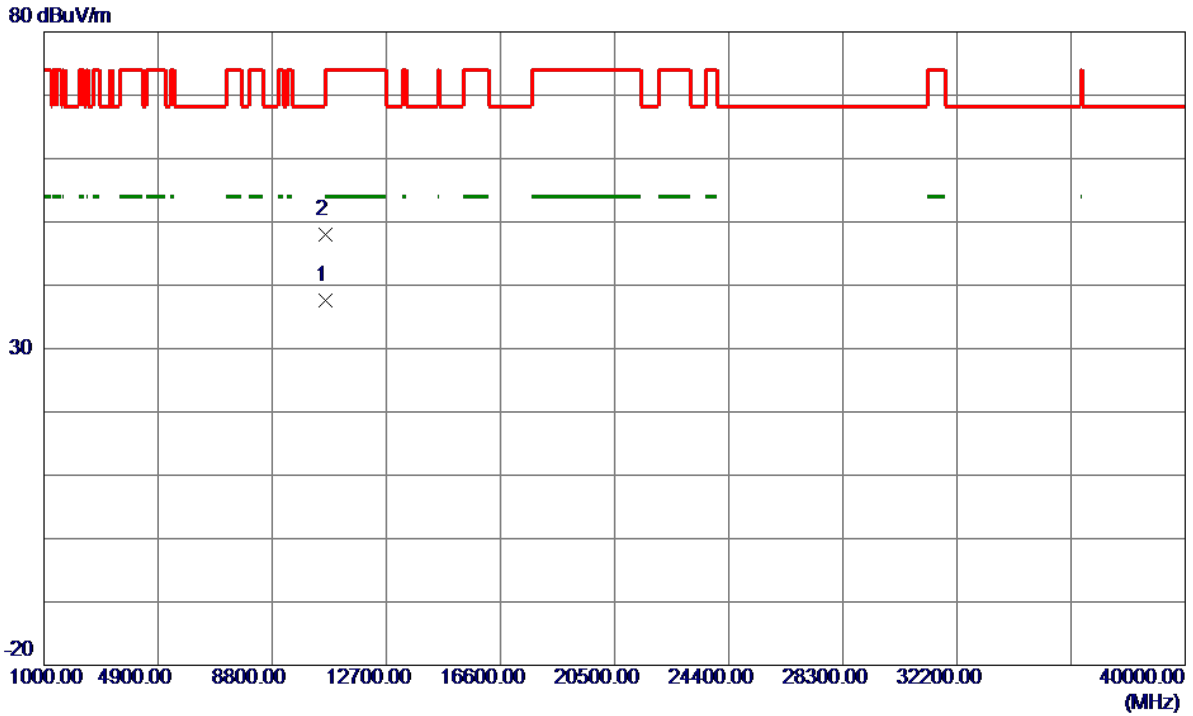

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10616.6000	25.65	11.98	37.63	54.00	-16.37	AVG	
2	10618.2100	36.05	11.98	48.03	74.00	-25.97	Peak	


Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5310MHz

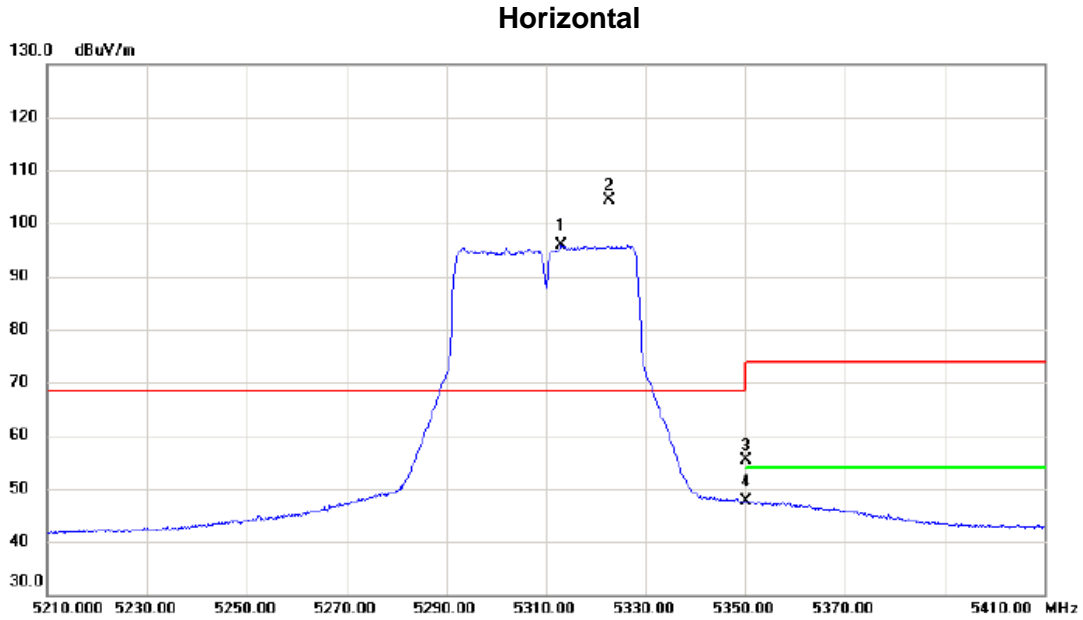

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5313.200	81.08	14.76	95.84	68.30	27.54	AVG	No Limit
2	*	5322.700	89.47	14.79	104.26	68.30	35.96	peak	No Limit
3		5350.000	40.64	14.86	55.50	74.00	-18.50	peak	
4		5350.000	32.72	14.86	47.58	54.00	-6.42	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5310MHz


Horizontal

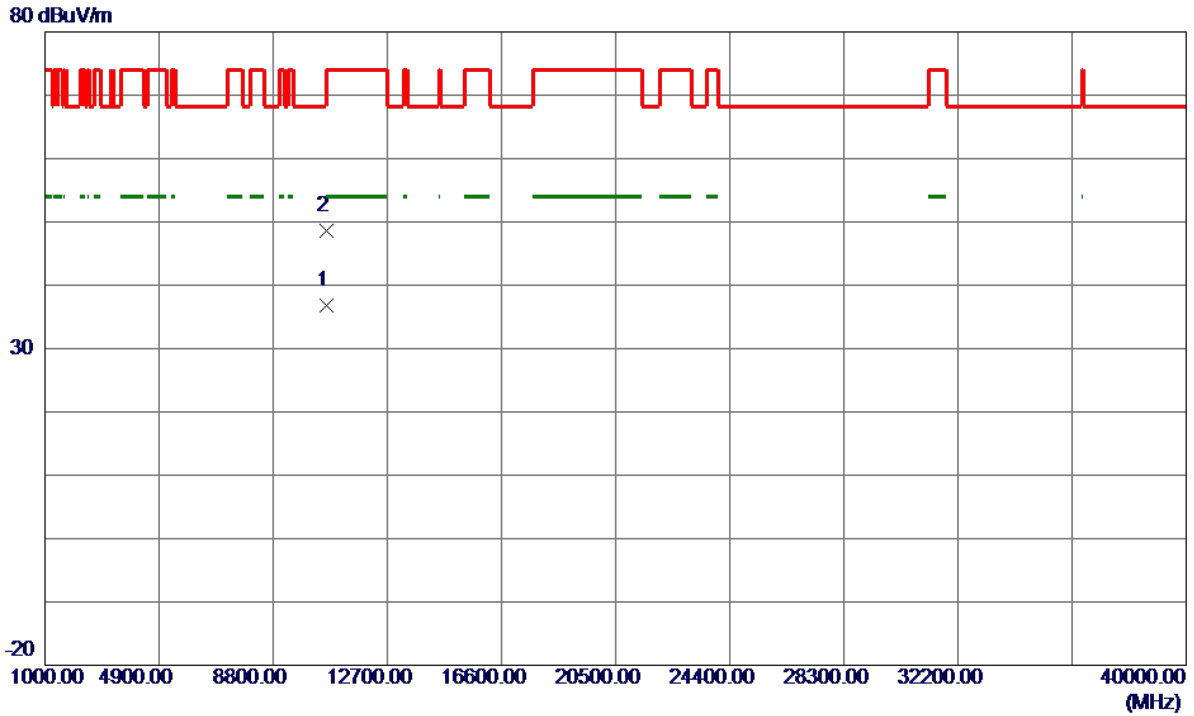

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10624.4300	24.80	11.98	36.78	54.00	-17.22	AVG	
2	10625.1900	36.58	11.98	48.56	74.00	-25.44	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC80 Mode 5290MHz


Vertical

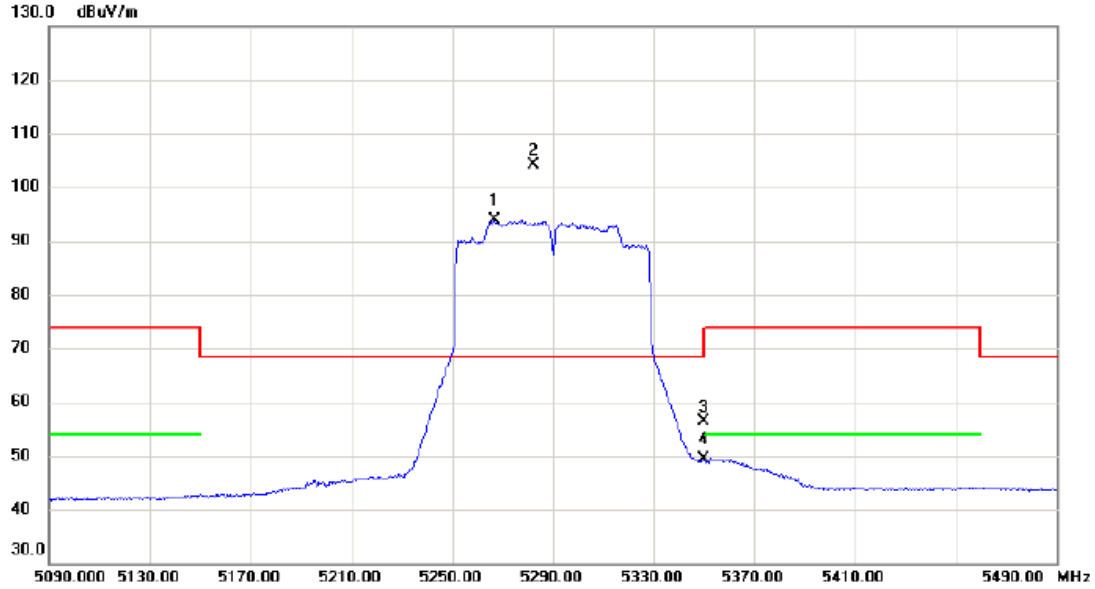

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5266.600	79.31	14.65	93.96	68.30	25.66	AVG	No Limit
2	*	5282.400	89.47	14.69	104.16	68.30	35.86	peak	No Limit
3		5350.000	41.48	14.86	56.34	74.00	-17.66	peak	
4		5350.000	34.58	14.86	49.44	54.00	-4.56	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC80 Mode 5290MHz


Vertical

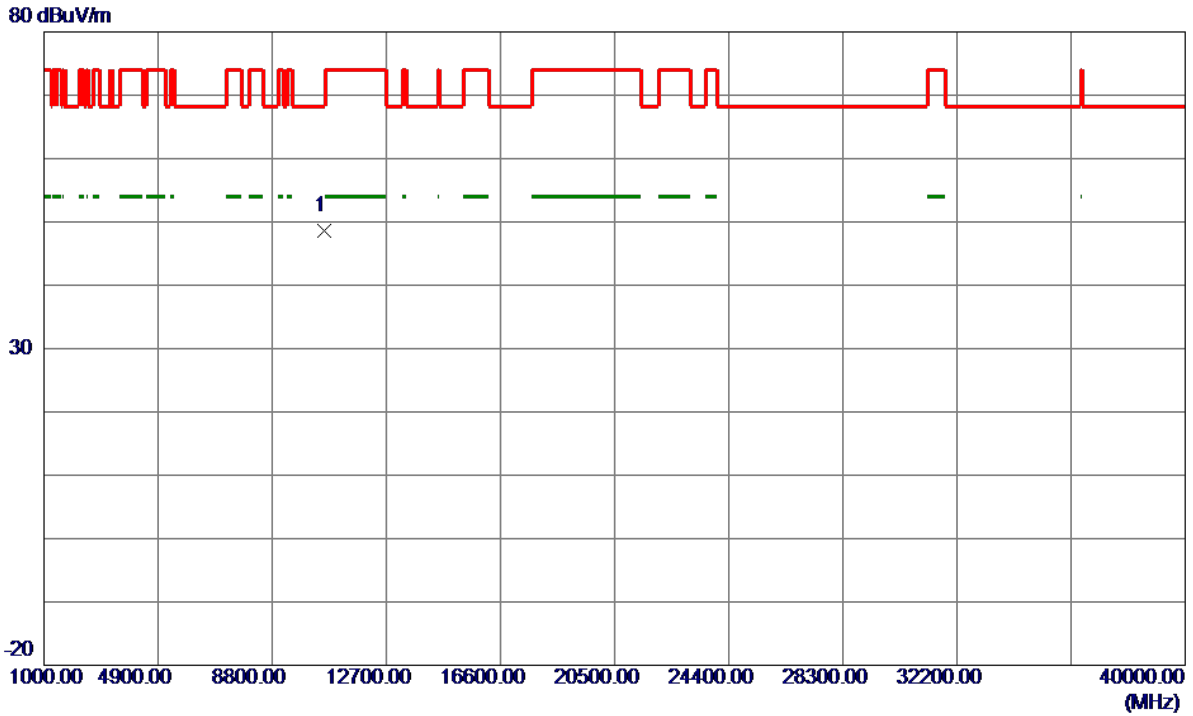

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10584.9400	36.58	11.97	48.55	68.30	-19.75	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC80 Mode 5290MHz


Horizontal

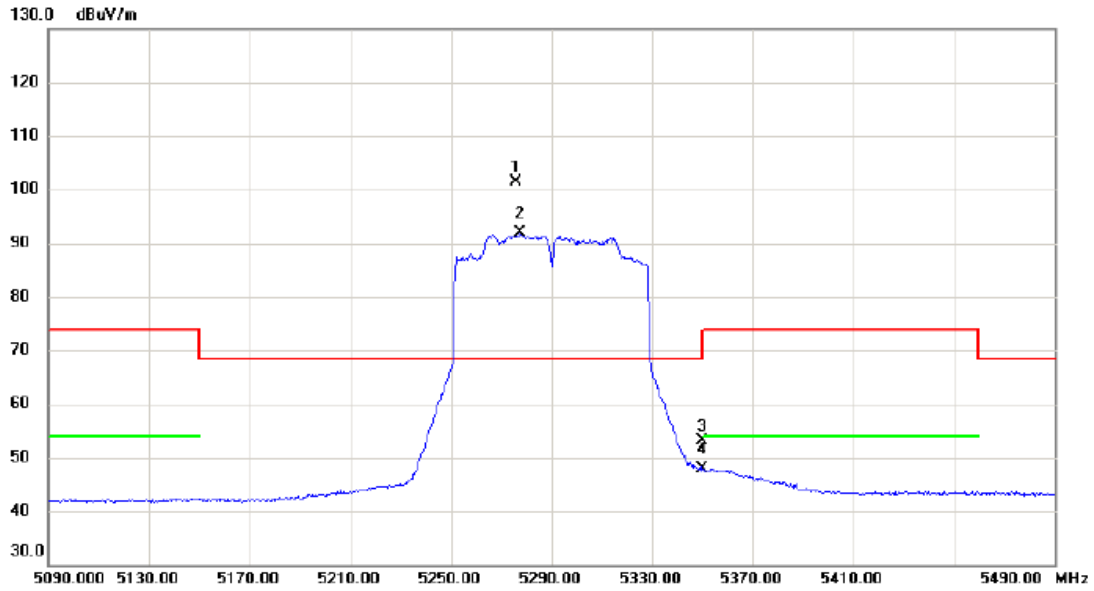

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5275.800	86.70	14.67	101.37	68.30	33.07	peak	No Limit
2	X	5277.600	77.28	14.68	91.96	68.30	23.66	AVG	No Limit
3		5350.000	38.37	14.86	53.23	74.00	-20.77	peak	
4		5350.000	32.99	14.86	47.85	54.00	-6.15	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC80 Mode 5290MHz

Horizontal

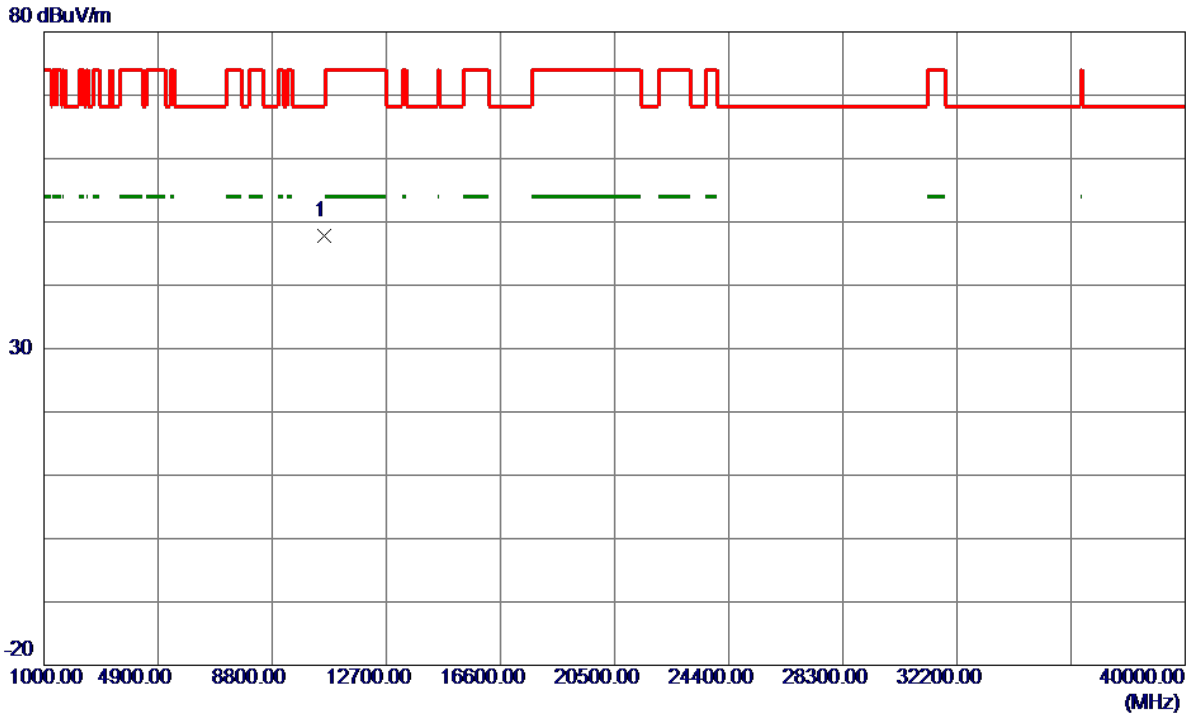


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10584.8099	35.85	11.97	47.82	68.30	-20.48	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5500 MHz

Vertical


130 dBuV/m

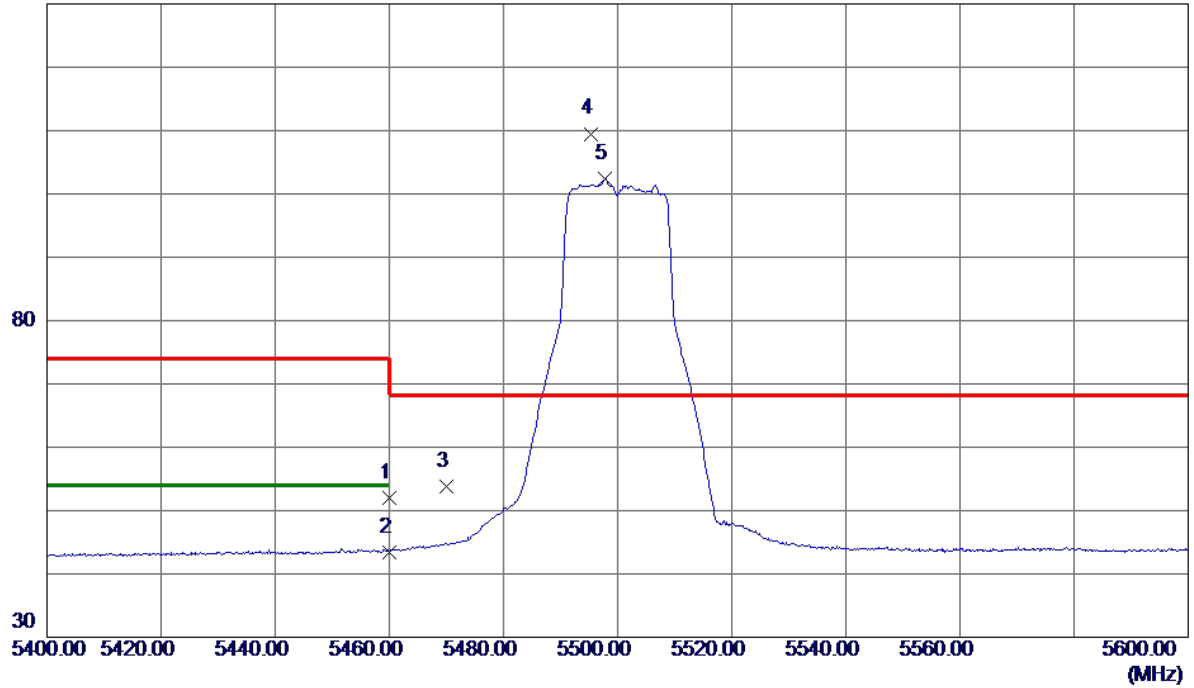

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	36.79	15.14	51.93	74.00	-22.07	Peak	
2	5460.0000	28.33	15.14	43.47	54.00	-10.53	AVG	
3	5470.0000	38.62	15.17	53.79	68.30	-14.51	Peak	
4 *	5495.4000	94.27	15.23	109.50	68.30	41.20	Peak	No Limit
5	5497.7000	87.18	15.24	102.42	999.00	-896.58	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5500 MHz

Vertical

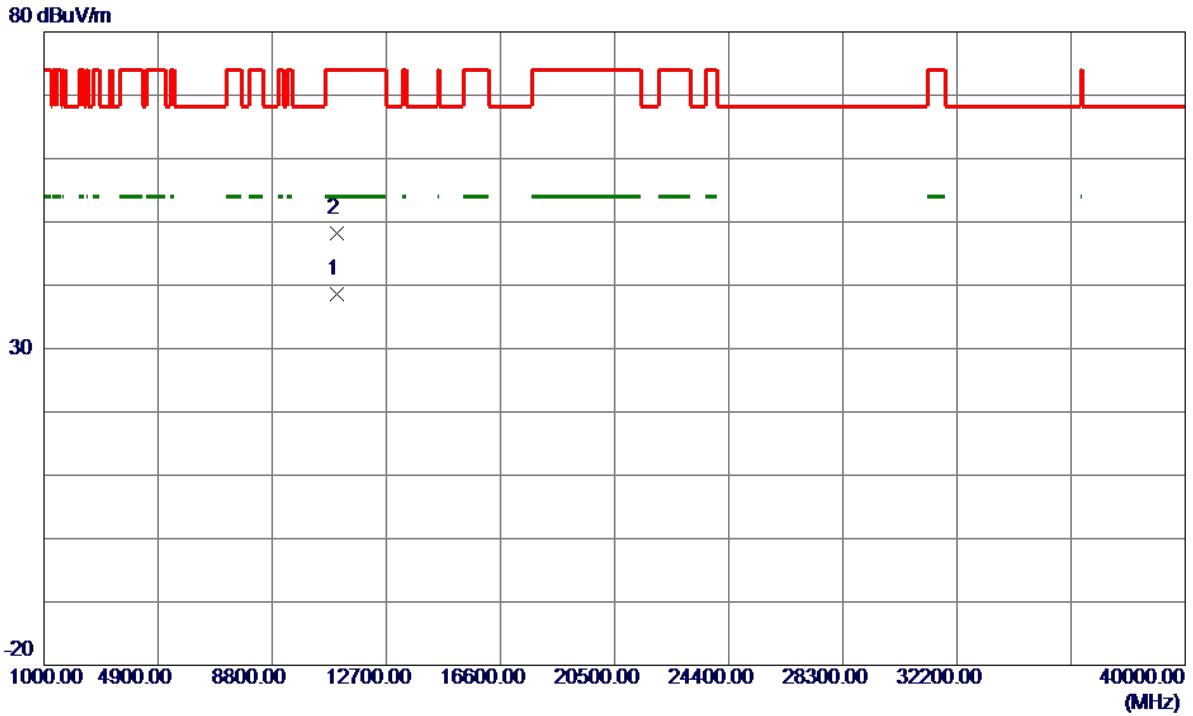


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10999.9400	26.53	12.12	38.65	54.00	-15.35	AVG	
2	11000.3500	36.00	12.12	48.12	74.00	-25.88	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5500 MHz

Horizontal


130 dBuV/m

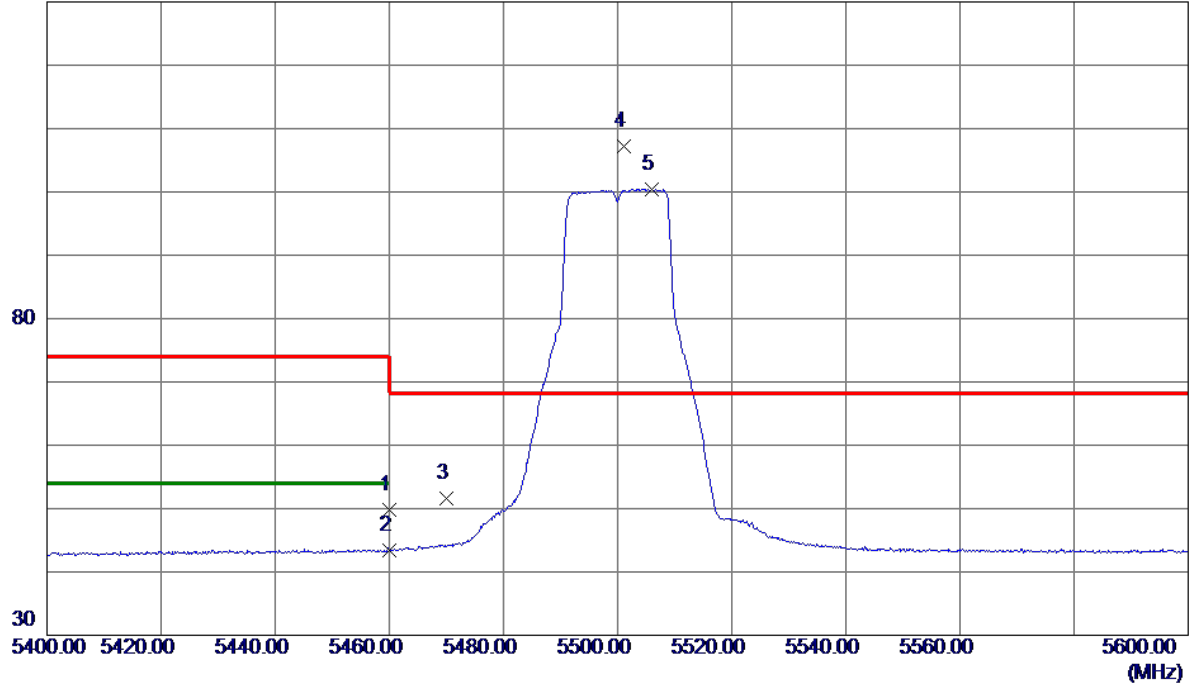

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	34.61	15.14	49.75	74.00	-24.25	Peak	
2	5460.0000	28.34	15.14	43.48	54.00	-10.52	AVG	
3	5470.0000	36.51	15.17	51.68	68.30	-16.62	Peak	
4 *	5501.1000	92.01	15.25	107.26	68.30	38.96	Peak	No Limit
5	5506.0000	85.17	15.26	100.43	999.00	-898.57	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5500 MHz

Horizontal

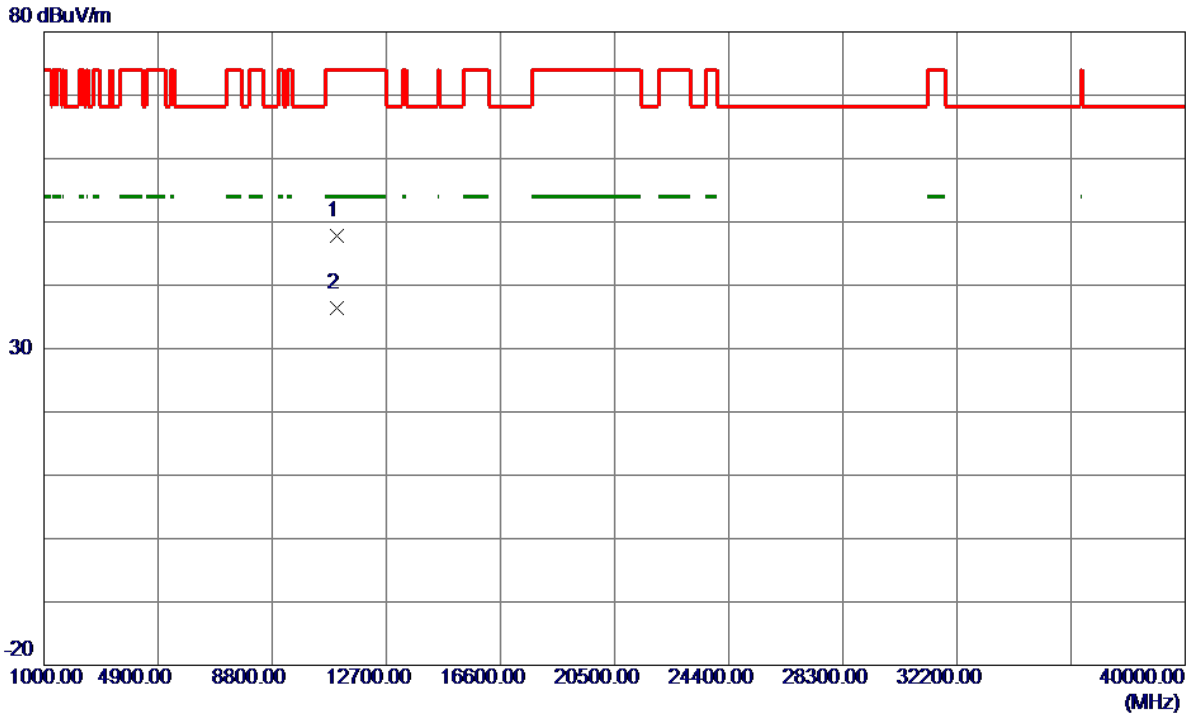


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10990.4700	35.69	12.12	47.81	74.00	-26.19	Peak	
2 *	10999.7100	24.21	12.12	36.33	54.00	-17.67	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5580 MHz

Vertical


130 dBuV/m

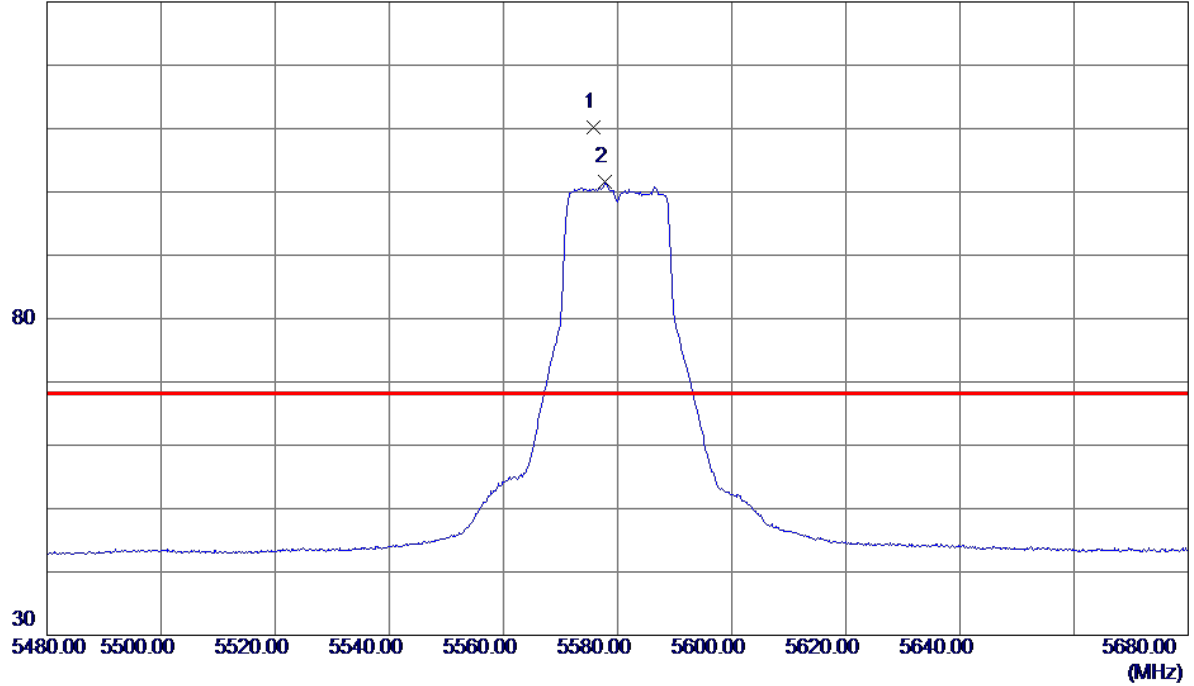

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5575.7000	94.78	15.48	110.26	68.30	41.96	Peak	No Limit
2	5577.8000	86.08	15.49	101.57	999.00	-897.43	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5580 MHz

Vertical

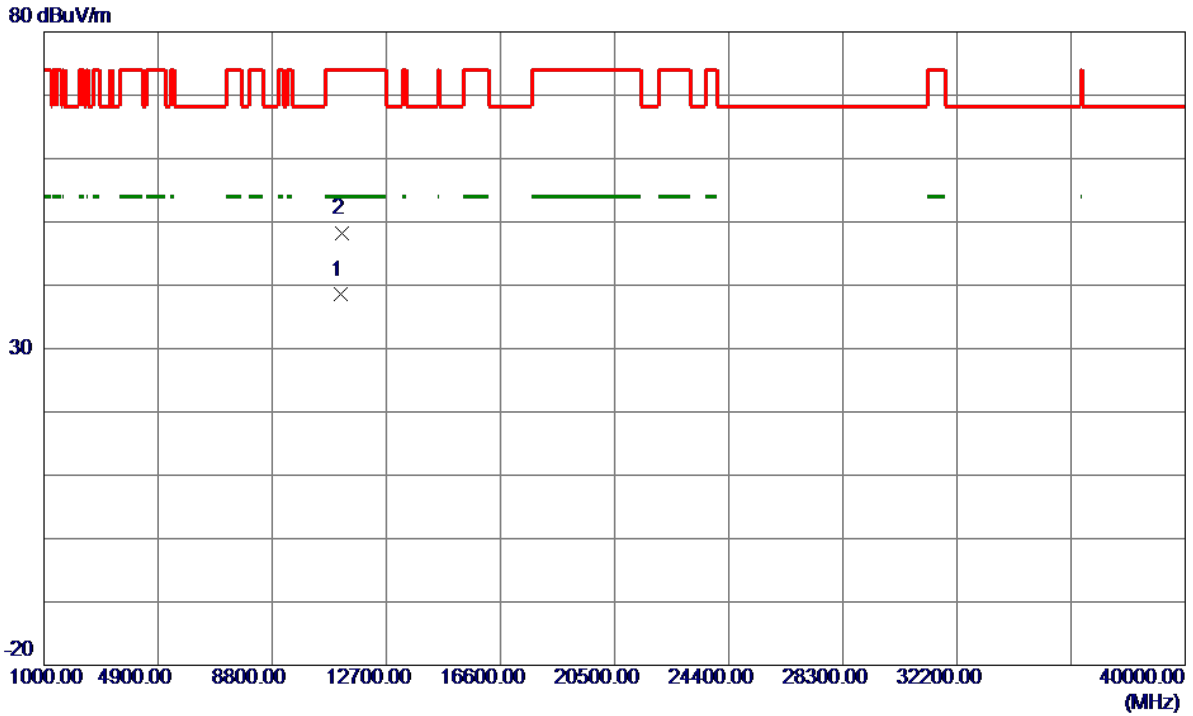


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11155.3200	26.27	12.23	38.50	54.00	-15.50	AVG	
2	11162.4600	35.90	12.24	48.14	74.00	-25.86	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5580 MHz

Horizontal


130 dBuV/m

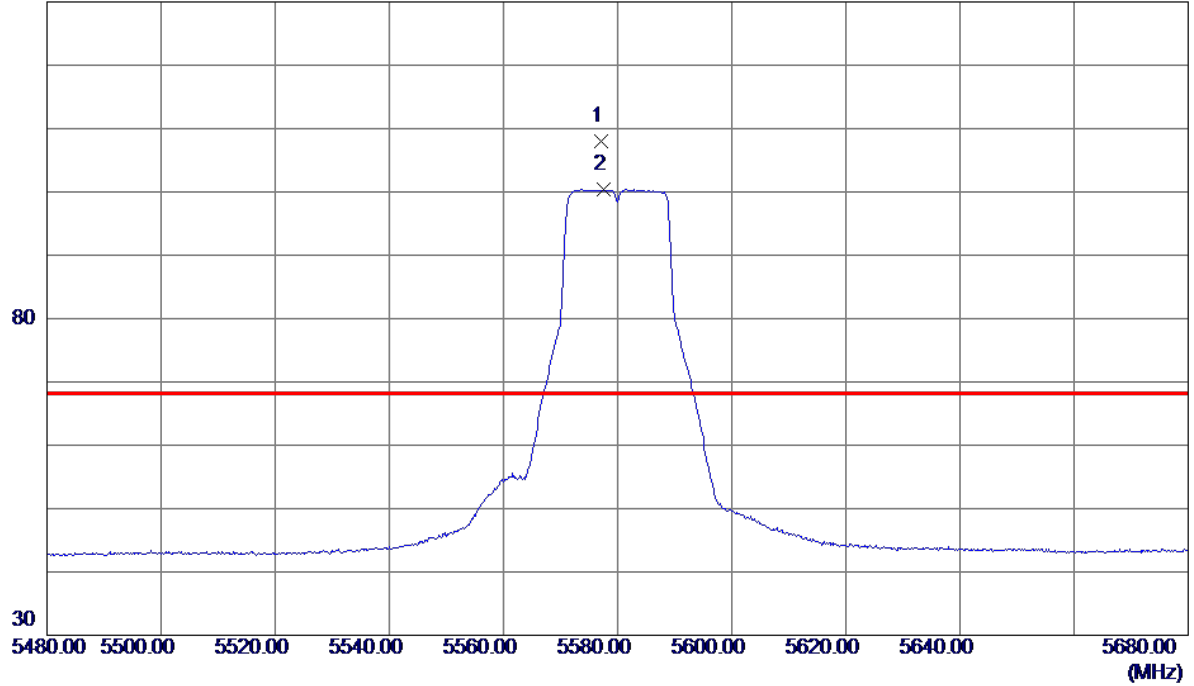

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5577.2000	92.54	15.49	108.03	68.30	39.73	Peak	No Limit
2	5577.5000	84.88	15.49	100.37	999.00	-898.63	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5580 MHz

Horizontal

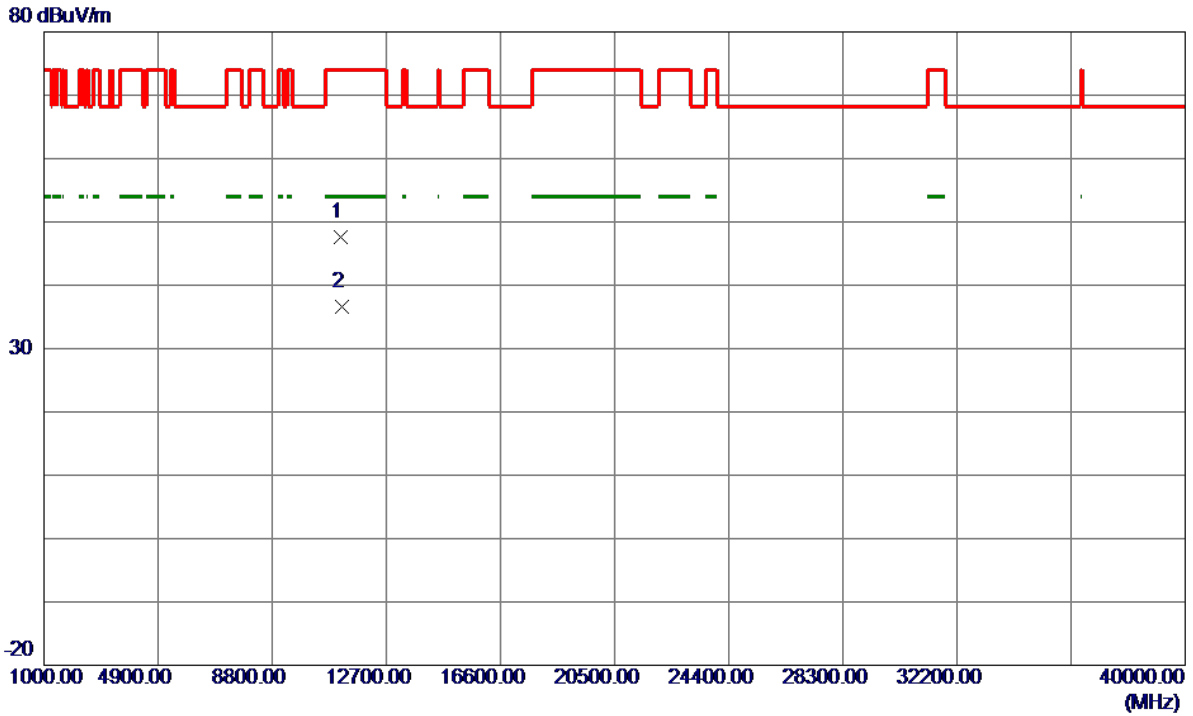


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11155.4500	35.33	12.23	47.56	74.00	-26.44	Peak	
2 *	11165.9700	24.27	12.24	36.51	54.00	-17.49	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5700 MHz

Vertical


130 dBuV/m

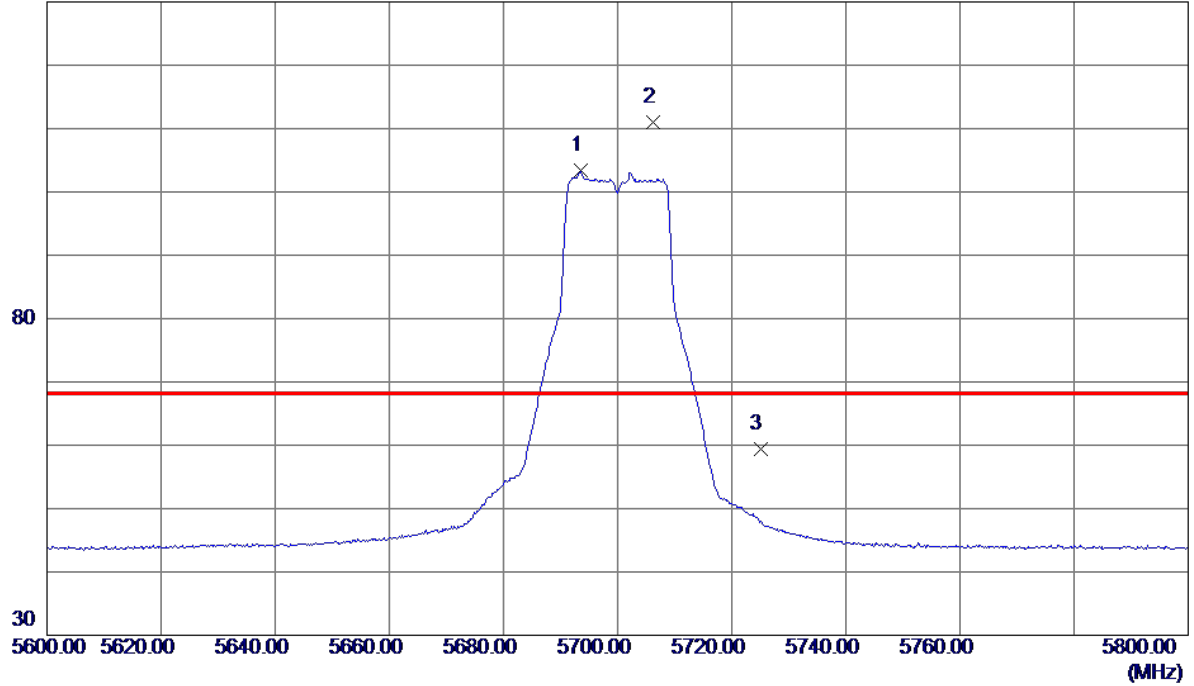

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5693.5000	87.55	15.86	103.41	999.00	-895.59	AVG	No Limit
2 *	5706.3000	95.13	15.90	111.03	68.30	42.73	Peak	No Limit
3	5725.0000	43.43	15.96	59.39	68.30	-8.91	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5700 MHz

Vertical

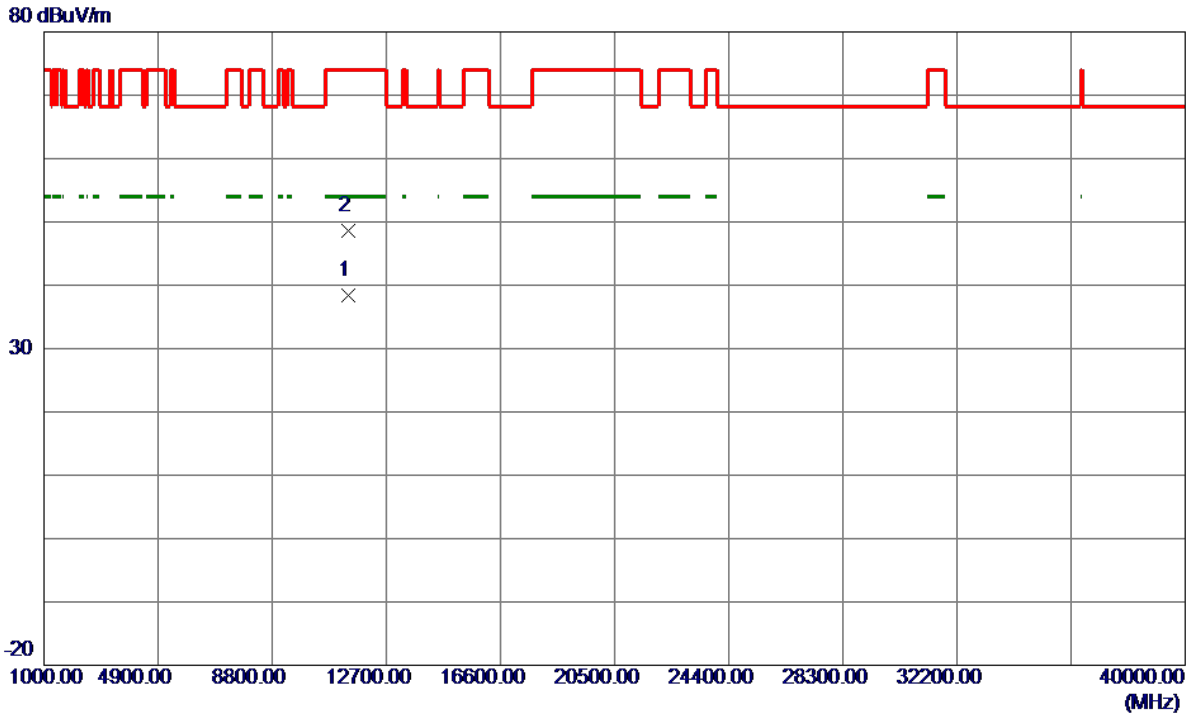


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11400.9300	25.99	12.40	38.39	54.00	-15.61	AVG	
2	11396.9300	36.19	12.40	48.59	74.00	-25.41	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5700 MHz

Horizontal


130 dBuV/m

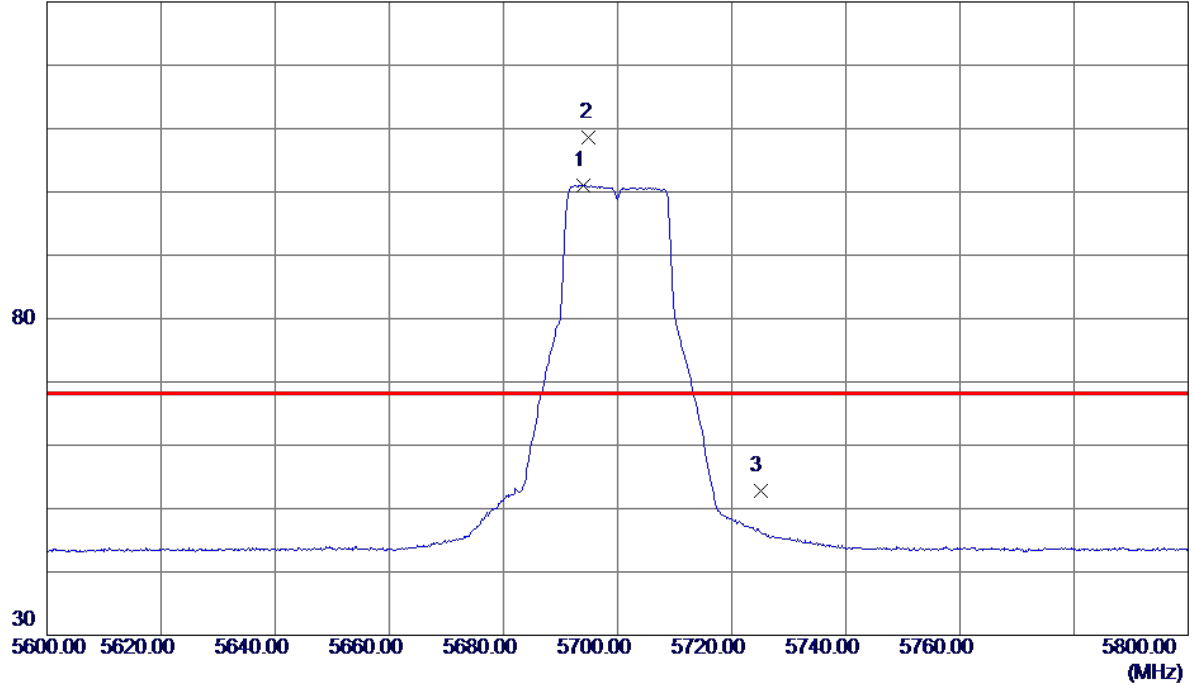

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5693.9000	85.20	15.86	101.06	999.00	-897.94	AVG	No Limit
2 *	5695.0000	92.74	15.86	108.60	68.30	40.30	Peak	No Limit
3	5725.0000	36.85	15.96	52.81	68.30	-15.49	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5700 MHz

Horizontal

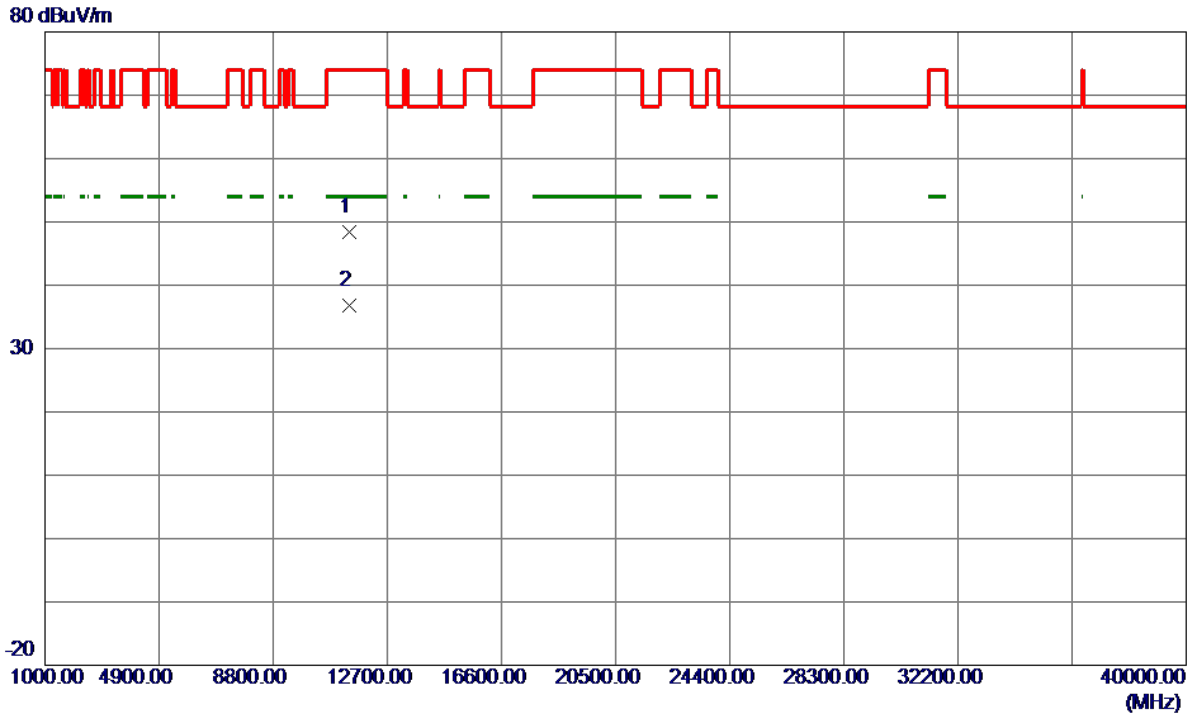


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11398.5000	35.98	12.40	48.38	74.00	-25.62	Peak	
2 *	11404.5400	24.38	12.41	36.79	54.00	-17.21	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5510MHz

Vertical


130 dBuV/m

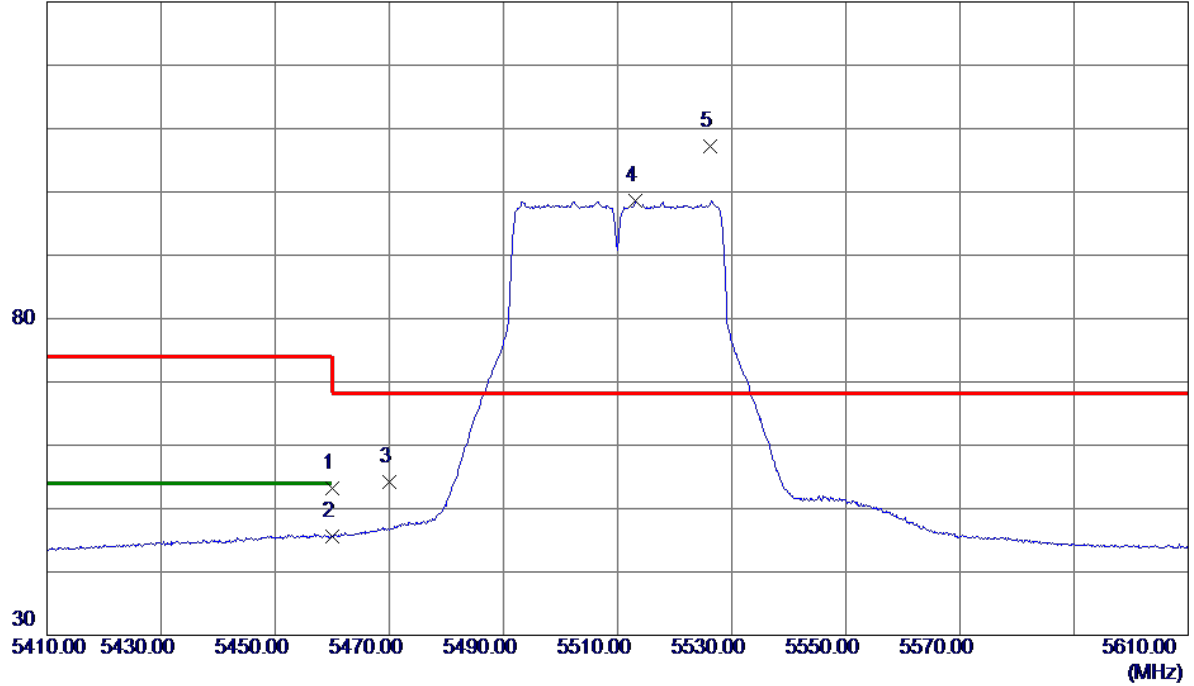

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	38.14	15.14	53.28	74.00	-20.72	Peak	
2	5460.0000	30.53	15.14	45.67	54.00	-8.33	AVG	
3	5470.0000	38.98	15.17	54.15	68.30	-14.15	Peak	
4	5513.2000	83.24	15.29	98.53	999.00	-900.47	AVG	No Limit
5 *	5526.3000	91.80	15.33	107.13	68.30	38.83	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5510MHz

Vertical

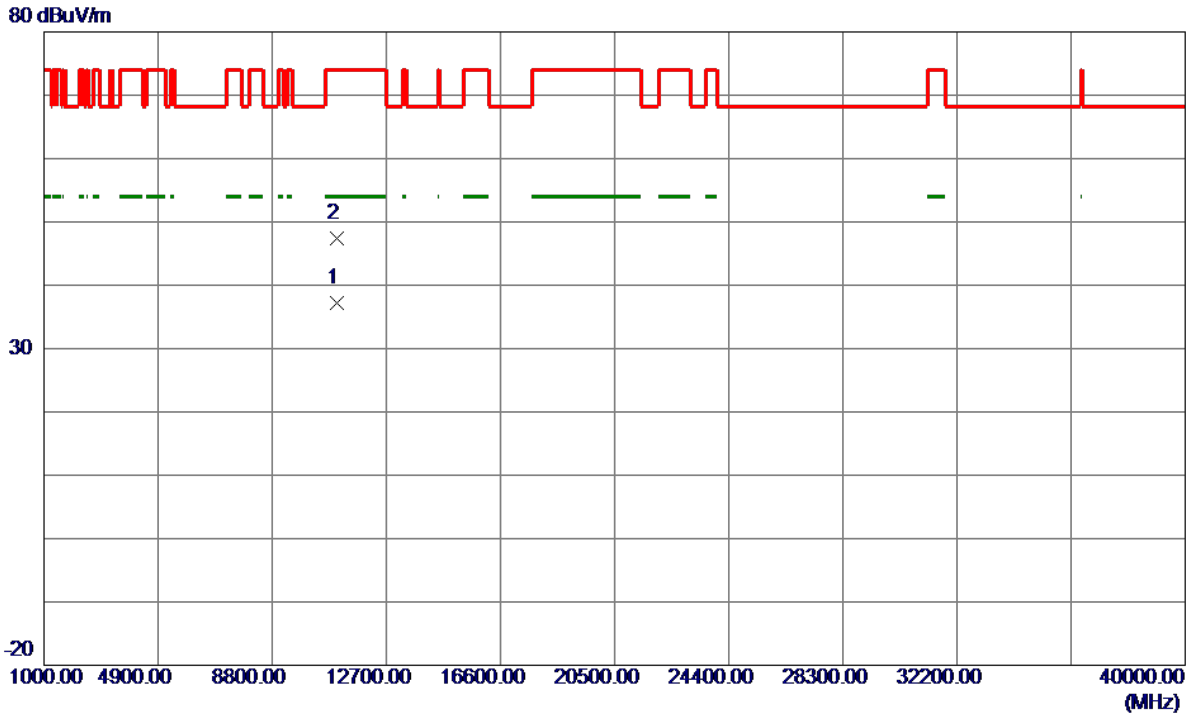


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11019.8500	25.16	12.13	37.29	54.00	-16.71	AVG	
2	11013.4600	35.29	12.13	47.42	74.00	-26.58	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5510MHz

Horizontal

130 dBuV/m

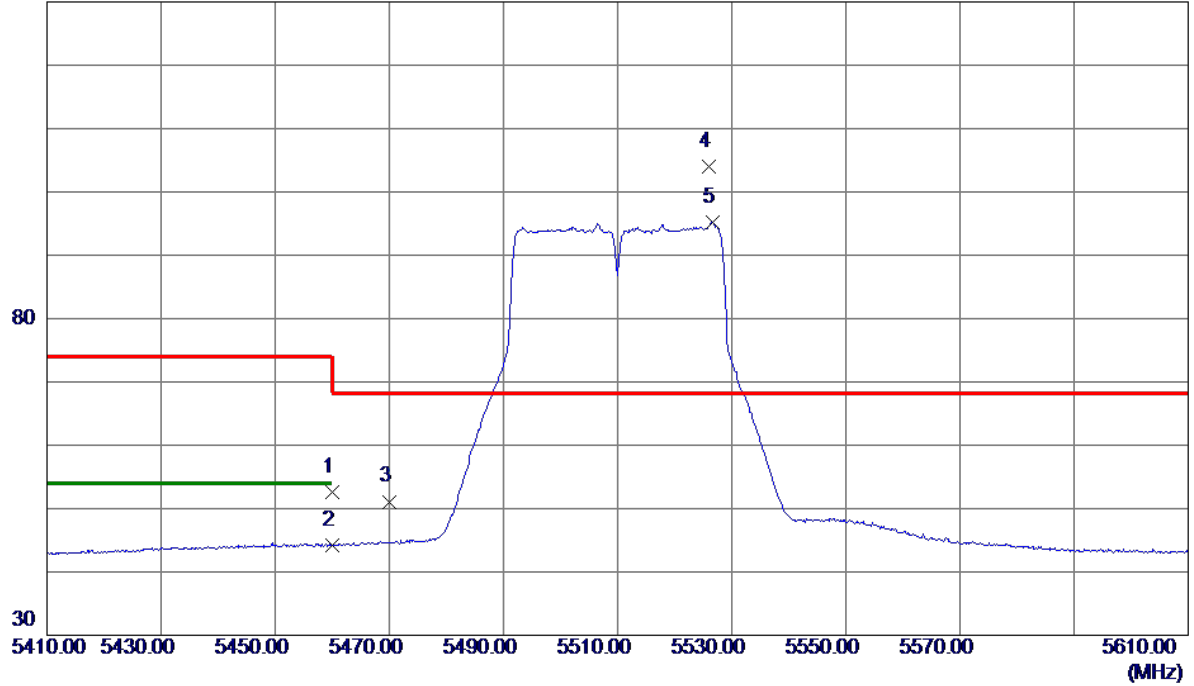

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	37.52	15.14	52.66	74.00	-21.34	Peak	
2	5460.0000	28.98	15.14	44.12	54.00	-9.88	AVG	
3	5470.0000	35.93	15.17	51.10	68.30	-17.20	Peak	
4 *	5526.0000	88.57	15.33	103.90	68.30	35.60	Peak	No Limit
5	5526.6000	79.84	15.33	95.17	999.00	-903.83	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5510MHz

Horizontal




No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11012.4800	35.34	12.13	47.47	74.00	-26.53	Peak	
2 *	11022.4300	24.35	12.14	36.49	54.00	-17.51	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5550MHz

Vertical


130 dBuV/m

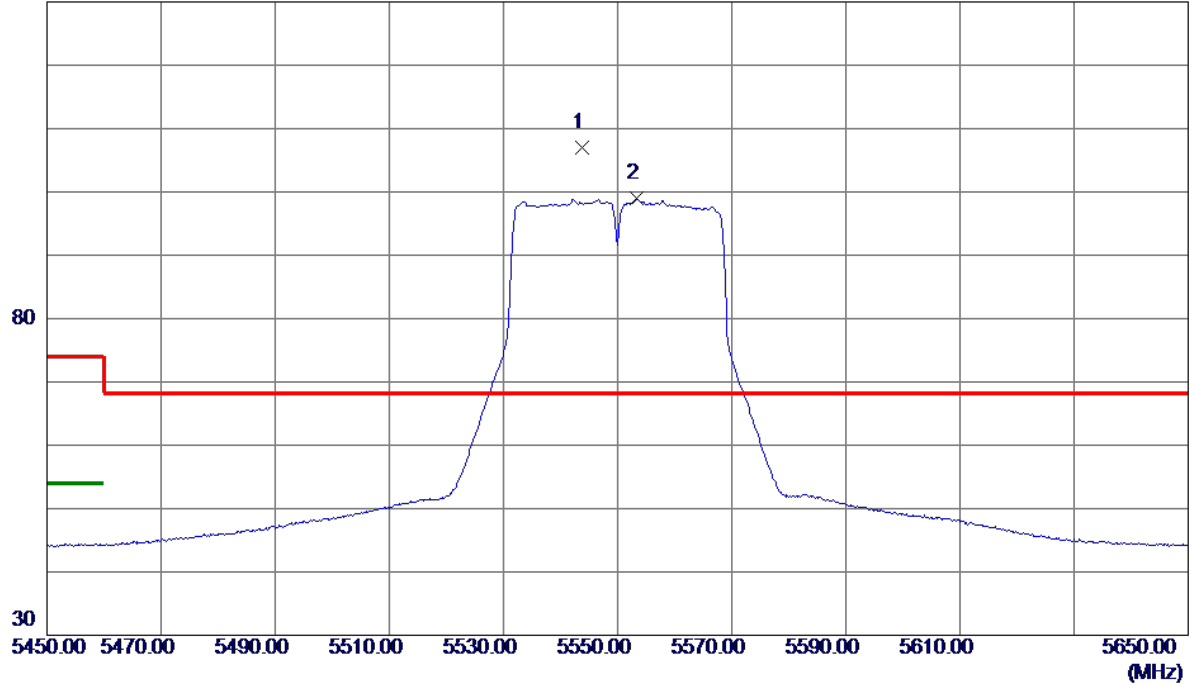

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5543.7000	91.70	15.38	107.08	68.30	38.78	Peak	No Limit
2	5553.4000	83.58	15.41	98.99	999.00	-900.01	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5550MHz

Vertical

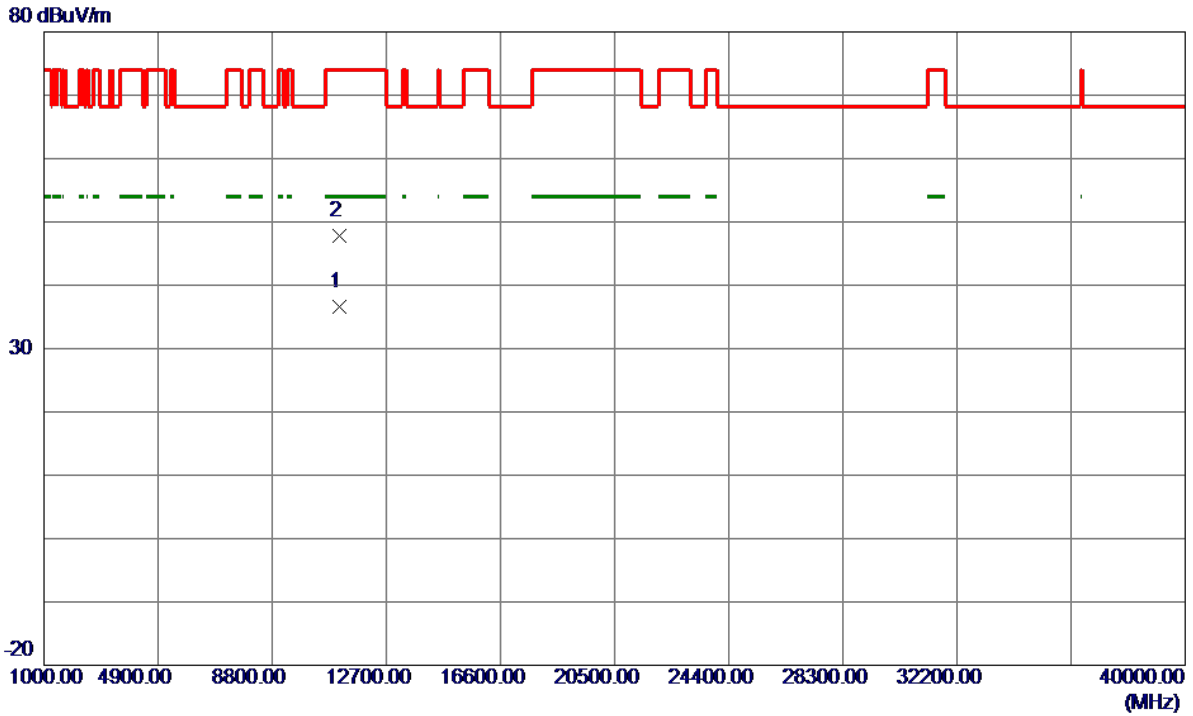


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11098.0300	24.44	12.19	36.63	54.00	-17.37	AVG	
2	11105.8099	35.52	12.20	47.72	74.00	-26.28	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5550MHz

Horizontal


130 dBuV/m

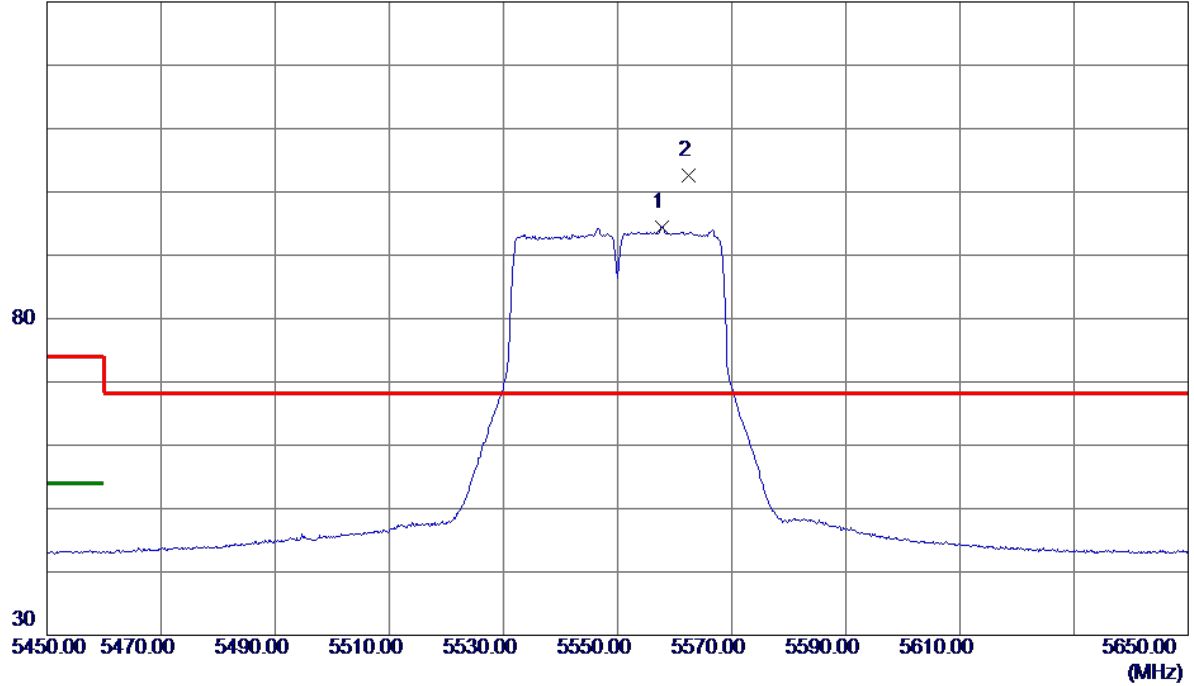

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5557.8000	79.03	15.43	94.46	999.00	-904.54	AVG	No Limit
2 *	5562.4000	87.24	15.44	102.68	68.30	34.38	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5550MHz

Horizontal

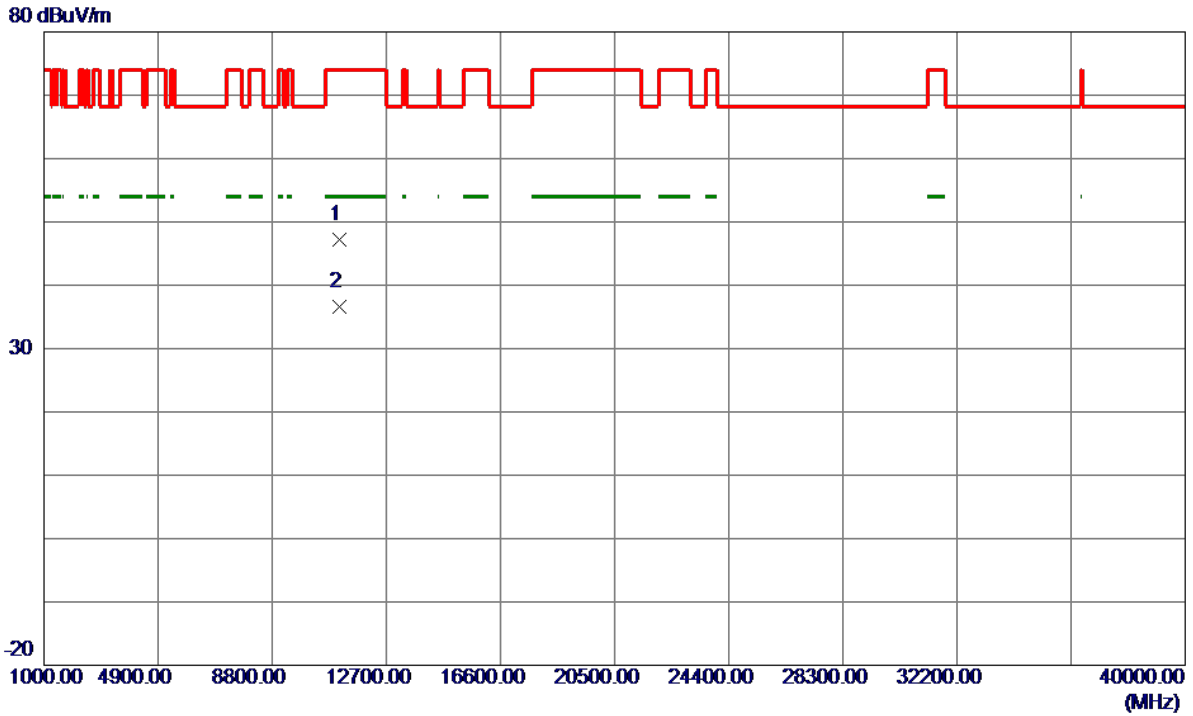


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11090.4000	35.10	12.18	47.28	74.00	-26.72	Peak	
2 *	11105.0300	24.40	12.19	36.59	54.00	-17.41	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5670MHz

Vertical


130 dBuV/m

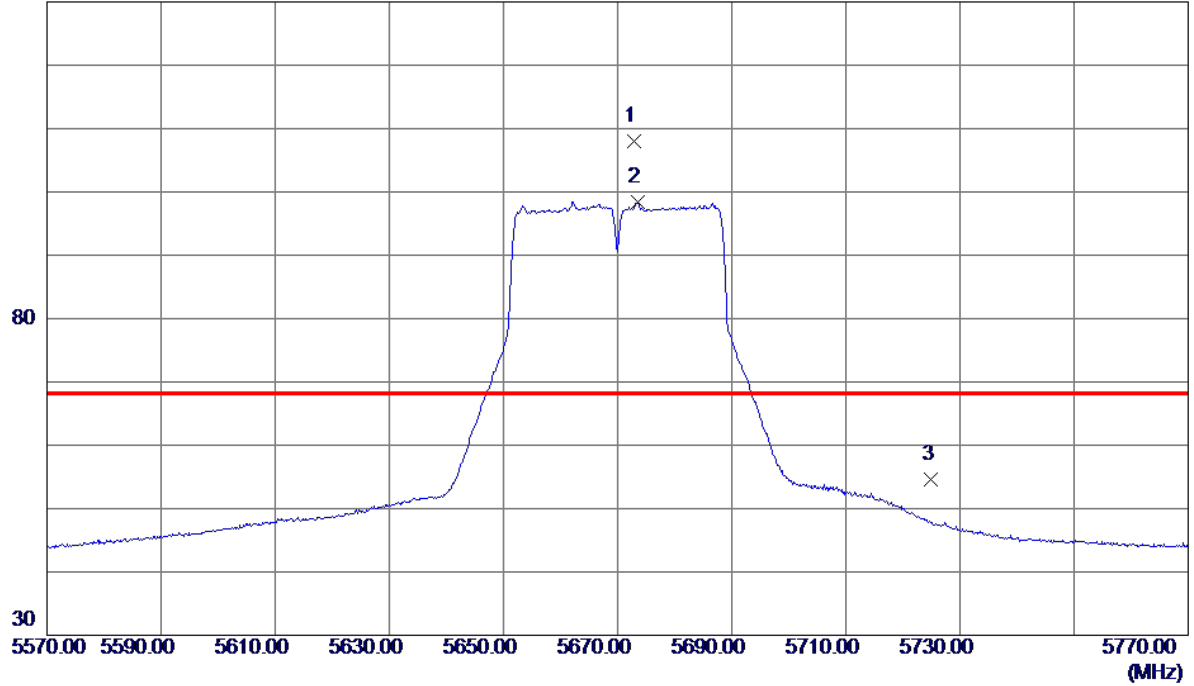

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5672.8000	92.21	15.79	108.00	68.30	39.70	Peak	No Limit
2	5673.5000	82.64	15.80	98.44	999.00	-900.56	AVG	No Limit
3	5725.0000	38.66	15.96	54.62	68.30	-13.68	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5670MHz

Vertical

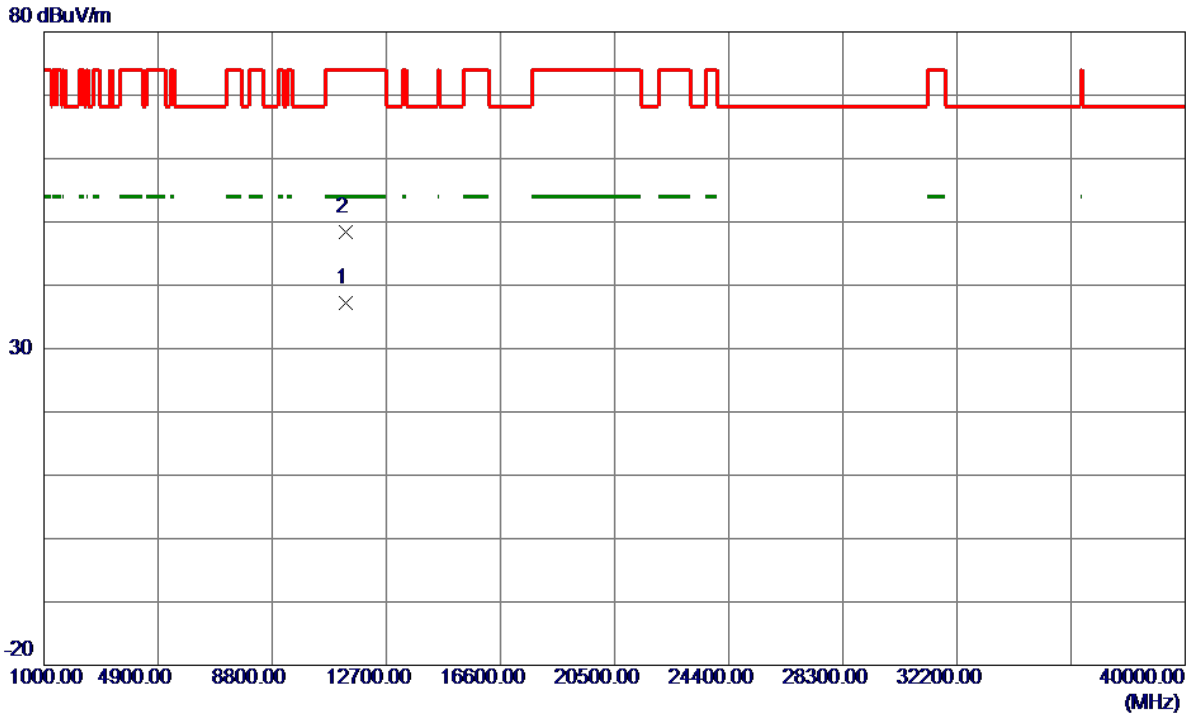


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11331.0700	24.81	12.36	37.17	54.00	-16.83	AVG	
2	11332.6500	36.09	12.36	48.45	74.00	-25.55	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5670MHz

Horizontal


130 dBuV/m

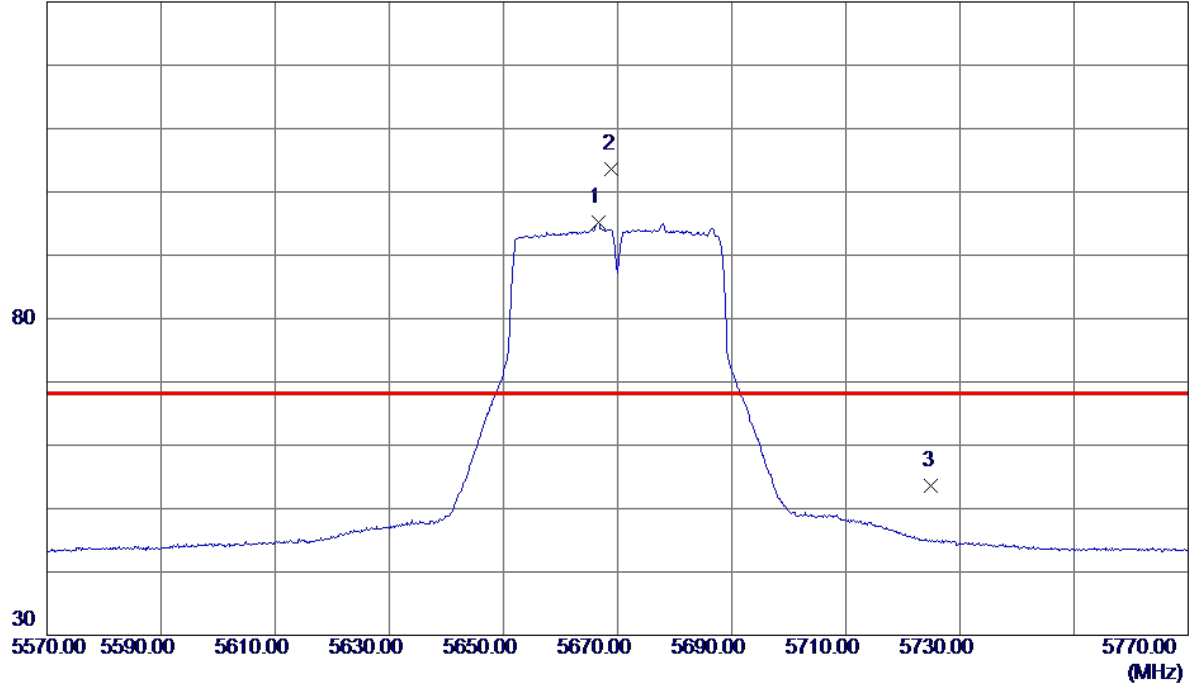

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5666.6000	79.48	15.77	95.25	999.00	-903.75	AVG	No Limit
2 *	5669.0000	87.91	15.78	103.69	68.30	35.39	Peak	No Limit
3	5725.0000	37.68	15.96	53.64	68.30	-14.66	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5670MHz

Horizontal

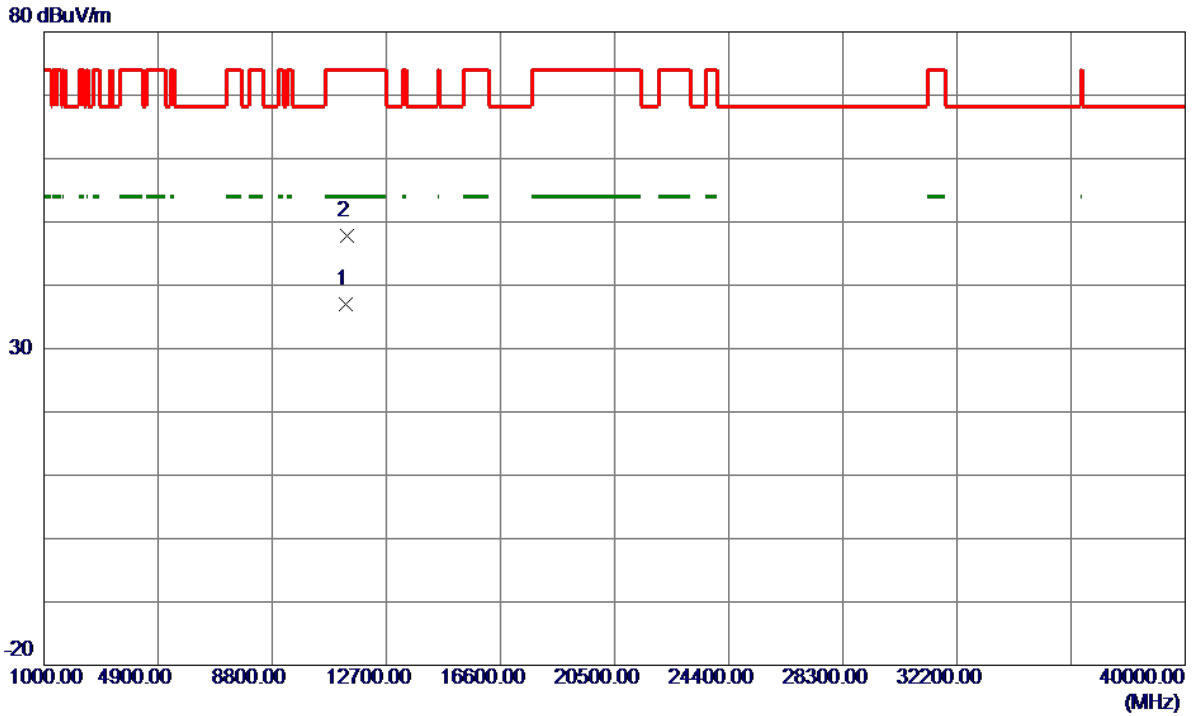


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11330.8900	24.73	12.35	37.08	54.00	-16.92	AVG	
2	11343.0900	35.39	12.36	47.75	74.00	-26.25	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5530MHz

Vertical


130 dBuV/m

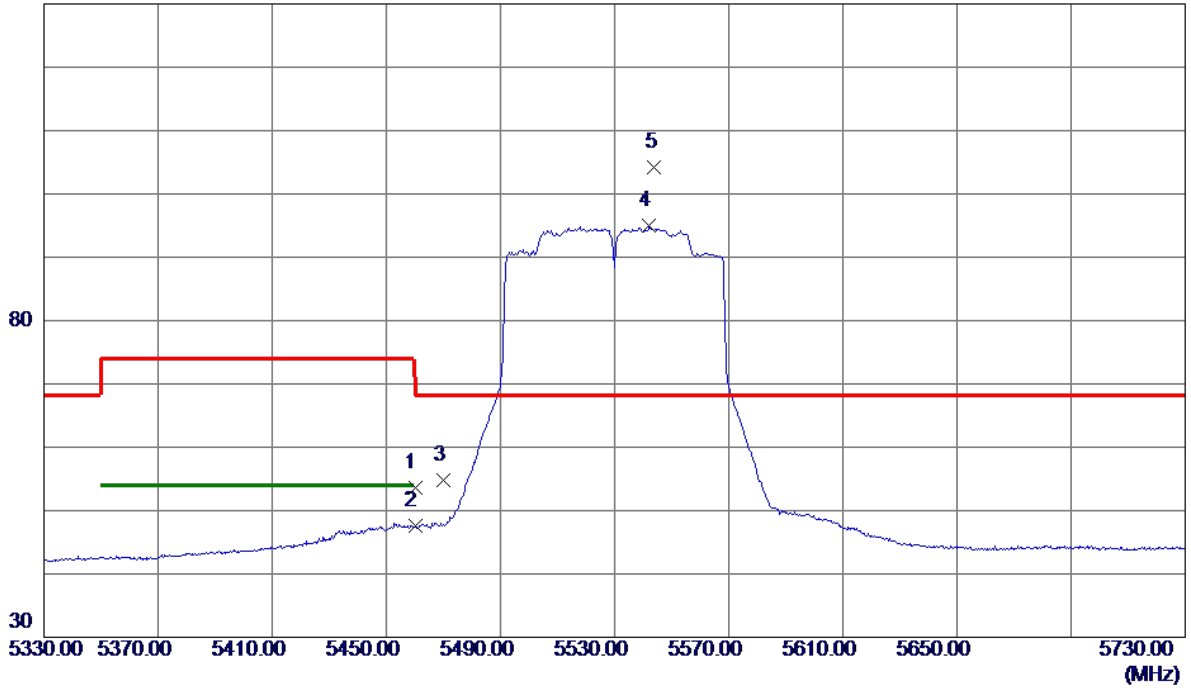

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	38.43	15.14	53.57	74.00	-20.43	Peak	
2	5460.0000	32.52	15.14	47.66	54.00	-6.34	AVG	
3	5470.0000	39.66	15.17	54.83	68.30	-13.47	Peak	
4	5542.2000	79.55	15.38	94.93	999.00	-904.07	AVG	No Limit
5 *	5544.0000	88.78	15.38	104.16	68.30	35.86	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5530MHz

Vertical

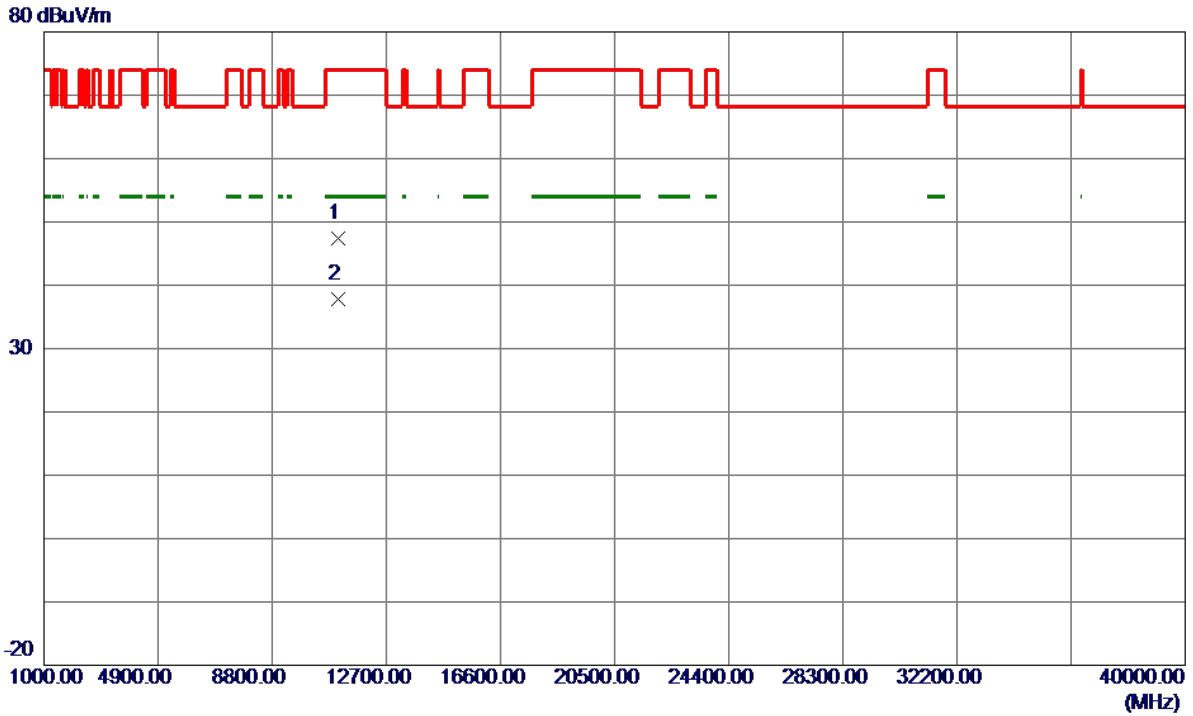


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11052.7900	35.27	12.16	47.43	74.00	-26.57	Peak	
2 *	11059.9400	25.71	12.16	37.87	54.00	-16.13	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5530MHz

Horizontal


130 dBuV/m

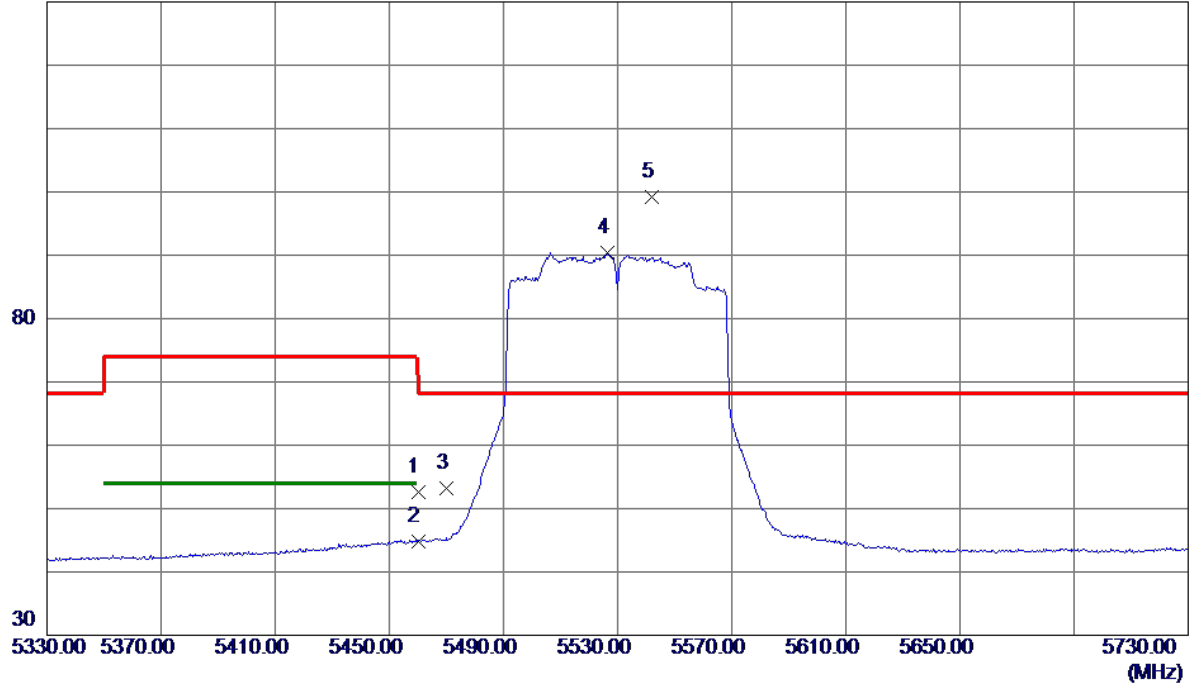

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	37.42	15.14	52.56	74.00	-21.44	Peak	
2	5470.0000	29.71	15.14	44.85	54.00	-9.15	AVG	
3	5470.0000	38.04	15.17	53.21	68.30	-15.09	Peak	
4	5526.6000	75.15	15.33	90.48	999.00	-908.52	AVG	No Limit
5 *	5542.2000	83.81	15.38	99.19	68.30	30.89	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5530MHz

Horizontal

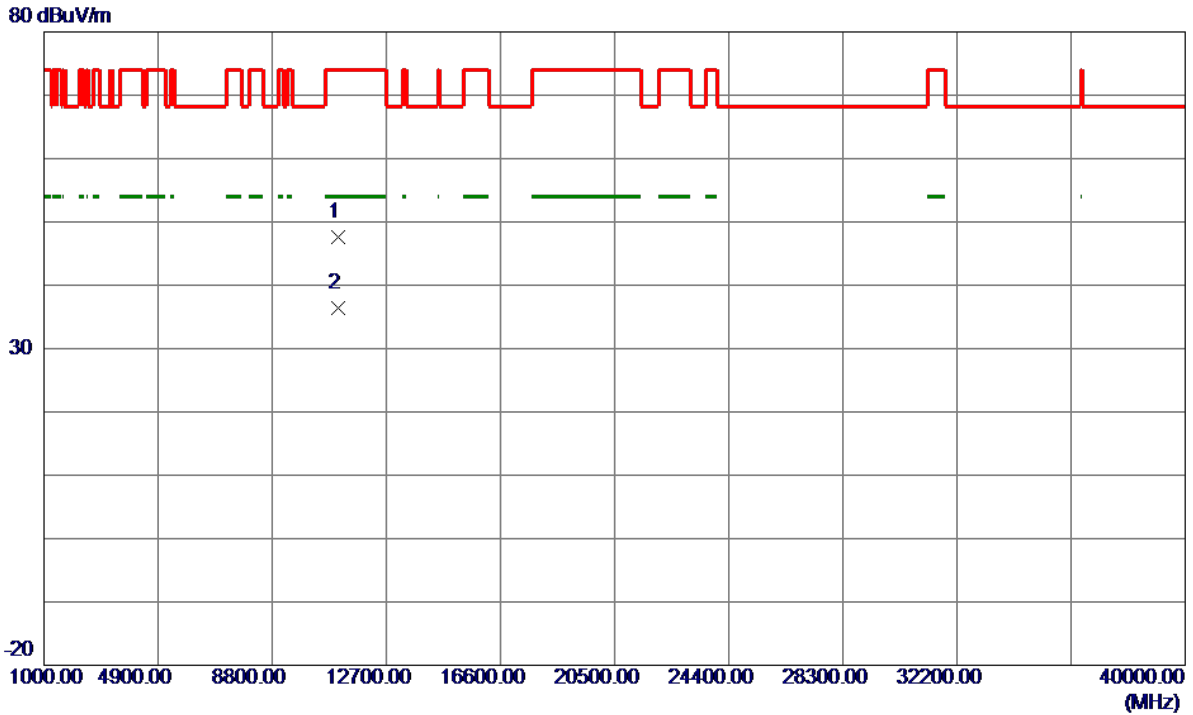


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11056.1400	35.52	12.16	47.68	74.00	-26.32	Peak	
2 *	11067.7600	24.32	12.17	36.49	54.00	-17.51	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5610MHz

Vertical


130 dBuV/m

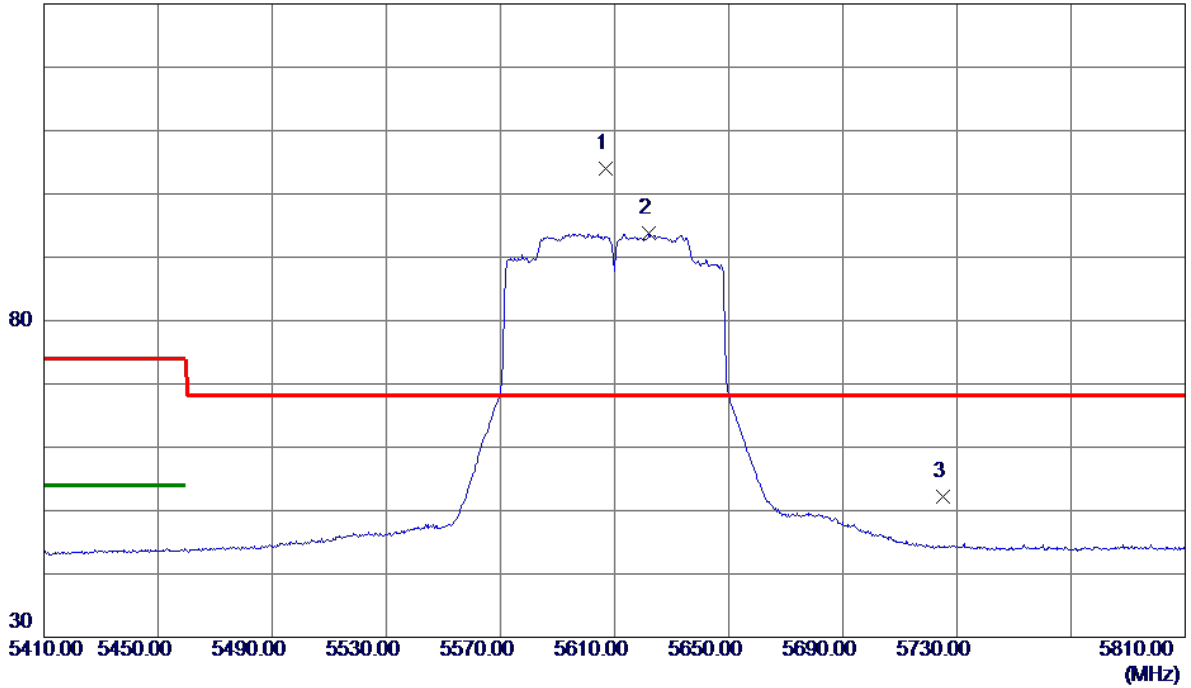

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5606.8000	88.37	15.58	103.95	68.30	35.65	Peak	No Limit
2	5622.2000	78.13	15.63	93.76	999.00	-905.24	AVG	No Limit
3	5725.0000	36.29	15.96	52.25	68.30	-16.05	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5610MHz

Vertical

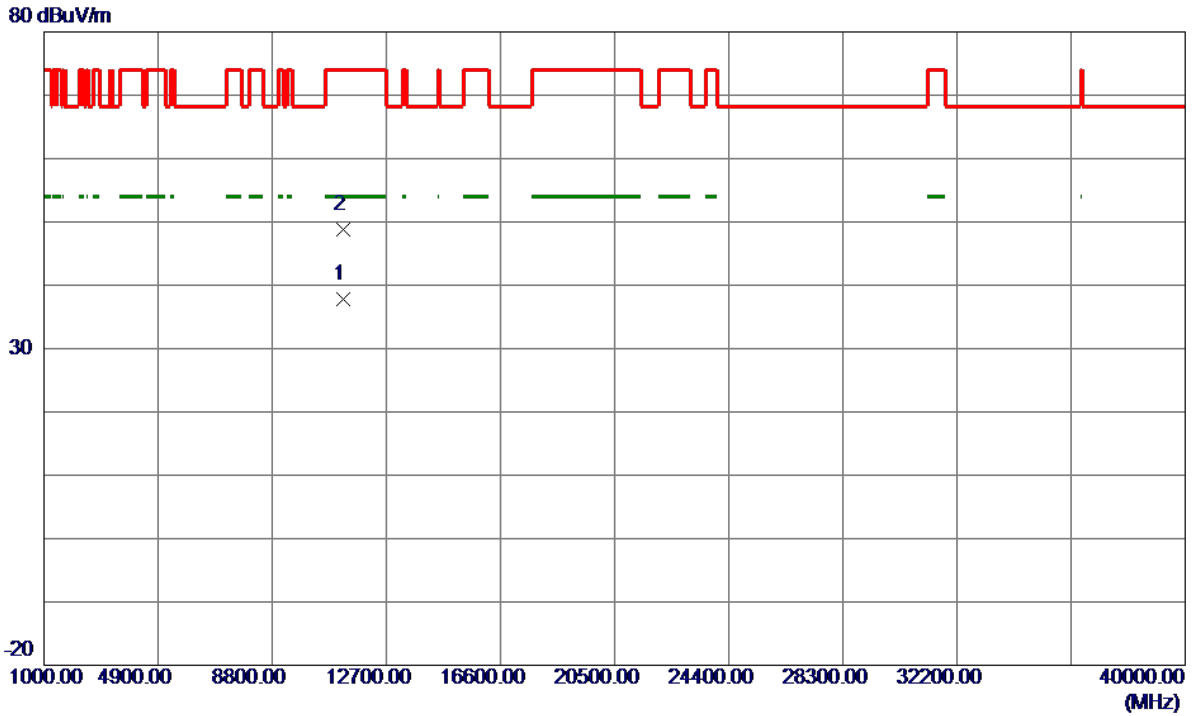


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11225.4900	25.55	12.28	37.83	54.00	-16.17	AVG	
2	11220.7000	36.60	12.28	48.88	74.00	-25.12	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5610MHz

Horizontal


130 dBuV/m

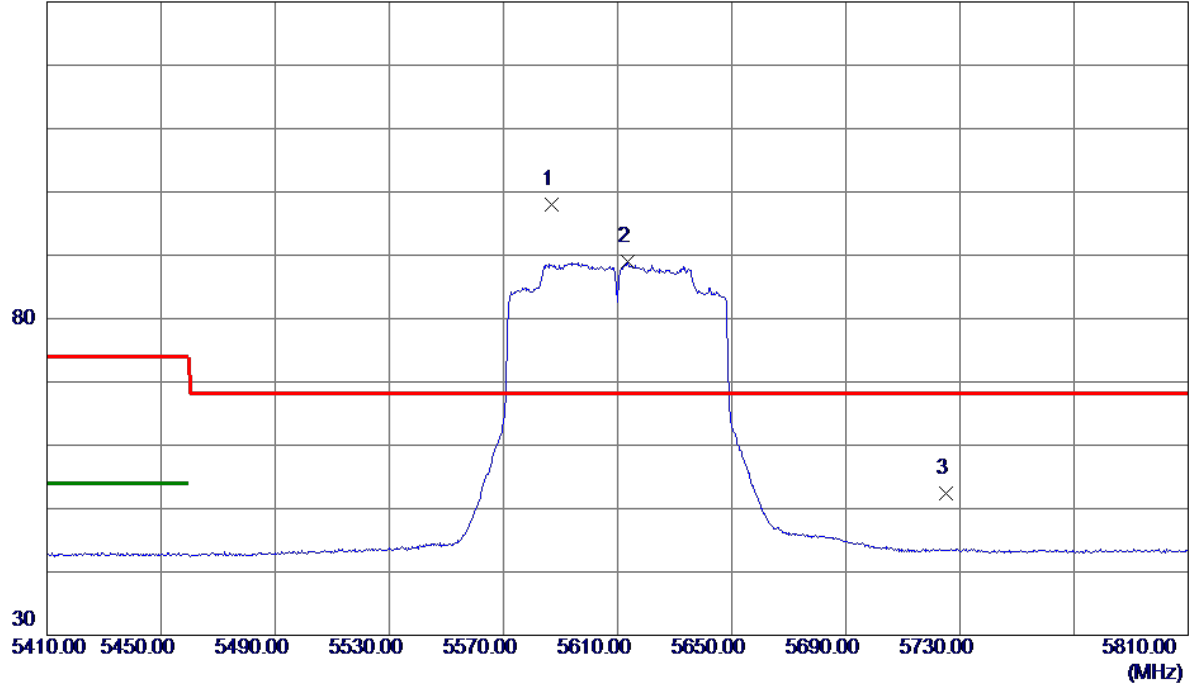

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5586.8000	82.49	15.52	98.01	68.30	29.71	Peak	No Limit
2	5613.4000	73.35	15.60	88.95	999.00	-910.05	AVG	No Limit
3	5725.0000	36.43	15.96	52.39	68.30	-15.91	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5610MHz


Horizontal

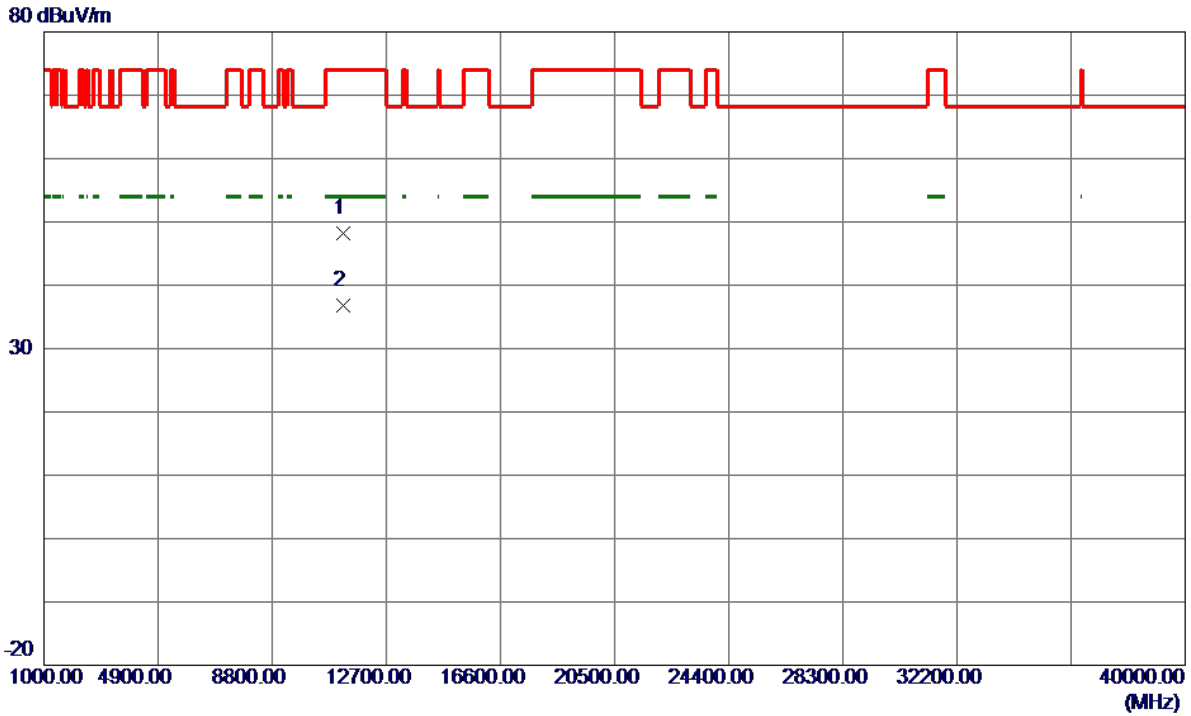

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11218.4300	35.95	12.28	48.23	74.00	-25.77	Peak	
2 *	11224.3600	24.61	12.28	36.89	54.00	-17.11	AVG	


Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC160 Mode 5570MHz

Vertical

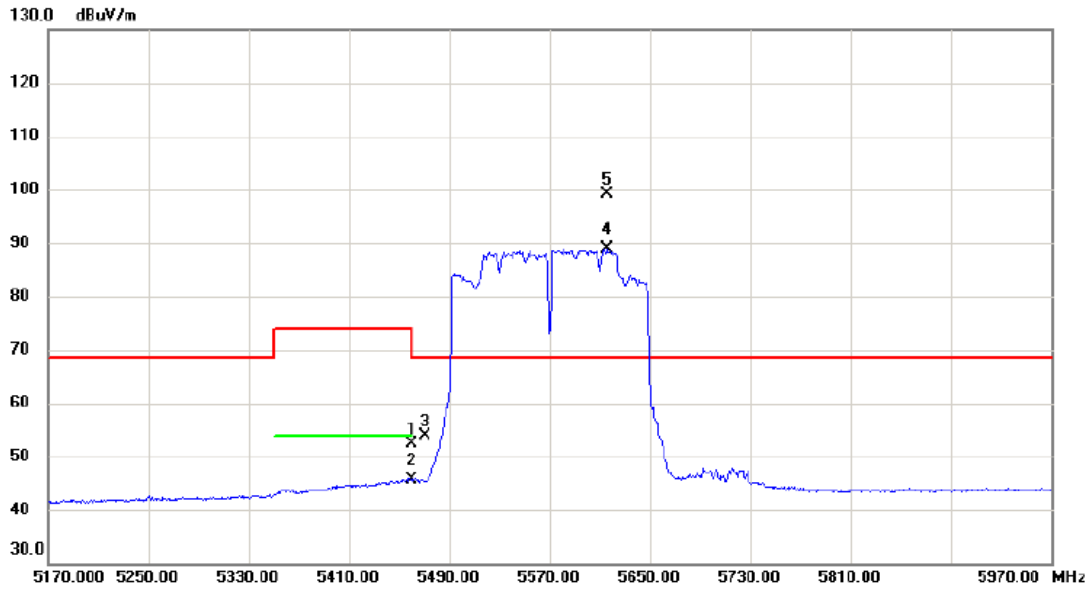

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	37.35	15.15	52.50	74.00	-21.50	peak	
2		5460.000	30.51	15.15	45.66	54.00	-8.34	AVG	
3		5470.000	38.73	15.17	53.90	68.30	-14.40	peak	
4	X	5614.800	73.28	15.61	88.89	68.30	20.59	AVG	No Limit
5	*	5615.200	83.42	15.61	99.03	68.30	30.73	peak	No Limit


Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC160 Mode 5570MHz

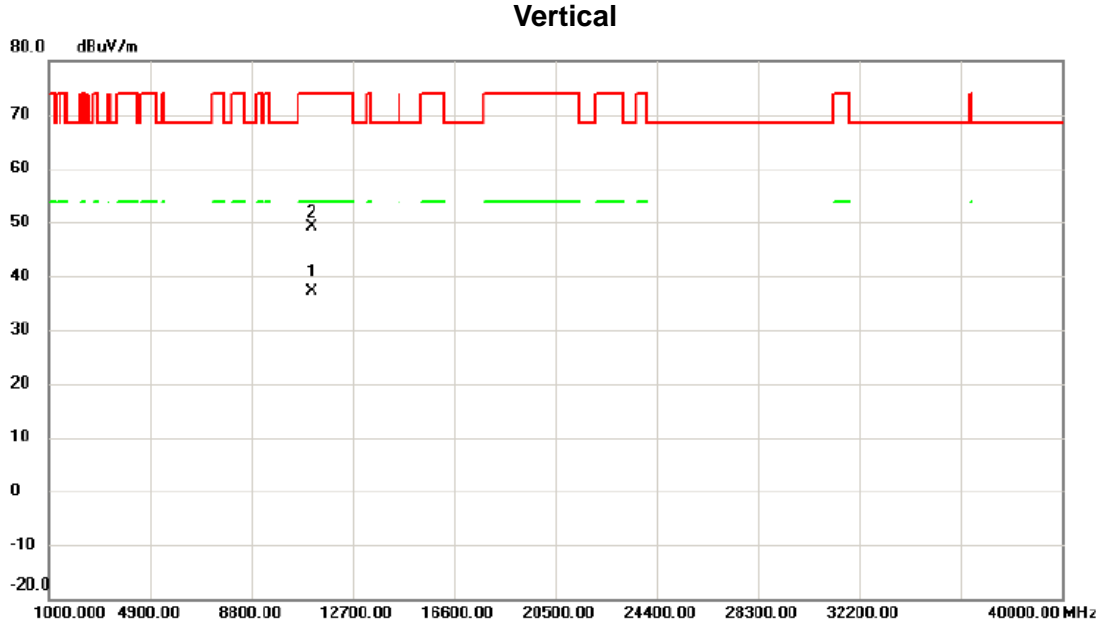

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11132.420	24.98	12.21	37.19	54.00	-16.81	AVG	
2		11131.680	36.93	12.21	49.14	74.00	-24.86	peak	


Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC160 Mode 5570MHz

Horizontal

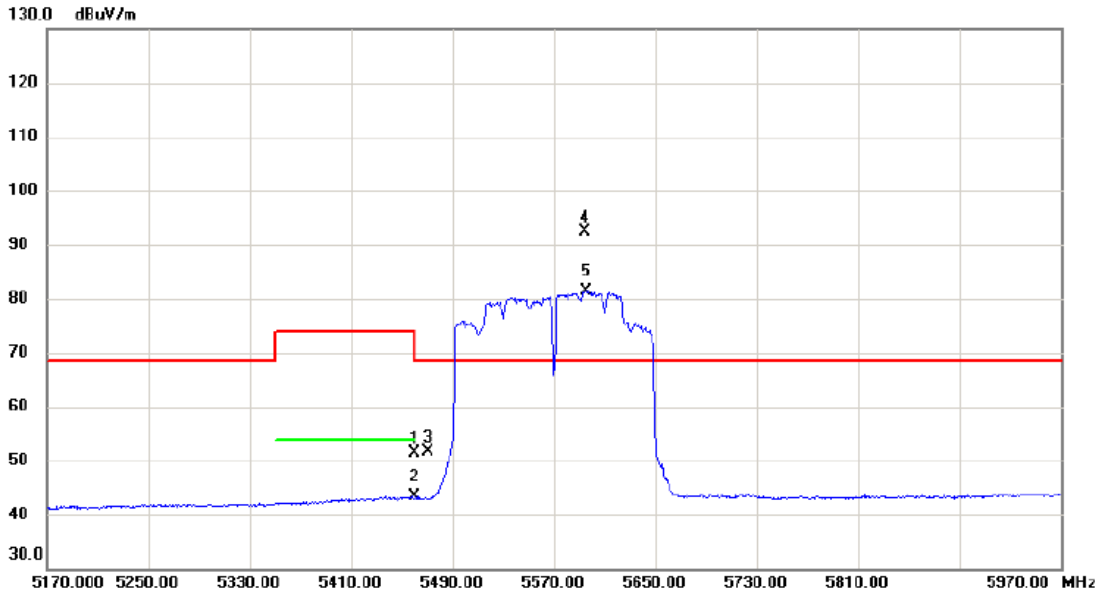

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.000	36.25	15.15	51.40	74.00	-22.60	peak	
2	5460.000	28.22	15.15	43.37	54.00	-10.63	AVG	
3	5470.000	36.36	15.17	51.53	68.30	-16.77	peak	
4 *	5594.000	76.86	15.54	92.40	68.30	24.10	peak	No Limit
5 X	5594.800	65.76	15.55	81.31	68.30	13.01	AVG	No Limit


Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC160 Mode 5570MHz

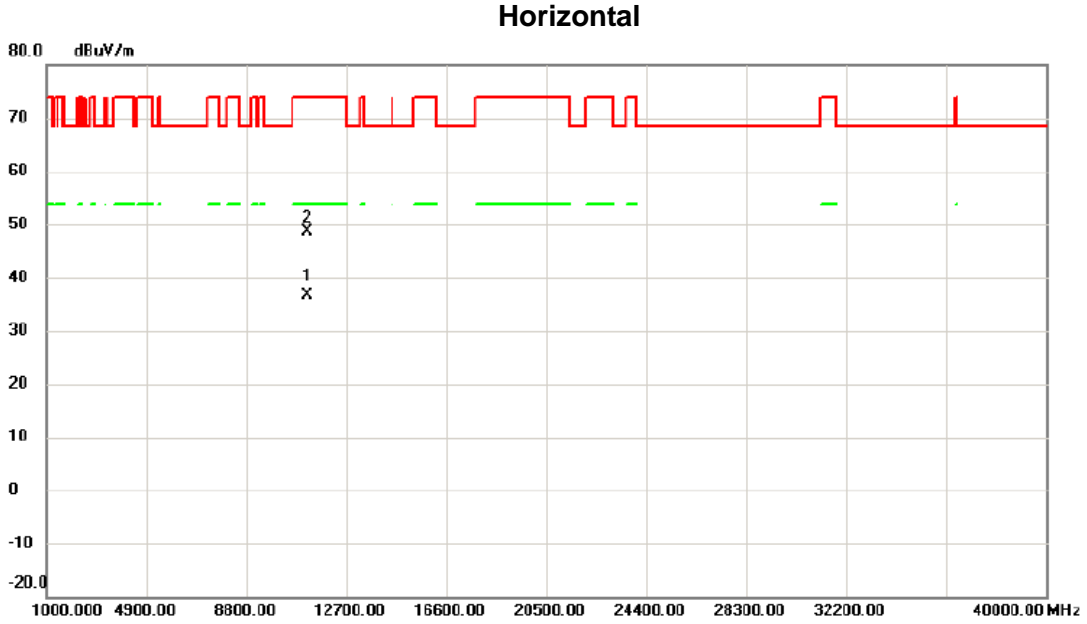

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11140.980	24.37	12.22	36.59	54.00	-17.41	AVG	
2		11141.480	36.41	12.22	48.63	74.00	-25.37	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5745 MHz


Vertical

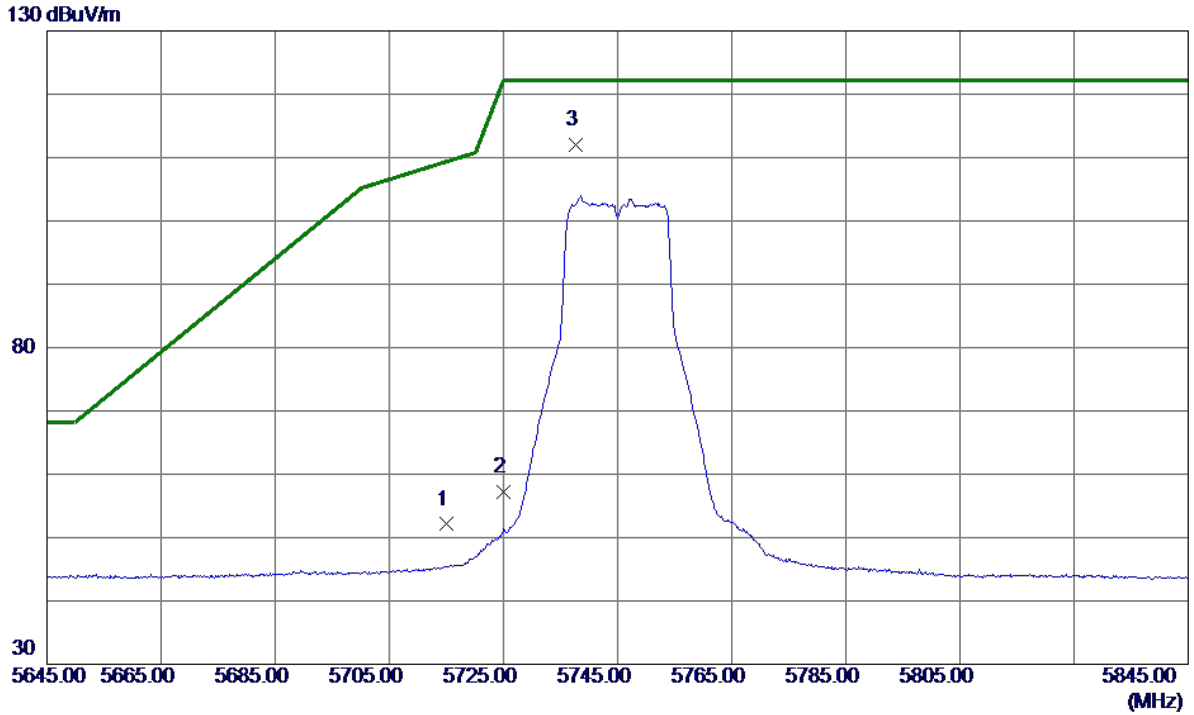

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	36.17	15.93	52.10	109.40	-57.30	Peak	
2	5725.0000	41.27	15.96	57.23	122.20	-64.97	Peak	
3 *	5737.6000	95.99	16.00	111.99	122.20	-10.21	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5745 MHz

Vertical

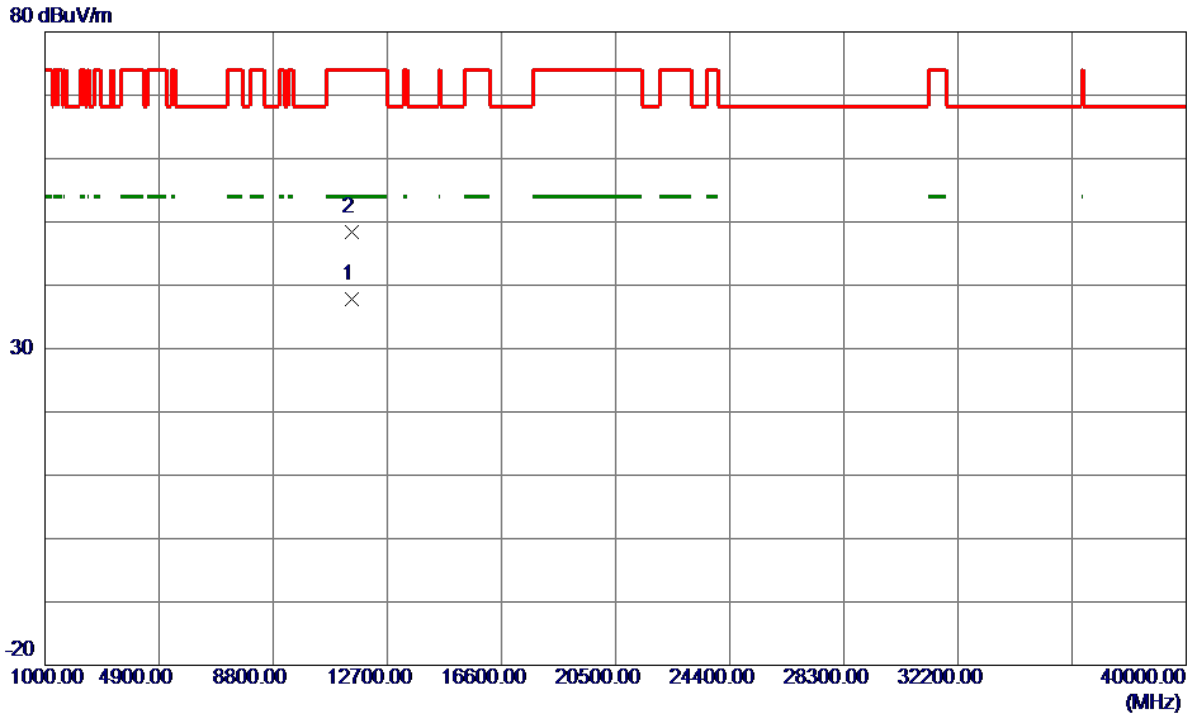


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11490.0000	25.28	12.47	37.75	54.00	-16.25	AVG	
2	11488.5000	35.93	12.47	48.40	74.00	-25.60	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5745 MHz

Horizontal


130 dBuV/m

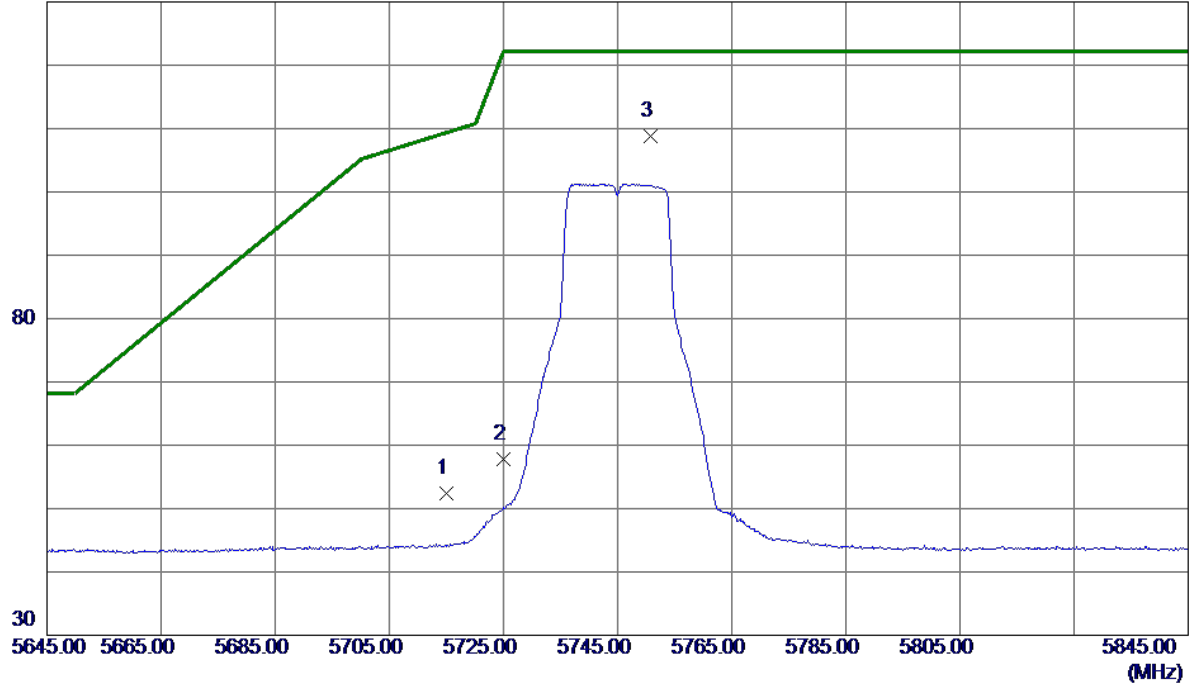

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	36.41	15.93	52.34	109.40	-57.06	Peak	
2	5725.0000	41.85	15.96	57.81	122.20	-64.39	Peak	
3 *	5750.7000	92.75	16.04	108.79	122.20	-13.41	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5745 MHz


Horizontal

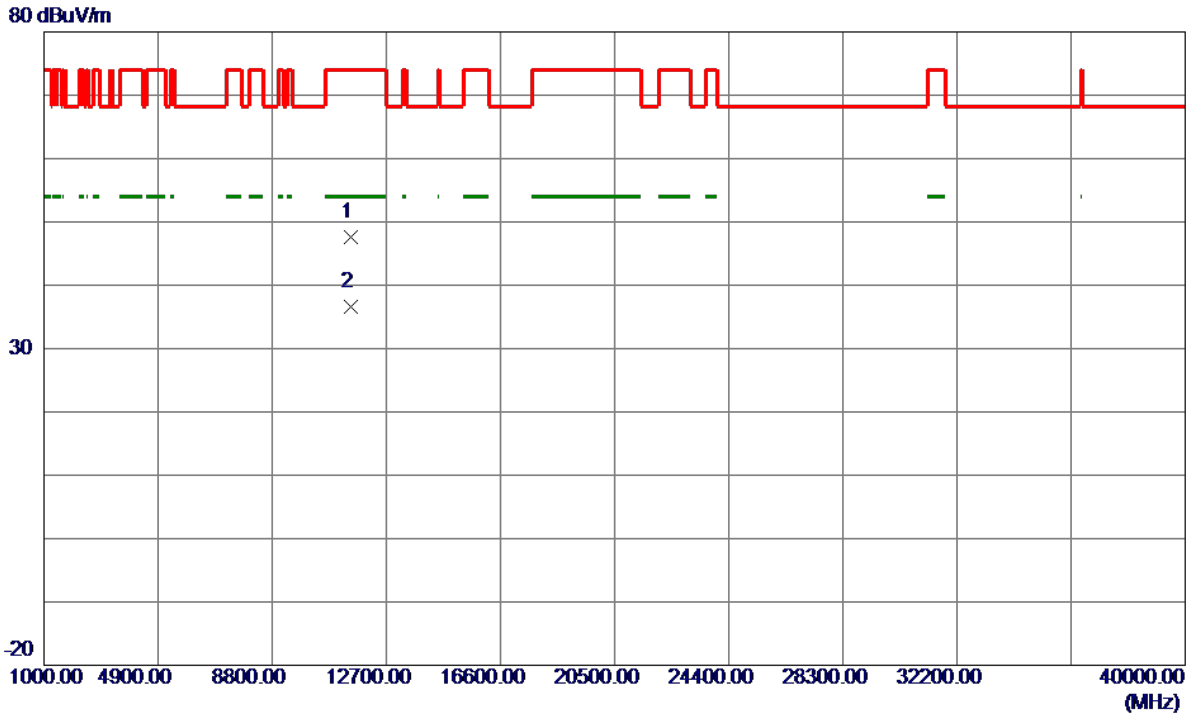

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11482.4900	35.13	12.46	47.59	74.00	-26.41	Peak	
2 *	11497.6000	24.21	12.47	36.68	54.00	-17.32	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5785 MHz


Vertical

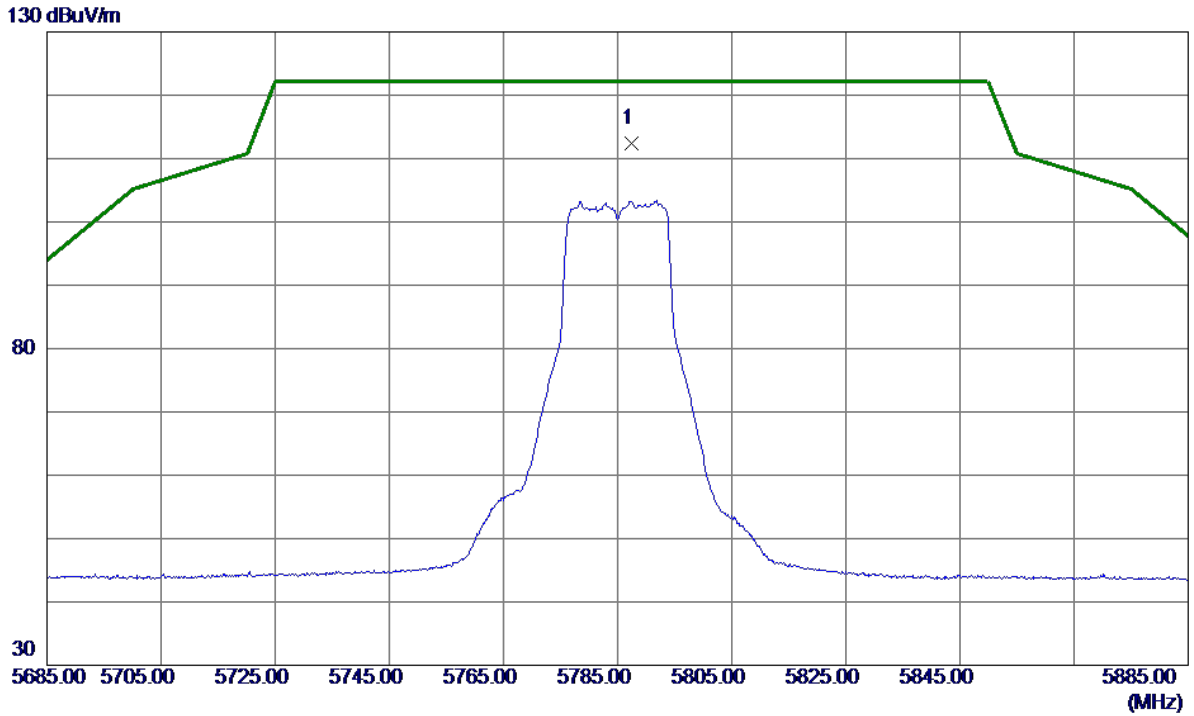

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5787.5000	96.30	16.16	112.46	122.20	-9.74	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5785 MHz


Vertical

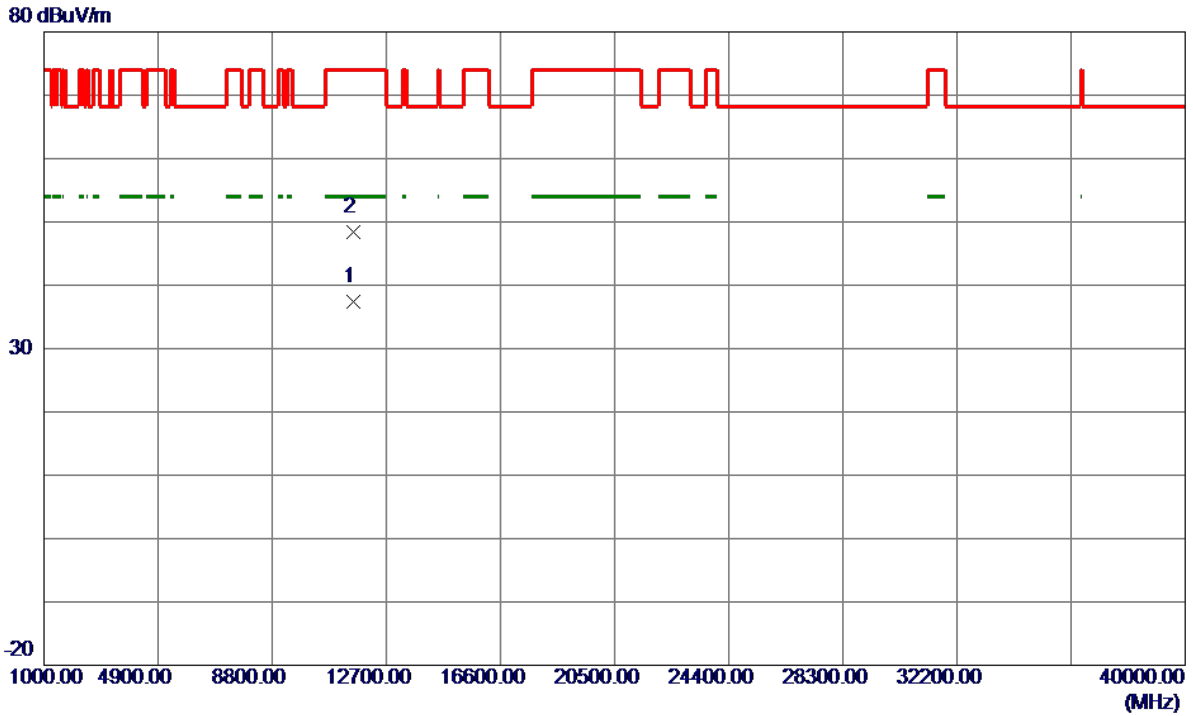

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11563.7600	24.88	12.51	37.39	54.00	-16.61	AVG	
2	11569.5400	35.91	12.52	48.43	74.00	-25.57	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5785 MHz


Horizontal

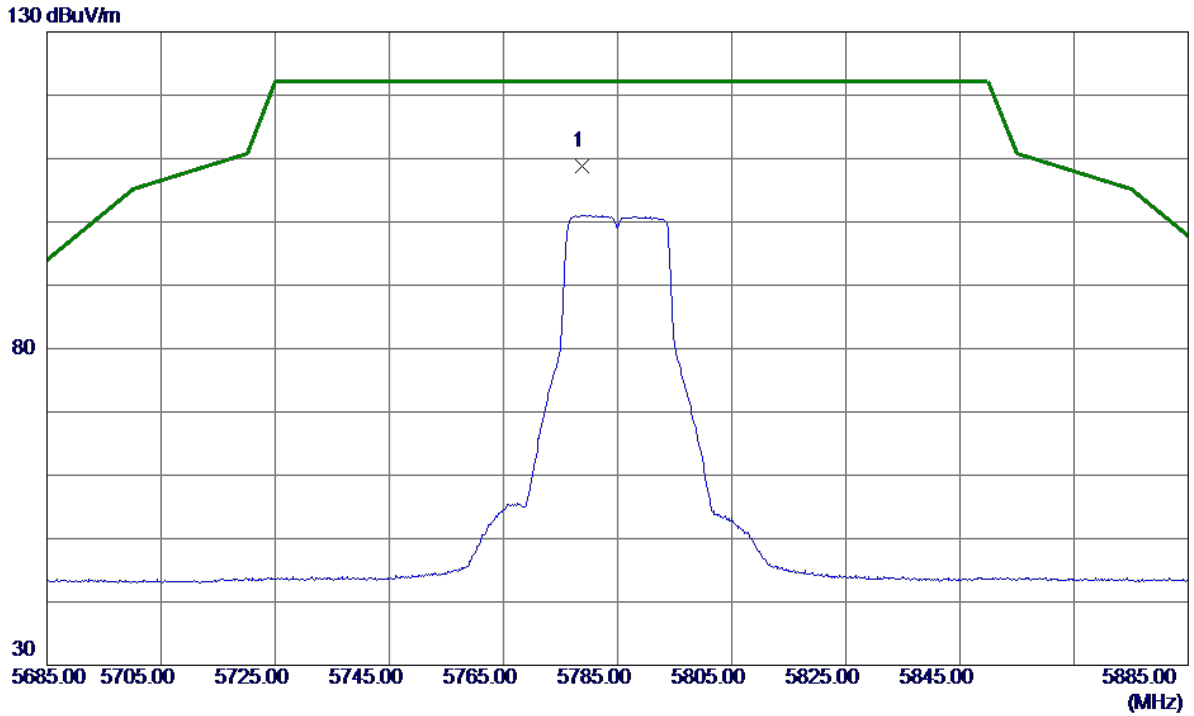

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5778.8000	92.76	16.13	108.89	122.20	-13.31	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5785 MHz


Horizontal

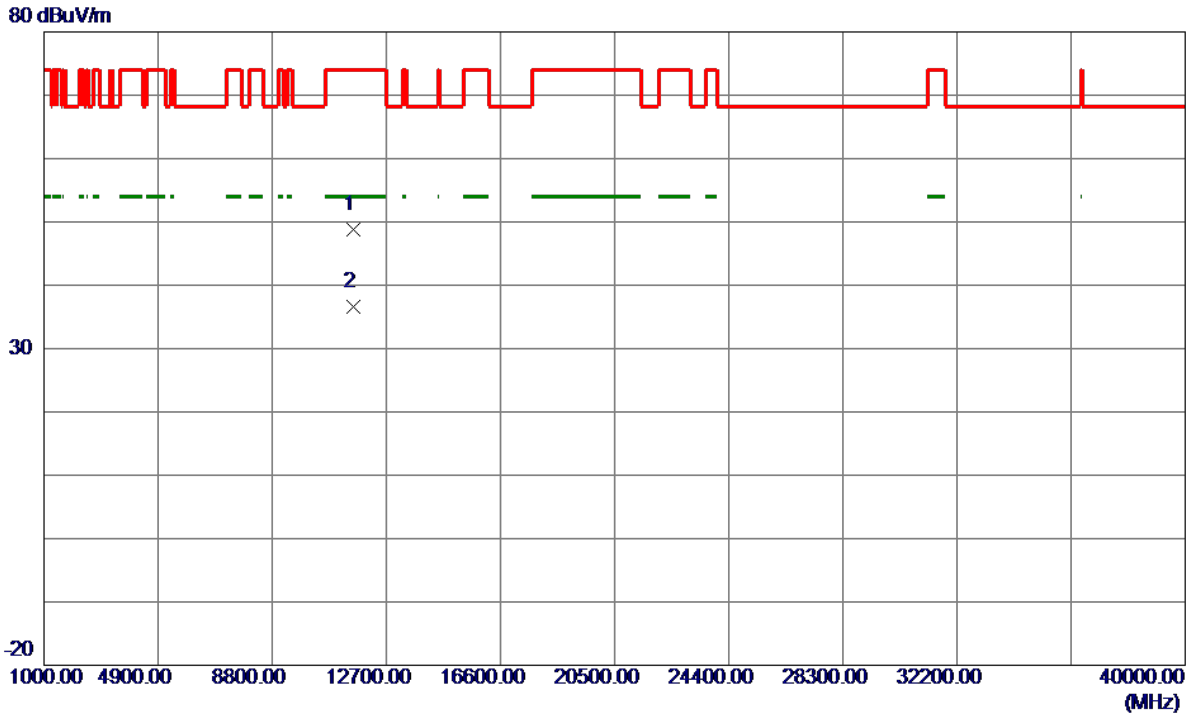

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11560.5800	36.27	12.51	48.78	74.00	-25.22	Peak	
2 *	11565.6400	24.11	12.52	36.63	54.00	-17.37	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5825 MHz


Vertical

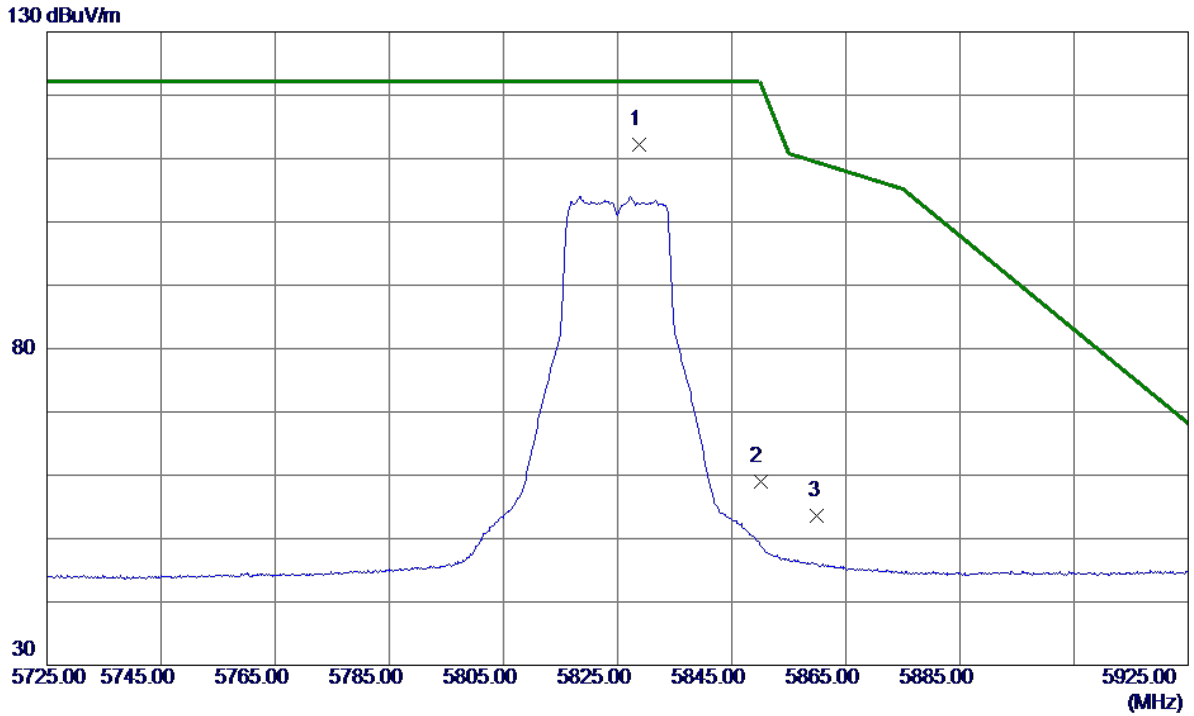

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5828.8000	95.84	16.29	112.13	122.20	-10.07	Peak	No Limit
2	5850.0000	42.58	16.35	58.93	122.20	-63.27	Peak	
3	5860.0000	37.12	16.39	53.51	109.40	-55.89	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5825 MHz


Vertical

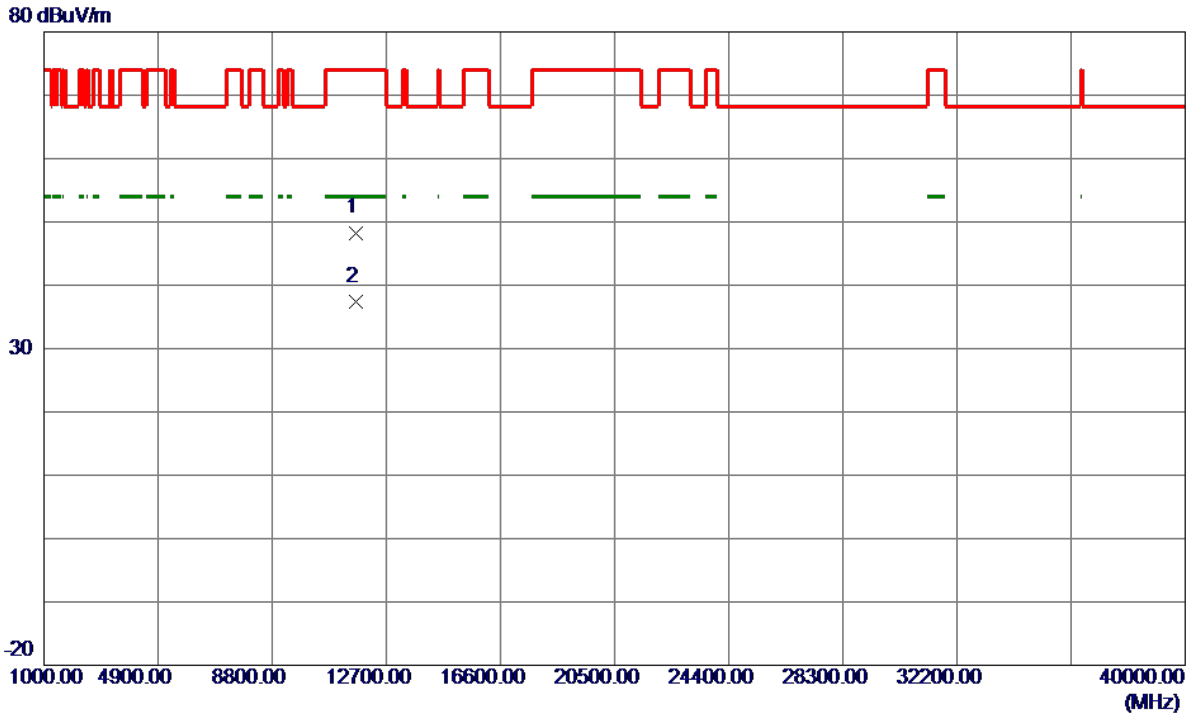

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11650.6000	35.73	12.57	48.30	74.00	-25.70	Peak	
2 *	11654.2200	24.92	12.57	37.49	54.00	-16.51	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5825 MHz


Horizontal

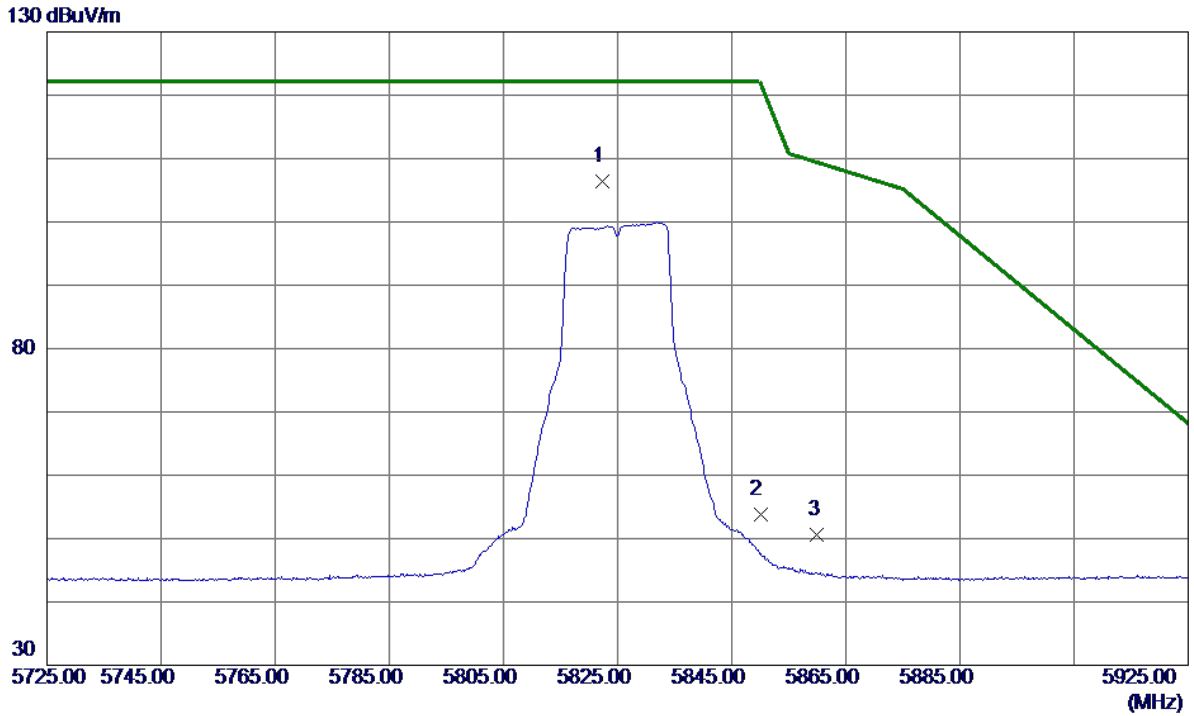

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5822.3000	90.08	16.27	106.35	122.20	-15.85	Peak	No Limit
2	5850.0000	37.54	16.35	53.89	122.20	-68.31	Peak	
3	5860.0000	34.25	16.39	50.64	109.40	-58.76	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5825 MHz

Horizontal

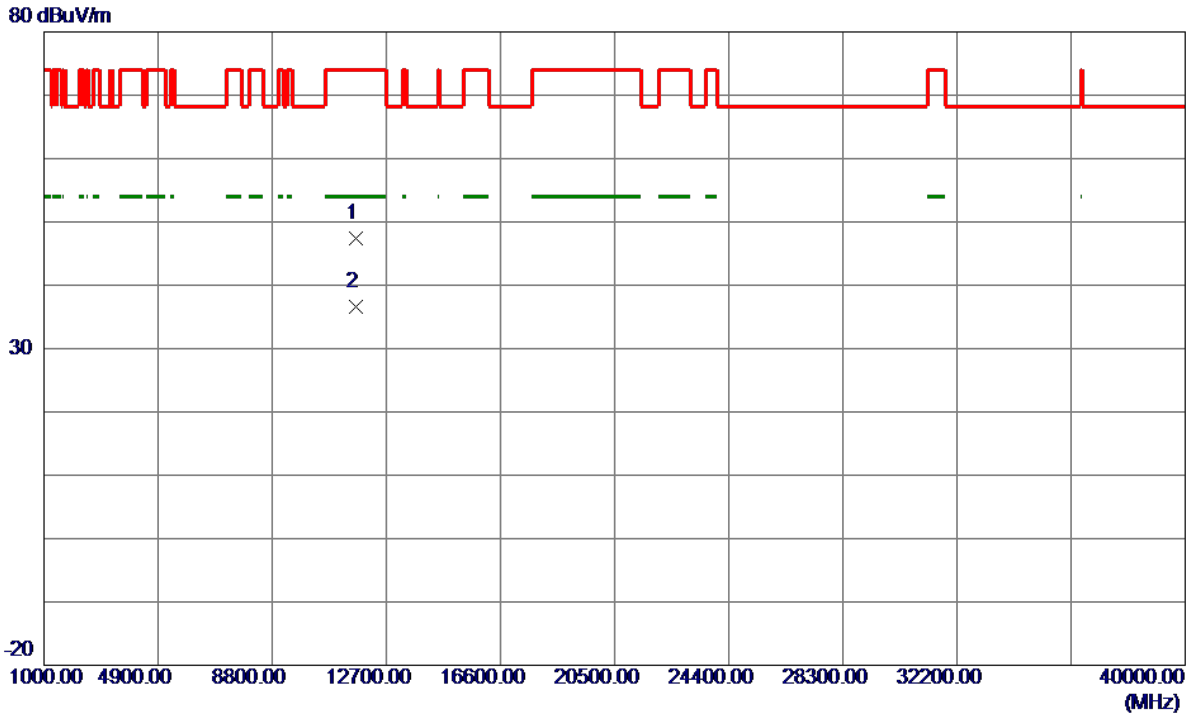


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11645.3200	34.76	12.56	47.32	74.00	-26.68	Peak	
2 *	11651.2900	23.99	12.57	36.56	54.00	-17.44	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5755MHz

Vertical


130 dBuV/m

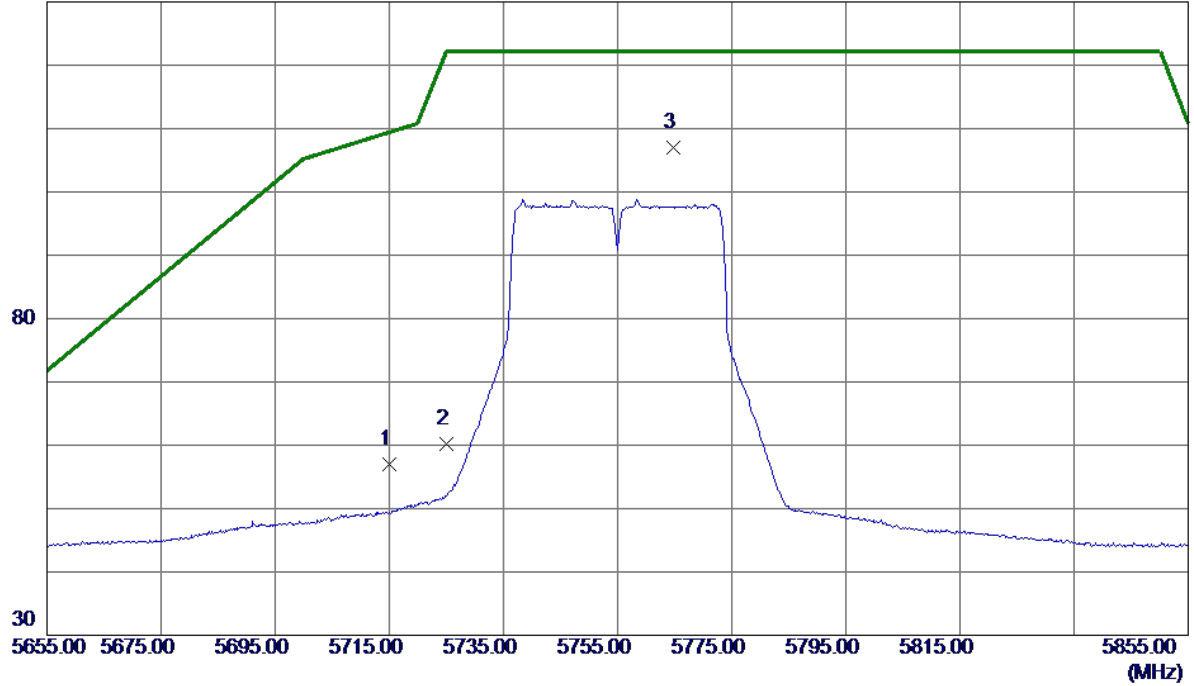

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	41.04	15.93	56.97	109.40	-52.43	Peak	
2	5725.0000	44.25	15.96	60.21	122.20	-61.99	Peak	
3 *	5764.7000	90.91	16.08	106.99	122.20	-15.21	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5755MHz


Vertical

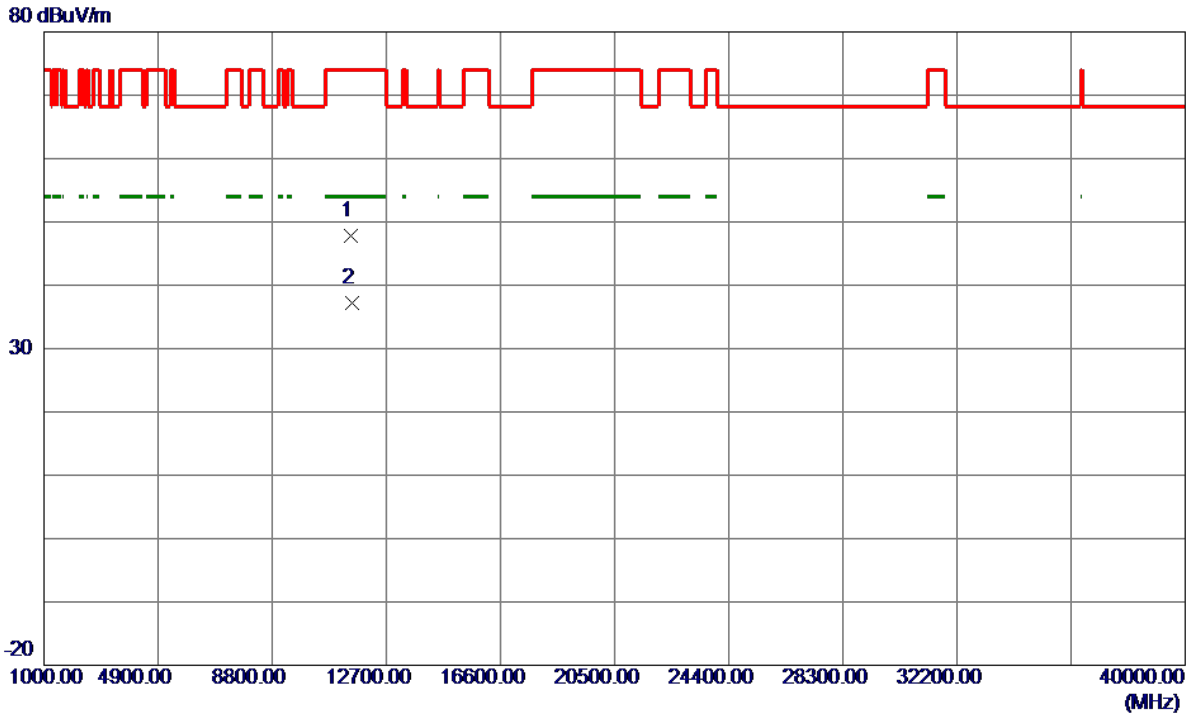

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11507.6500	35.34	12.48	47.82	74.00	-26.18	Peak	
2 *	11510.0400	24.69	12.48	37.17	54.00	-16.83	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5755MHz


Horizontal

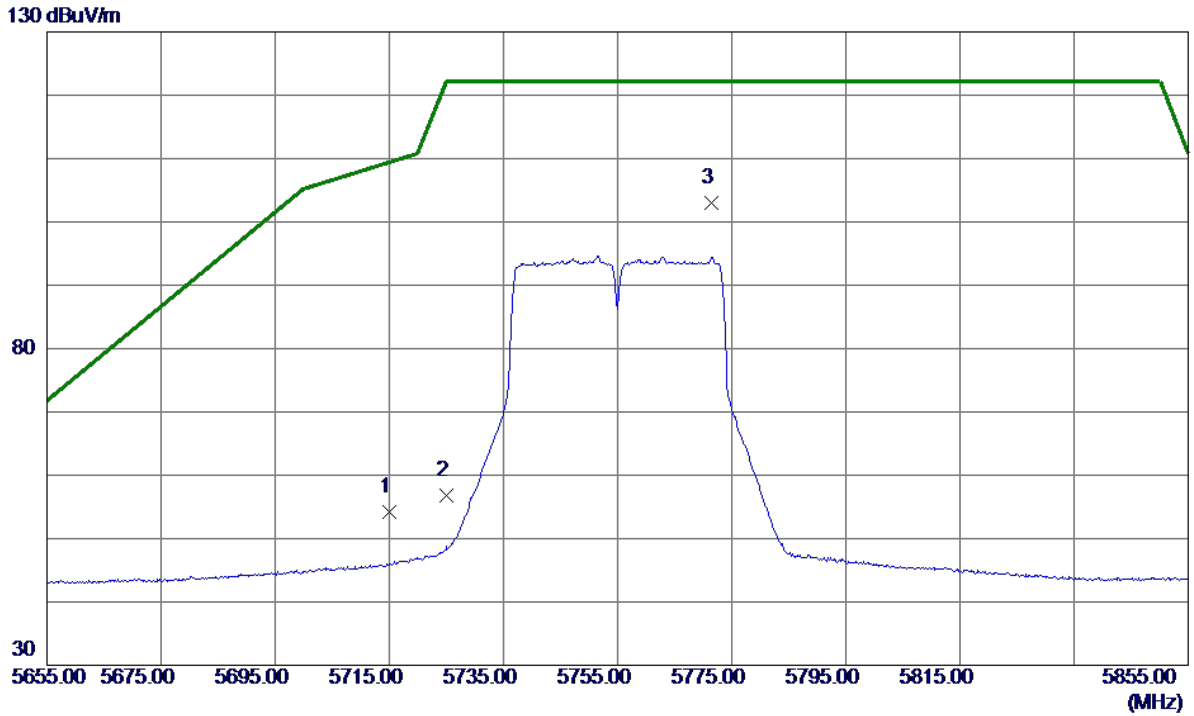

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	38.32	15.93	54.25	109.40	-55.15	Peak	
2	5725.0000	40.82	15.96	56.78	122.20	-65.42	Peak	
3 *	5771.5000	86.96	16.11	103.07	122.20	-19.13	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5755MHz


Horizontal

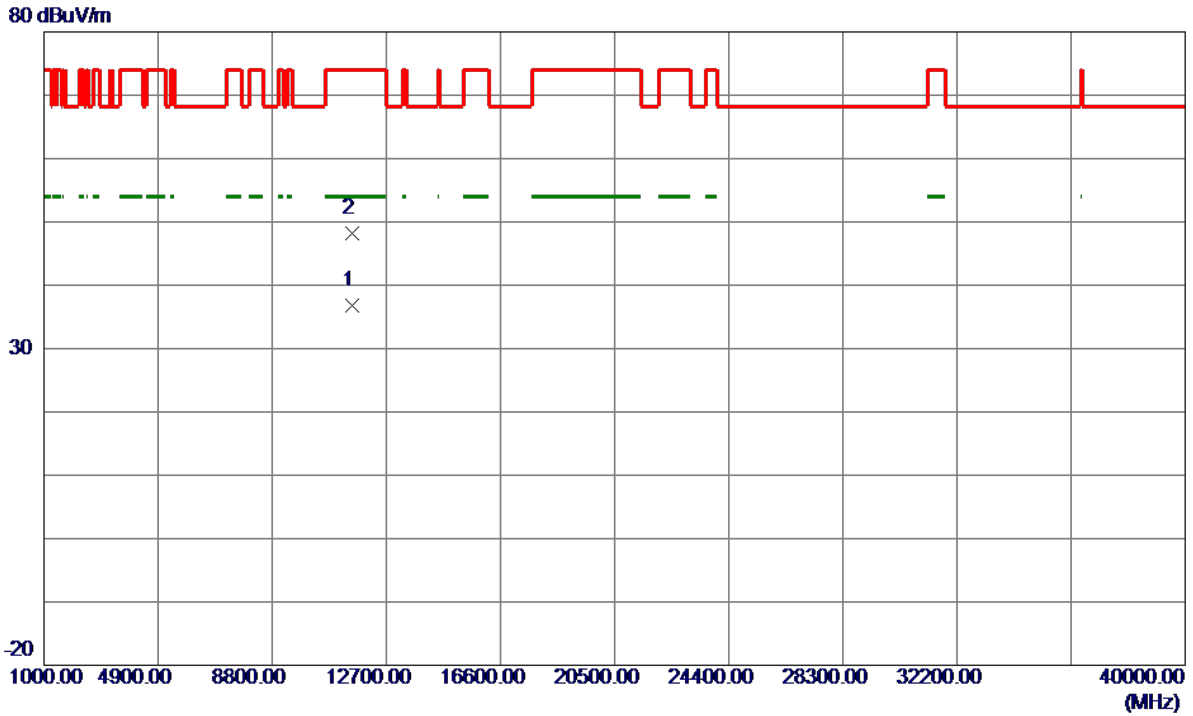

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11512.2600	24.29	12.48	36.77	54.00	-17.23	AVG	
2	11516.6000	35.71	12.49	48.20	74.00	-25.80	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5795MHz


Vertical

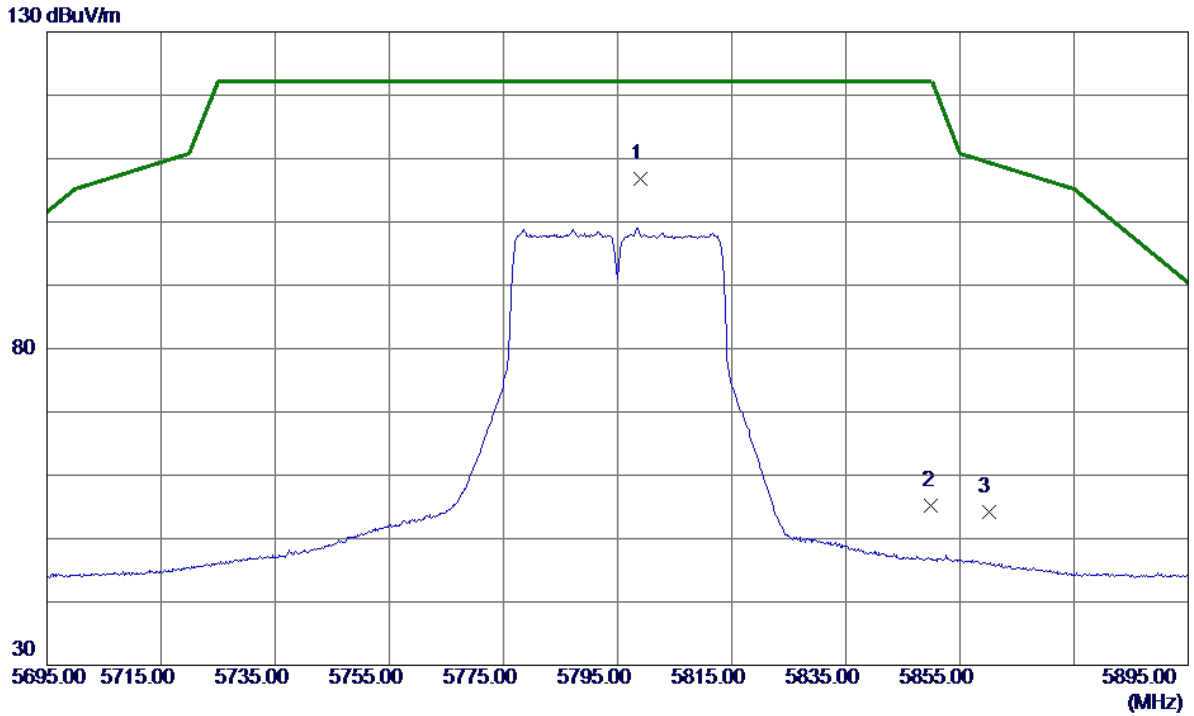

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5798.9000	90.56	16.19	106.75	122.20	-15.45	Peak	No Limit
2	5850.0000	38.85	16.35	55.20	122.20	-67.00	Peak	
3	5860.0000	37.81	16.39	54.20	109.40	-55.20	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5795MHz


Vertical

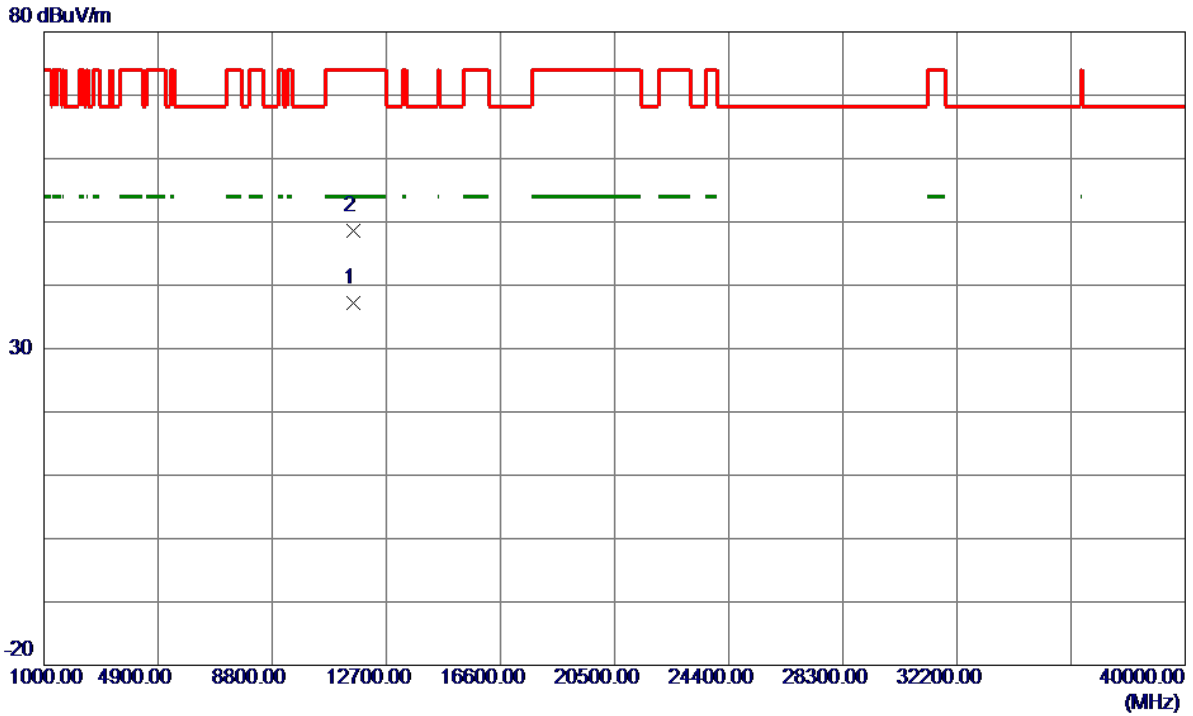

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11593.9500	24.66	12.53	37.19	54.00	-16.81	AVG	
2	11592.2920	36.12	12.53	48.65	74.00	-25.35	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5795MHz


Horizontal

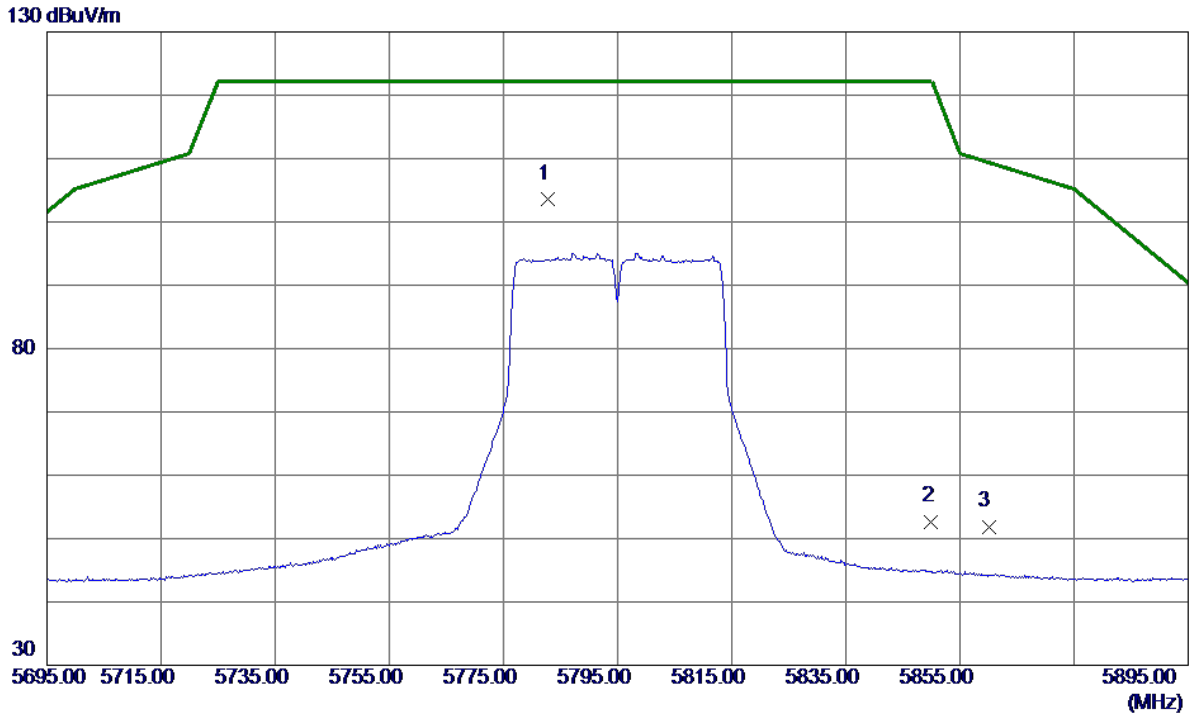

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5782.7000	87.48	16.14	103.62	122.20	-18.58	Peak	No Limit
2	5850.0000	36.35	16.35	52.70	122.20	-69.50	Peak	
3	5860.0000	35.51	16.39	51.90	109.40	-57.50	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5795MHz

Horizontal

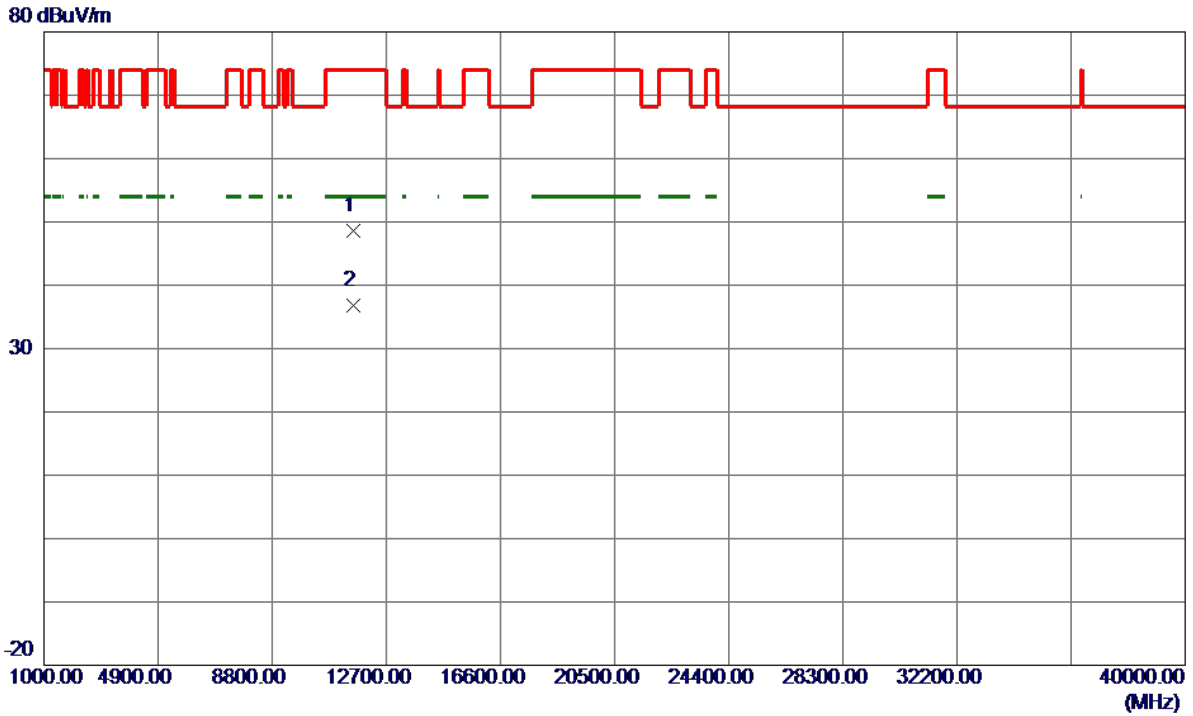


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11584.6900	36.13	12.53	48.66	74.00	-25.34	Peak	
2 *	11588.5300	24.31	12.53	36.84	54.00	-17.16	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz

Vertical


130 dBuV/m

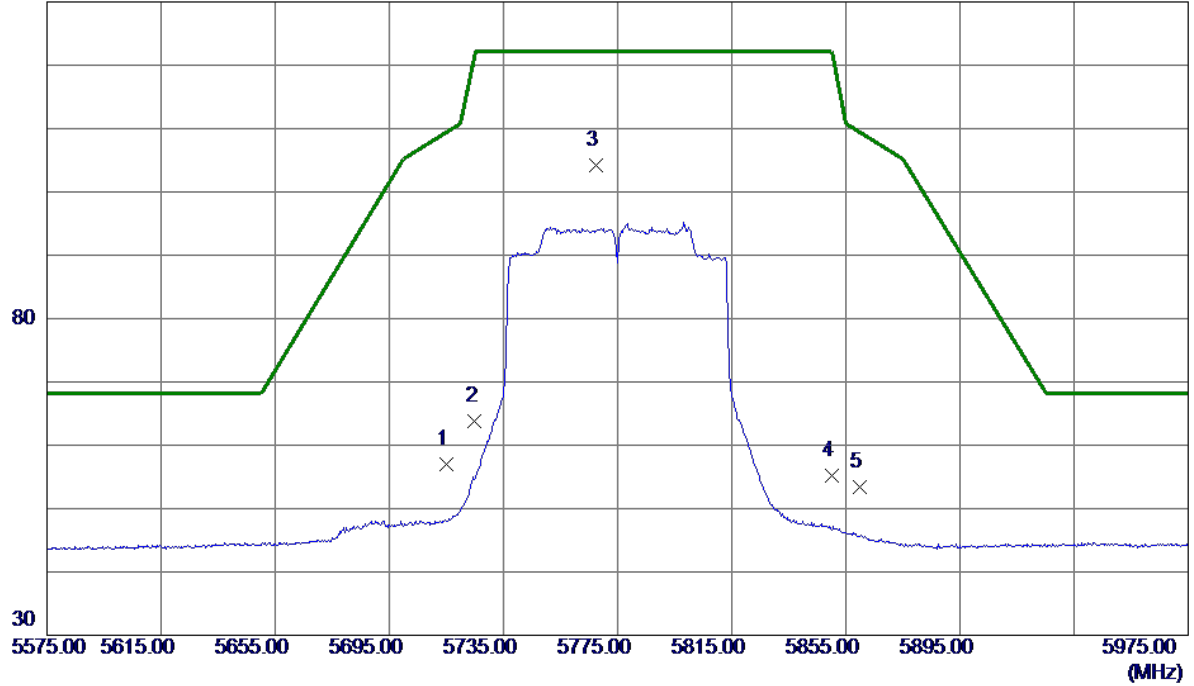

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	41.10	15.93	57.03	109.40	-52.37	Peak	
2	5725.0000	47.87	15.96	63.83	122.20	-58.37	Peak	
3 *	5767.4000	88.02	16.09	104.11	122.20	-18.09	Peak	No Limit
4	5850.0000	38.90	16.35	55.25	122.20	-66.95	Peak	
5	5860.0000	37.04	16.39	53.43	109.40	-55.97	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz


Vertical

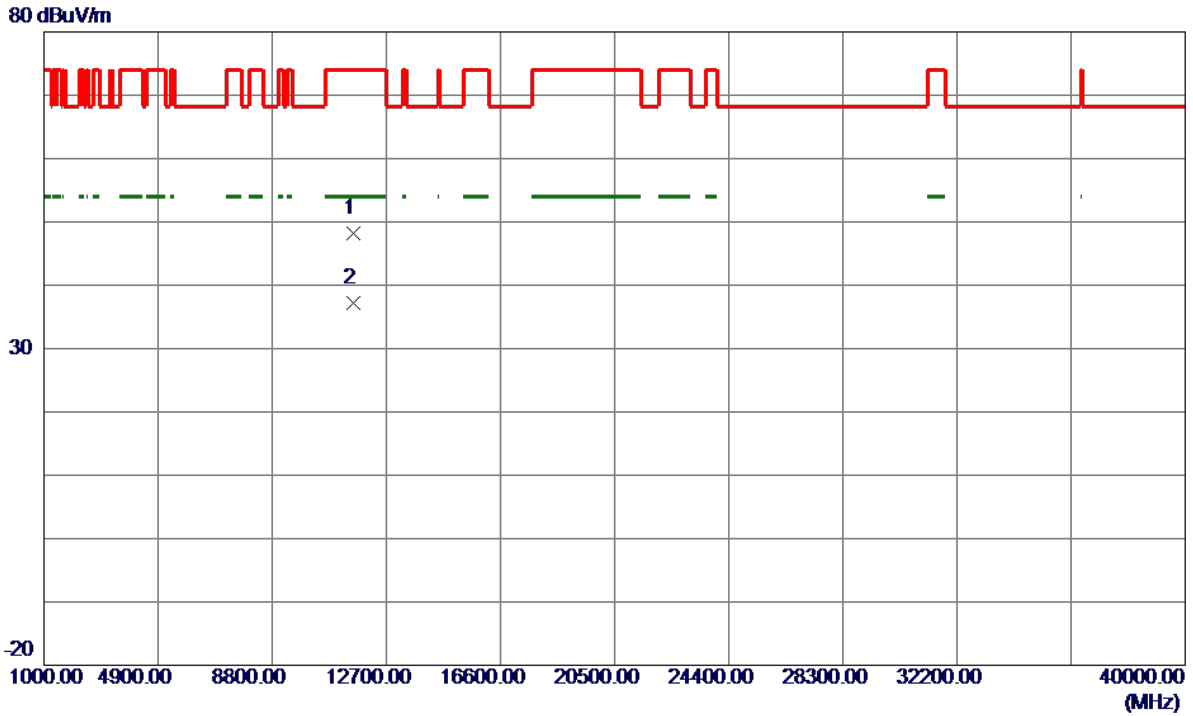

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11551.7900	35.68	12.51	48.19	74.00	-25.81	Peak	
2 *	11551.9580	24.71	12.51	37.22	54.00	-16.78	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz


Horizontal

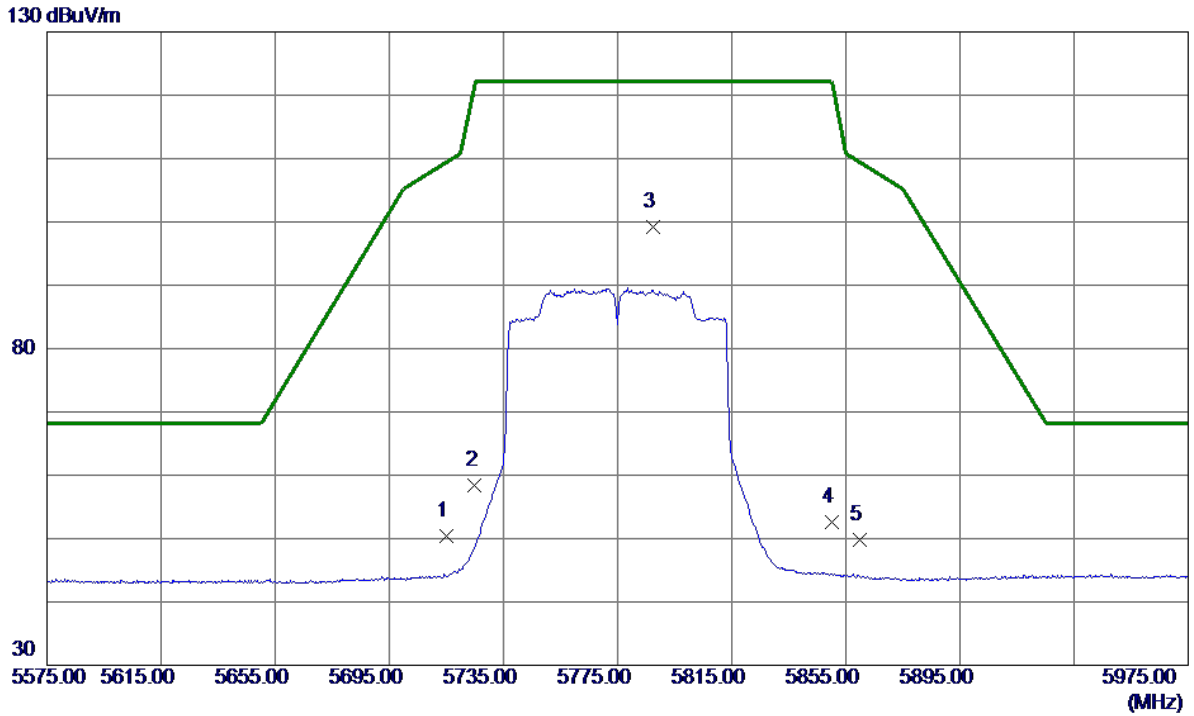

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	34.52	15.93	50.45	109.40	-58.95	Peak	
2	5725.0000	42.41	15.96	58.37	122.20	-63.83	Peak	
3 *	5787.4000	83.10	16.16	99.26	122.20	-22.94	Peak	No Limit
4	5850.0000	36.23	16.35	52.58	122.20	-69.62	Peak	
5	5860.0000	33.46	16.39	49.85	109.40	-59.55	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz

Horizontal

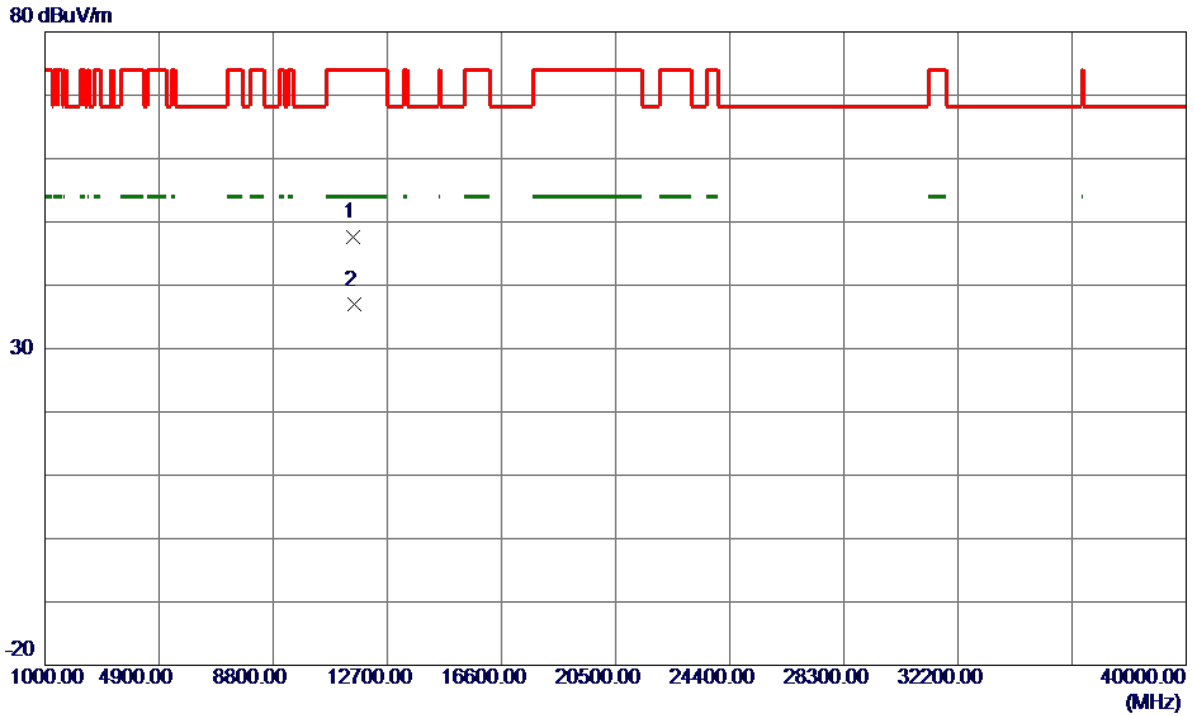

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11548.1600	35.07	12.50	47.57	74.00	-26.43	Peak	
2 *	11554.6100	24.39	12.51	36.90	54.00	-17.10	AVG	

TX A Mode_DUTY CYCLE

Duty cycle = T_{ON} / T_{Total}


T_{ON} : 2.048 msec

T_{Total} : 2.112 msec

Duty cycle: 96.97%

Duty Factor = $10 \log(1/\text{Duty cycle})$

Duty Factor = 0.13

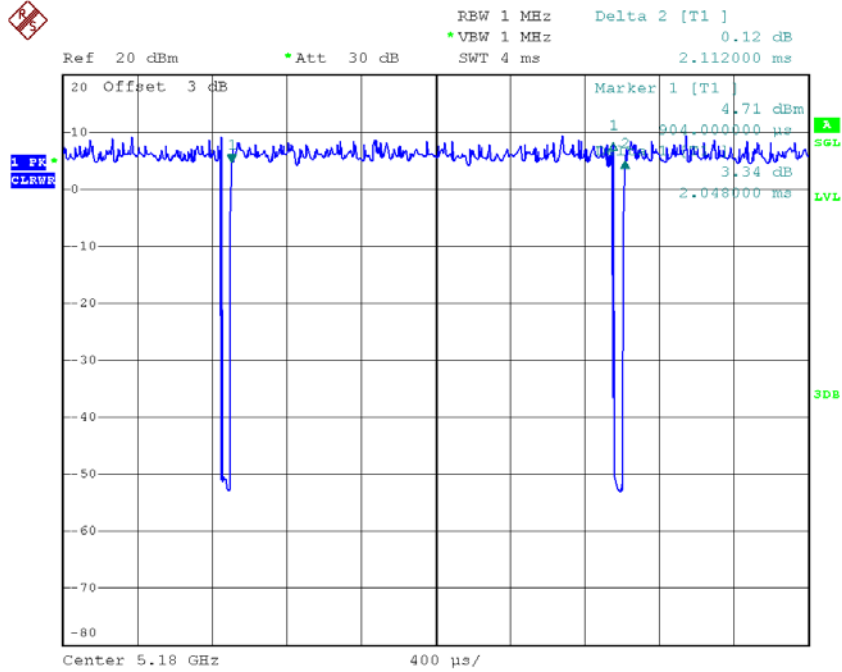

Date: 19.NOV.2018 08:42:17

Note: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle < 98 %, so, the output power and power spectral density should be calculated as

Output Power = Measured power + Duty factor

Power Spectral Density = Measured density + Duty factor

TX N20 Mode_DUTY CYCLE

Duty cycle = T_{ON} / T_{Total}


T_{ON} : 1.912 msec

T_{Total} : 1.968 msec

Duty cycle: 97.15%

Duty Factor = $10 \log(1/\text{Duty cycle})$

Duty Factor = 0.13

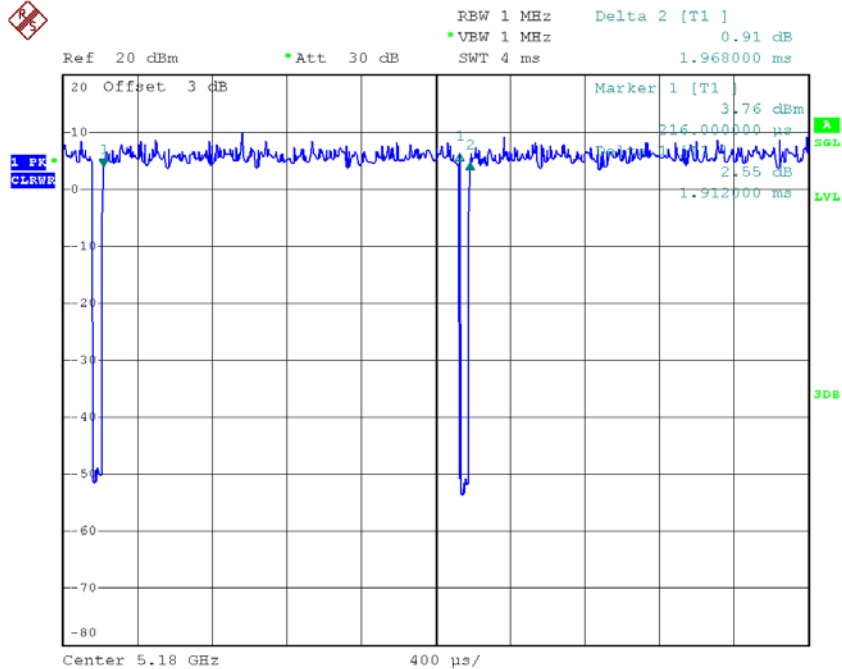

Date: 19.NOV.2018 08:42:39

Note: The EUT was programmed to be in countinously transmitting mode and the transmit duty cycle < 98 %, so, the output power and power spectral density should be calculated as

Output Power = Measured power + Duty factor

Power Spectral Density = Measured density + Duty factor

TX N40 Mode_DUTY CYCLE

Duty cycle = T_{ON} / T_{Total}


T_{ON} : 0.925 msec

T_{Total} : 0.990 msec

Duty cycle: 93.43%

Duty Factor = $10 \log(1/\text{Duty cycle})$

Duty Factor = 0.29

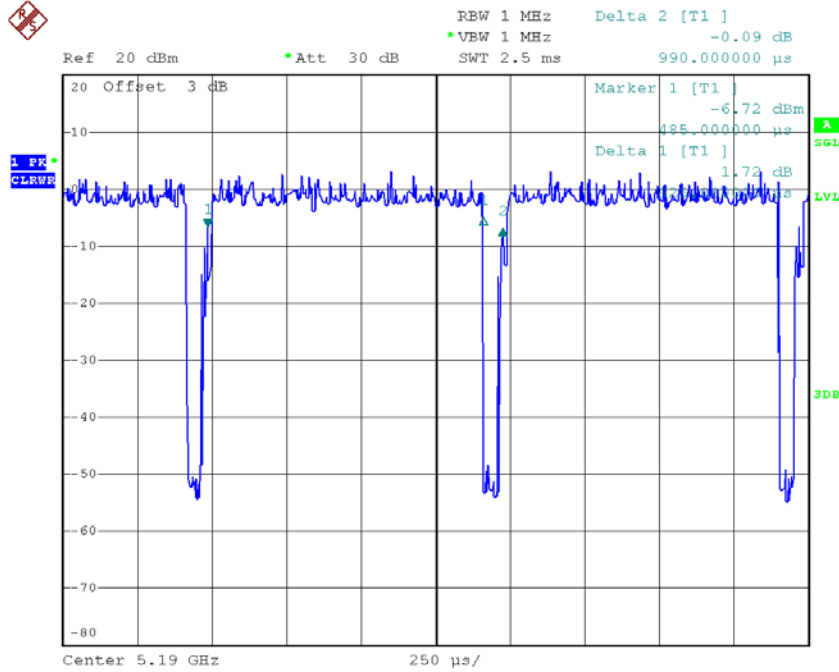

Date: 19.NOV.2018 08:43:29

Note: The EUT was programmed to be in countinously transmitting mode and the transmit duty cycle < 98 %, so, the output power and power spectral density should be calculated as

Output Power = Measured power + Duty factor

Power Spectral Density = Measured density + Duty factor

TX AC20 Mode_DUTY CYCLE

Duty cycle = T_{ON} / T_{Total}


T_{ON} : 0.980 msec

T_{Total} : 1.040 msec

Duty cycle: 94.23%

Duty Factor = $10 \log(1/\text{Duty cycle})$

Duty Factor = 0.26

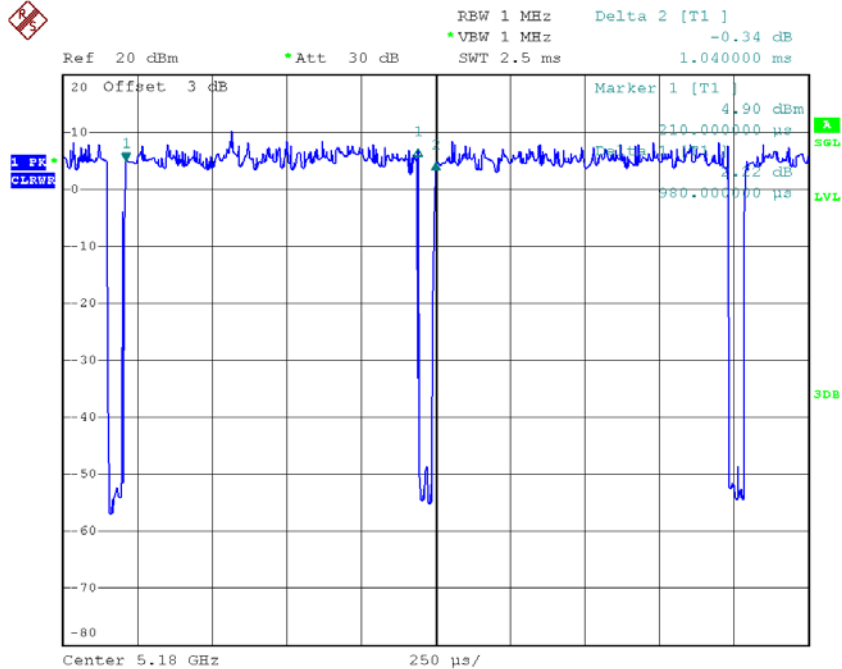

Date: 19.NOV.2018 08:43:04

Note: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle < 98 %, so, the output power and power spectral density should be calculated as

Output Power = Measured power + Duty factor

Power Spectral Density = Measured density + Duty factor

TX AC40 Mode_DUTY CYCLE

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$


T_{ON} : 0.470 msec

T_{Total} : 0.550 msec

Duty cycle: 85.45%

$$\text{Duty Factor} = 10 \log(1/\text{Duty cycle})$$

Duty Factor = 0.68

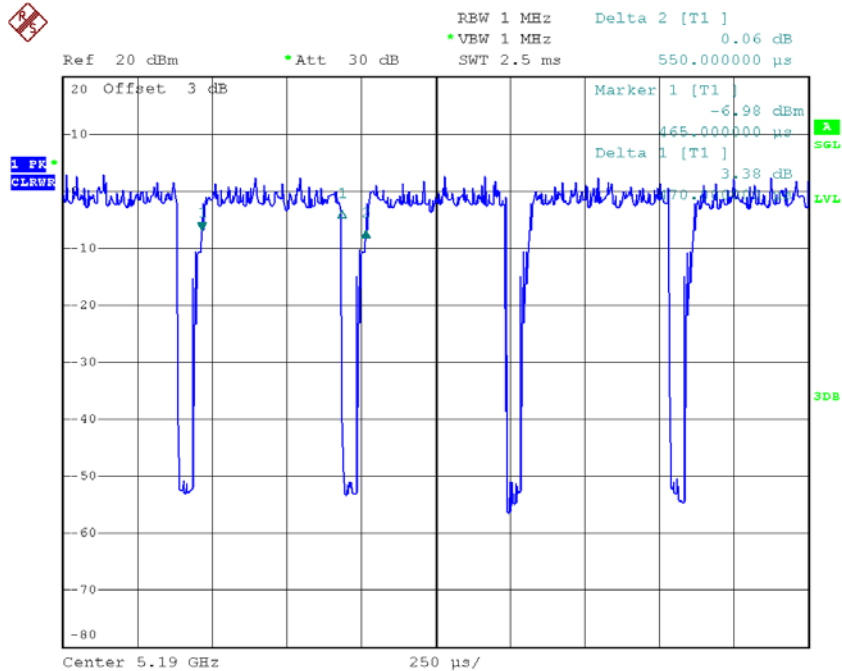

Date: 19.NOV.2018 08:43:51

Note: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle < 98 %, so, the output power and power spectral density should be calculated as

$$\text{Output Power} = \text{Measured power} + \text{Duty factor}$$

$$\text{Power Spectral Density} = \text{Measured density} + \text{Duty factor}$$

TX AC80 Mode_DUTY CYCLE

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$


T_{ON} : 0.225 msec

T_{Total} : 0.310 msec

Duty cycle: 72.58%

$$\text{Duty Factor} = 10 \log(1/\text{Duty cycle})$$

Duty Factor = 1.39

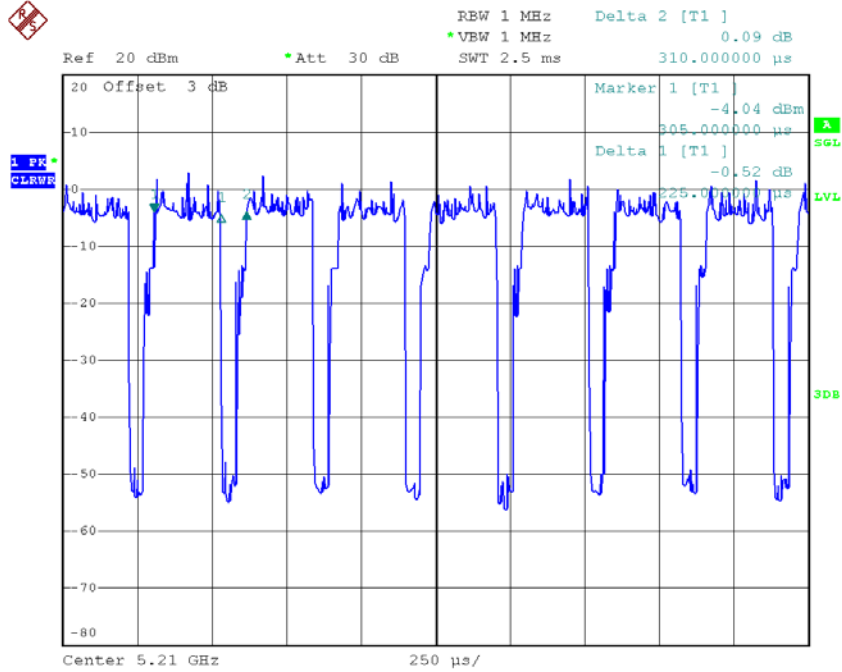

Date: 19.NOV.2018 08:44:18

Note: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle < 98 %, so, the output power and power spectral density should be calculated as

$$\text{Output Power} = \text{Measured power} + \text{Duty factor}$$

$$\text{Power Spectral Density} = \text{Measured density} + \text{Duty factor}$$

TX AC160 Mode_DUTY CYCLE

Duty cycle = T_{ON} / T_{Total}


T_{ON} : 0.155 msec

T_{Total} : 0.195 msec

Duty cycle: 79.48%

Duty Factor = $10 \log(1/\text{Duty cycle})$

Duty Factor = 1.00

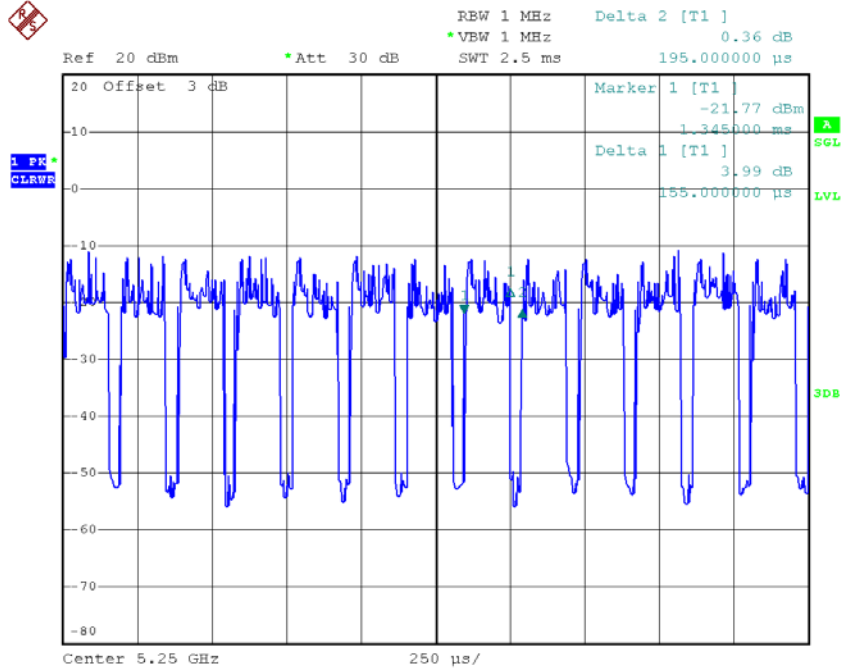

Date: 26.NOV.2018 20:04:01

Note: The EUT was programmed to be in countinously transmitting mode and the transmit duty cycle < 98 %, so, the output power and power spectral density should be calculated as


Output Power = Measured power + Duty factor

Power Spectral Density = Measured density + Duty factor

APPENDIX E - BANDWIDTH


Test Mode: UNII-1/TX A Mode_CH36/CH40/CH48

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH36	5180	25.15	17.30
CH40	5200	24.30	17.20
CH48	5240	25.45	17.10

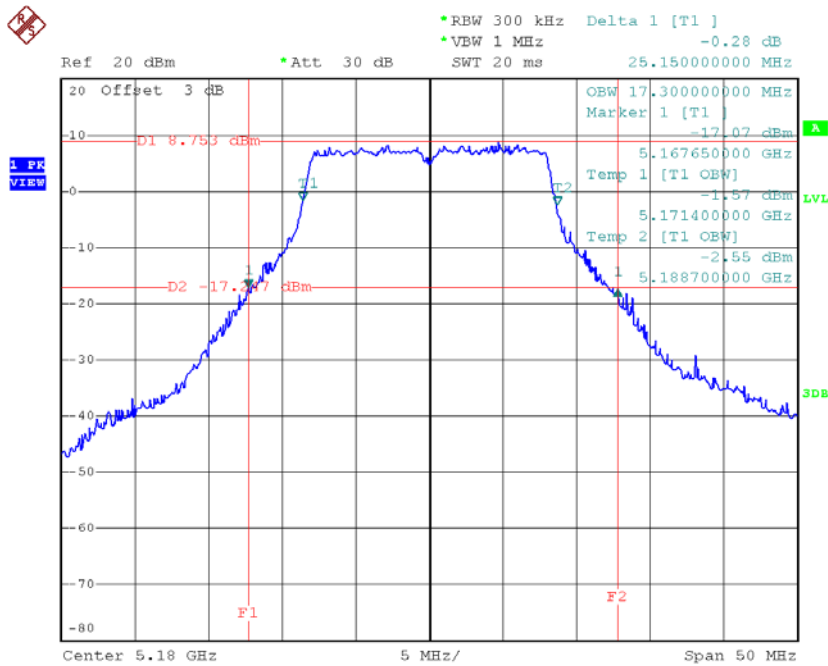TX CH36


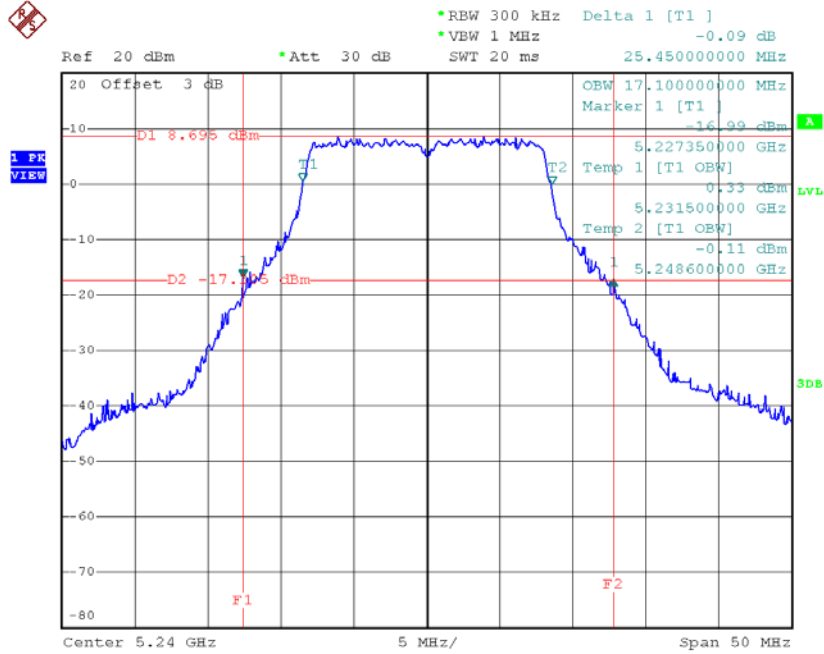
Date: 26.NOV.2018 14:04:00

TX CH40

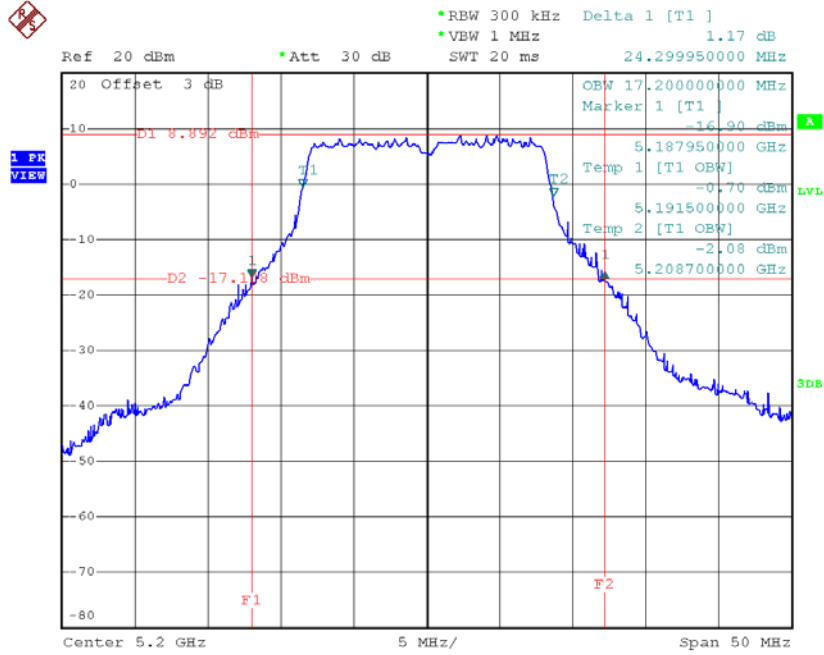

Date: 26.NOV.2018 14:06:09

TX CH48




Date: 26.NOV.2018 14:17:38

Test Mode: UNII-1/TX N20 Mode_CH36/CH40/CH48


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH36	5180	25.60	18.30
CH40	5200	24.60	18.30
CH48	5240	25.10	18.20

TX CH36

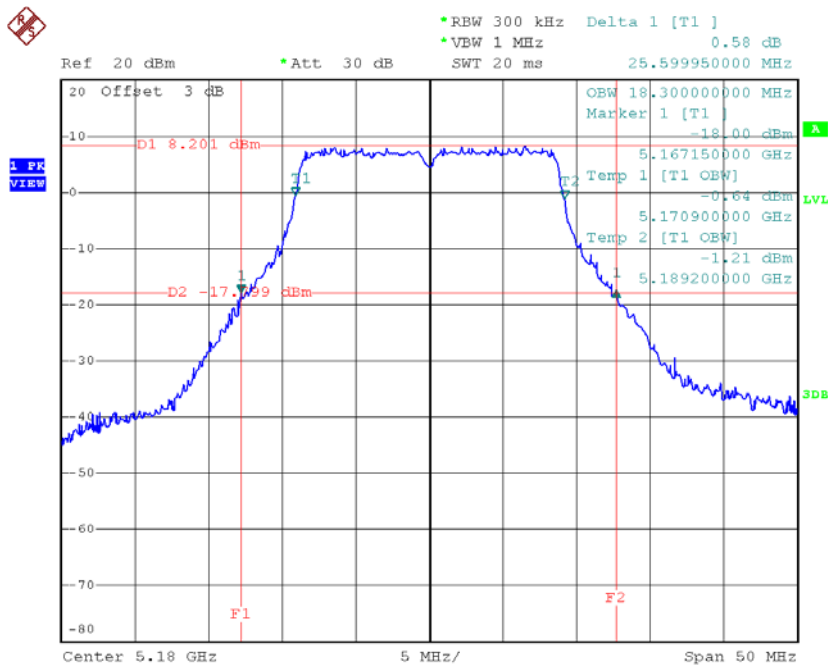


Date: 26.NOV.2018 15:48:27

TX CH40

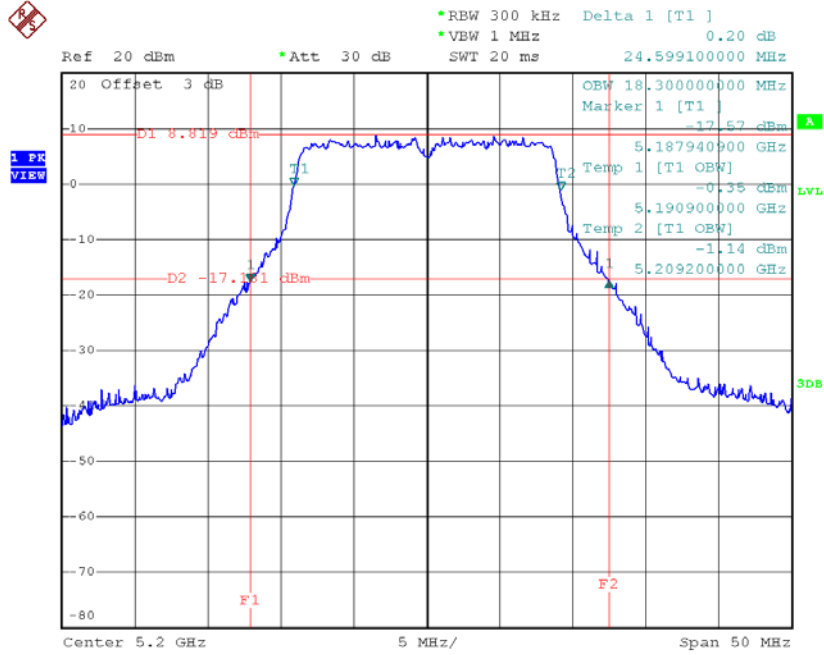

Date: 26.NOV.2018 15:49:26

TX CH48

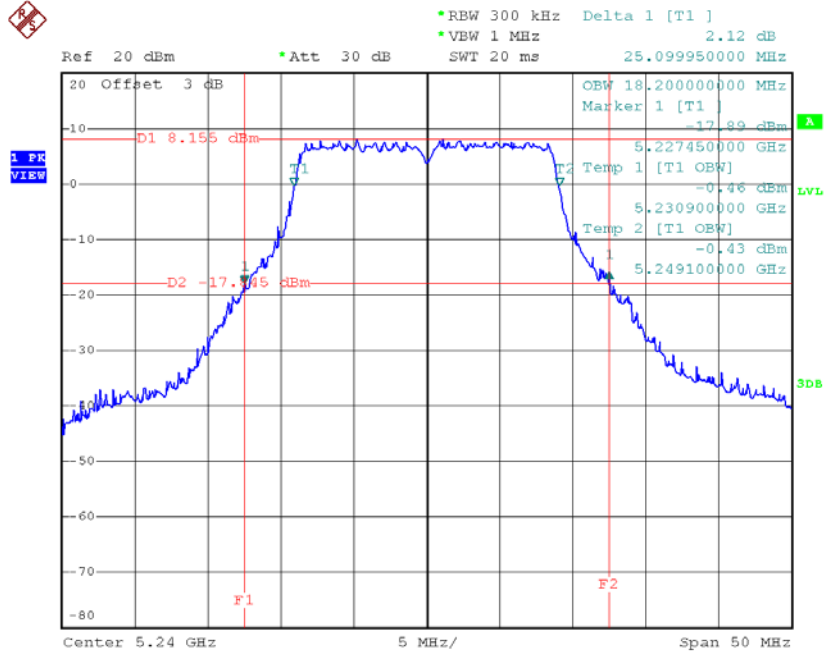


Date: 26.NOV.2018 16:27:09

Test Mode: UNII-1/TX N40 Mode_CH38/CH46


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH38	5190	45.99	37.00
CH46	5230	44.79	37.00

TX CH38

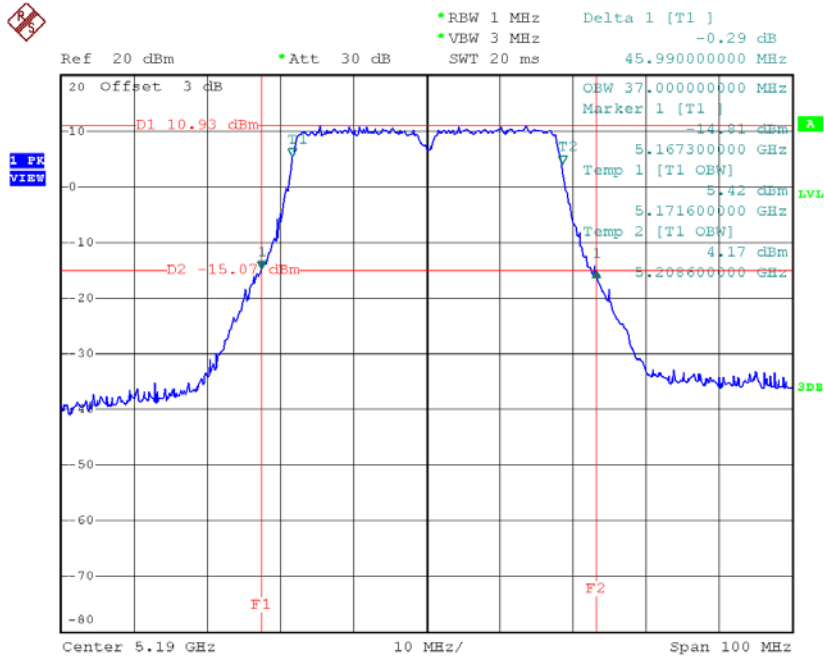

Date: 28.NOV.2018 15:13:53

TX CH46

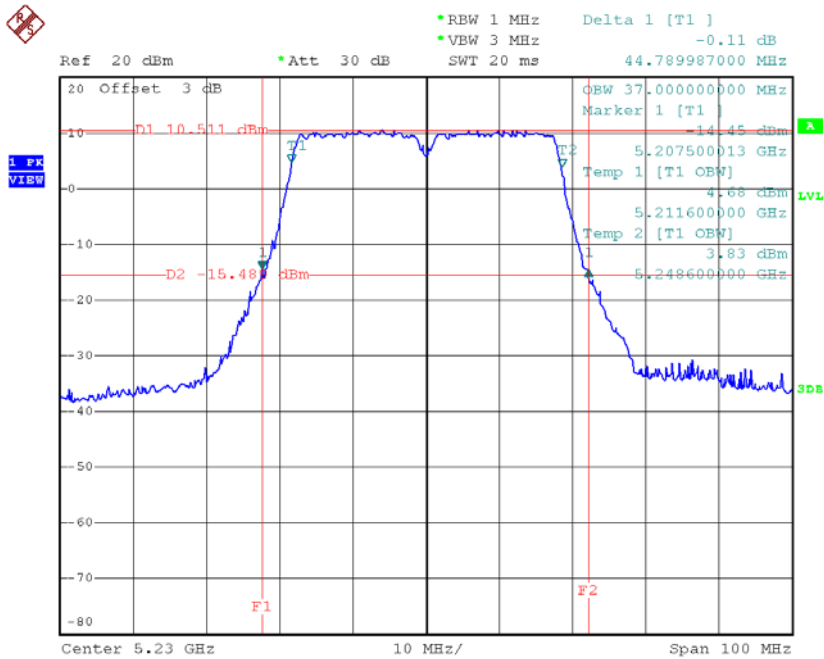


Date: 28.NOV.2018 15:15:17

Test Mode: UNII-2A/TX A Mode_CH52/CH60/CH64

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH52	5260	25.20	17.30
CH60	5300	24.25	17.20
CH64	5320	24.85	17.20


Note:

The maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10log B, where B is the 26dB Bandwidth in megahertz.

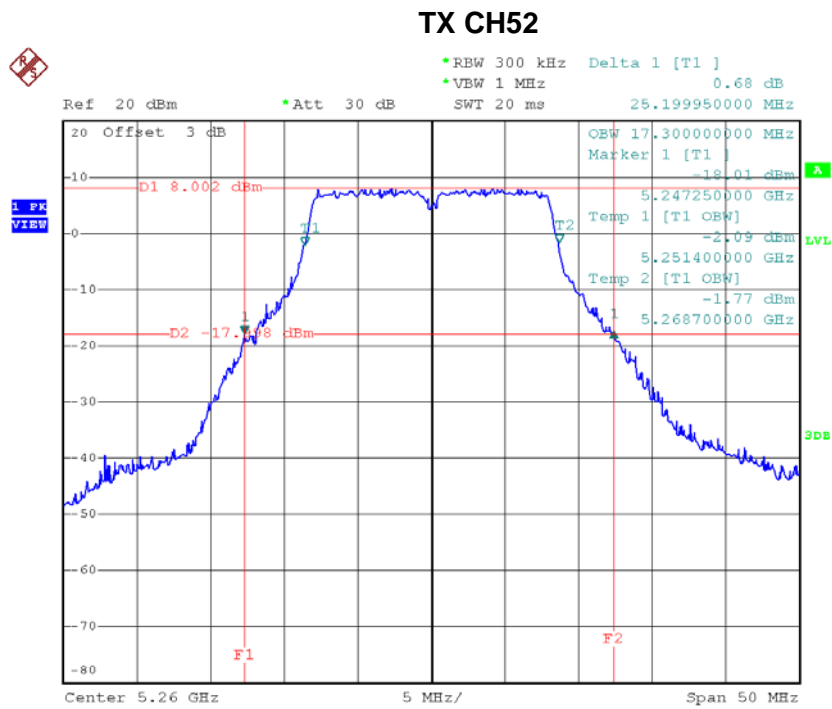


Date: 26.NOV.2018 14:24:40

TX CH60

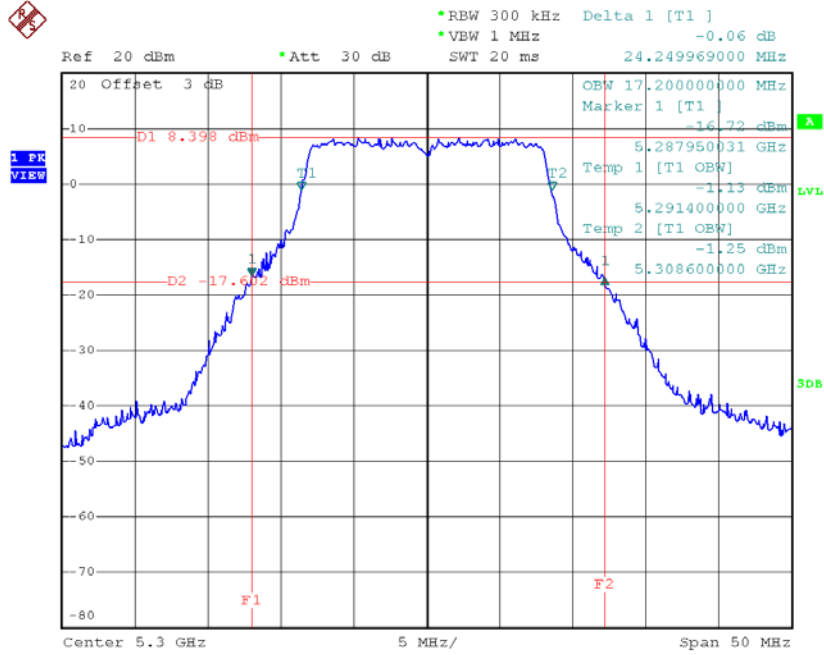

Date: 26.NOV.2018 14:25:38

TX CH64

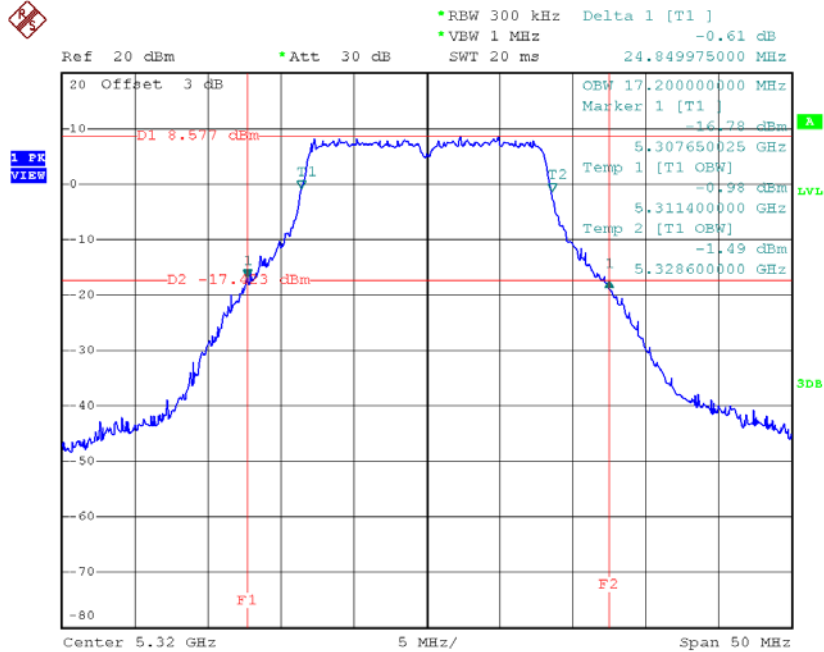


Date: 26.NOV.2018 14:28:39

Test Mode: UNII-2A/TX N20 Mode_CH52/CH60/CH64

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH52	5260	24.60	18.30
CH60	5300	24.89	18.20
CH64	5320	25.05	18.20


Note:

The maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10log B, where B is the 26dB Bandwidth in megahertz.

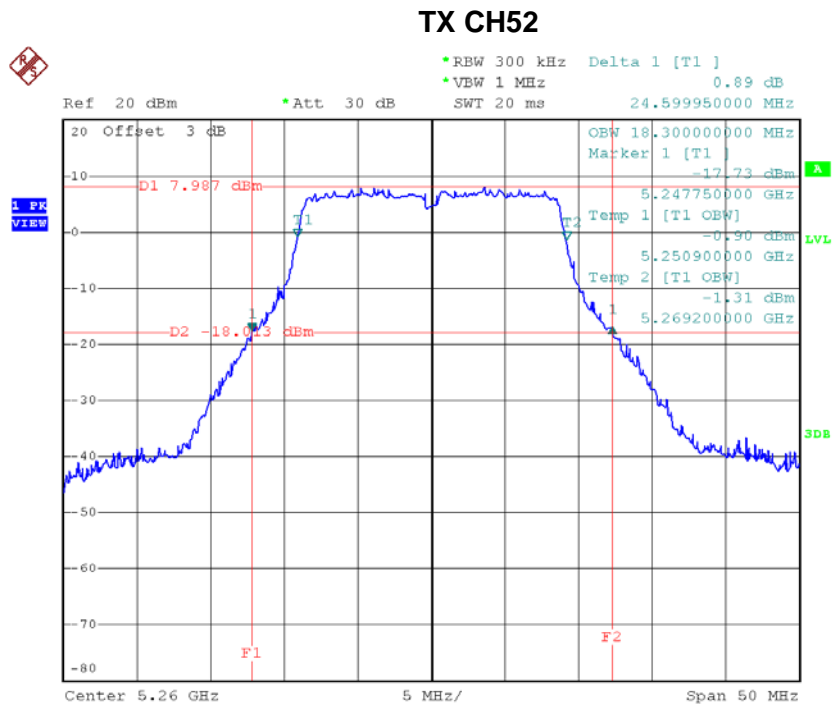


Date: 26.NOV.2018 16:28:18

TX CH60

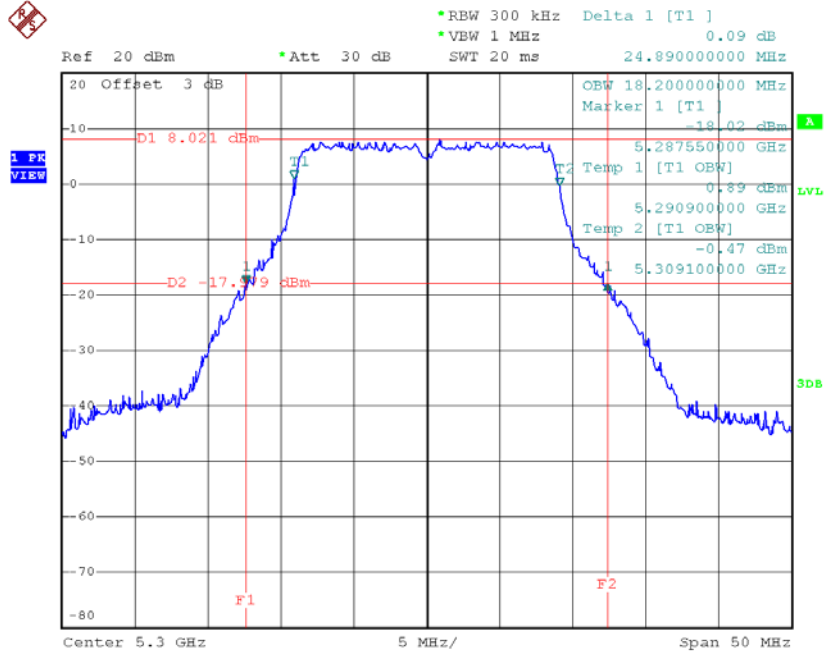

Date: 26.NOV.2018 16:29:23

TX CH64

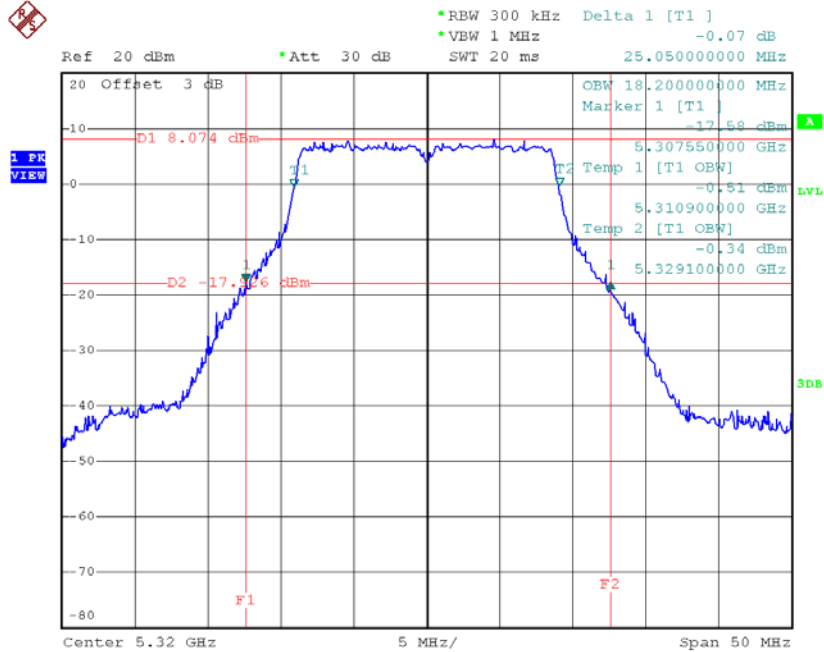

Date: 26.NOV.2018 16:30:39


Test Mode: UNII-2A/TX N40 Mode_CH54/CH62

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH54	5270	44.80	37.20
CH62	5310	44.30	37.20

Note:


The maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10\log B$, where B is the 26dB Bandwidth in megahertz.

TX CH54

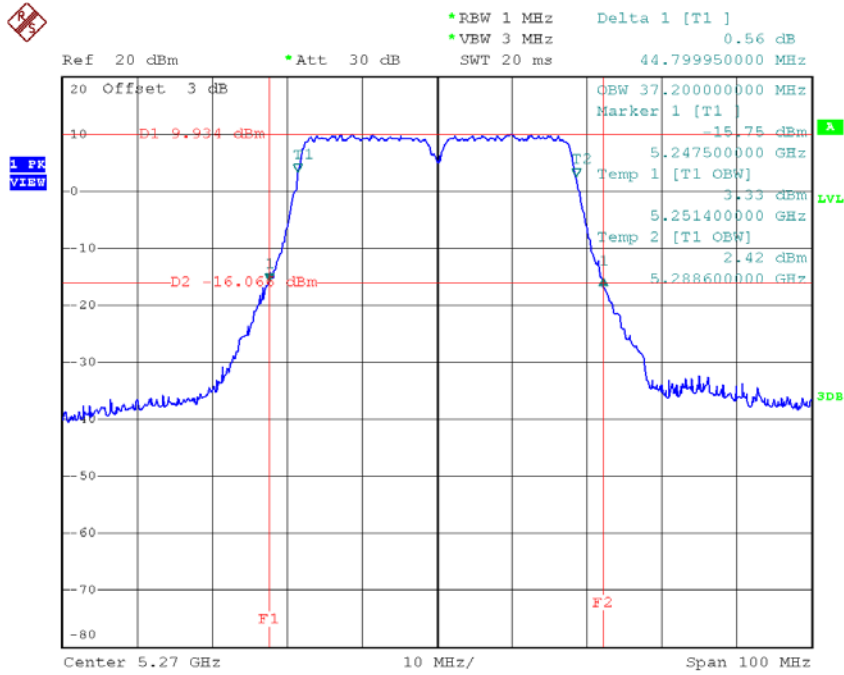

Date: 28.NOV.2018 15:16:23

TX CH62

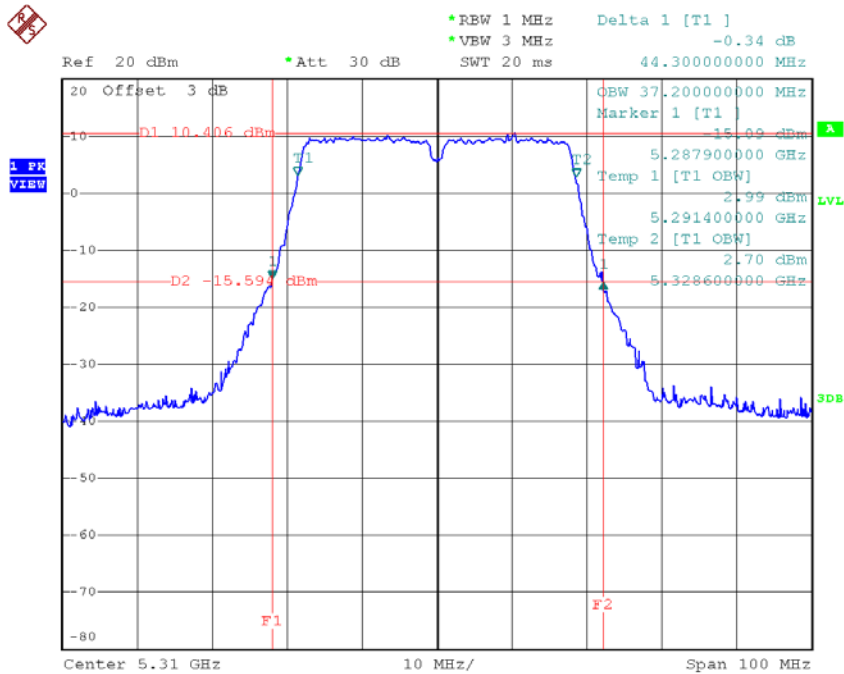


Date: 28.NOV.2018 15:17:30

Test Mode: UNII-2C/TX A Mode_CH100/CH116/CH140

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH100	5500	24.60	17.10
CH116	5580	24.55	17.10
CH140	5700	24.75	17.20


Note:

The maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10log B, where B is the 26dB Bandwidth in megahertz.

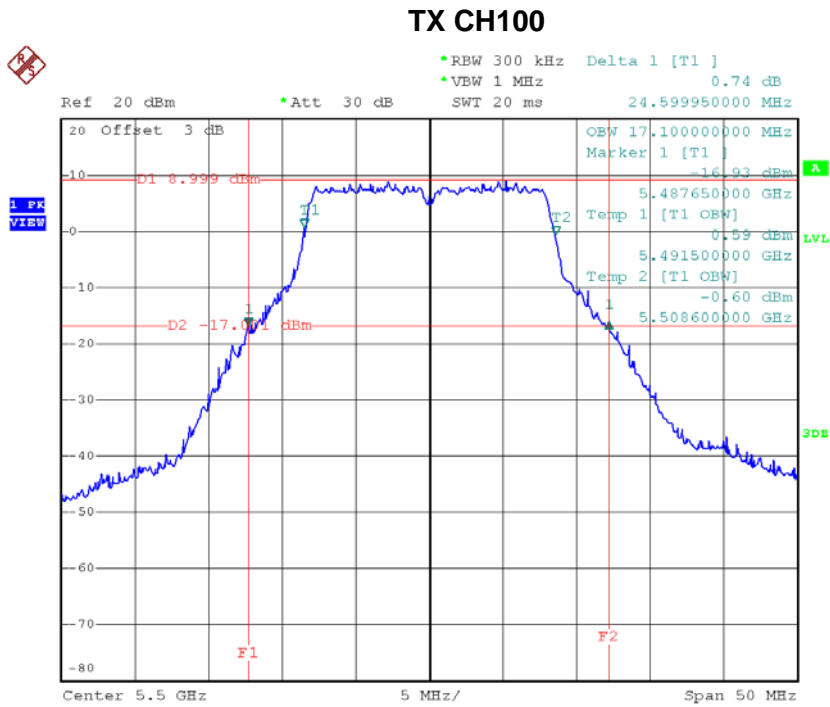


Date: 26.NOV.2018 14:30:23

TX CH116

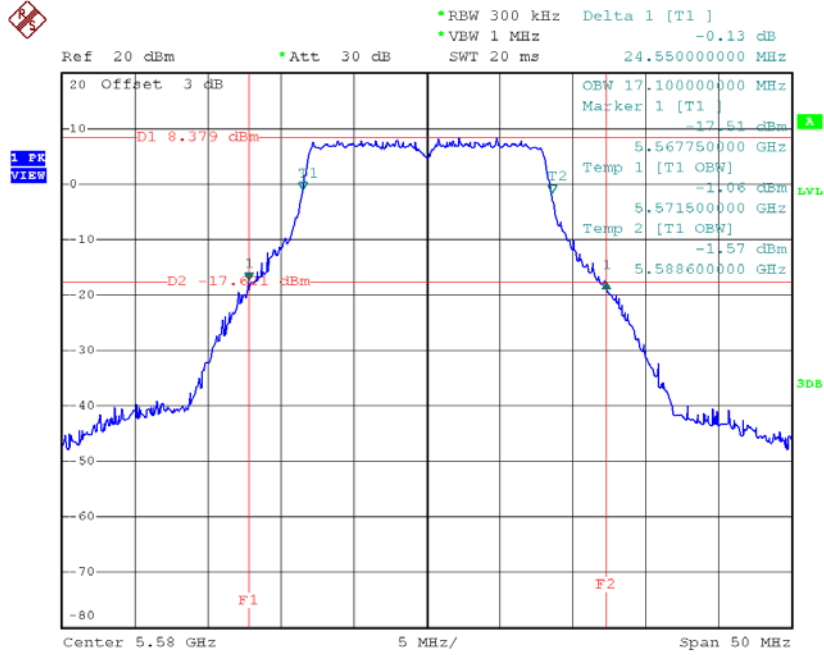

Date: 26.NOV.2018 14:31:25

TX CH140

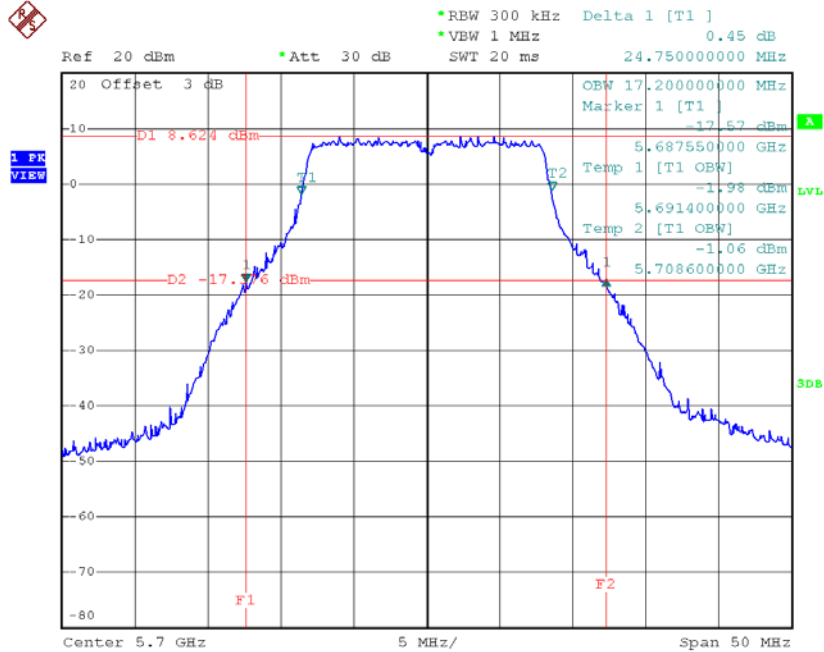


Date: 26.NOV.2018 14:32:26

Test Mode: UNII-2C/TX N20 Mode_CH100/CH116/CH140

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH100	5500	24.95	18.20
CH116	5580	24.55	18.20
CH140	5700	24.40	18.20


Note:

The maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10log B, where B is the 26dB Bandwidth in megahertz.

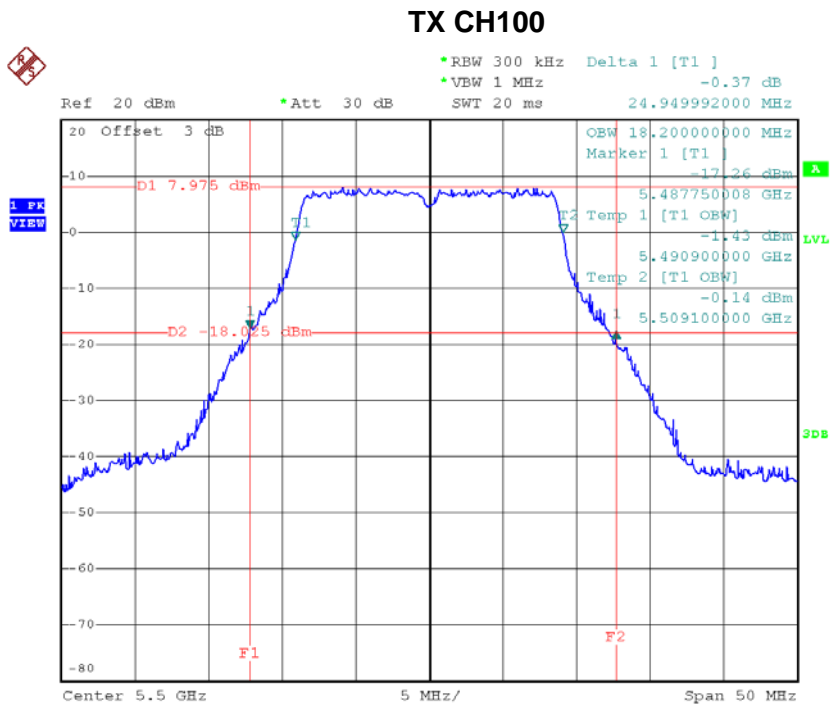


Date: 26.NOV.2018 16:31:41

TX CH116

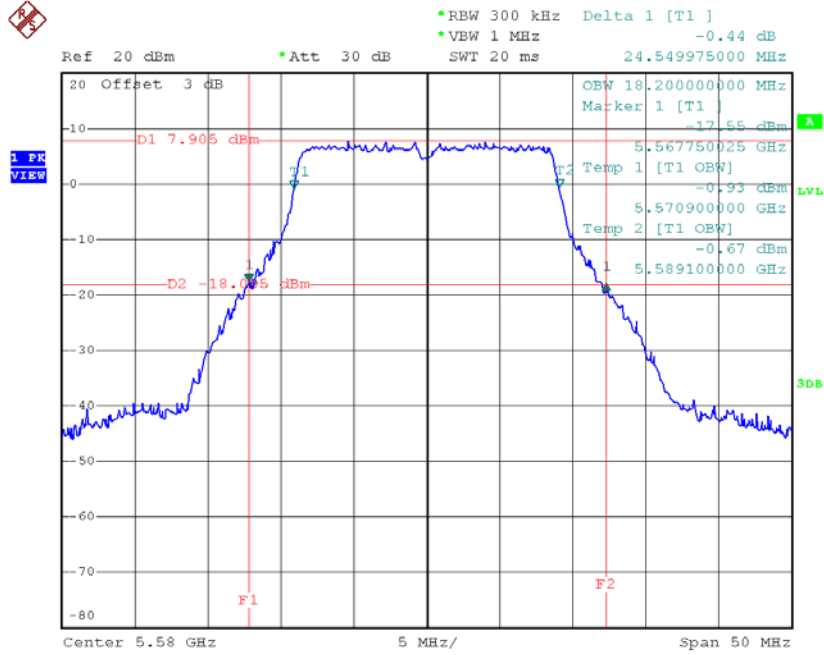

Date: 26.NOV.2018 16:32:45

TX CH140

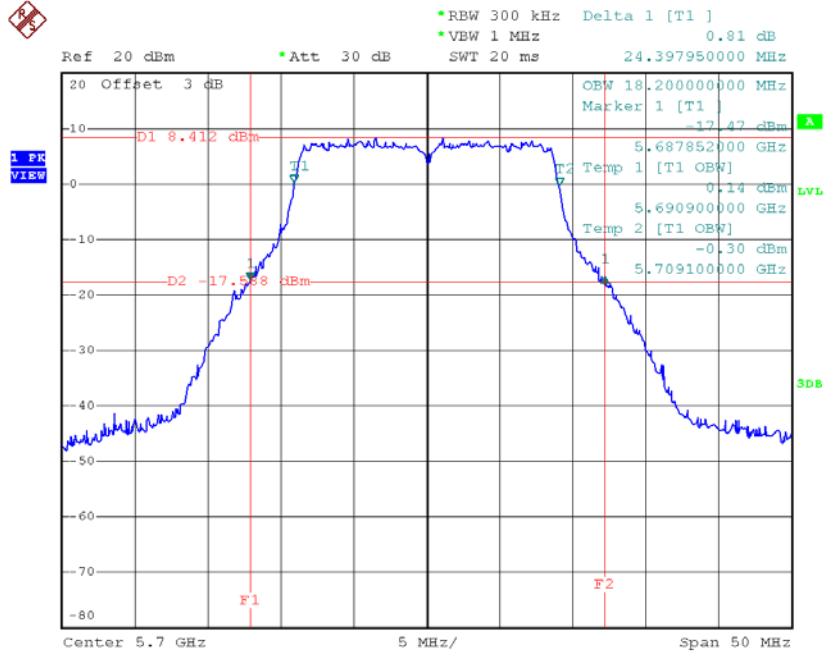


Date: 26.NOV.2018 16:33:55

Test Mode: UNII-2C/TX N40 Mode_CH102/CH110/CH134

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH102	5510	45.19	37.20
CH110	5550	44.50	37.20
CH134	5670	45.80	37.20


Note:

The maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10log B, where B is the 26dB Bandwidth in megahertz.

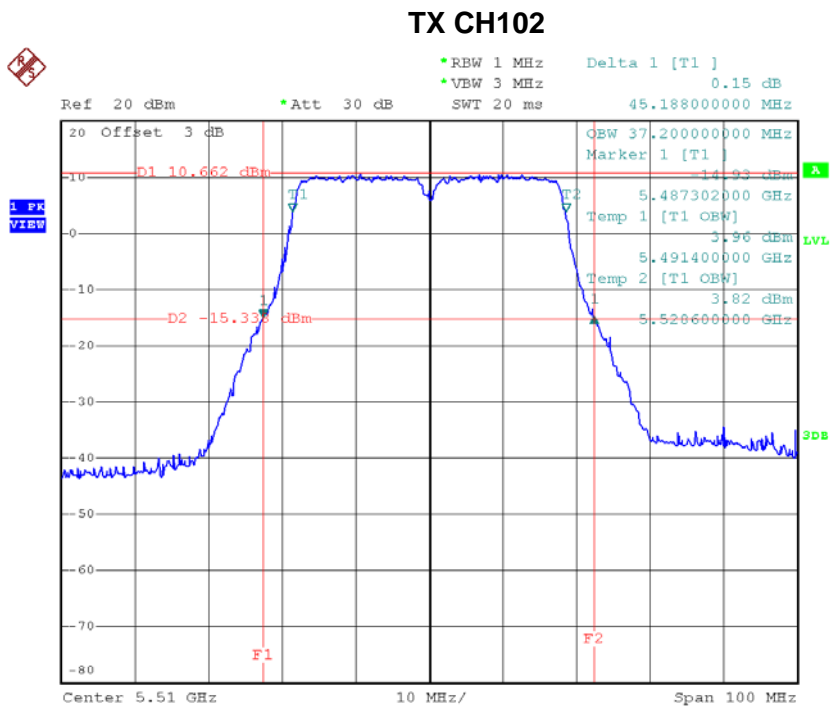


Date: 28.NOV.2018 15:18:52

TX CH110

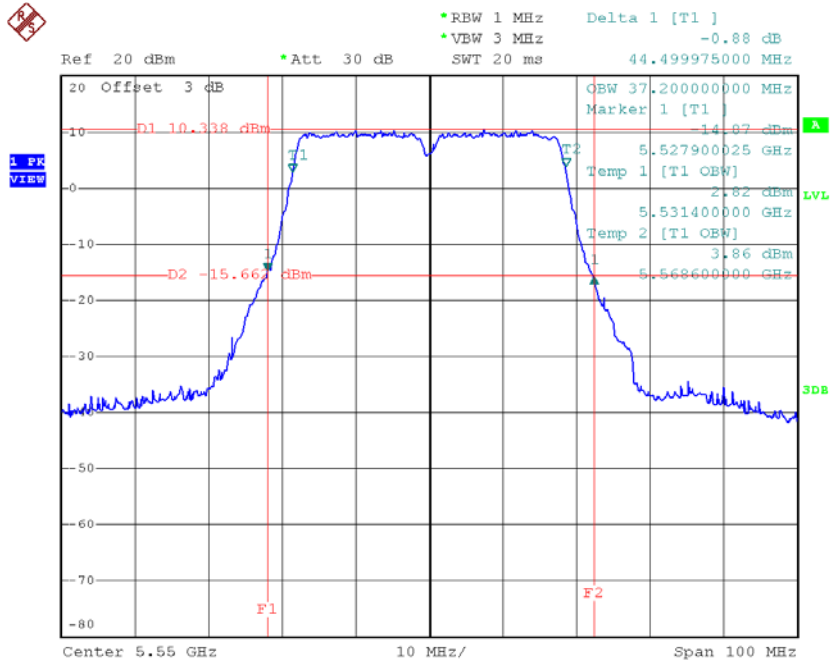

Date: 28.NOV.2018 15:19:56

TX CH134

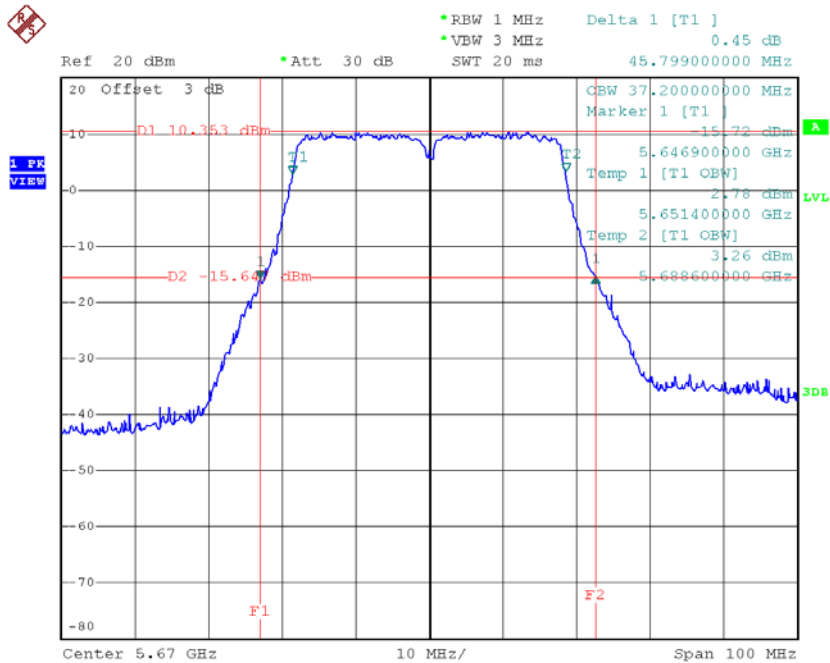


Date: 28.NOV.2018 15:20:55

Test Mode: UNII-3/ TX A Mode_CH149/CH157/CH165


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH149	5745	16.41	16.60	>=500
CH157	5785	16.50	16.60	>=500
CH165	5825	16.50	16.60	>=500

TX CH 149

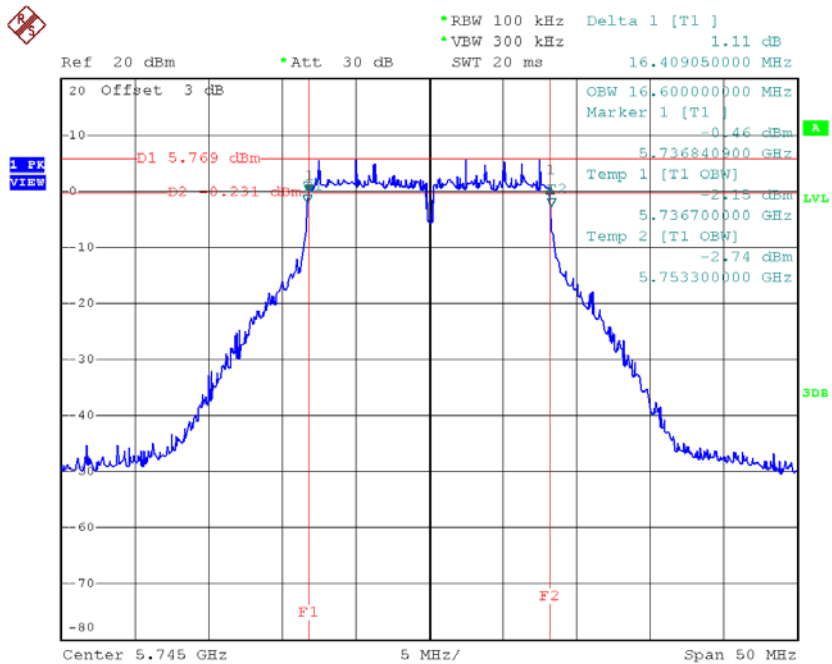


Date: 26.NOV.2018 14:34:07

TX CH 157

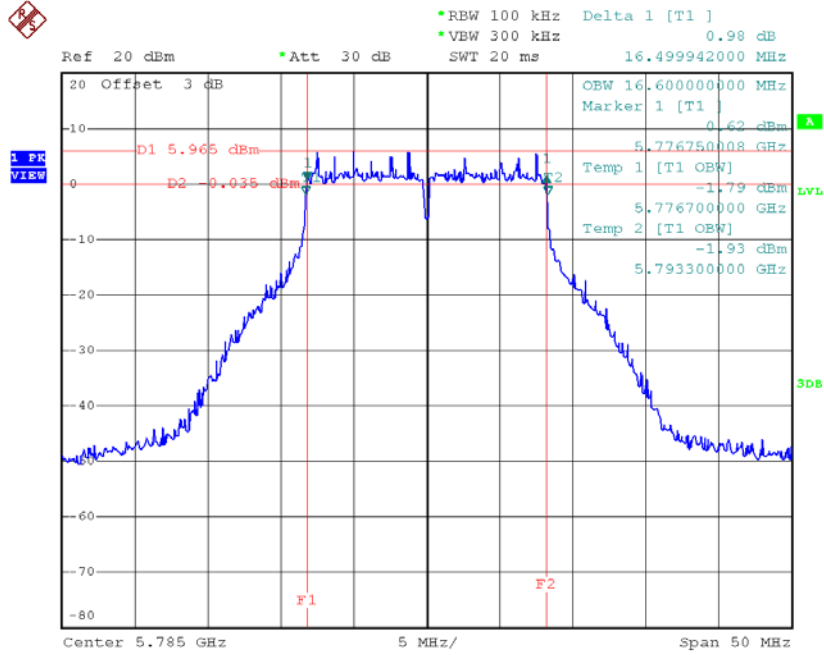

Date: 26.NOV.2018 14:35:14


TX CH 165

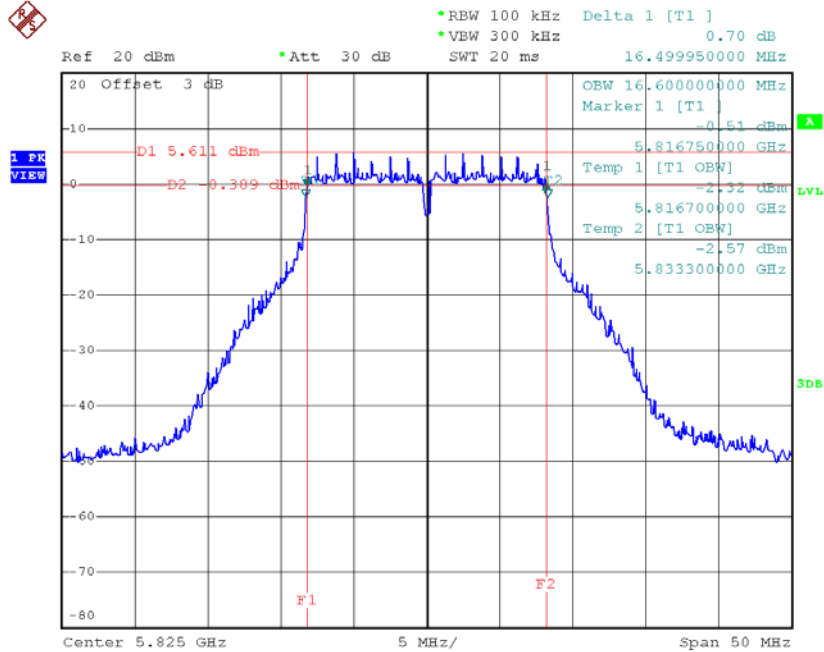

Date: 26.NOV.2018 14:36:17


Test Mode: UNII-3/ TX N20 Mode_CH149/CH157/CH165

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH149	5745	17.70	17.80	>=500
CH157	5785	17.70	17.80	>=500
CH165	5825	17.65	17.80	>=500

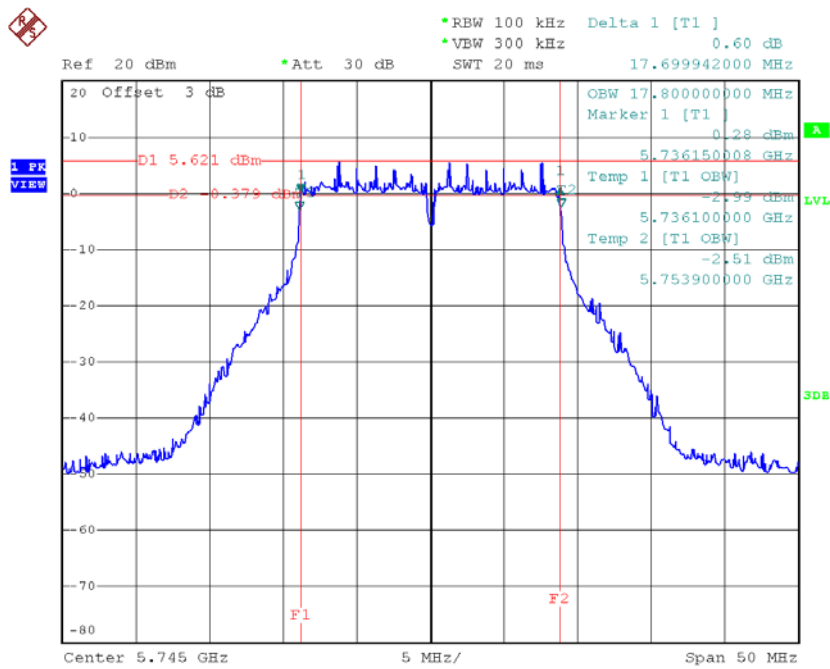TX CH 149


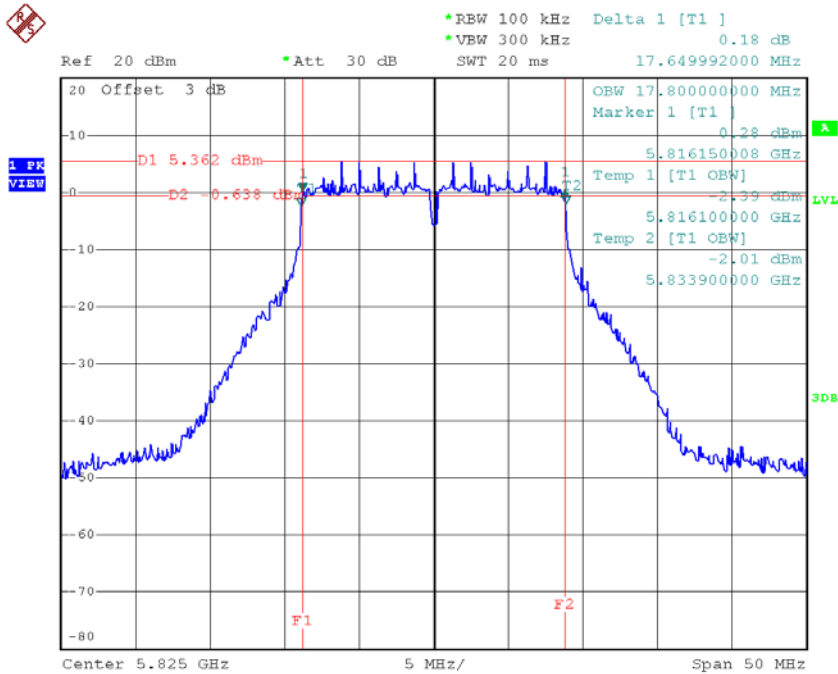
Date: 26.NOV.2018 16:35:04

TX CH 157

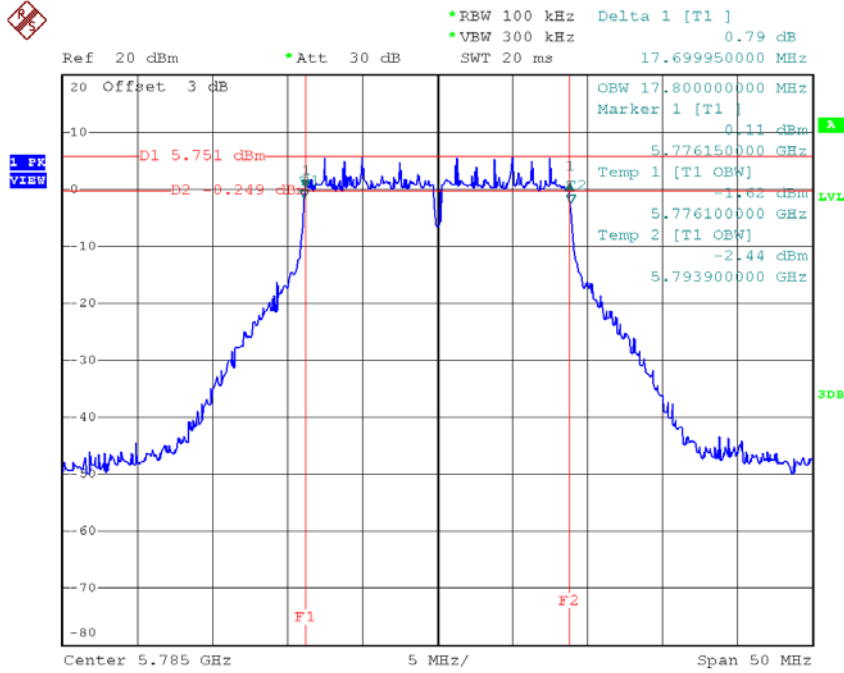

Date: 26.NOV.2018 16:36:09

TX CH 165




Date: 26.NOV.2018 16:37:12

Test Mode: UNII-3/ TX N40 Mode_CH151/CH159


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH151	5755	36.50	36.40	≥ 500
CH159	5795	36.50	36.40	≥ 500

TX CH 151

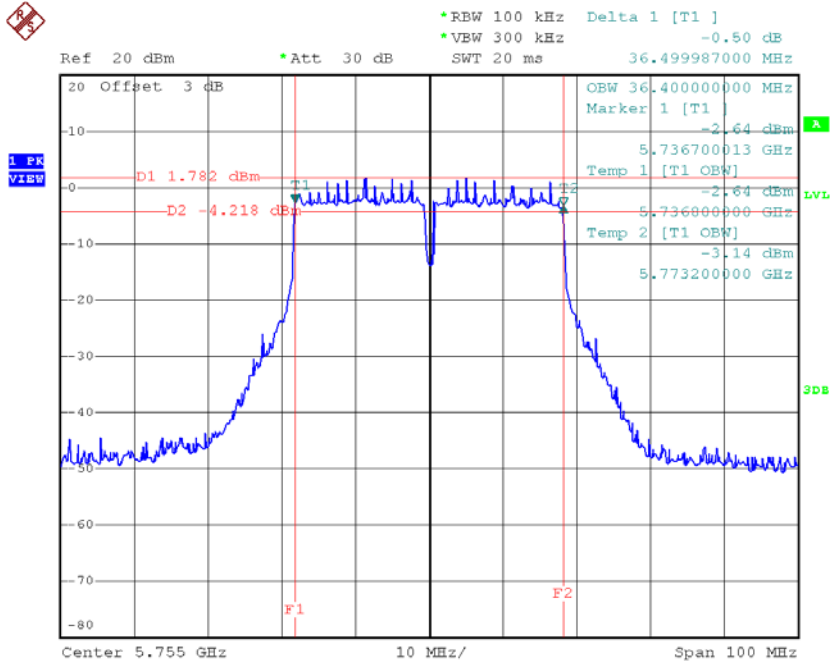

Date: 28.NOV.2018 15:22:03

TX CH 159

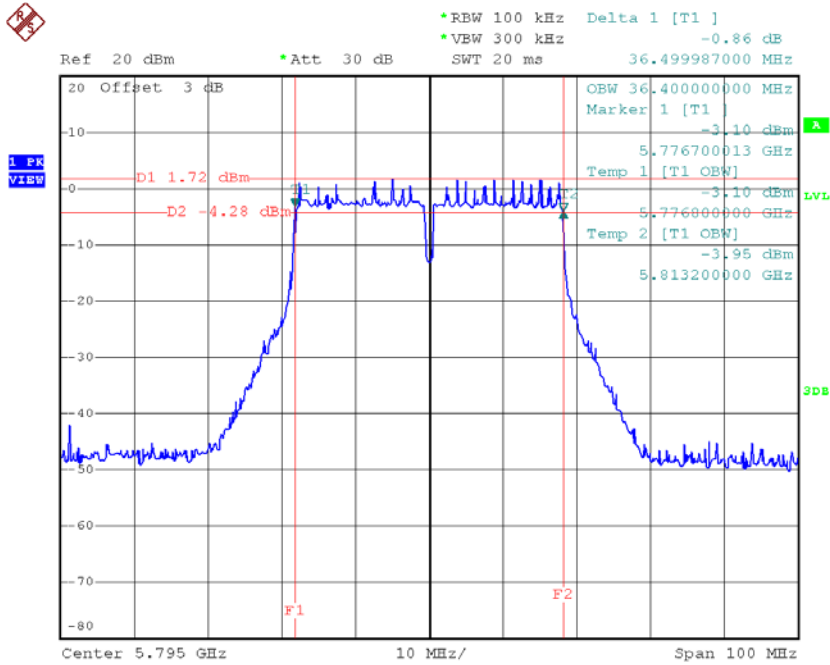


Date: 28.NOV.2018 15:23:09

Test Mode: UNII-1/TX AC20 Mode_CH36/CH40/CH48


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH36	5180	24.75	18.30
CH40	5200	25.10	18.30
CH48	5240	25.25	18.30

TX CH36

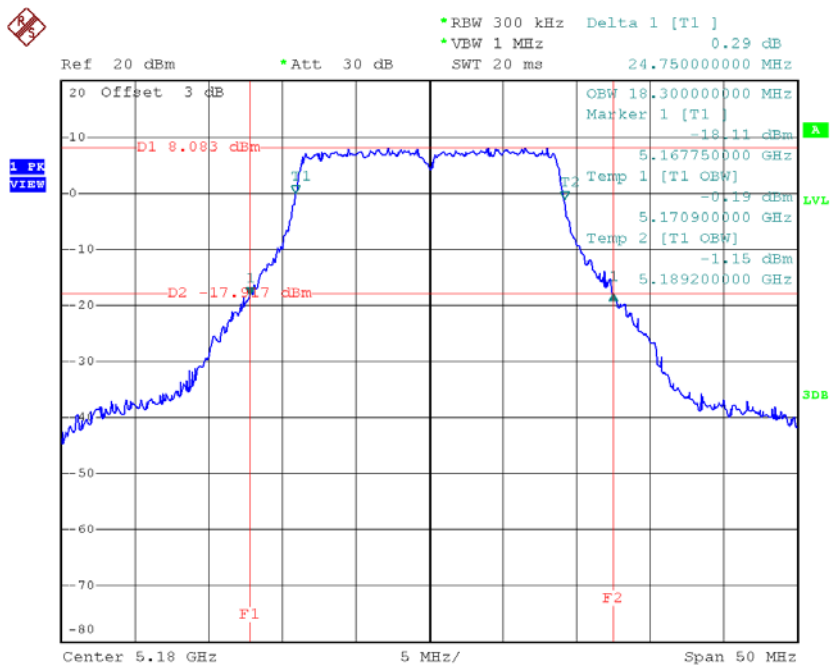


Date: 26.NOV.2018 17:51:24

TX CH40

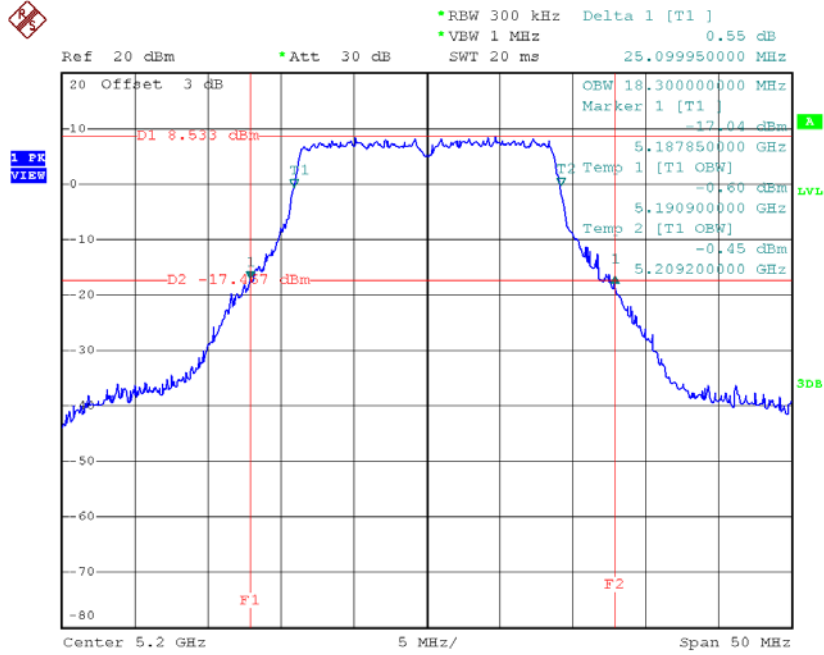

Date: 26.NOV.2018 17:54:00

TX CH48

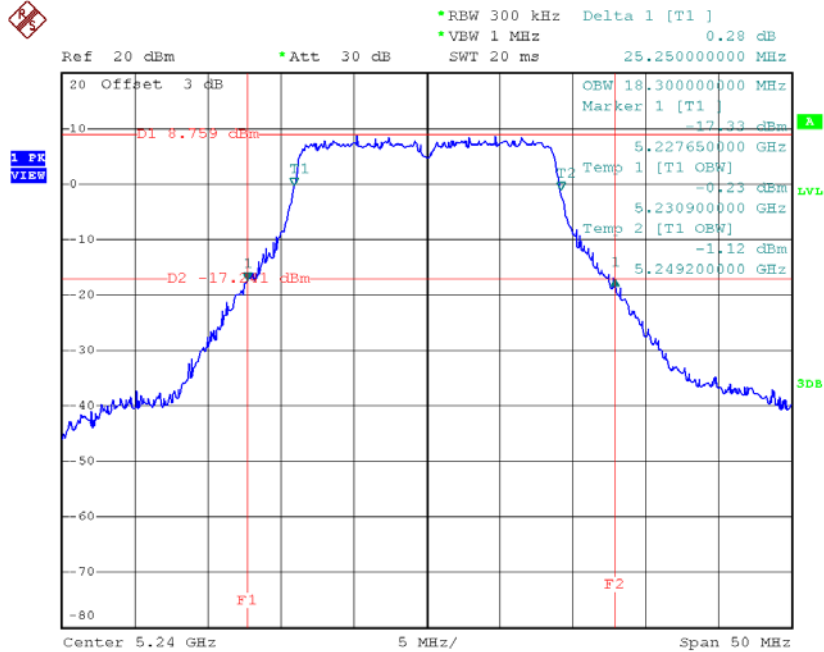


Date: 26.NOV.2018 17:58:45

Test Mode: UNII-1/TX AC40 Mode_CH38/CH46


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH38	5190	46.40	37.00
CH46	5230	44.19	37.20

TX CH38

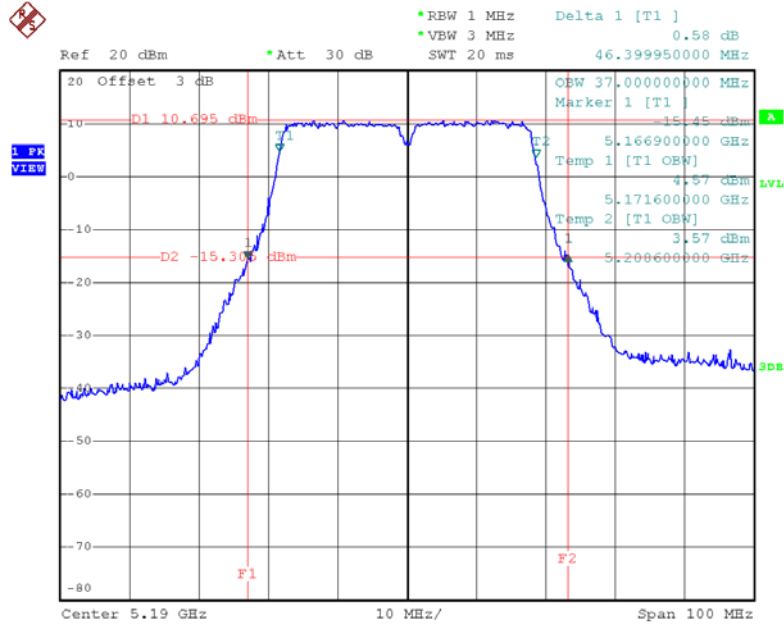

Date: 28.NOV.2018 15:02:46

TX CH46

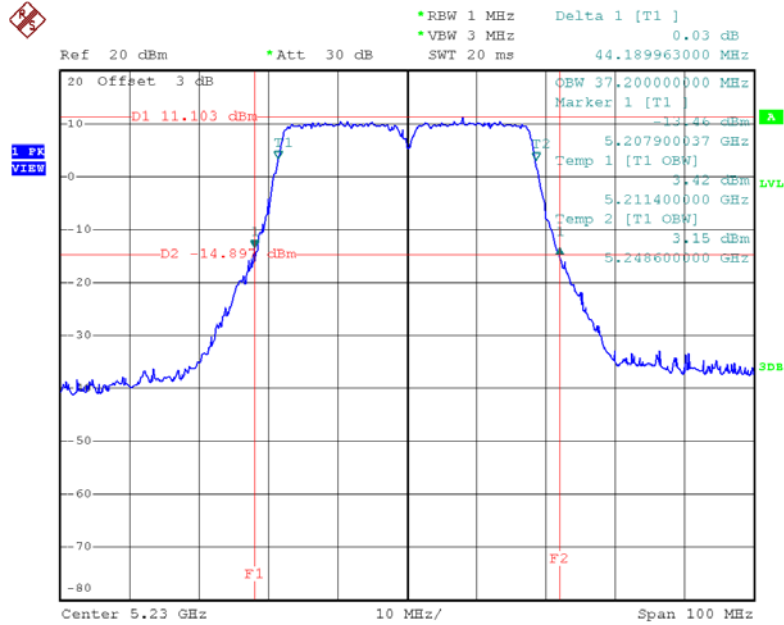


Date: 28.NOV.2018 15:04:29

Test Mode: UNII-1/TX AC80 Mode_CH42

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH42	5210	83.80	75.20

TX CH42

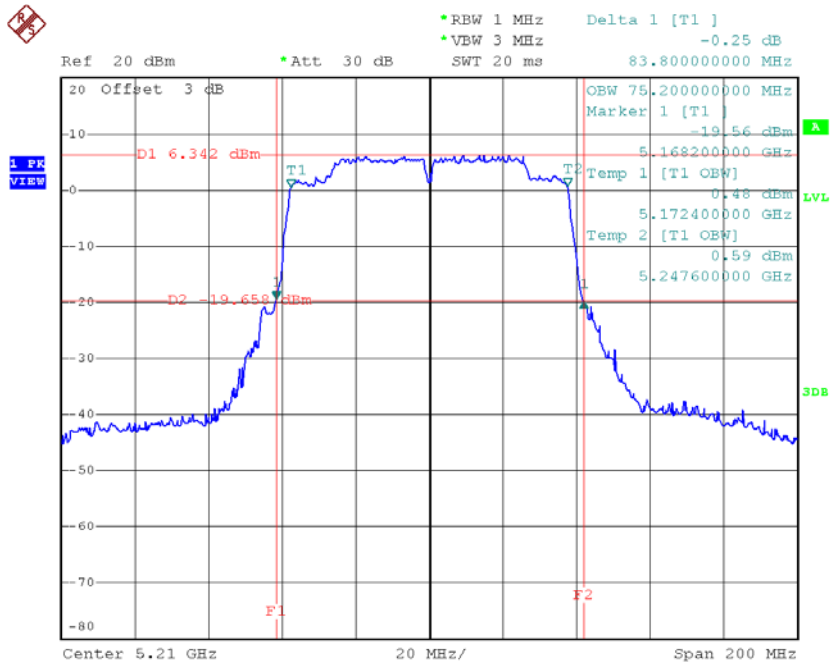

Date: 26.NOV.2018 19:26:14

