



# FCC PART 15C TEST REPORT No.I22Z60808-IOT04

for

**Razer Inc.**

**Gaming Tablet**

**RZ45-0460VWQ**

With

**FCC ID: RWO-RZ450460**

**Hardware Version: V4**

**Software Version: Razer Edge 5G-12-user**

**Issued Date: 2022-08-26**

**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

**Test Laboratory:**

**CTTL-Telecommunication Technology Labs, CAICT**

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: [ctl\\_terminals@caict.ac.cn](mailto:ctl_terminals@caict.ac.cn), website: [www.caict.ac.cn](http://www.caict.ac.cn)



## **REPORT HISTORY**

<b>Report Number</b>	<b>Revision</b>	<b>Description</b>	<b>Issue Date</b>
I22Z60808-IOT04	Rev.0	1st edition	2022-08-03
I22Z60808-IOT04	Rev.1	Add the power result graph. Add the result of Band Edges Compliance.	2022-08-26

## **CONTENTS**

<b>1. TEST LABORATORY .....</b>	<b>5</b>
1.1. INTRODUCTION & ACCREDITATION .....	5
1.2. TESTING LOCATION .....	5
1.3. TESTING ENVIRONMENT.....	5
1.4. PROJECT DATE .....	5
1.5. SIGNATURE .....	5
<b>2. CLIENT INFORMATION.....</b>	<b>6</b>
2.1. APPLICANT INFORMATION .....	6
2.2. MANUFACTURER INFORMATION .....	6
<b>3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) .....</b>	<b>7</b>
3.1. ABOUT EUT .....	7
3.2. INTERNAL IDENTIFICATION OF EUT .....	7
3.3. INTERNAL IDENTIFICATION OF AE.....	7
3.4. GENERAL DESCRIPTION.....	8
3.5. INTERPRETATION OF THE TEST ENVIRONMENT.....	8
<b>3.6. EUT SET-UPS .....</b>	<b>8</b>
<b>4. REFERENCE DOCUMENTS.....</b>	<b>8</b>
4.1. DOCUMENTS SUPPLIED BY APPLICANT .....	8
4.2. REFERENCE DOCUMENTS FOR TESTING.....	8
<b>5. TEST RESULTS .....</b>	<b>9</b>
5.1. SUMMARY OF TEST RESULTS.....	9
5.2. STATEMENTS.....	9
5.3. TEST CONDITIONS .....	9
<b>6. TEST FACILITIES UTILIZED .....</b>	<b>10</b>
<b>7. MEASUREMENT UNCERTAINTY .....</b>	<b>11</b>
7.1. MAXIMUM OUTPUT POWER.....	11
7.2. PEAK POWER SPECTRAL DENSITY .....	11
7.3. DTS 6-DB SIGNAL BANDWIDTH.....	11
7.4. BAND EDGES COMPLIANCE .....	11
7.5. TRANSMITTER SPURIOUS EMISSION .....	11
7.6. AC POWER-LINE CONDUCTED EMISSION .....	11
<b>ANNEX A: DETAILED TEST RESULTS.....</b>	<b>12</b>
<b>A.1. MEASUREMENT METHOD.....</b>	<b>12</b>
<b>A.2. MAXIMUM OUTPUT POWER.....</b>	<b>13</b>



A.2.1. PEAK OUTPUT POWER-CONDUCTED ..... 13

**A.3. PEAK POWER SPECTRAL DENSITY..... 18**

**A.4. DTS 6-DB SIGNAL BANDWIDTH ..... 41**

**A.5. BAND EDGES COMPLIANCE ..... 52**

**A.6. TRANSMITTER SPURIOUS EMISSION..... 66**

    A.6.1 TRANSMITTER SPURIOUS EMISSION – CONDUCTED ..... 66

    A.6.2 TRANSMITTER SPURIOUS EMISSION - RADIATED..... 223

**A.7. AC POWER-LINE CONDUCTED EMISSION ..... 245**

**ANNEX B: EUT PARAMETERS..... 249**

**ANNEX C: ACCREDITATION CERTIFICATE ..... 249**

## 1. Test Laboratory

### 1.1. Introduction & Accreditation

**Telecommunication Technology Labs, CAICT** is an ISO/IEC 17025:2017 accredited test laboratory under NATIONAL VOLUNTARY LABORATORY ACCREDITATION PROGRAM (NVLAP) with lab code 600118-0, and is also an FCC accredited test laboratory (CN5017), and ISED accredited test laboratory (ISED#: 24849). The detail accreditation scope can be found on NVLAP website.

### 1.2. Testing Location

Location 1:CTTL(Huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,  
P. R. China100191

### 1.3. Testing Environment

Normal Temperature: 15-35°C


Relative Humidity: 20-75%

### 1.4. Project date

Testing Start Date: 2022-04-20


Testing End Date: 2022-08-03

### 1.5. Signature




---

Xie Xiuzhen  
(Prepared this test report)



---

Zheng Wei  
(Reviewed this test report)



---

Hu Xiaoyu  
(Approved this test report)



## **2. Client Information**

### **2.1.Applicant Information**

Company Name: Razer Inc.  
Address /Post: 9 Pasteur, Suite 100, Irvine, CA 92618, USA.  
Contact: Johnsen Tia  
Email: Johnsen.tia@razer.com  
Telephone: +65 6571 6828

### **2.2.Manufacturer Information**

Company Name: Razer Inc.  
Address /Post: 9 Pasteur, Suite 100, Irvine, CA 92618, USA.  
Contact: Johnsen Tia  
Email: Johnsen.tia@razer.com  
Telephone: +65 6571 6828

### 3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

#### 3.1. About EUT

Description	Gaming Tablet
Model name	RZ45-0460VWQ
FCC ID	RWO-RZ450460
With WLAN Function	Yes
Frequency Band	ISM 2400MHz~2483.5MHz
Type of Modulation	DSSS/CCK/OFDM/OFDMA
Number of Channels	11
Antenna	Embedded Antenna
MAX Conducted Power	28.87dBm
Power Supply	3.87V

#### 3.2. Internal Identification of EUT

EUT ID*	SN or IMEI	HW Version	SW Version
UT65a	867034040041429	V4	Razer Edge 5G-12-user
UT10a	867034040041676	V4	Razer Edge 5G-12-user

\*EUT ID: is used to identify the test sample in the lab internally.

#### 3.3. Internal Identification of AE

AE ID*	Description		
AE1	Battery	/	Inbuilt
AE2	USB Cable	/	/
AE3	Adapter	/	/

##### AE1

Model	RC30-046001
Manufacturer	ATL
Capacitance	5000mAh
Nominal voltage	3.87V

##### AE2

Model	LS2-A001A
Manufacturer	/
Length	/

##### AE3

Model	A849-200225C-US 1
Manufacturer	/
Note	/

\*AE ID: is used to identify the test sample in the lab internally.

### 3.4. General Description

The Equipment under Test (EUT) is a model of Gaming Tablet with embedded antenna and inbuilt battery.

It has Bluetooth (EDR) function.

It consists of normal options: travel charger, USB cable.

Manual and specifications of the EUT were provided to fulfil the test.

Samples undergoing test were selected by the client.

### 3.5. Interpretation of the Test Environment

For the test methods, the test environment uncertainty figures correspond to an expansion factor  $k=2$ .

Measurement Uncertainty

Parameter	Uncertainty
temperature	0.48°C
humidity	2 %
DC voltages	0.003V

### 3.6. EUT set-ups

No.	EUT set-up	Combination of EUT and AE	Remarks
	Set.1	EUT1 + AE1 + AE2+ AE3	/

## 4. Reference Documents

### 4.1. Documents supplied by applicant

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

### 4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part15	FCC CFR 47, Part 15, Subpart C: 15.205 Restricted bands of operation; 15.209 Radiated emission limits, general requirements; 15.247 Operation within the bands 902-928MHz, 2400-2483.5 MHz, and 5725-5850 MHz.	2018
ANSI C63.10	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices Federal Communications Commission Office of Engineering and Technology Laboratory Division	2013
KDB 558074 D01	GUIDANCE FOR COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION	2019



15.247 OF THE FCC RULES

KDB 662911 D01 Emissions Testing of Transmitters with Multiple Outputs in  
the Same Band(e.g., MIMO, Smart Antenna, etc) 2013-10

## 5. Test Results

### 5.1. Summary of Test Results

SUMMARY OF MEASUREMENT RESULTS	Sub-clause of Part15C	Sub-clause of IC	Verdict
Maximum Peak Output Power	15.247 (b)	/	P
Peak Power Spectral Density	15.247 (e)	/	P
Occupied 6dB Bandwidth	15.247 (a)	/	P
Band Edges Compliance	15.247 (d)	/	P
Transmitter Spurious Emission - Conducted	15.247 (d)	/	P
Transmitter Spurious Emission - Radiated	15.247, 15.205, 15.209	/	P
AC Powerline Conducted Emission	15.107, 15.207	/	P

Please refer to **ANNEX A** for detail.

Terms used in Verdict column

P	Pass, The EUT complies with the essential requirements in the standard.
NP	Not Perform, The test was not performed by CTTL
NA	Not Applicable, The test was not applicable
F	Fail, The EUT does not comply with the essential requirements in the standard

### 5.2. Statements

The test cases as listed in section 5.1 of this report for the EUT specified in section 3 was performed by CTTL and according to the standards or reference documents listed in section 4.2

The EUT met all requirements of the standards or reference documents, and only the WLAN function was tested in this report.

### 5.3. Test Conditions

T nom	Normal Temperature
T min	Low Temperature
T max	High Temperature
V nom	Normal Voltage

For this report, if the test cases listed above are tested under normal temperature and normal voltage, and also under norm humidity, the specific condition is shown as follows:

Temperature	T nom	26°C
Voltage	V nom	3.87V
Humidity	H nom	20-75%

## 6. Test Facilities Utilized

### Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Vector Signal Analyzer	FSQ40	200089	Rohde & Schwarz	1 year	2023-05-15
2	Test Receiver	ESCI 3	100344	R&S	1 year	2023-02-21
3	LISN	ENV216	101200	R&S	1 year	2022-06-29
4	Attenuator	10dB/2W	/	Rosenberger	/	/
5	Shielding Room	S81	/	ETS-Lindgren	/	/

Note:

The test dates were before the calibration due dates of equipment used (the EMI Antenna which series number is 00167250, the LISN which series number is 101200)

### Radiated emission test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Test Receiver	ESW44	103023	R&S	1 year	2022-10-28
2	EMI Antenna	VULB 9163	483	SCHWARZBECK	1 year	2022-08-24
3	EMI Antenna	3115	00167250	ETS-Lindgren	1 year	2022-07-01
4	Loop Antenna	HFH2-Z2	829324/00 7	R&S	1 year	2022-12-22

Note:

The test dates were before the calibration due dates of equipment used (the EMI Antenna which series number is 00167250)

## 7. Measurement Uncertainty

### 7.1. Maximum Output Power

Measurement Uncertainty: 0.387dB,k=1.96

### 7.2. Peak Power Spectral Density

Measurement Uncertainty: 0.705dB,k=1.96

### 7.3. DTS 6-dB Signal Bandwidth

Measurement Uncertainty: 60.80Hz,k=1.96

### 7.4. Band Edges Compliance

Measurement Uncertainty : 0.62dB,k=1.96

### 7.5. Transmitter Spurious Emission

#### Conducted (k=1.96)

Frequency Range	Uncertainty(dB)
$30\text{MHz} \leq f \leq 2\text{GHz}$	1.22
$2\text{GHz} \leq f \leq 3.6\text{GHz}$	1.22
$3.6\text{GHz} \leq f \leq 8\text{GHz}$	1.22
$8\text{GHz} \leq f \leq 12.75\text{GHz}$	1.51
$12.75\text{GHz} \leq f \leq 26\text{GHz}$	1.51
$26\text{GHz} \leq f \leq 40\text{GHz}$	1.59

#### Radiated (k=2)

Frequency Range	Uncertainty(dB)
9kHz-30MHz	4.92
$30\text{MHz} \leq f \leq 1\text{GHz}$	5.15
$1\text{GHz} \leq f \leq 18\text{GHz}$	5.54
$18\text{GHz} \leq f \leq 40\text{GHz}$	5.26

### 7.6. AC Power-line Conducted Emission

Measurement Uncertainty : 3.08dB,k=2

## **ANNEX A: Detailed Test Results**

### **A.1. Measurement Method**

#### **A.1.1. Conducted Measurements**


Connect the EUT to the test system as Fig.A.1.1.1 shows.

Set the EUT to the required work mode.

Set the EUT to the required channel.

Set the Vector Signal Analyzer and start measurement.

Record the values. Vector Signal Analyzer

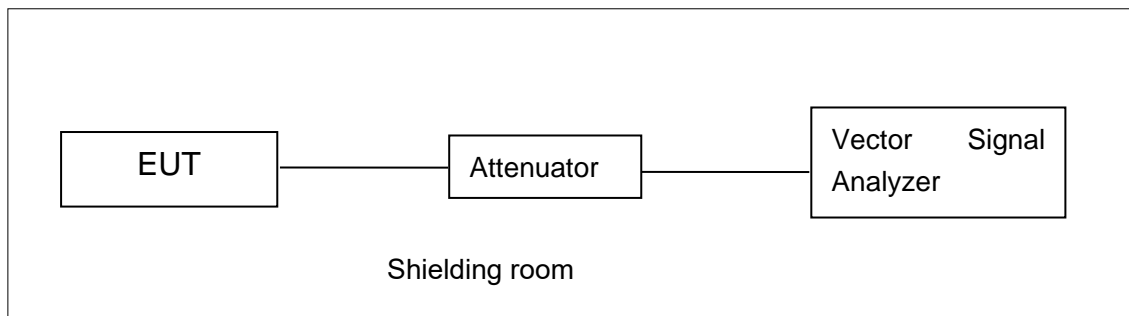


**Fig.A.1.1.1: Test Setup Diagram for Conducted Measurements**

#### **A.1.2. Radiated Emission Measurements**

In the case of radiated emission, the used settings are as follows,

Sweep frequency from 30 MHz to 1GHz, RBW = 100 kHz, VBW = 300 kHz;

Sweep frequency from 1 GHz to 26GHz, RBW = 1MHz, VBW = 10Hz;

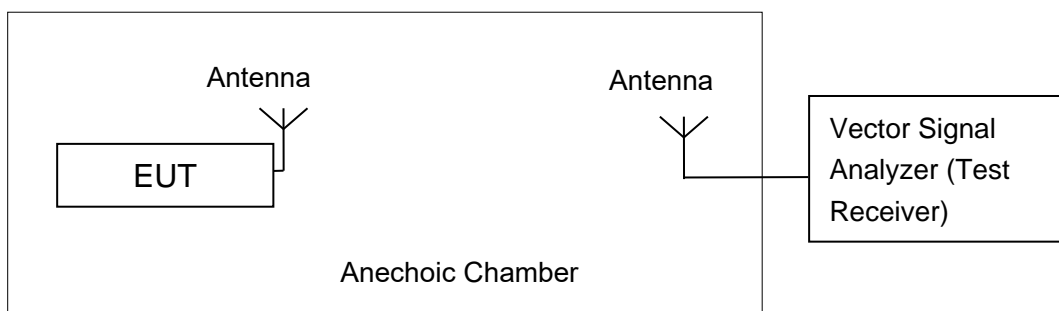

**Fig.A.1.2.1: Test Setup Diagram for Radiated Measurements**

## **A.2. Maximum Output Power**

**Method of Measurement: See ANSI C63.10-2013-clause 11.9.1.1**

- a) Set the RBW  $\geq$  DTS bandwidth.
- b) Set VBW  $\geq$  [3  $\times$  RBW].
- c) Set span  $\geq$  [3  $\times$  RBW].
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

**Measurement Limit:**

Standard	Limit (dBm)
FCC CRF Part 15.247(b)	< 30

**EUT ID: UT10a**

### **A.2.1. Peak Output Power-conducted**

**Measurement Results:**

Frequency	Ant4(dBi)	Ant5(dBi)	DG(dBi) beamforming
2412	0.4	-0.1	3.16
2437	0.1	0.0	3.06
2462	-0.2	-0.3	2.76
2422	0.3	-0.1	3.11
2437	0.1	0.0	3.06
2452	0	-0.1	2.96

For BF transmissions, power and PSD directional gain is calculated as:

Directional gain =  $10 \log [(10G1 / 20 + 10G2 / 20 + \dots + 10Gn / 20) 2 / \text{NANT}]$  dBi, as following table for PSD. NANT = number of transmit antennas NSS = number of spatial streams. (The worst case directional gain will occur when NSS = 1)

**SISO-Ant4**

**802.11b/g mode**

Mode	Data Rate (Mbps)	Test Result (dBm)		
		2412MHz (Ch1)	2437MHz (Ch6)	2462 MHz (Ch11)
802.11b	1	18.42	19.04	18.37

802.11g	6	23.76	23.47	17.70
---------	---	-------	-------	-------

The data rate 1Mbps and 6Mbps are selected as worse condition, and the following cases are performed with this condition.

#### 802.11n-HT20 mode

Mode	Data Rate (Index)	Test Result (dBm)		
		2412MHz (Ch1)	2437MHz (Ch6)	2462 MHz (Ch11)
802.11n(20MHz)	MCS0	23.31	23.29	17.43

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

#### 802.11n-HT40 mode

Mode	Data Rate (Index)	Test Result (dBm)		
		2422MHz (Ch3)	2437MHz (Ch6)	2452 MHz (Ch9)
802.11n(40MHz)	MCS0	22.48	22.59	22.34

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

#### 802.11ax-HE20 mode(RU26-index0)

Mode	Data Rate (Index)	Test Result (dBm)		
		2412MHz (Ch1)	2437MHz (Ch6)	2462 MHz (Ch11)
802.11ax(20MHz)	MCS0	25.01	24.37	25.32

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

#### 802.11ax-HE40 mode(RU26-index0)

Mode	Data Rate (Index)	Test Result (dBm)		
		2422MHz (Ch3)	2437MHz (Ch6)	2452 MHz (Ch9)
802.11ax(40MHz)	MCS0	23.32	24.73	24.05

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

#### SISO-Ant5

#### 802.11b/g mode

Mode	Data Rate (Mbps)	Test Result (dBm)		
		2412MHz (Ch1)	2437MHz (Ch6)	2462 MHz (Ch11)
802.11b	1	17.97	17.96	17.75
802.11g	6	23.44	23.32	17.50

The data rate 1Mbps and 6Mbps are selected as worse condition, and the following cases are performed with this condition.

#### 802.11n-HT20 mode

Mode	Data Rate (Index)	Test Result (dBm)		
		2412MHz (Ch1)	2437MHz (Ch6)	2462 MHz (Ch11)
802.11n(20MHz)	MCS0	22.99	22.83	17.46

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

#### 802.11n-HT40 mode

Mode	Data Rate (Index)	Test Result (dBm)		
		2422MHz (Ch3)	2437MHz (Ch6)	2452 MHz (Ch9)
802.11n(40MHz)	MCS0	21.85	21.80	21.61

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

#### 802.11ax-HE20 mode(RU26-index0)

Mode	Data Rate (Index)	Test Result (dBm)		
		2412MHz (Ch1)	2437MHz (Ch6)	2462 MHz (Ch11)
802.11ax(20MHz)	MCS0	25.69	25.03	25.91

The data rate is selected as worse condition, and the following cases are performed with this condition.

#### 802.11ax-HE40 mode(RU26-index0)

Mode	Data Rate (Index)	Test Result (dBm)		
		2422MHz (Ch3)	2437MHz (Ch6)	2452 MHz (Ch9)
802.11ax(40MHz)	MCS0	24.84	24.45	24.37

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

### MIMO

#### 802.11b/g mode

Mode	Data Rate (Mbps)	Test Result (dBm)								
		2412MHz (Ch1)			2437MHz (Ch6)			2462 MHz (Ch11)		
		Ant4	Ant5	Sum	Ant4	Ant5	Sum	Ant4	Ant5	Sum
802.11b	1	17.89	17.70	20.81	18.55	17.21	20.94	18.21	17.33	20.80

802.11g	6	24.09	23.88	27.00	22.87	23.30	26.10	18.24	17.27	20.79
---------	---	-------	-------	-------	-------	-------	-------	-------	-------	-------

The data rate 1Mbps and 6Mbps are selected as worse condition, and the following cases are performed with this condition.

#### 802.11n-HT20 mode

Mode	Data Rate (Index)	Test Result (dBm)								
		2412MHz (Ch1)			2437MHz (Ch6)			2462 MHz (Ch11)		
		Ant4	Ant5	Sum	Ant4	Ant5	Sum	Ant4	Ant5	Sum
802.11n (20MHz)	MCS0	23.30	23.35	26.34	22.98	23.36	26.18	17.48	17.51	20.51

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

#### 802.11n-HT40 mode

Mode	Data Rate (Index)	Test Result (dBm)								
		2422MHz (Ch3)			2437MHz (Ch6)			2452 MHz (Ch9)		
		Ant4	Ant5	Sum	Ant4	Ant5	Sum	Ant4	Ant5	Sum
802.11n (40MHz)	MCS0	22.27	22.87	25.59	22.20	22.60	25.41	21.99	22.33	25.17

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

#### 802.11ax-HE20 mode(RU26-index0)

Mode	Data Rate (Index)	Test Result (dBm)								
		2412MHz (Ch1)			2437MHz (Ch6)			2462 MHz (Ch11)		
		Ant4	Ant5	Sum	Ant4	Ant5	Sum	Ant4	Ant5	Sum
802.11ax (20MHz)	MCS0	25.06	25.86	28.49	24.71	25.22	27.98	25.91	25.81	28.87

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

#### 802.11ax-HE40 mode(RU26-index0)


Mode	Data Rate (Index)	Test Result (dBm)								
		2422MHz (Ch3)			2437MHz (Ch6)			2452 MHz (Ch9)		
		Ant4	Ant5	Sum	Ant4	Ant5	Sum	Ant4	Ant5	Sum
802.11ax (40MHz)	MCS0	25.46	25.33	28.41	24.13	24.76	27.47	24.09	24.40	27.26

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.



this condition.


802.11b-2412MHz-ant4:

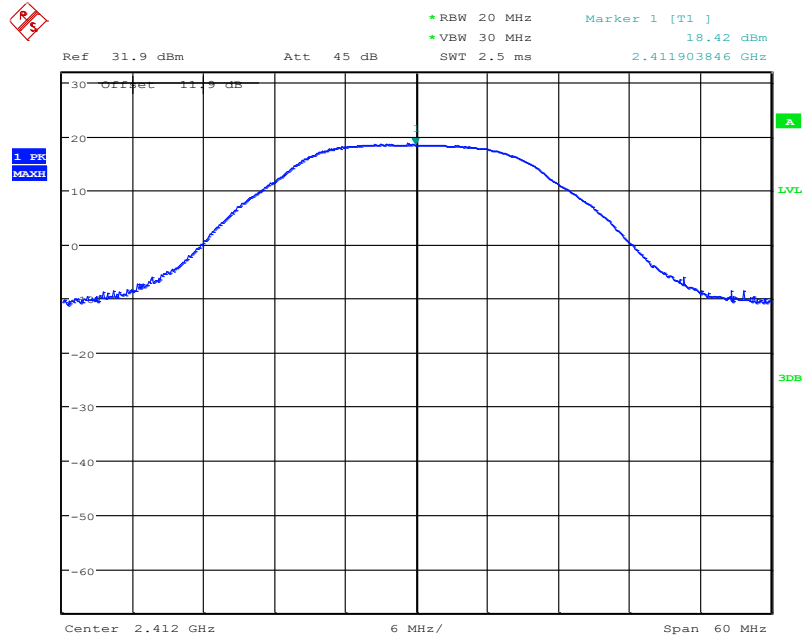

Date: 27.AUG.2022 04:15:51

### Duty Cycle

Mode	802.11b	802.11g	802.11n20	802.11n40	802.11ax20	802.11ax40
Duty Cycle	98%	99%	99%	99%	99%	99%

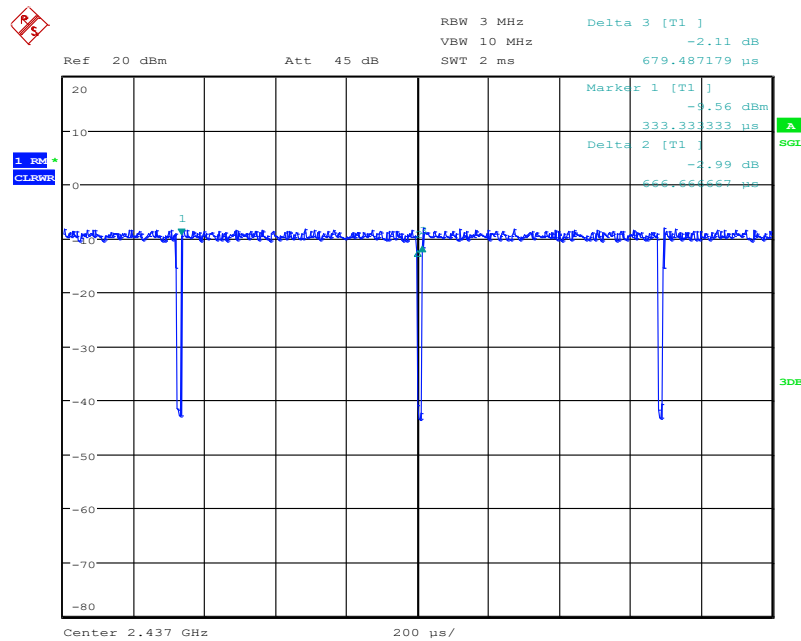

Date: 4.AUG.2022 15:17:58

Note: The following cases are performed with this condition:

- a) 802.11b/g/n20/n40 mode (Ant4) are selected as the worst condition (SISO);  
 802.11ax20/40 mode (Ant5) are selected as the worst condition (SISO);
- b) 802.11b/g/ax20/ax40 mode (Ant4) is selected as the worst condition (MIMO);  
 802.11n20/n40 mode (Ant5) is selected as the worst condition (MIMO);
- c) The maximum power of 802.11ax20/40 is got with RU26-index0(SISO/MIMO).

**Conclusion: Pass**

### **A.3. Peak Power Spectral Density**

**Method of Measurement: See ANSI C63.10-2013-clause 11.10.2**

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to RBW = 3 kHz.
- d) Set the VBW = 10 kHz.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.

**Measurement Limit:**

Standard	Limit
FCC CRF Part 15.247(e)	< 8 dBm/3 kHz

**Measurement Results:**
**SISO-Ant4**
**802.11b/g mode**

Mode	Channel	Power Spectral Density ( dBm/3 kHz )		Conclusion
802.11b	1	Fig.A.3.1	-7.10	P
	6	Fig.A.3.2	-7.48	P
	11	Fig.A.3.3	-7.50	P
802.11g	1	Fig.A.3.4	-9.20	P
	6	Fig.A.3.5	-10.15	P
	11	Fig.A.3.6	-15.49	P

**802.11n-HT20 mode**

Mode	Channel	Power Spectral Density ( dBm/3 kHz )		Conclusion
802.11n (HT20)	1	Fig.A.3.7	-3.25	P
	6	Fig.A.3.8	-4.14	P
	11	Fig.A.3.9	-8.47	P

**802.11n-HT40 mode**

Mode	Channel	Power Spectral Density ( dBm/3 kHz )		Conclusion
802.11n (HT40)	3	Fig.A.3.10	-13.40	P
	6	Fig.A.3.11	-13.23	P
	9	Fig.A.3.12	-12.12	P

**SISO-Ant5**
**802.11ax-HE20 mode(RU26-index0)**

Mode	Channel	Power Spectral Density ( dBm/3 kHz )		Conclusion
802.11ax (HE20)	1	Fig.A.3.13	-3.44	P
	6	Fig.A.3.14	-2.68	P
	11	Fig.A.3.15	-2.99	P

**802.11ax-HE40 mode(RU26-index0)**

Mode	Channel	Power Spectral Density ( dBm/3 kHz )		Conclusion
802.11ax (HE40)	3	Fig.A.3.16	-4.46	P
	6	Fig.A.3.17	-3.76	P
	9	Fig.A.3.18	-4.74	P

**MIMO**
**802.11b mode**

Mode	Power Spectral Density ( dBm/3 kHz )				Conclusion
	802.11b	Ant4	2412	-7.86	
Ant5		2412	-8.28	/	<b>P</b>
total		2412	-5.05	/	<b>P</b>
Ant4		2437	-4.82	Fig.A.3.20	<b>P</b>
Ant5		2437	-8.39	/	<b>P</b>
total		2437	-3.24	/	<b>P</b>
Ant4		2462	-9.79	Fig.A.3.21	<b>P</b>
Ant5		2462	-9.12	/	<b>P</b>
total		2462	-6.43	/	<b>P</b>

**802.11g mode**

Mode	Power Spectral Density ( dBm/3 kHz )				Conclusion
	802.11g	Ant4	2412	-10.62	
Ant5		2412	-10.60	/	<b>P</b>
total		2412	-7.60	/	<b>P</b>
Ant4		2437	-10.13	Fig.A.3.23	<b>P</b>
Ant5		2437	-11.21	/	<b>P</b>
total		2437	-7.63	/	<b>P</b>
Ant4		2462	-14.74	Fig.A.3.24	<b>P</b>
Ant5		2462	-16.46	/	<b>P</b>
total		2462	-12.51	/	<b>P</b>

**802.11n-HT20 mode**

Mode	Power Spectral Density ( dBm/3 kHz )				Conclusion
	802.11n	Ant4	2412	-9.55	

(HT20)	Ant5	2412	-11.13	Fig.A.3.25	<b>P</b>
	total	2412	-7.26	/	<b>P</b>
	Ant4	2437	-10.12	/	<b>P</b>
	Ant5	2437	-11.04	Fig.A.3.26	<b>P</b>
	total	2437	-7.55	/	<b>P</b>
	Ant4	2462	-15.40	/	<b>P</b>
	Ant5	2462	-16.21	Fig.A.3.27	<b>P</b>
	total	2462	-12.78	/	<b>P</b>

**802.11n-HT40 mode**

Mode	Power Spectral Density ( dBm/3 kHz )				Conclusion
	802.11n (HT40)	Ant4	2422	-14.00	
Ant5		2422	-13.73	Fig.A.3.28	<b>P</b>
total		2422	-10.85	/	<b>P</b>
Ant4		2437	-13.13	/	<b>P</b>
Ant5		2437	-14.19	Fig.A.3.29	<b>P</b>
total		2437	-10.62	/	<b>P</b>
Ant4		2452	-14.06	/	<b>P</b>
Ant5		2452	-14.27	Fig.A.3.30	<b>P</b>
total		2452	-11.15	/	<b>P</b>

**802.11ax-HE20 mode(RU26-index0)**

Mode	Power Spectral Density ( dBm/3 kHz )				Conclusion
	802.11ax (HE20)	Ant4	2412	-3.85	
Ant5		2412	-3.45	/	<b>P</b>
total		2412	-0.64	/	<b>P</b>
Ant4		2437	-3.62	Fig.A.3.32	<b>P</b>
Ant5		2437	-2.74	/	<b>P</b>
total		2437	-0.15	/	<b>P</b>

	Ant4	2462	-2.21	Fig.A.3.33	<b>P</b>
	Ant5	2462	-2.28	/	<b>P</b>
	total	2462	0.77	/	<b>P</b>

**802.11ax-HE40 mode(RU26-index0)**

Mode	Power Spectral Density ( dBm/3 kHz )				Conclusion
	802.11ax (HE20)	Ant4	2422	-3.76	
Ant5		2422	-4.53	/	<b>P</b>
total		2422	-1.12	/	<b>P</b>
Ant4		2437	-4.04	Fig.A.3.35	<b>P</b>
Ant5		2437	-4.06	/	<b>P</b>
total		2437	-1.04	/	<b>P</b>
Ant4		2452	-5.72	Fig.A.3.36	<b>P</b>
Ant5		2452	-3.85	/	<b>P</b>
total		2452	-1.67	/	<b>P</b>

Note: All Antenna are tested, only the worst-case plot have been reported.

**Conclusion: Pass**

**Test graphs as below:**

**SISO-Ant4**

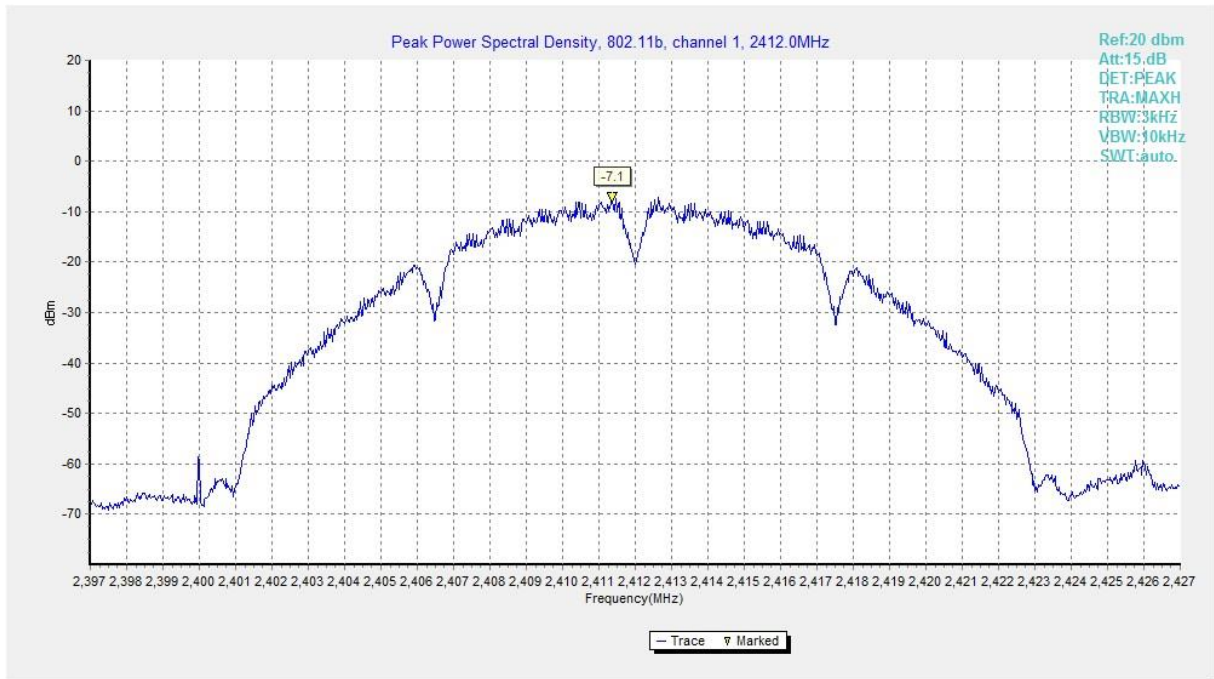


Fig.A.3.1 Power Spectral Density(802.11b,Ch1)

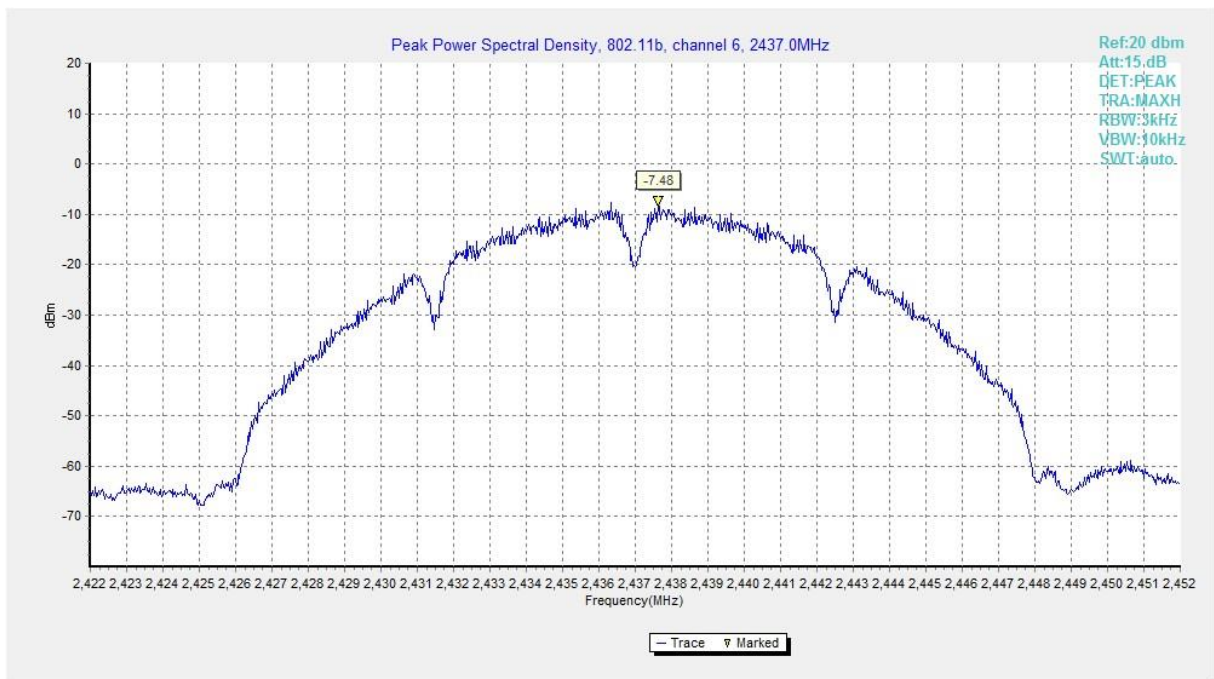


Fig.A.3.2 Power Spectral Density (802.11b, Ch 6)

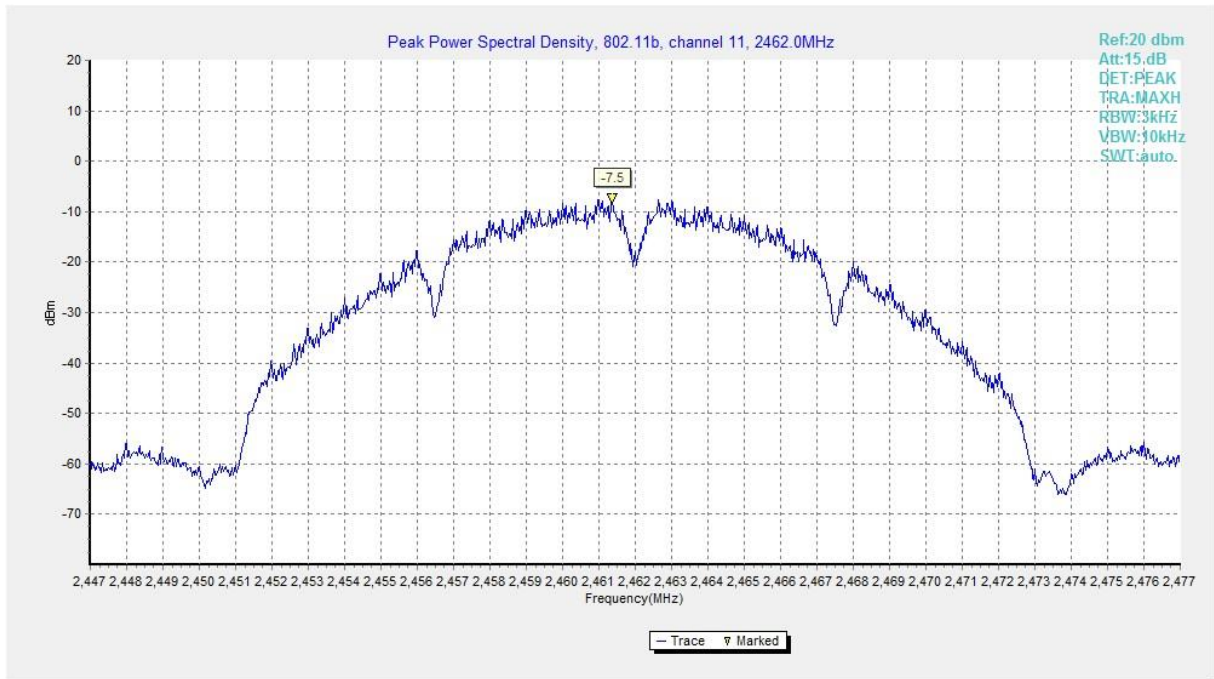


Fig.A.3.3 Power Spectral Density (802.11b, Ch 11)



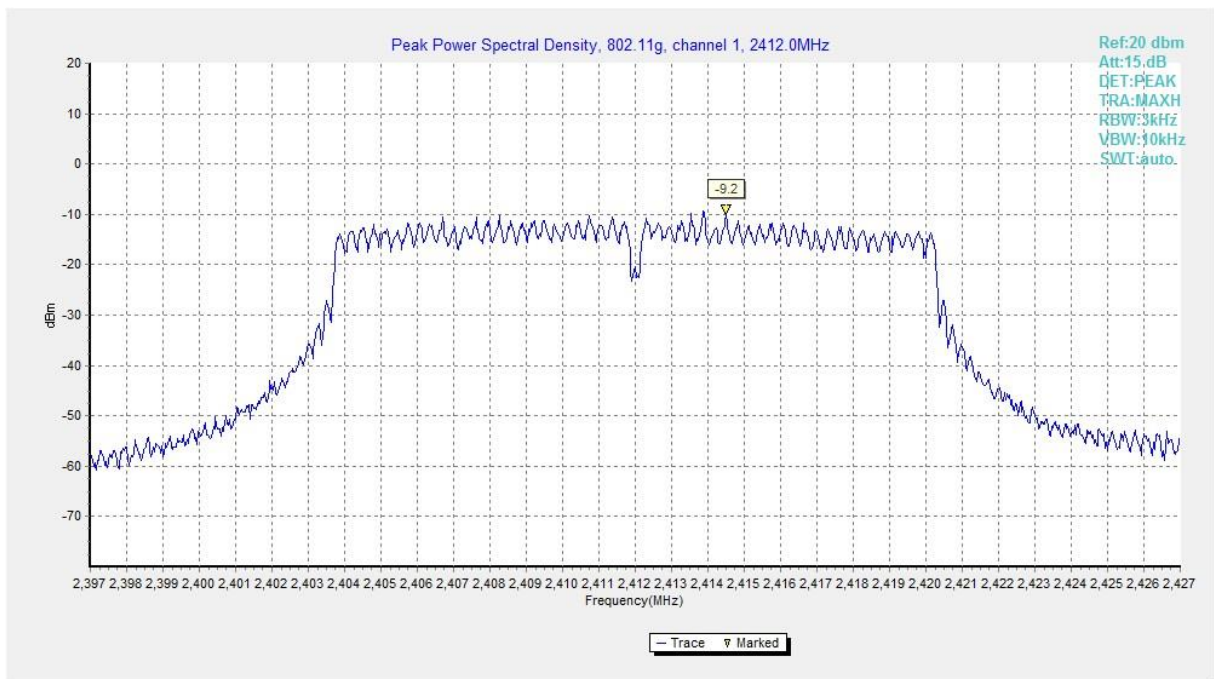


Fig.A.3.4 Power Spectral Density (802.11g, Ch 1)



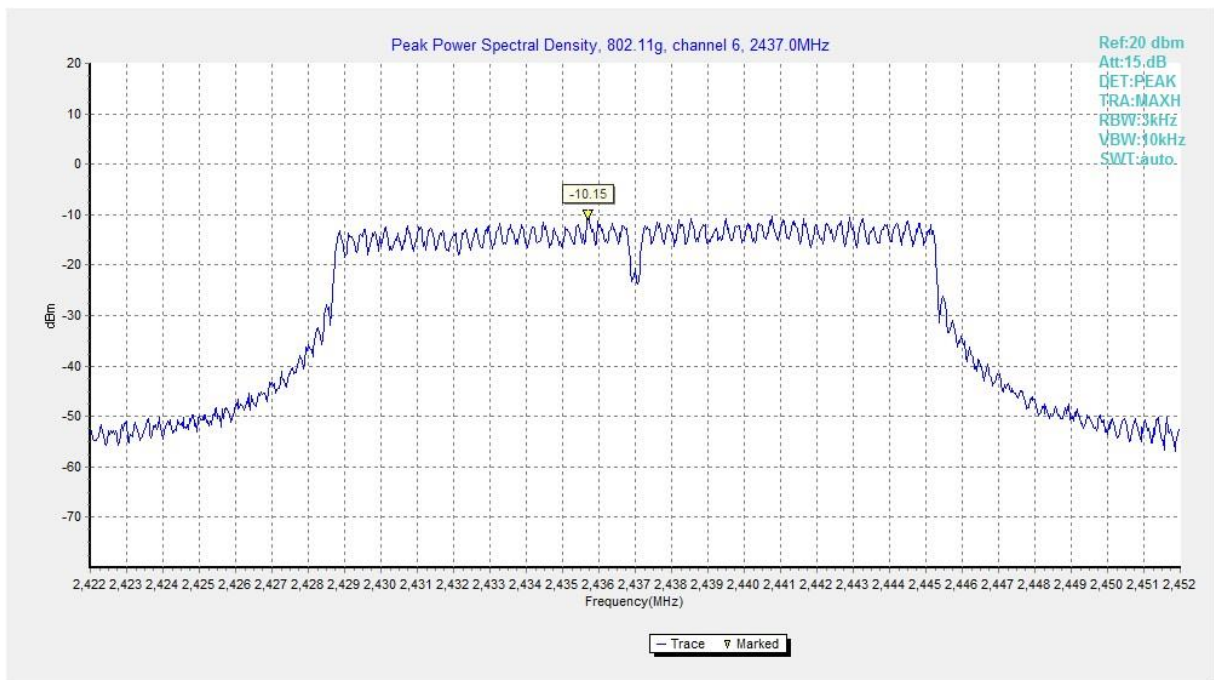


**Fig.A.3.5 Power Spectral Density (802.11g, Ch 6)**

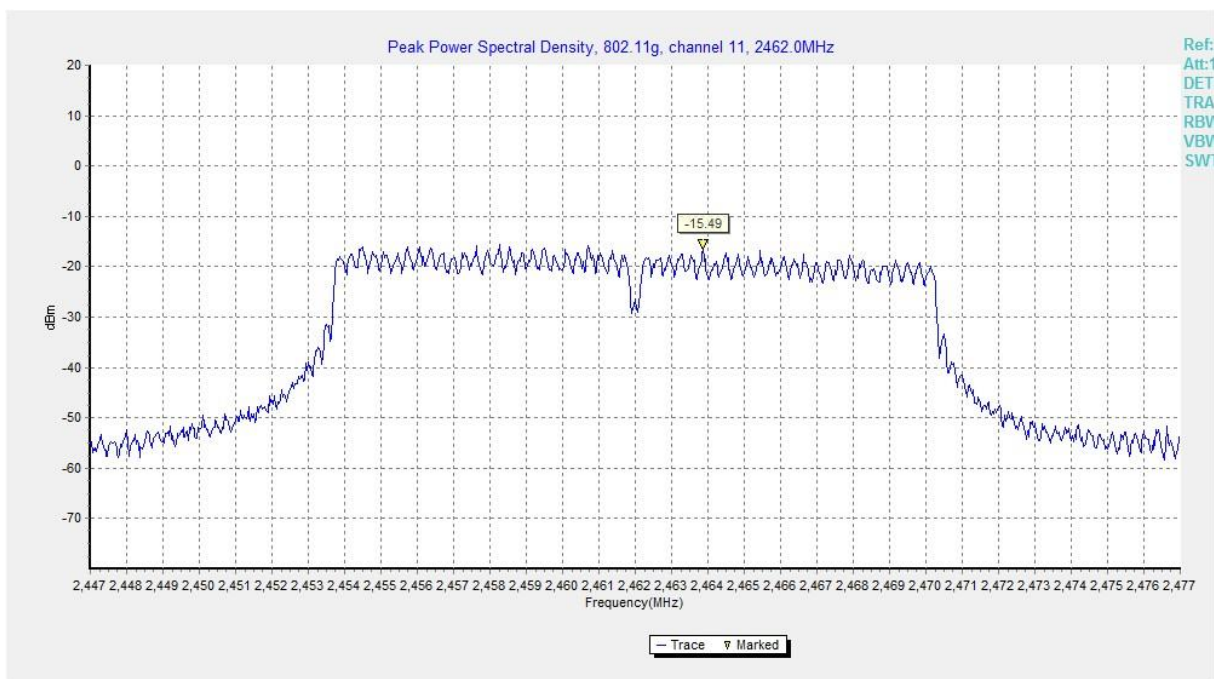


**Fig.A.3.6 Power Spectral Density (802.11g, Ch 11)**




**Fig.A.3.7 Power Spectral Density (802.11n-HT20, Ch 1)**

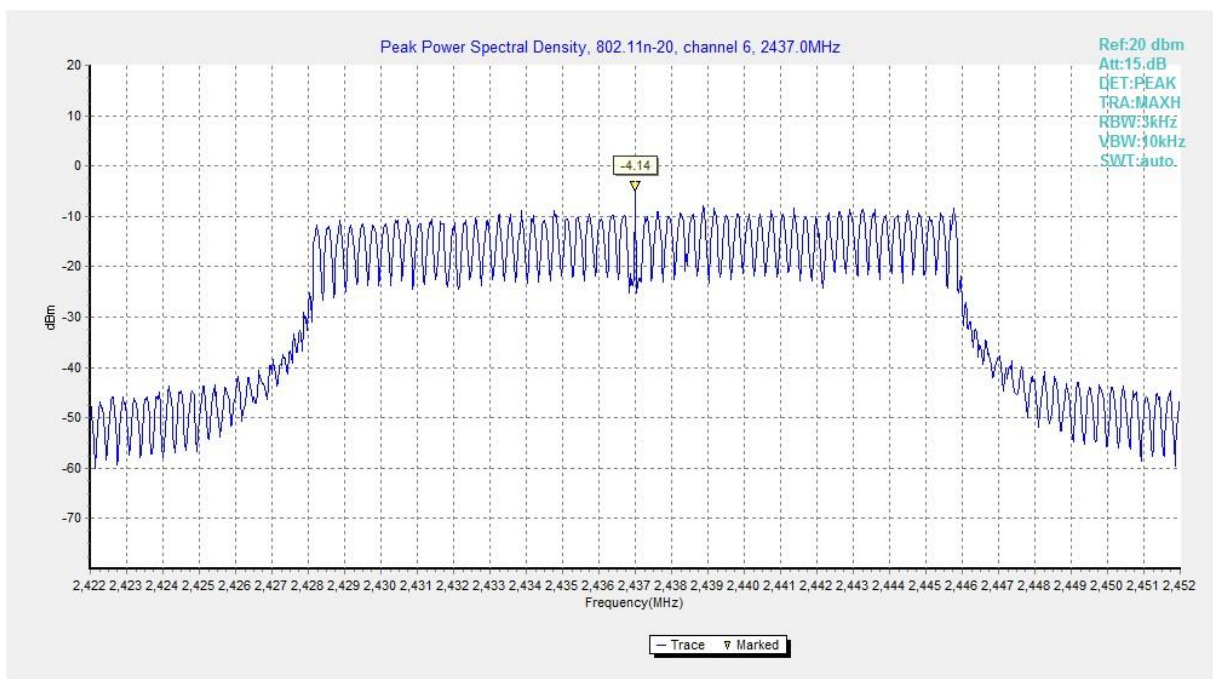

**Fig.A.3.8 Power Spectral Density (802.11n-HT20, Ch 6)**

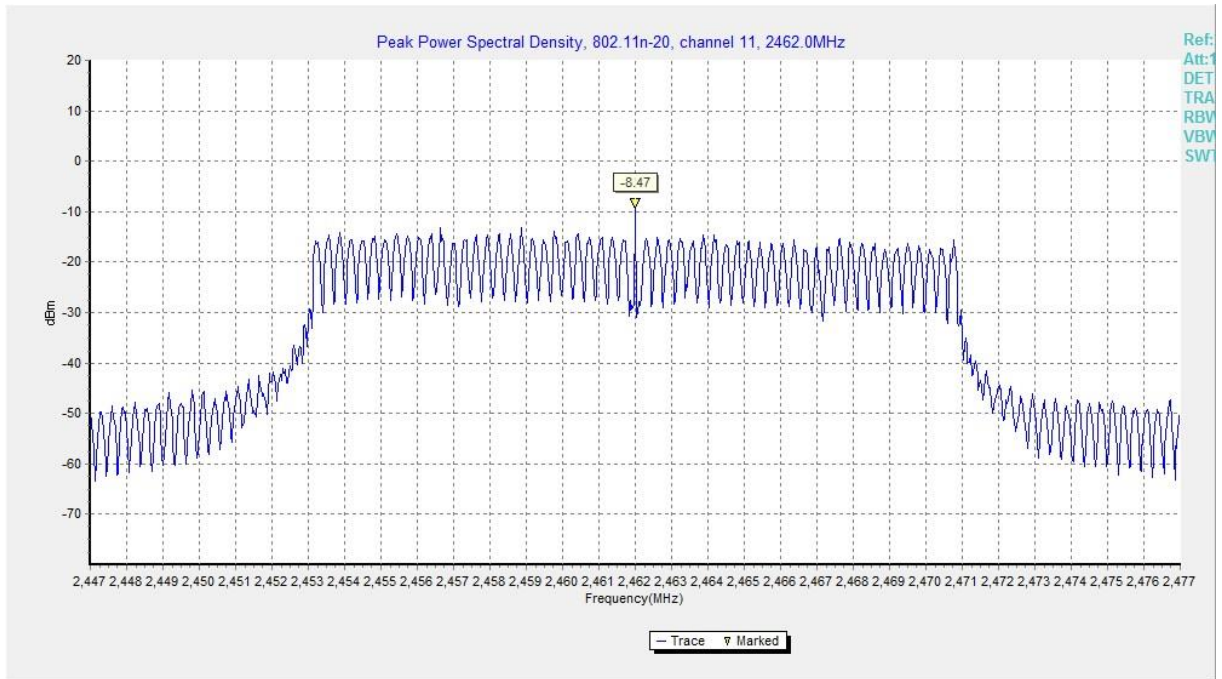

**Fig.A.3.9 Power Spectral Density (802.11n-HT20, Ch 11)**

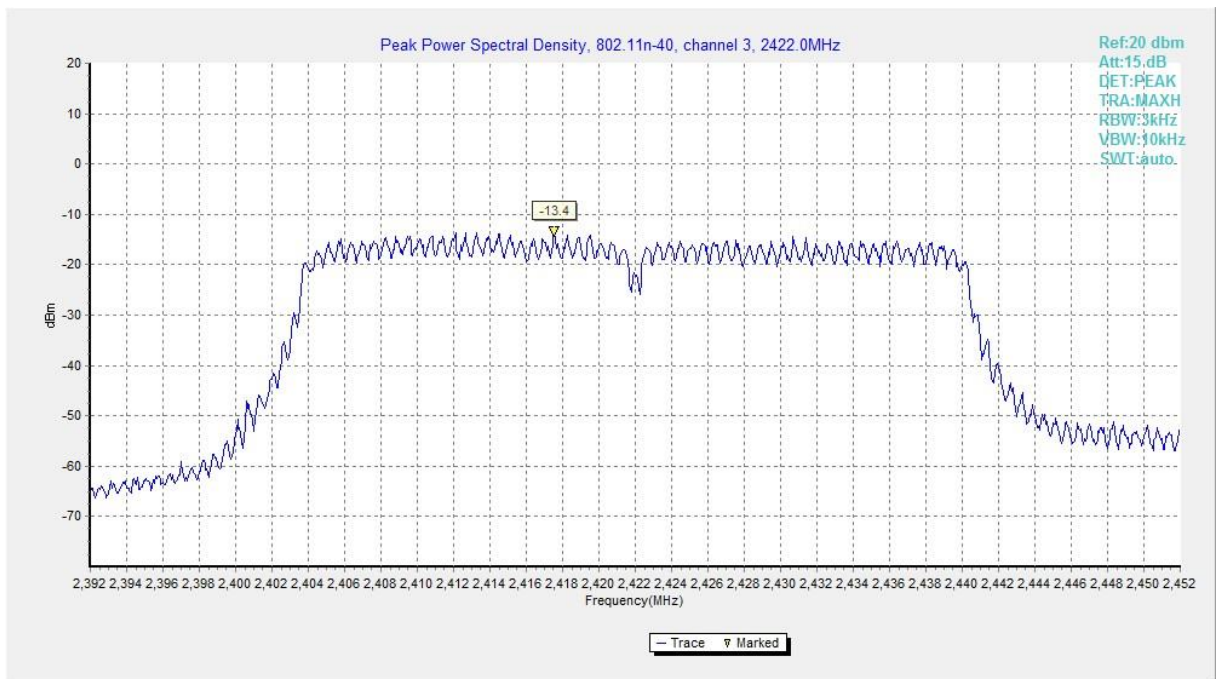

**Fig.A.3.10 Power Spectral Density (802.11n-HT40, Ch 3)**

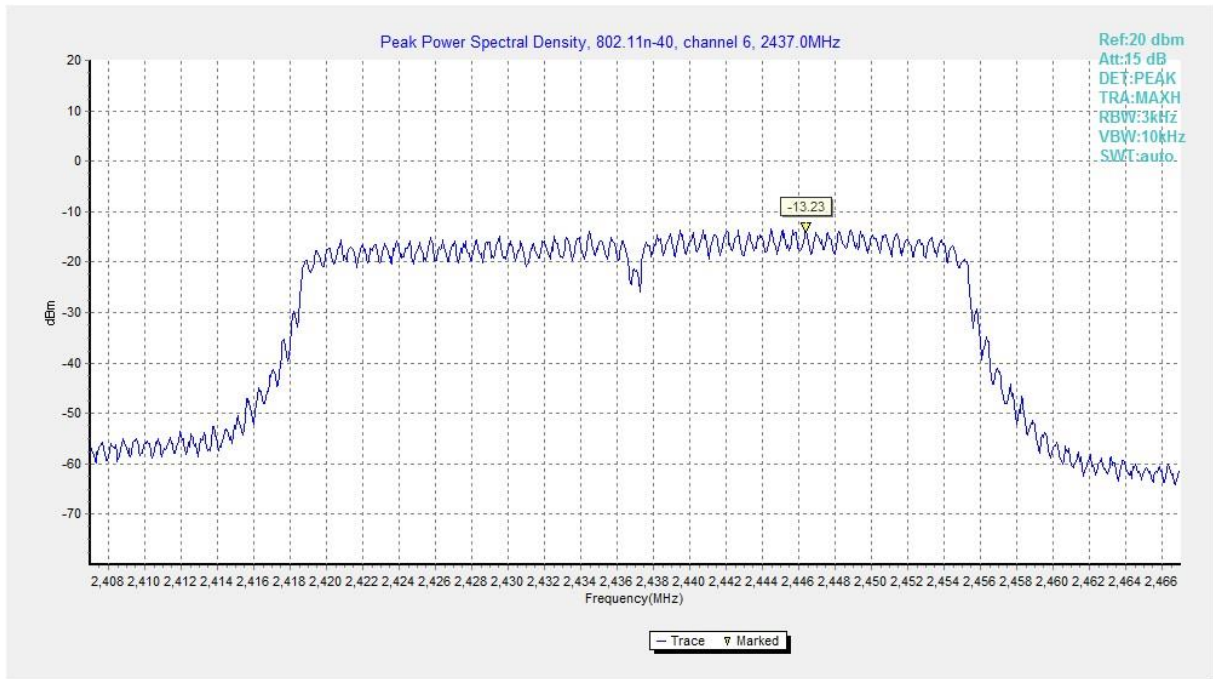


Fig.A.3.11 Power Spectral Density (802.11n-HT40, Ch 6)

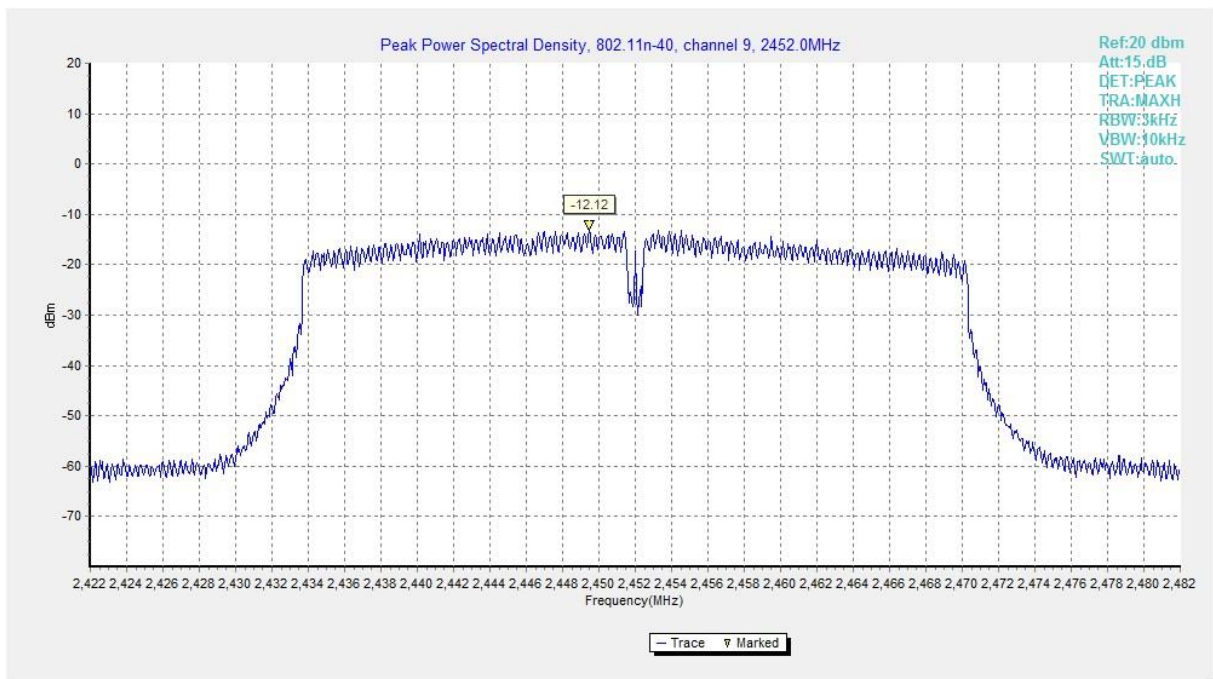


Fig.A.3.12 Power Spectral Density (802.11n-HT40, Ch 9)

SISO-Ant5

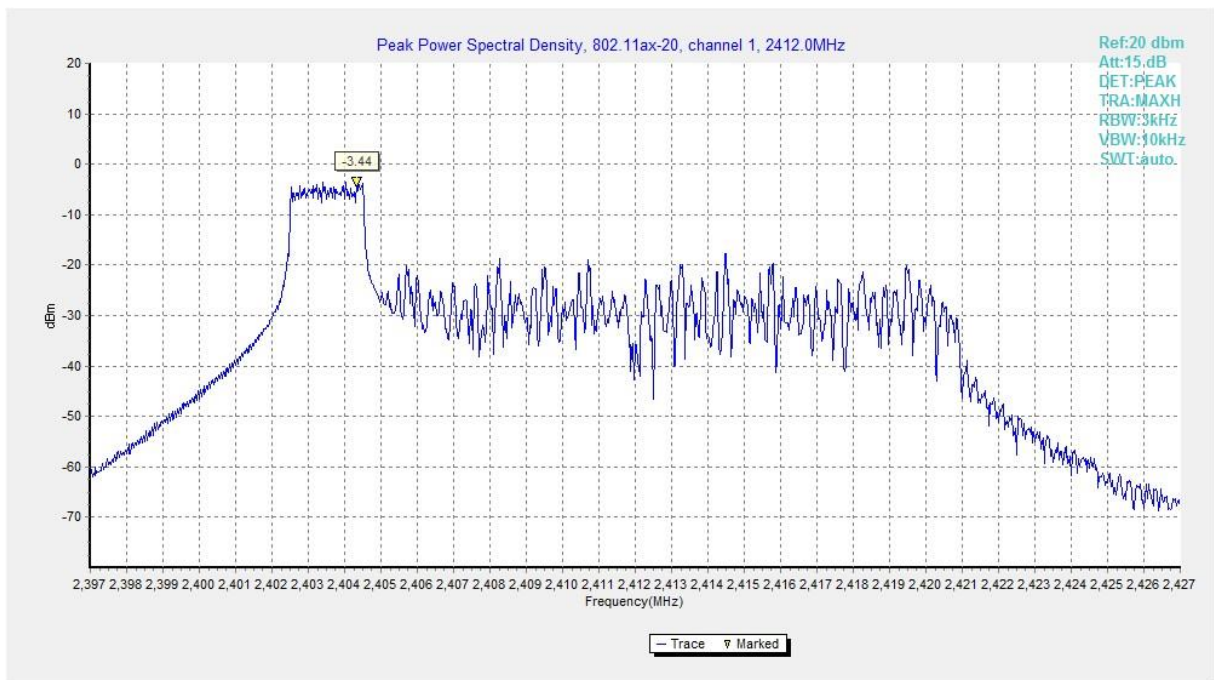


Fig.A.3.13 Power Spectral Density (802.11ax-HE20 RU26-index0, Ch 1)

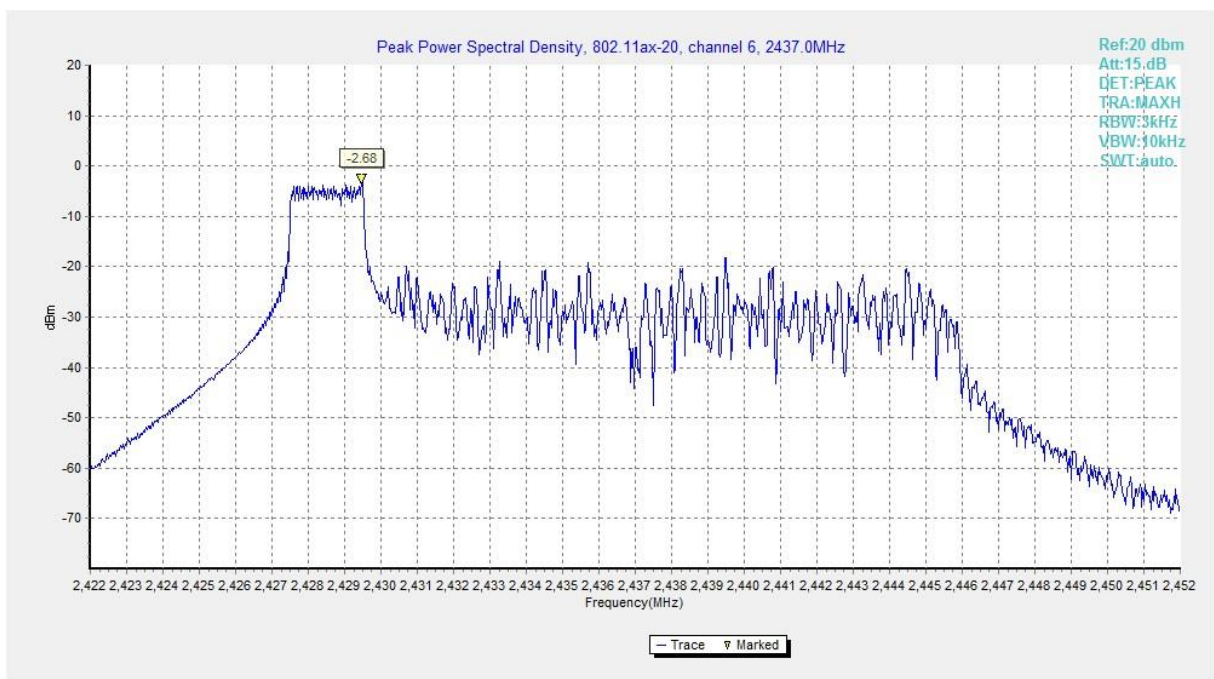


Fig.A.3.14 Power Spectral Density (802.11ax-HE20 RU26-index0, Ch 6)

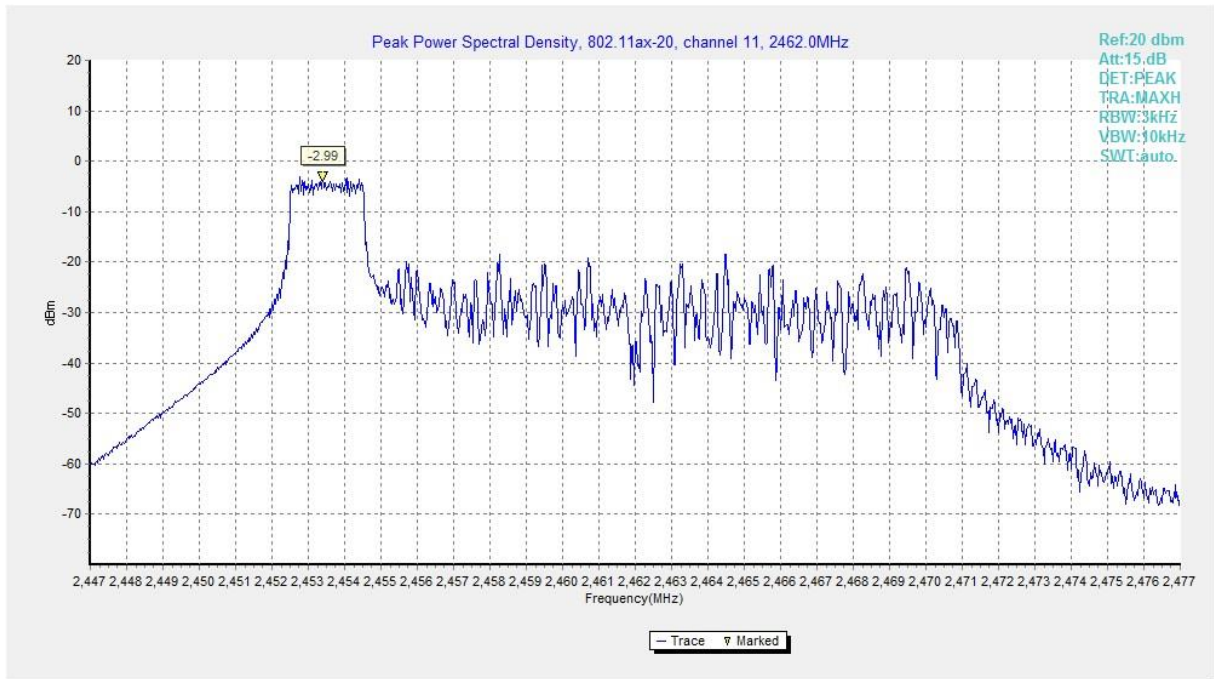


Fig.A.3.15 Power Spectral Density (802.11ax-HE20 RU26-index0, Ch 11)

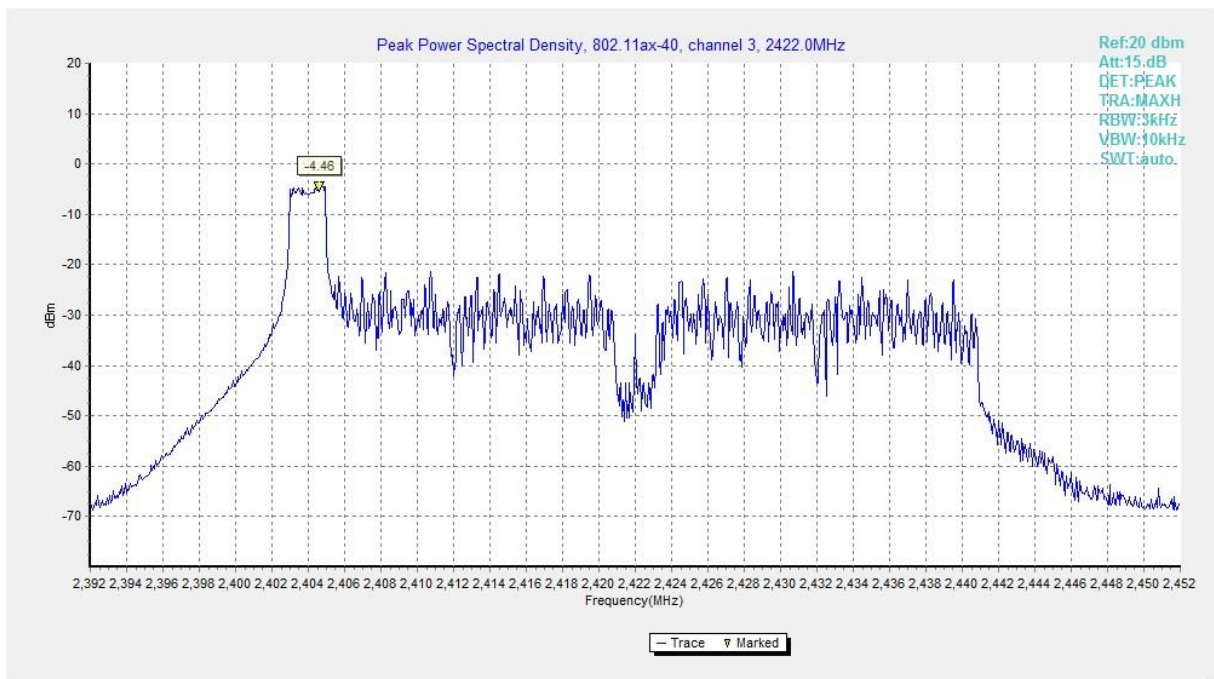


Fig.A.3.16 Power Spectral Density (802.11ax-HE40 RU26-index0, Ch 3)

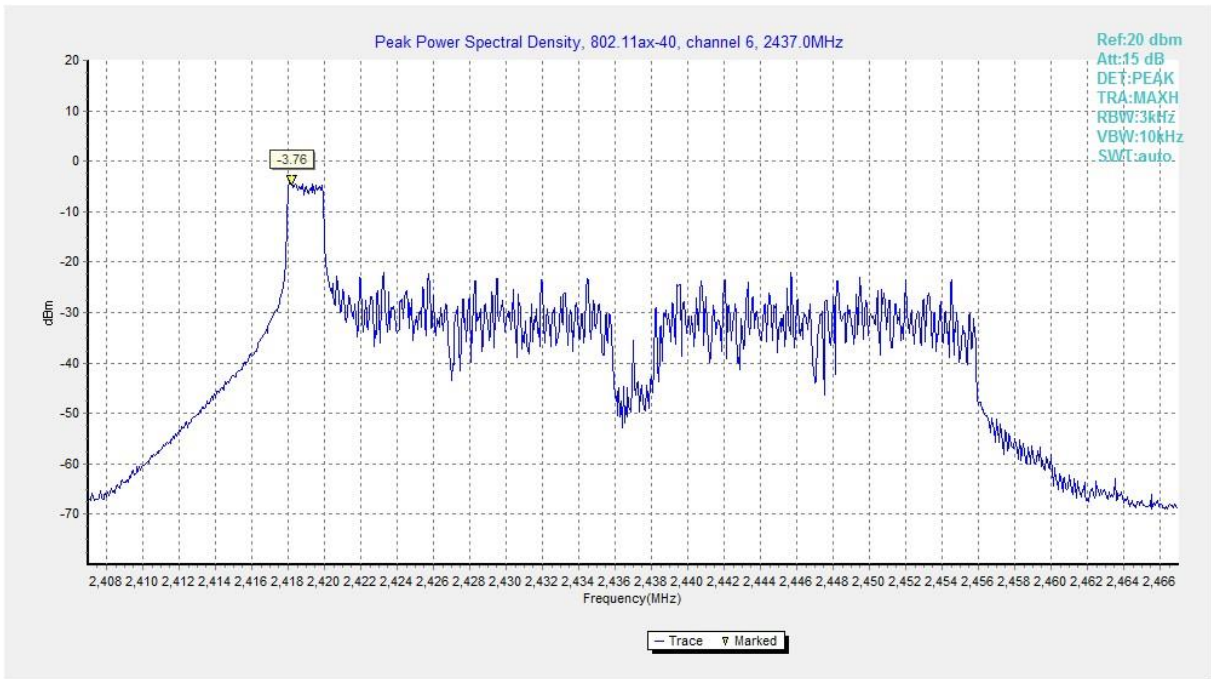


Fig.A.3.17 Power Spectral Density (802.11ax-HE40 RU26-index0, Ch 6)

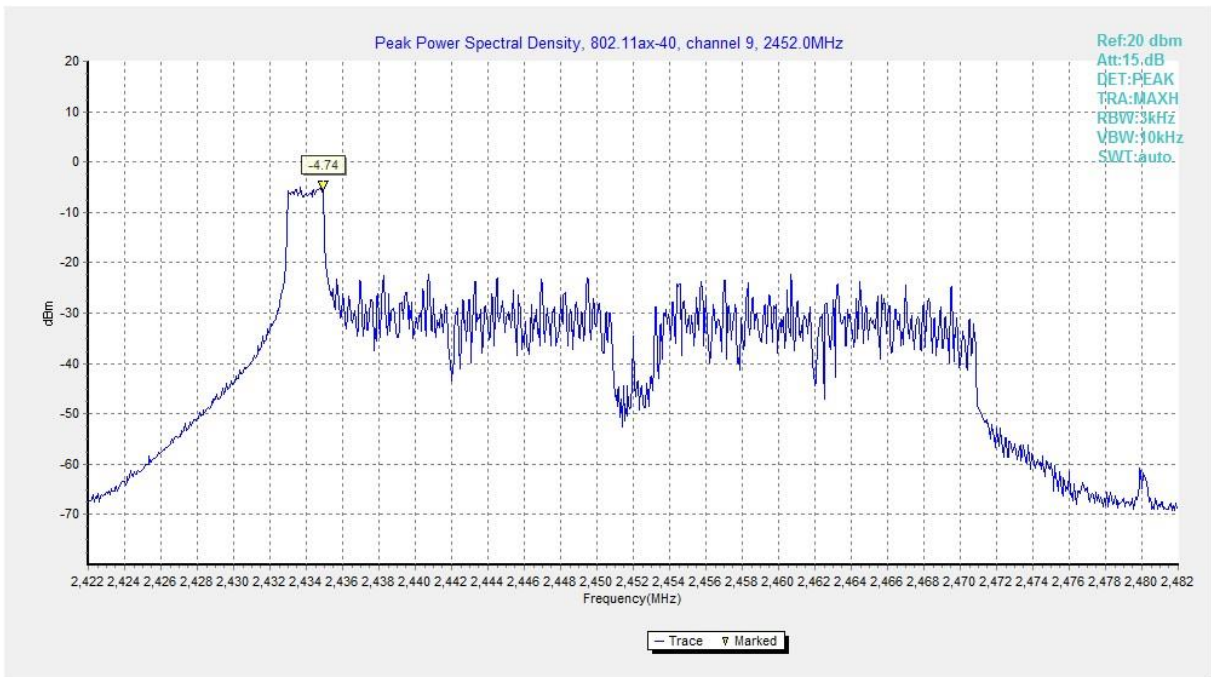


Fig.A.3.18 Power Spectral Density (802.11ax-HE40 RU26-index0, Ch 9)

MIMO-Ant4

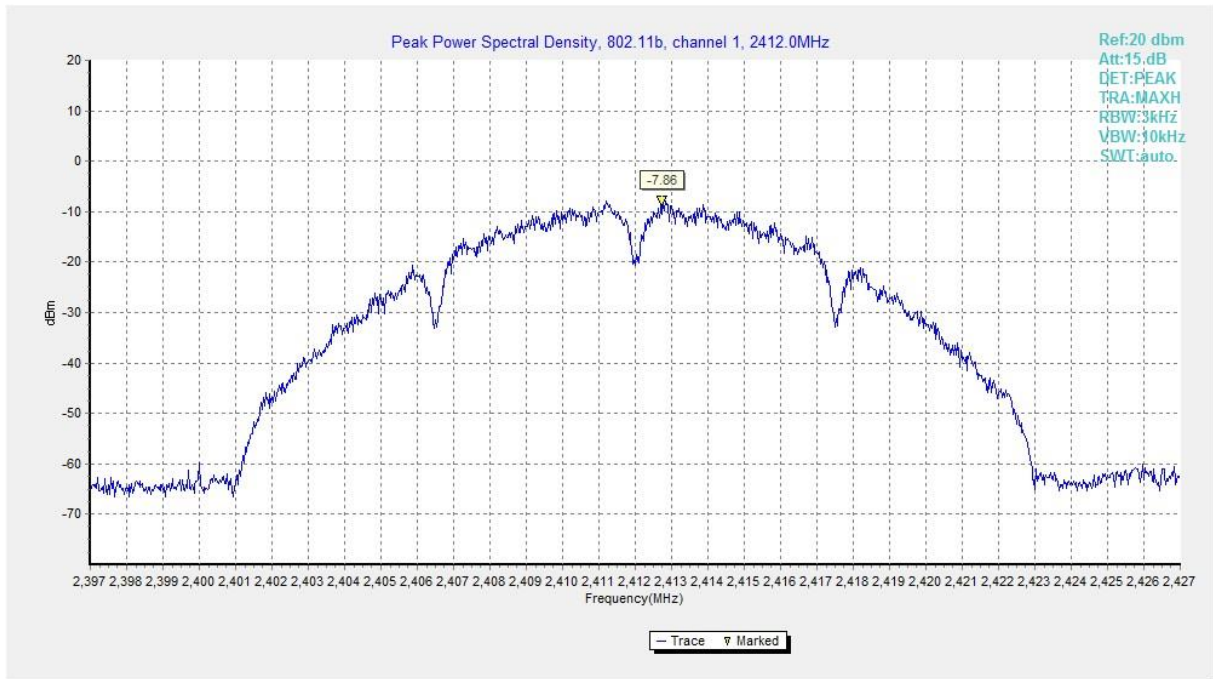


Fig.A.3.19 Power Spectral Density(802.11b,Ch1)

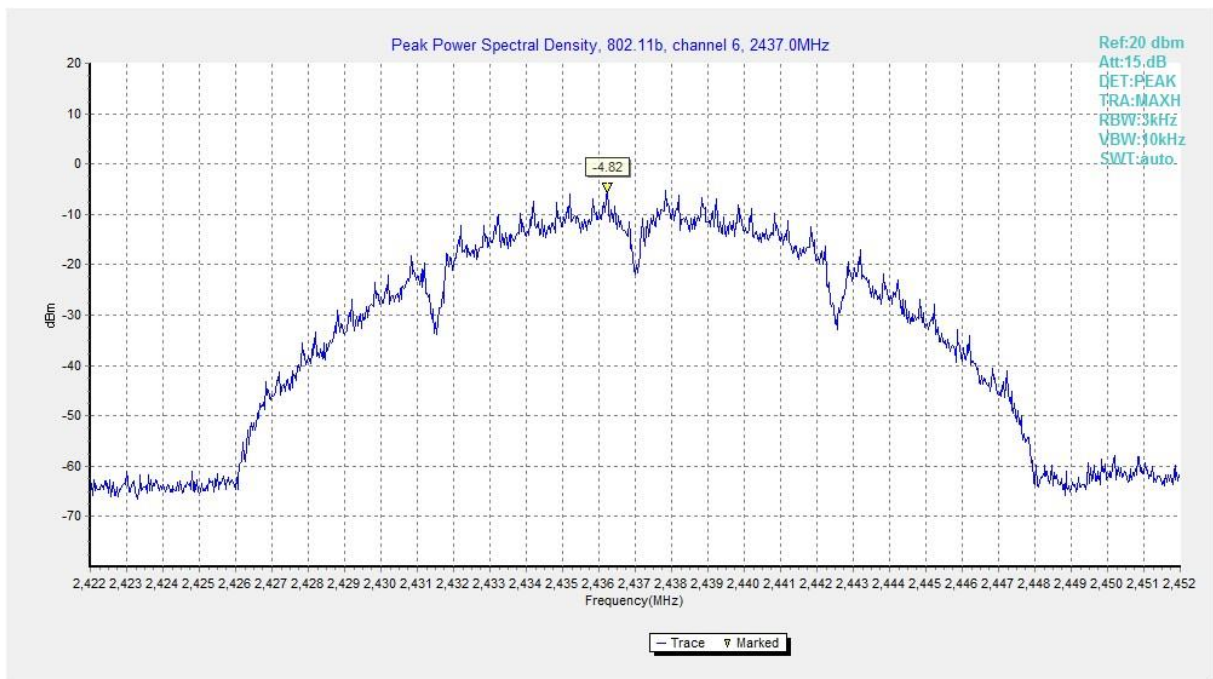


Fig.A.3.20 Power Spectral Density (802.11b, Ch 6)



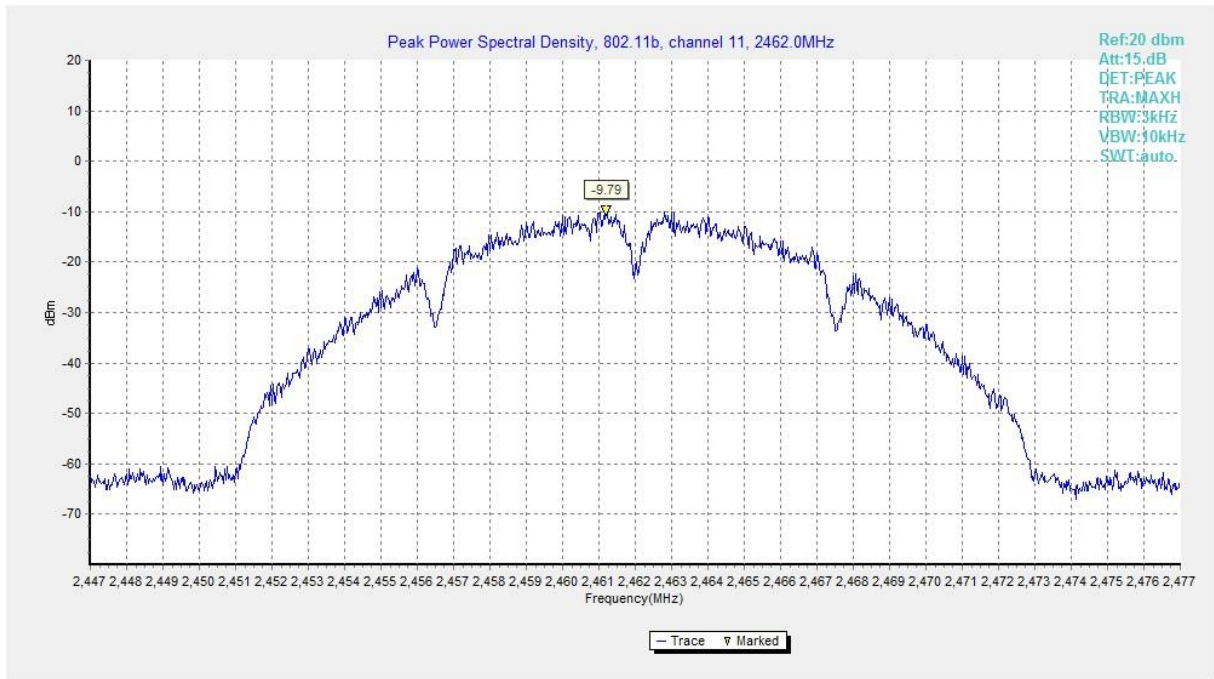


Fig.A.3.21 Power Spectral Density (802.11b, Ch 11)

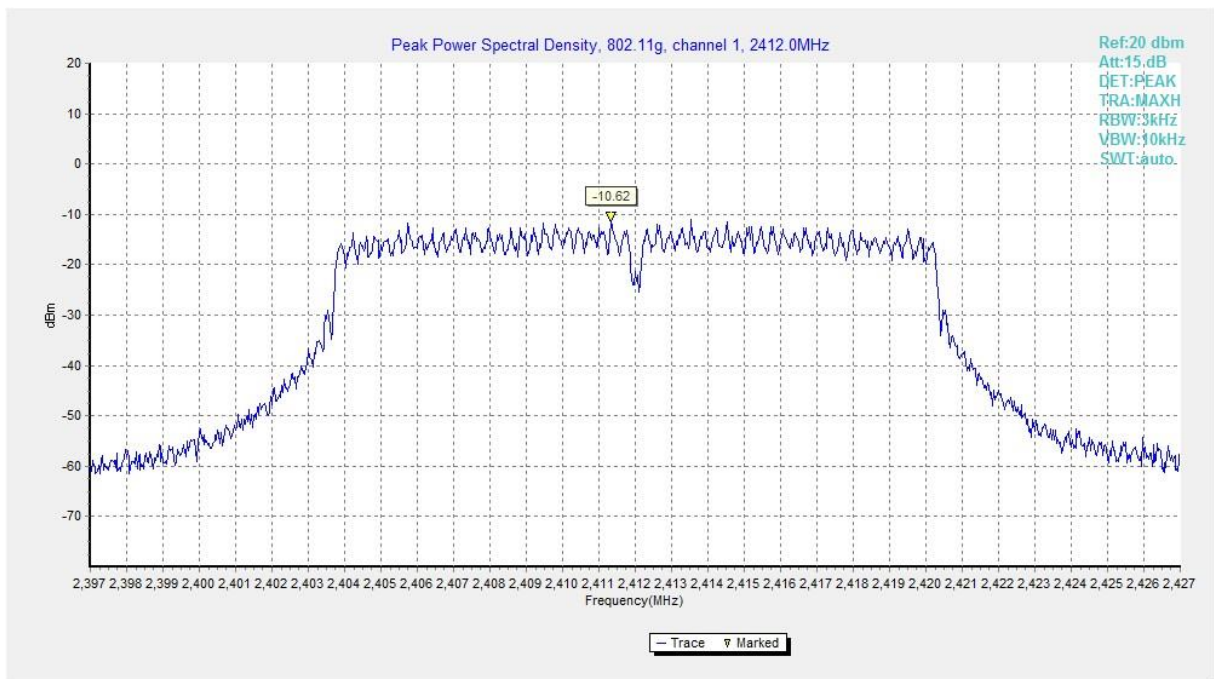


Fig.A.3.22 Power Spectral Density (802.11g, Ch 1)

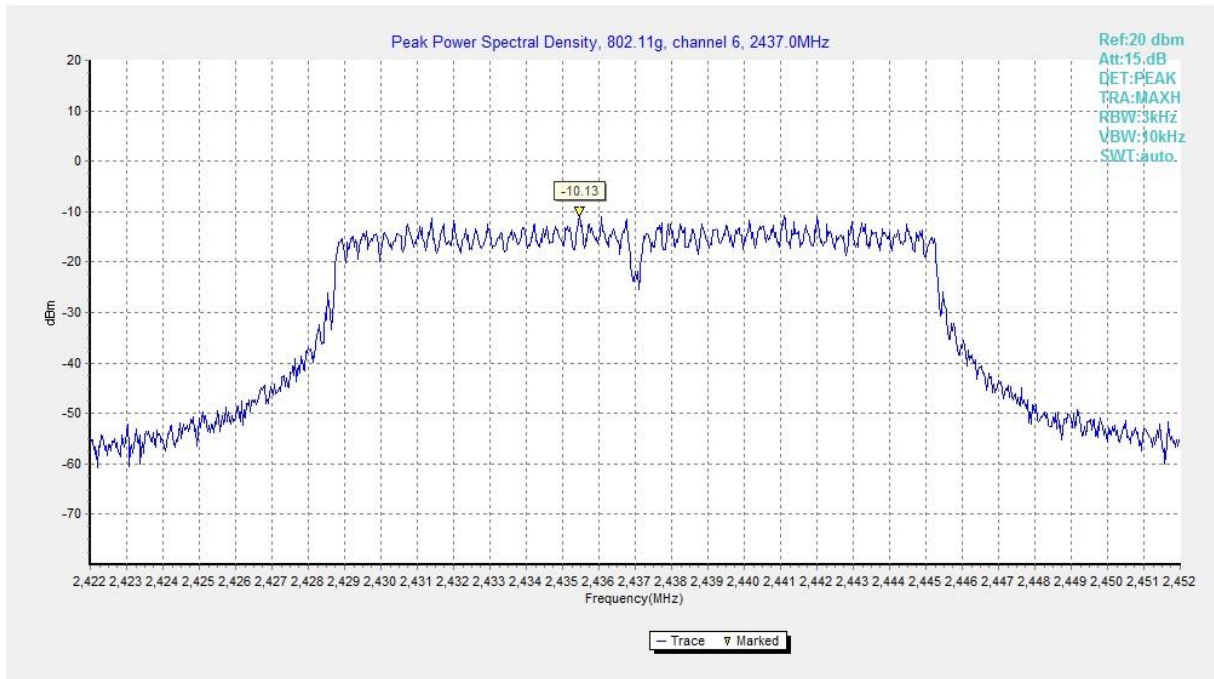


Fig.A.3.23 Power Spectral Density (802.11g, Ch 6)

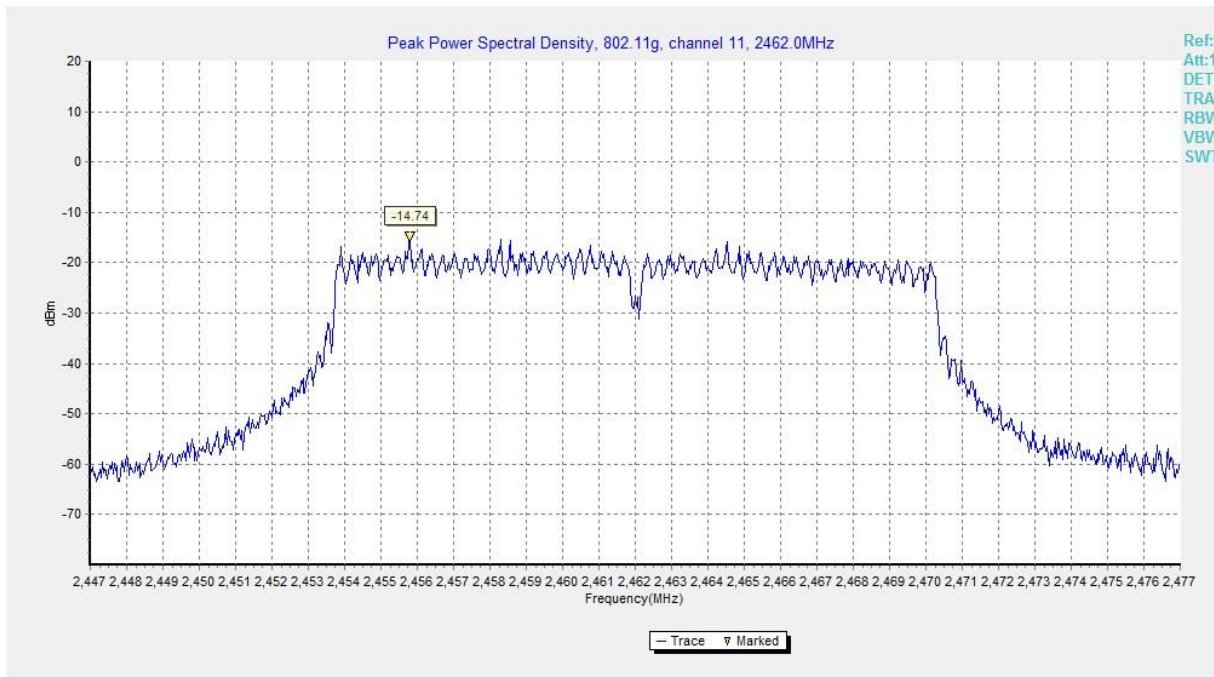


Fig.A.3.24 Power Spectral Density (802.11g, Ch 11)

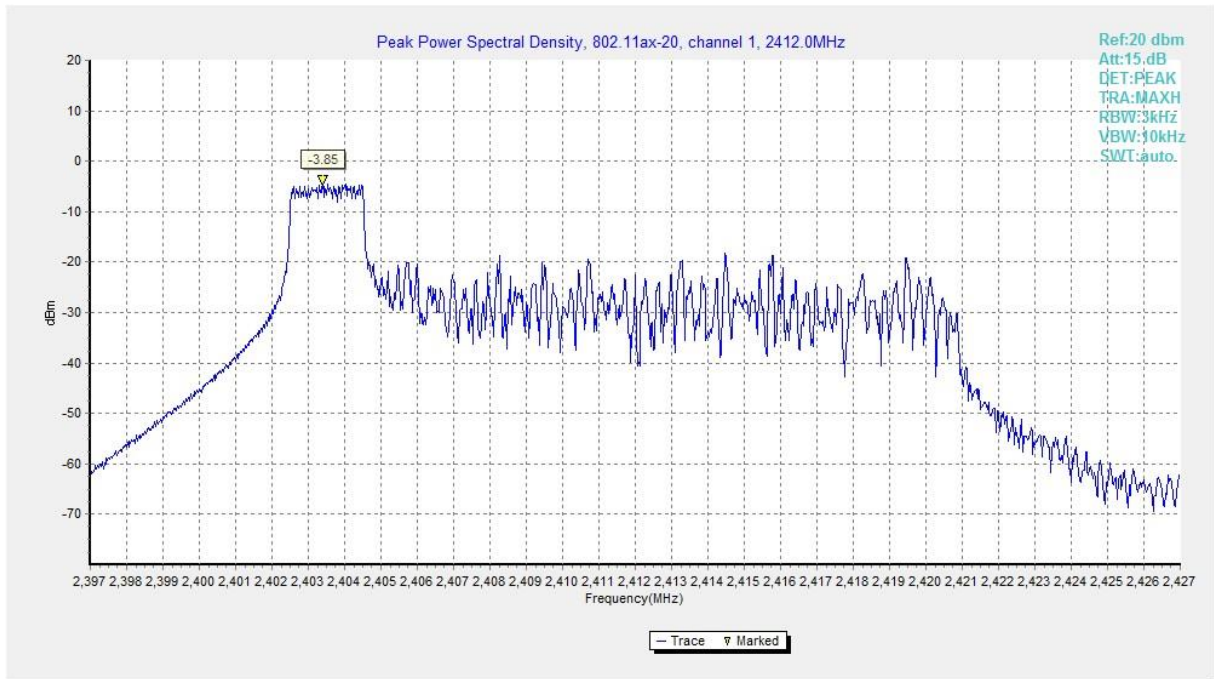


Fig.A.3.25 Power Spectral Density (802.11ax-HE20 RU26-index0, Ch 1)

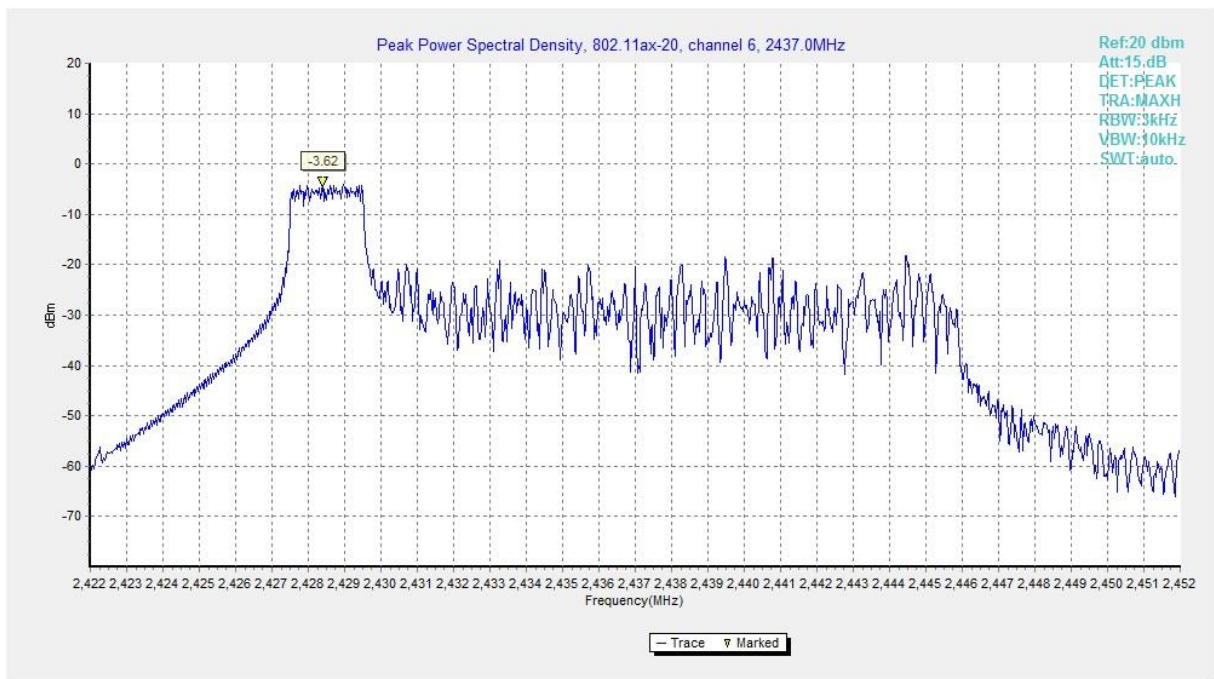


Fig.A.3.26 Power Spectral Density (802.11ax-HE20 RU26-index0, Ch 6)

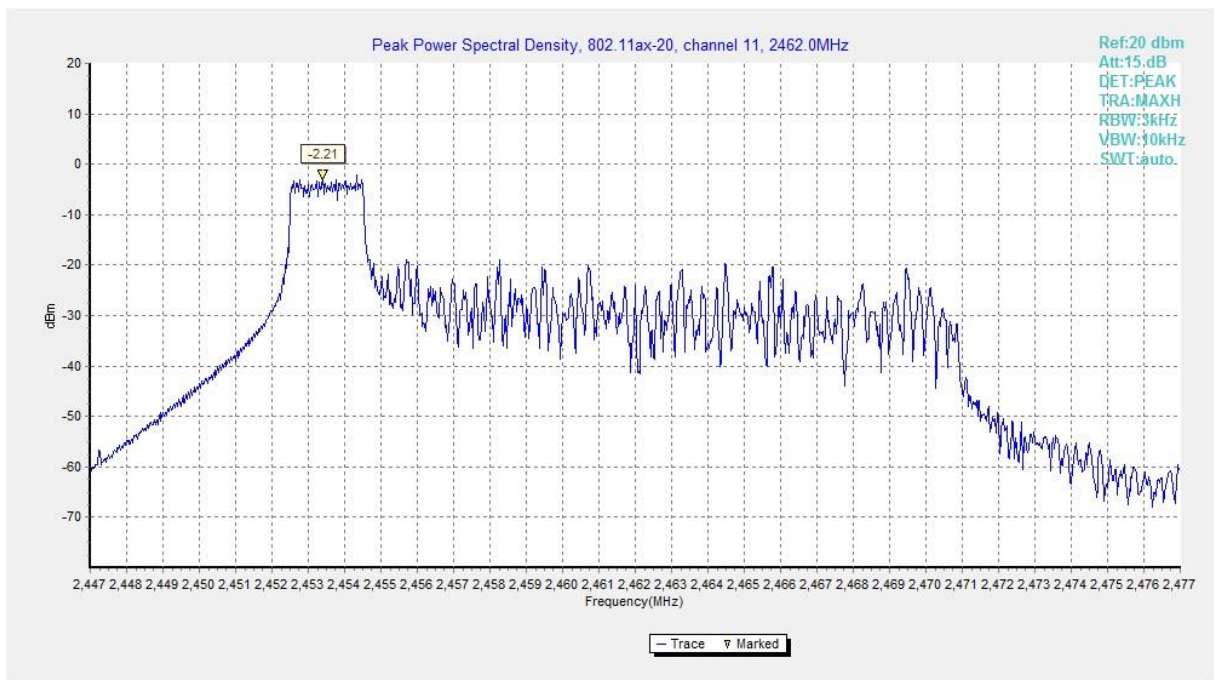


Fig.A.3.27 Power Spectral Density (802.11ax-HE20 RU26-index0, Ch 11)

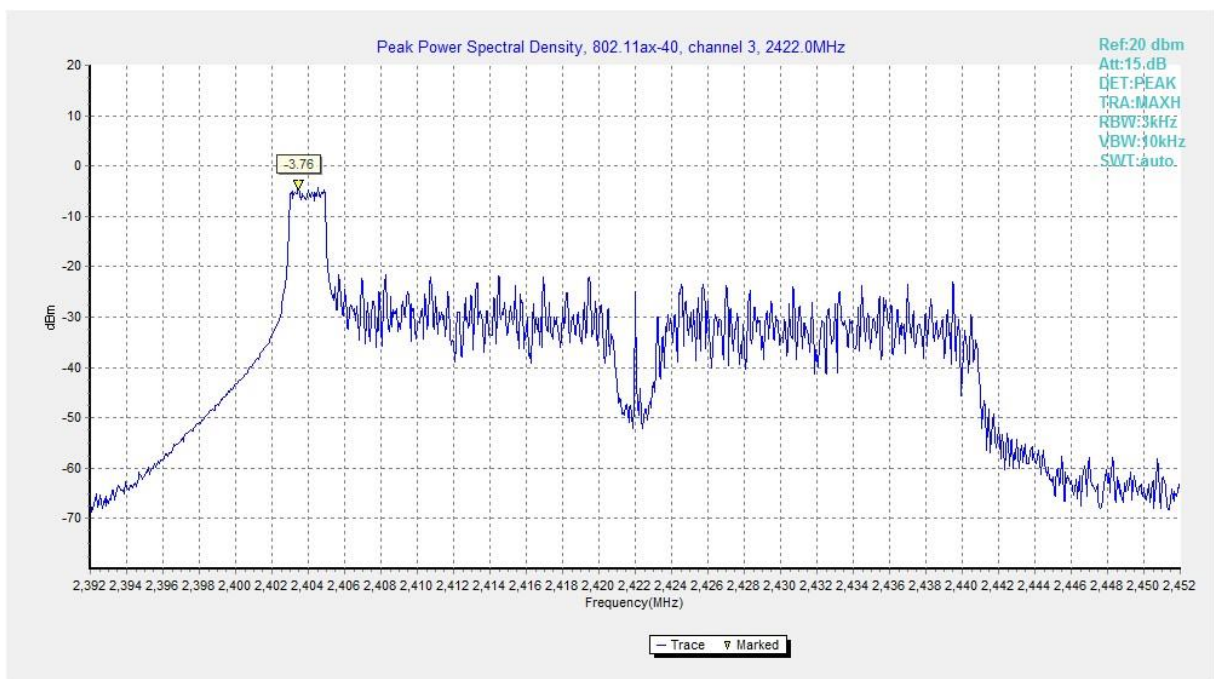


Fig.A.3.28 Power Spectral Density (802.11ax-HE40 RU26-index0, Ch 3)

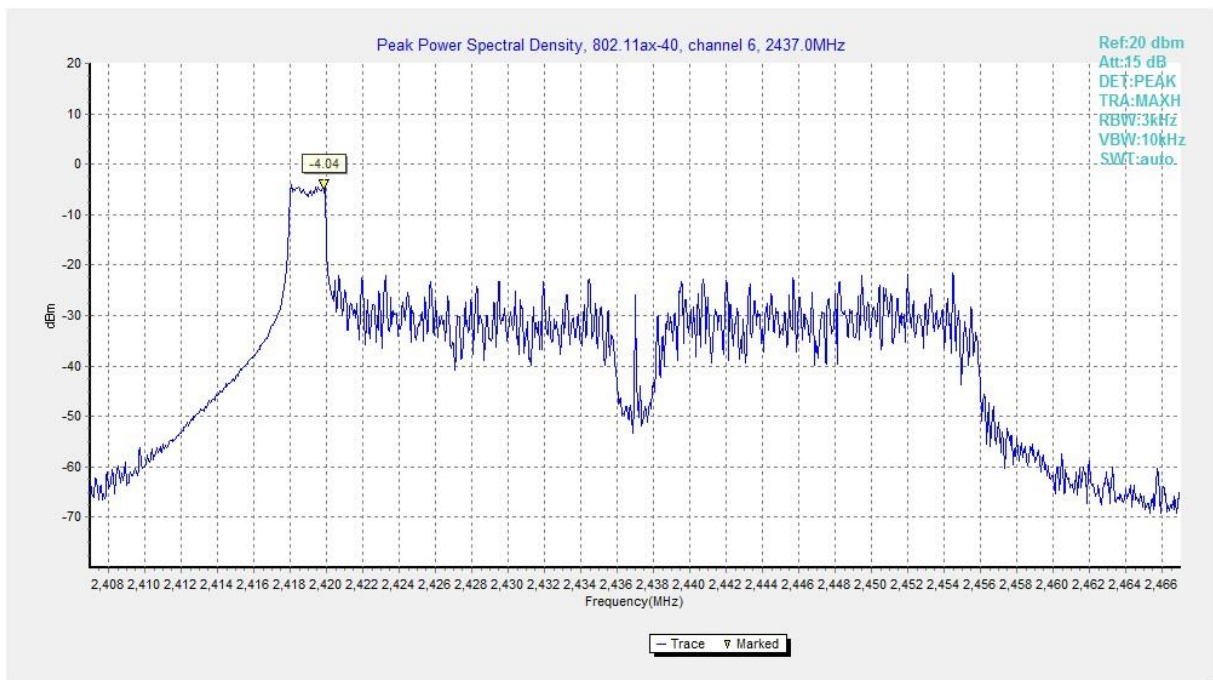


Fig.A.3.29 Power Spectral Density (802.11ax-HE40 RU26-index0, Ch 6)

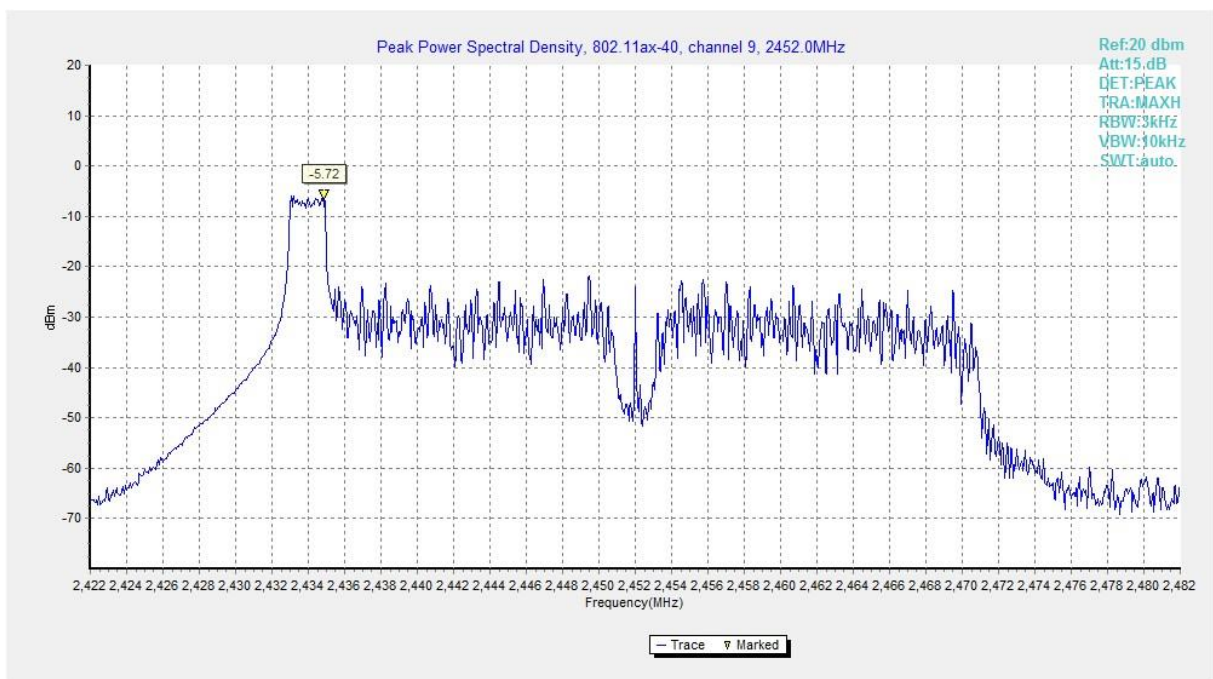


Fig.A.3.30 Power Spectral Density (802.11ax-HE40 RU26-index0, Ch 9)

MIMO-Ant5

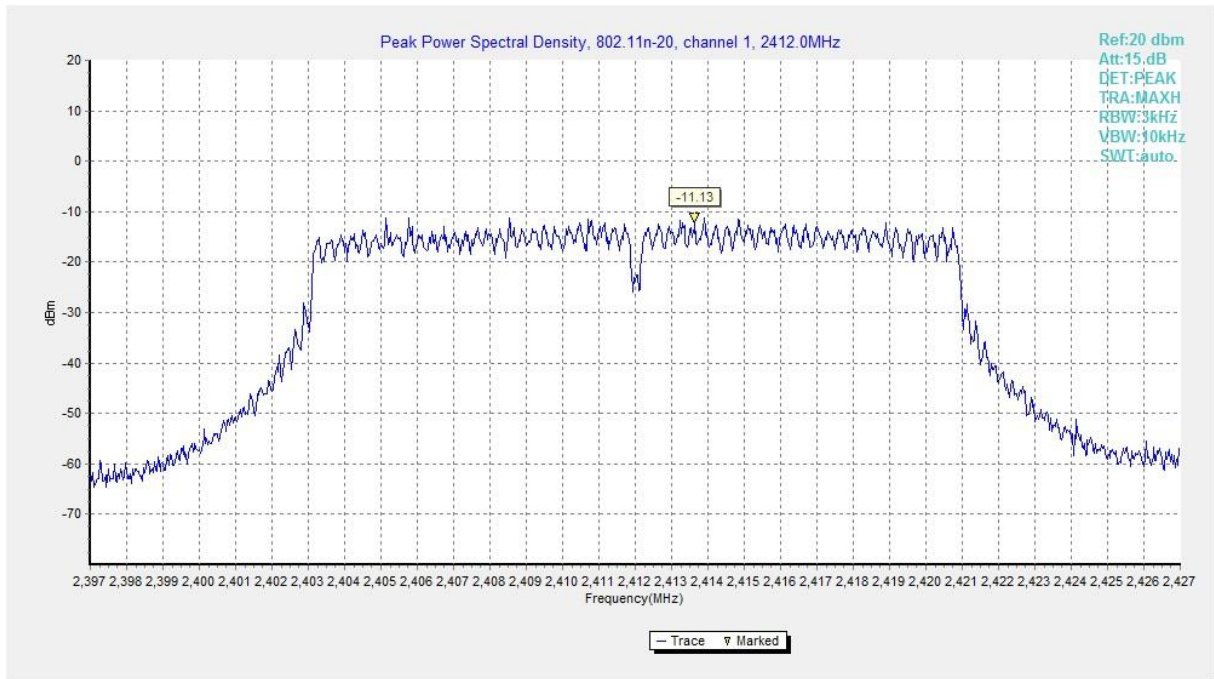


Fig.A.3.31 Power Spectral Density (802.11n-HT20, Ch 1)



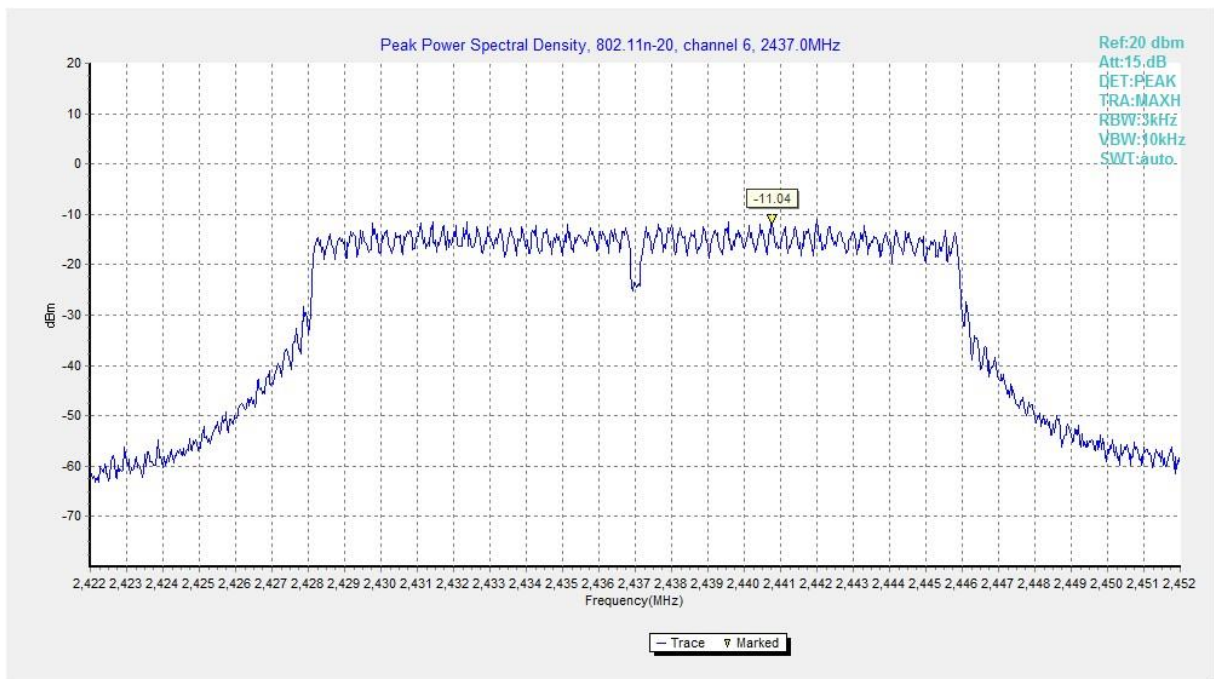



Fig.A.3.32 Power Spectral Density (802.11n-HT20, Ch 6)

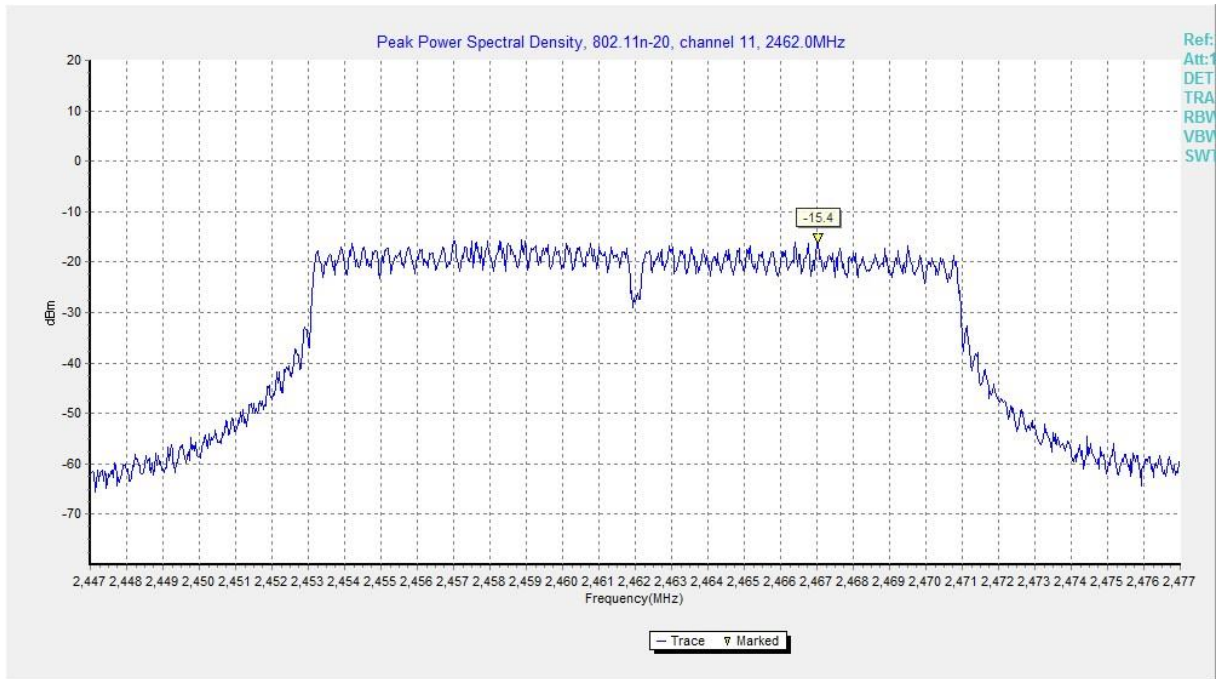


**Fig.A.3.33 Power Spectral Density (802.11n-HT20, Ch 11)**

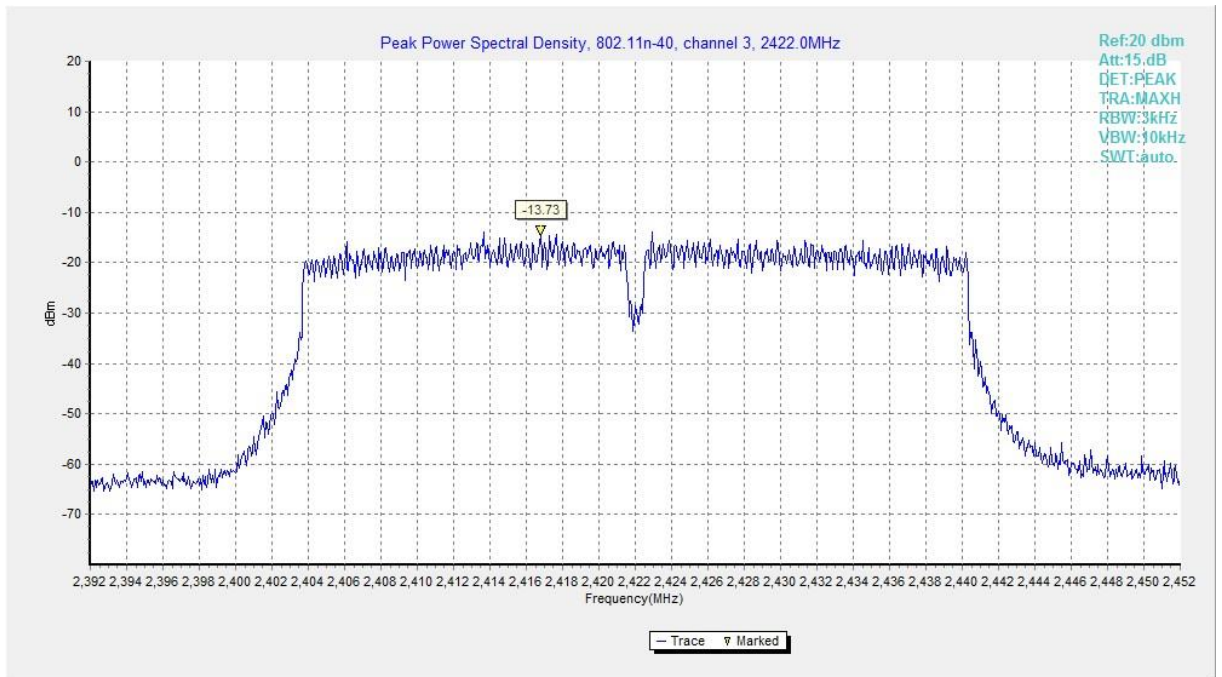

**Fig.A.3.34 Power Spectral Density (802.11n-HT40, Ch 3)**

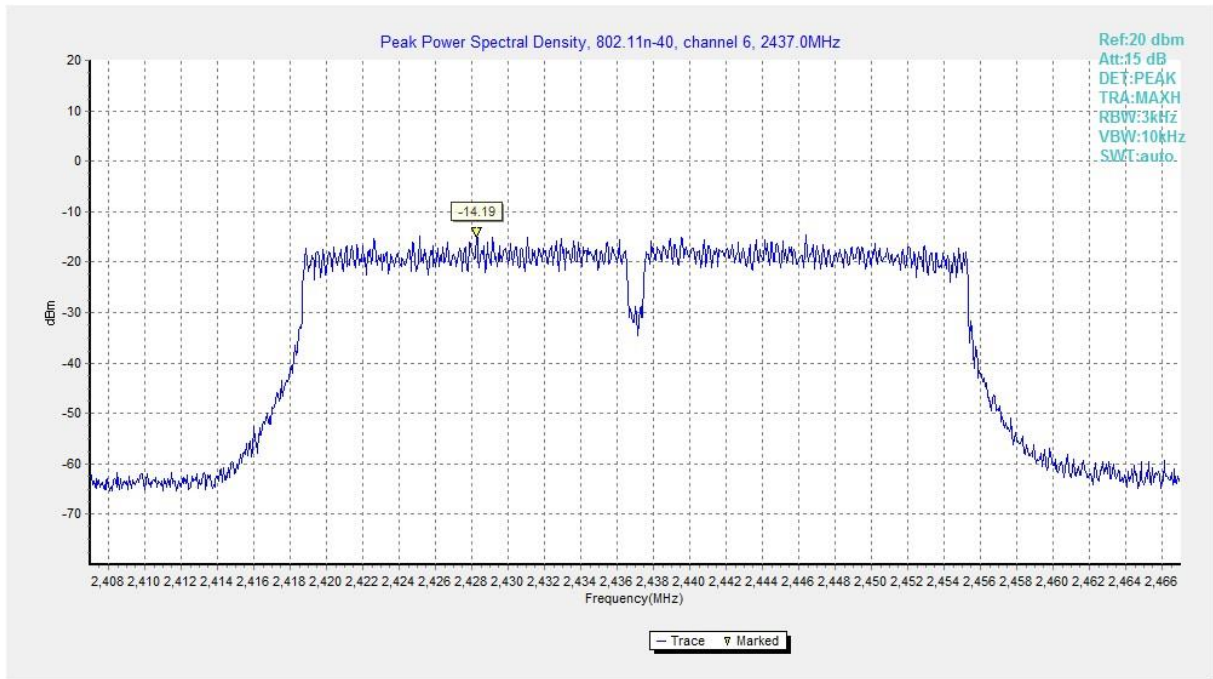

**Fig.A.3.35 Power Spectral Density (802.11n-HT40, Ch 6)**

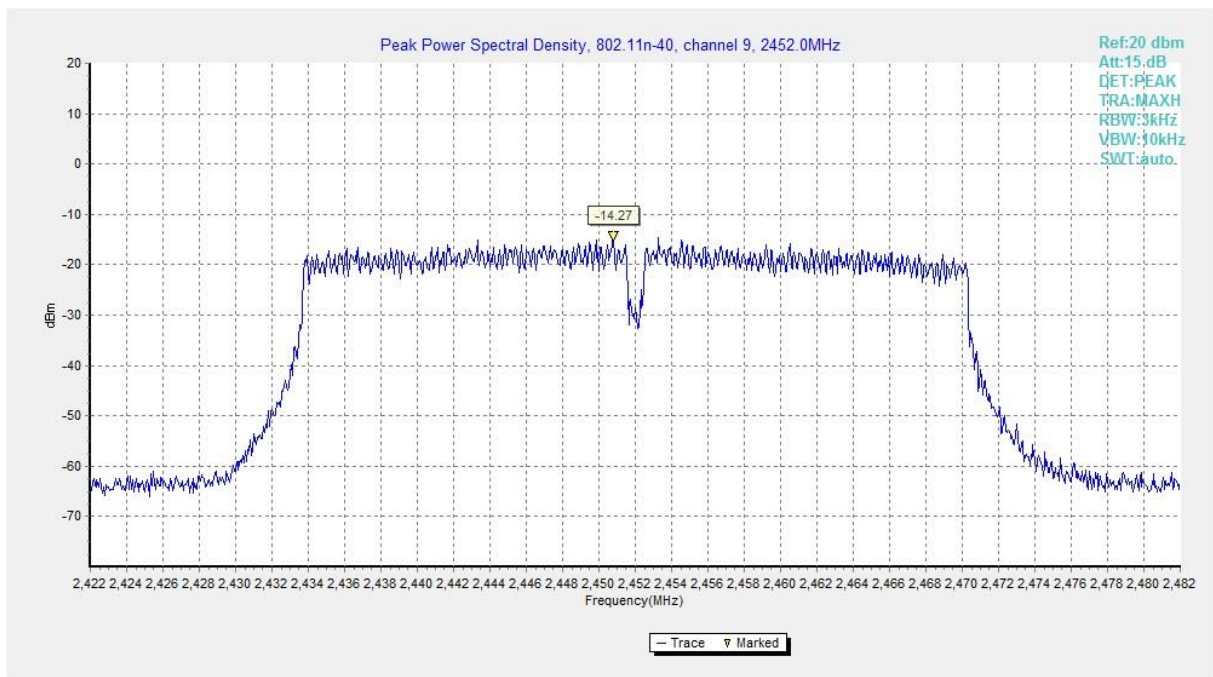

**Fig.A.3.36 Power Spectral Density (802.11n-HT40, Ch 9)**



#### **A.4. DTS 6-dB Signal Bandwidth**

**Method of Measurement: See ANSI C63.10-2013 section 11.8.1.**

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) = 300 kHz.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

**Measurement Limit:**

Standard	Limit (kHz)
FCC 47 CFR Part 15.247 (a)	≥ 500

**EUT ID: UT10a**

**Measurement Result:**

##### **802.11b/g mode**

Mode	Channel	Occupied 6dB Bandwidth ( MHz)		conclusion
802.11b	1	Fig.A.4.1	8.05	<b>P</b>
	6	Fig.A.4.2	8.55	<b>P</b>
	11	Fig.A.4.3	8.05	<b>P</b>
802.11g	1	Fig.A.4.4	16.00	<b>P</b>
	6	Fig.A.4.5	15.95	<b>P</b>
	11	Fig.A.4.6	15.75	<b>P</b>

##### **802.11n-HT20 mode**

Mode	Channel	Occupied 6dB Bandwidth ( MHz)		conclusion
802.11n (HT20)	1	Fig.A.4.7	16.35	<b>P</b>
	6	Fig.A.4.8	16.65	<b>P</b>
	11	Fig.A.4.9	16.35	<b>P</b>

##### **802.11n-HT40 mode**

Mode	Channel	Occupied 6dB Bandwidth ( MHz)		conclusion
802.11n (HT40)	3	Fig.A.4.10	35.28	<b>P</b>
	6	Fig.A.4.11	35.20	<b>P</b>
	9	Fig.A.4.12	35.12	<b>P</b>

##### **802.11ax-HE20 mode**


Mode	Channel	Occupied 6dB Bandwidth ( MHz)		conclusion
		Fig.A.4.13	18.95	
802.11ax (HE20)	1	Fig.A.4.13	18.95	P
	6	Fig.A.4.14	19.05	P
	11	Fig.A.4.15	19.00	P

**802.11ax-HE40 mode**

Mode	Channel	Occupied 6dB Bandwidth ( MHz)		conclusion
		Fig.A.4.16	38.08	
802.11ax (HE40)	3	Fig.A.4.16	38.08	P
	6	Fig.A.4.17	38.16	P
	9	Fig.A.4.18	37.84	P

**Conclusion: Pass**

**Test graphs as below:**

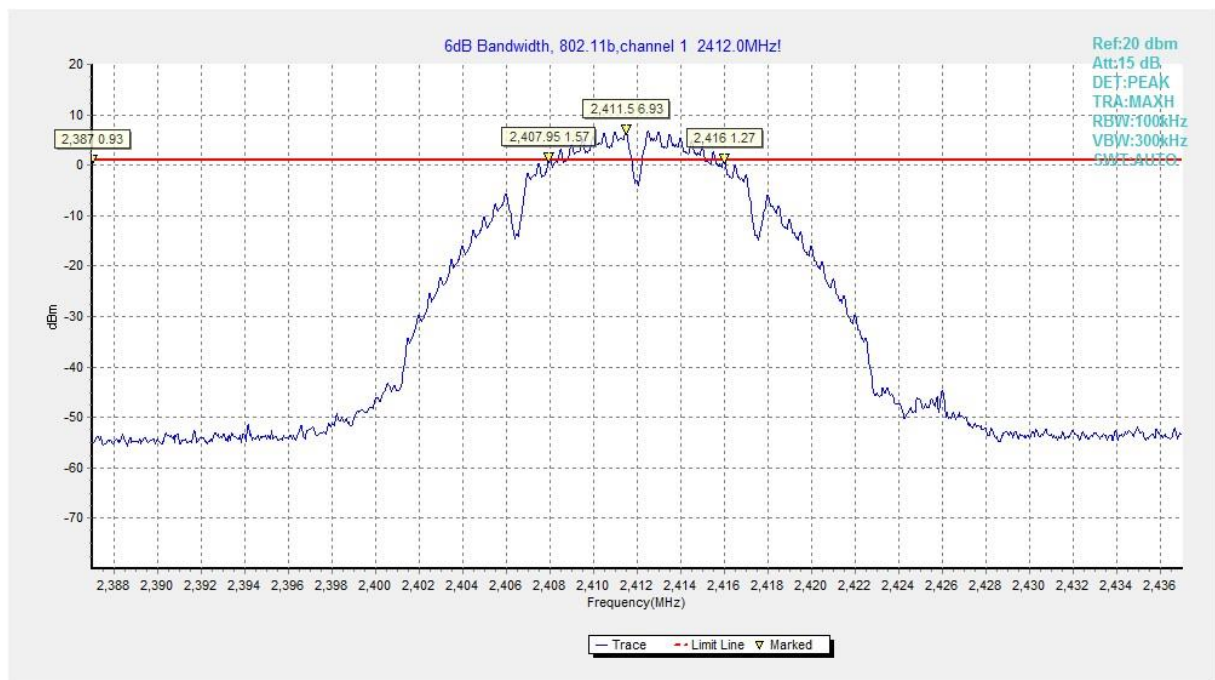

**Fig.A.4.1 Occupied 6dB Bandwidth(802.11b,Ch 1)**

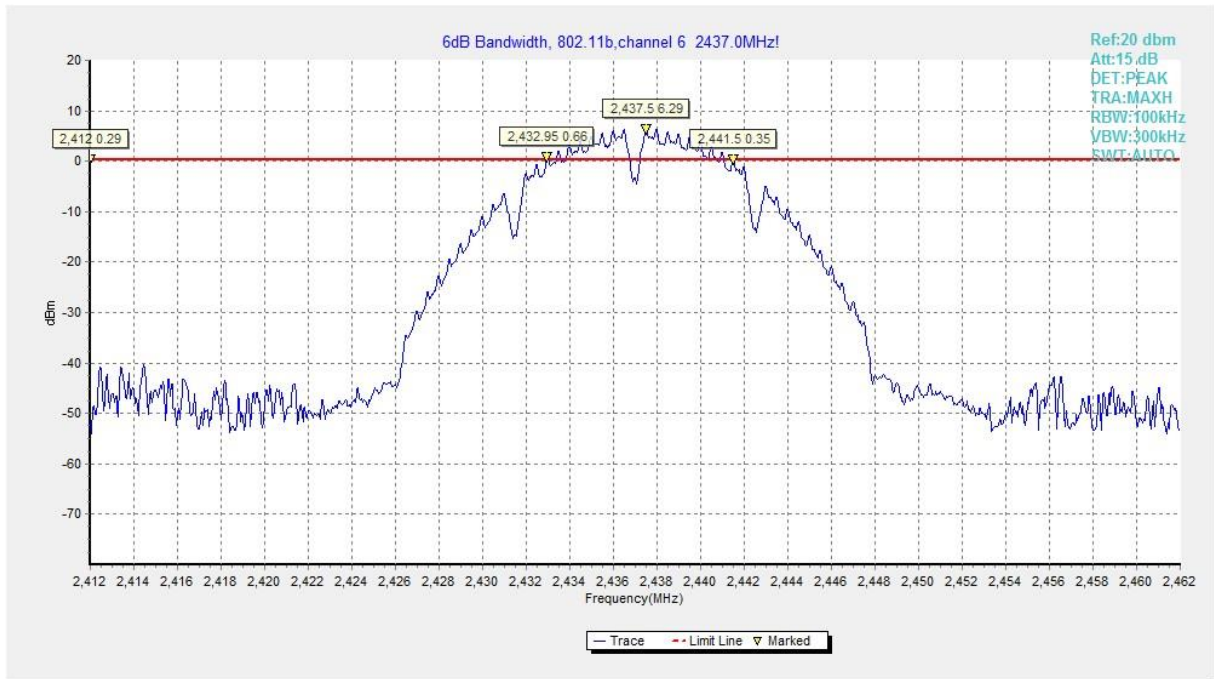


Fig.A.4.2 Occupied 6dB Bandwidth (802.11b, Ch 6)

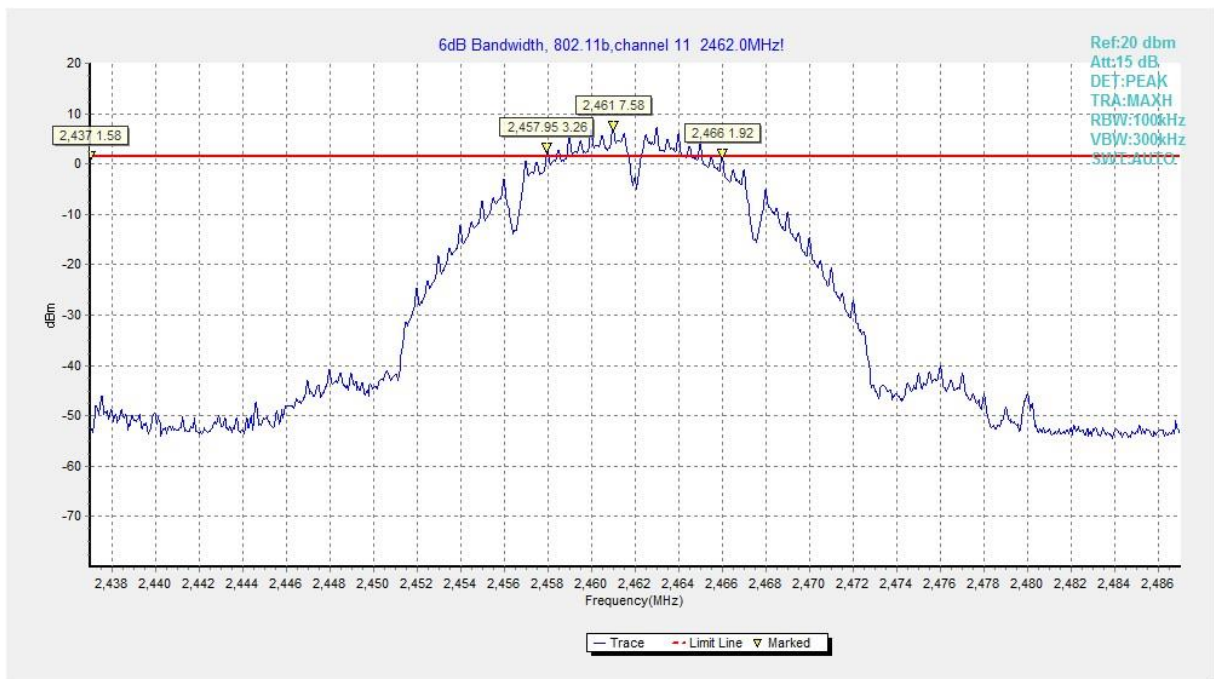


Fig.A.4.3 Occupied 6dB Bandwidth (802.11b, Ch 11)

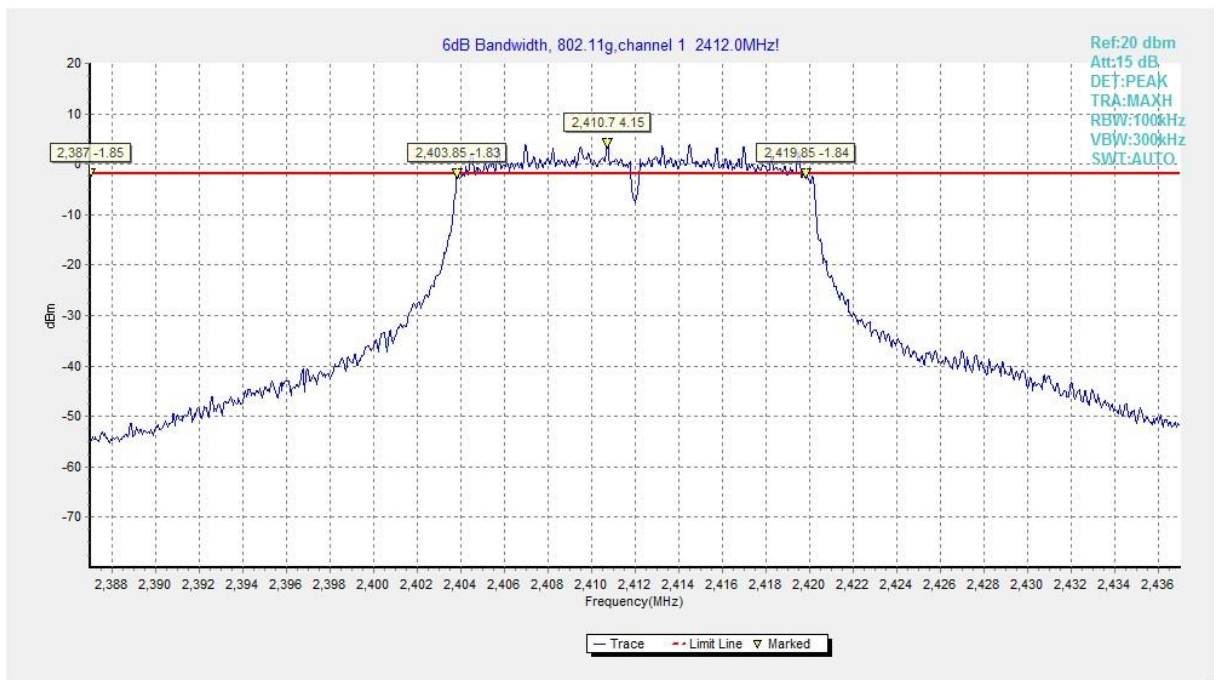


Fig.A.4.4 Occupied 6dB Bandwidth (802.11g, Ch 1)

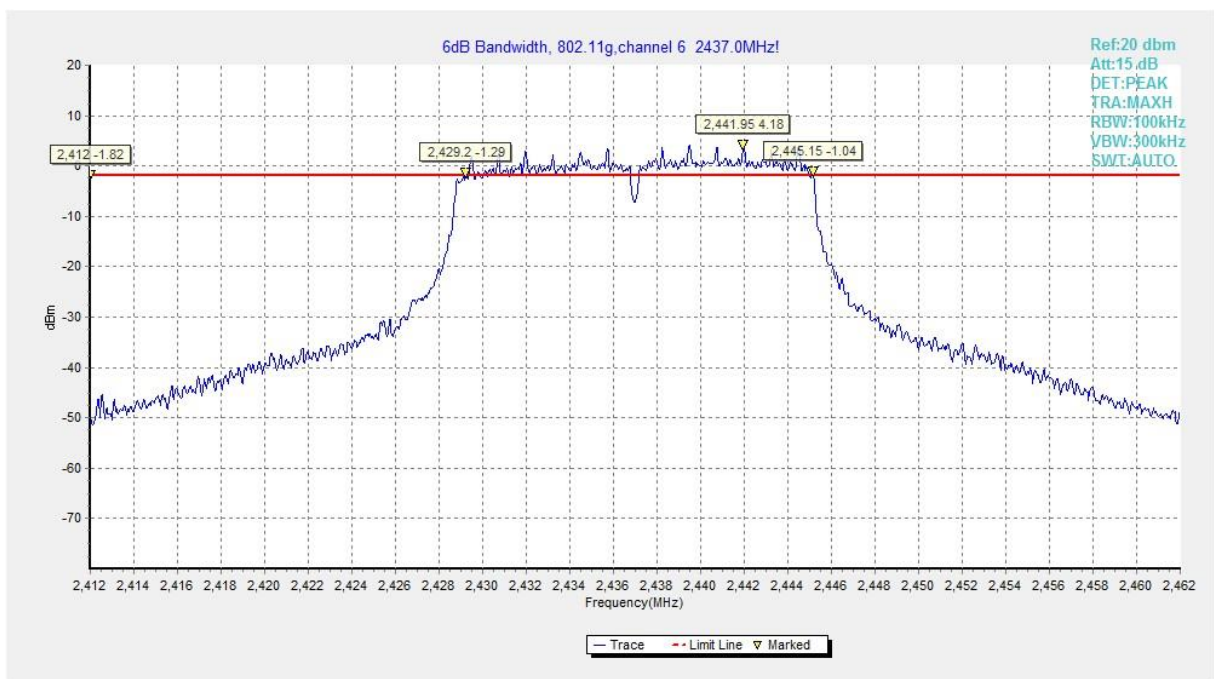


Fig.A.4.5 Occupied 6dB Bandwidth (802.11g, Ch 6)

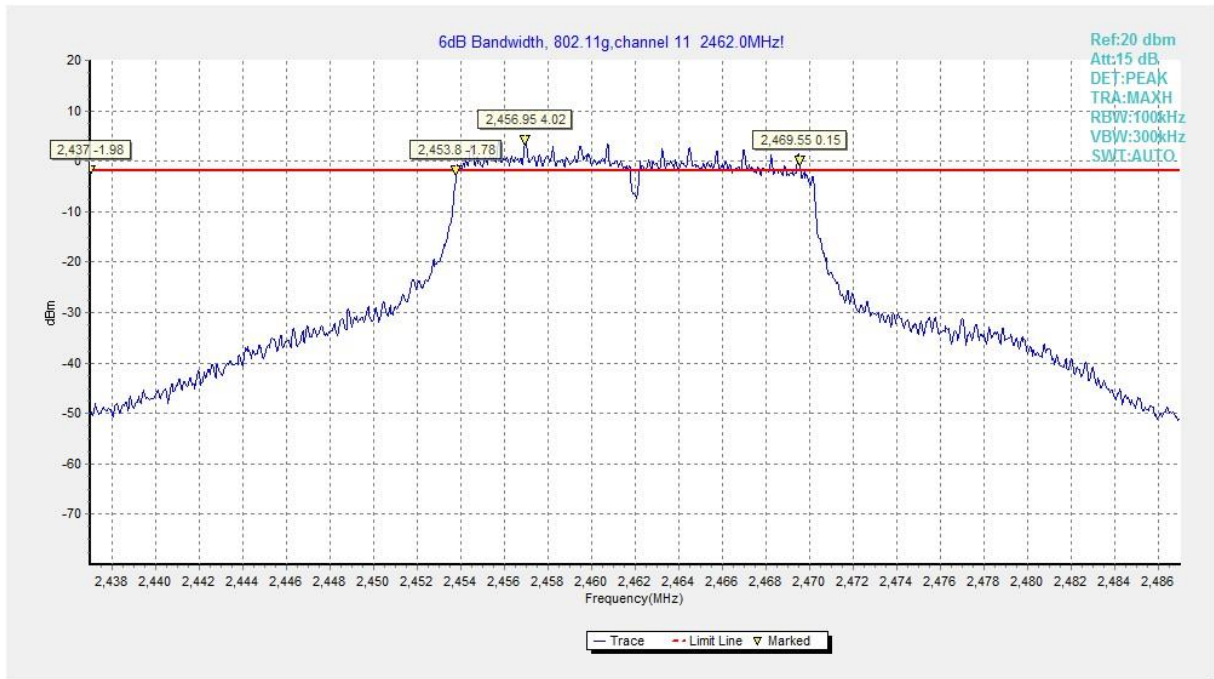


Fig.A.4.6 Occupied 6dB Bandwidth (802.11g, Ch 11)

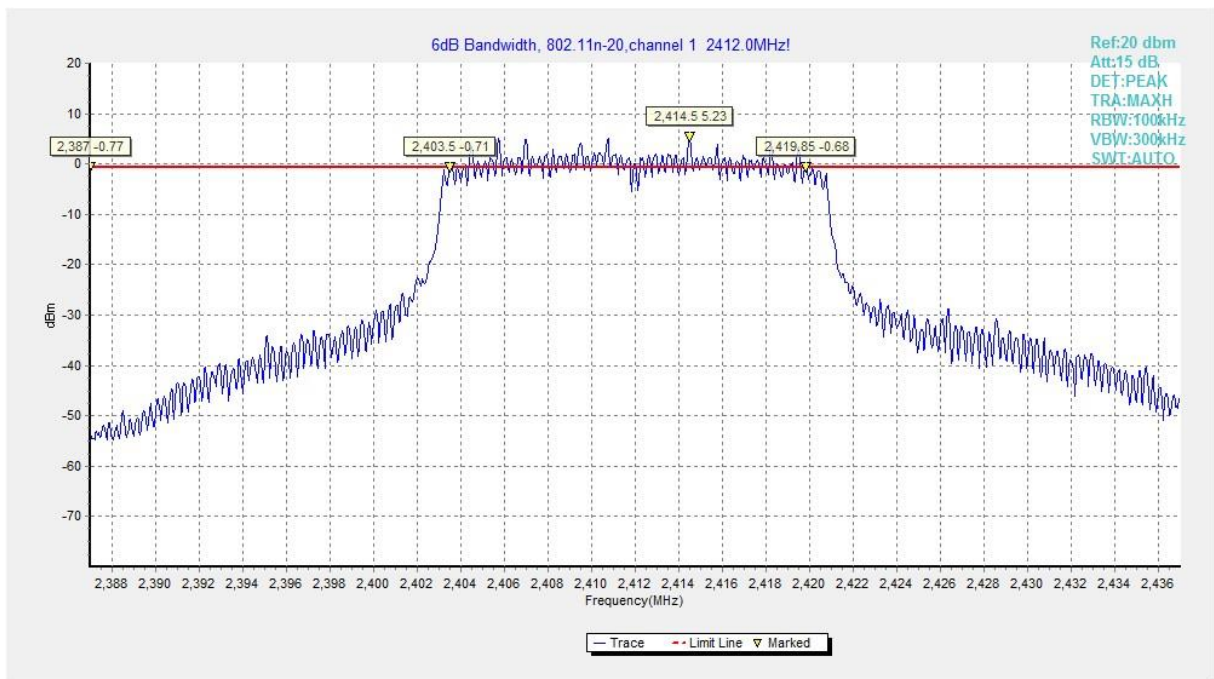


Fig.A.4.7 Occupied 6dB Bandwidth (802.11n-HT20, Ch 1)

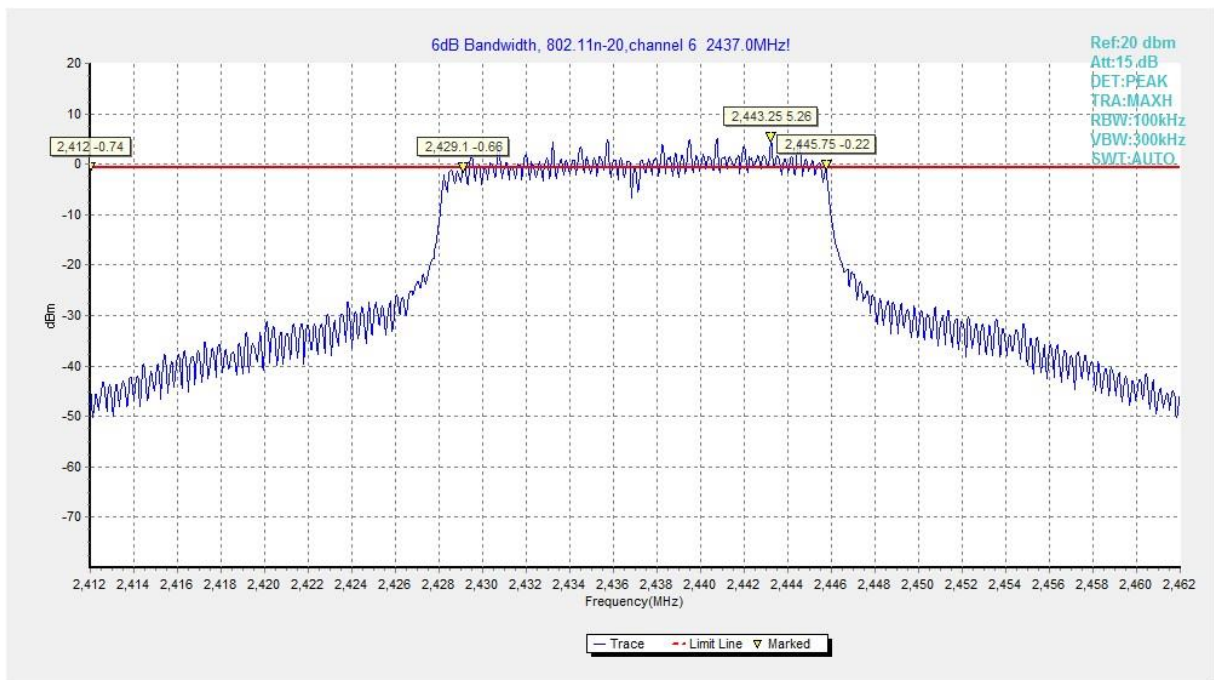


Fig.A.4.8 Occupied 6dB Bandwidth (802.11n-HT20, Ch 6)

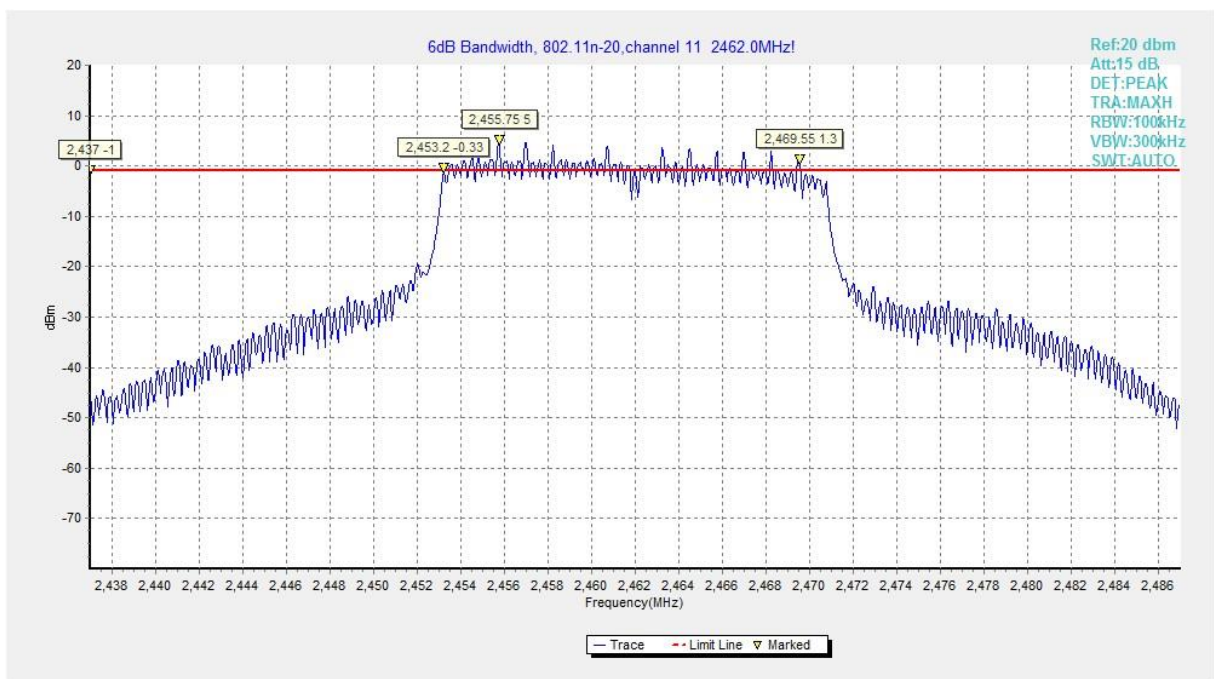


Fig.A.4.9 Occupied 6dB Bandwidth (802.11n-HT20, Ch 11)

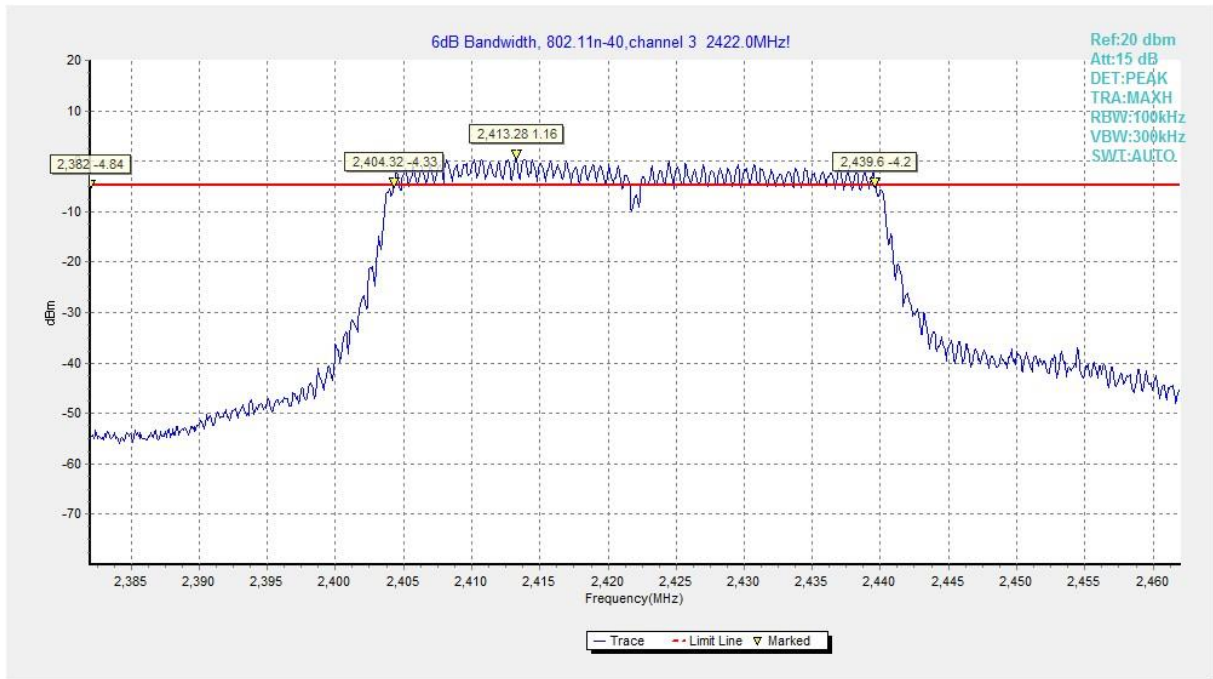


Fig.A.4.10 Occupied 6dB Bandwidth (802.11n-HT40, Ch 3)

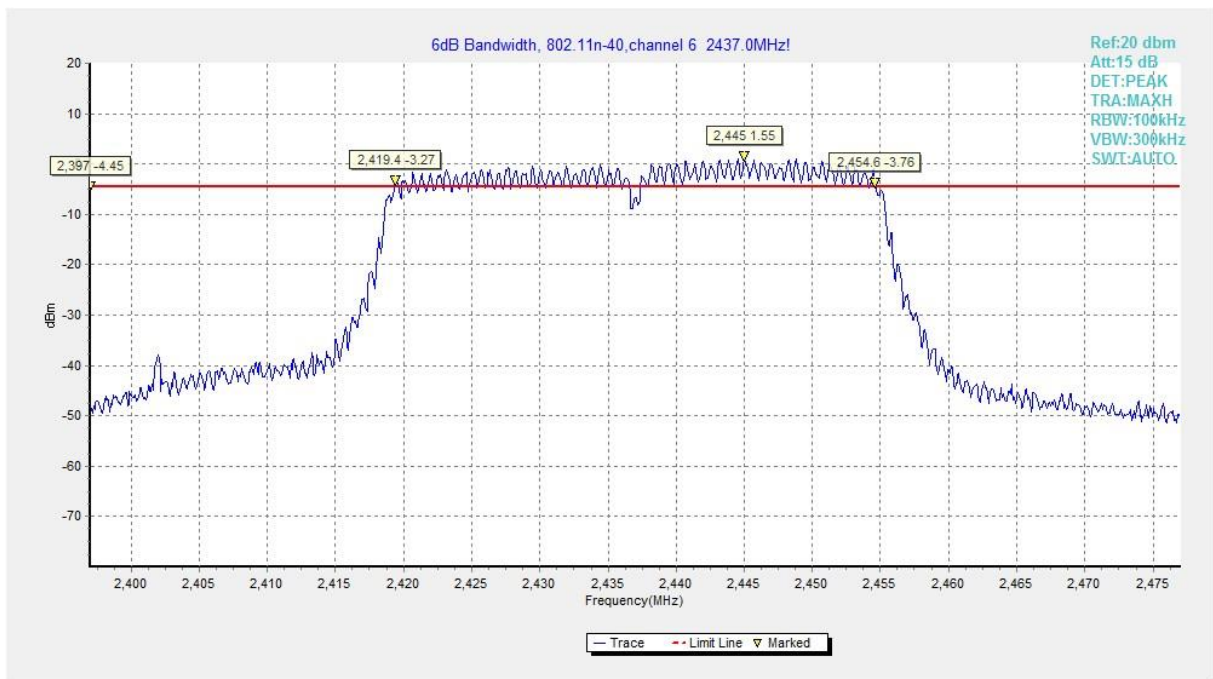


Fig.A.4.11 Occupied 6dB Bandwidth (802.11n-HT40, Ch 6)