MINIME
DSP
EARTHQUAKE
SOUND
The Sound That Will Move You
DESIGNED IN THE USA
POWER
PAIRING
IR INPUT
VOLUME
LOW LEVEL
AUTO
DSP
VOLUME
FREQUENCY
PHASE SHIFT
DIGITAL
POWER
600 WATTS
WARNING
POWER

225mm

240mm

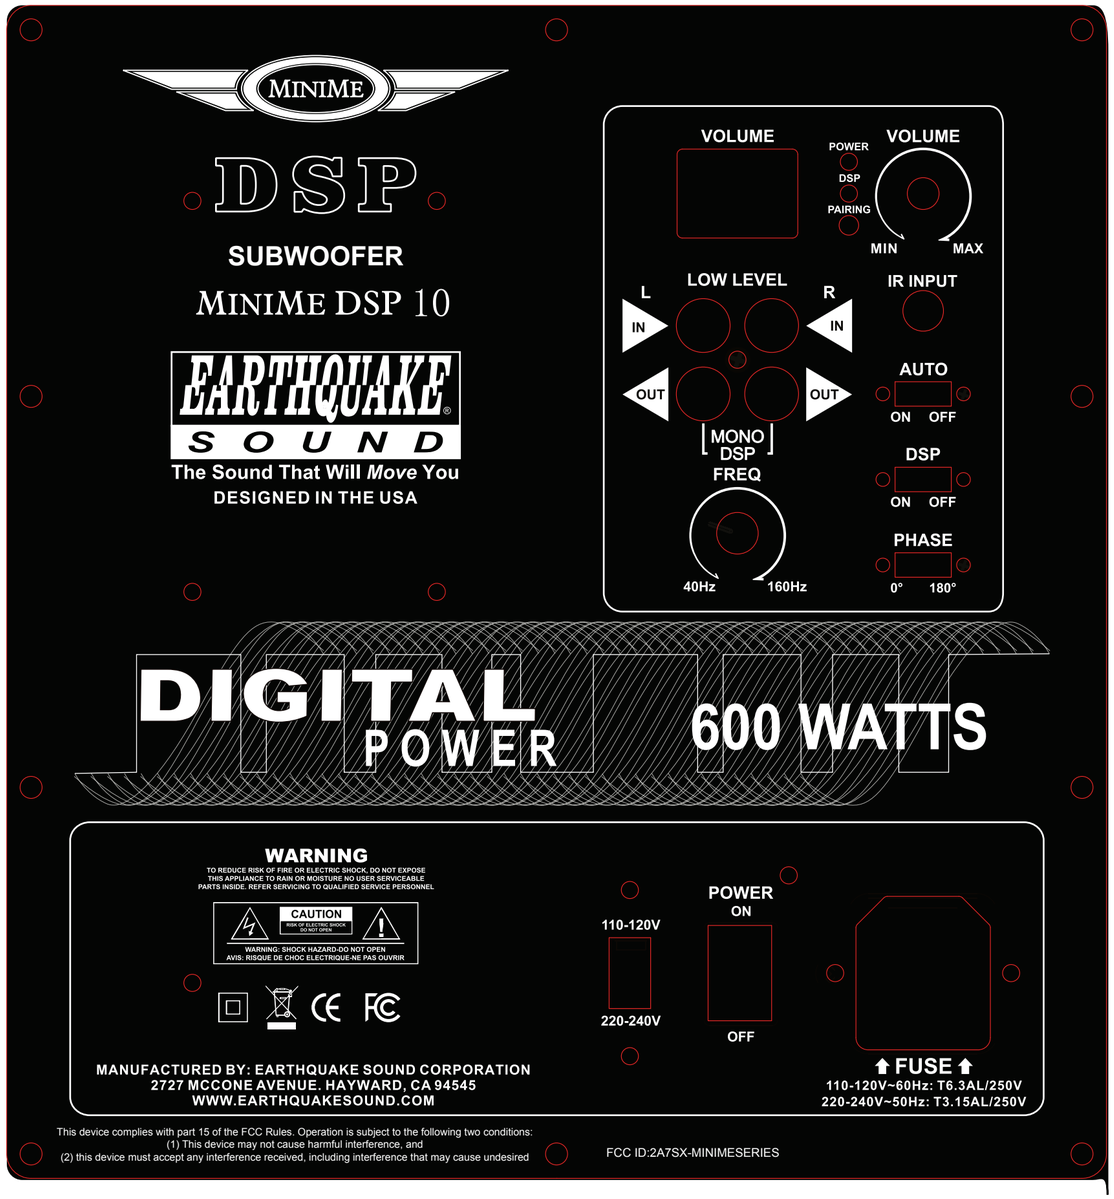
MINIME
DSP
SUBWOOFER
MINIME DSP 10
EARTHQUAKE
SOUND
The Sound That Will Move You
DESIGNED IN THE USA
VOLUME
POWER
DSP
PAIRING
VOLUME
MIN
MAX
LOW LEVEL
L
R
IN
IN
OUT
OUT
MONO DSP
FREQ
40Hz
160Hz
IR INPUT
AUTO
ON OFF
DSP
ON OFF
PHASE
0° 180°
DIGITAL POWER
600 WATTS
WARNING
TO REDUCE RISK OF FIRE OR ELECTRIC SHOCK, DO NOT EXPOSE THIS APPLIANCE TO RAIN OR MOISTURE NO USER SERVICEABLE PARTS INSIDE. REFER SERVICING TO QUALIFIED SERVICE PERSONNEL
CAUTION
RISK OF ELECTRIC SHOCK DO NOT OPEN
WARNING: SHOCK HAZARD-DO NOT OPEN
AVIS: RISQUE DE CHOC ELECTRIQUE-NE PAS OUVRIR
110-120V
220-240V
POWER
ON
OFF
FUSE
110-120V~60Hz: T6.3AL/250V
220-240V~50Hz: T3.15AL/250V
MANUFACTURED BY: EARTHQUAKE SOUND CORPORATION
2727 MCCONE AVENUE. HAYWARD, CA 94545
WWW.EARTHQUAKESOUND.COM
This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:
(1) This device may not cause harmful interference, and
(2) this device must accept any interference received, including interference that may cause undesired
FCC ID:2A7SX-MINIMESERIES