


# FCC Radio Test Report

## FCC ID: RWO-RZ090421

**This report concerns: Class II Permissive Change**

**Project No.** : 2111C140  
**Equipment** : Notebook PC  
**Brand Name** : RAZER  
**Test Model** : RZ09-0421  
**Series Model** : N/A  
**Applicant** : Razer Inc.  
**Address** : 9 Pasteur, Suite 100, Irvine, CA92618, USA  
**Manufacturer** : Razer Inc.  
**Address** : 9 Pasteur, Suite 100, Irvine, CA92618, USA  
**Date of Receipt** : Nov. 22, 2021  
**Date of Test** : Dec. 02, 2021 ~ Dec. 23, 2021  
**Issued Date** : Feb. 10, 2022  
**Report Version** : R00  
**Test Sample** : Sample No.: DG20211202160 for conducted, DG20211201114 for radiated.  
**Standard(s)** : FCC CFR Title 47, Part 15, Subpart E  
ANSI C63.10-2013  
FCC KDB 987594 D02 U-NII 6GHz EMC Measurement v01  
FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01  
FCC KDB 662911 D01 Multiple Transmitter Output v02r01

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.



Prepared by : Evan Yang



Approved by : Chay Cai



Add: No. 3 Jinshagang 1st Rd. Shixia, Dalang Town Dongguan City, Guangdong 523792  
People's Republic of China.  
Tel: +86-769-8318-3000  
Web: [www.newbtl.com](http://www.newbtl.com)

**Declaration**

**BTL** represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

**BTL**'s reports apply only to the specific samples tested under conditions. It is manufacturer's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, A2LA, or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

**BTL**'s laboratory quality assurance procedures are in compliance with the **ISO/IEC 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

**BTL** is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

**Limitation**

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

| Table of Contents  | Page      |
|--|-----------|
| <b>REPORT ISSUED HISTORY</b>                                 | <b>4</b>  |
| <b>1 . SUMMARY OF TEST RESULTS</b>                           | <b>5</b>  |
| 1.1 TEST FACILITY  | 6         |
| 1.2 MEASUREMENT UNCERTAINTY                                  | 6         |
| 1.3 TEST ENVIRONMENT CONDITIONS                              | 6         |
| <b>2 . GENERAL INFORMATION</b>                               | <b>7</b>  |
| 2.1 GENERAL DESCRIPTION OF EUT                               | 7         |
| 2.2 TEST MODES   | 13        |
| 2.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED | 14        |
| 2.4 SUPPORT UNITS  | 14        |
| <b>3 . RADIATED EMISSIONS</b>                                | <b>15</b> |
| 3.1 LIMIT  | 15        |
| 3.2 TEST PROCEDURE   | 15        |
| 3.3 DEVIATION FROM TEST STANDARD                             | 16        |
| 3.4 TEST SETUP   | 16        |
| 3.5 EUT OPERATION CONDITIONS                                 | 17        |
| 3.6 TEST RESULTS - 30 MHZ TO 1000 MHZ                        | 17        |
| 3.7 TEST RESULTS - ABOVE 1000 MHZ                            | 17        |
| <b>4 . CONTENTION BASED PROTOCOL</b>                         | <b>18</b> |
| 4.1 LIMIT  | 18        |
| 4.2 TEST PROCEDURE   | 18        |
| 4.3 DEVIATION FROM STANDARD                                  | 19        |
| 4.4 TEST SETUP   | 19        |
| 4.5 EUT OPERATION CONDITIONS                                 | 19        |
| 4.6 TEST RESULTS   | 19        |
| <b>5 . MEASUREMENT INSTRUMENTS LIST</b>                      | <b>20</b> |
| <b>APPENDIX A - RADIATED EMISSION - 30 MHZ TO 1000 MHZ</b>   | <b>21</b> |
| <b>APPENDIX B - RADIATED EMISSION - ABOVE 1000 MHZ</b>       | <b>24</b> |
| <b>APPENDIX C - CONTENTION BASED PROTOCOL</b>                | <b>41</b> |

**REPORT ISSUED HISTORY**

| Report Version | Description     | Issued Date   |
|----------------|-----------------|---------------|
| R00            | Original Issue. | Feb. 10, 2022 |

## 1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

| FCC CFR Title 47, Part 15, Subpart E |  |                          |          |                      |
|--------------------------------------|--|--------------------------|----------|----------------------|
| Standard(s)<br>Section               | Test Item                                    | Test Result              | Judgment | Remark               |
| 15.207<br>15.407(b)                  | AC Power Line Conducted Emissions            | -----                    | PASS     | -----                |
| 15.407(b)<br>15.205(a)<br>15.209(a)  | Radiated Emissions                           | Appendix A<br>Appendix B | PASS     | -----                |
| 15.407(a)                            | Bandwidth                                    | -----                    | PASS     | -----                |
| 15.407(a)                            | Maximum e.i.r.p.                             | -----                    | PASS     | -----                |
| 15.407(a)                            | Maximum Power Spectral Density<br>(e.i.r.p.) | -----                    | PASS     | -----                |
| 15.407(b)                            | In-Band Emission (Mask)                      | -----                    | PASS     | -----                |
| 15.407(d)                            | Contention Based Protocol                    | Appendix C               | PASS     | -----                |
| 15.407(g)                            | Frequency Stability                          | -----                    | PASS     | -----                |
| 15.203<br>15.407(a)                  | Antenna Requirements                         | -----                    | PASS     | NOTE (2)<br>NOTE (3) |

Note:

- (1) "N/A" denotes test is not applicable in this test report.
- (2) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.
- (3) The device employ a permanently attached integrated antenna.
- (4) Device Type:
  - Indoor access point
  - Subordinate device (operating under control of a low-power indoor access point)
  - Indoor client (operating under control of a low-power indoor access point)
  - Dual client (operating under control of either a low-power indoor access point or standard power access point)
  - Standard power access point
  - Standard client (operating under control of a Standard power access point)
  - Fixed client (operating under control of a Standard power access point)
- (5) In this report only the worst cases of radiated spurious emissions were evaluated and recorded. For the test results of all other test items please refer to module test report.

## 1.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No. 3 Jinshagang 1st Rd. Shixia, Dalang Town Dongguan City, Guangdong 523792 People's Republic of China.  
 BTL's Registration Number for FCC: 357015  
 BTL's Designation Number for FCC: CN1240

## 1.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

The BTL measurement uncertainty as below table:

### A. Radiated emissions test:

| Test Site       | Method | Measurement Frequency Range | Ant. H / V | U,(dB) |
|-----------------|--------|-----------------------------|------------|--------|
| DG-CB03<br>(3m) | CISPR  | 30MHz ~ 200MHz              | V          | 4.36   |
|                 |        | 30MHz ~ 200MHz              | H          | 3.32   |
|                 |        | 200MHz ~ 1,000MHz           | V          | 4.08   |
|                 |        | 200MHz ~ 1,000MHz           | H          | 3.96   |

| Test Site       | Method | Measurement Frequency Range | U,(dB) |
|-----------------|--------|-----------------------------|--------|
| DG-CB03<br>(3m) | CISPR  | 1GHz ~ 6GHz                 | 3.80   |
|                 |        | 6GHz ~ 18GHz                | 4.82   |

| Test Site       | Method | Measurement Frequency Range | U,(dB) |
|-----------------|--------|-----------------------------|--------|
| DG-CB03<br>(1m) | CISPR  | 18 ~ 26.5 GHz               | 3.62   |
|                 |        | 26.5 ~ 40 GHz               | 4.00   |

### B. Other Measurement test:

| Test Item   | Uncertainty |
|-------------|-------------|
| Temperature | ±0.08 °C    |
| Humidity    | ±1.5%       |

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

## 1.3 TEST ENVIRONMENT CONDITIONS

| Test Item                           | Temperature | Humidity | Test Voltage | Tested By   |
|-------------------------------------|-------------|----------|--------------|-------------|
| Radiated Emissions-30MHz to 1000MHz | 24°C        | 45%      | AC 120V/60Hz | Hayden Chen |
| Radiated Emissions-Above 1000 MHz   | 22°C        | 42%      | AC 120V/60Hz | Hayden Chen |
| Contention Based Protocol           | 22°C        | 53%      | AC 120V/60Hz | Mark Wu     |

## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

|                             |  |
|-----------------------------|--|
| Equipment                   | Notebook PC  |
| Brand Name                  | RAZER  |
| Test Model                  | RZ09-0421  |
| Series Model                | N/A  |
| Model Difference(s)         | N/A  |
| Power Source                | 1# DC Voltage supplied from AC adapter.<br>Model: RC30-024801<br>2# Supplied from battery.<br>Model: RC30-0248                                 |
| Power Rating                | 1# I/P: 100-240V~ 50/60Hz 3.6A O/P: 19.5V <del>---</del> 11.8A<br>2# 15.4V, 5209mAh, 80Wh  |
| Operation Frequency Band(s) | UNII-5: 5925 MHz ~ 6425 MHz<br>UNII-6: 6425 MHz ~ 6525 MHz<br>UNII-7: 6525 MHz ~ 6875 MHz<br>UNII-8: 6875 MHz ~ 7125 MHz                       |
| Modulation Type             | IEEE 802.11a/n/ac: OFDM<br>IEEE 802.11ax: OFDMA  |
| Bit Rate of Transmitter     | IEEE 802.11a: 54/48/36/24/18/12/9/6 Mbps<br>IEEE 802.11n: Up to 300 Mbps<br>IEEE 802.11ac: Up to 1733.4 Mbps<br>IEEE 802.11ax: Up to 2402 Mbps |

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

## 2. Channel List:

| UNII-5  |                 |         |                 |         |                 |
|---|-----------------|---------|-----------------|---------|-----------------|
| IEEE 802.11a, IEEE 802.11n(HT20), IEEE 802.11ac(VHT20), IEEE 802.11ax(HE20) |                 |         |                 |         |                 |
| Channel   | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 1   | 5955            | 33      | 6115            | 65      | 6275            |
| 5   | 5975            | 37      | 6135            | 69      | 6295            |
| 9   | 5995            | 41      | 6155            | 73      | 6315            |
| 13  | 6015            | 45      | 6175            | 77      | 6335            |
| 17  | 6035            | 49      | 6195            | 81      | 6355            |
| 21  | 6055            | 53      | 6215            | 85      | 6375            |
| 25  | 6075            | 57      | 6235            | 89      | 6395            |
| 29  | 6095            | 61      | 6255            | 93      | 6415            |

| UNII-5  |                 |         |                 |         |                 |
|---|-----------------|---------|-----------------|---------|-----------------|
| IEEE 802.11n(HT40), IEEE 802.11ac(VHT40), IEEE 802.11ax(HE40) |                 |         |                 |         |                 |
| Channel   | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 3   | 5965            | 35      | 6125            | 67      | 6285            |
| 11  | 6005            | 43      | 6165            | 75      | 6325            |
| 19  | 6045            | 51      | 6205            | 83      | 6365            |
| 27  | 6085            | 59      | 6245            | 91      | 6405            |

| UNII-5                                    |                 |         |                 |         |                 |
|---|-----------------|---------|-----------------|---------|-----------------|
| IEEE 802.11ac(VHT80), IEEE 802.11ax(HE80) |                 |         |                 |         |                 |
| Channel                                   | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 7   | 5985            | 39      | 6145            | 71      | 6305            |
| 23  | 6065            | 55      | 6225            | 87      | 6385            |

| UNII-5                                      |                 |         |                 |         |                 |
|---|-----------------|---------|-----------------|---------|-----------------|
| IEEE 802.11ac(VHT160), IEEE 802.11ax(HE160) |                 |         |                 |         |                 |
| Channel                                     | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 15  | 6025            | 47      | 6185            | 79      | 6345            |

| UNII-6  |                 |         |                 |         |                 |
|---|-----------------|---------|-----------------|---------|-----------------|
| IEEE 802.11a, IEEE 802.11n(HT20), IEEE 802.11ac(VHT20), IEEE 802.11ax(HE20) |                 |         |                 |         |                 |
| Channel   | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 97  | 6435            | 105     | 6475            | 113     | 6515            |
| 101   | 6455            | 109     | 6495            |         |                 |

| UNII-6  |                 |         |                 |         |                 |
|---|-----------------|---------|-----------------|---------|-----------------|
| IEEE 802.11n(HT40), IEEE 802.11ac(VHT40), IEEE 802.11ax(HE40) |                 |         |                 |         |                 |
| Channel   | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 99  | 6445            | 107     | 6485            | 115     | 6525            |

| UNII-6                                    |                 |         |                 |         |                 |
|---|-----------------|---------|-----------------|---------|-----------------|
| IEEE 802.11ac(VHT80), IEEE 802.11ax(HE80) |                 |         |                 |         |                 |
| Channel                                   | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 103                                       | 6465            |         |                 |         |                 |

| UNII-6                                      |                 |         |                 |         |                 |
|---|-----------------|---------|-----------------|---------|-----------------|
| IEEE 802.11ac(VHT160), IEEE 802.11ax(HE160) |                 |         |                 |         |                 |
| Channel                                     | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 111   | 6505            |         |                 |         |                 |

| UNII-7  |                 |         |                 |         |                 |
|---|-----------------|---------|-----------------|---------|-----------------|
| IEEE 802.11a, IEEE 802.11n(HT20), IEEE 802.11ac(VHT20), IEEE 802.11ax(HE20) |                 |         |                 |         |                 |
| Channel   | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 117   | 6535            | 141     | 6655            | 165     | 6775            |
| 121   | 6555            | 145     | 6675            | 169     | 6795            |
| 125   | 6575            | 149     | 6695            | 173     | 6815            |
| 129   | 6595            | 153     | 6715            | 177     | 6835            |
| 133   | 6615            | 157     | 6735            | 181     | 6855            |
| 137   | 6635            | 161     | 6755            | 185     | 6875            |

| UNII-7  |                 |         |                 |         |                 |
|---|-----------------|---------|-----------------|---------|-----------------|
| IEEE 802.11n(HT40), IEEE 802.11ac(VHT40), IEEE 802.11ax(HE40) |                 |         |                 |         |                 |
| Channel   | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 123   | 6565            | 147     | 6685            | 171     | 6805            |
| 131   | 6605            | 155     | 6725            | 179     | 6845            |
| 139   | 6645            | 163     | 6765            |         |                 |

| UNII-7                                    |                 |         |                 |         |                 |
|---|-----------------|---------|-----------------|---------|-----------------|
| IEEE 802.11ac(VHT80), IEEE 802.11ax(HE80) |                 |         |                 |         |                 |
| Channel                                   | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 119                                       | 6545            | 151     | 6705            | 183     | 6865            |
| 135                                       | 6625            | 167     | 6785            |         |                 |

| UNII-7                                      |                 |         |                 |         |                 |
|---|-----------------|---------|-----------------|---------|-----------------|
| IEEE 802.11ac(VHT160), IEEE 802.11ax(HE160) |                 |         |                 |         |                 |
| Channel                                     | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 143   | 6665            | 175     | 6825            |         |                 |

| UNII-8  |                 |         |                 |         |                 |
|---|-----------------|---------|-----------------|---------|-----------------|
| IEEE 802.11a, IEEE 802.11n(HT20), IEEE 802.11ac(VHT20), IEEE 802.11ax(HE20) |                 |         |                 |         |                 |
| Channel   | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 189   | 6895            | 205     | 6975            | 221     | 7055            |
| 193   | 6915            | 209     | 6995            | 225     | 7075            |
| 197   | 6935            | 213     | 7015            | 229     | 7095            |
| 201   | 6955            | 217     | 7035            | 233     | 7115            |

| UNII-8  |                 |         |                 |         |                 |
|---|-----------------|---------|-----------------|---------|-----------------|
| IEEE 802.11n(HT40), IEEE 802.11ac(VHT40), IEEE 802.11ax(HE40) |                 |         |                 |         |                 |
| Channel   | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 187   | 6885            | 203     | 6965            | 219     | 7045            |
| 195   | 6925            | 211     | 7005            | 227     | 7085            |

| UNII-8                                    |                 |         |                 |         |                 |
|---|-----------------|---------|-----------------|---------|-----------------|
| IEEE 802.11ac(VHT80), IEEE 802.11ax(HE80) |                 |         |                 |         |                 |
| Channel                                   | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 199                                       | 6945            | 215     | 7025            |         |                 |

| UNII-8                                      |                 |         |                 |         |                 |
|---|-----------------|---------|-----------------|---------|-----------------|
| IEEE 802.11ac(VHT160), IEEE 802.11ax(HE160) |                 |         |                 |         |                 |
| Channel                                     | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 207   | 6985            |         |                 |         |                 |

### 3. Table for Filed Antenna:

| Ant. | Brand                       | P/N             | Antenna Type | Connector | Gain (dBi) |
|------|-----------------------------|-----------------|--------------|-----------|------------|
| 1    | Amphenol Taiwan Corporation | BY5921-15-001-C | PIFA         | N/A       | 3.87       |
| 2    | Amphenol Taiwan Corporation | BY5921-15-001-C | PIFA         | N/A       | 3.03       |

Note:

- 1) This EUT supports MIMO 2X2, any transmit signals are correlated with each other, so Directional gain = $10\log[(10^{\frac{G1}{10}}+10^{\frac{G2}{10}}+\dots+10^{\frac{GN}{10}})^2/N] \text{dBi}$ , that is Directional gain= $10\log[(10^{\frac{3.87}{10}}+10^{\frac{3.03}{10}})^2/2] \text{dBi} = 6.47$ .
- 2) The antenna gain is provided by the manufacturer.

## 4. Table for Antenna Configuration:

| Operating Mode        | TX Mode | 2TX                 |
|-----------------------|---------|---------------------|
| IEEE 802.11a          |         | V (Ant. 1 + Ant. 2) |
| IEEE 802.11n(HT20)    |         | V (Ant. 1 + Ant. 2) |
| IEEE 802.11n(HT40)    |         | V (Ant. 1 + Ant. 2) |
| IEEE 802.11ac(VHT20)  |         | V (Ant. 1 + Ant. 2) |
| IEEE 802.11ac(VHT40)  |         | V (Ant. 1 + Ant. 2) |
| IEEE 802.11ac(VHT80)  |         | V (Ant. 1 + Ant. 2) |
| IEEE 802.11ac(VHT160) |         | V (Ant. 1 + Ant. 2) |
| IEEE 802.11ax(HE20)   |         | V (Ant. 1 + Ant. 2) |
| IEEE 802.11ax(HE40)   |         | V (Ant. 1 + Ant. 2) |
| IEEE 802.11ax(HE80)   |         | V (Ant. 1 + Ant. 2) |
| IEEE 802.11ax(HE160)  |         | V (Ant. 1 + Ant. 2) |

## 2.2 TEST MODES

The test system was pre-tested based on the consideration of all possible combinations of EUT operation mode.

Following mode(s) was (were) found to be the worst case(s) and selected for the final test.

| Final Test Mode | Description                              |
|-----------------|--|
| Mode 1          | TX AX(HE20) Mode Channel 53 (UNII-5)     |
| Mode 2          | TX AX(HE160) Mode Channel 47/79 (UNII-5) |
| Mode 3          | TX AX(HE20) Mode Channel 101 (UNII-6)    |
| Mode 4          | TX AX(HE160) Mode Channel 111 (UNII-6)   |
| Mode 5          | TX AX(HE20) Mode Channel 149 (UNII-7)    |
| Mode 6          | TX AX(HE160) Mode Channel 143 (UNII-7)   |
| Mode 7          | TX AX(HE20) Mode Channel 213 (UNII-8)    |
| Mode 8          | TX AX(HE160) Mode Channel 207 (UNII-8)   |
| Mode 9          | Normal Mode                              |

### Radiated Emissions Test - Below 1GHz

| Final Test Mode | Description |
|-----------------|-------------|
| Mode 9          | Normal Mode |

### Radiated Emissions Test - Above 1GHz

| Final Test Mode | Description                            |
|-----------------|--|
| Mode 2          | TX AX(HE160) Mode Channel 79 (UNII-5)  |
| Mode 4          | TX AX(HE160) Mode Channel 111 (UNII-6) |
| Mode 6          | TX AX(HE160) Mode Channel 143 (UNII-7) |
| Mode 8          | TX AX(HE160) Mode Channel 207 (UNII-8) |


### Contention Based Protocol

| Final Test Mode | Description                              |
|-----------------|--|
| Mode 1          | TX AX(HE20) Mode Channel 53 (UNII-5)     |
| Mode 2          | TX AX(HE160) Mode Channel 47/79 (UNII-5) |
| Mode 3          | TX AX(HE20) Mode Channel 101 (UNII-6)    |
| Mode 4          | TX AX(HE160) Mode Channel 111 (UNII-6)   |
| Mode 5          | TX AX(HE20) Mode Channel 149 (UNII-7)    |
| Mode 6          | TX AX(HE160) Mode Channel 143 (UNII-7)   |
| Mode 7          | TX AX(HE20) Mode Channel 213 (UNII-8)    |
| Mode 8          | TX AX(HE160) Mode Channel 207 (UNII-8)   |

Note:

(1) IEEE 802.11ax mode only supports full RU, so only the full RU is evaluated and measured inside report.

## 2.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

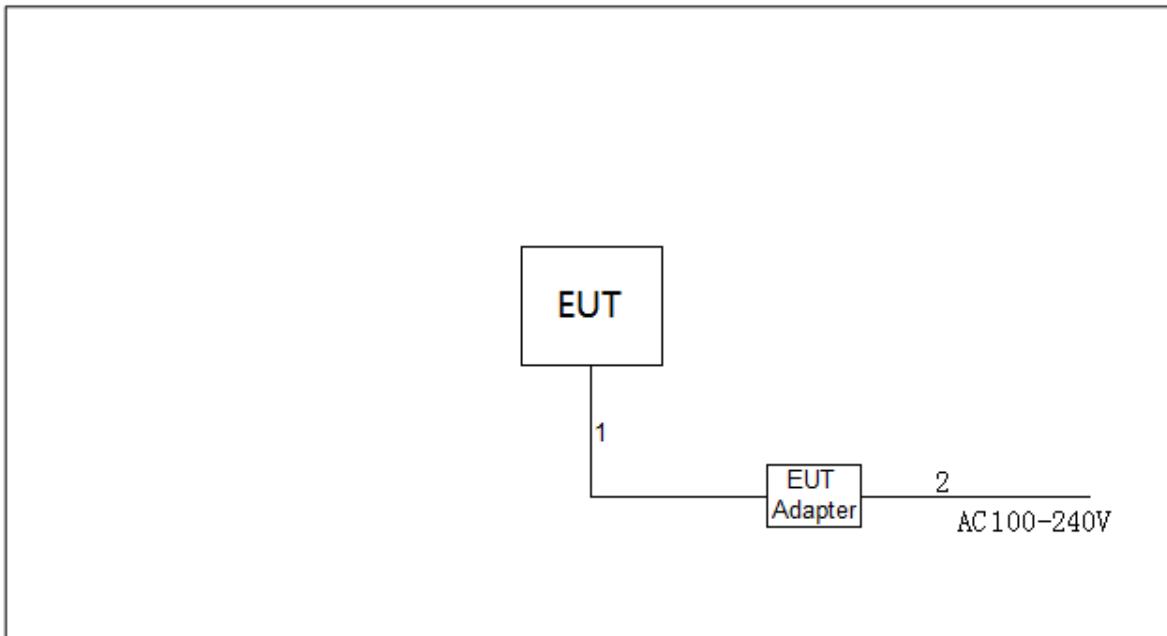

## 2.4 SUPPORT UNITS

| Item | Equipment | Brand | Model No. | Series No. |
|------|-----------|-------|-----------|------------|
| -    | -         | -     | -         | -          |

| Item | Cable Type | Shielded Type | Ferrite Core | Length |
|------|------------|---------------|--------------|--------|
| 1    | DC Cable   | NO            | NO           | 2m     |
| 2    | AC Cable   | NO            | NO           | 1m     |

### 3. RADIATED EMISSIONS

#### 3.1 LIMIT

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

##### LIMITS OF RADIATED EMISSIONS MEASUREMENT (30 MHz to 1000 MHz)

| Frequency (MHz) | Field Strength (microvolts/meter) | Measurement Distance (meters) |
|-----------------|-----------------------------------|-------------------------------|
| 30-88           | 100                               | 3                             |
| 88-216          | 150                               | 3                             |
| 216-960         | 200                               | 3                             |
| Above 960       | 500                               | 3                             |

##### LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS (Above 1000 MHz)

| Frequency (MHz) | EIRP Limit (dBm/MHz) | Equivalent Field Strength at 3m (dB $\mu$ V/m) |
|-----------------|----------------------|--|
| 5925-7125       | Average: -27         | 68.2   |

##### NOTE:

(1) The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m}, \text{ where } P \text{ is the eirp (Watts)}$$

#### 3.2 TEST PROCEDURE

- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1 GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1 GHz)
- i. For the actual test configuration, please refer to the related Item –EUT Test Photos.

The following table is the setting of the receiver:

| Spectrum Parameters    | Setting                         |
|------------------------|---------------------------------|
| Start ~ Stop Frequency | 9 kHz~150 kHz for RBW 200 Hz    |
| Start ~ Stop Frequency | 0.15 MHz~30 MHz for RBW 9 kHz   |
| Start ~ Stop Frequency | 30 MHz~1000 MHz for RBW 100 kHz |


| Spectrum Parameters                        | Setting  |
|--|--|
| Start Frequency                            | 1000 MHz   |
| Stop Frequency                             | 10th carrier harmonic or 40 GHz, whichever is lower        |
| RBW / VBW<br>(Emission in restricted band) | 1 MHz / 3 MHz for PK value<br>1 MHz / 1/T Hz for AVG value |


| Receiver Parameters    | Setting                             |
|------------------------|-------------------------------------|
| Start ~ Stop Frequency | 9 kHz~90 kHz for PK/AVG detector    |
| Start ~ Stop Frequency | 90 kHz~110 kHz for QP detector      |
| Start ~ Stop Frequency | 110 kHz~490 kHz for PK/AVG detector |
| Start ~ Stop Frequency | 490 kHz~30 MHz for QP detector      |
| Start ~ Stop Frequency | 30 MHz~1000 MHz for QP detector     |
| Start ~ Stop Frequency | 1 GHz~40 GHz for PK/AVG detector    |

### 3.3 DEVIATION FROM TEST STANDARD

No deviation.

### 3.4 TEST SETUP

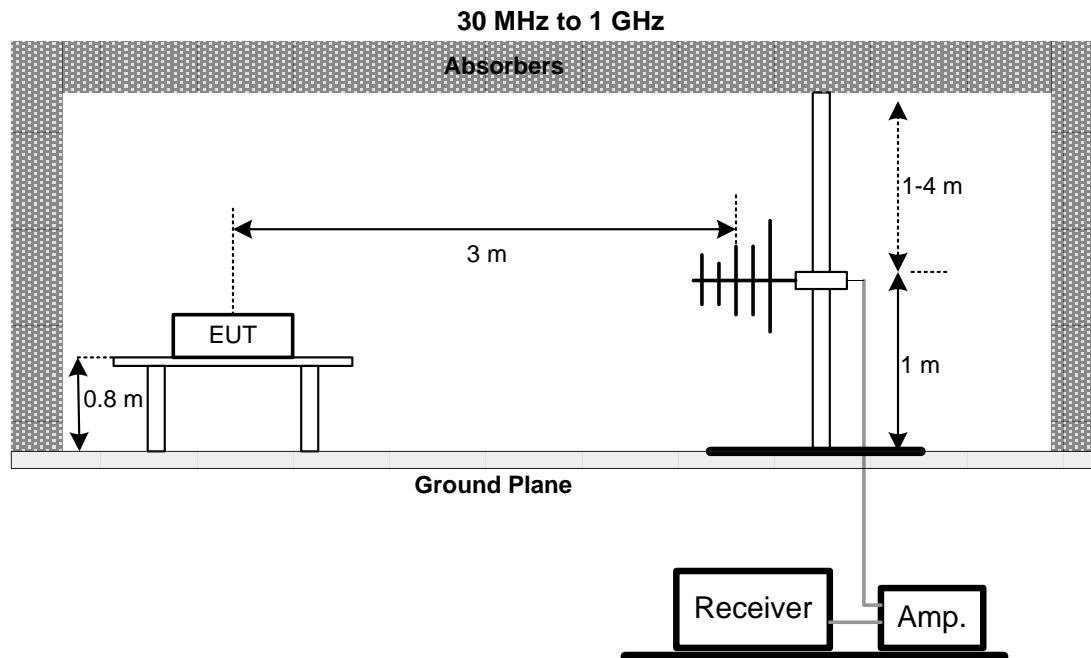

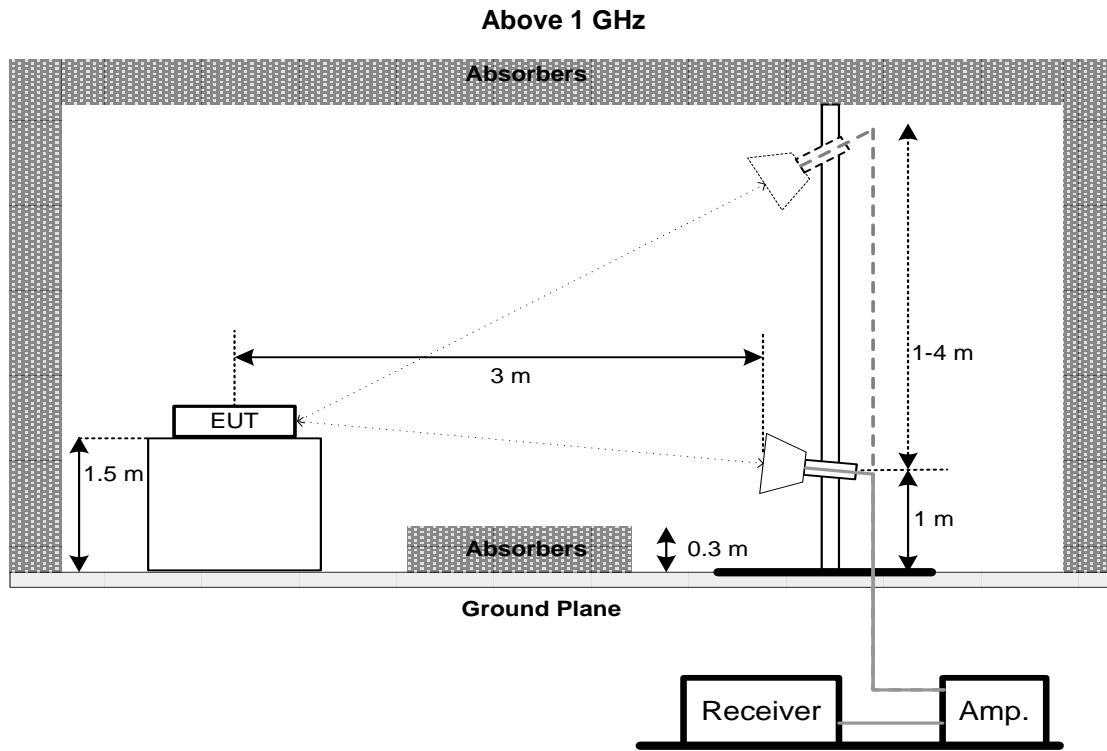

### 3.5 EUT OPERATION CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

The EUT was programmed to be in continuously transmitting/TX mode.

### 3.6 TEST RESULTS - 30 MHZ TO 1000 MHZ

Please refer to the APPENDIX A.

### 3.7 TEST RESULTS - ABOVE 1000 MHZ

Please refer to the APPENDIX B.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.  
For fundamental signal judgment was referred to Peak output test.

## 4. CONTENTION BASED PROTOCOL

### 4.1 LIMIT

Indoor access points, subordinate devices and client devices operating in the 5.925-7.125 GHz band (herein referred to as unlicensed devices) are required to use technologies that include a contention-based protocol to avoid co-channel interference with incumbent devices sharing the band. To ensure incumbent co-channel operations are detected in a technology-agnostic manner, unlicensed devices are required to detect co-channel radio frequency energy (energy detect) and avoid simultaneous transmission.

Unlicensed low-power indoor devices must detect co-channel radio frequency power that is at least -62 dBm or lower. Upon detection of energy in the band, unlicensed low power indoor devices must vacate the channel and stay off the channel as long as detected radio frequency power is equal to or greater than the threshold (-62 dBm). The -62 dBm (or lower) threshold is referenced to a 0 dBi antenna gain.

To ensure incumbent operations are reliably detected in the band, low power indoor devices must detect RF energy throughout their intended operating channel. For example, an 802.11 device that plans to transmit a 40 MHz- wide signal (on a primary 20 MHz channel and a secondary 20 MHz channel) must detect energy throughout the entire 40 MHz channel. Additionally, low-power indoor devices must detect co-channel energy with 90% or greater certainty.

Note: The EUT with a lowest gain is 3.03dBi. All power injected into EUT should be -62+3.03= -58.97dBm.

### 4.2 TEST PROCEDURE

a. Number of times detection threshold:

| If                                    | Number of Tests  | Placement of Incumbent Transmission  |
|---------------------------------------|--|--|
| $BW_{EUT} \leq BW_{Inc}$              | Once   | Tune incumbent and EUT transmissions ( $f_{c1}=f_{c2}$ )   |
| $BW_{Inc} < BW_{EUT} \leq 2BW_{Inc}$  | Once   | Incumbent transmission is contained within $BW_{EUT}$  |
| $2BW_{Inc} < BW_{EUT} \leq 4BW_{Inc}$ | Twice. Incumbent transmission is contained within $BW_{EUT}$ | Incumbent transmission is located as closely as possible to the lower edge and upper edge, respectively, of the EUT channel  |
| $BW_{EUT} > 4BW_{Inc}$                | Three times  | Incumbent transmission is located as closely as possible to the lower edge of the EUT channel, in the middle of EUT channel, and as closely as possible to the upper edge of the EUT channel |

Where:

$BW_{EUT}$ : Transmission bandwidth of EUT signal.

$BW_{Inc}$ : Transmission bandwidth of the simulated incumbent signal (10 MHz wide AWGN signal).

$f_{c1}$ : Center frequency of EUT transmission.


$f_{c2}$ : Center frequency of simulated incumbent signal.

- b. Using an AWGN signal source, generate (but do not transmit, i.e., RF OFF) a 10 MHz-wide AWGN signal. Use step b table to determine the center frequency of the 10 MHz AWGN signal relative to the EUT's channel bandwidth and center frequency.
- c. Set the AWGN signal power to an extremely low level (more than 20 dB below the -62 dBm threshold). Connect the AWGN signal source, via a 3-dB splitter, to the signal analyzer and the EUT as show in the block diagram below.
- d. Transmit the AWGN signal (RF ON) and verify its characteristics on the signal analyzer.
- e. Monitor the signal analyzer to verify if the AWGN signal has been detected and the EUT has ceased transmission. If the EUT continues to transmit, then incrementally increase the AWGN signal power level until the EUT stops transmitting.
- f. (Including all losses in the RF paths) Determine and record the AWGN signal power level (at the EUT's antenna port) at which the EUT ceased transmission. Repeat the procedure at least 10 times to verify the EUT can detect an AWGN signal with 90% (or better) level of certainty.
- g. Refer to step b table to determine number of times the detection threshold testing needs to be repeated. If testing is required more than once, then go back to step c, choose a different center frequency for the AWGN signal and repeat the process.

#### 4.3 DEVIATION FROM STANDARD

No deviation.

#### 4.4 TEST SETUP

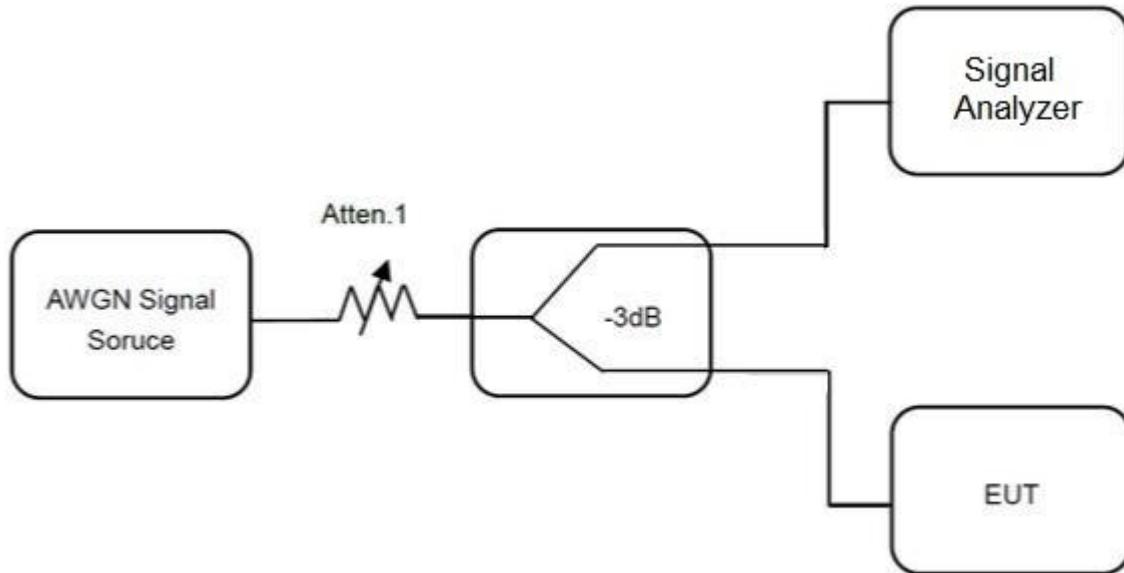

#### 4.5 EUT OPERATION CONDITIONS

The EUT was Configured to be in normally transmitting mode with a constant duty cycle.

#### 4.6 TEST RESULTS

Please refer to the APPENDIX C.

## 5. MEASUREMENT INSTRUMENTS LIST

| Radiated Emissions - 30 MHz to 1 GHz |                      |              |                          |             |                  |
|--------------------------------------|----------------------|--------------|--------------------------|-------------|------------------|
| Item                                 | Kind of Equipment    | Manufacturer | Type No.                 | Serial No.  | Calibrated until |
| 1                                    | Antenna              | Schwarzbeck  | VULB9160                 | 9160-3232   | Mar. 15, 2022    |
| 2                                    | Amplifier            | HP           | 8447D                    | 2944A08742  | Feb. 28, 2022    |
| 3                                    | Cable                | emci         | LMR-400                  | N/A         | Nov. 30, 2022    |
| 4                                    | Controller           | CT           | SC100                    | N/A         | N/A              |
| 5                                    | Controller           | MF           | MF-7802                  | MF780208416 | N/A              |
| 6                                    | Receiver             | Agilent      | N9038A                   | MY52130039  | Mar. 19, 2022    |
| 7                                    | Measurement Software | Farad        | EZ-EMC<br>Ver.NB-03A1-01 | N/A         | N/A              |
| 8                                    | 966 Chamber Room     | RM           | 9*6*6                    | N/A         | Jul. 24, 2022    |

| Radiated Emissions - Above 1 GHz |                                     |                |                          |               |                  |
|----------------------------------|-------------------------------------|----------------|--------------------------|---------------|------------------|
| Item                             | Kind of Equipment                   | Manufacturer   | Type No.                 | Serial No.    | Calibrated until |
| 1                                | Double Ridged Guide Antenna         | ETS            | 3115                     | 75789         | May 10, 2022     |
| 2                                | Broad-Band Horn Antenna             | Schwarzbeck    | BBHA 9170                | 9170319       | Jun. 30, 2022    |
| 3                                | Amplifier                           | Agilent        | 8449B                    | 3008A02584    | Jul. 10, 2022    |
| 4                                | Microwave Preamplifier With Adaptor | EMC INSTRUMENT | EMC2654045               | 980039 & HA01 | Feb. 28, 2022    |
| 5                                | Receiver                            | Agilent        | N9038A                   | MY52130039    | Mar. 19, 2022    |
| 6                                | Controller                          | CT             | SC100                    | N/A           | N/A              |
| 7                                | Controller                          | MF             | MF-7802                  | MF780208416   | N/A              |
| 8                                | Cable                               | N/A            | EMC104-SM-SM-6000        | N/A           | Oct. 16, 2022    |
| 9                                | Measurement Software                | Farad          | EZ-EMC<br>Ver.NB-03A1-01 | N/A           | N/A              |
| 10                               | Band Reject Filter                  | Micro-Tronics  | BRC50705-01              | 10            | Feb. 27, 2022    |
| 11                               | Band Reject Filter                  | Micro-Tronics  | BRC50704-01              | 8             | Feb. 27, 2022    |
| 12                               | Band Reject Filter                  | Micro-Tronics  | BRC50703-01              | 7             | Feb. 27, 2022    |
| 13                               | 966 Chamber Room                    | RM             | 9*6*6m                   | N/A           | Jul. 25, 2022    |

| Contention Based Protocol |                                |               |                   |               |                  |
|---------------------------|--------------------------------|---------------|-------------------|---------------|------------------|
| Item                      | Kind of Equipment              | Manufacturer  | Type No.          | Serial No.    | Calibrated until |
| 1                         | EXA Spectrum Analyzer          | Agilent       | N9010A            | MY55150209    | Jul. 10, 2022    |
| 2                         | Frequency expansion instrument | Keysight      | N5182BX07         | MY59360135    | N/A              |
| 3                         | MXG Vector Signal Generator    | Keysight      | N5182B            | MY57300568    | Jul. 10, 2022    |
| 4                         | Wi-Fi Router                   | ASUS          | GT-AXE11000       | N/A           | N/A              |
| 5                         | POWER SPLITTER                 | Mini-Circuits | ZN4PD1-63-S+      | SF9335D1045-2 | Feb. 07, 2022    |
| 6                         | POWER SPLITTER                 | Mini-Circuits | ZFRSC-183-S+      | SF601301339-1 | Feb. 07, 2022    |
| 7                         | Cable                          | N/A           | EMC104-SM-SM-6000 | N/A           | Oct. 16, 2022    |

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.

**APPENDIX A - RADIATED EMISSION - 30 MHZ TO 1000 MHZ**

|           |             |              |          |
|-----------|-------------|--------------|----------|
| Test Mode | Normal Mode | Polarization | Vertical |
|-----------|-------------|--------------|----------|




| No. | Mk. | Freq.    | Reading | Correct | Measure- | Limit  | Margin | Detector | Comment |
|-----|-----|----------|---------|---------|----------|--------|--------|----------|---------|
|     |     |          | Level   | Factor  | ment     |        |        |          |         |
|     |     | MHz      | dBuV    | dB      | dBuV/m   | dBuV/m | dB     |          |         |
| 1   |     | 33.8800  | 47.62   | -15.09  | 32.53    | 40.00  | -7.47  | peak     |         |
| 2   | *   | 75.5900  | 52.62   | -17.45  | 35.17    | 40.00  | -4.83  | peak     |         |
| 3   |     | 151.2500 | 44.75   | -12.59  | 32.16    | 43.50  | -11.34 | peak     |         |
| 4   |     | 378.2300 | 40.01   | -9.30   | 30.71    | 46.00  | -15.29 | peak     |         |
| 5   |     | 570.2900 | 37.32   | -5.35   | 31.97    | 46.00  | -14.03 | peak     |         |
| 6   |     | 806.9700 | 38.19   | -0.67   | 37.52    | 46.00  | -8.48  | peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |             |              |            |
|-----------|-------------|--------------|------------|
| Test Mode | Normal Mode | Polarization | Horizontal |
|-----------|-------------|--------------|------------|

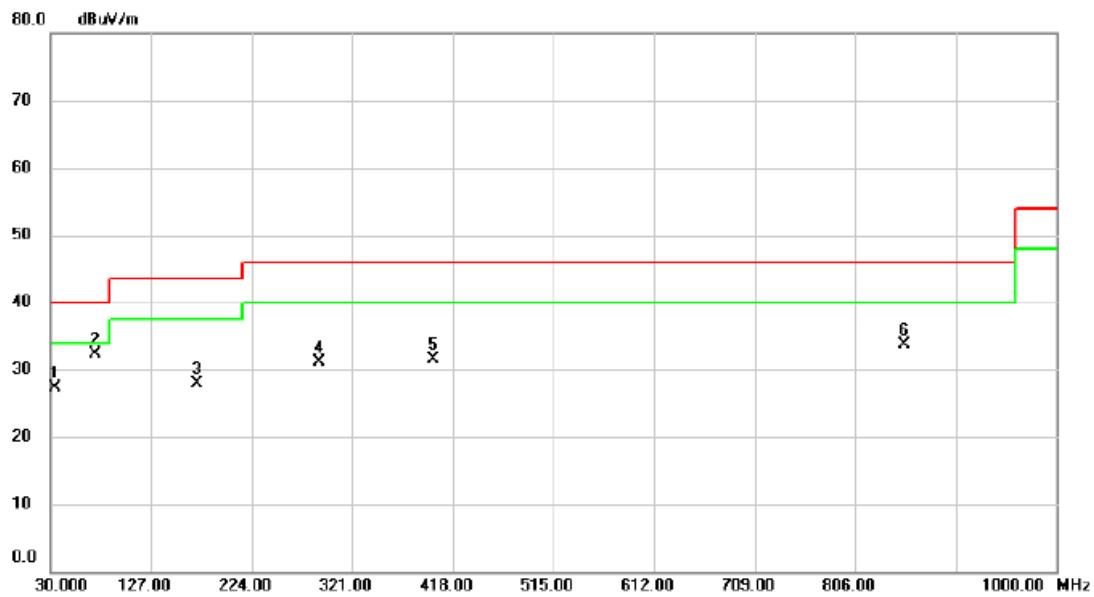


| No. | Mk. | Freq.    | Reading | Correct | Measure- | Limit | Margin | Detector | Comment |
|-----|-----|----------|---------|---------|----------|-------|--------|----------|---------|
|     |     |          | Level   | Factor  | ment     |       |        |          |         |
| 1   |     | 33.8800  | 42.37   | -15.09  | 27.28    | 40.00 | -12.72 | peak     |         |
| 2   | *   | 72.6800  | 49.19   | -16.81  | 32.38    | 40.00 | -7.62  | peak     |         |
| 3   |     | 171.6200 | 40.63   | -12.75  | 27.88    | 43.50 | -15.62 | peak     |         |
| 4   |     | 289.9600 | 42.27   | -11.22  | 31.05    | 46.00 | -14.95 | peak     |         |
| 5   |     | 398.6000 | 40.26   | -8.81   | 31.45    | 46.00 | -14.55 | peak     |         |
| 6   |     | 853.5300 | 34.24   | -0.58   | 33.66    | 46.00 | -12.34 | peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

**APPENDIX B - RADIATED EMISSION - ABOVE 1000 MHZ**

|           |                                   |              |          |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-5_TX AX(HE160) Mode 6345 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

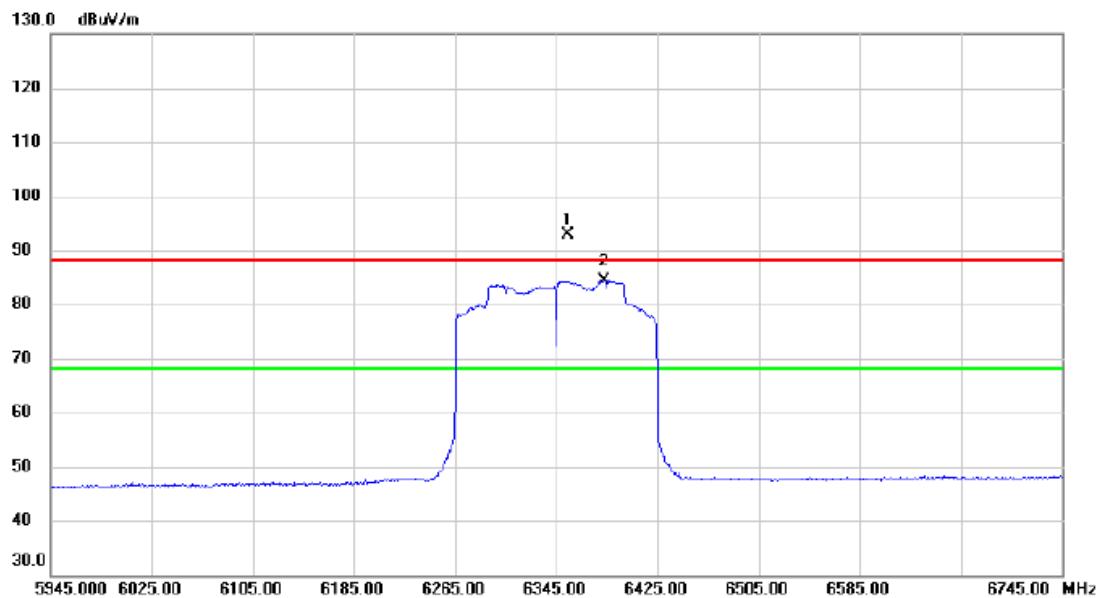


| No. | Mk. | Freq.    | Reading | Correct | Measure- | Limit  | Margin | Detector | Comment  |
|-----|-----|----------|---------|---------|----------|--------|--------|----------|----------|
|     |     |          | Level   | Factor  | ment     |        |        |          |          |
|     |     | MHz      | dBuV    | dB      | dBuV/m   | dBuV/m | dB     |          |          |
| 1   | X   | 6353.800 | 75.36   | 17.63   | 92.99    | 88.20  | 4.79   | peak     | No Limit |
| 2   | *   | 6383.400 | 66.80   | 17.69   | 84.49    | 68.20  | 16.29  | AVG      | No Limit |

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |          |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-5_TX AX(HE160) Mode 6345 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

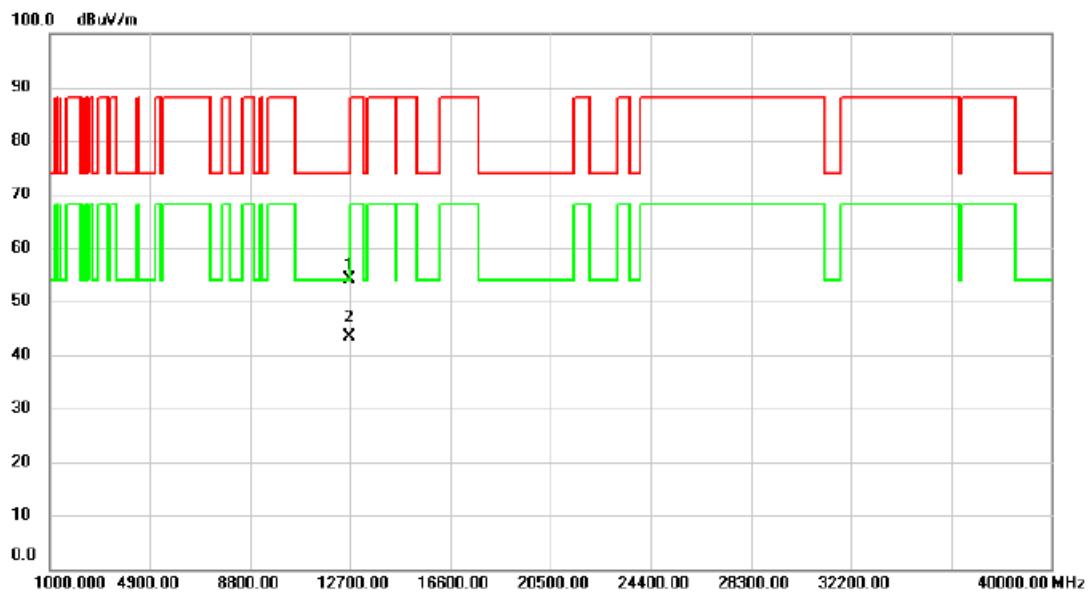


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measure-<br>ment | Limit | Margin   |         |
|-----|-----|----------|---------------|----------------|------------------|-------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m           | dB    | Detector | Comment |
| 1   |     | 12688.17 | 37.85         | 16.30          | 54.15            | 74.00 | -19.85   | peak    |
| 2   | *   | 12689.87 | 27.03         | 16.30          | 43.33            | 54.00 | -10.67   | AVG     |

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |            |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-5_TX AX(HE160) Mode 6345 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

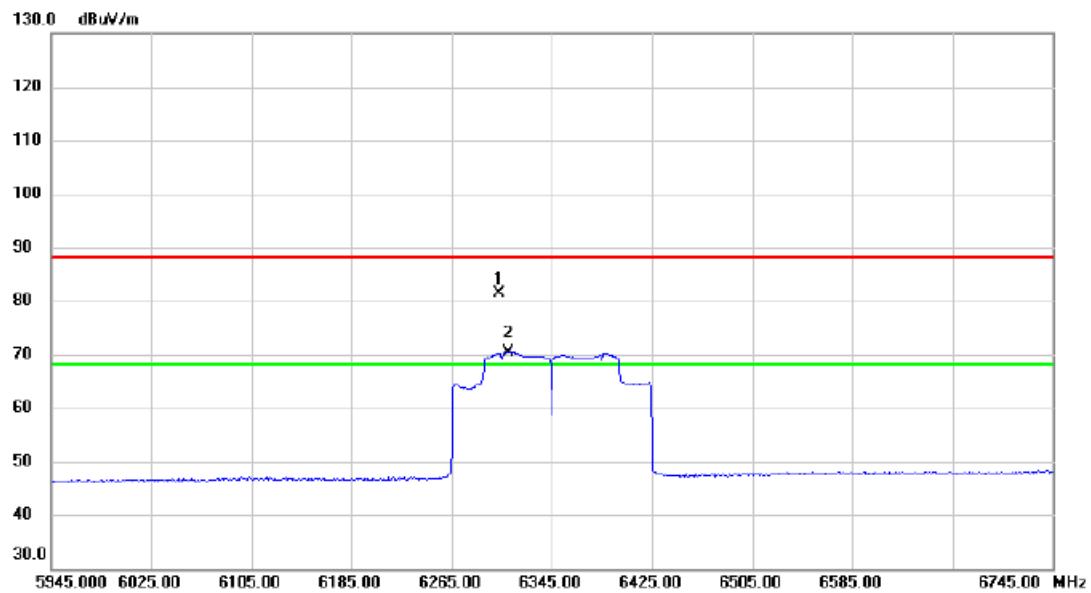


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measure-<br>ment | Limit | Margin   |               |
|-----|-----|----------|---------------|----------------|------------------|-------|----------|---------------|
|     |     | MHz      | dBuV          | dB             | dBuV/m           | dB    | Detector | Comment       |
| 1   |     | 6302.600 | 63.84         | 17.53          | 81.37            | 88.20 | -6.83    | peak No Limit |
| 2   | *   | 6310.600 | 52.84         | 17.54          | 70.38            | 68.20 | 2.18     | AVG No Limit  |

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |            |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-5_TX AX(HE160) Mode 6345 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

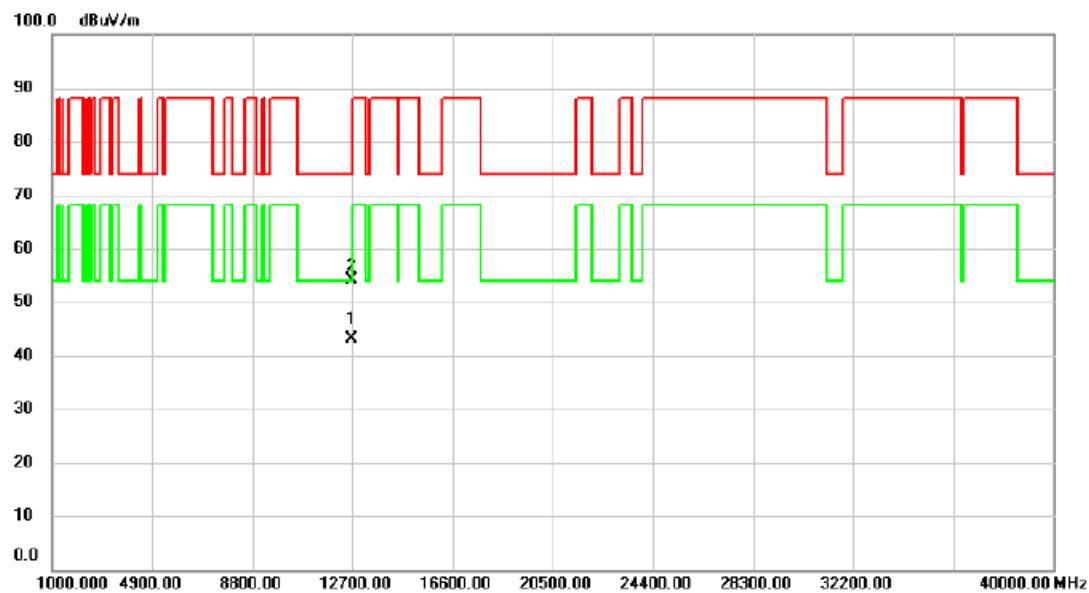


| No. | Mk. | Freq.    | Reading | Correct | Measure- | Limit | Margin | Detector | Comment |
|-----|-----|----------|---------|---------|----------|-------|--------|----------|---------|
|     |     |          | Level   | Factor  | ment     |       |        |          |         |
| 1   | *   | 12691.30 | 26.84   | 16.31   | 43.15    | 54.00 | -10.85 | AVG      |         |
| 2   |     | 12691.64 | 37.72   | 16.31   | 54.03    | 74.00 | -19.97 | peak     |         |

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |          |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-6_TX AX(HE160) Mode 6505 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

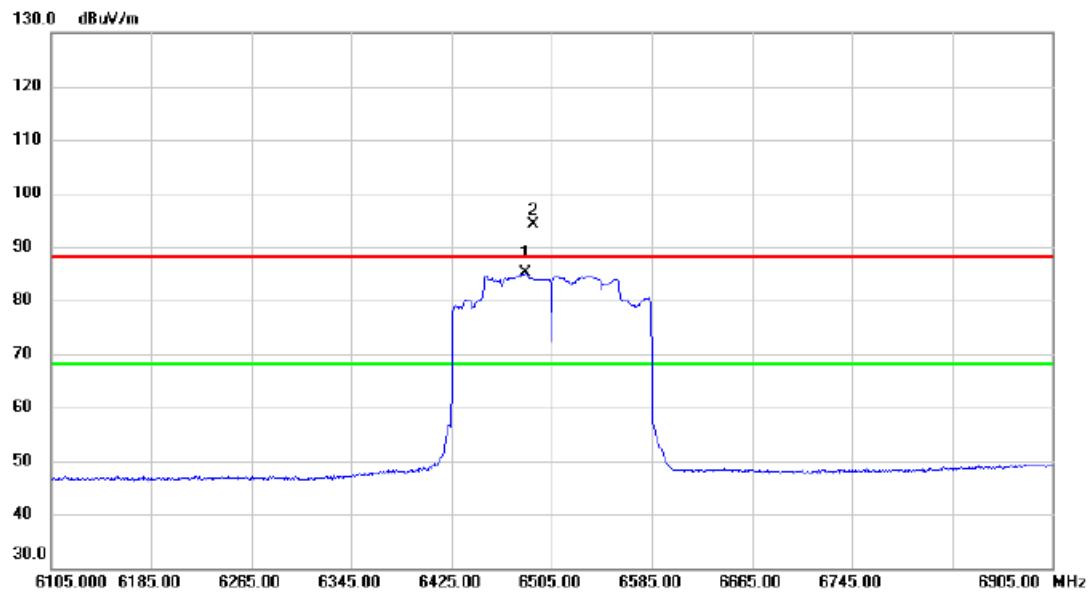


| No. | Mk. | Freq.    | Reading | Correct | Measure- | Limit  | Margin | Detector | Comment  |
|-----|-----|----------|---------|---------|----------|--------|--------|----------|----------|
|     |     |          | Level   | Factor  | ment     |        |        |          |          |
|     |     | MHz      | dBuV    | dB      | dBuV/m   | dBuV/m | dB     |          |          |
| 1   | *   | 6484.200 | 67.19   | 17.87   | 85.06    | 68.20  | 16.86  | AVG      | No Limit |
| 2   | X   | 6490.600 | 76.22   | 17.88   | 94.10    | 88.20  | 5.90   | peak     | No Limit |

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |          |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-6_TX AX(HE160) Mode 6505 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

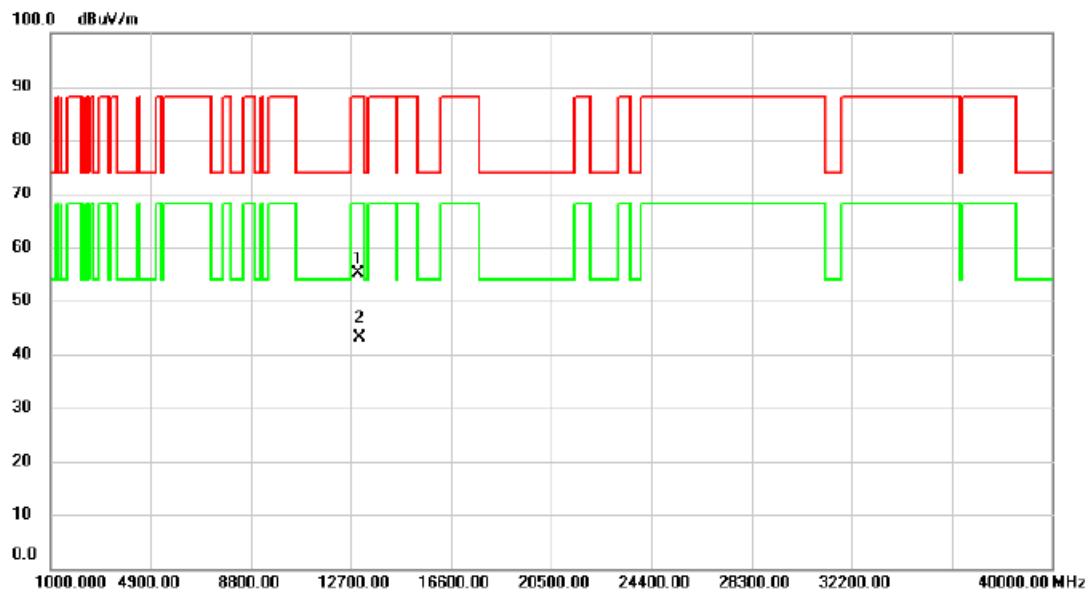


| No. | Mk. | Freq.    | Reading | Correct | Measure- | Limit | Margin | Detector | Comment |
|-----|-----|----------|---------|---------|----------|-------|--------|----------|---------|
|     |     |          | Level   | Factor  | ment     |       |        |          |         |
|     |     | MHz      | dBuV    | dB      | dBuV/m   | dB    |        |          |         |
| 1   |     | 13011.74 | 38.37   | 16.65   | 55.02    | 88.20 | -33.18 | peak     |         |
| 2   | *   | 13012.22 | 26.39   | 16.65   | 43.04    | 68.20 | -25.16 | AVG      |         |

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |            |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-6_TX AX(HE160) Mode 6505 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

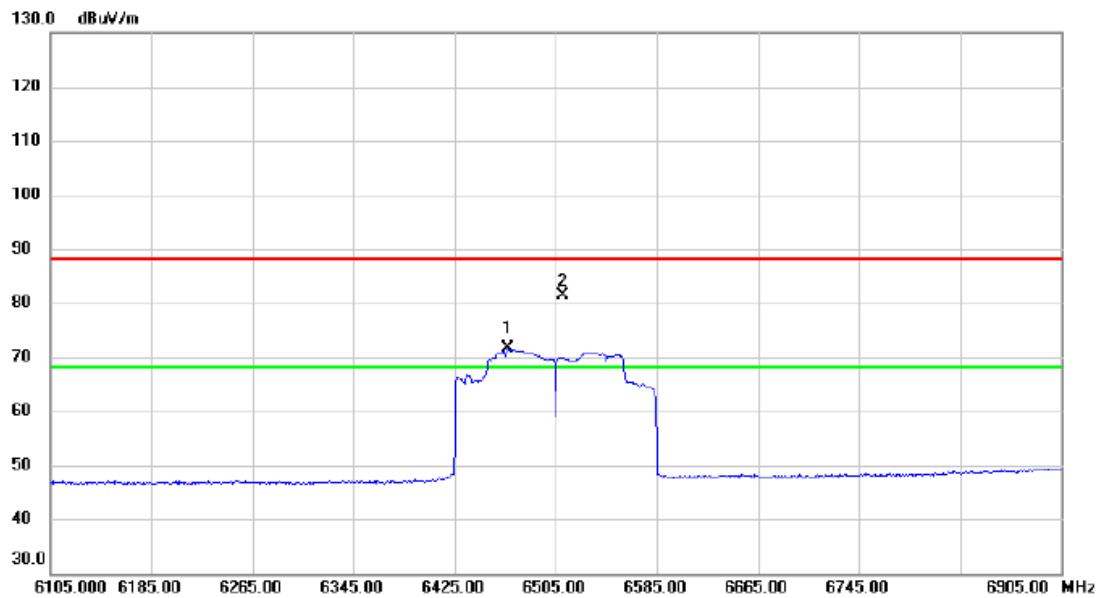


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measure-<br>ment | Limit | Margin   |               |
|-----|-----|----------|---------------|----------------|------------------|-------|----------|---------------|
|     |     | MHz      | dBuV          | dB             | dBuV/m           | dB    | Detector | Comment       |
| 1   | *   | 6467.400 | 53.71         | 17.84          | 71.55            | 68.20 | 3.35     | AVG No Limit  |
| 2   |     | 6511.400 | 63.46         | 17.95          | 81.41            | 88.20 | -6.79    | peak No Limit |

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |            |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-6_TX AX(HE160) Mode 6505 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

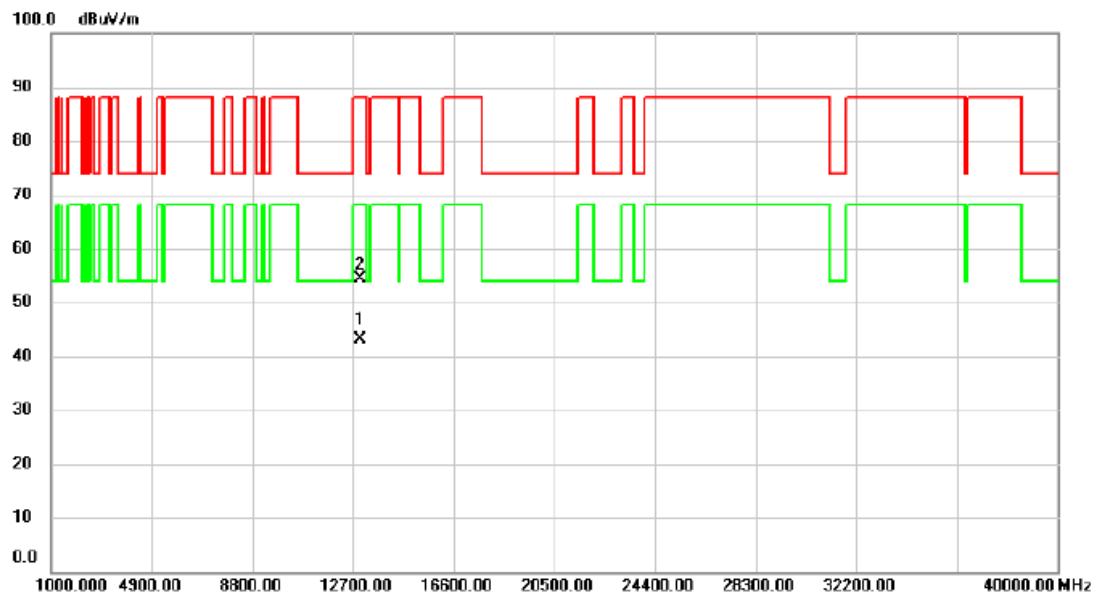


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measure-<br>ment | Limit | Margin   |         |
|-----|-----|----------|---------------|----------------|------------------|-------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m           | dB    | Detector | Comment |
| 1   | *   | 13009.44 | 26.47         | 16.65          | 43.12            | 68.20 | -25.08   | AVG     |
| 2   |     | 13011.15 | 37.66         | 16.65          | 54.31            | 88.20 | -33.89   | peak    |

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |          |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-7_TX AX(HE160) Mode 6665 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

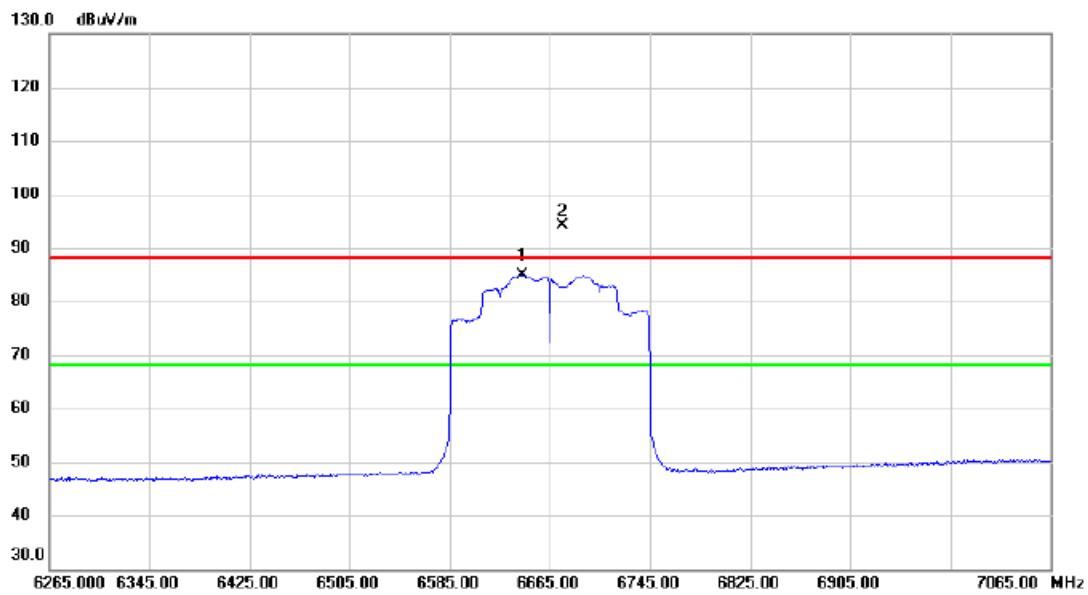


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measure-<br>ment | Limit  | Margin |          |          |
|-----|-----|----------|---------------|----------------|------------------|--------|--------|----------|----------|
|     |     | MHz      | dBuV          | dB             | dBuV/m           | dBuV/m | dB     | Detector | Comment  |
| 1   | *   | 6643.400 | 66.40         | 18.58          | 84.98            | 68.20  | 16.78  | AVG      | No Limit |
| 2   | X   | 6674.600 | 75.28         | 18.74          | 94.02            | 88.20  | 5.82   | peak     | No Limit |

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |          |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-7_TX AX(HE160) Mode 6665 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

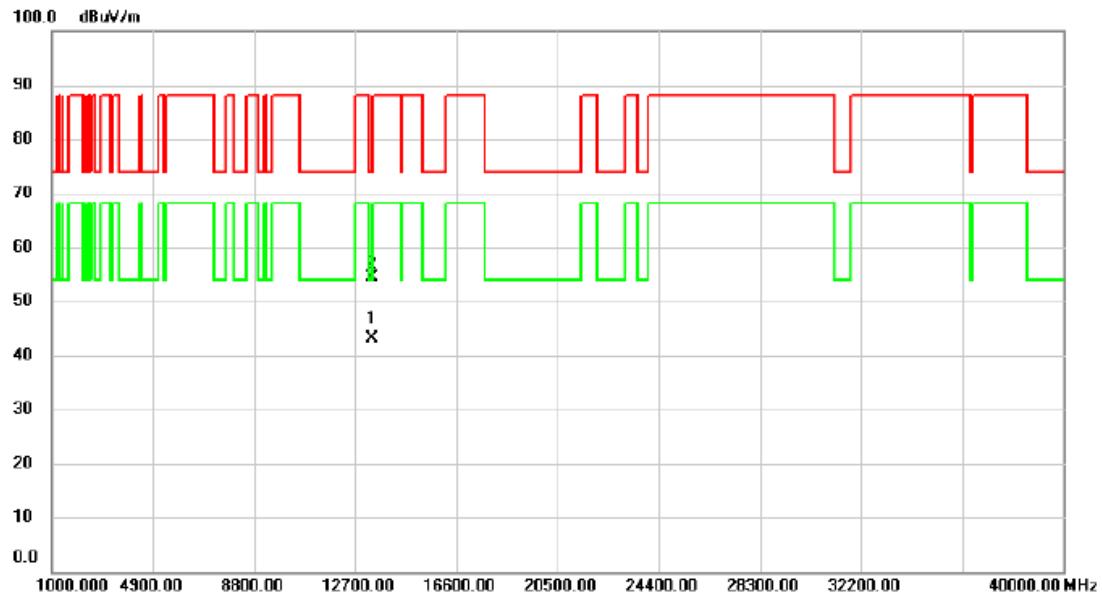


| No. | Mk. | Freq.    | Reading | Correct | Measure- | Limit | Margin   |         |
|-----|-----|----------|---------|---------|----------|-------|----------|---------|
|     |     |          | Level   | Factor  | ment     |       |          |         |
|     |     | MHz      | dBuV    | dB      | dBuV/m   | dB    | Detector | Comment |
| 1   | *   | 13330.16 | 25.88   | 17.19   | 43.07    | 54.00 | -10.93   | AVG     |
| 2   |     | 13330.75 | 37.14   | 17.19   | 54.33    | 74.00 | -19.67   | peak    |

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |            |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-7_TX AX(HE160) Mode 6665 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

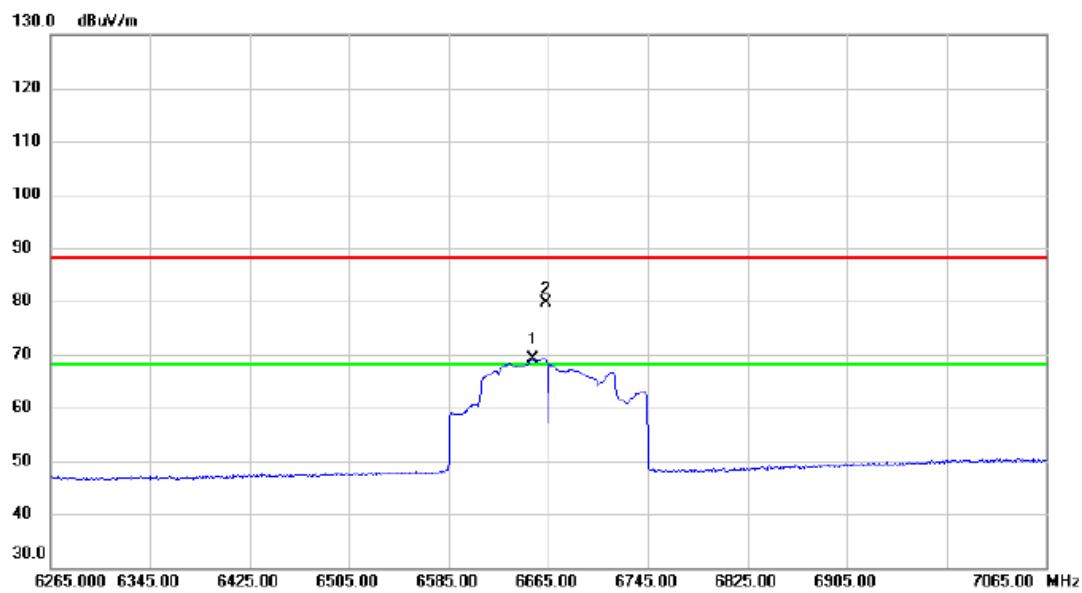


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measure-<br>ment | Limit | Margin   |               |
|-----|-----|----------|---------------|----------------|------------------|-------|----------|---------------|
|     |     | MHz      | dBuV          | dB             | dBuV/m           | dB    | Detector | Comment       |
| 1   | *   | 6663.000 | 50.45         | 18.64          | 69.09            | 68.20 | 0.89     | AVG No Limit  |
| 2   |     | 6663.400 | 60.84         | 18.69          | 79.53            | 88.20 | -8.67    | peak No Limit |

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |            |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-7_TX AX(HE160) Mode 6665 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

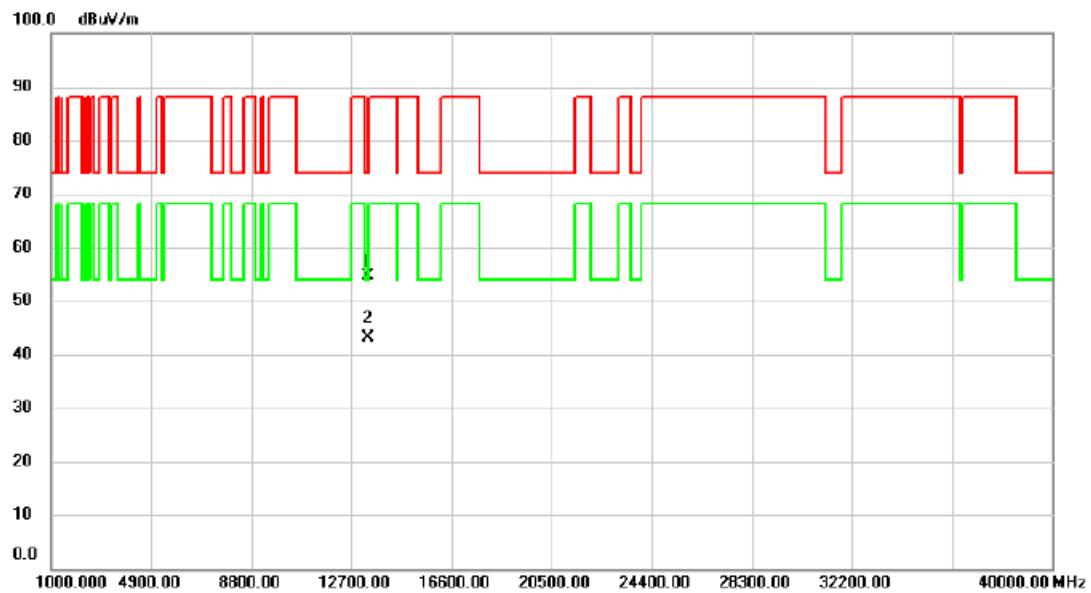


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measure-<br>ment | Limit | Margin   |         |
|-----|-----|----------|---------------|----------------|------------------|-------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m           | dB    | Detector | Comment |
| 1   |     | 13329.57 | 37.41         | 17.19          | 54.60            | 74.00 | -19.40   | peak    |
| 2   | *   | 13331.32 | 25.81         | 17.20          | 43.01            | 54.00 | -10.99   | AVG     |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |          |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-8_TX AX(HE160) Mode 6985 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

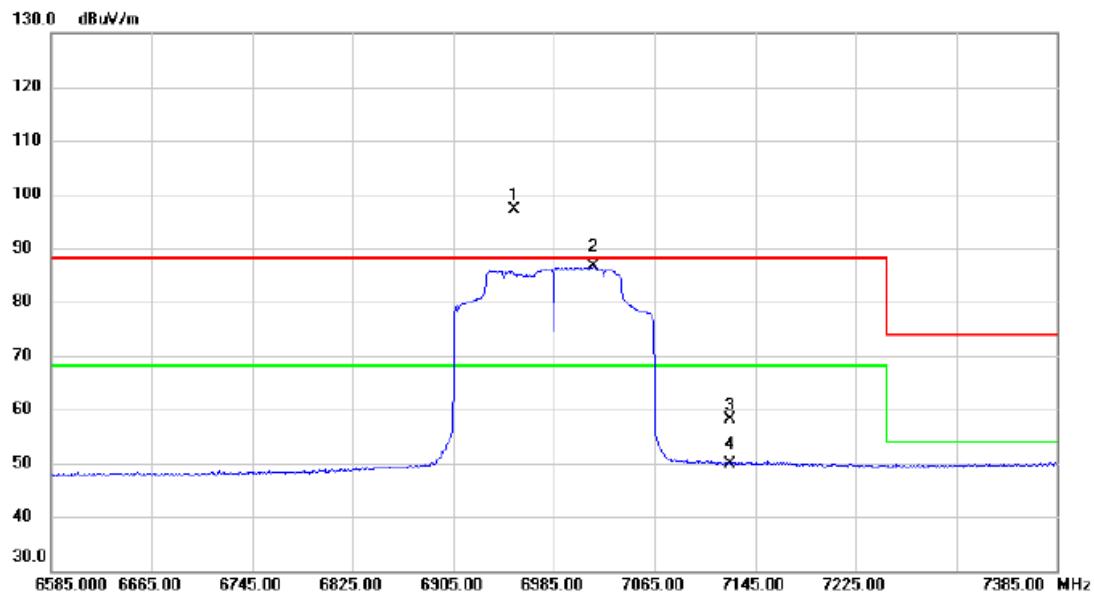


| No. | Mk. | Freq.    | Reading | Correct | Measure- | Limit  | Margin | Detector | Comment  |
|-----|-----|----------|---------|---------|----------|--------|--------|----------|----------|
|     |     |          | Level   | Factor  | ment     |        |        |          |          |
|     |     | MHz      | dBuV    | dB      | dBuV/m   | dBuV/m | dB     |          |          |
| 1   | X   | 6953.800 | 77.18   | 20.07   | 97.25    | 88.20  | 9.05   | peak     | No Limit |
| 2   | *   | 7016.200 | 66.22   | 20.31   | 86.53    | 68.20  | 18.33  | AVG      | No Limit |
| 3   |     | 7125.000 | 37.73   | 20.46   | 58.19    | 88.20  | -30.01 | peak     |          |
| 4   |     | 7125.000 | 29.52   | 20.46   | 49.98    | 68.20  | -18.22 | AVG      |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |          |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-8_TX AX(HE160) Mode 6985 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

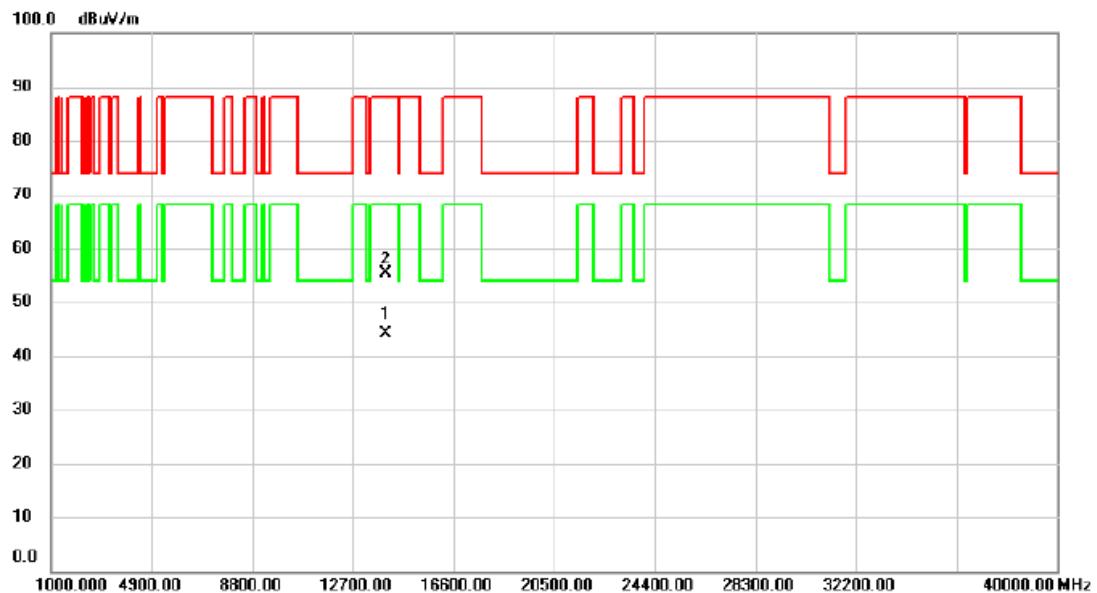


| No. | Mk. | Freq.    | Reading | Correct | Measure- | Limit | Margin | Detector | Comment |
|-----|-----|----------|---------|---------|----------|-------|--------|----------|---------|
|     |     |          | Level   | Factor  | ment     |       |        |          |         |
| 1   | *   | 13970.01 | 25.61   | 18.51   | 44.12    | 68.20 | -24.08 | AVG      |         |
| 2   |     | 13971.85 | 36.83   | 18.51   | 55.34    | 88.20 | -32.86 | peak     |         |

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |            |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-8_TX AX(HE160) Mode 6985 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

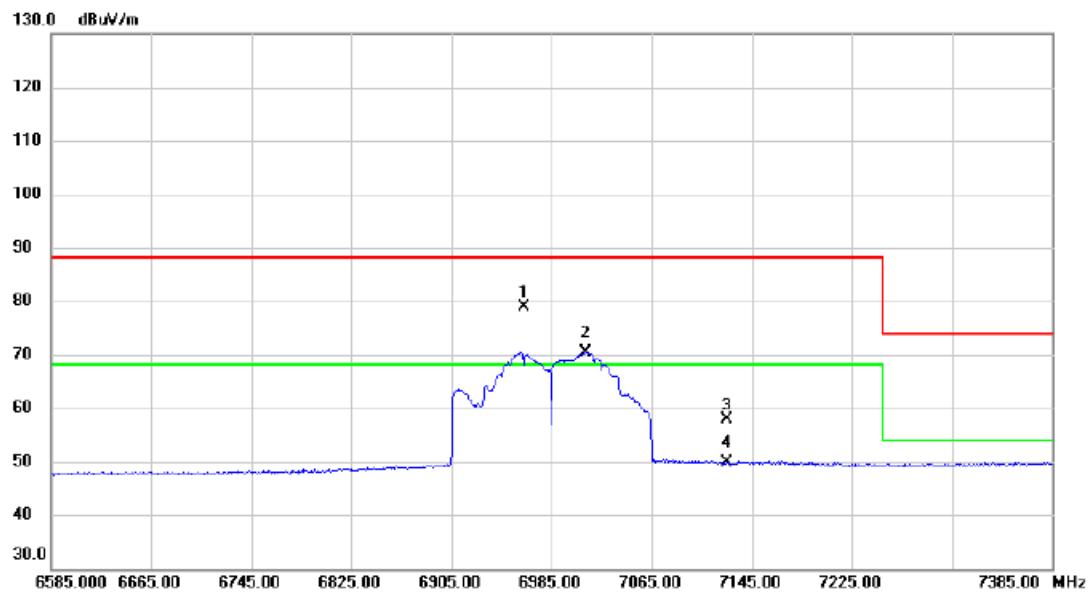


| No. | Mk. | Freq.    | Reading | Correct | Measure- | Limit  | Margin | Detector | Comment  |
|-----|-----|----------|---------|---------|----------|--------|--------|----------|----------|
|     |     |          | Level   | Factor  | ment     |        |        |          |          |
|     |     | MHz      | dBuV    | dB      | dBuV/m   | dBuV/m | dB     |          |          |
| 1   |     | 6963.400 | 58.72   | 20.12   | 78.84    | 88.20  | -9.36  | peak     | No Limit |
| 2   | *   | 7012.200 | 50.10   | 20.30   | 70.40    | 68.20  | 2.20   | AVG      | No Limit |
| 3   |     | 7125.000 | 37.53   | 20.46   | 57.99    | 88.20  | -30.21 | peak     |          |
| 4   |     | 7125.000 | 29.33   | 20.46   | 49.79    | 68.20  | -18.41 | AVG      |          |

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |            |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-8_TX AX(HE160) Mode 6985 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

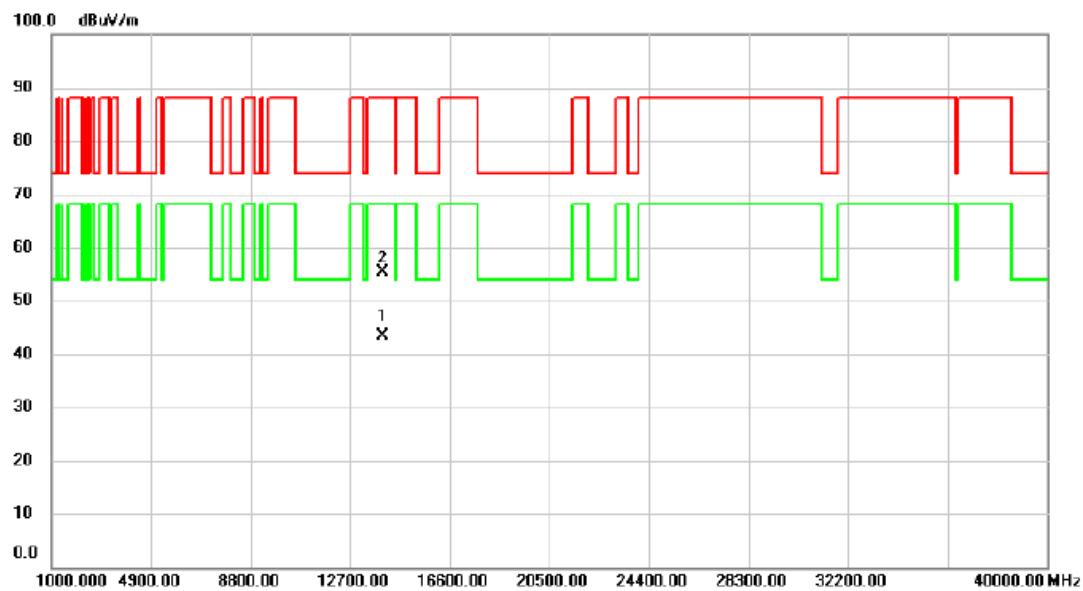


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measure-<br>ment | Limit | Margin   |         |
|-----|-----|----------|---------------|----------------|------------------|-------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m           | dB    | Detector | Comment |
| 1   | *   | 13970.90 | 24.95         | 18.51          | 43.46            | 68.20 | -24.74   | AVG     |
| 2   |     | 13970.99 | 36.98         | 18.51          | 55.49            | 88.20 | -32.71   | peak    |

**REMARKS:**


- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

## **APPENDIX C - CONTENTION BASED PROTOCOL**


Test Mode UNII-5, UNII-6, UNII-7, UNII-8

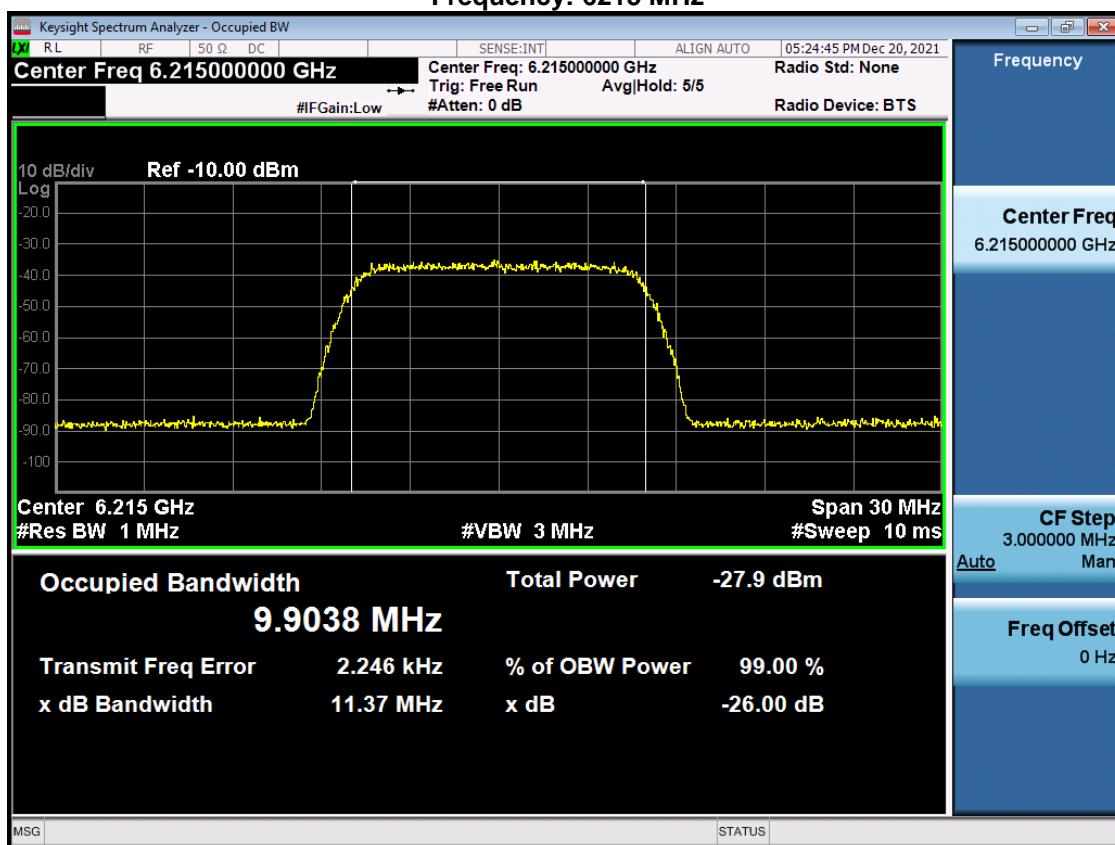**Incumbent Signal (AWGN)**  
**Frequency: 6215 MHz**


## Frequency: 6110 MHz

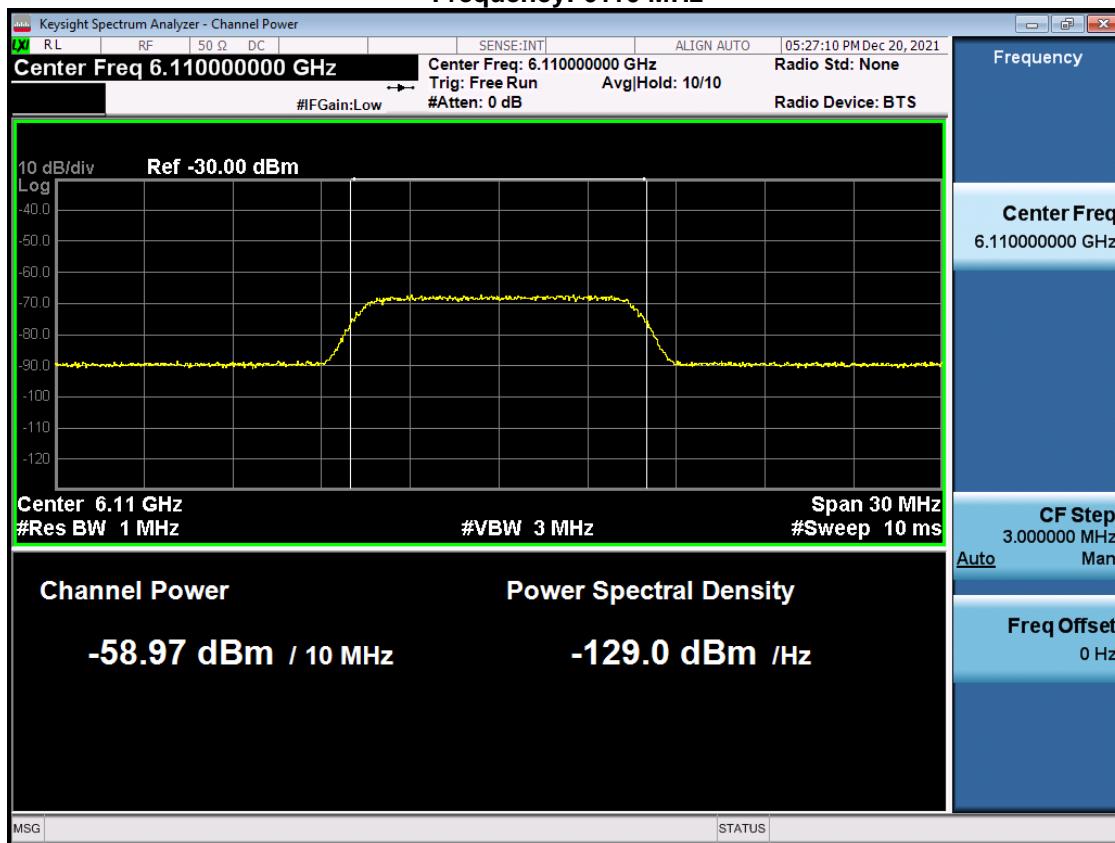


## Frequency: 6185 MHz

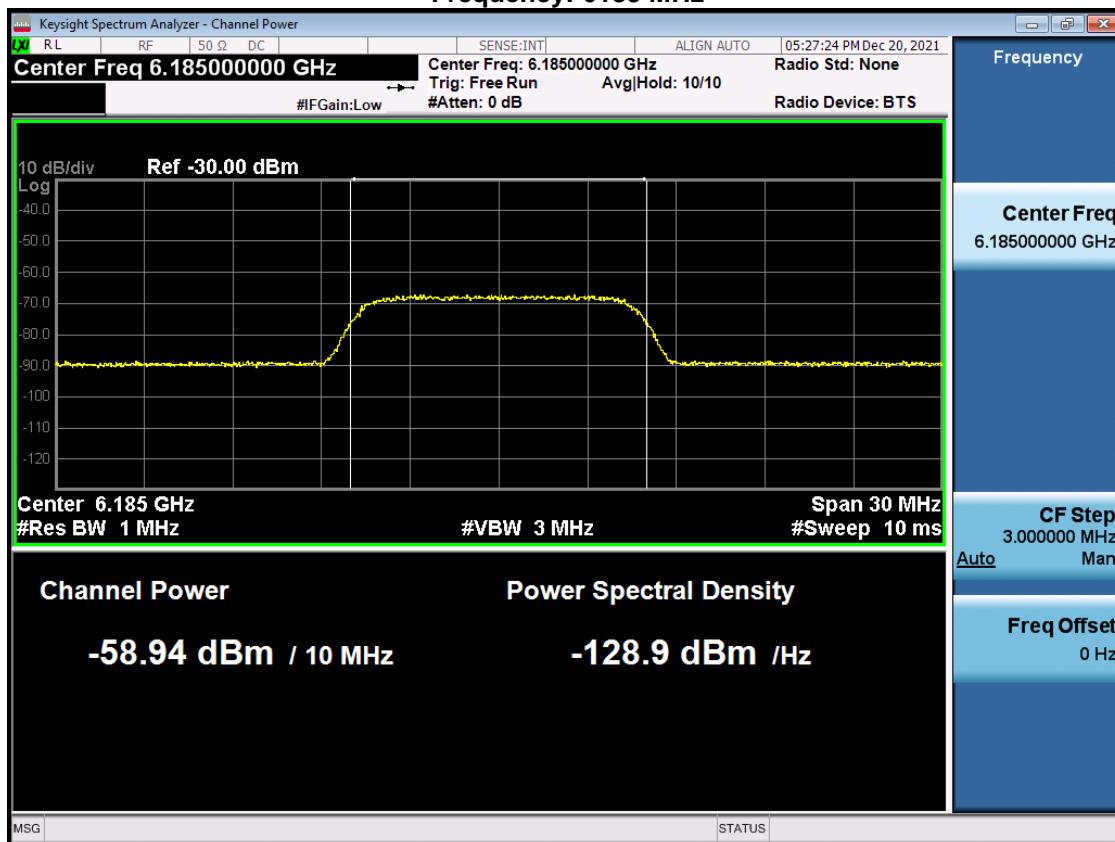


## Frequency: 6215 MHz

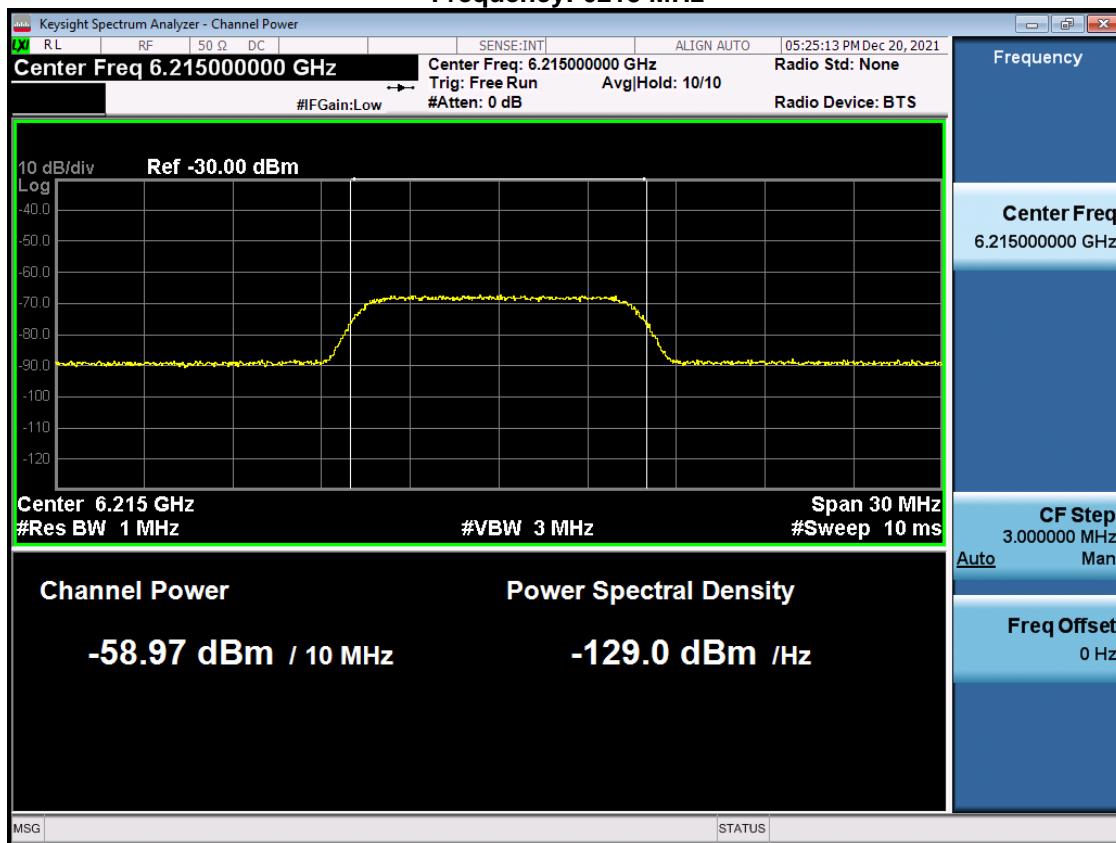


## Frequency: 6260 MHz

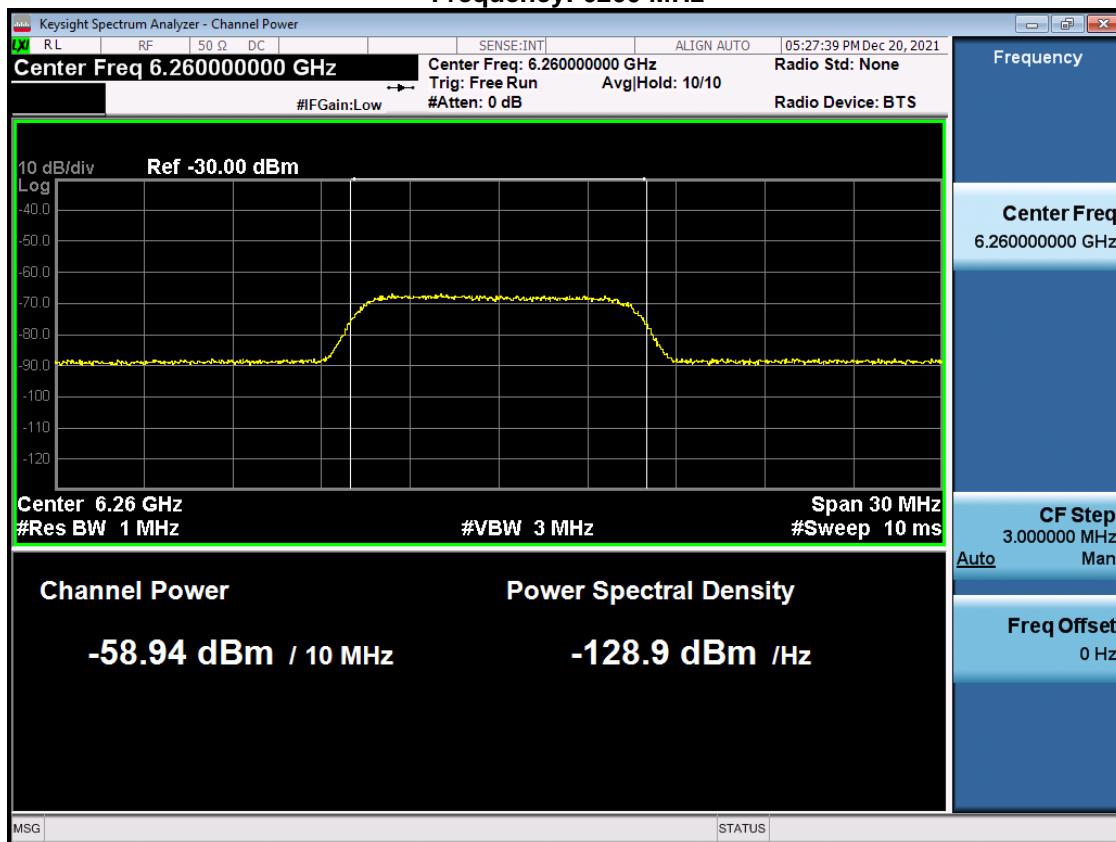


## Frequency: 6430 MHz

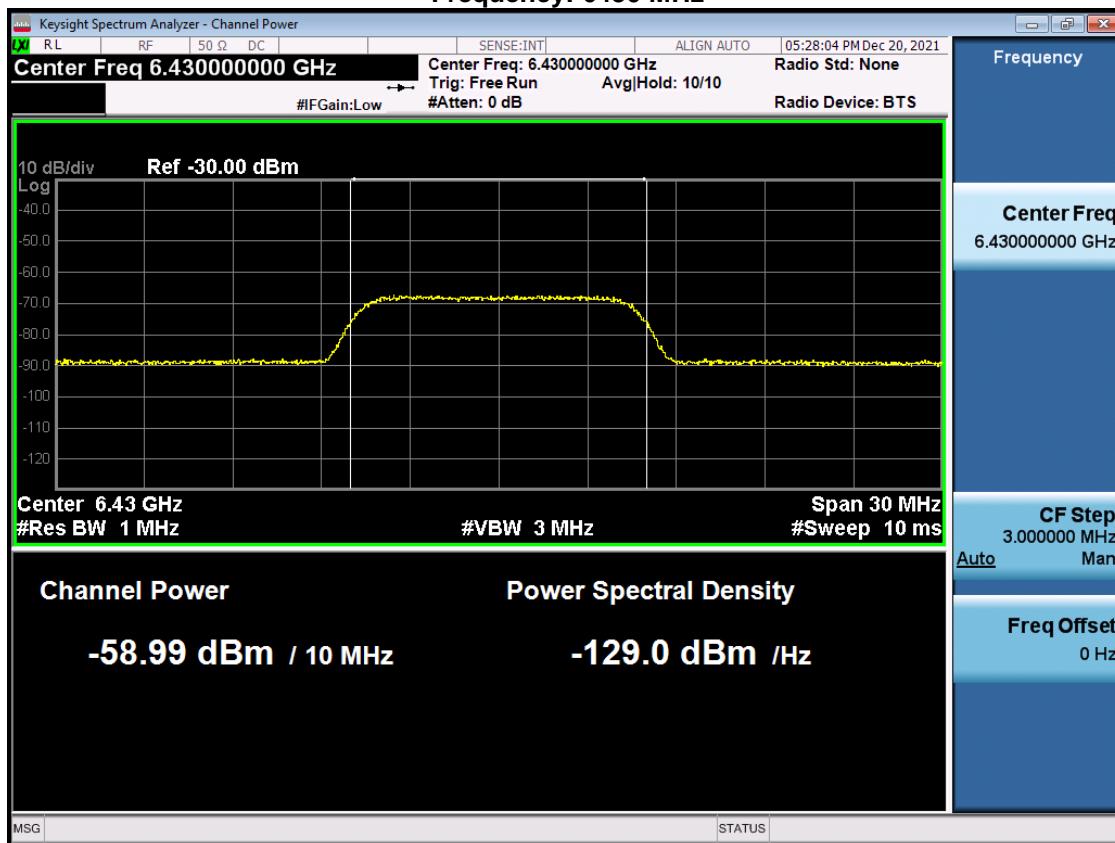


## Frequency: 6455 MHz

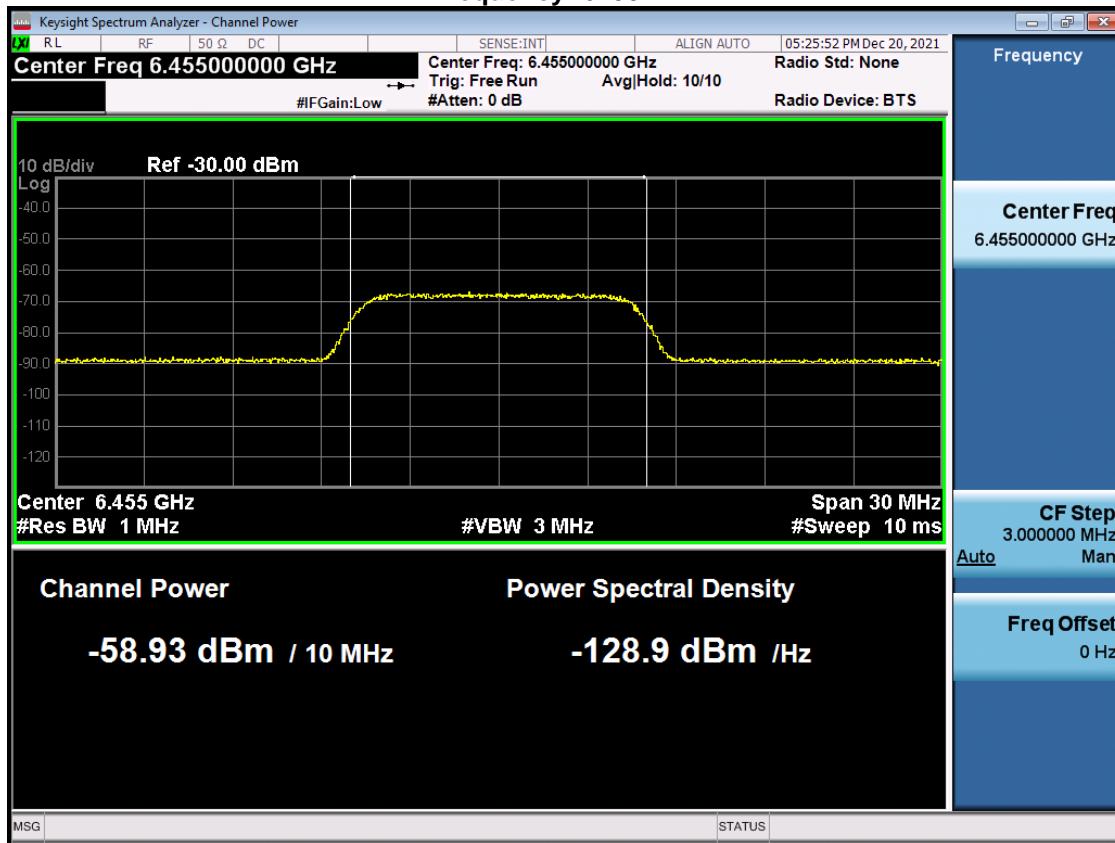


## Frequency: 6505 MHz

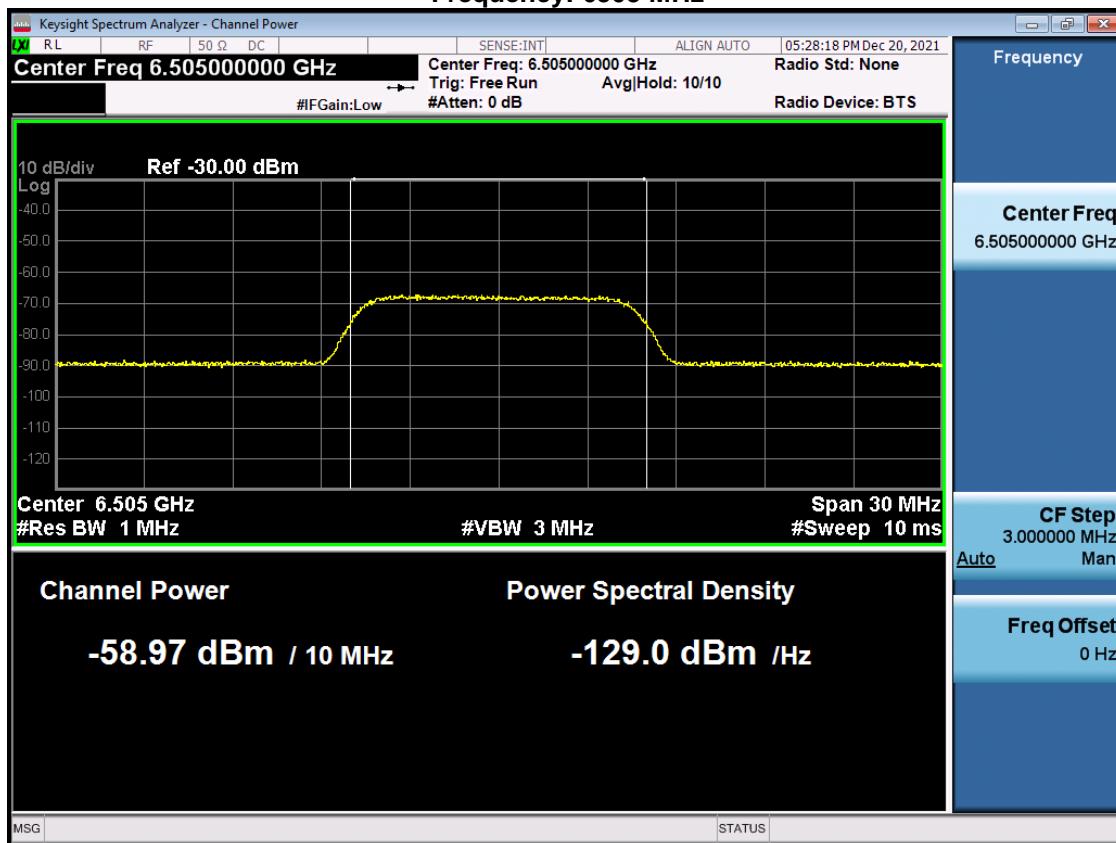


## Frequency: 6580 MHz

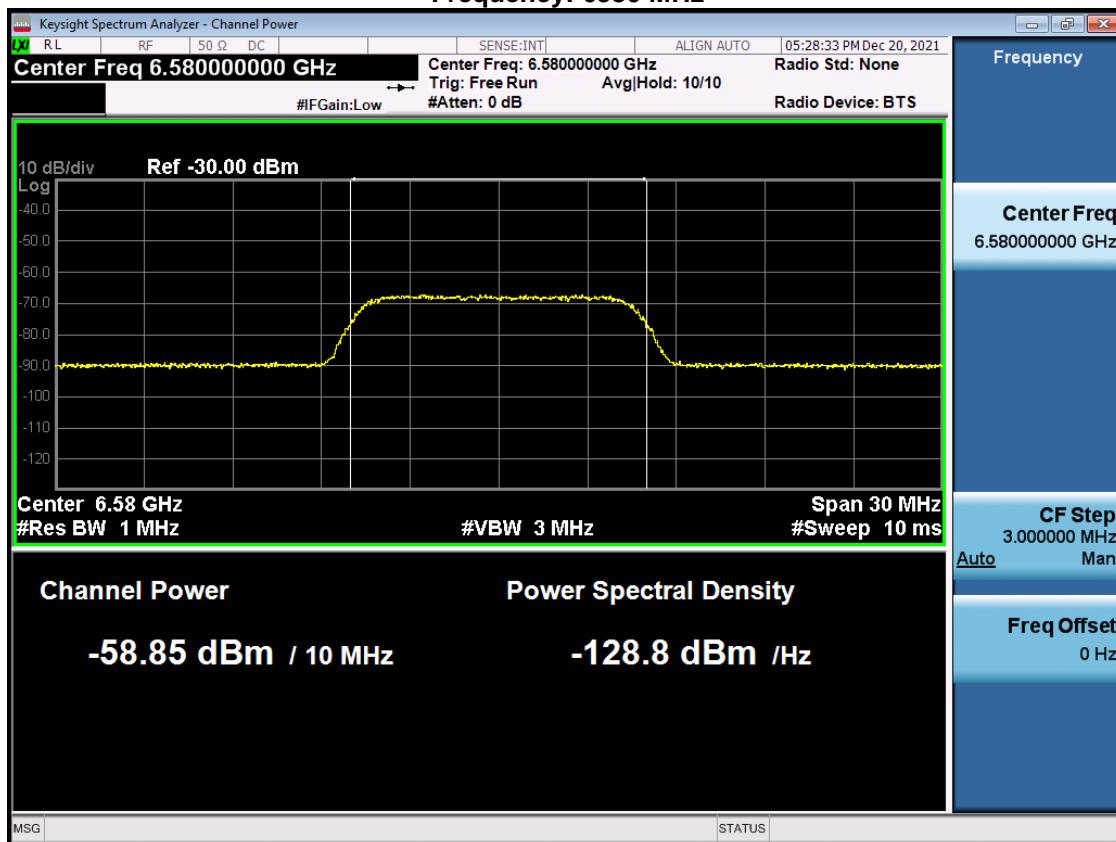


## Frequency: 6590 MHz

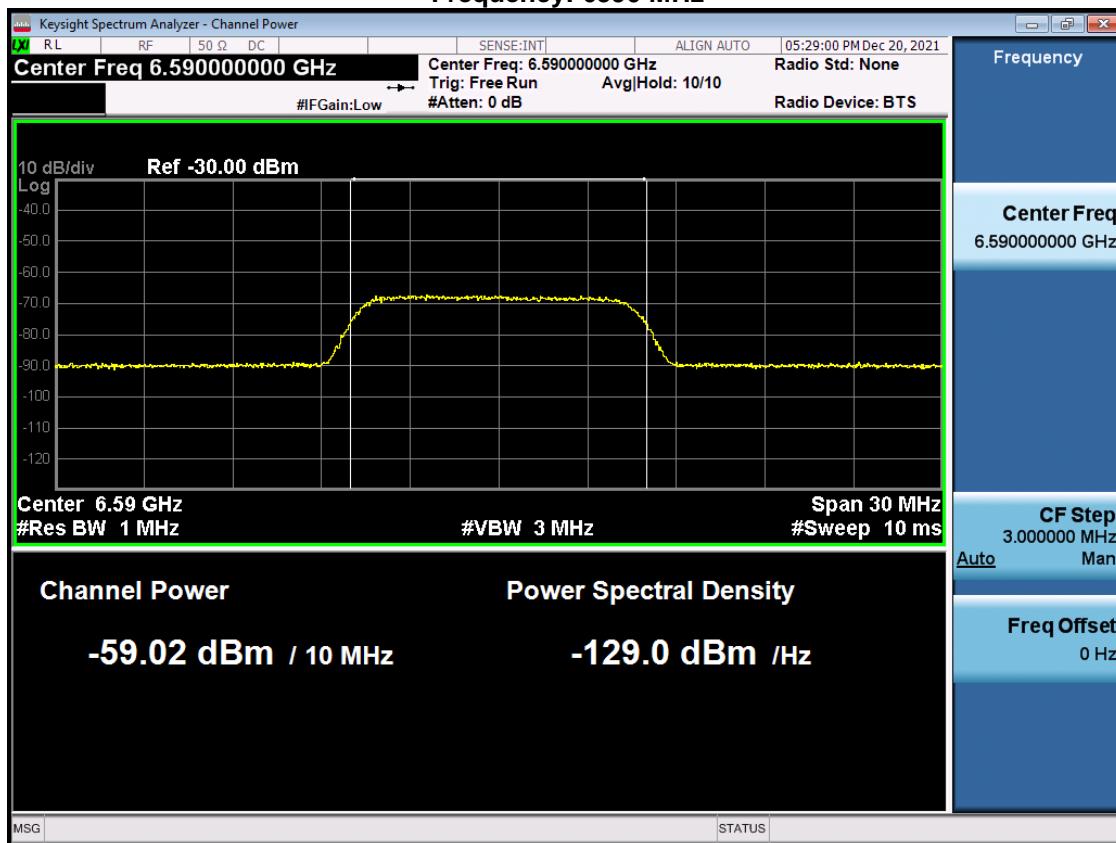


## Frequency: 6665 MHz

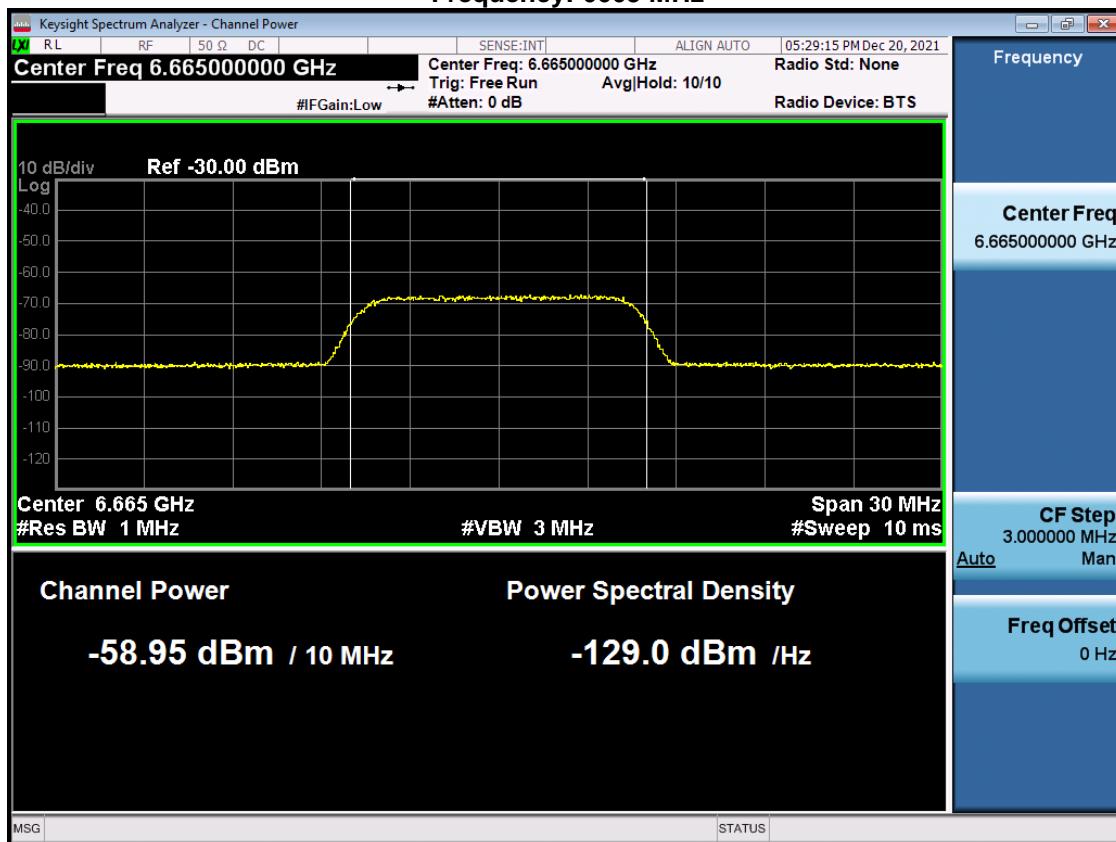


## Frequency: 6695 MHz

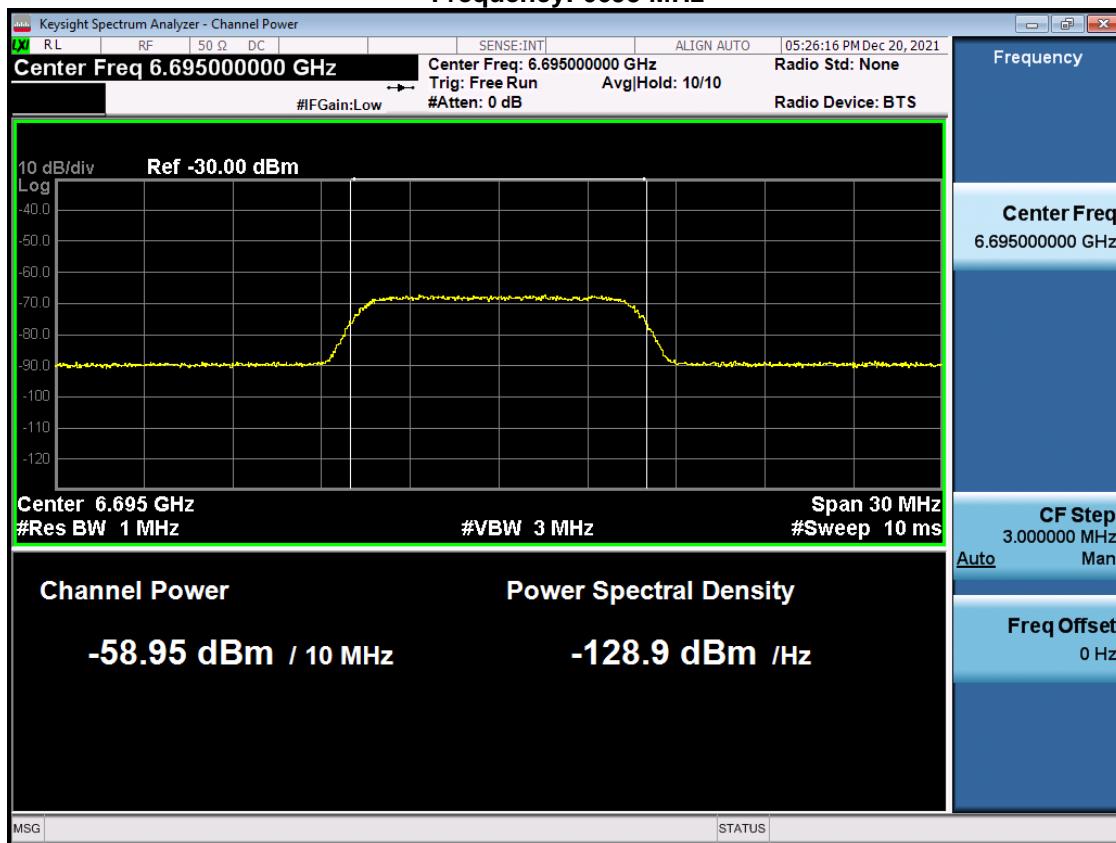


## Frequency: 6740 MHz

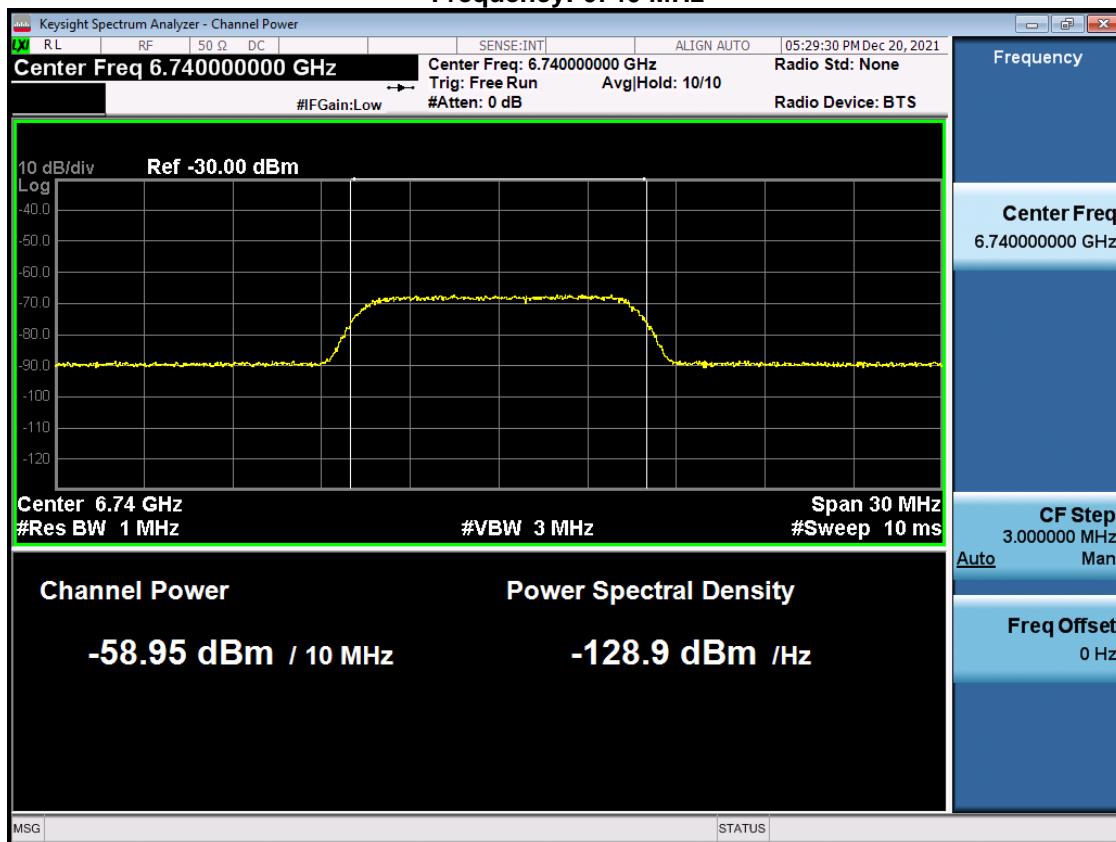

## Frequency: 6910 MHz

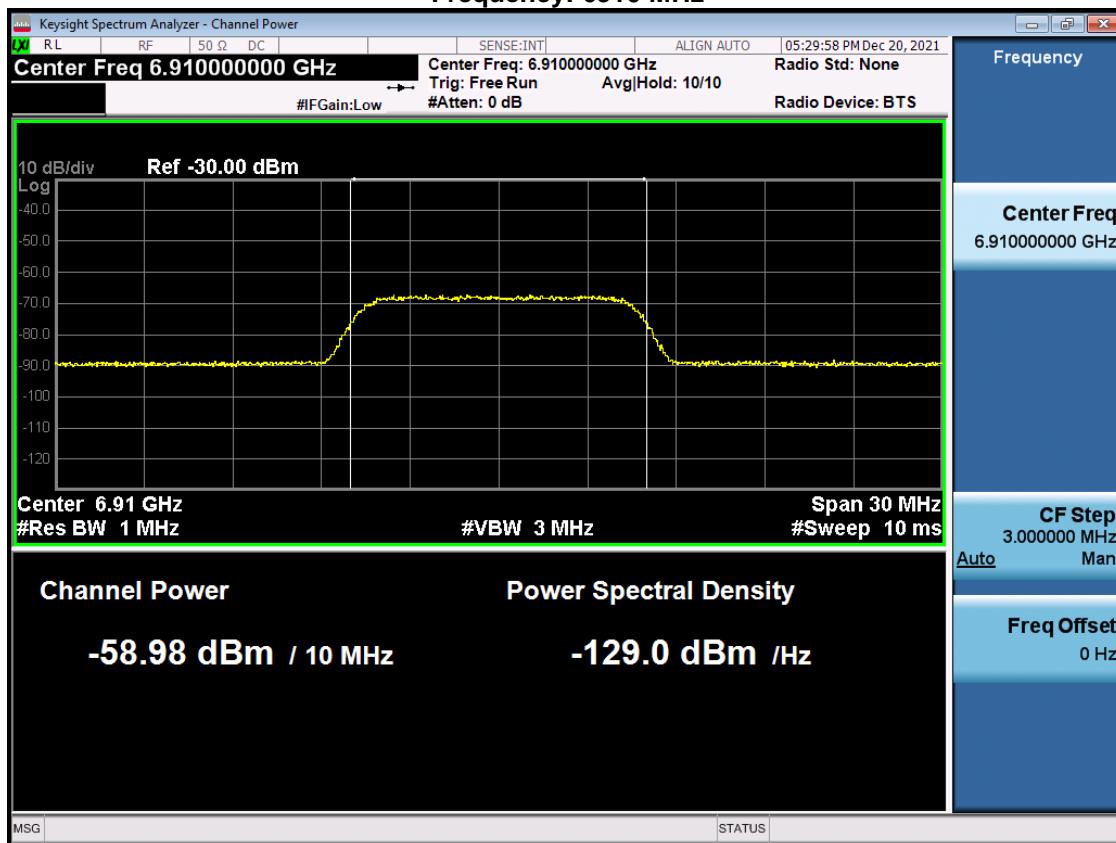


## Frequency: 6985 MHz

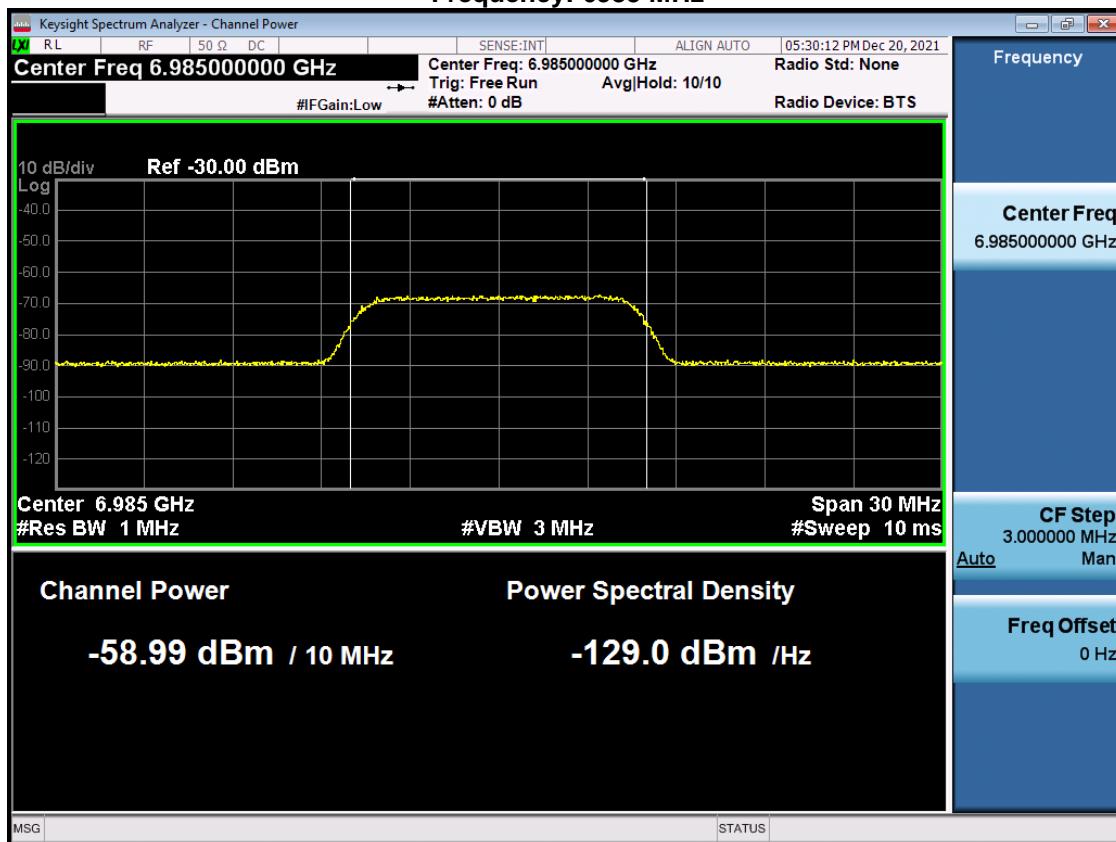

## Frequency: 7015 MHz




## Frequency: 7060 MHz

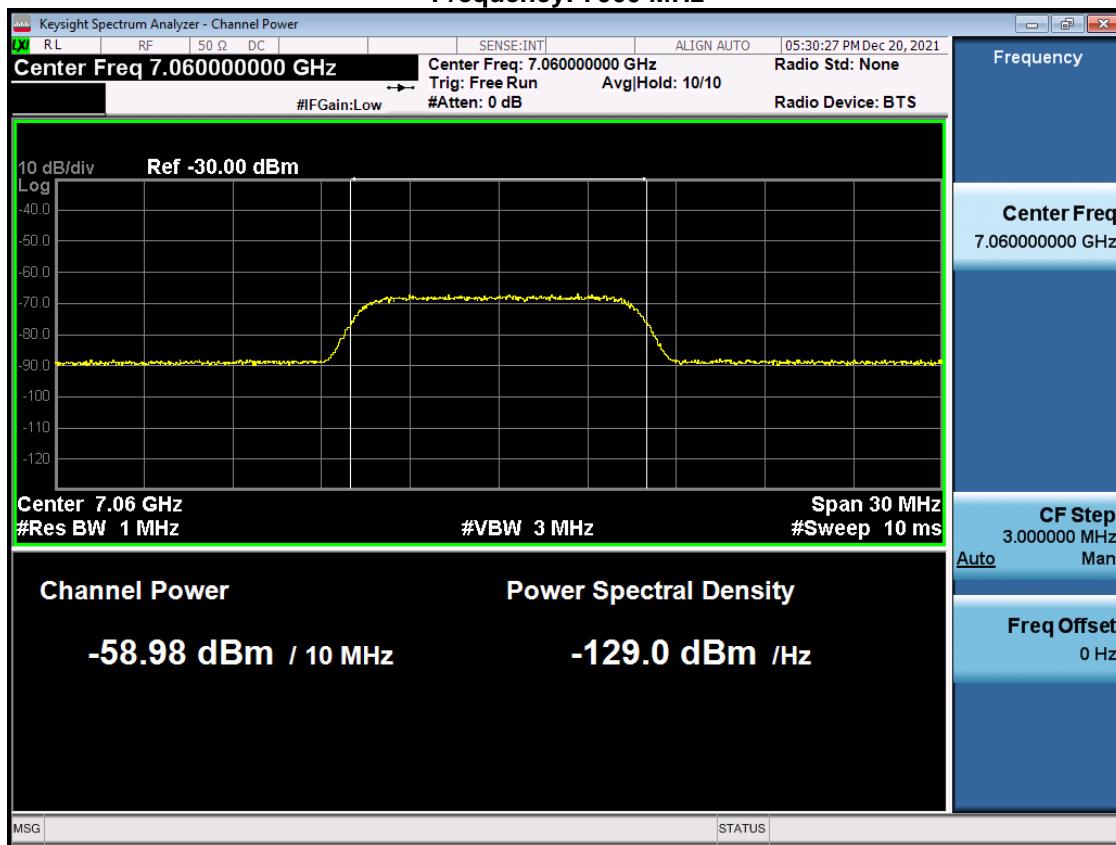


**Detection power level and detection probability**

| Bands  | Test Mode | Bandwidth (MHz) | Channel | Frequency (MHz) | interference Frequency (MHz) | Detection power level (dBm) | Detection Power Limit (dBm) | Number of Times | Number of Detected | Detection Probability | Detection Probability Limit | Test Result |
|--------|-----------|-----------------|---------|-----------------|------------------------------|-----------------------------|-----------------------------|-----------------|--------------------|-----------------------|-----------------------------|-------------|
| UNII-5 | 802.11a   | 20              | 53      | 6215            | 6215                         | -59.31                      | -58.97                      | 10              | 10                 | 100%                  | 90%                         | Pass        |
|        | 802.11ax  | 160             | 47      | 6185            | 6110                         | -59.35                      | -58.97                      | 10              | 9                  | 90%                   | 90%                         | Pass        |
|        |           |                 |         |                 | 6185                         | -60.67                      | -58.97                      | 10              | 10                 | 100%                  | 90%                         | Pass        |
|        |           |                 |         |                 | 6260                         | -60.86                      | -58.97                      | 10              | 10                 | 100%                  | 90%                         | Pass        |
| UNII-6 | 802.11a   | 20              | 101     | 6455            | 6455                         | -59.83                      | -58.97                      | 10              | 9                  | 90%                   | 90%                         | Pass        |
|        | 802.11ax  | 160             | 111     | 6505            | 6430                         | -59.17                      | -58.97                      | 10              | 10                 | 100%                  | 90%                         | Pass        |
|        |           |                 |         |                 | 6505                         | -59.32                      | -58.97                      | 10              | 10                 | 100%                  | 90%                         | Pass        |
|        |           |                 |         |                 | 6580                         | -60.83                      | -58.97                      | 10              | 9                  | 90%                   | 90%                         | Pass        |
| UNII-7 | 802.11a   | 20              | 149     | 6695            | 6695                         | -59.12                      | -58.97                      | 10              | 10                 | 100%                  | 90%                         | Pass        |
|        | 802.11ax  | 160             | 143     | 6665            | 6590                         | -59.23                      | -58.97                      | 10              | 10                 | 100%                  | 90%                         | Pass        |
|        |           |                 |         |                 | 6665                         | -59.99                      | -58.97                      | 10              | 9                  | 90%                   | 90%                         | Pass        |
|        |           |                 |         |                 | 6740                         | -60.37                      | -58.97                      | 10              | 10                 | 100%                  | 90%                         | Pass        |
| UNII-8 | 802.11a   | 20              | 213     | 7015            | 7015                         | -59.98                      | -58.97                      | 10              | 9                  | 90%                   | 90%                         | Pass        |
|        | 802.11ax  | 160             | 207     | 6985            | 6910                         | -59.63                      | -58.97                      | 10              | 10                 | 100%                  | 90%                         | Pass        |
|        |           |                 |         |                 | 6985                         | -60.54                      | -58.97                      | 10              | 9                  | 90%                   | 90%                         | Pass        |
|        |           |                 |         |                 | 7060                         | -60.72                      | -58.97                      | 10              | 10                 | 100%                  | 90%                         | Pass        |


**Contention-Based Protocol**  
**EUT Channel: CH53 Incumbent Signal Frequency: 6215 MHz**

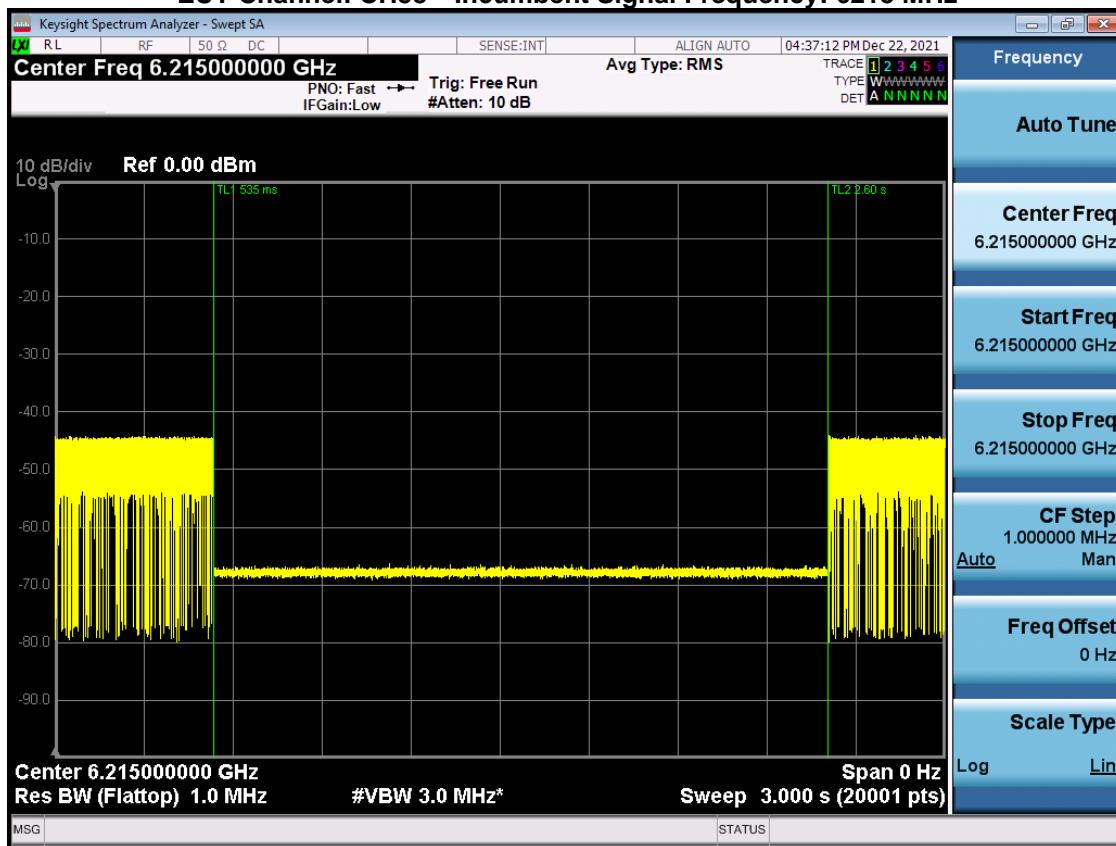


**EUT Channel: CH101 Incumbent Signal Frequency: 6455 MHz**

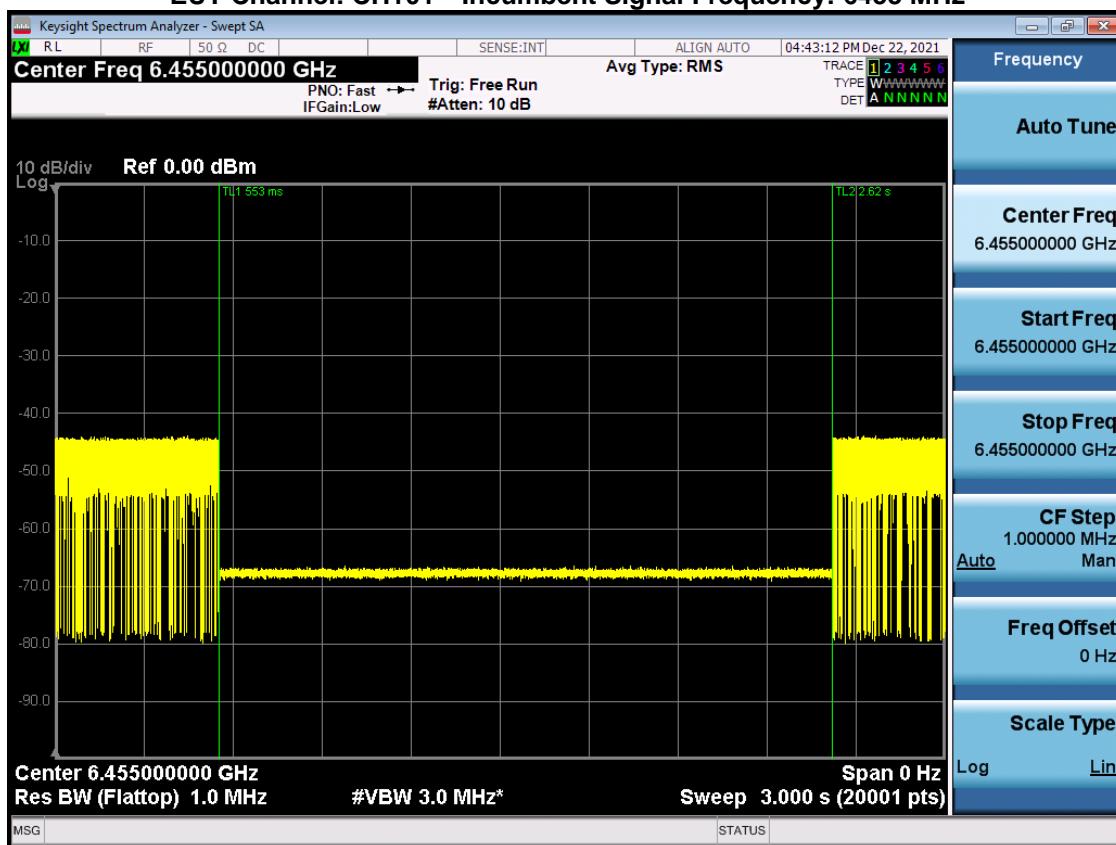


## EUT Channel: CH149 Incumbent Signal Frequency: 6695 MHz

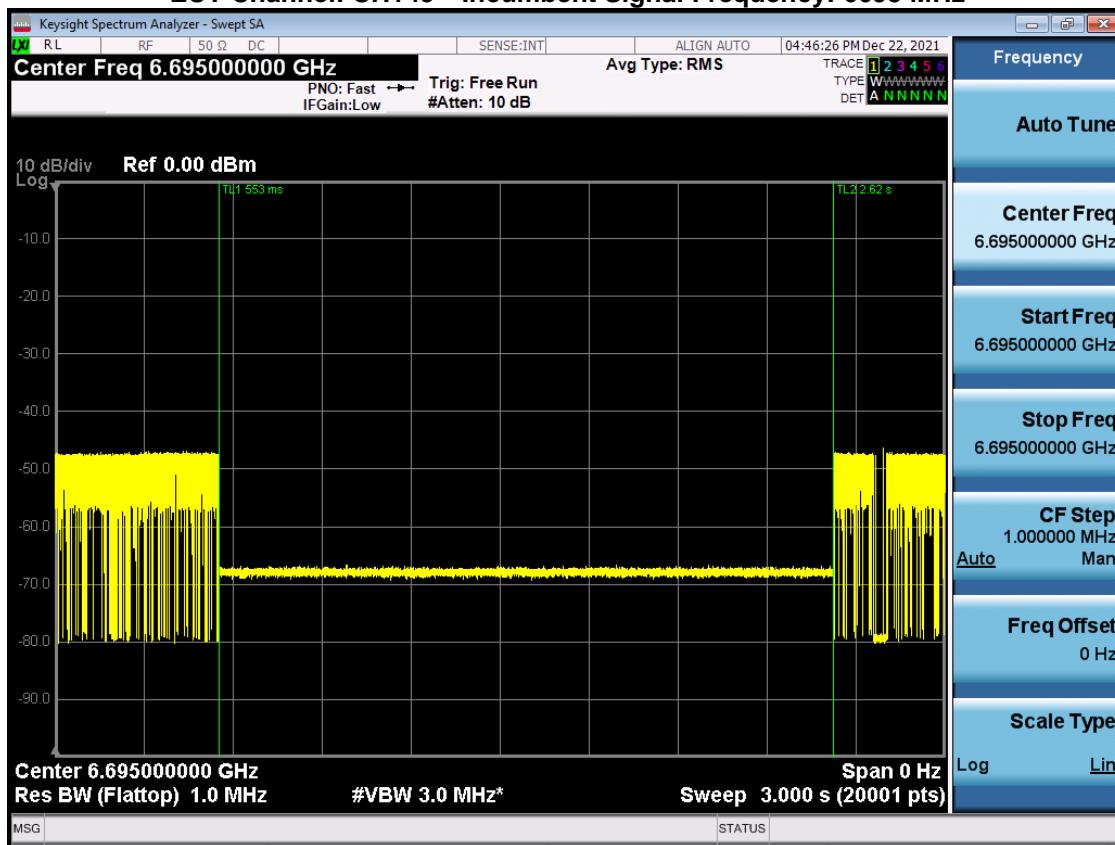


## EUT Channel: CH213 Incumbent Signal Frequency: 7015 MHz

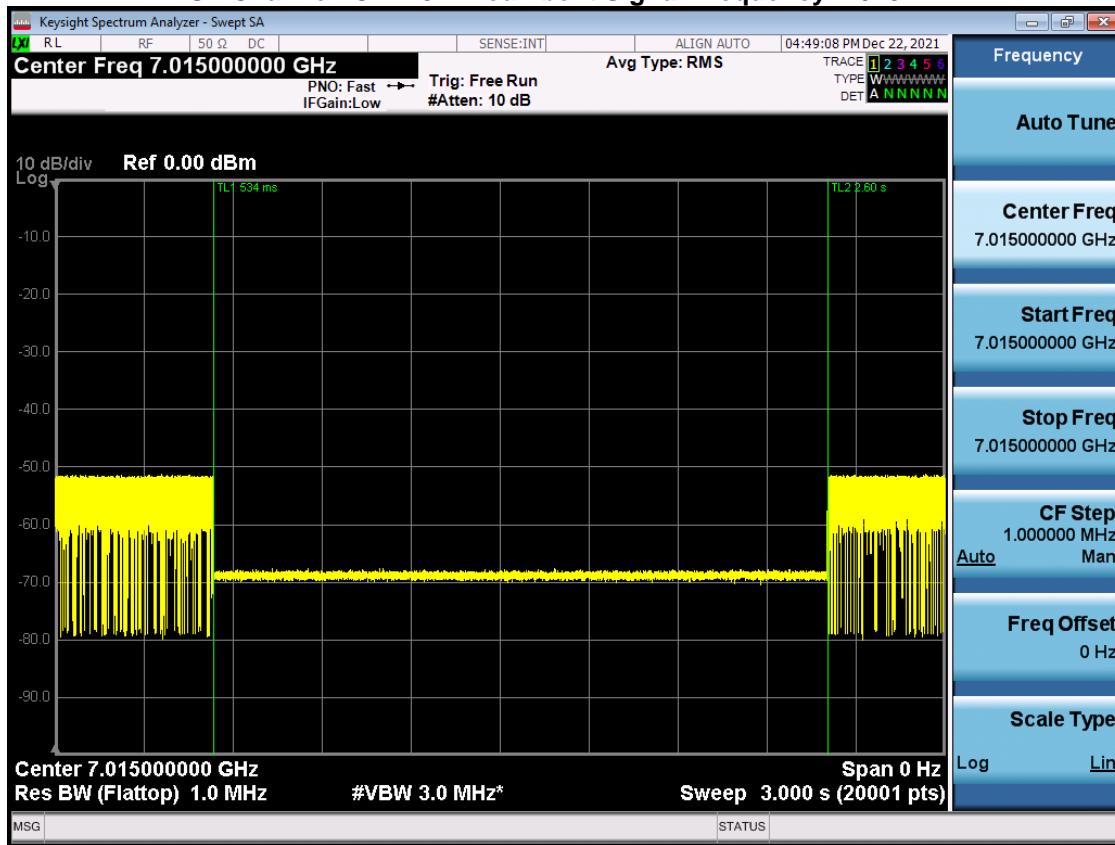


## EUT Channel: CH47 Incumbent Signal Frequency: 6110 MHz

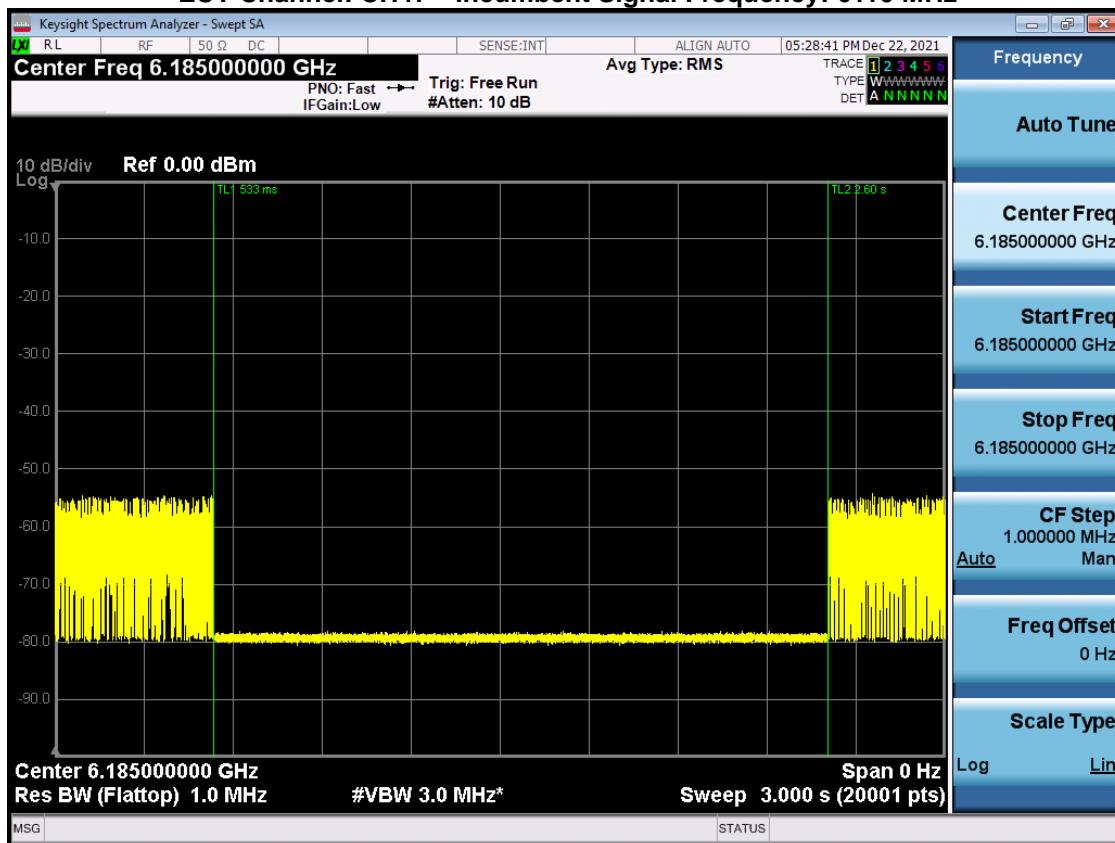


## EUT Channel: CH47 Incumbent Signal Frequency: 6185 MHz

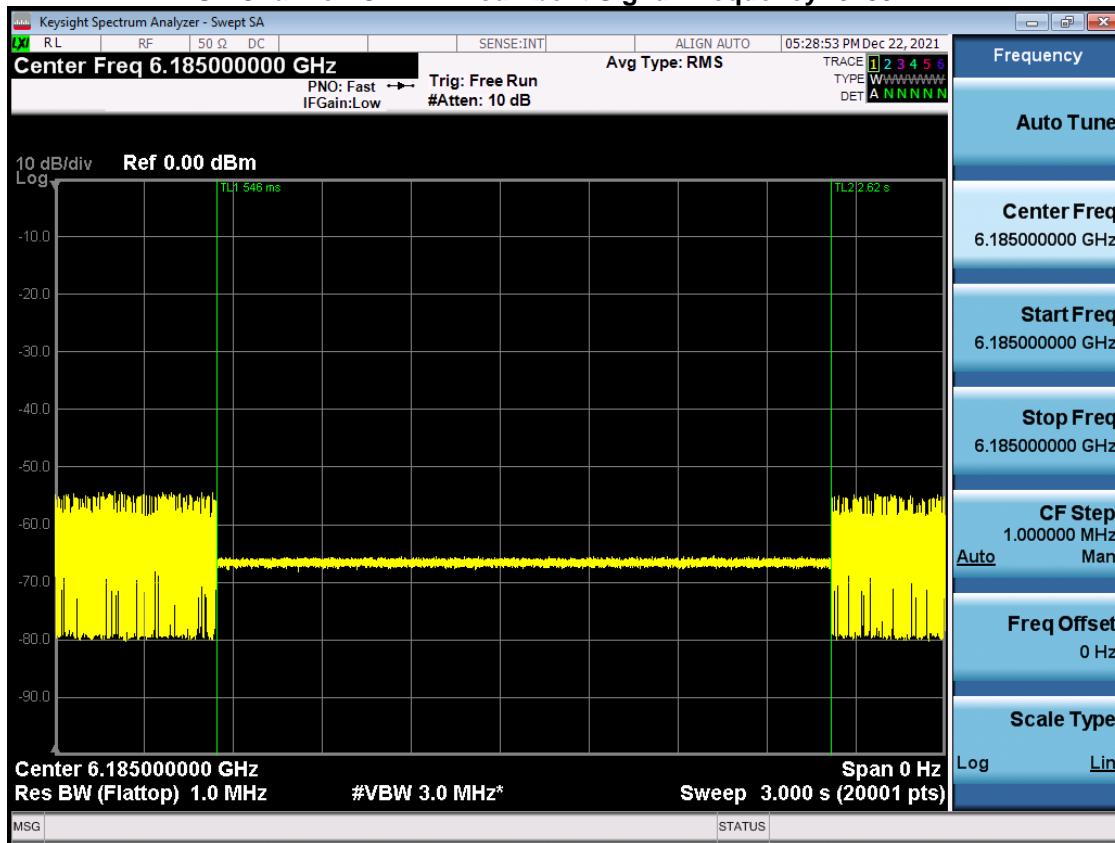


## EUT Channel: CH47 Incumbent Signal Frequency: 6260 MHz

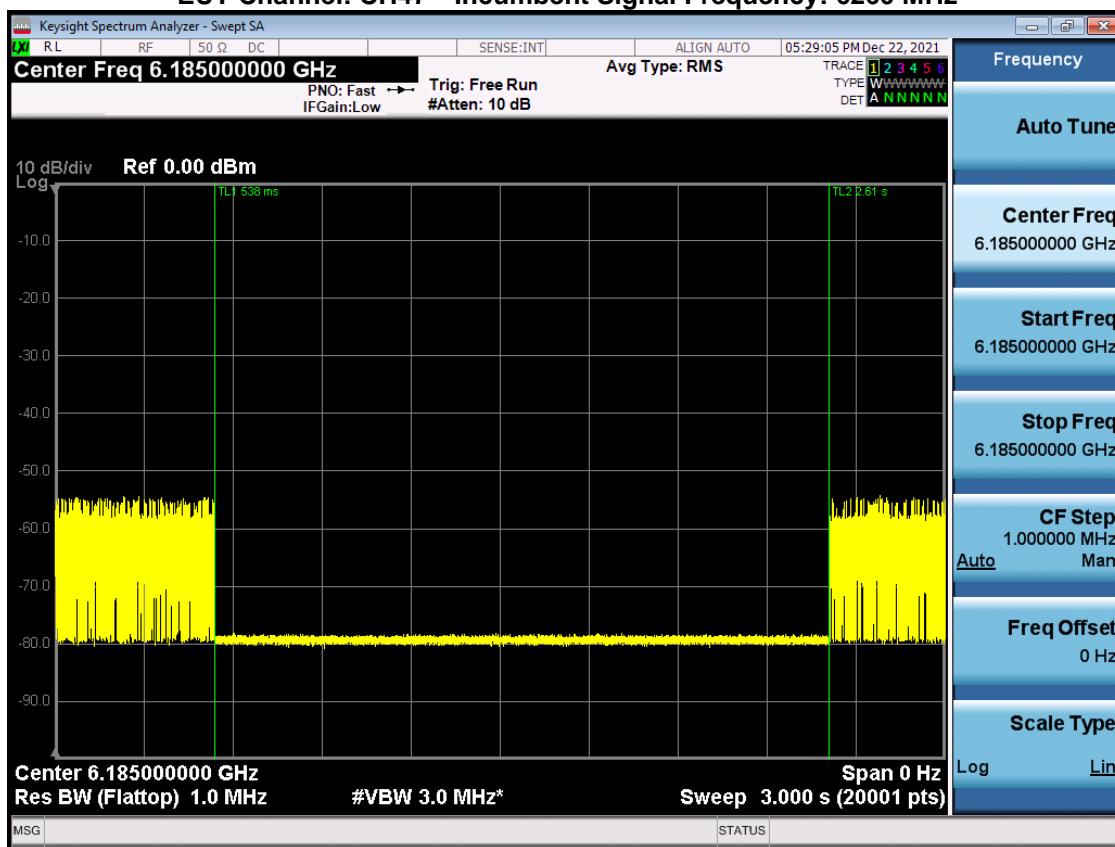


## EUT Channel: CH111 Incumbent Signal Frequency: 6430 MHz

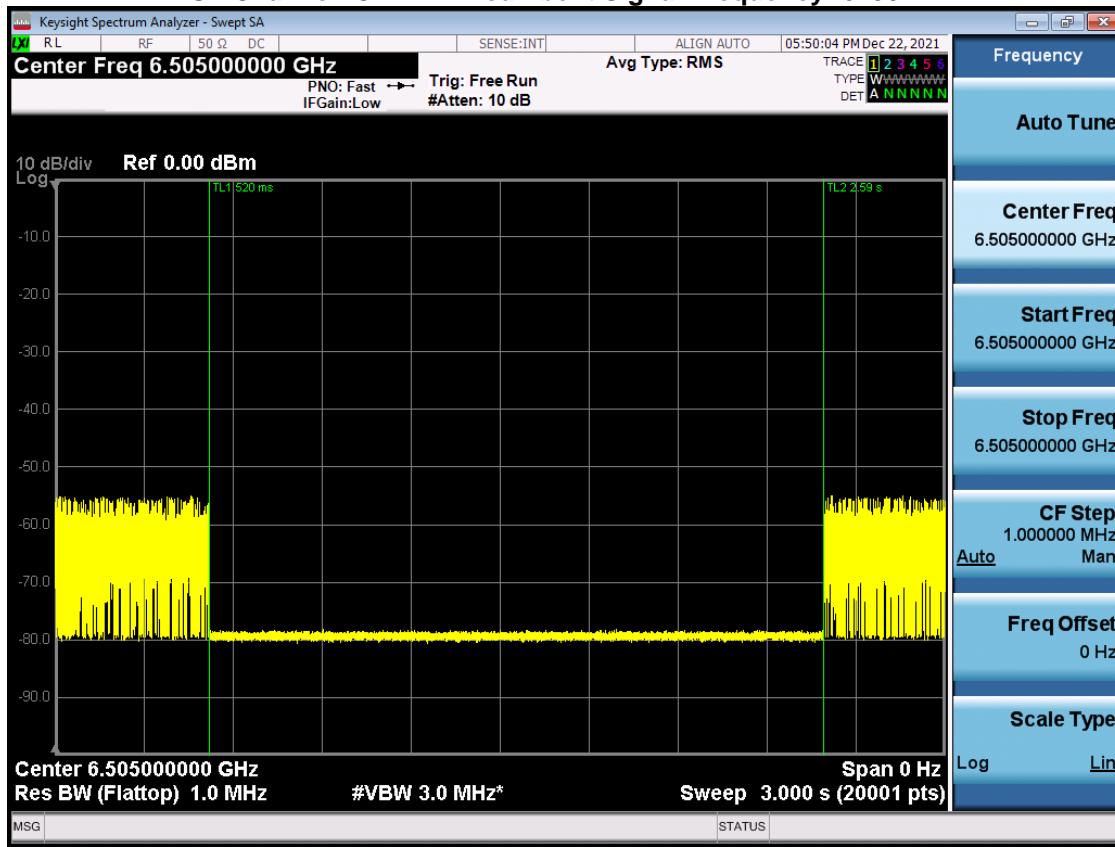


## EUT Channel: CH111 Incumbent Signal Frequency: 6505 MHz

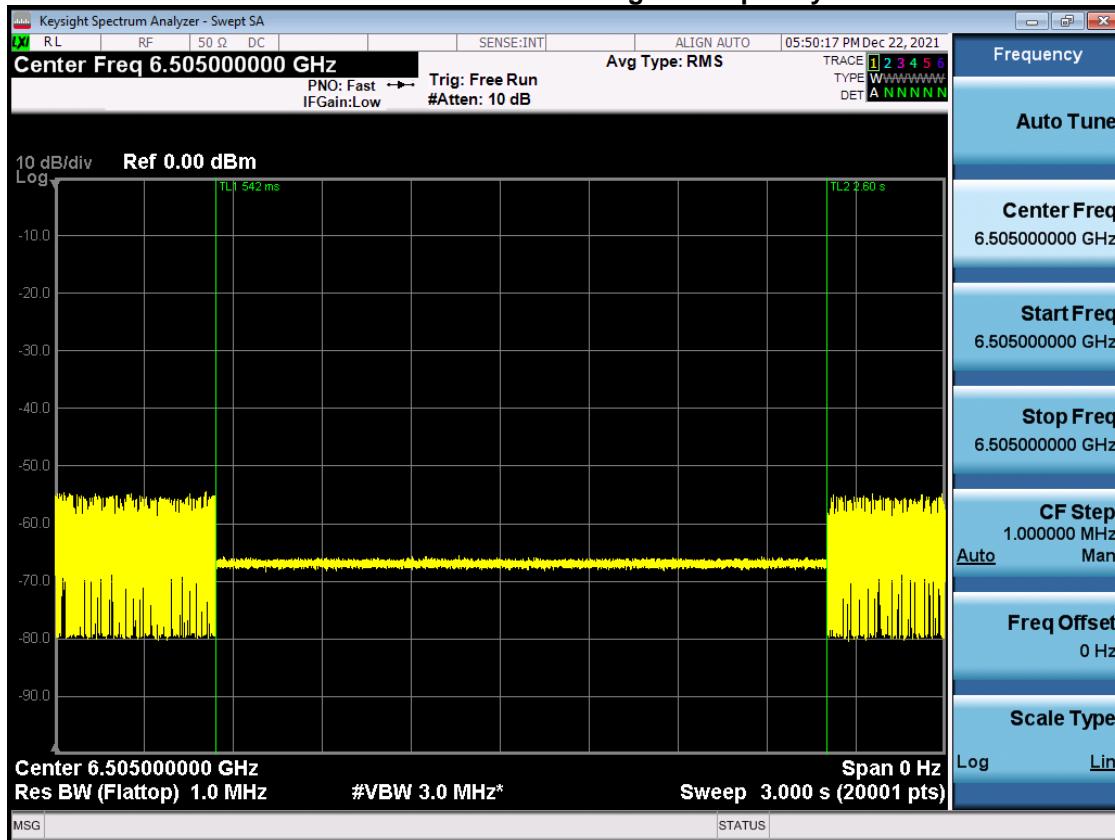


## EUT Channel: CH111 Incumbent Signal Frequency: 6580 MHz

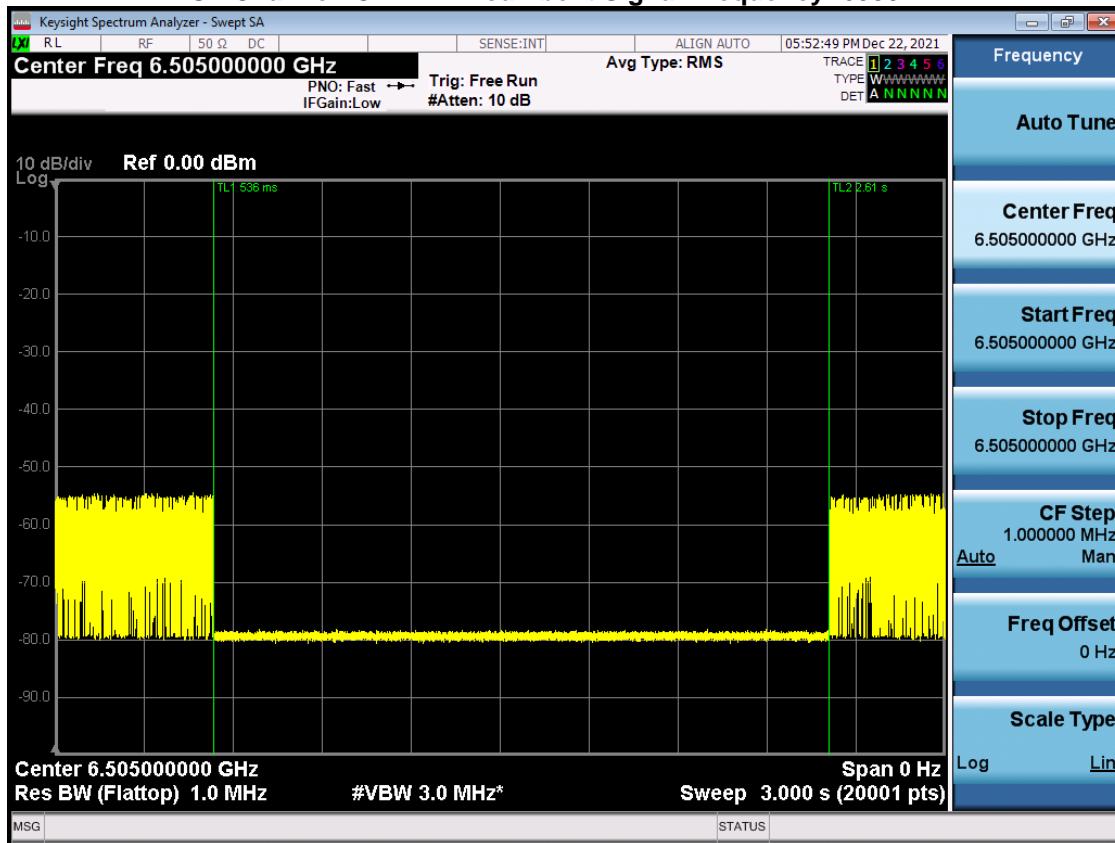


## EUT Channel: CH143 Incumbent Signal Frequency: 6590 MHz

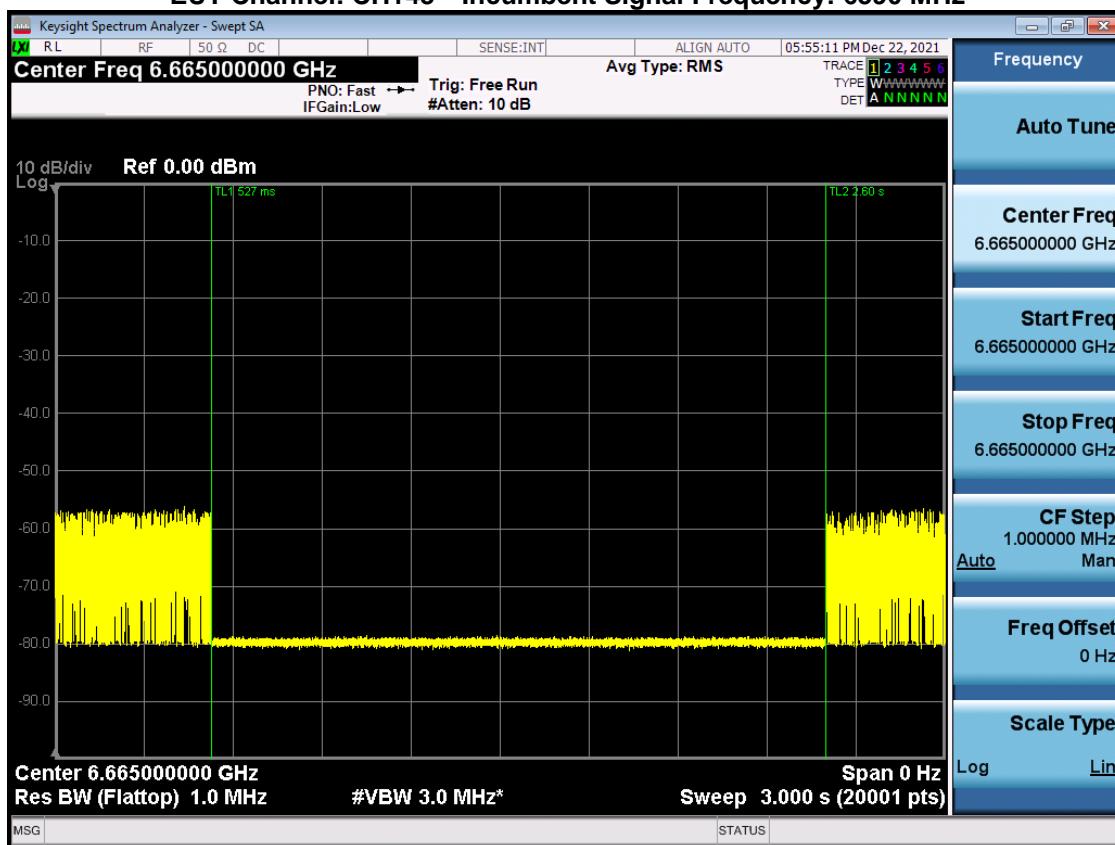


## EUT Channel: CH143 Incumbent Signal Frequency: 6665 MHz

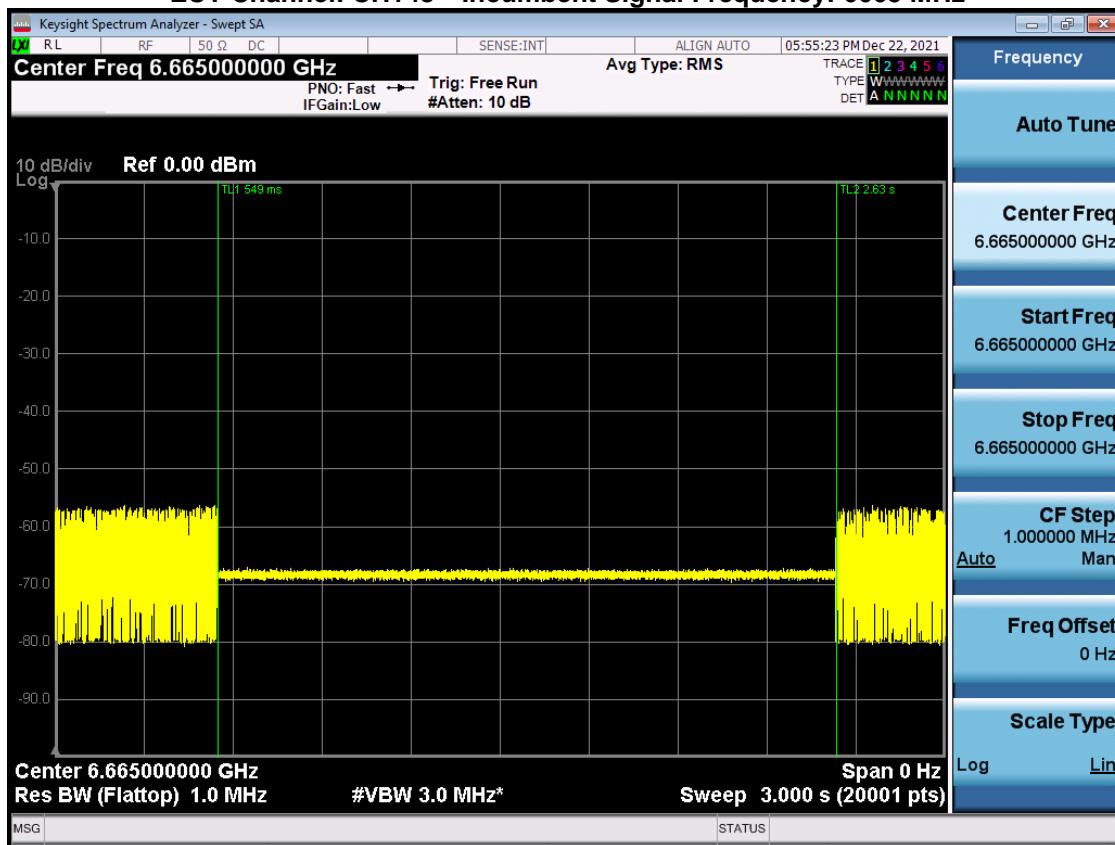


## EUT Channel: CH143 Incumbent Signal Frequency: 6740 MHz

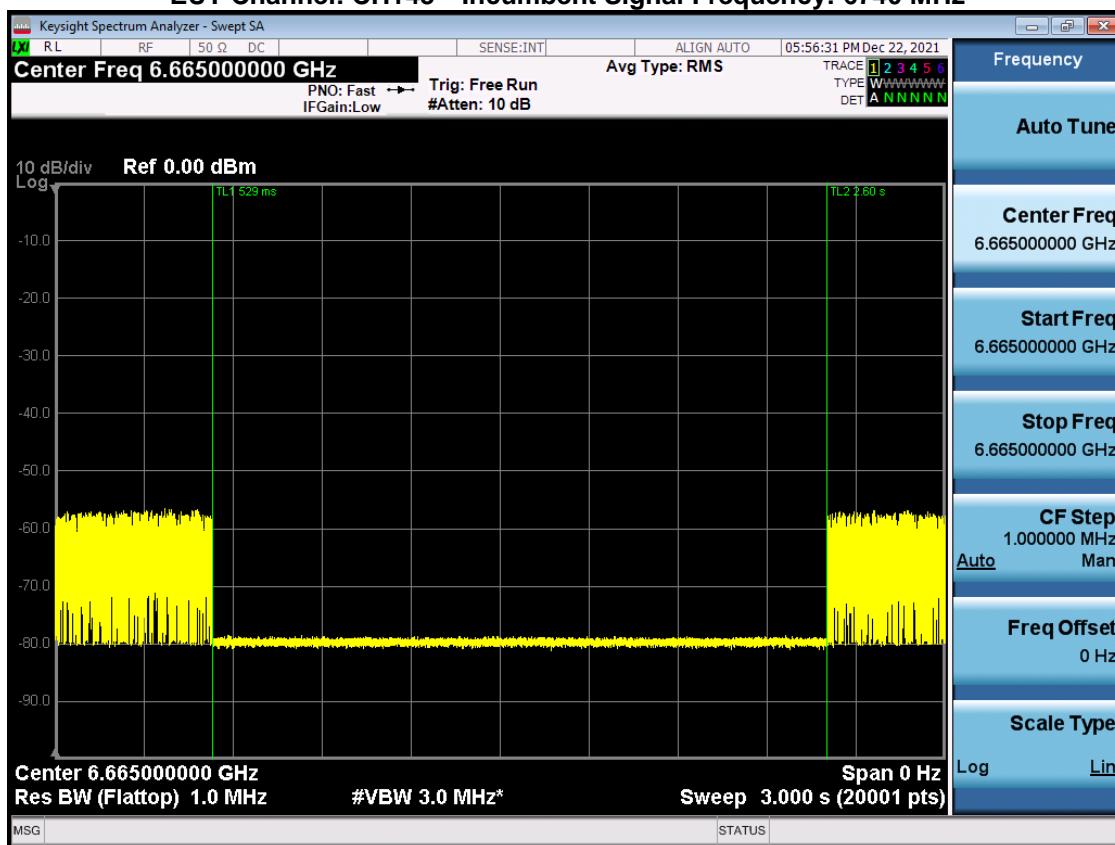


## EUT Channel: CH207 Incumbent Signal Frequency: 6910 MHz

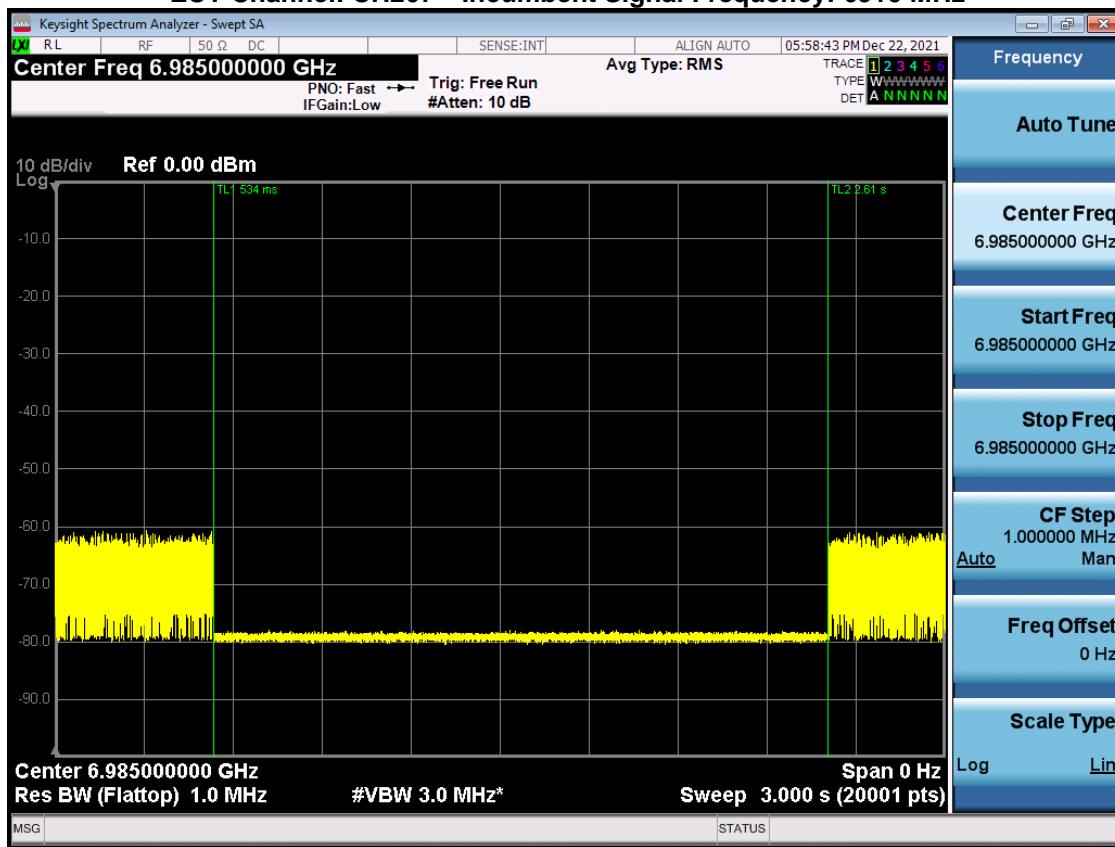

## EUT Channel: CH207 Incumbent Signal Frequency: 6985 MHz

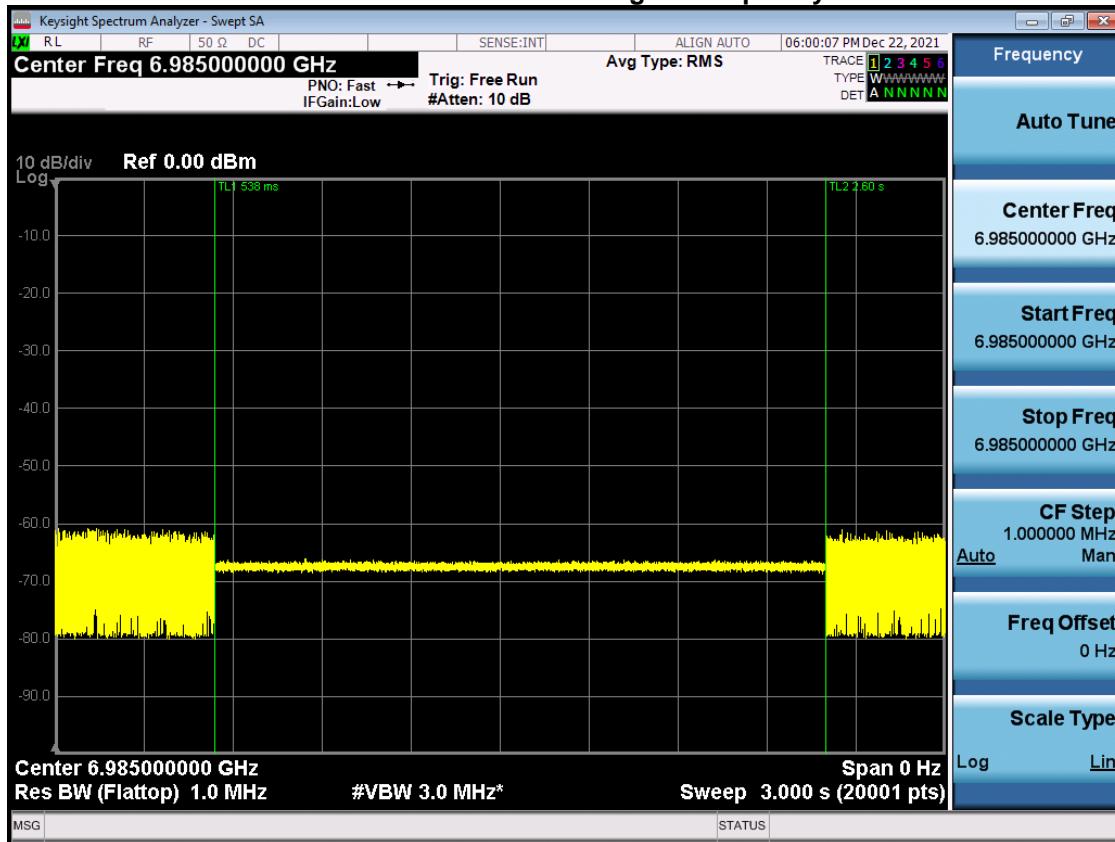

## EUT Channel: CH207 Incumbent Signal Frequency: 7060 MHz

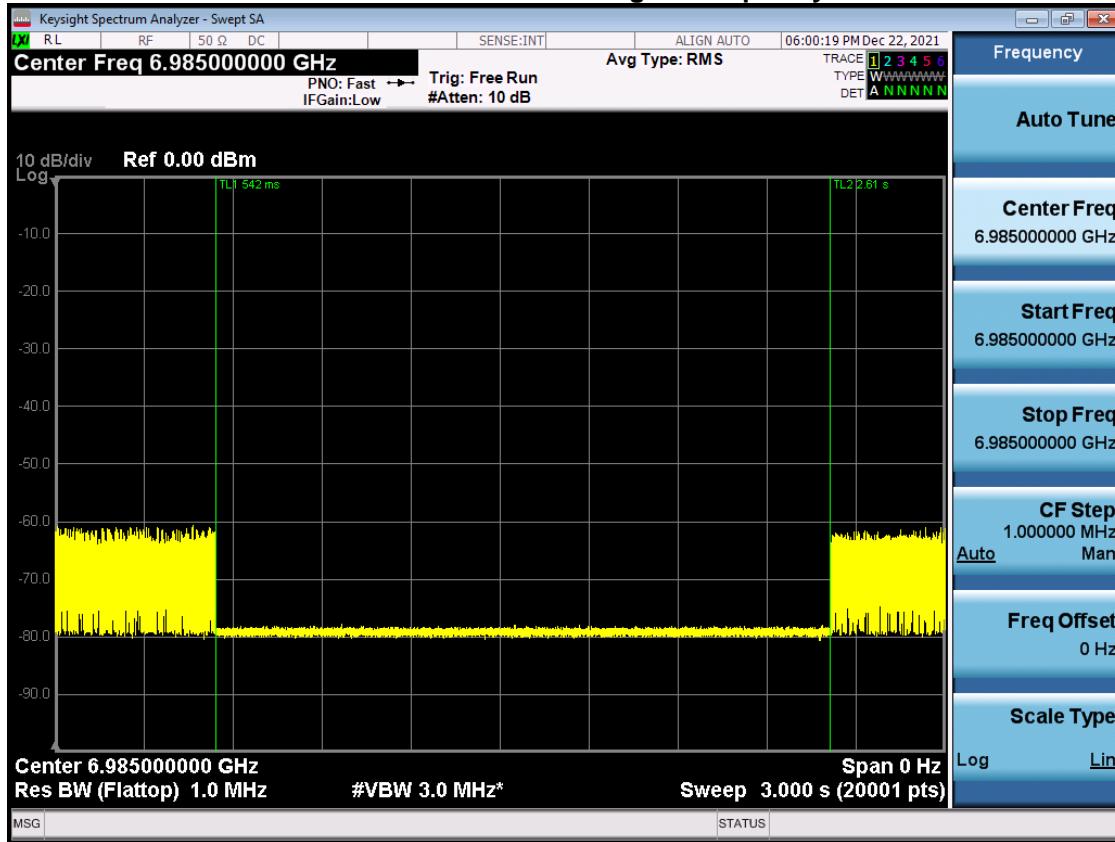

End of Test Report