


## Appendix B: Test Results of Conducted Test\_ANT & Nordic

### Original

### Test Result of 6 dB Bandwidth





#### ANT

Channel	Channel Frequency (MHz)	6 dB Bandwidth (kHz)	Limit (kHz)	Result
Low Channel	2402	504.50	> 500	Pass
Middle Channel	2441	500.50	> 500	Pass
High Channel	2480	504.50	> 500	Pass

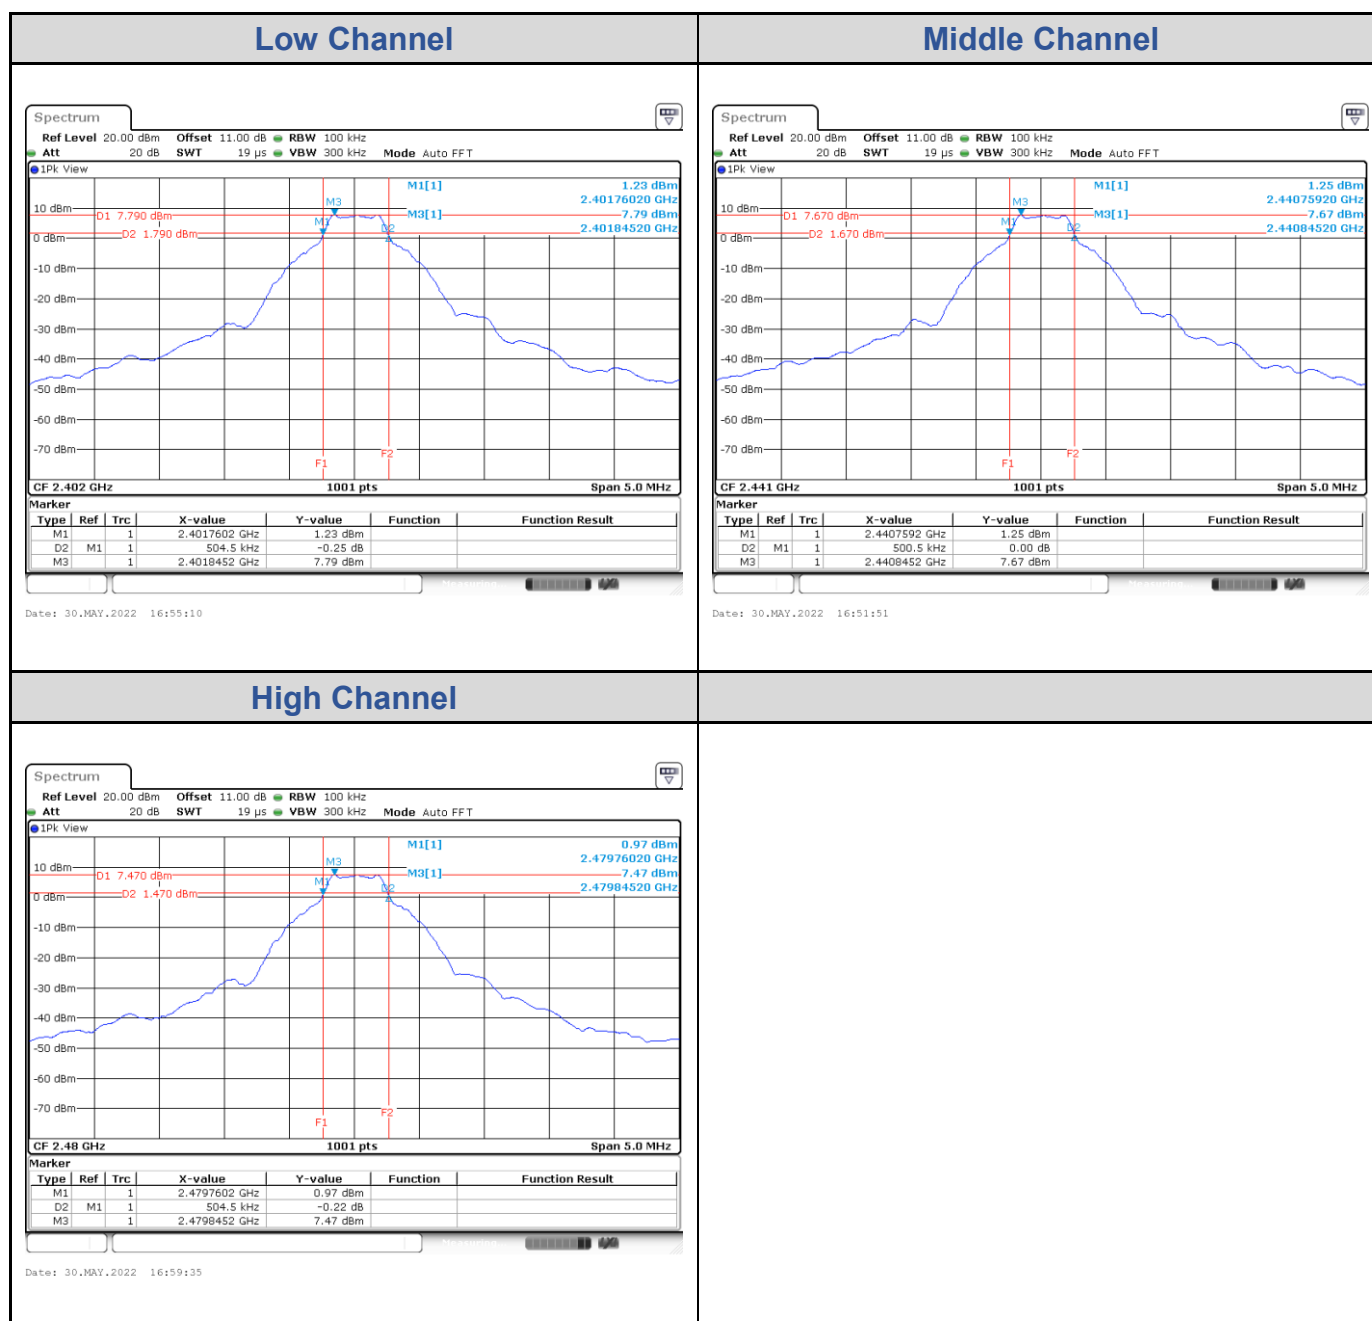

**Nordic Original**

Channel	Channel Frequency (MHz)	6 dB Bandwidth (kHz)	Limit (kHz)	Result
Low Channel	2402	849.20	> 500	Pass
Middle Channel	2441	844.20	> 500	Pass
High Channel	2480	834.20	> 500	Pass

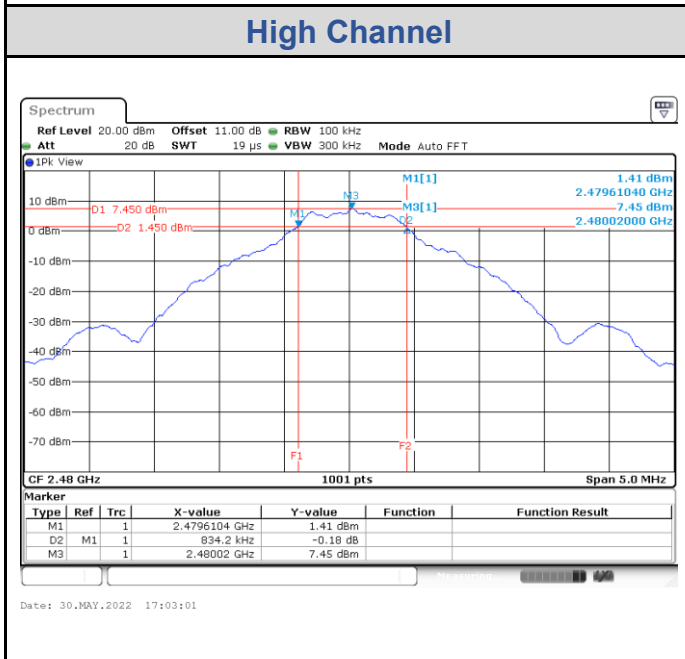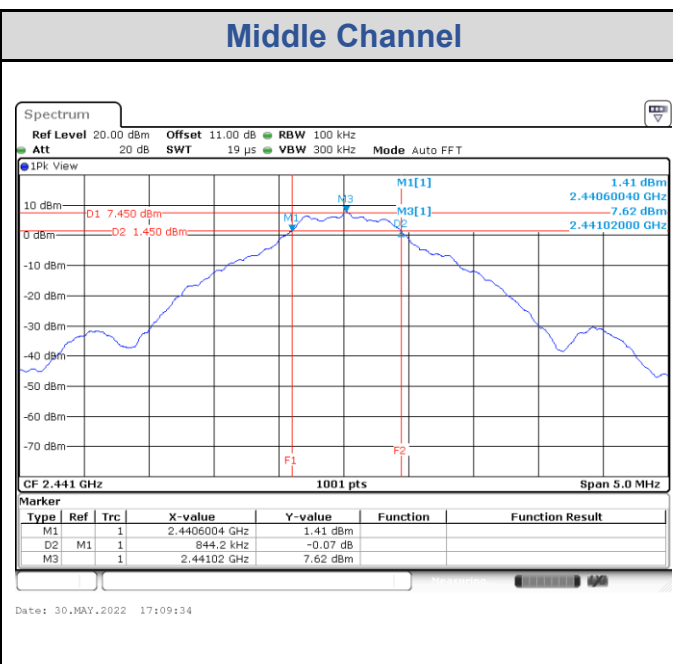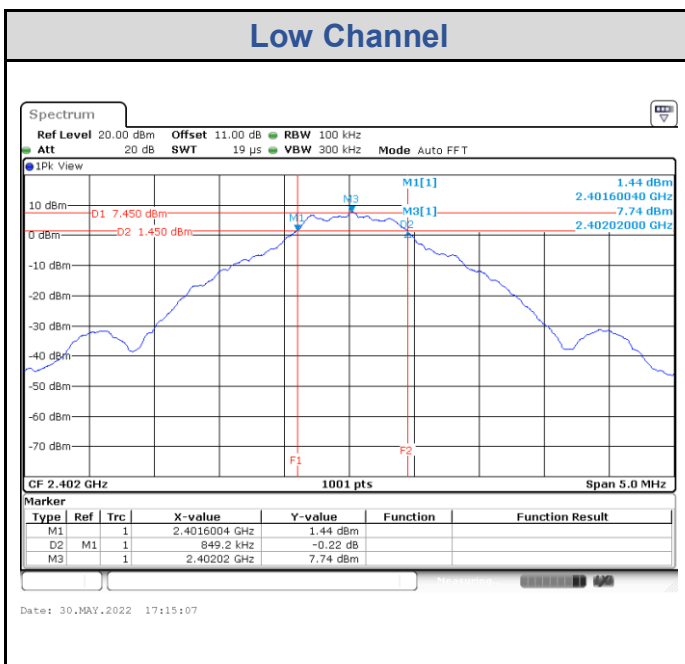


## Test Result of 99% Occupied Bandwidth


### ANT

Channel	Channel Frequency (MHz)	99% Bandwidth (MHz)
Low Channel	2402	0.91
Middle Channel	2441	0.92
High Channel	2480	0.93


### Low Channel

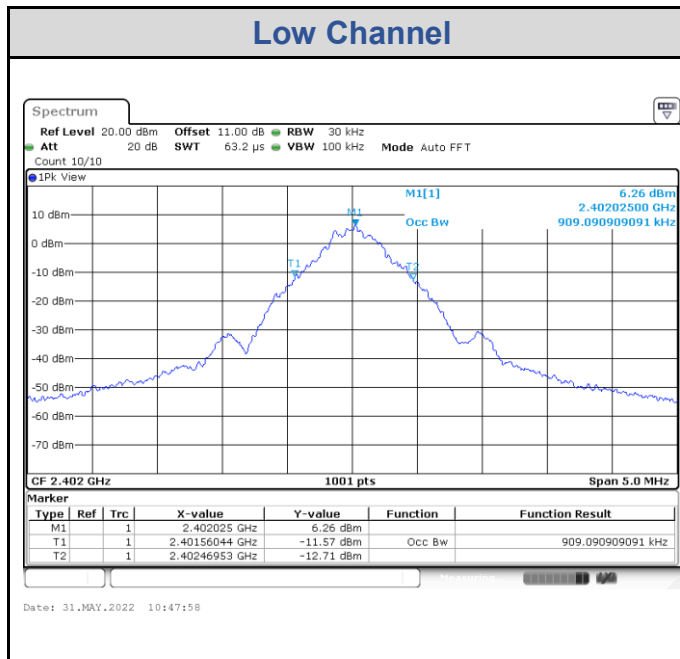

### Middle Channel

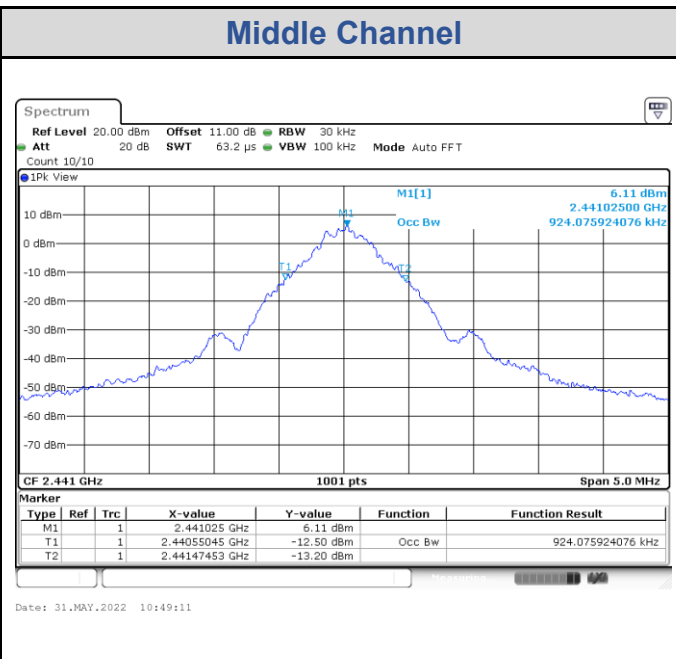


### High Channel

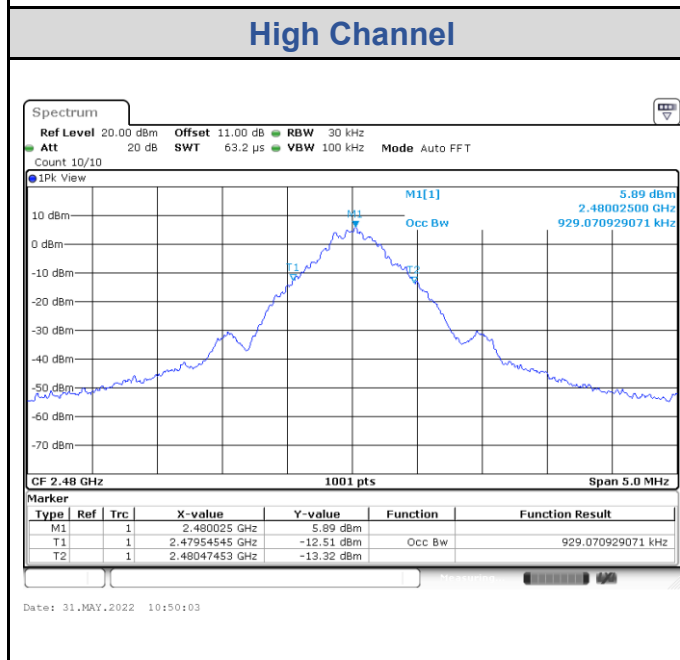

**Nordic Original**


Channel	Channel Frequency (MHz)	99% Bandwidth (MHz)
Low Channel	2402	1.74
Middle Channel	2441	1.76
High Channel	2480	1.76

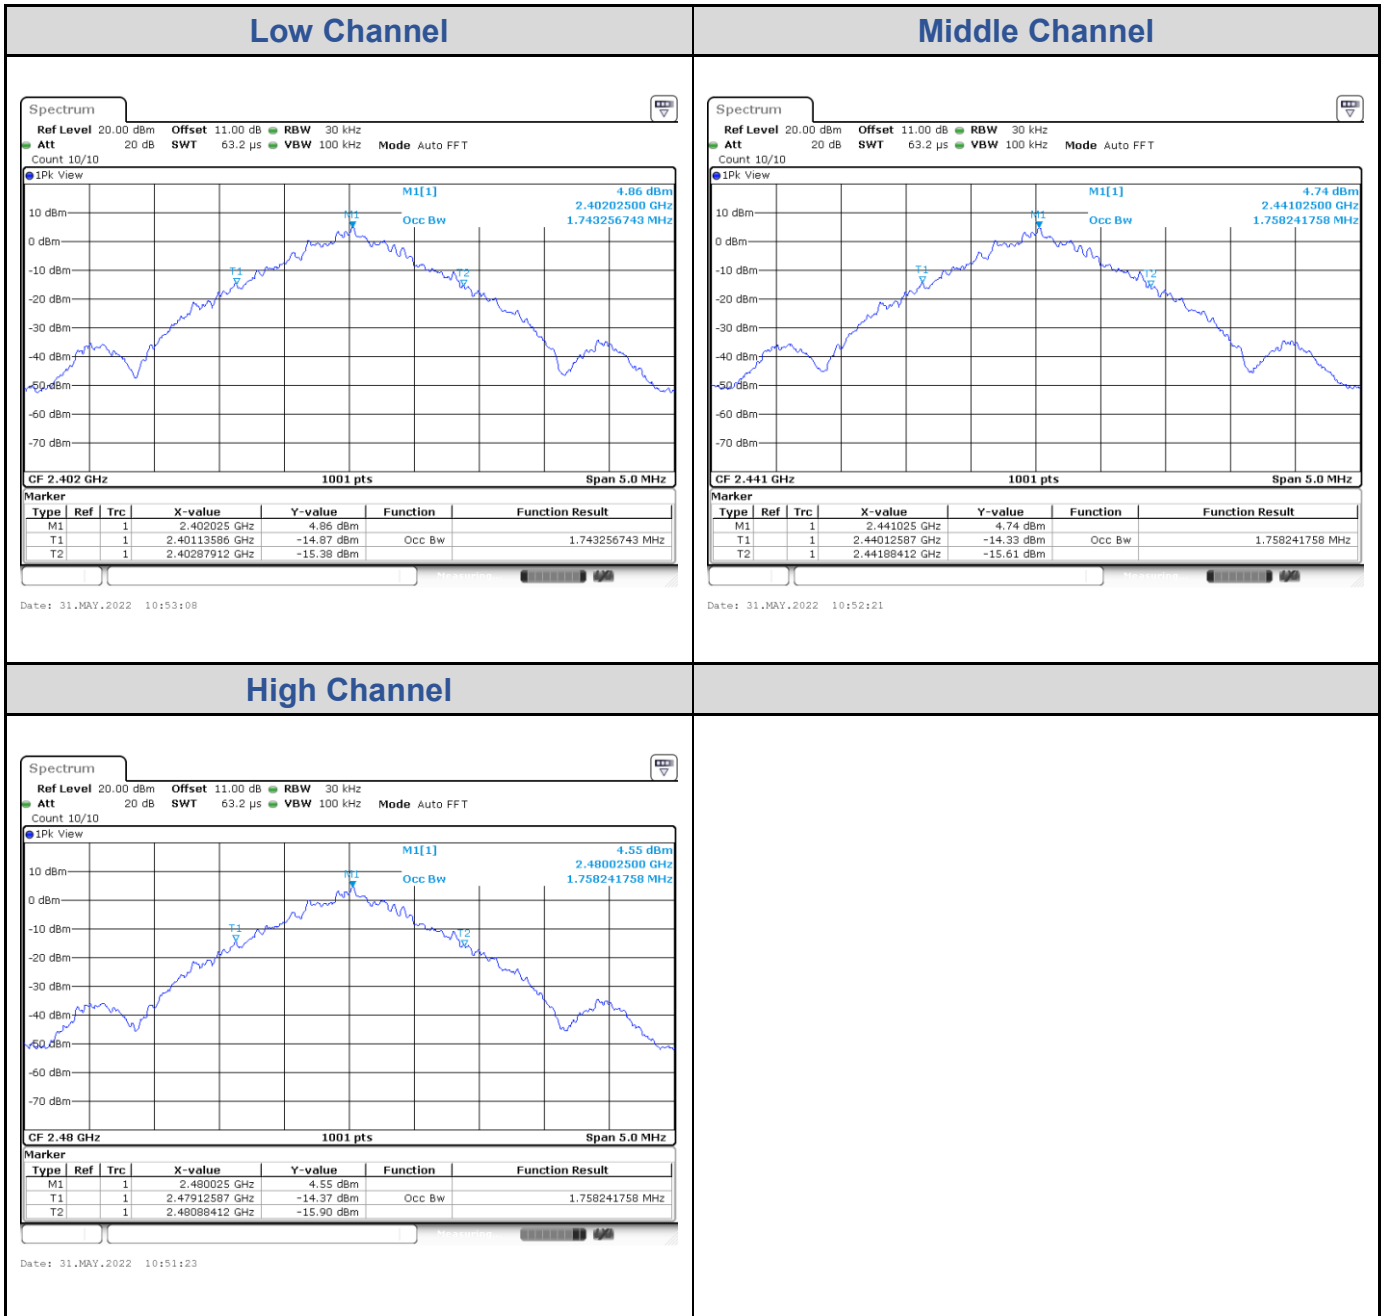

## Test Result of Power Spectral Density


### ANT

Channel	Channel Frequency (MHz)	Power Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
Low Channel	2402	-3.40	8	Pass
Middle Channel	2441	-3.55	8	Pass
High Channel	2480	-3.73	8	Pass

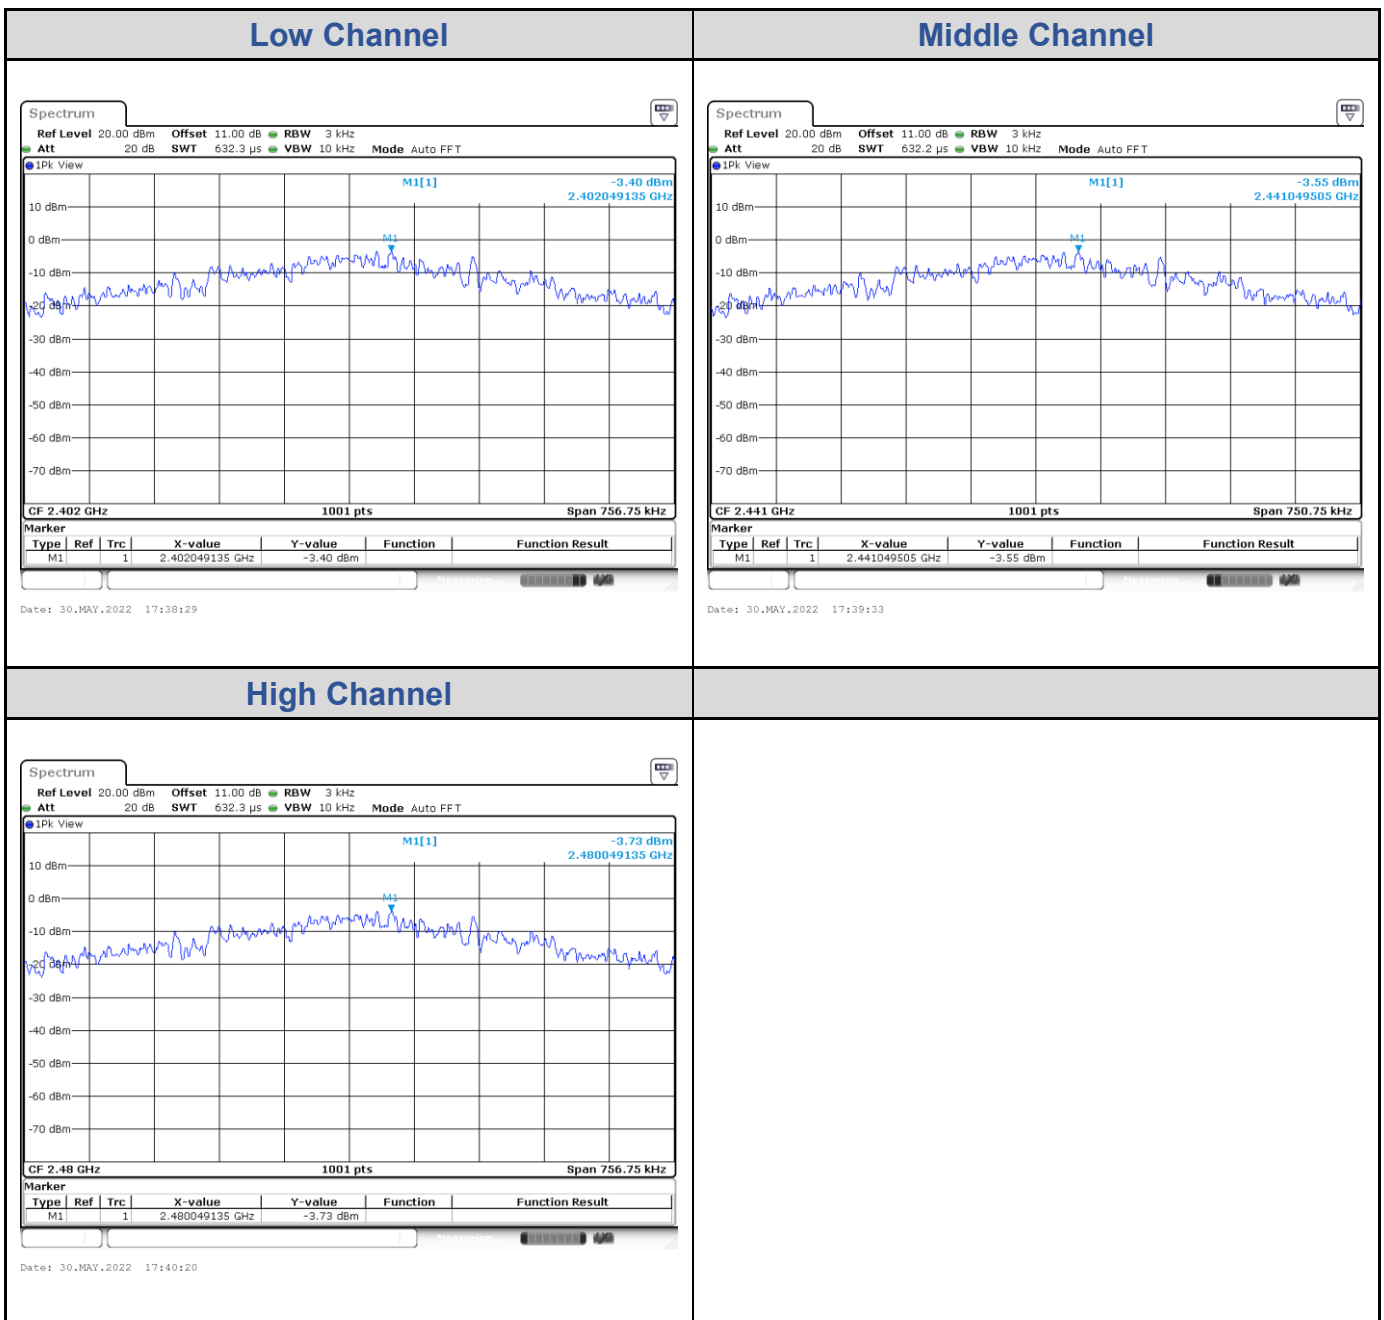


**Nordic Original**

Channel	Channel Frequency (MHz)	Power Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
Low Channel	2402	-6.07	8	Pass
Middle Channel	2441	-6.25	8	Pass
High Channel	2480	-6.34	8	Pass

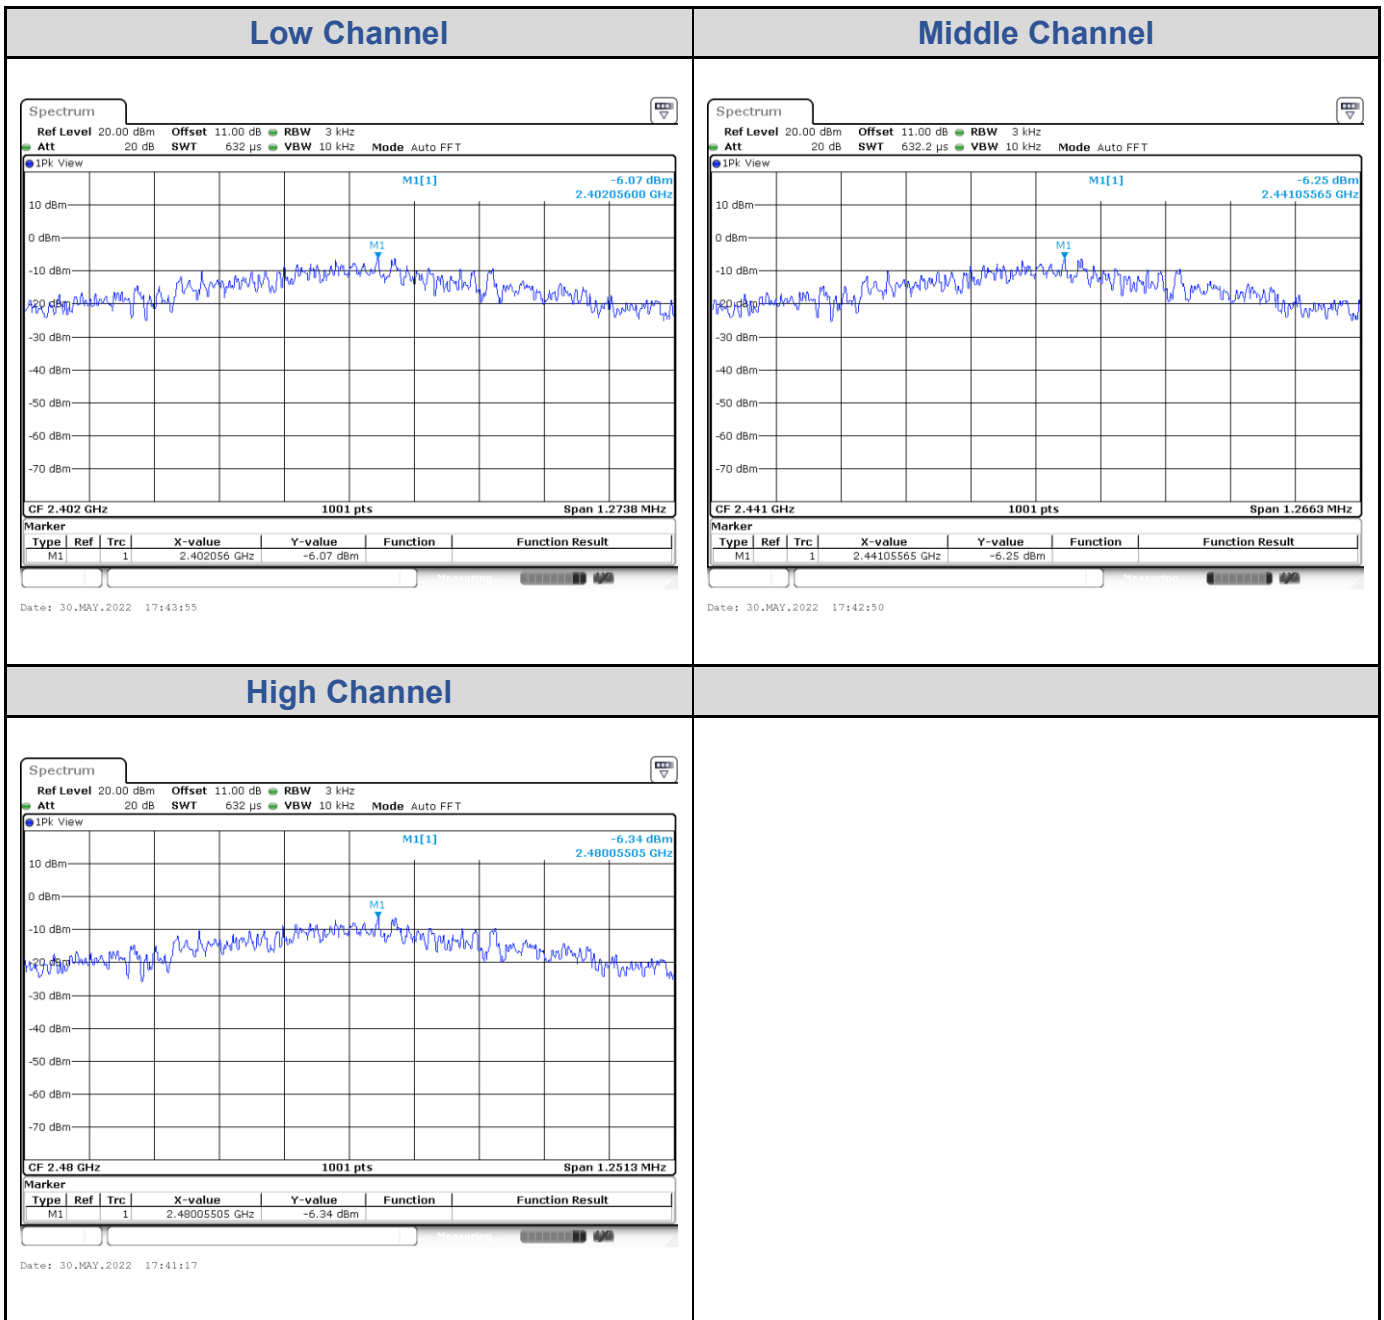


### Test Result of Conducted Spurious Emissions, Tx Mode

#### ANT

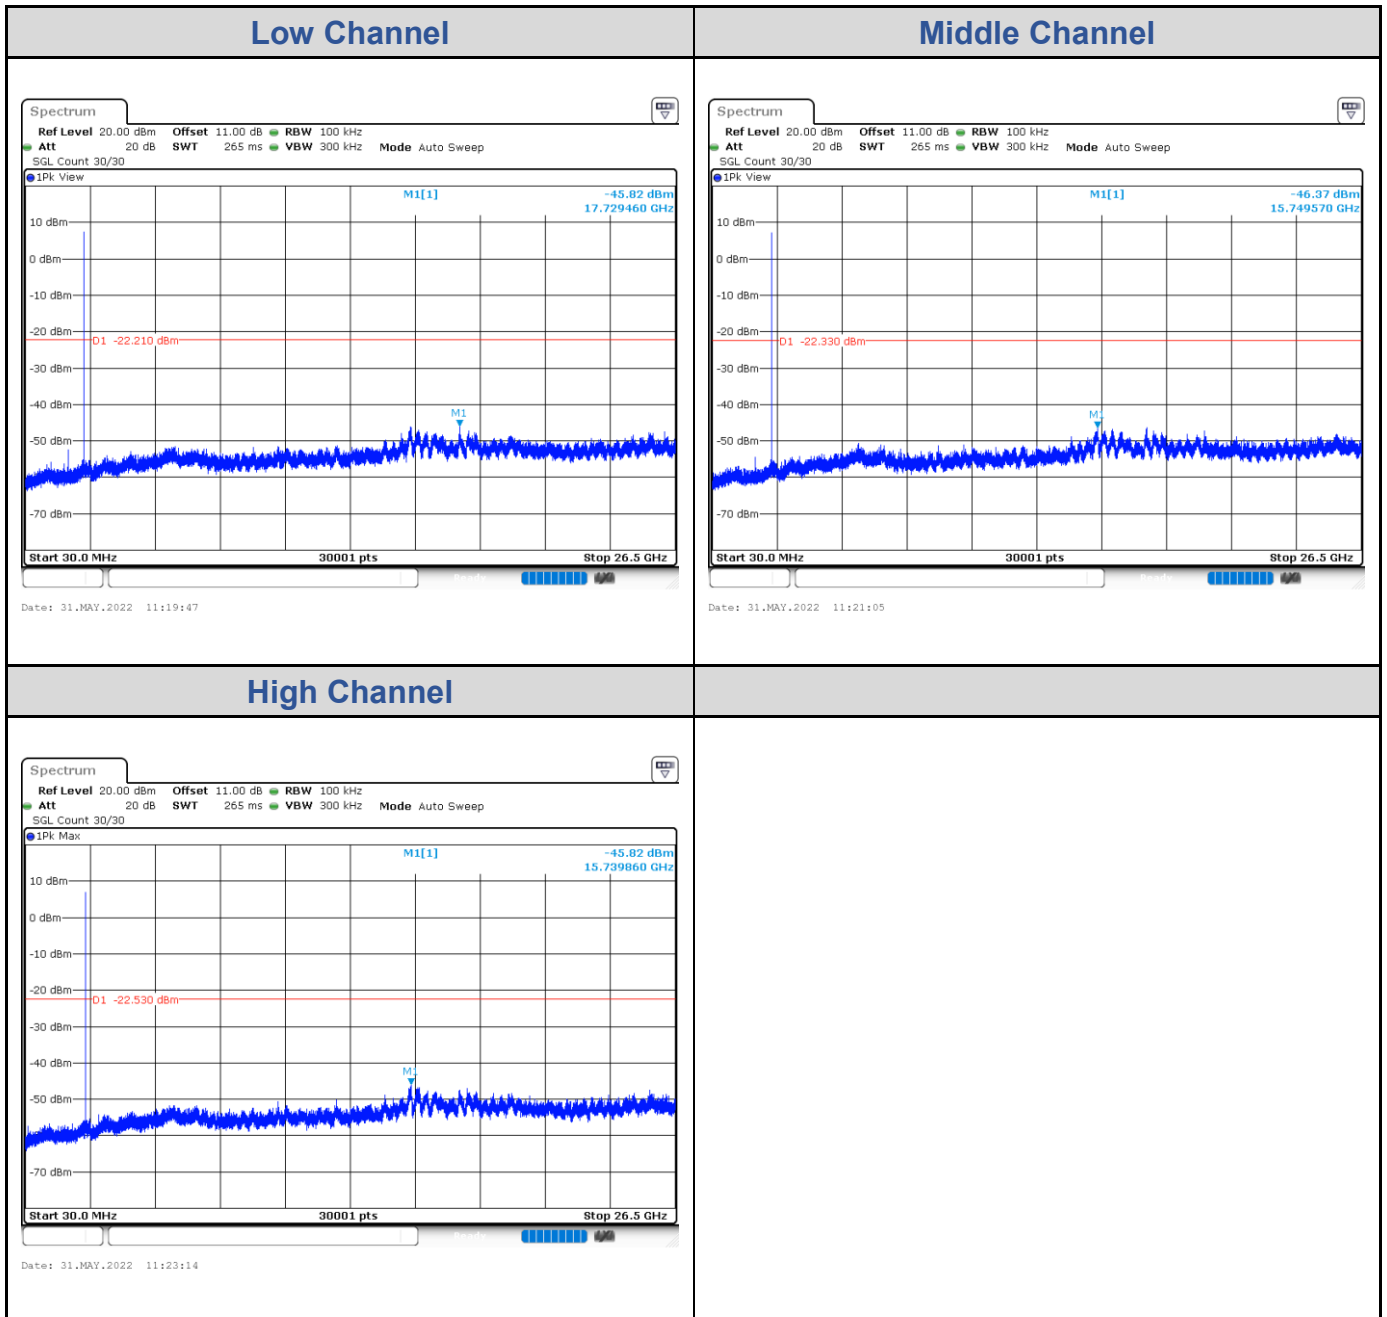


Nordic Original

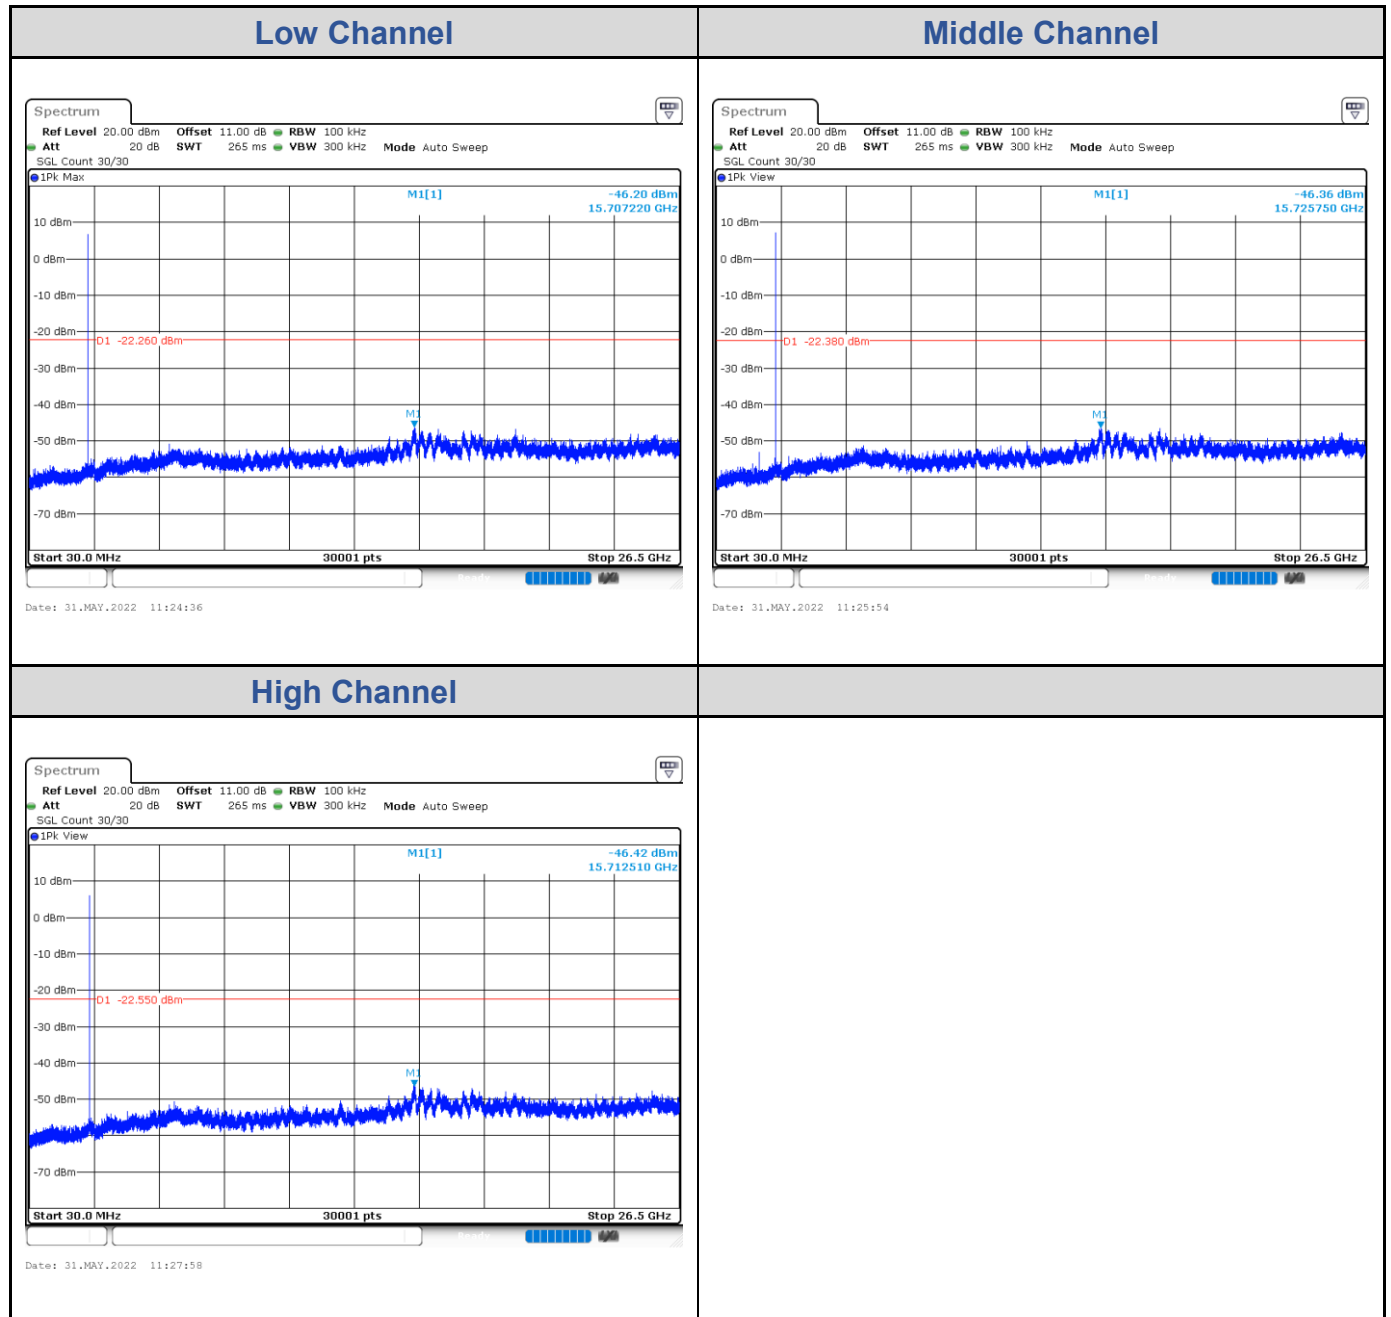



## Test Result of Conducted Band Edge, Tx Mode

### ANT

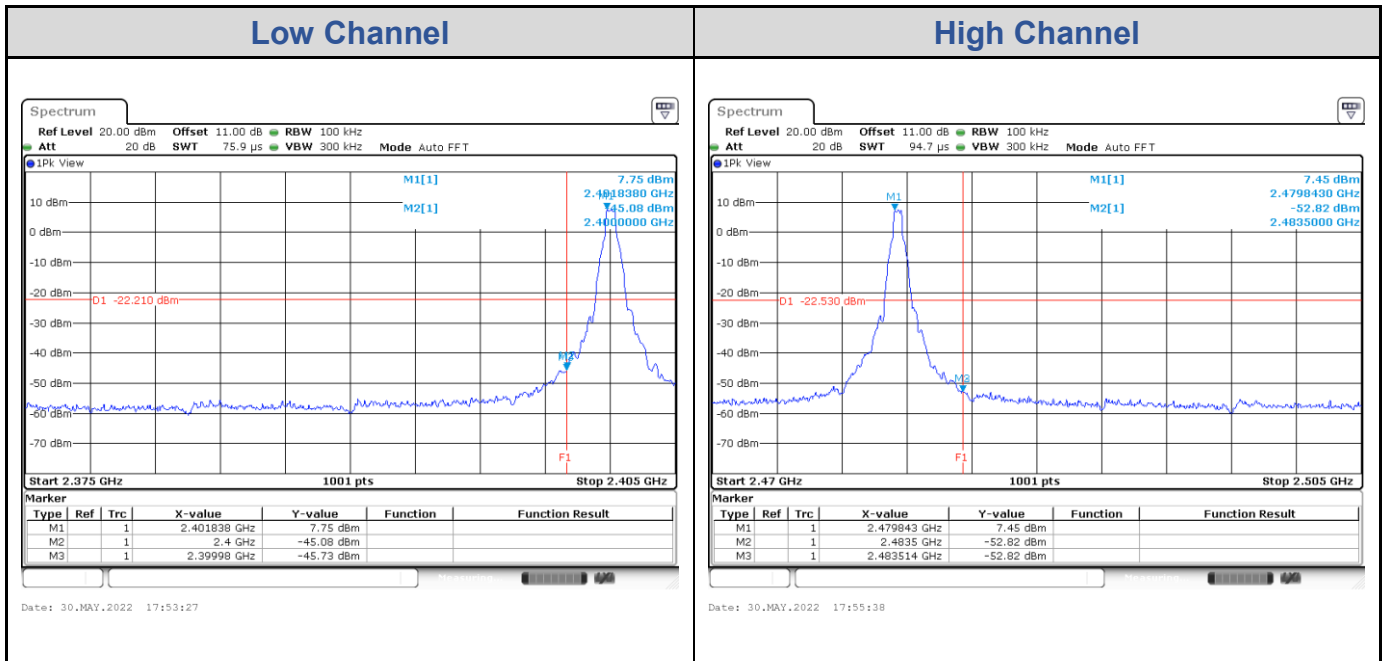

### Nordic Original

