



Appendix A. Test Result of AC Power Line Conducted Emission

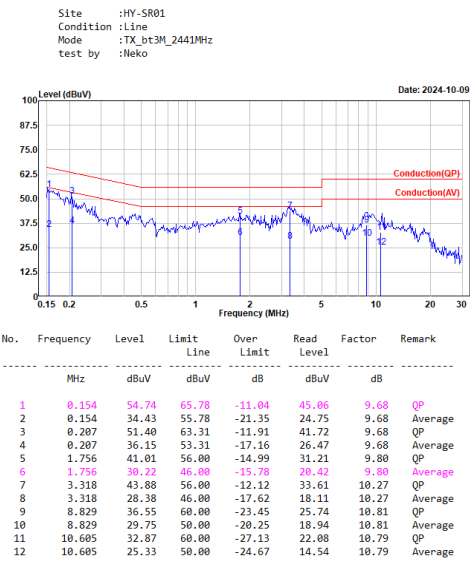


Note:
1. Level = Read Level + Factor
2. Factor = LISN insertion loss + Cable loss
3. Over Limit = Level - Limit Line

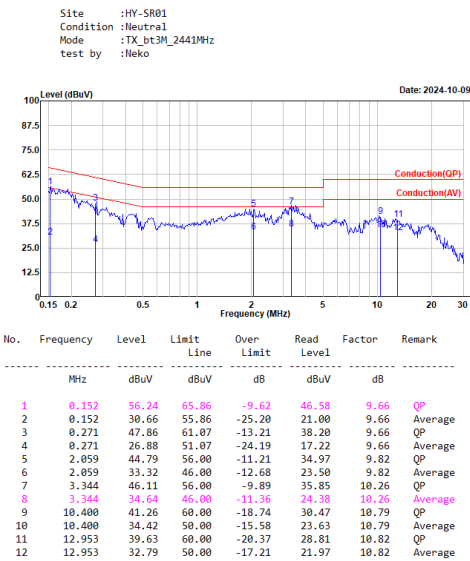

Note:
1. Level = Read Level + Factor
2. Factor = LISN insertion loss + Cable loss
3. Over Limit = Level - Limit Line


Appendix B. Test Result of 20dB Bandwidth

Modulation	Frequency (MHz)	Measure Level (MHz)	Limit (MHz)
GFSK	2402	0.93	-
	2441	0.93	-
	2480	0.93	-
8DPSK	2402	1.29	-
	2441	1.29	-
	2480	1.29	-

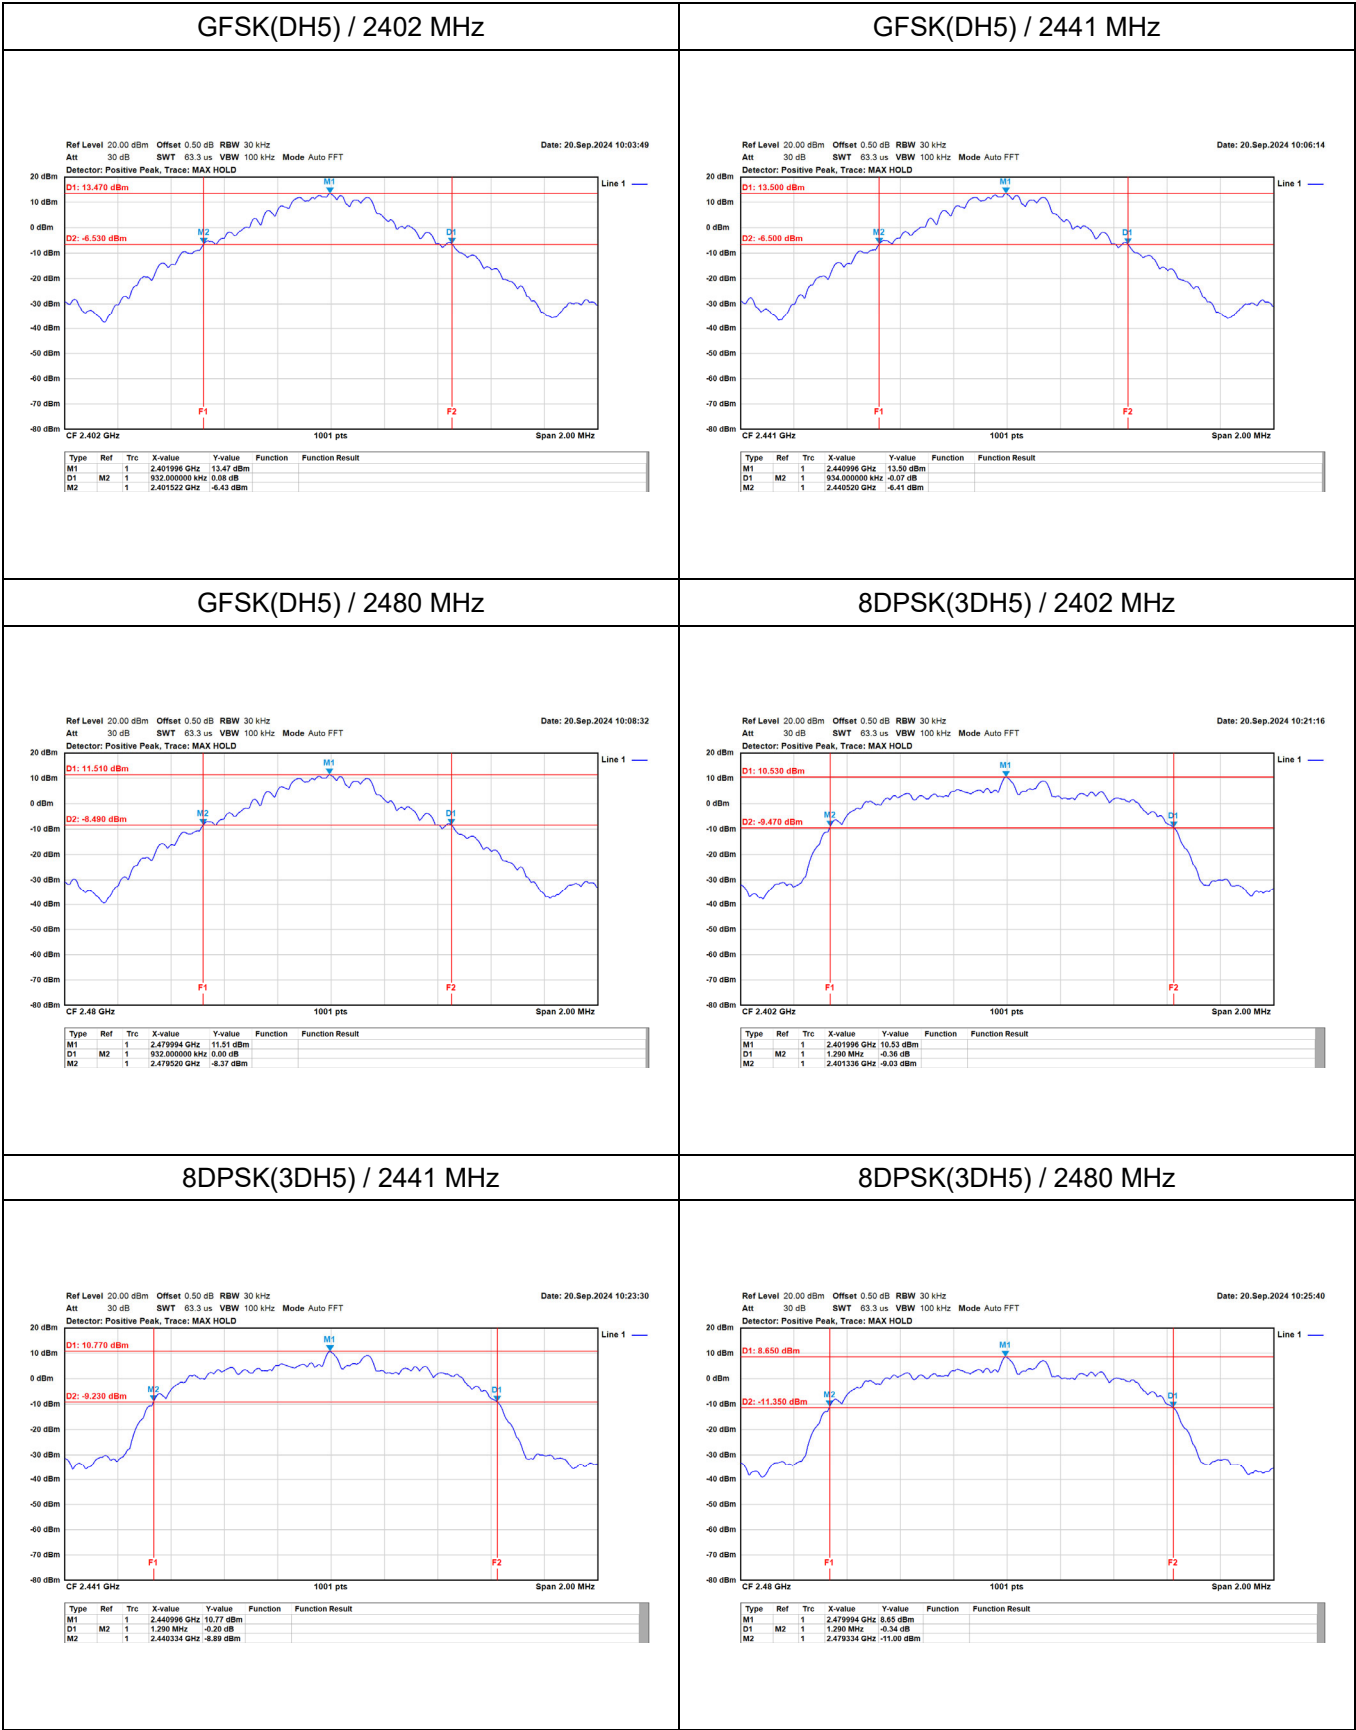

Appendix C. Test Result of Carrier Frequency Separation

Modulation	Frequency (MHz)	Measure Level (MHz)	Limit (MHz)	Result
GFSK	2402	0.99	0.621	Pass
	2441	1.00	0.623	Pass
	2480	1.00	0.621	Pass
8DPSK	2402	0.99	0.860	Pass
	2441	1.00	0.860	Pass
	2480	1.00	0.860	Pass

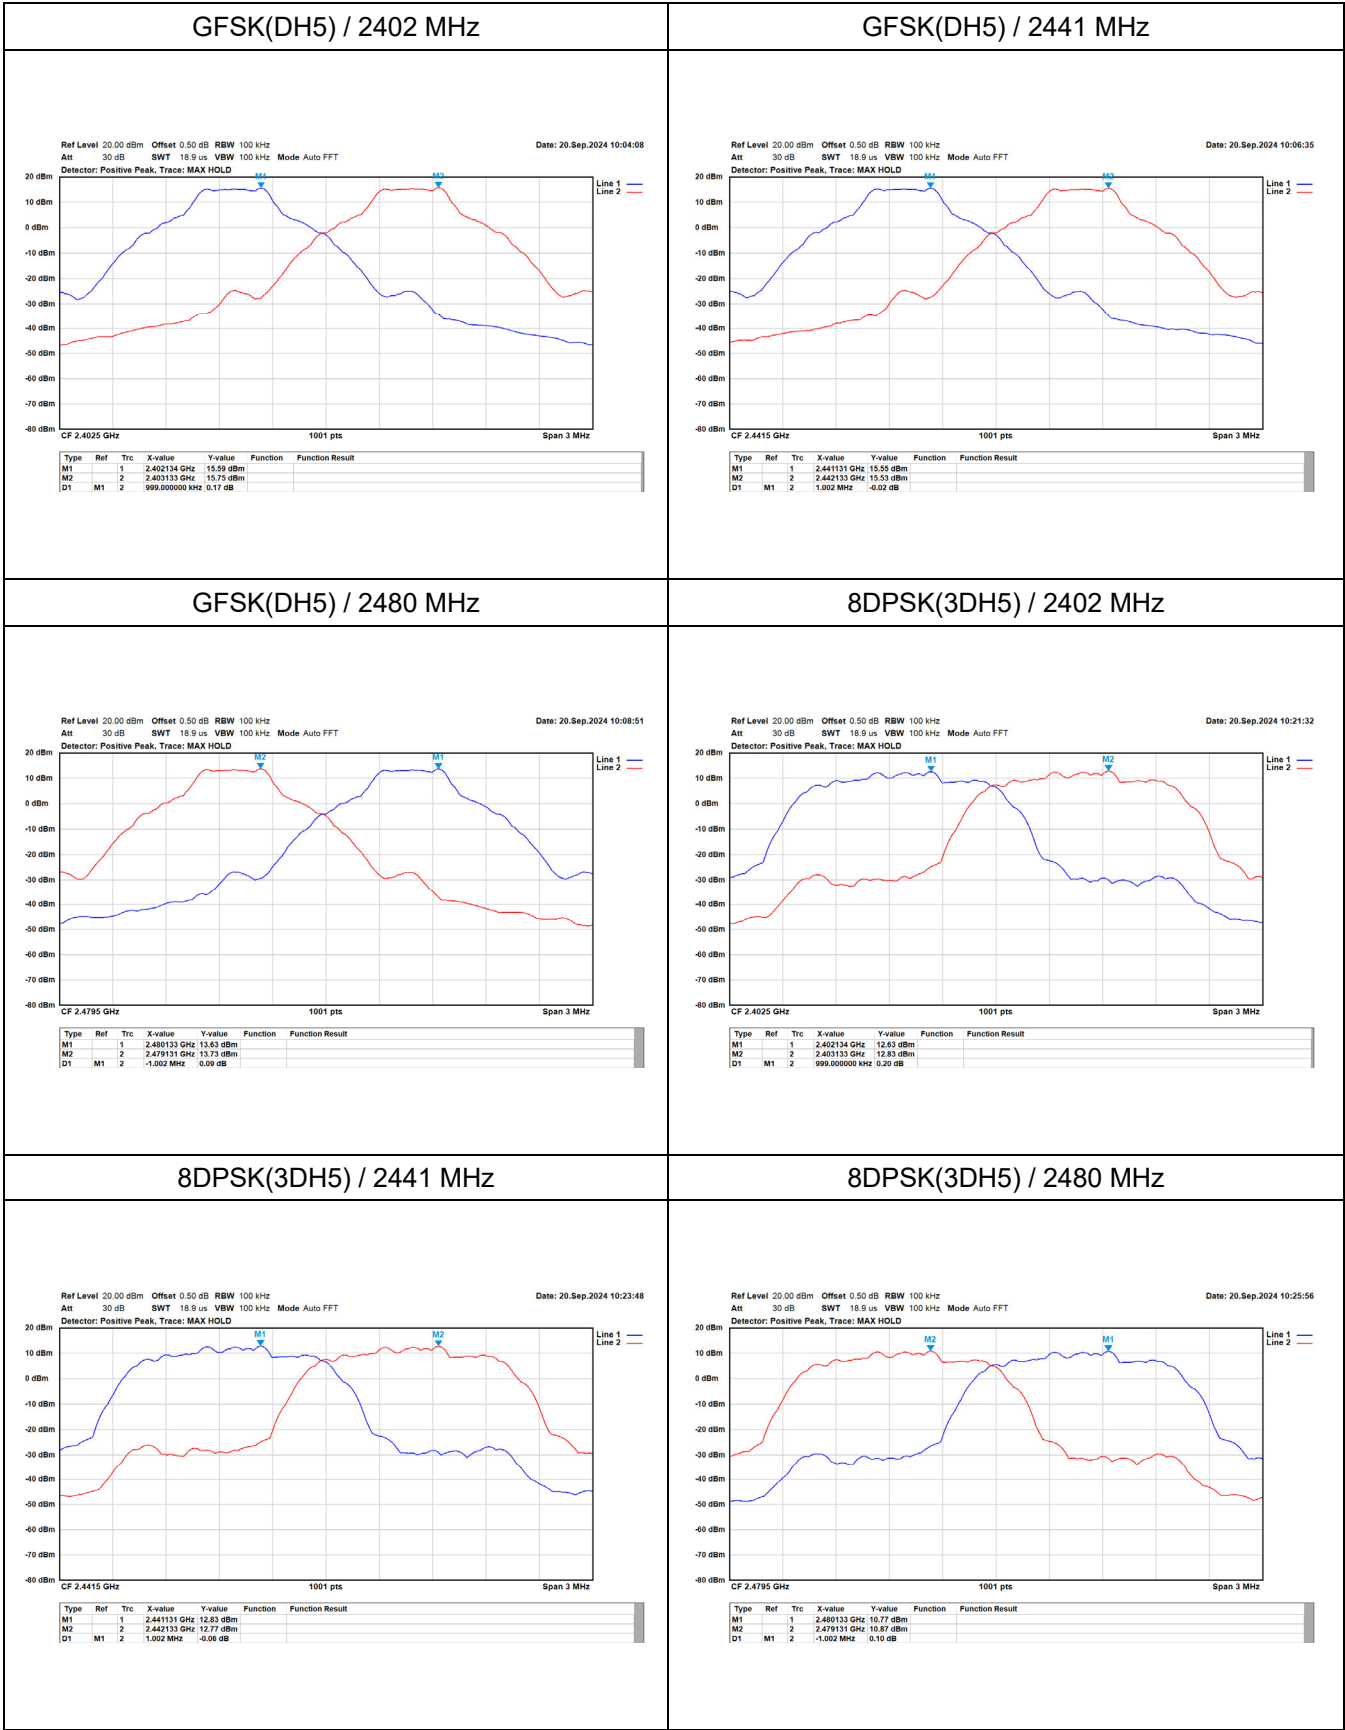


Appendix D. Test Result of Maximum Conducted Output Power

Modulation	Frequency (MHz)	Maximum Conducted Peak Output Power (dBm)	Limit (dBm)	Result
GFSK	2402	13.01	21.00	Pass
	2441	13.53	21.00	Pass
	2480	15.13	21.00	Pass
8DPSK	2402	16.09	21.00	Pass
	2441	15.78	21.00	Pass
	2480	14.59	21.00	Pass


Appendix E. Test Result of Number of Hopping Frequency

Frequency Range (MHz)	Measure Level (Channels)	Limit (Channels)
2402.0 ~ 2480.0	79	≥ 15

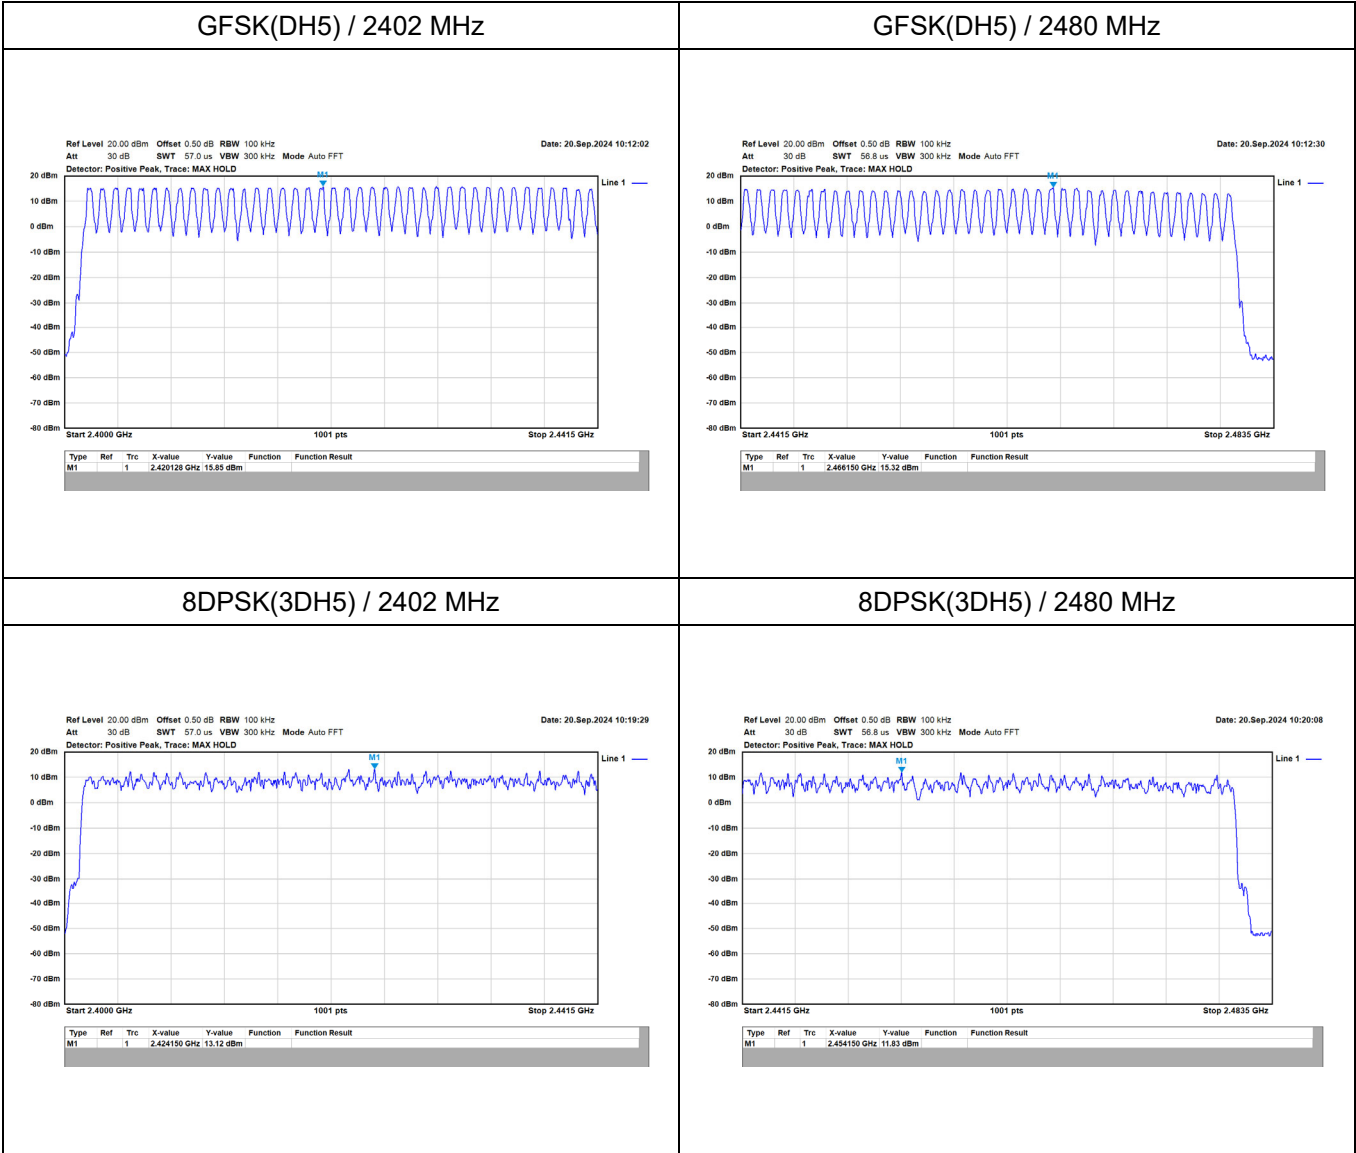


Appendix F. Test Result of Dwell Time

Modulation	Occupancy Time of Frequency Hopping System
GFSK	A) 2402 MHz Test Time Period: $0.4 \times 79 = 31.60$ sec, Time slot length :2.86 = 0.002860 sec Dwell Time : $0.002860 \times (266.67/79) \times 31.60 = 0.305$ sec °
	B) 2441 MHz Test Time Period: $0.4 \times 79 = 31.60$ sec, Time slot length :2.84 = 0.002840 sec Dwell Time : $0.002840 \times (266.67/79) \times 31.60 = 0.303$ sec °
	C) 2480 MHz Test Time Period: $0.4 \times 79 = 31.60$ sec, Time slot length :2.86 = 0.002860 sec Dwell Time : $0.002860 \times (266.67/79) \times 31.60 = 0.305$ sec °
8DPSK	A) 2402 MHz Test Time Period: $0.4 \times 79 = 31.60$ sec, Time slot length :2.86 = 0.002860 sec Dwell Time : $0.002860 \times (266.67/79) \times 31.60 = 0.305$ sec °
	B) 2441 MHz Test Time Period: $0.4 \times 79 = 31.60$ sec, Time slot length :2.84 = 0.002840 sec Dwell Time : $0.002840 \times (266.67/79) \times 31.60 = 0.303$ sec °
	C) 2480 MHz Test Time Period: $0.4 \times 79 = 31.60$ sec, Time slot length :2.86 = 0.002860 sec Dwell Time : $0.002860 \times (266.67/79) \times 31.60 = 0.305$ sec °
Test Result: The Average Occupancy Time of Each Highest, Middle and Lowest Channel Is Less than 0.4 sec, And Corresponds to The Standard.	

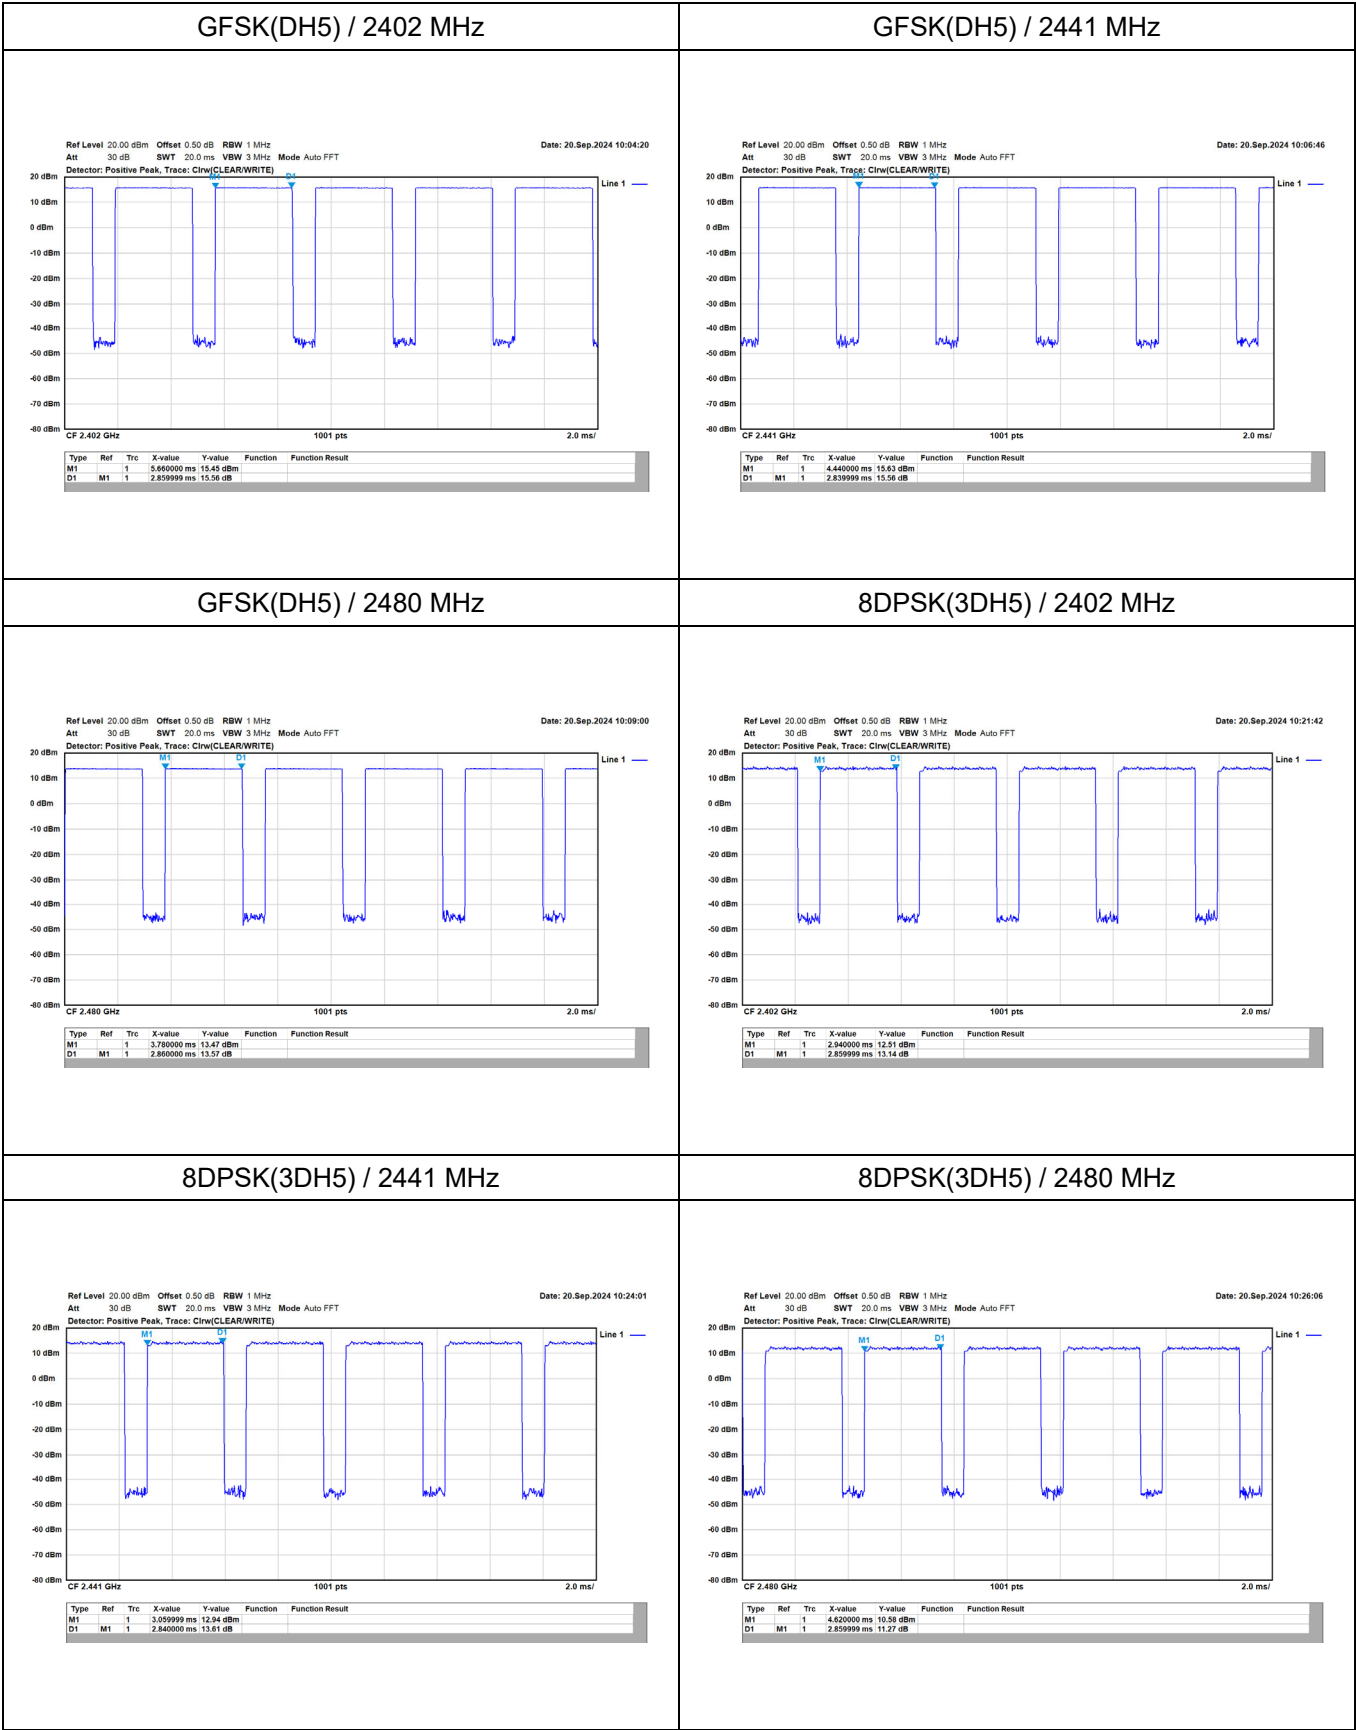


Appendix G. Test Result of Antenna Port Conducted Emission

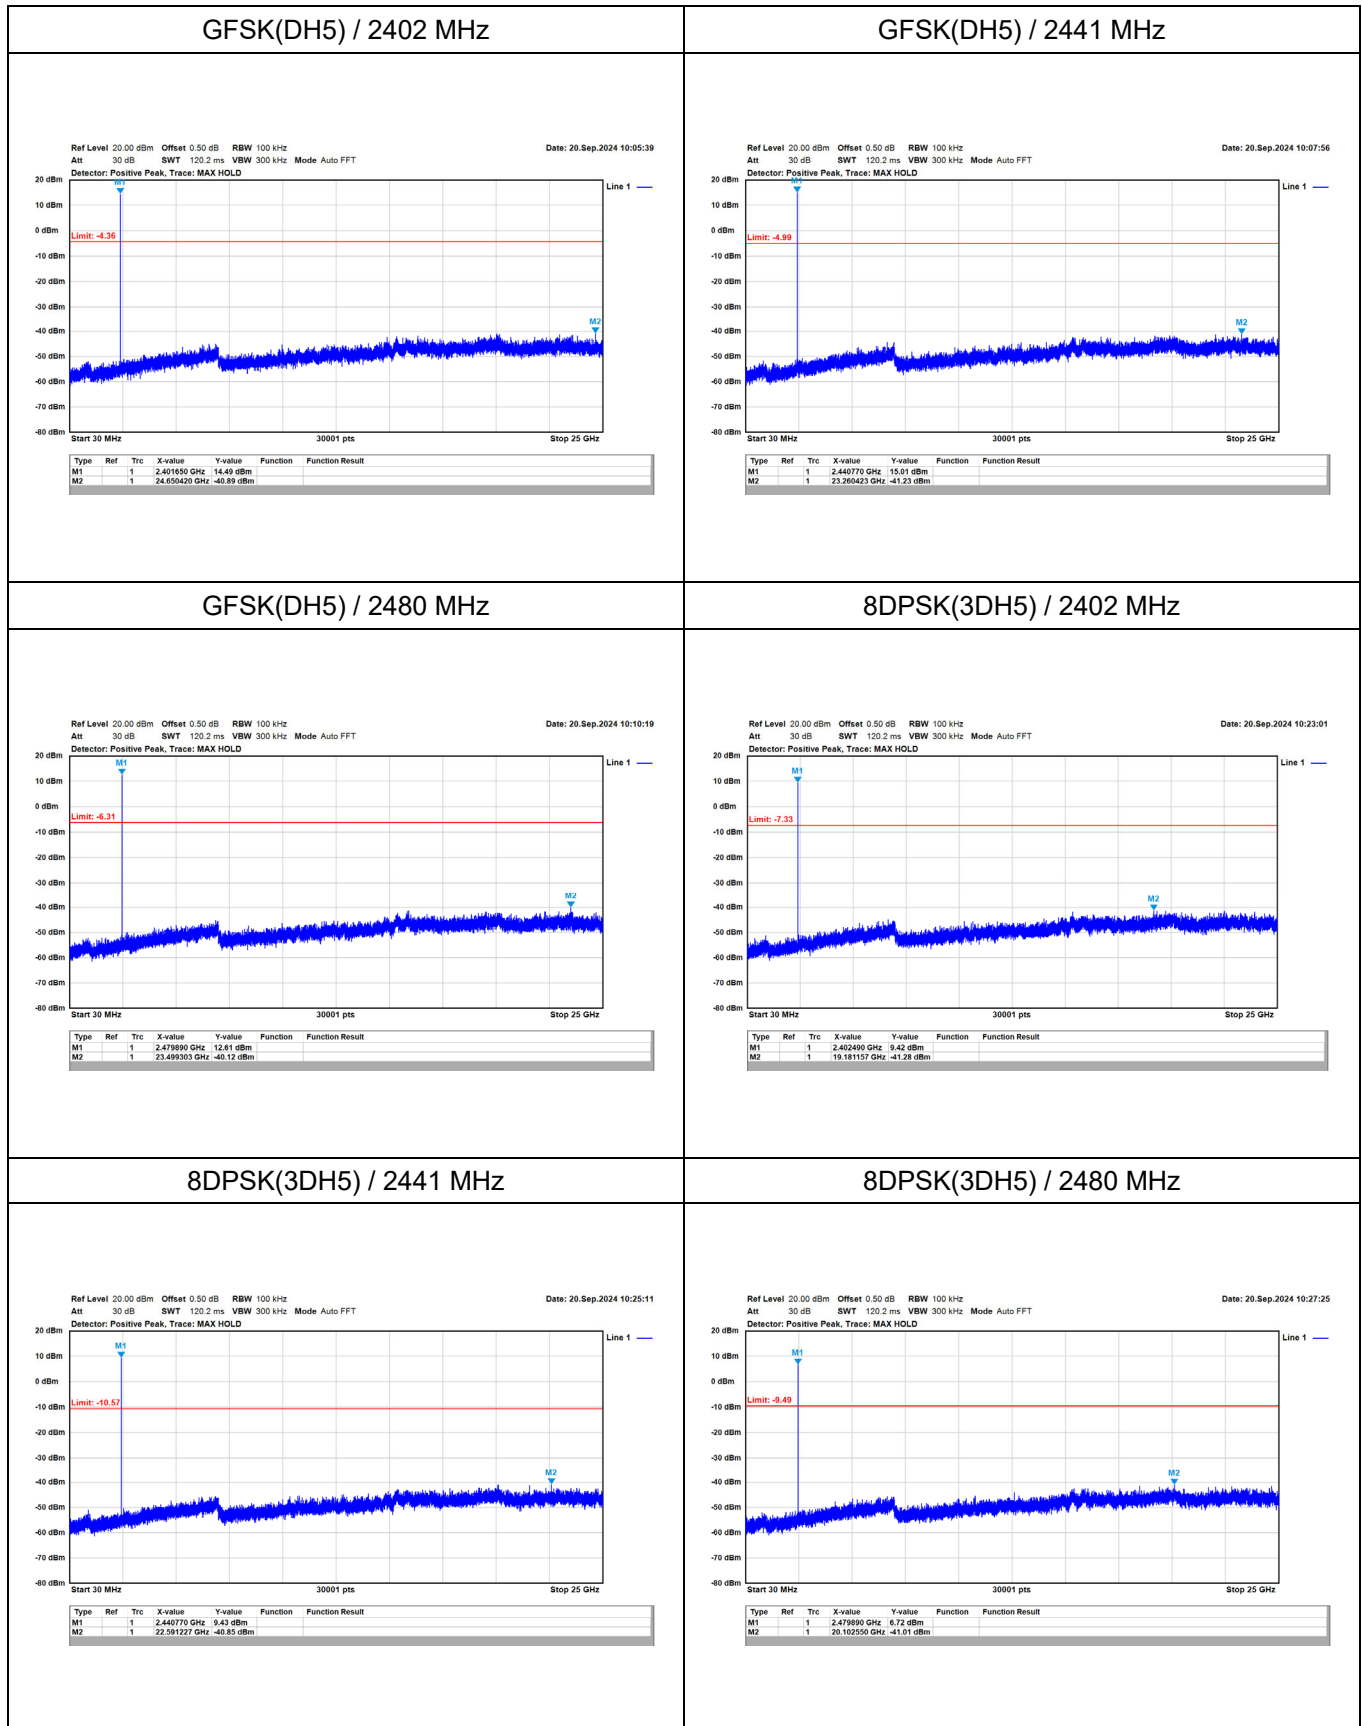

Hopping off


Modulation	Measurement Level Δ (dB)	Result
GFSK	> 20	Pass
8DPSK	> 20	Pass

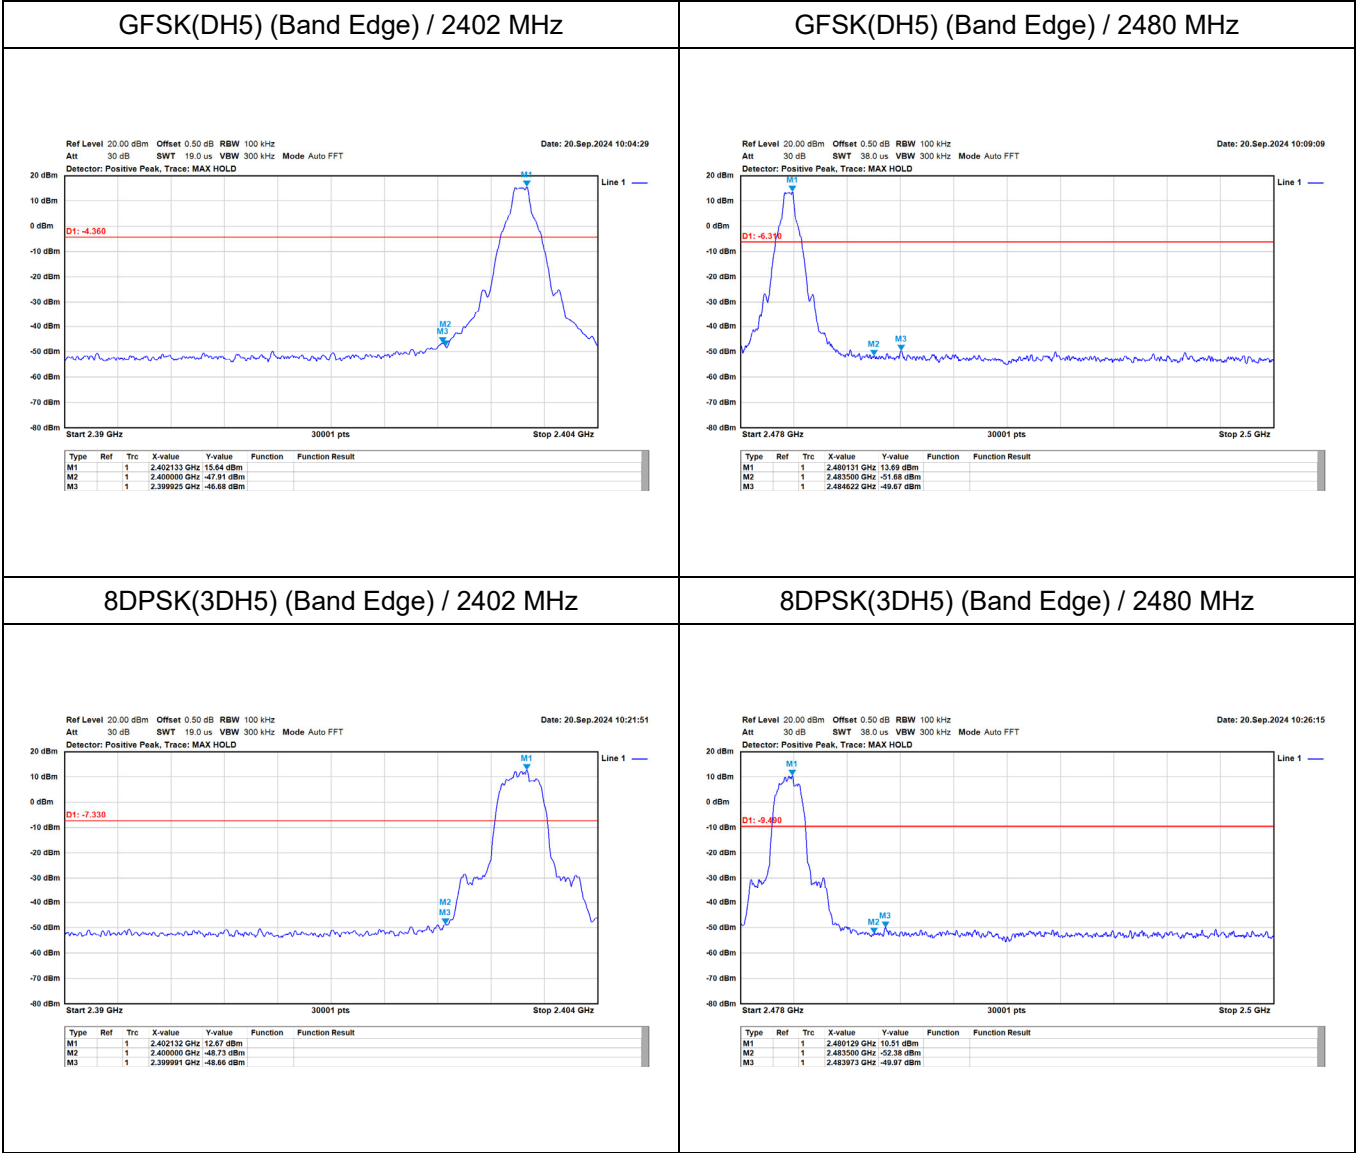


Hopping on

Modulation	Measurement Level Δ (dB)	Result
GFSK	> 20	Pass
8DPSK	> 20	Pass


GFSK(DH5) (Band Edge Hopping) / 2402 MHz

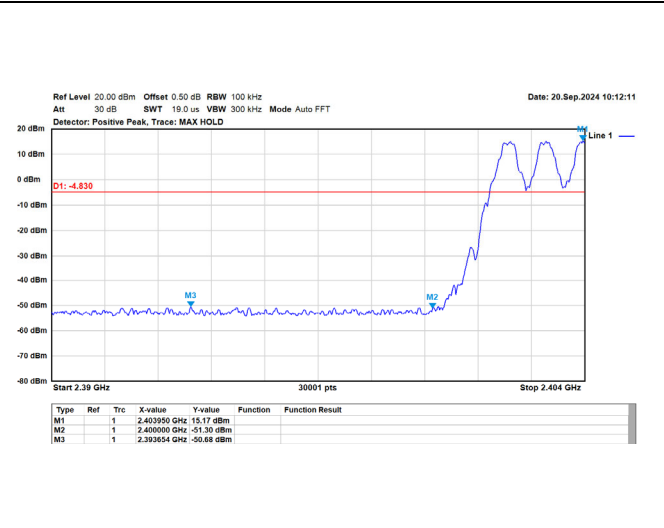


GFSK(DH5) (Band Edge Hopping) / 2480 MHz

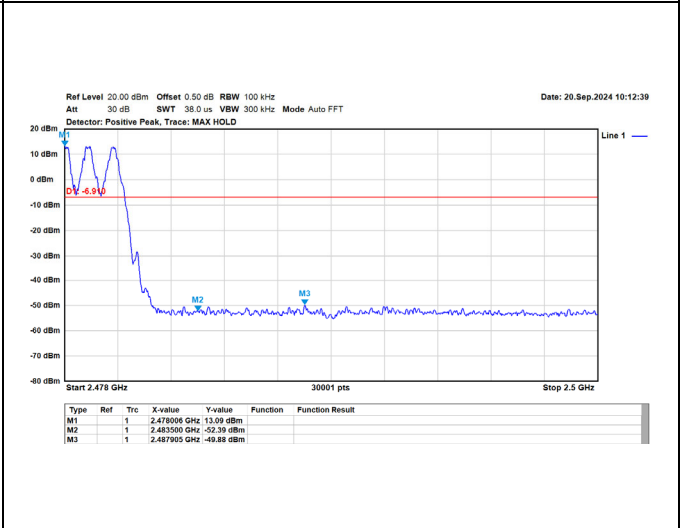

8DPSK(3DH5) (Band Edge Hopping) / 2402 MHz

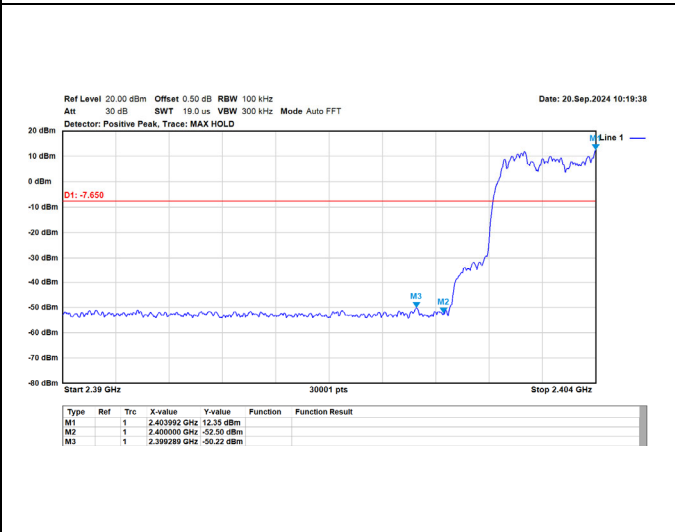


8DPSK(3DH5) (Band Edge Hopping) / 2480 MHz

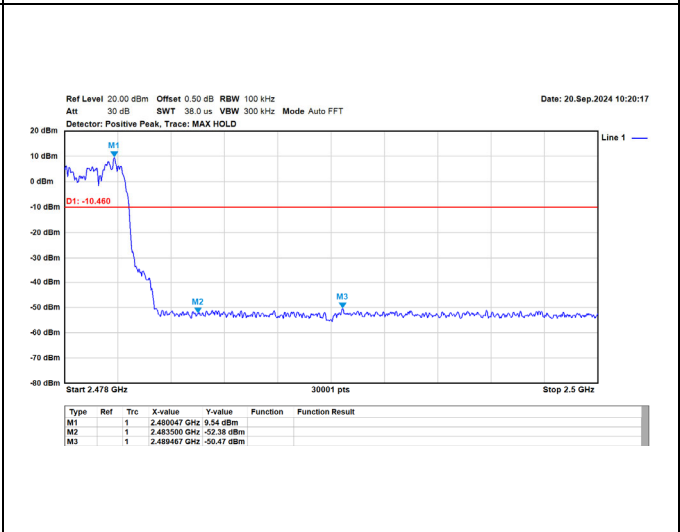

Appendix H. Test Result of Radiated Emission

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_bt1M_2402MHz
Test BY :Bob

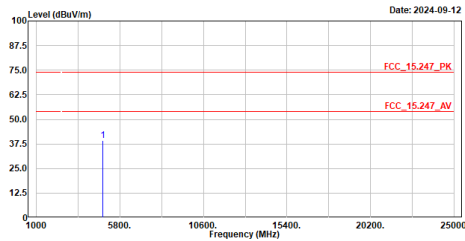


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4884.000	39.19	74.00	-34.81	53.41	-14.22	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_bt1M_2402MHz
Test BY :Bob

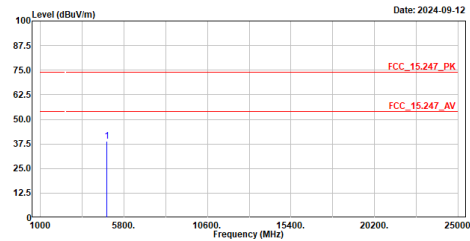


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4884.000	39.02	74.00	-34.98	53.24	-14.22	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_bt1M_2441MHz
Test BY :Bob

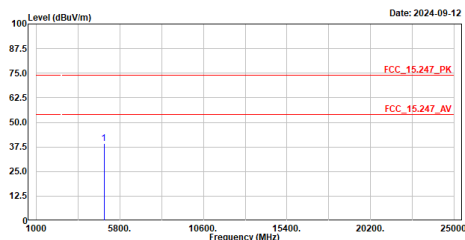


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4882.000	39.15	74.00	-34.85	52.90	-13.75	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_bt1M_2441MHz
Test BY :Bob

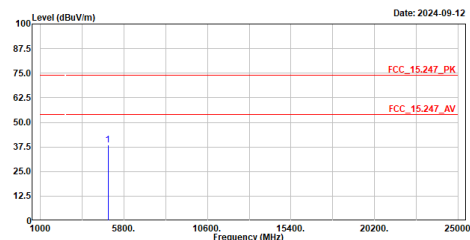


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4882.000	38.36	74.00	-35.64	52.11	-13.75	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_bt1M_2480MHz
Test BY :Bob

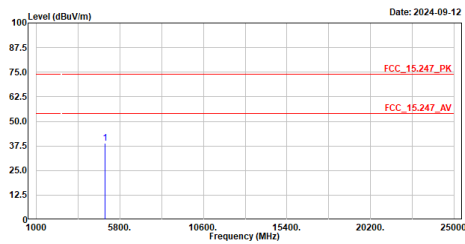


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4960.000	38.85	74.00	-35.15	52.02	-13.17	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_bt1M_2480MHz
Test BY :Bob

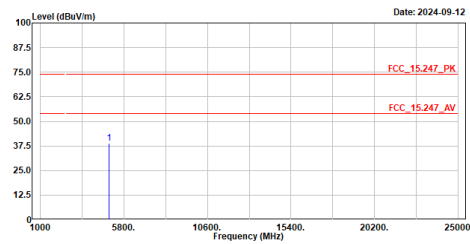


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4960.000	38.95	74.00	-35.05	52.12	-13.17	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_bt3M_2402MHz
Test BY :Bob

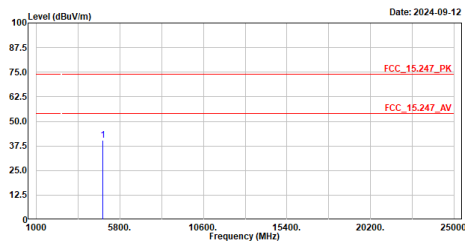


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4804.000	40.23	74.00	-33.77	54.45	-14.22	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_bt3M_2402MHz
Test BY :Bob

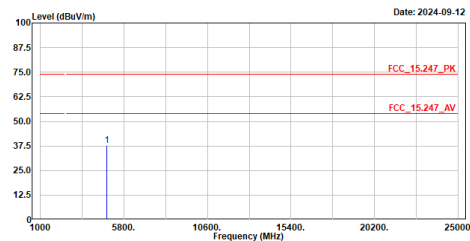


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4804.000	37.81	74.00	-36.19	52.03	-14.22	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_bt3M_2441MHz
Test BY :Bob

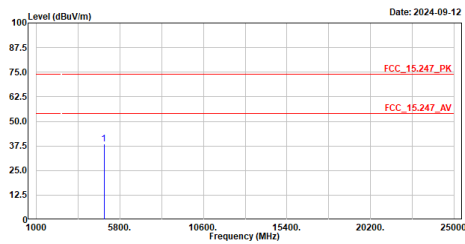


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4882.000	38.35	74.00	-35.65	52.10	-13.75	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_bt3M_2441MHz
Test BY :Bob

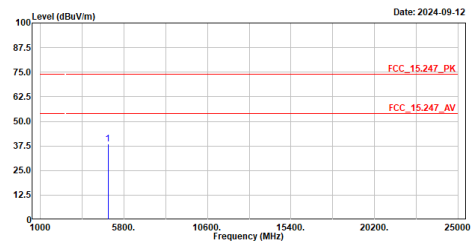


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4882.000	38.50	74.00	-35.50	52.25	-13.75	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_bt3M_2480MHz
Test BY :Bob

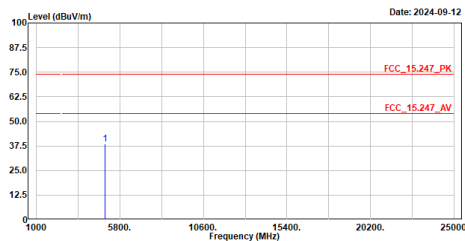


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4960.000	38.66	74.00	-35.34	51.83	-13.17	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_bt3M_2480MHz
Test BY :Bob

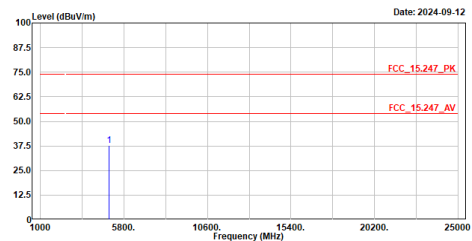


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4960.000	37.57	74.00	-36.43	50.74	-13.17	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_bt3M_2441MHz
Test BY :Ashton

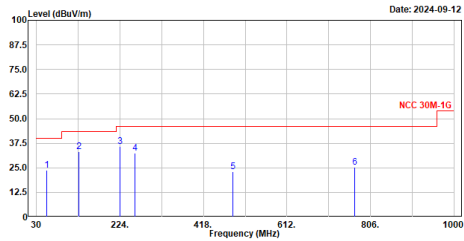


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	53.280	23.95	40.00	-16.05	47.33	-23.38	QP
2	127.970	33.03	43.50	-10.47	58.47	-25.44	QP
3	224.970	35.93	46.00	-10.07	62.08	-26.15	QP
4	258.920	32.35	46.00	-13.65	56.88	-24.53	QP
5	486.870	23.11	46.00	-22.89	41.21	-18.10	QP
6	769.140	25.35	46.00	-20.65	38.03	-12.68	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_bt3M_2441MHz
Test BY :Ashton

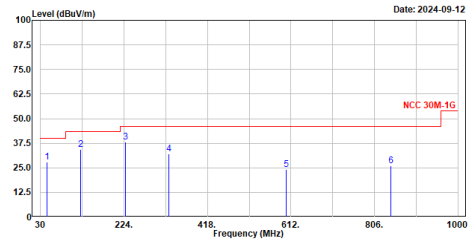


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	45.520	27.82	40.00	-12.18	51.23	-23.41	QP
2	123.120	34.47	43.50	-9.03	60.32	-25.85	QP
3	226.910	37.97	46.00	-8.03	63.92	-25.95	QP
4	327.790	32.12	46.00	-13.88	54.07	-21.95	QP
5	600.360	24.25	46.00	-21.75	39.47	-15.22	QP
6	844.800	25.91	46.00	-20.09	37.78	-11.87	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB03
 Condition :3m Horizontal
 Mode :TX_bt1M_2402MHz
 Test BY :Bob

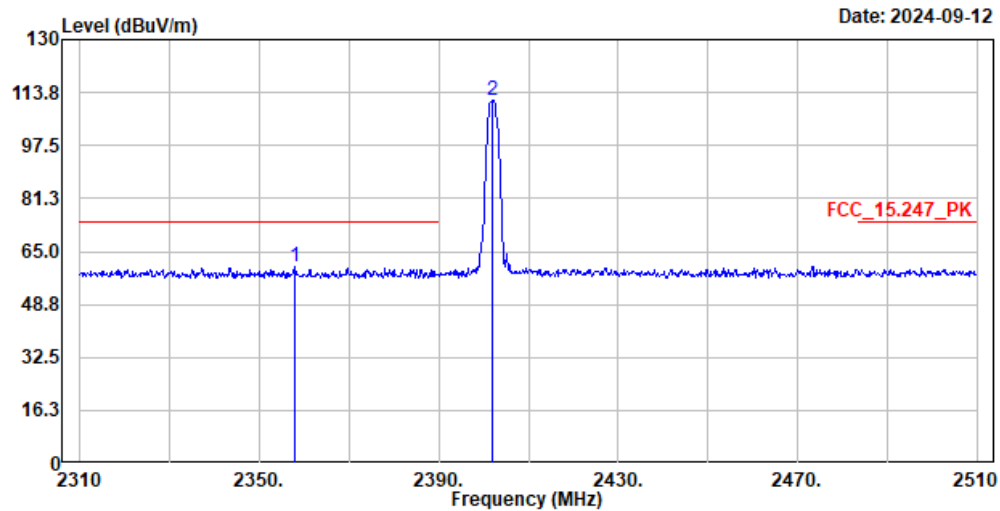

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2357.800	60.15	74.00	-13.85	29.66	30.49	Peak
2	2402.000	111.48	-----	-----	80.95	30.53	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Horizontal-Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
2357.8	60.15	-31.057	29.093	-24.907	54.000
2402	111.48	-31.057	80.423	--	--

Site :HY-CB03
 Condition :3m Vertical
 Mode :TX_bt1M_2402MHz
 Test BY :Bob

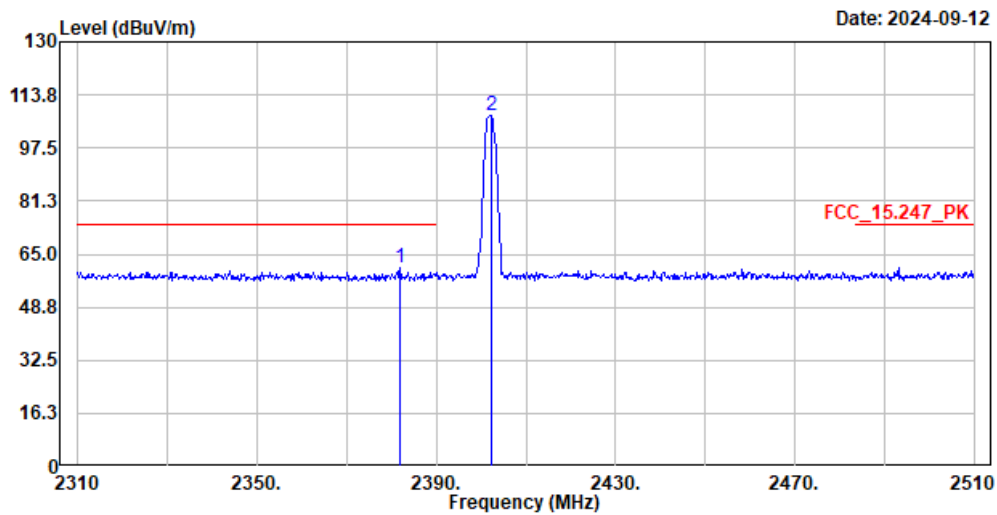

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2382.000	60.75	74.00	-13.25	30.25	30.50	Peak
2	2402.200	107.55	-----	-----	77.02	30.53	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical-Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
2382	60.75	-31.057	29.693	-24.307	54.000
2402.2	107.55	-31.057	76.493	--	--

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_bt1M_2480MHz
Test BY :Bob

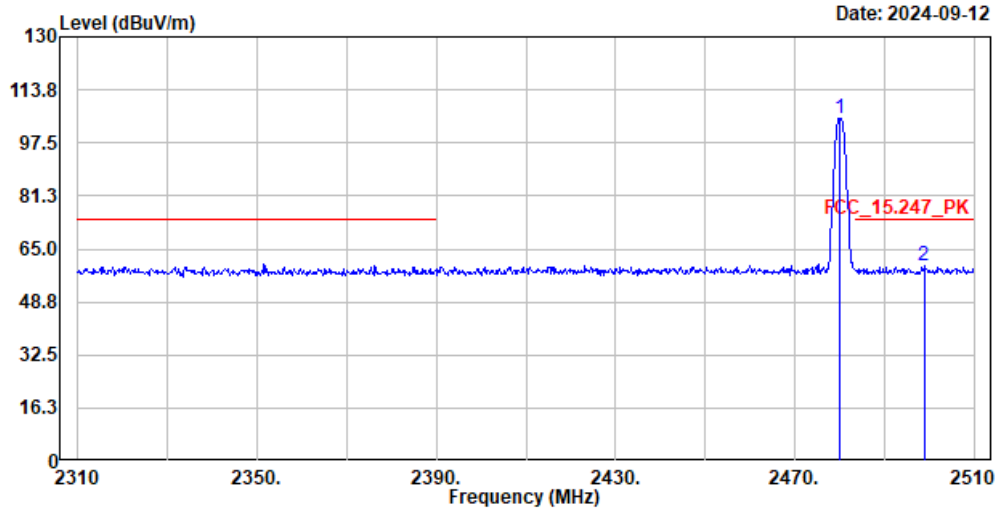

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2480.000	104.98	-----	-----	74.52	30.46	Peak
2	2498.800	59.68	74.00	-14.32	29.10	30.58	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Horizontal-Average Detector:

Frequency (MHz)	Peak Measurement (dBuV/m)	Duty Cycle Factor (dB)	Measurement Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)
2480	104.98	-31.057	73.923	--	--
2498.8	59.68	-31.057	28.623	-25.377	54.000

Site :HY-CB03
 Condition :3m Vertical
 Mode :TX_bt1M_2480MHz
 Test BY :Bob

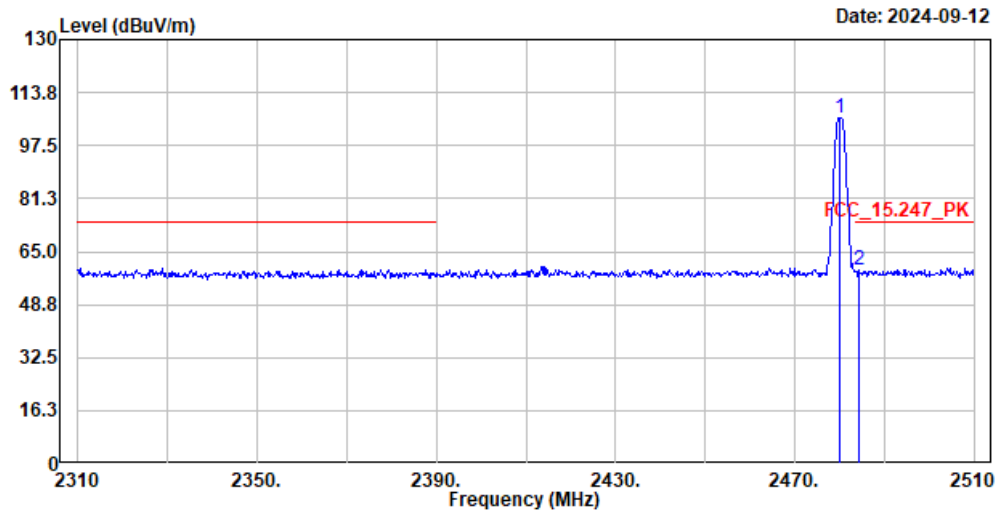

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2480.000	106.21	-----	-----	75.75	30.46	Peak
2	2484.400	59.52	74.00	-14.48	29.01	30.51	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical-Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
2480	106.21	-31.057	75.153	--	--
2484.4	59.52	-31.057	28.463	-25.537	54.000

Site :HY-CB03
 Condition :3m Horizontal
 Mode :TX_bt3M_2402MHz
 Test BY :Bob

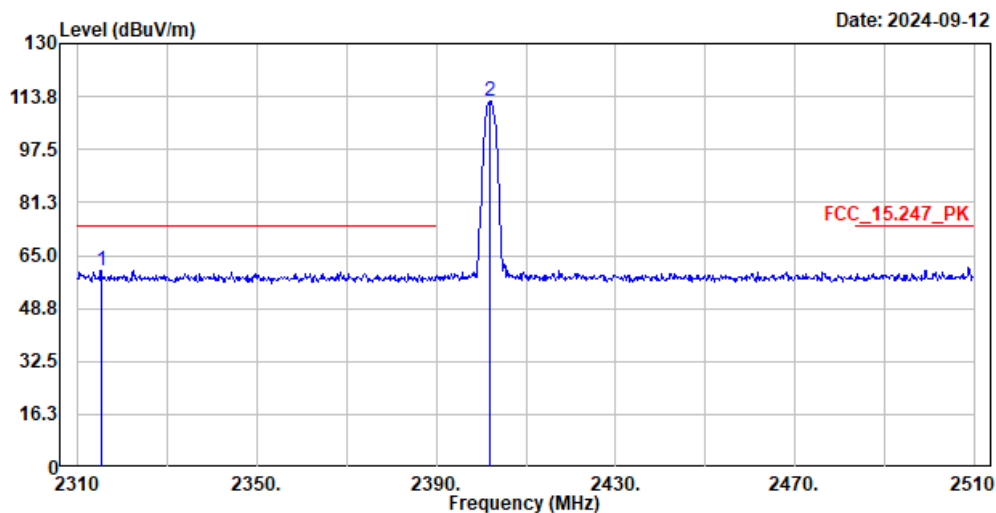

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2315.200	60.51	74.00	-13.49	29.85	30.66	Peak
2	2402.000	112.37	-----	-----	81.84	30.53	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Horizontal-Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
2315.2	60.51	-30.752	29.758	-24.242	54.000
2402	112.37	-30.752	81.618	--	--

Site :HY-CB03
Condition :3m Vertical
Mode :TX_bt3M_2402MHz
Test BY :Bob

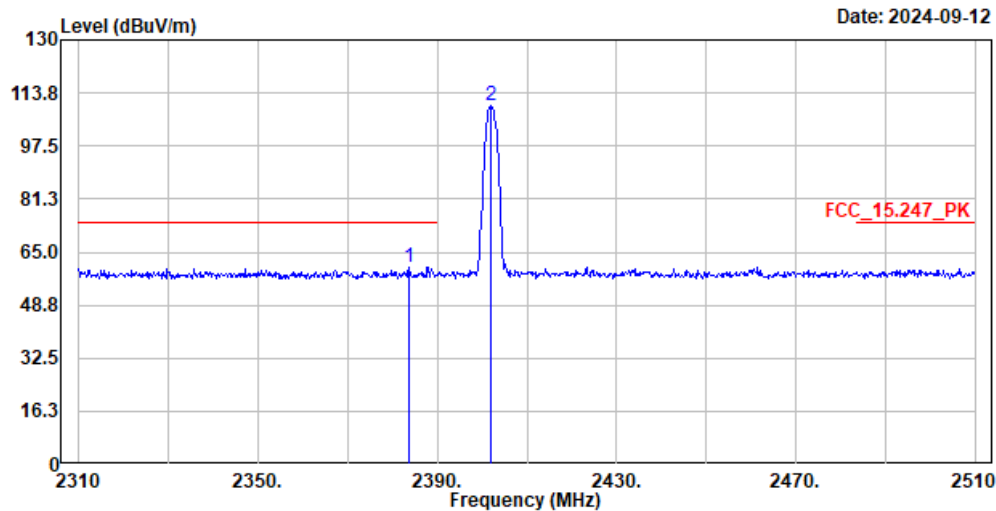

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2383.800	60.48	74.00	-13.52	29.98	30.50	Peak
2	2402.000	109.88	-----	-----	79.35	30.53	Peak


Note:

- 1. Level = Read Level + Factor
- 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
- 3. Over Limit = Level - Limit Line
- 4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical-Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
2383.8	60.48	-30.752	29.728	-24.272	54.000
2402	109.88	-30.752	79.128	--	--

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_bt3M_2480MHz
Test BY :Bob

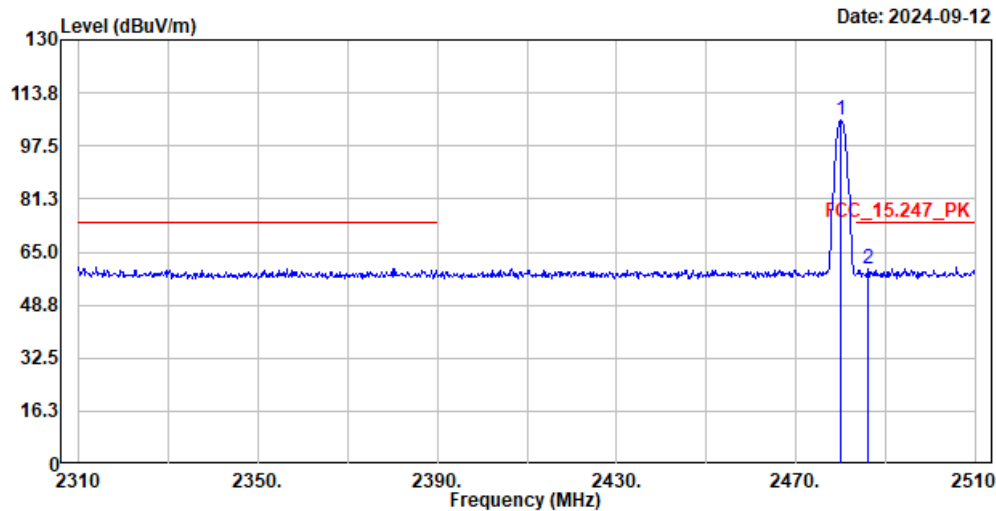

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB/m	
1	2480.000	105.34	-----	-----	74.88	30.46	Peak
2	2486.000	60.09	74.00	-13.91	29.56	30.53	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Horizontal-Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
2480	105.34	-30.752	74.588	--	--
2486	60.09	-30.752	29.338	-24.662	54.000

Site :HY-CB03
Condition :3m Vertical
Mode :TX_bt3M_2480MHz
Test BY :Bob

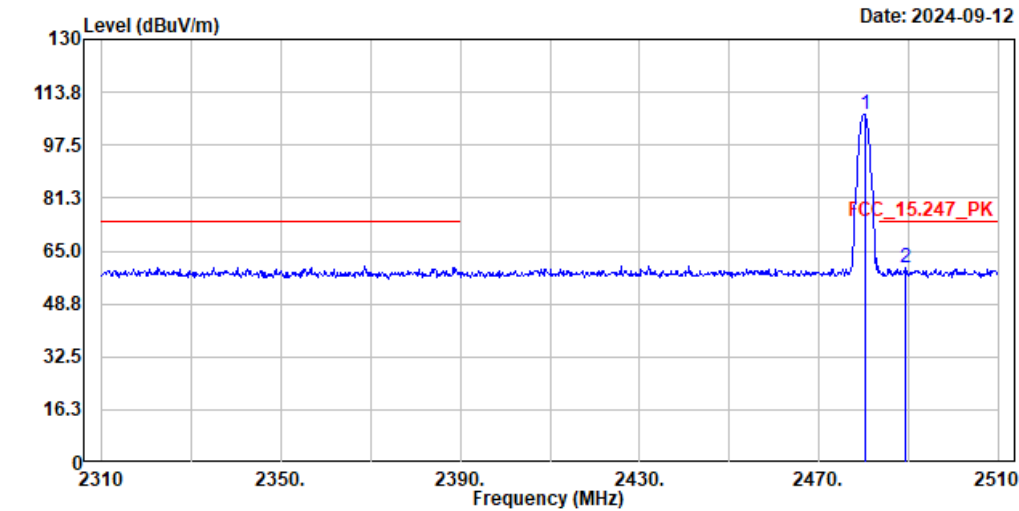

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2480.200	106.79	-----	-----	76.33	30.46	Peak
2	2489.400	59.70	74.00	-14.30	29.14	30.56	Peak

Note:


1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical-Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
2480.2	106.79	-30.752	76.038	--	--
2489.4	59.7	-30.752	28.948	-25.052	54.000

Appendix I. Test Result of Radiated Emissions Co-location

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_g_2412MHz+bt1M_2402MHz_5GHR_n14_10M_CH152600
Test BY :Ashton

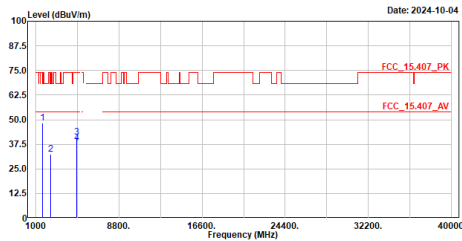


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	1586.000	48.22	74.00	-25.78	73.69	-25.47	Peak
2	2379.000	32.28	74.00	-41.72	55.59	-23.31	Peak
3	4804.000	41.31	74.00	-32.69	55.53	-14.22	Peak
4	4824.000	38.09	74.00	-35.91	52.16	-14.07	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_g_2412MHz+bt1M_2402MHz_5GHR_n14_10M_CH152600
Test BY :Ashton

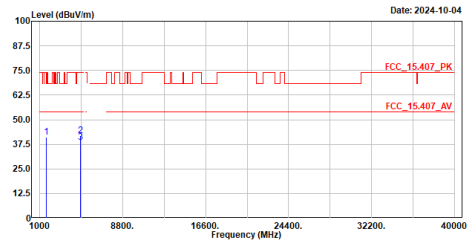


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	1586.000	41.05	74.00	-32.95	66.52	-25.47	Peak
2	4804.000	42.04	74.00	-31.96	56.26	-14.22	Peak
3	4824.000	38.46	74.00	-35.54	52.53	-14.07	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_g_2412MHz+bt1M_2402MHz_LTEB26_15M_QPSK_1R80_CH26865
Test BY :Bob

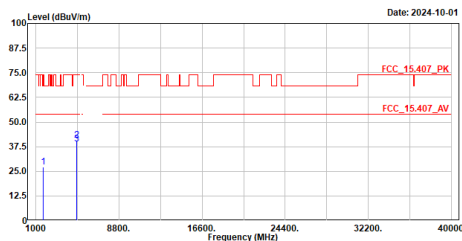


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	1663.000	27.36	74.00	-46.64	52.68	-25.32	Peak
2	4804.000	40.77	74.00	-33.23	54.99	-14.22	Peak
3	4824.000	38.79	74.00	-35.21	52.86	-14.07	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_g_2412MHz+bt1M_2402MHz_LTEB26_15M_QPSK_1R80_CH26865
Test BY :Bob

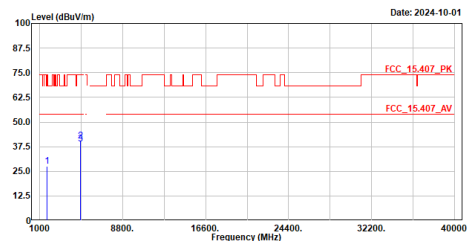


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	1663.000	27.46	74.00	-46.54	52.78	-25.32	Peak
2	4804.000	40.55	74.00	-33.45	54.77	-14.22	Peak
3	4824.000	38.97	74.00	-35.03	53.04	-14.07	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_ax80_5210MHz+bt1M_2402MHz_5GHR_n48_40M_CH641666
Test BY :Ashton

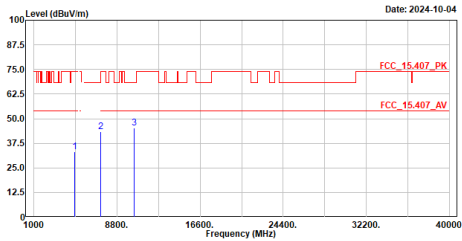


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	Mhz	dBuV/m	Line	Limit	Level	dB/m	
1	4804.000	33.26	74.00	-40.74	47.48	-14.22	Peak
2	7249.980	43.38	68.22	-24.84	49.93	-6.55	Peak
3	10420.000	45.24	68.22	-22.98	49.47	-4.23	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_ax80_5210MHz+bt1M_2402MHz_5GHR_n48_40M_CH641666
Test BY :Ashton

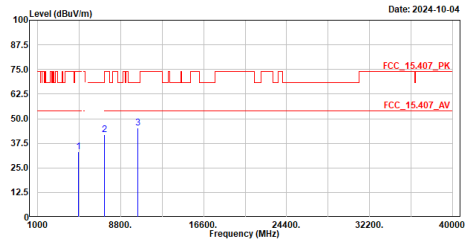


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	Mhz	dBuV/m	Line	Limit	Level	dB/m	
1	4804.000	33.35	74.00	-40.65	47.57	-14.22	Peak
2	7249.980	41.96	68.22	-26.26	48.51	-6.55	Peak
3	10420.000	45.15	68.22	-23.07	49.38	-4.23	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_ax80_5210MHz+bt1M_2402MHz_5GHR_n77_100M_CH650000
Test BY :Ashton

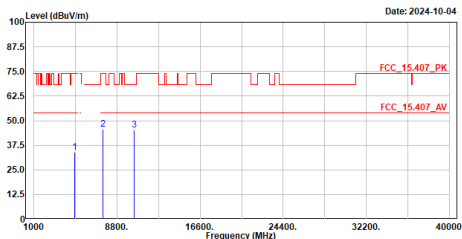


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	Mhz	dBuV/m	Line	Limit	Level	dB/m	
1	4804.000	33.90	74.00	-40.10	48.12	-14.22	Peak
2	7500.000	45.49	74.00	-28.51	51.99	-6.50	Peak
3	10420.000	45.34	68.22	-22.88	49.57	-4.23	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_ax80_5210MHz+bt1M_2402MHz_5GHR_n77_100M_CH650000
Test BY :Ashton

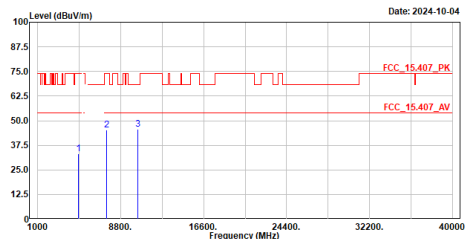


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	Mhz	dBuV/m	Line	Limit	Level	dB/m	
1	4804.000	33.16	74.00	-40.84	47.38	-14.22	Peak
2	7500.000	45.11	74.00	-28.89	51.61	-6.50	Peak
3	10420.000	45.70	68.22	-22.52	49.93	-4.23	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_ax80_5210MHz+bt1M_2402MHz_LTEB25_20M_QPSK_1R80_CH26365
Test BY :Bob

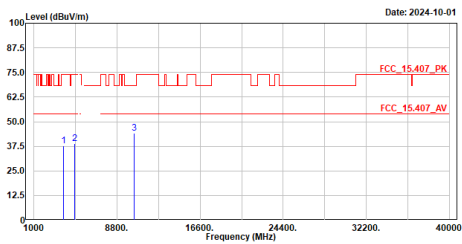


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	3765.000	37.66	74.00	-36.34	56.44	-18.78	Peak
2	4804.000	38.86	74.00	-35.14	53.08	-14.22	Peak
3	10420.000	44.18	68.22	-24.04	48.41	-4.23	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_ax80_5210MHz+bt1M_2402MHz_LTEB25_20M_QPSK_1R80_CH26365
Test BY :Bob

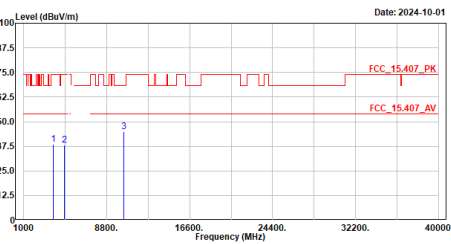


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	3765.000	38.37	74.00	-35.63	57.15	-18.78	Peak
2	4804.000	38.03	74.00	-35.97	52.25	-14.22	Peak
3	10420.000	44.93	68.22	-23.29	49.16	-4.23	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_g_2412MHz+bt1M_2402MHz_5GMR_n14_10M_CH152600
Test BY :Ashton

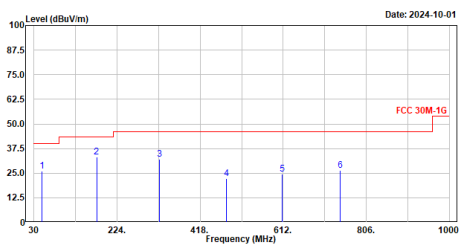


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	48.430	26.03	40.00	-13.97	49.22	-23.19	QP
2	176.470	33.18	43.50	-10.32	58.07	-24.89	QP
3	322.940	32.24	46.00	-13.76	54.38	-22.14	QP
4	479.110	22.33	46.00	-23.67	40.59	-18.26	QP
5	610.060	24.42	46.00	-21.58	39.73	-15.31	QP
6	744.890	26.37	46.00	-19.63	39.47	-13.10	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.


Site :HY-CB03
Condition :3m Vertical
Mode :TX_g_2412MHz+bt1M_2402MHz_5GMR_n14_10M_CH152600
Test BY :Ashton

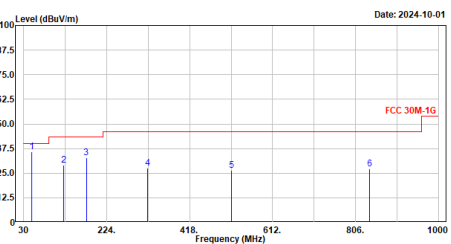


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	48.430	35.96	40.00	-4.04	59.15	-23.19	QP
2	123.120	29.02	43.50	-14.48	54.87	-25.85	QP
3	176.470	32.93	43.50	-10.57	57.82	-24.89	QP
4	320.030	27.38	46.00	-18.62	49.66	-22.28	QP
5	515.970	26.50	46.00	-19.50	44.01	-17.51	QP
6	838.980	27.10	46.00	-18.90	39.11	-12.01	QP

Note:


1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

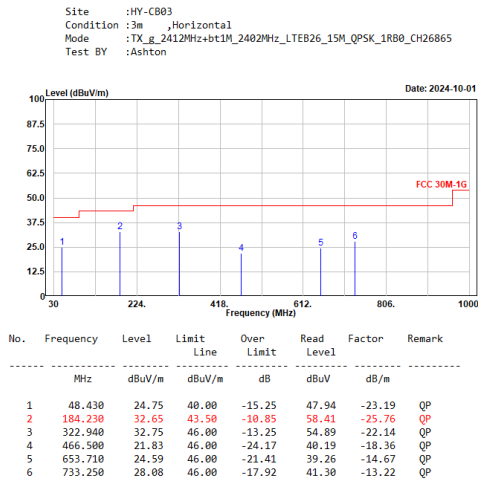


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

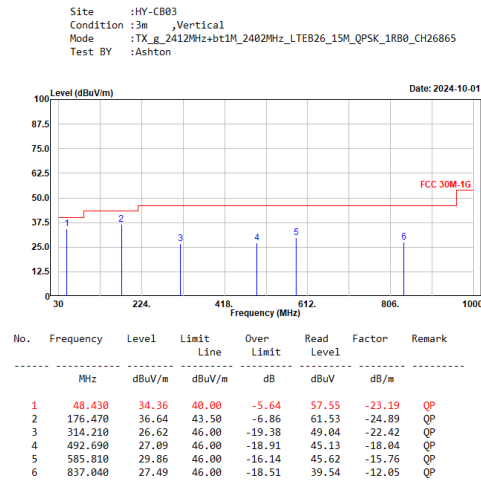

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

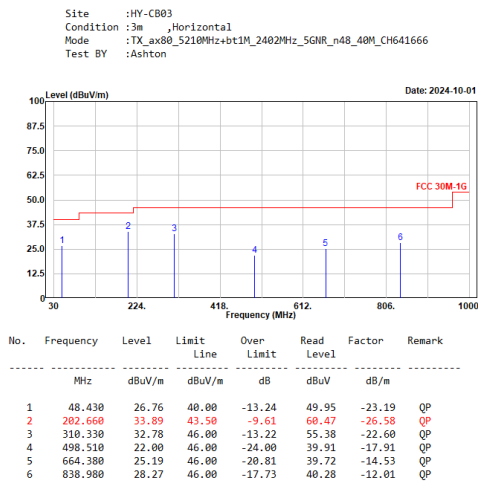


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

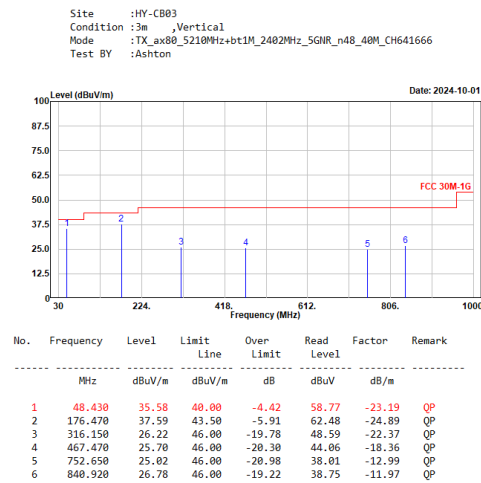

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax80_5210MHz+bt1M_2402MHz_5GHR_n77_100M_CH650000
Test BY :Ashton

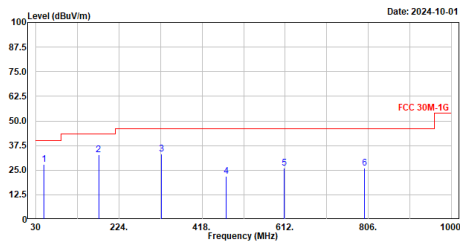


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	48.430	28.05	40.00	-11.95	51.24	-23.19	QP
2	176.470	32.80	43.50	-10.70	57.69	-24.89	QP
3	323.910	33.04	46.00	-12.96	55.14	-22.10	QP
4	474.260	22.07	46.00	-23.93	40.42	-18.35	QP
5	610.060	26.06	46.00	-19.94	41.37	-15.31	QP
6	797.270	26.18	46.00	-19.82	38.58	-12.40	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax80_5210MHz+bt1M_2402MHz_5GHR_n77_100M_CH650000
Test BY :Ashton

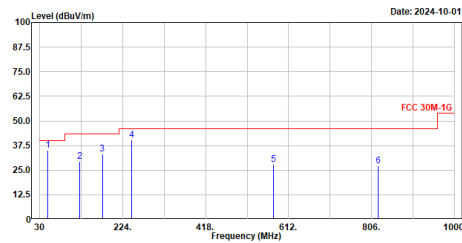


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	48.430	35.26	40.00	-4.74	58.45	-23.19	QP
2	123.120	29.29	43.50	-14.21	55.14	-25.85	QP
3	176.470	33.09	43.50	-10.41	57.98	-24.89	QP
4	244.370	40.44	46.00	-5.56	65.22	-24.78	QP
5	576.110	27.94	46.00	-18.06	44.06	-16.12	QP
6	821.520	27.26	46.00	-18.74	39.50	-12.24	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax80_5210MHz+bt1M_2402MHz_LTEB25_20M_QPSK_1RB0_CH26365
Test BY :Ashton

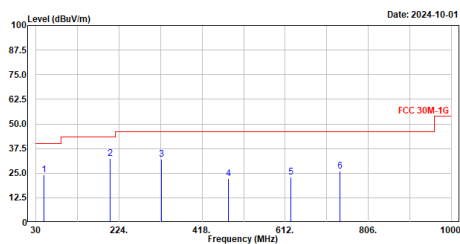


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	48.430	24.05	40.00	-15.95	47.24	-23.19	QP
2	202.660	32.49	43.50	-11.01	59.07	-26.58	QP
3	322.940	31.91	46.00	-14.09	54.05	-22.14	QP
4	480.080	22.13	46.00	-23.87	40.36	-18.23	QP
5	624.610	23.15	46.00	-22.85	38.25	-15.10	QP
6	740.040	26.09	46.00	-19.91	39.19	-13.10	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax80_5210MHz+bt1M_2402MHz_LTEB25_20M_QPSK_1RB0_CH26365
Test BY :Ashton

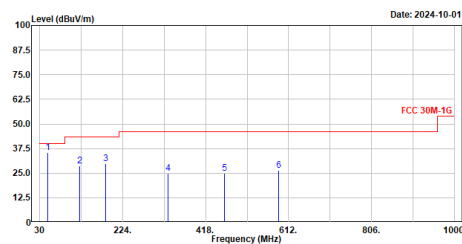

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	48.430	35.39	40.00	-4.61	58.58	-23.19	QP
2	123.120	28.67	43.50	-14.83	54.52	-25.85	QP
3	184.230	29.79	43.50	-13.71	55.55	-25.76	QP
4	329.730	25.02	46.00	-20.98	46.87	-21.85	QP
5	461.650	24.92	46.00	-21.08	43.35	-18.43	QP
6	588.720	26.41	46.00	-19.59	42.04	-15.63	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.