



# FCC SAR Test Report

APPLICANT : Trimble Navigation Limited  
EQUIPMENT : Tablet PC  
BRAND NAME : Trimble  
MODEL NAME : Yuma 2  
FCC ID : S9E-Y2C3  
STANDARD : FCC 47 CFR Part 2 (2.1093)  
ANSI/IEEE C95.1-1992  
IEEE 1528-2003  
FCC OET Bulletin 65 Supplement C (Edition 01-01)

The product was completely tested on Nov. 02, 2012. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:

Jones Tsai / Manager



**SPORTON INTERNATIONAL INC.**

No. 52, Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.



## Table of Contents

<b>1. Statement of Compliance</b> .....	<b>4</b>
<b>2. Administration Data</b> .....	<b>5</b>
2.1 Testing Laboratory.....	5
2.2 Applicant .....	5
2.3 Manufacturer.....	5
2.4 Application Details.....	5
<b>3. General Information</b> .....	<b>6</b>
3.1 Description of Equipment Under Test (EUT) .....	6
3.2 Product Photos.....	7
3.3 Applied Standard.....	7
3.4 Device Category and SAR Limits .....	7
3.5 Test Conditions.....	7
<b>4. Specific Absorption Rate (SAR)</b> .....	<b>8</b>
4.1 Introduction .....	8
4.2 SAR Definition.....	8
<b>5. SAR Measurement System</b> .....	<b>9</b>
5.1 E-Field Probe .....	10
5.2 Data Acquisition Electronics (DAE) .....	11
5.3 Robot .....	11
5.4 Measurement Server.....	11
5.5 Phantom.....	12
5.6 Device Holder.....	13
5.7 Data Storage and Evaluation .....	14
5.8 Test Equipment List .....	16
<b>6. Tissue Simulating Liquids</b> .....	<b>17</b>
<b>7. SAR Measurement Evaluation</b> .....	<b>18</b>
7.1 Purpose of System Performance check .....	18
7.2 System Setup.....	18
7.3 Validation Results.....	19
<b>8. EUT Testing Position</b> .....	<b>19</b>
<b>9. Measurement Procedures</b> .....	<b>20</b>
9.1 Spatial Peak SAR Evaluation .....	20
9.2 Area & Zoom Scan Procedures.....	20
9.3 Volume Scan Procedures.....	21
9.4 SAR Averaged Methods .....	21
9.5 Power Drift Monitoring.....	21
<b>10. SAR Test Configurations</b> .....	<b>22</b>
10.1 Exposure Positions Consideration .....	22
10.2 Conducted RF Output Power (Unit: dBm) .....	24
<b>11. SAR Test Results</b> .....	<b>26</b>
11.1 Test Records for Body SAR Test .....	26
11.2 Simultaneous Transmission SAR Analysis and Measurements.....	27
<b>12. Uncertainty Assessment</b> .....	<b>30</b>
<b>13. References</b> .....	<b>32</b>

Appendix A. Plots of System Performance Check

Appendix B. Plots of SAR Measurement

Appendix C. DASYS Calibration Certificate

Appendix D. Product Photos

Appendix E. Test Setup Photos



### Revision History

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FA280604A	Rev. 01	Initial issue of report	Sep. 26, 2012
FA280604A	Rev. 02	Update report of revising section 3.1 and section 11.2 description	Oct. 04, 2012
FA280604A	Rev. 03	Update report of adding CDMA2000 BC0 and CDMA2000 BC1 data	Nov. 05, 2012



### 1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **Trimble Navigation Limited, Tablet PC, Yuma 2**, are as follows.

Band	Position	SAR <sub>1g</sub> (W/kg)
GSM850	Body (0 cm Gap)	0.625
GSM1900	Body (0 cm Gap)	0.424
WCDMA Band V	Body (0 cm Gap)	0.332
WCDMA Band IV	Body (0 cm Gap)	0.616
WCDMA Band II	Body (0 cm Gap)	0.451
CDMA2000 BC0	Body (0 cm Gap)	0.348
CDMA2000 BC1	Body (0 cm Gap)	0.436

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2003 and FCC OET Bulletin 65 Supplement C (Edition 01-01).



## 2. Administration Data

### 2.1 Testing Laboratory

Test Site	SPORTON INTERNATIONAL INC.
Test Site Location	No. 52, Hwa Ya 1 <sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978

### 2.2 Applicant

Company Name	Trimble Navigation Limited
Address	345 SW Avery, Corvallis, OR, US, 97333

### 2.3 Manufacturer

Company Name	Trimble Navigation Limited
Address	345 SW Avery, Corvallis, OR, US, 97333

### 2.4 Application Details

Date of Start during the Test	Aug. 24, 2012
Date of End during the Test	Nov. 02, 2012



### 3. General Information

#### 3.1 Description of Equipment Under Test (EUT)

Product Feature & Specification	
EUT	Tablet PC
Brand Name	Trimble
Model Name	Yuma 2
Integrated WWAN Module	Brand Name: Sierra Wireless Model Name: MC8355
FCC ID	S9E-Y2C3
Tx Frequency	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz WCDMA Band IV: 1712.4 MHz ~ 1752.6 MHz CDMA2000 BC0 : 824.70 MHz ~ 848.31 MHz CDMA2000 BC1 : 1851.25 MHz ~ 1908.75 MHz
Rx Frequency	GSM850: 869.2 MHz ~ 893.8 MHz GSM1900: 1930.2 MHz ~ 1989.8 MHz WCDMA Band V: 871.4 MHz ~ 891.6 MHz WCDMA Band II: 1932.4 MHz ~ 1987.6 MHz WCDMA Band IV: 2112.4 MHz ~ 2152.6 MHz CDMA2000 BC0 : 869.70 MHz ~ 893.31 MHz CDMA2000 BC1 : 1931.25 MHz ~ 1988.75 MHz
Maximum Average Output Power to Antenna	GSM850: 33.25 dBm GSM1900: 30.75 dBm WCDMA Band V: 24.16 dBm WCDMA Band II: 24.44 dBm WCDMA Band IV: 24.17 dBm CDMA2000 BC0 : 23.73 dBm CDMA2000 BC1 : 23.72 dBm
Antenna Type	PIFA Antenna
Uplink Modulations	GPRS: GMSK EDGE: GMSK / 8PSK WCDMA(Rel 99): QPSK (uplink) HSDPA: (3GPP Rel 6): QPSK (uplink) HSUPA: (3GPP Rel 6 ): QPSK (uplink) CDMA2000 : QPSK
EUT Stage	Identical Prototype
Remark:	<ol style="list-style-type: none"><li>1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.</li><li>2. Voice call is not supported.</li></ol>



**3.2 Product Photos**

Please refer to Appendix D.

**3.3 Applied Standard**

The Specific Absorption Rate (SAR) testing specification, method and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2003
- FCC OET Bulletin 65 Supplement C (Edition 01-01)
- FCC KDB 447498 D01 v04
- FCC KDB 616217 D03 v01
- FCC KDB 941225 D01 v02
- FCC KDB 941225 D03 v01

**3.4 Device Category and SAR Limits**

This device belongs to portable device category because its radiating structure is allowed to be used within 20 centimeters of the body of the user. Limit for General Population/Uncontrolled exposure should be applied for this device, it is 1.6 W/kg as averaged over any 1 gram of tissue.

**3.5 Test Conditions**

**3.5.1 Ambient Condition**

Ambient Temperature	20 to 24 °C
Humidity	< 60 %

**3.5.2 Test Configuration**

For WWAN SAR testing, the device was controlled by using a base station emulator. Communication between the device and the emulator was established by air link. The distance between the EUT and the antenna of the emulator is larger than 50 cm and the output power radiated from the emulator antenna is at least 30 dB smaller than the output power of EUT. The EUT was set from the emulator to radiate maximum output power during all tests.

## **4. Specific Absorption Rate (SAR)**

### **4.1 Introduction**

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

### **4.2 SAR Definition**

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density ( $\rho$ ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$\text{SAR} = C \left( \frac{\delta T}{\delta t} \right)$$

Where: C is the specific heat capacity,  $\delta T$  is the temperature rise and  $\delta t$  is the exposure duration, or related to the electrical field in the tissue by


$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where:  $\sigma$  is the conductivity of the tissue,  $\rho$  is the mass density of the tissue and E is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.



## 5. SAR Measurement System

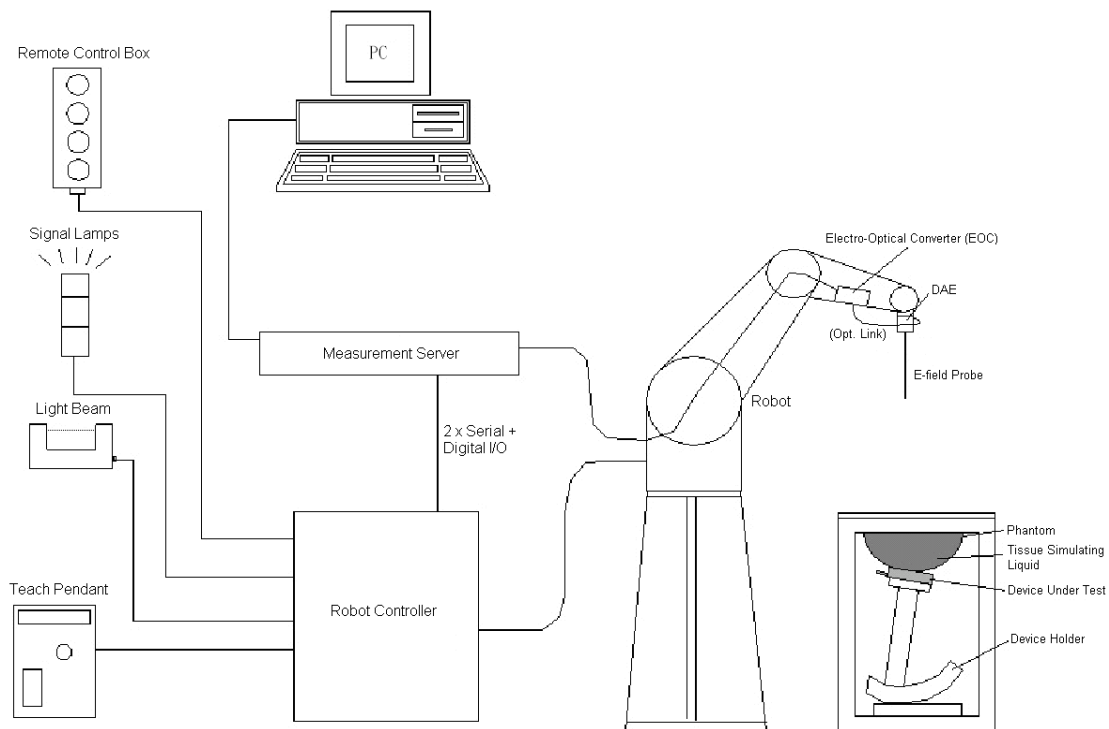

**Fig 5.1 SPEAG DASY System Configurations**

The DASY system for performance compliance tests is illustrated above graphically. This system consists of the following items:

- A standard high precision 6-axis robot with controller, a teach pendant and software
- A data acquisition electronic (DAE) attached to the robot arm extension
- A dosimetric probe equipped with an optical surface detector system
- The electro-optical converter (EOC) performs the conversion between optical and electrical signals
- A measurement server performs the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the accuracy of the probe positioning
- A computer operating Windows XP
- DASY software
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom
- A device holder
- Tissue simulating liquid
- Dipole for evaluating the proper functioning of the system


Some of the components are described in details in the following sub-sections.

**5.1 E-Field Probe**


The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG).The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

**5.1.1 E-Field Probe Specification**

**<ET3DV6 / ET3DV6R Probe >**

Construction	Symmetrical design with triangular core Built-in optical fiber for surface detection system. Built-in shielding against static charges. PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	 <p><b>Fig 5.2 Photo of ET3DV6/ET3DV6R</b></p>
Frequency	10 MHz to 3 GHz; Linearity: ± 0.2 dB	
Directivity	± 0.2 dB in HSL (rotation around probe axis) ± 0.4 dB in HSL (rotation normal to probe axis)	
Dynamic Range	5 µW/g to 100 mW/g; Linearity: ± 0.2 dB	
Dimensions	Overall length: 330 mm (Tip: 16 mm) Tip diameter: 6.8 mm (Body: 12 mm) Distance from probe tip to dipole centers: 2.7 mm	

**<EX3DV4 / ES3DV4 Probe>**

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	 <p><b>Fig 5.3 Photo of EX3DV4/ES3DV4</b></p>
Frequency	10 MHz to 6 GHz; Linearity: ± 0.2 dB	
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)	
Dynamic Range	10 µW/g to 100 mW/g; Linearity: ± 0.2 dB (noise: typically < 1 µW/g)	
Dimensions	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

**5.1.2 E-Field Probe Calibration**

Each probe needs to be calibrated according to a dosimetric assessment procedure with accuracy better than ± 10%. The spherical isotropy shall be evaluated and within ± 0.25 dB. The sensitivity parameters (NormX, NormY, and NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested. The calibration data can be referred to appendix C of this report.

### 5.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Fig 5.4 Photo of DAE

### 5.3 Robot

The SPEAG DASY system uses the high precision robots (DASY4: RX90BL; DASY5: TX90XL) type from Stäubli SA (France). For the 6-axis controller system, the robot controller version (DASY4: CS7MB; DASY5: CS8c) from Stäubli is used. The Stäubli robot series have many features that are important for our application:

- High precision (repeatability  $\pm 0.035$  mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)



Fig 5.5 Photo of DASY4



Fig 5.6 Photo of DASY5

### 5.4 Measurement Server

The measurement server is based on a PC/104 CPU board with CPU (DASY4: 166 MHz, Intel Pentium; DASY5: 400 MHz, Intel Celeron), chipdisk (DASY4: 32 MB; DASY5: 128 MB), RAM (DASY4: 64 MB, DASY5: 128 MB). The necessary circuits for communication with the DAE electronic box, as well as the 16 bit AD converter system for optical detection and digital I/O interface are contained on the DASY I/O board, which is directly connected to the PC/104 bus of the CPU board.

The measurement server performs all the real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operations.



Fig 5.7 Photo of Server for DASY4



Fig 5.8 Photo of Server for DASY5

### 5.5 Phantom

<SAM Twin Phantom>

<b>Shell Thickness</b>	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm
<b>Filling Volume</b>	Approx. 25 liters
<b>Dimensions</b>	Length: 1000 mm; Width: 500 mm; Height: adjustable feet
<b>Measurement Areas</b>	Left Hand, Right Hand, Flat Phantom

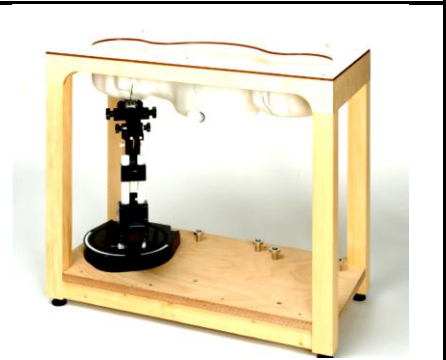


Fig 5.9 Photo of SAM Phantom

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI4 Phantom>

<b>Shell Thickness</b>	2 ± 0.2 mm (sagging: <1%)
<b>Filling Volume</b>	Approx. 30 liters
<b>Dimensions</b>	Major ellipse axis: 600 mm Minor axis: 400 mm

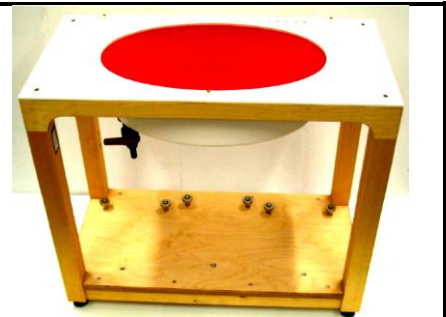


Fig 5.10 Photo of ELI4 Phantom

The ELI4 phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

## 5.6 Device Holder

### <Device Holder for SAM Twin Phantom>

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5 mm distance, a positioning uncertainty of  $\pm 0.5$  mm would produce a SAR uncertainty of  $\pm 20$  %. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.

The DASY device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation center for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.

The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity  $\epsilon = 3$  and loss tangent  $\delta = 0.02$ . The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.



Fig 5.11 Device Holder

### <Laptop Extension Kit>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.

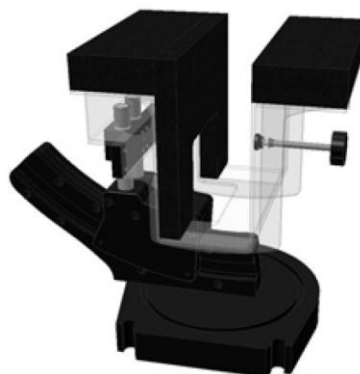


Fig 5.12 Laptop Extension Kit



## 5.7 Data Storage and Evaluation

### 5.7.1 Data Storage

The DASY software stores the assessed data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all the necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files. The post-processing software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of erroneous parameter settings. For example, if a measurement has been performed with an incorrect crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be reevaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type (e.g., [V/m], [A/m], [mW/g]). Some of these units are not available in certain situations or give meaningless results, e.g., a SAR-output in a non-lose media, will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

### 5.7.2 Data Evaluation

The DASY post-processing software (SEMCAD) automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software :

<b>Probe parameters :</b>	- Sensitivity	Norm <sub>i</sub> , a <sub>i0</sub> , a <sub>i1</sub> , a <sub>i2</sub>
	- Conversion factor	ConvF <sub>i</sub>
	- Diode compression point	dcp <sub>i</sub>
<b>Device parameters :</b>	- Frequency	f
	- Crest factor	cf
<b>Media parameters :</b>	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multi-meter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power.

The formula for each channel can be given as :

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

with  $V_i$  = compensated signal of channel i, (i = x, y, z)  
 $U_i$  = input signal of channel i, (i = x, y, z)  
 cf = crest factor of exciting field (DASY parameter)  
 dcp<sub>i</sub> = diode compression point (DASY parameter)

From the compensated input signals, the primary field data for each channel can be evaluated :

$$\text{E-field Probes : } E_i = \sqrt{\frac{V_i}{\text{Norm}_i \cdot \text{ConvF}}}$$

$$\text{H-field Probes : } H_i = \sqrt{V_i \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}}$$

with  $V_i$  = compensated signal of channel i, (i = x, y, z)  
 Norm<sub>i</sub> = sensor sensitivity of channel i, (i = x, y, z),  $\mu\text{V}/(\text{V/m})^2$  for E-field Probes  
 ConvF = sensitivity enhancement in solution  
 a<sub>ij</sub> = sensor sensitivity factors for H-field probes  
 f = carrier frequency [GHz]  
 E<sub>i</sub> = electric field strength of channel i in V/m  
 H<sub>i</sub> = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude) :

$$E_{\text{tot}} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$\text{SAR} = E_{\text{tot}}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$$

with SAR = local specific absorption rate in mW/g  
 E<sub>tot</sub> = total field strength in V/m  
 σ = conductivity in [mho/m] or [Siemens/m]  
 ρ = equivalent tissue density in g/cm<sup>3</sup>

Note that the density is set to 1, to account for actual head tissue density rather than the density of the tissue simulating liquid.



**5.8 Test Equipment List**

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	835MHz System Validation Kit	D835V2	499	Mar. 22, 2010	Mar. 21, 2013
SPEAG	1750MHz System Validation Kit	D1750V2	1023	Jun. 20, 2012	Jun. 19, 2013
SPEAG	1900MHz System Validation Kit	D1900V2	5d041	Mar. 23, 2010	Mar. 22, 2013
SPEAG	Data Acquisition Electronics	DAE3	577	Jun. 06, 2012	Jun. 05, 2013
SPEAG	Data Acquisition Electronics	DAE4	778	Aug. 27, 2012	Aug. 26, 2013
SPEAG	Dosimetric E-Field Probe	ET3DV6R	1788	Jan. 26, 2012	Jan. 25, 2013
SPEAG	Dosimetric E-Field Probe	EX3DV4	3801	Jun. 22, 2012	Jun. 21, 2013
SPEAG	Device Holder	N/A	N/A	NCR	NCR
SPEAG	SAM Phantom	QD 000 P40 C	TP-1303	NCR	NCR
SPEAG	SAM Phantom	QD 000 P40 C	TP-1383	NCR	NCR
SPEAG	SAM Phantom	QD 000 P40 C	TP-1446	NCR	NCR
SPEAG	SAM Phantom	QD 000 P40 C	TP-1478	NCR	NCR
SPEAG	SAM Phantom	QD 000 P41 C	TP-1150	NCR	NCR
SPEAG	SAM Phantom	QD 000 P40 CD	TP-1644	NCR	NCR
SPEAG	SAM Phantom	SM 000 T01 DA	TP-1542	NCR	NCR
SPEAG	ELI4 Phantom	QD 0VA 001 BB	1026	NCR	NCR
SPEAG	ELI4 Phantom	QD 0VA 001 BA	1029	NCR	NCR
SPEAG	ELI4 Phantom	QD 0VA 002 AA	TP-1127	NCR	NCR
SPEAG	ELI4 Phantom	QD 0VA 002 AA	TP-1131	NCR	NCR
Agilent	Network Analyzer	E5071C	MY46101588	May 11, 2012	May 10, 2013
Agilent	ESG Vector Series Signal Generator	E4438C	MY49070755	Oct. 02, 2012	Oct. 01, 2013
Anritsu	Power Meter	ML2495A	0932001	Sep. 21, 2011	Sep. 20, 2012
Anritsu	Radio Communication Analyzer	MT8820C	6201074414	Dec. 21, 2011	Dec. 20, 2012
Agilent	Wireless Communication Test Set	E5515C	MY48360820	Jan. 05, 2012	Jan. 04, 2014
R&S	Universal Digital Radiocommunication Tester	CMU200	106656	Jun. 28, 2012	Jun. 27, 2013
R&S	Spectrum Analyzer	FSP	101131	Jul. 23, 2012	Jul. 22, 2013

**Table 5.1 Test Equipment List**

**Note:**

1. The calibration certificate of DASYS can be referred to appendix C of this report.
2. Referring to KDB 450824 D02, the dipole calibration interval can be extended to 3 years with justification. The dipoles are also not physically damaged, or repaired during the interval.
3. The justification data of dipole D835V2, SN: 499 and D1900V2, SN: 5d041 can be found in appendix C. The return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration.



## 6. Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 6.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 6.2.

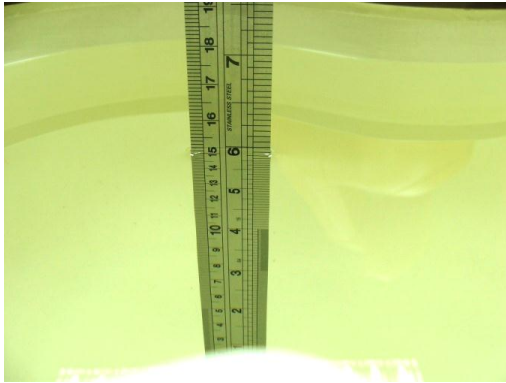


Fig 6.1 Photo of Liquid Height for Head SAR



Fig 6.2 Photo of Liquid Height for Body SAR

The following table gives the recipes for tissue simulating liquid.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity ( $\sigma$ )	Permittivity ( $\epsilon_r$ )
<b>For Body</b>								
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
900	50.8	48.2	0	0.9	0.1	0	1.05	55.0
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3

Table 6.1 Recipes of Tissue Simulating Liquid

The dielectric parameters of the liquids were verified prior to the SAR evaluation using an Agilent 85070D Dielectric Probe Kit and an Agilent Network Analyzer.

The following table shows the measuring results for simulating liquid.

Freq. (MHz)	Liquid Type	Temp. (°C)	Conductivity ( $\sigma$ )	Permittivity ( $\epsilon_r$ )	Conductivity Target ( $\sigma$ )	Permittivity Target ( $\epsilon_r$ )	Delta ( $\sigma$ ) (%)	Delta ( $\epsilon_r$ ) (%)	Limit (%)	Date
835	Body	21.5	0.955	52.7	0.97	55.2	-1.55	-4.53	±5	Aug. 24, 2012
835	Body	21.5	0.994	54.715	0.97	55.2	2.47	-0.88	±5	Nov. 02, 2012
1750	Body	21.5	1.51	52.2	1.49	53.4	1.34	-2.25	±5	Aug. 24, 2012
1900	Body	21.5	1.55	51.9	1.52	53.3	1.97	-2.63	±5	Aug. 24, 2012
1900	Body	21.4	1.544	51.591	1.52	53.3	1.58	-3.21	±5	Nov. 02, 2012

Table 6.2 Measuring Results for Simulating Liquid

## 7. SAR Measurement Evaluation

Each DASY system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the DASY software, enable the user to conduct the system performance check and system validation. System validation kit includes a dipole, tripod holder to fix it underneath the flat phantom and a corresponding distance holder.

### 7.1 Purpose of System Performance check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

### 7.2 System Setup

In the simplified setup for system evaluation, the EUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:


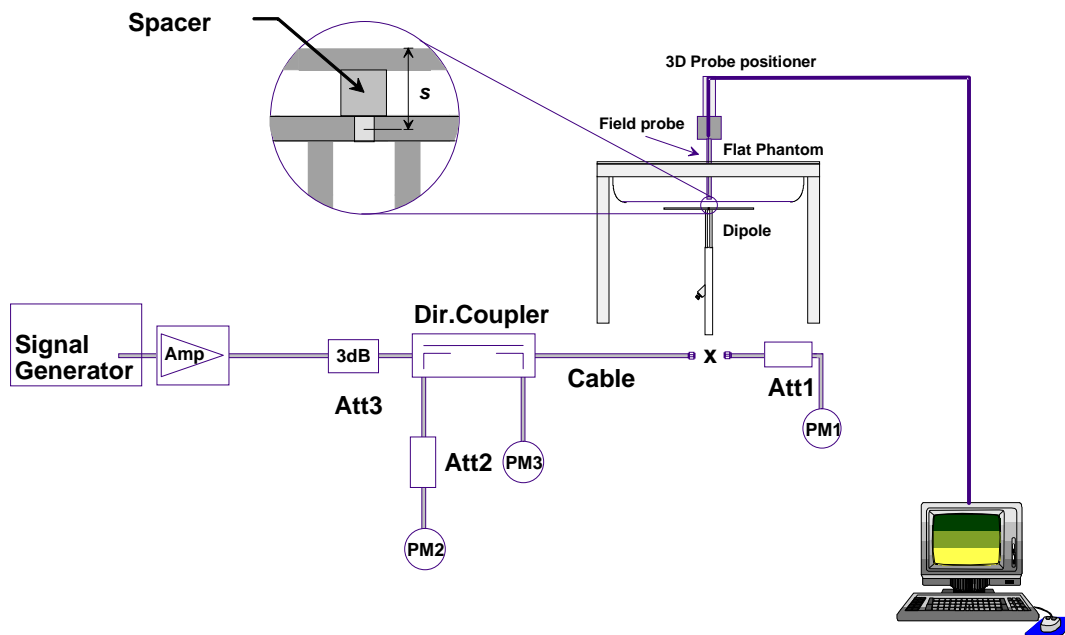


Fig 7.1 System Setup for System Evaluation

1. Signal Generator
2. Amplifier
3. Directional Coupler
4. Power Meter
5. Calibrated Dipole

The output power on dipole port must be calibrated to 24 dBm (250 mW) before dipole is connected.

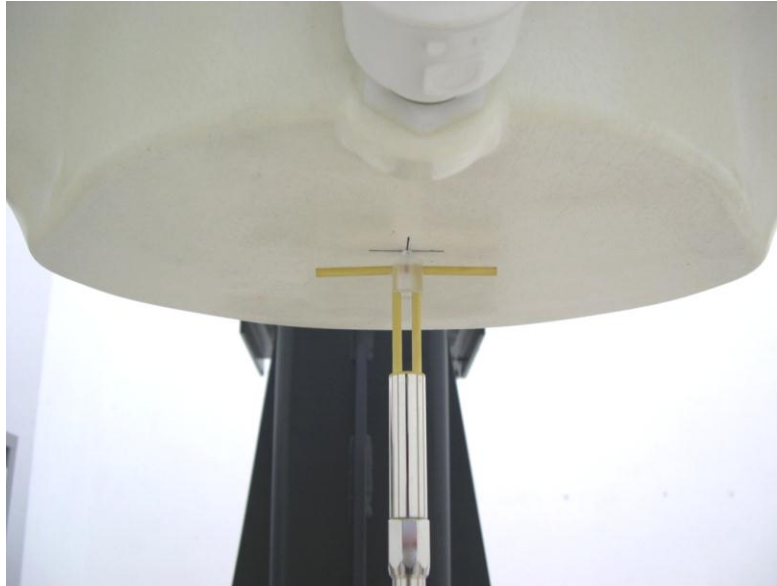

**Fig 7.2 Photo of Dipole Setup**

**7.3 Validation Results**

Comparing to the original SAR value provided by SPEAG, the validation data should be within its specification of 10 %. Table 7.1 shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Measurement Date	Frequency (MHz)	Liquid Type	Targeted SAR <sub>1g</sub> (W/kg)	Measured SAR <sub>1g</sub> (W/kg)	Normalized SAR <sub>1g</sub> (W/kg)	Deviation (%)
Aug. 24, 2012	835	Body	9.82	2.26	9.04	-7.94
Nov. 02, 2012	835	Body	9.82	2.45	9.80	-0.20
Aug. 24, 2012	1750	Body	37	8.52	34.08	-7.89
Aug. 24, 2012	1900	Body	40	9.34	37.36	-6.60
Nov. 02, 2012	1900	Body	40	10.2	40.80	2.00

**Table 7.1 Target and Measurement SAR after Normalized**

**8. EUT Testing Position**

This EUT was tested in two different positions. They are bottom face of tablet PC and Edge2. In these positions, the surface of EUT is touching with phantom 0 cm gap. Please refer to Appendix E for the test setup photos.

## **9. Measurement Procedures**

The measurement procedures are as follows:

- (a) Use base station simulator (if applicable) or engineering software to transmit RF power continuously (continuous Tx) in the highest power channel.
- (b) Keep EUT to radiate maximum output power or 100% duty factor (if applicable)
- (c) Measure output power through RF cable and power meter.
- (d) Place the EUT in the positions as Appendix E demonstrates.
- (e) Set scan area, grid size and other setting on the DASY software.
- (f) Measure SAR results for the highest power channel on each testing position.
- (g) Find out the largest SAR result on these testing positions of each band
- (h) Measure SAR results for other channels in worst SAR testing position if the SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

### **9.1 Spatial Peak SAR Evaluation**

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

### **9.2 Area & Zoom Scan Procedures**

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan measures 5x5x7 points with step size 8, 8 and 5 mm for 300 MHz to 3 GHz, and 8x8x8 points with step size 4, 4 and 2.5 mm for 3 GHz to 6 GHz. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g.



### **9.3 Volume Scan Procedures**

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing (step-size is 4, 4 and 2.5 mm). When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

### **9.4 SAR Averaged Methods**

In DASYS, the interpolation and extrapolation are both based on the modified Quadratic Shepard's method. The interpolation scheme combines a least-square fitted function method and a weighted average method which are the two basic types of computational interpolation and approximation.


Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5 mm.

### **9.5 Power Drift Monitoring**

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASYS measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.

## 10. SAR Test Configurations

### 10.1 Exposure Positions Consideration

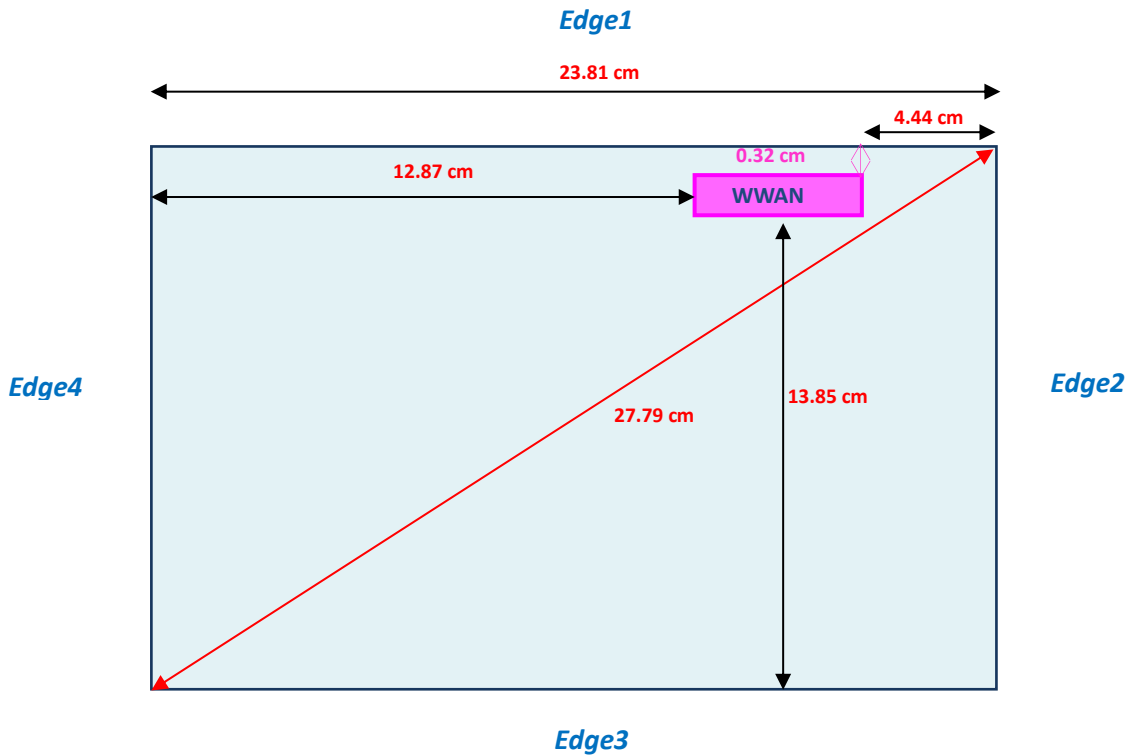

Front View

Antennas	Wireless Interface
WWAN (Tx/Rx)	GSM850 PCS WCDMA Band II WCDMA Band IV WCDMA Band V CDMA2000 BC 0 CDMA2000 BC 1



Sides for SAR tests; Tablet mode						
	Front Face	Bottom Face	Edge1	Edge2	Edge3	Edge4
GPRS / EDGE / UMTS	No	Yes (0 mm)	No	Yes (0 mm)	No	No

**Note:**

- 1 Per KDB 941225 D07, the EUT diagonal > 20 cm and Mini-Tablet procedure is not applied. Therefore, SAR tests follow the Tablet Mode in KDB 447498.
- 2. As in (1), the test distance is 0 mm to the flat phantom; SAR evaluation is required for Bottom Face and each applicable Edge with the antenna within 5 cm to the user.
- 3. Per KDB 447498 D01, the distance from WWAN antenna to the Edge3 / Edge4 > 5 cm, therefore the stand-alone in these configurations SAR are not required.
- 4. There is only Edge 1 screen orientation limitation in EUT; that is 3 orientations are supported.



**10.2 Conducted RF Output Power (Unit: dBm)**

<GPRS / EDGE>

Burst Average Power						
Band	GSM850			GSM1900		
Channel	128	189	251	512	661	810
Frequency (MHz)	824.2	836.4	848.8	1850.2	1880.0	1909.8
GPRS 8 (1 Uplink) CS1	33.20	<b>33.25</b>	32.96	<b>30.75</b>	30.68	30.64
GPRS 10 (2 Uplink) CS1	32.86	32.91	32.84	30.74	30.65	30.61
EDGE 8 (GMSK, 1 Uplink) MCS1	32.85	32.89	32.80	30.71	30.62	30.56
EDGE 10 (GMSK, 2 Uplink) MCS1	32.79	32.86	32.77	30.68	30.61	30.55
EDGE 8 (8PSK, 1 Uplink) MCS9	27.27	27.30	27.32	26.47	26.41	26.45
EDGE 10 (8PSK, 2 Uplink) MCS9	27.15	27.18	27.27	26.36	26.34	26.35
Source-Based Time-Averaged Power						
Band	GSM850			GSM1900		
Channel	128	189	251	512	661	810
Frequency (MHz)	824.2	836.4	848.8	1850.2	1880.0	1909.8
GPRS 8 (1 Uplink) CS1	24.20	24.25	23.96	21.75	21.68	21.64
GPRS 10 (2 Uplink) CS1	26.86	<b>26.91</b>	26.84	<b>24.74</b>	24.65	24.61
EDGE 8 (GMSK, 1 Uplink) MCS1	23.85	23.89	23.80	21.71	21.62	21.56
EDGE 10 (GMSK, 2 Uplink) MCS1	26.79	26.86	26.77	24.68	24.61	24.55
EDGE 8 (8PSK, 1 Uplink) MCS9	18.27	18.30	18.32	17.47	17.41	17.45
EDGE 10 (8PSK, 2 Uplink) MCS9	21.15	21.18	21.27	20.36	20.34	20.35

**Remark:** The source-based time-averaged power is linearly scaled the maximum burst averaged power based on time slots. The calculated method are shown as below:  
 Source based time averaged power = Maximum burst averaged power (1 Uplink) - 9 dB  
 Source based time averaged power = Maximum burst averaged power (2 Uplink) - 6 dB

**Note:**

- Following KDB 941225 D03, for Body SAR testing, the EUT was set in GPRS 10 for GSM850 and set in GPRS 10 for GSM1900 due to its highest source-based time-average power.
- Per KDB 447498, the maximum output power channel is used for SAR testing and for further SAR test reduction.
- EDGE tests with MCS1 setting, GMSK modulation. Burst average power with MCS9 setting 8 PSK modulations, is provided voluntary for reference.





<UMTS>

Band	WCDMA Band V			WCDMA Band II			WCDMA Band IV		
Channel	4132	4182	4233	9262	9400	9538	1312	1413	1513
Frequency (MHz)	826.4	836.4	846.6	1852.4	1880.0	1907.6	1712.4	1732.6	1752.6
RMC 12.2K	23.98	24.11	24.16	24.44	24.33	24.05	24.11	24.01	24.17
HSDPA Subtest-1	23.57	23.59	23.62	23.98	23.89	23.71	23.65	23.74	23.64
HSDPA Subtest-2	23.48	23.66	23.76	23.99	23.97	23.54	23.66	23.74	23.61
HSDPA Subtest-3	23.12	23.21	23.18	23.53	23.58	23.16	23.15	23.22	23.17
HSDPA Subtest-4	23.11	23.18	23.20	23.54	23.49	23.22	23.26	23.23	23.20
HSUPA Subtest-1	23.13	23.56	23.62	23.62	23.42	23.54	22.83	23.12	23.75
HSUPA Subtest-2	21.74	22.17	22.22	22.69	22.51	22.61	21.79	22.09	22.69
HSUPA Subtest-3	22.07	22.44	22.49	23.14	22.96	23.06	21.82	22.12	22.72
HSUPA Subtest-4	21.76	22.13	22.18	23.06	22.88	22.98	21.88	22.18	22.78
HSUPA Subtest-5	23.19	23.56	23.61	23.66	23.48	23.58	22.71	23.01	23.61

MPR (dB)										
3GPP MPR	Subtest	WCDMA Band V			WCDMA Band II			WCDMA Band IV		
0	HSDPA Subtest-1	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
0	HSDPA Subtest-2	0.09	-0.07	-0.14	-0.01	-0.08	0.17	-0.01	0.00	0.03
≤ 0.5	HSDPA Subtest-3	0.45	0.38	0.44	0.45	0.31	0.55	0.50	0.52	0.47
≤ 0.5	HSDPA Subtest-4	0.46	0.41	0.42	0.44	0.40	0.49	0.39	0.51	0.44
0	HSUPA Subtest-1	0.06	0.00	-0.01	0.04	0.06	0.04	-0.12	-0.11	-0.14
≤ 2	HSUPA Subtest-2	1.45	1.39	1.39	0.97	0.97	0.97	0.92	0.92	0.92
≤ 1	HSUPA Subtest-3	1.12	1.12	1.12	0.52	0.52	0.52	0.89	0.89	0.89
≤ 2	HSUPA Subtest-4	1.43	1.43	1.43	0.60	0.60	0.60	0.83	0.83	0.83
0	HSUPA Subtest-5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

Note:

- Per KDB 941225 D01, RMC 12.2kbps setting is used to evaluate SAR. If HSDPA subset-1 and HSUPA subset-5 output power is < 1/4 dB higher than RMC, or SAR with RMC 12.2kbps setting is ≤ 1.2W/kg, HSDPA and HSUPA SAR evaluation can be excluded.
- EUT is designed to follow the MPR of 3GPP Table 5.2B.1 specification. In production units, MPR result deviation from 3GPP is expected; the implementation and expected deviation is detailed in tune-up procedure exhibit.

<CDMA2000>

Band	CDMA2000 BC0			CDMA2000 BC1		
Channel	1013	384	777	25	600	1175
Frequency (MHz)	824.70	836.52	848.31	1851.25	1880.00	1908.75
1xRTT RC1+SO55	23.63	23.55	23.43	23.63	23.30	22.85
1xRTT RC3+SO55	23.57	23.48	23.57	23.56	23.23	22.86
1xRTT RC3+SO32 (FCH)	23.55	23.50	23.39	23.57	23.32	22.70
1xRTT RC3+SO32 (FCH+SCH)	23.54	23.45	23.41	23.59	23.31	22.83
1xEVDO RTAP 153.6	23.73	23.67	23.53	23.72	23.33	22.85
1xEVDO RETAP 4096	23.69	23.66	23.52	23.71	23.31	23.00

Note: Per KDB 941225 D01, CDMA Data device SAR is tested with RTAP 153.6 kbps (Ev-Do). If RC3+SO32 power is less than 1/4dB higher than Ev-Do, SAR tests with RC3+SO32 setting are not necessary.

## 11. SAR Test Results

### 11.1 Test Records for Body SAR Test

#### <GPRS/EDGE>

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Battery	Power Drift (dB)	SAR <sub>1g</sub> (W/kg)
34	GSM850	GPRS10	Bottom Face	0	189	836	32.91	1	-0.181	0.625
35	GSM850	GPRS10	Edge2	0	189	836	32.91	1	-0.091	0.415
36	GSM850	GPRS10	Bottom Face	0	189	836	32.91	2	-0.153	0.252
43	GSM1900	GPRS10	Bottom Face	0	512	1850.2	30.74	1	-0.154	0.424
44	GSM1900	GPRS10	Edge2	0	512	1850.2	30.74	1	-0.01	0.288
45	GSM1900	GPRS10	Bottom Face	0	512	1850.2	30.74	2	-0.033	0.107

Note: Per KDB 447498, if the highest output channel SAR for each exposure position  $\leq 0.8$  W/kg other channels SAR tests are not necessary.

#### <UMTS>

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Battery	Power Drift (dB)	SAR <sub>1g</sub> (W/kg)
37	WCDMA V	RMC12.2K	Bottom Face	0	4233	846.6	24.16	1	-0.182	0.332
38	WCDMA V	RMC12.2K	Edge2	0	4233	846.6	24.16	1	-0.164	0.198
39	WCDMA V	RMC12.2K	Bottom Face	0	4233	846.6	24.16	2	0.118	0.113
46	WCDMA IV	RMC12.2K	Bottom Face	0	1513	1752.6	24.17	1	-0.124	0.344
47	WCDMA IV	RMC12.2K	Edge2	0	1513	1752.6	24.17	1	-0.131	0.616
48	WCDMA IV	RMC12.2K	Edge2	0	1513	1752.6	24.17	2	-0.163	0.569
40	WCDMA II	RMC12.2K	Bottom Face	0	9262	1852.4	24.44	1	-0.174	0.446
41	WCDMA II	RMC12.2K	Edge2	0	9262	1852.4	24.44	1	-0.164	0.451
42	WCDMA II	RMC12.2K	Edge2	0	9262	1852.4	24.44	2	-0.198	0.315

Note: Per KDB 447498, if the highest output channel SAR for each exposure position  $\leq 0.8$  W/kg other channels SAR tests are not necessary.

#### <CDMA2000>

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Battery	Power Drift (dB)	SAR <sub>1g</sub> (W/kg)
49	CDMA BC0	RTAP 153.6	Bottom Face	0	1013	824.7	23.73	1	0.125	0.348
50	CDMA BC0	RTAP 153.6	Edge 2	0	1013	824.7	23.73	1	0.121	0.193
51	CDMA BC0	RTAP 153.6	Bottom Face	0	1013	824.7	23.73	2	0.196	0.131
52	CDMA BC1	RTAP 153.6	Bottom Face	0	25	1851.25	23.72	1	-0.1	0.435
53	CDMA BC1	RTAP 153.6	Edge 2	0	25	1851.25	23.72	1	-0.05	0.436
54	CDMA BC1	RTAP 153.6	Edge 2	0	25	1851.25	23.72	2	0.04	0.269

Note: Per KDB 447498, if the highest output channel SAR for each exposure position  $\leq 0.8$  W/kg other channels SAR tests are not necessary.

**11.2 Simultaneous Transmission SAR Analysis and Measurements**

No.	Applicable Simultaneous Transmission Combination
1.	WWAN + BT
2.	WWAN + WLAN 2.4G
3.	WWAN + WLAN 5G
4.	WLAN 2.4G + BT
5.	WLAN 5G + BT

**Note:**

- EUT will choose either WLAN2.4G or WLAN5G according to the network signal condition; therefore they will not transmit simultaneously.
- This WiFi module, FCC ID: PPD-AR5B22, is going to be integrated into this tablet host via its C2PC filing. The WiFi SAR test data in Sporton report No.: FA280604B is used for simultaneous transmission analysis.

**<Ant. 1>**

Position	WWAN			WLAN2.4G		Max. SAR Summation	Scaled WWAN				Scaled WWAN + WLAN
	WWAN Band	Plot No	Max. WWAN SAR (W/kg)	Plot No	Max. WLAN SAR (W/kg)		Average Power (dBm)	Tune-up Limit (dBm)	Scaling Factor	Scaled WWAN (W/kg)	
Bottom Face At 0cm	GSM850	34	0.625	1	0.124	0.75	32.91	33.5	1.146	0.716	<b>0.84</b>
	GSM1900	43	0.424	1	0.124	0.55	30.94	31.5	1.138	0.482	<b>0.61</b>
	WCDMA V	37	0.332	1	0.124	0.46	24.16	24.5	1.081	0.359	<b>0.48</b>
	WCDMA IV	46	0.344	1	0.124	0.47	24.17	24.5	1.079	0.371	<b>0.50</b>
	WCDMA II	40	0.446	1	0.124	0.57	24.44	25	1.138	0.507	<b>0.63</b>
	CDMA BC0	49	0.348	1	0.124	0.47	23.73	24	1.064	0.370	<b>0.49</b>
	CDMA BC1	52	0.435	1	0.124	0.56	23.72	24	1.067	0.464	<b>0.59</b>
Edge4 At 0cm	GSM850	-	0	2	0.053	0.05	0	0	1.000	0.000	<b>0.05</b>
	GSM1900	-	0	2	0.053	0.05	0	0	1.000	0.000	<b>0.05</b>
	WCDMA V	-	0	2	0.053	0.05	0	0	1.000	0.000	<b>0.05</b>
	WCDMA IV	-	0	2	0.053	0.05	0	0	1.000	0.000	<b>0.05</b>
	WCDMA II	-	0	2	0.053	0.05	0	0	1.000	0.000	<b>0.05</b>
	CDMA BC0	-	0	2	0.053	0.05	0	0	1.000	0.000	<b>0.05</b>
	CDMA BC1	-	0	2	0.053	0.05	0	0	1.000	0.000	<b>0.05</b>
Edge2 At 0cm	GSM850	35	0.415	-	0	0.42	32.91	33.5	1.146	0.475	<b>0.48</b>
	GSM1900	44	0.288	-	0	0.29	30.94	31.5	1.138	0.328	<b>0.33</b>
	WCDMA V	38	0.198	-	0	0.20	24.16	24.5	1.081	0.214	<b>0.21</b>
	WCDMA IV	47	0.616	-	0	0.62	24.17	24.5	1.079	0.665	<b>0.67</b>
	WCDMA II	41	0.451	-	0	0.45	24.44	25	1.138	0.513	<b>0.51</b>
	CDMA BC0	50	0.193	-	0	0.19	23.73	24	1.064	0.205	<b>0.21</b>
	CDMA BC1	53	0.436	-	0	0.44	23.72	24	1.067	0.465	<b>0.47</b>



<Ant. 0+1>

Position	WWAN			WLAN2.4G		Max. SAR Summation	Scaled WWAN				Scaled WWAN + WLAN
	WWAN Band	Plot No	Max. WWAN SAR (W/kg)	Plot No	Max. WLAN SAR (W/kg)		Average Power (dBm)	Tune-up Limit (dBm)	Scaling Factor	Scaled WWAN (W/kg)	
Bottom Face At 0cm	GSM850	34	0.625	4	0.083	0.71	32.91	33.5	1.146	0.716	0.80
	GSM1900	43	0.424	4	0.083	0.51	30.94	31.5	1.138	0.482	0.57
	WCDMA V	37	0.332	4	0.083	0.42	24.16	24.5	1.081	0.359	0.44
	WCDMA IV	46	0.344	4	0.083	0.43	24.17	24.5	1.079	0.371	0.45
	WCDMA II	40	0.446	4	0.083	0.53	24.44	25	1.138	0.507	0.59
	CDMA BC0	49	0.348	4	0.083	0.43	23.73	24	1.064	0.370	0.45
	CDMA BC1	52	0.435	4	0.083	0.52	23.72	24	1.067	0.464	0.55
Edge4 At 0cm	GSM850	-	0	5	0.027	0.03	0	0	1.000	0.000	0.03
	GSM1900	-	0	5	0.027	0.03	0	0	1.000	0.000	0.03
	WCDMA V	-	0	5	0.027	0.03	0	0	1.000	0.000	0.03
	WCDMA IV	-	0	5	0.027	0.03	0	0	1.000	0.000	0.03
	WCDMA II	-	0	5	0.027	0.03	0	0	1.000	0.000	0.03
	CDMA BC0	-	0	5	0.027	0.03	0	0	1.000	0.000	0.03
	CDMA BC1	-	0	5	0.027	0.03	0	0	1.000	0.000	0.03
Edge2 At 0cm	GSM850	35	0.415	-	0	0.42	32.91	33.5	1.146	0.475	0.48
	GSM1900	44	0.288	-	0	0.29	30.94	31.5	1.138	0.328	0.33
	WCDMA V	38	0.198	-	0	0.20	24.16	24.5	1.081	0.214	0.21
	WCDMA IV	47	0.616	-	0	0.62	24.17	24.5	1.079	0.665	0.67
	WCDMA II	41	0.451	-	0	0.45	24.44	25	1.138	0.513	0.51
	CDMA BC0	50	0.193	-	0	0.19	23.73	24	1.064	0.205	0.21
	CDMA BC1	53	0.436	-	0	0.44	23.72	24	1.067	0.465	0.47

<Ant. 1>

Position	WWAN			WLAN5G		Max. SAR Summation	Scaled WWAN				Scaled WWAN + WLAN
	WWAN Band	Plot No	Max. WWAN SAR (W/kg)	Plot No	Max. WLAN SAR (W/kg)		Average Power (dBm)	Tune-up Limit (dBm)	Scaling Factor	Scaled WWAN (W/kg)	
Bottom Face At 0cm	GSM850	34	0.625	9	0.6	1.23	32.91	33.5	1.146	0.716	1.32
	GSM1900	43	0.424	9	0.6	1.02	30.94	31.5	1.138	0.482	1.08
	WCDMA V	37	0.332	9	0.6	0.93	24.16	24.5	1.081	0.359	0.96
	WCDMA IV	46	0.344	9	0.6	0.94	24.17	24.5	1.079	0.371	0.97
	WCDMA II	40	0.446	9	0.6	1.05	24.44	25	1.138	0.507	1.11
	CDMA BC0	49	0.348	9	0.6	0.95	23.73	24	1.064	0.370	0.97
	CDMA BC1	52	0.435	9	0.6	1.04	23.72	24	1.067	0.464	1.06
Edge4 At 0cm	GSM850	-	0	10	0.035	0.04	0	0	1.000	0.000	0.04
	GSM1900	-	0	10	0.035	0.04	0	0	1.000	0.000	0.04
	WCDMA V	-	0	10	0.035	0.04	0	0	1.000	0.000	0.04
	WCDMA IV	-	0	10	0.035	0.04	0	0	1.000	0.000	0.04
	WCDMA II	-	0	10	0.035	0.04	0	0	1.000	0.000	0.04
	CDMA BC0	-	0	10	0.035	0.04	0	0	1.000	0.000	0.04
	CDMA BC1	-	0	10	0.035	0.04	0	0	1.000	0.000	0.04
Edge2 At 0cm	GSM850	35	0.415	-	0	0.42	32.91	33.5	1.146	0.475	0.48
	GSM1900	44	0.288	-	0	0.29	30.94	31.5	1.138	0.328	0.33
	WCDMA V	38	0.198	-	0	0.20	24.16	24.5	1.081	0.214	0.21
	WCDMA IV	47	0.616	-	0	0.62	24.17	24.5	1.079	0.665	0.67
	WCDMA II	41	0.451	-	0	0.45	24.44	25	1.138	0.513	0.51
	CDMA BC0	50	0.193	-	0	0.19	23.73	24	1.064	0.205	0.21
	CDMA BC1	53	0.436	-	0	0.44	23.72	24	1.067	0.465	0.47



<Ant. 0+1>

Position	WWAN			WLAN5G		Max. SAR Summation	Scaled WWAN				Scaled WWAN + WLAN
	WWAN Band	Plot No	Max. WWAN SAR (W/kg)	Plot No	Max. WLAN SAR (W/kg)		Average Power (dBm)	Tune-up Limit (dBm)	Scaling Factor	Scaled WWAN (W/kg)	
Bottom Face At 0cm	GSM850	34	0.625	19	0.365	0.99	32.91	33.5	1.146	0.716	1.08
	GSM1900	43	0.424	19	0.365	0.79	30.94	31.5	1.138	0.482	0.85
	WCDMA V	37	0.332	19	0.365	0.70	24.16	24.5	1.081	0.359	0.72
	WCDMA IV	46	0.344	19	0.365	0.71	24.17	24.5	1.079	0.371	0.74
	WCDMA II	40	0.446	19	0.365	0.81	24.44	25	1.138	0.507	0.87
	CDMA BC0	49	0.348	19	0.365	0.71	23.73	24	1.064	0.370	0.74
	CDMA BC1	52	0.435	19	0.365	0.80	23.72	24	1.067	0.464	0.83
Edge4 At 0cm	GSM850	-	0	20	0.031	0.03	0	0	1.000	0.000	0.03
	GSM1900	-	0	20	0.031	0.03	0	0	1.000	0.000	0.03
	WCDMA V	-	0	20	0.031	0.03	0	0	1.000	0.000	0.03
	WCDMA IV	-	0	20	0.031	0.03	0	0	1.000	0.000	0.03
	WCDMA II	-	0	20	0.031	0.03	0	0	1.000	0.000	0.03
	CDMA BC0	-	0	20	0.031	0.03	0	0	1.000	0.000	0.03
	CDMA BC1	-	0	20	0.031	0.03	0	0	1.000	0.000	0.03
Edge2 At 0cm	GSM850	35	0.415	-	0	0.42	32.91	33.5	1.146	0.475	0.48
	GSM1900	44	0.288	-	0	0.29	30.94	31.5	1.138	0.328	0.33
	WCDMA V	38	0.198	-	0	0.20	24.16	24.5	1.081	0.214	0.21
	WCDMA IV	47	0.616	-	0	0.62	24.17	24.5	1.079	0.665	0.67
	WCDMA II	41	0.451	-	0	0.45	24.44	25	1.138	0.513	0.51
	CDMA BC0	50	0.193	-	0	0.19	23.73	24	1.064	0.205	0.21
	CDMA BC1	53	0.436	-	0	0.44	23.72	24	1.067	0.465	0.47

Note:

1. The maximum SAR summation is calculated based on the same configuration and test position.
2. When stand-alone 1-g SAR is not required for a transmitter or antenna, its SAR is considered zero in the 1-g SAR summing process to determine simultaneous transmission SAR evaluation requirements
3. If 1g-SAR scalar summation < 1.6W/kg, simultaneous SAR measurement is not necessary.
4. WLAN Power refer Sporton FA280604B SAR Report.

Test Engineer : Vic Yang, Jack Wu, and Michael Yang

## 12. Uncertainty Assessment

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observations is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience, and knowledge of the behavior and properties of relevant materials and instruments, manufacture's specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in Table 12.1

Uncertainty Distributions	Normal	Rectangular	Triangular	U-Shape
Multi-plying Factor <sup>(a)</sup>	1/k <sup>(b)</sup>	1/√3	1/√6	1/√2

(a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity

(b)  $k$  is the coverage factor

**Table 12.1 Standard Uncertainty for Assumed Distribution**

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual "root-sum-squares" (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is shown in the following tables:



Error Description	Uncertainty Value (±%)	Probability Distribution	Divisor	Ci (1g)	Ci (10g)	Standard Uncertainty (1g)	Standard Uncertainty (10g)
<b>Measurement System</b>							
Probe Calibration	6.0	Normal	1	1	1	± 6.0 %	± 6.0 %
Axial Isotropy	4.7	Rectangular	√3	0.7	0.7	± 1.9 %	± 1.9 %
Hemispherical Isotropy	9.6	Rectangular	√3	0.7	0.7	± 3.9 %	± 3.9 %
Boundary Effects	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Linearity	4.7	Rectangular	√3	1	1	± 2.7 %	± 2.7 %
System Detection Limits	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Readout Electronics	0.3	Normal	1	1	1	± 0.3 %	± 0.3 %
Response Time	0.8	Rectangular	√3	1	1	± 0.5 %	± 0.5 %
Integration Time	2.6	Rectangular	√3	1	1	± 1.5 %	± 1.5 %
RF Ambient Noise	3.0	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
RF Ambient Reflections	3.0	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
Probe Positioner	0.4	Rectangular	√3	1	1	± 0.2 %	± 0.2 %
Probe Positioning	2.9	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
Max. SAR Eval.	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
<b>Test Sample Related</b>							
Device Positioning	2.9	Normal	1	1	1	± 2.9 %	± 2.9 %
Device Holder	3.6	Normal	1	1	1	± 3.6 %	± 3.6 %
Power Drift	5.0	Rectangular	√3	1	1	± 2.9 %	± 2.9 %
<b>Phantom and Setup</b>							
Phantom Uncertainty	4.0	Rectangular	√3	1	1	± 2.3 %	± 2.3 %
Liquid Conductivity (Target)	5.0	Rectangular	√3	0.64	0.43	± 1.8 %	± 1.2 %
Liquid Conductivity (Meas.)	2.5	Normal	1	0.64	0.43	± 1.6 %	± 1.1 %
Liquid Permittivity (Target)	5.0	Rectangular	√3	0.6	0.49	± 1.7 %	± 1.4 %
Liquid Permittivity (Meas.)	2.5	Normal	1	0.6	0.49	± 1.5 %	± 1.2 %
<b>Combined Standard Uncertainty</b>						± 11.0 %	± 10.8 %
<b>Coverage Factor for 95 %</b>						K=2	
<b>Expanded Uncertainty</b>						± 22.0 %	± 21.5 %

Table 12.2 Uncertainty Budget of DASY for frequency range 300 MHz to 3 GHz



### **13. References**

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2003, "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- [4] FCC OET Bulletin 65 (Edition 97-01) Supplement C (Edition 01-01), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields", June 2001
- [5] SPEAG DASY System Handbook
- [6] FCC KDB 447498 D01 v04, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", November 2009
- [7] FCC KDB 616217 D03 v01, "SAR Evaluation Considerations for Laptop/Notebook/Netbook and Tablet Computers", November 2009
- [8] FCC KDB 941225 D01 v02, "SAR Measurement Procedures for 3G Devices – CDMA 2000 / Ev-Do / WCDMA / HSDPA / HSPA", October 2007
- [9] FCC KDB 941225 D03 v01, "Recommended SAR Test Reduction Procedures for GSM / GPRS / EDGE", December 2008





## ***Appendix A. Plots of System Performance Check***

The plots are shown as follows.



## ***Appendix B. Plots of SAR Measurement***

The plots are shown as follows.



## **Appendix C. DASYS Calibration Certificate**

The DASYS calibration certificates are shown as follows.