



America

Modular Approval Certification Test Report

FCC ID: SDBSONIXIQV2

IC: 2220A-SONIXIQV2

**FCC Rule Part: CFR 47 Part 24 Subpart D, Part 101 Subpart C
ISED Canada's Radio Standards Specification: RSS-119, RSS-134**

TÜV SÜD Report Number: RD72158415.100

Applicant: Sensus USA, Inc.
Model: SONIXIQV2

Test Begin Date: March 12, 2020
Test End Date: April 7, 2020

Report Issue Date: April 14, 2020



A2LA Cert. No. 2955.18

FOR THE SCOPE OF ACCREDITATION UNDER LAB Code 2955.18

This report must not be used by the client to claim product certification, approval, or endorsement by A2LA, ANSI, or any agency of the Federal Government.

Prepared by:

**Chris Gormley
RF Wireless Engineer
TÜV SÜD America Inc.**

Reviewed by:

**Kirby Munroe
Technical Manager, US Wireless
TÜV SÜD America, Inc.**

This test report shall not be reproduced except in full. This report may be reproduced in part with prior written consent of TÜV SÜD America Inc. The results contained in this report are representative of the sample(s) submitted for evaluation.

REVISION HISTORY

Report Number: RD72158415.100

Manufacturer: Sensus USA, Inc.

Model: SONIXIQV2

DATE	OLD REVISION	NEW REVISION	REASON	PAGES AFFECTED	APPROVED BY
April 14, 2020	---	.100	Initial Release	All	Kirby Munroe

Table of Content

1.0 GENERAL -----	4
1.1 PURPOSE -----	4
1.2 PRODUCT DESCRIPTION -----	4
1.3 TEST METHODOLOGY -----	4
1.4 EMISSION DESIGNATORS -----	6
2.0 TEST FACILITIES -----	7
2.1 LOCATION -----	7
2.2 LABORATORY ACCREDITATIONS/RECOGNITIONS/CERTIFICATIONS -----	7
2.3 RADIATED & CONDUCTED EMISSIONS TEST SITE DESCRIPTION -----	8
3.0 APPLICABLE STANDARD REFERENCES -----	9
4.0 LIST OF TEST EQUIPMENT -----	10
5.0 SUPPORT EQUIPMENT -----	11
6.0 EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM -----	11
7.0 SUMMARY OF TESTS -----	12
7.1 RF POWER OUTPUT -----	12
7.2 OUT OF BAND UNWANTED EMISSIONS -----	13
7.3 99% BANDWIDTH -----	29
7.5 FIELD STRENGTH OF SPURIOUS EMISSIONS -----	53
7.6 FREQUENCY STABILITY -----	59
8.0 MEASUREMENT UNCERTAINTY -----	76
9.0 CONCLUSION -----	76

1.0 GENERAL

1.1 Purpose

The purpose of this report is to demonstrate compliance with Part 2 Subpart J, Part 24 Subpart D and Part 101 Subpart C of the FCC’s Code of Federal Regulations, and ISED Canada Radio Standards Specifications RSS-119 and RSS-134.

1.2 Product Description

The SonixIQ radio is an RF transceiver that can communicate via a Sensus-proprietary RF protocol with the Sensus FlexNet Fixed Base and Drive-by Systems. The SonixIQ radio can communicate in various modes with either the Sensus FlexNet walk-by system, Drive-By system, and/or with the FlexNet Fixed Base System which forms a 2-way wireless network.

Antenna: Monopole, 3 dBi

Manufacturer Information:
Sensus USA, Inc.
639 Davis Drive
Morrisville, NC 27560

Test Sample Serial Numbers:

TCXO Manufacturer	TX Radiated	RF Conducted/Frequency Stability
KDS	4262	4236
TXC	4362	4425

Test Sample Condition: The test samples were provided in good working order with no visible defects.

1.3 Test Methodology

1.3.1 Configurations and Justification

The FLEXNET 900MHz transmitter was evaluated for radiated and RF conducted measurements for all modulation types. Where applicable, data is provided for the unit and modulation having the worst-case emissions. The KDS and TXC brands of TCXOs were evaluated. The worst-case TCXO was the TXC which is documented in this report.

For radiated emissions, the EUT was evaluated in all 3 orthogonal orientations X, Y, and Z-planes. The results presented in this document represented the worse-case orientation, which was the X-plane.

The EUT was tested standalone, and a power supply was used to power the EUT.

The client provided a PC and optical probe to configure the EUT.

1.3.2 In-Band Testing Methodology

The EUT is designed to operate in multiple bands under the requirements of CFR 47 Parts 24 and 101. The following is a list of the frequency bands of operation sorted based on the FCC rule parts in which the band is associated.

CFR Title 47 Rule Part	Frequency Band of Operation (MHz)
24D	901.0 - 902.0
24D	930.0 - 931.0
24D	940.0 - 941.0
101	928.85 - 929.0
101	932.0 - 932.5
101	941.0 - 941.5
101	952.0 – 953.0
101	959.85 - 960.0

Based on the requirements set forth in accordance 47 CFR 2.1046-2.1057 as stated above, the methodology in selecting the places to test in the available bands of operation is outlined in the following table.

CFR Title 47 Rule Part	Frequency Band of Operation (MHz)	Location in the Range of Operation	Approx. Test Freq.
24D	901.0 - 902.0	Middle	901.5000
101	928.85 - 929.0	Middle	928.9250
24D	930.0 - 931.0	Middle	930.5000
101	932.0 - 932.5	Middle	932.2500
24D	940.0 - 941.0	Middle	940.5000
101	941.0 - 941.5	Middle	941.2500
101	952.0 – 953.0	Middle	952.5000
101	959.85 – 960.0	Middle	959.9250

1.4 Emission Designators

The SONIXIQV2 transmitter produces twelve distinct modulation types. The emission designators for the modulation types used by the SONIXIQV2 transmitter were calculated using the baud rate defined in the Theory of Operation are as follows:

EMISSIONS DESIGNATORS

Mode	Emission Designator	Modulation
Normal	9K60F2D	7-FSK
Double Density	9K60F2D	13-FSK
C & I (Half Baud)	4K80F2D	7-FSK
Boost Mode	1K10F2D	7-FSK
MPass Mode (5kbps)	5K90F1D	2-GFSK
MPass Mode (10kbps)	11K8F1D	2-GFSK
Priority	4K80F2D	13-FSK
2SFSK	10K0F1D	2-SFSK
2SFSK (Half Baud)	5K00F1D	2-SFSK
2SFSK (Eighth Baud)	1K30F1D	2-SFSK
4SFSK	11K3F1D	4-SFSK
4SFSK (Half Baud)	5K60F1D	4-SFSK

2.0 TEST FACILITIES

2.1 Location

The radiated and conducted emissions test sites are located at the following address:

TÜV SÜD America Inc.
2320 Presidential Drive, Suite 101
Durham, NC 27703
Phone: (919) 381-4235

2.2 Laboratory Accreditations/Recognitions/Certifications

TÜV SÜD America Inc. (Durham) is accredited to ISO/IEC 17025 by A2LA accreditation program, and has been issued certificate number 2955.18 in recognition of this accreditation. Unless otherwise specified, all tests methods described within this report are covered under the ISO/IEC 17025 scope of accreditation.

The Semi-Anechoic Chamber Test Site and Conducted Emissions Site have been fully described, submitted to, and accepted by the FCC and Innovation, Science and Economic Development (ISED) Canada.

FCC Designation Number: US1245
FCC Test Firm Registration Number: 238628
ISED Canada Company Number: 20446

2.3 Radiated & Conducted Emissions Test Site Description

2.3.1 Semi-Anechoic Chamber Test Site

The Semi-Anechoic Chamber Test Site consists of an 18' x 28' x 18' shielded enclosure. The chamber is lined with Samwha Electronics Co. LTD Ferrite Absorber, model number SFA300 (HSN-1). The ferrite tile is 10cm x 10 cm and weighs approximately 1.4lbs. These tiles are mounted on steel panels and installed directly on the inner walls of the chamber. On top of the ferrite tiles is DMAS HT-45 (Dutch Microwave Absorber Solutions) hybrid absorber on all walls except the wall behind the antenna mast which has a shorter DMAS HT-25 absorber.

The turntable is 1.50m in diameter and is located 150cm from the back wall of the chamber. The chamber is grounded via 1 - 8' copper ground rod, installed at the center of the back wall, it is bound to the ground plane using short #6 copper wire. The turntable is an aluminum, flush mounted table installed in an all steel frame. The table is remotely operated from inside the control room located 25' from the turntable. The turntable is electrically bonded to the surrounding ground plane via steel fingers installed on the edge of the turn table. The steel fingers make constant contact with the ground plane.

Behind the turntable is a 2' x 6' x 1.5' deep shielded pit used for support equipment if necessary. The pit is equipped with 2 - 4" PVC chase from the turntable to the pit that allow for cabling to the EUT if necessary. The underside of the turntable can be accessed from the pit so cables can be supplied to the EUT from the pit.

A diagram of the Semi-Anechoic Chamber Test Site is shown in Figure 2.3.1-1 below:

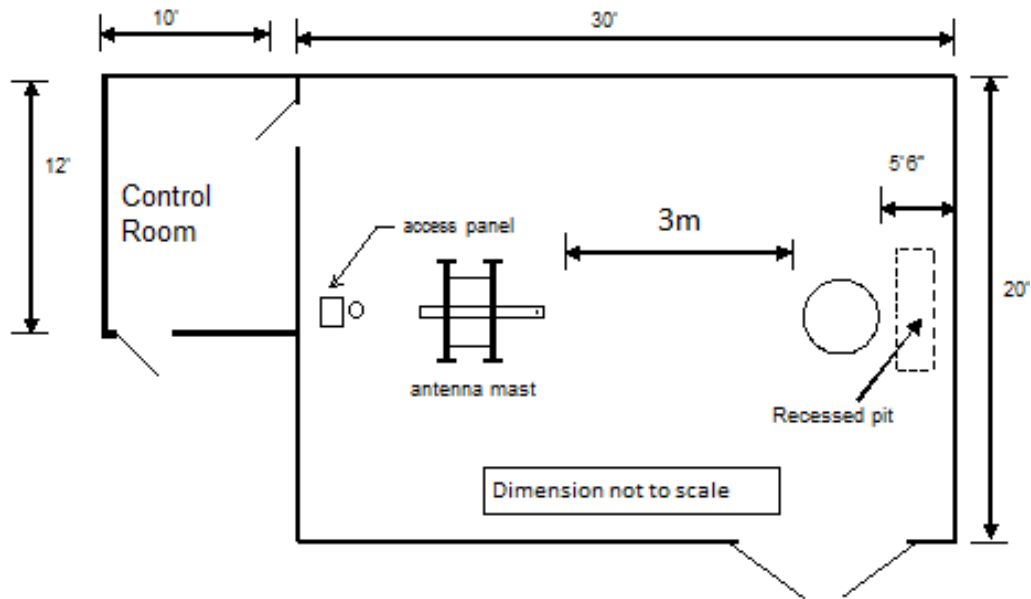


Figure 2.3.1-1: Semi-Anechoic Chamber Test Site

3.0 APPLICABLE STANDARD REFERENCES

The following standards were used:

- ❖ ANSI C63.26-2015: Compliance Testing of Transmitters Used in Licensed Radio Services
- ❖ US Code of Federal Regulations (CFR): Title 47, Part 2, Subpart J: Equipment Authorization Procedures - 2020
- ❖ US Code of Federal Regulations (CFR): Title 47, Part 24, Subpart D: Personal Communications Services – 2020
- ❖ US Code of Federal Regulations (CFR): Title 47, Part 101, Subpart C: Fixed Microwave Services -2020
- ❖ ISED Canada Radio Standards Specification: RSS-119 - Radio Transmitters and Receivers Operating in the Land Mobile and Fixed Services in the Frequency Range 27.41-960 MHz, Issue 12, May 2015
- ❖ ISED Canada Radio Standards Specification: RSS-134 - 900 MHz Narrow Band Personal Communication Service, Issue 2, February 2016
- ❖ ISED Canada Radio Standards Specification: RSS-GEN – General Requirements for Compliance of Radio Apparatus, Issue 5, March 2019 Amendment 1.

4.0 LIST OF TEST EQUIPMENT

The calibration interval of test equipment is annually or the manufacturer's recommendations. Where the calibration interval deviates from the annual cycle based on the instrument manufacturer's recommendations, it shall be stated below.

Table 4-1: Test Equipment Used

Asset ID	Manufacturer	Model #	Equipment Type	Serial #	Last Calibration Date	Calibration Due Date
DEMC0426	Thermotron	S-8 Mini Max	Environmental Chamber	25-2888-10	1/23/2020	1/23/2021
DEMC0499	EMCO	3146	Antenna	1108	6/20/2019	6/20/2021
DEMC3002	Rohde & Schwarz	ESU40	Receiver	100346	1/22/2020	1/22/2021
DEMC3006	Rohde & Schwarz	TS-PR18	Amplifier	122006	1/23/2020	1/23/2021
DEMC3008	Rohde & Schwarz	NRP2	Meter	103131	2/11/2020	2/11/2021
DEMC3009	Rohde & Schwarz	NRP-Z81	Meter	102397	2/11/2020	2/11/2021
DEMC3012	Rohde & Schwarz	EMC32-EB	Software	100731	NCR	NCR
DEMC3013	Agilent	53132A	Meter	MY40007729	1/23/2020	1/23/2021
DEMC3014	EMCO	3115	Antenna	9901-5653	4/12/2019	4/12/2021
DEMC3016	Fei Teng Wireless Technology	HA-07M18G-NF	Antenna	2013120203	2/7/2018	5/7/2020
DEMC3020	Rohde & Schwarz	SMB100A	Signal Generator	175943	1/22/2020	1/22/2021
DEMC3029	Micro-Tronics	HPM50108	900MHz HP Filter	134	1/27/2020	1/27/2021
DEMC3032	Hasco, Inc.	HLL142-S1-S1-192/WA	Cable	3075	1/23/2020	1/23/2021
DEMC3033	Hasco, Inc.	HLL142-S1-S1-36	Cable	1435	1/23/2020	1/23/2021
DEMC3038	Florida RF Labs	NMSE-290AW-60.0-NMSE	Cable Set	1448	1/27/2020	1/27/2021
DEMC3039	Florida RF Labs	NMSE-290AW-396.0-NMSE	Cable Set	1447	1/27/2020	1/27/2021
DEMC3045	Aeroflex Inmet	18N10W-20	Attenuator	1437	1/27/2020	1/27/2021
DEMC3064	Times	LMR195	Cable	3064	8/15/2019	8/15/2020
DEMC3085	Rohde & Schwarz	FSW43	Spectrum Analyzer	103997	1/22/2020	1/22/2021
DEMC3161	TESEQ	CBL-6112D	Antenna	51323	2/18/2020	2/18/2021
DEMC3178	Micro-Tronics	BRC50722	Filter	G040	3/6/2020	3/6/2021

NCR = No Calibration Required

Asset DEMC3002: Firmware Version: ESU40 is 4.73 SP4

Asset DEMC3012: Software Version: EMC32-B is 10.50.00

Asset DEMC3020: Firmware Rev: 2.20.382.113

Asset DEMC3085: Instrument Firmware 2.90 SP1

5.0 SUPPORT EQUIPMENT

Table 5-1: EUT and Support Equipment Description

Item #	Type Device	Manufacturer	Model/Part #	Serial #
1	EUT	Sensus	SONIXIQV2	See Section 1.2
2	DC Power Supply	Sorenson	QRD20-4	2716

Table 5-2: Cable Description

Cable #	Cable Type	Length	Shield	Termination
A	DC Power Cable	0.77m	No	1 to 2
B	AC Power Cable	1.7m	No	2 to AC

6.0 EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM

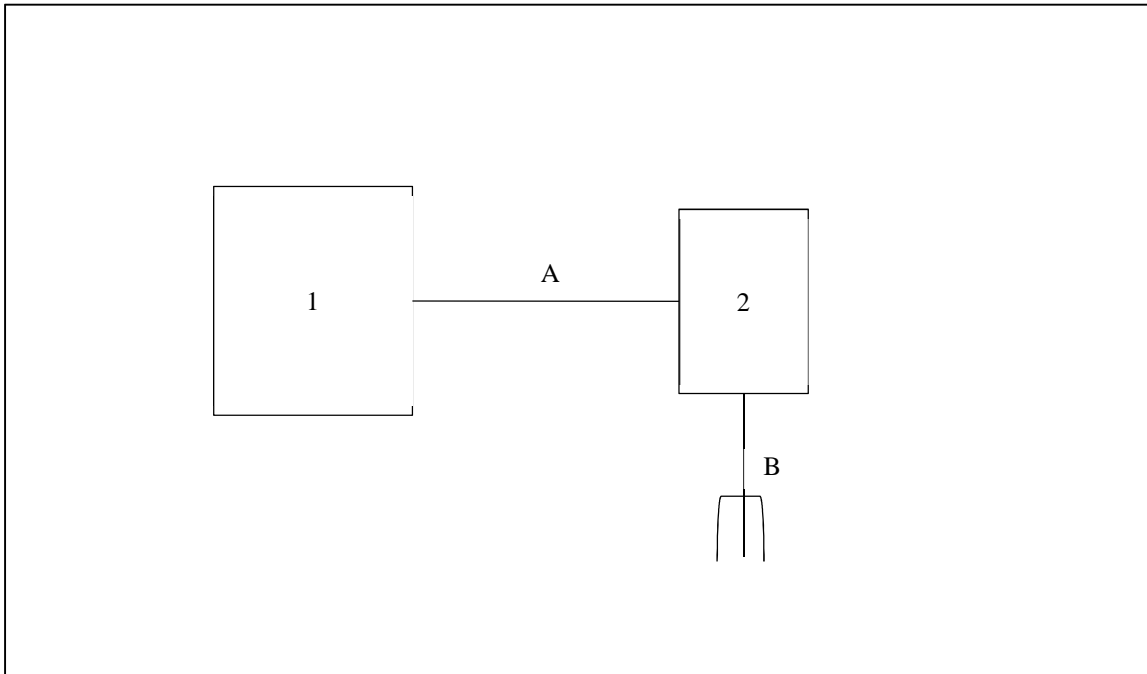


Figure 6-1: Test Setup Block Diagram

7.0 SUMMARY OF TESTS

Along with the tabular data shown below, plots were taken of all signals deemed important enough to document.

7.1 RF Power Output

7.1.1 Measurement Procedure (ANSI 63.26: 2015 Section 5.2.3.2)

The RF output of the equipment under test was directly connected to the input of a wide band RF power meter through 19.9dB of passive attenuation. The results are shown below.

Part 24.132, 101.113 (a), and ISED Canada RSS-134 4.3(a), (b) and RSS-119 5.4 – Power Output

7.1.2 Measurement Results

Performed by: Chris Gormley

Table 7.1.2-1: Peak Output Power - TXC

FCC Rule Part	Frequency (MHz)	Output Power High (dBm)	Output Power High (Watts)
24D	901.5000	29.92	0.98
24D	930.5000	29.70	0.94
24D	940.5000	29.51	0.89
101	928.9250	29.72	0.94
101	932.2500	29.65	0.92
101	941.2500	29.50	0.89
101	952.5000	29.33	0.86
101	959.9250	29.27	0.85

7.2 Out of Band Unwanted Emissions

7.2.1 Measurement Procedure (ANSI 63.26: 2015 Section 5.7.3)

The RF output of the equipment under test was directly connected to the input of the Spectrum Analyzer through 19.9dB of passive attenuation. The spectrum analyzer resolution and video bandwidths were set to 300 Hz and 1000 Hz respectively. The internal correction factors of the spectrum analyzer were employed to correct for any cable or attenuator losses. Results of the test are shown below for all modes of operation.

7.2.2 Measurement Results – Emission Masks

Performed by: Chris Gormley

Part 24.133 a(1), a(2), ISED Canada RSS-134 4.4.1 (a), (b), 4.4.2 (a),(b) – Emission Limits TXC

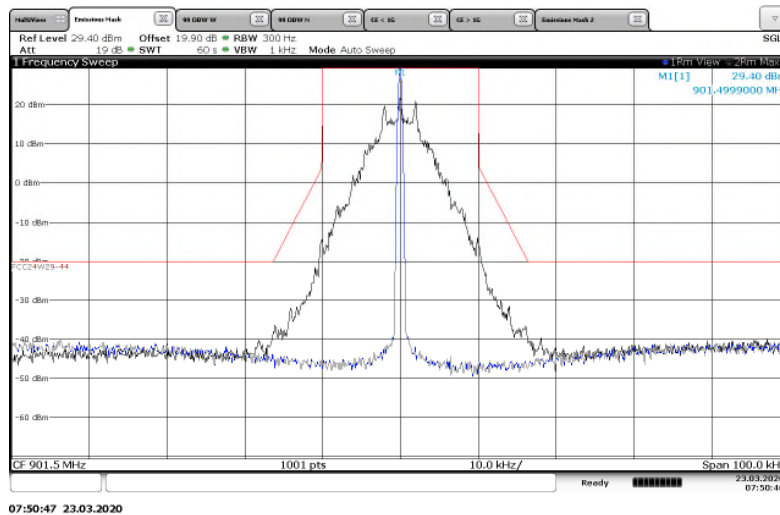


Figure 7.2.2-1: 901.5 MHz – 25 kHz Channel Spacing – Normal Mode

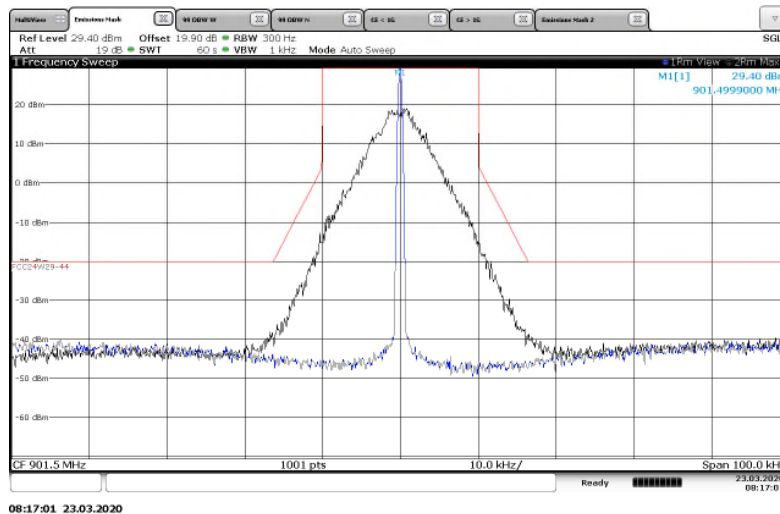


Figure 7.2.2-2: 901.5 MHz – 25 kHz Channel Spacing – Double Density Mode

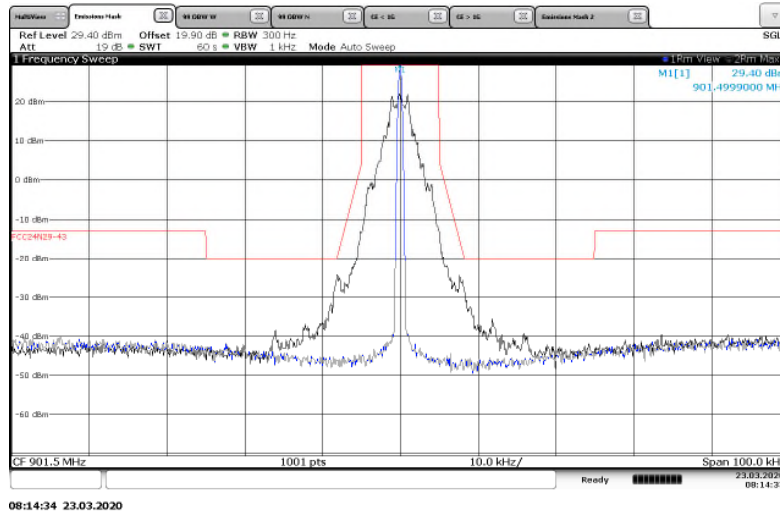


Figure 7.2.2-3: 901.5 MHz – 12.5 kHz Channel Spacing – C&I (Half Baud) Mode

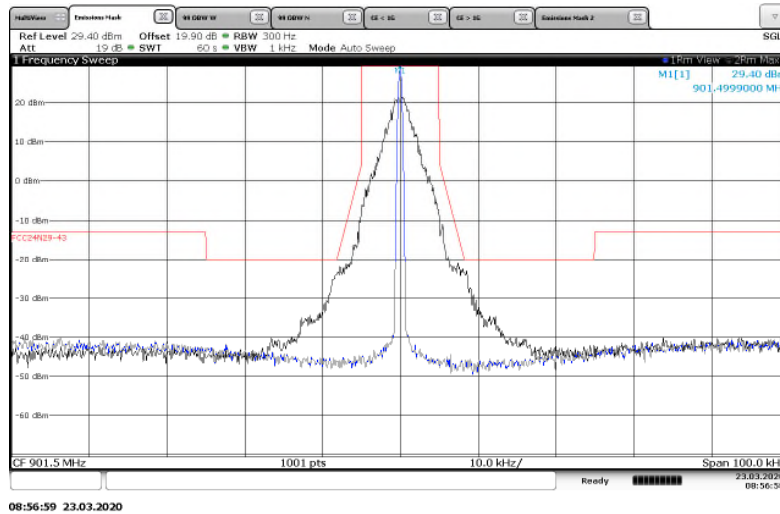


Figure 7.2.2-4: 901.5 MHz – 12.5 kHz Channel Spacing – Priority Mode

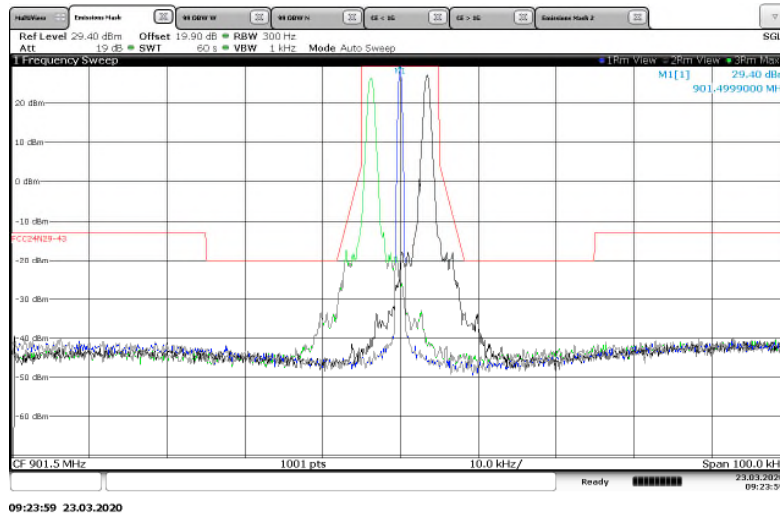


Figure 7.2.2-5: 901.5 MHz – 12.5 kHz Channel Spacing – Boost Mode

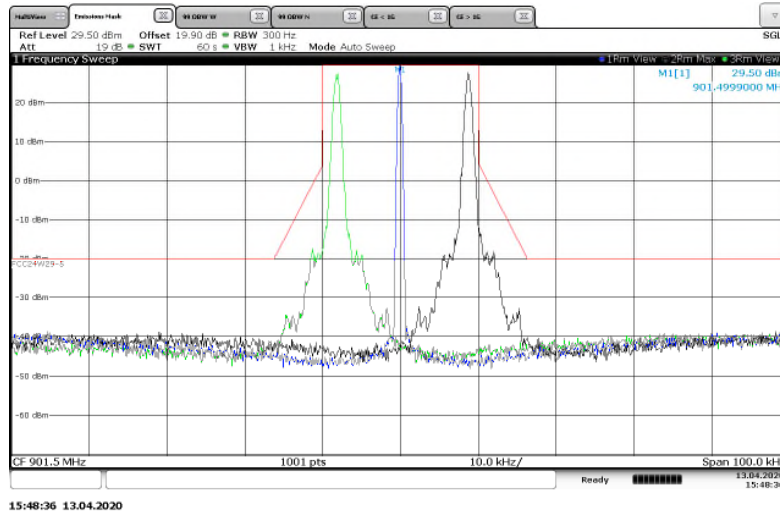


Figure 7.2.2-6: 901.5 MHz – 25 kHz Channel Spacing – Boost Mode

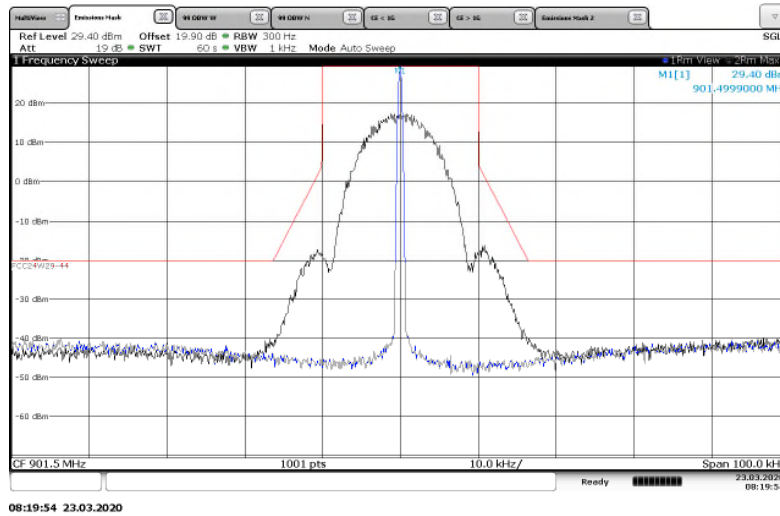


Figure 7.2.2-7: 901.5 MHz – 25 kHz Channel Spacing – 2FSK Mode

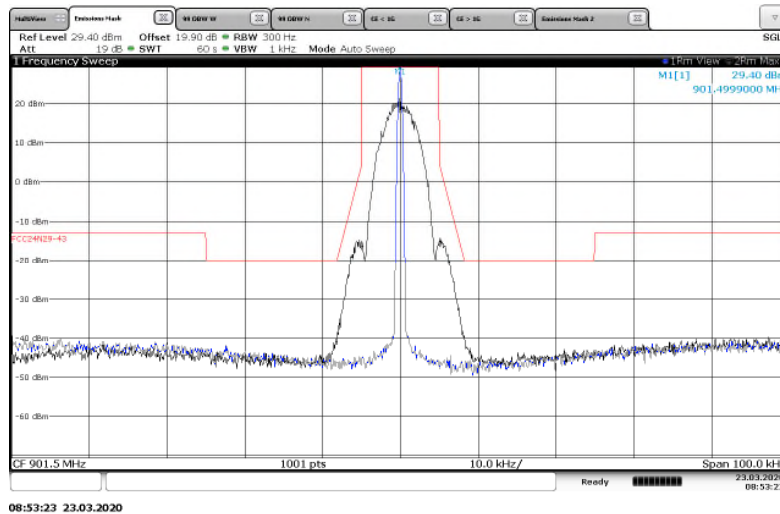


Figure 7.2.2-8: 901.5 MHz – 12.5 kHz Channel Spacing – 2FSK Half Baud Mode

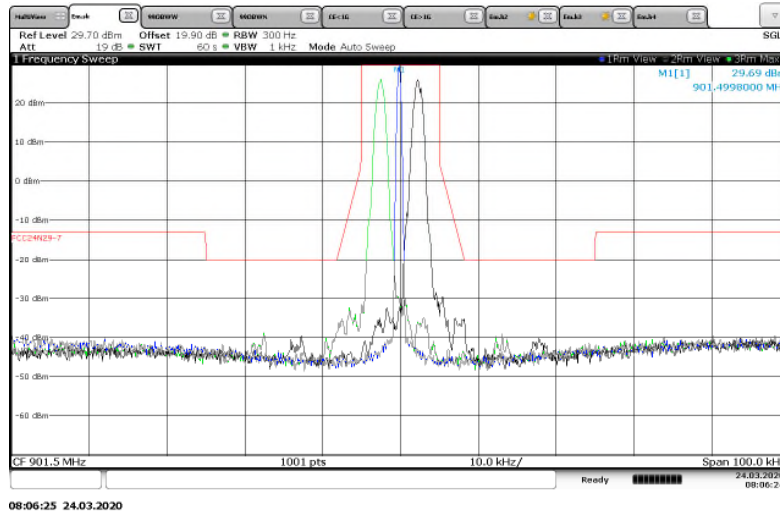


Figure 7.2.2-9: 901.5 MHz – 12.5 kHz Channel Spacing – 2FSK Boost Eighth Baud Mode

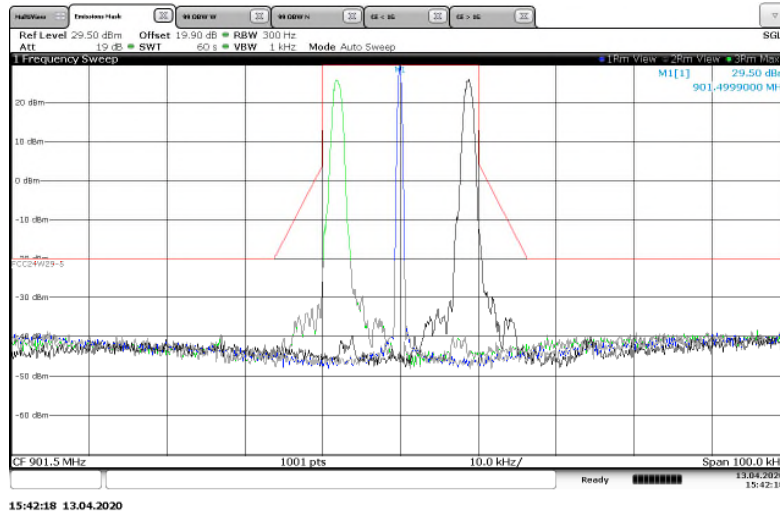


Figure 7.2.2-10: 901.5 MHz – 25 kHz Channel Spacing – 2FSK Boost Eighth Baud Mode

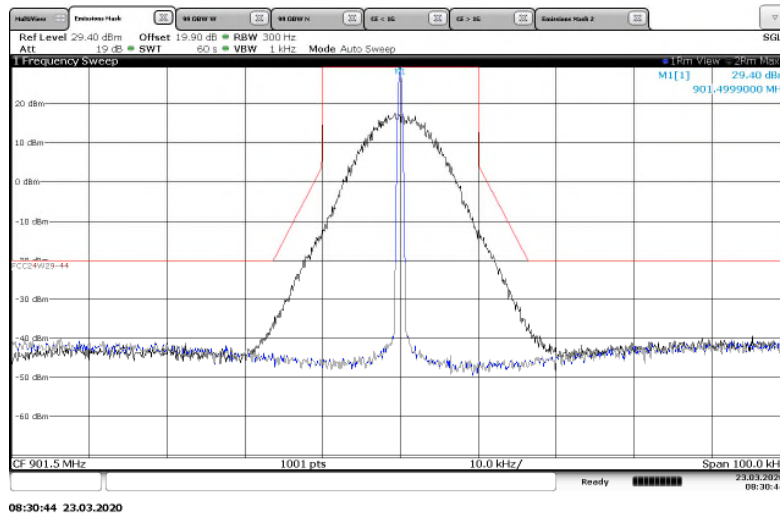


Figure 7.2.2-11: 901.5 MHz – 25 kHz Channel Spacing – 4FSK Mode

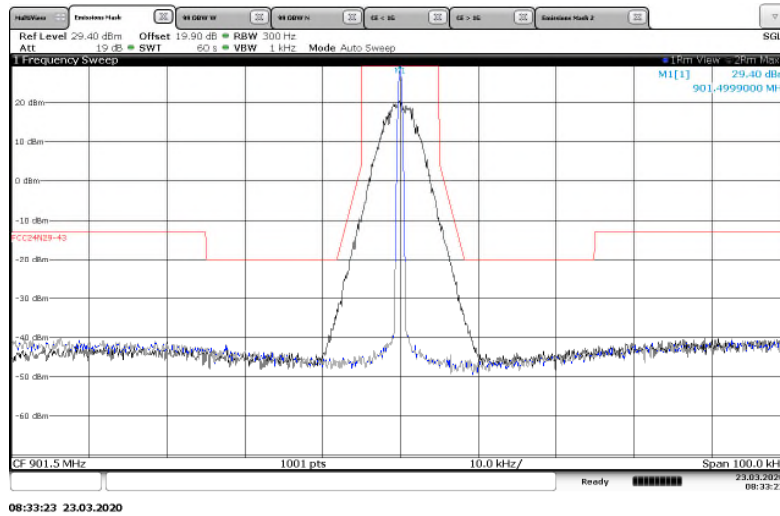


Figure 7.2.2-12: 901.5 MHz – 12.5 kHz Channel Spacing – 4FSK Half Baud Mode

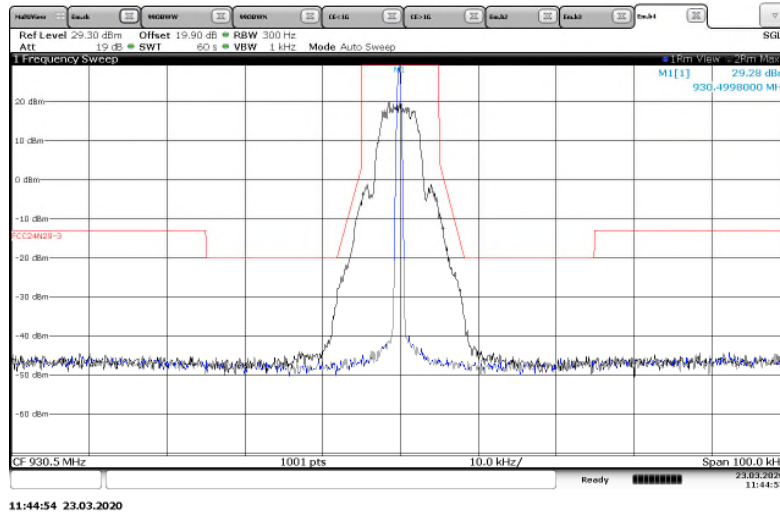


Figure 7.2.2-13: 930.5 MHz – 12.5 kHz Channel Spacing – MPass 5k Mode

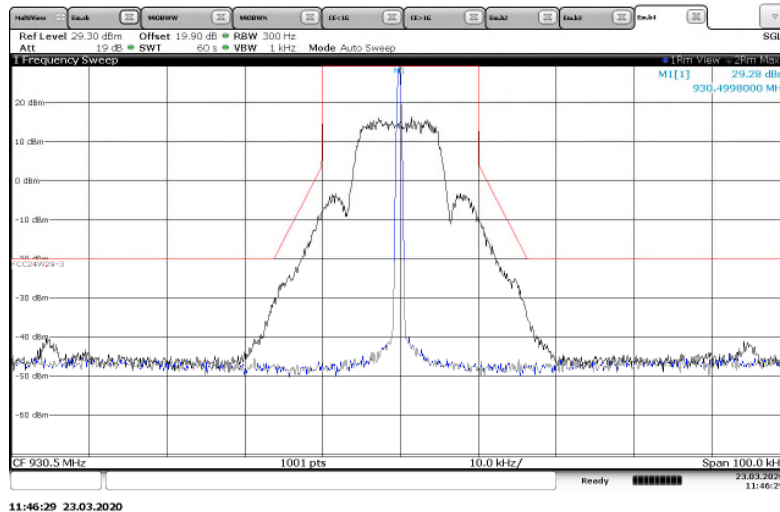


Figure 7.2.2-14: 930.5 MHz – 25 kHz Channel Spacing – MPass 10k Mode

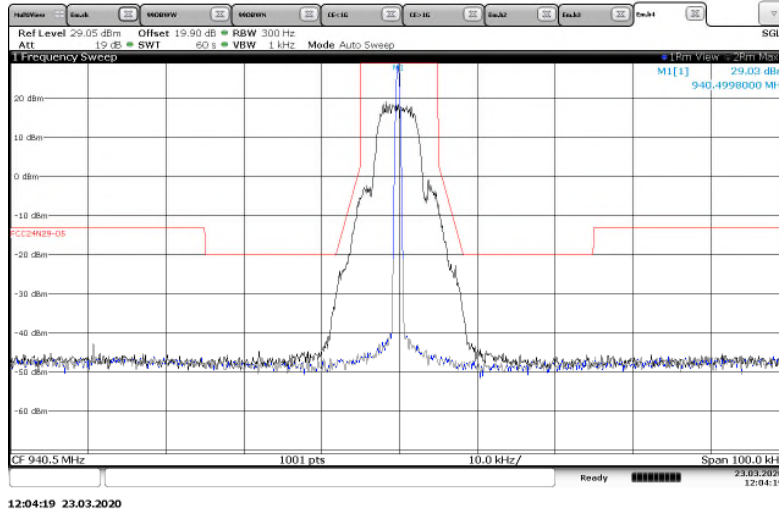


Figure 7.2.2-15: 940.5 MHz – 12.5 kHz Channel Spacing – MPass 5k Mode

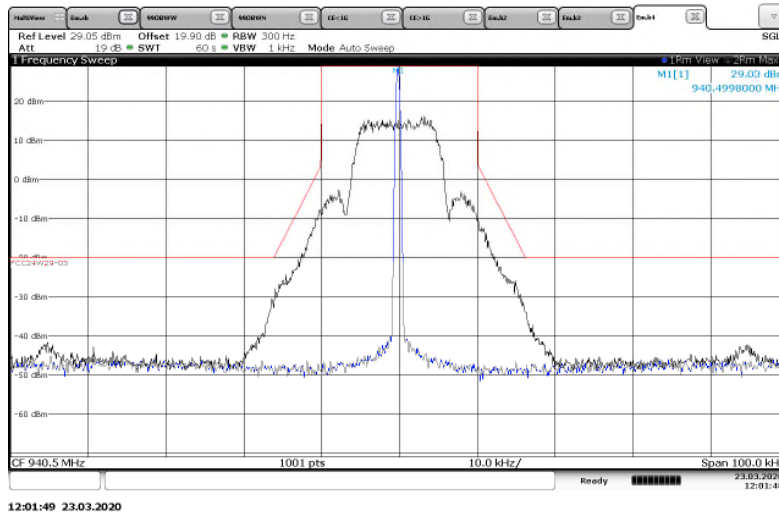


Figure 7.2.2-16: 940.5 MHz – 25 kHz Channel Spacing – MPass 10k Mode

Part 101.111 a(5), a(6), RSS-119 5.8.6 (FCC Part 101.111 a(5) a(6) provides worst case)

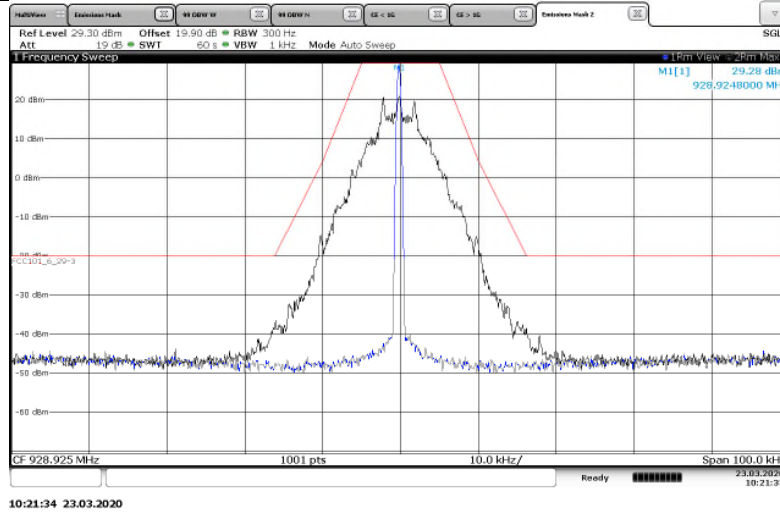


Figure 7.2.2-17: 928.925 MHz – 25 kHz Channel Spacing – Normal Mode

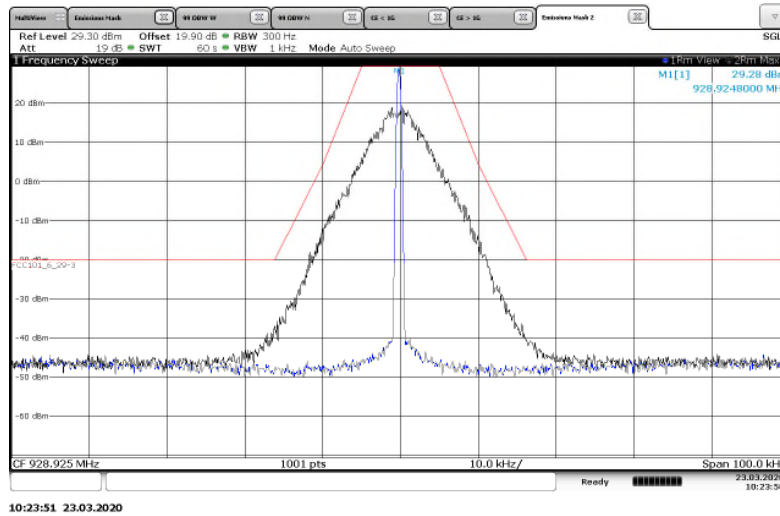


Figure 7.2.2-18: 928.925 MHz – 25 kHz Channel Spacing – Double Density Mode

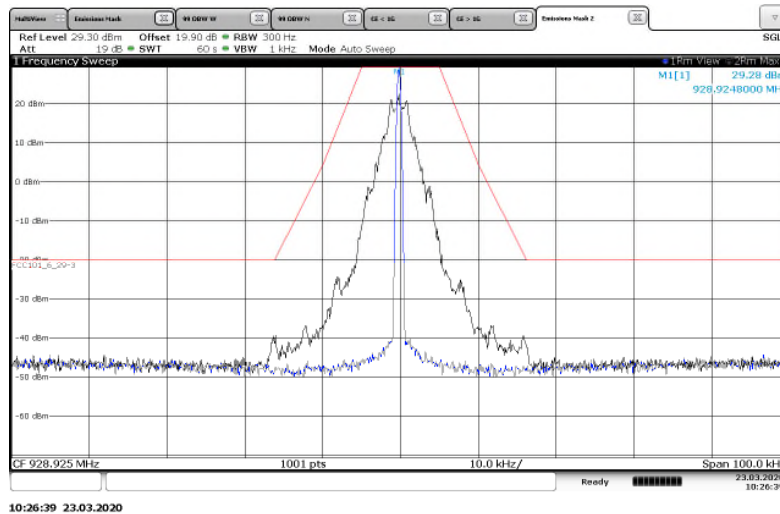


Figure 7.2.2-19: 928.925 MHz – 25 kHz Channel Spacing – C&I (Half Baud) Mode

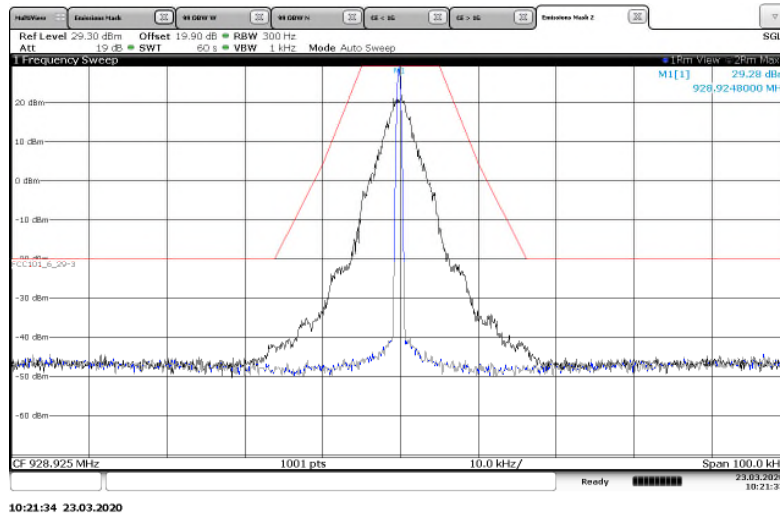


Figure 7.2.2-20: 928.925 MHz – 25 kHz Channel Spacing – Priority Mode

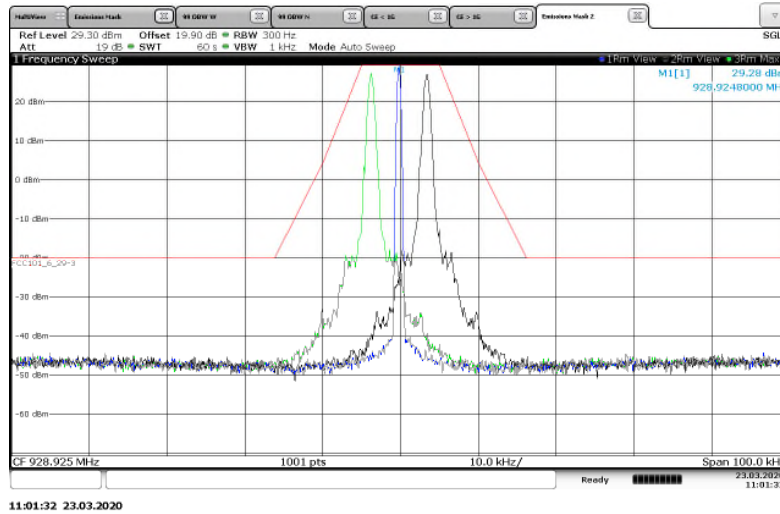


Figure 7.2.2-21: 928.925 MHz – 25 kHz Channel Spacing – Boost Mode

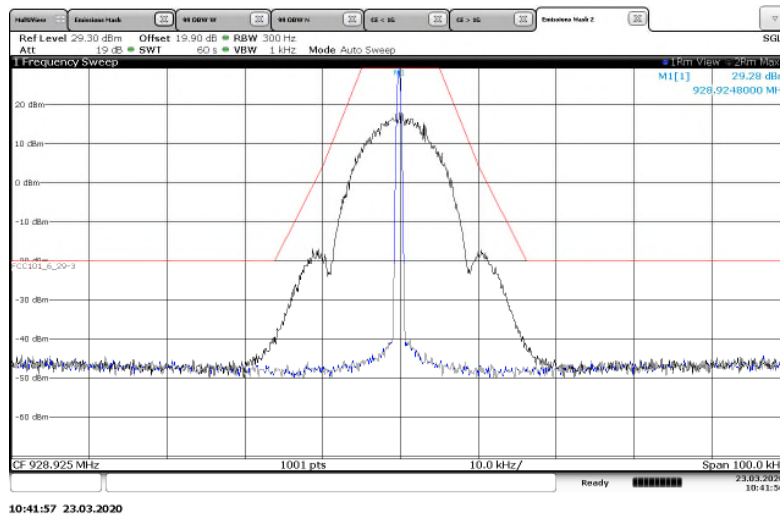


Figure 7.2.2-22: 928.925 MHz – 25 kHz Channel Spacing – 2FSK Mode

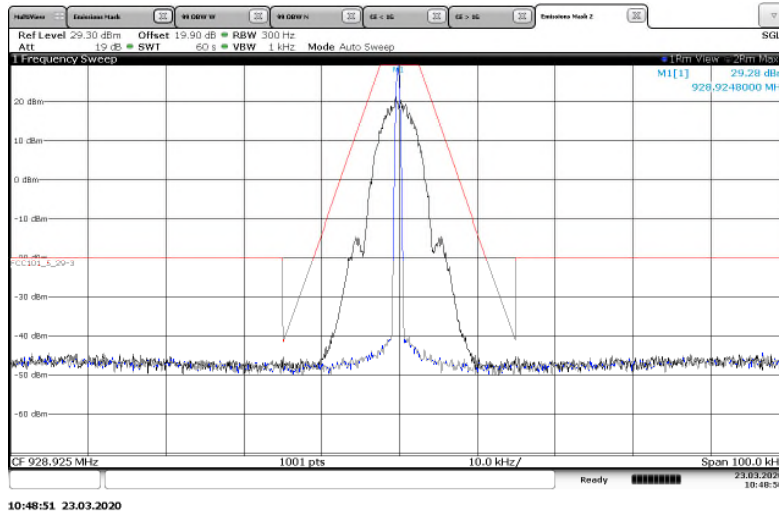


Figure 7.2.2-23: 928.925 MHz – 12.5 kHz Channel Spacing – 2FSK Half Baud Mode

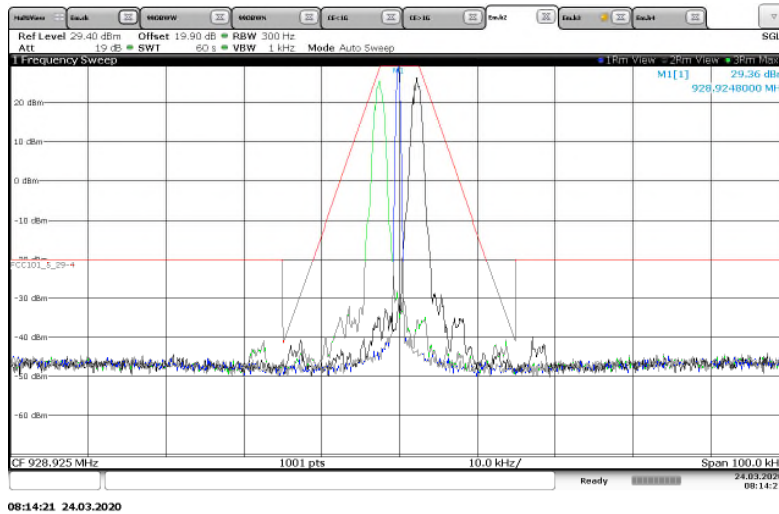


Figure 7.2.2-24: 928.925 MHz – 12.5 kHz Channel Spacing – 2FSK Boost Eighth Baud Mode

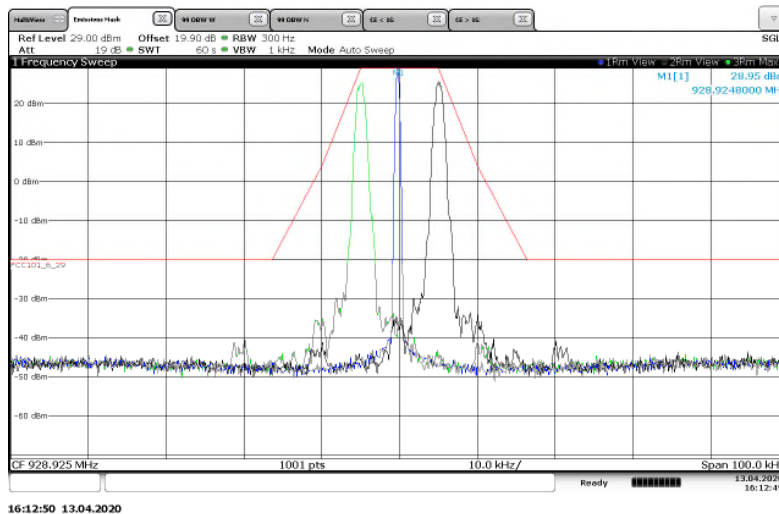


Figure 7.2.2-25: 928.925 MHz – 25 kHz Channel Spacing – 2FSK Boost Eighth Baud Mode

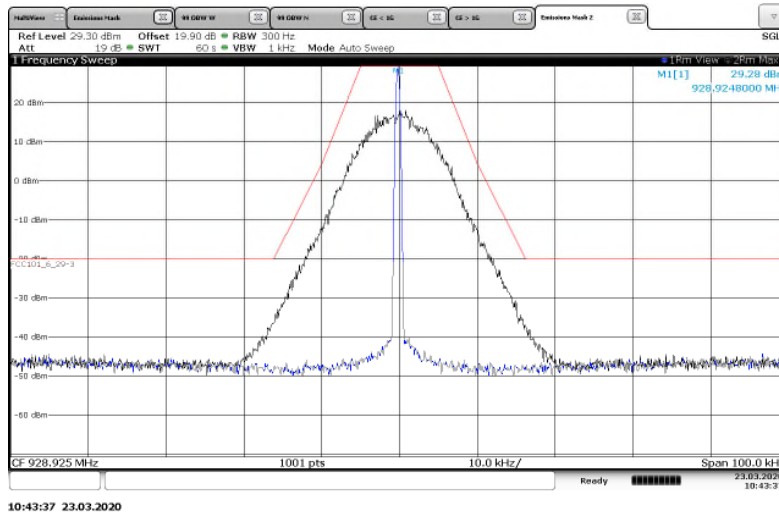


Figure 7.2.2-26: 928.925 MHz – 25 kHz Channel Spacing – 4FSK Mode

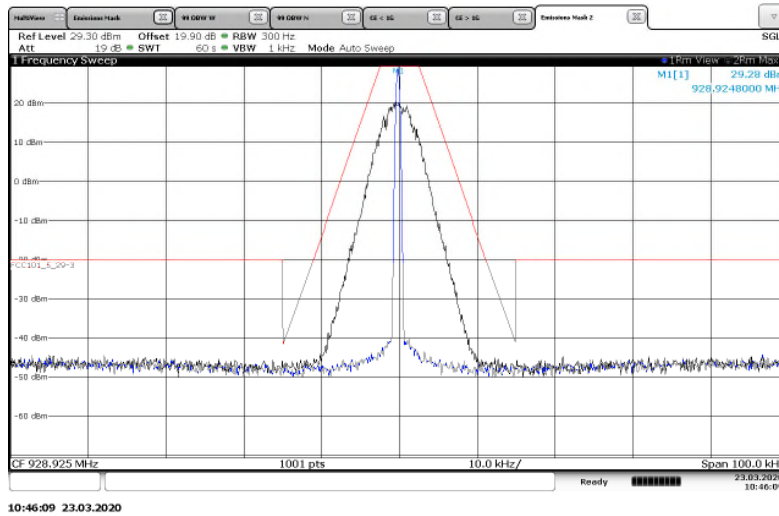


Figure 7.2.2-27: 928.925 MHz – 12.5 kHz Channel Spacing – 4FSK Half Baud Mode

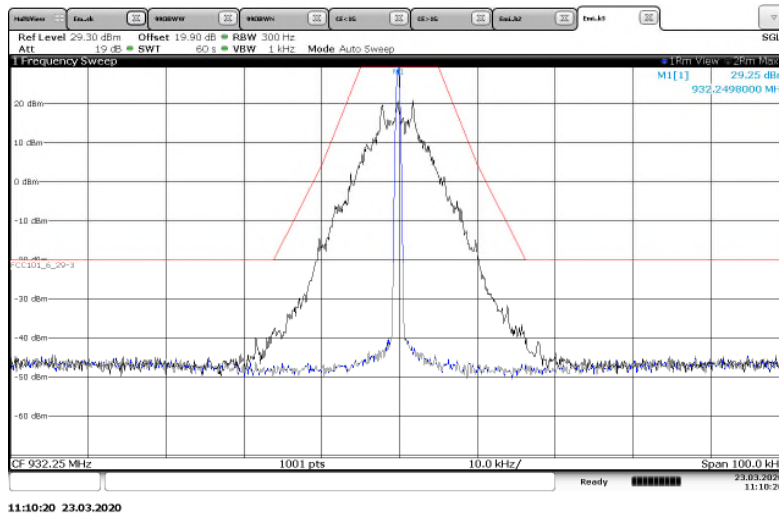


Figure 7.2.2-28: 932.25 MHz – 25 kHz Channel Spacing – Normal Mode

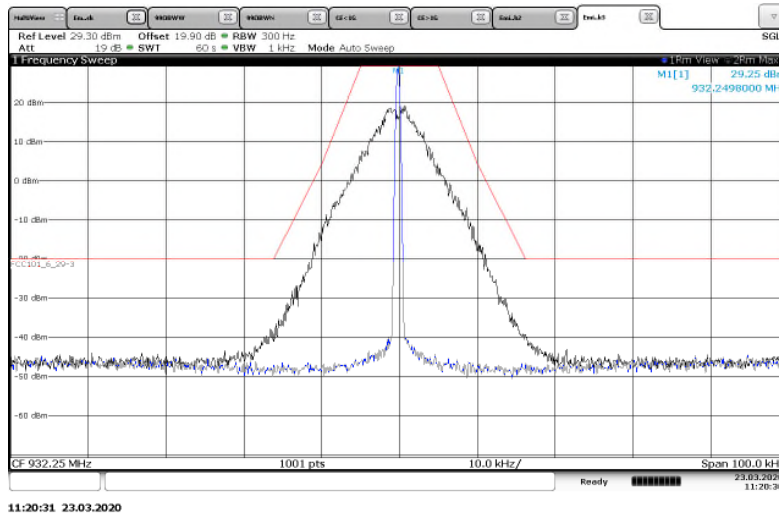


Figure 7.2.2-29: 932.25 MHz – 25 kHz Channel Spacing – Double Density Mode

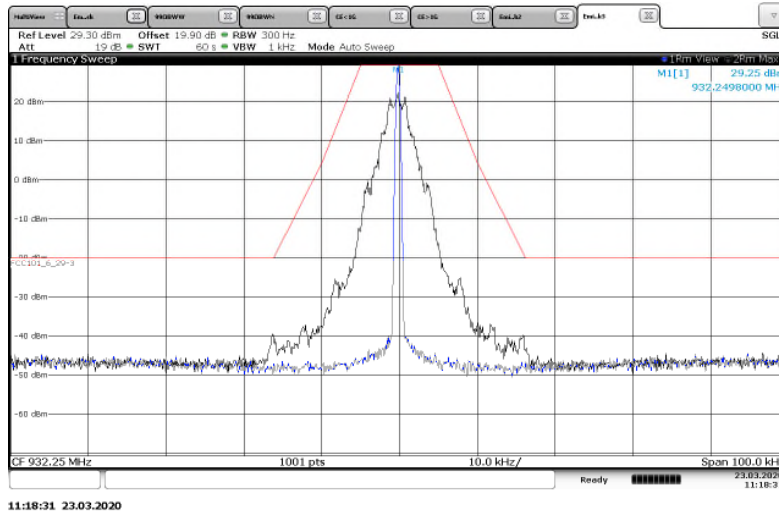


Figure 7.2.2-30: 932.25 MHz – 25 kHz Channel Spacing – C&I (Half Baud) Mode

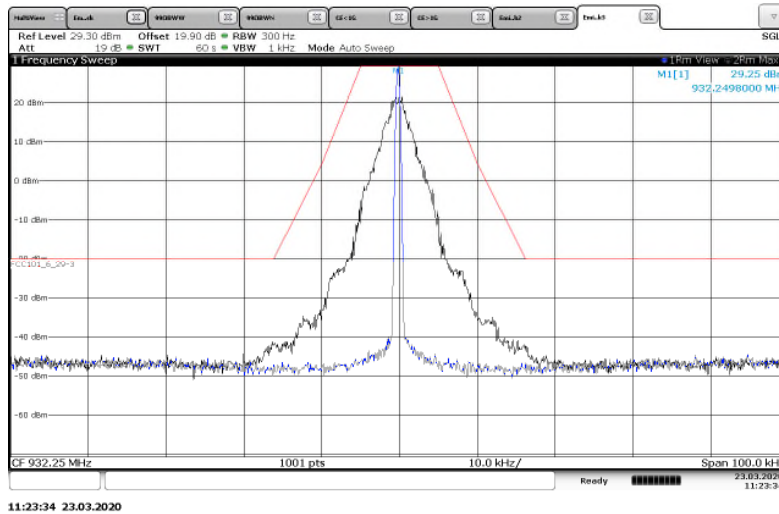


Figure 7.2.2-31: 932.25 MHz – 25 kHz Channel Spacing – Priority Mode

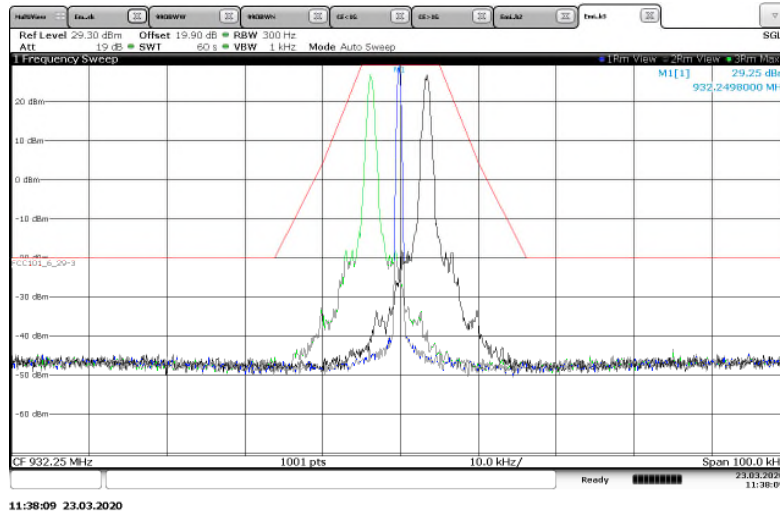


Figure 7.2.2-32: 932.25 MHz – 25 kHz Channel Spacing – Boost Mode

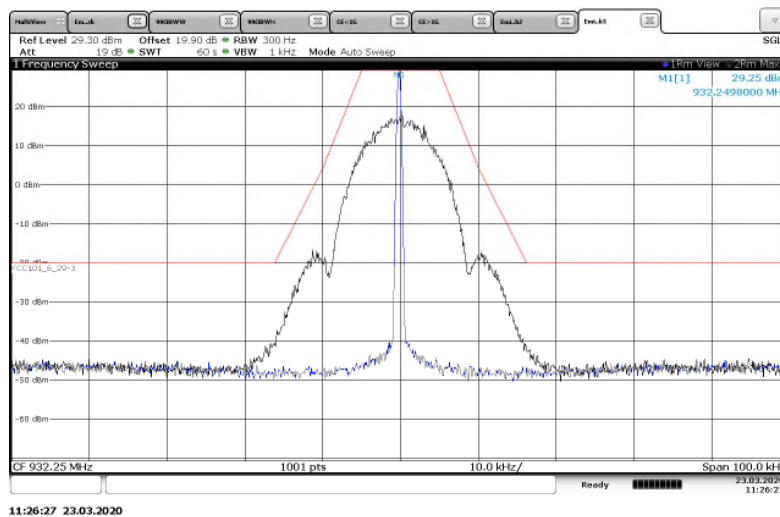


Figure 7.2.2-33: 932.25 MHz – 25 kHz Channel Spacing – 2FSK Mode

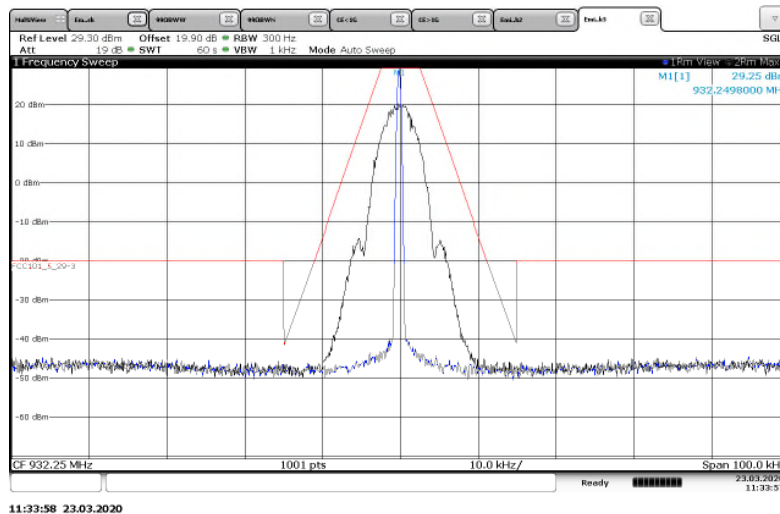


Figure 7.2.2-34: 932.25 MHz – 12.5 kHz Channel Spacing – 2FSK Half Baud Mode

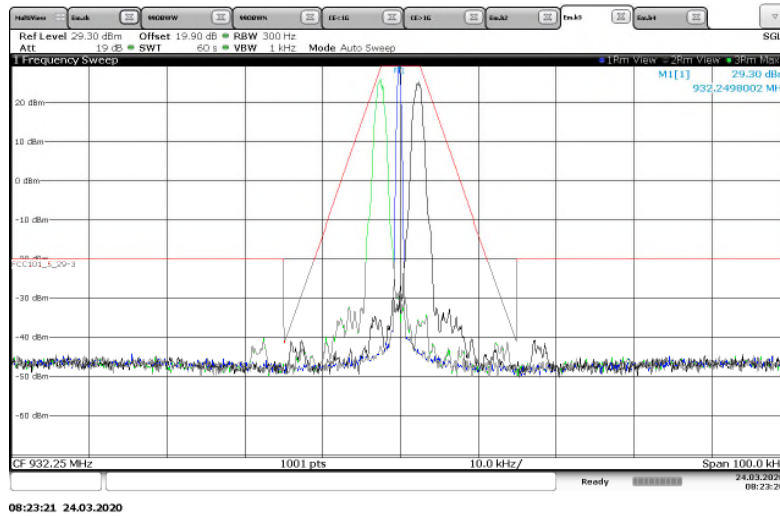


Figure 7.2.2-35: 932.25 MHz – 12.5 kHz Channel Spacing – 2FSK Boost Eighth Baud Mode

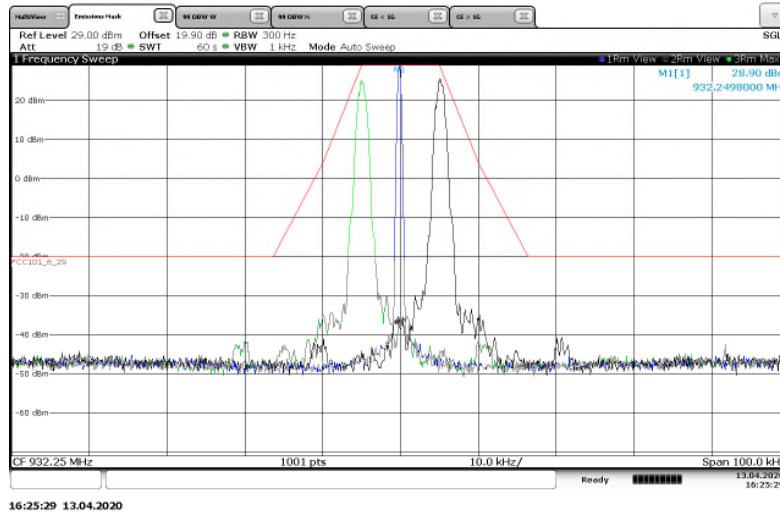


Figure 7.2.2-36: 932.25 MHz – 25 kHz Channel Spacing – 2FSK Boost Eighth Baud Mode

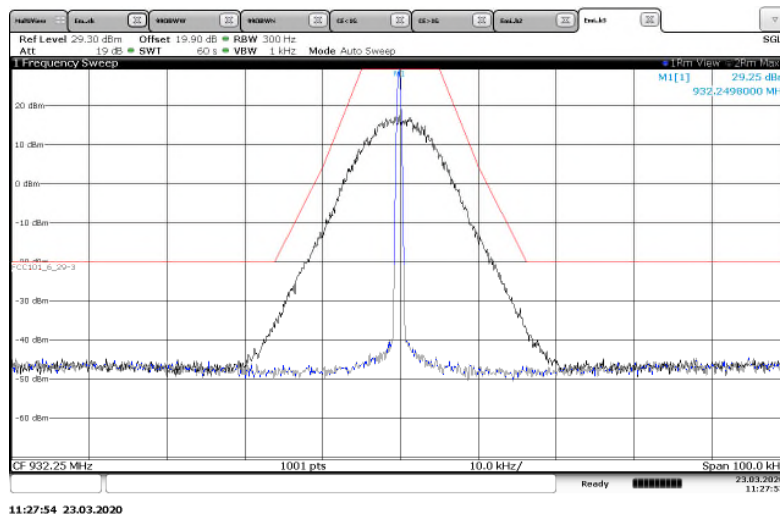


Figure 7.2.2-37: 932.25 MHz – 25 kHz Channel Spacing – 4FSK Mode

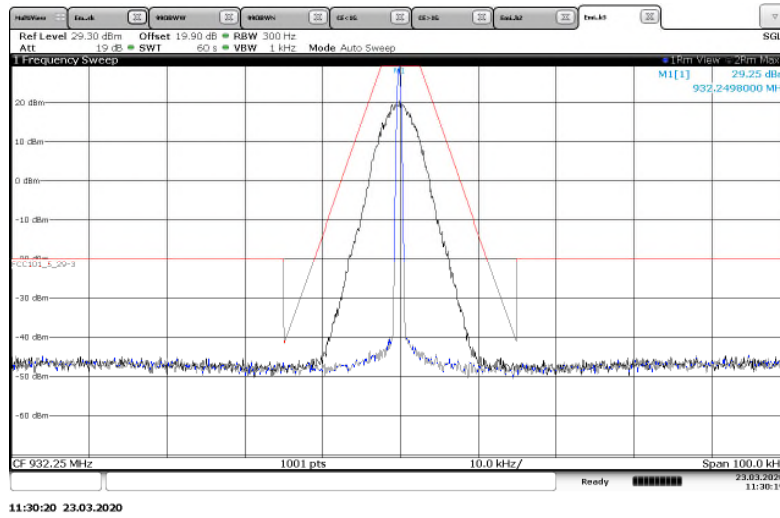


Figure 7.2.2-38: 932.25 MHz – 12.5 kHz Channel Spacing – 4FSK Half Baud Mode

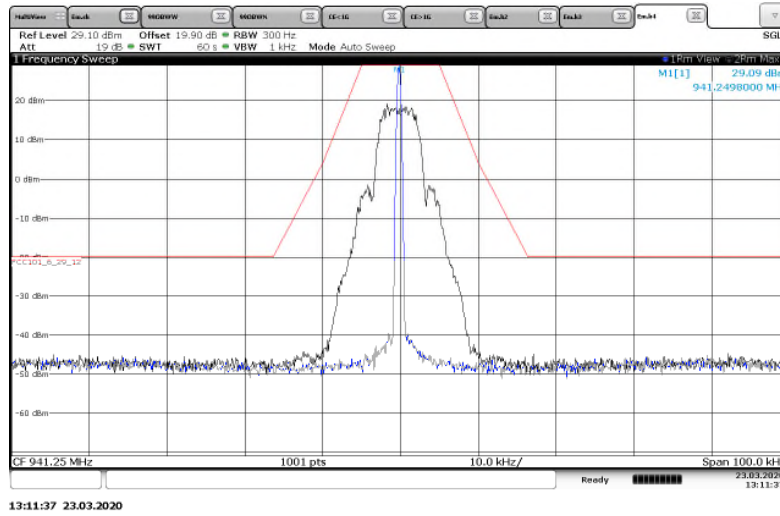


Figure 7.2.2-39: 941.25 MHz – 25 kHz Channel Spacing – mPass 5k Mode

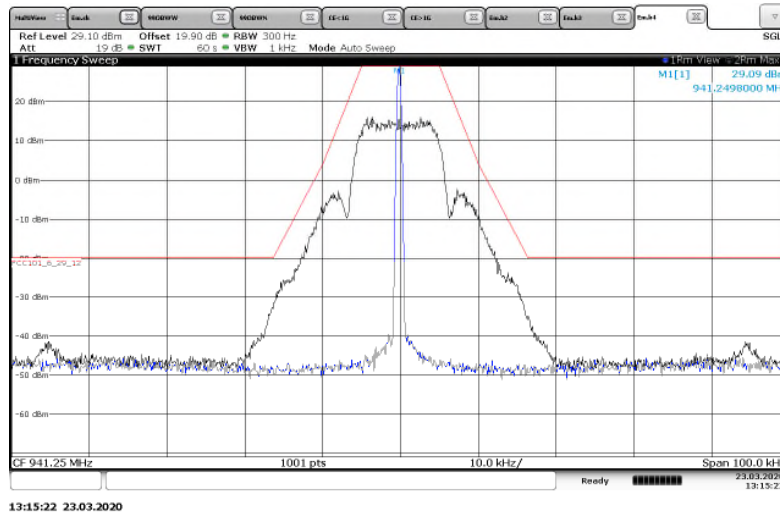


Figure 7.2.2-40: 941.25 MHz – 25 kHz Channel Spacing – mPass 10k Mode

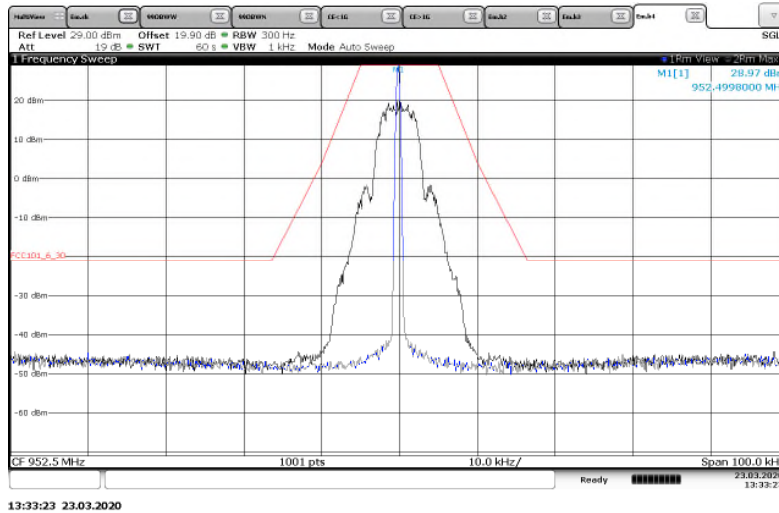


Figure 7.2.2-41: 952.5 MHz – 25 kHz Channel Spacing – mPass 5k Mode

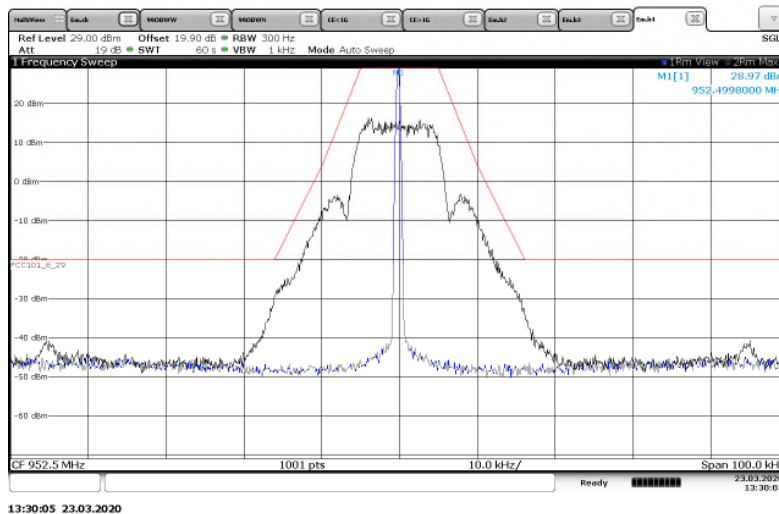


Figure 7.2.2-42: 952.5 MHz – 25 kHz Channel Spacing – mPass 10k Mode

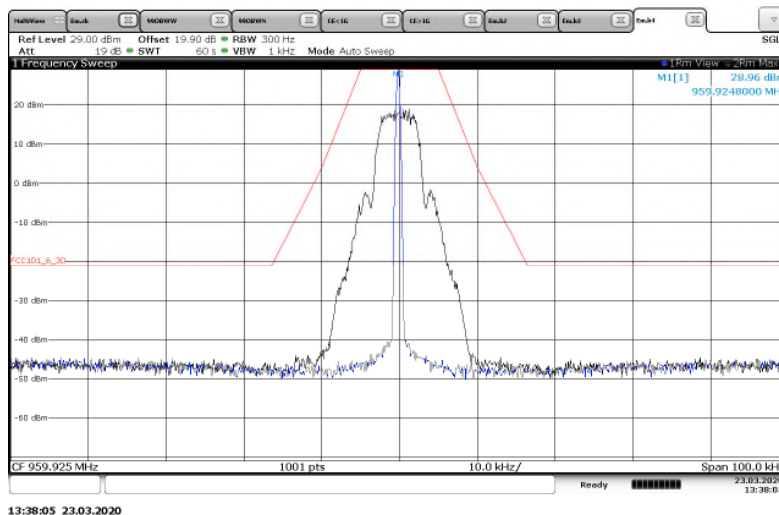


Figure 7.2.2-43: 959.925 MHz – 25 kHz Channel Spacing – mPass 5k Mode

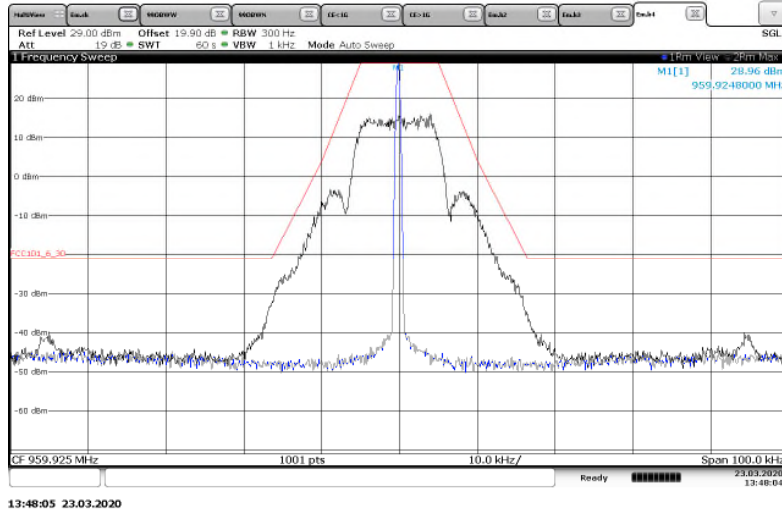


Figure 7.2.2-44: 959.925 MHz – 25 kHz Channel Spacing – mPass 10k Mode

7.3 99% Bandwidth

7.3.1 Measurement Procedure (ANSI 63.26: 2015 Section 5.4.4)

The RF output of the equipment under test was directly connected to the input of the Spectrum Analyzer through 19.9dB of passive attenuation. The internal correction factors of the spectrum analyzer were employed to correct for any cable and attenuator losses.

The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts. The nominal IF filter 3 dB bandwidth (RBW) is in the range of 1% to 5% of the OBW, and the VBW was set $\geq 3 \times$ RBW. The reference level was set to prevent the signal amplitude from exceeding the maximum spectrum analyzer input mixer level for linear operation. The measurements were made using the spectrum analyzer's 99% BW function.

7.3.2 Measurement Results

Performed by: Chris Gormley

TXC

Frequency (MHz)	ISED Canada Rule Part	Mode of Operation	99% Bandwidth (kHz)
901.5000	RSS-134	Normal	11.97
901.5000	RSS-134	Double Density	13.50
901.5000	RSS-134	C&I (Half-Baud)	6.12
901.5000	RSS-134	Priority	6.79
901.5000	RSS-134	Boost	1.32
901.5000	RSS-134	2SFSK	11.92
901.5000	RSS-134	2SFSK (Half Baud)	5.97
901.5000	RSS-134	2SFSK (Eighth Baud)	1.52
901.5000	RSS-134	4SFSK	13.57
901.5000	RSS-134	4SFSK (Half Baud)	6.74
930.5000	RSS-134	MPass 5k	5.81
930.5000	RSS-134	MPass 10k	11.89
940.0125	RSS-134	MPass 5k	5.80
940.0125	RSS-134	MPass 10k	11.93
928.9250	RSS-119	Normal	11.98
928.9250	RSS-119	Double Density	13.73
928.9250	RSS-119	C&I (Half-Baud)	6.16
928.9250	RSS-119	Priority	6.78
928.9250	RSS-119	Boost	1.30
928.9250	RSS-119	2SFSK	11.95
928.9250	RSS-119	2SFSK (Half Baud)	5.91
928.9250	RSS-119	2SFSK (Eighth Baud)	1.49
928.9250	RSS-119	4SFSK	13.59
928.9250	RSS-119	4SFSK (Half Baud)	6.77
932.2500	RSS-119	Normal	11.90
932.2500	RSS-119	Double Density	13.26

932.2500	RSS-119	C&I (Half-Baud)	6.04
932.2500	RSS-119	Priority	6.86
932.2500	RSS-119	Boost	1.27
932.2500	RSS-119	2SFSK	12.08
932.2500	RSS-119	2SFSK (Half Baud)	6.00
932.2500	RSS-119	2SFSK (Eighth Baud)	1.55
932.2500	RSS-119	4SFSK	13.58
932.2500	RSS-119	4SFSK (Half Baud)	6.74
941.4875	RSS-119	MPass 5k	5.80
941.4875	RSS-119	MPass 10k	11.92
952.5000	RSS-119	MPass 5k	5.82
952.5000	RSS-119	MPass 10k	11.87
959.9250	RSS-119	MPass 5k	5.81
959.9250	RSS-119	MPass 10k	11.88

ISED Canada RSS-GEN 6.6, ISED Canada RSS-134

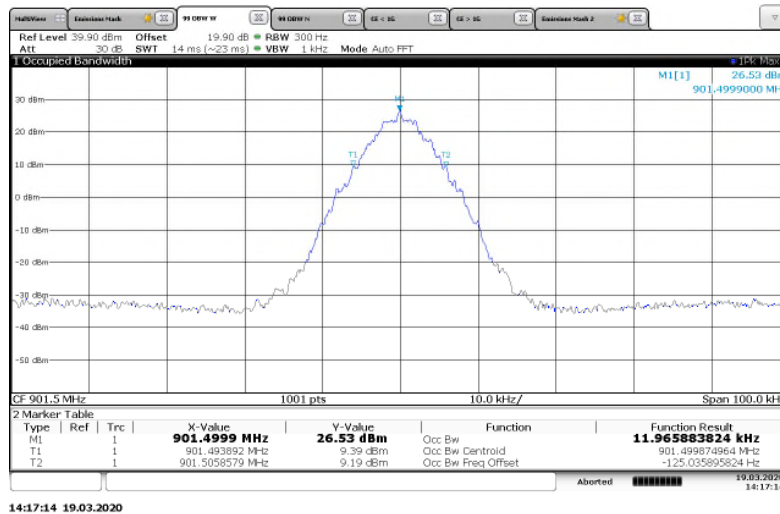


Figure 7.3.2-1: 901.5 MHz – Normal Mode

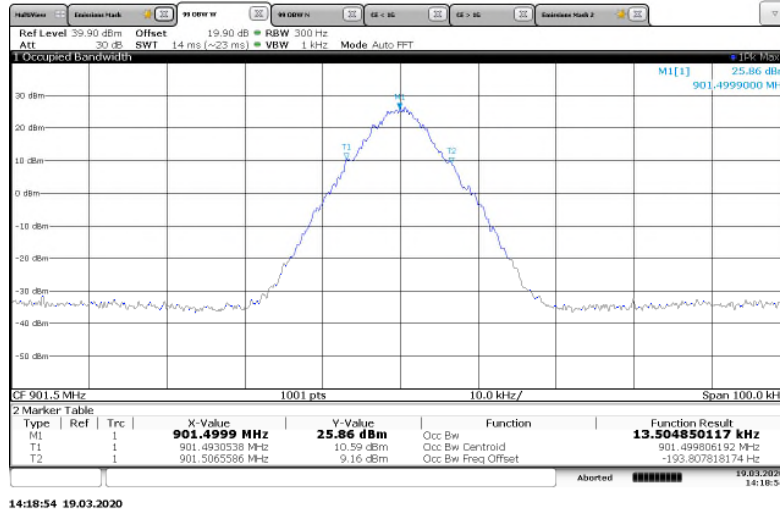


Figure 7.3.2-2: 901.5 MHz – Double Density Mode

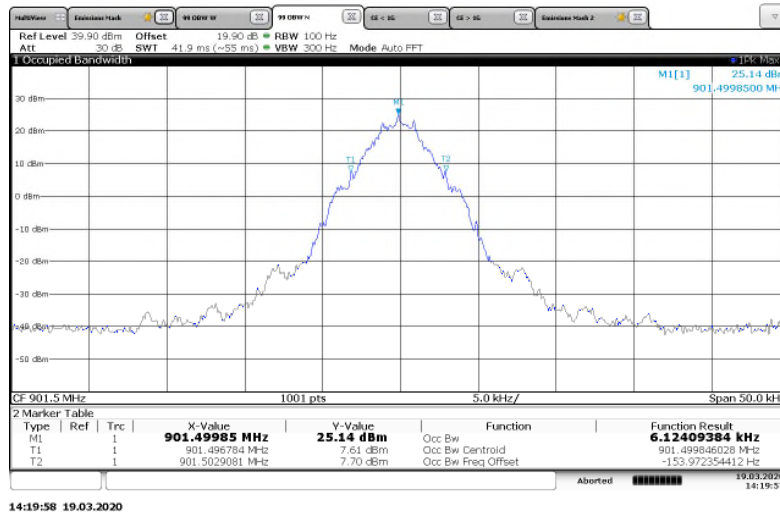


Figure 7.3.2-3: 901.5 MHz – C&I (Half Baud) Mode

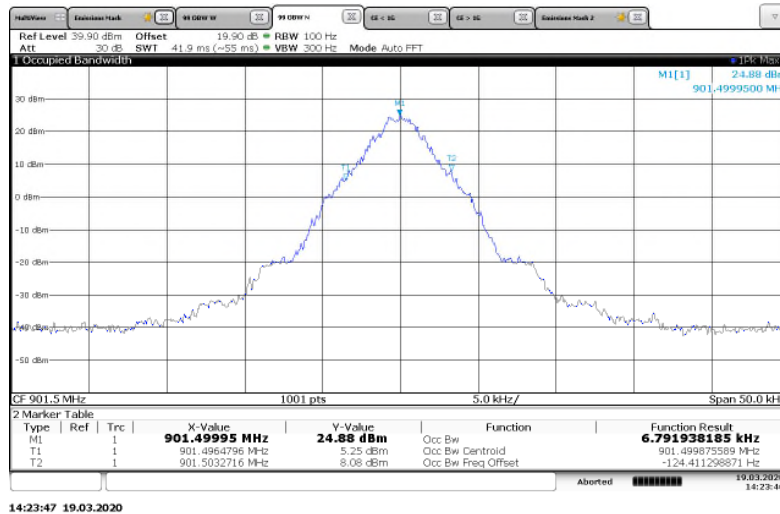


Figure 7.3.2-4: 901.5 MHz – Priority Mode

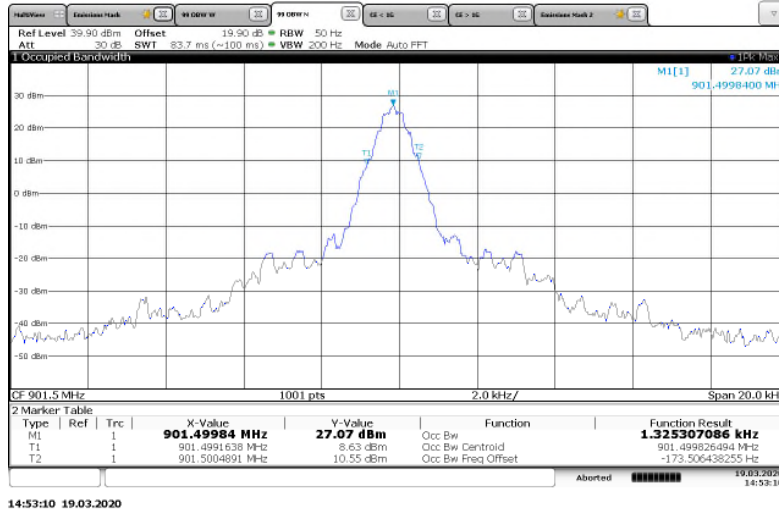


Figure 7.3.2-5: 901.5 MHz – Boost Mode

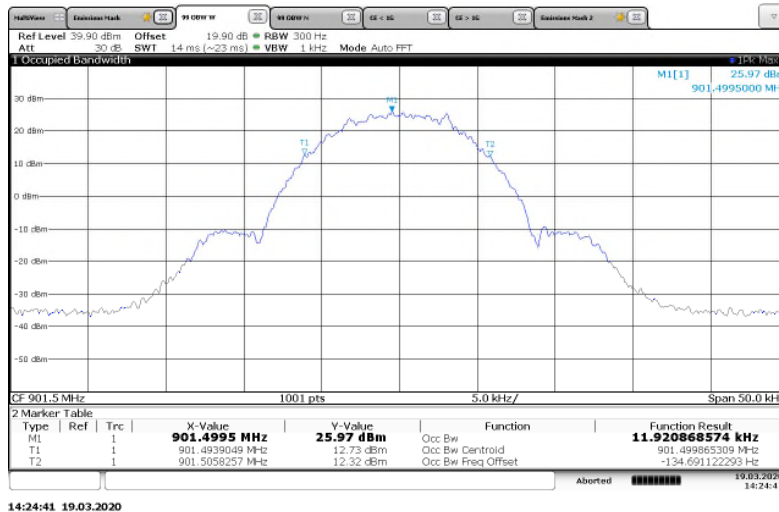


Figure 7.3.2-6: 901.5 MHz – 2SFSK Mode

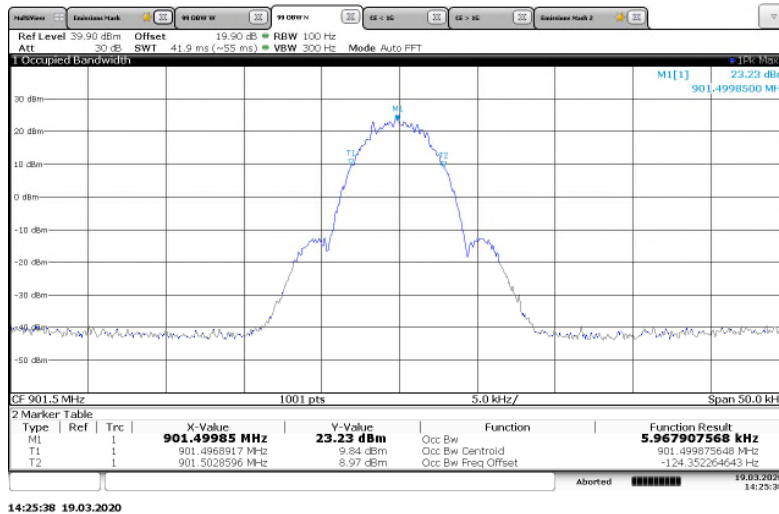


Figure 7.3.2-7: 901.5 MHz – 2SFSK Half Baud Mode

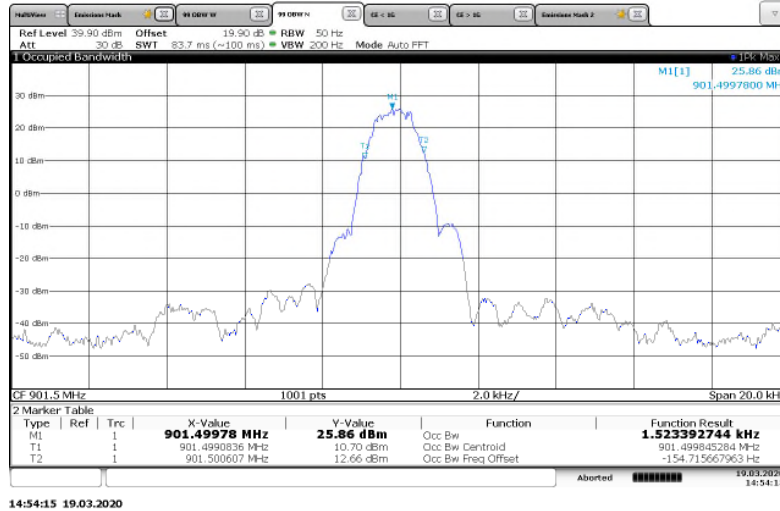


Figure 7.3.2-8: 901.5 MHz – 2FSK Eighth Baud Mode

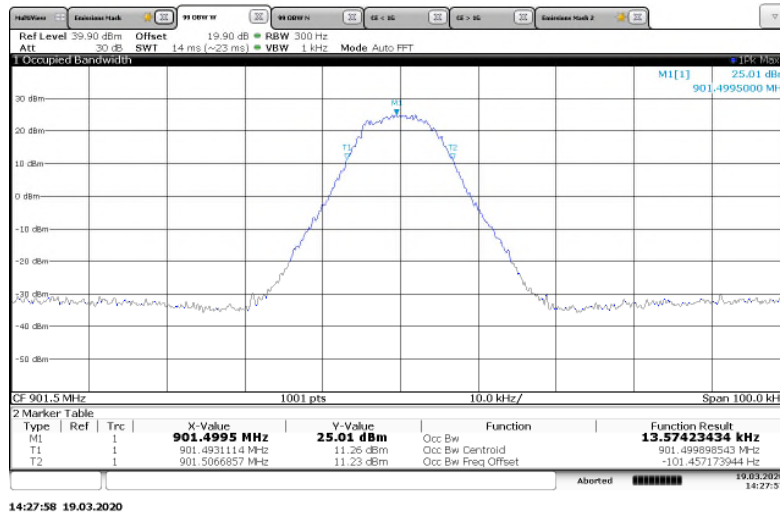


Figure 7.3.2-9: 901.5 MHz – 4FSK Mode

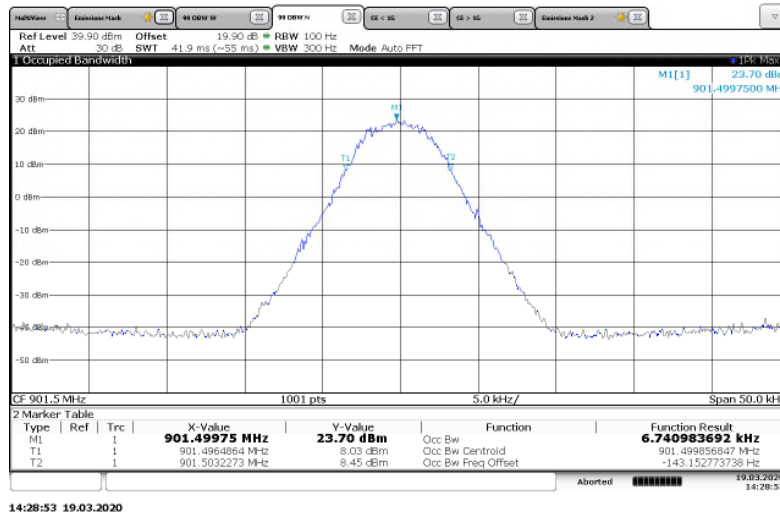


Figure 7.3.2-10: 901.5 MHz – 4FSK Half Baud Mode

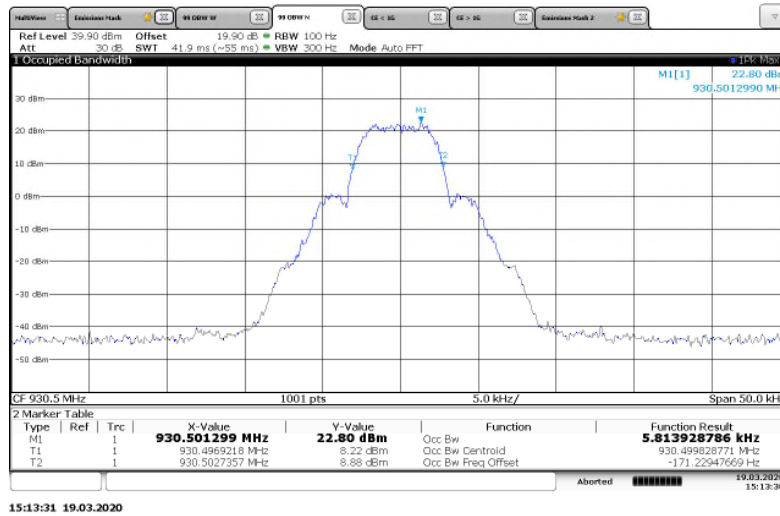


Figure 7.3.2-11: 930.5 MHz – MPass 5k Mode

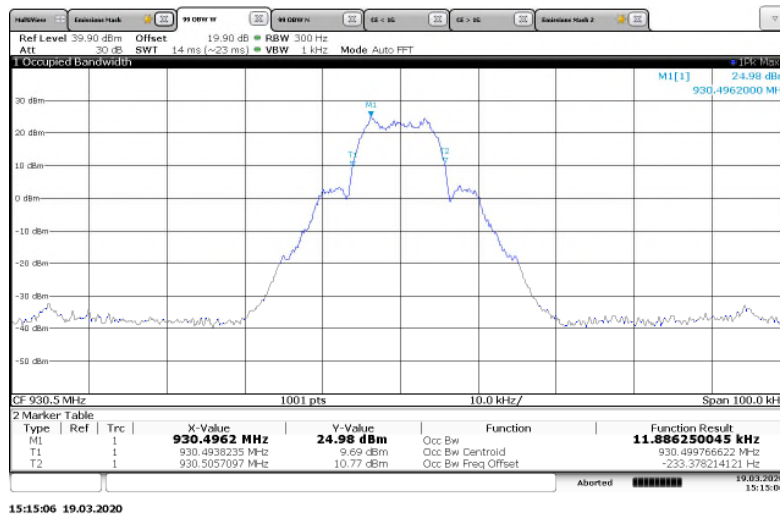


Figure 7.3.2-12: 930.5 MHz – MPass 10k Mode

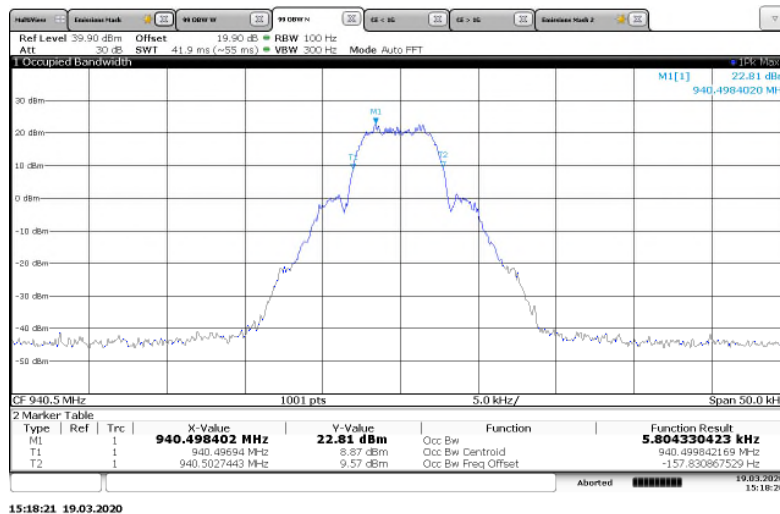


Figure 7.3.2-13: 940.5 MHz – MPass 5k Mode

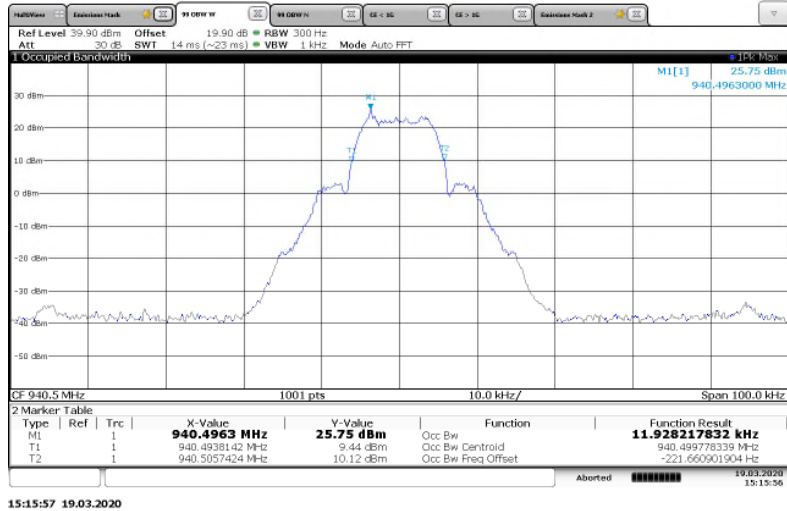


Figure 7.3.2-14: 940.5 MHz – MPass 10k Mode

ISED Canada RSS-GEN 6.6, ISED Canada RSS-119

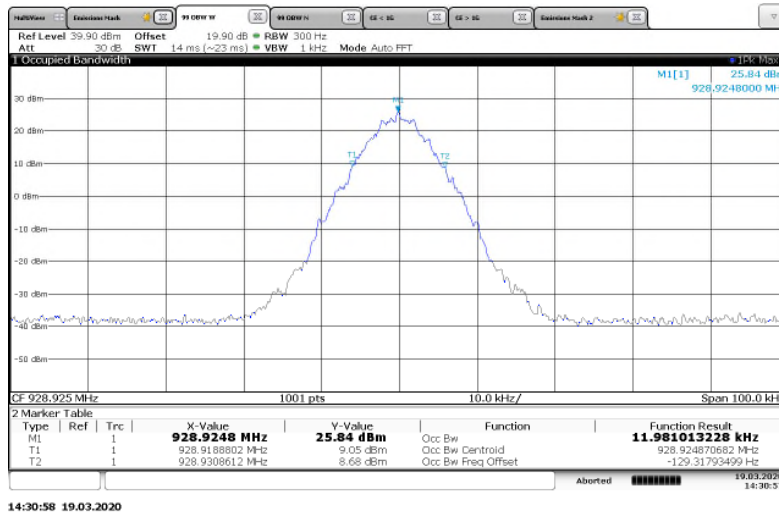


Figure 7.3.2-15: 928.925 MHz – Normal Mode

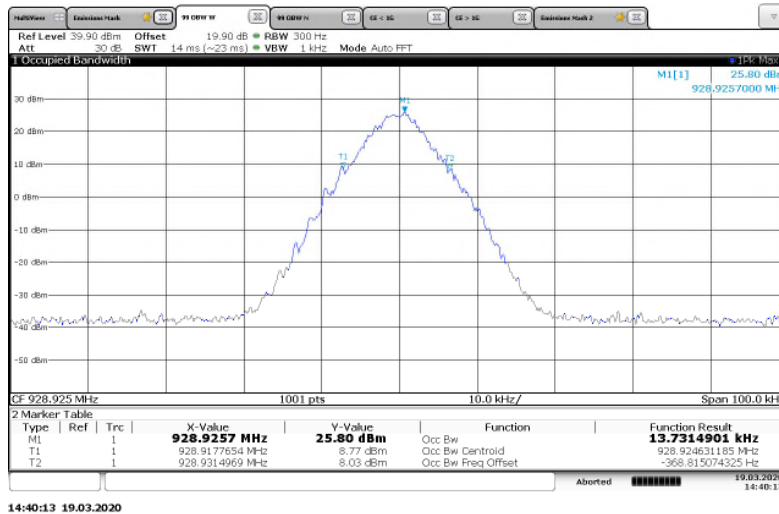


Figure 7.3.2-16: 928.925 MHz – Double Density Mode

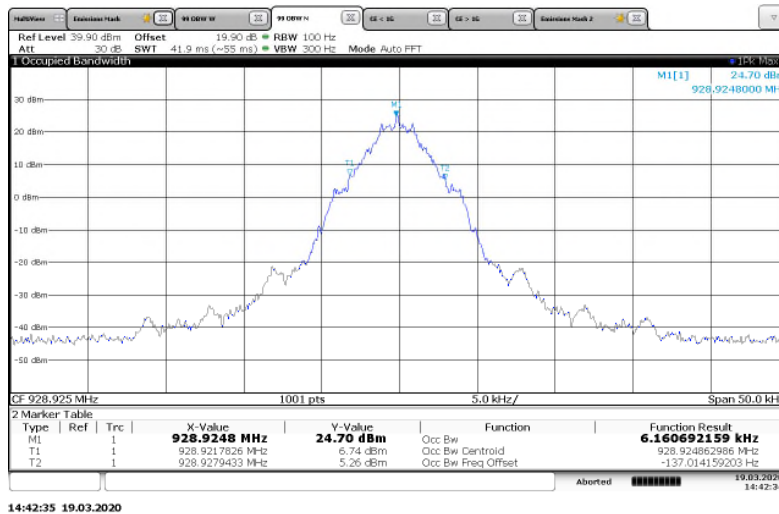


Figure 7.3.2-17: 928.925 MHz – C&I (Half Baud) Mode

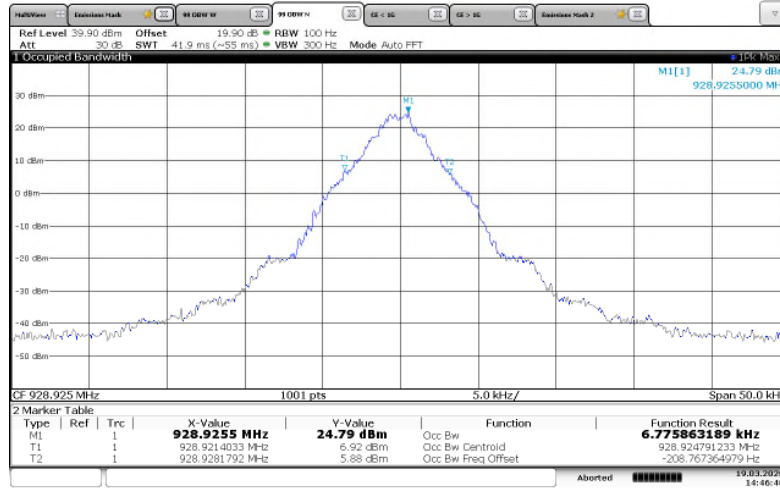


Figure 7.3.2-18: 928.925 MHz – Priority Mode

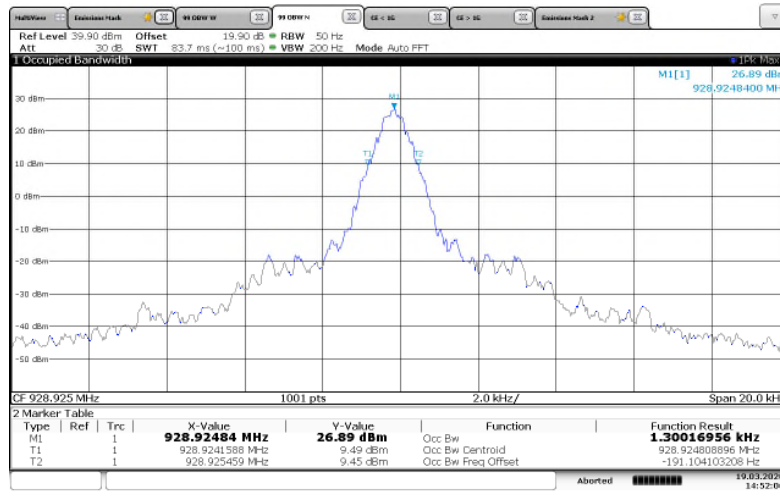


Figure 7.3.2-19: 928.925 MHz – Boost Mode

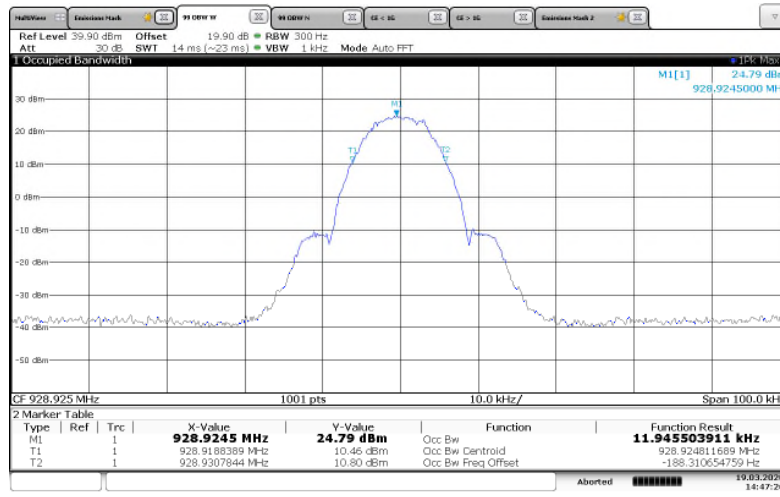


Figure 7.3.2-20: 928.925 MHz – 2SFSK Mode

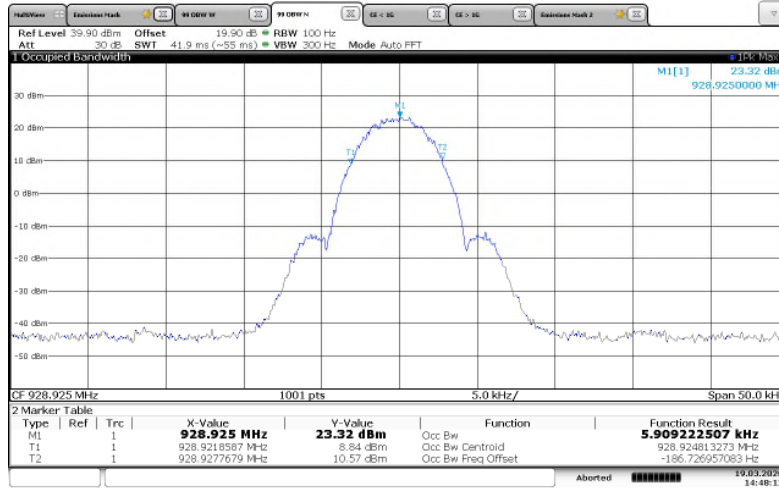


Figure 7.3.2-21: 928.925 MHz – 2FSK Half Baud Mode

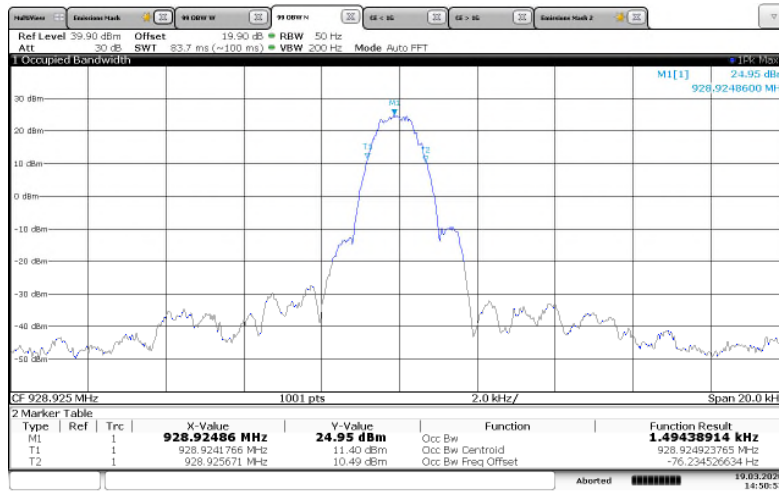


Figure 7.3.2-22: 928.925 MHz – 2FSK Eighth Baud Mode

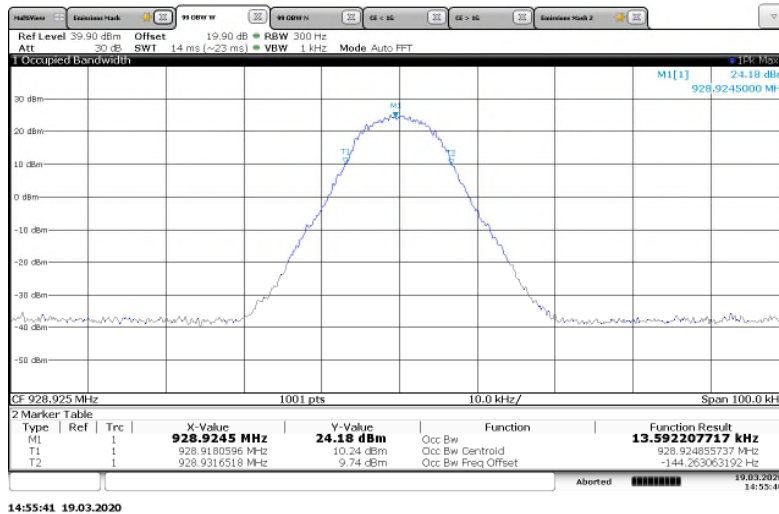


Figure 7.3.2-23: 928.925 MHz – 4FSK Mode

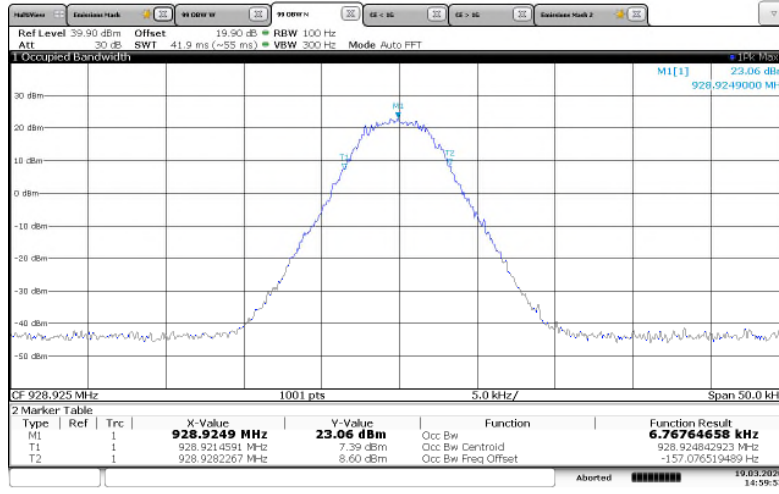


Figure 7.3.2-24: 928.925 MHz – 4FSK Half Baud Mode

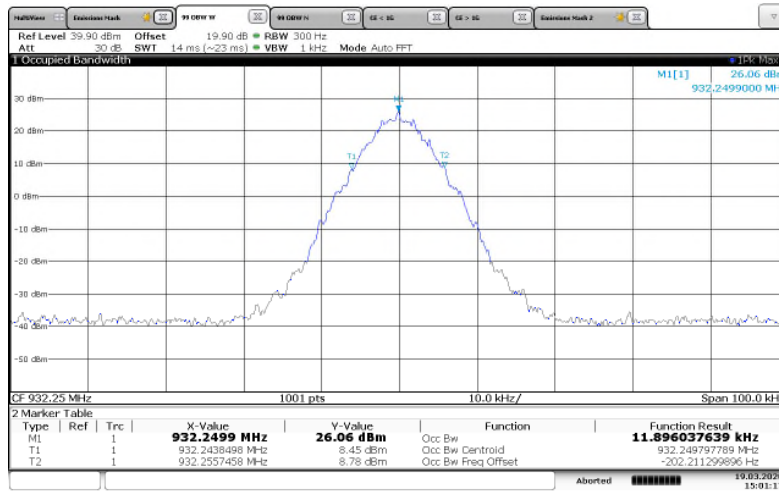


Figure 7.3.2-25: 932.25 MHz – Normal Mode

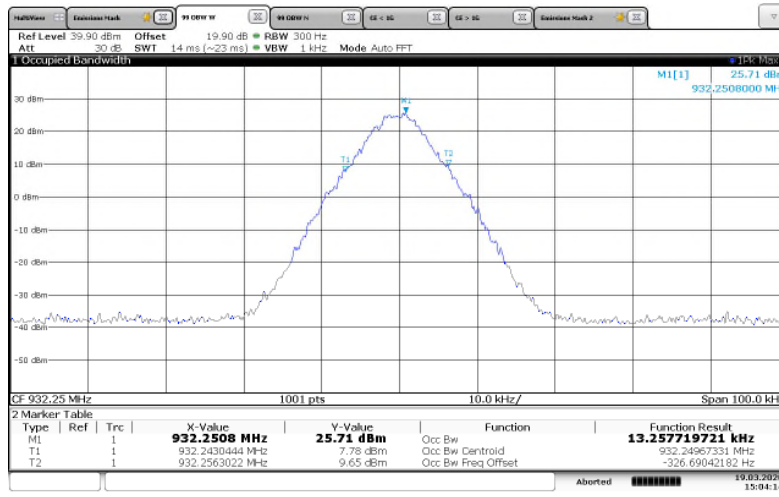


Figure 7.3.2-26: 932.25 MHz – Double Density Mode

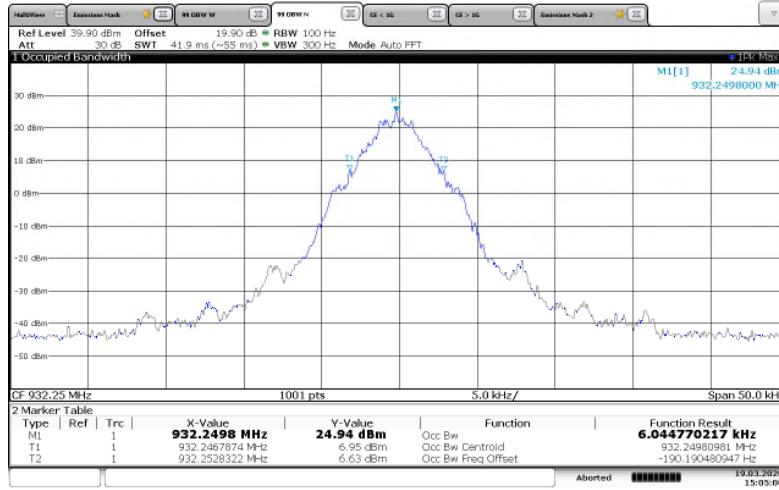


Figure 7.3.2-27: 932.25 MHz – C&I (Half Baud) Mode

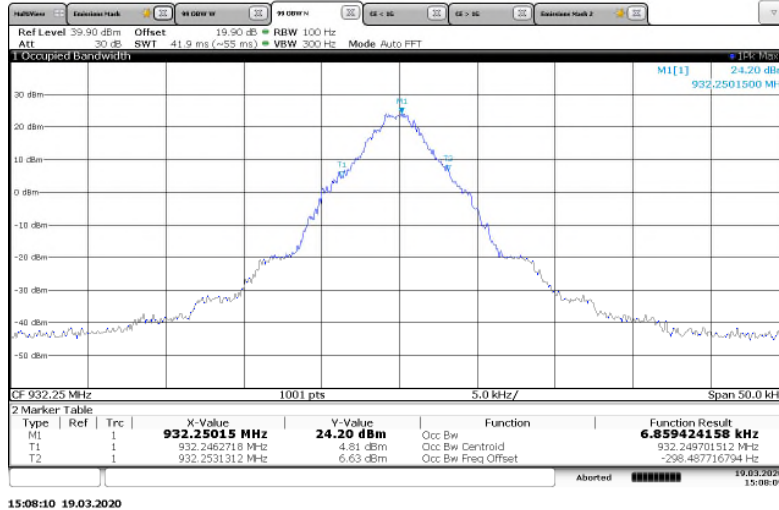


Figure 7.3.2-28: 932.25 MHz – Priority Mode

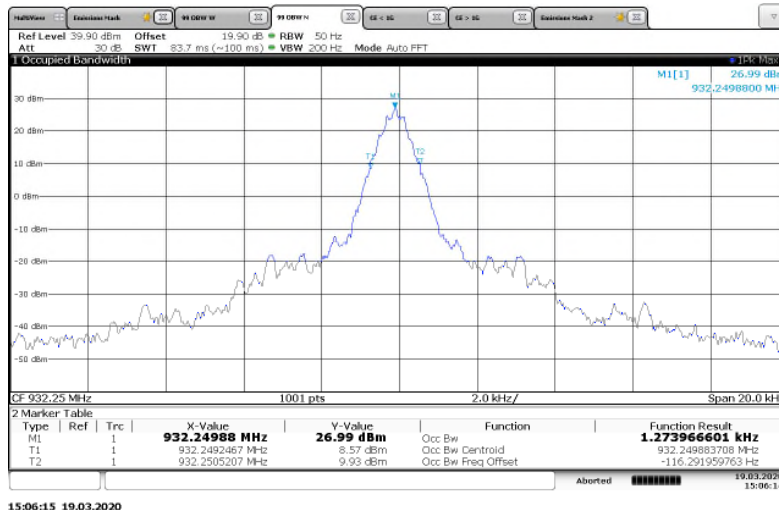


Figure 7.3.2-29: 932.25 MHz – Boost Mode

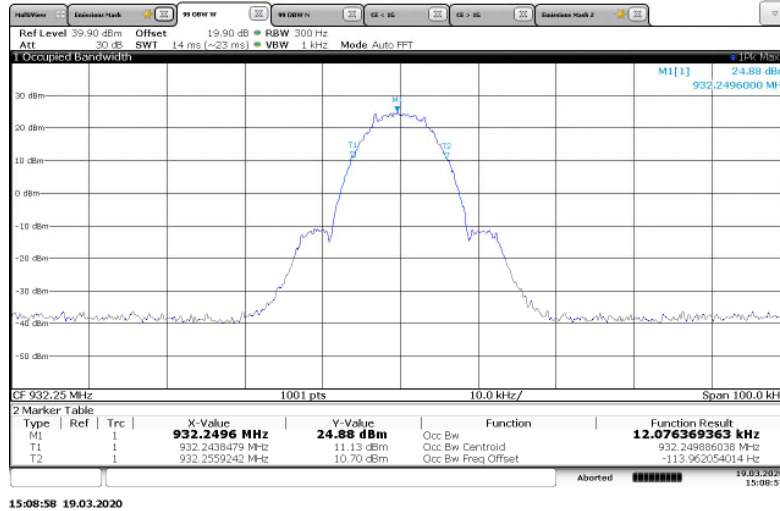


Figure 7.3.2-30: 932.25 MHz – 2FSK Mode

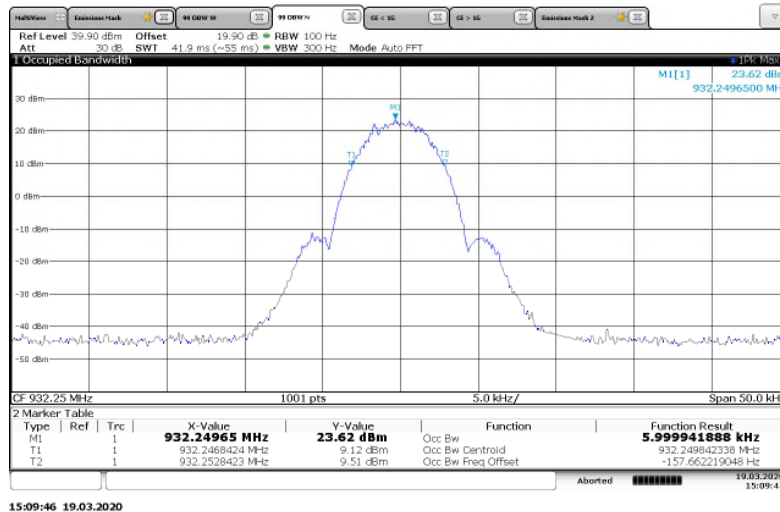


Figure 7.3.2-31: 932.25 MHz – 2FSK Half Baud Mode

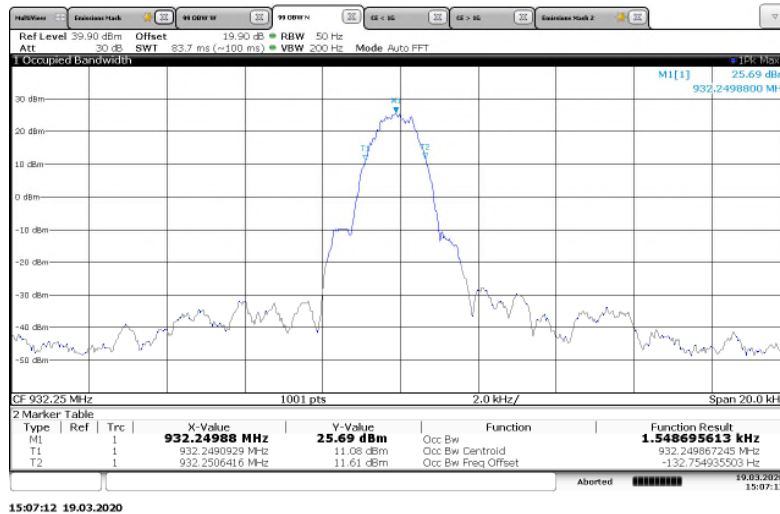


Figure 7.3.2-32: 932.25 MHz – 2FSK Eighth Baud Mode

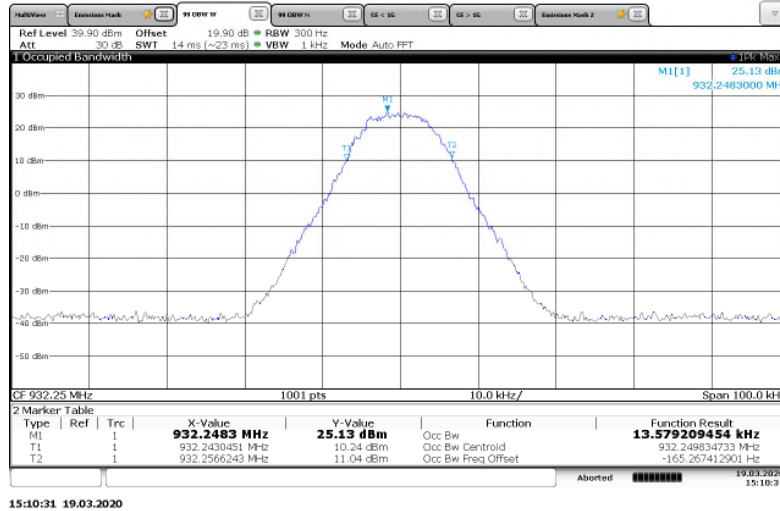


Figure 7.3.2-33: 932.25 MHz – 4FSK Mode

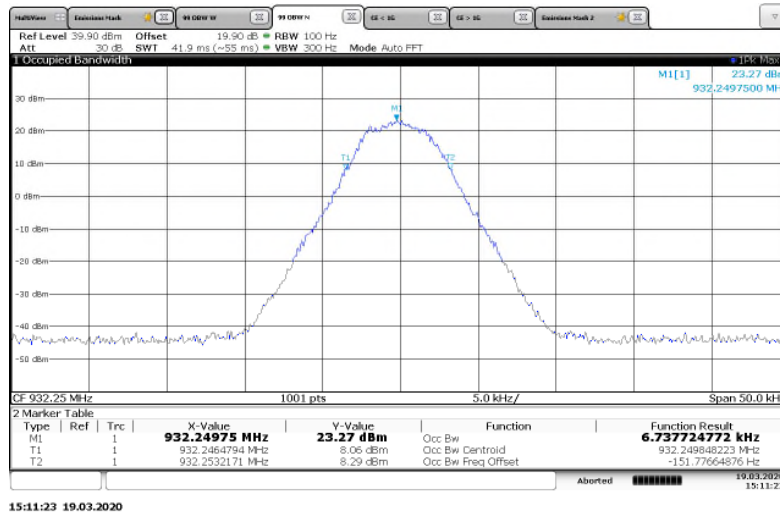


Figure 7.3.2-34: 932.25 MHz – 4FSK Half Baud Mode

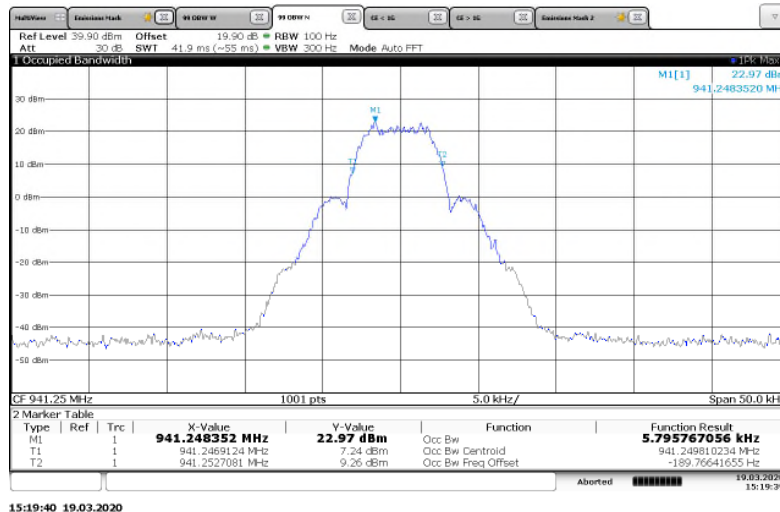


Figure 7.3.2-35: 941.25 MHz – MPass 5k Mode

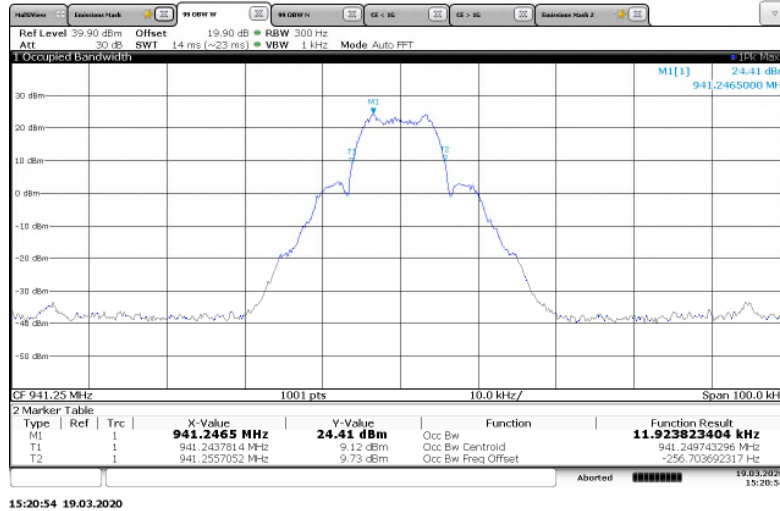


Figure 7.3.2-36: 941.25 MHz – MPass 10k Mode

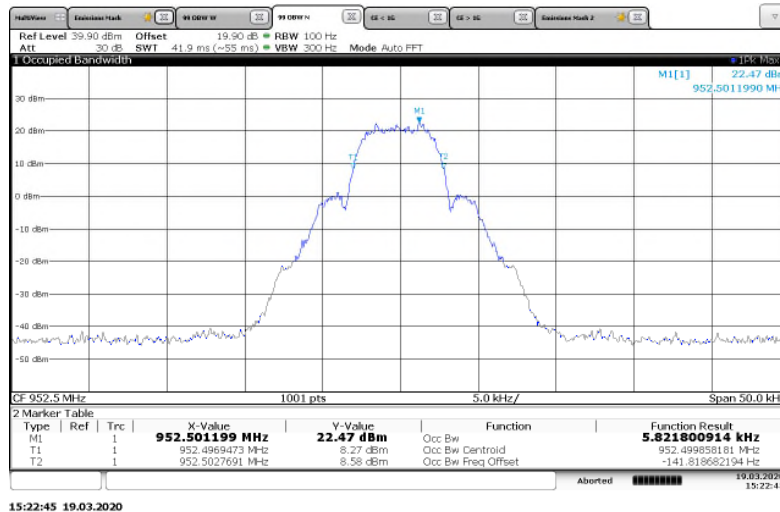


Figure 7.3.2-37: 952.5 MHz – MPass 5k Mode

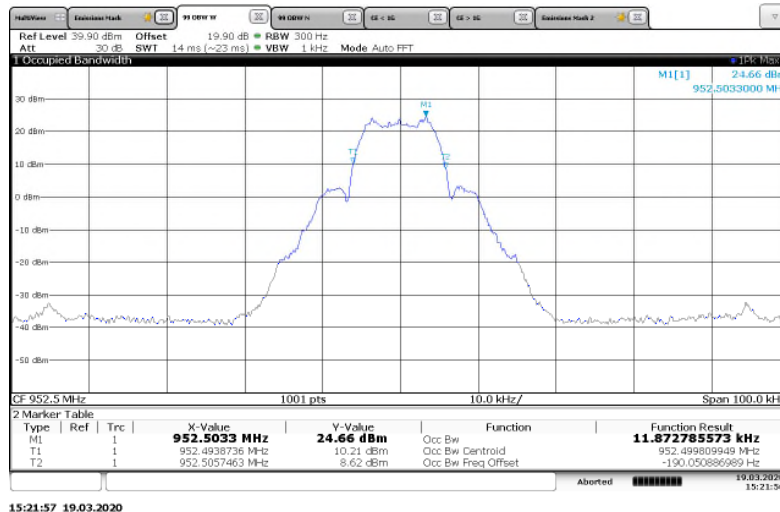


Figure 7.3.2-38: 952.5 MHz – MPass 10k Mode

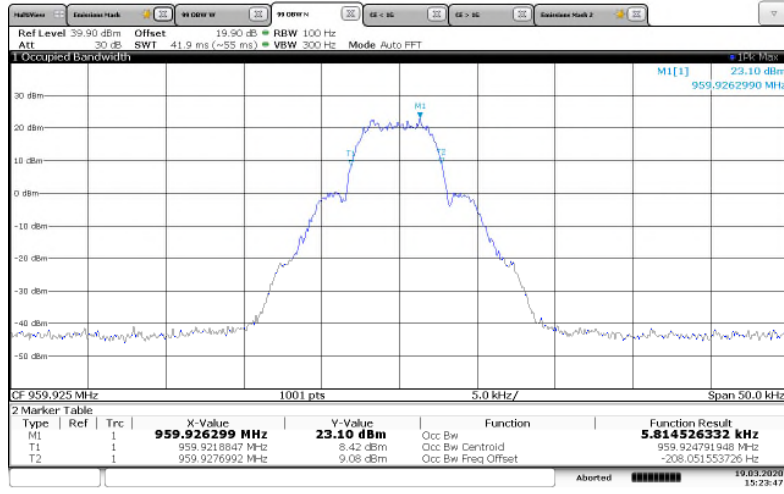


Figure 7.3.2-39: 959.925 MHz – MPass 5k Mode

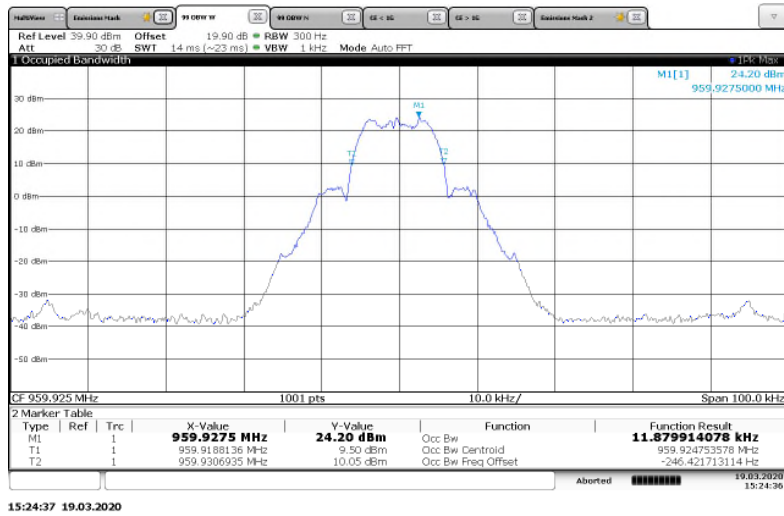


Figure 7.3.2-40: 959.925 MHz – MPass 10k Mode

7.4 Spurious Emissions at Antenna Terminals

7.4.1 Measurement Procedure (ANSI 63.26: 2015 Section 5.7.4)

The RF output of the equipment under test was directly connected to the input of the Spectrum Analyzer through 19.9dB of passive attenuation. The spectrum analyzer resolution bandwidth was set to 100 kHz below 1000 MHz and 1 MHz above 1000 MHz. The internal correction factors of the spectrum analyzer were employed to correct for any cable, attenuator or filter losses. The spectrum was investigated in accordance to CFR 47 Part 2.1057. There were no significant emissions from 9 kHz or lowest frequency generated to 30 MHz. Results are shown below.

7.4.2 Measurement Results

Performed by: Chris Gormley

Part 24.133 a(1), a(2), ISED Canada RSS-134 4.4.1 (a), (b), 4.4.2 (a), (b) TXC

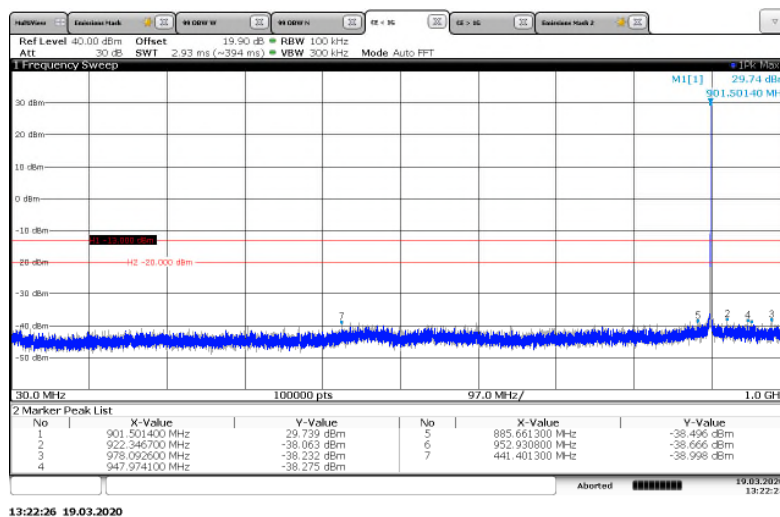


Figure 7.4.2-1: 901.5 MHz – 30MHz to 1GHz – Normal mode



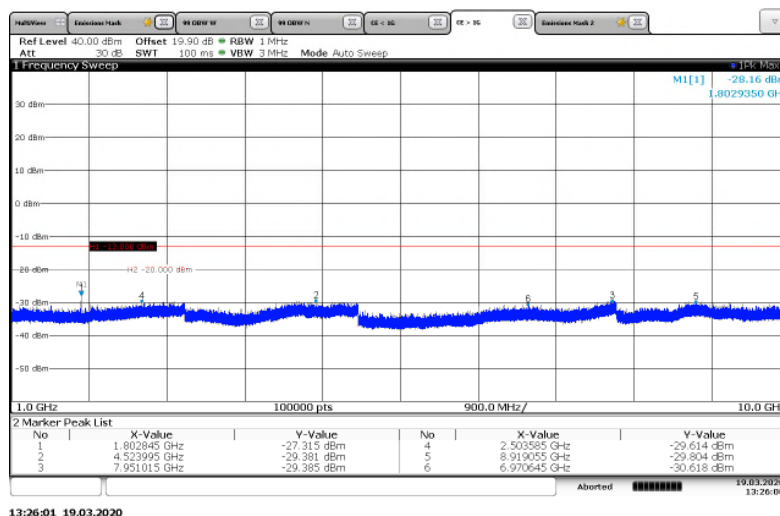


Figure 7.4.2-2: 901.5 MHz – 1GHz to 10GHz – Normal mode

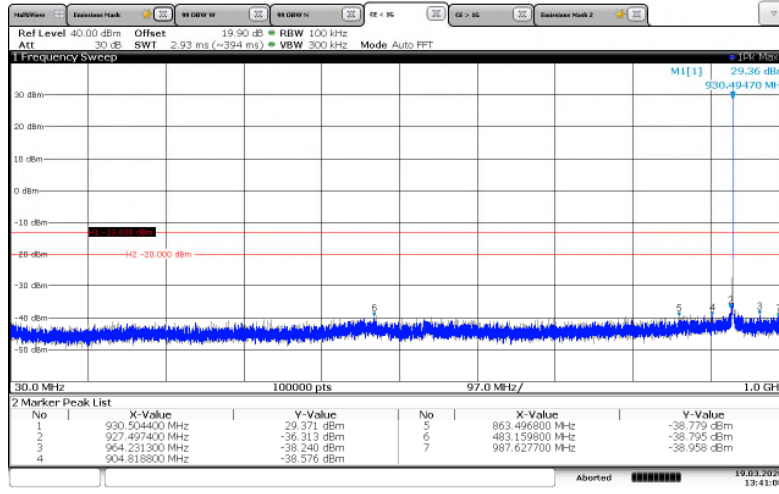


13:41:08 19.03.2020

Figure 7.4.2-3: 930.5 MHz – 30MHz to 1GHz – Mpass5k mode

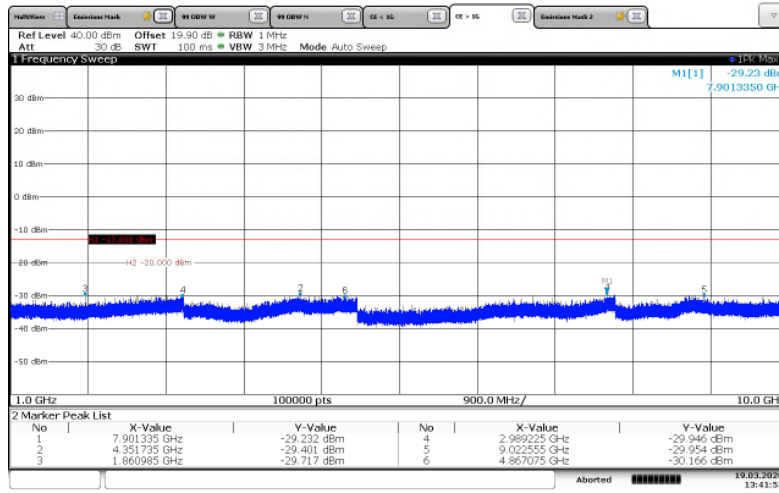


13:41:55 19.03.2020

Figure 7.4.2-4: 930.5 MHz – 1GHz to 10GHz – Mpass 5k mode

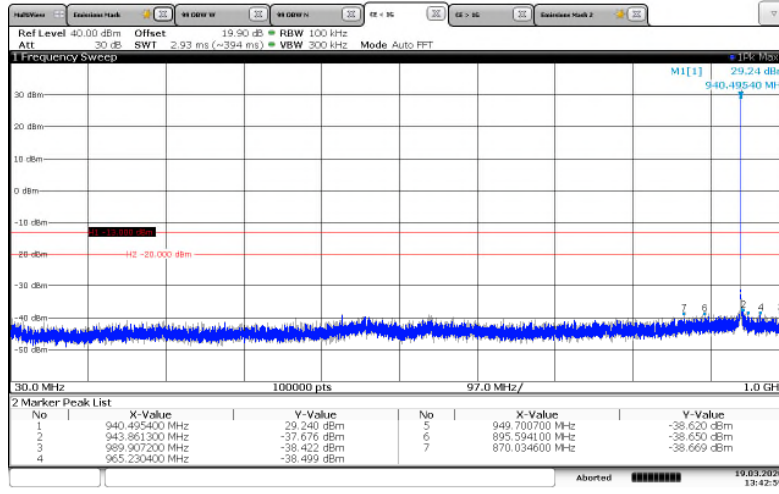

13:43:00 19.03.2020


Figure 7.4.2-5: 940.5 MHz – 30MHz to 1GHz – Mpass5k mode

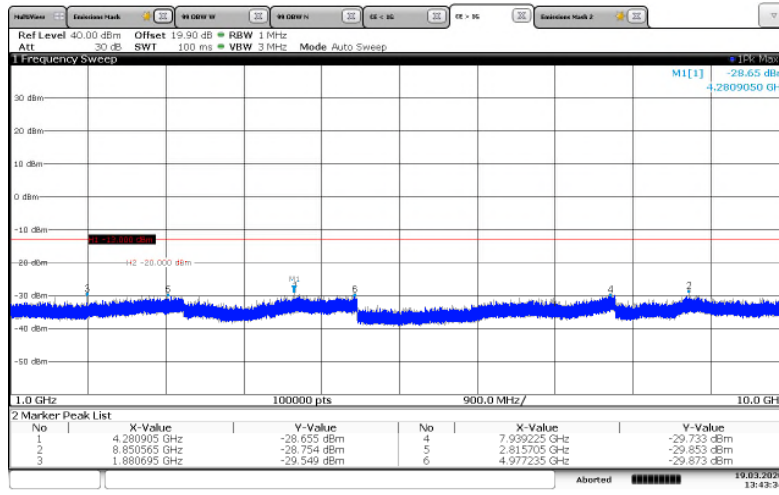

13:43:34 19.03.2020


Figure 7.4.2-6: 940.5 MHz – 1GHz to 10GHz – Mpass5k mode

Part 101.111 a(6), RSS-119 5.8.6

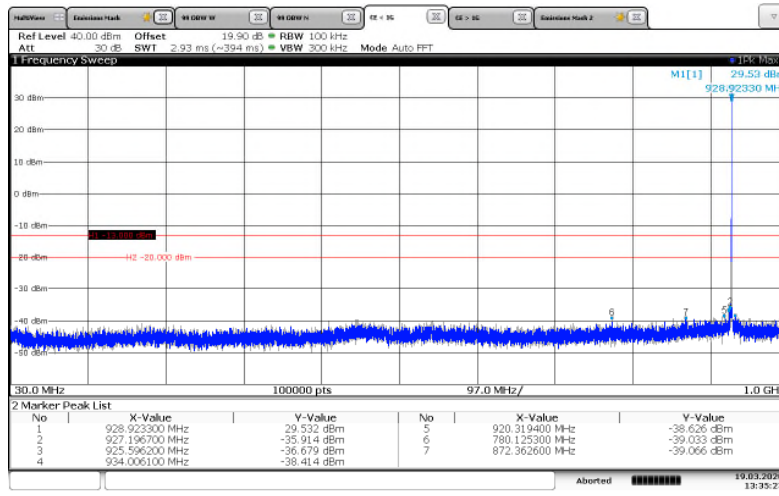


13:35:24 19.03.2020

Figure 7.4.2-7: 928.925 MHz – 30MHz to 1GHz – Normal mode

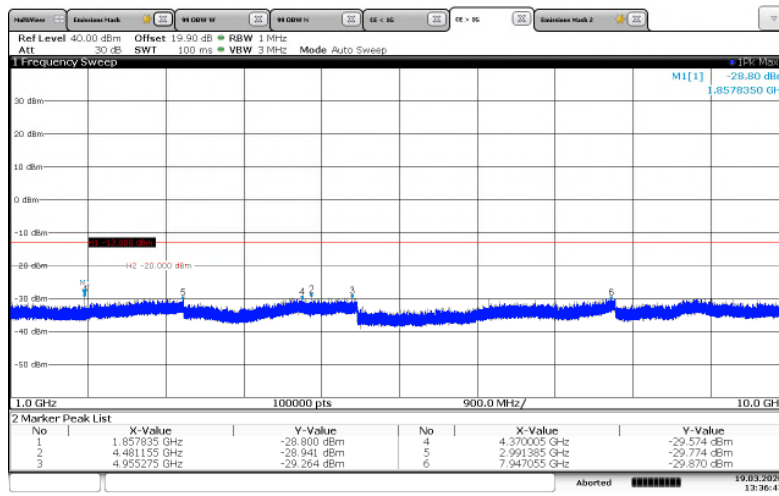


13:36:43 19.03.2020

Figure 7.4.2-8: 928.925 MHz – 1GHz to 10GHz – Normal mode

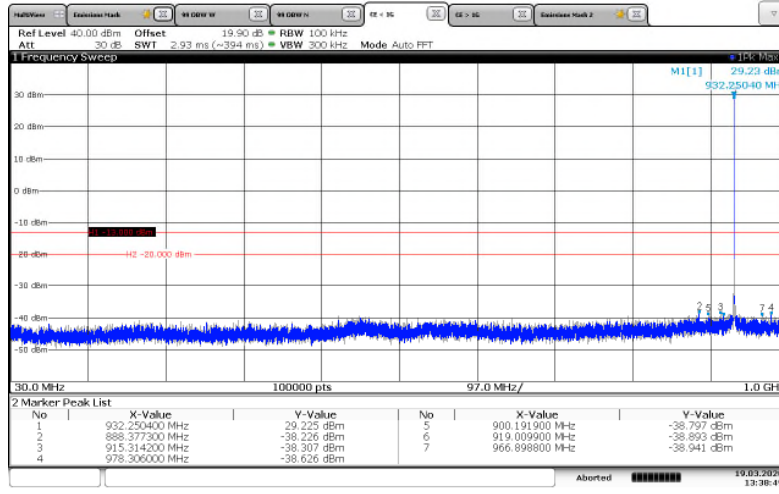


13:38:49 19.03.2020

Figure 7.4.2-9: 932.25 MHz – 30MHz to 1GHz – Normal mode

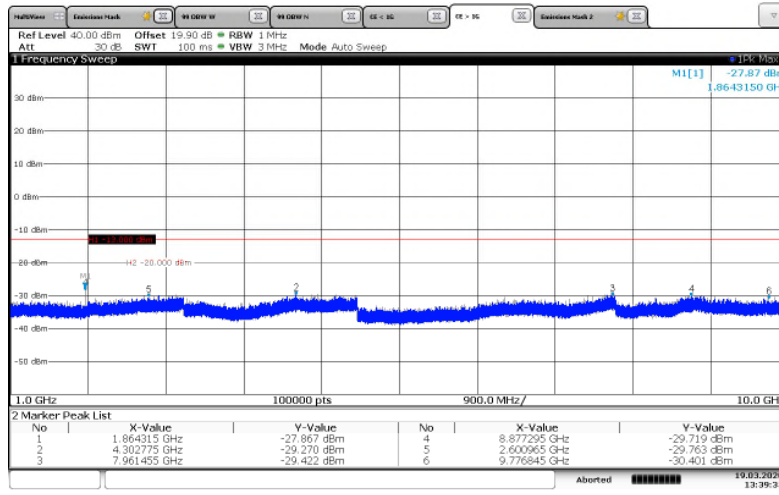


13:39:36 19.03.2020

Figure 7.4.2-10: 932.25 MHz – 1GHz to 10GHz – Normal mode

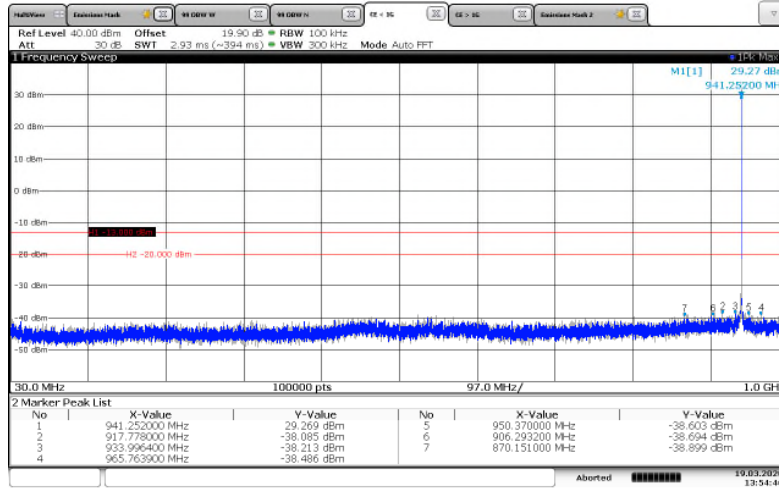


13:54:47 19.03.2020

Figure 7.4.2-11: 941.25 MHz – 30MHz to 1GHz – Mpass5k mode

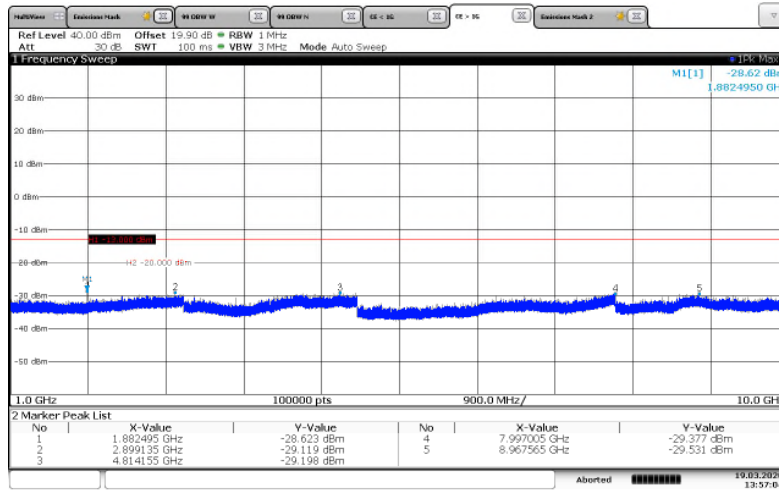


13:57:04 19.03.2020

Figure 7.4.2-12: 941.25 MHz – 1GHz to 10GHz – Mpass5k mode

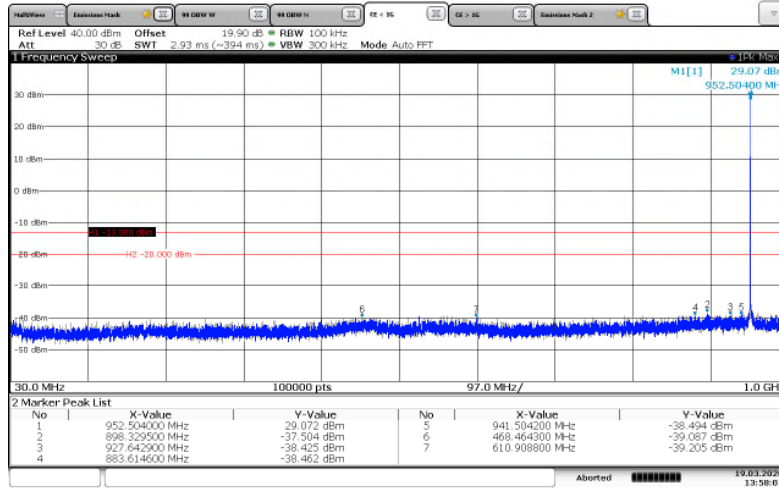

13:58:01 19.03.2020

Figure 7.4.2-13: 952.5 MHz – 30MHz to 1GHz – Mpass5k mode

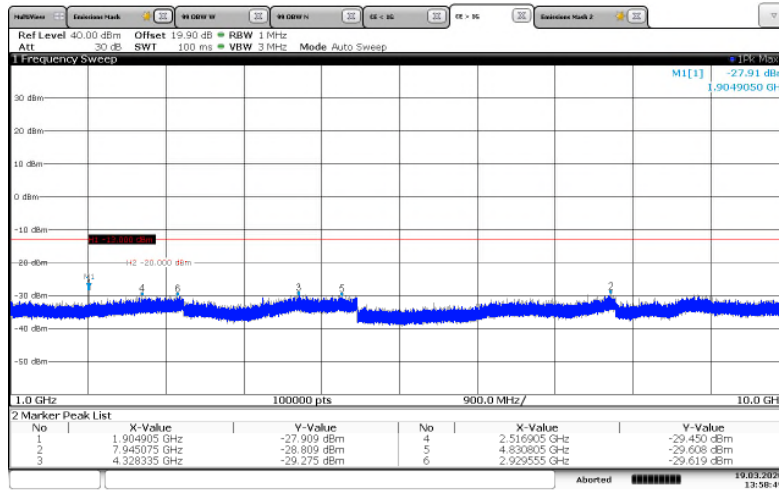

13:58:50 19.03.2020

Figure 7.4.2-14: 952.5 MHz – 1GHz to 10GHz – Mpass5k mode

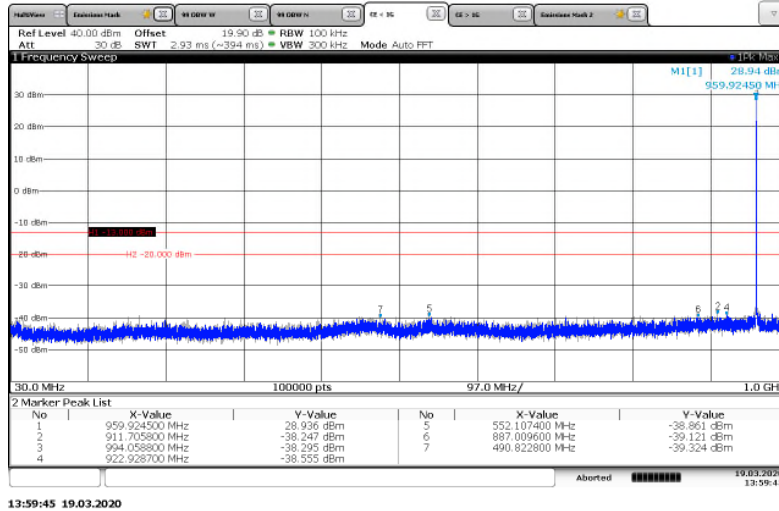


Figure 7.4.2-15: 959.925 MHz – 30MHz to 1GHz – Mpass5k mode

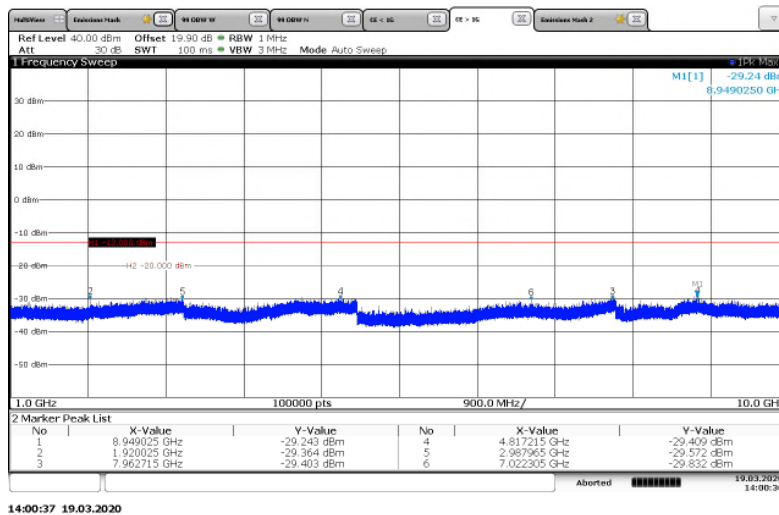


Figure 7.4.2-16: 959.925 MHz – 1GHz to 10GHz – Mpass5k mode

7.5 Field Strength of Spurious Emissions

7.5.1 Measurement Procedure (ANSI 63.26: 2015 Section 5.5.2.3.1)

The equipment under test is placed in the Semi-Anechoic Chamber (described in section 2.3.1) on a table at the turntable center. Below 1 GHz the table height was 80cm and above 1 GHz the table height was 1.5m. For each spurious emission, the antenna mast is raised and lowered from one (1) to four (4) meters and the turntable is rotated 360° and the maximum reading on the spectrum analyzer is recorded. This was repeated for both horizontal and vertical polarizations of the receive antenna.

The equipment under test is then replaced with a substitution antenna fed by a signal generator. The signal generator's frequency is set to that of the spurious emission recorded from the equipment under test. The antenna mast is raised and lowered from one (1) to four (4) meters to obtain a maximum reading on the spectrum analyzer. The output of the signal generator is then adjusted until the reading on the spectrum analyzer matches that obtained from the equipment under test. The signal generator level is recorded. The power in dBm of each spurious emission is calculated by correcting the signal generator level for the cable loss and gain of the substitution antenna referenced to a dipole. The spectrum was investigated in accordance to CFR 47 Part 2.1057.

The magnitude of all spurious emissions not reported were attenuated below the noise floor of the measurement system and therefore not specified in this report. Results are shown below.

7.5.2 Measurement Results

Performed by: Chris Gormley

Part 24.133 a(1), a(2), RSS-134 4.4.1 (a), (b), 4.4.2 (a), (b)

TXC

Table 7.5.2-1: Field Strength of Spurious Emissions – 901.5 MHz – Normal Mode

Frequency (MHz)	Spectrum Analyzer Level (dBμV)	Antenna Polarity (H/V)	Spurious ERP (dBm)	Limit (dBm)	Margin (dB)
1803	66.8	H	-33.79	-13.00	20.79
2704.5	44.8	H	-57.68	-13.00	44.68
3606	43.1	V	-55.68	-13.00	42.68
4507.5	46	V	-48.37	-13.00	35.37
5409	48.2	V	-45.04	-13.00	32.04
6310.5	44.7	V	-48.00	-13.00	35.00

NOTE: All frequencies not listed were below the noise floor of the spectrum analyzer.

Table 7.5.2-2: Field Strength of Spurious Emissions – 930.5 MHz – mPass 5k Mode

Frequency (MHz)	Spectrum Analyzer Level (dB μ V)	Antenna Polarity (H/V)	Spurious ERP (dBm)	Limit (dBm)	Margin (dB)
1861	53.3	H	-48.53	-13.00	35.53
2791.5	46.6	H	-54.22	-13.00	41.22
3722	43.1	V	-56.75	-13.00	43.75
4652.5	44	V	-50.90	-13.00	37.90
5583	46.7	V	-47.39	-13.00	34.39
6513.5	41.8	V	-52.23	-13.00	39.23

NOTE: All frequencies not listed were below the noise floor of the spectrum analyzer.

Table 7.5.2-3: Field Strength of Spurious Emissions – 940.5 MHz – mPass 5k Mode

Frequency (MHz)	Spectrum Analyzer Level (dB μ V)	Antenna Polarity (H/V)	Spurious ERP (dBm)	Limit (dBm)	Margin (dB)
1881	56.3	H	-45.04	-13.00	32.04
2821.5	46.6	H	-53.83	-13.00	40.83
3762	42.1	V	-60.84	-13.00	47.84
4702.5	43.6	V	-52.72	-13.00	39.72
5643	47.8	V	-45.70	-13.00	32.70
6583.5	42.7	V	-51.92	-13.00	38.92

NOTE: All frequencies not listed were below the noise floor of the spectrum analyzer.

Figure 7.5.2-1: Emission Profile Below 1GHz – 901.5MHz – Normal Mode
Full Spectrum


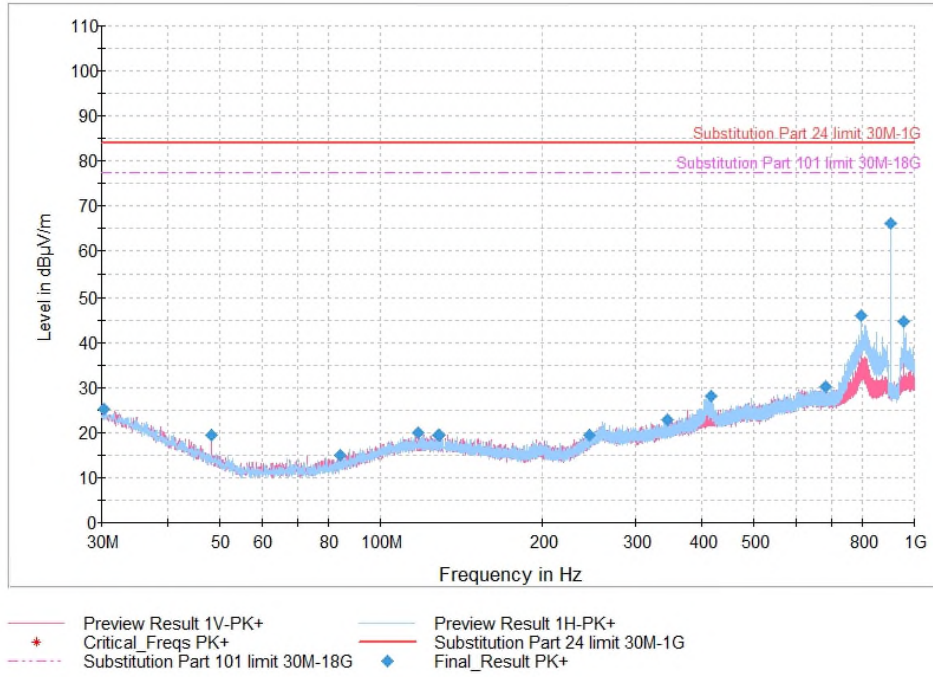


Figure 7.5.2-2: Emission Profile Above 1GHz – 901.5MHz – Normal Mode
Full Spectrum

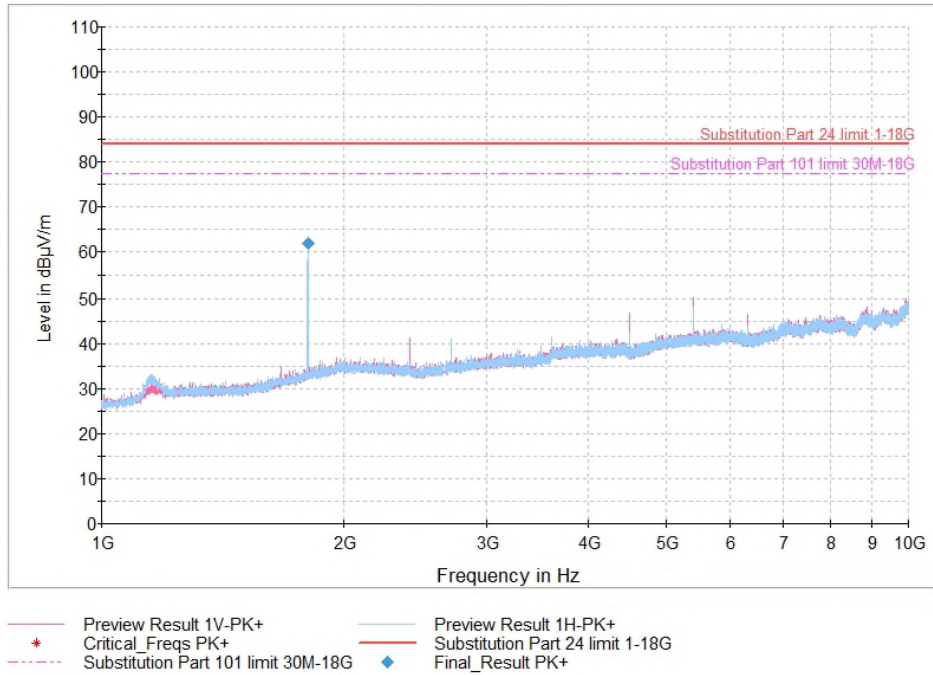

Part 101.111a(5) & a(6), RSS-119 5.8.6**Table 7.5.2-4: Field Strength of Spurious Emissions – 928.925 MHz – Normal Mode**

Frequency (MHz)	Spectrum Analyzer Level (dB μ V)	Antenna Polarity (H/V)	Spurious ERP (dBm)	Limit (dBm)	Margin (dB)
1857.85	53.4	H	-48.33	-20.00	28.33
2786.775	46.7	H	-54.22	-20.00	34.22
3715.7	43.8	V	-55.15	-20.00	35.15
4644.625	43.6	V	-51.69	-20.00	31.69
5573.55	46.6	V	-47.51	-20.00	27.51
6502.475	41.7	V	-53.02	-20.00	33.02

NOTE: All frequencies not listed were below the noise floor of the spectrum analyzer.

Table 7.5.2-5: Field Strength of Spurious Emissions – 932.25 MHz – Normal Mode

Frequency (MHz)	Spectrum Analyzer Level (dB μ V)	Antenna Polarity (H/V)	Spurious ERP (dBm)	Limit (dBm)	Margin (dB)
1864.5	52.6	H	-49.23	-20.00	29.23
2796.75	46.3	H	-54.82	-20.00	34.82
3729	42.6	H	-56.55	-20.00	36.55
4661.25	43.1	V	-54.52	-20.00	34.52
5593.5	46.6	V	-48.28	-20.00	28.28
6525.75	41.1	V	-55.95	-20.00	35.95

NOTE: All frequencies not listed were below the noise floor of the spectrum analyzer.

Table 7.5.2-6: Field Strength of Spurious Emissions – 941.25 MHz – mPass 5k Mode

Frequency (MHz)	Spectrum Analyzer Level (dB μ V)	Antenna Polarity (H/V)	Spurious ERP (dBm)	Limit (dBm)	Margin (dB)
1882.5	56.5	H	-44.54	-20.00	24.54
2823.75	47	H	-53.23	-20.00	33.23
3765	41.6	V	-61.84	-20.00	41.84
4706.25	43.7	V	-52.13	-20.00	32.13
5647.5	47.7	V	-45.40	-20.00	25.40
6588.75	42.9	V	-50.73	-20.00	30.73

NOTE: All frequencies not listed were below the noise floor of the spectrum analyzer.

Table 7.5.2-7: Field Strength of Spurious Emissions – 952.5 MHz – mPass 5k Mode

Frequency (MHz)	Spectrum Analyzer Level (dB μ V)	Antenna Polarity (H/V)	Spurious ERP (dBm)	Limit (dBm)	Margin (dB)
1905	60.5	H	-39.66	-20.00	19.66
2857.5	47.6	V	-52.45	-20.00	32.45
3810	42.7	V	-58.23	-20.00	38.23
4762.5	44.4	V	-51.26	-20.00	31.26
5715	46.1	V	-48.70	-20.00	28.70
6667.5	41	V	-55.83	-20.00	35.83

NOTE: All frequencies not listed were below the noise floor of the spectrum analyzer.

Table 7.5.2-8: Field Strength of Spurious Emissions – 959.925 MHz – mPass 5k Mode

Frequency (MHz)	Spectrum Analyzer Level (dB μ V)	Antenna Polarity (H/V)	Spurious ERP (dBm)	Limit (dBm)	Margin (dB)
1919.85	62.4	H	-38.07	-20.00	18.07
2879.775	47.4	V	-54.16	-20.00	34.16
3839.7	44.7	V	-54.82	-20.00	34.82
4799.625	46.2	V	-48.55	-20.00	28.55
5759.55	44.7	V	-50.93	-20.00	30.93
6719.475	43	V	-50.59	-20.00	30.59

NOTE: All frequencies not listed were below the noise floor of the spectrum analyzer.

Figure 7.5.2-3: Emission Profile Below 1GHz – 959.925MHz – MPass Mode
Full Spectrum


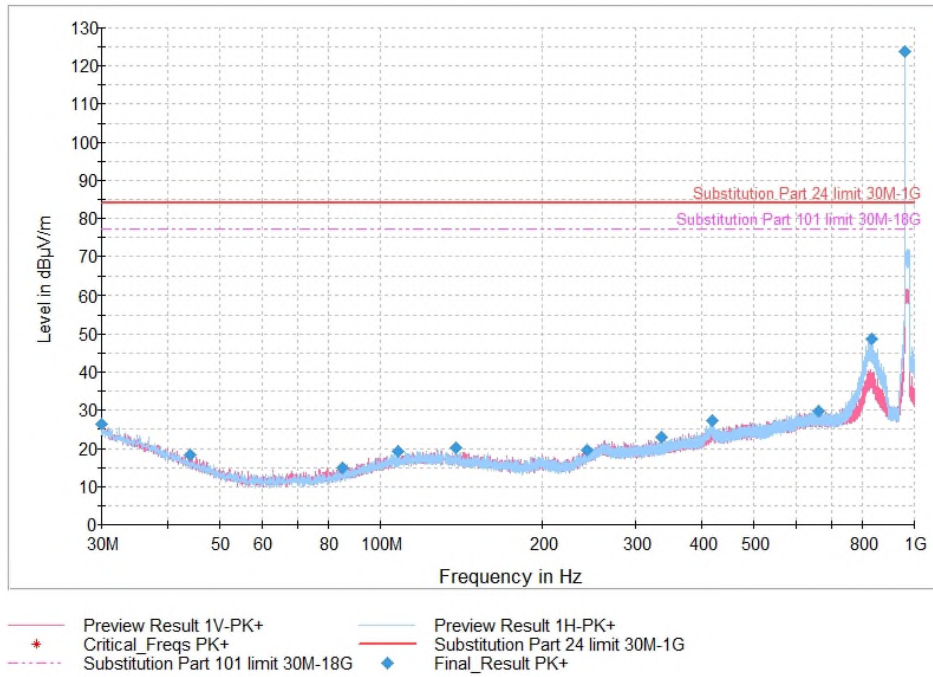


Figure 7.5.2-4: Emission Profile Above 1GHz – 959.925MHz – MPass Mode
Full Spectrum

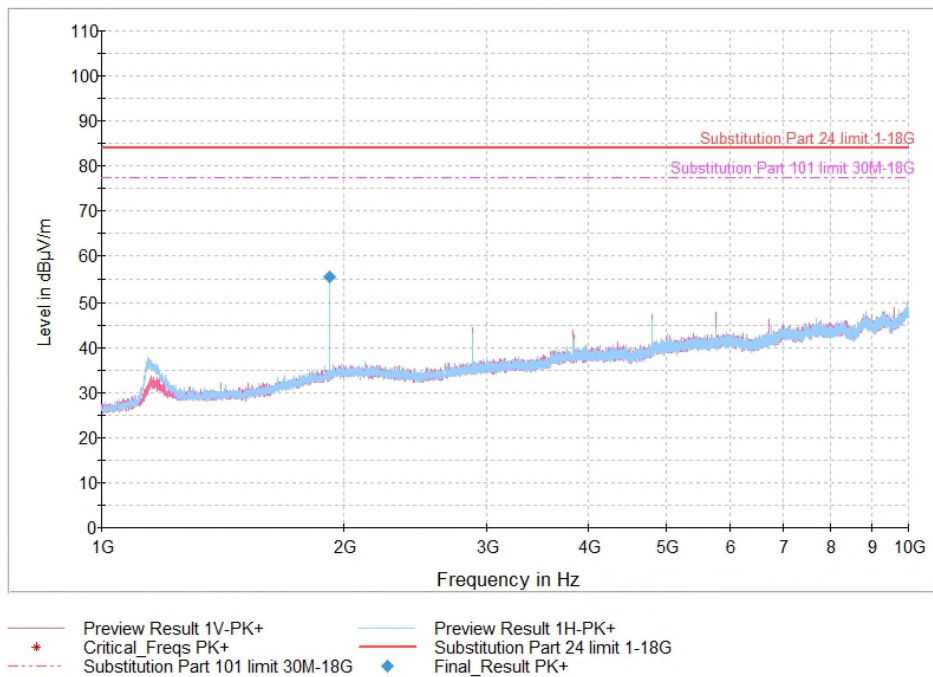

7.6 Frequency Stability

7.6.1 Measurement Procedure (ANSI C63.26 Section 5.6.3)

The equipment under test is placed inside an environmental chamber. The RF output is directly coupled to the input of the measurement equipment and a power supply is attached to the primary supply voltage.

Frequency measurements were made at the extremes of the of temperature range -30°C to $+50^{\circ}\text{C}$ and at intervals of 10°C at normal supply voltage. A period of time sufficient to stabilize all components of the equipment was allowed at each frequency measurement. The equipment operates at 3.6VDC. Measurements were made to the equipment under test at a temperature of 20°C and at 85% and 115% variation of 3.65VDC. The maximum variation of frequency was recorded.

At the clients request data for all TCXO variants are included in the results below.

7.6.2 Measurement Results

Performed by: Chris Gormley

Part 24.135, RSS-134 (4.5)

Frequency Stability				
		Frequency (MHz):	901.5	
		Deviation Limit (PPM):	1.0	
Temperature C	Frequency MHz	Frequency Error (PPM)	Voltage (%)	Voltage (VDC)
-30 C	901.500343	0.380	100%	3.65
-20 C	901.500258	0.287	100%	3.65
-10 C	901.500195	0.217	100%	3.65
0 C	901.500151	0.167	100%	3.65
10 C	901.500206	0.228	100%	3.65
20 C	901.500110	0.122	100%	3.65
30 C	901.500048	0.053	100%	3.65
40 C	901.500049	0.054	100%	3.65
50 C	901.500020	0.022	100%	3.65
20 C	901.500121	0.135	85%	3.10
20 C	901.500120	0.133	115%	4.20

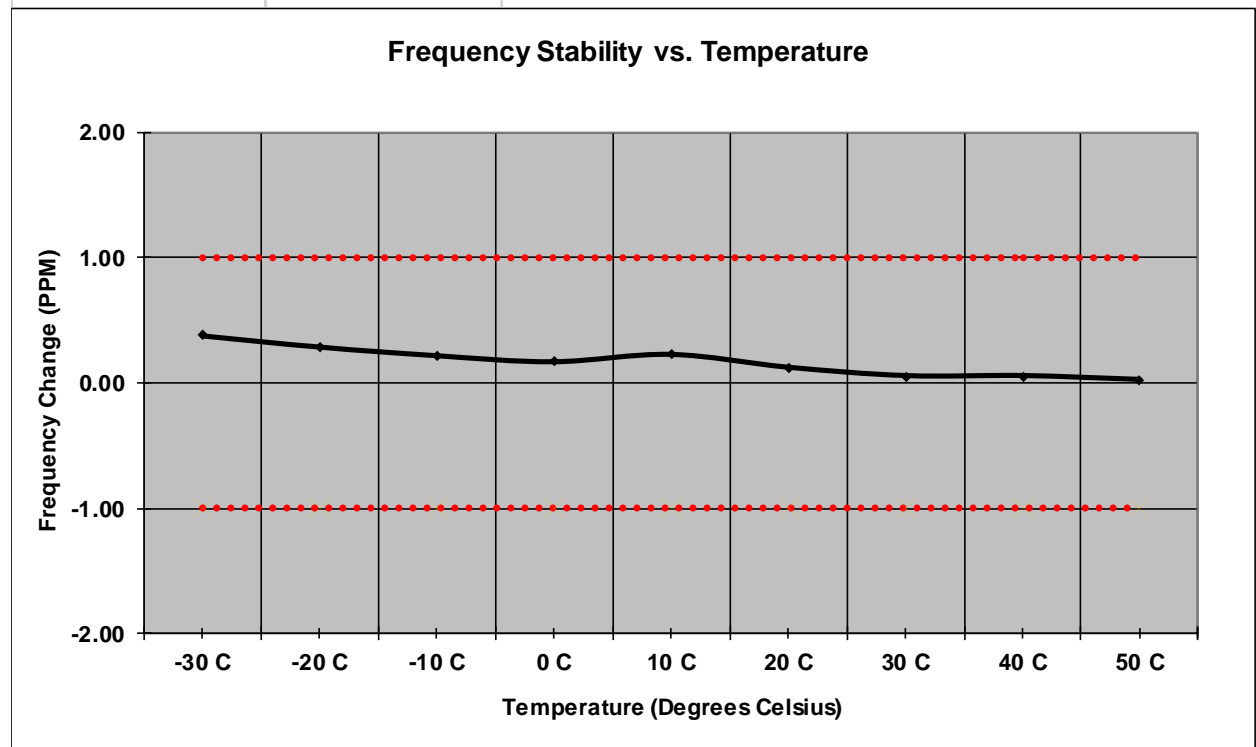


Figure 7.6.2-1: Frequency Stability – 901.5 MHz – TXC

Frequency Stability

Frequency (MHz): 901.5

Deviation Limit (PPM): 1.0

Temperature C	Frequency MHz	Frequency Error (PPM)	Voltage (%)	Voltage (VDC)
-30 C	901.499596	-0.448	100%	3.65
-20 C	901.499845	-0.172	100%	3.65
-10 C	901.500025	0.028	100%	3.65
0 C	901.500080	0.089	100%	3.65
10 C	901.500035	0.039	100%	3.65
20 C	901.499981	-0.021	100%	3.65
30 C	901.499924	-0.084	100%	3.65
40 C	901.499968	-0.035	100%	3.65
50 C	901.499944	-0.062	100%	3.65
20 C	901.499965	-0.039	85%	3.10
20 C	901.499966	-0.037	115%	4.20

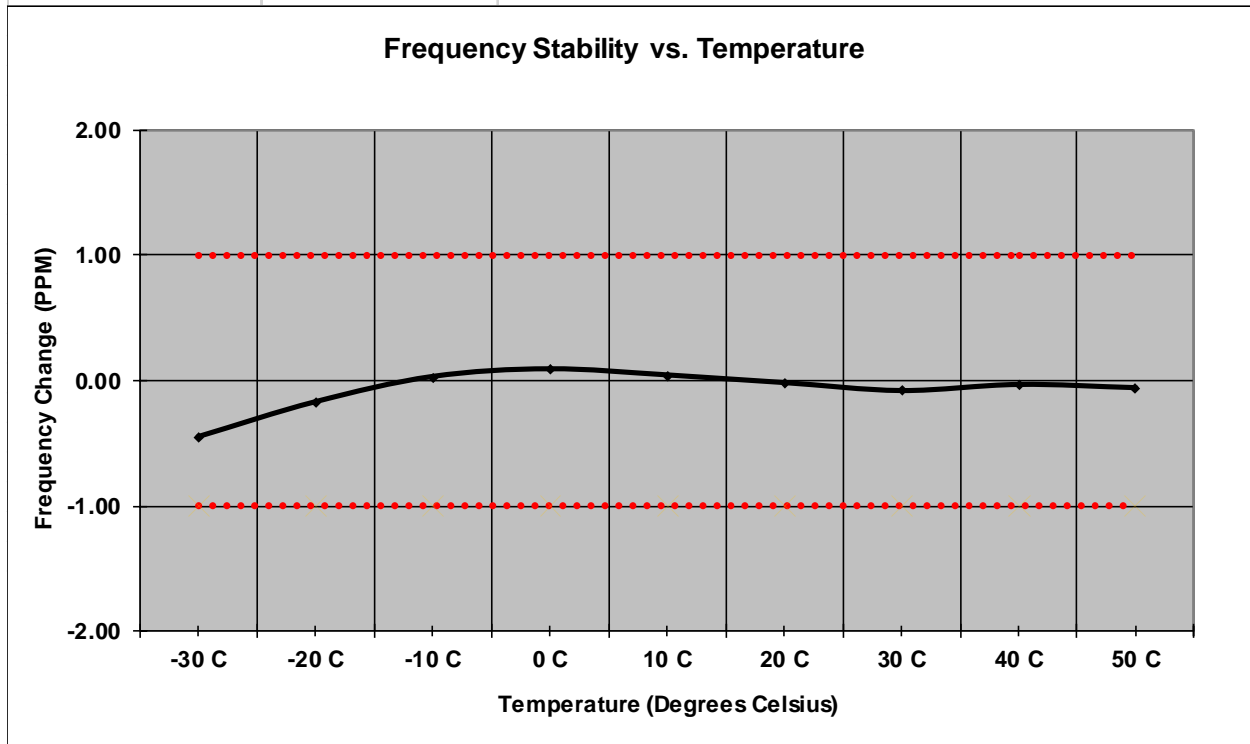


Figure 7.6.2-2: Frequency Stability – 901.5 MHz – KDS

Frequency Stability

Frequency (MHz): 930.5

Deviation Limit (PPM): 1.0

Temperature C	Frequency MHz	Frequency Error (PPM)	Voltage (%)	Voltage (VDC)
-30 C	930.500338	0.363	100%	3.65
-20 C	930.500245	0.263	100%	3.65
-10 C	930.500198	0.213	100%	3.65
0 C	930.500156	0.167	100%	3.65
10 C	930.500202	0.217	100%	3.65
20 C	930.500073	0.079	100%	3.65
30 C	930.500005	0.006	100%	3.65
40 C	930.500006	0.007	100%	3.65
50 C	930.499926	-0.080	100%	3.65
20 C	930.500083	0.089	85%	3.10
20 C	930.500087	0.094	115%	4.20

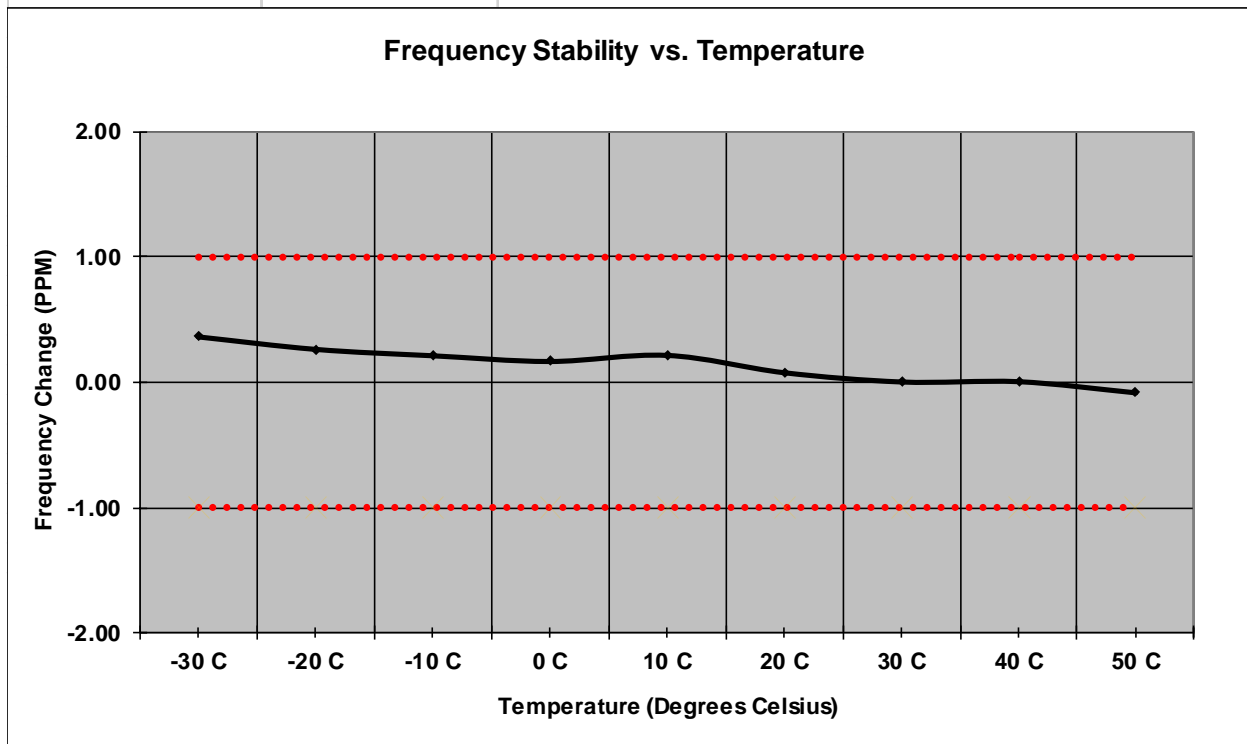


Figure 7.6.2-3: Frequency Stability – 930.5 MHz – TXC

Frequency Stability

Frequency (MHz): 930.5

Deviation Limit (PPM): 1.0

Temperature C	Frequency MHz	Frequency Error (PPM)	Voltage (%)	Voltage (VDC)
-30 C	930.499629	-0.398	100%	3.65
-20 C	930.499888	-0.120	100%	3.65
-10 C	930.500093	0.100	100%	3.65
0 C	930.500127	0.136	100%	3.65
10 C	930.500078	0.084	100%	3.65
20 C	930.500010	0.011	100%	3.65
30 C	930.500006	0.007	100%	3.65
40 C	930.500020	0.021	100%	3.65
50 C	930.499968	-0.035	100%	3.65
20 C	930.500003	0.003	85%	3.10
20 C	930.499996	-0.004	115%	4.20

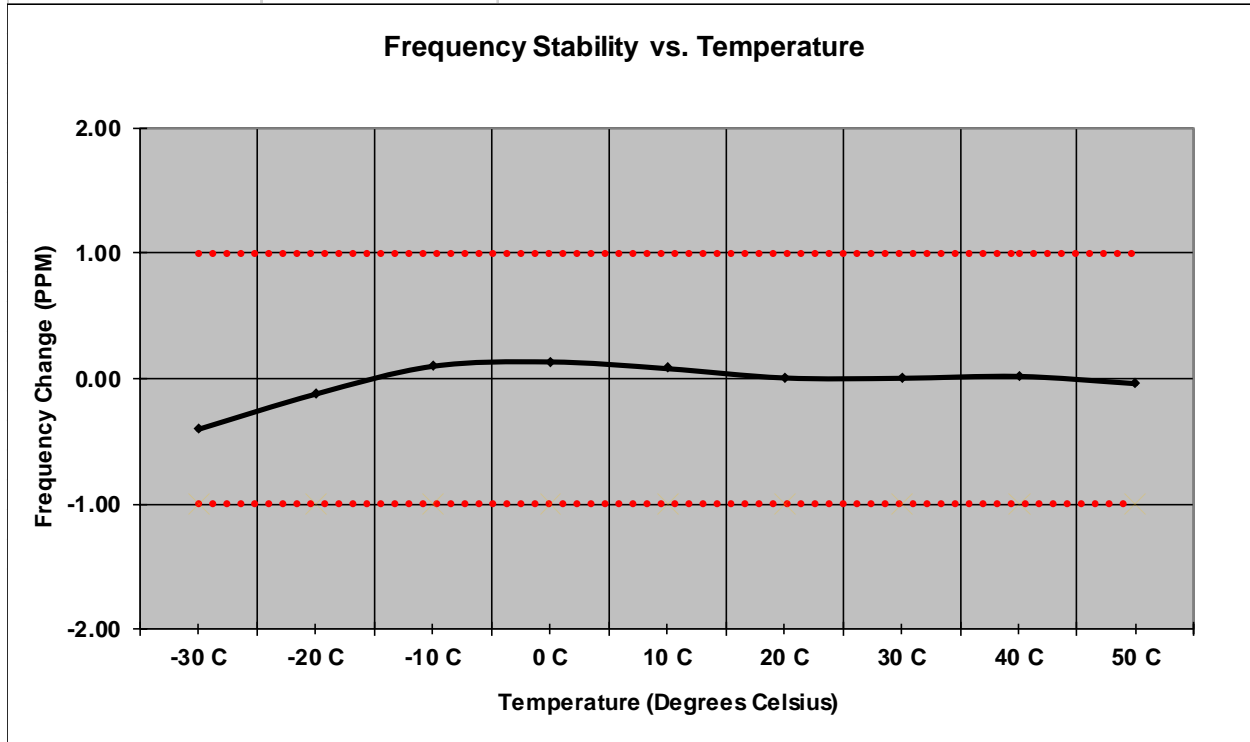


Figure 7.6.2-4: Frequency Stability – 930.5 MHz – KDS

Frequency Stability

Frequency (MHz): 940.5

Deviation Limit (PPM): 1.0

Temperature C	Frequency MHz	Frequency Error (PPM)	Voltage (%)	Voltage (VDC)
-30 C	940.500306	0.325	100%	3.65
-20 C	940.500233	0.248	100%	3.65
-10 C	940.500203	0.216	100%	3.65
0 C	940.500165	0.175	100%	3.65
10 C	940.500190	0.202	100%	3.65
20 C	940.500052	0.055	100%	3.65
30 C	940.499989	-0.012	100%	3.65
40 C	940.500000	0.000	100%	3.65
50 C	940.499893	-0.114	100%	3.65
20 C	940.500056	0.060	85%	3.10
20 C	940.500068	0.072	115%	4.20

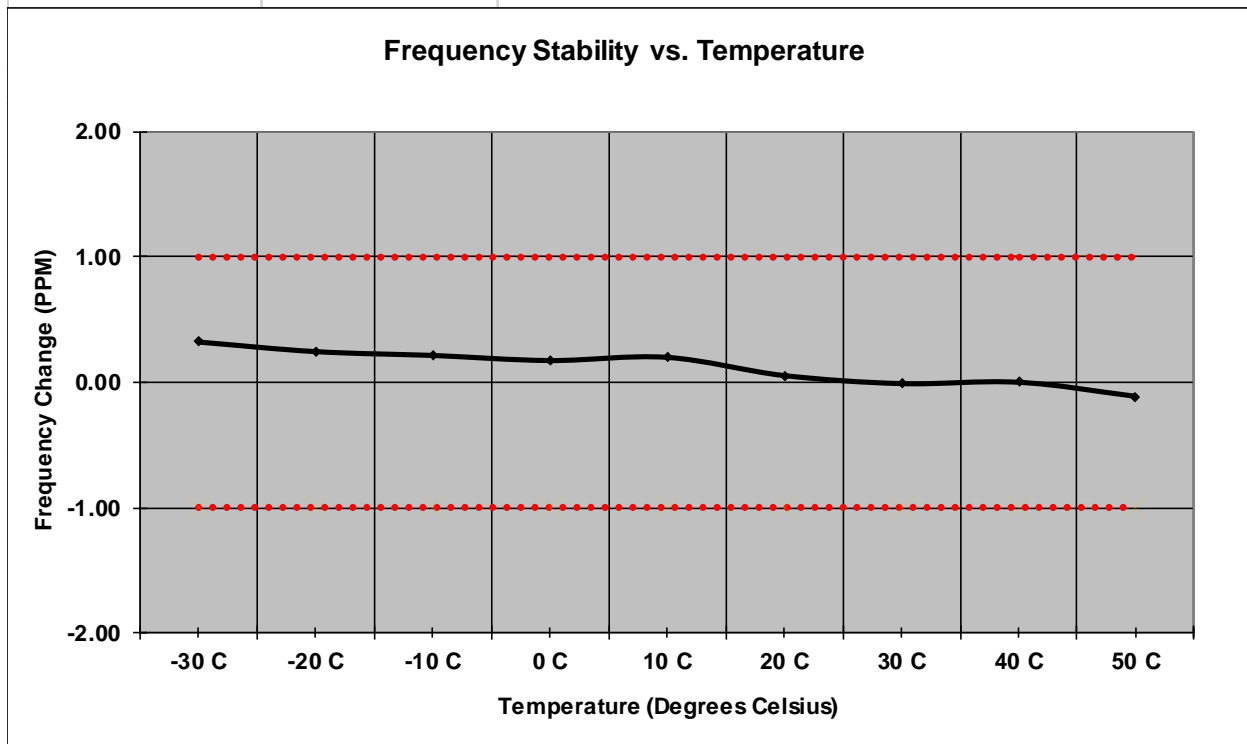


Figure 7.6.2-5: Frequency Stability – 940.5 MHz – TxC

Frequency Stability

Frequency (MHz): 940.5

Deviation Limit (PPM): 1.0

Temperature C	Frequency MHz	Frequency Error (PPM)	Voltage (%)	Voltage (VDC)
-30 C	940.499609	-0.415	100%	3.65
-20 C	940.499864	-0.145	100%	3.65
-10 C	940.500065	0.069	100%	3.65
0 C	940.500120	0.128	100%	3.65
10 C	940.500072	0.077	100%	3.65
20 C	940.499993	-0.008	100%	3.65
30 C	940.499970	-0.032	100%	3.65
40 C	940.500009	0.010	100%	3.65
50 C	940.499967	-0.035	100%	3.65
20 C	940.499992	-0.009	85%	3.10
20 C	940.499992	-0.008	115%	4.20

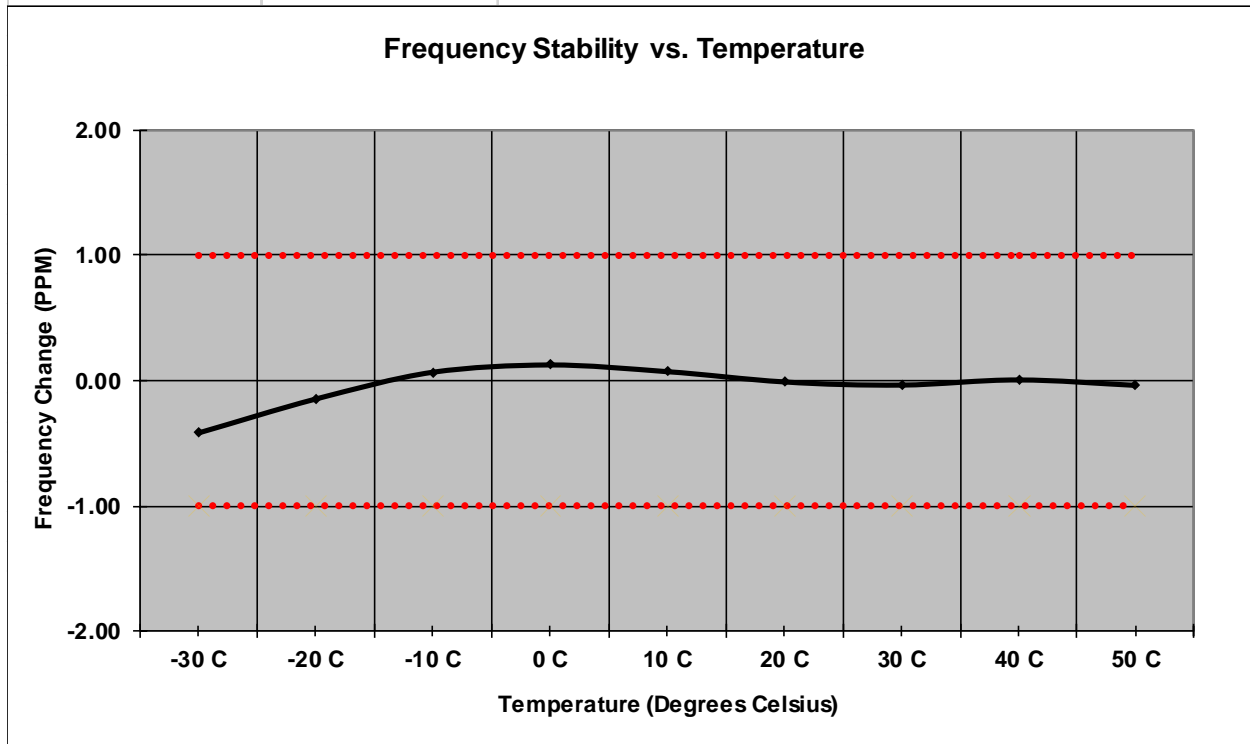


Figure 7.6.2-6: Frequency Stability – 940.5 MHz – KDS

Part 101.107, RSS-119 5.3

Frequency Stability

Frequency (MHz): 928.925

Deviation Limit (PPM): 1.0

Temperature C	Frequency MHz	Frequency Error (PPM)	Voltage (%)	Voltage (VDC)
-30 C	928.925331	0.356	100%	3.65
-20 C	928.925245	0.264	100%	3.65
-10 C	928.925194	0.209	100%	3.65
0 C	928.925174	0.188	100%	3.65
10 C	928.925206	0.222	100%	3.65
20 C	928.925152	0.163	100%	3.65
30 C	928.925013	0.013	100%	3.65
40 C	928.925041	0.044	100%	3.65
50 C	928.924969	-0.033	100%	3.65
20 C	928.925138	0.148	85%	3.10
20 C	928.925129	0.139	115%	4.20

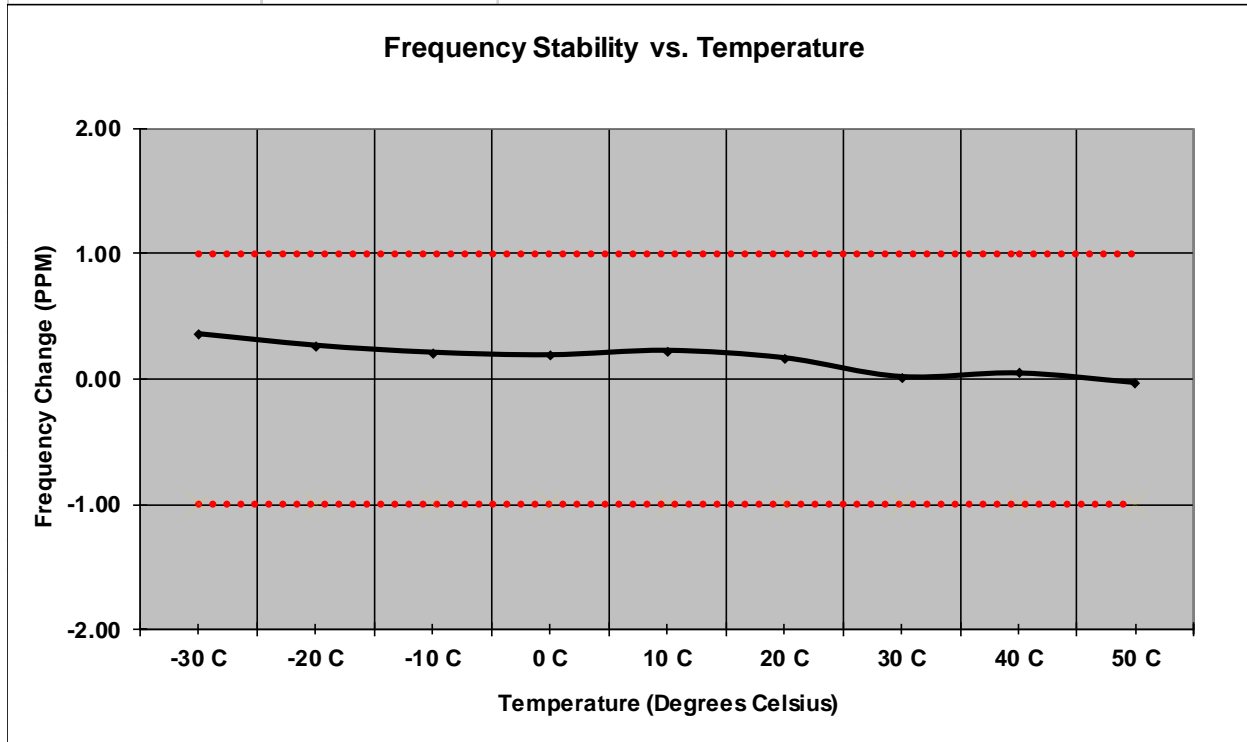


Figure 7.6.2-7: Frequency Stability – 928.925 MHz – TXC

Frequency Stability

Frequency (MHz): 928.925

Deviation Limit (PPM): 1.0

Temperature C	Frequency MHz	Frequency Error (PPM)	Voltage (%)	Voltage (VDC)
-30 C	928.924601	-0.430	100%	3.65
-20 C	928.924865	-0.146	100%	3.65
-10 C	928.925056	0.060	100%	3.65
0 C	928.925074	0.080	100%	3.65
10 C	928.925022	0.023	100%	3.65
20 C	928.924931	-0.075	100%	3.65
30 C	928.924961	-0.042	100%	3.65
40 C	928.924963	-0.040	100%	3.65
50 C	928.924918	-0.089	100%	3.65
20 C	928.924925	-0.081	85%	3.10
20 C	928.924926	-0.079	115%	4.20

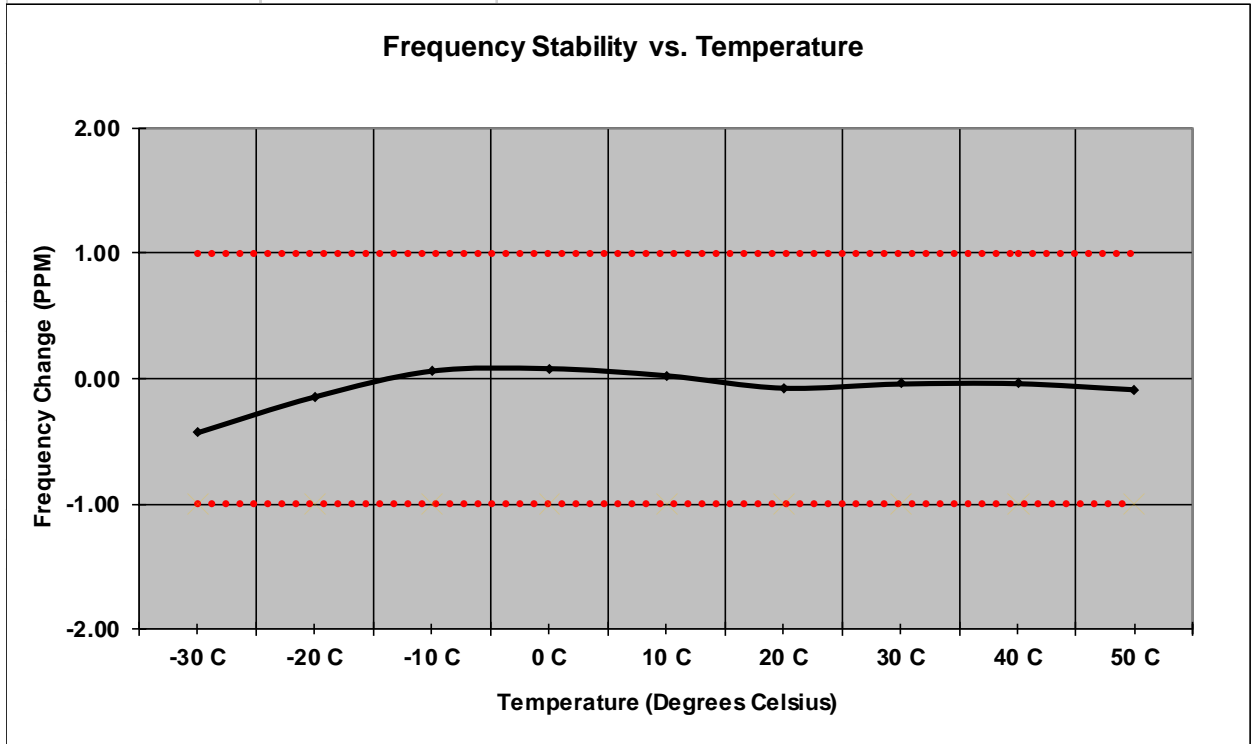


Figure 7.6.2-8: Frequency Stability – 928.925 MHz – KDS

Frequency Stability

Frequency (MHz): 932.25

Deviation Limit (PPM): 1.0

Temperature C	Frequency MHz	Frequency Error (PPM)	Voltage (%)	Voltage (VDC)
-30 C	932.250304	0.326	100%	3.65
-20 C	932.250232	0.249	100%	3.65
-10 C	932.250201	0.215	100%	3.65
0 C	932.250144	0.155	100%	3.65
10 C	932.250189	0.202	100%	3.65
20 C	932.250062	0.067	100%	3.65
30 C	932.250004	0.004	100%	3.65
40 C	932.250014	0.015	100%	3.65
50 C	932.249904	-0.103	100%	3.65
20 C	932.250069	0.074	85%	3.10
20 C	932.250072	0.077	115%	4.20

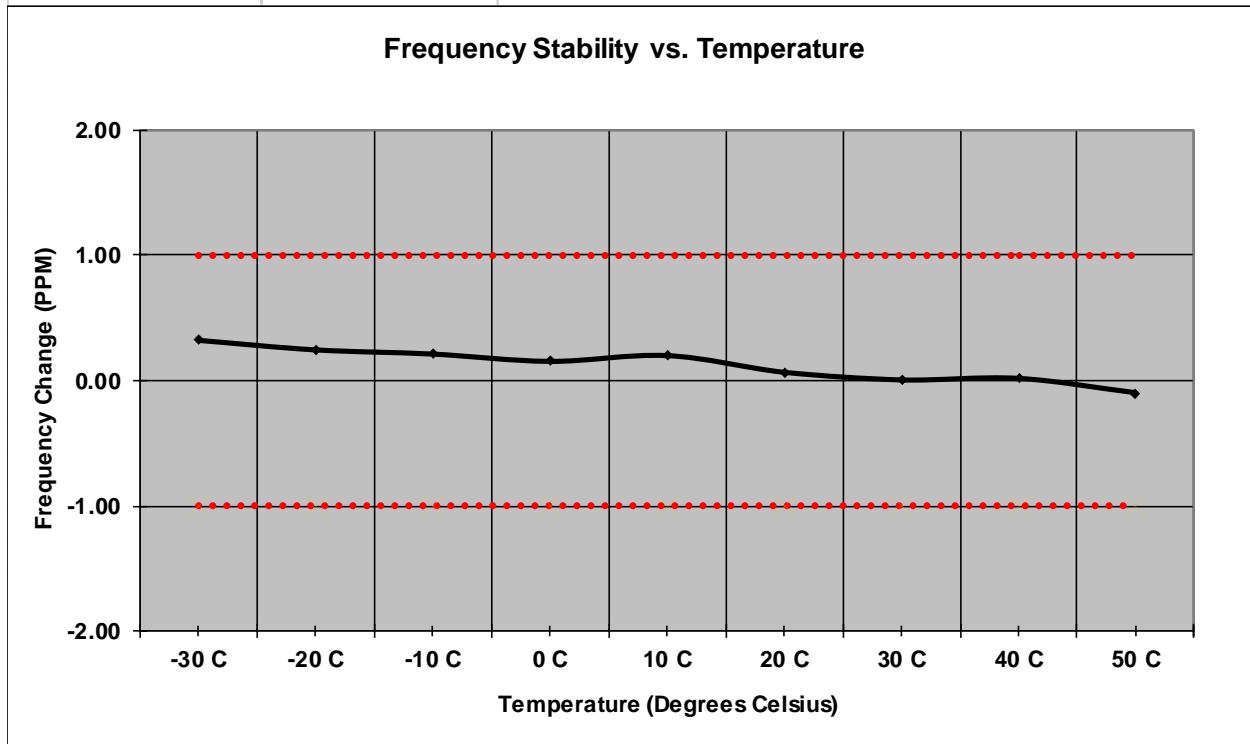


Figure 7.6.2-9: Frequency Stability – 932.25 MHz – TXC

Frequency Stability

Frequency (MHz): 932.25

Deviation Limit (PPM): 1.0

Temperature C	Frequency MHz	Frequency Error (PPM)	Voltage (%)	Voltage (VDC)
-30 C	932.249626	-0.401	100%	3.65
-20 C	932.249874	-0.136	100%	3.65
-10 C	932.250063	0.067	100%	3.65
0 C	932.250121	0.129	100%	3.65
10 C	932.250070	0.075	100%	3.65
20 C	932.249988	-0.013	100%	3.65
30 C	932.250028	0.029	100%	3.65
40 C	932.250009	0.010	100%	3.65
50 C	932.249962	-0.041	100%	3.65
20 C	932.249984	-0.017	85%	3.10
20 C	932.249984	-0.017	115%	4.20

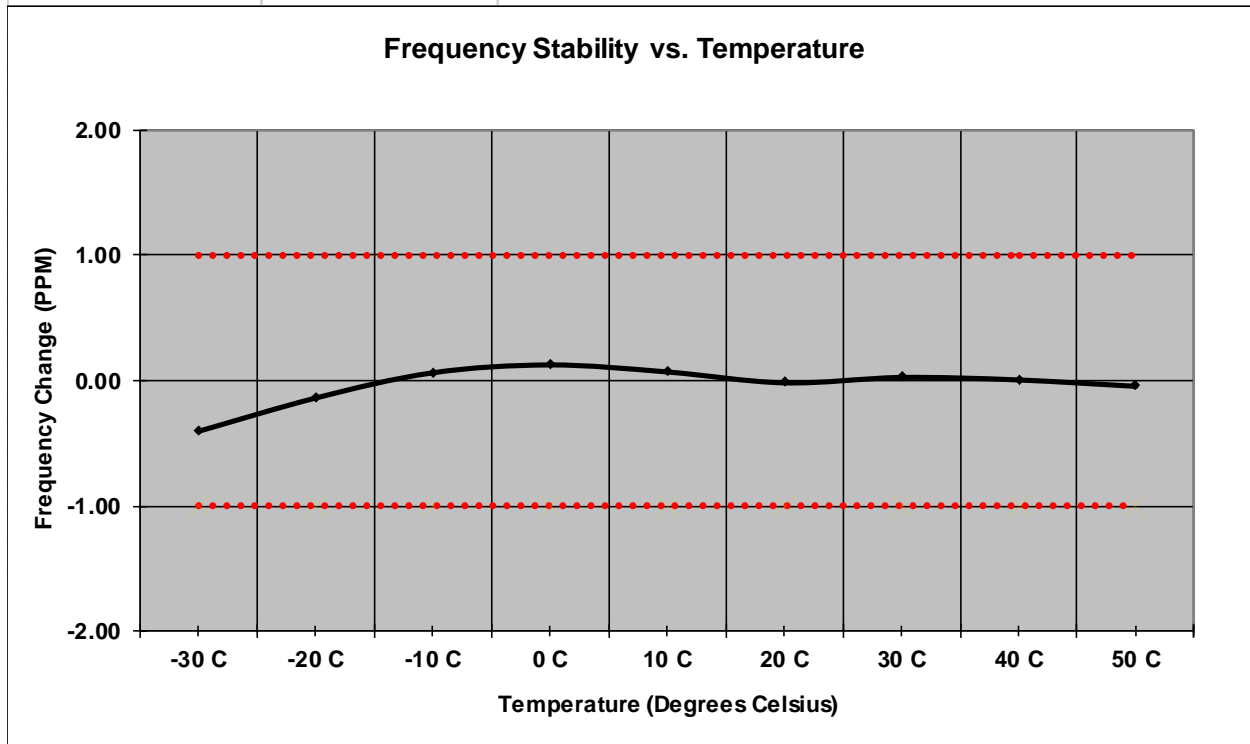


Figure 7.6.2-10: Frequency Stability – 932.25 MHz – KDS

Frequency Stability

Frequency (MHz): 941.25

Deviation Limit (PPM): 1.0

Temperature C	Frequency MHz	Frequency Error (PPM)	Voltage (%)	Voltage (VDC)
-30 C	941.250318	0.338	100%	3.65
-20 C	941.250247	0.263	100%	3.65
-10 C	941.250206	0.219	100%	3.65
0 C	941.250154	0.164	100%	3.65
10 C	941.250200	0.213	100%	3.65
20 C	941.250042	0.044	100%	3.65
30 C	941.249987	-0.014	100%	3.65
40 C	941.249998	-0.002	100%	3.65
50 C	941.249882	-0.126	100%	3.65
20 C	941.250049	0.052	85%	3.10
20 C	941.250060	0.063	115%	4.20

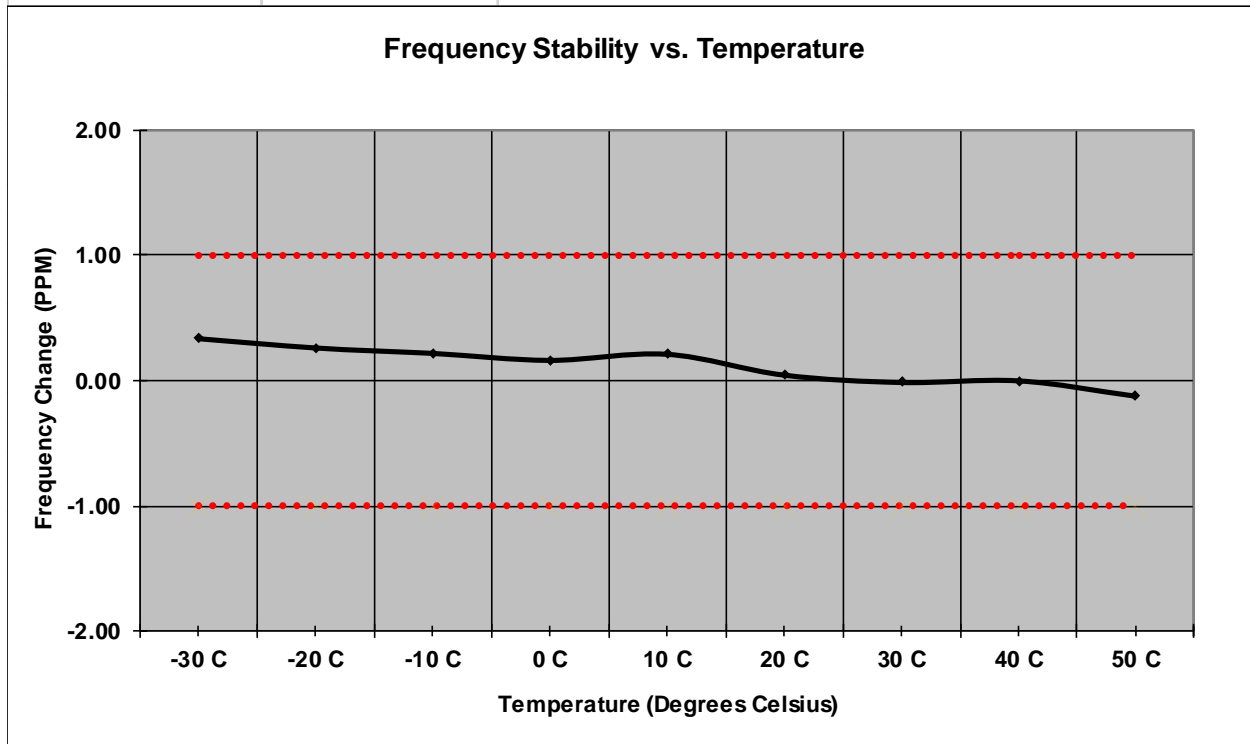


Figure 7.6.2-11: Frequency Stability – 941.25 MHz – TXC

Frequency Stability

Frequency (MHz): 941.25

Deviation Limit (PPM): 1.0

Temperature C	Frequency MHz	Frequency Error (PPM)	Voltage (%)	Voltage (VDC)
-30 C	941.249615	-0.409	100%	3.65
-20 C	941.249883	-0.124	100%	3.65
-10 C	941.250117	0.125	100%	3.65
0 C	941.250125	0.133	100%	3.65
10 C	941.250076	0.081	100%	3.65
20 C	941.249994	-0.007	100%	3.65
30 C	941.249984	-0.017	100%	3.65
40 C	941.250017	0.019	100%	3.65
50 C	941.249960	-0.043	100%	3.65
20 C	941.249991	-0.009	85%	3.10
20 C	941.249990	-0.011	115%	4.20

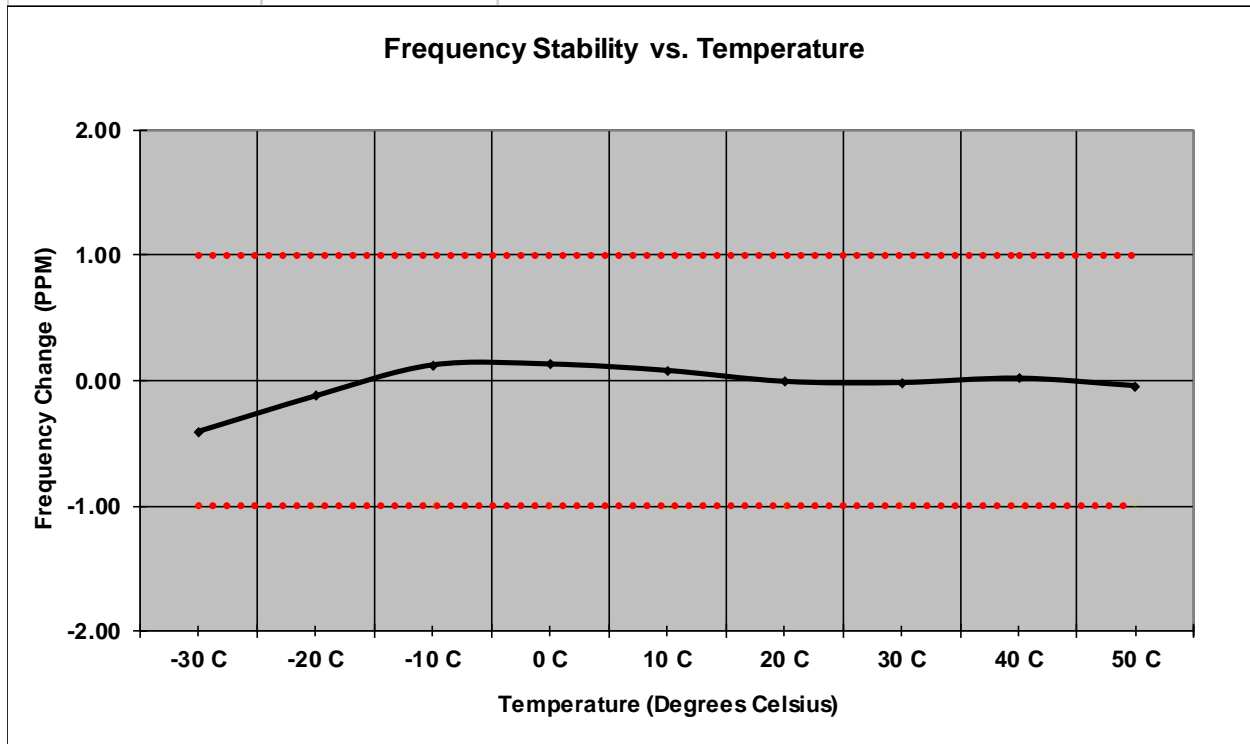


Figure 7.6.2-12: Frequency Stability – 941.25 MHz – KDS

Frequency Stability

Frequency (MHz): 952.5

Deviation Limit (PPM): 1.0

Temperature C	Frequency MHz	Frequency Error (PPM)	Voltage (%)	Voltage (VDC)
-30 C	952.500346	0.363	100%	3.65
-20 C	952.500268	0.282	100%	3.65
-10 C	952.500236	0.248	100%	3.65
0 C	952.500174	0.183	100%	3.65
10 C	952.500226	0.237	100%	3.65
20 C	952.500058	0.061	100%	3.65
30 C	952.499999	-0.001	100%	3.65
40 C	952.500005	0.005	100%	3.65
50 C	952.499912	-0.092	100%	3.65
20 C	952.500062	0.065	85%	3.10
20 C	952.500069	0.073	115%	4.20

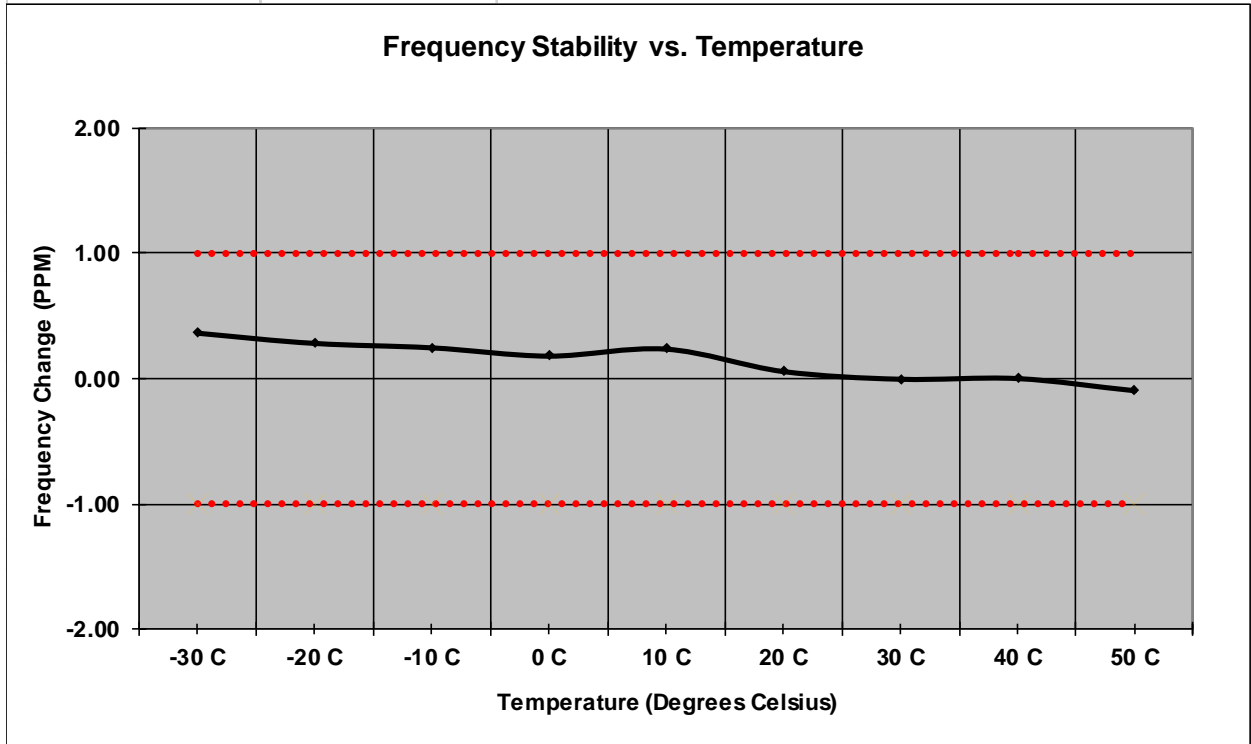


Figure 7.6.2-13: Frequency Stability – 952.5 MHz – TXC

Frequency Stability

Frequency (MHz): 952.5

Deviation Limit (PPM): 1.0

Temperature C	Frequency MHz	Frequency Error (PPM)	Voltage (%)	Voltage (VDC)
-30 C	952.499571	-0.450	100%	3.65
-20 C	952.499847	-0.161	100%	3.65
-10 C	952.500043	0.045	100%	3.65
0 C	952.500088	0.092	100%	3.65
10 C	952.500034	0.036	100%	3.65
20 C	952.499953	-0.050	100%	3.65
30 C	952.499953	-0.049	100%	3.65
40 C	952.499977	-0.024	100%	3.65
50 C	952.499923	-0.081	100%	3.65
20 C	952.499949	-0.054	85%	3.10
20 C	952.499948	-0.055	115%	4.20

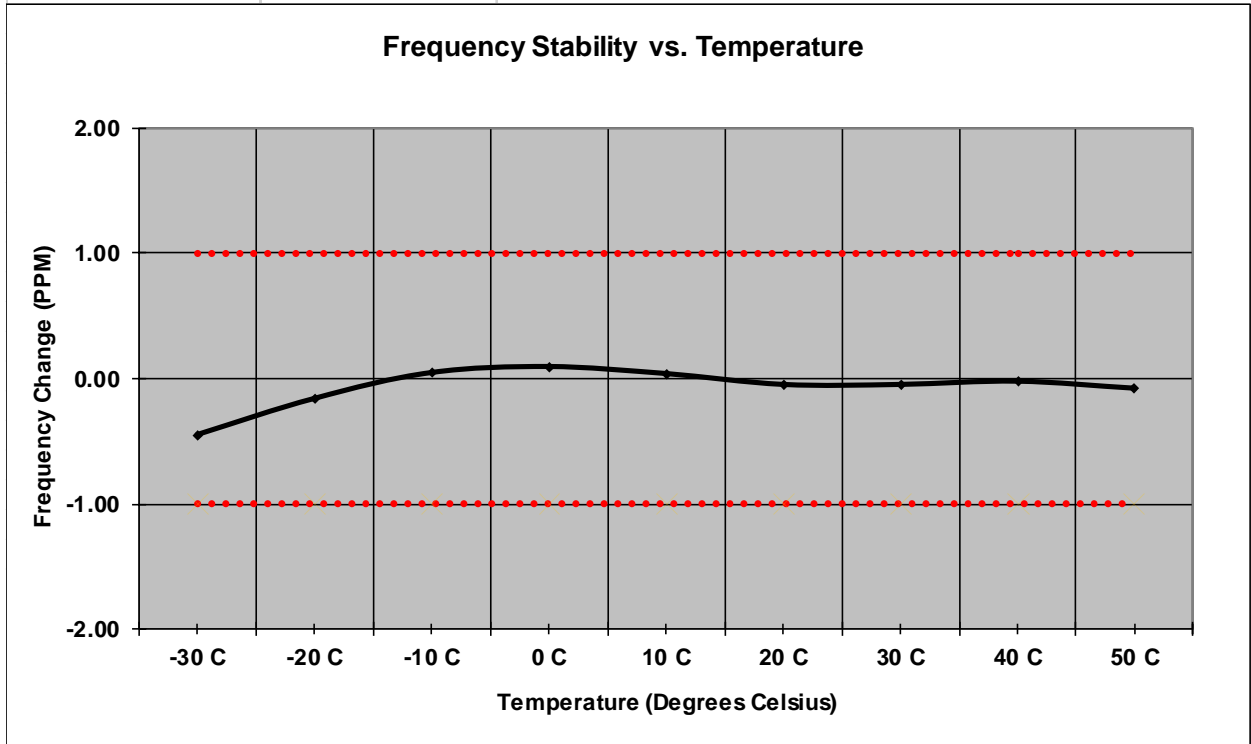


Figure 7.6.2-14: Frequency Stability – 952.5 MHz – KDS

Frequency Stability

Frequency (MHz): 959.925

Deviation Limit (PPM): 1.0

Temperature C	Frequency MHz	Frequency Error (PPM)	Voltage (%)	Voltage (VDC)
-30 C	959.925312	0.325	100%	3.65
-20 C	959.925235	0.244	100%	3.65
-10 C	959.925177	0.184	100%	3.65
0 C	959.925116	0.121	100%	3.65
10 C	959.925172	0.179	100%	3.65
20 C	959.925024	0.025	100%	3.65
30 C	959.924937	-0.066	100%	3.65
40 C	959.925006	0.007	100%	3.65
50 C	959.924854	-0.153	100%	3.65
20 C	959.925015	0.016	85%	3.10
20 C	959.925024	0.025	115%	4.20

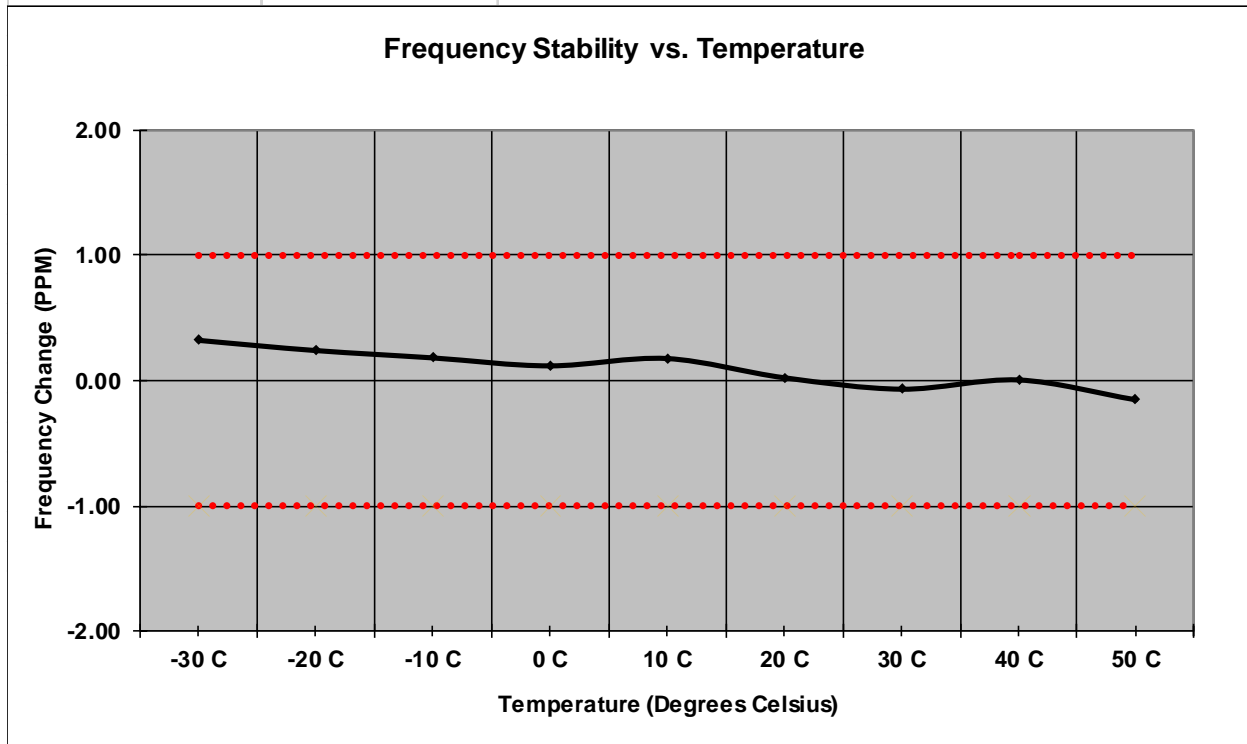


Figure 7.6.2-15: Frequency Stability – 959.925 MHz – TXC

Frequency Stability

Frequency (MHz): 959.925

Deviation Limit (PPM): 1.0

Temperature C	Frequency MHz	Frequency Error (PPM)	Voltage (%)	Voltage (VDC)
-30 C	959.924562	-0.457	100%	3.65
-20 C	959.924770	-0.240	100%	3.65
-10 C	959.925077	0.080	100%	3.65
0 C	959.925099	0.103	100%	3.65
10 C	959.925045	0.047	100%	3.65
20 C	959.924962	-0.039	100%	3.65
30 C	959.924995	-0.005	100%	3.65
40 C	959.924990	-0.011	100%	3.65
50 C	959.924946	-0.056	100%	3.65
20 C	959.924956	-0.046	85%	3.10
20 C	959.924955	-0.046	115%	4.20

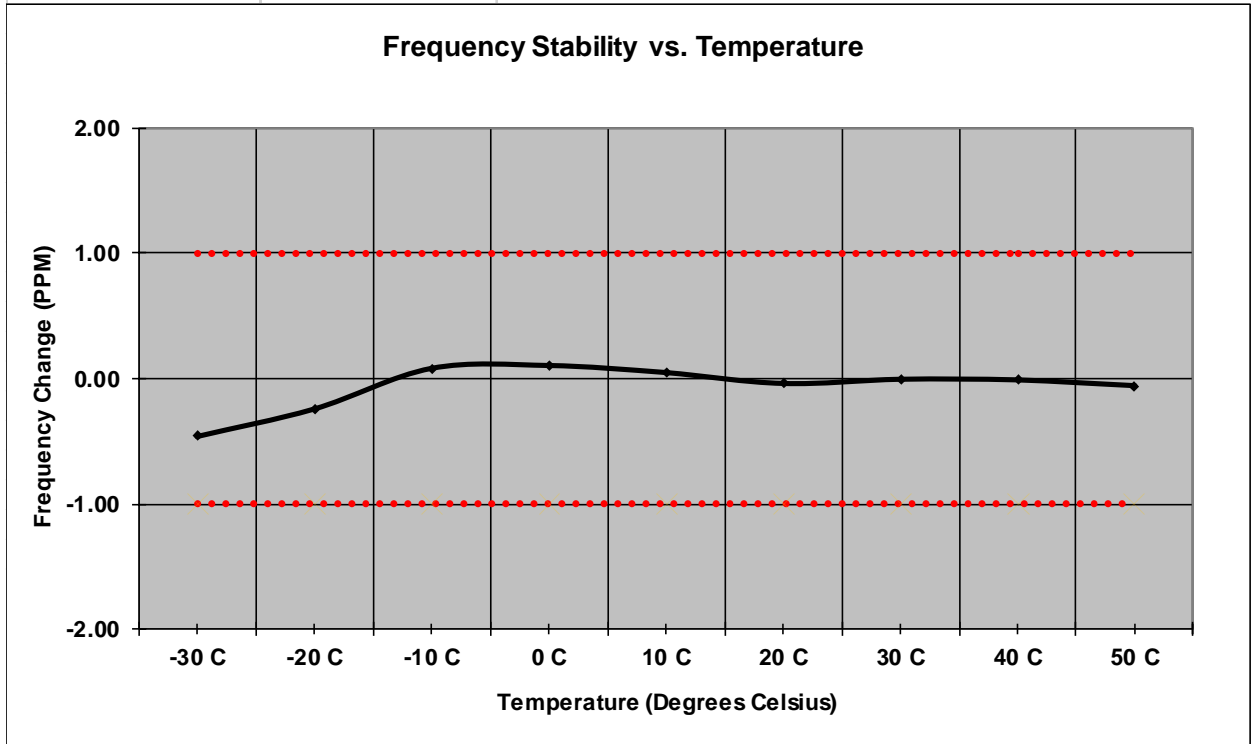


Figure 7.6.2-16: Frequency Stability – 959.925 MHz – KDS

8.0 MEASUREMENT UNCERTAINTY

The expanded laboratory measurement uncertainty figures (U_{Lab}) provided below correspond to an expansion factor (coverage factor) $k = 1.96$ which provide confidence levels of 95%.

Parameter	U_{lab}
Occupied Channel Bandwidth	$\pm 0.004\%$
RF Conducted Output Power	± 0.689 dB
Power Spectral Density	± 0.5 dB
Antenna Port Conducted Emissions	± 2.717 dB
Radiated Emissions	± 5.877 dB
Temperature	± 0.860 °C
Radio Frequency	$\pm 2.832 \times 10^{-8}$
AC Power Line Conducted Emissions	± 2.85

9.0 CONCLUSION

In the opinion of TÜV SÜD America Inc. the model SONIXIQV2, manufactured by Sensus USA, Inc., meets all the requirements of FCC Part 24D and Part 101 as well as ISED Canada RSS-119 and RSS-134 where applicable.

End Report