


Orthogonal Axis :	X
Test Mode :	Band 3/ TX A Mode 5700MHz


Horizontal

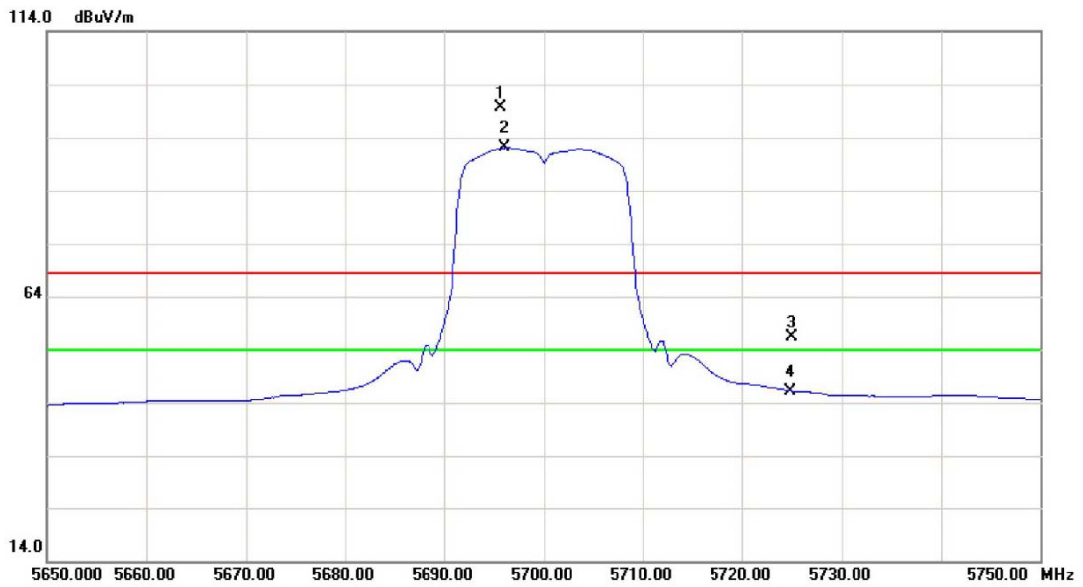

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5695.600	55.28	44.43	99.71	68.30	31.41	peak	Fundamental frequency, no limit
2	*	5696.100	47.59	44.43	92.02	54.00	38.02	AVG	Fundamental frequency, no limit
3		5725.000	11.85	44.58	56.43	68.30	-11.87	peak	
4		5725.000	1.66	44.58	46.24	54.00	-7.76	AVG	

Orthogonal Axis :	X
Test Mode :	Band 3/ TX A Mode 5700MHz


Horizontal

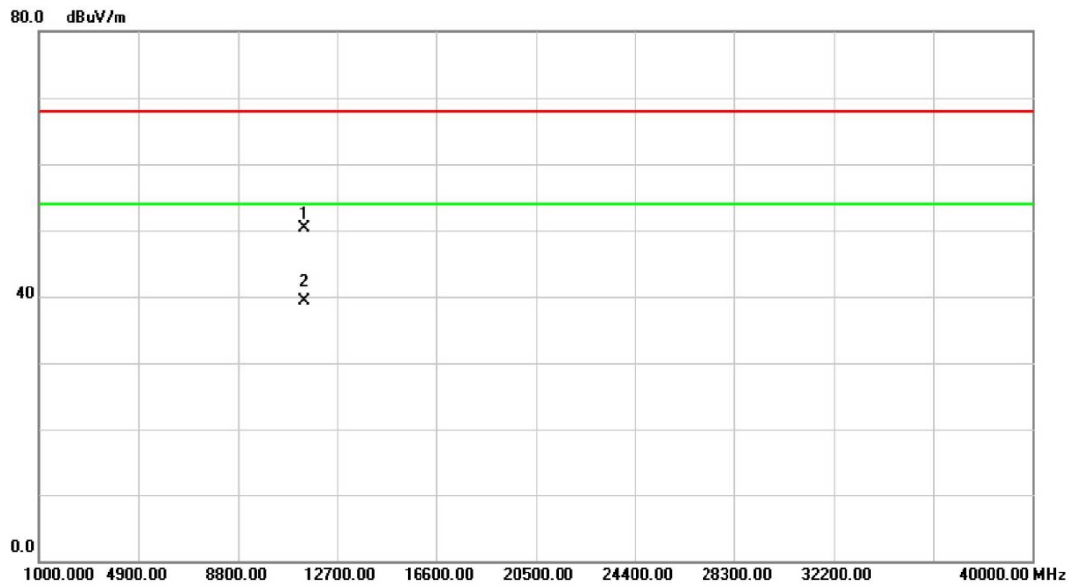

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11400.56	34.00	16.25	50.25	68.00	-17.75	peak	
2	*	11400.72	23.07	16.25	39.32	54.00	-14.68	AVG	

Orthogonal Axis :	X
Test Mode :	Band 3/ TX N20 Mode 5500MHz


Vertical

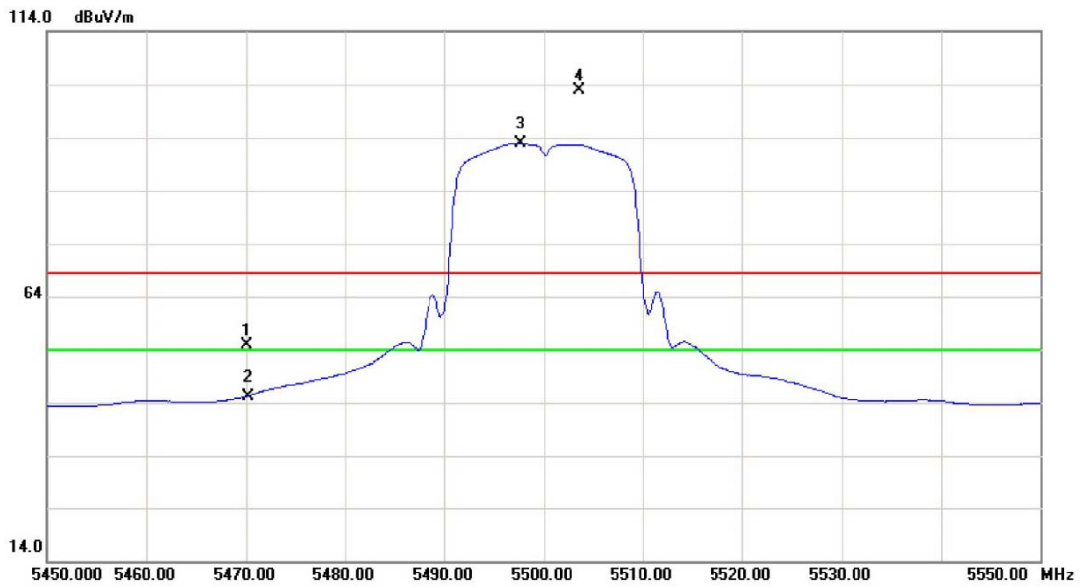

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5470.000	11.46	43.30	54.76	68.30	-13.54	peak	
2		5470.000	1.91	43.30	45.21	54.00	-8.79	AVG	
3	*	5497.700	49.48	43.41	92.89	54.00	38.89	AVG	Fundamental frequency, no limit
4	X	5503.600	59.37	43.44	102.81	68.30	34.51	peak	Fundamental frequency, no limit

Orthogonal Axis :	X
Test Mode :	Band 3/ TX N20 Mode 5500MHz


Vertical

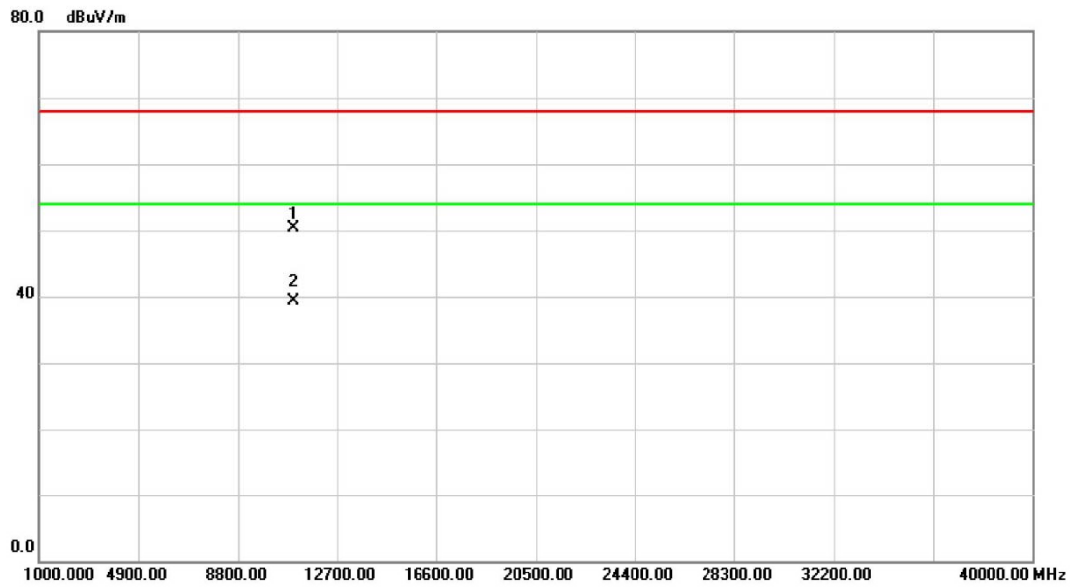

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11000.36	35.04	15.31	50.35	68.00	-17.65	peak	
2	*	11000.47	23.90	15.31	39.21	54.00	-14.79	AVG	

Orthogonal Axis :	X
Test Mode :	Band 3/ TX N20 Mode 5500MHz


Horizontal

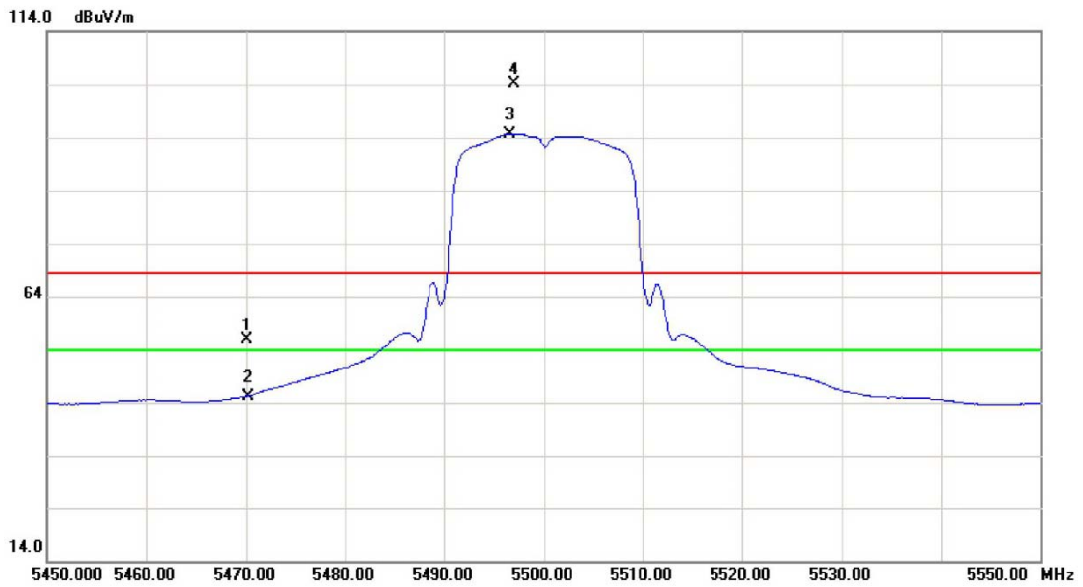

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5470.000	12.67	43.30	55.97	68.30	-12.33	peak	
2		5470.000	1.92	43.30	45.22	54.00	-8.78	AVG	
3	*	5496.600	51.33	43.41	94.74	54.00	40.74	AVG	Fundamental frequency, no limit
4	X	5497.000	60.83	43.41	104.24	68.30	35.94	peak	Fundamental frequency, no limit

Orthogonal Axis :	X
Test Mode :	Band 3/ TX N20 Mode 5500MHz


Horizontal

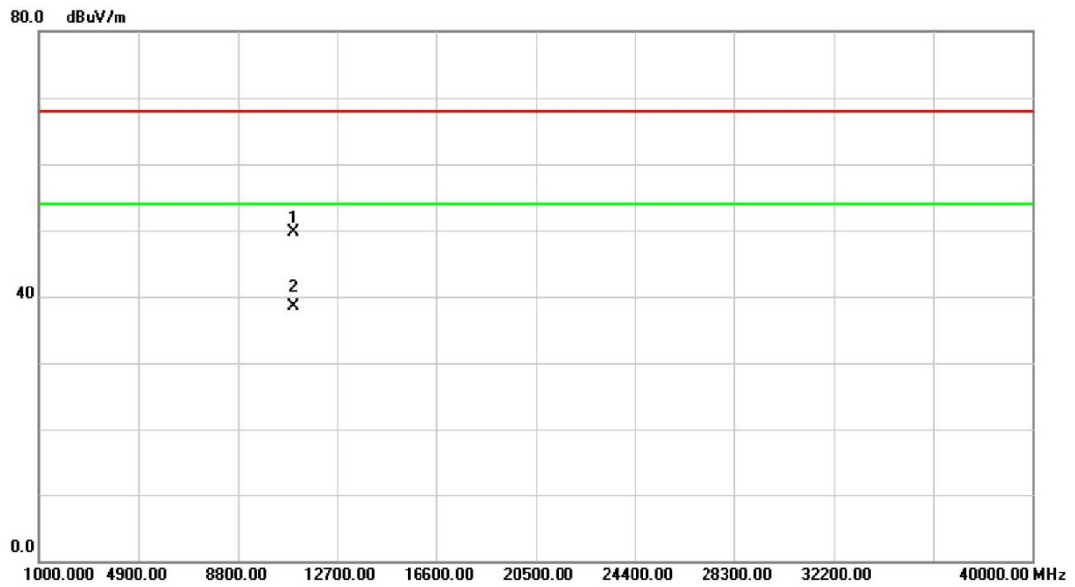

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10999.36	34.36	15.31	49.67	68.00	-18.33	peak	
2	*	10999.85	23.21	15.31	38.52	54.00	-15.48	AVG	

Orthogonal Axis :	X
Test Mode :	Band 3/ TX N20 Mode 5580MHz


Vertical

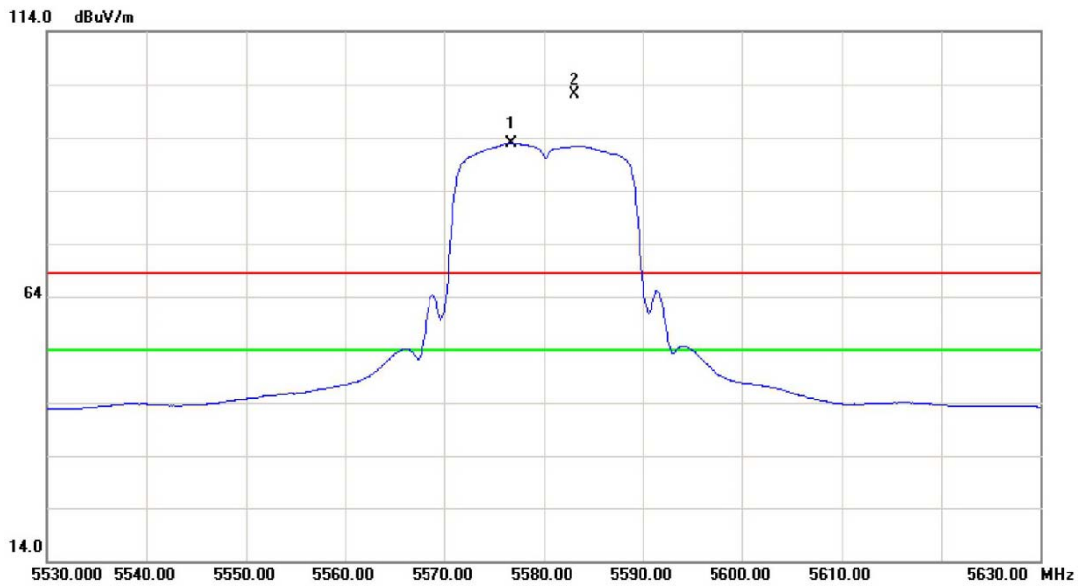

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5576.700	49.02	43.82	92.84	54.00	38.84	AVG	Fundamental frequency, no limit
2	X	5583.100	58.37	43.85	102.22	68.30	33.92	peak	Fundamental frequency, no limit

Orthogonal Axis :	X
Test Mode :	Band 3/ TX N20 Mode 5580MHz


Vertical

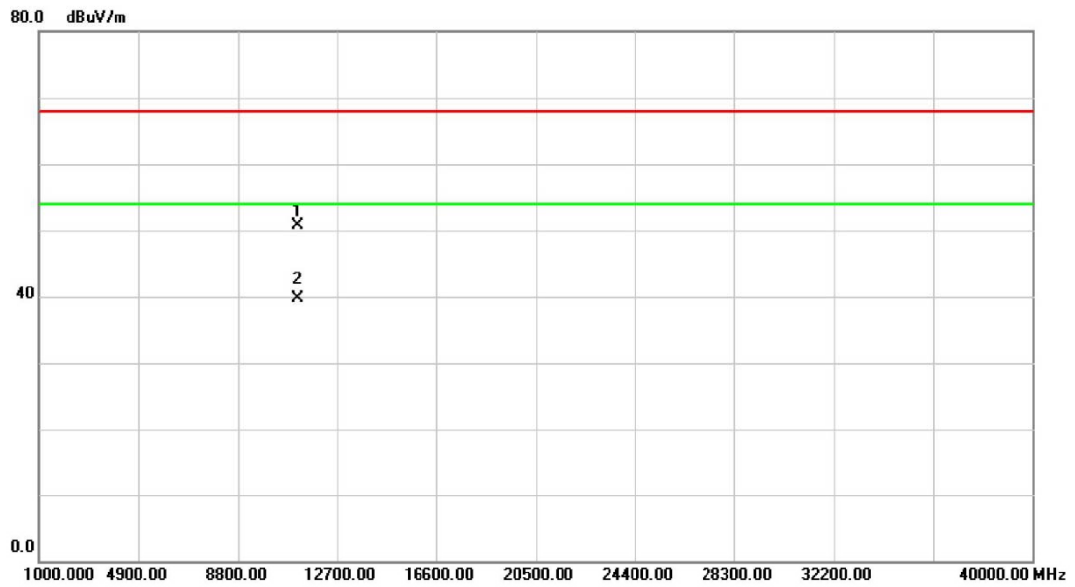

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11159.10	35.12	15.68	50.80	68.00	-17.20	peak	
2	*	11160.36	23.98	15.69	39.67	54.00	-14.33	AVG	

Orthogonal Axis :	X
Test Mode :	Band 3/ TX N20 Mode 5580MHz


Horizontal

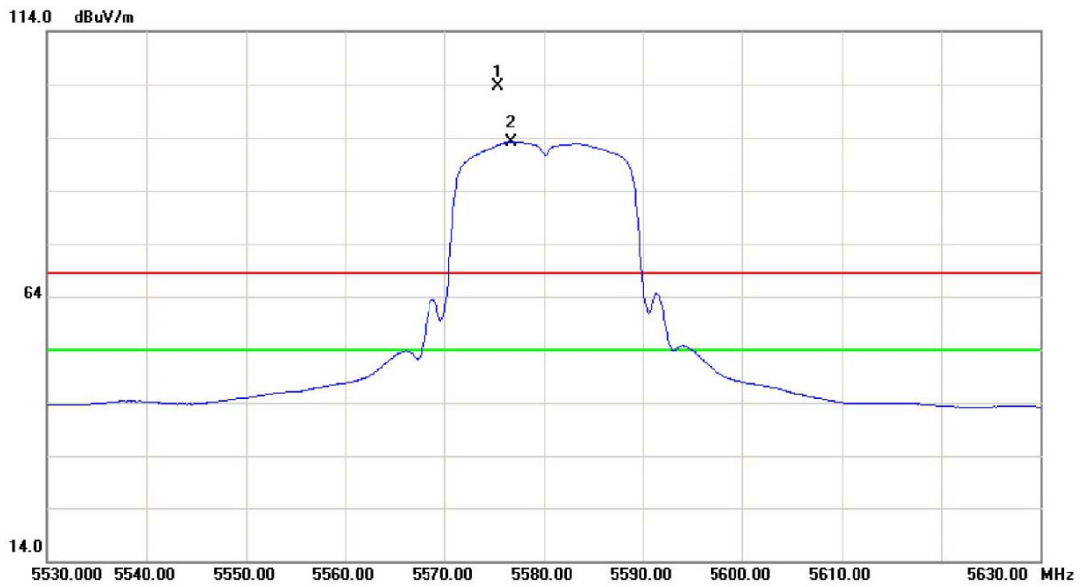

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5575.400	59.75	43.81	103.56	68.30	35.26	peak	Fundamental frequency, no limit
2	*	5576.700	49.32	43.82	93.14	54.00	39.14	AVG	Fundamental frequency, no limit

Orthogonal Axis :	X
Test Mode :	Band 3/ TX N20 Mode 5580MHz


Horizontal

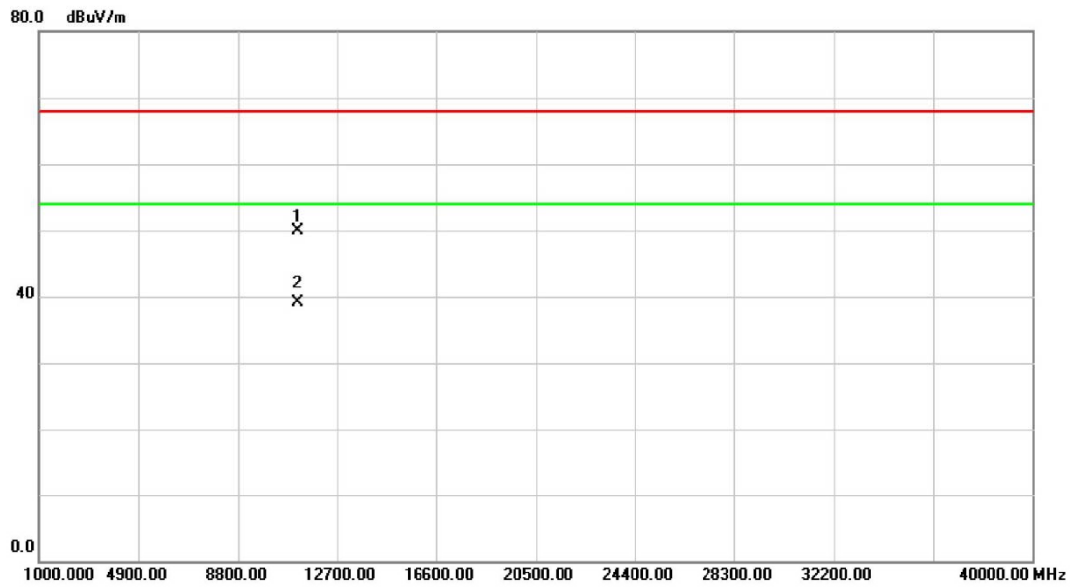

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11159.14	34.22	15.68	49.90	68.00	-18.10	peak	
2	*	11159.36	23.48	15.68	39.16	54.00	-14.84	AVG	

Orthogonal Axis :	X
Test Mode :	Band 3/ TX N20 Mode 5700MHz


Vertical

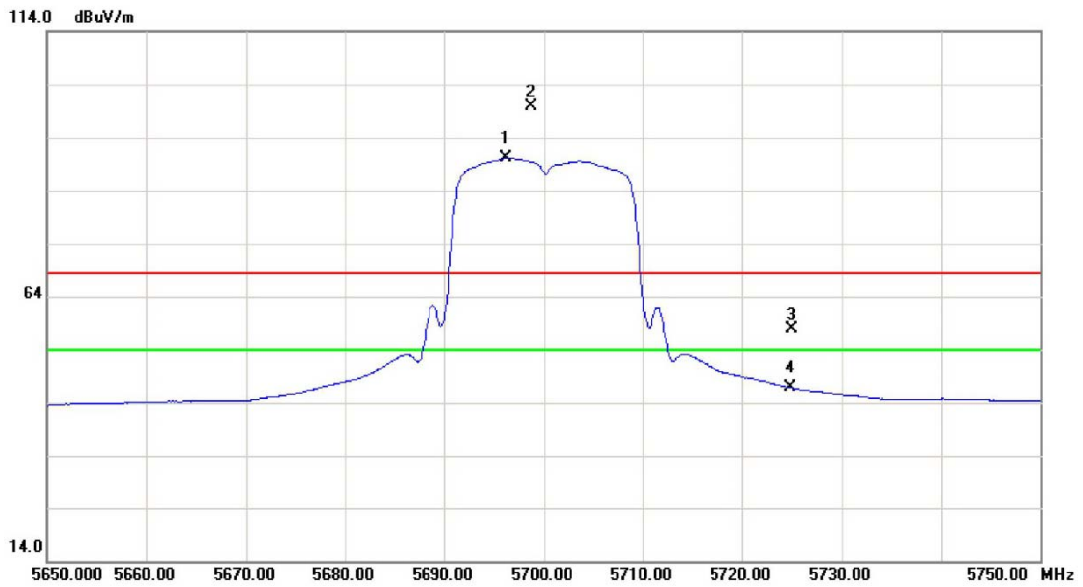

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5696.200	45.66	44.43	90.09	54.00	36.09	AVG	Fundamental frequency, no limit
2	X	5698.700	55.35	44.44	99.79	68.30	31.49	peak	Fundamental frequency, no limit
3		5725.000	13.38	44.58	57.96	68.30	-10.34	peak	
4		5725.000	2.21	44.58	46.79	54.00	-7.21	AVG	

Orthogonal Axis :	X
Test Mode :	Band 3/ TX N20 Mode 5700MHz


Vertical

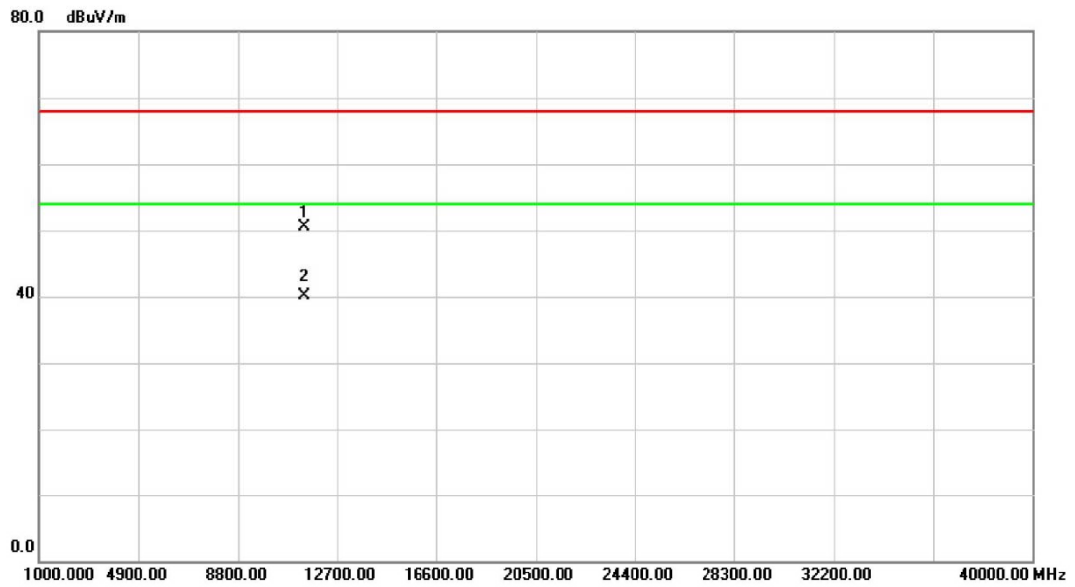

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11400.25	34.34	16.25	50.59	68.00	-17.41	peak	
2	*	11400.36	23.87	16.25	40.12	54.00	-13.88	AVG	

Orthogonal Axis :	X
Test Mode :	Band 3/ TX N20 Mode 5700MHz


Horizontal

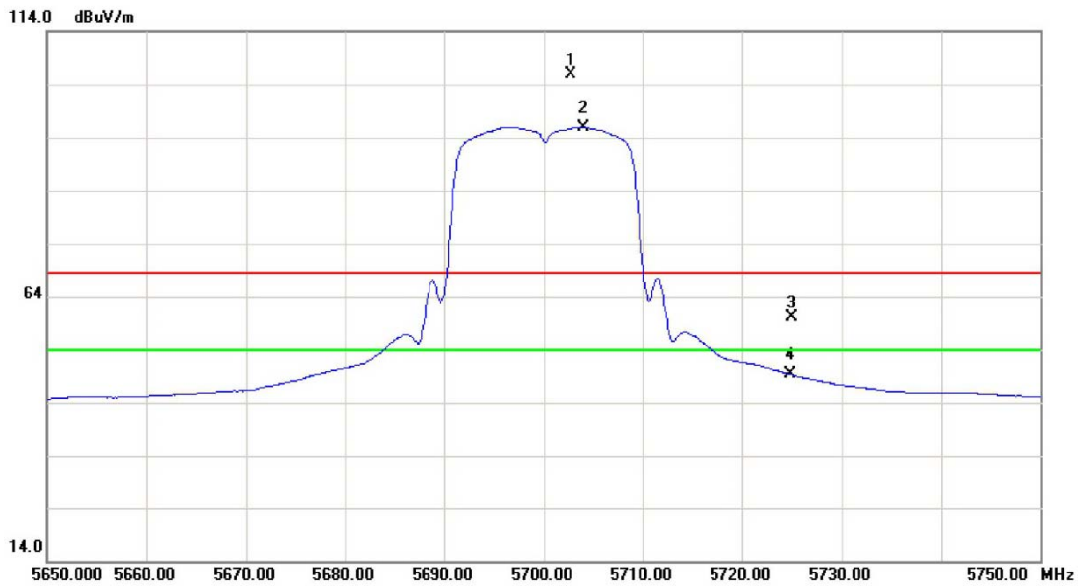

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5702.700	61.32	44.46	105.78	68.30	37.48	peak	Fundamental frequency, no limit
2	*	5704.000	51.50	44.48	95.98	54.00	41.98	AVG	Fundamental frequency, no limit
3		5725.000	15.64	44.58	60.22	68.30	-8.08	peak	
4		5725.000	4.70	44.58	49.28	54.00	-4.72	AVG	

Orthogonal Axis :	X
Test Mode :	Band 3/ TX N20 Mode 5700MHz


Horizontal

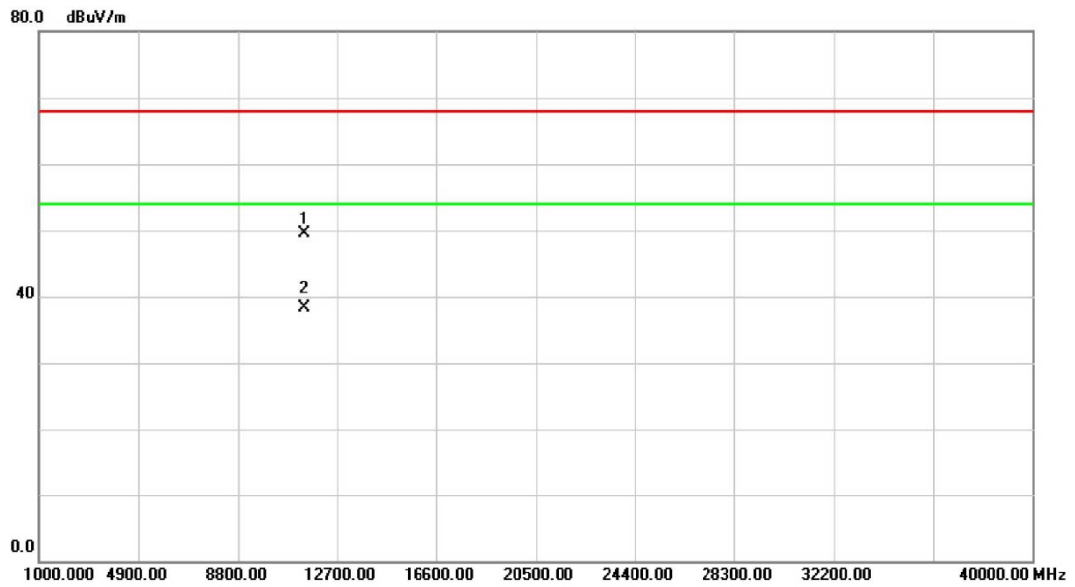

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11400.21	33.19	16.25	49.44	68.00	-18.56	peak	
2	*	11400.63	22.14	16.25	38.39	54.00	-15.61	AVG	

Orthogonal Axis :	X
Test Mode :	Band 3/ TX N40 Mode 5510MHz


Vertical

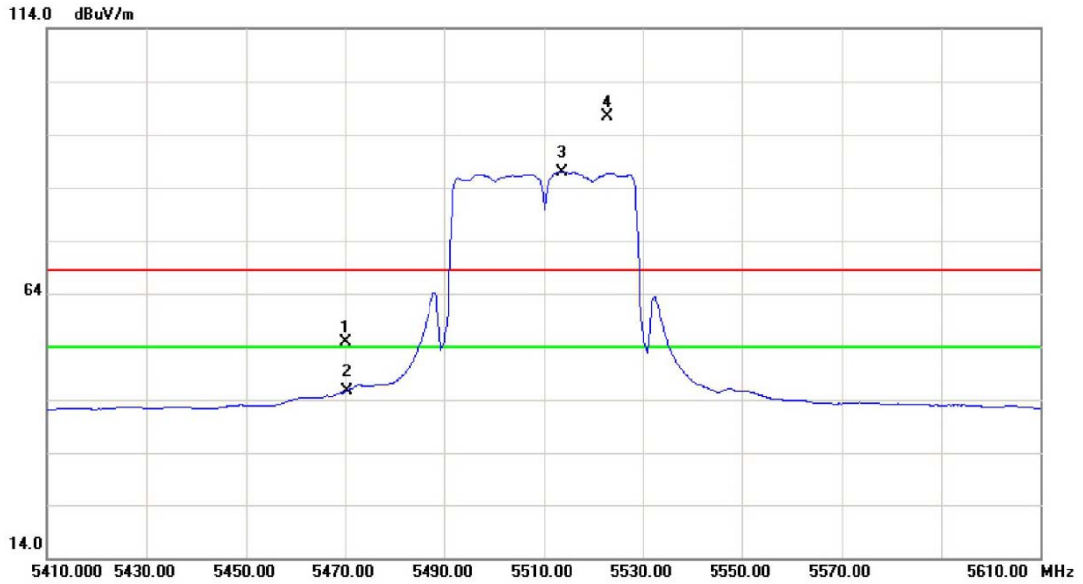

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5470.000	11.66	43.30	54.96	68.30	-13.34	peak	
2		5470.000	2.26	43.30	45.56	54.00	-8.44	AVG	
3	*	5513.600	43.50	43.49	86.99	54.00	32.99	AVG	Fundamental frequency, no limit
4	X	5522.800	53.96	43.54	97.50	68.30	29.20	peak	Fundamental frequency, no limit

Orthogonal Axis :	X
Test Mode :	Band 3/ TX N40 Mode 5510MHz


Vertical

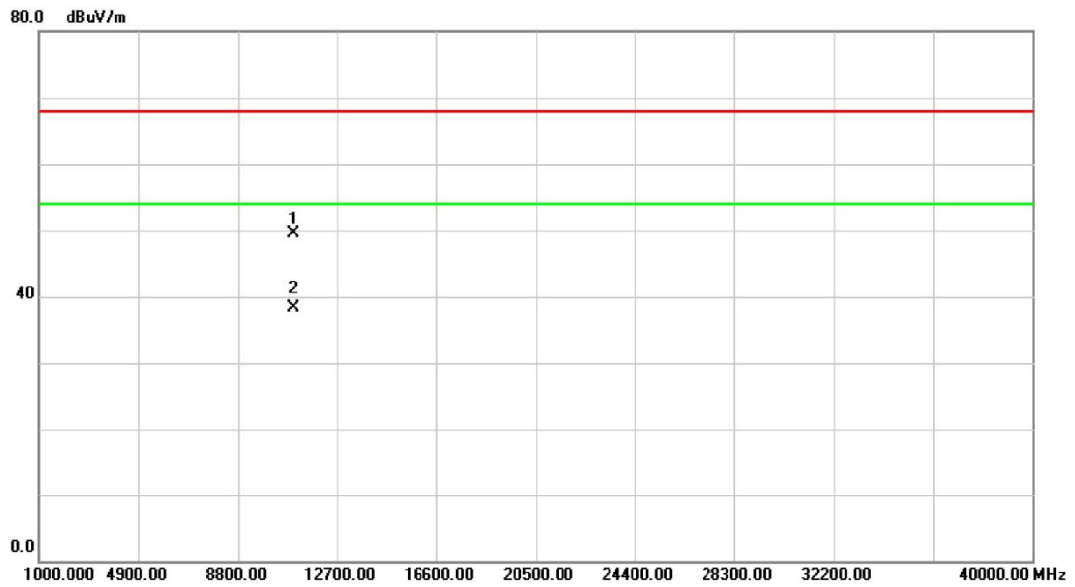

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11020.18	34.22	15.35	49.57	68.00	-18.43	peak	
2	*	11020.69	22.88	15.35	38.23	54.00	-15.77	AVG	

Orthogonal Axis :	X
Test Mode :	Band 3/ TX N40 Mode 5510MHz


Horizontal

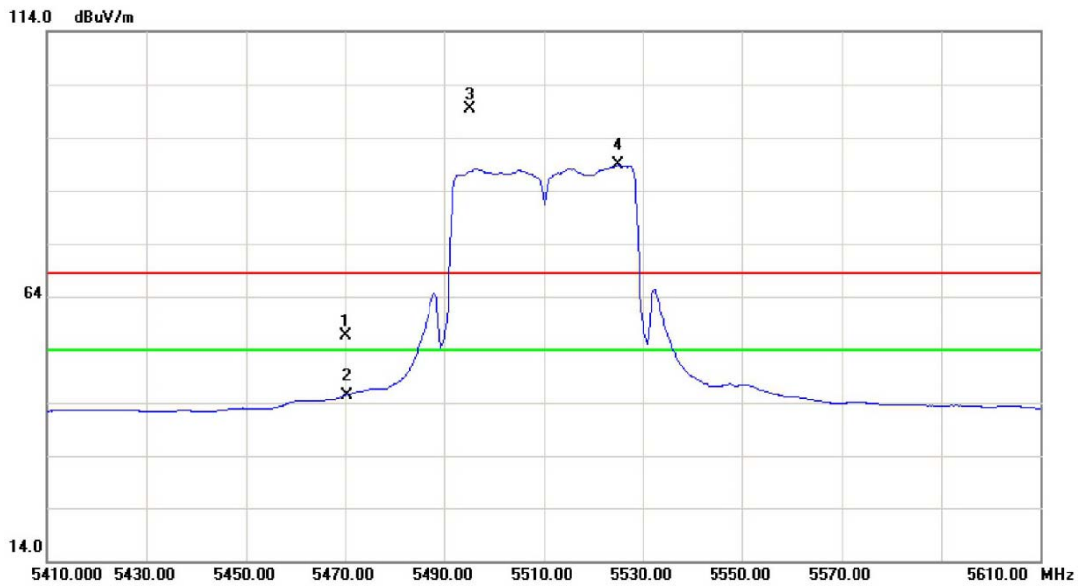

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5470.000	13.43	43.30	56.73	68.30	-11.57	peak	
2		5470.000	2.11	43.30	45.41	54.00	-8.59	AVG	
3	X	5495.200	56.01	43.40	99.41	68.30	31.11	peak	Fundamental frequency, no limit
4	*	5525.000	45.21	43.55	88.76	54.00	34.76	AVG	Fundamental frequency, no limit

Orthogonal Axis :	X
Test Mode :	Band 3/ TX N40 Mode 5510MHz


Horizontal

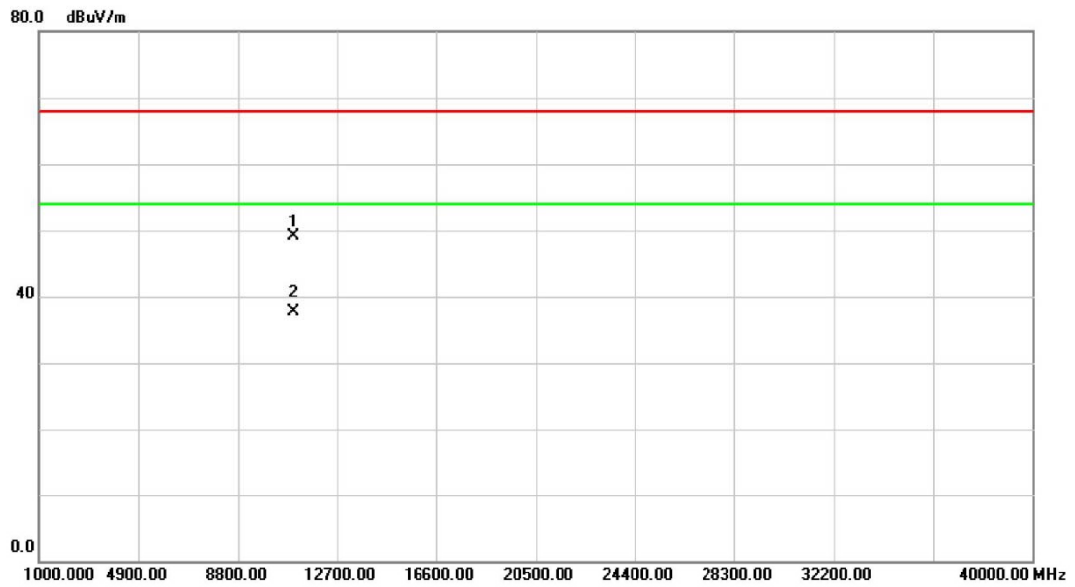

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11020.21	33.78	15.35	49.13	68.00	-18.87	peak	
2	*	11020.68	22.45	15.35	37.80	54.00	-16.20	AVG	

Orthogonal Axis :	X
Test Mode :	Band 3/ TX N40 Mode 5550MHz


Vertical

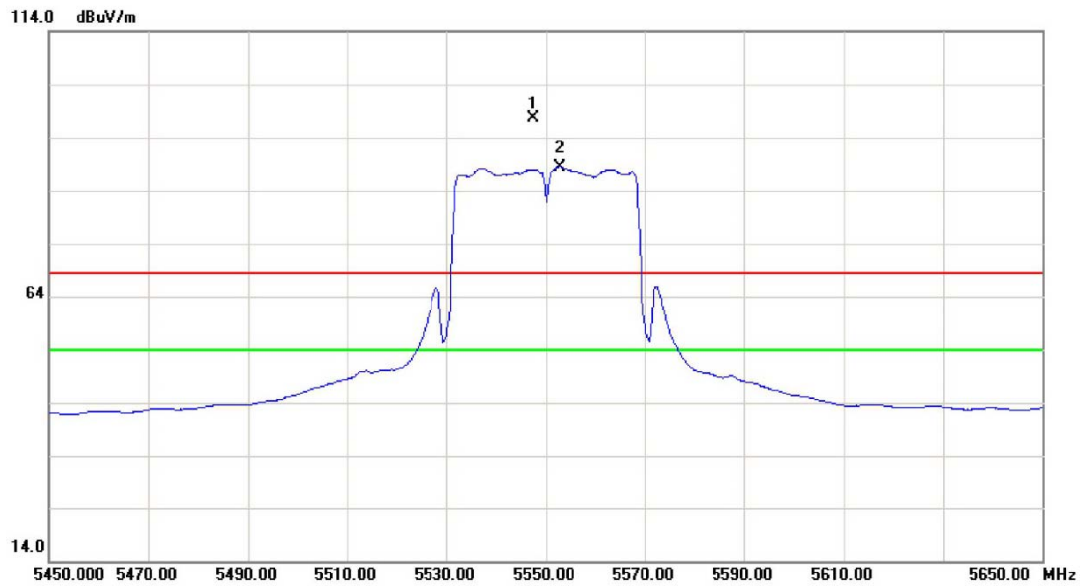

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5547.400	53.84	43.67	97.51	68.30	29.21	peak	Fundamental frequency, no limit
2	*	5552.800	44.81	43.69	88.50	54.00	34.50	AVG	Fundamental frequency, no limit

Orthogonal Axis :	X
Test Mode :	Band 3/ TX N40 Mode 5550MHz


Vertical

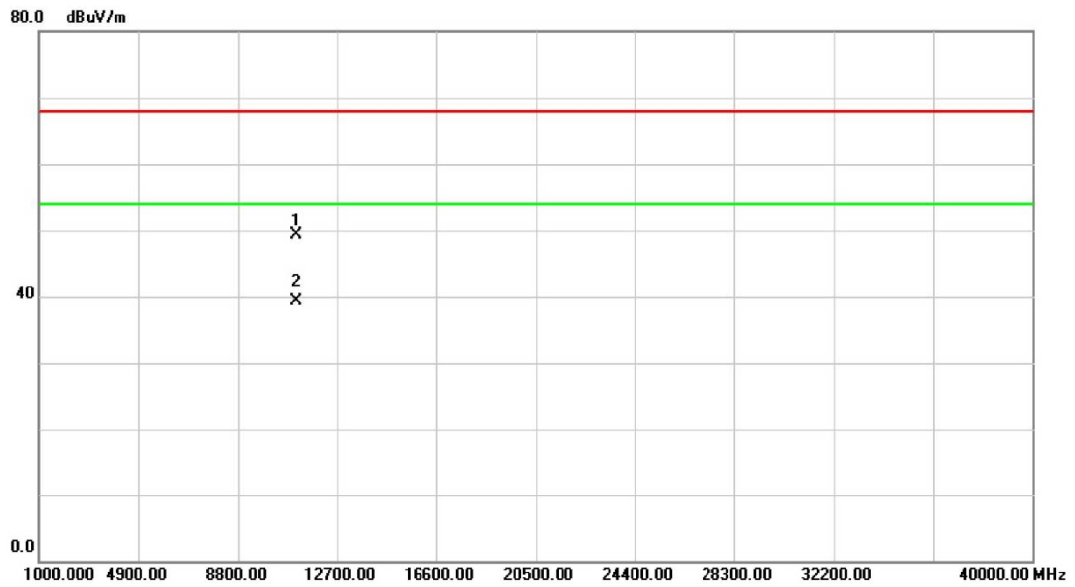

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11100.62	33.70	15.55	49.25	68.00	-18.75	peak	
2	*	11100.89	23.72	15.55	39.27	54.00	-14.73	AVG	

Orthogonal Axis :	X
Test Mode :	Band 3/ TX N40 Mode 5550MHz


Horizontal

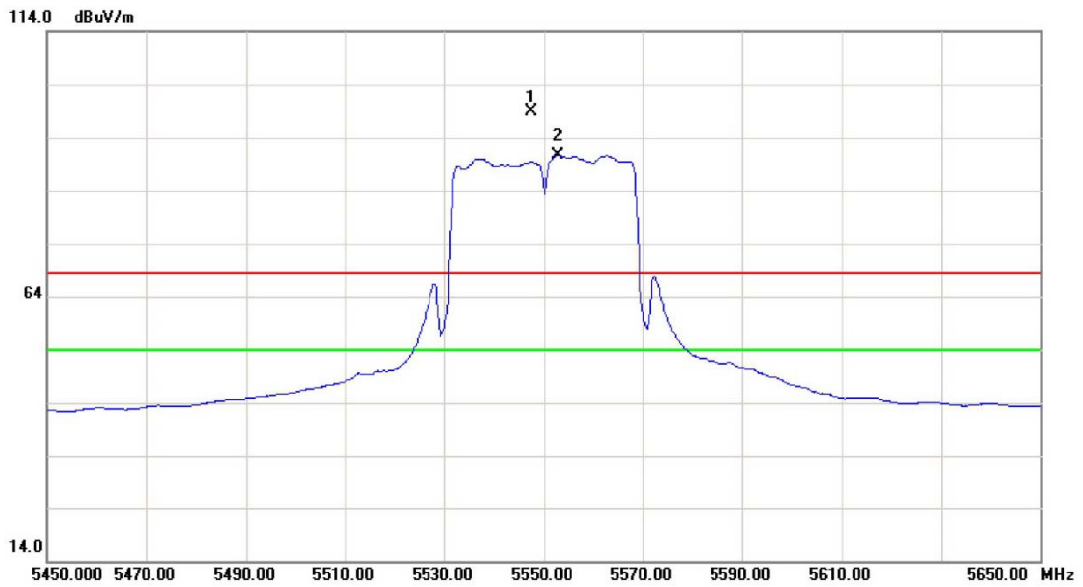

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5547.400	55.15	43.67	98.82	68.30	30.52	peak	Fundamental frequency, no limit
2	*	5552.800	46.89	43.69	90.58	54.00	36.58	AVG	Fundamental frequency, no limit

Orthogonal Axis :	X
Test Mode :	Band 3/ TX N40 Mode 5550MHz


Horizontal

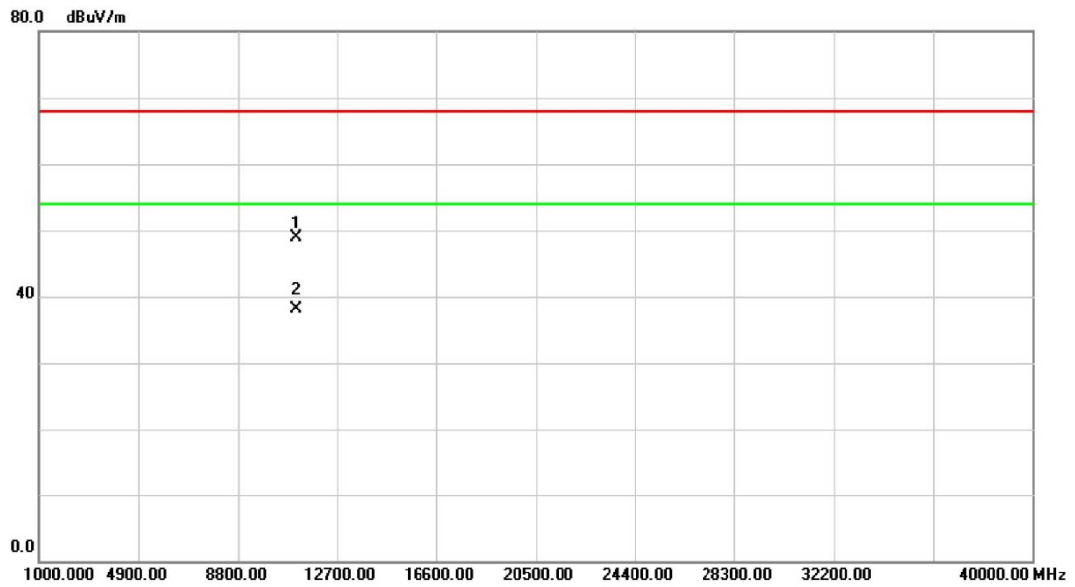

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11100.86	33.29	15.55	48.84	68.00	-19.16	peak	
2	*	11100.96	22.62	15.55	38.17	54.00	-15.83	AVG	

Orthogonal Axis :	X
Test Mode :	Band 3/ TX N40 Mode 5670MHz


Vertical

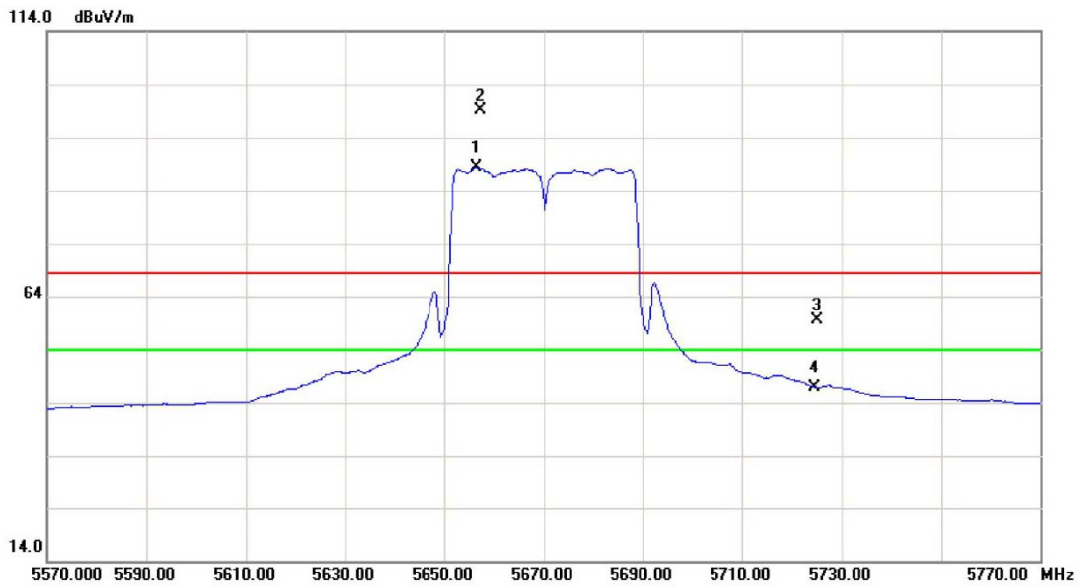

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5656.600	44.05	44.23	88.28	54.00	34.28	AVG	Fundamental frequency, no limit
2	X	5657.400	54.87	44.23	99.10	68.30	30.80	peak	Fundamental frequency, no limit
3		5725.000	14.99	44.58	59.57	68.30	-8.73	peak	
4		5725.000	2.34	44.58	46.92	54.00	-7.08	AVG	

Orthogonal Axis :	X
Test Mode :	Band 3/ TX N40 Mode 5670MHz


Vertical

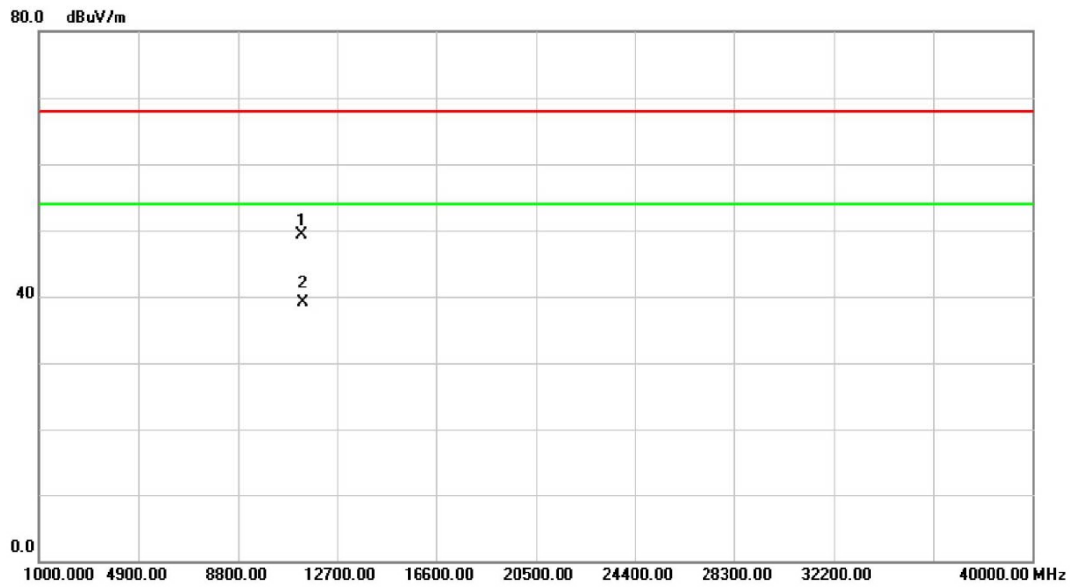

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11340.51	33.10	16.11	49.21	68.00	-18.79	peak	
2	*	11340.86	22.93	16.12	39.05	54.00	-14.95	AVG	

Orthogonal Axis :	X
Test Mode :	Band 3/ TX N40 Mode 5670MHz


Horizontal

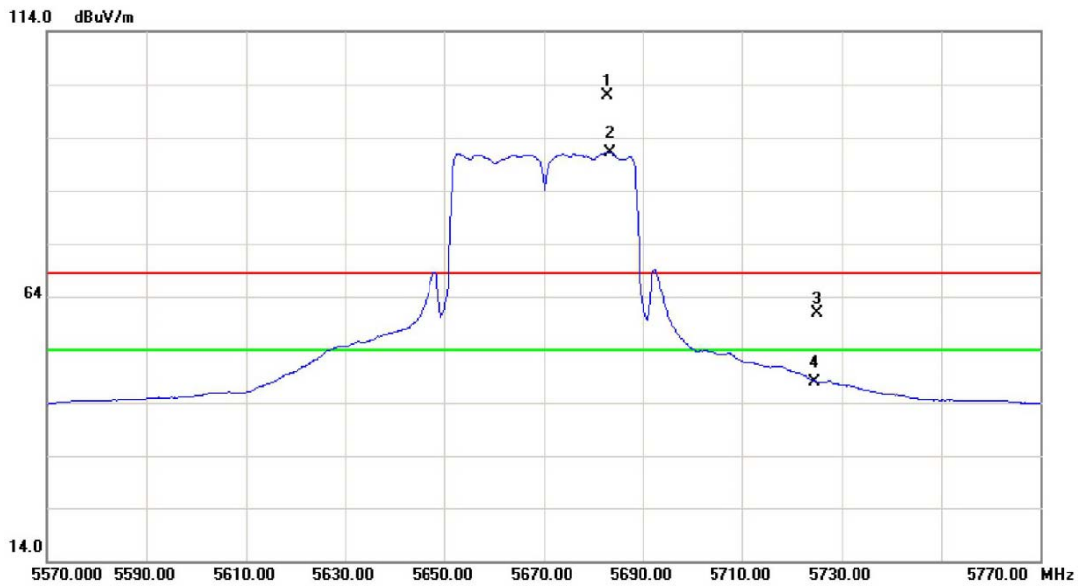

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5682.800	57.53	44.36	101.89	68.30	33.59	peak	Fundamental frequency, no limit
2	*	5683.400	46.76	44.37	91.13	54.00	37.13	AVG	Fundamental frequency, no limit
3		5725.000	16.22	44.58	60.80	68.30	-7.50	peak	
4		5725.000	3.37	44.58	47.95	54.00	-6.05	AVG	

Orthogonal Axis :	X
Test Mode :	Band 3/ TX N40 Mode 5670MHz

Horizontal

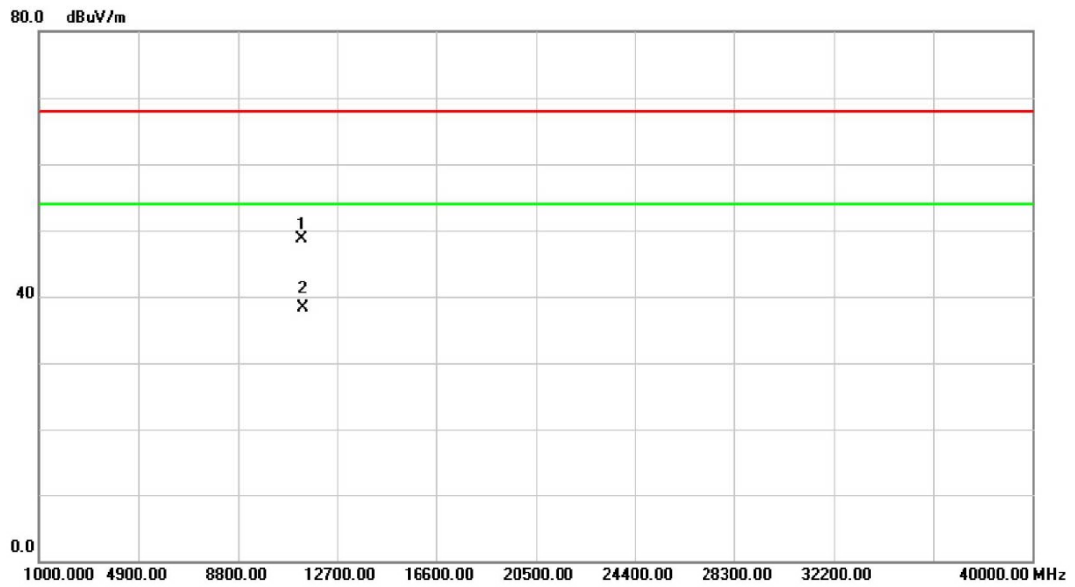


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11339.18	32.56	16.11	48.67	68.00	-19.33	peak	
2	*	11339.86	22.28	16.11	38.39	54.00	-15.61	AVG	

ATTACHMENTE –26DB BANDWIDTH

Test Mode :Band 1/TX A Mode_CH36/CH40/CH48


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH36	5180	20.48	16.75
CH40	5200	20.50	16.63
CH48	5240	20.33	16.75

TX CH36

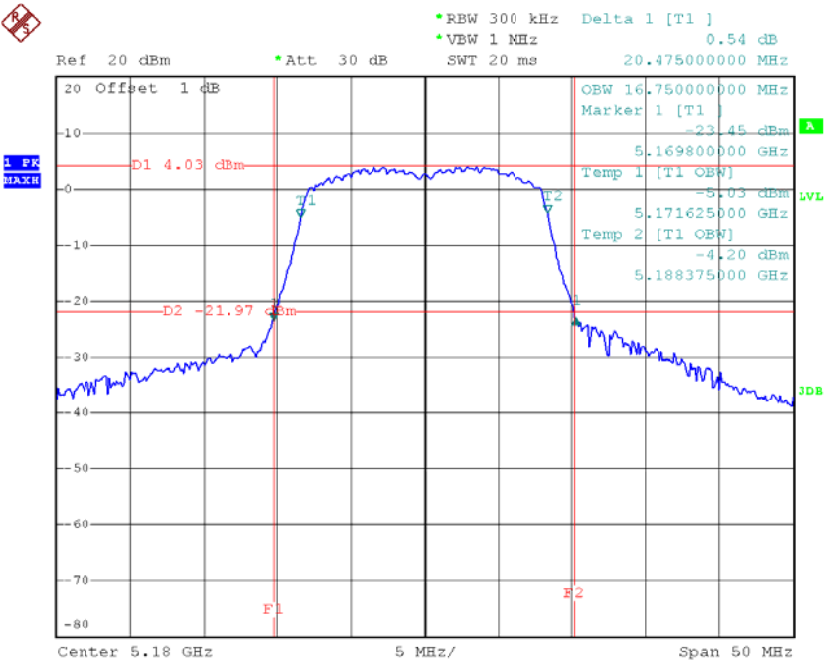


Date: 22.JUL.2014 19:56:44

TX CH40

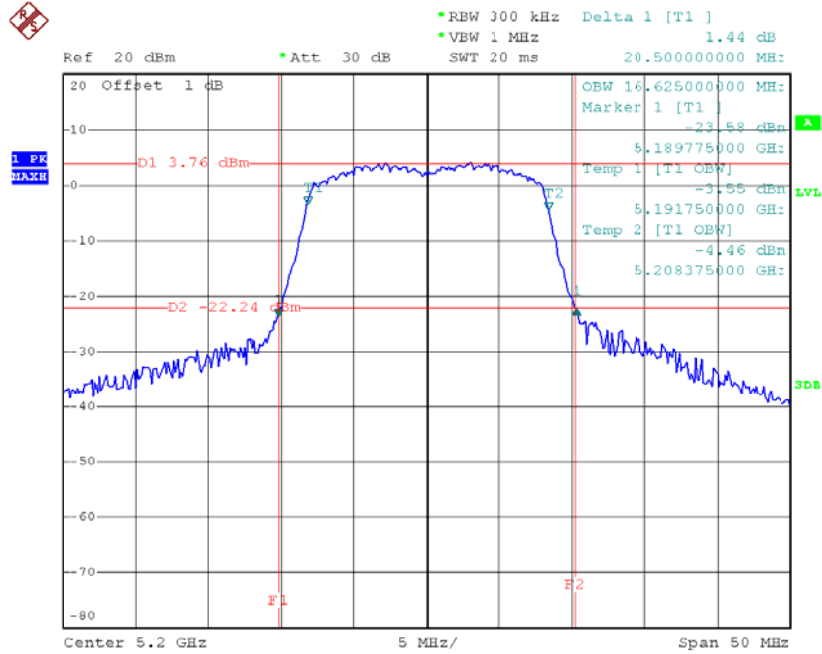

Date: 22.JUL.2014 20:16:48

TX CH48

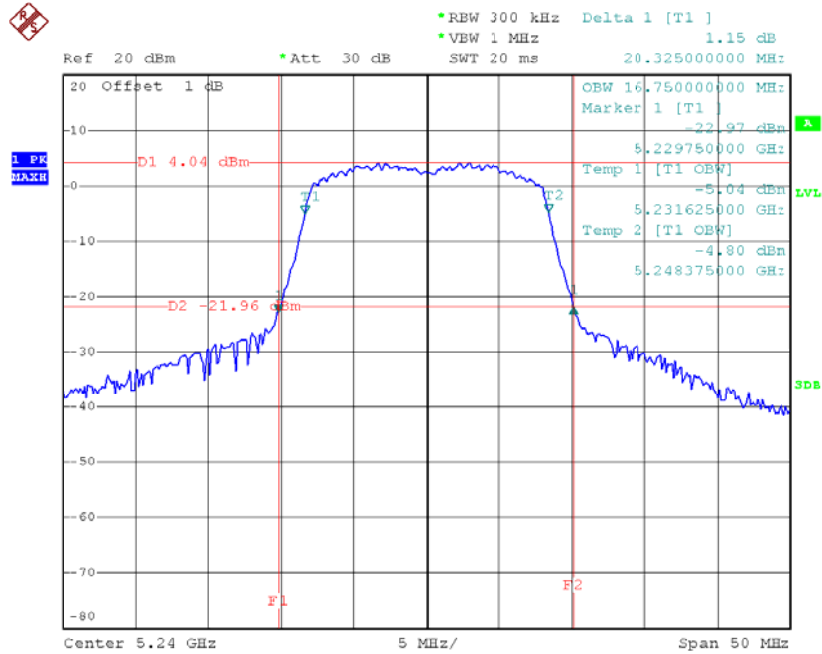


Date: 22.JUL.2014 20:23:16

Test Mode :Band 1/TXN20 Mode_ CH36/CH40/CH48_ANT 1


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH36	5180	21.25	17.63
CH40	5200	20.93	17.63
CH48	5240	21.10	17.63

TX CH36

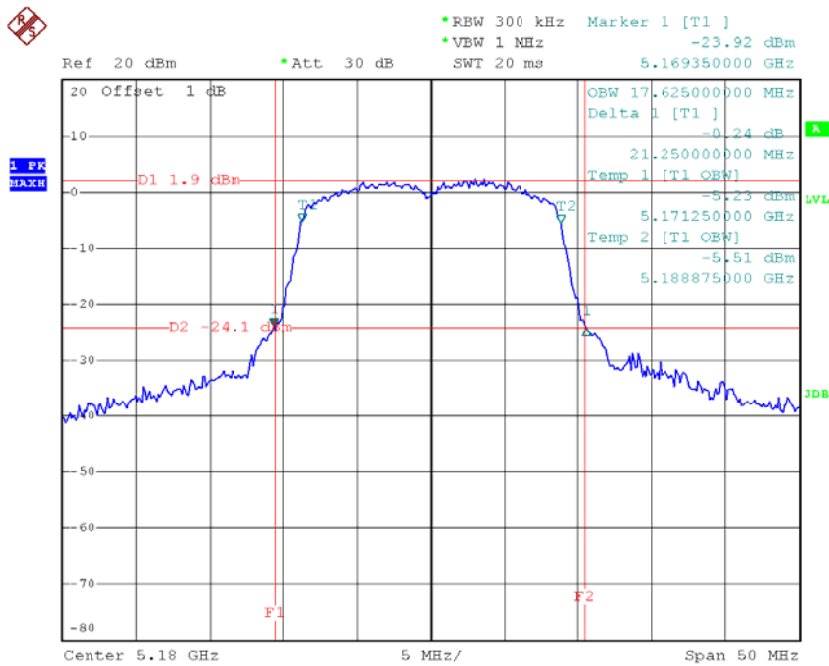


Date: 22.JUL.2014 22:24:01

TX CH40

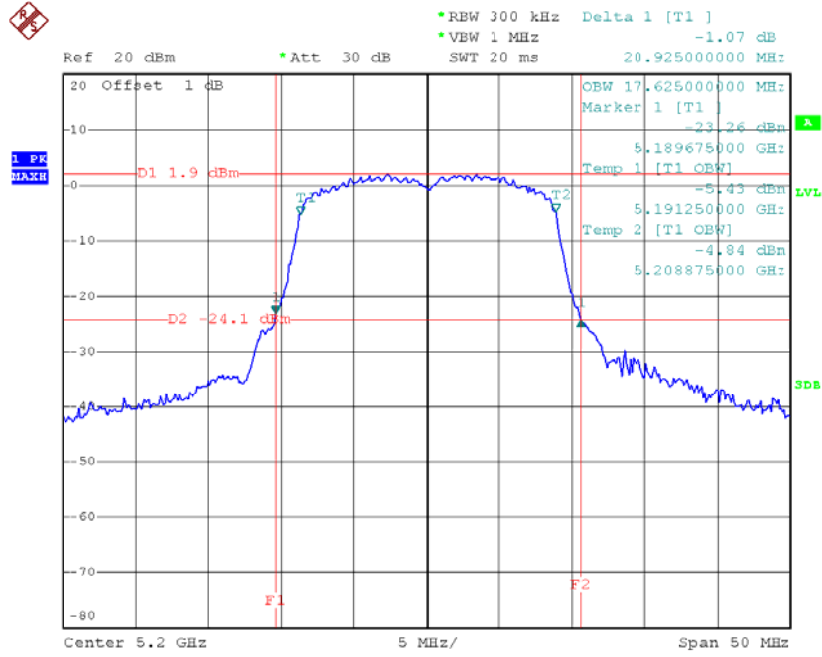

Date: 22.JUL.2014 22:28:57

TX CH48

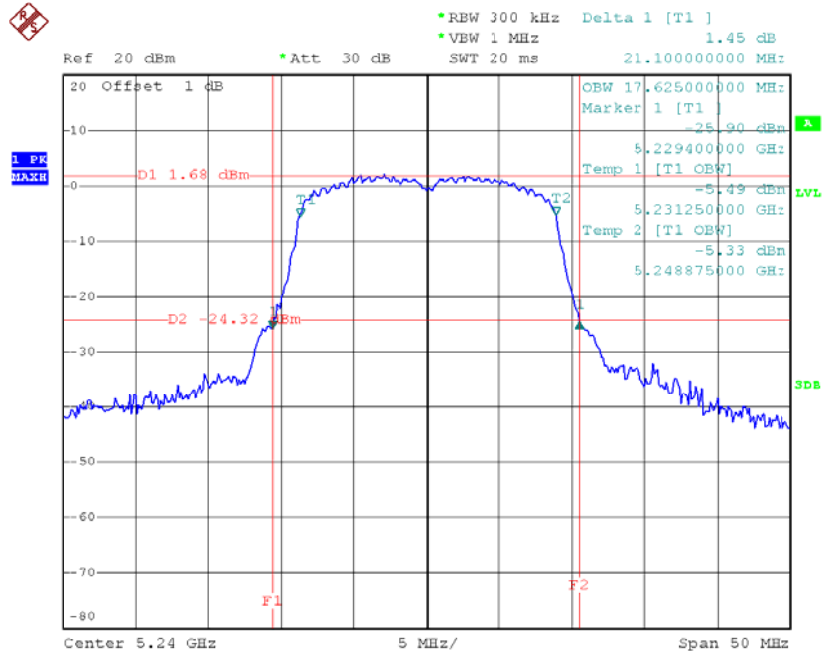


Date: 22.JUL.2014 22:35:51

Test Mode :Band 1/TXN20 Mode_ CH36/CH40/CH48_ANT 2


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH36	5180	21.58	17.63
CH40	5200	21.13	17.63
CH48	5240	21.05	17.63

TX CH36

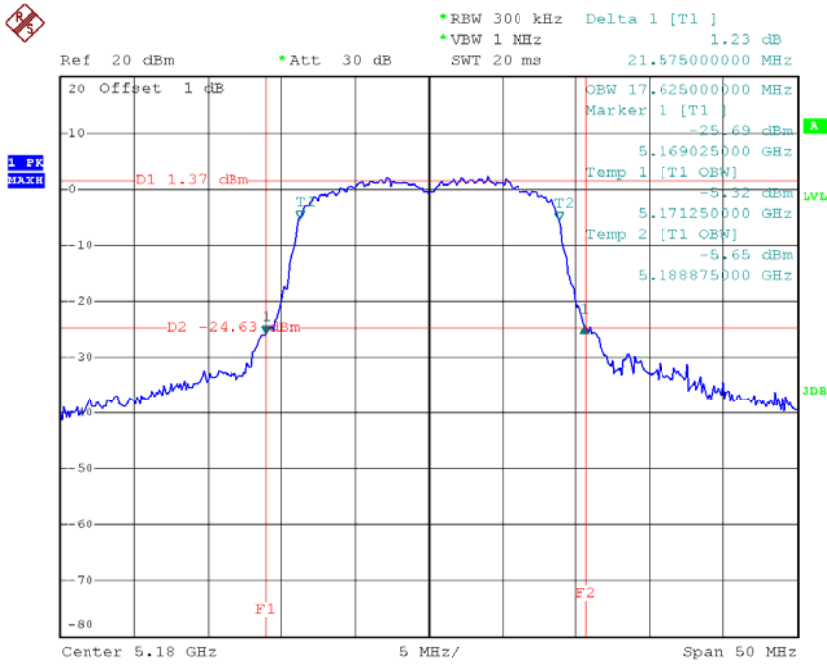


Date: 22.JUL.2014 22:23:20

TX CH40

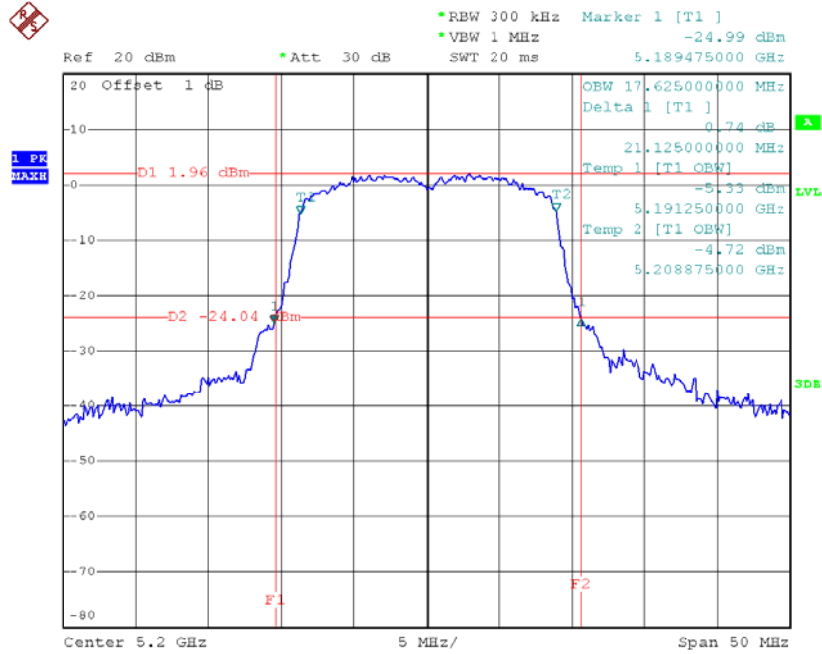

Date: 22.JUL.2014 22:29:47

TX CH48

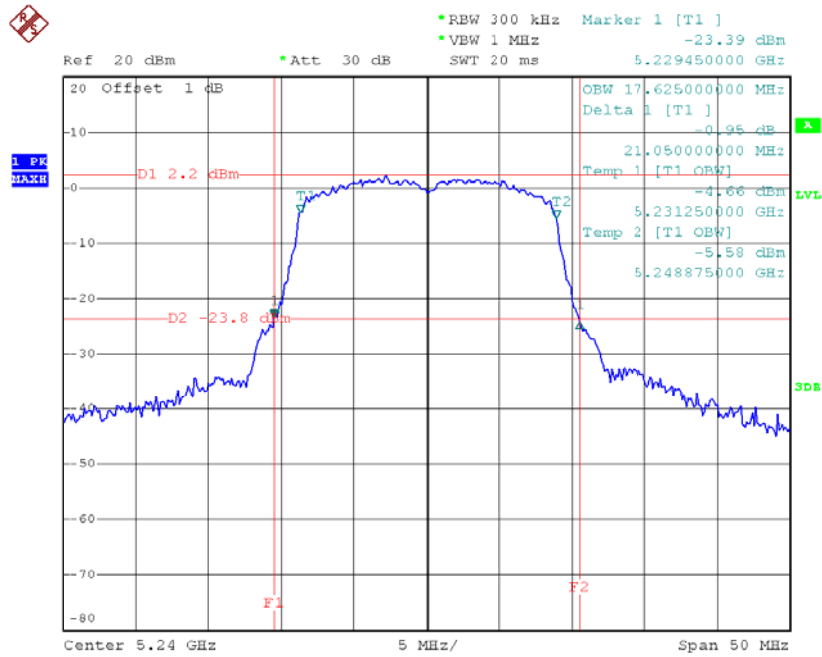


Date: 22.JUL.2014 22:36:42

Test Mode :Band 1/TXN40 Mode_CH38/CH46_ANT 1


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH38	5190	46.40	36.75
CH46	5230	45.95	36.50

TX CH38

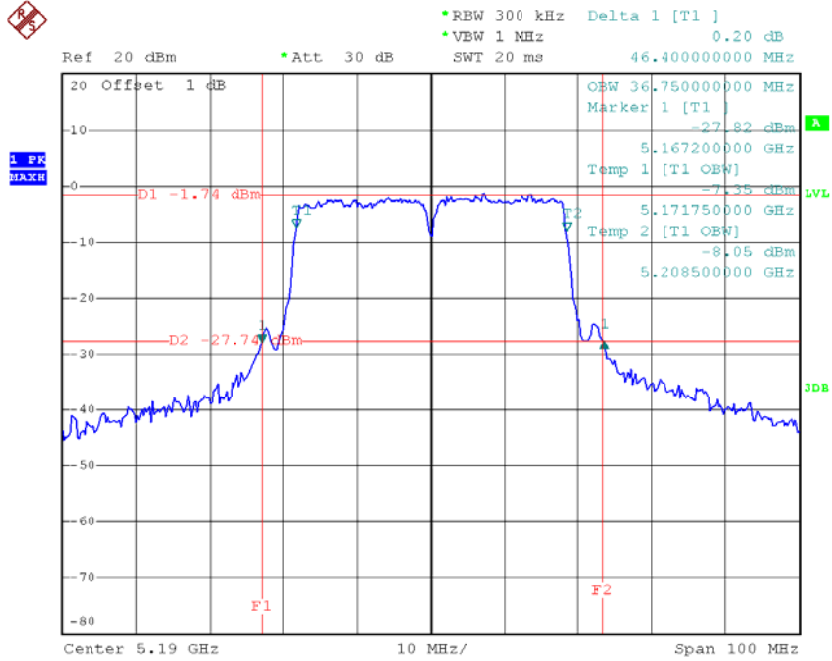

Date: 22.JUL.2014 23:17:30

TX CH46

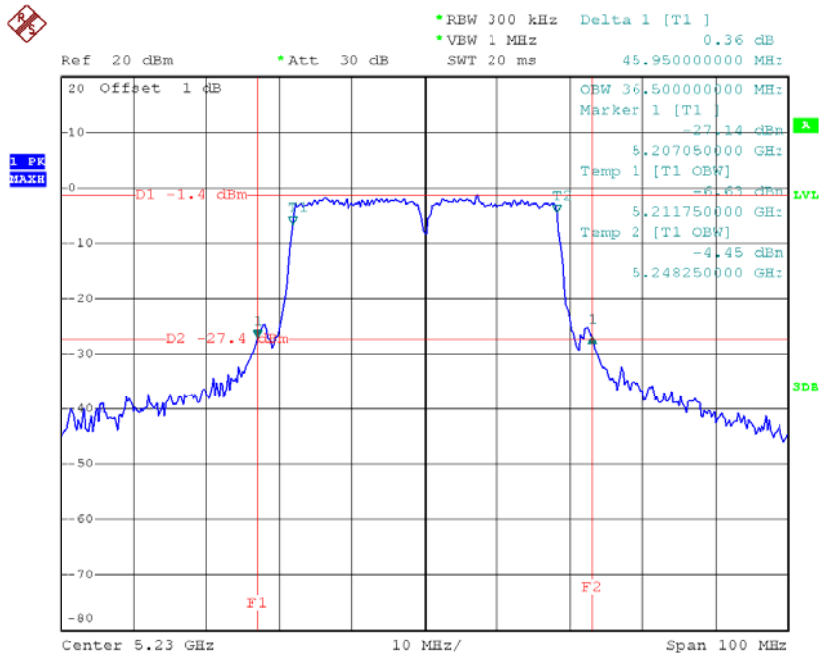


Date: 22.JUL.2014 23:19:32

Test Mode :Band 1/TXN40 Mode_CH38/CH46_ANT 2


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH38	5190	46.40	36.75
CH46	5230	46.25	36.50

TX CH38

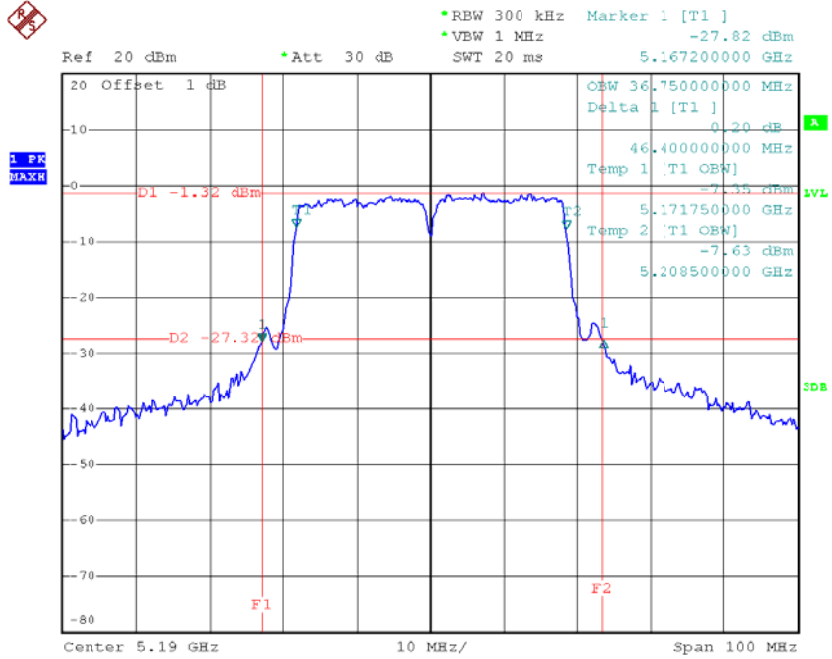

Date: 22.JUL.2014 23:17:55

TX CH46

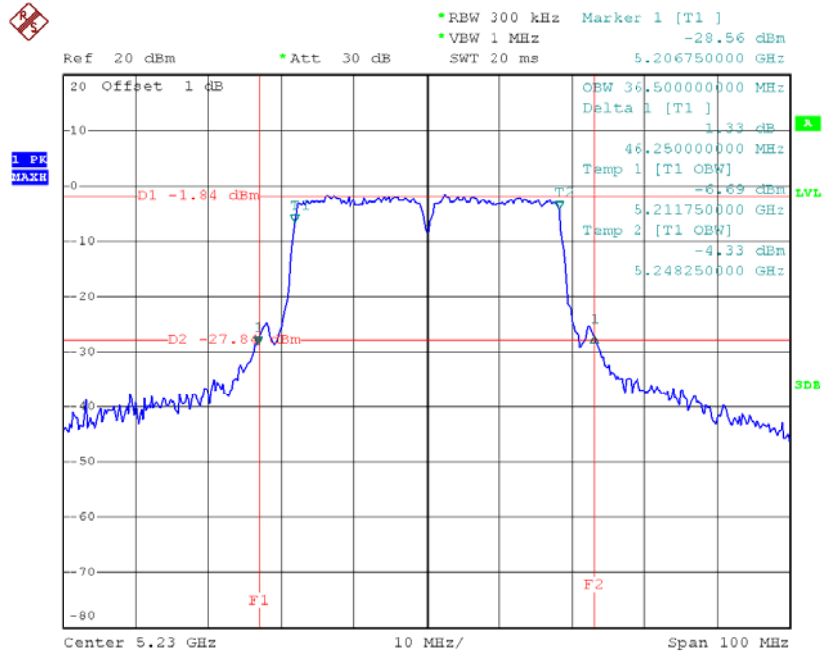


Date: 22.JUL.2014 23:20:17

Test Mode :Band 2/TX A Mode_CH52/CH60/CH64


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH52	5260	20.15	16.75
CH60	5300	20.38	16.50
CH64	5320	20.33	16.75

TX CH52

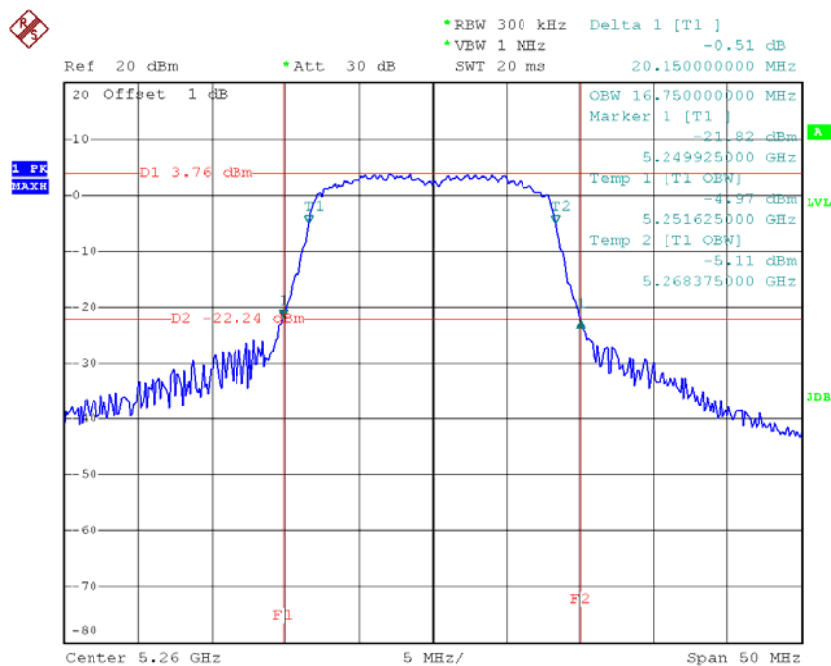


Date: 22.JUL.2014 20:29:33

TX CH60

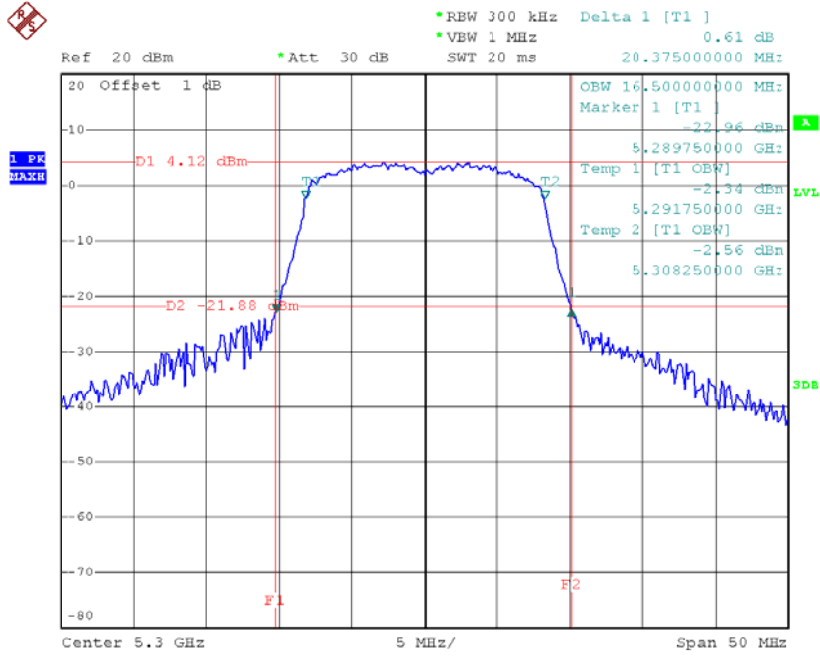

Date: 22.JUL.2014 20:38:25

TX CH64

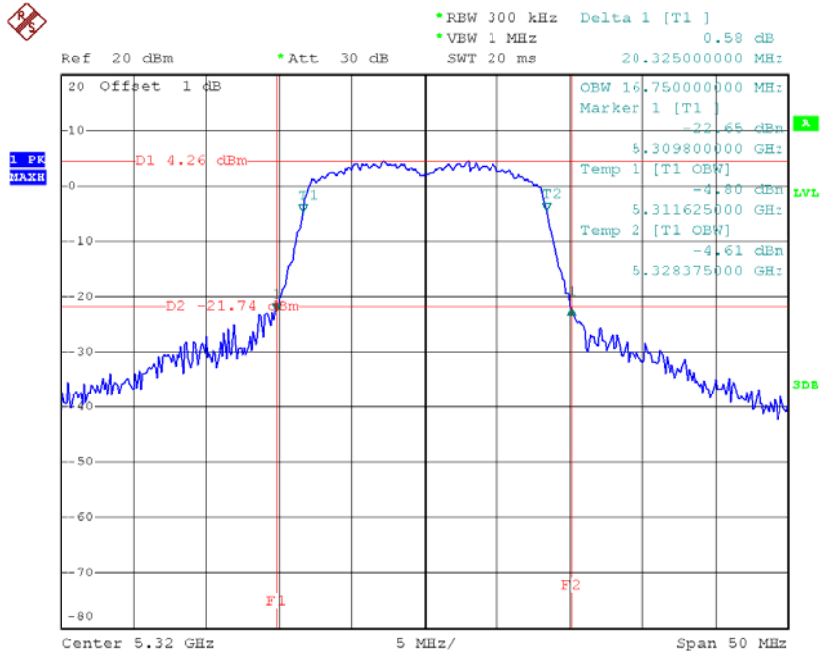


Date: 22.JUL.2014 20:41:02

Test Mode :Band 2/TXN20 Mode_ CH52/CH60/CH64_ANT 1


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH52	5260	20.83	17.63
CH60	5300	21.10	17.63
CH64	5320	20.85	17.63

TX CH52

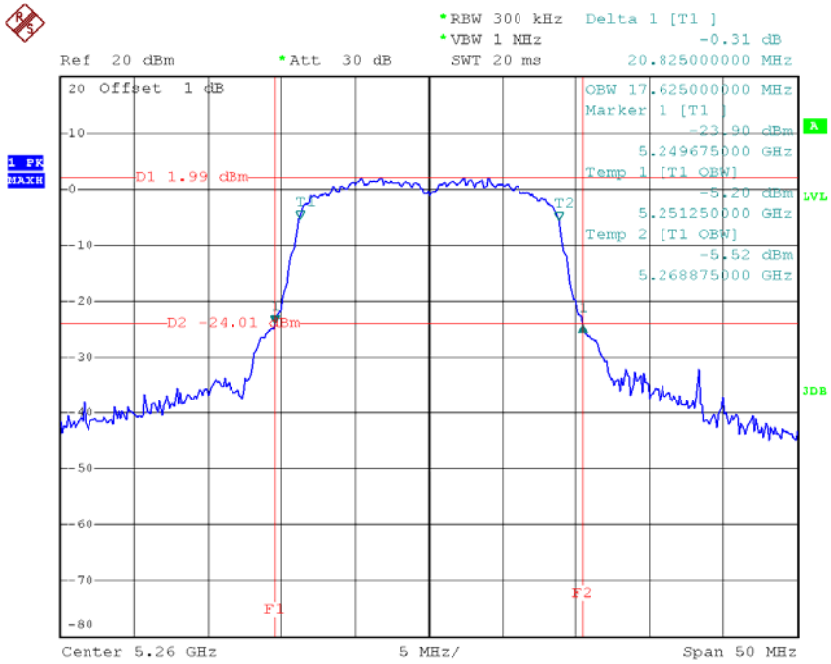


Date: 22.JUL.2014 22:37:51

TX CH60

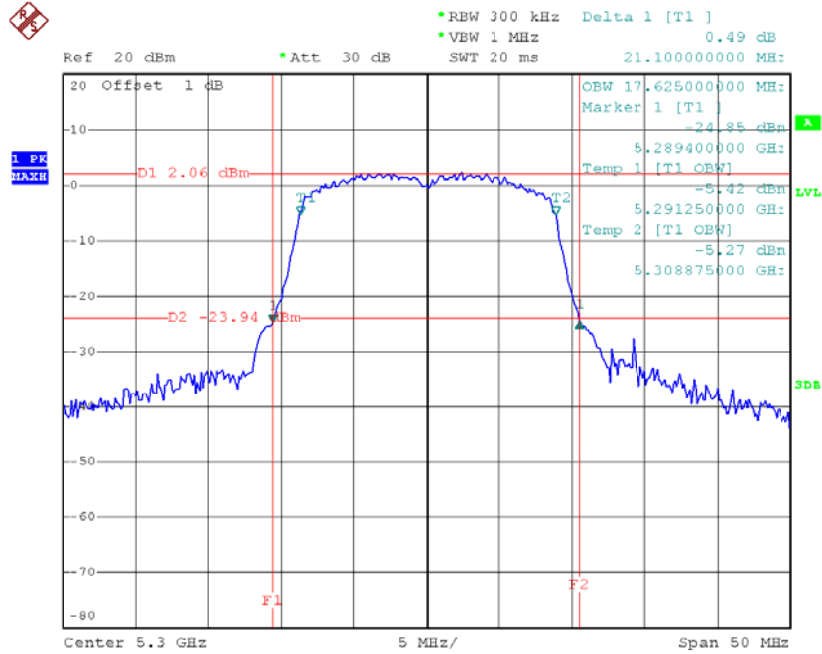

Date: 22.JUL.2014 22:44:49

TX CH64

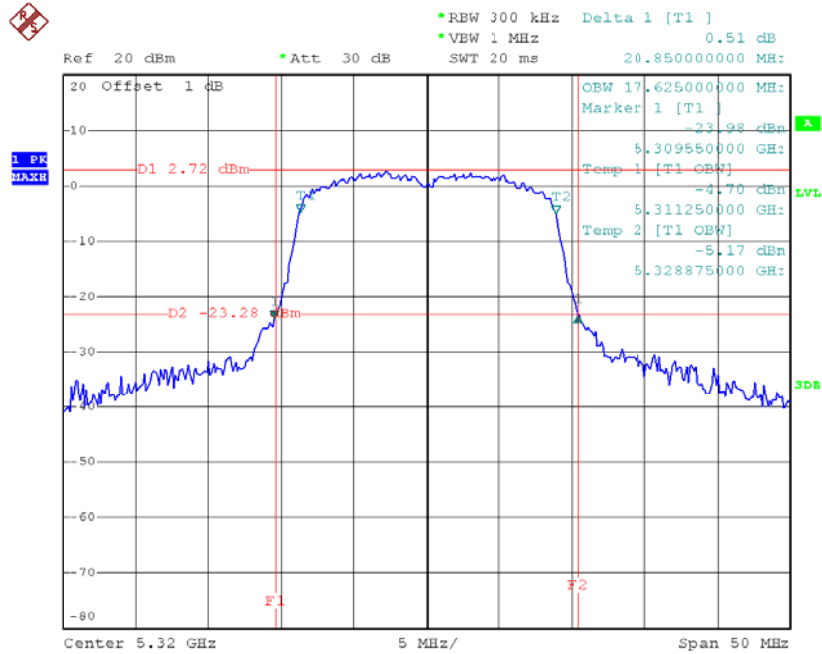


Date: 22.JUL.2014 22:48:06

Test Mode :Band 2/TXN20 Mode_ CH52/CH60/CH64_ANT 2


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH52	5260	21.28	17.63
CH60	5300	20.98	17.63
CH64	5320	20.73	17.60

TX CH52

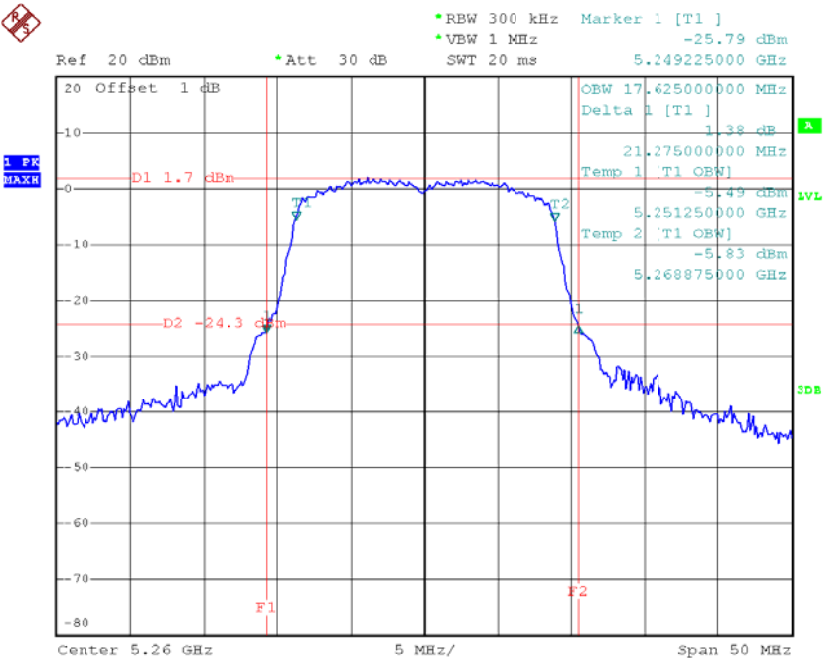


Date: 22.JUL.2014 22:38:37

TX CH60

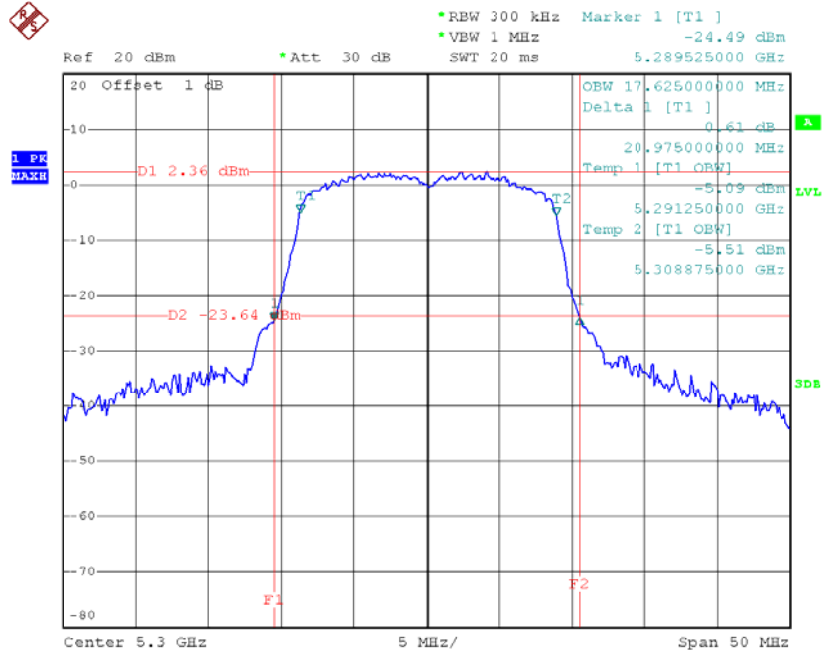

Date: 22.JUL.2014 22:45:38

TX CH64

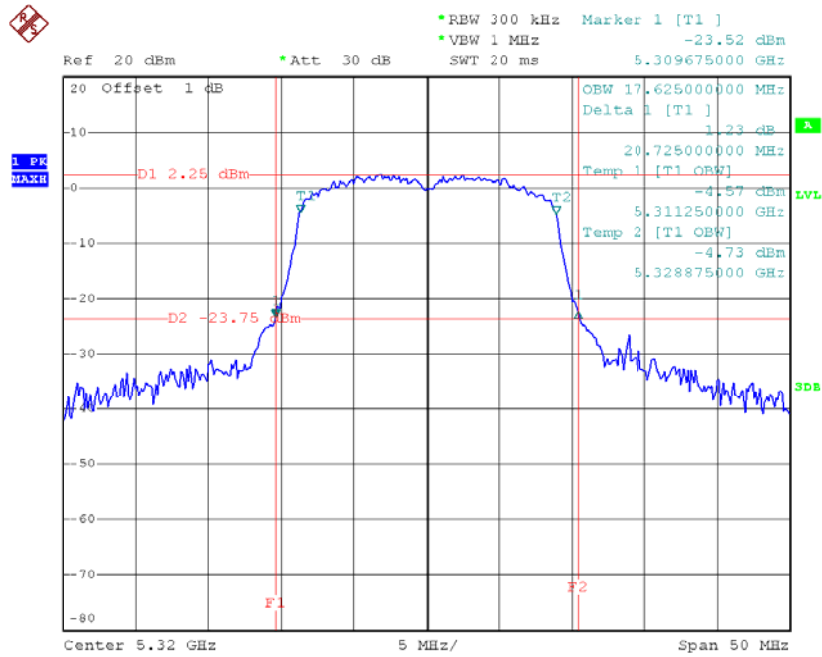


Date: 22.JUL.2014 22:48:40

Test Mode :Band 2/TXN40 Mode_CH54/CH65_ANT 1


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH54	5270	46.10	36.50
CH62	5310	46.30	36.50

TX CH54

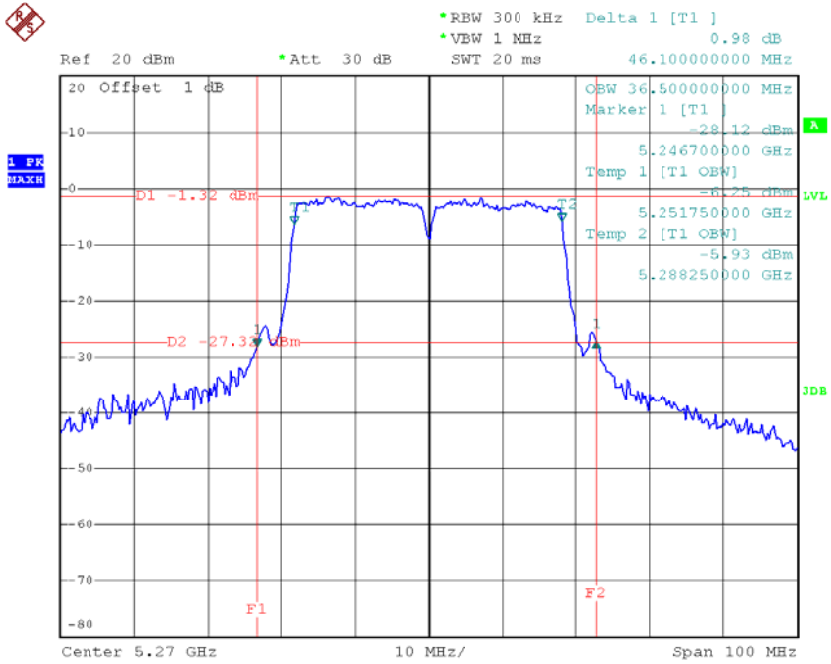


Date: 22.JUL.2014 23:22:57

TX CH62

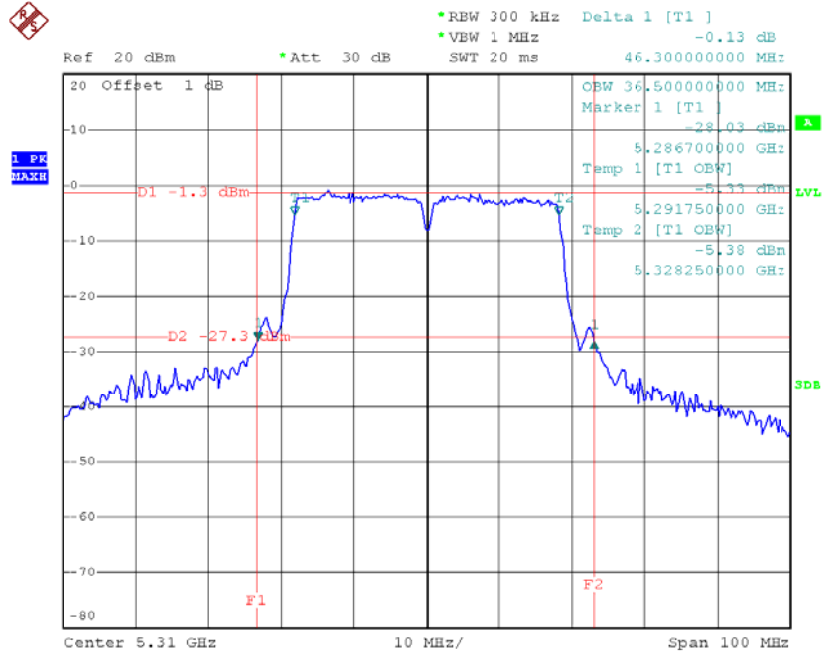

Date: 22.JUL.2014 23:25:21

TX CH62

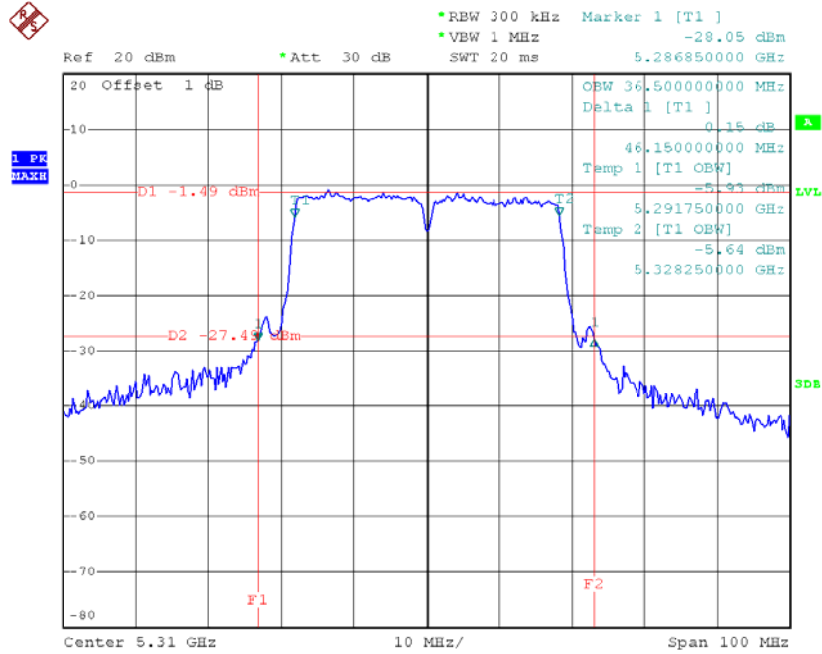


Date: 22.JUL.2014 23:25:58

Test Mode :Band 3/TX A Mode_CH100/CH116/CH140


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH100	5500	20.38	16.75
CH116	5580	20.33	16.75
CH140	5700	20.40	16.75

TX CH100

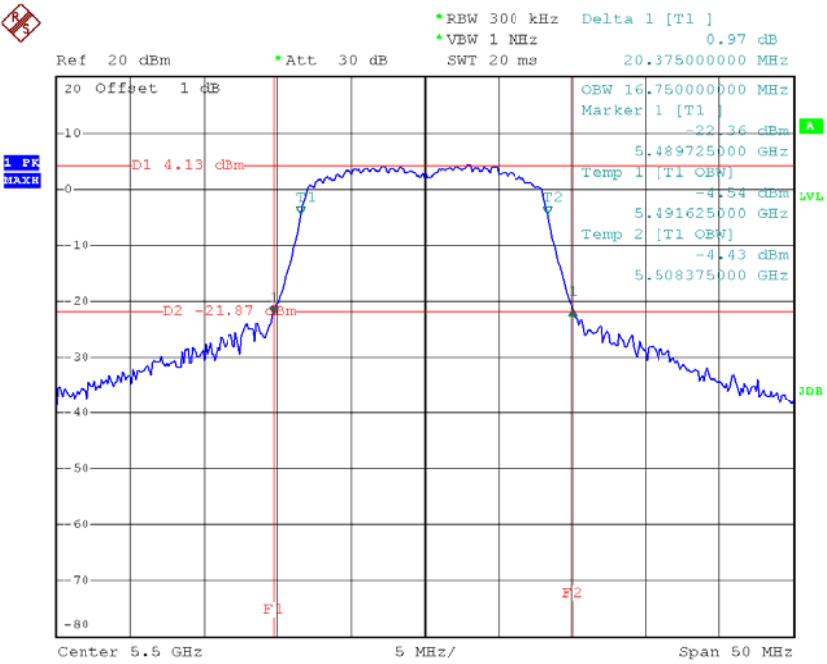


Date: 22.JUL.2014 21:23:01

TX CH116

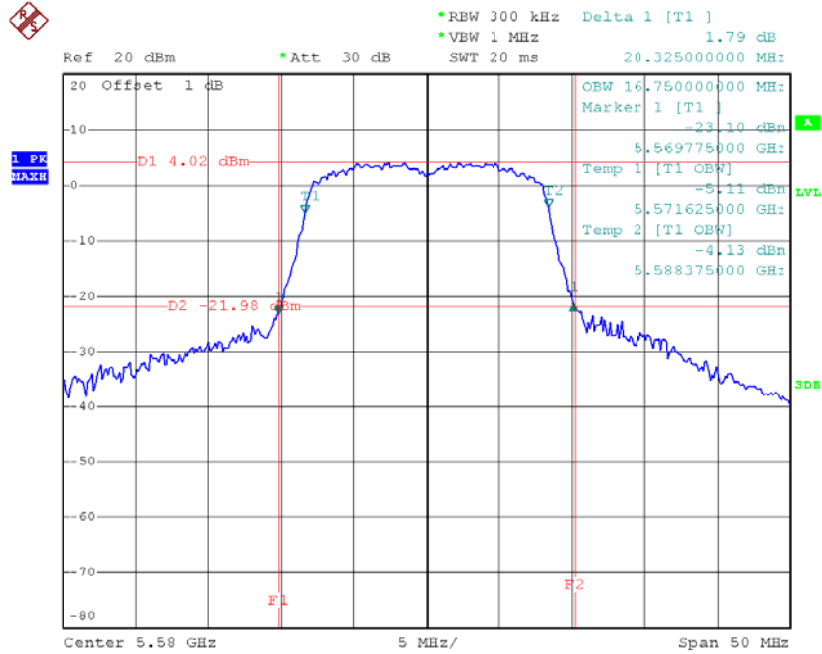

Date: 22.JUL.2014 21:20:06

TX CH140

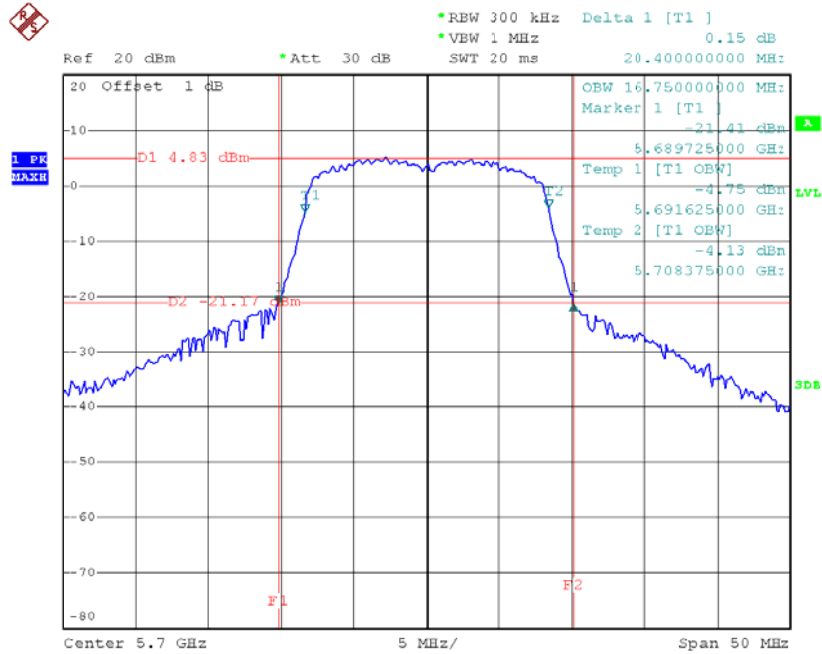


Date: 22.JUL.2014 21:18:11

Test Mode :Band 3/TXN20 Mode_CH100/CH116/CH140_ANT 1


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH100	5500	21.13	17.63
CH116	5580	21.20	17.63
CH140	5700	21.00	17.63

TX CH100

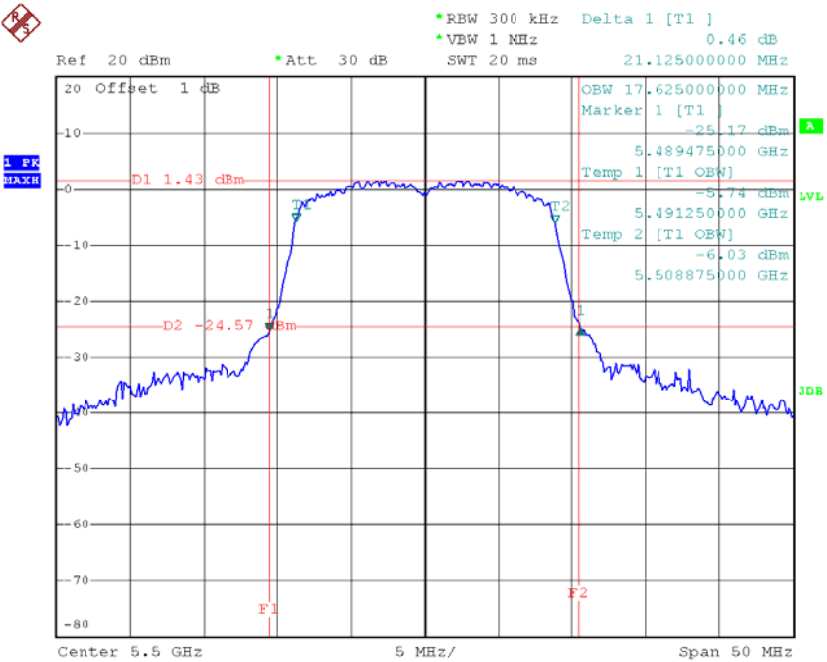


Date: 22.JUL.2014 22:51:34

TX CH116

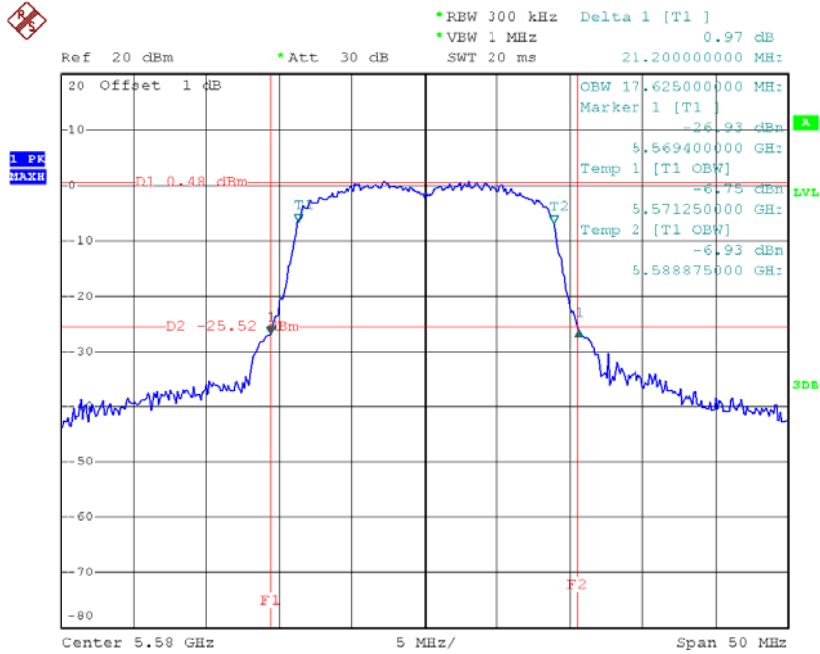

Date: 22.JUL.2014 23:03:36

TX CH140

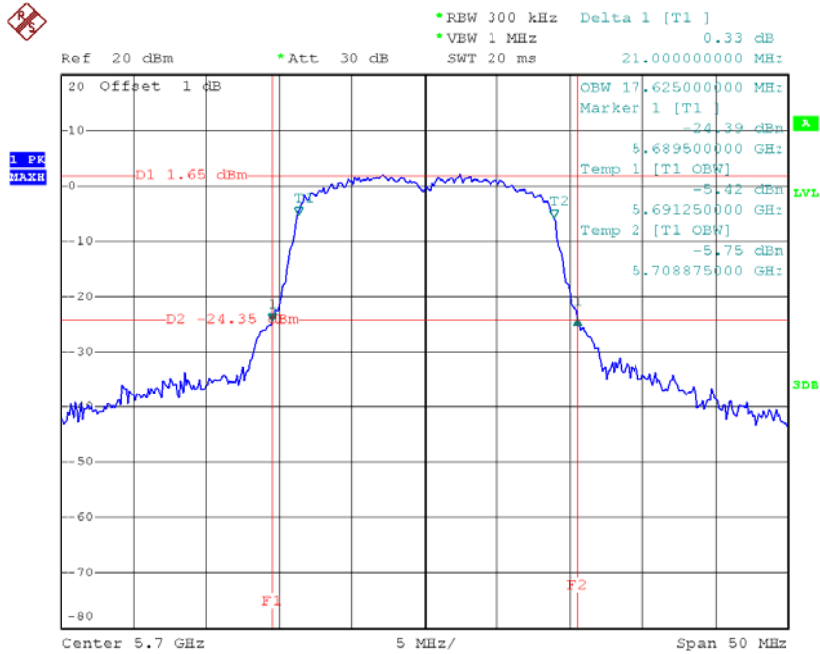


Date: 22.JUL.2014 23:05:52

Test Mode :Band 3/TXN20 Mode_CH100/CH116/CH140_ANT 2

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH100	5500	21.03	17.75
CH116	5580	20.95	17.63
CH140	5700	20.78	17.63

TX CH100

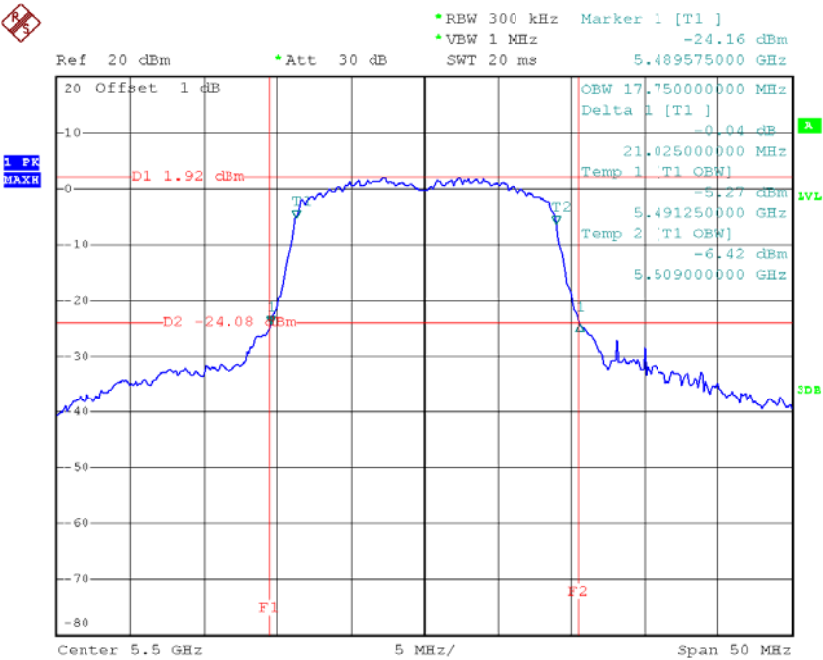

Date: 22.JUL.2014 22:56:38