



**FCC 47 CFR PART 15 SUBPART C: 2008 AND ANSI C63.4: 2003**

**TEST REPORT**

**For**

**11n/a/g/b Wi-Fi USB adapter**

**Model Number: GW-USFang300**

**Brand Name:** 

**Issued for**

**PLANEX Communications Inc.**

2F F NISSAY Ebisu Bldg. 3-16-3 Higashi, Shibuya-ku, Tokyo 150-0011, Japan

**Issued by**

**Compliance Certification Services Inc.**

**Tainan Lab.**

No.8, Jiucengling, Xinhua Dist., Tainan City 712, Taiwan (R.O.C.)

**TEL: 886-6-580-2201**

**FAX: 886-6-580-2202**

**Date of Issue: November 09, 2011**



---

**Note:** This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. Ltd. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document



**REVISION HISTORY**

<b>Rev.</b>	<b>Issue Date</b>	<b>Revisions</b>	<b>Effect Page</b>	<b>Revised By</b>
00	September 02, 2011	Initial Issue	ALL	Sunny Chang
01	October 26, 2011	Update Applicant Address	Page 1; 4	Sunny Chang
02	November 09, 2011	Update test data	Page 1; 2; 53; 96	Sunny Chang



**TABLE OF CONTENTS**

**1. TEST REPORT CERTIFICATION..... 4**

**2. EUT DESCRIPTION..... 5**

**3. DESCRIPTION OF TEST MODES..... 6**

**4. TEST METHODOLOGY..... 7**

**5. FACILITIES AND ACCREDITATIONS..... 7**

    5.1 FACILITIES 7

    5.2 EQUIPMENT 7

    5.3 LABORATORY ACCREDITATIONS LISTINGS 7

    5.4 TABLE OF ACCREDITATIONS AND LISTINGS 8

**6. CALIBRATION AND UNCERTAINTY..... 9**

    6.1 MEASURING INSTRUMENT CALIBRATION 9

    6.2 MEASUREMENT UNCERTAINTY 9

**7. SETUP OF EQUIPMENT UNDER TEST..... 10**

    7.1 SETUP CONFIGURATION OF EUT 10

    7.2 SUPPORT EQUIPMENT 10

    7.3 EUT OPERATING CONDITION 11

**8. APPLICABLE LIMITS AND TEST RESULTS..... 12**

    8.1 6DB BANDWIDTH 12

    8.2 MAXIMUM PEAK OUTPUT POWER 27

    8.3 POWER SPECTRAL DENSITY 31

    8.4 CONDUCTED SPURIOUS EMISSION 50

    8.5 RADIATED EMISSIONS 79

    8.6 POWERLINE CONDUCTED EMISSIONS 113

**9. ANTENNA REQUIREMENT..... 117**

    9.1 STANDARD APPLICABLE 117

    9.2 ANTENNA CONNECTED CONSTRUCTION 117

**APPENDIX SETUP PHOTOS..... 118**

**APPENDIX II PHOTOGRAPHS OF EUT.....A1**



### 1. TEST REPORT CERTIFICATION

**Applicant** : PLANEX Communications Inc.

**Address** : 2F F NISSAY Ebisu Bldg. 3-16-3 Higashi, Shibuya-ku, Tokyo 150-0011, Japan

**Manufacture** : Amigo Technology Inc.

**Address** : 5F, No. 63, Ln. 77, Xing'ai Rd., NeiHu Dist., 114, Taipei, Taiwan

**Equipment Under Test** : WiFi Broadband Router

**Model Number** : GW-USFang300

**Brand Name** : 

**Date of Test** : August 02, 2011 ~ August 23, 2011

APPLICABLE STANDARD	
STANDARD	TEST RESULT
FCC Part 15 Subpart C : 2008 AND ANSI C63.4 : 2003	No non-compliance noted

Approved by:


**Jeter Wu**  
Assistant Manager

Reviewed by:

**Eric Huang**  
Assistant Section Manager



## 2. EUT DESCRIPTION

<b>Product Name</b>	11n/a/g/b Wi-Fi USB adapter
<b>Model Number</b>	GW-USFang300
<b>Brand Name</b>	
<b>Received Date</b>	July 29, 2011
<b>Frequency Range</b>	IEEE 802.11b/g, 802.11n HT20 (DTS Band):2412MHz ~ 2462MHz IEEE 802.11n HT40 (DTS Band):2422MHz ~ 2452MHz
<b>Transmit Power</b>	IEEE 802.11b Mode : 17.05dBm (DTS Band) (50.69911mW) IEEE 802.11g Mode : 22.22dBm (DTS Band) (166.7247mW) IEEE 802.11n HT20 Mode : 23.65dBm (DTS Band) (231.7995mW) IEEE 802.11n HT40 Mode : 21.73dBm (DTS Band) (149.0660mW)
<b>Channel Spacing</b>	IEEE 802.11b/g, 802.11n HT20/HT40: 5MHz
<b>Channel Number</b>	IEEE 802.11b/g, 802.11n HT20:11 Channels IEEE 802.11n HT40 :7 Channels
<b>Transmit Data Rate</b>	IEEE 802.11b : 11, 5.5, 2, 1 Mbps
	IEEE 802.11g : 54, 48, 36, 24, 18, 12, 9, 6 Mbps
	IEEE 802.11n HT20 : 144.4, 130, 115.6, 86.7, 57.8, 43.3, 28.9, 14.4, 72.2, 65, 21.7, 13, 7.2 Mbps
	IEEE 802.11n HT40 :300, 270, 240, 180, 120, 90, 60, 30, 150, 135, 45, 27, 15 Mbps
<b>Type of Modulation</b>	IEEE 802.11b : DSSS (CCK, DQPSK, DBPSK)
	IEEE 802.11g : OFDM (64QAM, 16QAM, QPSK, BPSK)
	IEEE 802.11n HT20/40 : OFDM (64QAM, 16QAM, QPSK, BPSK)
<b>Frequency Selection</b>	By software / firmware
<b>Antenna Type</b>	<b>Two Antenna (2TX2RX)</b> Type: Omni Antenna Model: AN-152RRSU00 Antenna Gain: 3dBi Connector: Reverse SMA PLUG Manufacture: Yong-Shun Technology Co., Ltd XinXie Technology(SHENZHEN) co,Ltd.
<b>Power Source</b>	5Vdc
<b>Temperature Range</b>	0 ~ +55°C

**REMARK:**

1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.
2. This submittal(s) (test report) is intended for FCC ID: **SJ9GW-USFANG300** filing to comply with Section 15.207,15.209 and 15.247 of the FCC Part 15, Subpart C Rules.
3. For more details, please refer to the User's manual of the EUT.



### 3. DESCRIPTION OF TEST MODES

The EUT is a **Wireless USB Dongle**. It has two transmitter chains and two receive chains (2x2 configurations). The 2x2 configuration is implemented with two outside chains (Chain 0 and Chain 1).

The RF chipset is manufactured by Realtek Technology, Corp.

The antenna peak gain 3 dBi (highest gain) were chosen for full testing.

#### IEEE 802.11 b ,802.11g ,802.11n HT20 mode (DTS Band)

The EUT had been tested under operating condition.

There are three channels have been tested as following:

Channel	Frequency (MHz)
Low	2412
Middle	2437
High	2462

IEEE 802.11b mode: 1Mbps long data rate (worst case) were chosen for full testing.

IEEE 802.11g mode: 6Mbps data rate (worst case) were chosen for full testing.

IEEE 802.11n HT20 mode: 13Mbps data rate (worst case) were chosen for full testing.

#### IEEE 802.11n HT40 mode (DTS Band)

The EUT had been tested under operating condition.

There are three channels have been tested as following:

Channel	Frequency (MHz)
Low	2422
Middle	2437
High	2452

IEEE 802.11n HT40 mode: 27Mbps data rate (worst case) were chosen for full testing.

The worst-case data rates are determined according to the description above, based on the investigations by measuring the PSD, peak power and average power across all the data rates, bandwidths, modulations and spatial stream modes.

The worst-case channel is determined as the channel with the highest output power. The highest measured output power was at 2452 MHz.



## **4. TEST METHODOLOGY**

The tests documented in this report were performed in accordance with ANSI C63.4 and FCC CFR 47 2.1046, 2046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057, 15.207, 15.209 and 15.247.

## **5. FACILITIES AND ACCREDITATIONS**

### **5.1 FACILITIES**

All measurement facilities used to collect the measurement data are located at No.8, Jiucengling, Xinhua Dist., Tainan City 712, Taiwan (R.O.C.)

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

### **5.2 EQUIPMENT**

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with preselectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

### **5.3 LABORATORY ACCREDITATIONS LISTINGS**

The test facilities used to perform radiated and conducted emissions tests are accredited by Taiwan Accreditation Foundation for the specific scope of accreditation under Lab Code: 1109 to perform Electromagnetic Interference tests according to FCC PART 15 AND CISPR 22 requirements. No part of this report may be used to claim or imply product endorsement by TAF or any agency of the Government. In addition, the test facilities are listed with Federal Communications Commission (registration no: TW-1037 ).



## 5.4 TABLE OF ACCREDITATIONS AND LISTINGS

Our laboratories are accredited and approved by the following accreditation body according to ISO/IEC 17025.

<b>Taiwan</b>	TAF
---------------	-----

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

<b>Canada</b>	Industry Canada
<b>Germany</b>	TUV NORD
<b>Taiwan</b>	BSMI
<b>USA</b>	FCC

Copies of granted accreditation certificates are available for downloading from our web site, <http://www.ccsrf.com>





## **6. CALIBRATION AND UNCERTAINTY**

### **6.1 MEASURING INSTRUMENT CALIBRATION**

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### **6.2 MEASUREMENT UNCERTAINTY**

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

<b>PARAMETER</b>	<b>UNCERTAINTY</b>
Radiated Emission, 30 to 200 MHz Test Site : OATS-6	±3.59dB
Radiated Emission, 200 to 1000 MHz Test Site : OATS-6	±3.27dB
Radiated Emission, 1 to 26.5 GHz	± 3.20dB
Power Line Conducted Emission	± 2.90dB


Uncertainty figures are valid to a confidence level of 95%, K=2



## 7. SETUP OF EQUIPMENT UNDER TEST

### 7.1 SETUP CONFIGURATION OF EUT

For RF test & EMI test

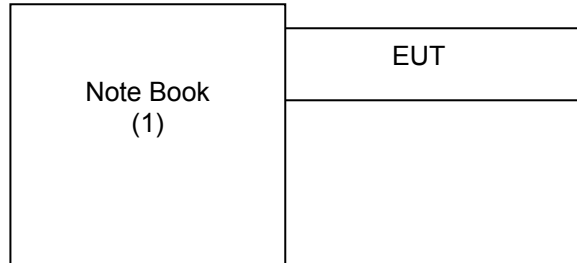

### 7.2 SUPPORT EQUIPMENT

RF & EMI test

No.	Product	Manufacturer	Model No.	Certify No.	Signal cable
1.	Note Book	IBM	T43	DoC	Power cable, unshd, 1.6m

No.	Signal cable description	
A	N/A	---

**REMARK:**

1. All the above equipment/cables were placed in worse case positions to maximize emission signals during emission test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.



### 7.3 EUT OPERATING CONDITION

#### RF Setup

1. Set up all computers like the setup diagram.
2. The “Realtek 11n Dual MAC 92D USB WLAN MP Diagnostic Program” software was used for testing
3. MAC , select [DMSP] from the command list.
4. Setting , Testing item select [Continuous Tx] from the command list.
5. Setting , Modulation select [Continuous Tx] from the command list.

#### **TX Mode:**

- ⇒ **Tx Mode:CCK 、 OFDM、 HT MixMode** (Bandwidth: 20、 40)
- ⇒ **Tx Data Rate: 1Mbps long** (IEEE 802.11b mode , TX)
  - 6Mbps** (IEEE 802.11g mode , TX)
  - 13Mbps** (IEEE 802.11n HT20 mode ,chain 0, chain 1 TX)
  - 27Mbps** (IEEE 802.11n HT40 mode, chain 0, chain 1 TX)

#### **Power control mode**

- Target Power:** IEEE 802.11b Channel Low (2412MHz) = **44 (Chain 0)**
  - IEEE 802.11b Channel Middle (2437MHz) = **44 (Chain 0)**
  - IEEE 802.11b Channel High (2462MHz) = **44 (Chain 0)**
- Target Power:** IEEE 802.11g Channel Low (2412MHz) = **48 (Chain 0)**
  - IEEE 802.11g Channel Middle (2437MHz) = **48 (Chain 0)**
  - IEEE 802.11g Channel High (2462MHz) = **48 (Chain 0)**
- Target Power:** IEEE 802.11n HT20 Channel Low (2412MHz) = **46 (Chain 0)**
  - IEEE 802.11 n HT20 Channel Middle (2437MHz) = **46 (Chain 0)**
  - IEEE 802.11 n HT20 Channel High (2462MHz) = **46 (Chain 0)**
  - IEEE 802.11n HT20 Channel Low (2412MHz) = **46 (Chain 1)**
  - IEEE 802.11 n HT20 Channel Middle (2437MHz) = **46 (Chain 1)**
  - IEEE 802.11 n HT20 Channel High (2462MHz) = **46 (Chain 1)**
- Target Power:** IEEE 802.11n HT40 Channel Low (2422MHz) = **44 (Chain 0)**
  - IEEE 802.11 n HT40 Channel Middle (2437MHz) = **44 (Chain 0)**
  - IEEE 802.11 n HT40 Channel High (2452MHz) = **44 (Chain 0)**
  - IEEE 802.11n HT40 Channel Low (2422MHz) = **44 (Chain 1)**
  - IEEE 802.11 n HT40 Channel Middle (2437MHz) = **44 (Chain 1)**
  - IEEE 802.11 n HT40 Channel High (2452MHz) = **44 (Chain 1)**

#### (2) **RX Mode :**

##### **Start RX**

3. All of the function are under run.
4. Start test.

#### **Normal Link Setup**

1. Set up all computers like the setup diagram.
2. All of the function are under run.
3. Notebook PC (2) ping 192.168.0.10 -t to Notebook PC (1).
4. Notebook PC (1) ping 192.168.0.20 -t to Notebook PC (2).
5. Notebook PC (1) ping 192.168.0.50 -t to Wireless Access Point (3).

Start test.



## 8. APPLICABLE LIMITS AND TEST RESULTS

### 8.1 6DB BANDWIDTH

#### LIMIT

§ 15.247(a) (2) For direct sequence systems, the minimum 6dB bandwidth shall be at least 500kHz

#### TEST EQUIPMENTS

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	R&S	FSEK 30	835253/002	JUL. 14, 2012

#### TEST SETUP



#### TEST PROCEDURE

The transmitter output was connected to a spectrum analyzer. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 KHz RBW and 100 KHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.



**TEST RESULTS**

No non-compliance noted.

**IEEE 802.11b mode (Two TX)**

Channel	Channel Frequency (MHz)	6dB Bandwidth (kHz)	Minimum Limit (kHz)	Pass / Fail
Low	2412	10321	500	PASS
Middle	2437	10321	500	PASS
High	2462	10321	500	PASS

**NOTE :**

1. At final test to get the worst-case emission at 1Mbps long.
2. The cable assembly insertion loss of 11.7dB (including 10 dB pad and 1.7 dB cable) was entered as an offset in the spectrum analyzer to allow for direct reading of power.

**IEEE 802.11g mode (Two TX)**

Channel	Channel Frequency (MHz)	6dB Bandwidth (kHz)	Minimum Limit (kHz)	Pass / Fail
Low	2412	16733	500	PASS
Middle	2437	16733	500	PASS
High	2462	16733	500	PASS

**NOTE :**

1. At final test to get the worst-case emission at 6Mbps.
2. The cable assembly insertion loss of 11.7dB (including 10 dB pad and 1.7 dB cable) was entered as an offset in the spectrum analyzer to allow for direct reading of power.



IEEE 802.11n HT20 mode (Two TX)

Channel	Channel Frequency (MHz)	6dB Bandwidth (kHz)		Minimum Limit (kHz)	Pass / Fail
		Chain 0	Chain1		
Low	2412	17936	17836	500	PASS
Middle	2437	17936	17836	500	PASS
High	2462	17936	17836	500	PASS

**NOTE :**

1. At final test to get the worst-case emission at 13Mbps.
2. The cable assembly insertion loss of 11.7dB (including 10 dB pad and 1.7 dB cable) was entered as an offset in the spectrum analyzer to allow for direct reading of power.

IEEE 802.11n HT40 mode (Two TX)



Channel	Channel Frequency (MHz)	6dB Bandwidth (kHz)		Minimum Limit (kHz)	Pass / Fail
		Chain 0	Chain1		
Low	2422	36673	36673	500	PASS
Middle	2437	36673	36673	500	PASS
High	2452	36673	36673	500	PASS


**NOTE :**

1. At final test to get the worst-case emission at 27Mbps.
2. The cable assembly insertion loss of 11.7dB (including 10 dB pad and 1.7 dB cable) was entered as an offset in the spectrum analyzer to allow for direct reading of power.



**6dB BANDWIDTH ( 802.11b MODE)**

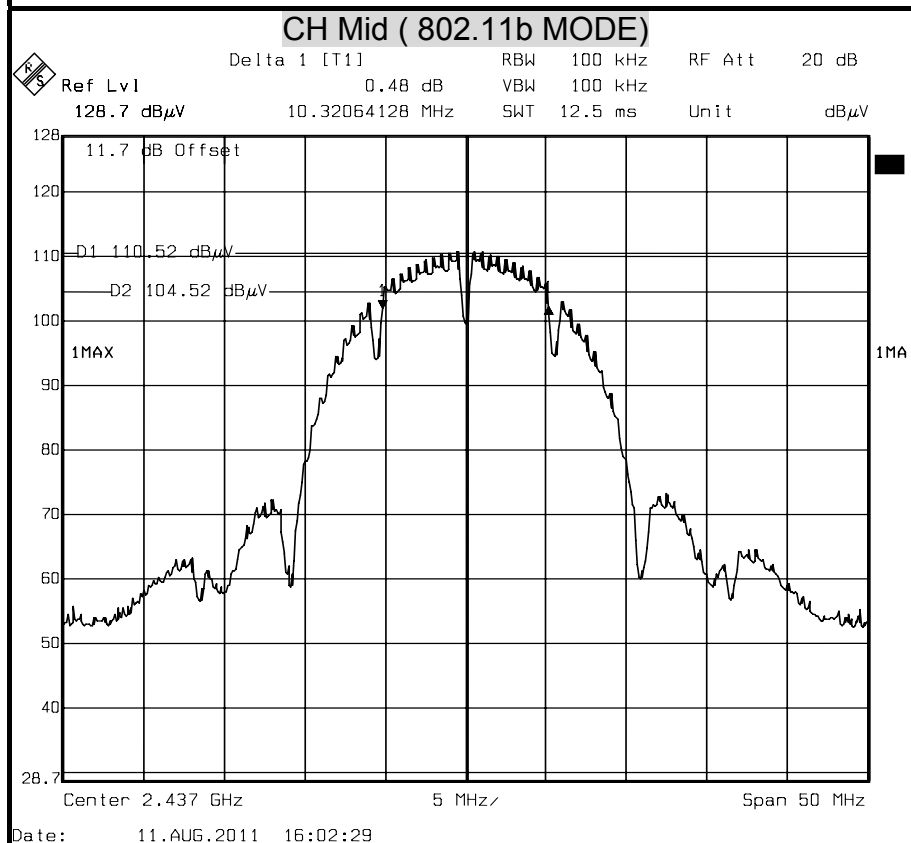
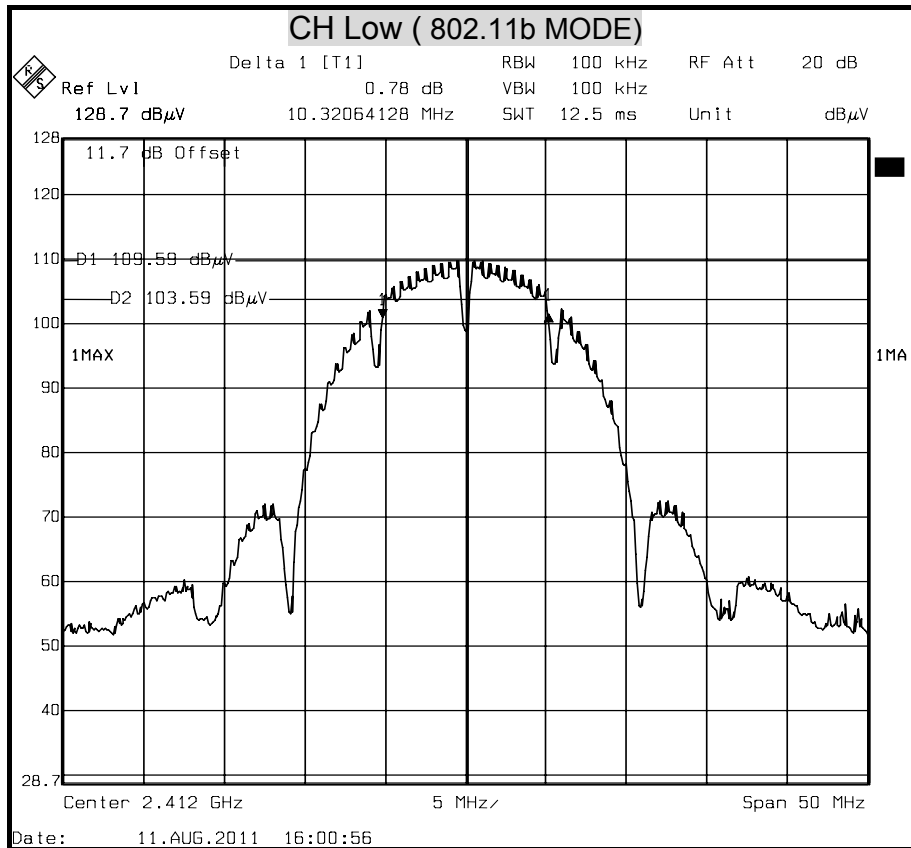


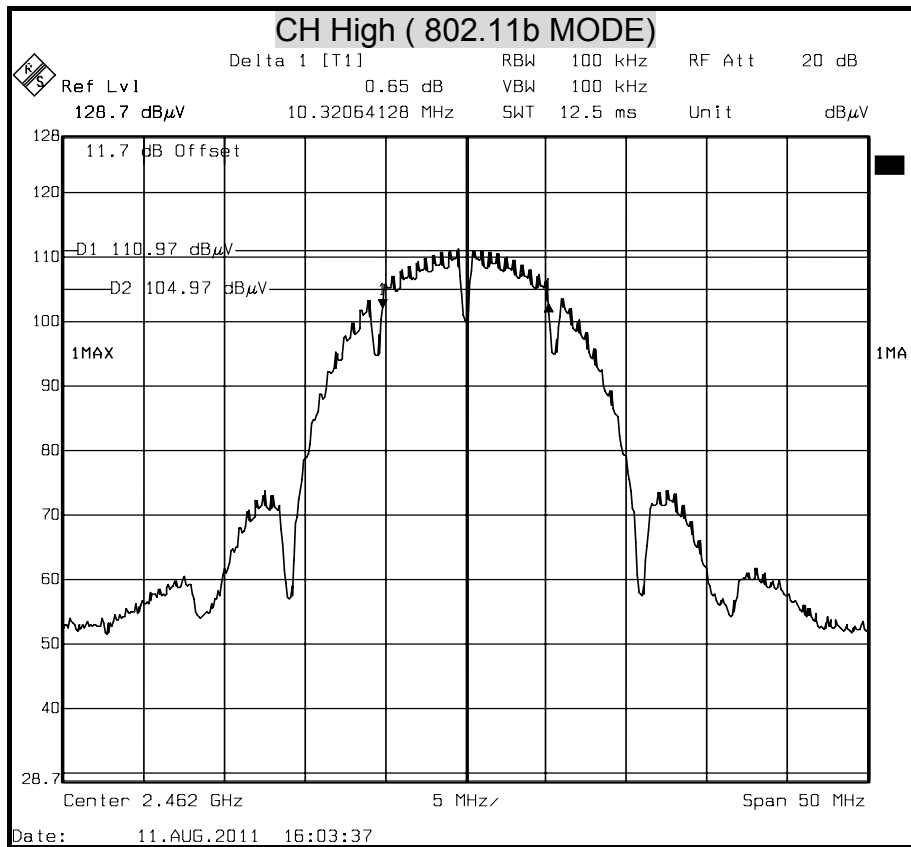








**6dB BANDWIDTH ( 802.11g MODE)**

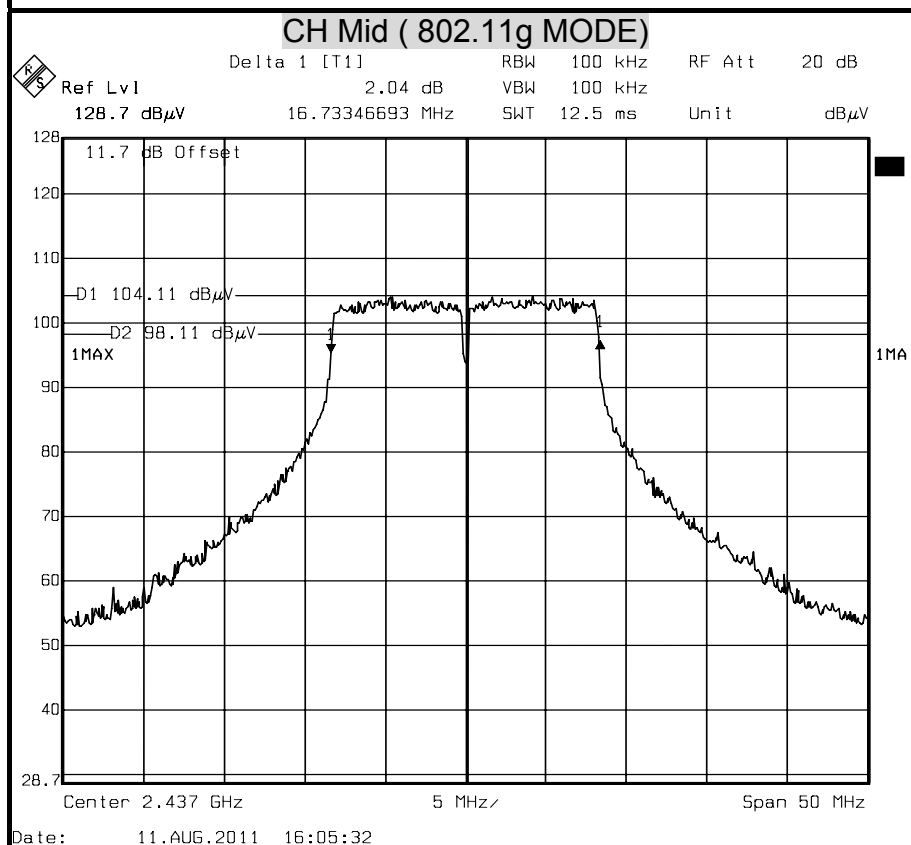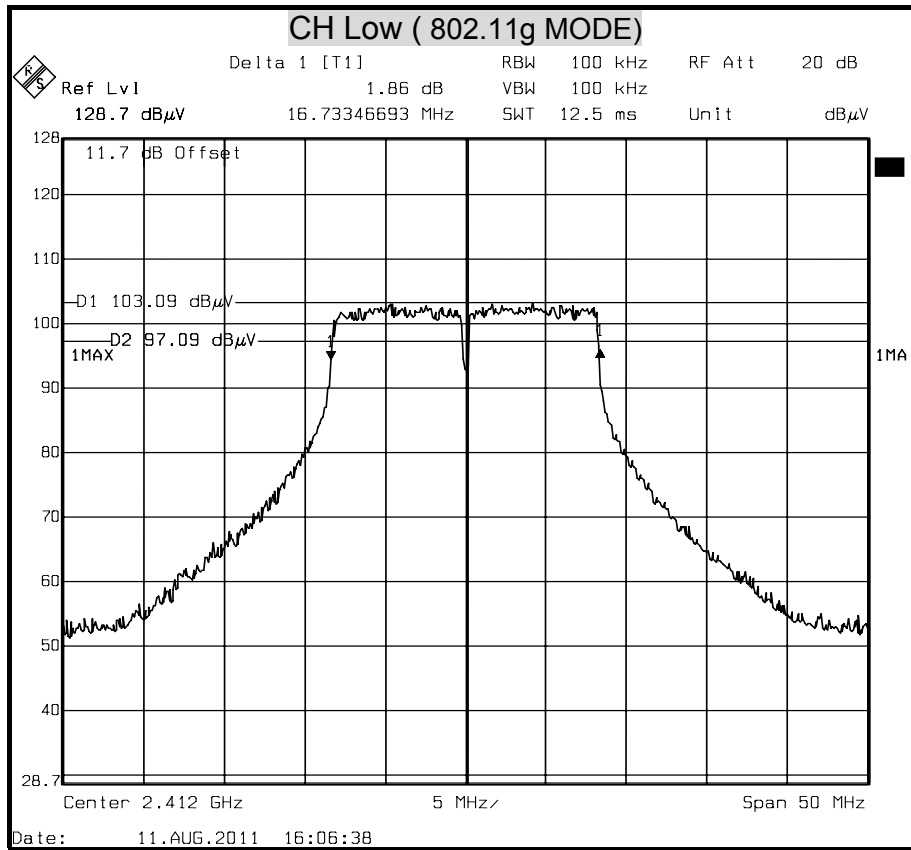


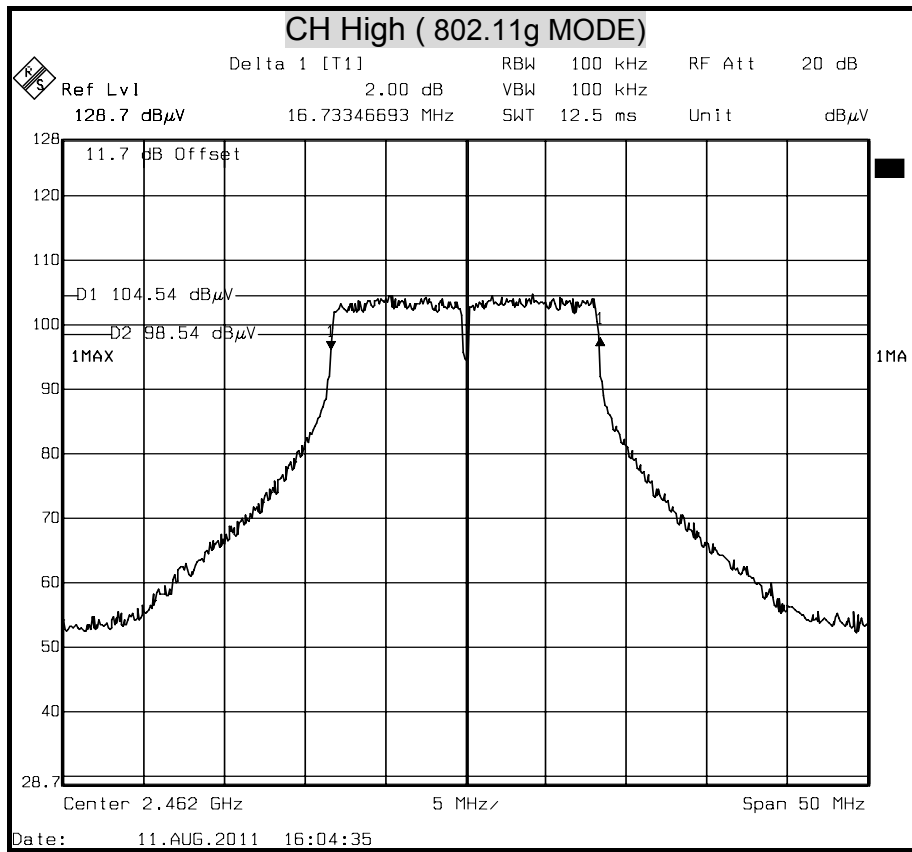





**6dB BANDWIDTH ( 802.11n HT20 MODE) Chain 0**

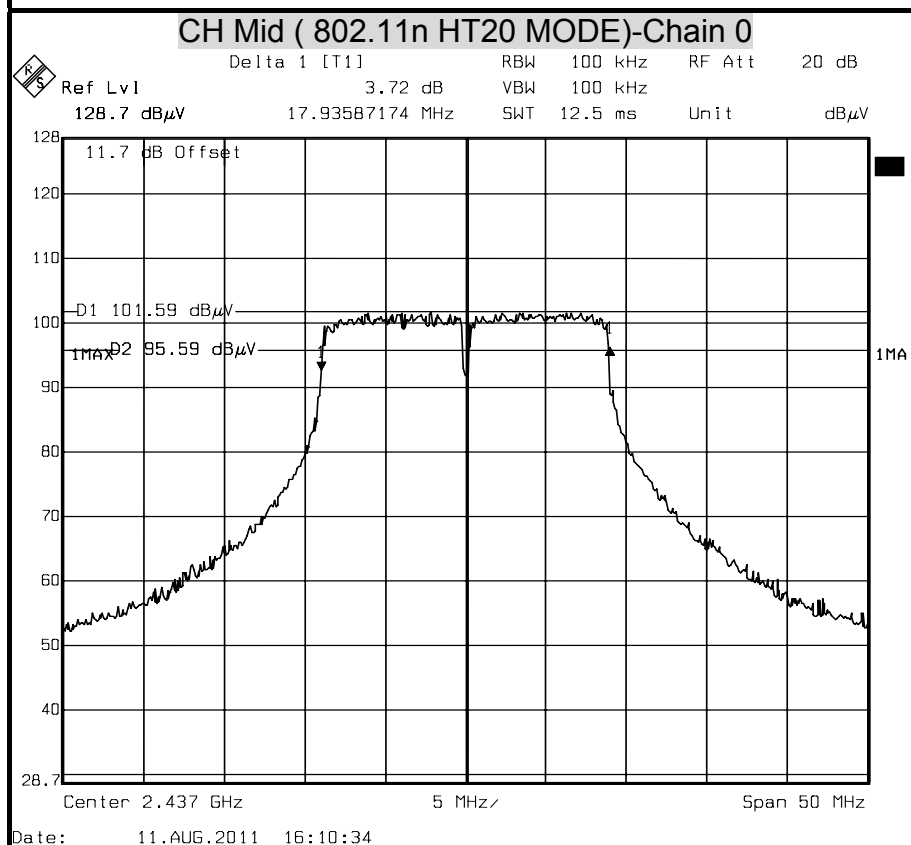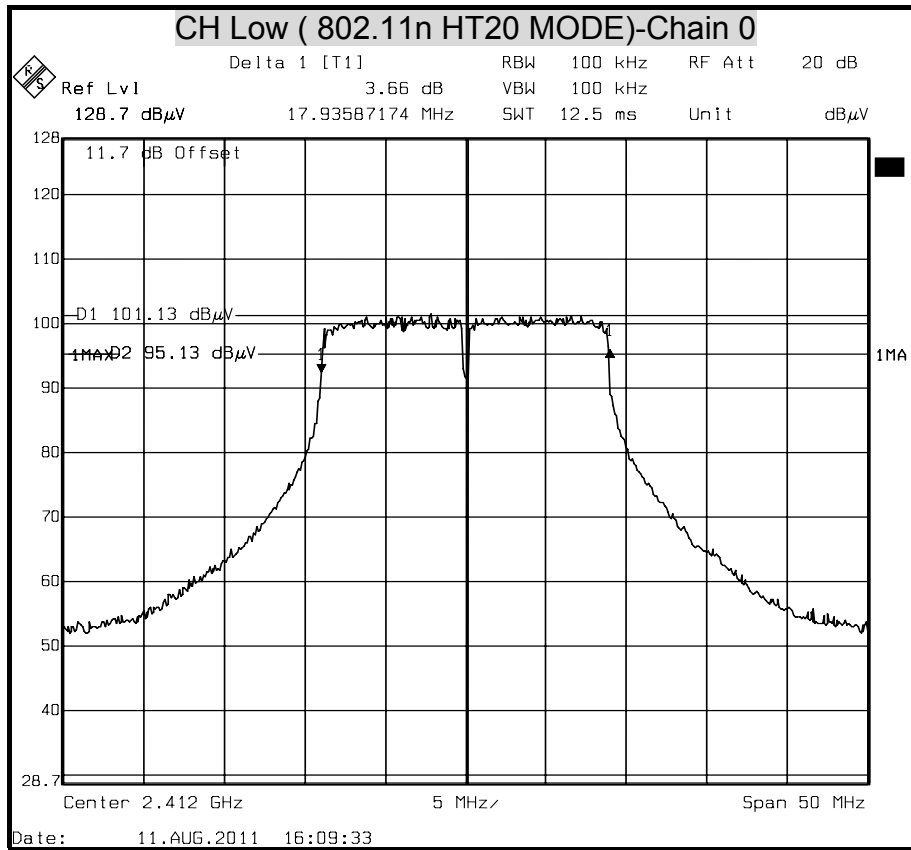


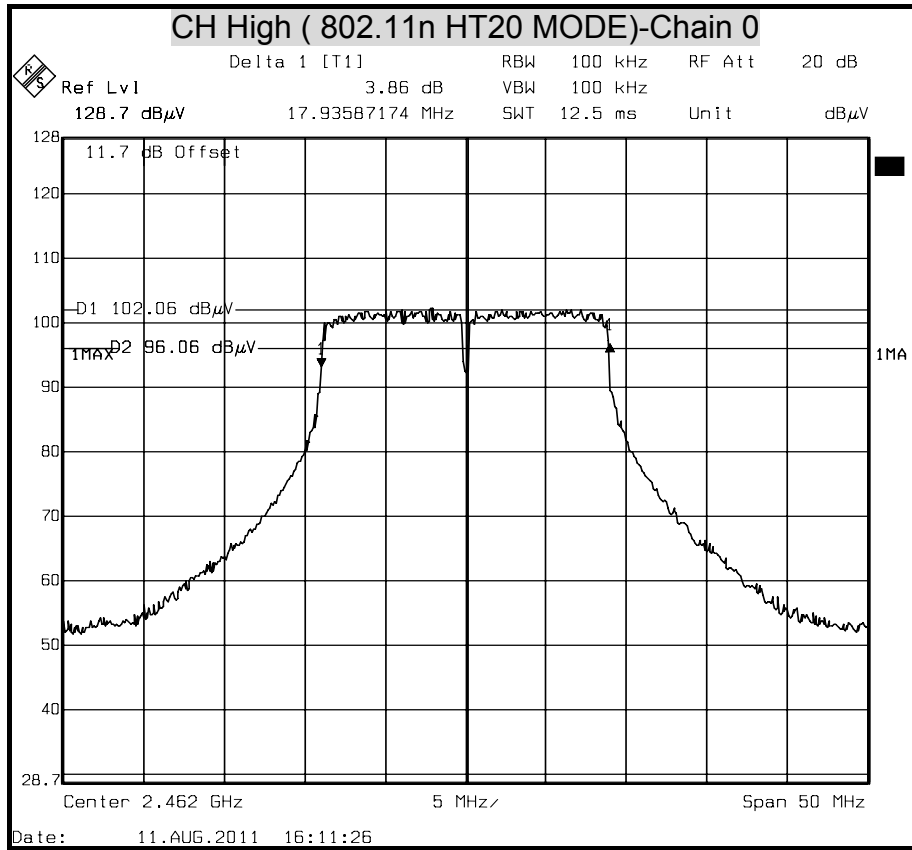





**6dB BANDWIDTH ( 802.11n HT20 MODE) Chain 1**

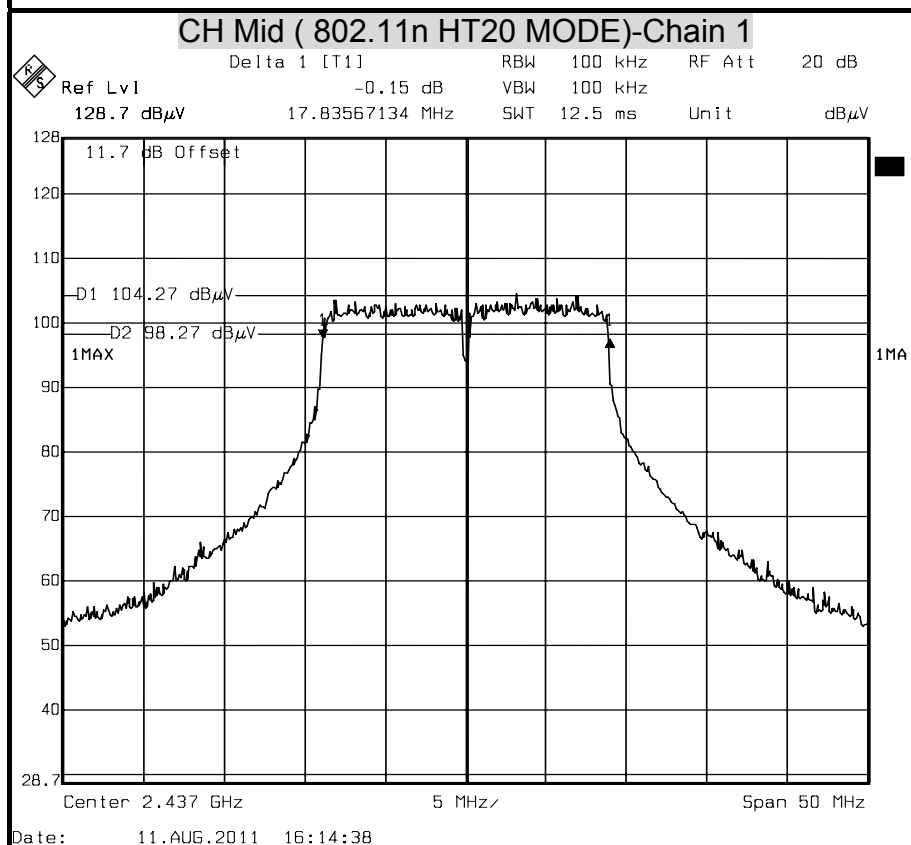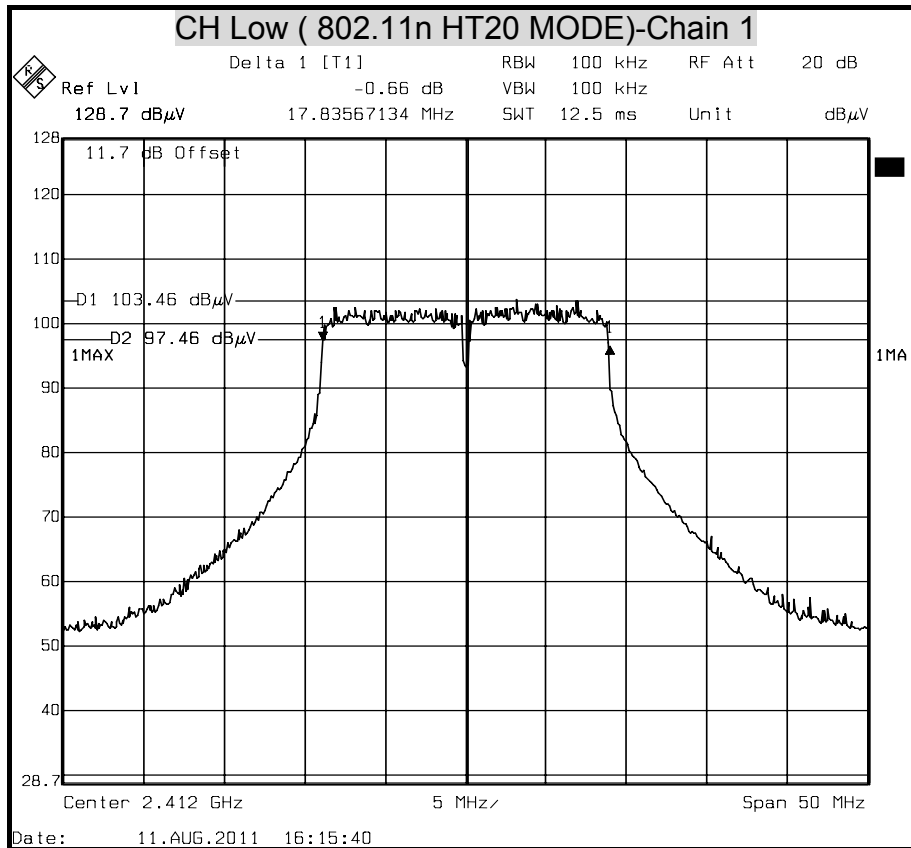


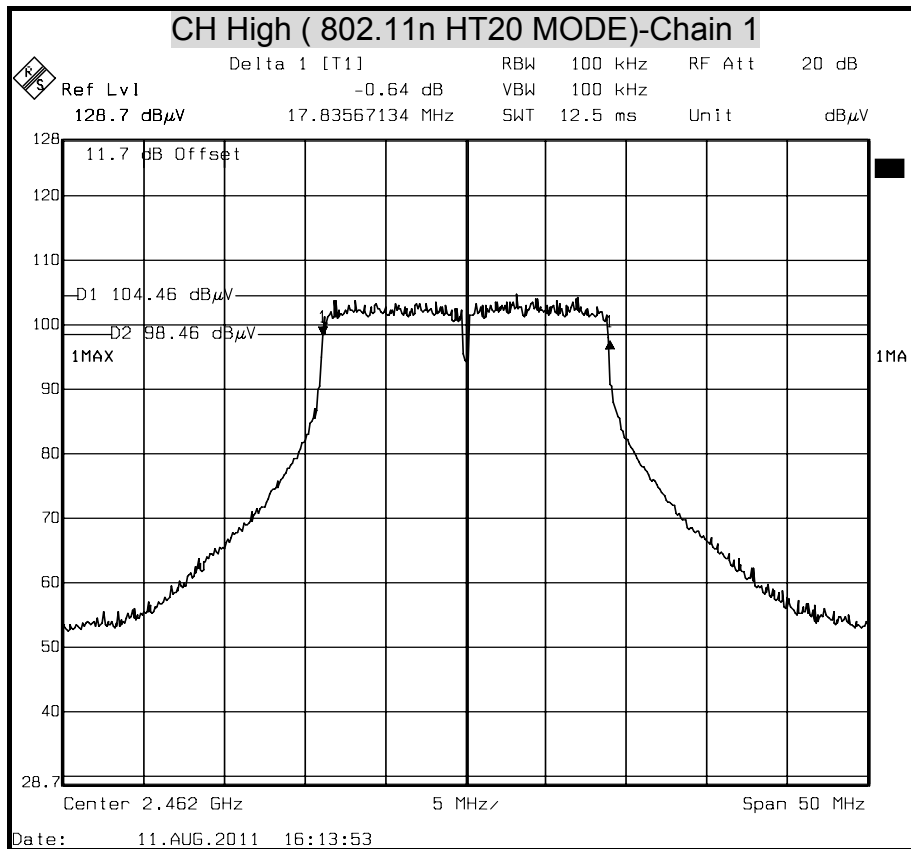



**6dB BANDWIDTH ( 802.11n HT40 MODE) Chain 0**

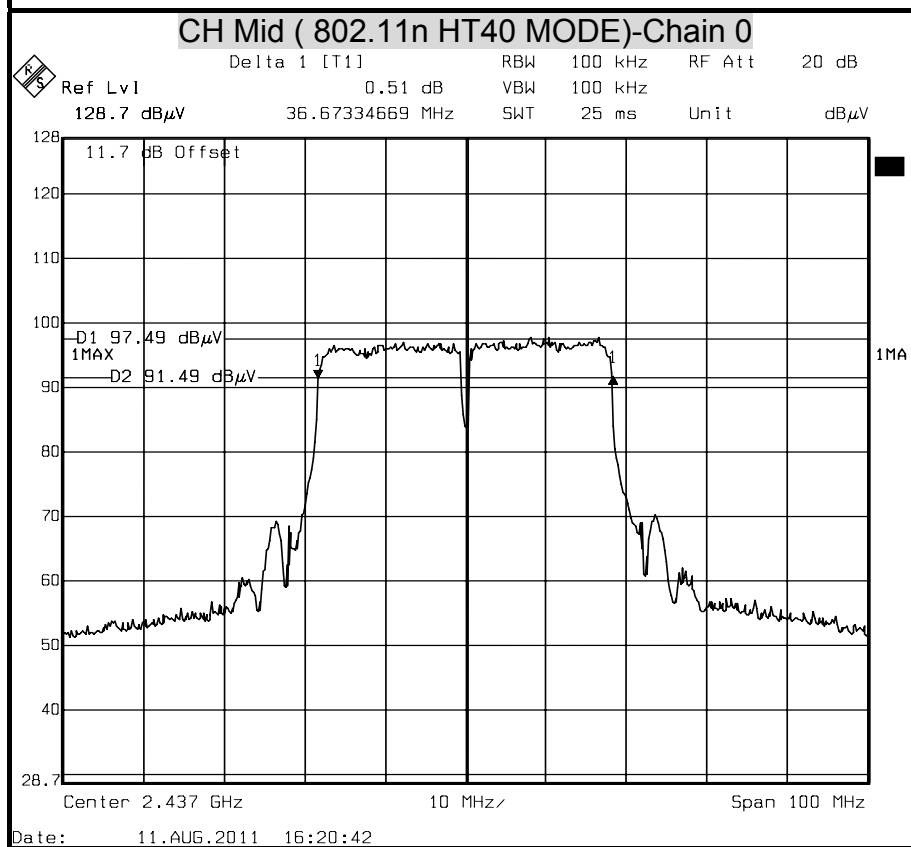
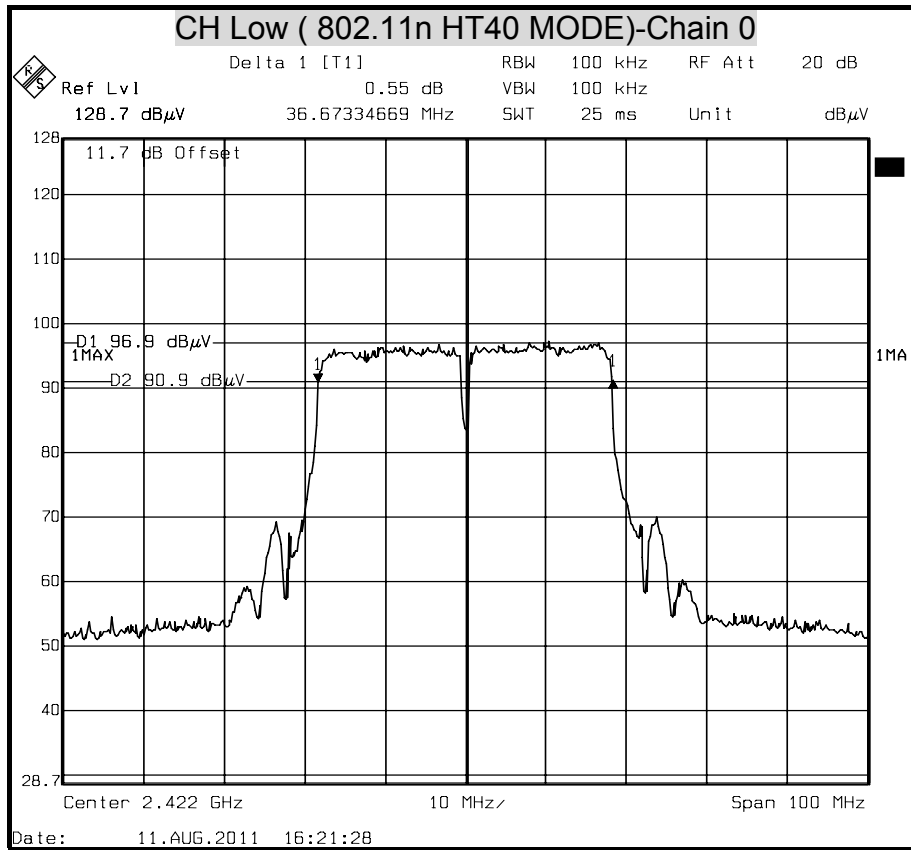


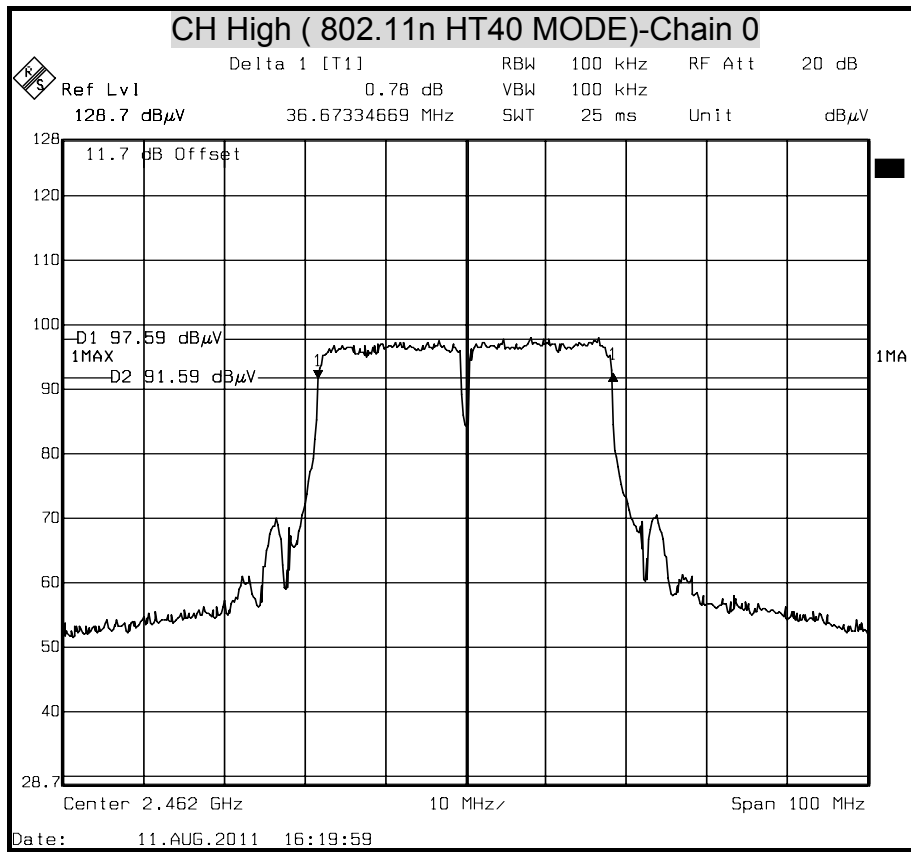






**6dB BANDWIDTH ( 802.11n HT40 MODE) Chain 1**

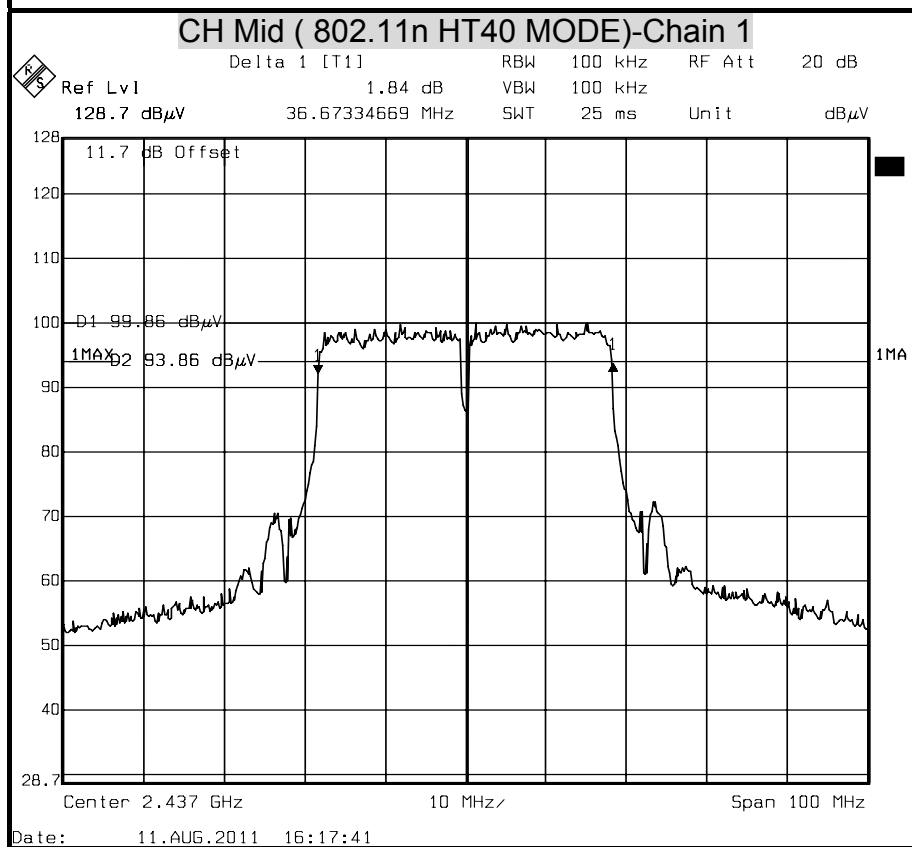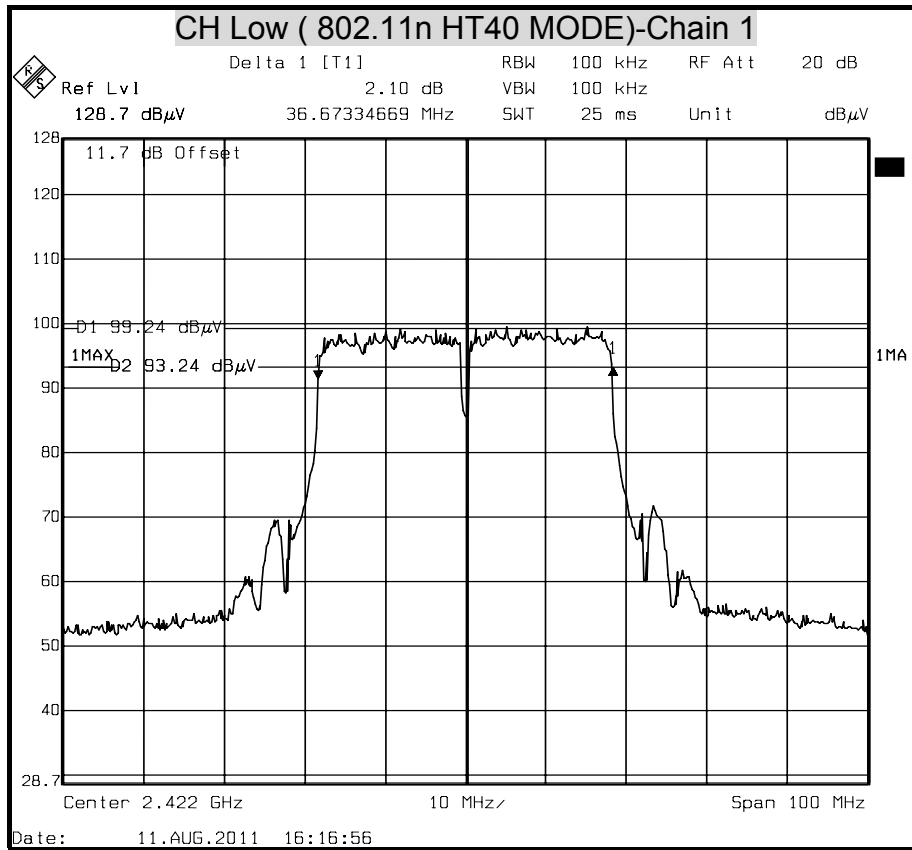

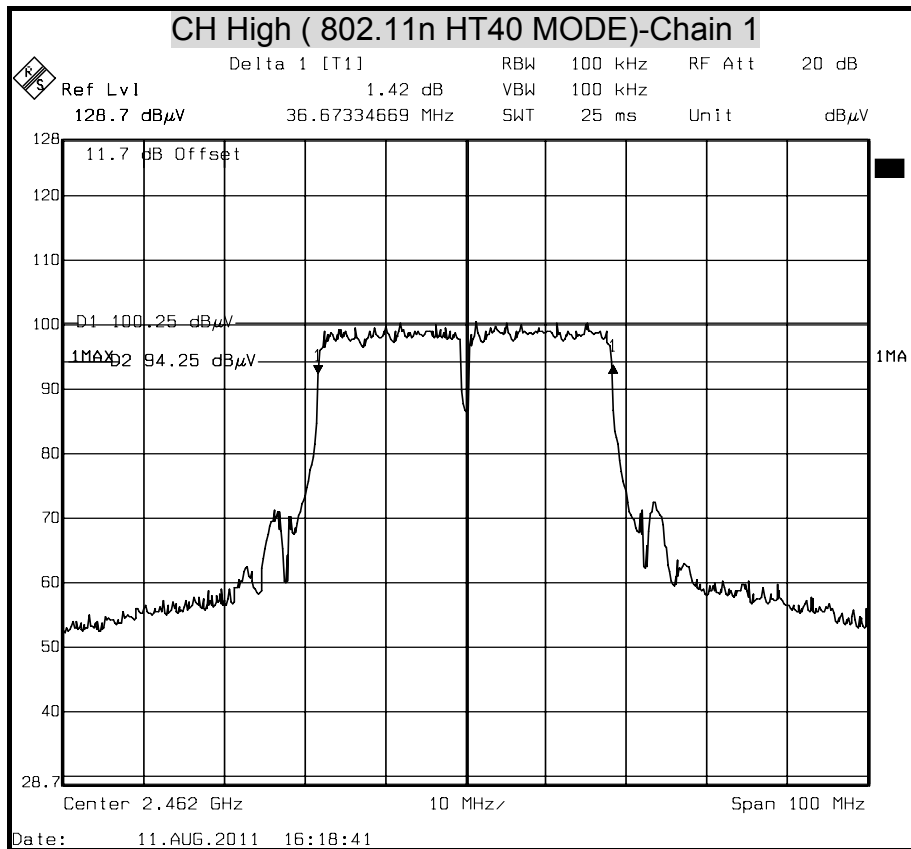



**8.2 MAXIMUM PEAK OUTPUT POWER**

**LIMIT**

§ 15.247(b) The maximum peak output power of the intentional radiator shall not exceed the following :


§ 15.247(b) (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands : 1 watt.

§ 15.247(b) (4) Except as shown in paragraphs (c) of this section , if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2), and (b)(3) of this section , as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

**TEST EQUIPMENTS**

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	R&S	FSEK 30	835253/002	JUL. 14, 2012

**TEST SETUP**

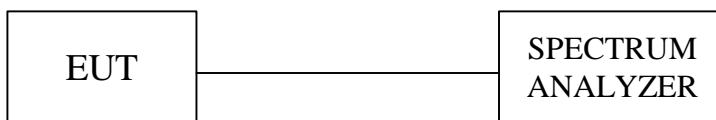

**TEST PROCEDURE**

Connect the EUT to spectrum analyzer, set the center frequency of the spectrum analyzer to the channel center frequency. Set the RBW to 1MHz and VBW to 3MHz.

Set sweep time=auto

Use detector max peak mode

Measurement of Digital Transmission Systems Operating under Section 15.247

**TEST RESULTS**

No non-compliance noted



**IEEE 802.11b mode (One TX)**

Channel	Channel Frequency (MHz)	Peak Power (dBm)	Peak Power Limit (dBm)	Pass / Fail
Low	2412	15.89	30.00	PASS
Middle	2437	16.67	30.00	PASS
High	2462	17.05	30.00	PASS

**NOTE :** 1. At final test to get the worst-case emission at 1Mbps long.  
2. The cable assembly insertion loss of 11.7dB (including 10 dB pad and 1.7 dB cable) was entered as an offset in the spectrum analyzer to allow for direct reading of power.

**IEEE 802.11g mode (One TX)**

Channel	Channel Frequency (MHz)	Peak Power (dBm)	Peak Power Limit (dBm)	Pass / Fail
Low	2412	20.98	30.00	PASS
Middle	2437	21.92	30.00	PASS
High	2462	22.22	30.00	PASS

**NOTE :** 1. At final test to get the worst-case emission at 6Mbps.  
2. The cable assembly insertion loss of 11.7dB (including 10 dB pad and 1.7 dB cable) was entered as an offset in the spectrum analyzer to allow for direct reading of power.



$10 \cdot \log((10^{(3/10)}) + (10^{(3/10)})) = 6.01$

$30 - (6.01 - 6) = 29.99$

IEEE 802.11n HT20 mode (Two TX)

Channel	Channel Frequency (MHz)	Peak Power (dBm)		Peak Power Total (dBm)	Peak Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1			
Low	2412	18.86	19.23	22.06	29.99	PASS
Middle	2437	20.04	20.43	23.25	29.99	PASS
High	2462	20.41	20.86	23.65	29.99	PASS

- NOTE :**
1. At final test to get the worst-case emission at 13Mbps.
  2. The cable assembly insertion loss of 11.7dB (including 10 dB pad and 1.7 dB cable) was entered as an offset in the spectrum analyzer to allow for direct reading of power.

$10 \cdot \log((10^{(3/10)}) + (10^{(3/10)})) = 6.01$

$30 - (6.01 - 6) = 29.99$

IEEE 802.11n HT40 mode (Two TX)

Channel	Channel Frequency (MHz)	Peak Power (dBm)		Peak Power Total (dBm)	Peak Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1			
Low	2422	17.62	18.33	21.00	29.99	PASS
Middle	2437	17.98	19.05	21.56	29.99	PASS
High	2452	18.15	19.23	21.73	29.99	PASS

- NOTE :**
1. At final test to get the worst-case emission at 27Mbps.
  2. The cable assembly insertion loss of 11.7dB (including 10 dB pad and 1.7 dB cable) was entered as an offset in the spectrum analyzer to allow for direct reading of power.



**Average Power Data**

**IEEE 802.11b mode**

Channel	Channel Frequency (MHz)	Average Power (dBm)
Low	2412	13.63
Middle	2437	14.38
High	2462	14.81

**IEEE 802.11g mode**

Channel	Channel Frequency (MHz)	Average Power (dBm)
Low	2412	10.85
Middle	2437	11.69
High	2462	12.12

**IEEE 802.11n HT20 mode**

Channel	Channel Frequency (MHz)	Average Power (dBm)	Average Power (dBm)
		Chain 0	Chain 1
Low	2412	8.89	10.01
Middle	2437	9.92	11.06
High	2462	10.27	11.57

**IEEE 802.11n HT40 mode**

Channel	Channel Frequency (MHz)	Average Power (dBm)	Average Power (dBm)
		Chain 0	Chain 1
Low	2422	8.04	9.05
Middle	2437	8.42	9.53
High	2452	8.46	9.81



### 8.3 POWER SPECTRAL DENSITY


#### LIMIT

§ 15.247(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

#### TEST EQUIPMENTS

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	R&S	FSEK 30	835253/002	JUL. 14, 2012

#### TEST SETUP

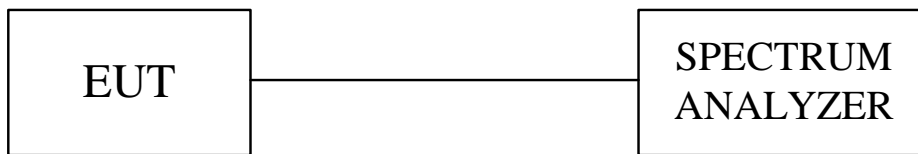

#### TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using RBW=3KHz and VBW RBW, set sweep time=span / 3KHz.

The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span / 3KHz for a full response of the mixer in the spectrum analyzer.

#### TEST RESULTS

Total peak power calculation formula:  
 $10 \log (10^{\text{Chain 0 PPSD}} / 10)$ .

No non-compliance noted.



IEEE 802.11b mode

Channel	Channel Frequency (MHz)	PPSD Chain 0 (dBm)	Maximum Limit (dBm)	Pass / Fail
Low	2412	-16.79	8	PASS
Middle	2437	-15.90	8	PASS
High	2462	-15.38	8	PASS

NOTE : 1. At final test to get the worst-case emission at 1Mbps long.  
 2. The cable assembly insertion loss of 11.7dB (including 10 dB pad and 1.7 dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.

IEEE 802.11g mode

Channel	Channel Frequency (MHz)	PPSD Chain 0 (dBm)	Maximum Limit (dBm)	Pass / Fail
Low	2412	-18.73	8	PASS
Middle	2437	-17.89	8	PASS
High	2462	-17.23	8	PASS

NOTE : 1. At final test to get the worst-case emission at 6Mbps.  
 2. The cable assembly insertion loss of 11.7dB (including 10 dB pad and 1.7 dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.

$10 \cdot \log((10^{(3/10)}) + (10^{(3/10)})) = 6.01$	$8 - (6.01 - 6) = 7.99$
---	-------------------------

IEEE 802.11n HT20 mode

Channel	Channel Frequency (MHz)	PPSD(dBm)			Maximum Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Total		
Low	2412	-19.61	-18.53	-16.03	7.99	PASS
Middle	2437	-18.12	-17.84	-14.97	7.99	PASS
High	2462	-18.68	-17.40	-14.98	7.99	PASS

NOTE : 1. At final test to get the worst-case emission at 13Mbps.  
 2. The cable assembly insertion loss of 11.7dB (including 10 dB pad and 1.7 dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.

$10 \cdot \log((10^{(3/10)}) + (10^{(3/10)})) = 6.01$	$8 - (6.01 - 6) = 7.99$
---	-------------------------

IEEE 802.11n HT40 mode

Channel	Channel Frequency (MHz)	PPSD(dBm)			Maximum Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Total		
Low	2422	-24.59	-22.77	-20.58	7.99	PASS
Middle	2437	-24.09	-22.22	-20.04	7.99	PASS
High	2452	-23.77	-21.97	-19.77	7.99	PASS

NOTE : 1. At final test to get the worst-case emission at 27Mbps.  
 2. The cable assembly insertion loss of 11.7dB (including 10 dB pad and 1.7 dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.





$$10 \cdot \log((10^{(3/10)}) + (10^{(3/10)})) = 6.01$$



$$8 - (6.01 - 6) = 7.99$$


**Combined mode**

Channel		Channel Frequency (MHz)	PPSD(dBm)	Maximum Limit (dBm)	Pass / Fail
802.11n HT20 Combined mode	CH Low	2412	-14.85	7.99	PASS
	CH Middle	2437	-14.12		
	CH High	2462	-13.57		
802.11n HT40 Combined mode	CH Low	2422	-19.41	7.99	PASS
	CH Middle	2437	-18.86		
	CH High	2452	-18.46		





**POWER SPECTRAL DENSITY ( IEEE 802.11b MODE)**

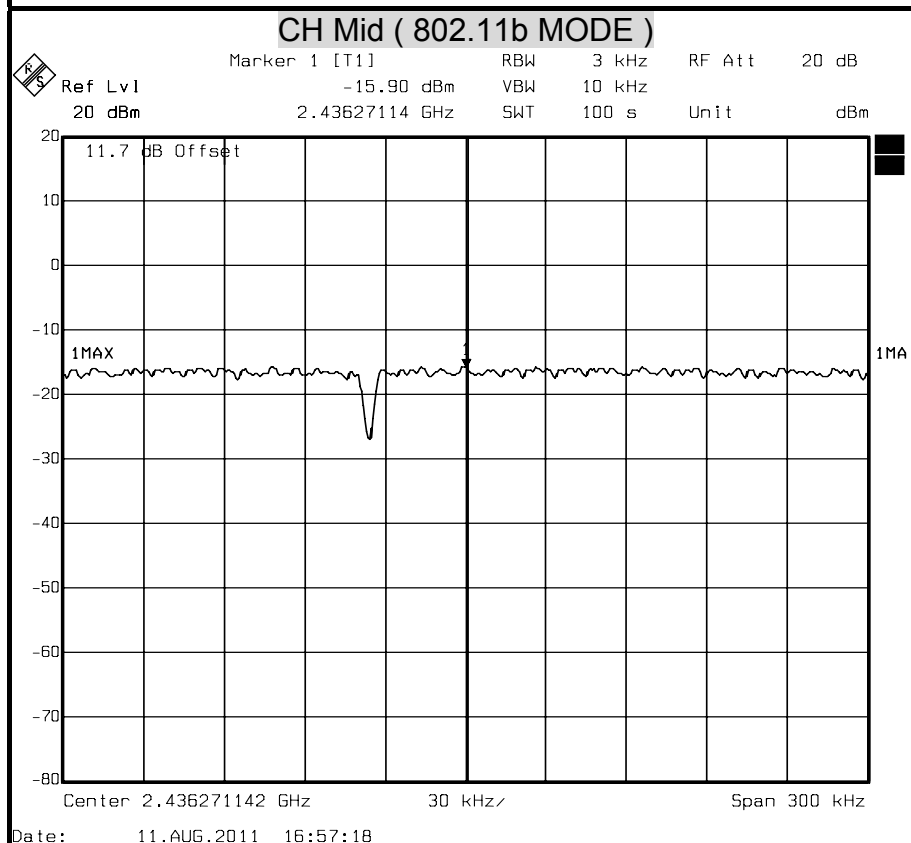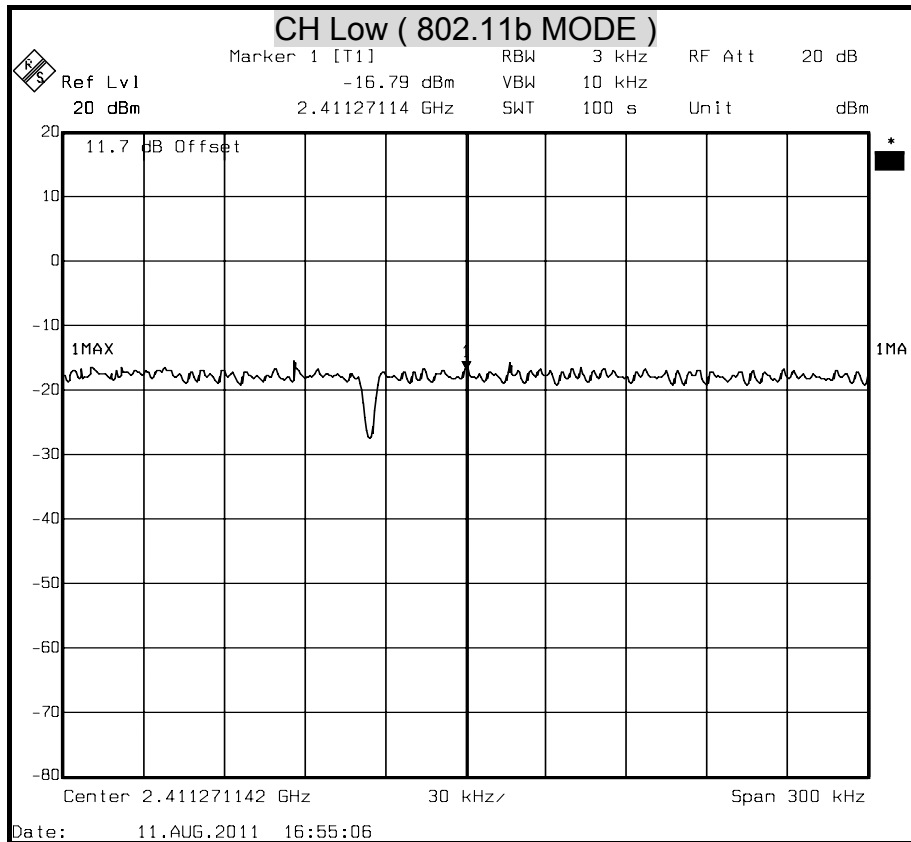


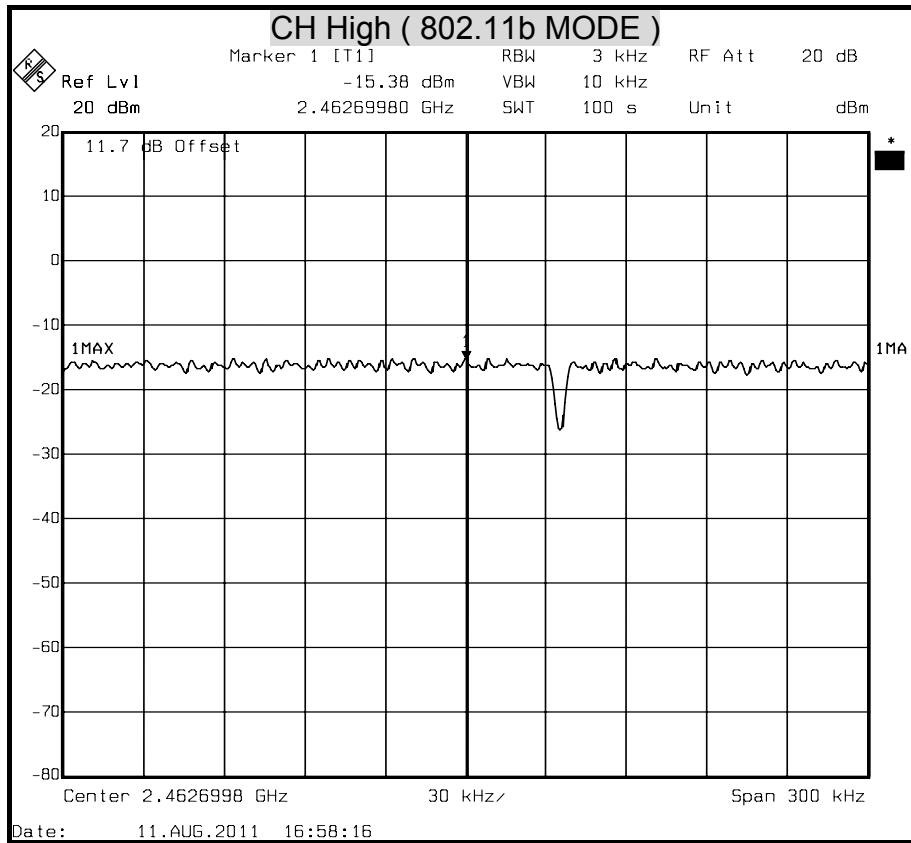





**POWER SPECTRAL DENSITY ( IEEE 802.11g MODE )**

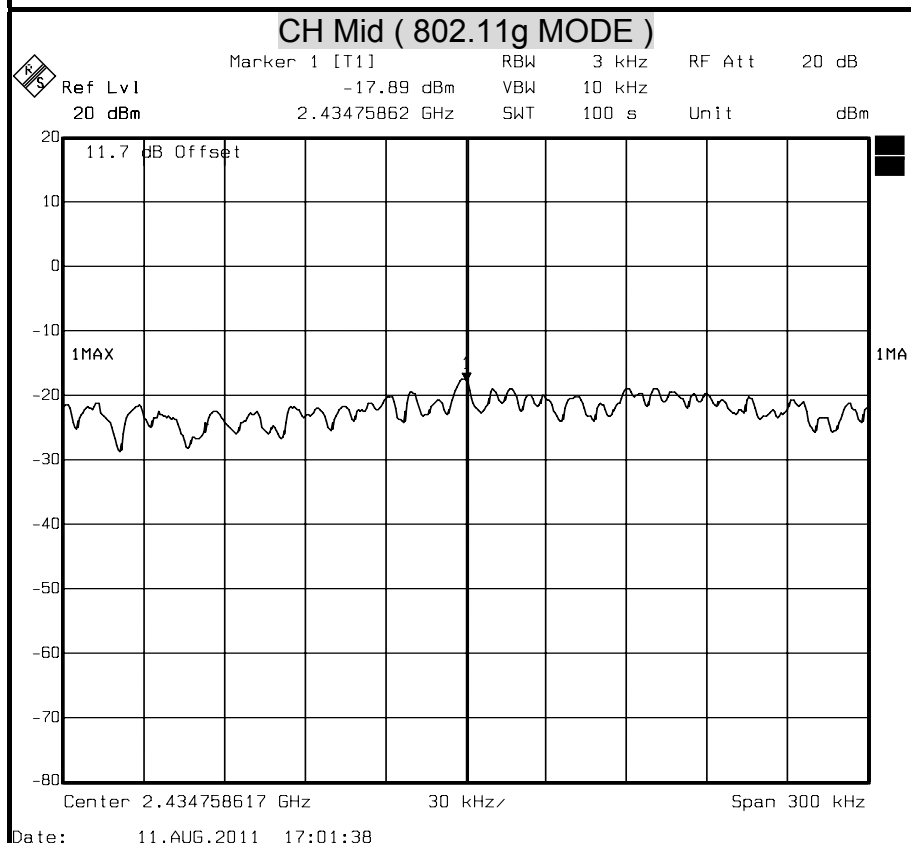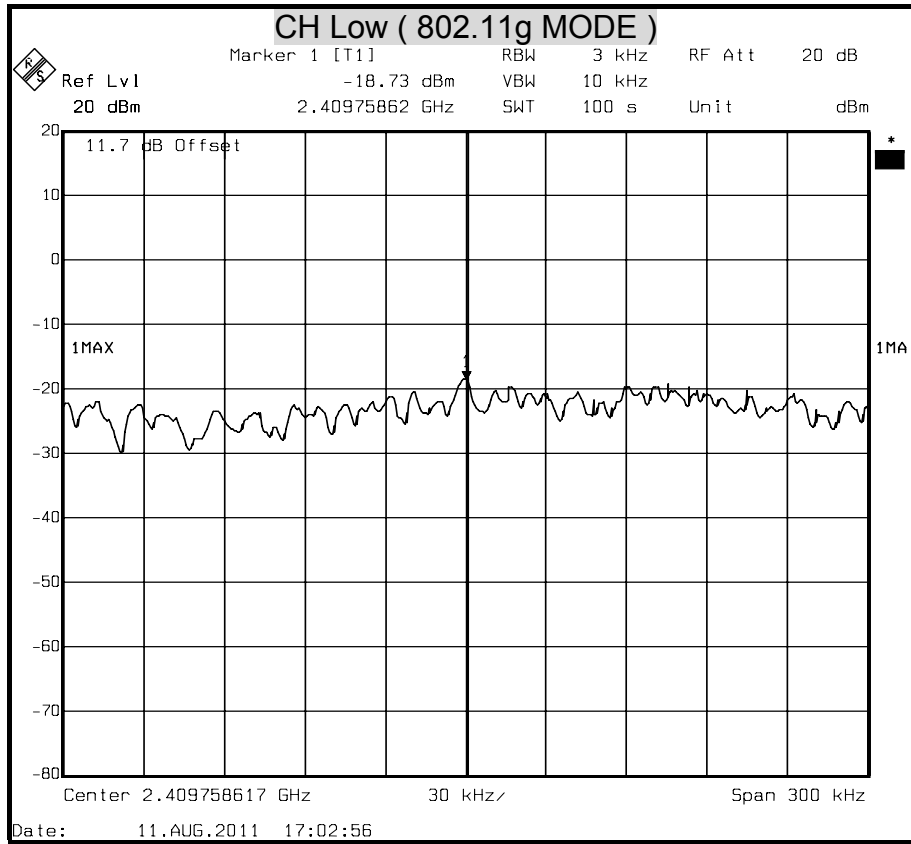


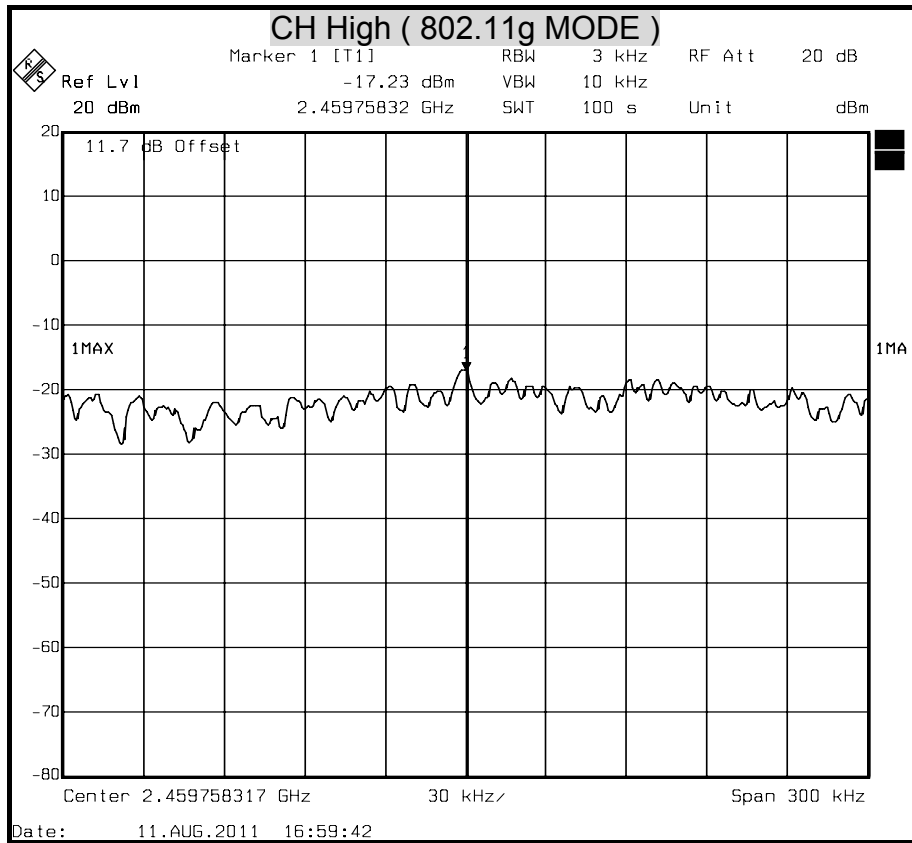





**POWER SPECTRAL DENSITY ( 802.11n HT20 MODE )**

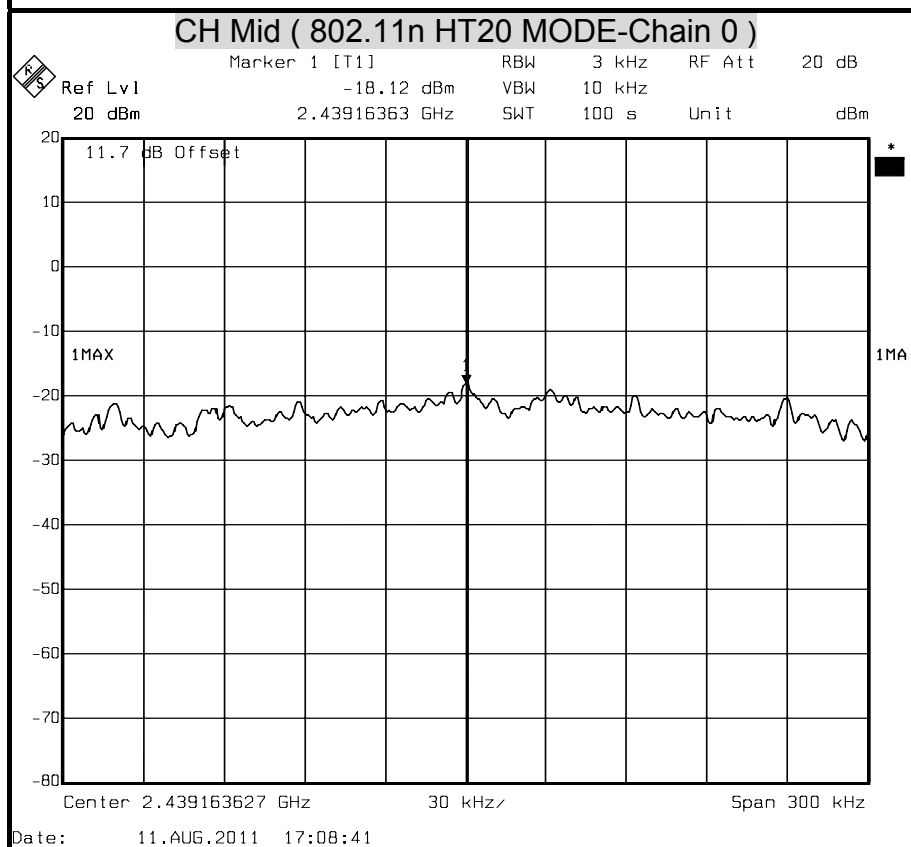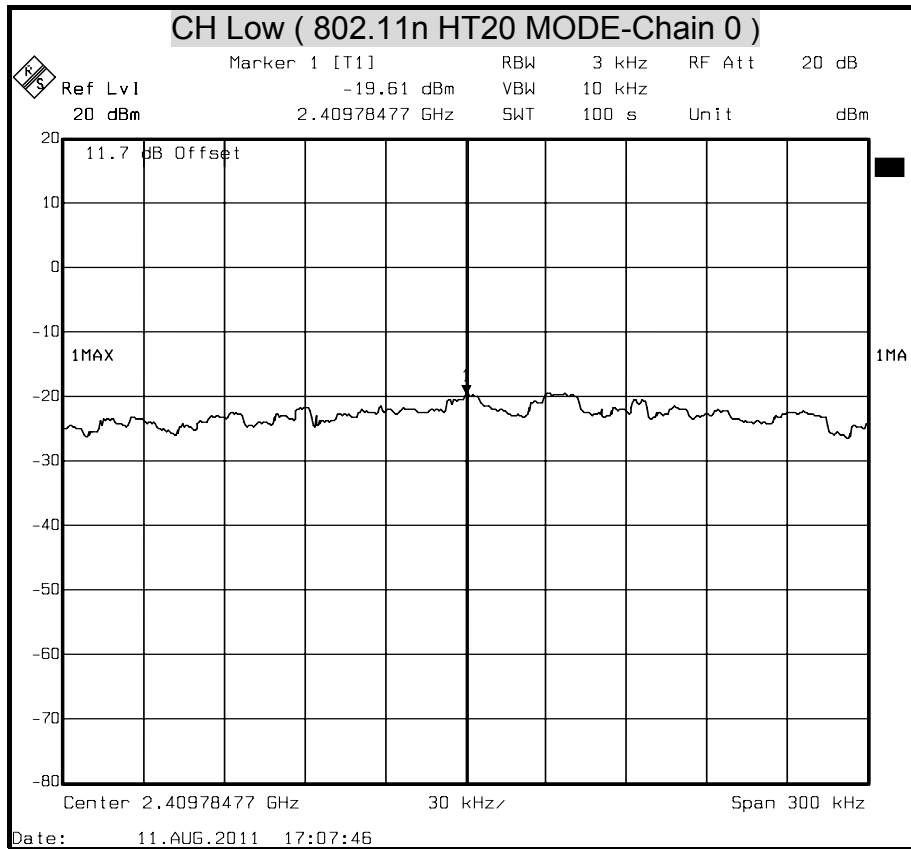

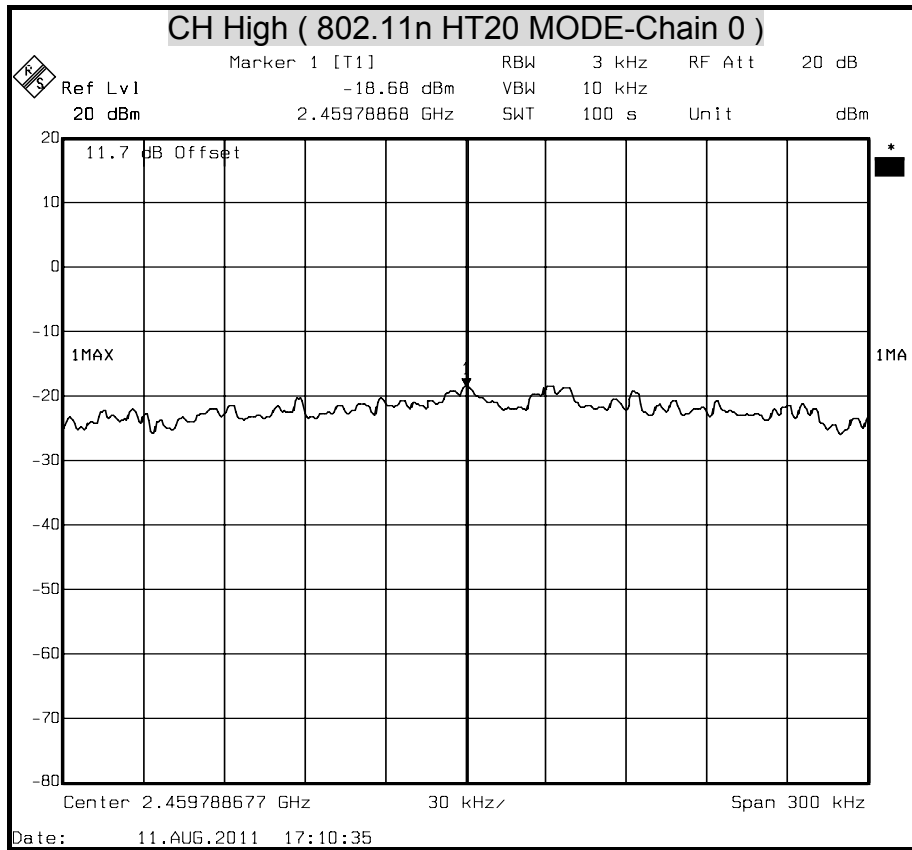




**POWER SPECTRAL DENSITY ( 802.11n HT20 MODE )**

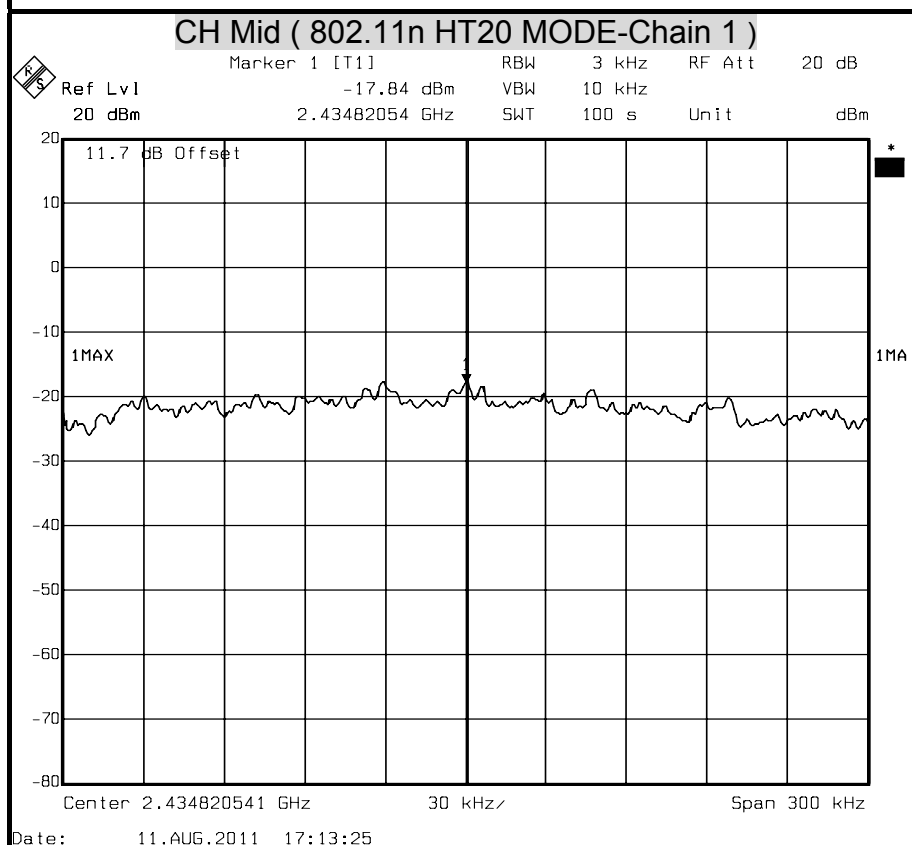
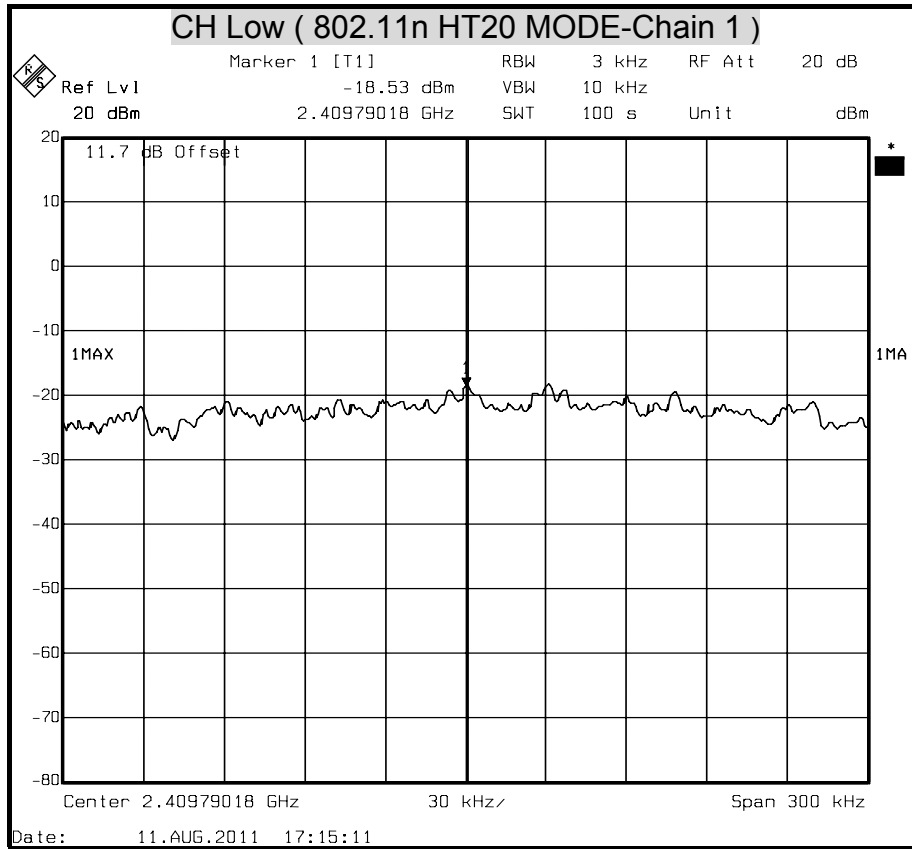





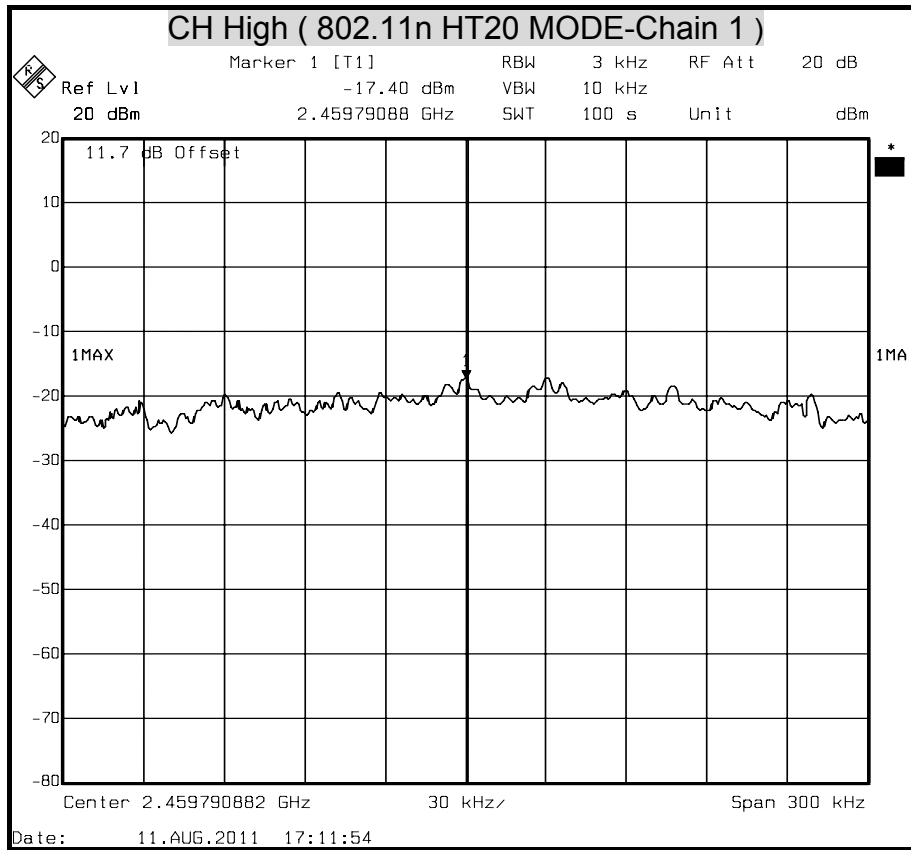





**POWER SPECTRAL DENSITY ( 802.11n HT40 MODE )**

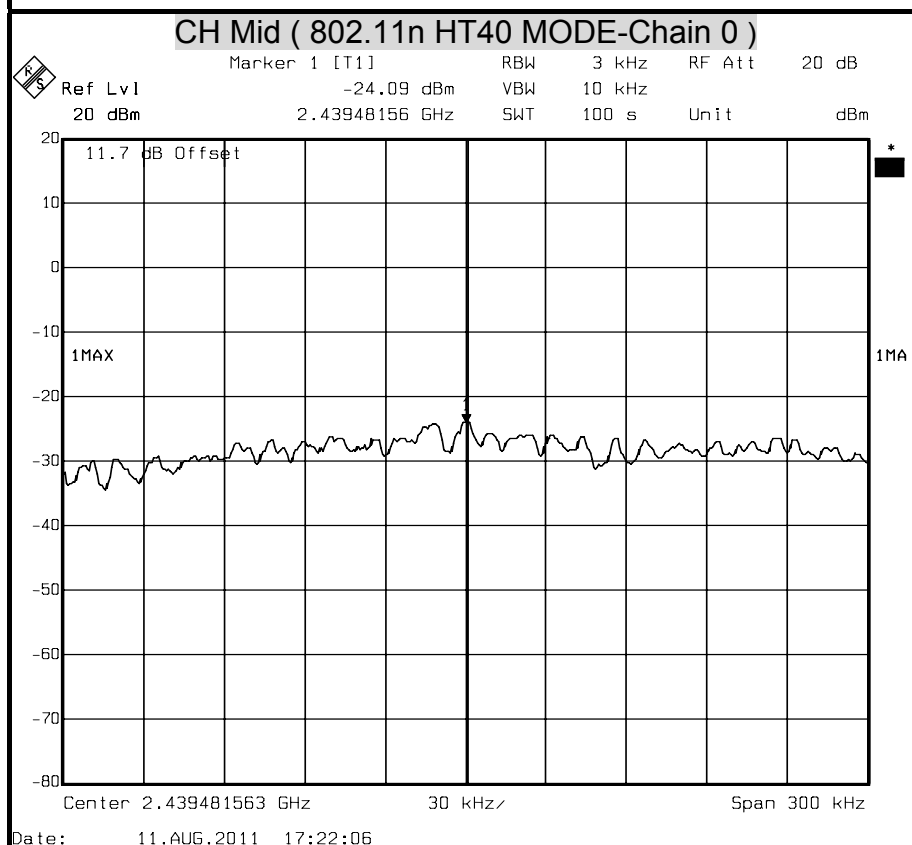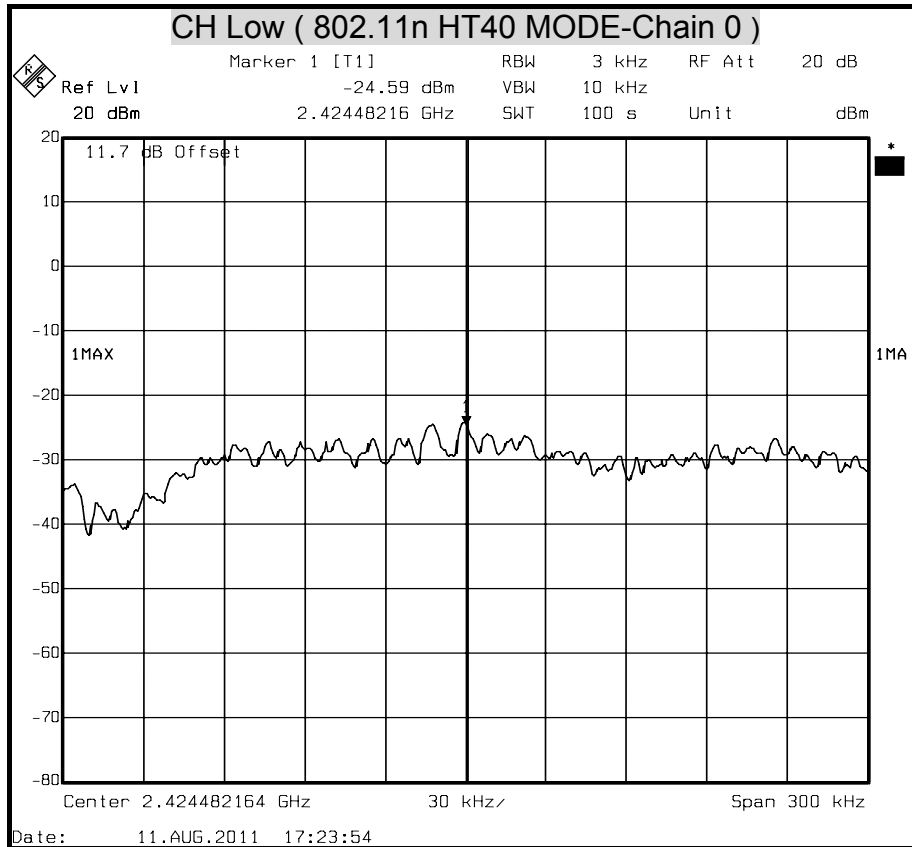


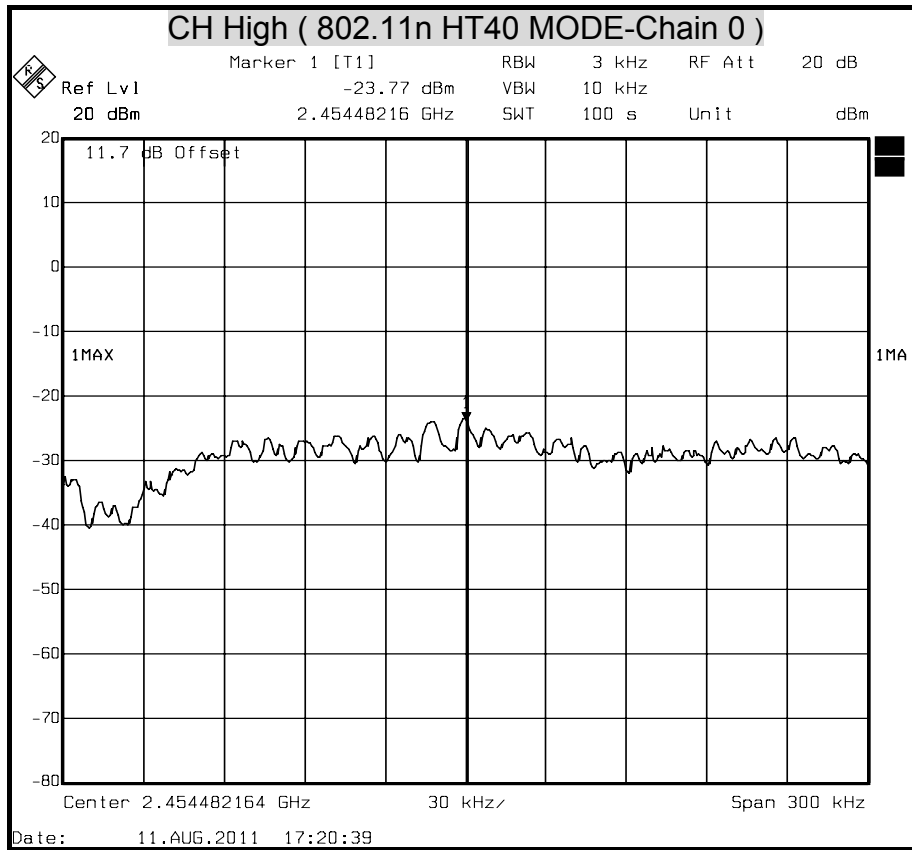





**POWER SPECTRAL DENSITY ( 802.11n HT40 MODE )**

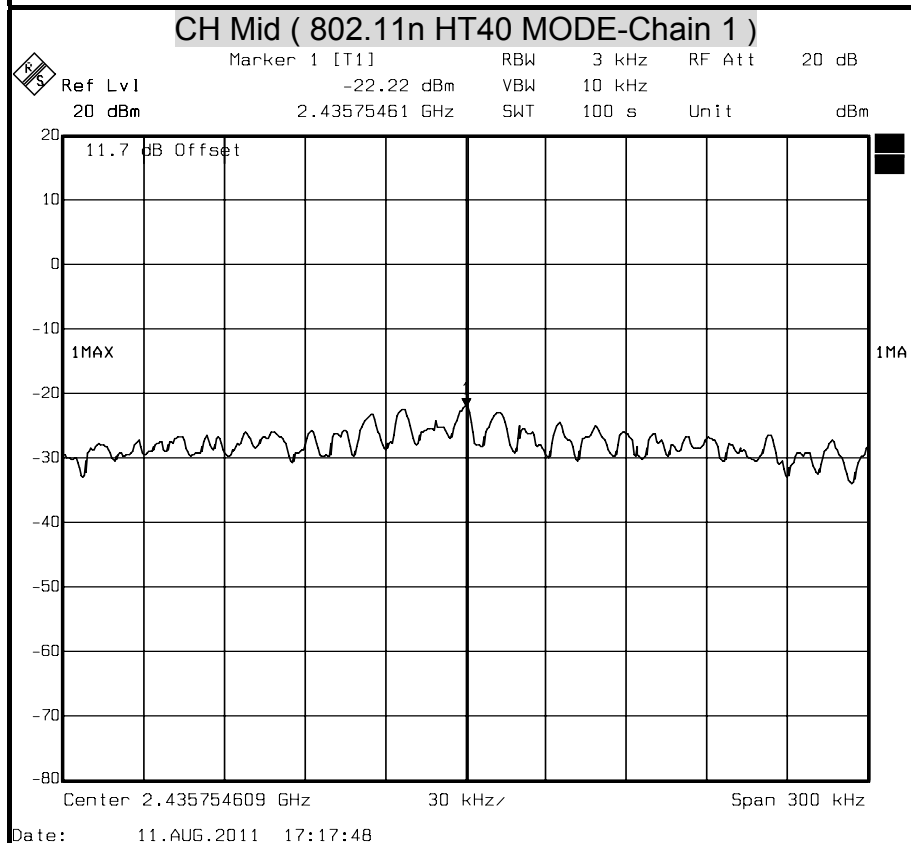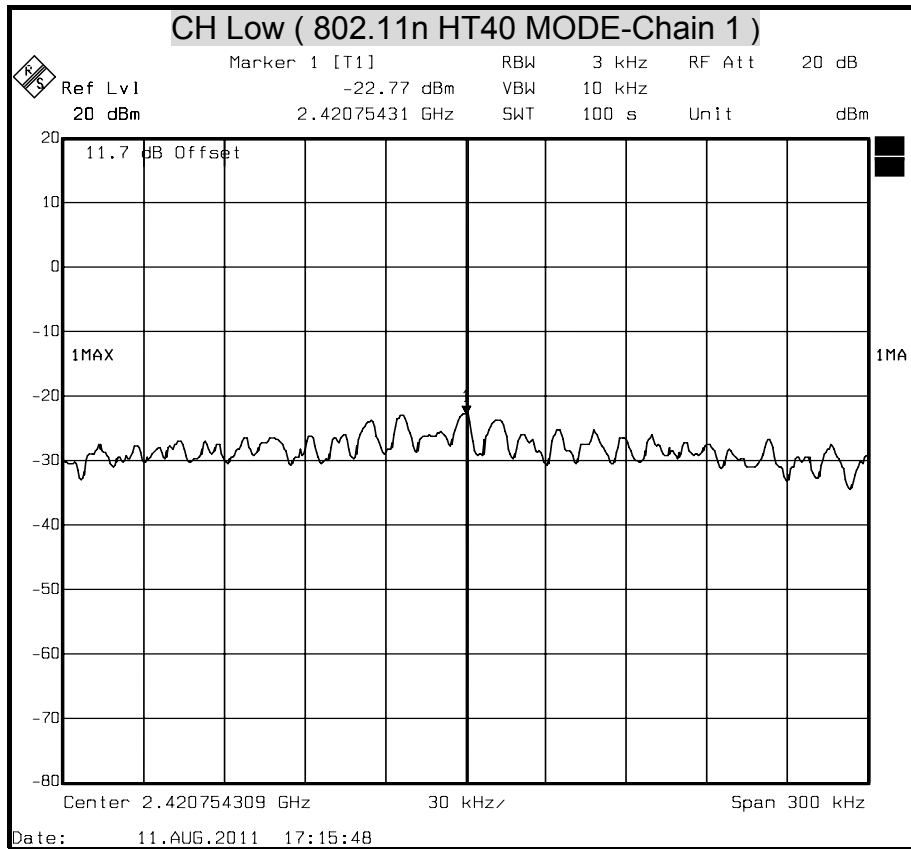


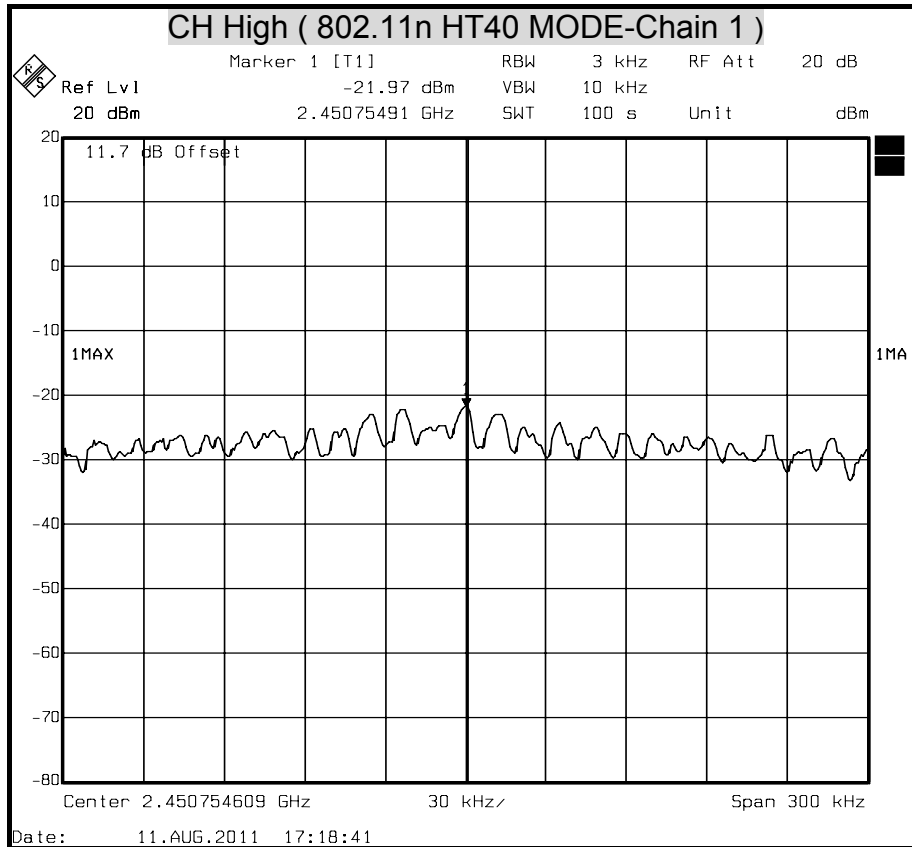





**POWER SPECTRAL DENSITY ( 802.11n HT20 Combined MODE )**

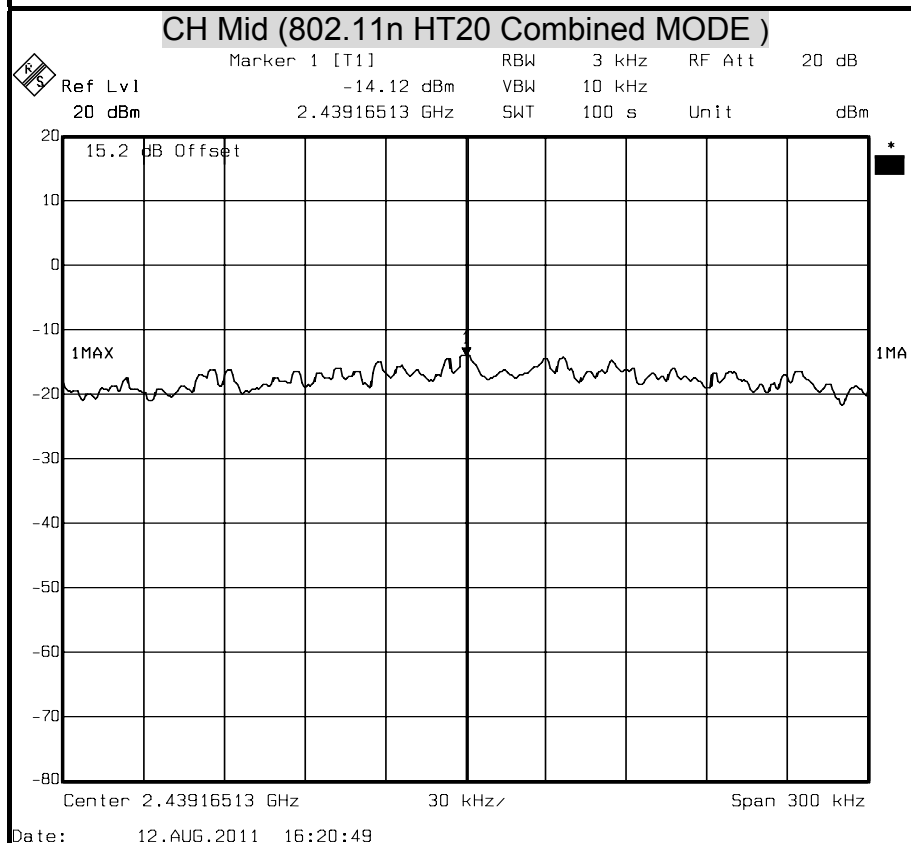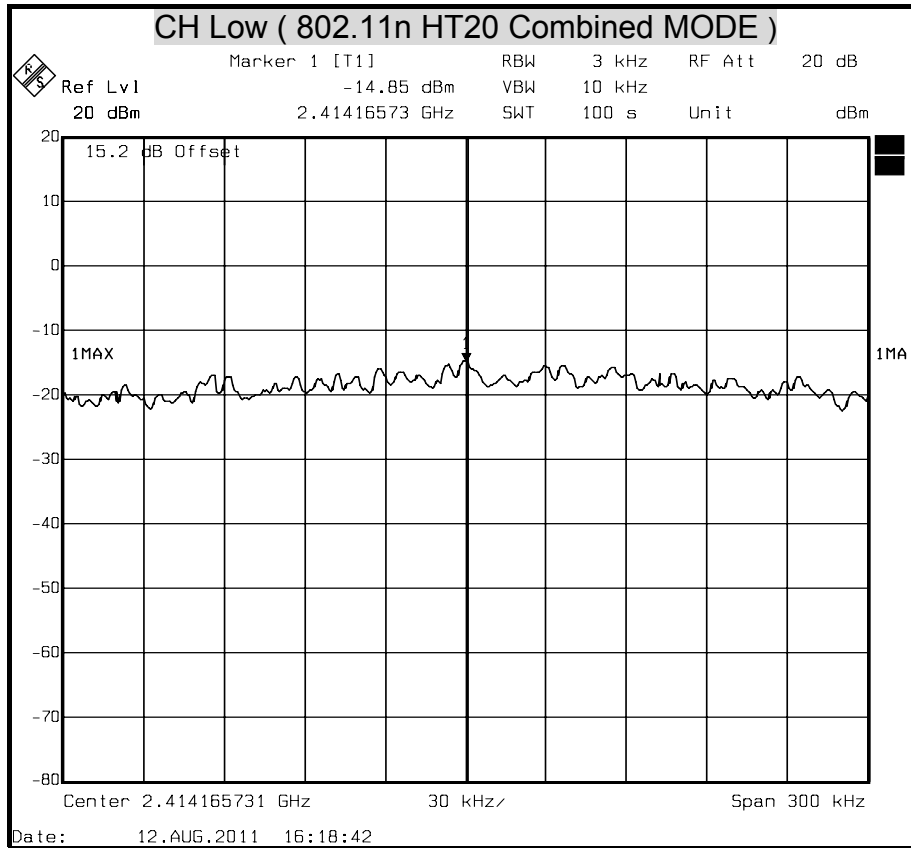

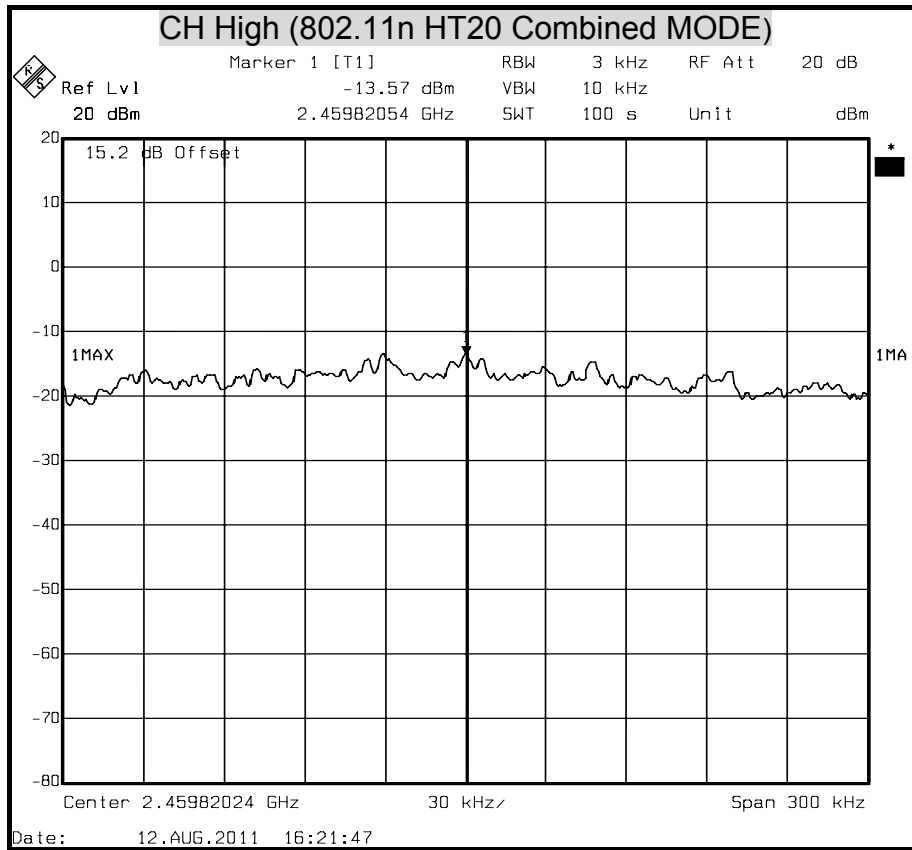




POWER SPECTRAL DENSITY ( 802.11n HT40 Combined MODE)

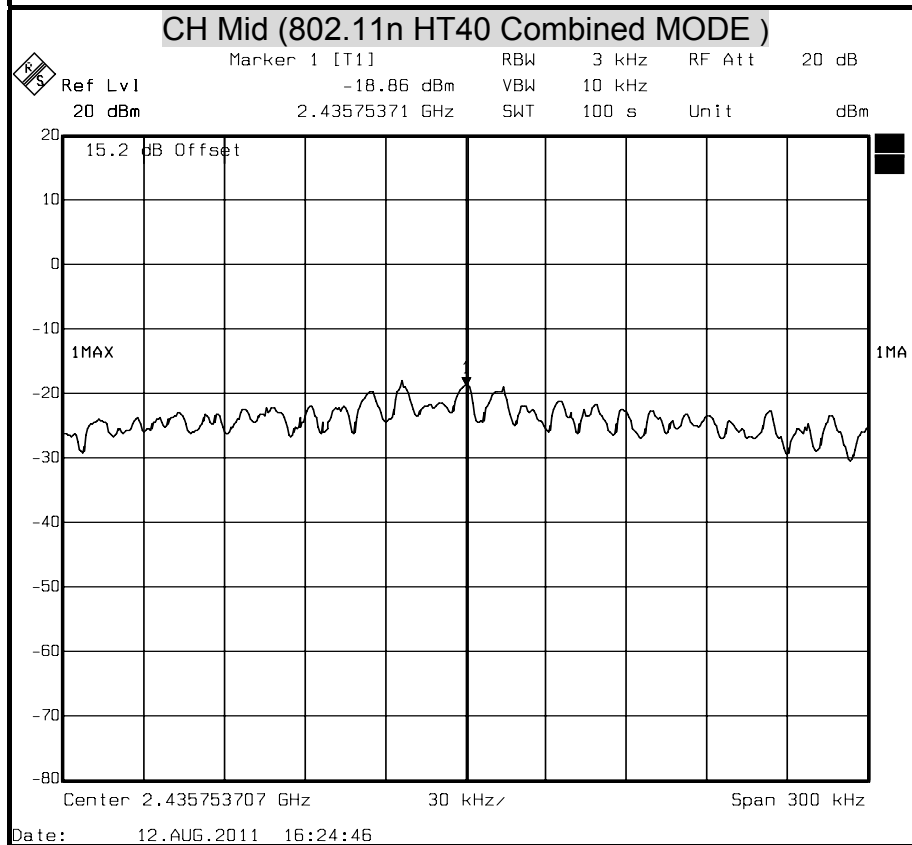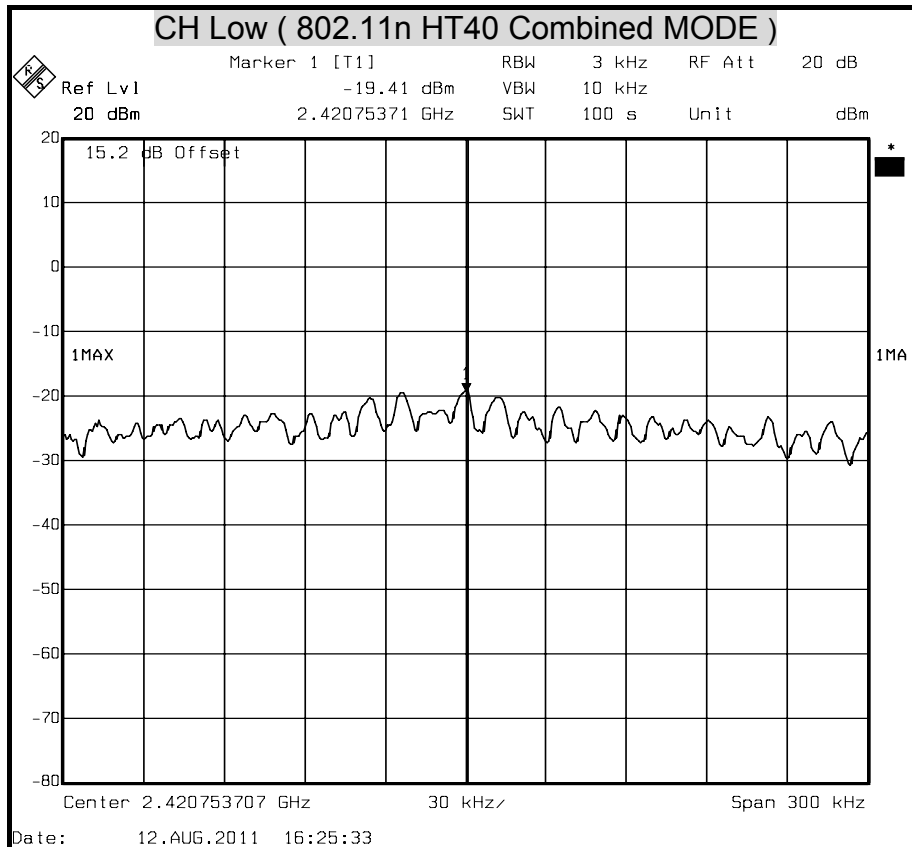



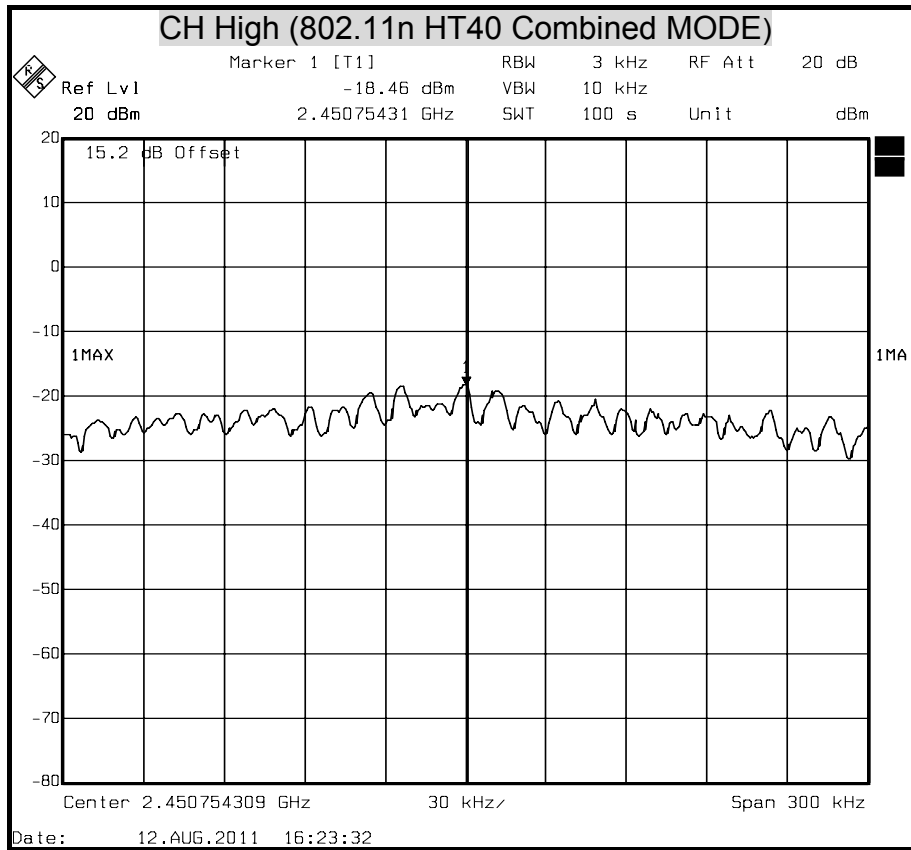



## 8.4 CONDUCTED SPURIOUS EMISSION

### LIMITS


§ 15.247(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz.

The spectrum from 30 MHz to 26.5 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.

### TEST SETUP

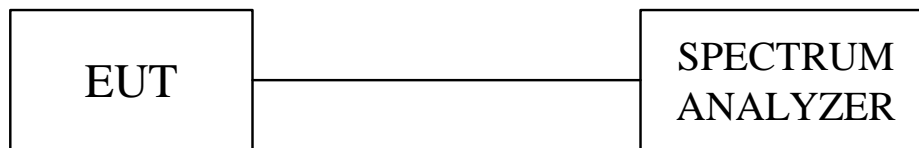

### TEST RESULTS

No non-compliance noted.



802.11b Mode

CH Low

Frequency	Offset	Reading	Level	Limit	Margin
(MHz)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dB)
2412	11.7	97.21	108.91	N/A	N/A
2400	11.7	59.02	70.72	88.91	-18.19
2613.12625	11.7	42.12	53.82	88.91	-35.09
6908.81764	11.7	44.98	56.68	88.91	-32.23

CH Mid

Frequency	Offset	Reading	Level	Limit	Margin
(MHz)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dB)
2437	11.7	98.22	109.92	N/A	N/A
2400	11.7	41.67	53.37	89.92	-36.55
2190.54108	11.7	40.82	52.52	89.92	-37.40
6955.91182	11.7	43.96	55.66	89.92	-34.26

CH High

Frequency	Offset	Reading	Level	Limit	Margin
(MHz)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dB)
2462	11.7	98.85	110.55	N/A	N/A
2400	11.7	41.05	52.75	90.55	-37.80
1672.72545	11.7	41.31	53.01	90.55	-37.54
6908.81764	11.7	44.87	56.57	90.55	-33.98

802.11g Mode

CH Low

Frequency	Offset	Reading	Level	Limit	Margin
(MHz)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dB)
2412	11.7	90.92	102.62	N/A	N/A
2400	11.7	60.55	72.25	82.62	-10.37
1976.27255	11.7	40.91	52.61	82.62	-30.01
6955.91182	11.7	45.16	56.86	82.62	-25.76

CH Mid

Frequency	Offset	Reading	Level	Limit	Margin
(MHz)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dB)
2437	11.7	91.56	103.26	N/A	N/A
2400	11.7	39.80	51.5	83.26	-31.76
1583.44689	11.7	41.00	52.7	83.26	-30.56
6955.91182	11.7	45.09	56.79	83.26	-26.47

CH High

Frequency	Offset	Reading	Level	Limit	Margin
(MHz)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dB)
2462	11.7	92.44	104.14	N/A	N/A
2400	11.7	40.50	52.2	84.14	-31.94
2833.34669	11.7	41.80	53.5	84.14	-30.64
6908.81764	11.7	44.90	56.6	84.14	-27.54



802.11n HT20 Mode Chain 0

CH Low

Frequency (MHz)	Offset (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)
2412	11.7	89.08	100.78	N/A	N/A
2400	11.7	58.53	70.23	80.78	-10.55
1892.94589	11.7	41.04	52.74	80.78	-28.04
6720.44088	11.7	44.97	56.67	80.78	-24.11

CH Mid

Frequency (MHz)	Offset (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)
2437	11.7	89.14	100.84	N/A	N/A
2400	11.7	39.98	51.68	80.84	-29.16
637.0941884	11.7	39.98	51.68	80.84	-29.16
6861.72345	11.7	45.70	57.4	80.84	-23.44

CH High

Frequency (MHz)	Offset (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)
2462	11.7	89.65	101.35	N/A	N/A
2400	11.7	41.38	53.08	81.35	-28.27
2910.72144	11.7	40.84	52.54	81.35	-28.81
6673.34669	11.7	45.60	57.3	81.35	-24.05

802.11n HT20 Mode Chain 1

CH Low

Frequency (MHz)	Offset (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)
2412	11.7	90.08	101.78	N/A	N/A
2400	11.7	60.55	72.25	81.78	-9.53
1547.73547	11.7	41.02	52.72	81.78	-29.06
6673.34669	11.7	44.29	55.99	81.78	-25.79

CH Mid

Frequency (MHz)	Offset (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)
2437	11.7	90.92	102.62	N/A	N/A
2400	11.7	40.63	52.33	82.62	-30.29
1256.09218	11.7	40.62	52.32	82.62	-30.30
6673.34669	11.7	44.12	55.82	82.62	-26.80

CH High

Frequency (MHz)	Offset (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)
2462	11.7	91.10	102.8	N/A	N/A
2400	11.7	40.52	52.22	82.80	-30.58
2232.20441	11.7	41.55	53.25	82.80	-29.55
6955.91182	11.7	44.91	56.61	82.80	-26.19



802.11n HT40 Mode Chain 0

CH Low

Frequency	Offset	Reading	Level	Limit	Margin
(MHz)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dB)
2422	11.7	84.25	95.95	N/A	N/A
2400	11.7	57.08	68.78	75.95	-7.17
1571.54309	11.7	40.97	52.67	75.95	-23.28
6673.34669	11.7	44.55	56.25	75.95	-19.70

CH Mid

Frequency	Offset	Reading	Level	Limit	Margin
(MHz)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dB)
2437	11.7	84.29	95.99	N/A	N/A
2400	11.7	42.46	54.16	75.99	-21.83
2625.03006	11.7	41.54	53.24	75.99	-22.75
6626.25251	11.7	44.42	56.12	75.99	-19.87

CH High

Frequency	Offset	Reading	Level	Limit	Margin
(MHz)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dB)
2452	11.7	84.52	96.22	N/A	N/A
2400	11.7	39.28	50.98	76.22	-25.24
1946.51303	11.7	41.28	52.98	76.22	-23.24
6673.34669	11.7	44.30	56	76.22	-20.22

802.11n HT40 Mode Chain 1

CH Low

Frequency	Offset	Reading	Level	Limit	Margin
(MHz)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dB)
2422	11.7	87.33	99.03	N/A	N/A
2400	11.7	57.47	69.17	79.03	-9.86
1714.38878	11.7	40.78	52.48	79.03	-26.55
6955.91182	11.7	45.92	57.62	79.03	-21.41

CH Mid

Frequency	Offset	Reading	Level	Limit	Margin
(MHz)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dB)
2437	11.7	87.14	98.84	N/A	N/A
2400	11.7	42.05	53.75	78.84	-25.09
1875.09018	11.7	41.11	52.81	78.84	-26.03
6955.91182	11.7	44.57	56.27	78.84	-22.57

CH High

Frequency	Offset	Reading	Level	Limit	Margin
(MHz)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dB)
2452	11.7	87.93	99.63	N/A	N/A
2400	11.7	40.52	52.22	79.63	-27.41
1339.41884	11.7	41.39	53.09	79.63	-26.54
6955.91182	11.7	44.62	56.32	79.63	-23.31



802.11n HT20 Combined Mode

CH Low

Frequency (MHz)	Offset (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)
2412	15.2	91.87	107.07	N/A	N/A
2400	15.2	61.71	76.91	87.07	-10.16
125.2304609	15.2	40.08	55.28	87.07	-31.79
6579.15832	15.2	44.79	59.99	87.07	-27.08

CH Mid

Frequency (MHz)	Offset (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)
2437	15.2	91.19	106.39	N/A	N/A
2400	15.2	40.29	55.49	86.39	-30.90
1351.32265	15.2	40.10	55.3	86.39	-31.09
6955.91182	15.2	44.42	59.62	86.39	-26.77

CH High

Frequency (MHz)	Offset (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)
2462	15.2	92.65	107.85	N/A	N/A
2400	15.2	41.07	56.27	87.85	-31.58
89.51903808	15.2	40.66	55.86	87.85	-31.99
6955.91182	15.2	46.51	61.71	87.85	-26.14

802.11n HT40 Combined Mode

CH Low

Frequency (MHz)	Offset (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)
2422	15.2	87.69	102.89	N/A	N/A
2400	15.2	57.67	72.87	82.89	-10.02
89.51903808	15.2	41.22	56.42	82.89	-26.47
6720.44088	15.2	45.46	60.66	82.89	-22.23

CH Mid



Frequency (MHz)	Offset (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)
2437	15.2	87.82	103.02	N/A	N/A
2400	15.2	43.98	59.18	83.02	-23.84
89.51903808	15.2	41.63	56.83	83.02	-26.19
6626.25251	15.2	43.92	59.12	83.02	-23.90



CH High

Frequency (MHz)	Offset (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)
2452	15.2	88.23	103.43	N/A	N/A
2400	15.2	39.22	54.42	83.43	-29.01
1256.09218	15.2	40.55	55.75	83.43	-27.68
6579.15832	15.2	44.18	59.38	83.43	-24.05





### OUT-OF-BAND SPURIOUS EMISSIONS-CONDUCTED MEASUREMENT ( IEEE 802.11b MODE )

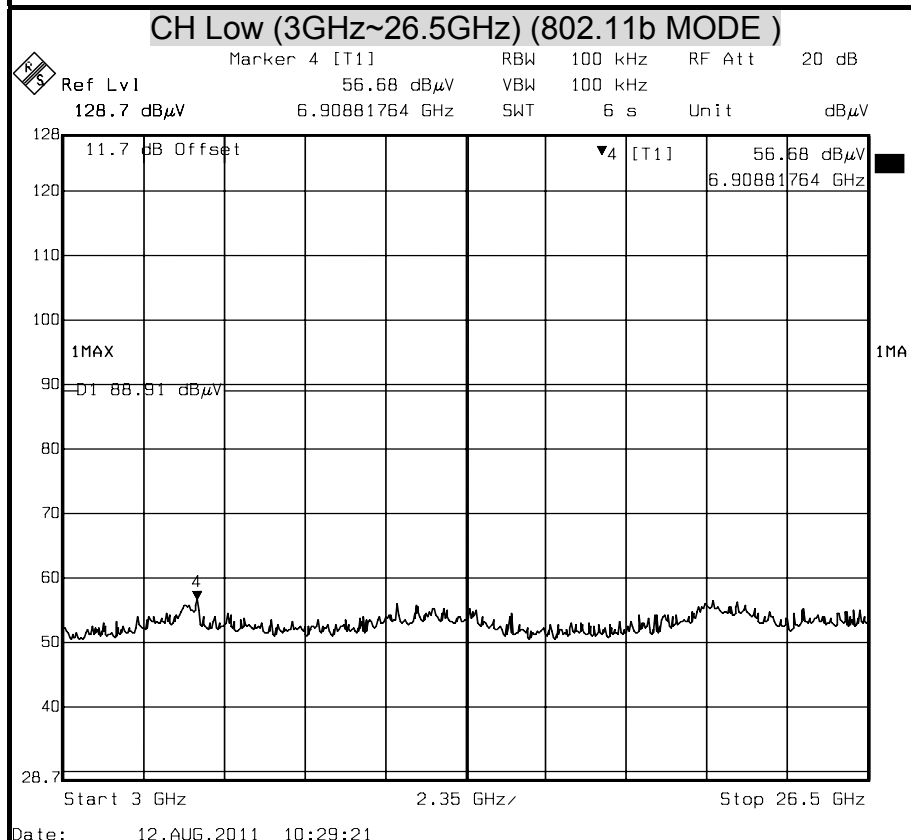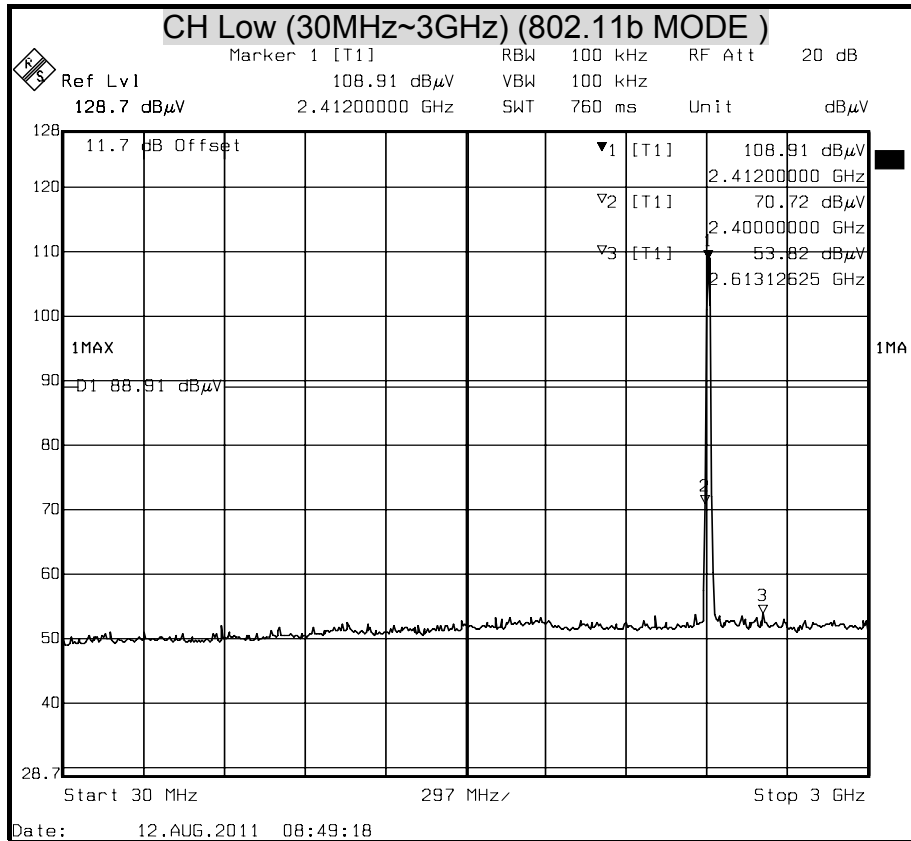

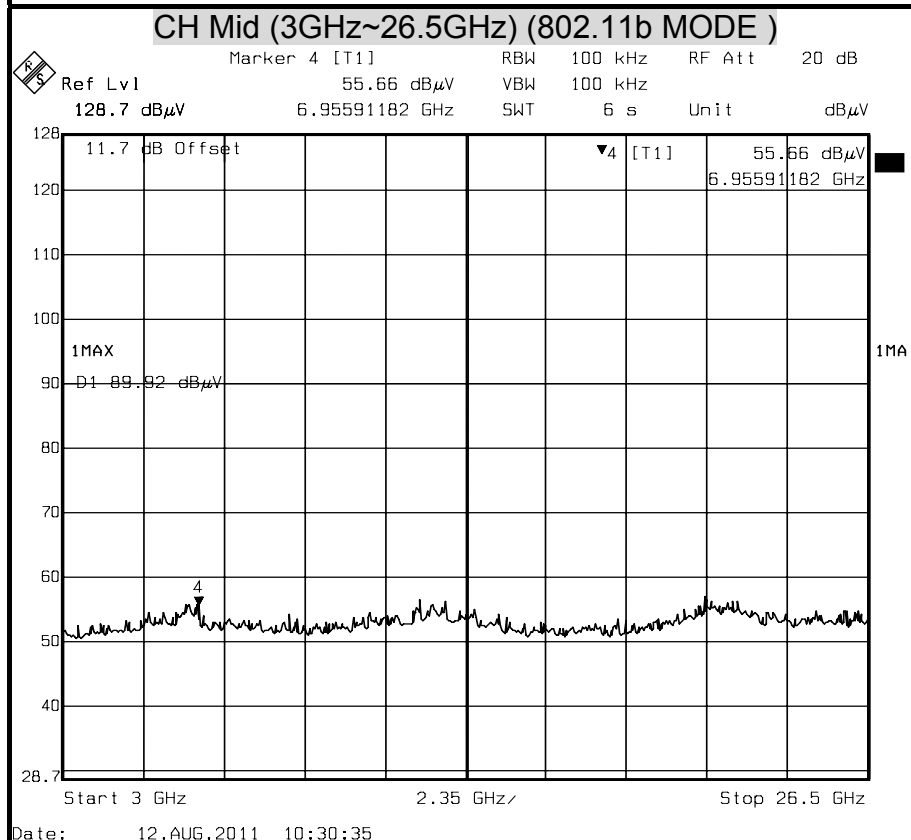
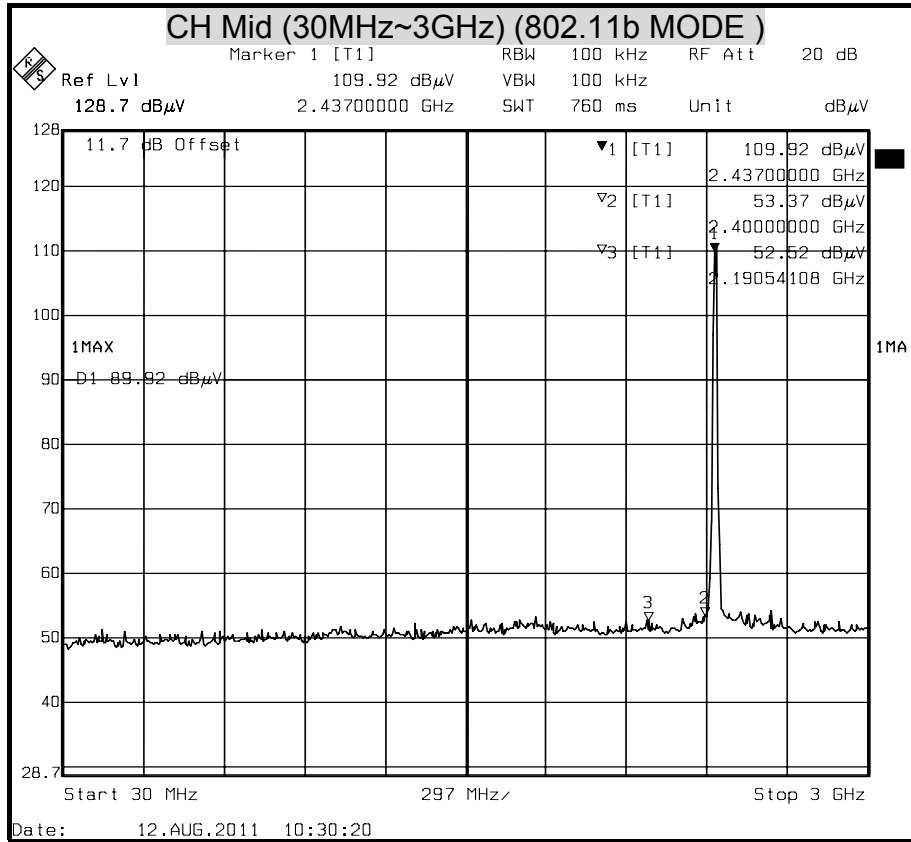






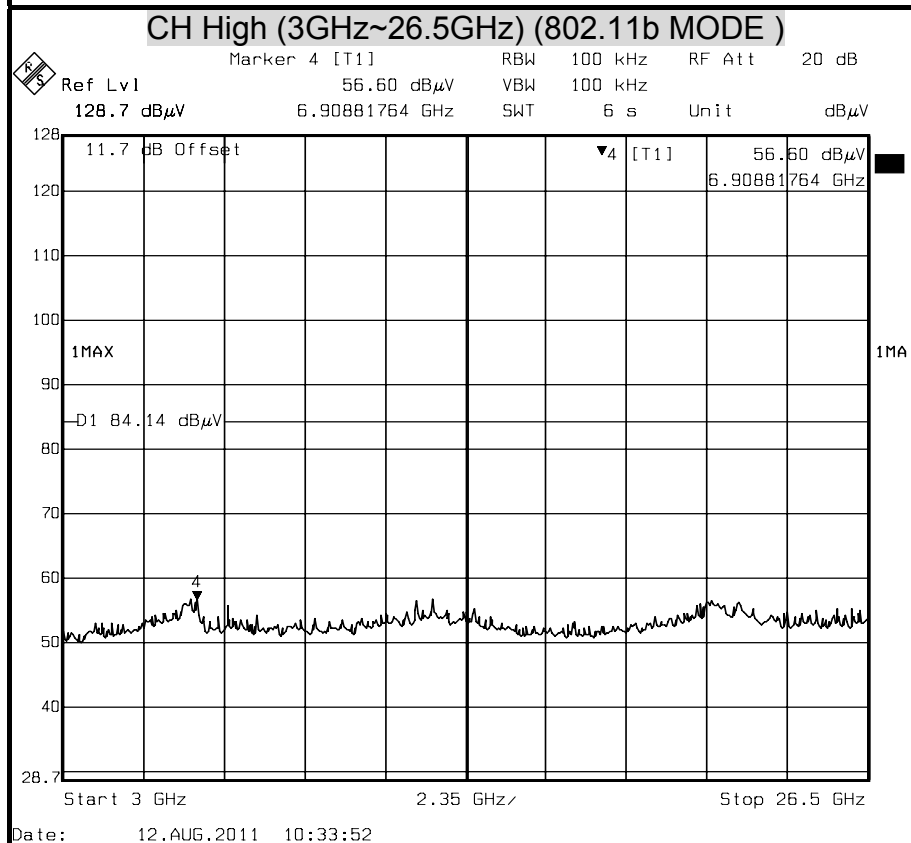
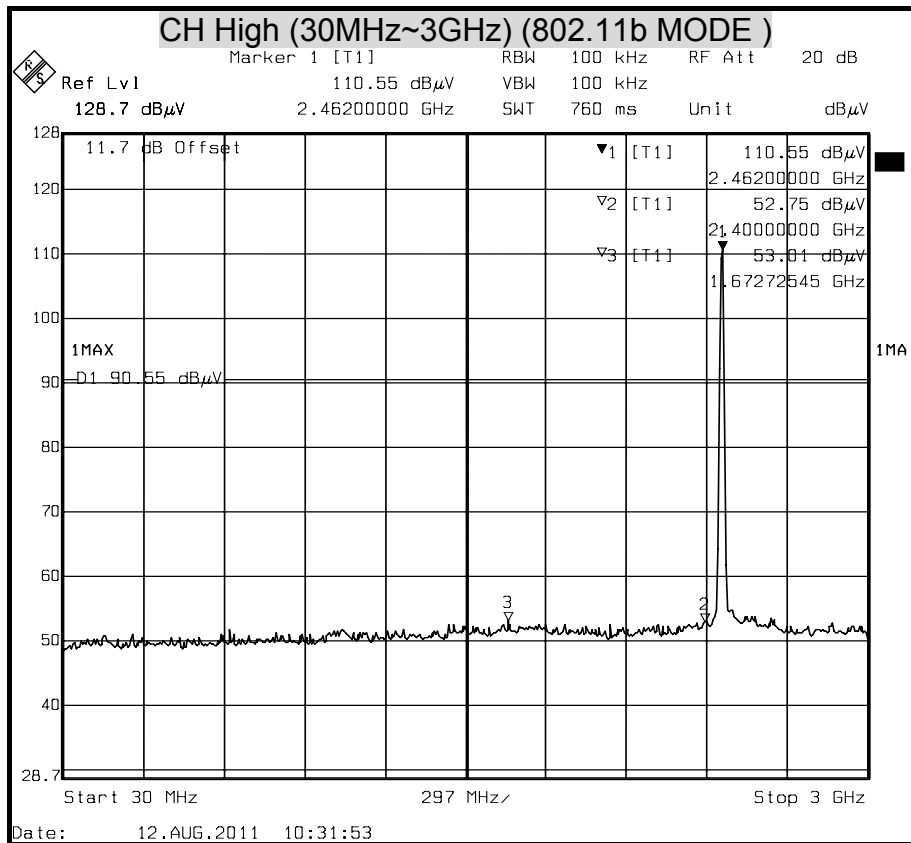




### OUT-OF-BAND SPURIOUS EMISSIONS-CONDUCTED MEASUREMENT ( 802.11g MODE )

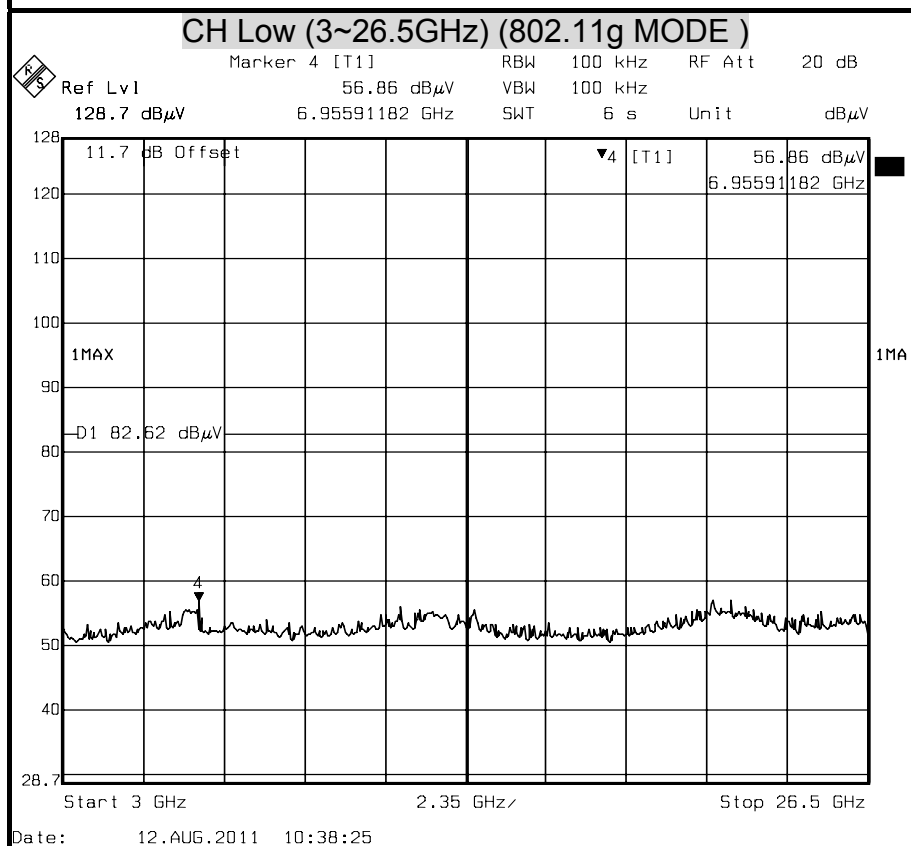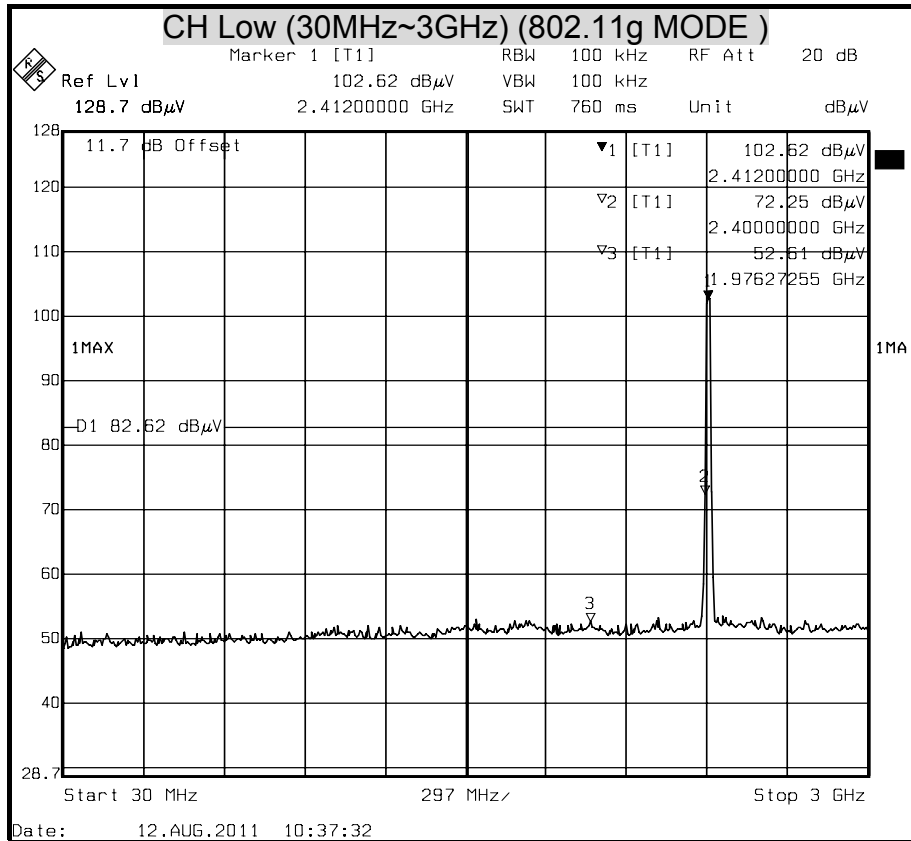


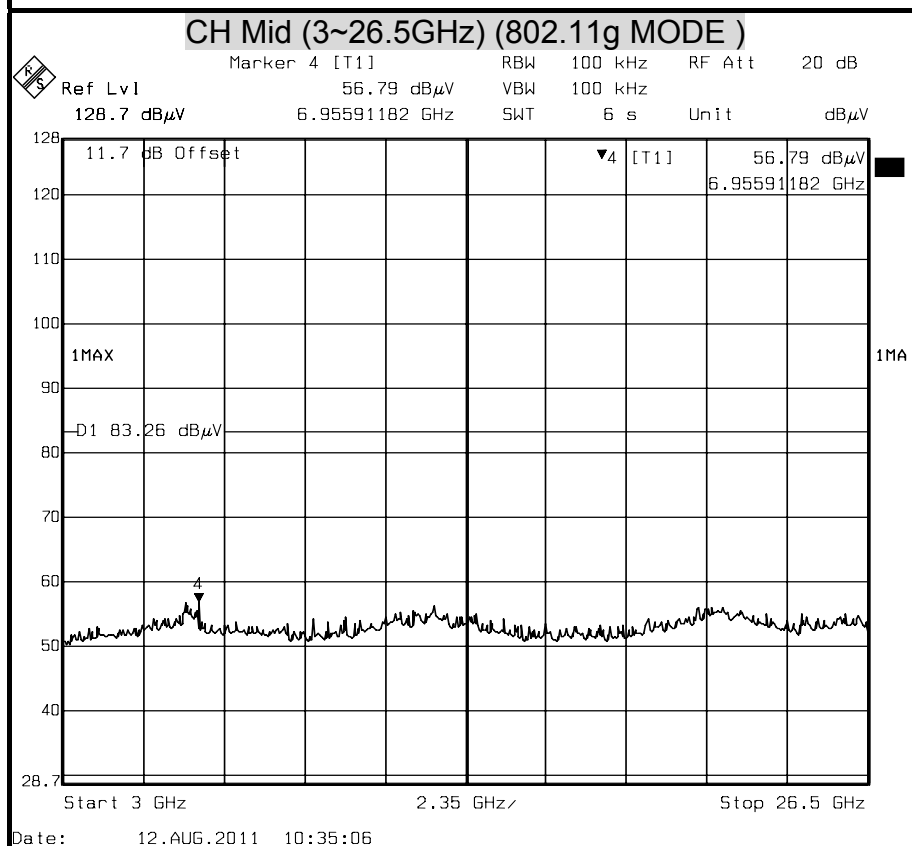
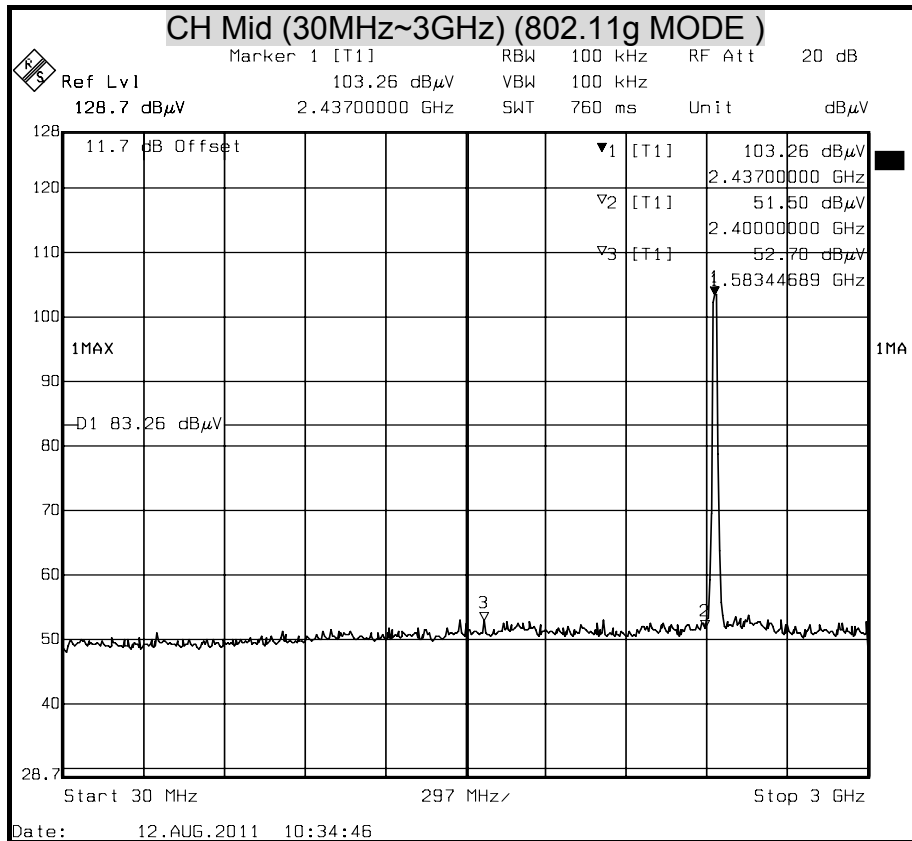


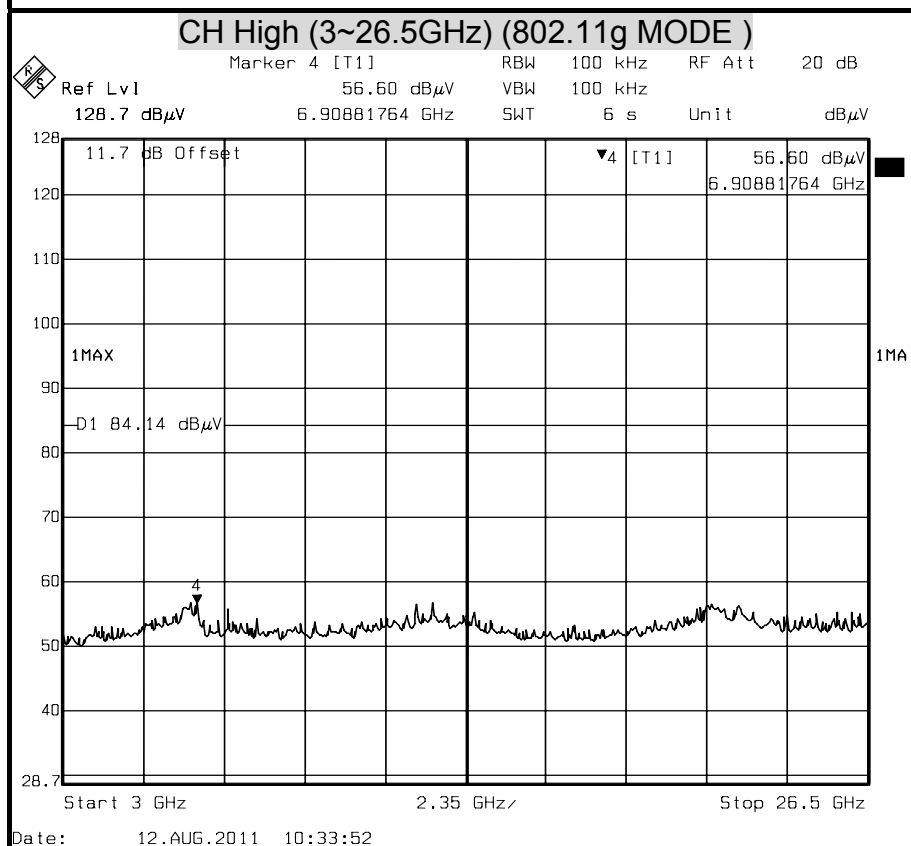
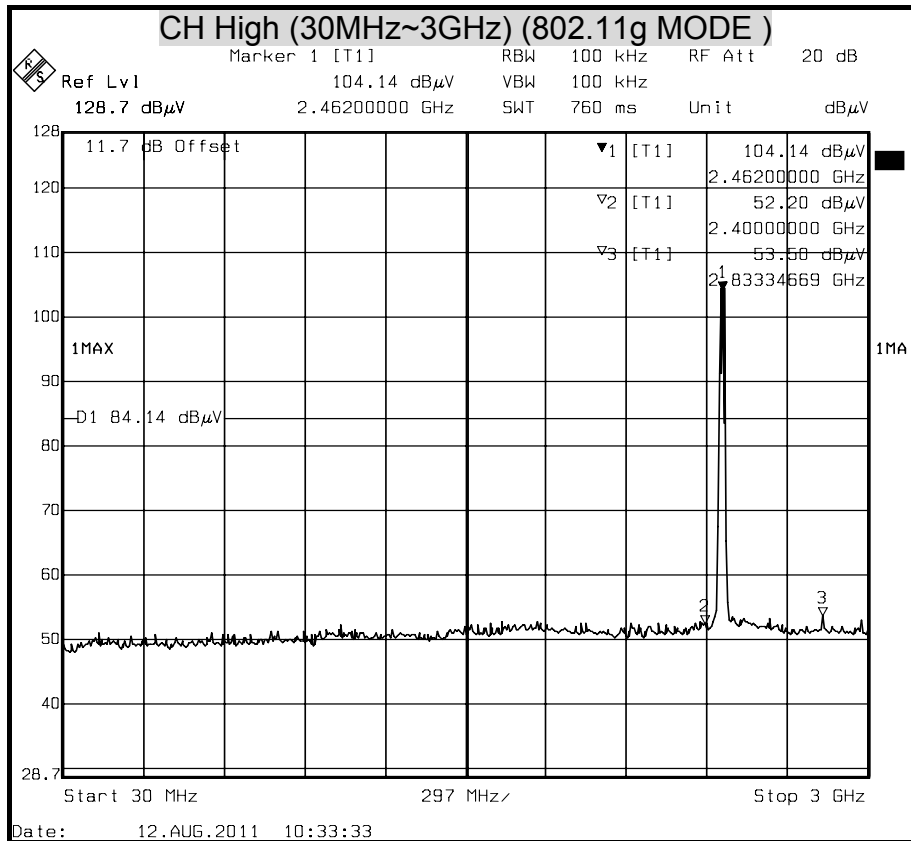






### OUT-OF-BAND SPURIOUS EMISSIONS-CONDUCTED MEASUREMENT ( 802.11n HT20 MODE )


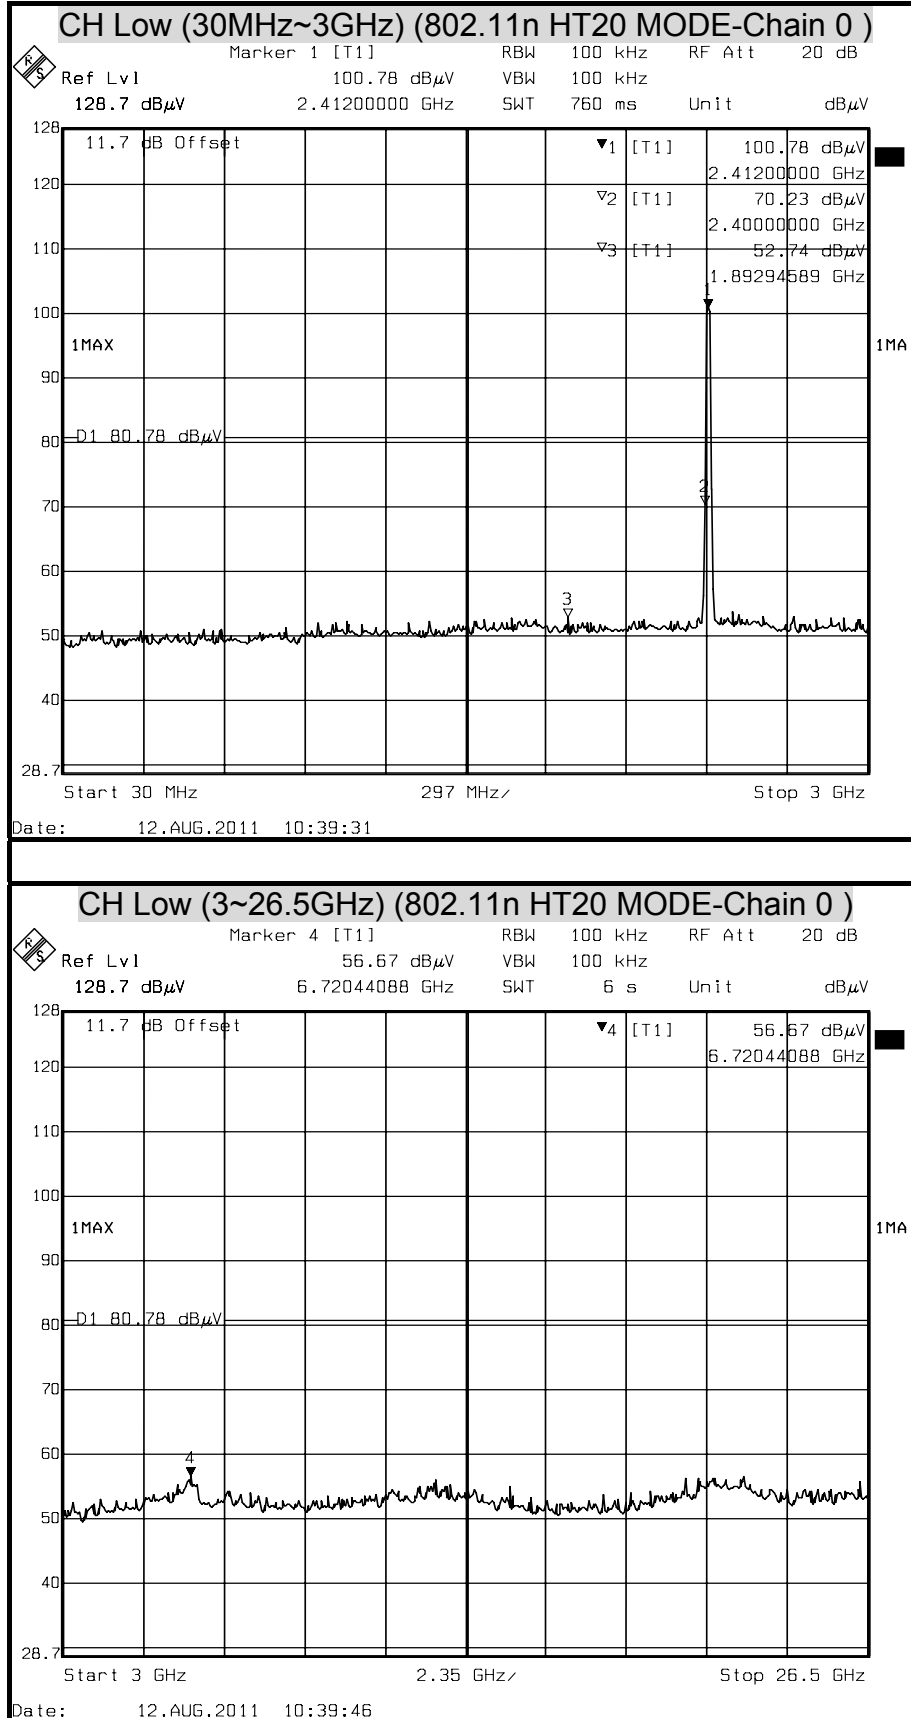


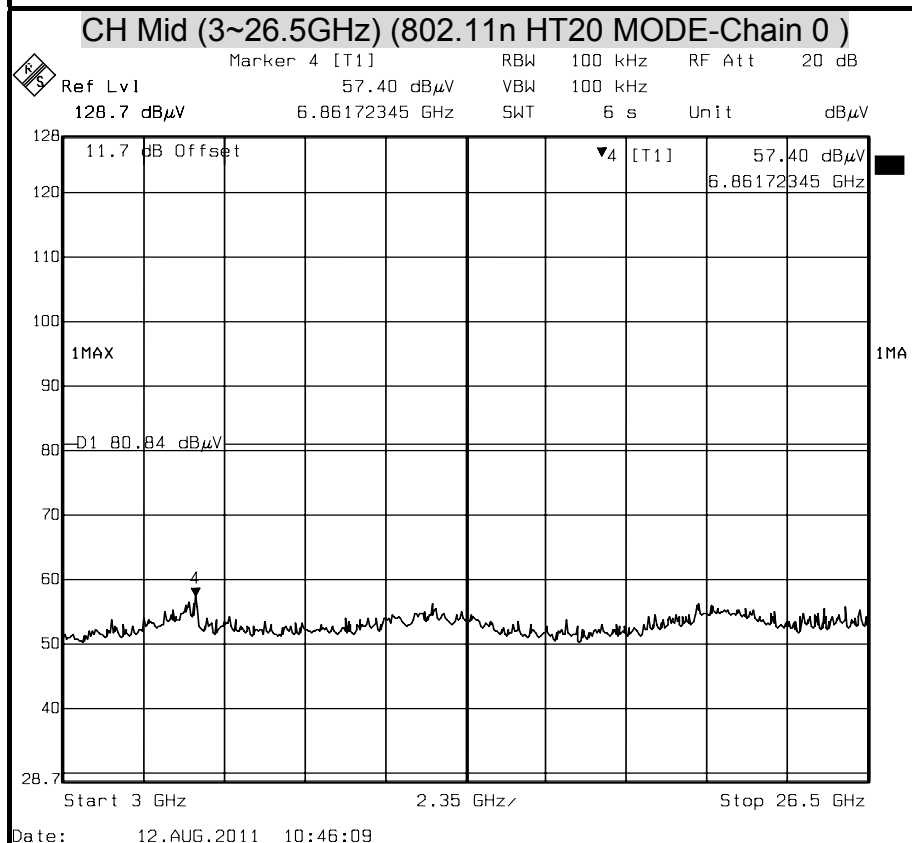
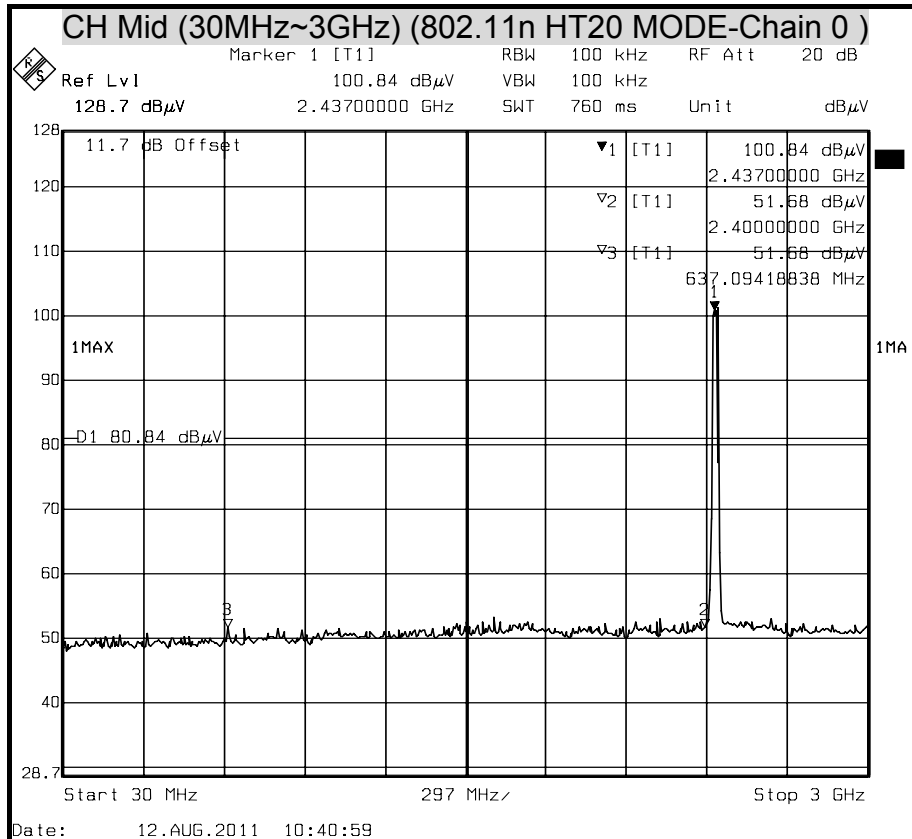


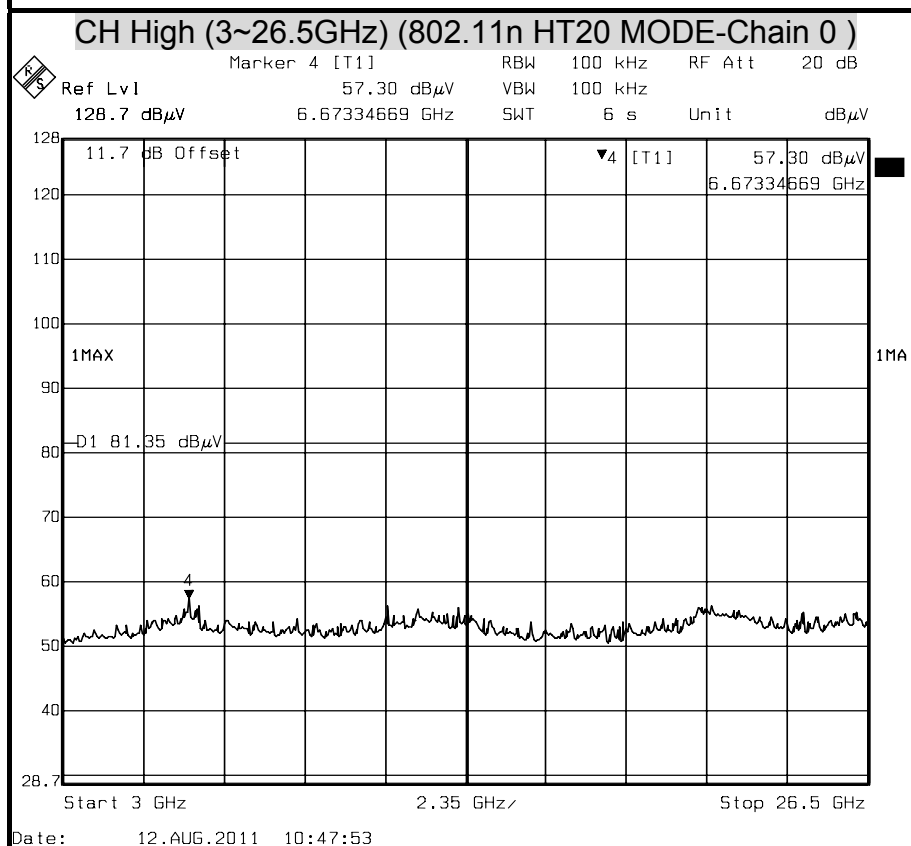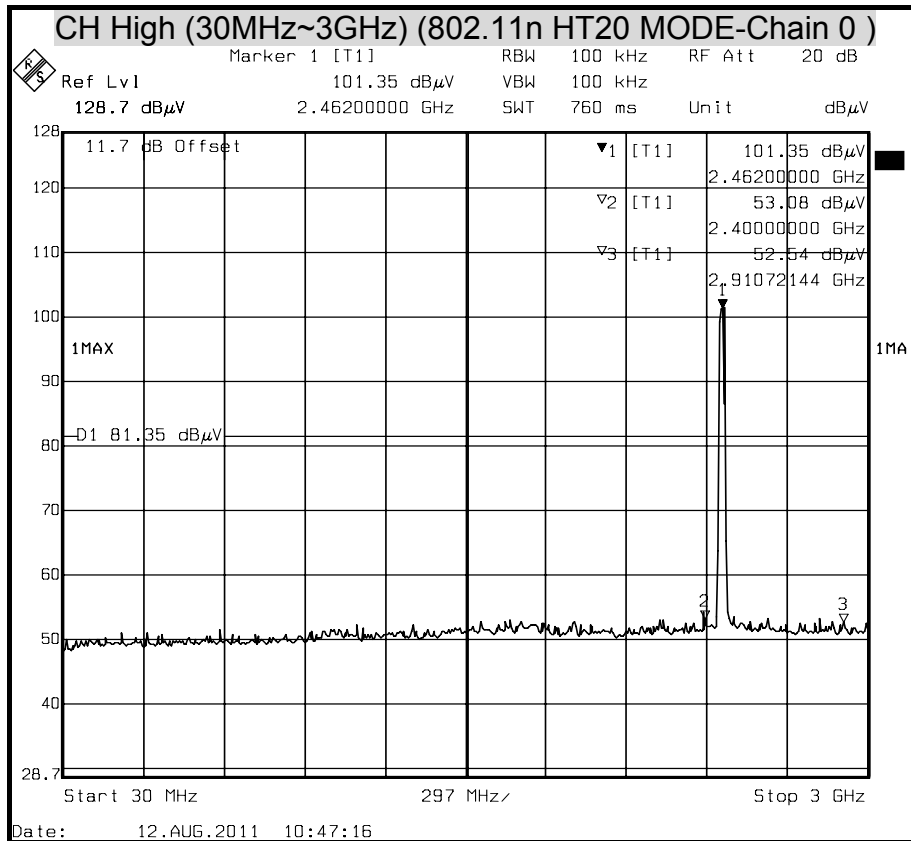

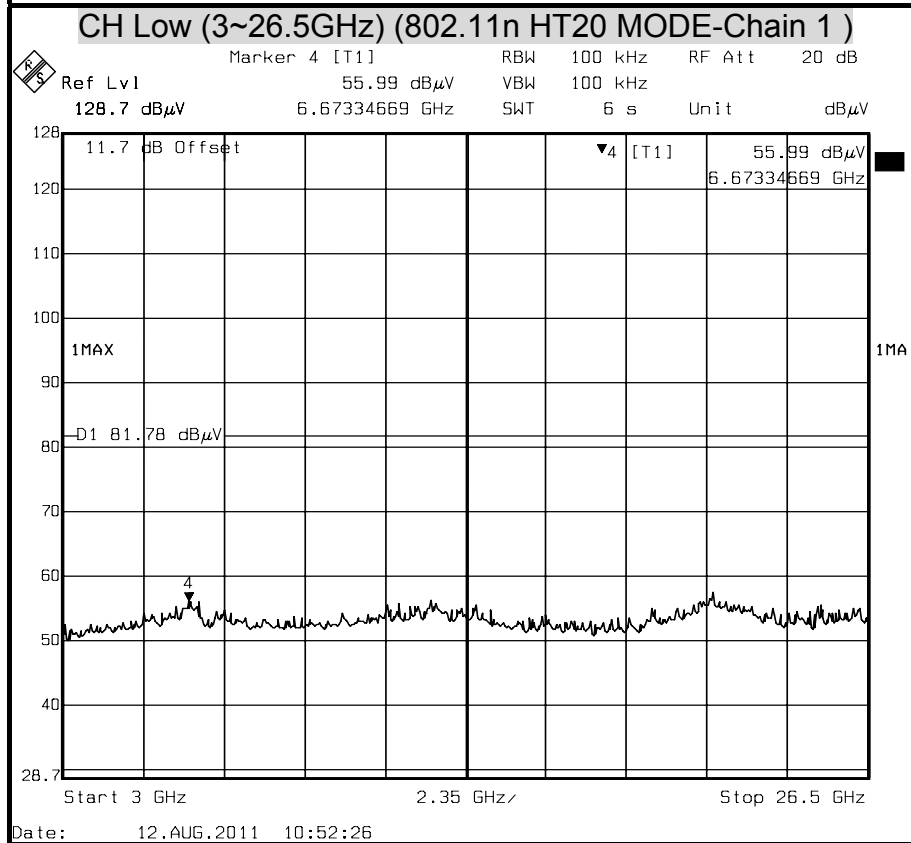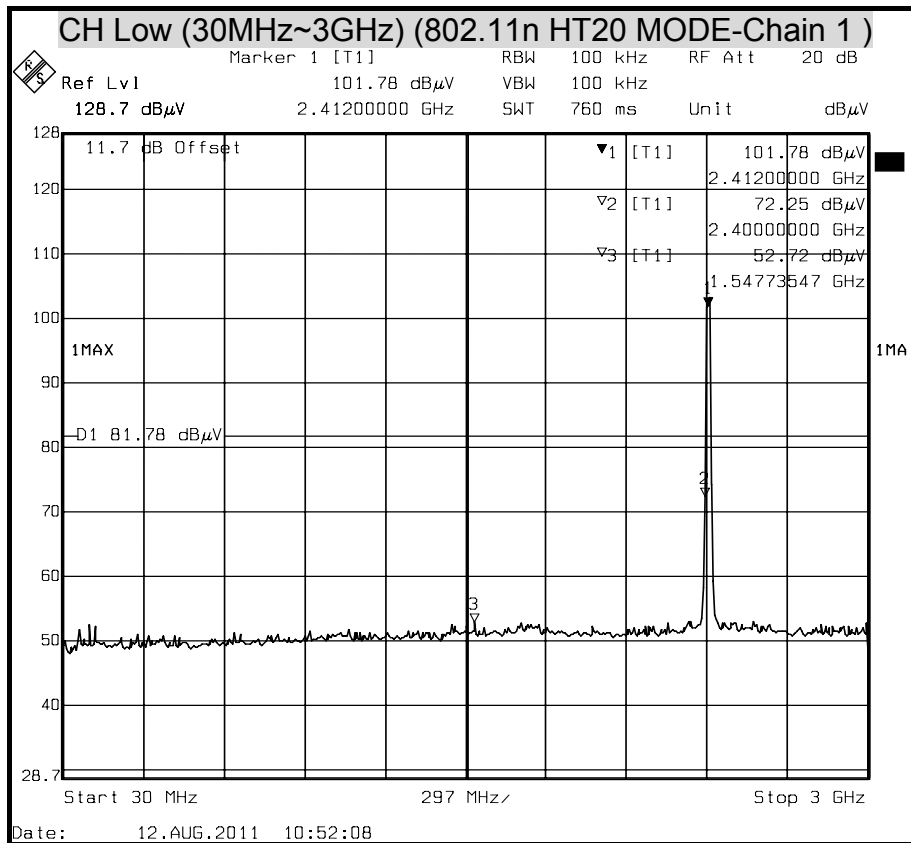





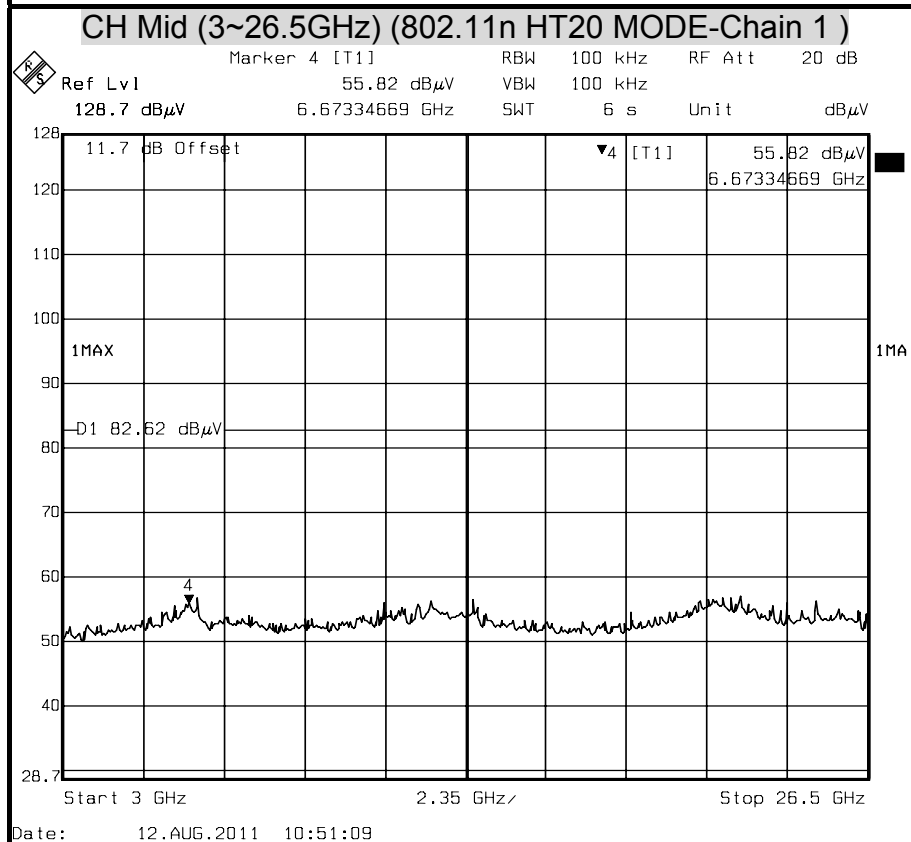
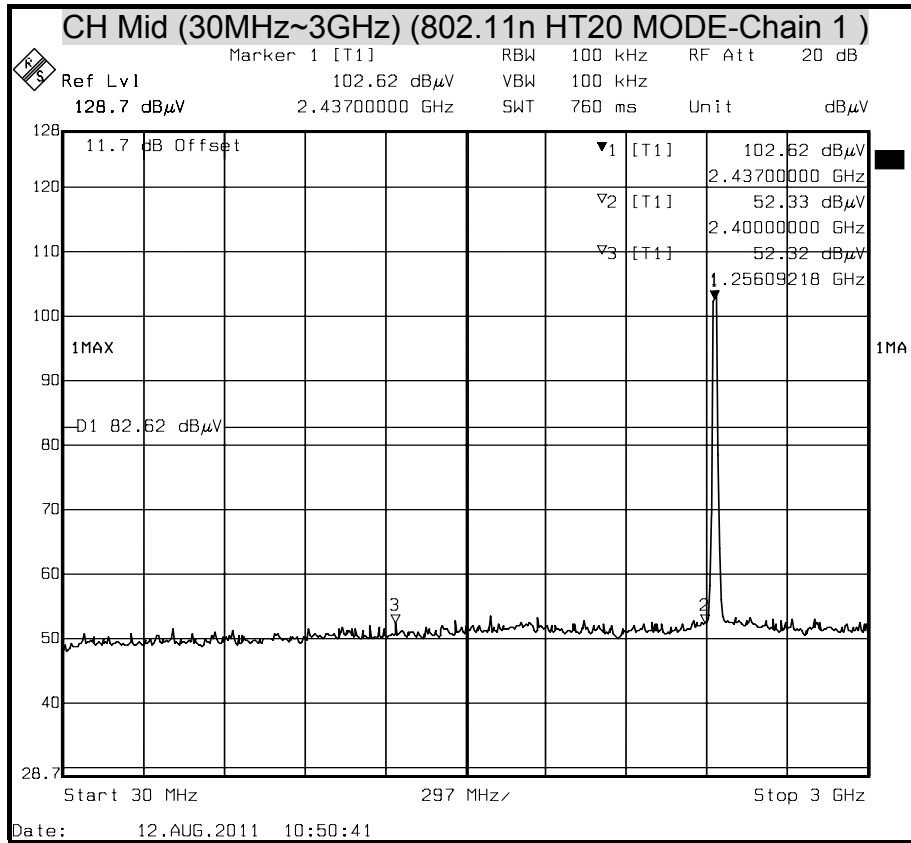


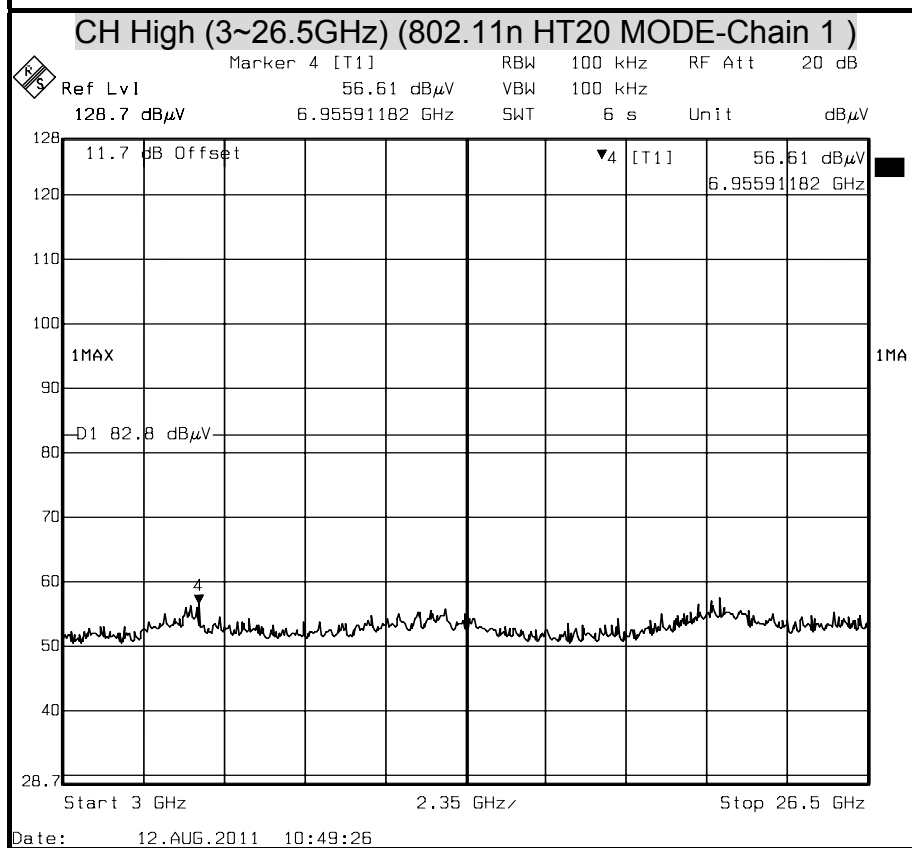
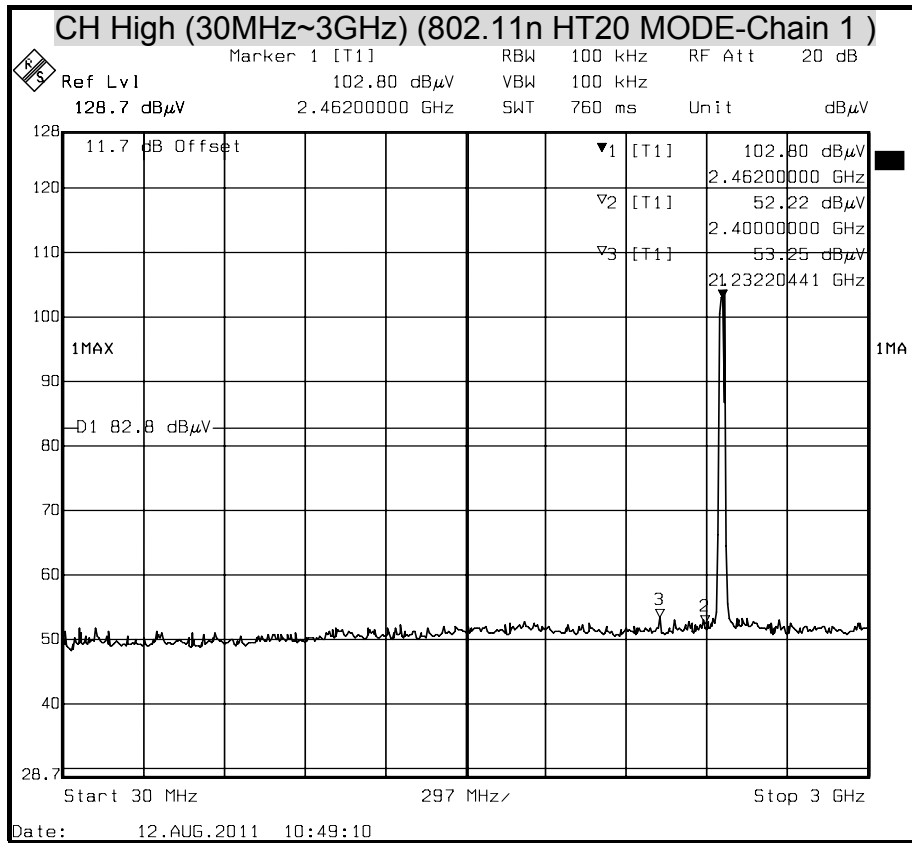








### OUT-OF-BAND SPURIOUS EMISSIONS-CONDUCTED MEASUREMENT ( 802.11n HT40 MODE )

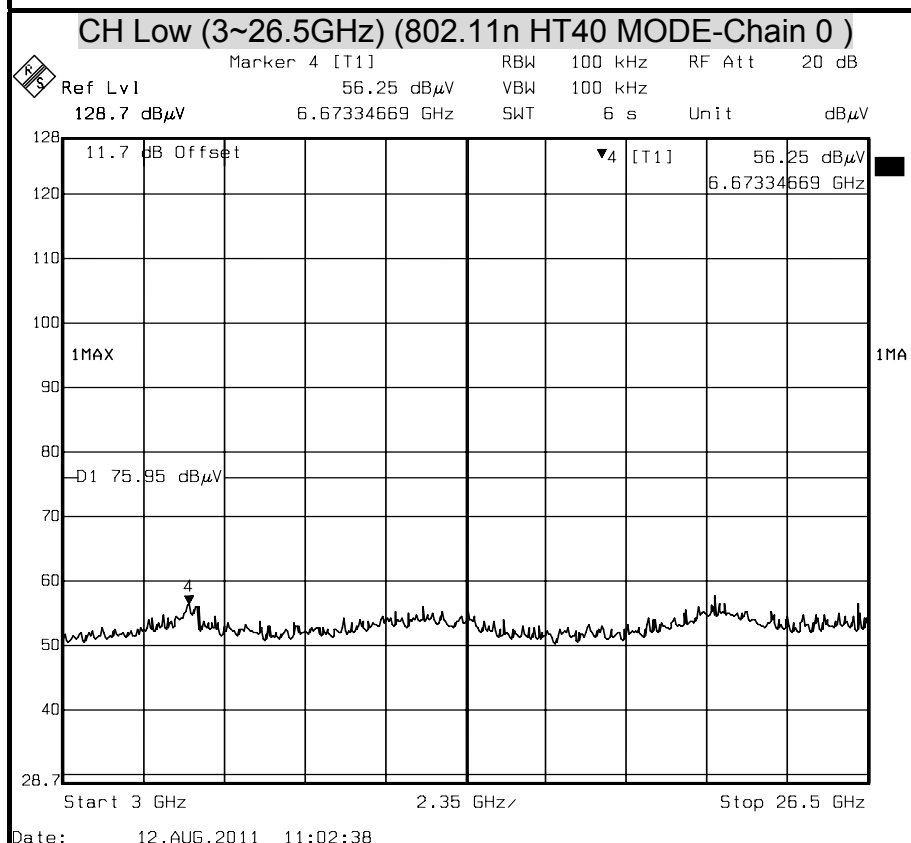
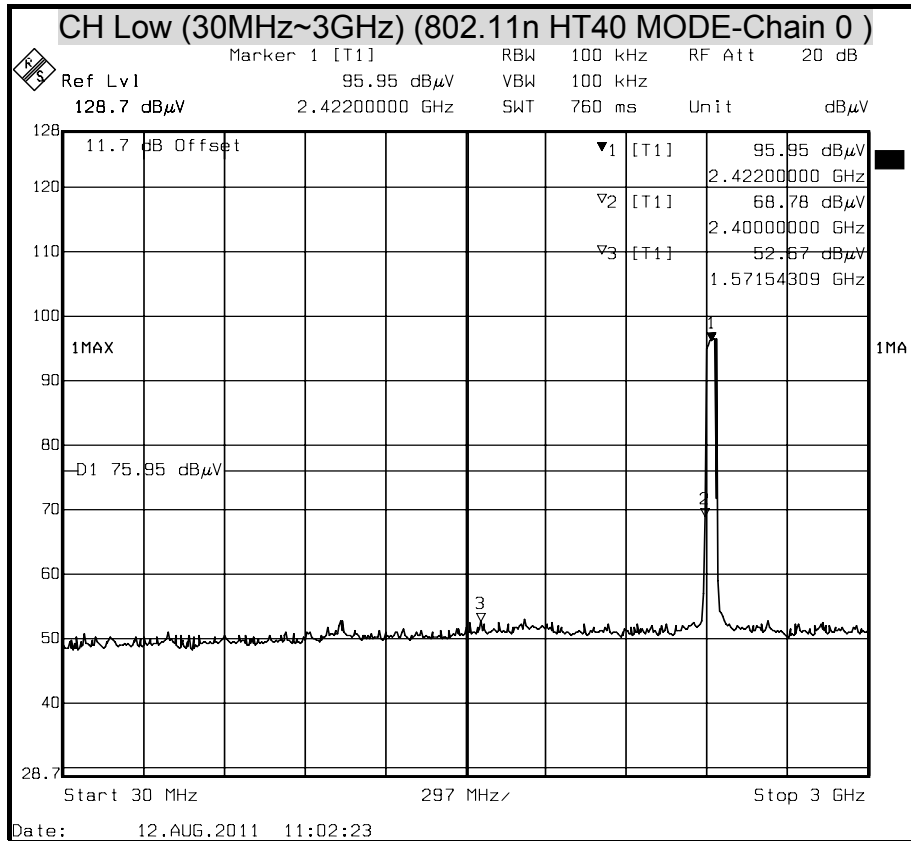


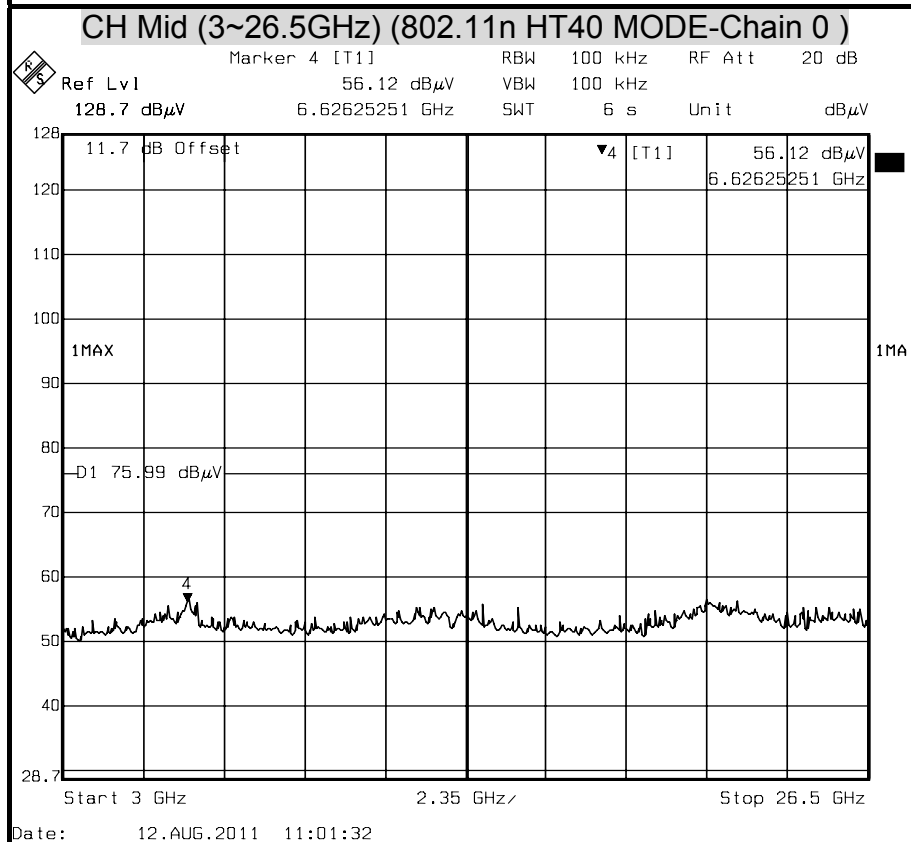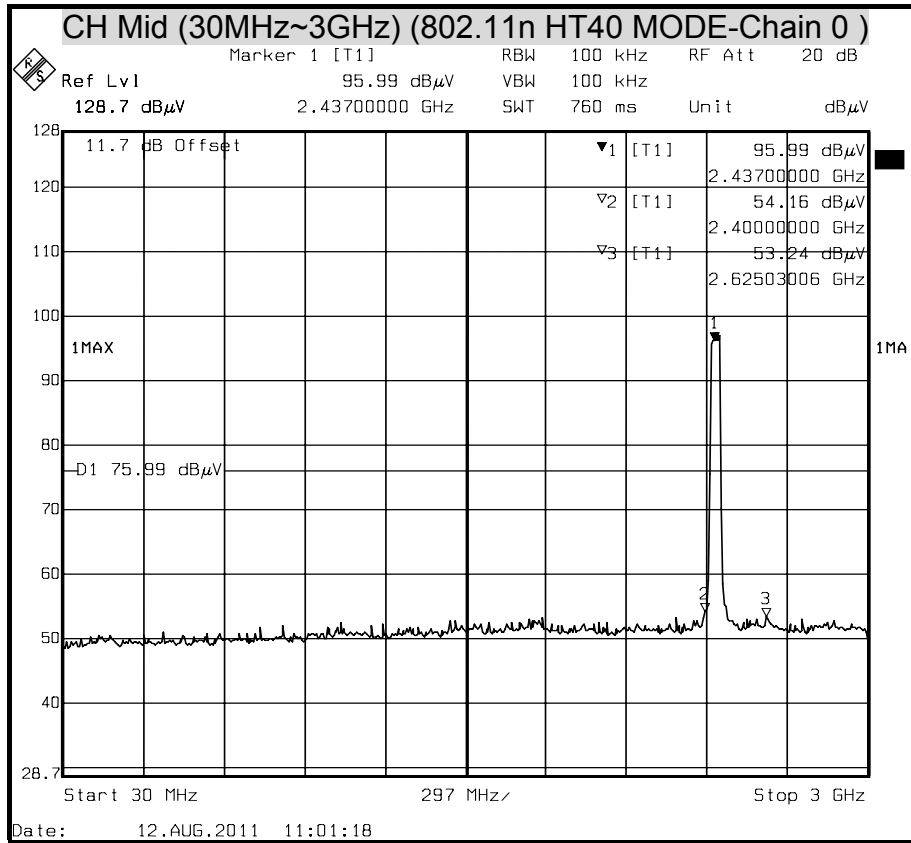

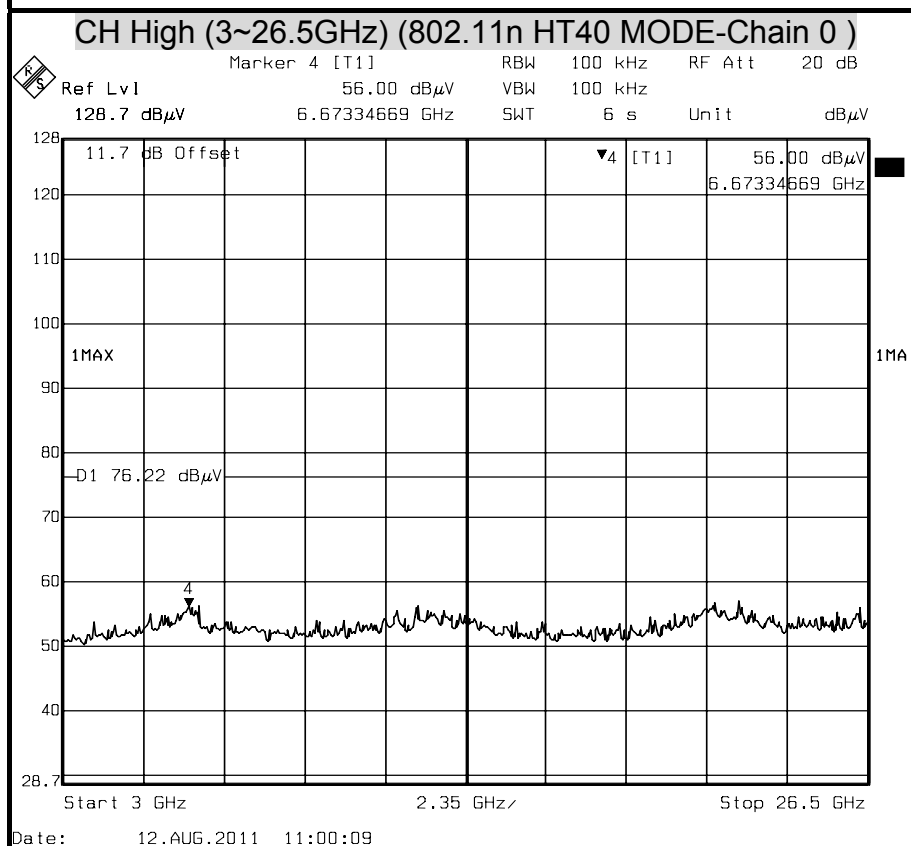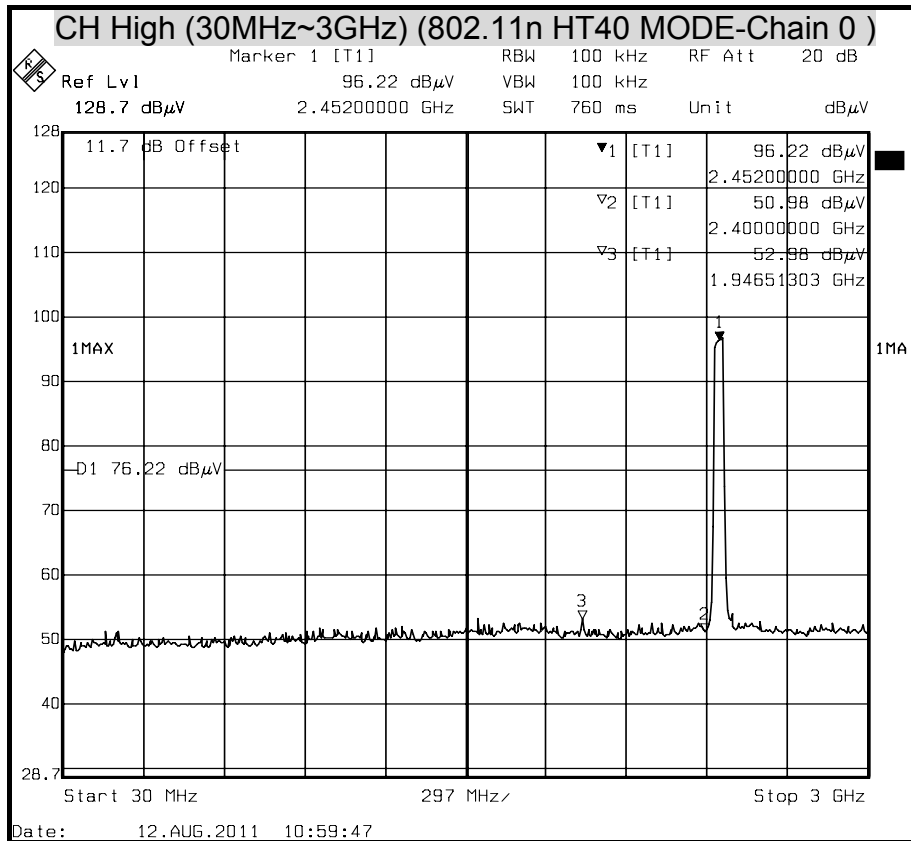

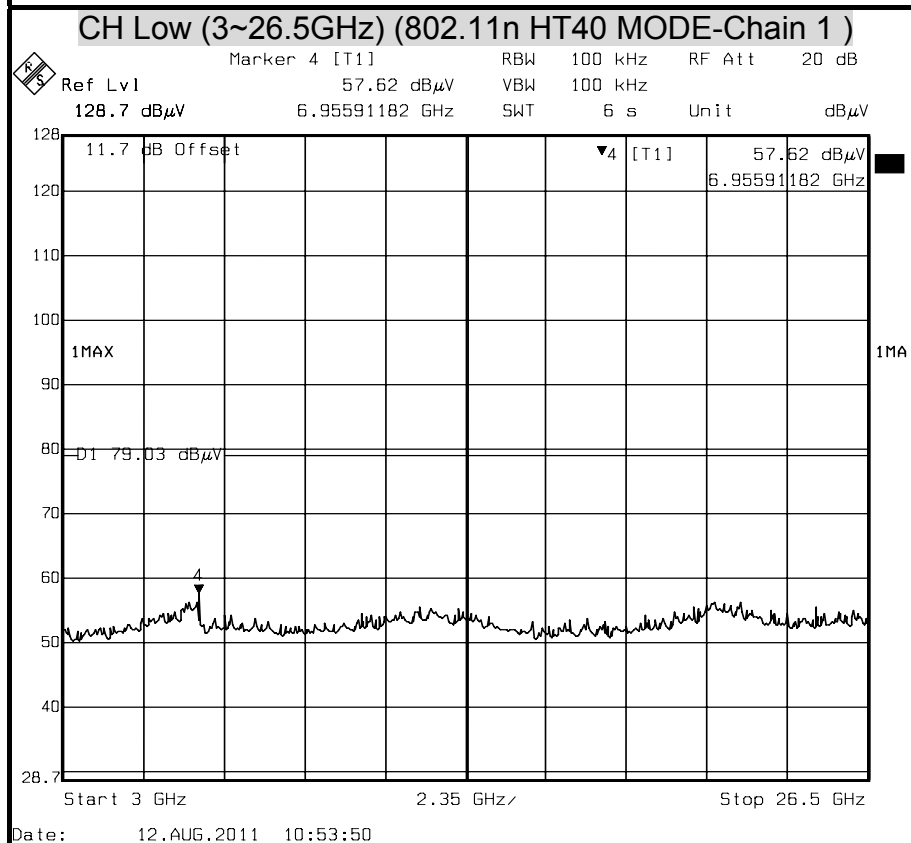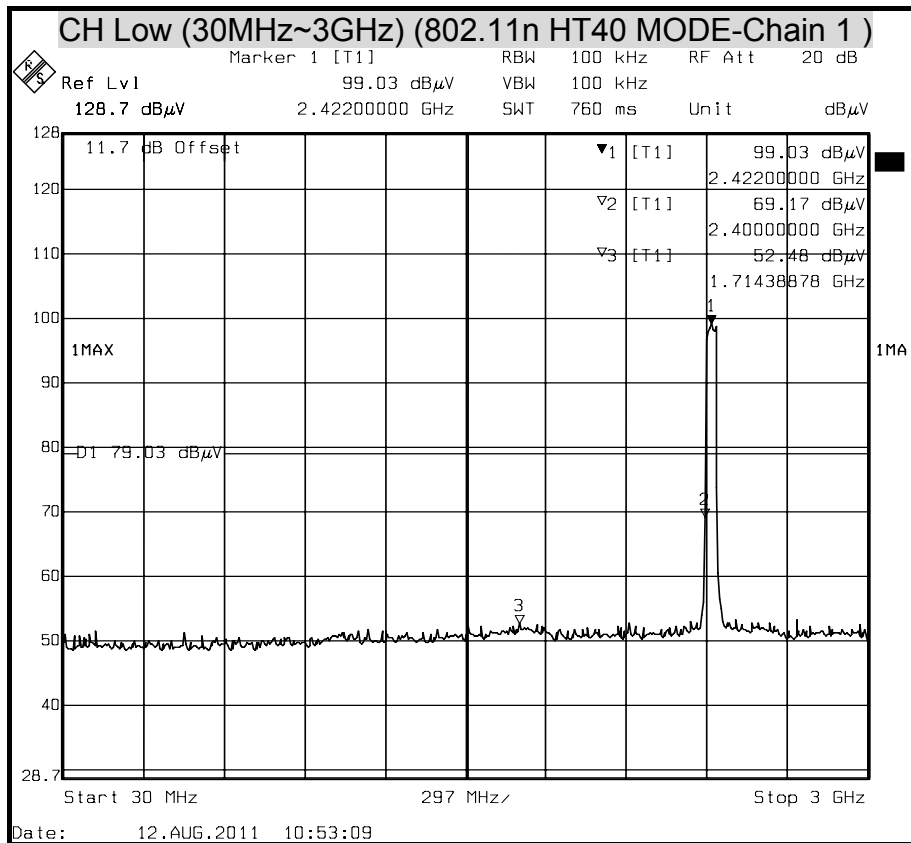

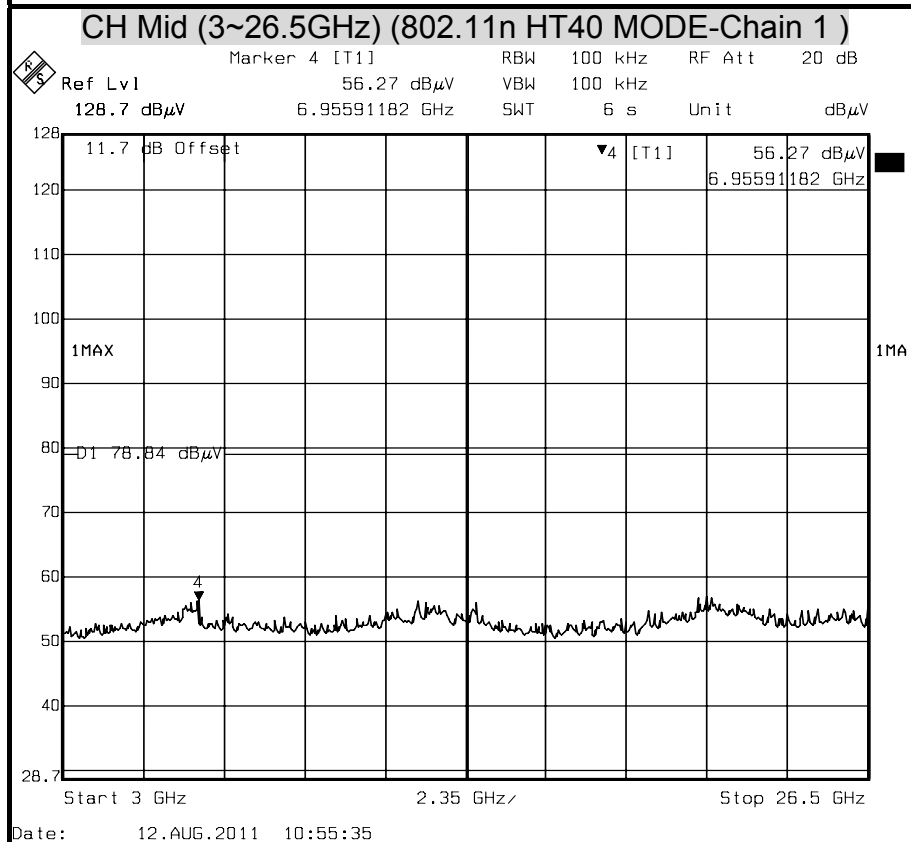
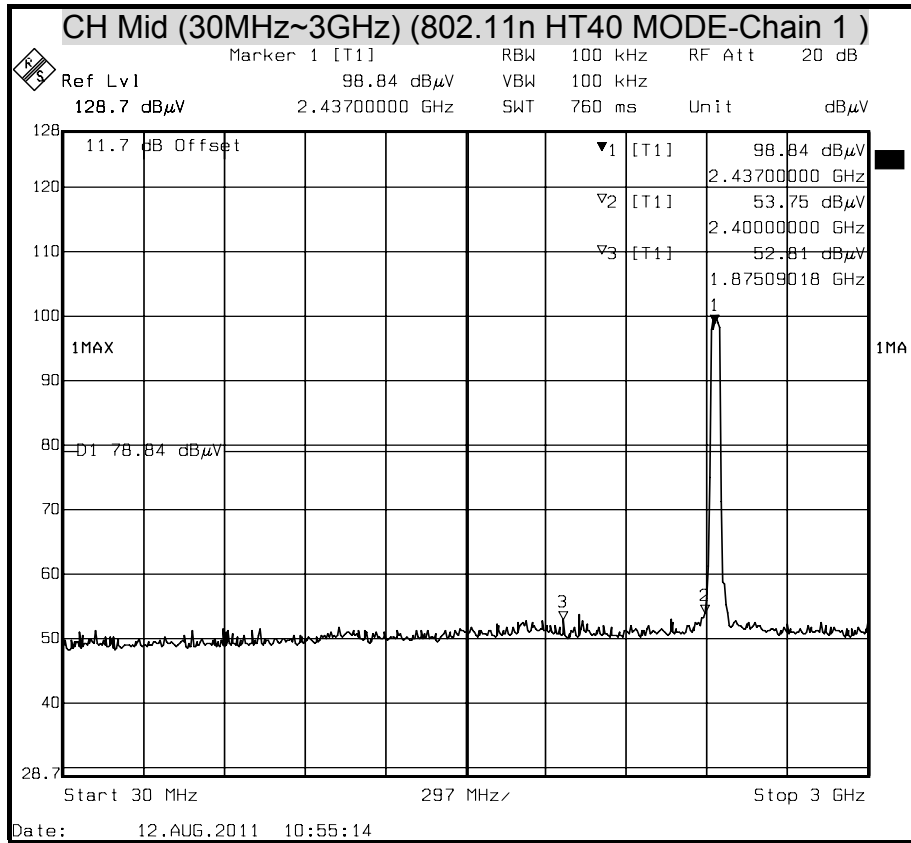


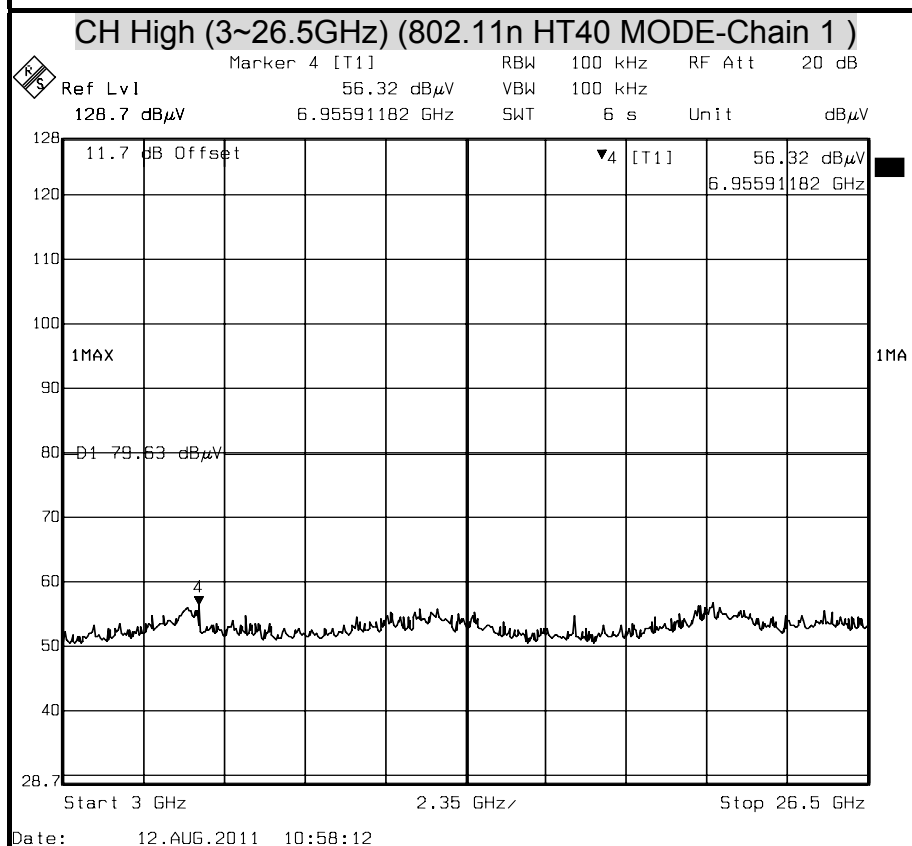
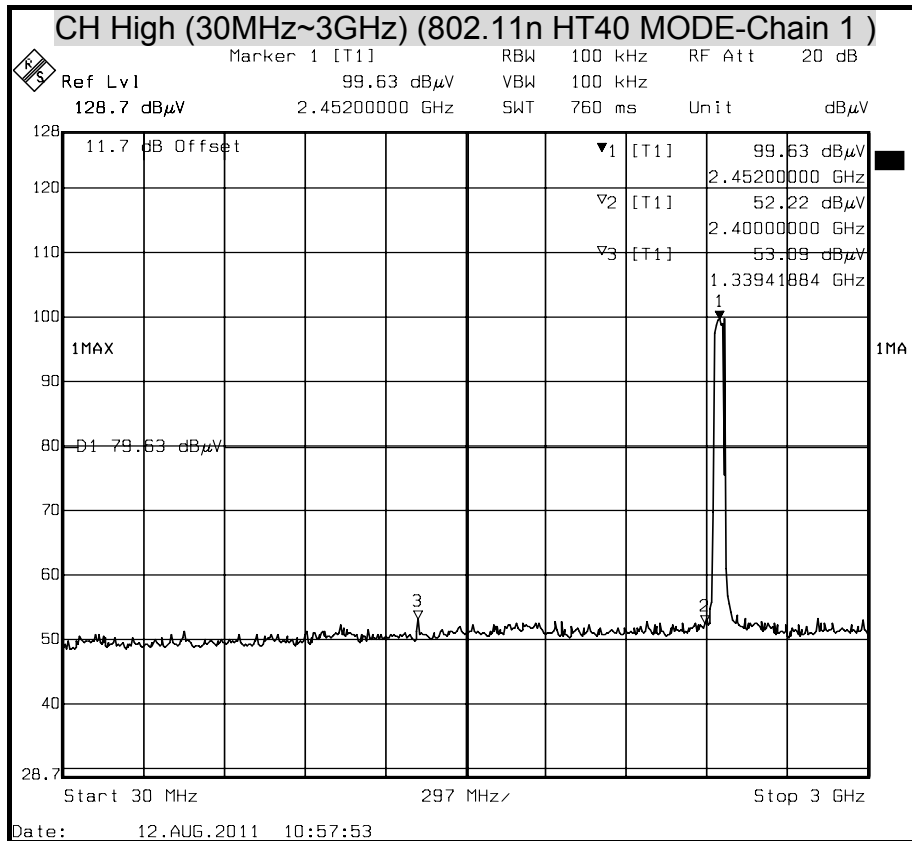








OUT-OF-BAND SPURIOUS EMISSIONS-CONDUCTED MEASUREMENT
( 802.11n HT20 Combined Mode )

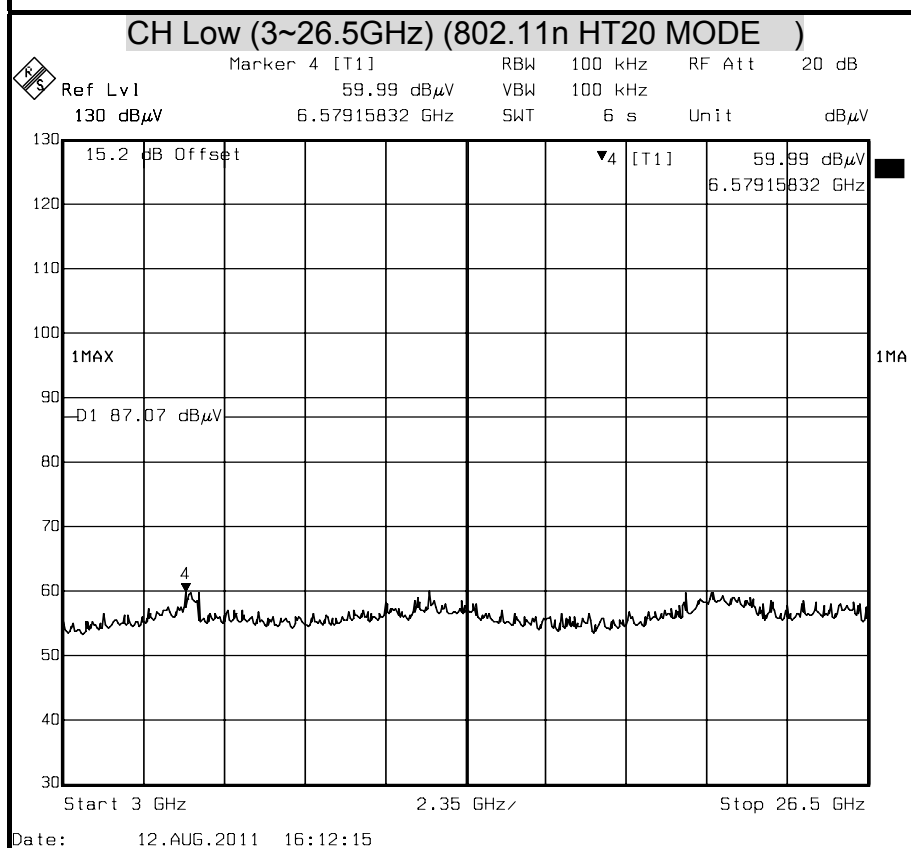
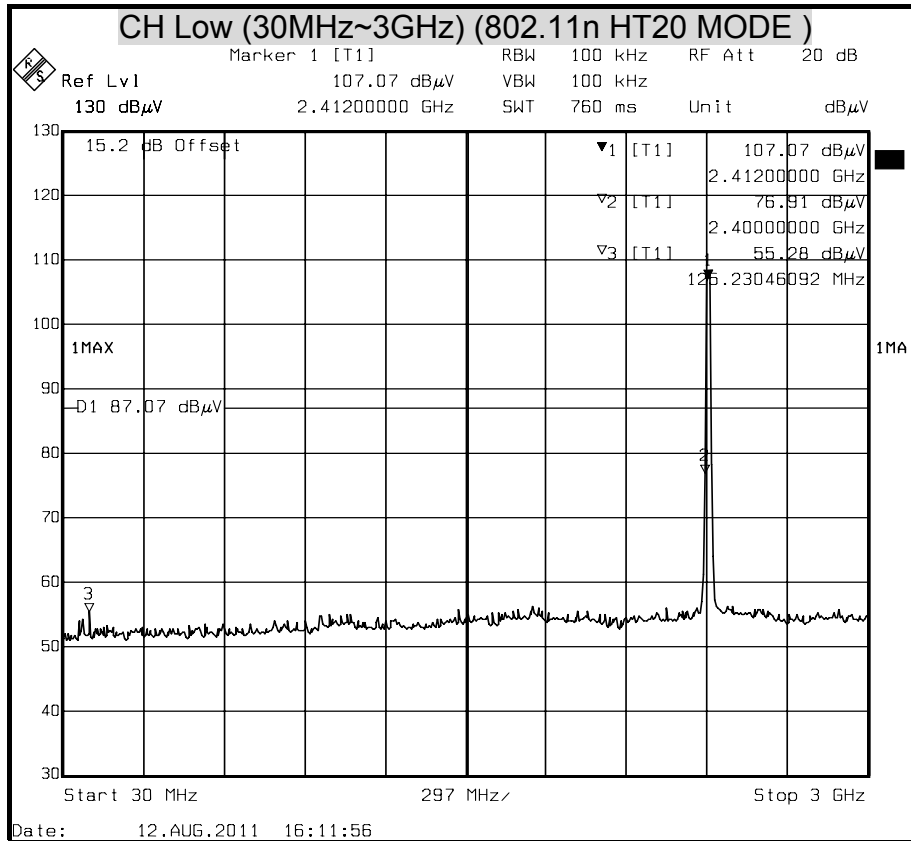


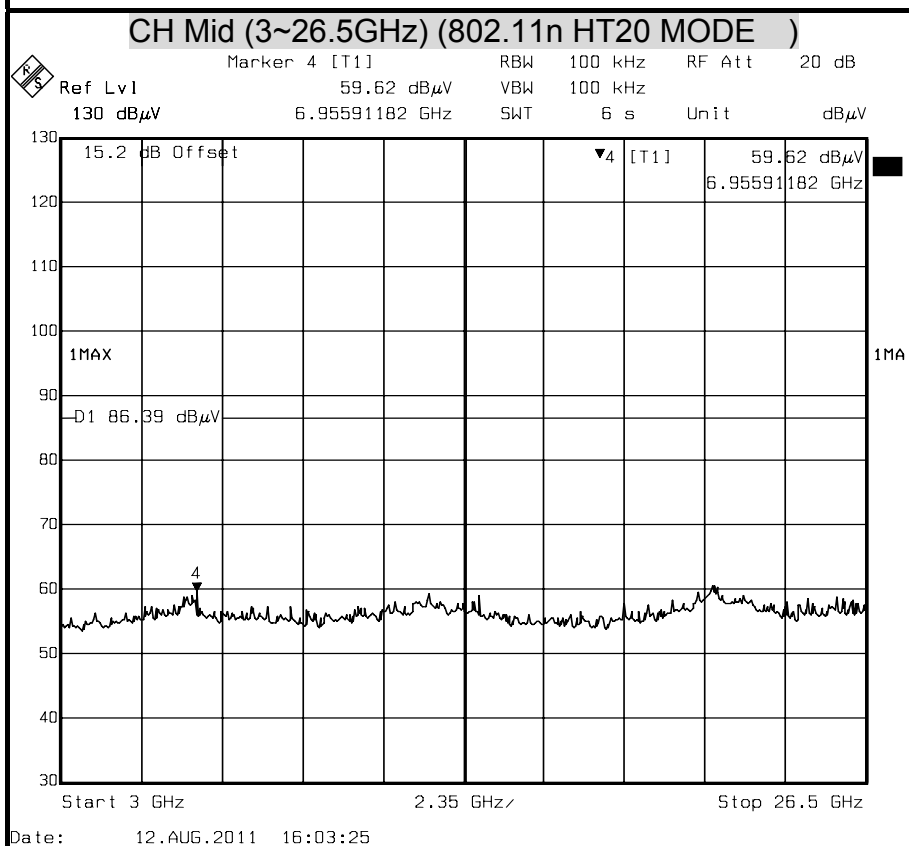
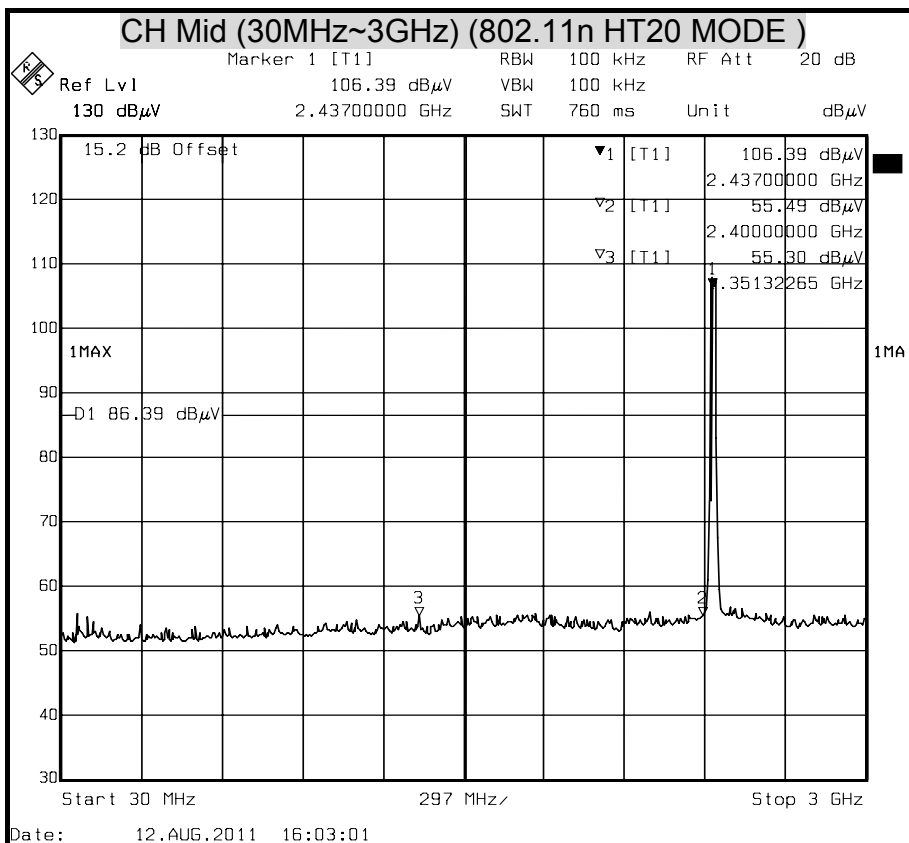


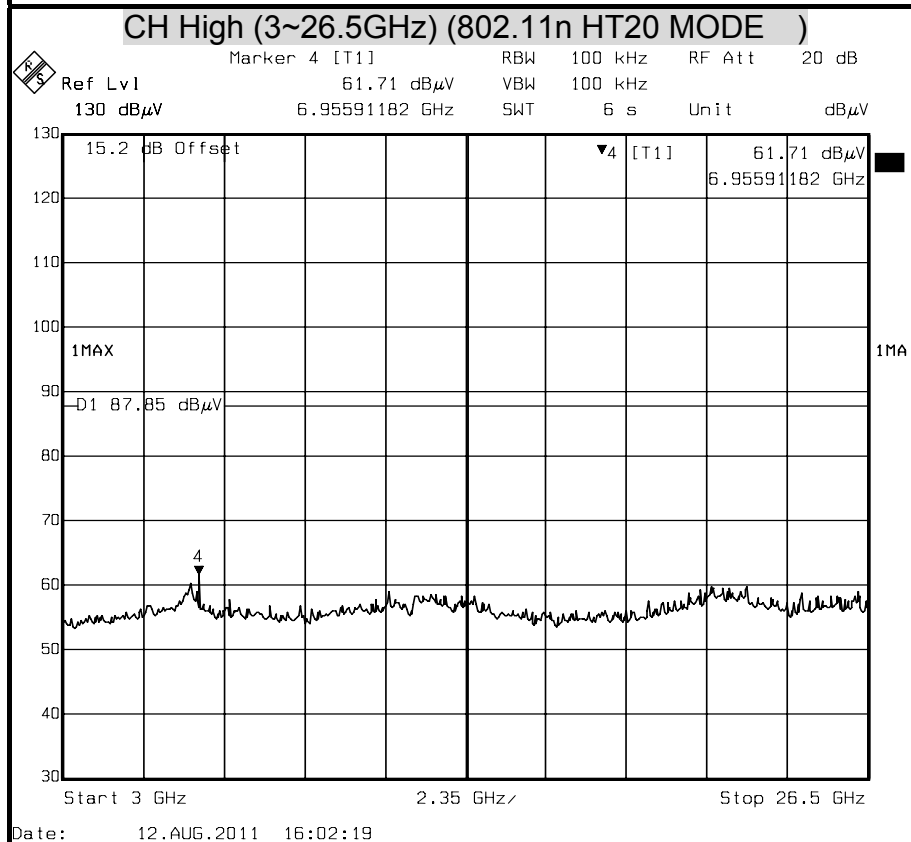
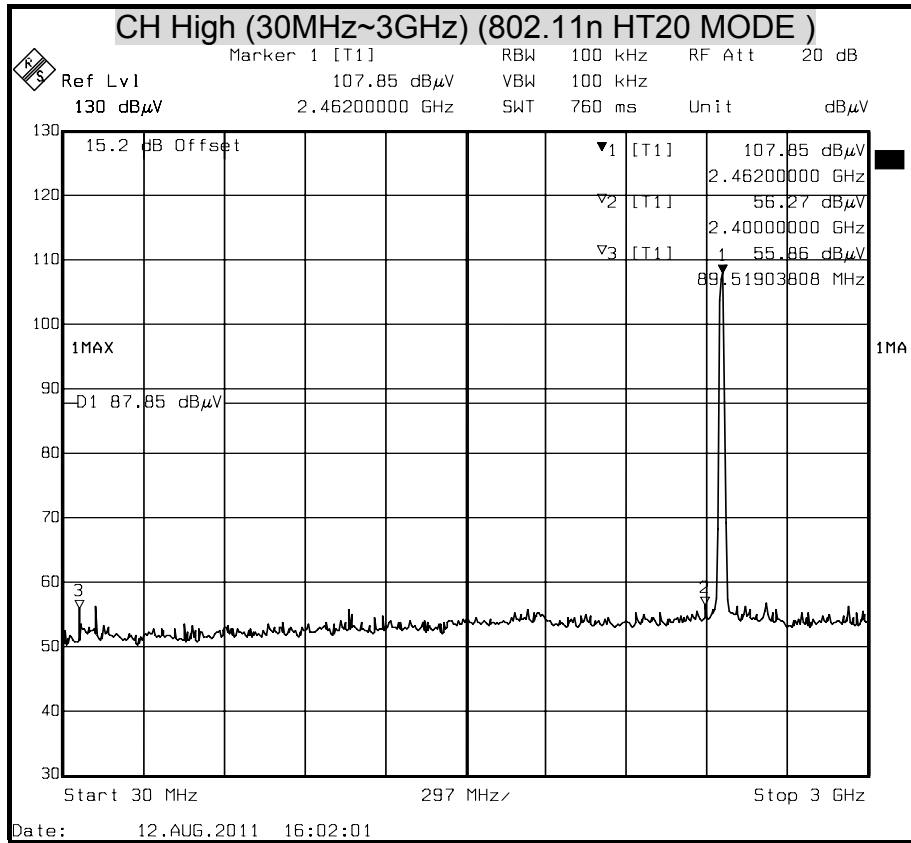




**OUT-OF-BAND SPURIOUS EMISSIONS-CONDUCTED MEASUREMENT**  
**( 802.11n HT40 Combined Mode )**

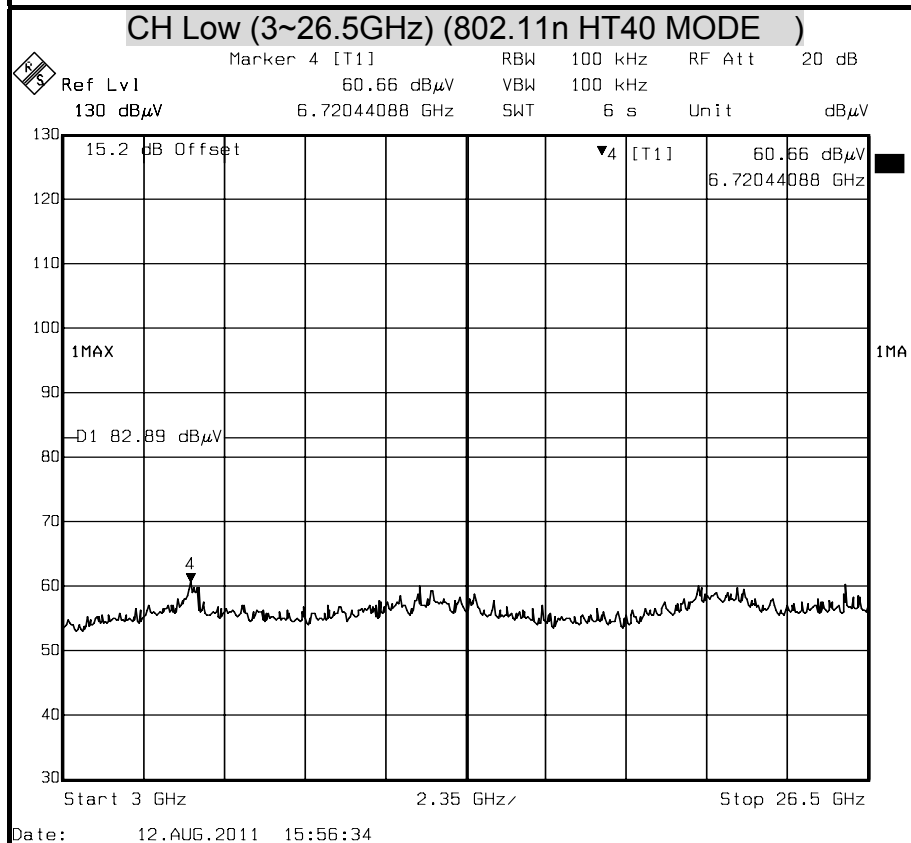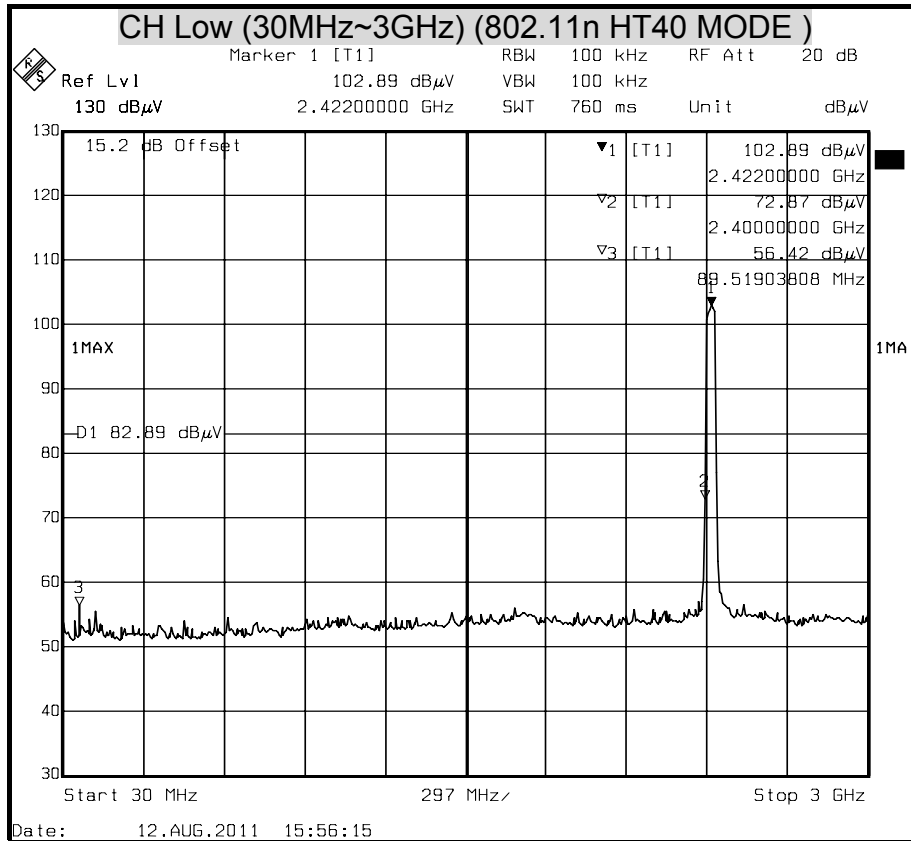

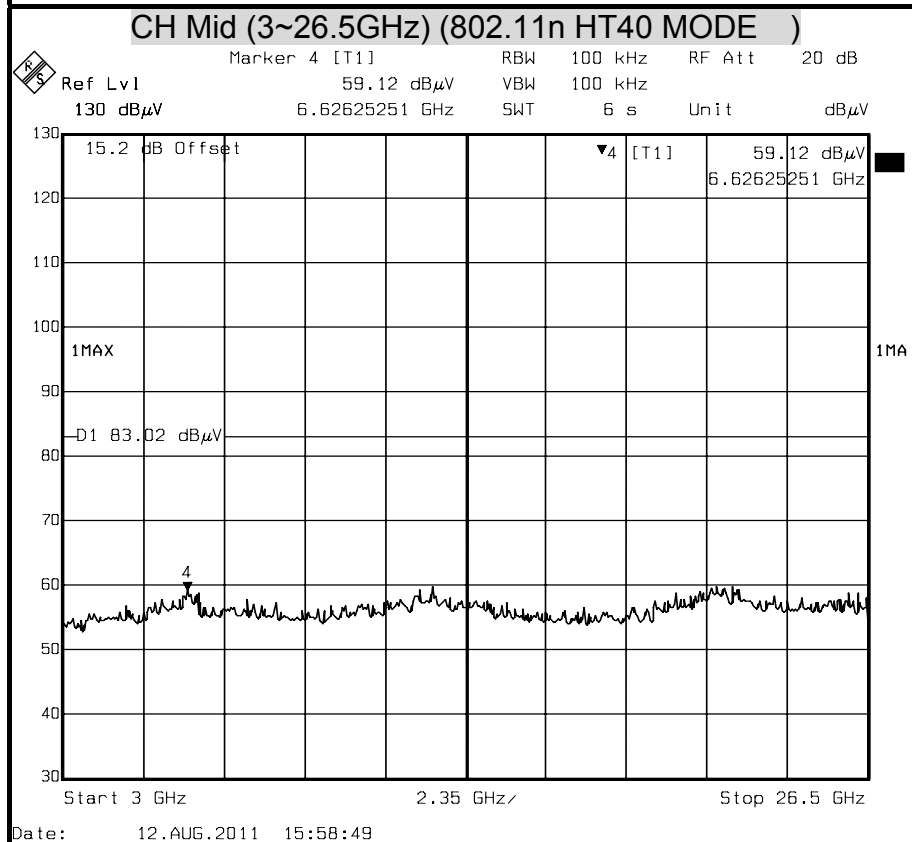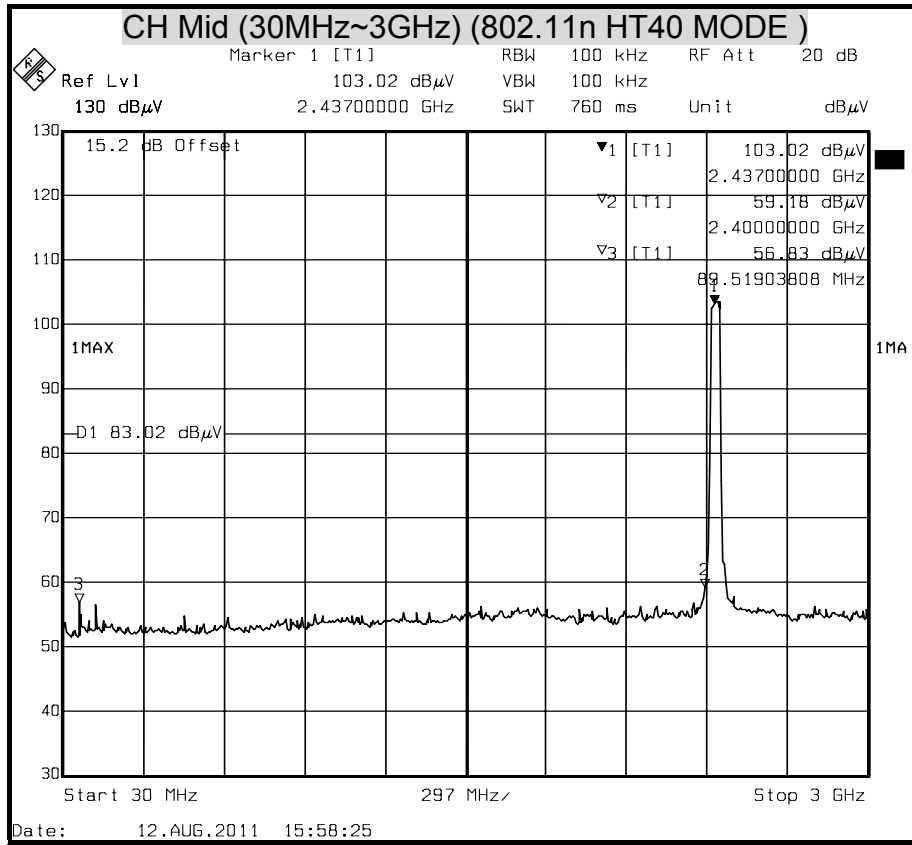

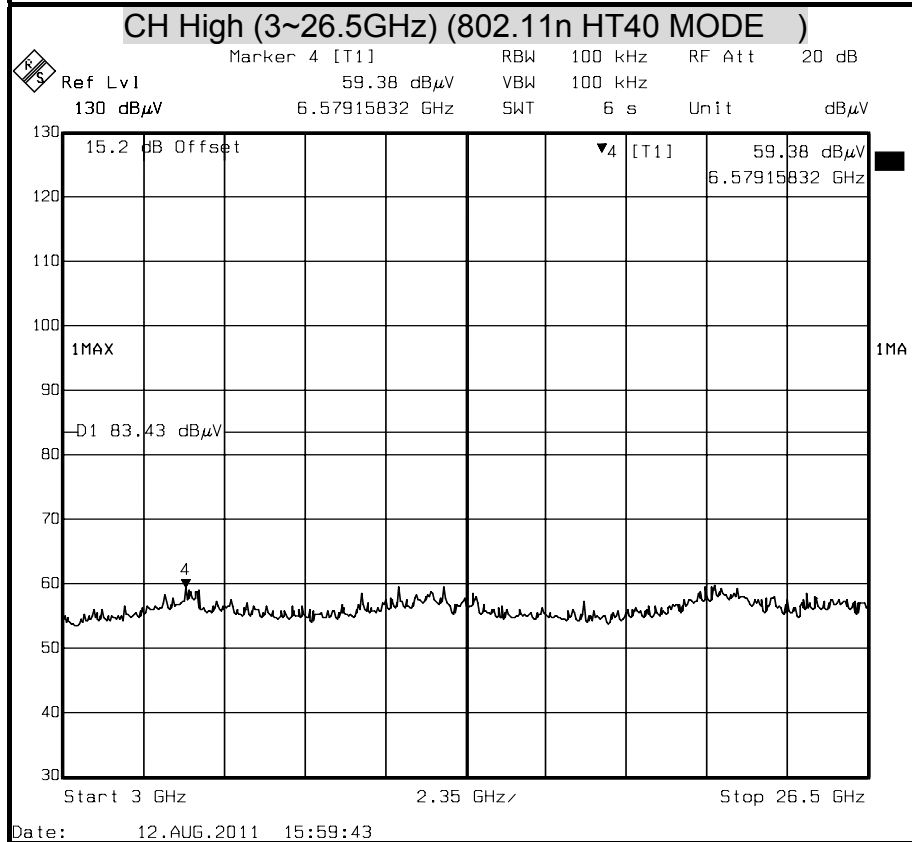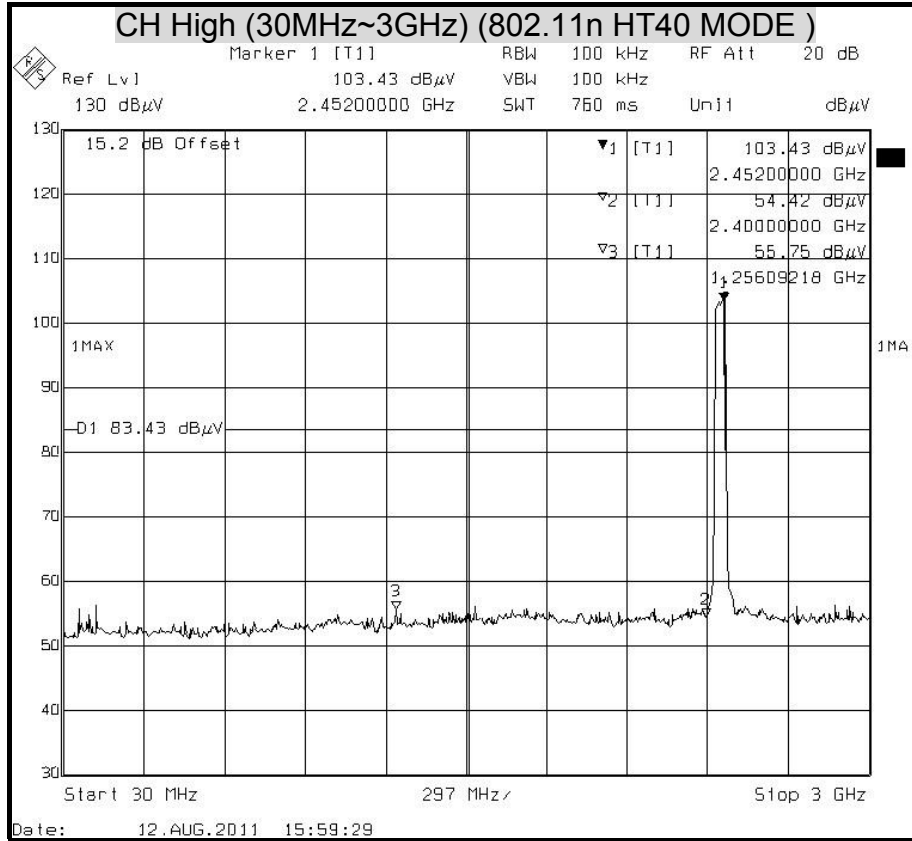



### 8.5 RADIATED EMISSIONS

#### 8.5.1 TRANSMITTER RADIATED SUPURIOUS EMSSIONS

##### LIMITS

§ 15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 -1710	10.6 -12.7
6.26775 - 6.26825	108 -121.94	1718.8 - 1722.2	13.25 -13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 – 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 -16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3338	36.43 - 36.5
12.57675 - 12.57725	322 -335.4	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41			

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup> Above 38.6

§ 15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.



§ 15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table :

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz, However, operation within these frequency bands is permitted under other sections of this Part, e-g, Sections 15.231 and 15.241.

§ 15.209 (b) In the emission table above, the tighter limit applies at the band edges.

**TEST EQUIPMENTS**

The following test equipments are utilized in making the measurements contained in this report.


Open Area Test Site # 6				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
TYPE N COAXIAL CABLE	SUHNER	CHA9513	6	NOV. 17, 2011
BI-LOG Antenna	Sunol	JB1	A070506-2	OCT. 04, 2011
LOOP ANTENNA	EMCO	6502	8905-2356	JUN. 10, 2012
Pre-Amplifier	HP	8447F	2944A03817	NOV. 23, 2011
EMI Receiver	R&S	ESVS10	833206/012	MAY 10, 2012
RF Cable	SUHNER	SUCOFLEX104PEA	20520/4PEA	NOV. 10, 2011
Horn Antenna	Com-Power	AH-118	071032	DEC. 27, 2011
Spectrum Analyzer	R&S	FSEK 30	835253/002	JUL. 14, 2012
Pre-Amplifier	MITEQ	AFS44-00108650-42-10P-44	1205908	NOV. 23, 2011
Turn Table	Yo Chen	001	-----	N.C.R.
Antenna Tower	AR	TP1000A	309874	N.C.R.
Controller	CT	SC101	-----	N.C.R.
RF Swicth	E-INSTRUMENT TELH LTD	ERS-180A	EC1204141	N.C.R
Test S/W	e-3 (5.04303e)			






**TEST SETUP**

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 to 1GHz.

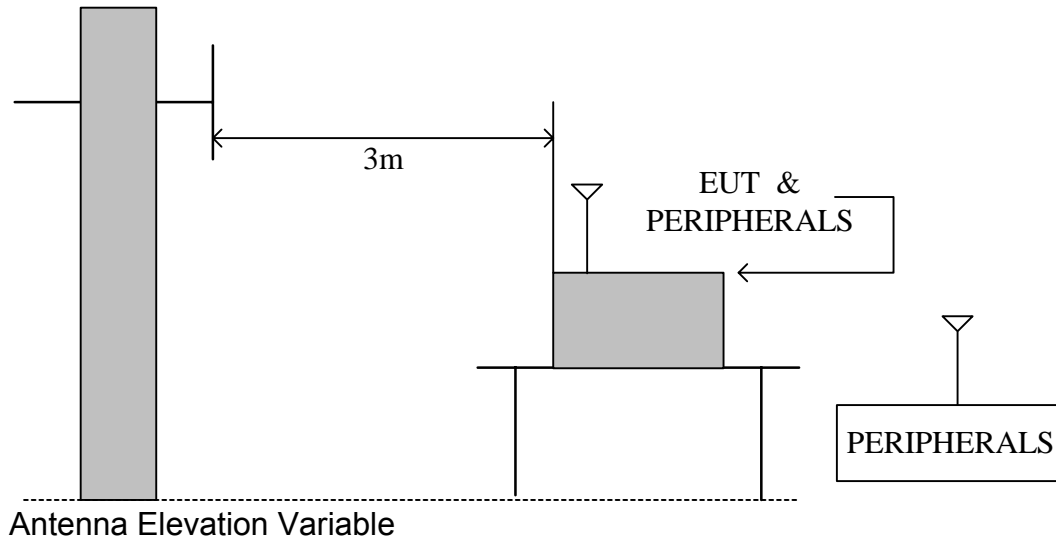

The diagram below shows the test setup that is utilized to make the measurements for emission above 1GHz.

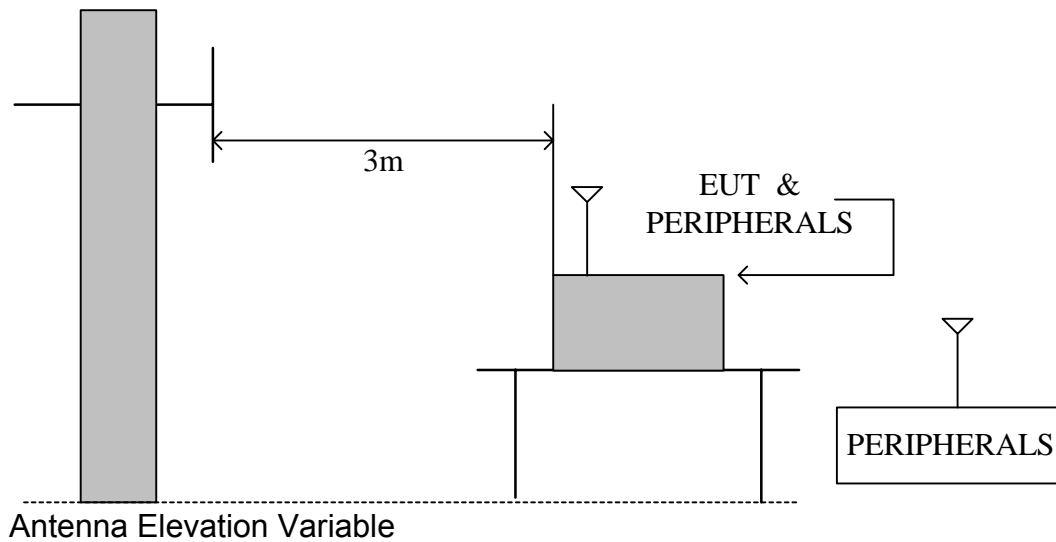



## TEST PROCEDURE

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. While measuring the radiated emission below 1GHz, the EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. While measuring the radiated emission above 1GHz, the EUT was set 3 meters away from the interference-receiving antenna
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarization of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

### **NOTE :**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 KHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection and frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.
4. **No emission is found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz)**

## TEST RESULTS

No non-compliance noted.



8.5.2 WORST-CASE RADIATED EMISSION BELOW 1 GHz

<b>Product Name</b>	11n/a/g/b Wi-Fi USB adapter	<b>Test Date</b>	2011/08/02
<b>Model</b>	GW-USFang300	<b>Test By</b>	Taiyu Cyu
<b>Test Mode</b>	Normal operating (worst case)	<b>TEMP&amp; Humidity</b>	31 , 60%

Horizontal

Freq.	Reading	Antenna	Cable	Measure	Limit	Over	Detector
MHz	Level	Factor	Loss	Level	dBuV/m	Limit	
	dBuV	dB/m	dB	dBuV/m	dBuV/m	dBuV/m	
65.75	7.05	7.71	1.82	16.58	30.00	-13.42	QP
149.95	7.33	12.59	3.06	22.98	30.00	-7.02	QP
214.08	1.38	11.75	3.72	16.84	30.00	-13.16	QP
336.00	3.68	14.19	4.79	22.66	37.00	-14.34	QP
438.90	1.32	16.88	5.62	23.82	37.00	-13.18	QP
526.03	0.90	18.16	6.28	25.34	37.00	-11.66	QP
635.45	0.59	19.41	7.04	27.04	37.00	-9.96	QP

Vertical

Freq.	Reading	Antenna	Cable	Measure	Limit	Over	Detector
MHz	Level	Factor	Loss	Level	dBuV/m	Limit	
	dBuV	dB/m	dB	dBuV/m	dBuV/m	dBuV/m	
70.85	8.49	7.94	1.91	18.34	30.00	-11.66	QP
206.40	6.03	12.13	3.65	21.81	30.00	-8.19	QP
336.00	4.68	14.19	4.79	23.66	37.00	-13.34	QP
426.18	1.40	16.43	5.51	23.34	37.00	-13.66	QP
521.25	0.92	18.11	6.24	25.27	37.00	-11.73	QP
613.00	0.66	18.93	6.89	26.48	37.00	-10.52	QP
737.93	0.80	20.58	7.77	29.15	37.00	-7.85	QP

REMARK: Emission level (dBuV/m) =Antenna Factor (dB/m) + Cable loss (dB) + Meter Reading (dBuV).



8.5.3 TRANSMITTER RADIATED EMISSION ABOVE 1 GHz

<b>Product Name</b>	11n/a/g/b Wi-Fi USB adapter	<b>Test Date</b>	2011/08/12
<b>Model</b>	GW-USFang300	<b>Test By</b>	John Chen
<b>Test Mode</b>	IEEE 802.11b TX (CH Low)	<b>TEMP&amp; Humidity</b>	29.8 , 51%

Horizontal

TX / IEEE 802.11b mode / CH Low				Measurement Distance at 3m				Horizontal polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBµV)	(dB/m)	(dB)	(dB)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	(P/Q/A)
* 1330.02	53.80	25.89	2.12	41.74	0.76	40.82	74.00	-33.18	P
* 1330.02	43.56	25.89	2.12	41.74	0.76	30.58	54.00	-23.42	A
* 4823.98	53.71	33.17	3.73	42.38	0.69	48.92	74.00	-25.08	P
* 4823.98	41.39	33.17	3.73	42.38	0.69	36.60	54.00	-17.40	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

Vertical

TX / IEEE 802.11b mode / CH Low				Measurement Distance at 3m				Vertical polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBµV)	(dB/m)	(dB)	(dB)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	(P/Q/A)
* 1330.14	54.71	25.89	2.12	41.74	0.76	41.73	74.00	-32.27	P
* 1330.14	43.65	25.89	2.12	41.74	0.76	30.67	54.00	-23.33	A
* 4824.01	54.39	33.17	3.73	42.38	0.69	49.60	74.00	-24.40	P
* 4824.01	41.08	33.17	3.73	42.38	0.69	36.29	54.00	-17.71	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:  
Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



<b>Product Name</b>	11n/a/g/b Wi-Fi USB adapter	<b>Test Date</b>	2011/08/12
<b>Model</b>	GW-USFang300	<b>Test By</b>	John Chen
<b>Test Mode</b>	IEEE 802.11b TX (CH Middle)	<b>TEMP&amp; Humidity</b>	29.8 , 51%

Horizontal

TX / IEEE 802.11b mode / CH Middle				Measurement Distance at 3m				Horizontal polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBµV)	(dB/m)	(dB)	(dB)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	(P/Q/A)
* 1329.98	53.80	25.89	2.12	41.74	0.76	40.82	74.00	-33.18	P
* 1329.98	43.56	25.89	2.12	41.74	0.76	30.58	54.00	-23.42	A
* 4874.01	56.02	33.32	3.74	42.43	0.71	51.36	74.00	-22.64	P
* 4874.01	43.32	33.32	3.74	42.43	0.71	38.66	54.00	-15.34	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P

Vertical

TX / IEEE 802.11b mode / CH Middle				Measurement Distance at 3m				Vertical polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBµV)	(dB/m)	(dB)	(dB)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	(P/Q/A)
* 1330.08	54.25	25.89	2.12	41.74	0.76	41.27	74.00	-32.73	P
* 1330.08	44.96	25.89	2.12	41.74	0.76	31.98	54.00	-22.02	A
* 4874.00	55.28	33.32	3.74	42.43	0.71	50.62	74.00	-23.38	P
* 4874.00	43.19	33.32	3.74	42.43	0.71	38.53	54.00	-15.47	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:  
Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



<b>Product Name</b>	11n/a/g/b Wi-Fi USB adapter	<b>Test Date</b>	2011/08/12
<b>Model</b>	GW-USFang300	<b>Test By</b>	John Chen
<b>Test Mode</b>	IEEE 802.11b TX (CH High)	<b>TEMP&amp; Humidity</b>	29.8 , 51%

Horizontal

TX / IEEE 802.11b mode / CH High				Measurement Distance at 3m				Horizontal polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
* 1330.05	54.38	25.89	2.12	41.74	0.76	41.40	74.00	-32.60	P
* 1330.05	43.64	25.89	2.12	41.74	0.76	30.66	54.00	-23.34	A
* 4924.01	53.82	33.47	3.76	42.48	0.73	49.30	74.00	-24.70	P
* 4924.01	42.01	33.47	3.76	42.48	0.73	37.49	54.00	-16.51	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

Vertical

TX / IEEE 802.11b mode / CH High				Measurement Distance at 3m				Vertical polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
* 1330.14	54.18	25.89	2.12	41.74	0.76	41.20	74.00	-32.80	P
* 1330.14	43.35	25.89	2.12	41.74	0.76	30.37	54.00	-23.63	A
* 4924.03	55.19	33.47	3.76	42.48	0.73	50.67	74.00	-23.33	P
* 4924.03	43.27	33.47	3.76	42.48	0.73	38.75	54.00	-15.25	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:  
Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



<b>Product Name</b>	11n/a/g/b Wi-Fi USB adapter	<b>Test Date</b>	2011/08/12
<b>Model</b>	GW-USFang300	<b>Test By</b>	John Chen
<b>Test Mode</b>	IEEE 802.11g TX (CH Low)	<b>TEMP&amp; Humidity</b>	29.8 , 51%

Horizontal

TX / IEEE 802.11g mode / CH Low				Measurement Distance at 3m				Horizontal polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
* 1330.23	54.26	25.89	2.12	41.74	0.76	41.28	74.00	-32.72	P
* 1330.23	44.70	25.89	2.12	41.74	0.76	31.72	54.00	-22.28	A
* 4824.02	54.03	33.17	3.73	42.38	0.69	49.24	74.00	-24.76	P
* 4824.02	42.25	33.17	3.73	42.38	0.69	37.46	54.00	-16.54	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

Vertical

TX / IEEE 802.11g mode / CH Low				Measurement Distance at 3m				Vertical polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
* 1330.04	54.39	25.89	2.12	41.74	0.76	41.41	74.00	-32.59	P
* 1330.04	44.16	25.89	2.12	41.74	0.76	31.18	54.00	-22.82	A
* 4824.03	55.08	33.17	3.73	42.38	0.69	50.29	74.00	-23.71	P
* 4824.03	42.36	33.17	3.73	42.38	0.69	37.57	54.00	-16.43	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:  
Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



<b>Product Name</b>	11n/a/g/b Wi-Fi USB adapter	<b>Test Date</b>	2011/08/12
<b>Model</b>	GW-USFang300	<b>Test By</b>	John Chen
<b>Test Mode</b>	IEEE 802.11g TX (CH Middle)	<b>TEMP&amp; Humidity</b>	29.8 , 51%

Horizontal

	TX / IEEE 802.11g mode / CH Middle				Measurement Distance at 3m				Horizontal polarity	
	Freq. (MHz)	Reading (dBµV)	AF (dB/m)	Cable Loss (dB)	Pre-amp (dB)	Filter (dB)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Mark (P/Q/A)
*	1330.16	53.41	25.89	2.12	41.74	0.76	40.43	74.00	-33.57	P
*	1330.16	43.82	25.89	2.12	41.74	0.76	30.84	54.00	-23.16	A
*	4874.06	54.91	33.32	3.74	42.43	0.71	50.25	74.00	-23.75	P
*	4874.06	42.47	33.32	3.74	42.43	0.71	37.81	54.00	-16.19	A
	N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
	N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

Vertical

	TX / IEEE 802.11g mode / CH Middle				Measurement Distance at 3m				Vertical polarity	
	Freq. (MHz)	Reading (dBµV)	AF (dB/m)	Cable Loss (dB)	Pre-amp (dB)	Filter (dB)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Mark (P/Q/A)
*	1330.10	53.41	25.89	2.12	41.74	0.76	40.43	74.00	-33.57	P
*	1330.10	43.26	25.89	2.12	41.74	0.76	30.28	54.00	-23.72	A
*	4874.05	54.33	33.32	3.74	42.43	0.71	49.67	74.00	-24.33	P
*	4874.05	42.58	33.32	3.74	42.43	0.71	37.92	54.00	-16.08	A
	N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
	N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:  
Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.





<b>Product Name</b>	11n/a/g/b Wi-Fi USB adapter	<b>Test Date</b>	2011/08/12
<b>Model</b>	GW-USFang300	<b>Test By</b>	John Chen
<b>Test Mode</b>	IEEE 802.11g TX (CH High)	<b>TEMP&amp; Humidity</b>	29.8 , 51%

Horizontal

TX / IEEE 802.11g mode / CH High				Measurement Distance at 3m				Horizontal polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
* 1330.17	52.19	25.89	2.12	41.74	0.76	39.21	74.00	-34.79	P
* 1330.17	42.34	25.89	2.12	41.74	0.76	29.36	54.00	-24.64	A
* 4924.00	54.16	33.47	3.76	42.48	0.73	49.64	74.00	-24.36	P
* 4924.00	42.90	33.47	3.76	42.48	0.73	38.38	54.00	-15.62	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

Vertical

TX / IEEE 802.11g mode / CH High				Measurement Distance at 3m				Vertical polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
* 1330.12	54.02	25.89	2.12	41.74	0.76	41.04	74.00	-32.96	P
* 1330.12	43.44	25.89	2.12	41.74	0.76	30.46	54.00	-23.54	A
* 4924.06	54.65	33.47	3.76	42.48	0.73	50.13	74.00	-23.87	P
* 4924.06	42.71	33.47	3.76	42.48	0.73	38.19	54.00	-15.81	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:  
Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



<b>Product Name</b>	11n/a/g/b Wi-Fi USB adapter	<b>Test Date</b>	2011/08/12
<b>Model</b>	GW-USFang300	<b>Test By</b>	John Chen
<b>Test Mode</b>	IEEE 802.11n HT20 TX (CH Low)	<b>TEMP&amp; Humidity</b>	29.8 , 51%

Horizontal

TX / IEEE 802.11n HT20 mode / CH Low				Measurement Distance at 3m				Horizontal polarity		
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark	
(MHz)	(dBµV)	(dB/m)	(dB)	(dB)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	(P/Q/A)	
* 1330.06	54.06	25.89	2.12	41.74	0.76	41.08	74.00	-32.92	P	
* 1330.06	43.38	25.89	2.12	41.74	0.76	30.40	54.00	-23.60	A	
* 4823.96	54.71	33.17	3.73	42.38	0.69	49.92	74.00	-24.08	P	
* 4823.96	42.19	33.17	3.73	42.38	0.69	37.40	54.00	-16.60	A	
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P	
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A	

Vertical

TX / IEEE 802.11n HT20 mode / CH Low				Measurement Distance at 3m				Vertical polarity		
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark	
(MHz)	(dBµV)	(dB/m)	(dB)	(dB)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	(P/Q/A)	
* 1330.12	55.16	25.89	2.12	41.74	0.76	42.18	74.00	-31.82	P	
* 1330.12	44.39	25.89	2.12	41.74	0.76	31.41	54.00	-22.59	A	
* 4823.99	55.26	33.17	3.73	42.38	0.69	50.47	74.00	-23.53	P	
* 4823.99	43.55	33.17	3.73	42.38	0.69	38.76	54.00	-15.24	A	
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P	
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A	

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:  
Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



<b>Product Name</b>	11n/a/g/b Wi-Fi USB adapter	<b>Test Date</b>	2011/08/12
<b>Model</b>	GW-USFang300	<b>Test By</b>	John Chen
<b>Test Mode</b>	IEEE 802.11n HT20 TX (CH Middle)	<b>TEMP&amp; Humidity</b>	29.8 , 51%

Horizontal

TX / IEEE 802.11n HT20 mode / CH Middle				Measurement Distance at 3m				Horizontal polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
* 1330.08	54.20	25.89	2.12	41.74	0.76	41.22	74.00	-32.78	P
* 1330.08	43.72	25.89	2.12	41.74	0.76	30.74	54.00	-23.26	A
* 4873.97	53.66	33.32	3.74	42.43	0.71	49.00	74.00	-25.00	P
* 4873.97	42.24	33.32	3.74	42.43	0.71	37.58	54.00	-16.42	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

Vertical

TX / IEEE 802.11n HT20 mode / CH Middle				Measurement Distance at 3m				Vertical polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
* 1330.10	53.95	25.89	2.12	41.74	0.76	40.97	74.00	-33.03	P
* 1330.10	43.26	25.89	2.12	41.74	0.76	30.28	54.00	-23.72	A
* 4874.03	54.14	33.32	3.74	42.43	0.71	49.48	74.00	-24.52	P
* 4874.03	43.44	33.32	3.74	42.43	0.71	38.78	54.00	-15.22	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:  
Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



<b>Product Name</b>	11n/a/g/b Wi-Fi USB adapter	<b>Test Date</b>	2011/08/12
<b>Model</b>	GW-USFang300	<b>Test By</b>	John Chen
<b>Test Mode</b>	IEEE 802.11n HT20 TX (CH High)	<b>TEMP&amp; Humidity</b>	29.8 , 51%

Horizontal

TX / IEEE 802.11n HT20 mode / CH High				Measurement Distance at 3m				Horizontal polarity		
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark	
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)	
* 1330.17	53.62	25.89	2.12	41.74	0.76	40.64	74.00	-33.36	P	
* 1330.17	43.05	25.89	2.12	41.74	0.76	30.07	54.00	-23.93	A	
* 4924.05	53.80	33.47	3.76	42.48	0.73	49.28	74.00	-24.72	P	
* 4924.05	41.27	33.47	3.76	42.48	0.73	36.75	54.00	-17.25	A	
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P	
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A	

Vertical

TX / IEEE 802.11n HT20 mode / CH High				Measurement Distance at 3m				Vertical polarity		
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark	
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)	
* 1330.19	54.23	25.89	2.12	41.74	0.76	41.25	74.00	-32.75	P	
* 1330.19	44.02	25.89	2.12	41.74	0.76	31.04	54.00	-22.96	A	
* 4924.01	55.16	33.47	3.76	42.48	0.73	50.64	74.00	-23.36	P	
* 4924.01	43.45	33.47	3.76	42.48	0.73	38.93	54.00	-15.07	A	
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P	
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A	

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:  
Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



<b>Product Name</b>	11n/a/g/b Wi-Fi USB adapter	<b>Test Date</b>	2011/08/12
<b>Model</b>	GW-USFang300	<b>Test By</b>	John Chen
<b>Test Mode</b>	IEEE 802.11n HT40 TX (CH Low)	<b>TEMP&amp; Humidity</b>	29.8 , 51%

Horizontal

TX / IEEE 802.11n HT40 mode / CH Low				Measurement Distance at 3m				Horizontal polarity		
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark	
(MHz)	(dBµV)	(dB/m)	(dB)	(dB)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	(P/Q/A)	
* 1330.13	55.12	25.89	2.12	41.74	0.76	42.14	74.00	-31.86	P	
* 1330.13	44.80	25.89	2.12	41.74	0.76	31.82	54.00	-22.18	A	
* 4844.05	53.16	33.23	3.74	42.40	0.70	48.43	74.00	-25.57	P	
* 4844.05	42.01	33.23	3.74	42.40	0.70	37.28	54.00	-16.72	A	
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P	
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A	

Vertical

TX / IEEE 802.11n HT40 mode / CH Low				Measurement Distance at 3m				Vertical polarity		
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark	
(MHz)	(dBµV)	(dB/m)	(dB)	(dB)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	(P/Q/A)	
* 1330.15	52.90	25.89	2.12	41.74	0.76	39.92	74.00	-34.08	P	
* 1330.15	42.14	25.89	2.12	41.74	0.76	29.16	54.00	-24.84	A	
* 4844.06	53.39	33.23	3.74	42.40	0.70	48.66	74.00	-25.34	P	
* 4844.06	42.54	33.23	3.74	42.40	0.70	37.81	54.00	-16.19	A	
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P	
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A	

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:  
Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



<b>Product Name</b>	11n/a/g/b Wi-Fi USB adapter	<b>Test Date</b>	2011/08/12
<b>Model</b>	GW-USFang300	<b>Test By</b>	John Chen
<b>Test Mode</b>	IEEE 802.11n HT40 TX (CH Middle)	<b>TEMP&amp; Humidity</b>	29.8 , 51%

### Horizontal

TX / IEEE 802.11n HT40 mode / CH Middle				Measurement Distance at 3m				Horizontal polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
* 1330.09	53.90	25.89	2.12	41.74	0.76	40.92	74.00	-33.08	P
* 1330.09	43.43	25.89	2.12	41.74	0.76	30.45	54.00	-23.55	A
* 4874.10	54.26	33.32	3.74	42.43	0.71	49.61	74.00	-24.39	P
* 4874.10	42.03	33.32	3.74	42.43	0.71	37.38	54.00	-16.62	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

### Vertical

TX / IEEE 802.11n HT40 mode / CH Middle				Measurement Distance at 3m				Vertical polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
* 1330.13	54.16	25.89	2.12	41.74	0.76	41.18	74.00	-32.82	P
* 1330.13	43.50	25.89	2.12	41.74	0.76	30.52	54.00	-23.48	A
* 4874.07	54.71	33.32	3.74	42.43	0.71	50.06	74.00	-23.94	P
* 4874.07	43.32	33.32	3.74	42.43	0.71	38.67	54.00	-15.33	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

### REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:  
Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



<b>Product Name</b>	11n/a/g/b Wi-Fi USB adapter	<b>Test Date</b>	2011/08/12
<b>Model</b>	GW-USFang300	<b>Test By</b>	John Chen
<b>Test Mode</b>	IEEE 802.11n HT40 TX (CH High)	<b>TEMP&amp; Humidity</b>	29.8 , 51%

Horizontal

TX / IEEE 802.11n HT40 mode / CH High				Measurement Distance at 3m				Horizontal polarity		
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark	
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)	
* 1330.19	54.16	25.89	2.12	41.74	0.76	41.18	74.00	-32.82	P	
* 1330.19	44.03	25.89	2.12	41.74	0.76	31.05	54.00	-22.95	A	
* 4903.96	54.19	33.41	3.75	42.46	0.72	49.61	74.00	-24.39	P	
* 4903.96	42.47	33.41	3.75	42.46	0.72	37.89	54.00	-16.11	A	
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P	
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A	

Vertical

TX / IEEE 802.11n HT40 mode / CH High				Measurement Distance at 3m				Vertical polarity		
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark	
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)	
* 1330.15	53.08	25.89	2.12	41.74	0.76	40.10	74.00	-33.90	P	
* 1330.15	42.76	25.89	2.12	41.74	0.76	29.78	54.00	-24.22	A	
* 4904.03	55.26	33.41	3.75	42.46	0.72	50.68	74.00	-23.32	P	
* 4904.03	43.40	33.41	3.75	42.46	0.72	38.82	54.00	-15.18	A	
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P	
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A	

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:  
Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



### 8.5.4 RESTRICTED BAND EDGES

#### 802.11b Mode

Channel	Polarity	Freq.(MHz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Detector
LOW	H	2390.00	56.33	74	-17.67	Peak
	H	2390.00	43.96	54	-10.04	Average
	V	2390.00	56.30	74	-17.70	Peak
	V	2390.00	44.05	54	-9.95	Average
HIGH	H	2483.50	55.8	74	-18.20	Peak
	H	2483.50	43.77	54	-10.23	Average
	V	2483.50	57.12	74	-16.88	Peak
	V	2483.50	44.85	54	-9.15	Average

#### 802.11g Mode

Channel	Polarity	Freq.(MHz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Detector
LOW	H	2390.00	55.9	74	-18.10	Peak
	H	2390.00	43.94	54	-10.06	Average
	V	2390.00	56.22	74	-17.78	Peak
	V	2390.00	44.08	54	-9.92	Average
HIGH	H	2483.50	55.71	74	-18.29	Peak
	H	2483.50	43.75	54	-10.25	Average
	V	2483.50	57.77	74	-16.23	Peak
	V	2483.50	44.7	54	-9.30	Average

#### 802.11n HT-20 Mode

Channel	Polarity	Freq.(MHz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Detector
LOW	H	2390.00	56.11	74	-17.89	Peak
	H	2390.00	43.9	54	-10.10	Average
	V	2390.00	56.86	74	-17.14	Peak
	V	2390.00	44.65	54	-9.35	Average
HIGH	H	2483.50	56.09	74	-17.91	Peak
	H	2483.50	43.81	54	-10.19	Average
	V	2483.50	57.22	74	-16.78	Peak
	V	2483.50	45.71	54	-8.29	Average

#### 802.11n HT-40 Mode


Channel	Polarity	Freq.(MHz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Detector
LOW	H	2390.00	55.64	74	-18.36	Peak
	H	2390.00	43.87	54	-10.13	Average
	V	2390.00	56.89	74	-17.11	Peak
	V	2390.00	44.70	54	-9.30	Average
HIGH	H	2483.50	55.89	74	-18.11	Peak
	H	2483.50	43.65	54	-10.35	Average
	V	2483.50	58.08	74	-15.92	Peak
	V	2483.50	45.46	54	-8.54	Average






Detector mode : Peak

Polarity : Horizontal

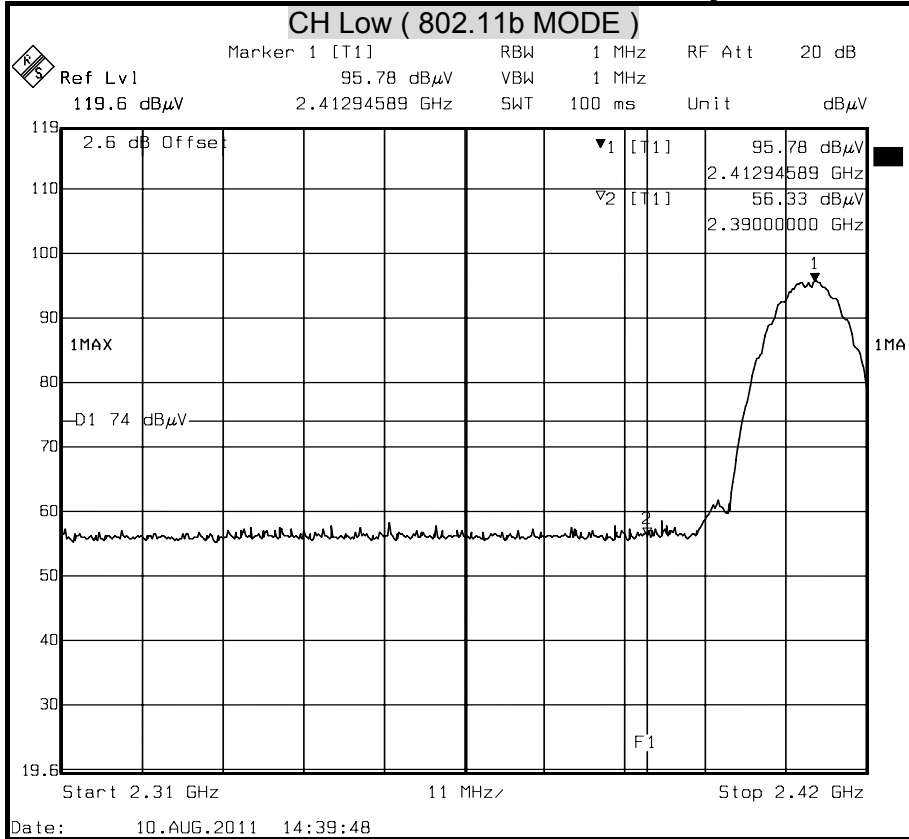

Detector mode : Average


Polarity : Horizontal

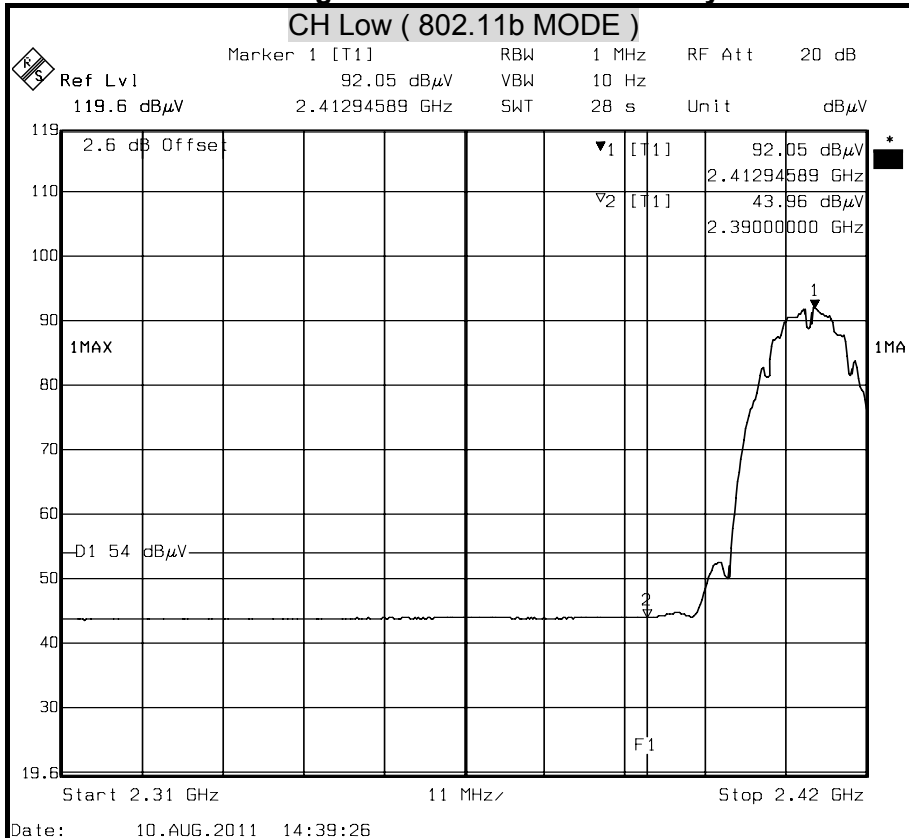




Detector mode : Peak

Polarity : Vertical

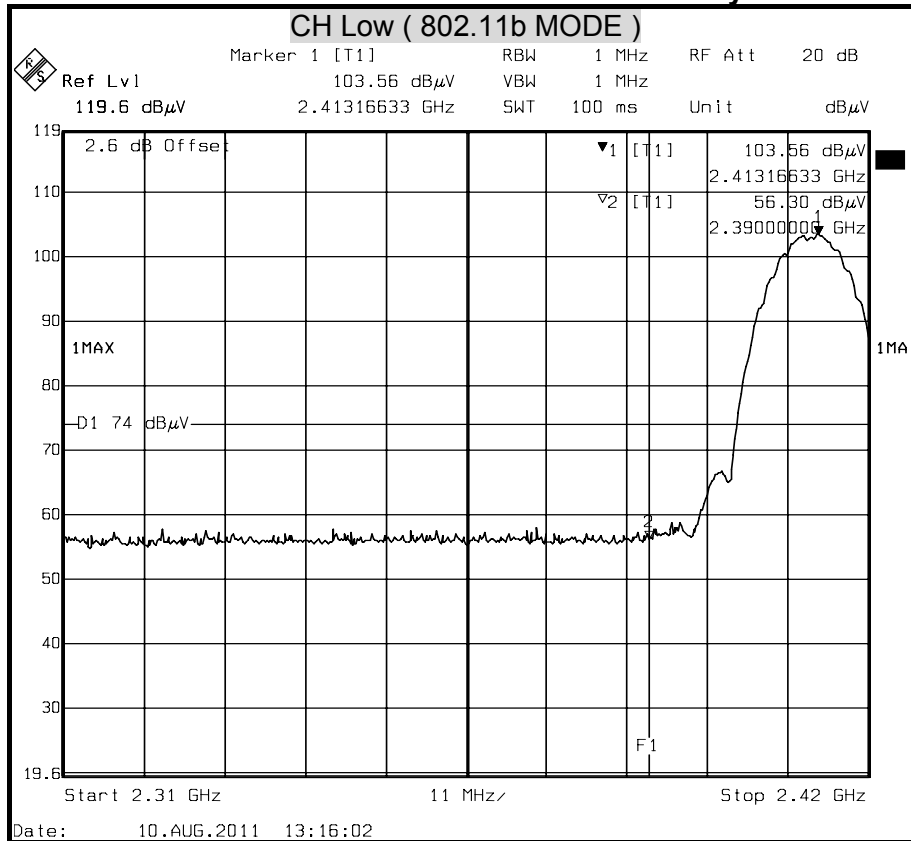

Detector mode : Average


Polarity : Vertical

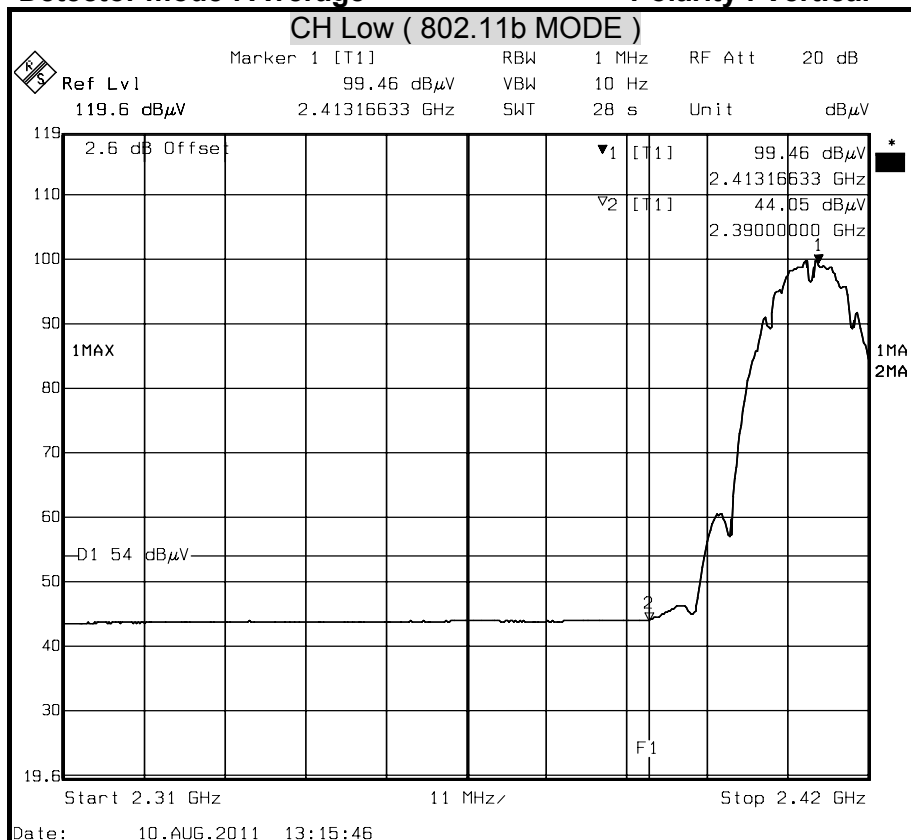




Detector mode : Peak

Polarity : Horizontal

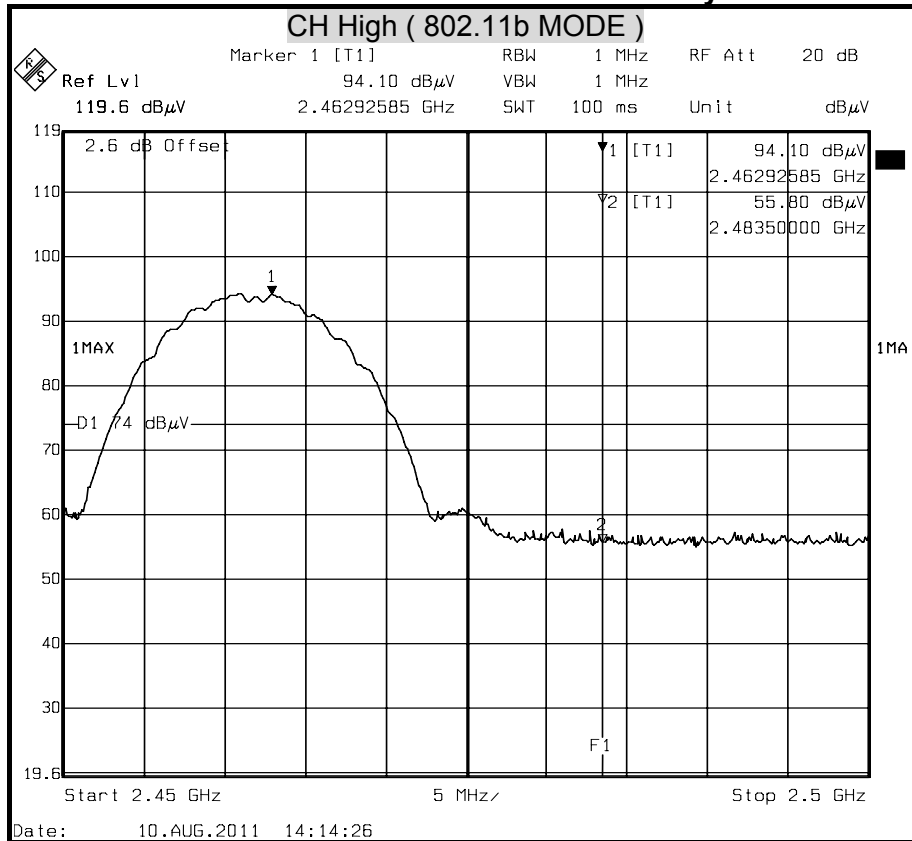

Detector mode : Average


Polarity : Horizontal

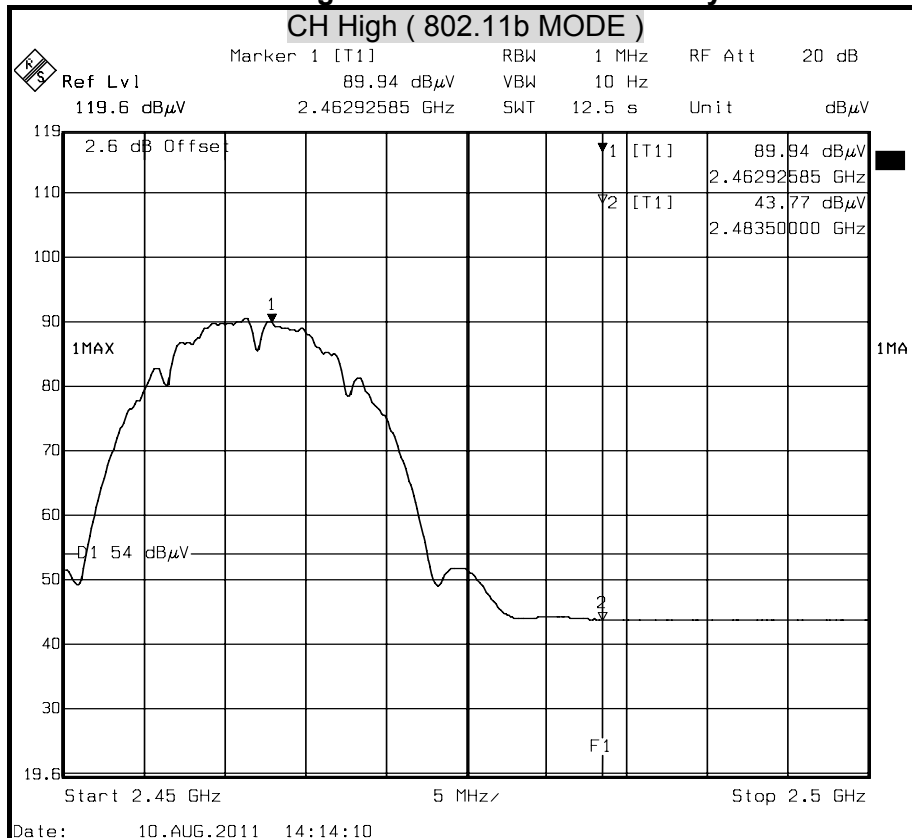




Detector mode : Peak

Polarity : Vertical

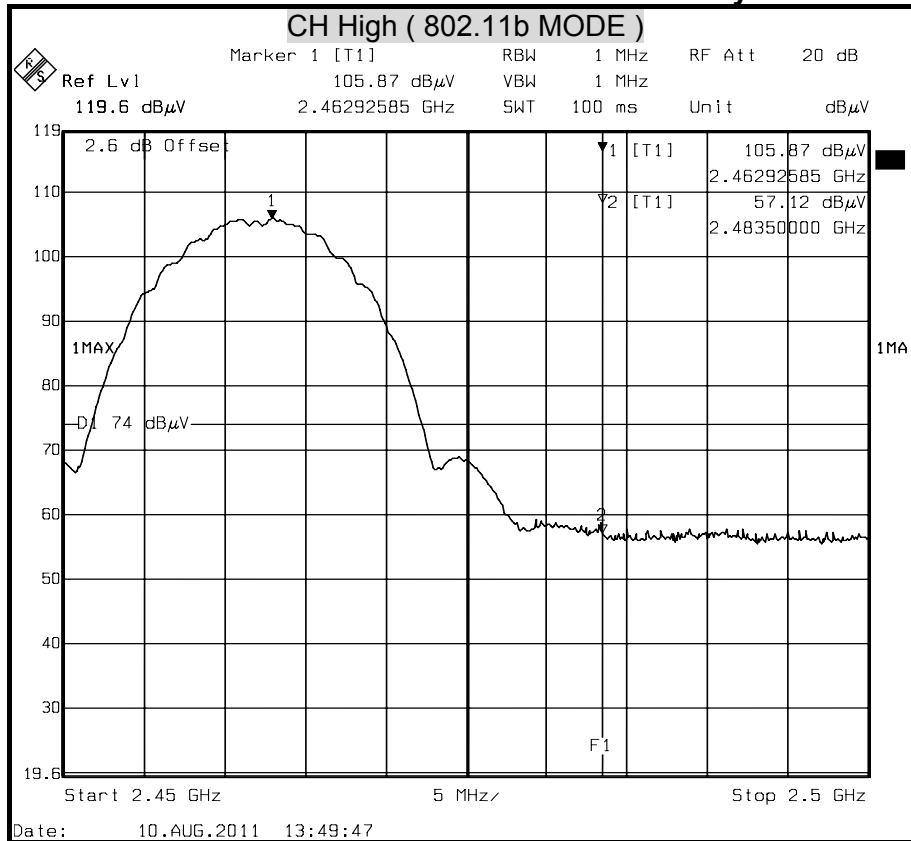

Detector mode : Average


Polarity : Vertical

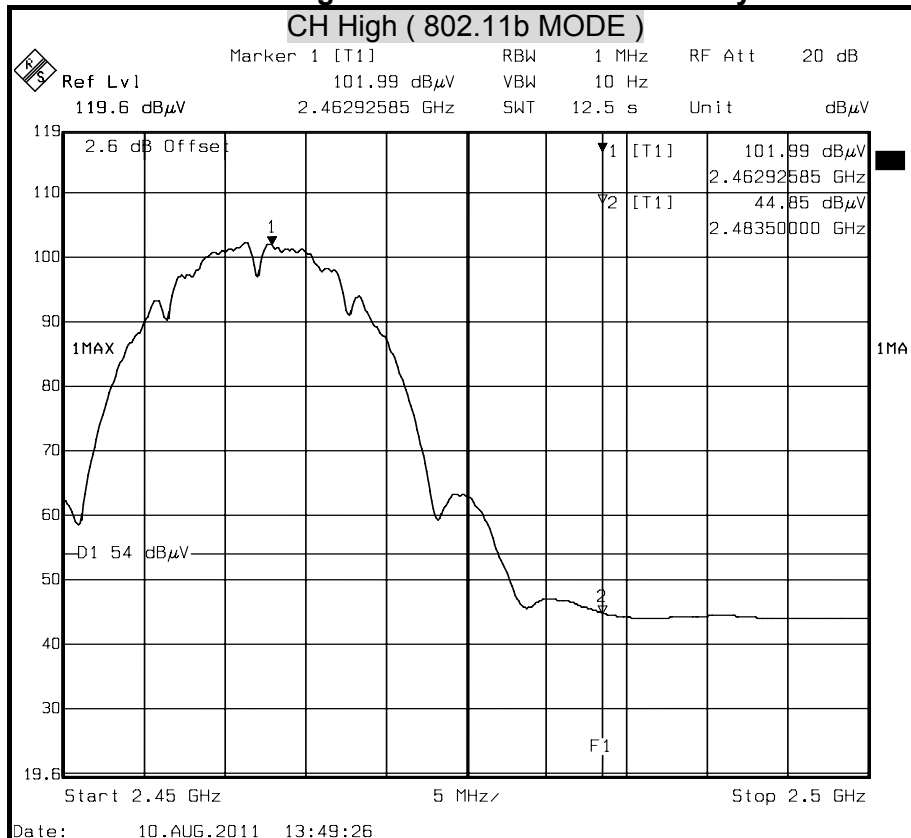




Detector mode : Peak

Polarity : Horizontal

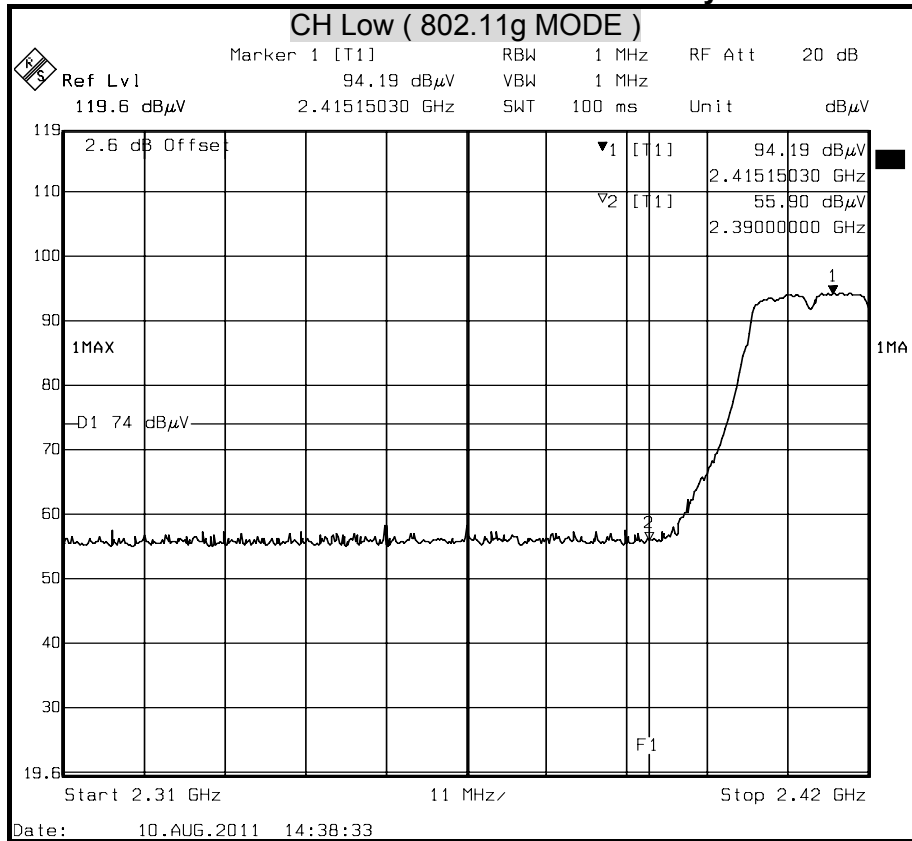

Detector mode : Average


Polarity : Horizontal

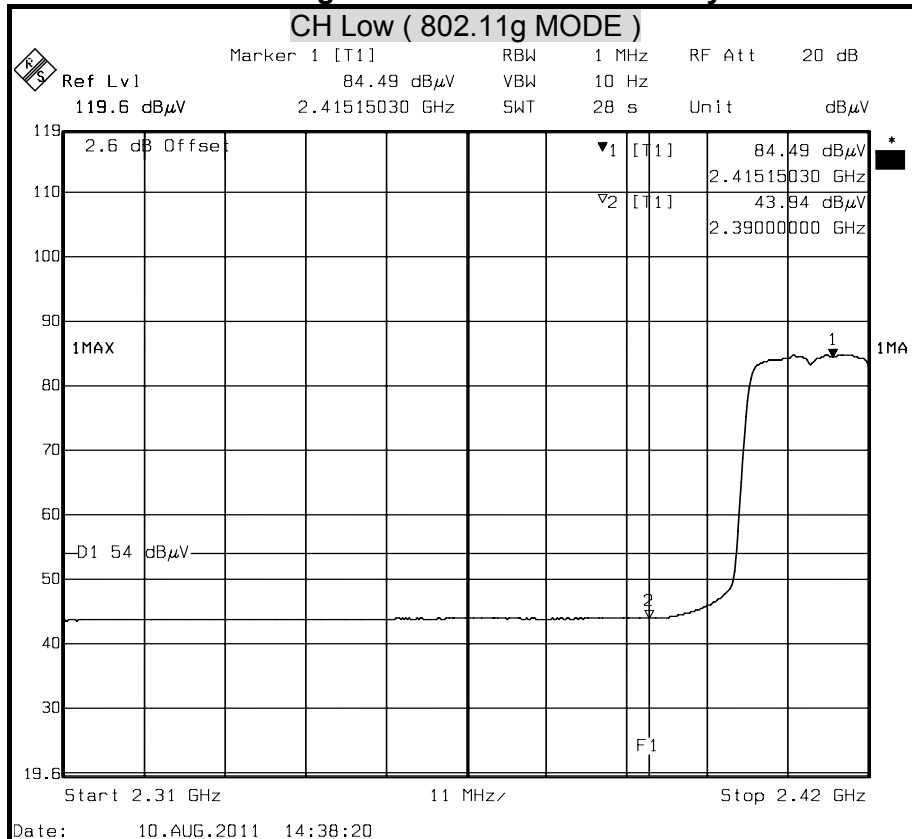




Detector mode : Peak

Polarity : Vertical

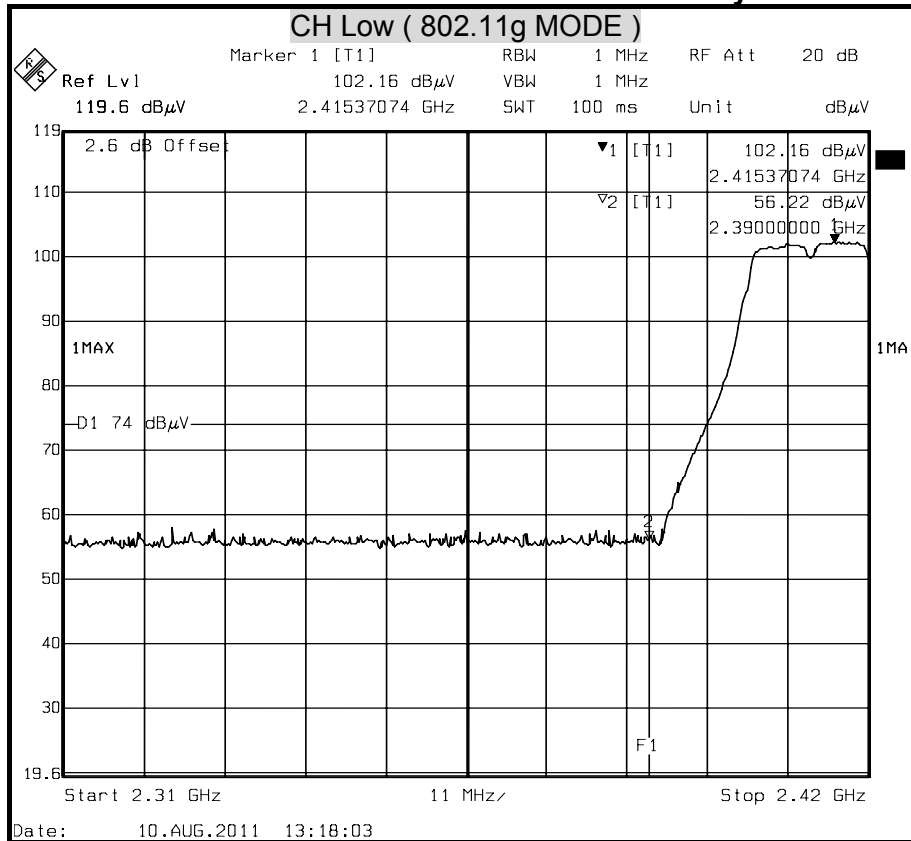

Detector mode : Average


Polarity : Vertical

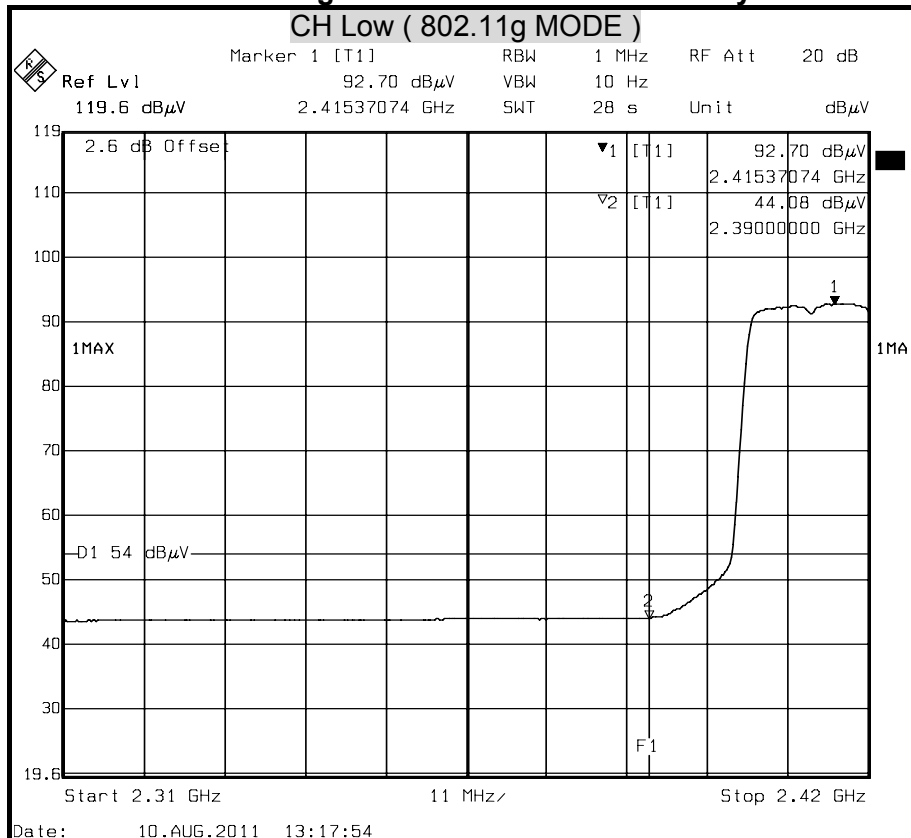




Detector mode : Peak

Polarity : Horizontal

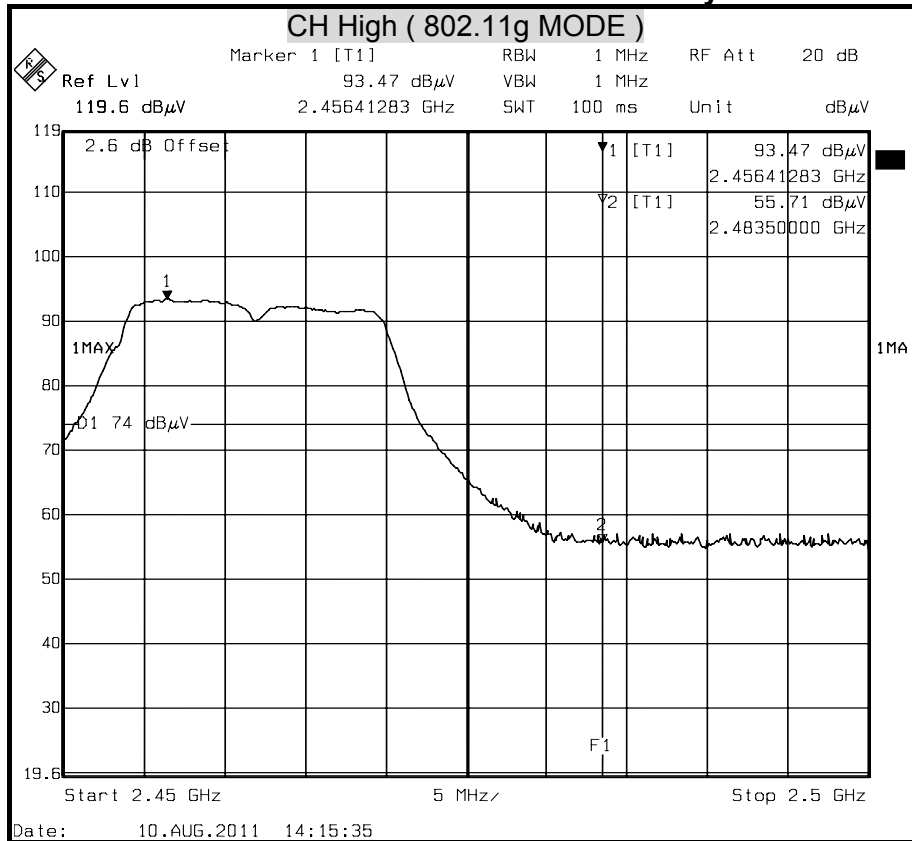

Detector mode : Average


Polarity : Horizontal

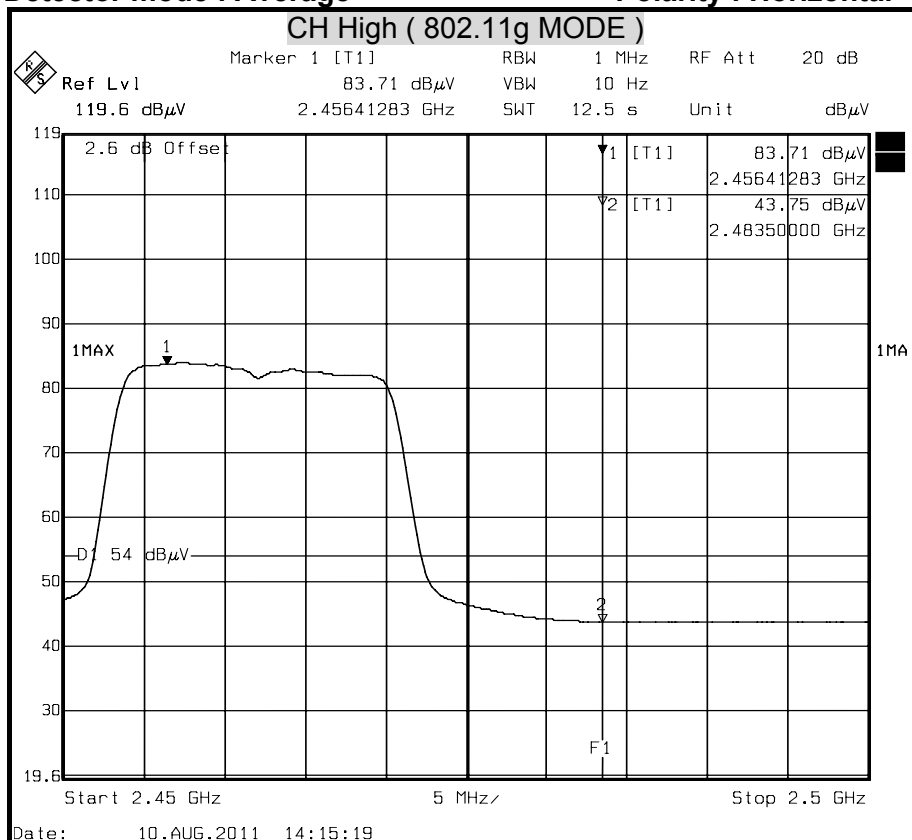




Detector mode : Peak

Polarity : Vertical

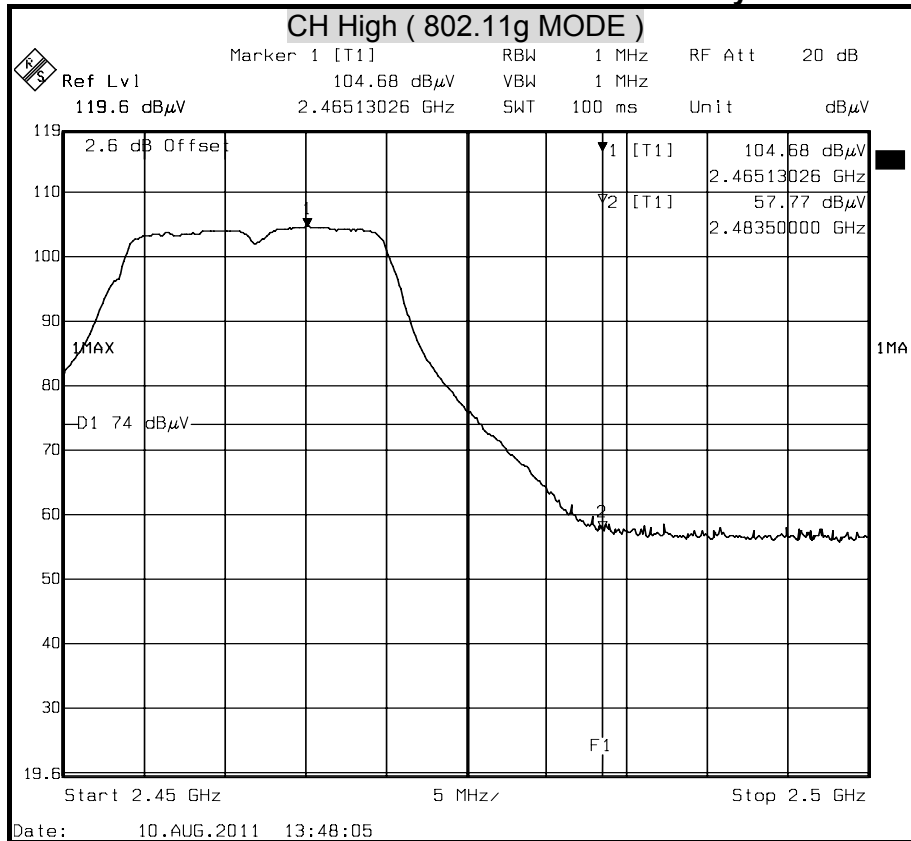

Detector mode : Average

Polarity : Vertical

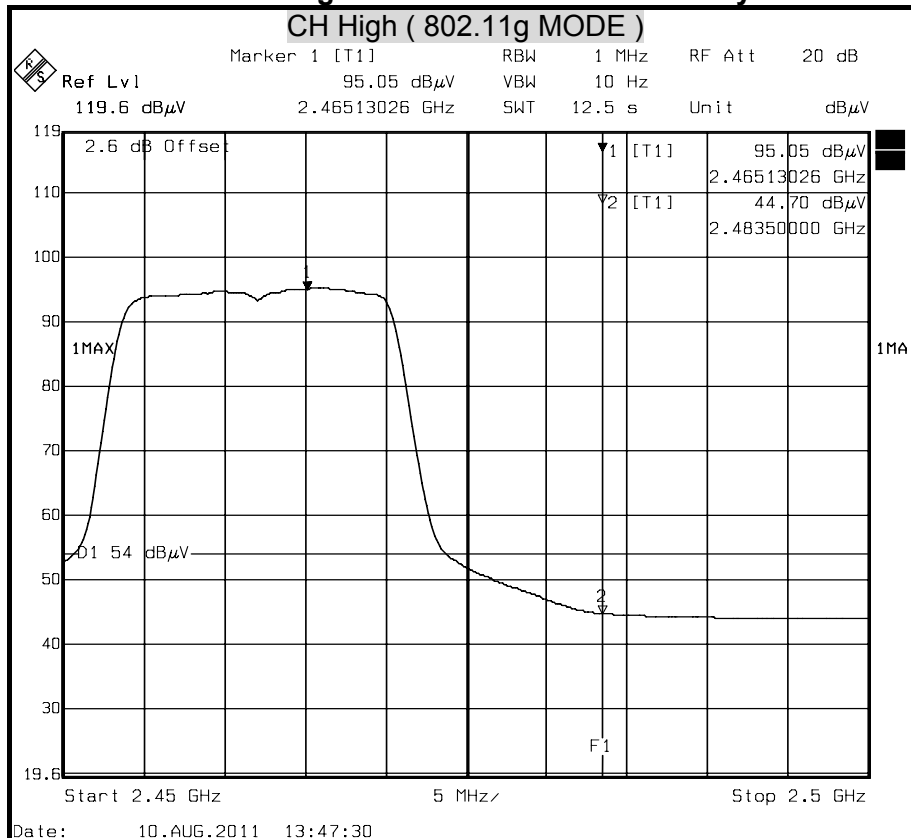







Detector mode : Peak

Polarity : Horizontal

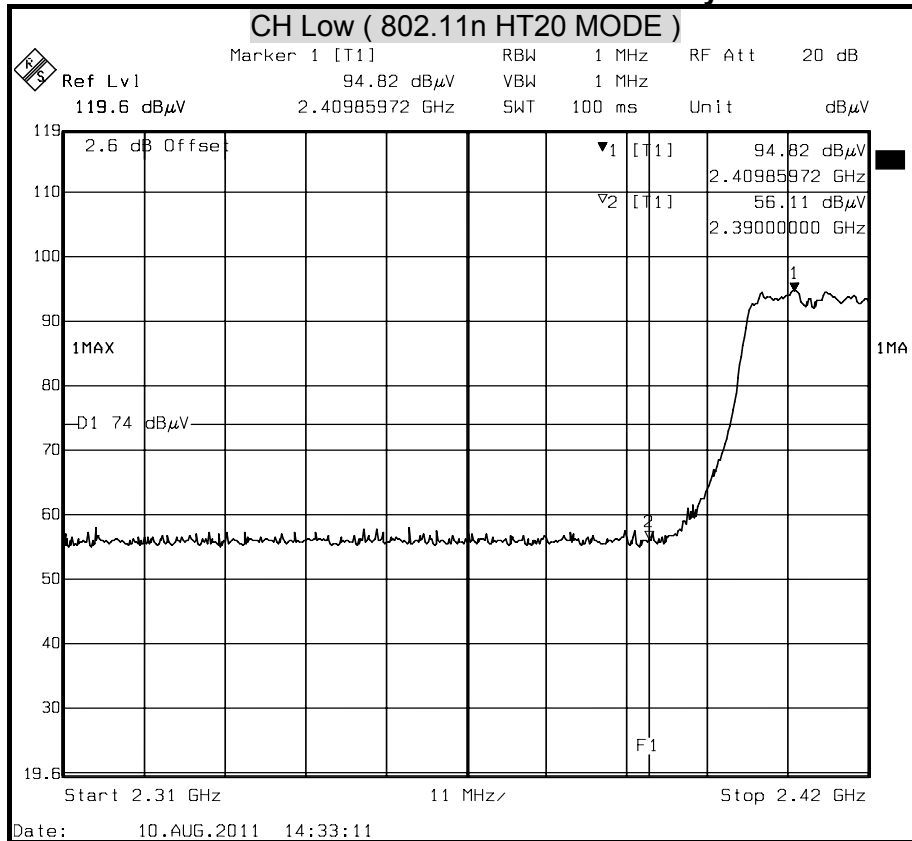

Detector mode : Average


Polarity : Horizontal

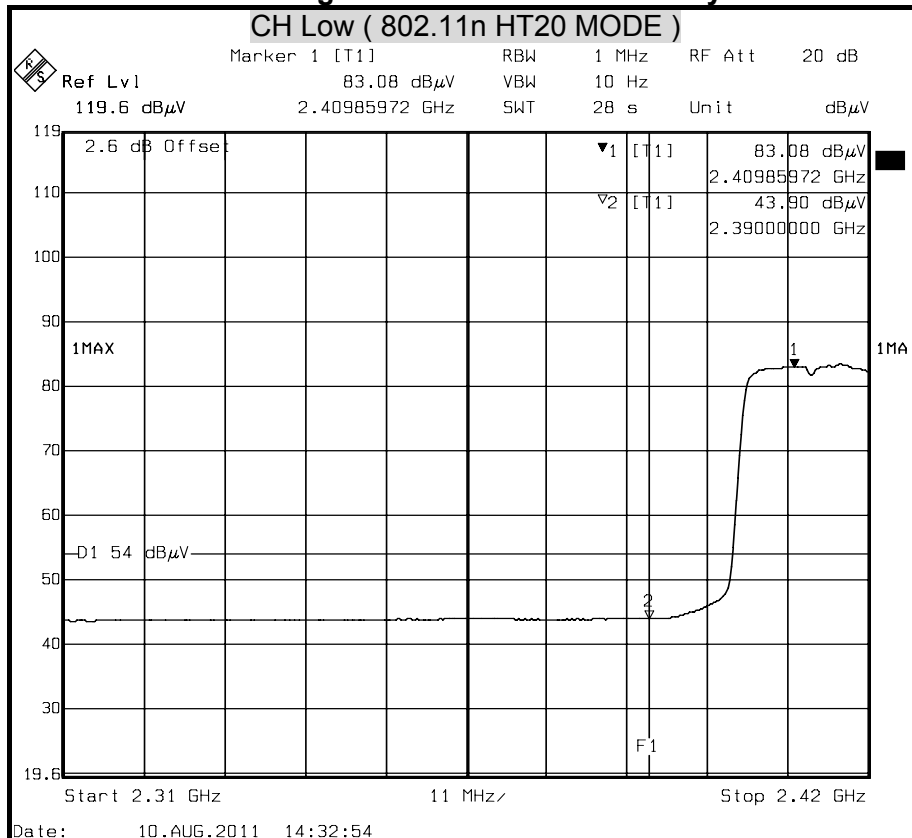




Detector mode : Peak

Polarity : Vertical

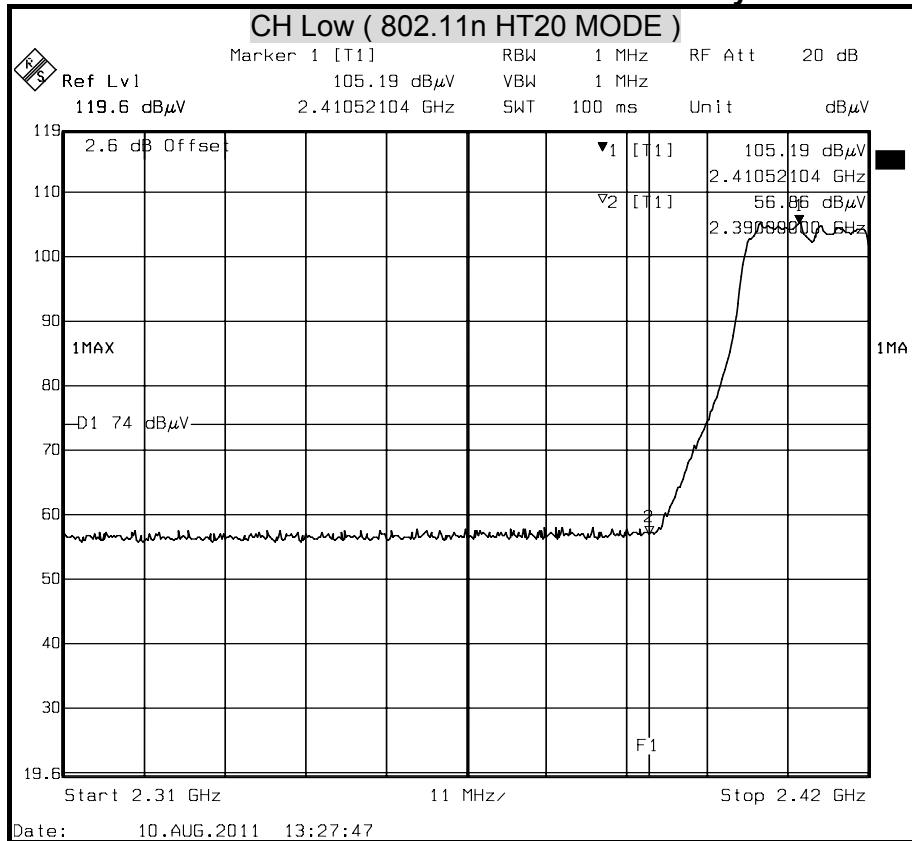

Detector mode : Average


Polarity : Vertical

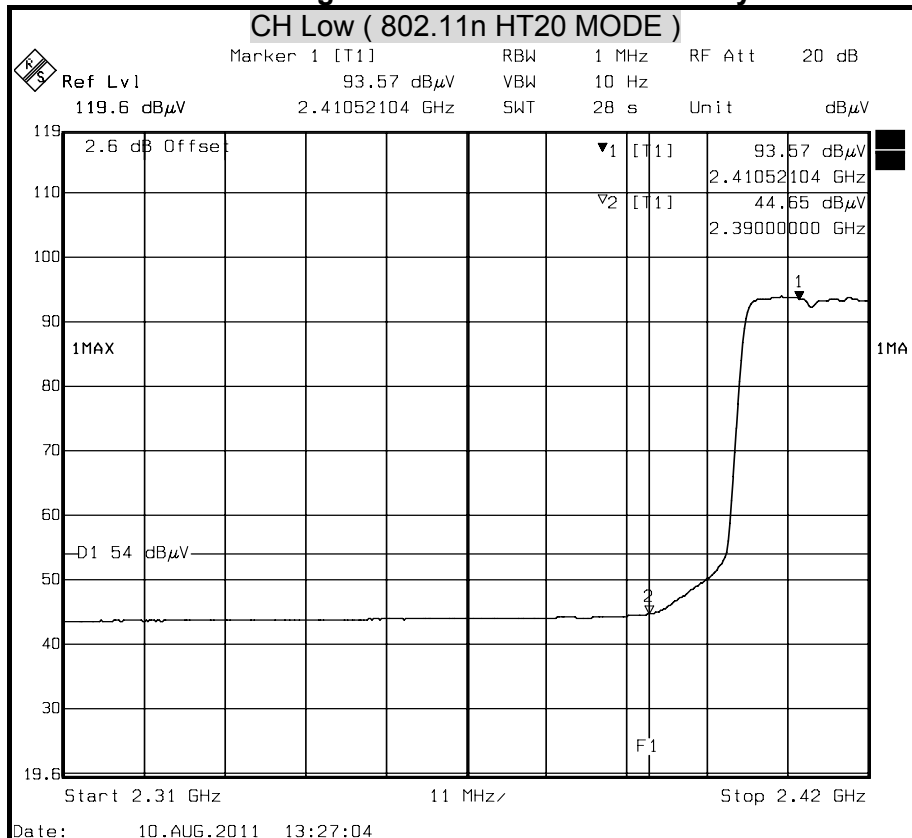




Detector mode : Peak

Polarity : Horizontal

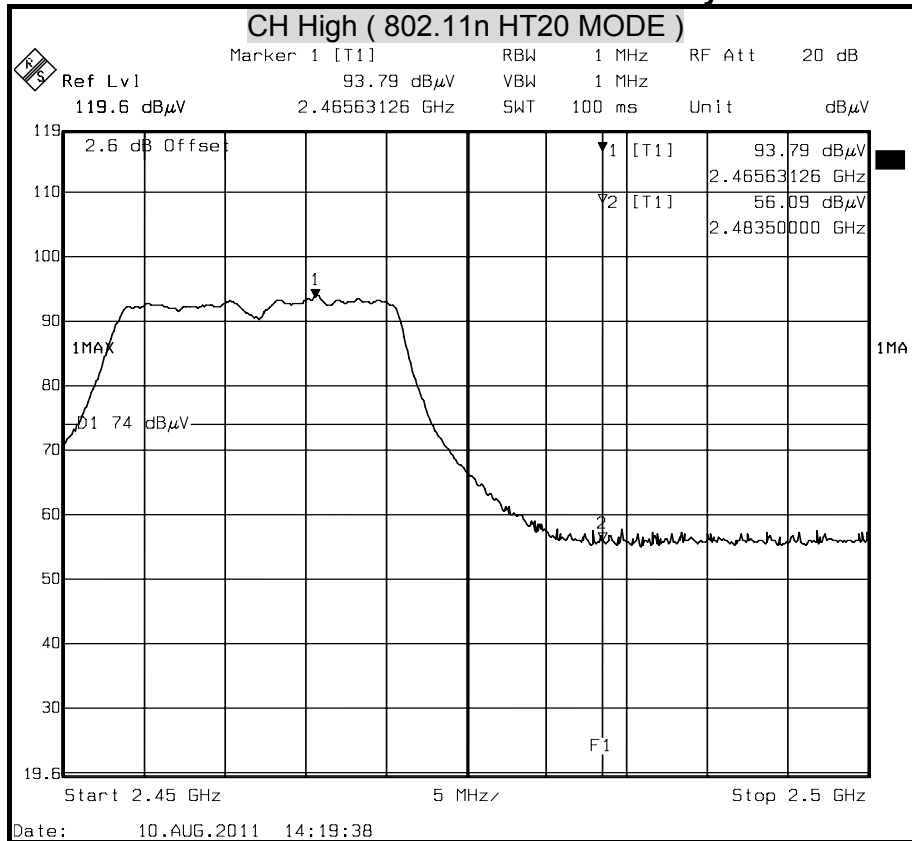

Detector mode : Average


Polarity : Horizontal

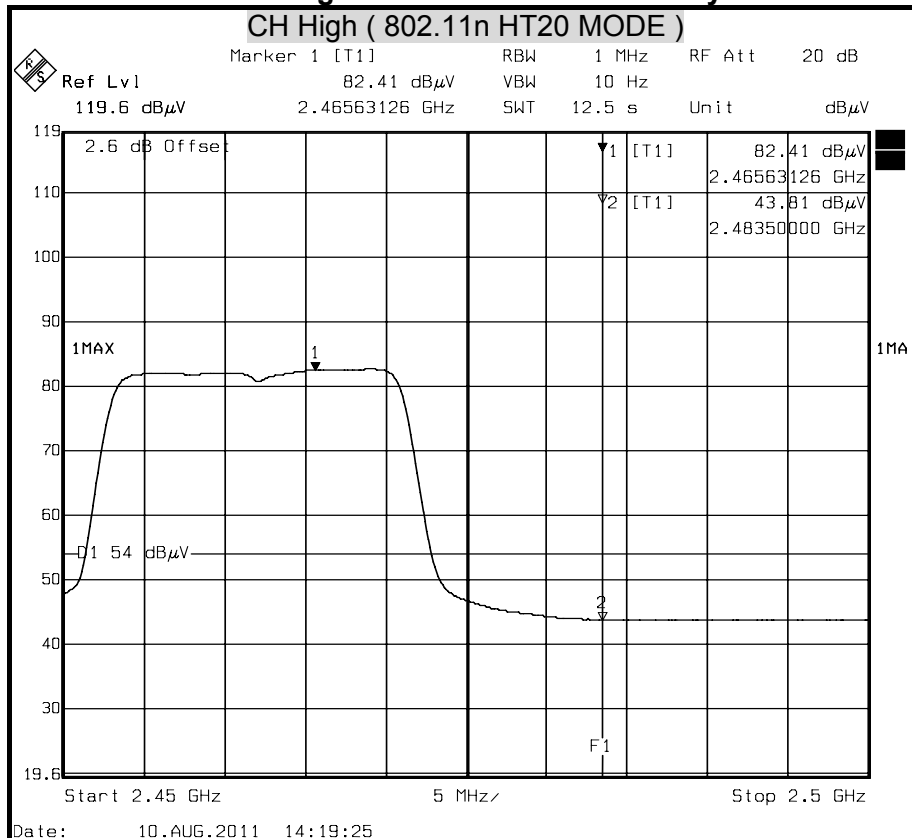




Detector mode : Peak

Polarity : Vertical

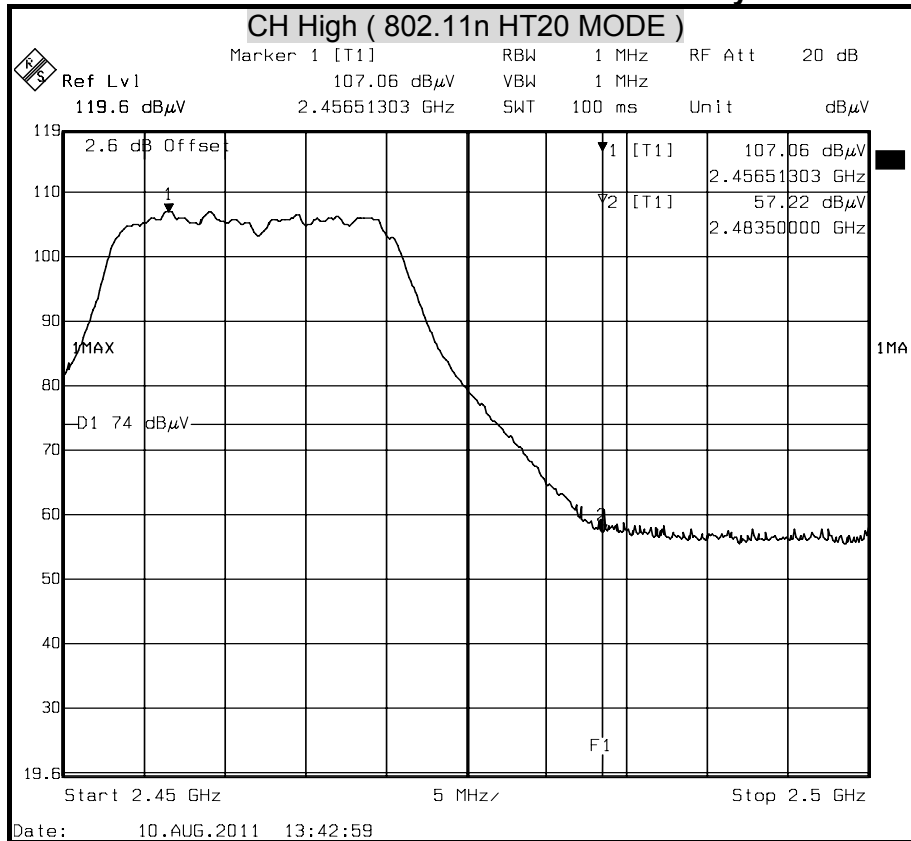

Detector mode : Average


Polarity : Vertical

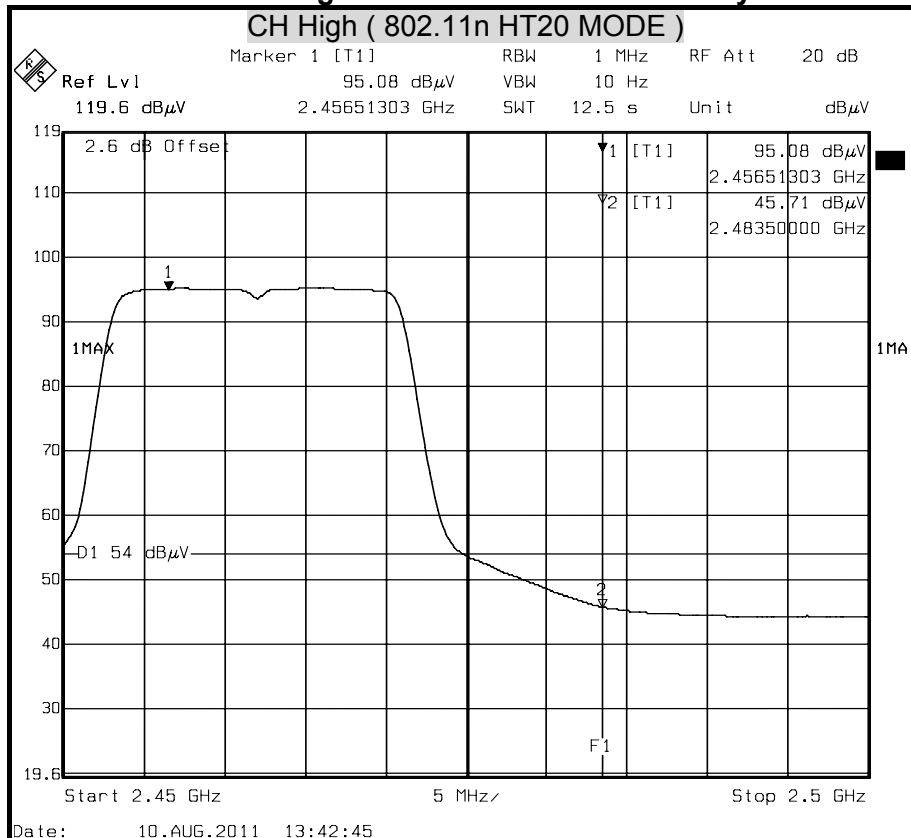




Detector mode : Peak

Polarity : Horizontal

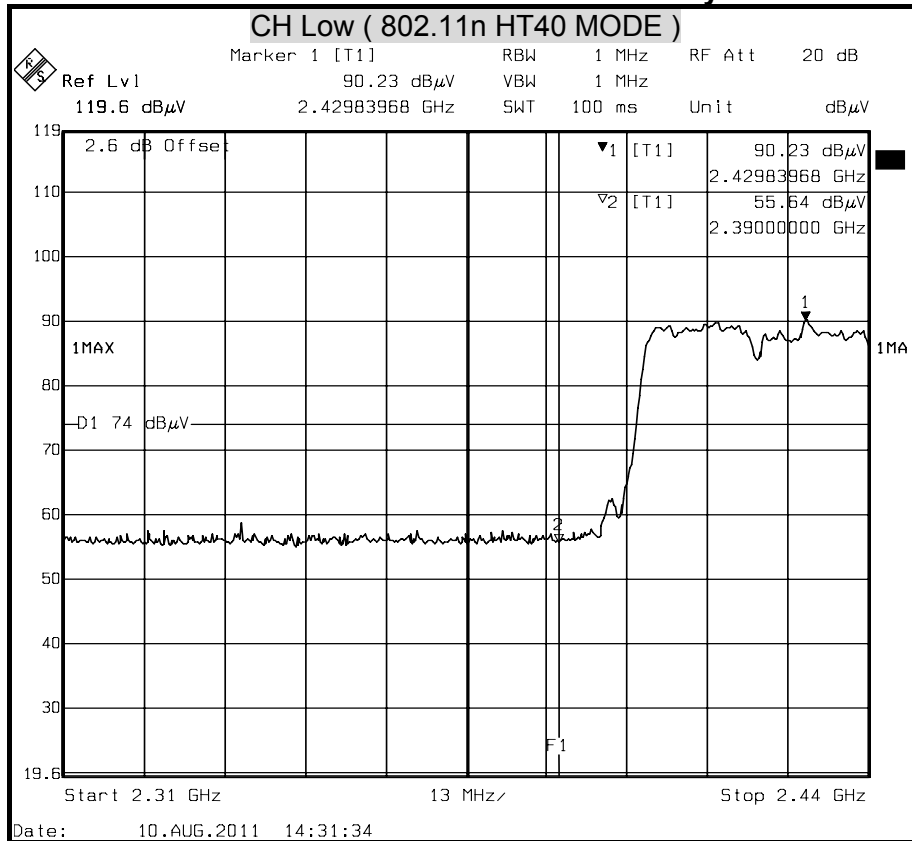

Detector mode : Average


Polarity : Horizontal

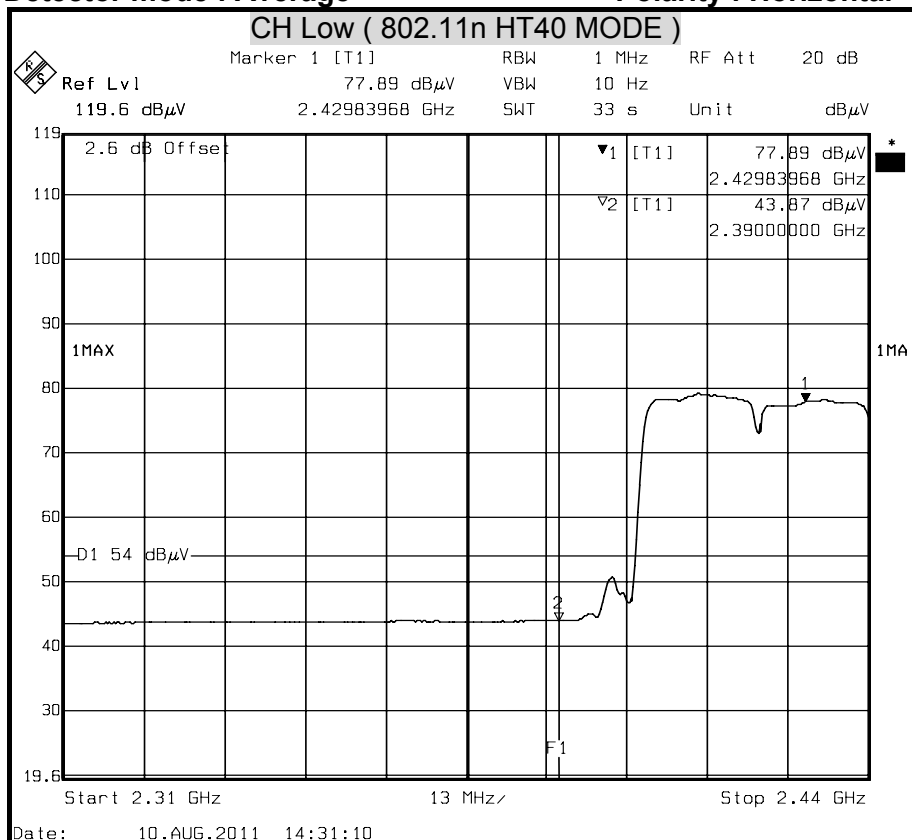




Detector mode : Peak

Polarity : Vertical

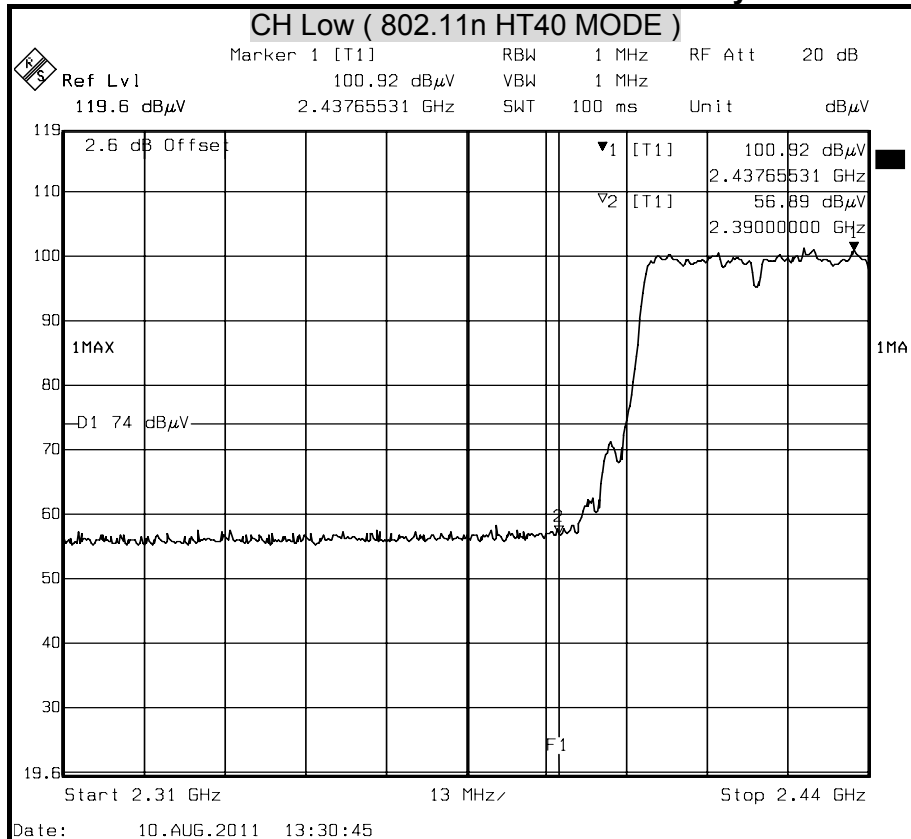

Detector mode : Average


Polarity : Vertical

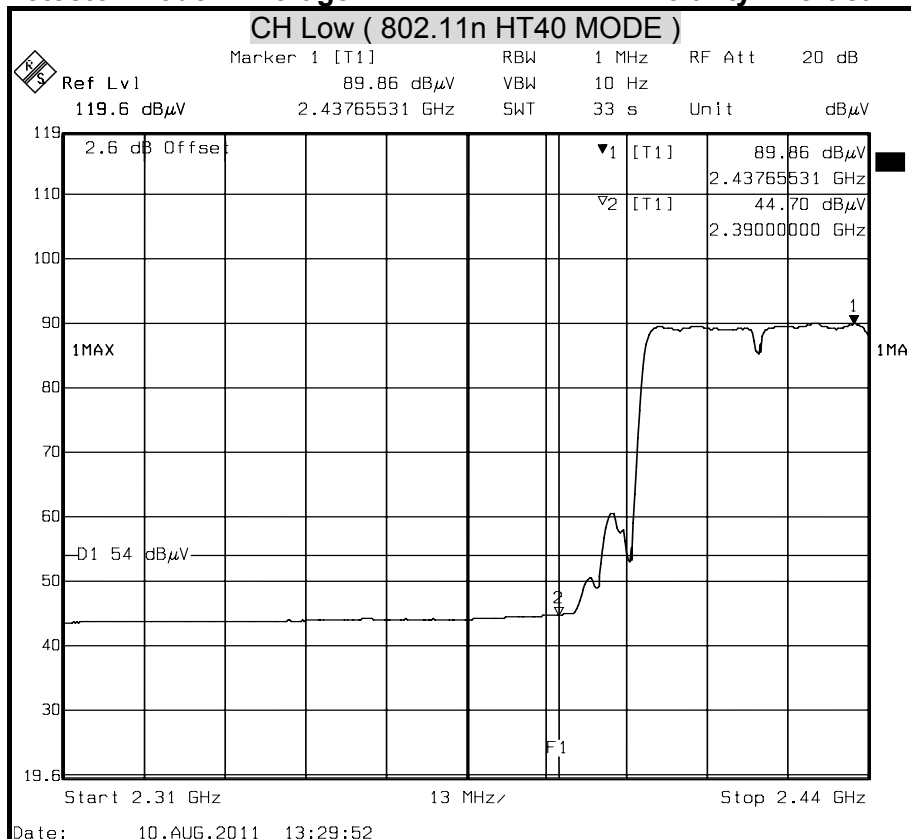




Detector mode : Peak

Polarity : Horizontal

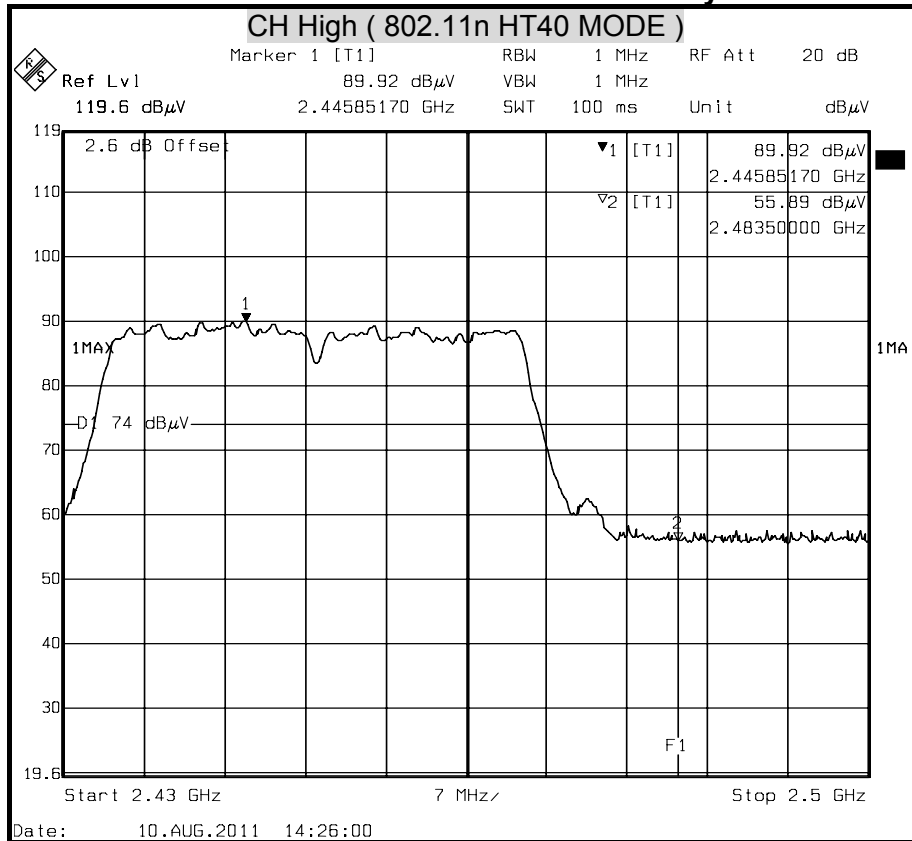

Detector mode : Average


Polarity : Horizontal

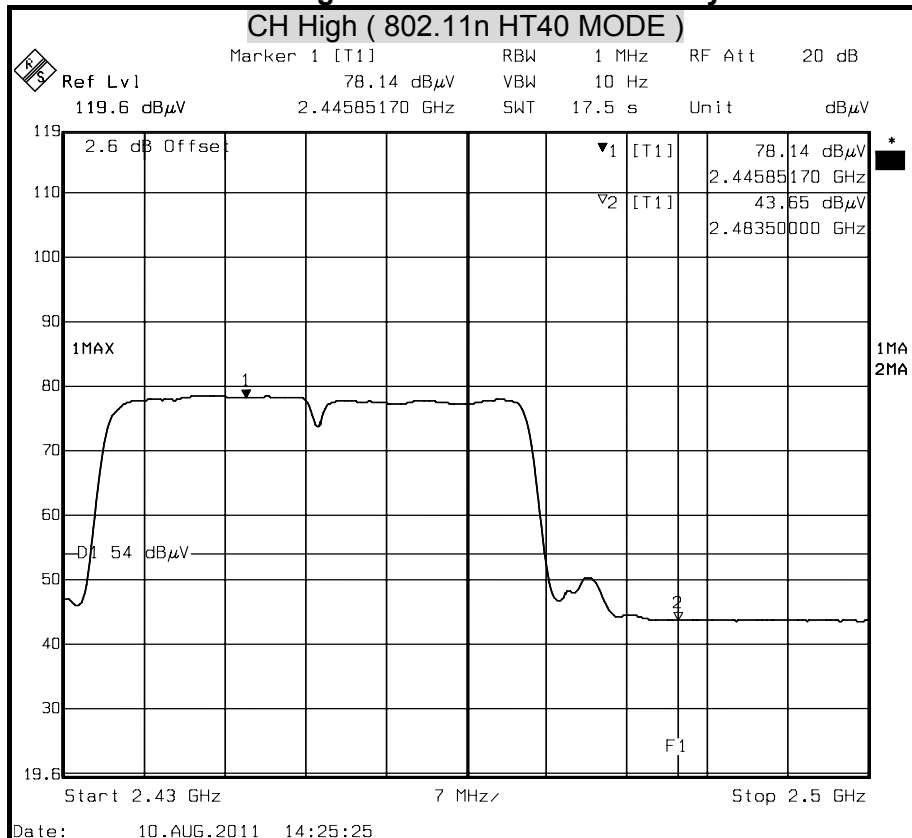




Detector mode : Peak

Polarity : Vertical

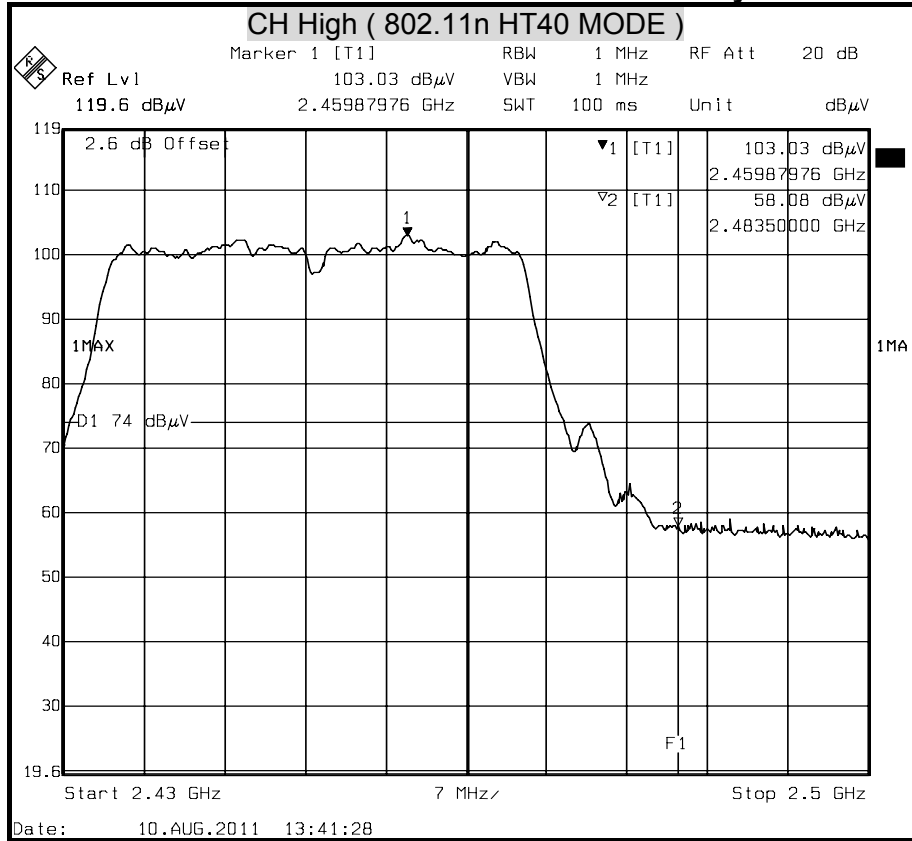

Detector mode : Average

Polarity : Vertical

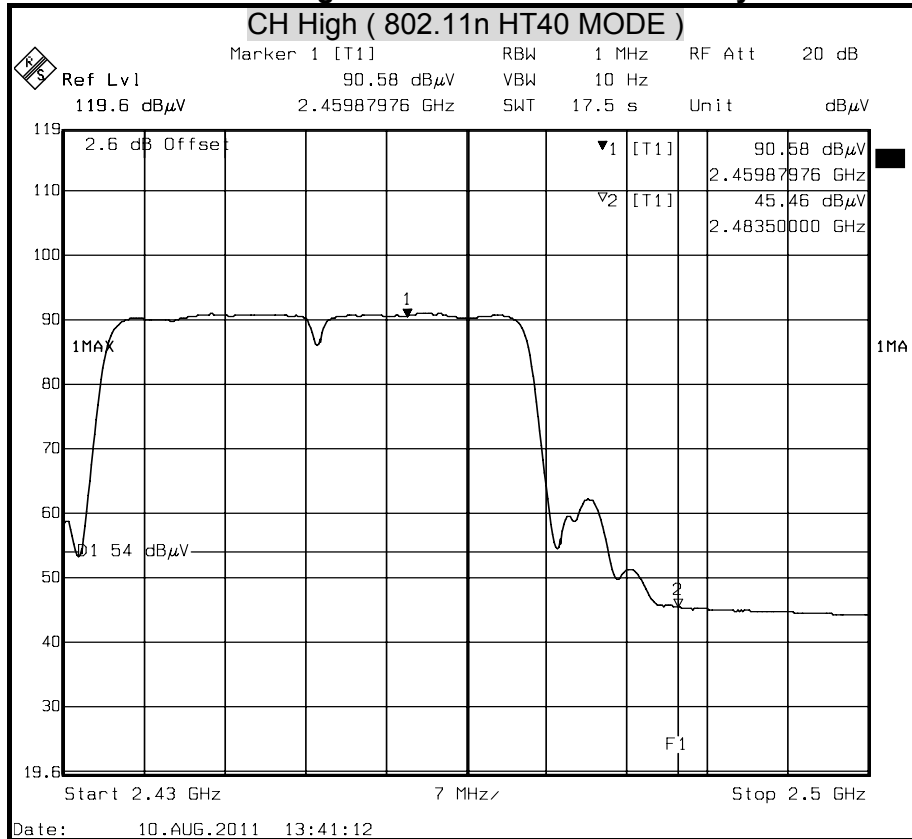





### 8.6 POWERLINE CONDUCTED EMISSIONS

#### LIMITS

§ 15.207 (a) Except as shown in paragraph (b) and (c) this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μH/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

The lower limit applies at the boundary between the frequency ranges.

Frequency of Emission (MHz)	Conducted limit (dBμv)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56	56 to 46
0.5 - 5	56	46
5 - 30	60	50


#### TEST EQUIPMENTS

The following test equipments are used during the conducted power line tests :

Conducted Emission room #1				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
L.I.S.N.	SCHWARZBECK	NNLK 8121	8121-308	MAR. 09, 2012
	Rohde & Schwarz	ESH 3-Z5	840062/021	Aug. 02, 2012
TEST RECEIVER	Rohde & Schwarz	ESCS 30	100348	JUL. 03, 2012
TYPE N COAXIAL CABLE	CCS	BNC50	11	OCT. 04, 2011
Test S/W	e-3 (5.04211c) R&S (2.27)			



## TEST SETUP

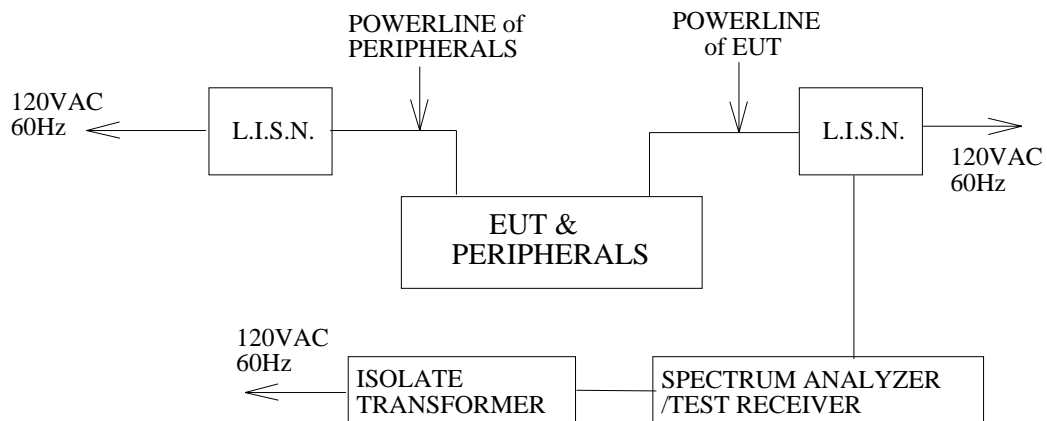

## TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80cm above the horizontal ground plane. The EUT IS CONFIGURED IN ACCORDANCE WITH ANSI C63.4.

The resolution bandwidth is set to 9 kHz for both quasi-peak detection and average detection measurements.

Line conducted data is recorded for both NEUTRAL and LINE.

## TEST RESULTS


No non-compliance noted.



CONDUCTED RF VOLTAGE MEASUREMENT

<b>Product Name</b>	11n/a/g/b Wi-Fi USB adapter	<b>Test Date</b>	2011/08/23
<b>Model</b>	GW-USFang300	<b>Test By</b>	Shiang Su
<b>Test Mode</b>	Normal operating (worst case)	<b>TEMP &amp; Humidity</b>	27°C, 62%

LINE

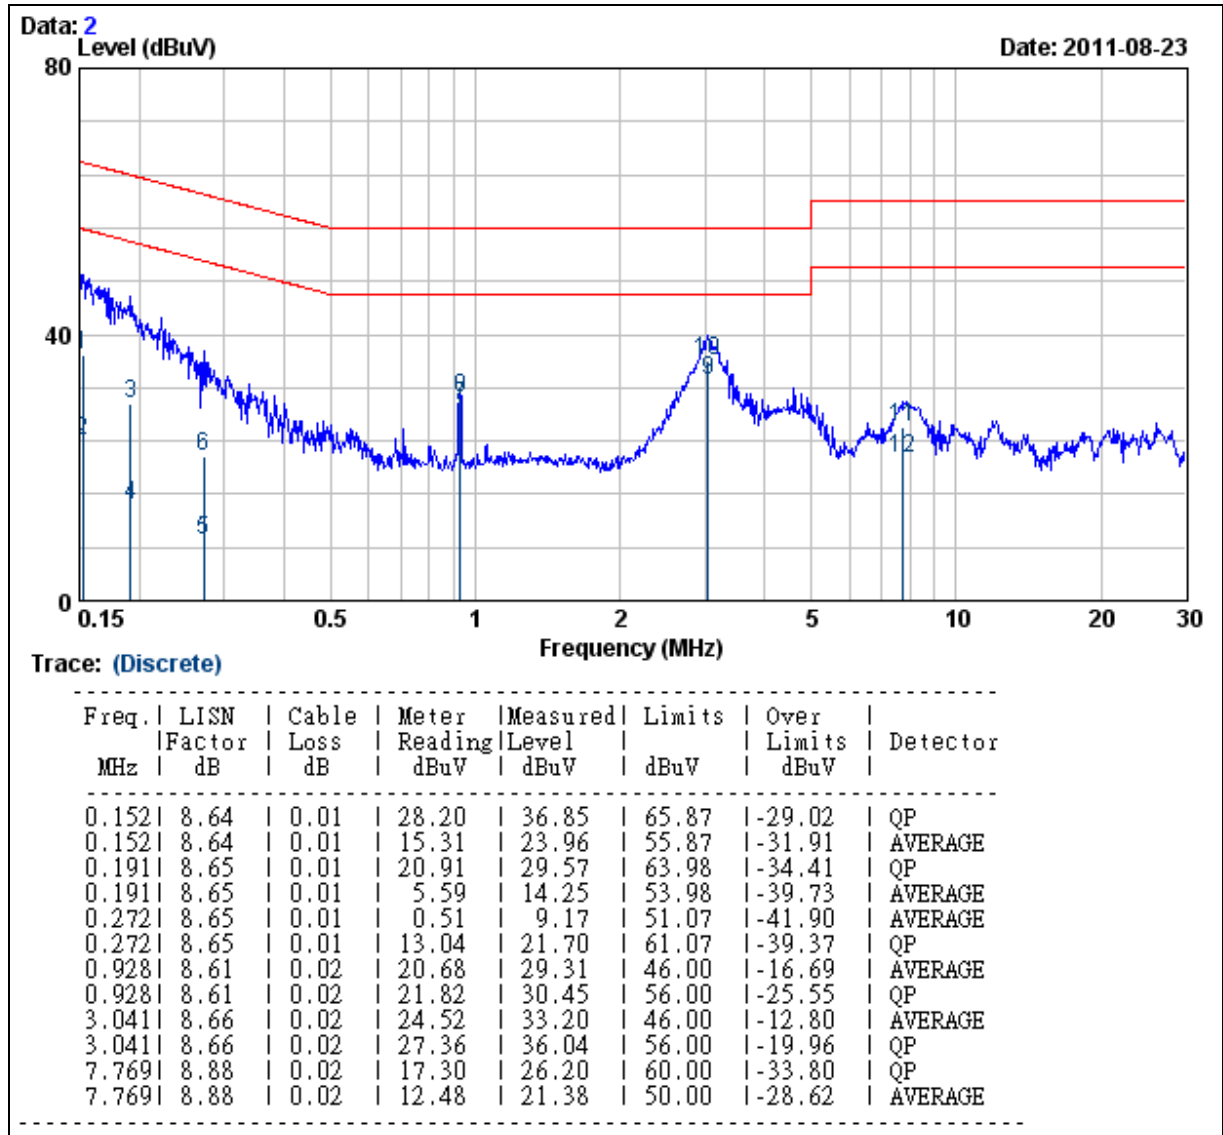


REMARK:

1. Correction Factor = Insertion loss + cable loss
2. Margin value = Emission level – Limit value



<b>Product Name</b>	11n/a/g/b Wi-Fi USB adapter	<b>Test Date</b>	2011/08/23
<b>Model</b>	GW-USFang300	<b>Test By</b>	Shiang Su
<b>Test Mode</b>	Normal operating (worst case)	<b>TEMP &amp; Humidity</b>	27°C, 62%

NEUTRAL

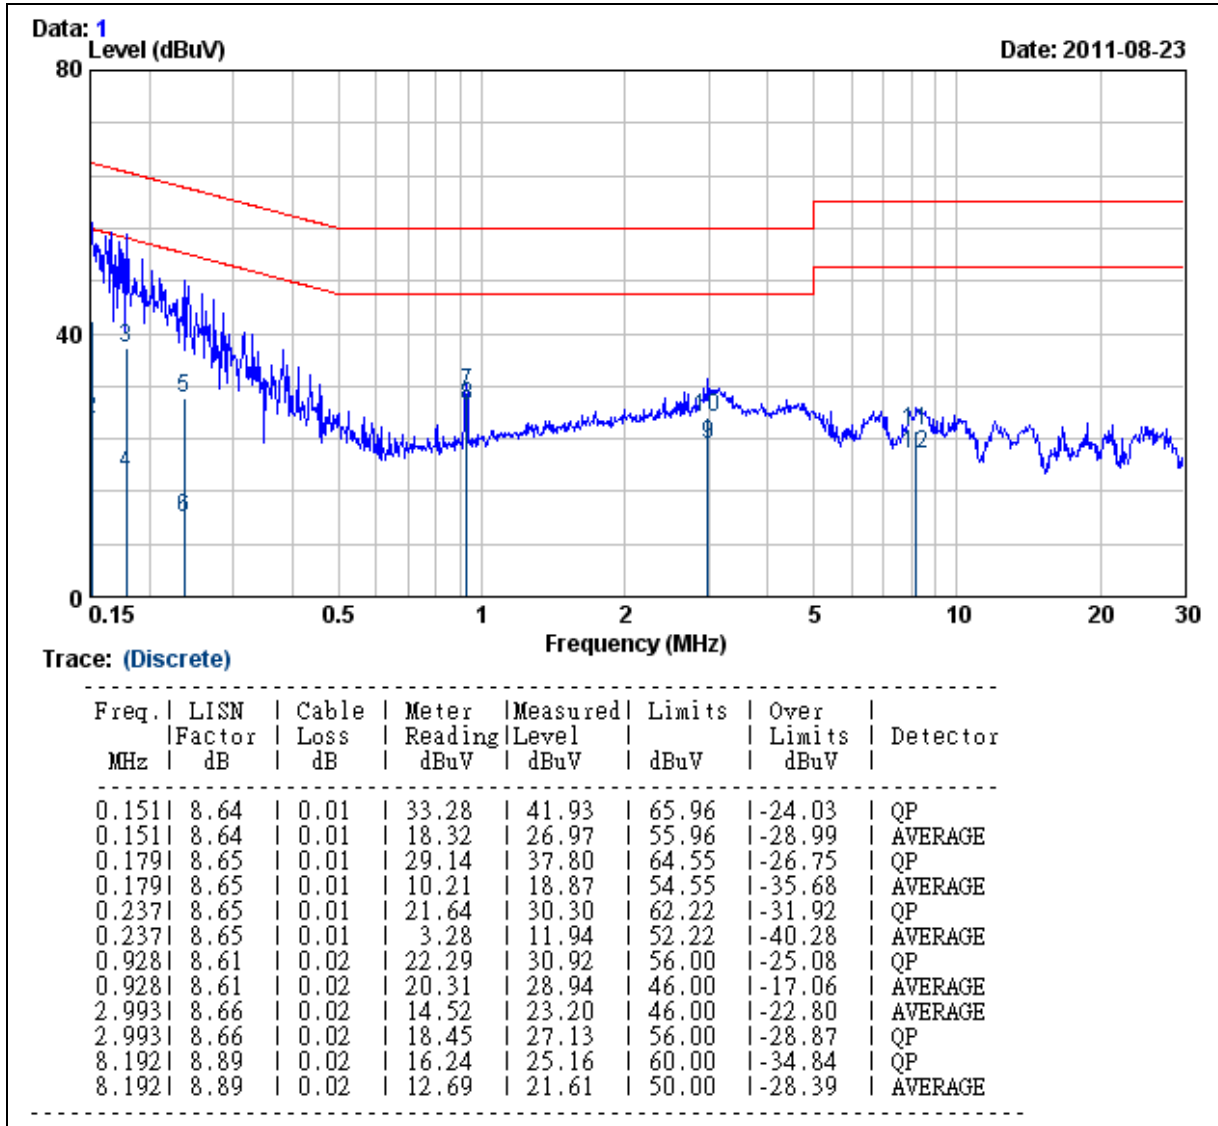

REMARK:

1. Correction Factor = Insertion loss + cable loss
2. Margin value = Emission level – Limit value



## **9. ANTENNA REQUIREMENT**

### **9.1 STANDARD APPLICABLE**

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### **9.2 ANTENNA CONNECTED CONSTRUCTION**

The antenna spec. As below:

#### **Two Antenna (2TX2RX)**

Type: Omni Antenna

Model: AN-152RRSU00

Antenna Gain: 3dBi

Connector: Reverse SMA PLUG

Manufacture: Yong-Shun Technology Co., Ltd

XinXie Technology(SHENZHEN) co,Ltd.