



此頁適用於 XH2-120-R

Case Label 黏貼位置:

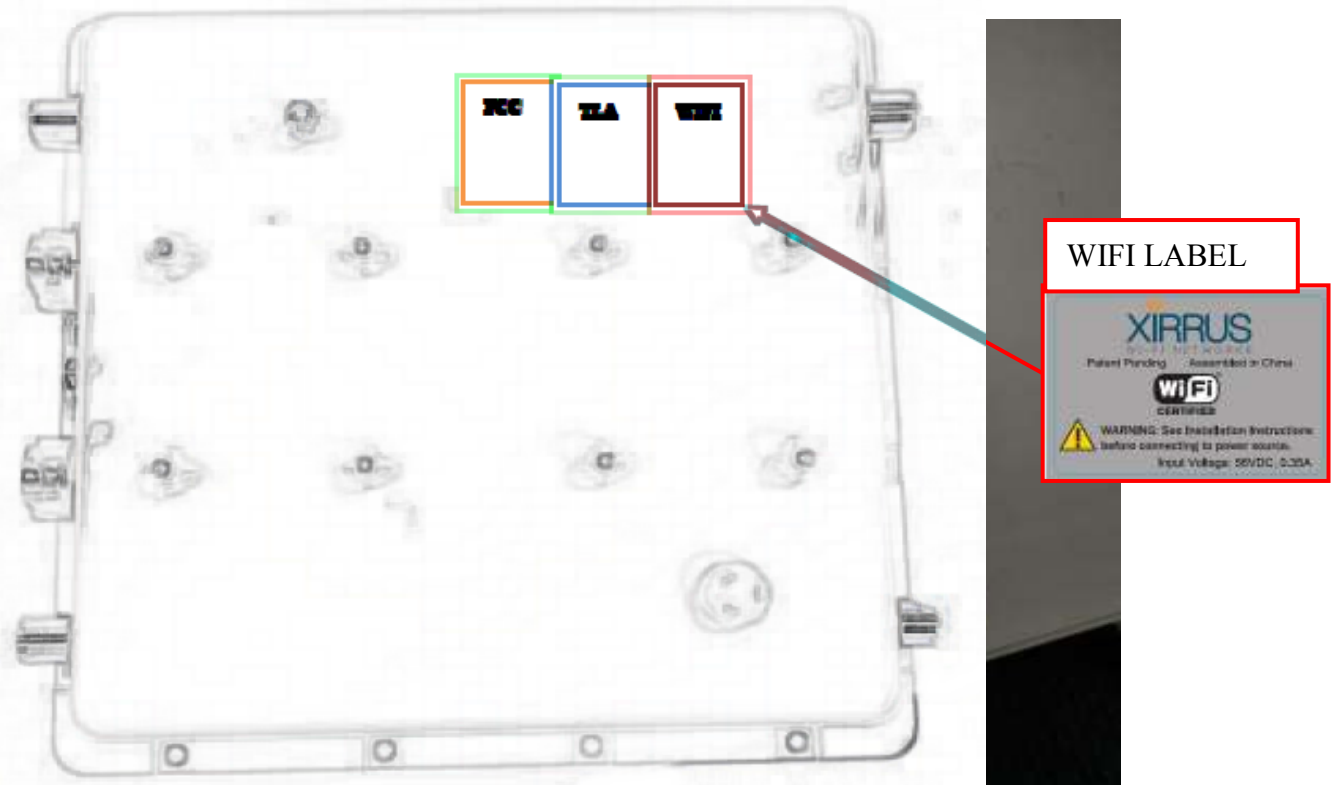

TLA label for case: p/n:3263963100 , 黏貼於 Case 上
需印一式一份貼於 Case。

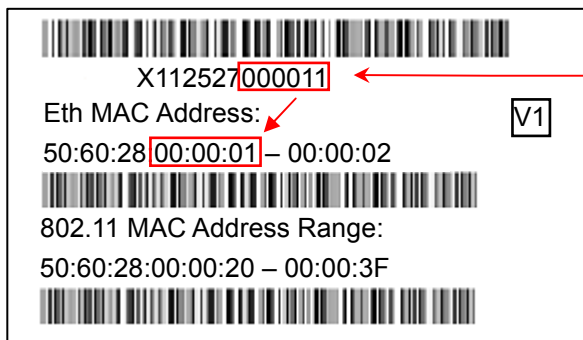

TLA Serial Number
編碼方式如下

TLA Serial Number 編碼方式如下 :

XRNNYWWEEEEEE = 例"X112527000001"

X -- Brand Identification

X = Xirrus

R -- The version number will be "1"

NN -- 12 for the XH2-120 series arrays

Y -- Single Digit Year Code (example 2014 = '4', 2015 = '5')


WW -- 2 digit Week code, Monday first day of week

EEEEEE -- last 6 digits of the Base Ethernet MAC Address

此頁適用於 XH2-120-R

Gift Box label and Carton label 都是用同一張 p/n: 3263985700

需印一式二份，一份貼於 Gift Box，一份貼於 Carton 用。

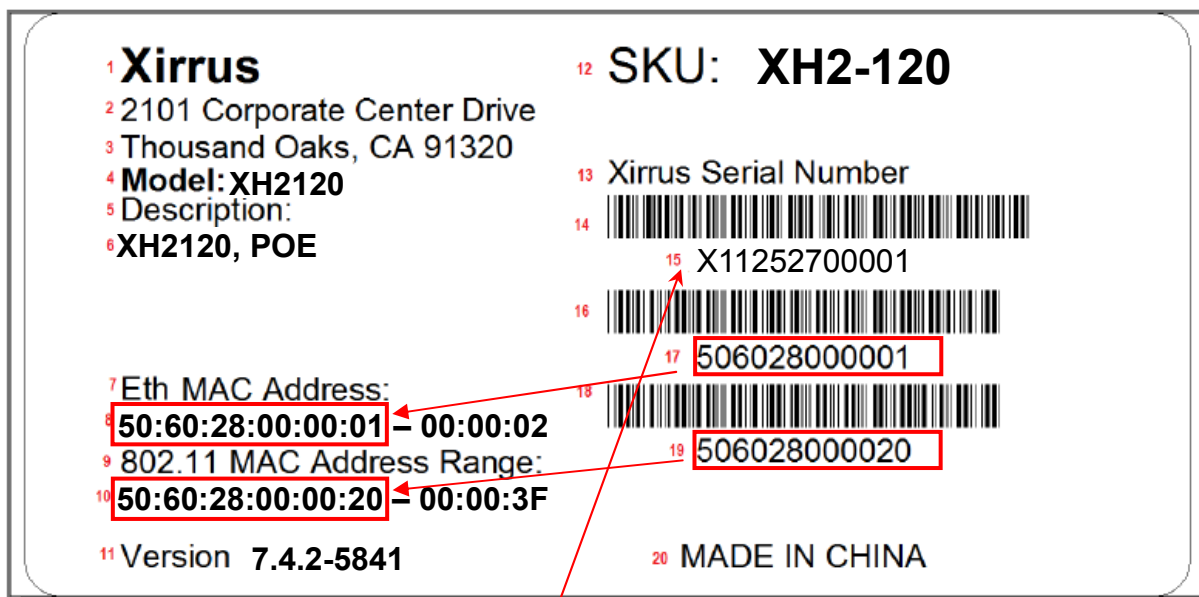

Serial Number 編碼方式,請依照
TLA Serial Number 之定義編碼

台灣生產時內容為 **MADE IN TAIWAN**
大陸生產時內容為 **MADE IN CHINA**

打印方式說明如下：

編號 8 跟編號 17 打印 MAC 碼一樣，編號 17 不需要打印冒號
編號 10 Range 前半段跟編號 19 打印 MAC 碼一樣，編號 19 不需要打印冒號

字型大小及字體，對應圖片上的編號

- 1.Arial 36pt BOLD
- 2.Arial 26pt
- 3.Arial 26pt
- 4.Arial 26pt BOLD
- 5.Arial 26pt
- 6.Arial 26pt
- 7.Arial 26pt
- 8.Arial 26pt
- 9.Arial 26pt
- 10.Arial 26pt
- 12.Arial 36pt
- 13.Arial 26pt
- 14.Bar Code = Code39-Full ASCII, X-Dimension = 6.67 mils, Y-Dimension = .15 in, Density = 10.344 Chars/in, Start/Stop Character = *
- 15.Arial 26pt
- 16.Bar Code = Code39-Full ASCII, X-Dimension = 6.67 mils, Y-Dimension = .15 in, Density = 10.344 Chars/in, Start/Stop Character = *
- 17.Arial 26pt
- 18.Bar Code = Code39-Full ASCII, X-Dimension = 6.67 mils, Y-Dimension = .15 in, Density = 10.344 Chars/in, Start/Stop Character = *
- 19.Arial 26pt
- 20.Arial 26pt

此頁適用於 XH2-120-R

FCC LABEL (3264243300)

This device complies with Part 15 of the FCC Rules.
Operation is subject to the following two conditions:
(1) This device may not cause harmful interference, and
(2) this device must accept any interference received,
including interference that may cause undesired operation.

MODEL: XH2120
SKU: XH2-120

FC FCC ID: SK6-XH2120
IC: 5428A-XH2120

