

TEST REPORT

APPLICANT	: Fujian Newland Auto-ID Tech Co.,Ltd.

- **PRODUCT NAME** : Information Terminal
- MODEL NAME : NLS-NQuire1000
- BRAND NAME : Newland
- FCC ID : SL9NLS-NQUIRE1000
- STANDARD(S) : 47 CFR Part 15 Subpart C
- **TEST DATE** : 2018-07-04 to 2018-07-25
- **ISSUE DATE** : 2018-07-27

Tested by:

Tu Ya'nan

Tu Ya'nan (Test Engineer)

Peng Huarui (Supervisor)

NOTE: This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

Approved by:



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China
 Tel: 86-755-36698555
 Fax: 86-755-36698525

 Http://www.morlab.cn
 E-mail: service@morlab.cn





DIRECTORY

1. T	echnical Information	4
1.1.	Applicant and Manufacturer Information	4
1.2.	Equipment Under Test (EUT) Description	4
1.3.	Test Standards and Results	5
1.4.	Environmental Conditions	5
2. 4	7 CFR Part 15C Requirements	6
2.1.	Antenna requirement	6
2.2.	Peak Output Power ······	6
2.3.	6dB Bandwidth······1	0
2.4.	Conducted Spurious Emissions and Band Edge1	3
2.5.	Power spectral density (PSD)1	7
2.6.	Conducted Emission 2	0
2.7.	Restricted Frequency Bands2	4
2.8.	Radiated Emission	8
Ann	ex A Test Uncertainty3	5
Ann	ex B Testing Laboratory Information3	6





Change History					
Issue Date Reason for change					
1.0 2018-07-27		First edition			



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

 Tel: 86-755-36698555
 Fax: 86-755-36698525

 Http://www.morlab.cn
 E-mail: service@morlab.cn



1. Technical Information

Note: Provide by applicant.

1.1. Applicant and Manufacturer Information

Applicant:	Fujian Newland Auto-ID Tech Co.,Ltd.	
Applicant Address:	Newland Science & Technology Park, No.1 Rujiang West	
	Rd.,Mawei district,Fuzhou,Fujian,P.R.China	
Manufacturer:	Shenzhen Chuangwei Electronic Appliance Tech Co., Ltd.	
Manufacturer Address:	4F & 6F, Overseas plant south, Skyworth Industrial Park, Shiyan	
	Street, Bao'an District, Shenzhen, P.R. China	

1.2. Equipment Under Test (EUT) Description

Product Name:	Information Terminal
Serial No:	(N/A, marked #1 by test site)
Hardware Version:	NQ1000-MB-D6-V02
Software Version:	NQ1000-Android-7-1-V005
Modulation Type:	GFSK
Operating Fraguency Banger	The frequency range used is 2402MHz - 2480MHz
Operating Frequency Range:	(40 channels, at intervals of 2MHz);
Bluetooth Version:	Bluetooth LE
Antenna Type:	FPC Antenna
Antenna Gain:	3.98 dBi

Note 1: The EUT contains Bluetooth Module operating at 2.4GHz ISM band; the frequencies is F(MHz)=2402+2*n (0<=n<=39). The lowest, middle, highest channel numbers of the Bluetooth Module used and tested in this report are separately 0 (2402MHz), 19 (2440MHz) and 39 (2480MHz).

Note 2: The EUT connected to the serial port of the computer with a serial communication cable, we use the dedicated software to control the EUT continuous transmission.

Note 3: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.





1.3. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C (Bluetooth, 2.4GHz ISM band radiators) for the EUT FCC ID Certification:

No	Identity	Document Title				
1	47 CFR Part 15 (10-1-15 Edition)	Radio Frequency Devices				
Test d	Test detailed items/section required by FCC rules and results are as below:					

No.	Section	Description	Test Date	Test Engineer	Result
1	15.203	Antenna Requirement	N/A	N/A	PASS
2	15.247(b)	Peak Output Power	Jul 04, 2018	Tu Ya'nan	PASS
3	15.247(a)	Bandwidth	Jul 04, 2018	Tu Ya'nan	PASS
4	15.247(d)	Conducted Spurious Emission and Band Edge	Jul 04, 2018	Tu Ya'nan	PASS
5	15.247(e)	Power spectral density (PSD)	Jul 04, 2018	Tu Ya'nan	PASS
6	15.207	Conducted Emission	Jul 25, 2018	Zheng Fengjian	PASS
7	15.247(d)	Restricted Frequency Bands	Jul 04, 2018	Zheng Fengjian	PASS
8	15.209, 15.247(d)	Radiated Emission	Jul 17, 2018	Zheng Fengjian	PASS


Note: The tests were performed according to the method of measurements prescribed in ANSIC63.10-2013 and KDB558074 D01 v04 (04/05/2017).

1.4. Environmental Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35
Relative Humidity (%):	30 -60
Atmospheric Pressure (kPa):	86-106







2. 47 CFR Part 15C Requirements

2.1. Antenna requirement

2.1.1. Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

2.1.2. Result: Compliant

The EUT has a permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.

2.2. Peak Output Power


2.2.1. Requirement

According to FCC section 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum peak conducted output power of the intentional radiator shall not exceed 1 Watt.

2.2.2. Test Description

The measured output power was calculated by the reading of the spectrum analyzer and calibration.

A. Test Setup:



The EUT (Equipment under the test) is coupled to the Spectrum analyzer; the RF load attached to the EUT antenna terminal is 500hm; the path loss as the factor is calibrated to correct the reading, all test result in Spectrum analyzer.





B. Equipments List:

Please refer ANNEX A (1.5).

2.2.3. Test procedure

The measured output power was calculated by the reading of the spectrum analyzer and calibration. Following is the test procedure for Peak Output Power test on the spectrum analyzer: a) Set analyzer center frequency to channel center frequency.

b) Set the RBW to1MHz

- c) Set VBW to 3MHz
- d) Set span to 3MHz
- e) Sweep time to auto couple.
- f) Detector = peak.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.

i) Use peak marker function to determine the peak amplitude level.

2.2.4. Test Result

The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the Module.

A. Test Verdict:

Channel		Measured Output Peak Power		Limit		Vardiat
Channel	(MHz)	dBm	W	dBm	W	Verdict
0	2402	7.52	0.0056			PASS
19	2440	9.81	0.0096	30	1	PASS
39	2480	8.97	0.0079			PASS





Test Plots: В.



(Channel 0, 2402MHz)



(Channel 19, 2440MHz)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



RF 50 Q AC Iarker 1 2.47978100000	0 GHz PNO: Fast G IFGain:Low		SOURCE OFF (A ALIGN AUTO/N Avg Type: Log-Pw Avg Hold:>100/100	TRACE 123456	Peak Search
Ref Offset 1.5 dB 0 dB/div Ref 20.00 dBm			Mk	r1 2.479 781 GHz 8.967 dBm	Next Pe
10.0		<u> </u>			Next Pk Rig
0.00 VIII 100					Next Pk L
0.0					Marker De
0.0					Mkr→
0.0					Mkr→Ref
0.0					M d 1 d
enter 2.480000 GHz Res BW 1.0 MHz	#VBV	V 3.0 MHz	Sweep	Span 3.000 MHz 1.000 ms (1001 pts)	10

(Channel 39, 2480MHz)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China




2.3. 6dB Bandwidth

2.3.1. Requirement

According to FCC section 15.247(a) (2), Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

2.3.2. Test Description

A. Test Set:



The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 500hm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

B. Equipments List:

Please refer ANNEX A(1.5).

2.3.3. Test procedure

The steps for the first option are as follows:

- (1) Set analyzer center frequency to channel center frequency.
- a) Set RBW = 100 kHz.
- b) Set the VBW=300 kHz.
- c) Detector = peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple
- f) Allow the trace to stabilize.

g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by6 dB relative to the maximum level measured in the fundamental emission.





(2) The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described in 11.8.1 (i.e., RBW = 100 kHz, VBW \ge 3 \times RBW, and peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be \ge 6 dB.

2.3.4. Test Result

The lowest, middle and highest channels are selected to perform testing to record the 6 dB bandwidth of the module.

A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits(kHz)	Result
0	2402	0.7122	≥500	PASS
19	2440	0.7190	≥500	PASS
39	2480	0.7130	≥500	PASS

B. Test Plots:




(Channel 0: 2402MHz)




SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China
 Tel: 86-755-36698555
 Fax: 86-755-36698525

 Http://www.morlab.cn
 E-mail: service@morlab.cn












(Channel 39: 2480MHz)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China
 Tel:
 86-755-36698555
 Fax:
 86-7

 Http://www.morlab.cn
 E-mail:
 s






2.4. Conducted Spurious Emissions and Band Edge

2.4.1. Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

2.4.2. Test Description

A. Test Set:



The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 500hm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

B. Equipments List:

Please refer ANNEX A (1.5).

2.4.3. Test Result

The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions.

	Frequency Measured Max. Out		Limit		
Channel	(MHz)	Band Emission (dBm)	Corrier Lovel	Calculated	Verdict
	(11112)		Carrier Level	-20dBc Limit	
0	2402	-42.86	5.85	-14.15	PASS
19	2440	-42.65	8.69	-11.31	PASS
39	2480	-42.43	7.56	-12.44	PASS

A. Test Verdict:



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China




B. Test Plots:

Note: the power of the Module transmitting frequency should be ignored.



(Channel = 0, 30MHz to 25GHz)

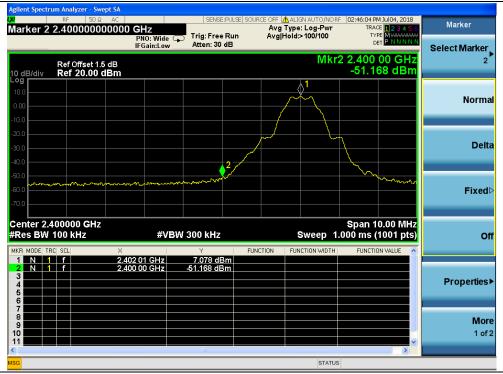

(Band Edge, Channel = 0)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



Agilent Spectrum Analyzer - Swept SA				
₩ RF 50 Ω AC		CE OFF ALIGN AUTO/NORF Avg Type: Log-Pwr	TRACE 1 2 3 4 5 6	Peak Search
PNO: Fast IFGain:Low	Trig: Free Run Atten: 30 dB	Avg Hold:>10/10	DET PNNNN	
Ref Offset 1.5 dB 10 dB/div Ref 20.00 dBm		Mkr	2 24.508 1 GHz -42.646 dBm	NextPeak
				Next Pk Right
-20.0				Next Pk Left
-50.0 -60.0 -70.0	Marine Marine	and the second second		Marker Delta
MKR MODE TRC SCL X		Sweep 2	Stop 25.00 GHz .387 s (10001 pts)	Mkr→CF
1 N 1 f 2.439 6 GHz 2 N 1 f 24.508 1 GHz 3 4 5 6 6	8.685 dBm -42.646 dBm			Mkr→RefLvl
7 8 9 10 11			~	More 1 of 2
MSG		STATUS		

(Channel = 19, 30MHz to 25GHz)



(Channel = 39, 30MHz to 25GHz)





Agilent Spectrum Analyzer - Swept SA	SENSE DI IL SE	SOURCE OFF	IORE 02:46:42 DM 1:04 2018	
Marker 2 2.483500000000 GHz		Avg Type: Log-Pw Avg Hold:>100/100	/r TRACE 123456	Marker
IFGain:Lov				Select Marker
Ref Offset 1.5 dB 10 dB/div Ref 20.00 dBm		M	kr2 2.483 50 GHz -54.288 dBm	2
Log 10.0 0.00 .10.0				Normal
-20.0	2			Delta
-50.0	terreter to the second se	mmmmmmmmmmmmmmmmmmmmmmmmmmmmmmmmmmmmmm		Fixed⊳
Center 2.483500 GHz #Res BW 100 kHz #V	/BW 300 kHz	Sweep	Span 10.00 MHz 1.000 ms (1001 pts)	Off
1 N 1 f 2.480 02 GHz 2 N 1 f 2.483 60 GHz 3 4 5 6	8.595 dBm -54.288 dBm			Properties►
7 8 9 10 11 11				More 1 of 2
MSG		STA	TUS	

(Band Edge, Channel = 39)








2.5. Power spectral density (PSD)

2.5.1. Requirement

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

2.5.2. Test Description

A. Test Set:



The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 500hm; the path loss as the factor is calibrated to correct the reading.

B. Equipments List:

Please refer ANNEX A (1.5).

2.5.3. Test procedure

The measured power spectral density was calculated by the reading of the spectrum analyzer and calibration. Following is the test procedure for PSD test:

- a) Set analyzer center frequency to channel center frequency.
- b) Set the span to 1.5 times DTS
- c) Set the RBW to 3 kHz
- d) Set the VBW to 10 kHz
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.





2.5.4. Test Result

The lowest, middle and highest channels are tested.

A. Test Verdict:

	Spectral power density (dBm/3kHz)											
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict								
0	2402	-6.42	8	PASS								
19	2440	-4.06	8	PASS								
39	2480	-4.97	8	PASS								
Measureme	Measurement uncertainty: ±1.3dB											

B. Test Plots:



(Channel = 0, 2402MHz)







(Channel = 19, 2440MHz)




(Channel = 39, 2480MHz)

MORLAB

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn

E-mail: service@morlab.cn





2.6. Conducted Emission

2.6.1. Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50μ H/50 Ω line impedance stabilization network (LISN).

Frequency range	Conducted Limit (dBµV)			
(MHz)	Quai-peak	Average		
0.15 - 0.50	66 to 56	56 to 46		
0.50 - 5	56	46		
5 - 30	60	50		


NOTE:

(a) The lower limit shall apply at the band edges.

(b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

2.6.2. Test Description

A. Test Setup:

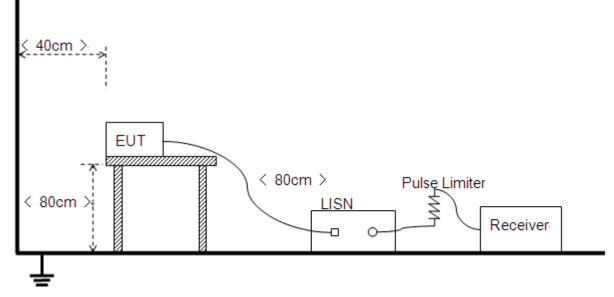

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10: 2013.





B. Equipments List: Please refer ANNEX A(1.5).

2.6.3. Test Result


The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

Note: Both of the test voltage AC 120V/60Hz and AC 230V/50Hz were considered and tested respectively, only the results of the worst case AC 120V/60Hz were recorded in this report.

A. Test setup:


The EUT configuration of the emission tests is $\underline{\text{EUT} + \text{Link.}}$ **Note:** The test voltage is AC 120V/60Hz.







B. Test Plots:

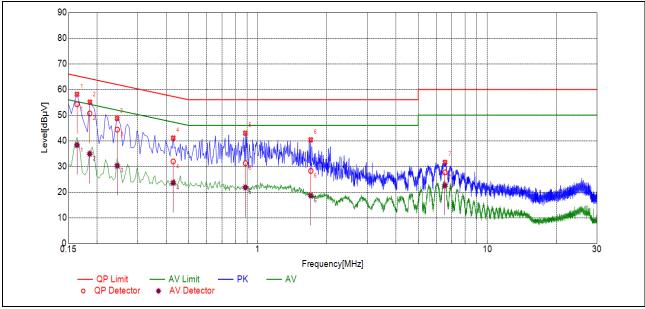



(L Phase)	
-----------	--

NO.	Fre.	Emission Level (dBµV)		Limit (dBµV)	Power-line	Verdict
	(MHz)	Quai-peak	Average	Quai-peak	Average		
1	0.16	54.23	38.33	65.29	55.29		PASS
2	0.19	50.65	34.93	64.22	54.22		PASS
3	0.24	44.36	30.27	61.94	51.94		PASS
4	0.43	31.95	23.63	57.28	47.28	Line	PASS
5	0.88	31.25	21.86	56.00	46.00		PASS
6	1.70	28.27	18.61	56.00	46.00		PASS
7	6.54	27.72	22.54	60.00	50.00		PASS



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China




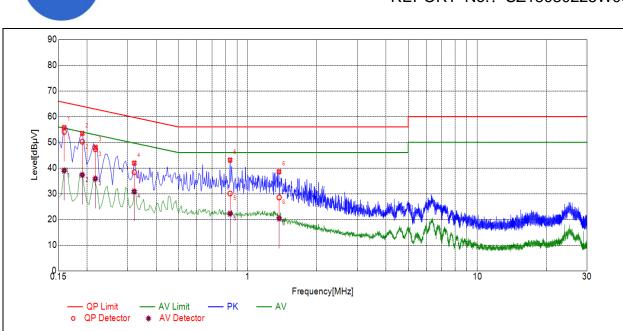

(N Phase)

NO.	Fre.	Emission Level (dBµV)		Limit (c	dBμV)	Power-line	Verdict
	(MHz)	Quai-peak	Average	Quai-peak	Average		
1	0.16	54.05	38.99	65.51	55.51		PASS
2	0.19	50.25	37.31	64.01	54.01		PASS
3	0.22	47.32	35.86	62.92	52.92	Neutral	PASS
4	0.32	38.38	30.90	59.69	49.69	Neutral	PASS
5	0.84	30.08	22.23	56.00	46.00		PASS
6	1.37	28.56	20.37	56.00	46.00		ASS

MORI






2.7. Restricted Frequency Bands

2.7.1. Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

2.7.2. Test Description

A. Test Setup

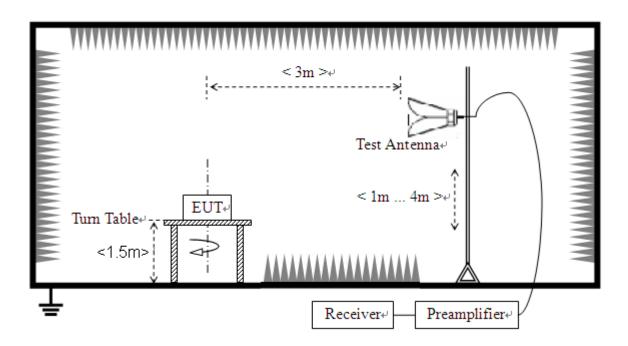

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.





B. Equipments List:

Please refer ANNEX A(1.5).

2.7.3. Test Result

The lowest and highest channels are tested to verify the Restricted Frequency Bands.

The measurement results are obtained as below: E $[dB\mu V/m] = U_R + A_T + A_{Factor} [dB]; A_T = L_{Cable loss} [dB] - G_{preamp} [dB]$ A_T: Total correction Factor except Antenna U_R: Receiver Reading G_{preamp}: Preamplifier Gain A_{Factor}: Antenna Factor at 3m

Note: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.

Channel	Frequency	Detector	Receiver Reading	A _T	A _{Factor}	Max. Emission	Limit	Verdict
Channer	(MHz)	PK/ AV	U _R (dBuV)	(dB)	(dB@3m)	E (dBµV/m)	(dBµV/m)	Vertuict
0	2325.17	PK	61.41	-33.63	32.56	60.34	74	PASS
0	2383.72	AV	46.62	-33.63	32.56	45.55	54	PASS
39	2484.77	PK	60.82	-33.18	32.50	60.14	74	PASS
39	2484.29	AV	46.73	-33.18	32.50	46.05	54	PASS

A. Test Verdict:



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China
 Tel: 86-755-36698555
 Fax: 86-755-36698525

 Http://www.morlab.cn
 E-mail: service@morlab.cn



B. Test Plots:

- ē 🔀								Keysight Spectru
6 Marker	03:56:07 PM Jul 04, 2018 TRACE 1 2 3 4 5 6	vg Type: Log-Pwr	SE:INT	SEN	Hz		RF 50 G	rker 1 2.
Select Marker	TYPE MWWWW DET PSNNNN	/g Hold:>100/100		Trig: Free Atten: 30	PNO: Fast (FGain:Low		5251000	
1	2.325 168 GHz 61.408 dBµV	Mkr1				0 dBµV	tef 120.00	dB/div
Normal								
Delta	2		for provide a straight		Marya Tolana	1-	de strage de la traversa	0 0 0
Fixed⊳								0 0 0
	Stop 2.40400 GHz .000 ms (1001 pts)			V 3.0 MHz	#VB		MHz	art 2.3000 s BW 1.0
Properties►	FUNCTION VALUE	FUNCTION WIDTH		Y <u>61.408 dB</u> 60.392 dB	68 GHz 00 GHz		f	
More 1 of 2				III				

(Channel = 0, PEAK)



(Channel = 0, AVG)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China
 Tel: 86-755-36698555
 Fax: 86-755-36698525

 Http://www.morlab.cn
 E-mail: service@morlab.cn



⊢	23456	38:55 PM Jul 04, TRACE 1 2 TYPE MW	r	be: Log-Pwr d:>100/100				Trig: Fr	Z 0: Fast G	AC 000 GI	llyzer - Swept 50 Ω 774000	RF	
Select Marker 2	GHz	DET P S 84 774 (0.822 d	22	Mkr			30 dB	Atten: 3	ain:Low	IF	120.00 c	Ref	/div
Norma													
Delta									2	1			
Fixed													
Of	0 GHz 01 pts)	o 2.50000 ms (1001	St 1.00	Sweep			lz	3.0 MH	#VBV				2.478 BW 1
Properties►	ALUE	FUNCTION VALU		UNCTION WIDT	FION	FUN		Y 59.450 d 60.822 d		× 2.483 50 2.484 77		f	ODE TRO
More 1 of 2													

(Channel = 39, PEAK)



(Channel = 39, AVG)





2.8. Radiated Emission

2.8.1. Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (µV/m)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:

- For Above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
- 2. For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK)

In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table)







2.8.2. Test Description

A. Test Setup:

1) For radiated emissions from 9kHz to 30MHz

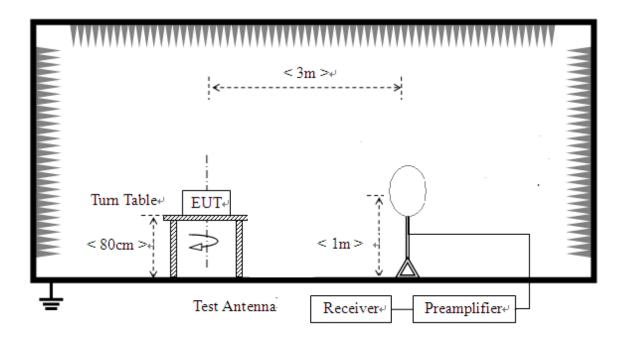

2) For radiated emissions from 30MHz to1GHz

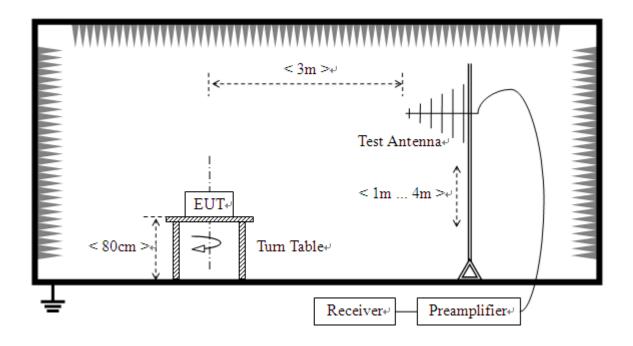




SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China
 Tel: 86-755-36698555
 Fax: 86-755-36698525

 Http://www.morlab.cn
 E-mail: service@morlab.cn



3) For radiated emissions above 1GHz

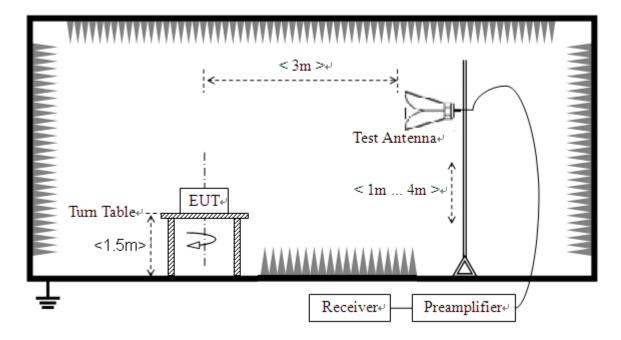

The RF absorbing material used on the reference ground plane and on the turntable have a maximum height (thickness) of 30 cm (12 in) and have a minimum-rated attenuation of 20 dB at all frequencies from 1 GHz to 18 GHz. Test site have a minimum area of the ground plane covered with RF absorbing material as specified in Figure 6 of ANSI C63.4: 2014.

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.10:2013. For radiated emissions below or equal to 1GHz, The EUT was set-up on insulator 80cm above the Ground Plane, For radiated emissions above 1GHz, The EUT was set-up on insulator 150cm above the Ground Plane. The set-up and test methods were according to ANSI C63.10:2013.

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

(a) In the frequency range of 9kHz to 30MHz, magnetic field is measured with Loop Test Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.

(b) In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Place the test antenna at 3m away from area of the EUT, while keeping the test antenna aimed at the source of emissions at each frequency of significant



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



emissions, with polarization oriented for maximum response. The test antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final test antenna elevation shall be that which maximizes the emissions. The test antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane. The emission levels at both horizontal and vertical polarizations should be tested.

B. Equipments List:

Please refer ANNEX A(1.5).

2.8.3. Test Result

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak limit, it is unnecessary to perform an quasi-peak measurement.

The measurement results are obtained as below:

 $E [dB\mu V/m] = U_R + A_T + A_{Factor} [dB]; A_T = L_{Cable loss} [dB] - G_{preamp} [dB] \\ A_T: Total correction Factor except Antenna \\ U_R: Receiver Reading \\ G_{preamp}: Preamplifier Gain \\ A_{Factor}: Antenna Factor at 3m$

During the test, the total correction Factor A_T and A_{Factor} were built in test software.

Note1: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.


Note2: For the frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

Note3: For the frequency, which started from 25GHz to 40GHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.






Plots for Channel = 0

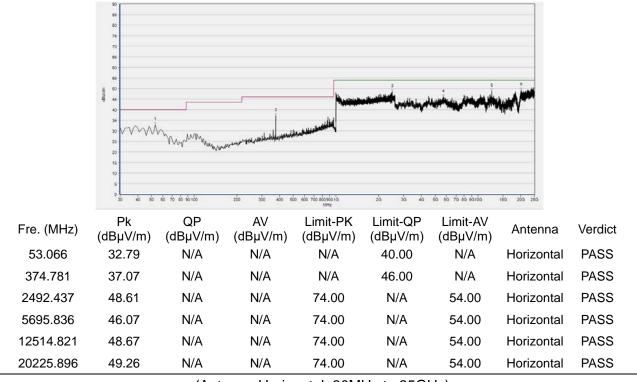

(Antenna Horizontal, 30MHz to 25GHz)

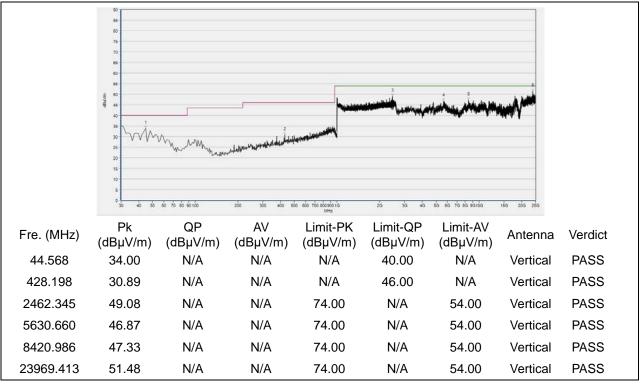


(Antenna Vertical, 30MHz to 25GHz)




SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Fa: Http://www.morlab.cn E-r



Plot for Channel = 19

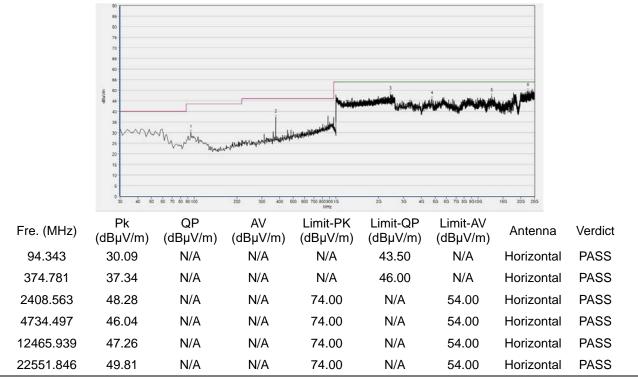

(Antenna Horizontal, 30MHz to 25GHz)

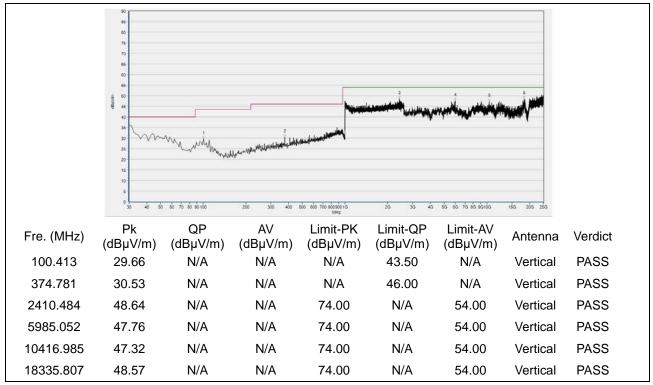


(Antenna Vertical, 30MHz to 25GHz)




SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.cn

Plot for Channel = 39

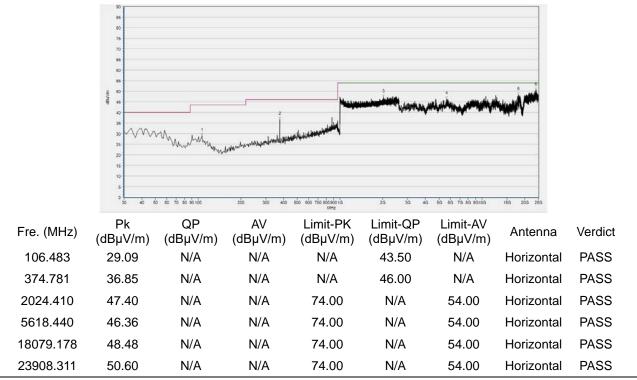

(Antenna Horizontal, 30MHz to 25GHz)

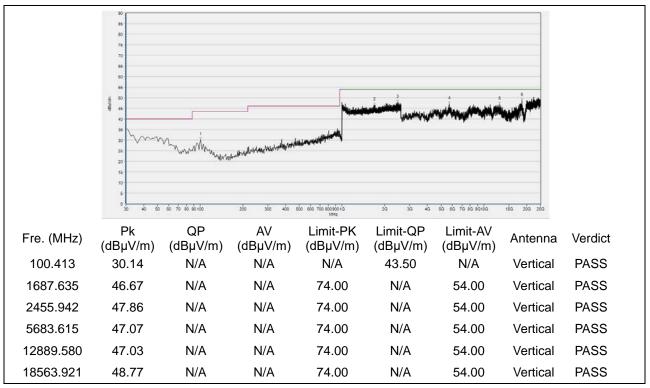

(Antenna Vertical, 30MHz to 25GHz)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Fa Http://www.morlab.cn E-



Annex A Test Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for test performed on the EUT as specified in CISPR 16-1-2:

Test items	Uncertainty
Peak Output Power	±2.22dB
Power spectral density (PSD)	±2.22dB
Bandwidth	±5%
Conducted Spurious Emission	±2.77 dB
Restricted Frequency Bands	±5%
Radiated Emission	±2.95dB
Conducted Emission	±2.44dB

This uncertainty represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



Annex B Testing Laboratory Information

1. Identification of the Responsible Testing Laboratory

Company Name:	Shenzhen Morlab Communications Technology Co., Ltd.					
Department:	Morlab Laboratory					
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang					
	Road, Block 67, BaoAn District, ShenZhen, GuangDong					
	Province, P. R. China					
Responsible Test Lab	Mr. Su Fond					
Manager:	Mr. Su Feng					
Telephone:	+86 755 36698555					
Facsimile:	+86 755 36698525					

2. Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd.
	Morlab Laboratory
	FL.3, Building A, FeiYang Science Park, No.8 LongChang
Address:	Road, Block 67, BaoAn District, ShenZhen, GuangDong
	Province, P. R. China

3. Facilities and Accreditations

All measurement facilities used to collect the measurement data are located at FL.3, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10-2013 and CISPR Publication 22; the FCC designation number is CN1192, the test firm registration number is 226174.





4. Test Equipments Utilized

4.1 Conducted Test Equipments

Equipment Name	Serial No.	Туре	Manufacturer	Cal. Date	Cal. Due
Power Splitter	NW521	1506A	Weinschel	2018.04.17	2019.04.16
Attenuator 1	(N/A.)	10dB	Resnet	2018.04.17	2019.04.16
Attenuator 2	(N/A.)	3dB	Resnet	2018.04.17	2019.04.16
EXA Signal	MY53470836	N9010A	Agilent	2017.12.03	2018.12.02
Analzyer					
RF cable	0004	RF01	Morlab	N/A	N/A
(30MHz-26GHz)	CB01				
Coaxial cable	CB02	RF02	Morlab	N/A	N/A
SMA connector	CN01	RF03	HUBER-SUHNER	N/A	N/A

4.2 Conducted Emission Test Equipments

Equipment Name	Serial No.	Туре	Manufacturer	Cal. Date	Cal. Due
Receiver	MY56400093	N9038A	KEYSIGHT	2018.05.08	2019.05.07
LISN	812744	NSLK 8127	Schwarzbeck	2018.05.08	2019.05.07
Pulse Limiter	0201	VTSD	Schwarzbeck	2018.05.08	2019.05.07
(20dB)	9391	9561-D			
Coaxial cable(BNC)	CB01	EMC01	Morlab	N/A	N/A
(30MHz-26GHz)	CB01				

4.3Auxiliary Test Equipment

Equipment Name	Model No.	Brand Name	Manufacturer	Cal.Date	Cal. Due
Computer	T430i	Think Pad	Lenovo	N/A	N/A

4.4 List of Software Used

Description	Manufacturer	Software Version
Test system	Tonscend	V2.6
Power Panel	Agilent	V3.8
MORLAB EMCR V1.2	MORLAB	V 1.0





4.5 Radiated Test Equipments

Equipment Name	Serial No.	Туре	Manufacturer	Cal. Date	Cal. Due
Receiver	MY54130016	N9038A	Agilent	2018.05.08	2019.05.07
Test Antenna - Bi-Log	9163-519	VULB 9163	Schwarzbeck	2018.05.08	2019.05.07
Test Antenna - Horn	9170C-531	BBHA9170	Schwarzbeck	2017.09.13	2018.09.12
Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2018.03.03	2019.03.02
Test Antenna - Horn	01774	BBHA 9120D	Schwarzbeck	2017.09.13	2018.09.12
Coaxial cable (N male) (9KHz-30MHz)	CB04	EMC04	Morlab	N/A	N/A
Coaxial cable (N male) (30MHz-26GHz)	CB02	EMC02	Morlab	N/A	N/A
Coaxial cable (N male) (30MHz-26GHz)	CB03	EMC03	Morlab	N/A	N/A
1-18GHz pre-Amplifier	MA02	TS-PR18	Rohde& Schwarz	2018.05.08	2019.05.07
18-26.5GHz pre-Amplifier	MA03	TS-PR18	Rohde& Schwarz	2018.05.08	2019.05.07
Anechoic Chamber	N/A	9m*6m*6m	CRT	2017.11.19	2020.11.18

_____ END OF REPORT

_



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China
 Tel: 86-755-36698555
 Fax: 86-755-36698525

 Http://www.morlab.cn
 E-mail: service@morlab.cn