



Test report No.: 23C0626R-RFUSV19S-A

TEST REPORT (Class II Permissive Change)

| | |
|--|--|
| Product Name | Wireless module |
| Trademark | MOXA |
| Model and /or type reference | WAPC003 |
| FCC ID | SLE-WAPC003 |
| Applicant's name / address | Moxa Inc. No. 1111, Heping Rd., Bade Dist., Taoyuan City 334004, Taiwan |
| Manufacturer's name | Moxa Inc. |
| Test method requested, standard | FCC CFR Title 47 Part 15 Subpart E 15.407 (h) KDB 905462 |
| Verdict Summary | IN COMPLIANCE |
| Documented By (Supervisor / Jinn Chen) | <i>Jinn Chen</i> |
| Tested By (Senior Engineer / Benjamin Pan) | <i>Benjamin Pan</i> |
| Approved By (Senior Engineer / Steven Tsai) | <i>Steven Tsai</i> |
| Date of Receipt | 2023/12/18 |
| Date of Issue | 2024/01/18 |
| Report Version | V1.0 |

INDEX

Page

| | |
|--|-----------|
| 1. General Information..... | 6 |
| 1.1. Standard Requirement | 6 |
| 1.2. EUT Description..... | 7 |
| 1.3. UNII Device Description..... | 10 |
| 1.4. Test Facility | 11 |
| 1.5. Test Equipment..... | 12 |
| 1.6. Uncertainty | 13 |
| 1.7. Summary of Test Results..... | 14 |
| 2. Test Setup..... | 15 |
| 2.1. DFS Detection Thresholds..... | 15 |
| 2.2. Radar Test Waveforms..... | 17 |
| 2.3. Radar Waveform Calibration | 20 |
| 2.4. Radar Waveform Calibration Result..... | 21 |
| 2.5. Master Data Traffic Plot Result | 37 |
| 3. UNII Detection Bandwidth | 40 |
| 3.1. Test Procedure | 40 |
| 3.2. Test Requirement..... | 40 |
| 3.3. Test Result of UNII Detection Bandwidth..... | 43 |
| 4. Initial Channel Availability Check Time..... | 49 |
| 4.1. Test Procedure | 49 |
| 4.2. Test Requirement..... | 49 |
| 4.3. Test Result of Initial Channel Availability Check Time | 50 |
| 5. Radar Burst at the Beginning of the Channel Availability Check Time..... | 51 |
| 5.1. Test Procedure | 51 |
| 5.2. Test Requirement..... | 51 |
| 5.3. Test Result of Radar Burst at the Beginning of the Channel Availability Check Time | 52 |
| 6. Radar Burst at the End of the Channel Availability Check Time | 53 |
| 6.1. Test Procedure | 53 |
| 6.2. Test Requirement..... | 53 |
| 6.3. Test Result of Radar Burst at the End of the Channel Availability Check Time | 54 |
| 7. In-Service Monitoring for Channel Move Time and Channel Closing Transmission Time and Non-Occupancy Period | 55 |

| | | |
|-----------|---|-----------|
| 7.1. | Test Procedure | 55 |
| 7.2. | Test Requirement..... | 55 |
| 7.3. | Test Result of Channel Move Time and Channel Closing Transmission Time and Non-Occupancy Period 56 | |
| 8. | Statistical Performance Check | 58 |
| 8.1. | Test Procedure | 58 |
| 8.2. | Test Requirement..... | 58 |
| 8.3. | Test Result of Statistical Performance Check..... | 60 |

Appendix 1: EUT Test Photographs

Appendix 2: Product Photos-Please refer to the file: 23C0626R-Product Photos

Competences and Guarantees

DEKRA is a testing laboratory competent to carry out the tests described in this report.

In order to assure the traceability to other national and international laboratories, DEKRA has a calibration and maintenance program for its measurement equipment.

DEKRA guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated in the report and it is based on the knowledge and technical facilities available at DEKRA at the time of performance of the test.

DEKRA is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA.

General conditions

1. The test results relate only to the samples tested.
2. The test results shown in the test report are traceable to the national/international standard through the calibration report of the equipment and evaluated measurement uncertainty herein.
3. This report must not be used to claim product endorsement by TAF or any agency of the government.
4. The test report shall not be reproduced without the written approval of DEKRA Testing and Certification Co., Ltd.
5. Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system, but are based on the results of the compliance measurement.

Revision History

| Report No. | Version | Description | Issued Date |
|---------------------|---------|--------------------------|-------------|
| 23C0626R-RFUSV19S-A | V1.0 | Initial issue of report. | 2024/01/18 |

1. General Information

1.1. Standard Requirement

FCC Part 15.407:

U-NII devices operating in the 5.25-5.35 GHz band and the 5.47-5.725 GHz band shall employ a TPC mechanism. The U-NII device is required to have the capability to operate at least 6 dB below the mean EIRP value of 30dBm. A TPC mechanism is not required for systems with an E.I.R.P. of less than 500mW.

U-NII devices operating in the 5.25-5.35 GHz and 5.47-5.725 GHz bands shall employ a DFS radar detection mechanism to detect the presence of radar systems and to avoid co-channel operation with radar systems.

1.2. EUT Description

| | |
|------------------------------|---|
| Product Name | Wireless module |
| Trademark | MOXA |
| Model and /or type reference | WAPC003 |
| FCC ID | SLE-WAPC003 |
| EUT Rated Voltage | DC 24V |
| EUT Test Voltage | DC 24V (by Power Adapter) |
| Frequency Range | 802.11a/n/ac-20 MHz: 5180-5320 MHz, 5500-5720 MHz, 5745-5825 MHz 802.11n/ac-40 MHz: 5190-5310 MHz, 5510-5710 MHz, 5755-5795 MHz 802.11ac-80 MHz: 5210-5290 MHz, 5530-5690 MHz, 5775 MHz |
| Number of Channels | 802.11a/n/ac-20 MHz: 25 CH 802.11n/ac-40 MHz: 12 CH 802.11ac-80 MHz: 6 CH |
| Data Rate | 802.11a: 6-54 Mbps 802.11n: up to 300 Mbps 802.11ac: up to 866.7 Mbps |
| Type of Modulation | 802.11a/n/ac: OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM) |
| Channel Control | Auto |
| Channel Bandwidth | 20/40/80 MHz |
| DFS Function | <input checked="" type="checkbox"/> Master <input type="checkbox"/> Slave |
| TPC Function | <input type="checkbox"/> <500mW not required <input checked="" type="checkbox"/> \geq 500mW employ a TPC* |
| Communication Mode | <input checked="" type="checkbox"/> IP Based Systems <input type="checkbox"/> Frame Based System <input type="checkbox"/> Other System |

Antenna List

| No. | Manufacturer | Part No. | Antenna Type | Peak Gain |
|-----|--------------|-------------------------|--------------|---|
| 1 | MOXA | ANT-WDB-ANM-0306 | Dipole | 5.7 dBi for 5.15~5.25GHz 5.7 dBi for 5.25~5.35GHz 6.3 dBi for 5.47~5.725GHz |
| 2 | MOXA | ANT-WDB-ANM-0502 | Dipole | 1.41 dBi for 5GHz |
| 3 | MOXA | ANT-WDB-ARM-02 | Dipole | 0.38 dBi for 5.15~5.25GHz 0.38 dBi for 5.25~5.35GHz -0.39 dBi for 5.47~5.725GHz |
| 4 | MOXA | ANT-WDB-ARM-0202 | Dipole | 1.8 dBi for 5GHz |
| 5 | MOXA | MAT-WDB-CA-RM-2-0205 | Dipole | 5.7 dBi for 5.15~5.25GHz 5.7 dBi for 5.25~5.35GHz 4.9 dBi for 5.47~5.725GHz |
| 6 | MOXA | MAT-WDB-DA-RM-2-0203-1m | Dipole | 2.72 dBi for 5.15~5.25GHz 2.72 dBi for 5.25~5.35GHz 2.26 dBi for 5.47~5.725GHz |
| 7 | MOXA | MAT-WDB-PA-NF-2-0708 | Panel | 8.77 dBi for 5.15~5.25GHz 8.77 dBi for 5.25~5.35GHz 8.61 dBi for 5.47~5.725GHz |
| 8 | MOXA | ANT-WDB-PNF-1011 | Panel | 12.04 dBi for 5.15~5.25GHz 12.04 dBi for 5.25~5.35GHz 11.06 dBi for 5.47~5.725GHz |
| 9 | MOXA | ANT-WDB-ONM-0707 | Dipole | 7.3 dBi for 5.15~5.25GHz 7.3 dBi for 5.25~5.35GHz 7.5 dBi for 5.47~5.725GHz |
| 10 | MOXA | ANT-WDB-ONF-0709 | Dipole | 8.61 dBi for 5.15~5.25GHz 8.15 dBi for 5.25~5.35GHz 8.87 dBi for 5.47~5.725GHz |
| 11 | MOXA | ANT-WSB5-PNF-16 | Panel | 16.38 dBi for 5.15~5.25GHz 16.38 dBi for 5.25~5.35GHz 16.94 dBi for 5.47~5.725GHz |

Note: 1. Each antenna has been evaluated and only the lower gain antenna is presented in the report.
2. The antenna gain as by the manufacturer provided.

802.11a/n/ac-20 MHz Center Working Frequency of Each Channel:

| Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
|---------|-----------------|---------|-----------------|---------|-----------------|---------|-----------------|
| 36 | 5180 | 40 | 5200 | 44 | 5220 | 48 | 5240 |
| 52 | 5260 | 56 | 5280 | 60 | 5300 | 64 | 5320 |
| 100 | 5500 | 104 | 5520 | 108 | 5540 | 112 | 5560 |
| 116 | 5580 | 120 | 5600 | 124 | 5620 | 128 | 5640 |
| 132 | 5660 | 136 | 5680 | 140 | 5700 | 144 | 5720 |
| 149 | 5745 | 153 | 5765 | 157 | 5785 | 161 | 5805 |
| 165 | 5825 | -- | -- | -- | -- | -- | -- |

802.11n/ac-40 MHz Center Working Frequency of Each Channel:

| Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
|---------|-----------------|---------|-----------------|---------|-----------------|---------|-----------------|
| 38 | 5190 | 46 | 5230 | 54 | 5270 | 62 | 5310 |
| 102 | 5510 | 110 | 5550 | 118 | 5590 | 126 | 5630 |
| 134 | 5670 | 142 | 5710 | 151 | 5755 | 159 | 5795 |

802.11ac-80MHz Center Working Frequency of Each Channel:

| Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
|---------|-----------------|---------|-----------------|---------|-----------------|---------|-----------------|
| 42 | 5210 | 58 | 5290 | 106 | 5530 | 122 | 5610 |
| 138 | 5690 | 155 | 5775 | -- | -- | -- | -- |

Note:

1. This is to request a Class II permissive change.

The major change filed under this application is:

Change #1: Additional Chassis added, Product name: Industrial Wireless 802.11a/b/g/n/ac Access Point, Brand: MOXA, Model number: AWK-1151C (AP), AWK-1151C-US (AP), AWK-1151C-US-T (AP).

Change #2: Add DFS master function through firmware.

| | | |
|-----------|--------|--|
| Test Mode | Mode 1 | Normal (802.11ac-20 MHz) Normal (802.11ac-40 MHz) Normal (802.11ac-80 MHz) |
|-----------|--------|--|

1.3. UNII Device Description

(1) The EUT operates in the following DFS band:

1. 5250-5350 MHz
2. 5470-5725 MHz

(2) The U-NII device maximum power is 30.00 dBm(E.I.R.P).

Master mode:

Below are the available 50 ohm antenna assemblies and their corresponding gains. 0 dBi gain was used to set the -61 dBm threshold level (-62dBm +1 dB) during calibration of the test setup.

Slave mode:

Below are the available 50 ohm antenna assemblies and their corresponding gains. 0dBi gain was used to set the -63 dBm threshold level (-64dBm +1 dB) during calibration of the test setup.

(3) WLAN traffic is generated by the test software “Iperf.exe” from the Master device to the Slave device in the transfer data rate >17%.

(4) For the 5250-5350 MHz and 5470-5725MHz bands, the Master device provides, on aggregate, uniform loading of the spectrum across all devices by selecting an operating channel among the available channels using a random algorithm.

(5) Master mode:

The client device is a Notebook pc contains Intel WLAN radio Module card (Model: AX200NGW). The Intel WLAN Module card FCC ID: PD9AX200NG.

(6) This device does not support partial RU function.

1.4. Test Facility

Ambient conditions in the laboratory:

| Performed Item | Items | Required | Actual |
|-------------------|------------------|----------|---------|
| Radiated Emission | Temperature (°C) | 10~40 °C | 22.6 °C |
| | Humidity (%RH) | 10~90 % | 55.9 % |

| | |
|--------|---|
| USA | FCC Registration Number: TW0033 |
| Canada | CAB Identifier Number: TW3023 / Company Number: 26930 |

| | |
|------------------|-------------------------|
| Site Description | Accredited by TAF |
| | Accredited Number: 3023 |

| | |
|--------------------|--|
| Test Laboratory | DEKRA Testing and Certification Co., Ltd. |
| | Linkou Laboratory |
| Address | No. 5-22, Ruishukeng Linkou District, New Taipei City, 24451, Taiwan, R.O.C. |
| Performed Location | No. 26, Huaya 1st Rd., Guishan Dist., Taoyuan City 333411, Taiwan, R.O.C. |
| Phone Number | +886-3-275-7255 |
| Fax Number | +886-3-327-8031 |

1.5. Test Equipment

Dynamic Frequency Selection (DFS) / HY-SR06

| Instrument | Manufacturer | Type No. | Serial No | Cal. Date |
|-------------------------|--------------|----------|-----------|------------|
| Spectrum Analyzer | R&S | FSV40 | 101894 | 2023.05.30 |
| Vector Signal Generator | R&S | SMBV100A | 261871 | 2023.05.30 |
| Horn Antenna | ETS-Lindgren | 3117 | 00227709 | 2023.11.27 |
| Horn Antenna | ETS-Lindgren | 3117 | 00201259 | 2023.11.14 |

| Instrument | Manufacturer | Type No. | Serial No |
|--------------|--------------|------------------|----------------|
| Notebook Pc | Dell | Inspiron 14 5459 | 1599Q72 |
| RF Cable | WOKEN | L1406-031C | S02-130729-305 |
| RF Cable | SUHNER | SUCOFLEX 106 | 3474516 |
| Access Point | ASUS | RT-AX88U | JCITHP000040 |

| Software | Manufacturer | Function |
|---|--------------|----------------------------------|
| R&S Pulse Sequencer DFS V 2.6, 07.06.2023 Build: 8558 Rev: 5141 | R&S | Radar Signal Generation Software |
| Iperf v2.0.8 | iperf.fr | Streaming data |

1.6. Uncertainty

Uncertainties have been calculated according to the DEKRA internal document.

The reported expanded uncertainties are based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.


Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system, but are based on the results of the compliance measurement.

| Test item | Uncertainty |
|------------------|--------------------|
| Timing | $\pm 0.53\%$ |

1.7. Summary of Test Results

| Test item | Result |
|--|---------------|
| UNII Detection Bandwidth | Pass |
| Initial Channel Availability Check Time | Pass |
| Radar Burst at the Beginning of the Channel Availability Check Time | Pass |
| Radar Burst at the End of the Channel Availability Check Time | Pass |
| In-Service Monitoring for Channel Move Time and Channel Closing Transmission Time and Non-Occupancy Period | Pass |
| Statistical Performance Check | Pass |
| UNII Detection Bandwidth | Pass |

2. Test Setup

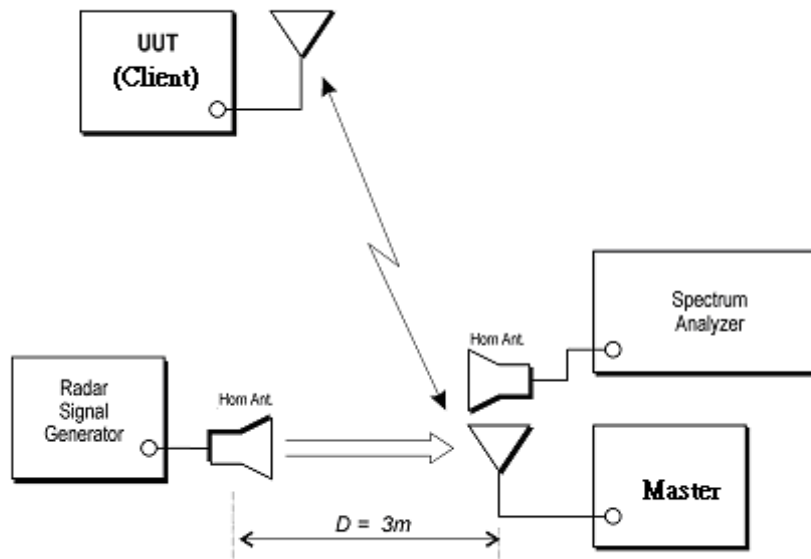

2.1. DFS Detection Thresholds

(1) Interference Threshold value, Master or Client incorporating In-Service Monitoring

| Maximum Transmit Power | Value (see note) |
|--|------------------|
| ≥ 200 milliwatt | -64dBm |
| EIRP < 200 milliwatt and power spectral density < 10 dBm/MHz | -62dBm |
| EIRP < 200 milliwatt that do not meet the power spectral density requirement | -64dBm |
| <p>Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.</p> <p>Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.</p> <p>Note 3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.</p> | |

(2) DFS Response requirement values

| Parameter | Value |
|-----------------------------------|--|
| Non-Occupancy Period | Minimum 30 Minutes |
| Channel Availability Check Time | 60 Seconds |
| Channel Move Time | 10 Seconds See Note 1. |
| Channel Closing Transmission Time | 200 milliseconds + approx. 60 milliseconds over remaining 10 seconds period (See Notes 1 and 2) |
| U-NII Detection Bandwidth | Minimum 100% of the 99% power bandwidth See Note 3. |

Note 1: *Channel Move Time* and the *Channel Closing Transmission Time* should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.

Note 2: The *Channel Closing Transmission Time* is comprised of 200 milliseconds starting at the beginning of the *Channel Move Time* plus any additional intermittent control signals required to facilitate a *Channel* move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the *U-NII Detection Bandwidth* detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

2.2. Radar Test Waveforms

This section provides the parameters for required test waveforms, minimum percentage of successful detections, and the minimum number of trials that must be used for determining DFS conformance. Step intervals of 0.1 microsecond for Pulse Width, 1 microsecond for PRI, 1 MHz for chirp width and 1 for the number of pulses will be utilized for the random determination of specific test waveforms.

(1) Short Pulse Radar Test Waveforms

| Radar Type | Pulse Width (μsec) | PRI (μsec) | Number of Pulses | Minimum Percentage of Successful Detection | Minimum Number of Trials |
|---|--------------------|---|---|--|--------------------------|
| 0 | 1 | 1428 | 18 | See Note 1 | See Note 1 |
| 1 | 1 | Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a | Roundup $\left\{ \begin{matrix} \left(\frac{1}{360} \right) \cdot \\ \left(\frac{19 \cdot 10^6}{PRI_{\mu sec}} \right) \end{matrix} \right\}$ | 60% | 30 |
| | | Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A | | | |
| 2 | 1-5 | 150-230 | 23-29 | 60% | 30 |
| 3 | 6-10 | 200-500 | 16-18 | 60% | 30 |
| 4 | 11-20 | 200-500 | 12-16 | 60% | 30 |
| Aggregate (Radar Types 1-4) | | | | 80% | 120 |
| Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests. | | | | | |

A minimum of 30 unique waveforms are required for each of the Short Pulse Radar Types 2 through 4. If more than 30 waveforms are used for Short Pulse Radar Types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms. If more than 30 waveforms are used for Short Pulse Radar Type 1, then each additional waveform is generated with Test B and must also be unique and not repeated from the previous waveforms in Tests A or B.

(2) Long Pulse Radar Test Signal

| Radar Waveform | Bursts | Number of Pulses Per Burst | Pulse Width (usec) | Chirp Width (MHz) | PRI (usec) | Minimum Percentage of Successful Detection | Minimum Trials |
|----------------|--------|----------------------------|--------------------|-------------------|------------|--|----------------|
| 5 | 8-20 | 1-3 | 50-100 | 5-20 | 1000-2000 | 80% | 30 |

The parameters for this waveform are randomly chosen. Thirty unique waveforms are required for the long pulse radar test signal. If more than 30 waveforms are used for the long pulse radar test signal, then each additional waveform must also be unique and not repeated from the previous waveforms.


Each waveform is defined as follows:

- 1) The transmission period for the Long Pulse Radar test signal is 12 seconds.
- 2) There are a total of 8 to 20 Bursts in the 12 second period, with the number of Bursts being randomly chosen. This number is Burst_Count.
- 3) Each Burst consists of 1 to 3 pulses, with the number of pulses being randomly chosen. Each Burst within the 12 second sequence may have a different number of pulses.
- 4) The pulse width is between 50 and 100 microseconds, with the pulse width being randomly chosen. Each pulse within a Burst will have the same pulse width. Pulses in different Bursts may have different pulse widths.
- 5) Each pulse has a linear frequency modulated chirp between 5 and 20 MHz, with the chirp width being randomly chosen. Each pulse within a transmission period will have the same chirp width. The chirp is centered on the pulse. For example, with a radar frequency of 5300 MHz and a 20 MHz chirped signal, the chirp starts at 5290 MHz and ends at 5310 MHz.
- 6) If more than one pulse is present in a Burst, the time between the pulses will be between 1000 and 2000 microseconds, with the time being randomly chosen. If three pulses are present in a Burst, the time between the first and second pulses is chosen independently of the time between the second and third pulses.
- 7) The 12 second transmission period is divided into even intervals. The number of intervals is equal to Burst_Count. Each interval is of length $(12,000,000 / \text{Burst_Count})$ microseconds. Each interval contains one Burst. The start time for the Burst, relative to the beginning of the interval, is between 1 and $[(12,000,000 / \text{Burst_Count}) - (\text{Total Burst Length}) + (\text{One Random PRI Interval})]$ microseconds, with the start time being randomly chosen. The step interval for the start time is 1 microsecond. The start time for each Burst is chosen independently.

A representative example of a Long Pulse radar test waveform:

- 1) The total test signal length is 12 seconds.
- 2) 8 Bursts are randomly generated for the Burst_Count.
- 3) Burst 1 has 2 randomly generated pulses.
- 4) The pulse width (for both pulses) is randomly selected to be 75 microseconds.
- 5) The PRI is randomly selected to be at 1213 microseconds.
- 6) Bursts 2 through 8 are generated using steps 3 – 5.
- 7) Each Burst is contained in even intervals of 1,500,000 microseconds. The starting location for Pulse 1, Burst 1 is randomly generated (1 to 1,500,000 minus the total Burst 1 length + 1 random PRI interval) at the 325,001 microsecond step. Bursts 2 through 8 randomly fall in successive 1,500,000 microsecond intervals (i.e. Burst 2 falls in the 1,500,001 – 3,000,000 microsecond range).

Graphical Representation of a Long Pulse radar Test Waveform

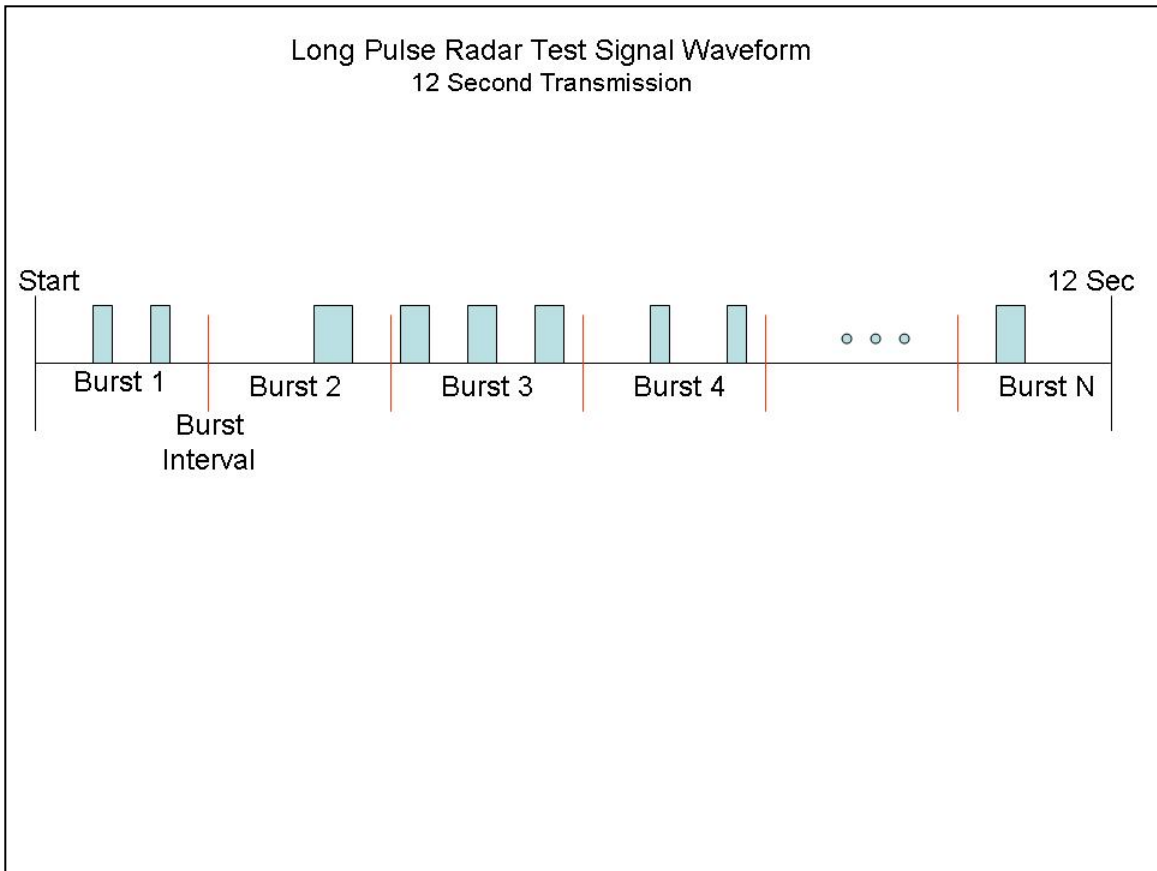

(3) Frequency Hopping Radar Test Signal

| Radar Waveform | Pulse Width (μsec) | PRI (μsec) | Hopping Sequence Length (msec) | Pulses Per Hop | Hopping Rate (kHz) | Minimum Percentage of Successful Detection | Minimum Trials |
|----------------|---------------------------------|-------------------------|--------------------------------|----------------|--------------------|--|----------------|
| 6 | 1 | 333 | 300 | 9 | 0.333 | 70% | 30 |

For the Frequency Hopping Radar Type, the same *Burst* parameters are used for each waveform. The hopping sequence is different for each waveform and a 100-length segment is selected from the hopping sequence defined by the following algorithm:


The first frequency in a hopping sequence is selected randomly from the group of 475 integer frequencies from 5250 – 5724 MHz. Next, the frequency that was just chosen is removed from the group and a frequency is randomly selected from the remaining 474 frequencies in the group. This process continues until all 475 frequencies are chosen for the set. For selection of a random frequency, the frequencies remaining within the group are always treated as equally likely.

2.3. Radar Waveform Calibration

The following equipment setup was used to calibrate the conducted radar waveform. A spectrum analyzer was used to establish the test signal level for each radar type. During this process there were replace 50ohm terminal from master and client device and no transmissions by either the master or client device. The spectrum analyzer was switched to the zero span (time domain) at the frequency of the radar waveform generator. Peak detection was utilized. The spectrum analyzer resolution bandwidth (RBW) and video bandwidth (VBW) were set to 3MHz and 3 MHz.


The signal generator amplitude was set so that the power level measured at the spectrum analyzer was -61dBm due to the interference threshold level is not required.

Radiated Calibration Setup

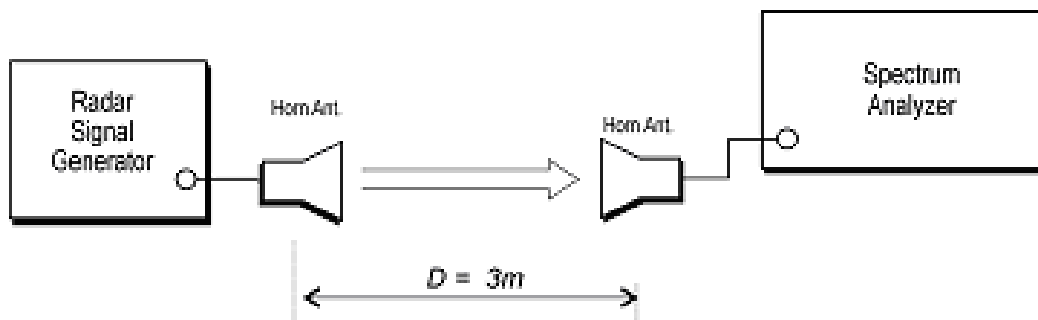


2.4. Radar Waveform Calibration Result

Radar Type 0 Calibration Plot (5500 MHz)

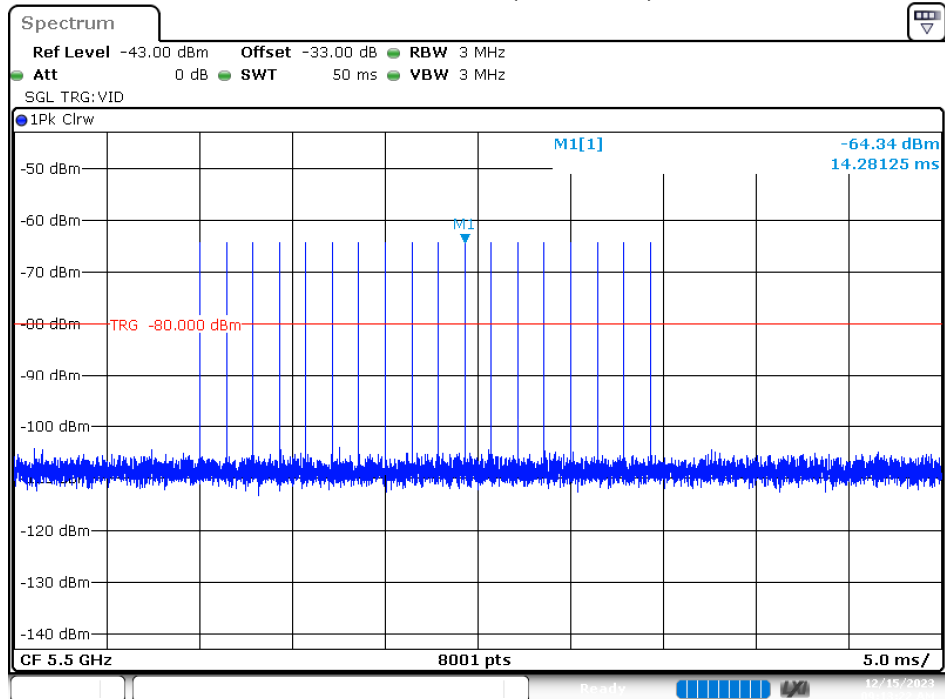


Date: 15.DEC.2023 09:13:23

Calibration Plot (5510 MHz)

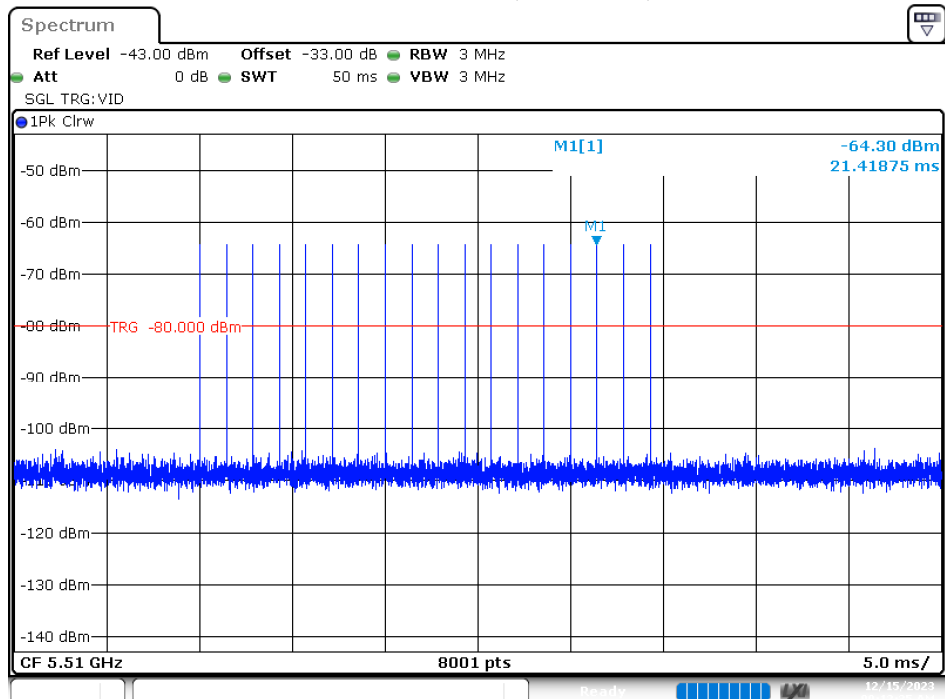


Date: 15.DEC.2023 09:12:36

Calibration Plot (5530 MHz)

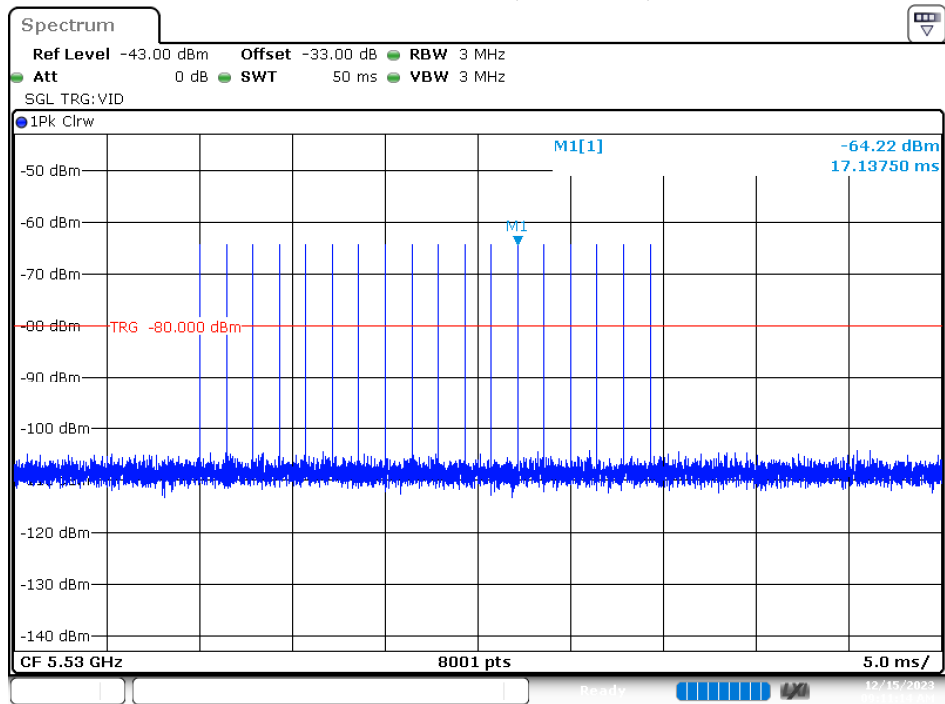


Date: 15.DEC.2023 09:11:15

Radar Type 1-A Calibration Plot (5500 MHz)

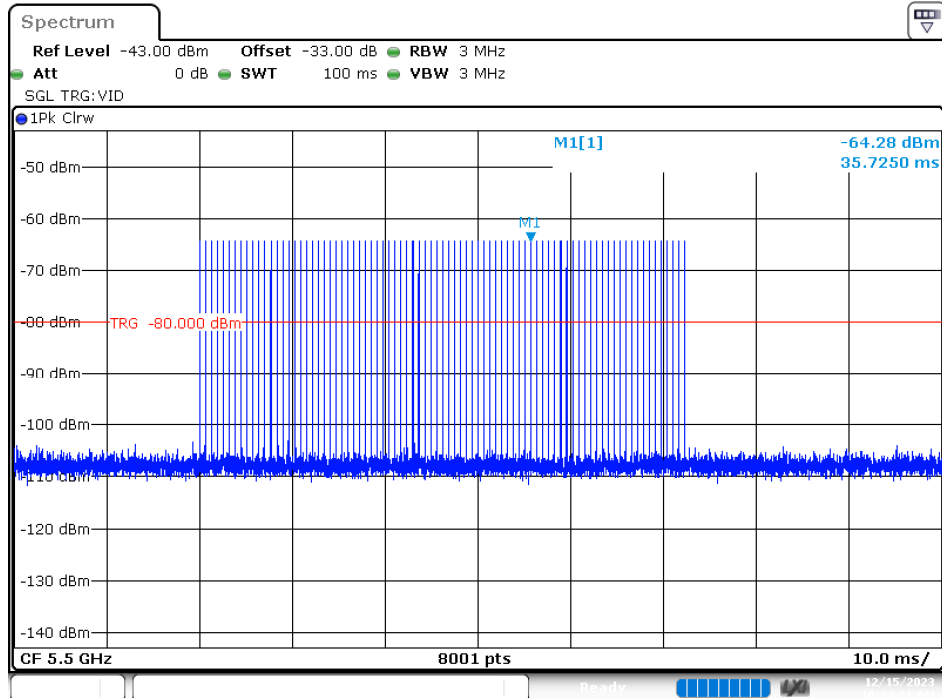


Date: 15.DEC.2023 10:14:31

Calibration Plot (5510 MHz)

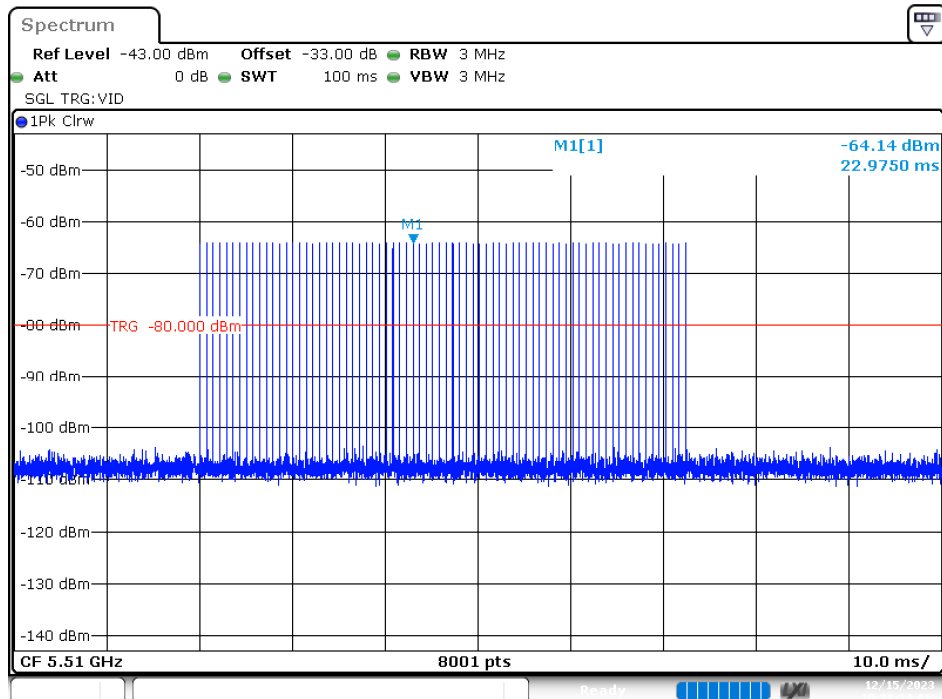

Date: 15.DEC.2023 10:21:35


Calibration Plot (5530 MHz)

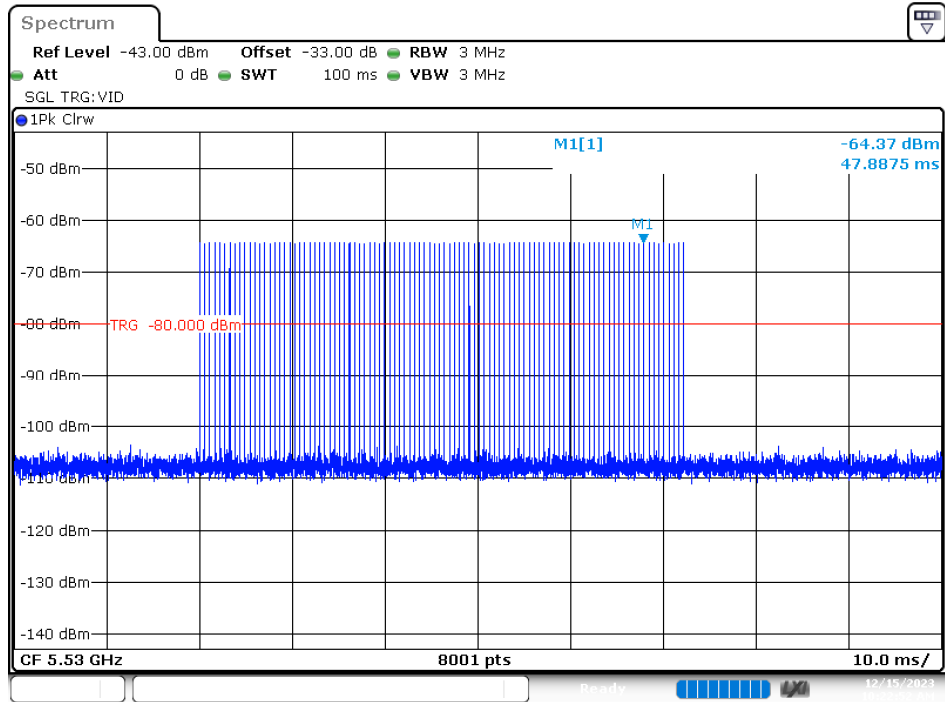

Date: 15.DEC.2023 10:22:52


Radar Type 1-B

Calibration Plot (5500 MHz)

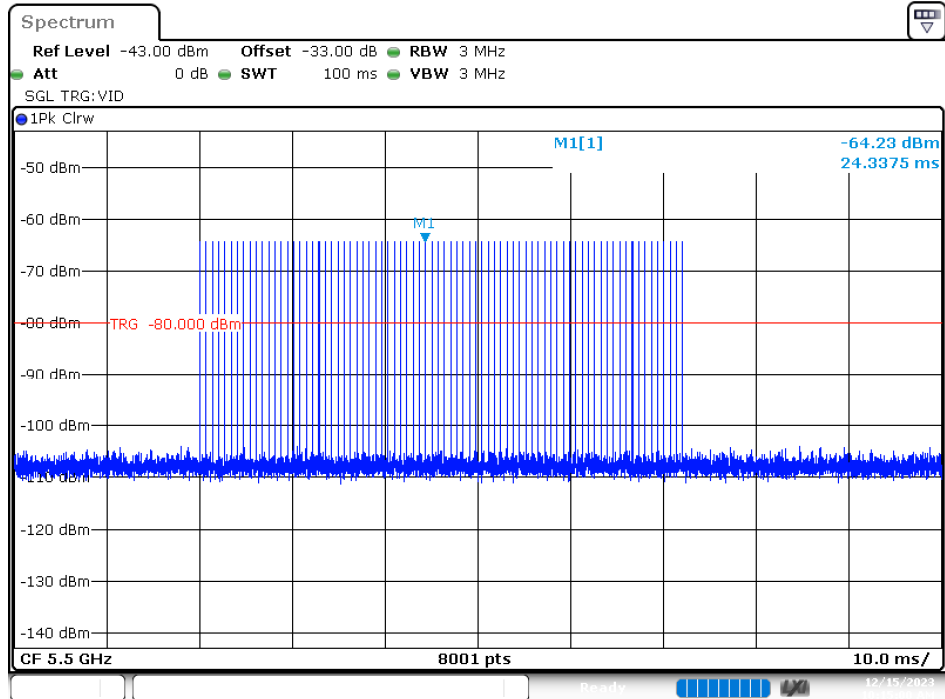


Date: 15.DEC.2023 10:15:01

Calibration Plot (5510 MHz)

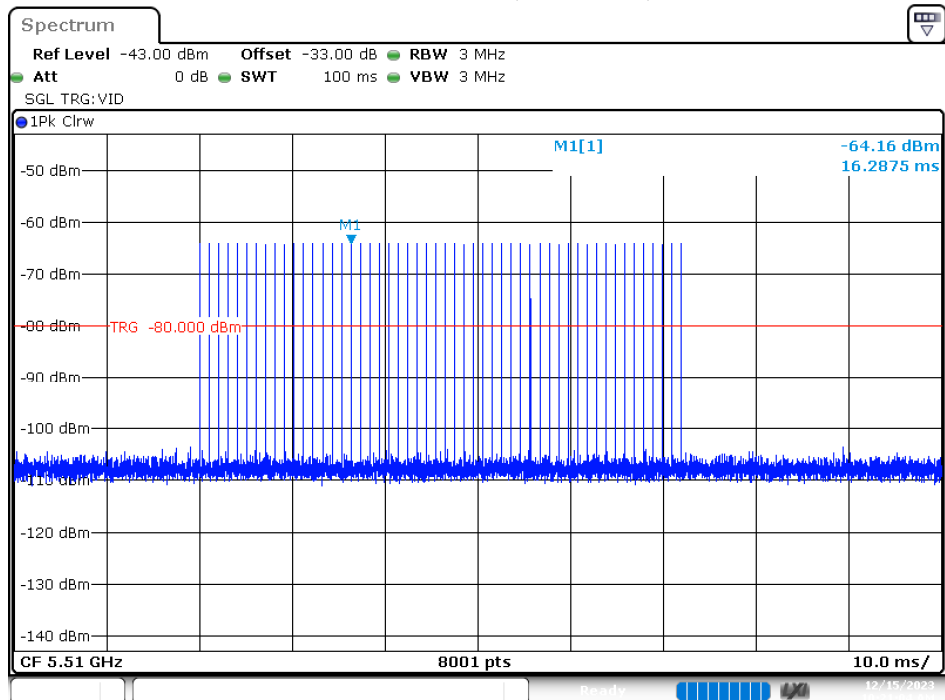


Date: 15.DEC.2023 10:21:05

Calibration Plot (5530 MHz)

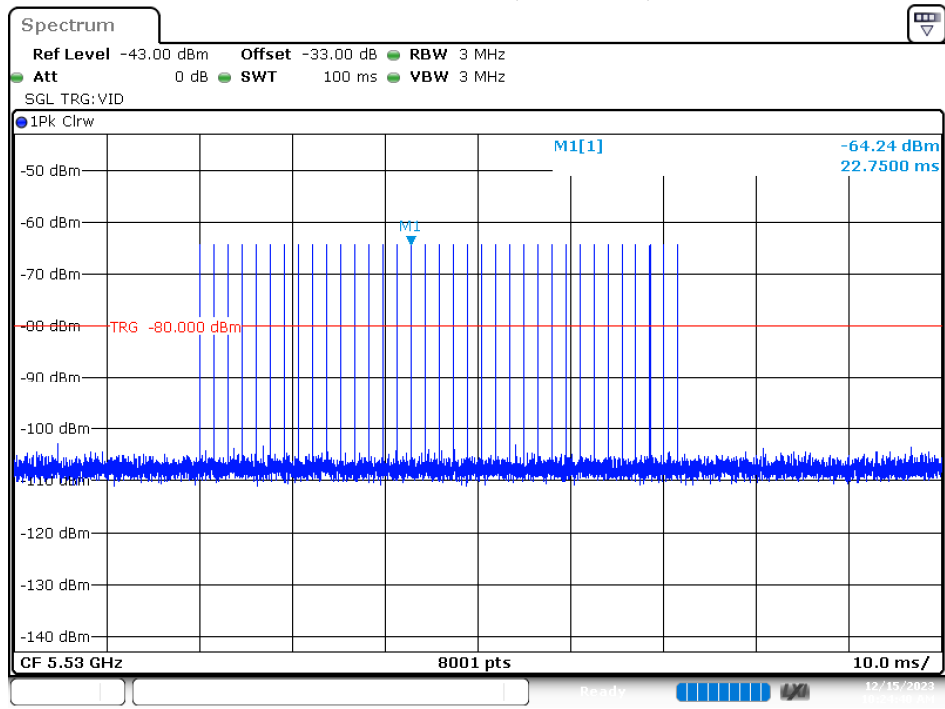


Date: 15.DEC.2023 10:24:41

Radar Type 2 Calibration Plot (5500 MHz)

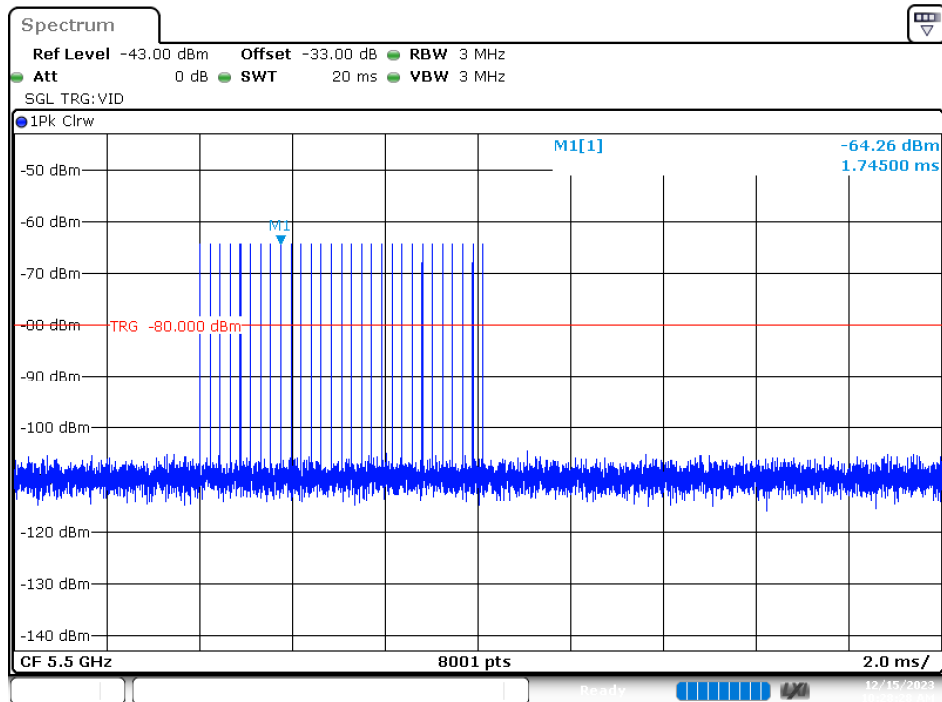


Date: 15.DEC.2023 10:28:29

Calibration Plot (5510 MHz)

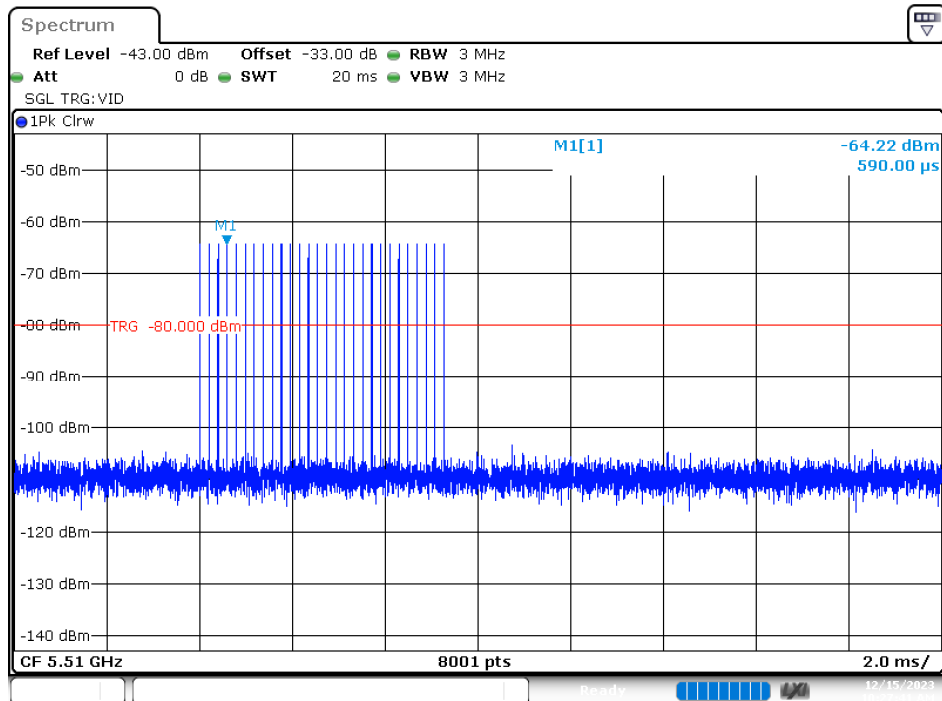


Date: 15.DEC.2023 10:27:42

Calibration Plot (5530 MHz)

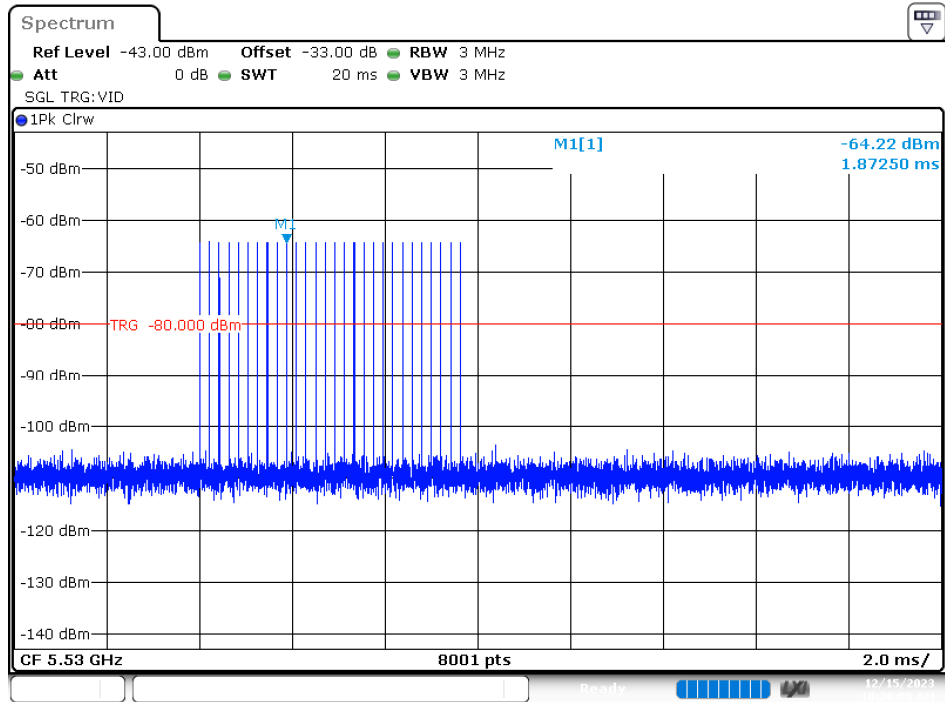


Date: 15.DEC.2023 10:26:09

Radar Type 3 Calibration Plot (5500 MHz)

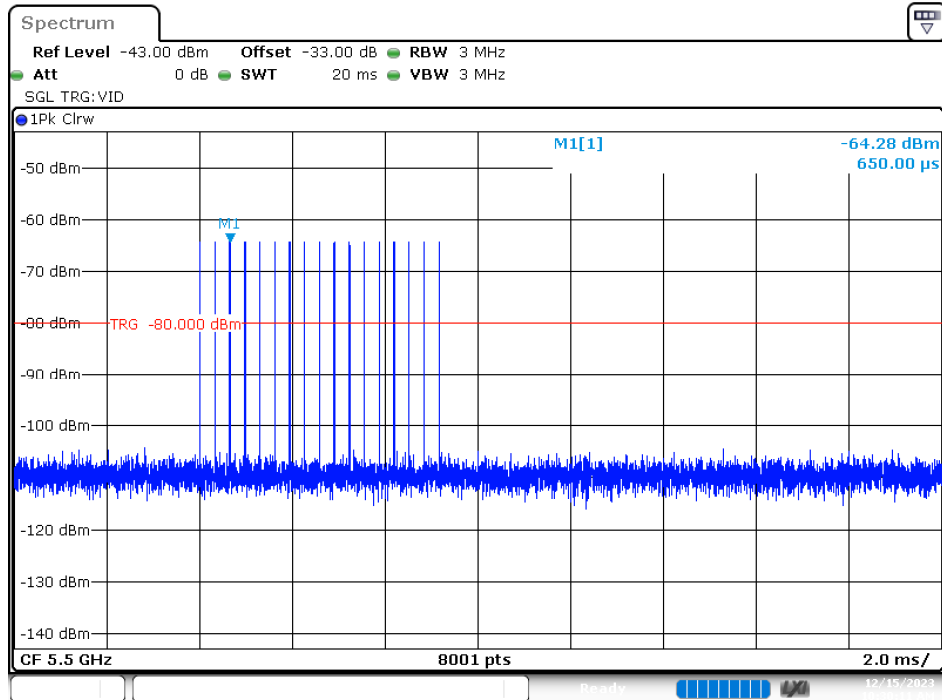


Date: 15.DEC.2023 10:30:11

Calibration Plot (5510 MHz)

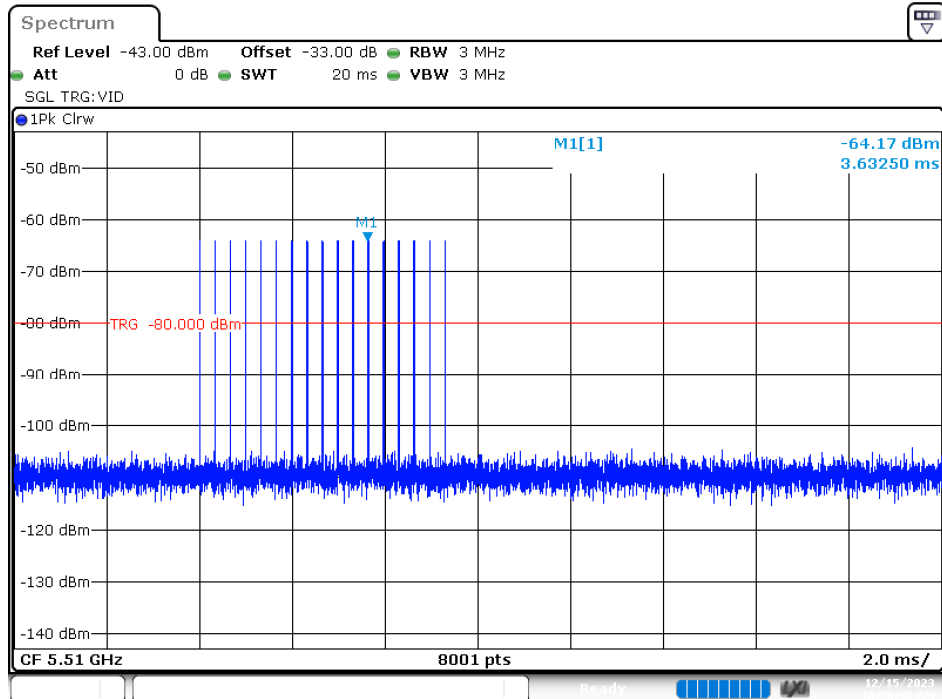


Date: 15.DEC.2023 10:30:51

Calibration Plot (5530 MHz)

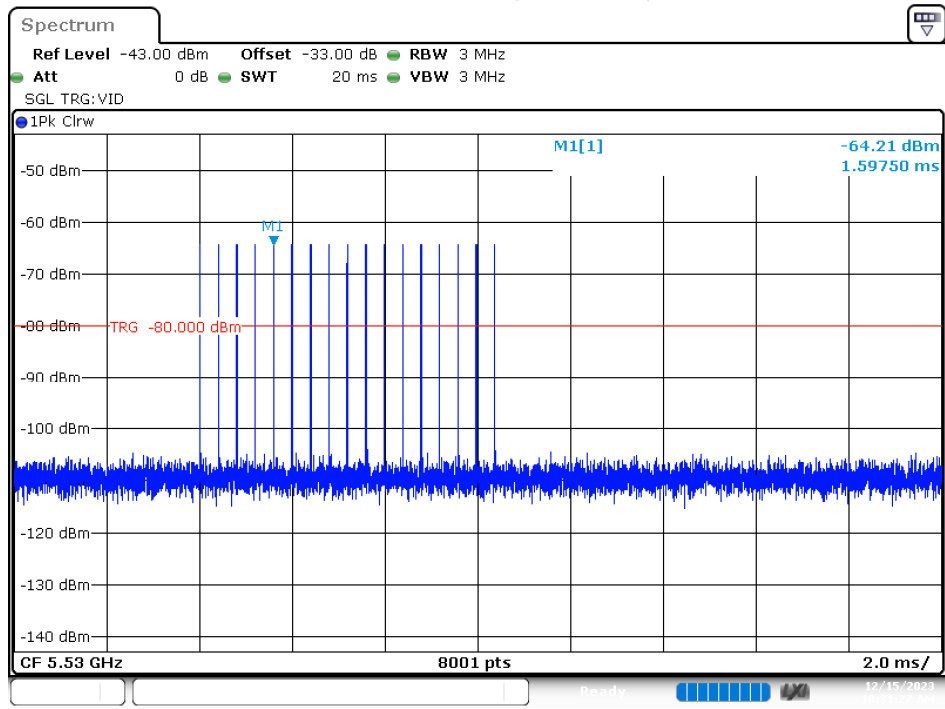


Date: 15.DEC.2023 10:31:28

Radar Type 4 Calibration Plot (5500 MHz)

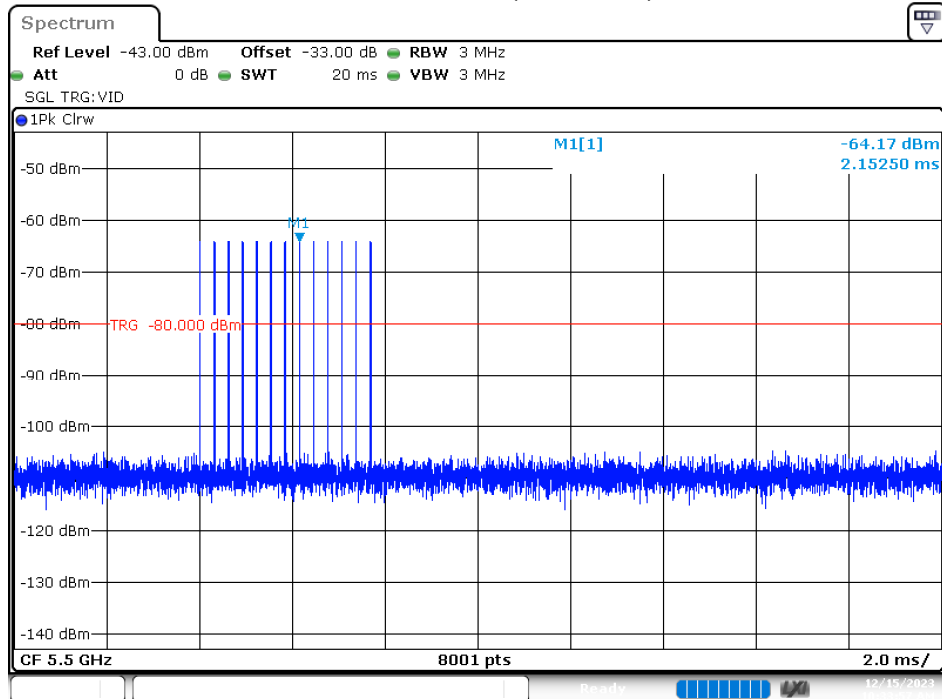


Date: 15.DEC.2023 10:33:58

Calibration Plot (5510 MHz)

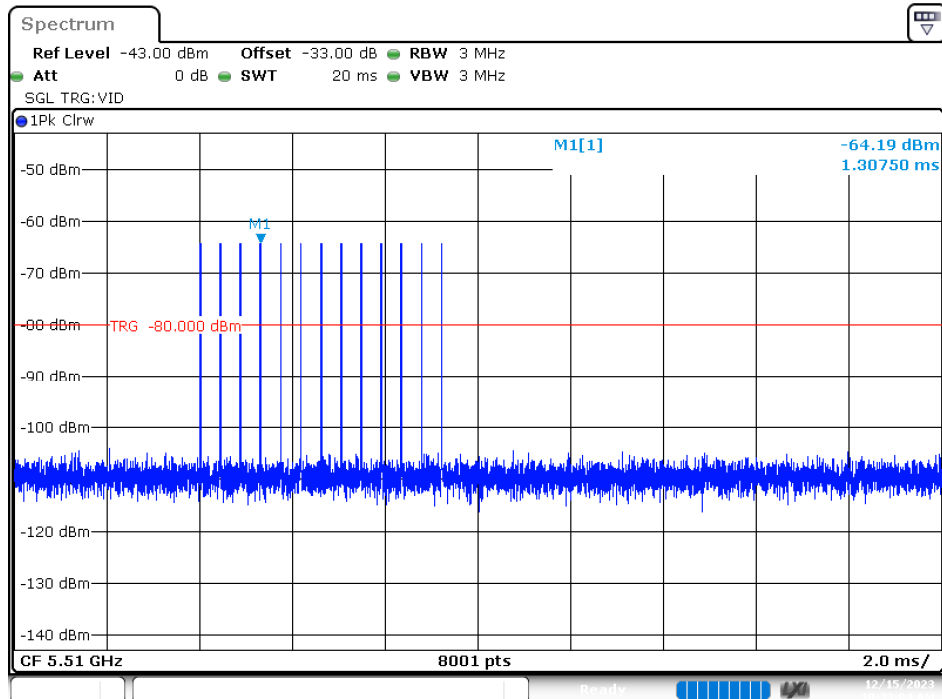


Date: 15.DEC.2023 10:33:05

Calibration Plot (5530 MHz)

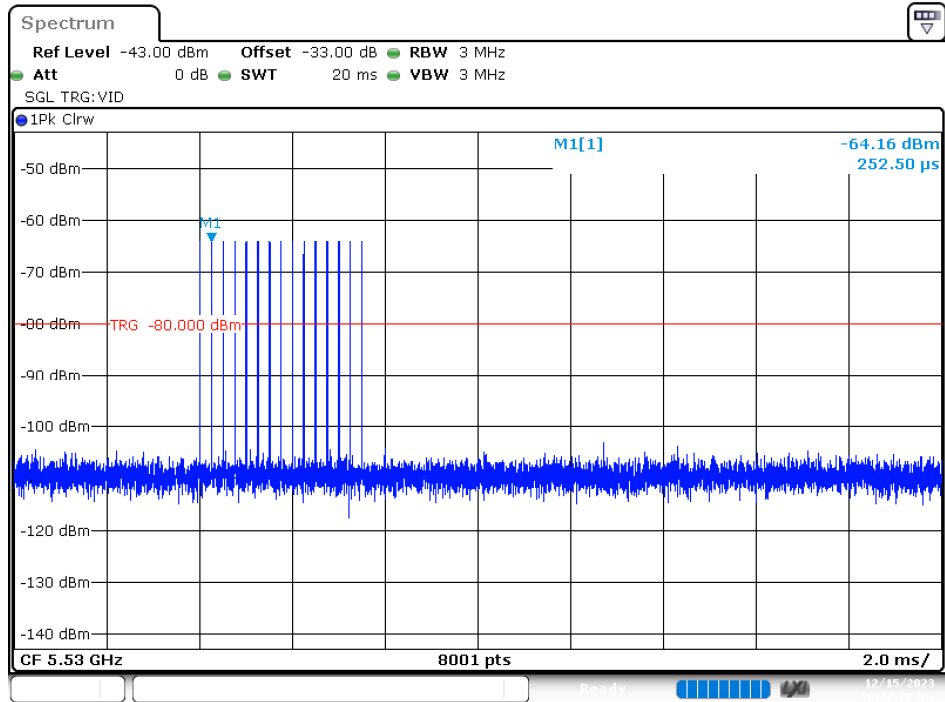


Date: 15.DEC.2023 10:32:23

Radar Type 5 Calibration Plot (5500 MHz)

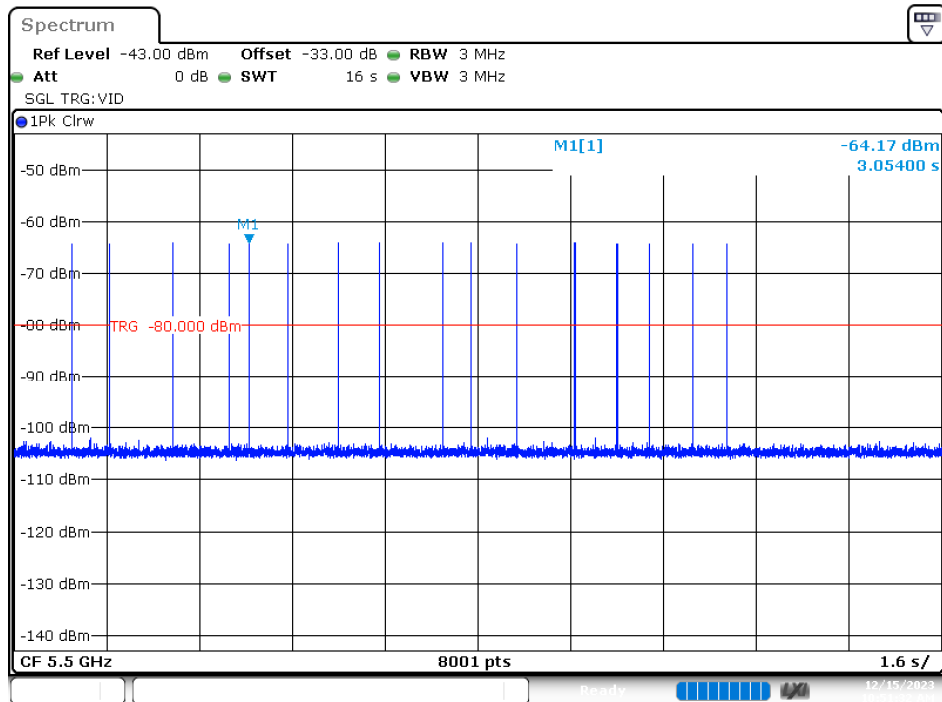


Date: 15.DEC.2023 10:51:32

Calibration Plot (5510 MHz)

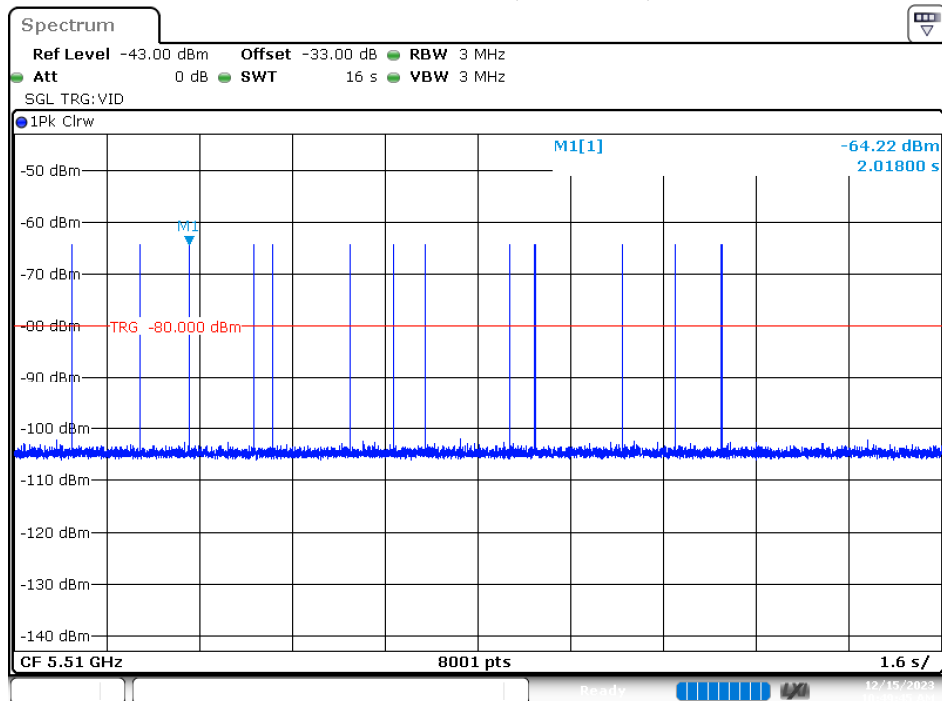


Date: 15.DEC.2023 10:49:45

Calibration Plot (5530 MHz)

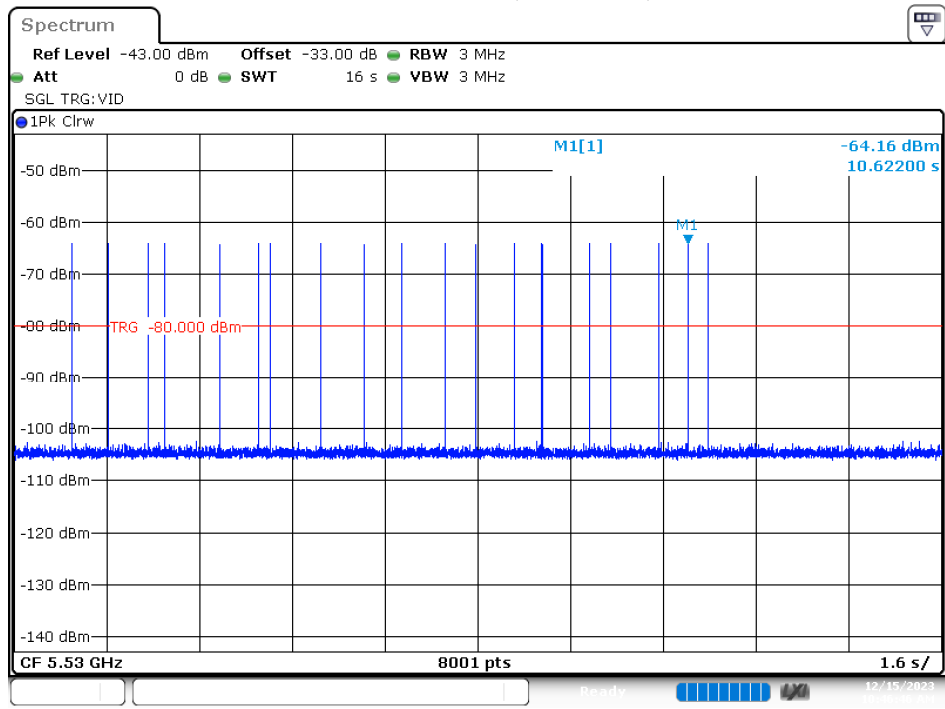


Date: 15.DEC.2023 10:46:46

Radar Type 6 Calibration Plot (5500 MHz)

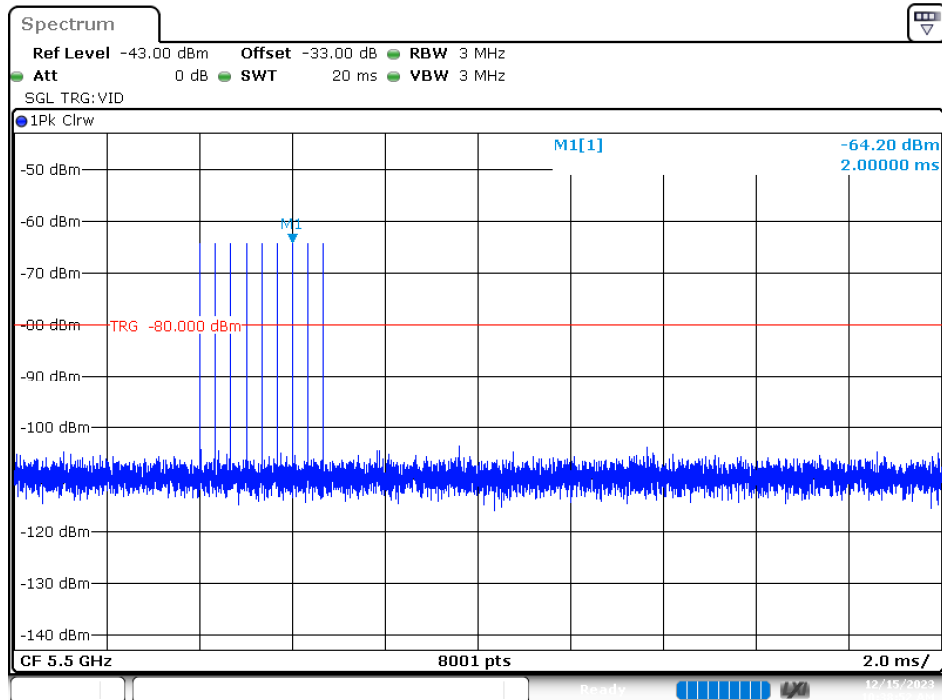


Date: 15.DEC.2023 10:38:53

Calibration Plot (5510 MHz)

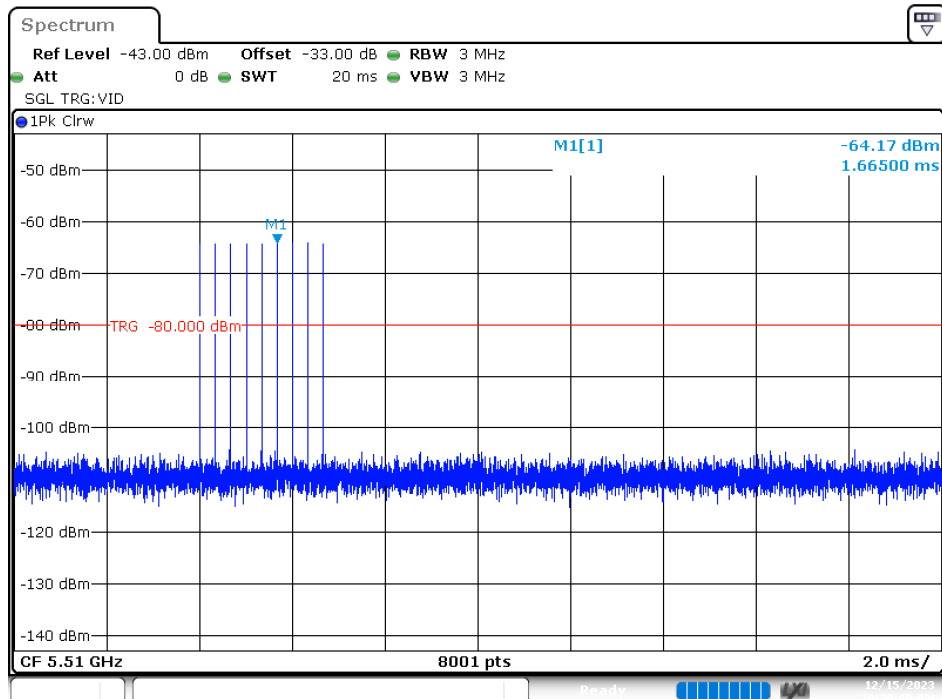

Date: 15.DEC.2023 10:39:50



Calibration Plot (5530 MHz)

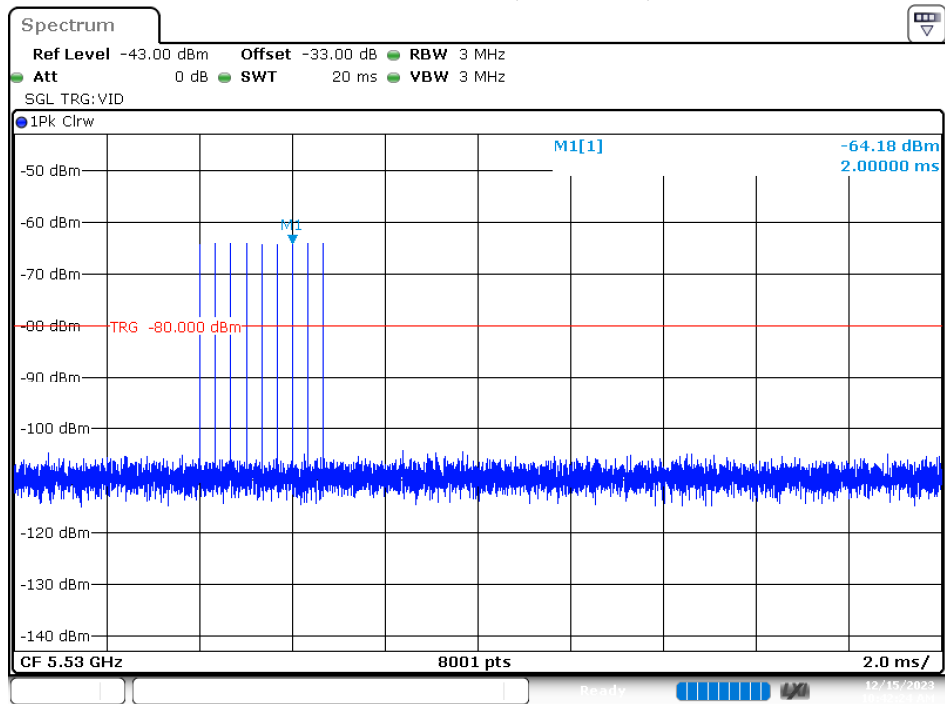

Date: 15.DEC.2023 10:42:25

2.5. Master Data Traffic Plot Result


Plot of WLAN Traffic at 5500 MHz

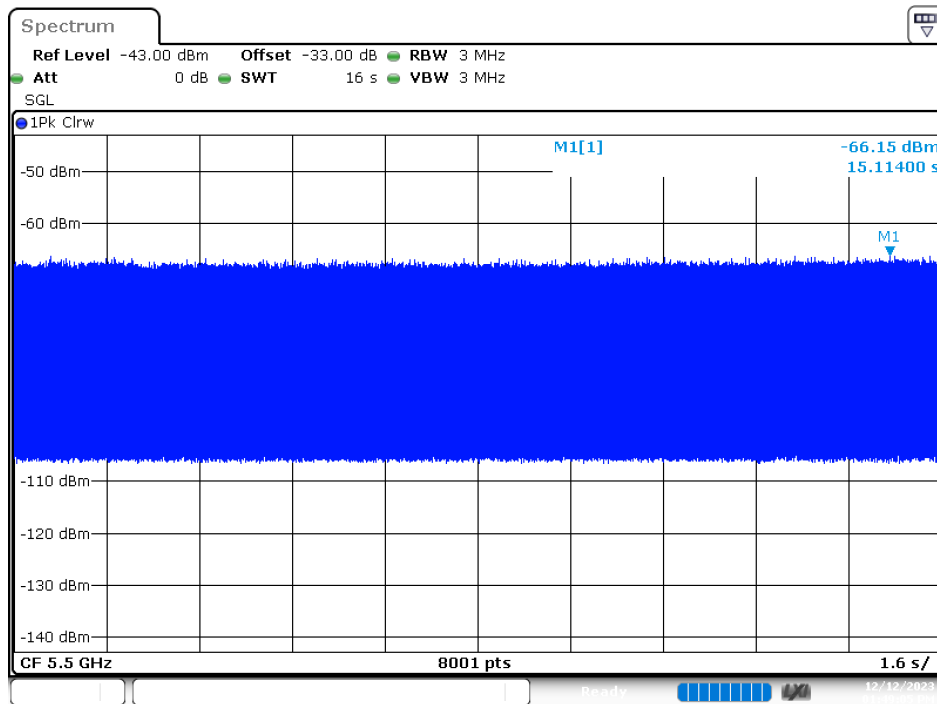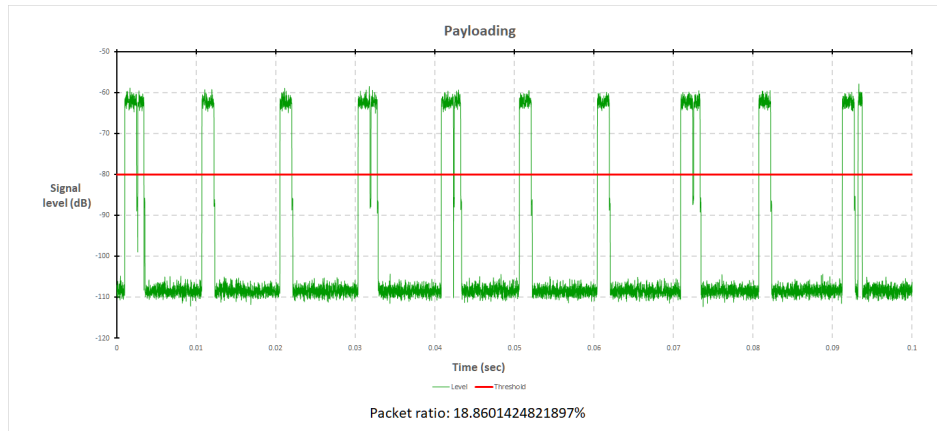

Date: 12.DEC.2023 13:49:05



| Channel loading | Requirement loading |
|-----------------|---------------------|
| 18.86 % | >17% |

Plot of WLAN Traffic at 5510 MHz

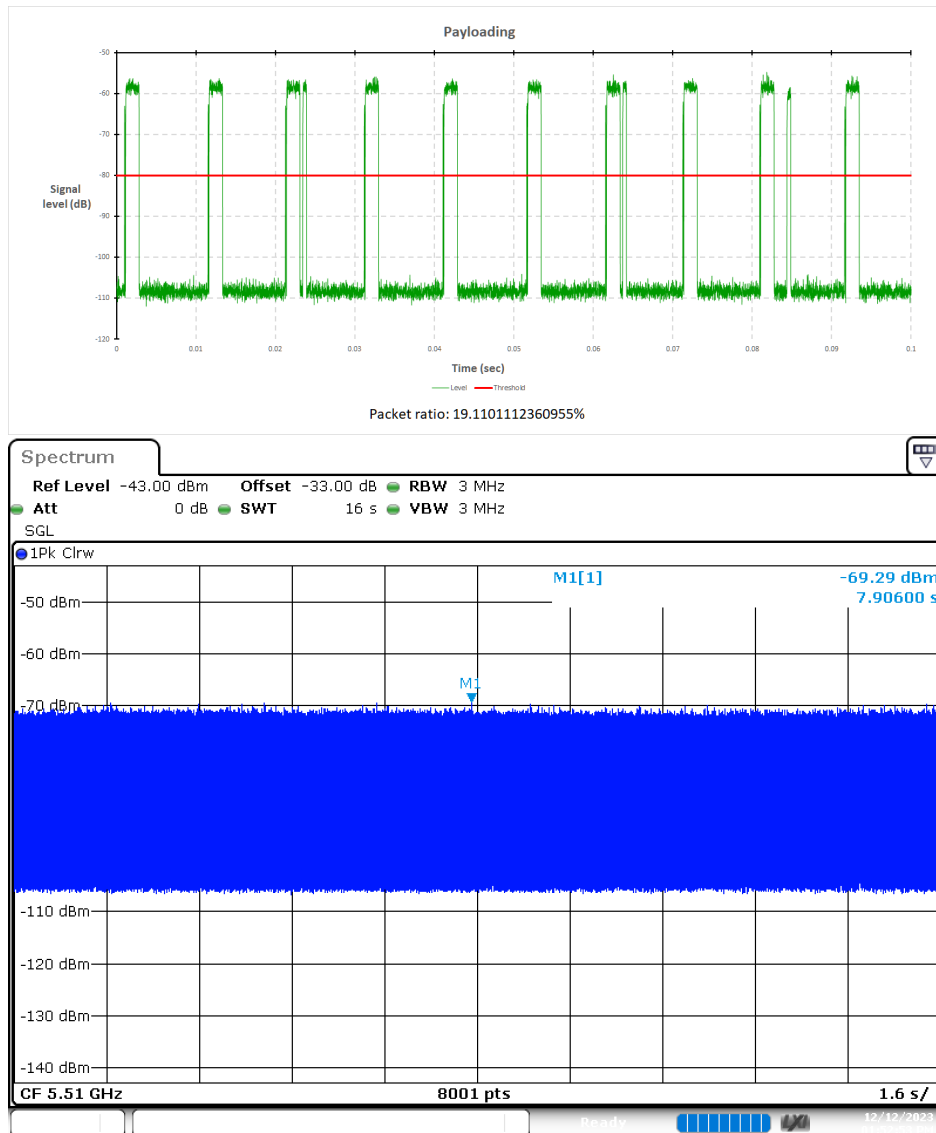

| Channel loading | Requirement loading |
|-----------------|---------------------|
| 19.11 % | >17% |

Plot of WLAN Traffic at 5530 MHz

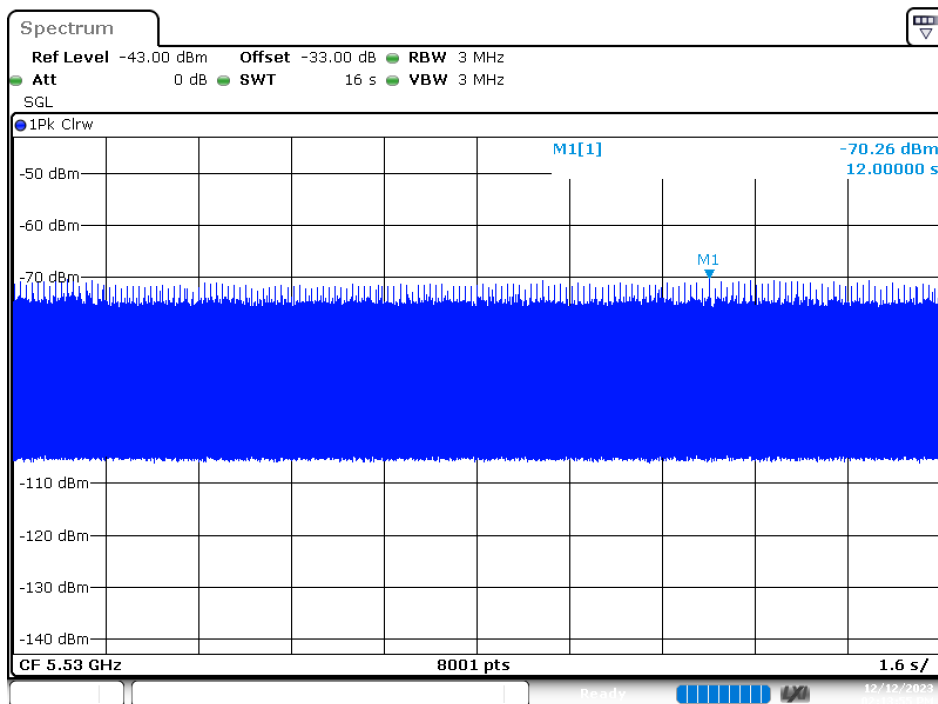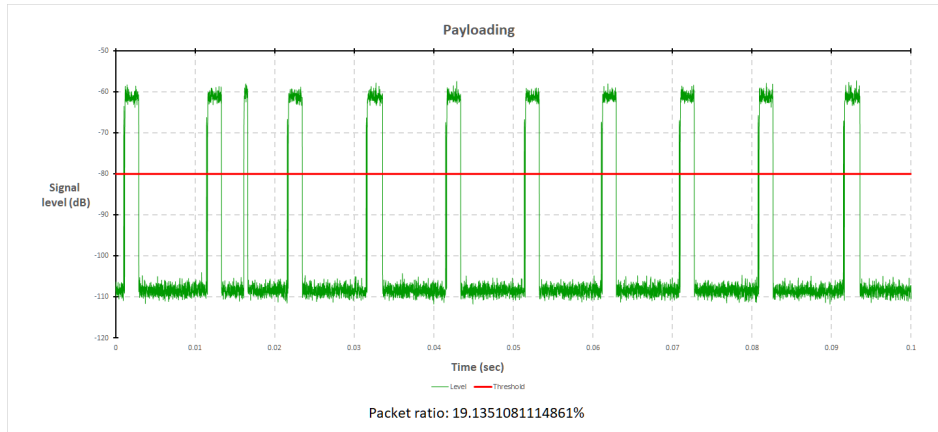

Date: 12.DEC.2023 14:13:55

| Channel loading | Requirement loading |
|-----------------|---------------------|
| 19.13 % | >17% |

3. UNII Detection Bandwidth

3.1. Test Procedure

The EUT was tested according to U-NII test procedure of KDB905462 D02 for compliance to FCC 47CFR15.407 requirements.

The generating equipment is configured as shown in the radiated Test Setup above. A single *Burst* of the short pulse radar type 0 is produced at 5300MHz and 5510 at a -63dBm level. The EUT is set up as a standalone device (no associated Client and no traffic).

A single radar Burst is generated for a minimum of 10 trials, and the response of the EUT is noted.

The EUT must detect the Radar Waveform 90% or more of the time. The radar frequency is increased in 1 MHz steps, repeating the above test sequence, until the detection rate falls below 90%. The highest frequency at which detection is greater than or equal to 90% is denoted as F_H .

The radar frequency is decreased in 1 MHz steps, repeating the above test sequence, until the detection rate falls below 90%. The lowest frequency at which detection is greater than or equal to 90% is denoted as F_L .

The U-NII Detection Bandwidth is calculated as follows:


$$\text{U-NII Detection Bandwidth} = F_H - F_L$$

The U-NII Detection Bandwidth must be at least 100% of the EUT transmitter 99% power, otherwise, the EUT does not comply with DFS requirements.

3.2. Test Requirement


All UNII 20/40MHz and 80MHz channels for this device have identical Channel bandwidths. All UNII 20/40/80MHz channels for this device also have identical Channel bandwidths. Therefore, all DFS testing was done at 5300MHz, 5500MHz, 5510MHz and 5530MHz. The 99% channel bandwidth for 20MHz signals is 17.43 MHz, and the 99% channel bandwidth for 40MHz signals is 35.96 MHz and 80MHz signals is 75.12MHz. Uncertainty

802.11ac-20 MHz

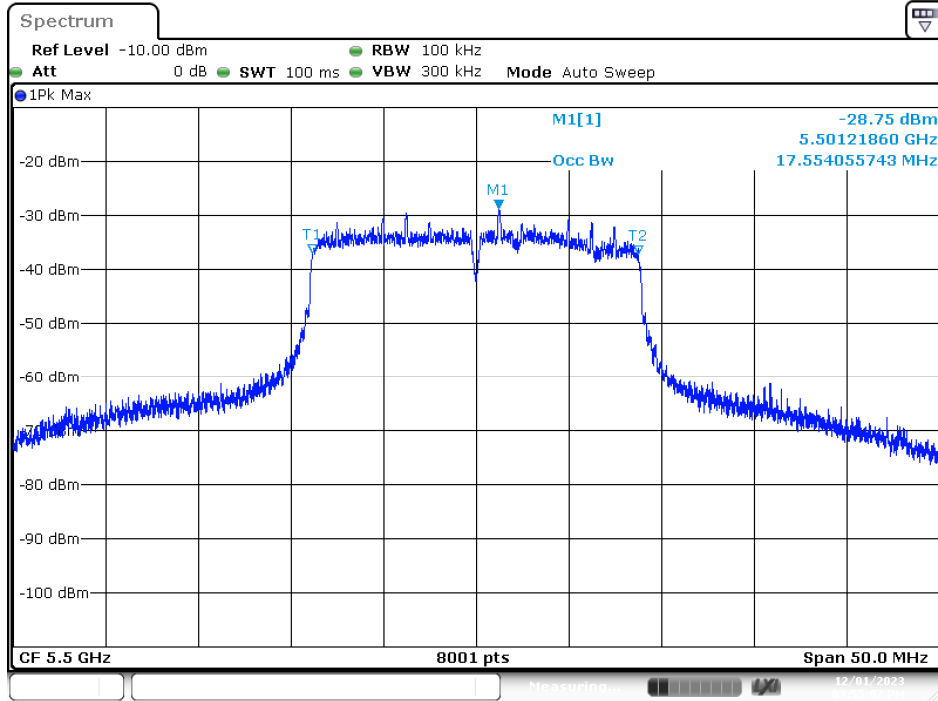


Date: 1.DEC.2023 15:55:07

802.11ac-40 MHz

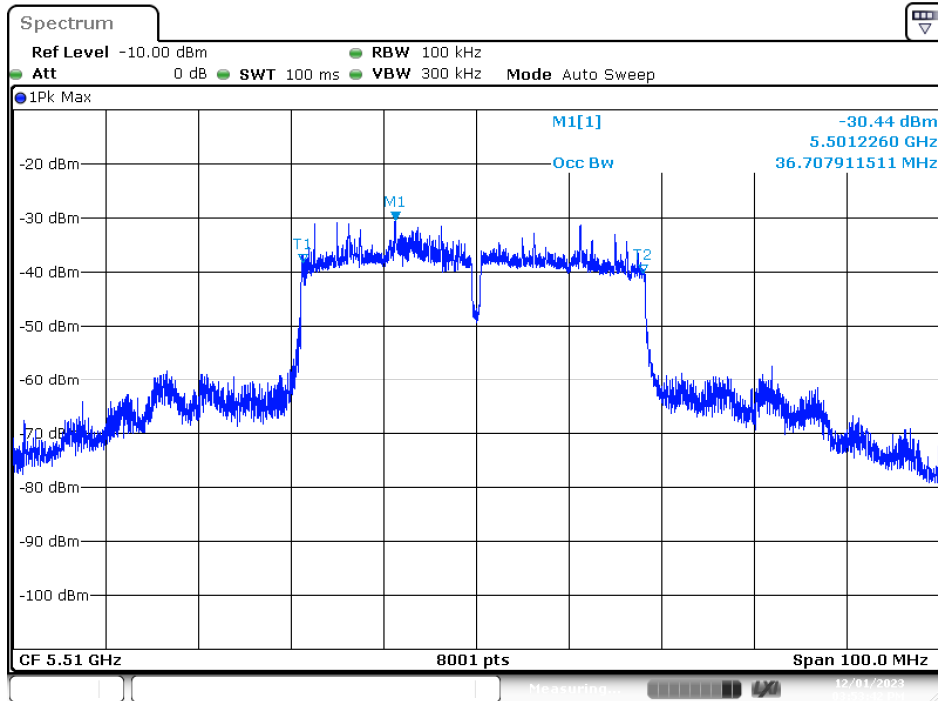

Date: 1.DEC.2023 15:53:42

802.11ac80 MHz

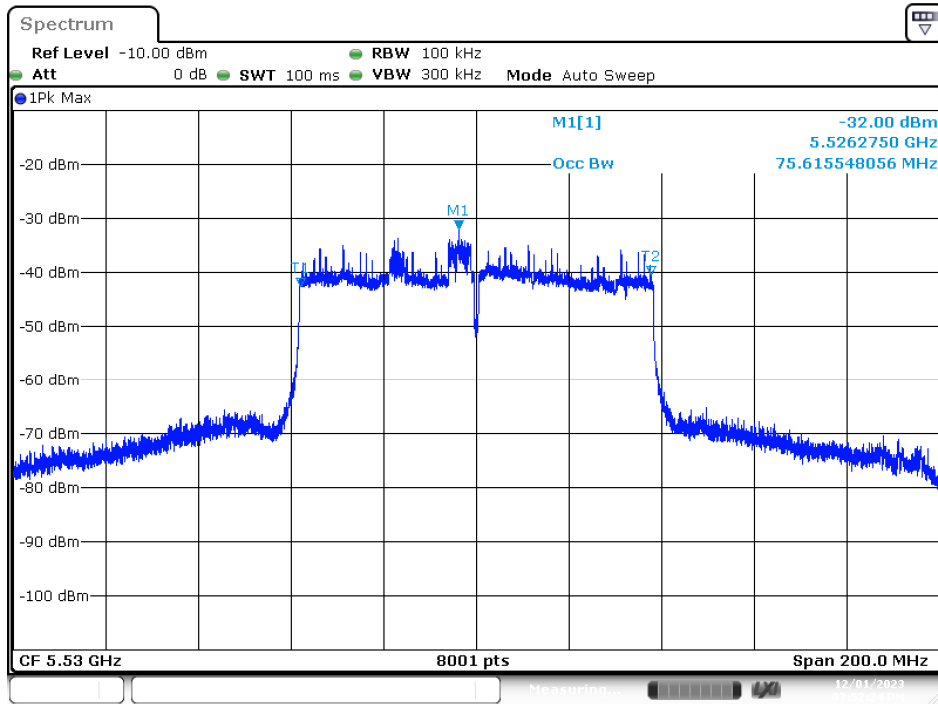

Date: 1. DEC. 2023 15:52:24

3.3. Test Result of UNII Detection Bandwidth

Product : Wireless module
 Test Item : UNII Detection Bandwidth
 Radar Type : Type 0
 Test Mode : Normal (802.11ac-20 MHz)
 Test Date : 2024/01/05

| Test Channel: 5500 MHz | | | | | | | | | | | |
|---|---|----------|----------|----------|----------|----------|----------|----------|----------|-----------|-------------------------------|
| Radar Frequency (MHz) | DFS Detection Trials (1= Detection, 0= No Detection) | | | | | | | | | | Detection Rate (%) |
| | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | |
| 5490 | 0 | 0 | 1 | 0 | 1 | 1 | n | 1 | n | 1 | 50.00 |
| 5491 (FL) | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5492 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5493 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5494 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5495 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5496 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5497 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5498 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5499 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5500 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5501 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5502 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5503 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5504 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5505 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5506 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5507 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5508 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5509 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5510 (FH) | 1 | 1 | 1 | 1 | 0 | 1 | 1 | 1 | 1 | 1 | 90.00 |
| Detection Bandwidth = FH - FL = 5510 MHz – 5491 MHz = 19 MHz | | | | | | | | | | | |
| EUT 99% Bandwidth = 17.5541 MHz | | | | | | | | | | | |
| UNII Detection Bandwidth Min. Limit = 17.5541 MHz X 100% = 17.5541 MHz | | | | | | | | | | | |

Product : Wireless module
 Test Item : UNII Detection Bandwidth
 Radar Type : Type 0
 Test Mode : Normal (802.11ac-40 MHz)
 Test Date : 2024/01/05

| Test Channel: 5510 MHz | | | | | | | | | | | |
|----------------------------------|---|----------|----------|----------|----------|----------|----------|----------|----------|-----------|-------------------------------|
| Radar Frequency (MHz) | DFS Detection Trials (1= Detection, 0= No Detection) | | | | | | | | | | Detection Rate (%) |
| | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | |
| 5490 | 0 | 0 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 1 | 30.00 |
| 5491 (FL) | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5492 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5493 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5494 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5495 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5496 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5497 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5498 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5499 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5500 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5501 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5502 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5503 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5504 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5505 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5506 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5507 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5508 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5509 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5510 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5511 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5512 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5513 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5514 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5515 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5516 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |

| | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|--------|
| 5517 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5518 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5519 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5520 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5521 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5522 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5523 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5524 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5525 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5526 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5527 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5528 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5529 (FH) | 1 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 90.00 |
| 5530 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0.00 |
| Detection Bandwidth = FH - FL = 5529 MHz – 5491 MHz = 38 MHz | | | | | | | | | | | |
| EUT 99% Bandwidth = 36.7079 MHz | | | | | | | | | | | |
| UNII Detection Bandwidth Min. Limit = 36.7079 MHz X 100% = 36.7079 MHz | | | | | | | | | | | |

Product : Wireless module
 Test Item : UNII Detection Bandwidth
 Radar Type : Type 0
 Test Mode : Normal (802.11ac-80 MHz)
 Test Date : 2024/01/05

| Test Channel: 5530 MHz | | | | | | | | | | | |
|----------------------------------|---|----------|----------|----------|----------|----------|----------|----------|----------|-----------|-------------------------------|
| Radar Frequency (MHz) | DFS Detection Trials (1= Detection, 0= No Detection) | | | | | | | | | | Detection Rate (%) |
| | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | |
| 5490 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 20.00 |
| 5491 (FL) | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5492 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5493 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5494 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5495 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5496 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5497 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5498 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5499 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5500 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5501 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5502 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5503 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5504 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5505 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5506 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5507 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5508 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5509 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5510 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5511 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5512 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5513 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5514 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5515 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5516 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |

| | | | | | | | | | | | |
|------|---|---|---|---|---|---|---|---|---|---|--------|
| 5517 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5518 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5519 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5520 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5521 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5522 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5523 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5524 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5525 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5526 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5527 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5528 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5529 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5530 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5531 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5532 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5533 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5534 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5535 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5536 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5537 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5538 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5539 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5540 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5541 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5542 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5543 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5544 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5545 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5546 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5547 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5548 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5549 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5550 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5551 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5552 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5553 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |

| | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|--------|
| 5554 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5555 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5556 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5557 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5558 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5559 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5560 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5561 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5562 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5563 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5564 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5565 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5566 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5567 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5568 (FH) | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100.00 |
| 5569 | 1 | 1 | 0 | 1 | 1 | 1 | 1 | 1 | 0 | 1 | 80.00 |
| 5570 | 1 | 0 | 0 | 1 | 0 | 1 | 0 | 0 | 1 | 0 | 40.00 |
| Detection Bandwidth = FH - FL = 5568 MHz – 5491 MHz = 77 MHz | | | | | | | | | | | |
| EUT 99% Bandwidth = 75.6155 MHz | | | | | | | | | | | |
| UNII Detection Bandwidth Min. Limit = 75.6155 MHz X 100% = 75.6155 MHz | | | | | | | | | | | |

4. Initial Channel Availability Check Time

4.1. Test Procedure

The EUT was tested according to U-NII test procedure of KDB905462 D02 for compliance to FCC 47CFR 15.407 requirements.

The U-NII device is powered on and instructed to operate at 5530MHz. At the same time the UUT is powered on, the spectrum analyzer is set to zero span mode with a 3 MHz resolution bandwidth at 5530MHz with a 2.5minute sweep time. The analyzer's sweep will be started the same time power is applied to the U-NII device.

The EUT should not transmit any beacon or data transmissions until at least 1 minute after the completion of the power-on cycle.

The initial power up time of the EUT is indicated by marker1 in the plot, Initial beacons/data transmissions are indicated by marker 1R.


4.2. Test Requirement

The EUT shall perform a channel availability check to ensure that there is no radar operation on the channel, after power-up sequence, receiver at least 1 minute on the intended operation frequency.

4.3. Test Result of Initial Channel Availability Check Time

Product : Wireless module
Test Item : Initial Channel Availability Check Time
Radar Type : Type 0
Test Mode : Normal (802.11ac-80 MHz)

The EUT does not transmit any beacon or data transmission until at least 1 minute after the completion of the power-on cycle (55.09sec). The initial power up time of the EUT is indicated by Marker 1 (115.09 sec) – CAC (60 sec). Initial beacons/data transmission is indicated by Marker 1 (115.09 sec)

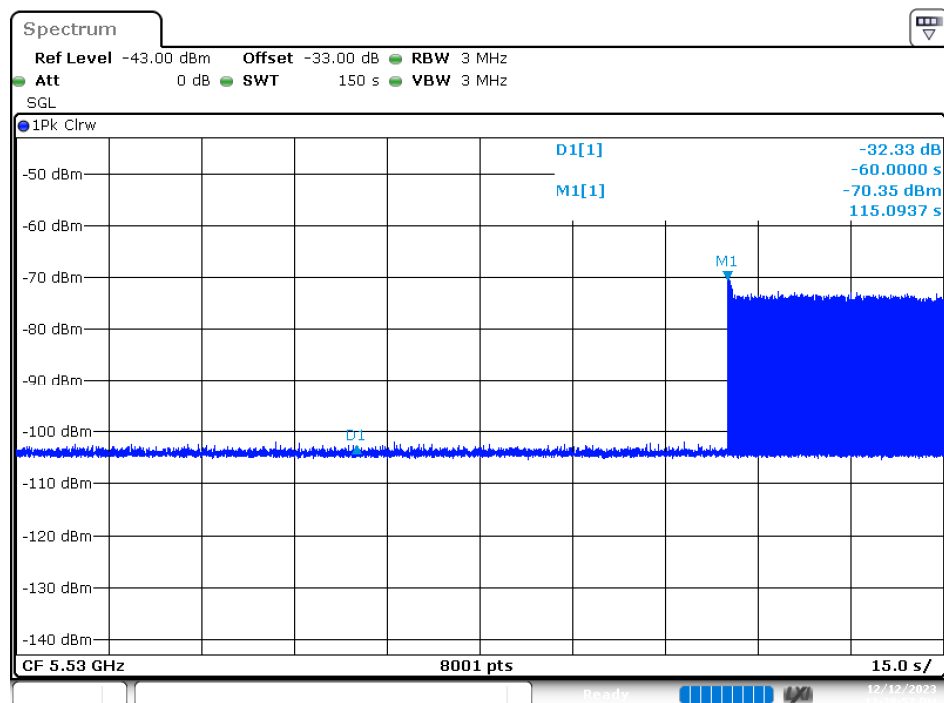

5. Radar Burst at the Beginning of the Channel Availability Check Time

5.1. Test Procedure

The EUT was tested according to U-NII test procedure of KDB905462 D02 for compliance to FCC 47CFR 15.407 requirements.

The steps below define the procedure to verify successful radar detection on the selected Channel during a period equal to the Channel Availability Check Time and avoidance of operation on that Channel when a radar Burst with a level equal to the DFS Detection Threshold + 1 dB (-62dBm) occurs at the beginning of the Channel Availability Check Time.

The EUT is powered on at T0. T1 denotes the instant when the EUT has completed its power-up sequence. The Channel Availability Check Time commences at instant T1 and will end no sooner than T1 + 60 seconds.

A single Burst of short pulse of radar type 1 at -63dBm will commence within a 6 second window starting at T1.


Visual indication on the EUT of successful detection of the radar Burst will be recorded and reported. Observation of emissions at 5530MHz will continue for 2.5 minutes after the radar Burst, Verify that during the 2.5 minute measurement window no EUT transmissions occurred at 5530MHz.

5.2. Test Requirement

In beginning of the Channel Availability Check (CAC) Time, radar is detected on this channel, select another intended channel and perform a CAC that channel.

5.3. Test Result of Radar Burst at the Beginning of the Channel Availability Check Time

Product : Wireless module
 Test Item : Radar Burst at the Beginning of the Channel Availability Check Time
 Radar Type : Type 0
 Test Mode : Normal (802.11ac-80 MHz)

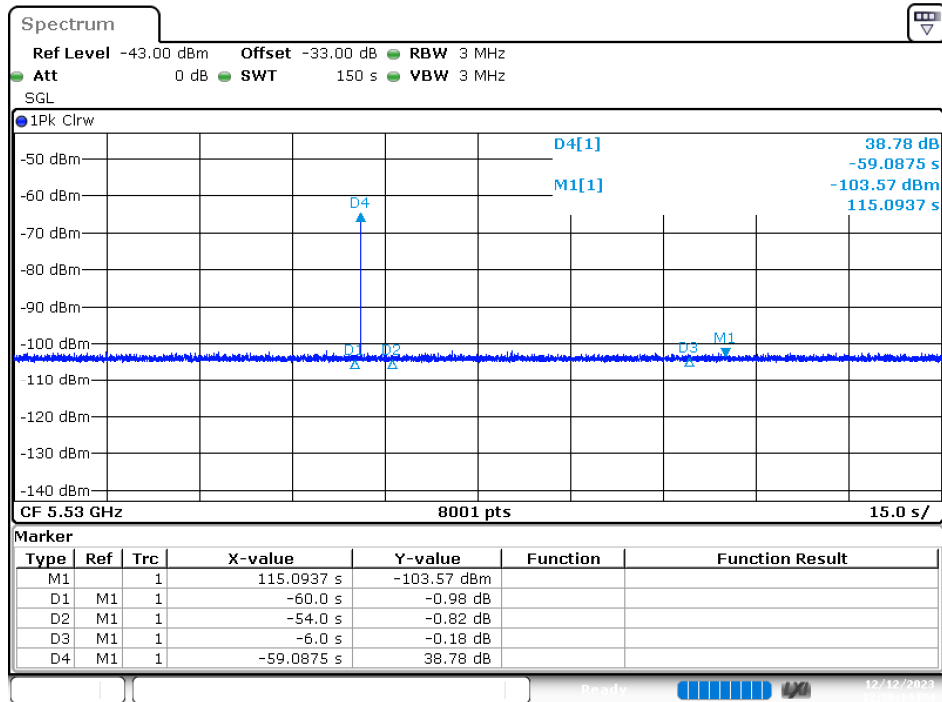

Date: 12.DEC.2023 12:36:15

6. Radar Burst at the End of the Channel Availability Check Time

6.1. Test Procedure

The EUT was tested according to U-NII test procedure of KDB905462 D02 for compliance to FCC 47CFR 15.407 requirements.

The steps below define the procedure to verify successful radar detection on the selected Channel during a period equal to the Channel Availability Check Time and avoidance of operation on that Channel when a radar Burst with a level equal to the DFS Detection Threshold + 1 dB (-62dBm) occurs at the end of the Channel Availability Check Time.

The UUT is powered on at T0. T1 denotes the instant when the UUT has completed its power-up sequence. The Channel Availability Check Time commences at instant T1 and will end no sooner than T1 + 60 seconds. A single Burst of short pulse of radar type 1 at -61 dBm will commence within a 6 second window starting at T1+ 54 seconds.

Visual indication on the UUT of successful detection of the radar Burst will be recorded and reported. Observation of emissions at 5530MHz will continue for 2.5 minutes after the radar Burst has been generated.


Verify that during the 2.5 minute measurement window no UUT transmissions occurred at 5530Hz.

6.2. Test Requirement

In the end of Channel Availability Check (CAC) Time, radar is detected on this channel, select another intended channel and perform a CAC that channel.

6.3. Test Result of Radar Burst at the End of the Channel Availability Check Time

Product : Wireless module
 Test Item : Radar Burst at the End of the Channel Availability Check Time
 Radar Type : Type 0
 Test Mode : Normal (802.11ac-80 MHz)

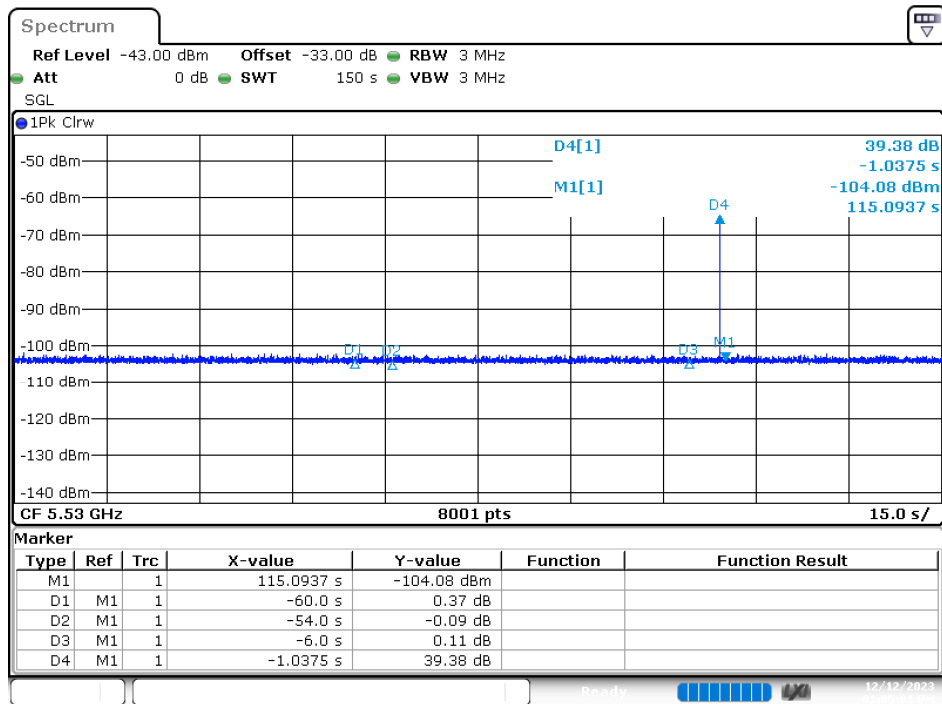

Date: 12.DEC.2023 13:05:00

7. In-Service Monitoring for Channel Move Time and Channel Closing Transmission Time and Non-Occupancy Period

7.1. Test Procedure

The EUT was tested according to U-NII test procedure of KDB905462 D02 for compliance to FCC 47CFR 15.407 requirements.

These tests define how the following DFS parameters are verified during In-Service Monitoring;

Channel Closing Transmission Time, Channel Move Time, and Non-Occupancy Period.. The steps below define the procedure to determine the above mentioned parameters when a radar Burst with a level equal to the DFS Detection Threshold + 1dB (-63dBm) is generated on the Operating Channel of the U-NII device.

A U-NII device operating as a Client Device will associate with the UUT (Master) at 5530MHz..

Stream the MPEG test file from the Master Device to the Client Device on the selected Channel for the entire period of the test.

At time T0 the Radar Waveform generator sends a Burst of pulses for each of the radar types at -61dBm.

Observe the transmissions of the UUT at the end of the radar Burst on the Operating Channel for duration greater than 10 seconds. Measure and record the transmissions from the UUT during the observation time (Channel Move Time). Compare the Channel Move Time and Channel Closing

Transmission Time results to the limits defined in the DFS Response requirement values table.

Measure the UUT for more than 30 minutes following the channel close/move time to verify that the UUT does not resume any transmissions on this Channel.


7.2. Test Requirement

| Parameter | Value |
|-----------------------------------|---|
| Channel Move Time | 10 Seconds |
| Channel Closing Transmission Time | 200 milliseconds + approx. 60 milliseconds over remaining 10 seconds period |
| Non-Occupancy Period | Minimum 30 minutes |

7.3. Test Result of Channel Move Time and Channel Closing Transmission Time and Non-Occupancy Period

Product : Wireless module
 Test Item : Channel Move Time and Channel Closing Transmission Time
 Radar Type : Type 0
 Test Mode : Normal (802.11ac-80 MHz)

Channel Closing Transmission Time and Channel Move Time for Radar Test Type 0 at 5570 MHz

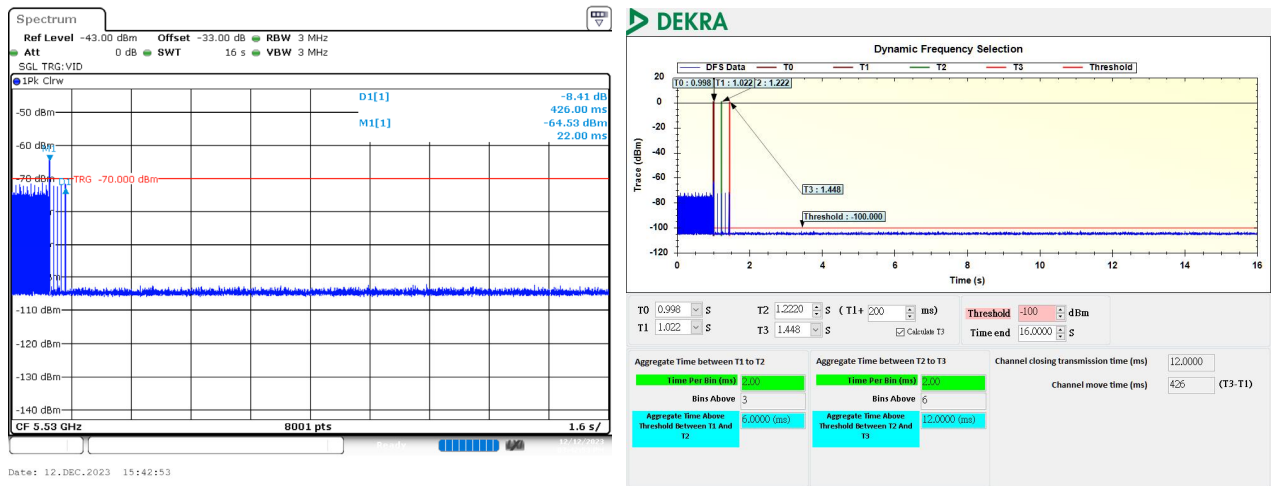


| Test Item | Test Result (ms) | Limit |
|-----------------------------------|------------------|---|
| Channel Closing Transmission Time | 12 | 200 milliseconds + approx. 60 milliseconds over remaining 10 seconds period |
| Channel Move Time | 426 | 10 seconds |

Note:

- 1.The results showed that after radar signal injected the channel transmission closing time less than 200 milliseconds and an aggregate of no more than 60 milliseconds.
- 2.The results showed that after radar signal injected the channel move time was less than 10 seconds.

Product : Wireless module
 Test Item : Non-Occupancy Period
 Radar Type : Type 0
 Test Mode : Normal (802.11ac-80 MHz)

Non-Occupancy Period at 5570 MHz

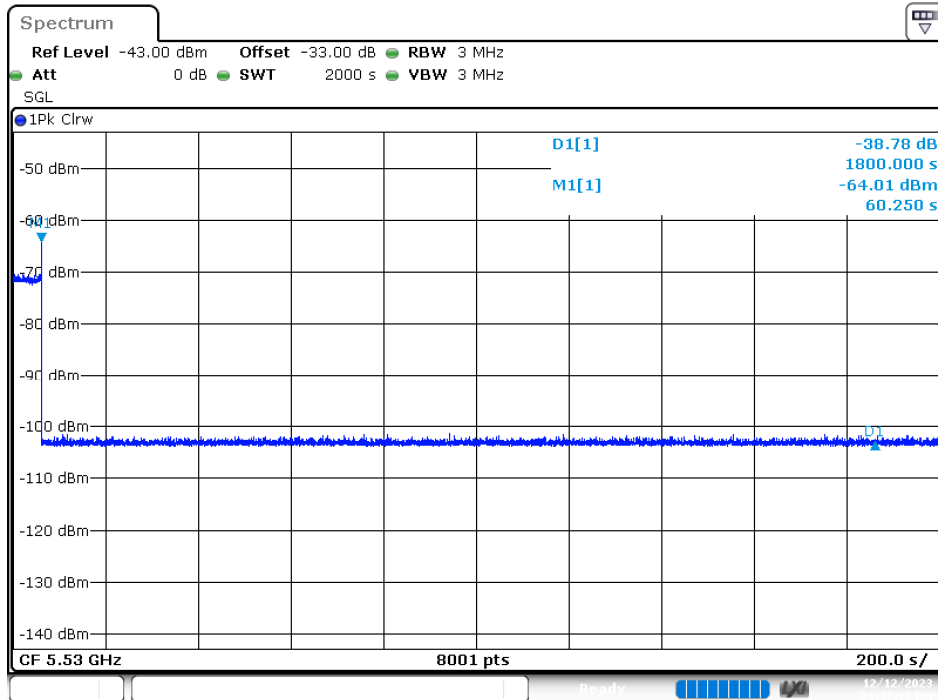

| Test Item | Test Result (Minutes) | Limit (Minutes) |
|----------------------|-----------------------|-----------------|
| Non-Occupancy Period | >30 | >30 |

*No EUT transmissions were observed on the test channel during 30 minutes observation time.

8. Statistical Performance Check

8.1. Test Procedure

The EUT was tested according to U-NII test procedure of KDB905462 D02 for compliance to FCC 47CFR 15.407 requirements.

The steps below define the procedure to determine the minimum percentage of detection when a radar burst with a level equal to the DFS Detection Threshold + 1dB (-63dBm) is generated on the

Operating Channel of the U-NII device.

A U-NII device operating as a Client Device will associate with the UUT (Master) at 5500MHz, 5510MHz and 5530MHz.

Stream the MPEG test file from the Master Device to the Client Device on the selected Channel for the entire period of the test.

The Radar Waveform generator sends the individual waveform for each of the radar types 1-6 at -62dbm. Statistical data will be gathered to determine the ability of the device to detect the radar test waveforms. The device can utilize a test mode to demonstrate when detection occurs to prevent the need to reset the device between trial runs.

8.2. Test Requirement

The minimum percentage of successful detections, and the minimum number of trials that must be used for determining DFS conformance. Step intervals of 0.1 microsecond for Pulse Width, 1 microsecond for PRI, 1 MHz for chirp width and 1 for the number of pulses will be utilized for the random determination of specific test waveforms.

Minimum percentage of successful detections

| Radar Type | Minimum Percentage of Successful Detection | Minimum Number of Trials |
|-----------------------------|--|--------------------------|
| 1 | 60% | 30 |
| 2 | 60% | 30 |
| 3 | 60% | 30 |
| 4 | 60% | 30 |
| Aggregate (Radar Types 1-4) | 80% | 120 |
| 5 | 80% | 30 |
| 6 | 70% | 30 |

The percentage of successful detection is calculated by:

$$\frac{\text{TotalWaveformDetections}}{\text{TotalWaveformTrials}} \times 100 = \text{Probability of Detection Radar Waveform}$$

In addition an aggregate minimum percentage of successful detection across all Short Pulse Radar Types 1-4 is required and is calculated as follows:

$$\frac{P_d 1 + P_d 2 + P_d 3 + P_d 4}{4}$$

8.3. Test Result of Statistical Performance Check

Product : Wireless module
 Test Item : Statistical Performance Check
 Radar Type : Type 1
 Test Mode : Normal (802.11ac-20 MHz)
 Test Date : 2024/01/05

| Trial # | Frequency (MHz) | Pulses/Burs | Pulse Width (us) | PRI (us) | 1= Detection 0= No Detection |
|---------------------------------|-----------------|-------------|------------------|----------|---------------------------------|
| 1 | 5500 | 67 | 1 | 798 | 1 |
| 2 | 5500 | 74 | 1 | 718 | 0 |
| 3 | 5500 | 89 | 1 | 598 | 1 |
| 4 | 5500 | 62 | 1 | 858 | 1 |
| 5 | 5500 | 63 | 1 | 838 | 1 |
| 6 | 5500 | 102 | 1 | 518 | 1 |
| 7 | 5500 | 95 | 1 | 558 | 1 |
| 8 | 5500 | 92 | 1 | 578 | 1 |
| 9 | 5500 | 68 | 1 | 778 | 1 |
| 10 | 5500 | 78 | 1 | 678 | 1 |
| 11 | 5500 | 81 | 1 | 658 | 1 |
| 12 | 5500 | 72 | 1 | 738 | 1 |
| 13 | 5500 | 58 | 1 | 918 | 1 |
| 14 | 5500 | 76 | 1 | 698 | 1 |
| 15 | 5500 | 61 | 1 | 878 | 0 |
| 16 | 5500 | 20 | 1 | 2647 | 1 |
| 17 | 5500 | 31 | 1 | 1730 | 1 |
| 18 | 5500 | 54 | 1 | 976 | 1 |
| 19 | 5500 | 29 | 1 | 1823 | 1 |
| 20 | 5500 | 42 | 1 | 1274 | 0 |
| 21 | 5500 | 25 | 1 | 2125 | 1 |
| 22 | 5500 | 56 | 1 | 948 | 1 |
| 23 | 5500 | 31 | 1 | 1742 | 1 |
| 24 | 5500 | 85 | 1 | 622 | 1 |
| 25 | 5500 | 35 | 1 | 1506 | 1 |
| 26 | 5500 | 19 | 1 | 2784 | 0 |
| 27 | 5500 | 63 | 1 | 840 | 1 |
| 28 | 5500 | 26 | 1 | 2044 | 1 |
| 29 | 5500 | 36 | 1 | 1474 | 1 |
| 30 | 5500 | 44 | 1 | 1210 | 1 |
| Detection Percentage (%) | | | | | 86.67% |

Product : Wireless module
 Test Item : Statistical Performance Check
 Radar Type : Type 2
 Test Mode : Normal (802.11ac-20 MHz)
 Test Date : 2024/01/05

| Trial # | Frequency (MHz) | Pulses/Burs | Pulse Width (us) | PRI (us) | 1= Detection 0= No Detection |
|---------------------------------|-----------------|-------------|------------------|----------|---------------------------------|
| 1 | 5500 | 27 | 3.20 | 199 | 0 |
| 2 | 5500 | 25 | 4.90 | 220 | 1 |
| 3 | 5500 | 25 | 3.30 | 196 | 1 |
| 4 | 5500 | 27 | 1.20 | 178 | 1 |
| 5 | 5500 | 23 | 1.10 | 168 | 1 |
| 6 | 5500 | 26 | 4.80 | 205 | 1 |
| 7 | 5500 | 26 | 3.10 | 167 | 1 |
| 8 | 5500 | 26 | 2.90 | 205 | 1 |
| 9 | 5500 | 28 | 1.10 | 168 | 1 |
| 10 | 5500 | 25 | 1.60 | 192 | 1 |
| 11 | 5500 | 25 | 1.30 | 223 | 1 |
| 12 | 5500 | 29 | 1.00 | 214 | 1 |
| 13 | 5500 | 24 | 2.10 | 228 | 1 |
| 14 | 5500 | 25 | 4.30 | 185 | 1 |
| 15 | 5500 | 28 | 1.00 | 210 | 1 |
| 16 | 5500 | 25 | 2.80 | 180 | 0 |
| 17 | 5500 | 25 | 3.90 | 211 | 1 |
| 18 | 5500 | 26 | 3.90 | 194 | 1 |
| 19 | 5500 | 28 | 4.90 | 209 | 1 |
| 20 | 5500 | 28 | 4.70 | 159 | 1 |
| 21 | 5500 | 24 | 3.00 | 218 | 1 |
| 22 | 5500 | 27 | 2.90 | 152 | 1 |
| 23 | 5500 | 28 | 4.00 | 185 | 1 |
| 24 | 5500 | 27 | 2.80 | 208 | 0 |
| 25 | 5500 | 25 | 4.90 | 201 | 1 |
| 26 | 5500 | 27 | 1.30 | 183 | 1 |
| 27 | 5500 | 23 | 3.90 | 158 | 1 |
| 28 | 5500 | 26 | 4.30 | 158 | 1 |
| 29 | 5500 | 26 | 4.50 | 153 | 1 |
| 30 | 5500 | 29 | 1.90 | 176 | 1 |
| Detection Percentage (%) | | | | | 90.00 % |

Product : Wireless module
 Test Item : Statistical Performance Check
 Radar Type : Type 3
 Test Mode : Normal (802.11ac-20 MHz)
 Test Date : 2024/01/05

| Trial # | Frequency (MHz) | Pulses/Burs | Pulse Width (us) | PRI (us) | 1= Detection 0= No Detection |
|---------------------------------|-----------------|-------------|------------------|----------|---------------------------------|
| 1 | 5500 | 16 | 7.00 | 397 | 1 |
| 2 | 5500 | 16 | 7.60 | 339 | 1 |
| 3 | 5500 | 17 | 6.50 | 261 | 1 |
| 4 | 5500 | 17 | 7.60 | 448 | 0 |
| 5 | 5500 | 16 | 8.80 | 499 | 1 |
| 6 | 5500 | 17 | 7.30 | 294 | 1 |
| 7 | 5500 | 17 | 8.90 | 408 | 1 |
| 8 | 5500 | 17 | 9.20 | 283 | 1 |
| 9 | 5500 | 18 | 6.70 | 214 | 1 |
| 10 | 5500 | 17 | 7.10 | 339 | 1 |
| 11 | 5500 | 18 | 8.90 | 295 | 1 |
| 12 | 5500 | 17 | 6.00 | 312 | 1 |
| 13 | 5500 | 17 | 7.90 | 417 | 0 |
| 14 | 5500 | 17 | 8.10 | 373 | 1 |
| 15 | 5500 | 17 | 8.50 | 362 | 1 |
| 16 | 5500 | 17 | 7.90 | 473 | 1 |
| 17 | 5500 | 18 | 6.80 | 294 | 1 |
| 18 | 5500 | 18 | 7.20 | 281 | 1 |
| 19 | 5500 | 18 | 9.60 | 279 | 1 |
| 20 | 5500 | 17 | 9.80 | 292 | 1 |
| 21 | 5500 | 18 | 7.80 | 363 | 1 |
| 22 | 5500 | 18 | 8.10 | 462 | 1 |
| 23 | 5500 | 17 | 9.20 | 295 | 1 |
| 24 | 5500 | 17 | 8.70 | 379 | 1 |
| 25 | 5500 | 16 | 8.20 | 425 | 0 |
| 26 | 5500 | 18 | 7.20 | 413 | 1 |
| 27 | 5500 | 16 | 9.10 | 280 | 1 |
| 28 | 5500 | 17 | 9.70 | 282 | 1 |
| 29 | 5500 | 16 | 7.60 | 342 | 1 |
| 30 | 5500 | 17 | 9.60 | 341 | 0 |
| Detection Percentage (%) | | | | | 86.67% |

Product : Wireless module
 Test Item : Statistical Performance Check
 Radar Type : Type 4
 Test Mode : Normal (802.11ac-20 MHz)
 Test Date : 2024/01/05

| Trial # | Frequency (MHz) | Pulses/Burs | Pulse Width (us) | PRI (us) | 1= Detection 0= No Detection |
|---------------------------------|-----------------|-------------|------------------|----------|---------------------------------|
| 1 | 5500 | 14 | 11.90 | 229 | 0 |
| 2 | 5500 | 15 | 11.80 | 460 | 1 |
| 3 | 5500 | 15 | 14.60 | 205 | 1 |
| 4 | 5500 | 13 | 13.90 | 238 | 0 |
| 5 | 5500 | 13 | 11.50 | 305 | 1 |
| 6 | 5500 | 16 | 14.70 | 219 | 1 |
| 7 | 5500 | 15 | 19.80 | 387 | 1 |
| 8 | 5500 | 15 | 13.80 | 441 | 1 |
| 9 | 5500 | 13 | 14.30 | 479 | 1 |
| 10 | 5500 | 14 | 18.90 | 323 | 1 |
| 11 | 5500 | 14 | 13.50 | 260 | 1 |
| 12 | 5500 | 14 | 16.20 | 386 | 1 |
| 13 | 5500 | 12 | 15.70 | 463 | 1 |
| 14 | 5500 | 13 | 14.10 | 220 | 1 |
| 15 | 5500 | 12 | 13.20 | 229 | 1 |
| 16 | 5500 | 15 | 18.10 | 339 | 0 |
| 17 | 5500 | 13 | 17.40 | 277 | 1 |
| 18 | 5500 | 14 | 17.30 | 337 | 1 |
| 19 | 5500 | 13 | 19.90 | 322 | 1 |
| 20 | 5500 | 14 | 13.50 | 202 | 0 |
| 21 | 5500 | 14 | 13.10 | 411 | 1 |
| 22 | 5500 | 15 | 13.10 | 346 | 1 |
| 23 | 5500 | 14 | 12.20 | 403 | 1 |
| 24 | 5500 | 12 | 17.90 | 245 | 1 |
| 25 | 5500 | 14 | 12.40 | 227 | 1 |
| 26 | 5500 | 13 | 11.50 | 372 | 1 |
| 27 | 5500 | 14 | 13.80 | 496 | 1 |
| 28 | 5500 | 14 | 12.30 | 330 | 1 |
| 29 | 5500 | 16 | 19.90 | 273 | 1 |
| 30 | 5500 | 14 | 18.50 | 320 | 0 |
| Detection Percentage (%) | | | | | 83.33% |

Product : Wireless module
 Test Item : Statistical Performance Check
 Radar Type : Type 1
 Test Mode : Normal (802.11ac-40 MHz)
 Test Date : 2024/01/05

| Trial # | Frequency (MHz) | Pulses/Burs | Pulse Width (us) | PRI (us) | 1= Detection 0= No Detection |
|---------------------------------|-----------------|-------------|------------------|----------|---------------------------------|
| 1 | 5510 | 86 | 1 | 618 | 1 |
| 2 | 5510 | 95 | 1 | 558 | 1 |
| 3 | 5510 | 92 | 1 | 578 | 1 |
| 4 | 5510 | 76 | 1 | 698 | 1 |
| 5 | 5510 | 74 | 1 | 718 | 0 |
| 6 | 5510 | 57 | 1 | 938 | 1 |
| 7 | 5510 | 78 | 1 | 678 | 1 |
| 8 | 5510 | 62 | 1 | 858 | 1 |
| 9 | 5510 | 18 | 1 | 3066 | 1 |
| 10 | 5510 | 83 | 1 | 638 | 1 |
| 11 | 5510 | 58 | 1 | 918 | 1 |
| 12 | 5510 | 63 | 1 | 838 | 1 |
| 13 | 5510 | 61 | 1 | 878 | 1 |
| 14 | 5510 | 98 | 1 | 538 | 1 |
| 15 | 5510 | 67 | 1 | 798 | 1 |
| 16 | 5510 | 26 | 1 | 2086 | 1 |
| 17 | 5510 | 19 | 1 | 2867 | 1 |
| 18 | 5510 | 89 | 1 | 596 | 0 |
| 19 | 5510 | 95 | 1 | 557 | 1 |
| 20 | 5510 | 28 | 1 | 1891 | 1 |
| 21 | 5510 | 89 | 1 | 593 | 1 |
| 22 | 5510 | 38 | 1 | 1405 | 1 |
| 23 | 5510 | 27 | 1 | 1986 | 1 |
| 24 | 5510 | 23 | 1 | 2356 | 0 |
| 25 | 5510 | 21 | 1 | 2589 | 1 |
| 26 | 5510 | 46 | 1 | 1158 | 1 |
| 27 | 5510 | 21 | 1 | 2532 | 1 |
| 28 | 5510 | 18 | 1 | 3055 | 1 |
| 29 | 5510 | 31 | 1 | 1738 | 1 |
| 30 | 5510 | 18 | 1 | 2959 | 1 |
| Detection Percentage (%) | | | | | 90.00% |

Product : Wireless module
 Test Item : Statistical Performance Check
 Radar Type : Type 2
 Test Mode : Normal (802.11ac-40 MHz)
 Test Date : 2024/01/05

| Trial # | Frequency (MHz) | Pulses/Burs | Pulse Width (us) | PRI (us) | 1= Detection 0= No Detection |
|---------------------------------|-----------------|-------------|------------------|----------|---------------------------------|
| 1 | 5510 | 24 | 3 | 205 | 1 |
| 2 | 5510 | 26 | 4.2 | 207 | 1 |
| 3 | 5510 | 28 | 2.1 | 224 | 1 |
| 4 | 5510 | 26 | 3.6 | 192 | 1 |
| 5 | 5510 | 25 | 3 | 220 | 1 |
| 6 | 5510 | 24 | 1.3 | 163 | 1 |
| 7 | 5510 | 25 | 1.6 | 185 | 1 |
| 8 | 5510 | 27 | 3.4 | 203 | 1 |
| 9 | 5510 | 29 | 3.2 | 162 | 0 |
| 10 | 5510 | 26 | 4.1 | 182 | 1 |
| 11 | 5510 | 28 | 4.7 | 163 | 1 |
| 12 | 5510 | 25 | 4.2 | 173 | 1 |
| 13 | 5510 | 26 | 2.4 | 156 | 1 |
| 14 | 5510 | 28 | 2.3 | 157 | 1 |
| 15 | 5510 | 25 | 3.9 | 215 | 1 |
| 16 | 5510 | 27 | 3.4 | 186 | 1 |
| 17 | 5510 | 28 | 1.6 | 190 | 1 |
| 18 | 5510 | 25 | 2.9 | 227 | 1 |
| 19 | 5510 | 25 | 2.9 | 158 | 1 |
| 20 | 5510 | 29 | 3.1 | 188 | 0 |
| 21 | 5510 | 28 | 2.2 | 153 | 1 |
| 22 | 5510 | 25 | 3.9 | 228 | 0 |
| 23 | 5510 | 24 | 1.1 | 196 | 1 |
| 24 | 5510 | 26 | 2.4 | 197 | 1 |
| 25 | 5510 | 26 | 1.3 | 195 | 1 |
| 26 | 5510 | 26 | 3.6 | 198 | 1 |
| 27 | 5510 | 27 | 2 | 159 | 1 |
| 28 | 5510 | 27 | 1 | 174 | 1 |
| 29 | 5510 | 25 | 3.5 | 199 | 1 |
| 30 | 5510 | 26 | 1.8 | 177 | 1 |
| Detection Percentage (%) | | | | | 90.00% |

Product : Wireless module
 Test Item : Statistical Performance Check
 Radar Type : Type 3
 Test Mode : Normal (802.11ac-40 MHz)
 Test Date : 2024/01/05

| Trial # | Frequency (MHz) | Pulses/Burs | Pulse Width (us) | PRI (us) | 1= Detection 0= No Detection |
|---------------------------------|-----------------|-------------|------------------|----------|---------------------------------|
| 1 | 5510 | 16 | 9.4 | 484 | 1 |
| 2 | 5510 | 17 | 9.9 | 338 | 1 |
| 3 | 5510 | 17 | 6.6 | 381 | 1 |
| 4 | 5510 | 17 | 8.2 | 313 | 0 |
| 5 | 5510 | 17 | 7.4 | 296 | 0 |
| 6 | 5510 | 18 | 9 | 463 | 1 |
| 7 | 5510 | 17 | 6 | 412 | 1 |
| 8 | 5510 | 17 | 6 | 460 | 1 |
| 9 | 5510 | 17 | 6.8 | 406 | 1 |
| 10 | 5510 | 18 | 8.8 | 268 | 1 |
| 11 | 5510 | 18 | 9.9 | 413 | 1 |
| 12 | 5510 | 16 | 7 | 467 | 1 |
| 13 | 5510 | 16 | 6.5 | 371 | 1 |
| 14 | 5510 | 18 | 7.9 | 475 | 1 |
| 15 | 5510 | 17 | 7.6 | 322 | 1 |
| 16 | 5510 | 17 | 6.9 | 297 | 1 |
| 17 | 5510 | 16 | 6.2 | 448 | 1 |
| 18 | 5510 | 17 | 7.1 | 459 | 1 |
| 19 | 5510 | 18 | 9.7 | 374 | 0 |
| 20 | 5510 | 18 | 8.8 | 496 | 1 |
| 21 | 5510 | 18 | 9.3 | 361 | 1 |
| 22 | 5510 | 18 | 7.9 | 221 | 1 |
| 23 | 5510 | 17 | 7.4 | 499 | 0 |
| 24 | 5510 | 17 | 9.1 | 417 | 1 |
| 25 | 5510 | 17 | 8.4 | 200 | 1 |
| 26 | 5510 | 16 | 7.7 | 328 | 1 |
| 27 | 5510 | 17 | 7.7 | 315 | 1 |
| 28 | 5510 | 17 | 6.7 | 369 | 1 |
| 29 | 5510 | 16 | 7.7 | 217 | 1 |
| 30 | 5510 | 16 | 6.4 | 275 | 1 |
| Detection Percentage (%) | | | | | 86.67% |

Product : Wireless module
 Test Item : Statistical Performance Check
 Radar Type : Type 4
 Test Mode : Normal (802.11ac-40 MHz)
 Test Date : 2024/01/05

| Trial # | Frequency (MHz) | Pulses/Burs | Pulse Width (us) | PRI (us) | 1= Detection 0= No Detection |
|---------------------------------|-----------------|-------------|------------------|----------|---------------------------------|
| 1 | 5510 | 12 | 16.9 | 215 | 0 |
| 2 | 5510 | 15 | 13.5 | 386 | 1 |
| 3 | 5510 | 14 | 14.7 | 463 | 1 |
| 4 | 5510 | 15 | 16.8 | 406 | 1 |
| 5 | 5510 | 15 | 14.6 | 308 | 1 |
| 6 | 5510 | 16 | 16.2 | 331 | 1 |
| 7 | 5510 | 16 | 19.5 | 447 | 1 |
| 8 | 5510 | 14 | 18.8 | 456 | 0 |
| 9 | 5510 | 15 | 19.4 | 388 | 1 |
| 10 | 5510 | 13 | 19.8 | 499 | 1 |
| 11 | 5510 | 16 | 11.5 | 418 | 1 |
| 12 | 5510 | 15 | 12.3 | 391 | 1 |
| 13 | 5510 | 13 | 14.5 | 229 | 1 |
| 14 | 5510 | 16 | 14.2 | 241 | 1 |
| 15 | 5510 | 12 | 13.6 | 270 | 0 |
| 16 | 5510 | 15 | 11.8 | 461 | 1 |
| 17 | 5510 | 14 | 16.1 | 443 | 1 |
| 18 | 5510 | 13 | 17.6 | 481 | 1 |
| 19 | 5510 | 13 | 11.9 | 231 | 1 |
| 20 | 5510 | 15 | 15.7 | 334 | 1 |
| 21 | 5510 | 15 | 12.1 | 384 | 1 |
| 22 | 5510 | 14 | 11.4 | 426 | 1 |
| 23 | 5510 | 16 | 11.6 | 495 | 1 |
| 24 | 5510 | 16 | 12.2 | 464 | 1 |
| 25 | 5510 | 14 | 12.2 | 419 | 1 |
| 26 | 5510 | 14 | 14 | 272 | 1 |
| 27 | 5510 | 16 | 11.9 | 215 | 1 |
| 28 | 5510 | 15 | 14.7 | 298 | 1 |
| 29 | 5510 | 13 | 11.7 | 231 | 0 |
| 30 | 5510 | 13 | 11.4 | 204 | 1 |
| Detection Percentage (%) | | | | | 86.67% |

Product : Wireless module
 Test Item : Statistical Performance Check
 Radar Type : Type 1
 Test Mode : Normal (802.11ac-80 MHz)
 Test Date : 2024/01/05

| Trial # | Frequency (MHz) | Pulses/Burs | Pulse Width (us) | PRI (us) | 1= Detection 0= No Detection |
|---------------------------------|-----------------|-------------|------------------|----------|---------------------------------|
| 1 | 5530 | 26 | 1 | 2059 | 1 |
| 2 | 5530 | 66 | 1 | 804 | 1 |
| 3 | 5530 | 63 | 1 | 848 | 1 |
| 4 | 5530 | 71 | 1 | 746 | 1 |
| 5 | 5530 | 29 | 1 | 1874 | 0 |
| 6 | 5530 | 22 | 1 | 2461 | 1 |
| 7 | 5530 | 27 | 1 | 2016 | 1 |
| 8 | 5530 | 79 | 1 | 675 | 1 |
| 9 | 5530 | 52 | 1 | 1016 | 1 |
| 10 | 5530 | 44 | 1 | 1199 | 0 |
| 11 | 5530 | 31 | 1 | 1747 | 1 |
| 12 | 5530 | 52 | 1 | 1023 | 0 |
| 13 | 5530 | 49 | 1 | 1097 | 1 |
| 14 | 5530 | 23 | 1 | 2340 | 1 |
| 15 | 5530 | 36 | 1 | 1498 | 1 |
| 16 | 5530 | 22 | 1 | 2412 | 1 |
| 17 | 5530 | 20 | 1 | 2665 | 1 |
| 18 | 5530 | 53 | 1 | 1008 | 1 |
| 19 | 5530 | 38 | 1 | 1417 | 1 |
| 20 | 5530 | 25 | 1 | 2111 | 1 |
| 21 | 5530 | 32 | 1 | 1652 | 0 |
| 22 | 5530 | 66 | 1 | 806 | 1 |
| 23 | 5530 | 35 | 1 | 1509 | 1 |
| 24 | 5530 | 32 | 1 | 1683 | 0 |
| 25 | 5530 | 42 | 1 | 1276 | 1 |
| 26 | 5530 | 27 | 1 | 1975 | 1 |
| 27 | 5530 | 39 | 1 | 1355 | 1 |
| 28 | 5530 | 70 | 1 | 759 | 1 |
| 29 | 5530 | 20 | 1 | 2727 | 1 |
| 30 | 5530 | 21 | 1 | 2588 | 1 |
| Detection Percentage (%) | | | | | 83.33% |

Product : Wireless module
 Test Item : Statistical Performance Check
 Radar Type : Type 2
 Test Mode : Normal (802.11ac-80 MHz)
 Test Date : 2024/01/05

| Trial # | Frequency (MHz) | Pulses/Burs | Pulse Width (us) | PRI (us) | 1= Detection 0= No Detection |
|---------------------------------|-----------------|-------------|------------------|----------|---------------------------------|
| 1 | 5530 | 26 | 1.8 | 169 | 1 |
| 2 | 5530 | 23 | 1.9 | 174 | 1 |
| 3 | 5530 | 27 | 2.7 | 203 | 0 |
| 4 | 5530 | 26 | 1.2 | 153 | 1 |
| 5 | 5530 | 25 | 2.2 | 164 | 1 |
| 6 | 5530 | 24 | 1.5 | 156 | 1 |
| 7 | 5530 | 26 | 2.7 | 152 | 1 |
| 8 | 5530 | 26 | 4.5 | 188 | 1 |
| 9 | 5530 | 25 | 3.8 | 157 | 1 |
| 10 | 5530 | 28 | 3 | 159 | 1 |
| 11 | 5530 | 26 | 4.6 | 221 | 1 |
| 12 | 5530 | 24 | 2.9 | 227 | 1 |
| 13 | 5530 | 27 | 4.8 | 164 | 1 |
| 14 | 5530 | 27 | 4.1 | 228 | 1 |
| 15 | 5530 | 26 | 1.9 | 196 | 0 |
| 16 | 5530 | 27 | 3.4 | 224 | 1 |
| 17 | 5530 | 29 | 4.1 | 153 | 1 |
| 18 | 5530 | 27 | 1.4 | 159 | 1 |
| 19 | 5530 | 27 | 4.4 | 202 | 0 |
| 20 | 5530 | 25 | 4 | 169 | 1 |
| 21 | 5530 | 24 | 4.4 | 203 | 1 |
| 22 | 5530 | 23 | 1.9 | 197 | 0 |
| 23 | 5530 | 27 | 3.5 | 202 | 1 |
| 24 | 5530 | 27 | 3.5 | 193 | 1 |
| 25 | 5530 | 24 | 2.6 | 179 | 1 |
| 26 | 5530 | 28 | 3.5 | 157 | 1 |
| 27 | 5530 | 28 | 3.1 | 217 | 1 |
| 28 | 5530 | 29 | 3 | 226 | 1 |
| 29 | 5530 | 26 | 4.6 | 212 | 1 |
| 30 | 5530 | 28 | 1.4 | 206 | 0 |
| Detection Percentage (%) | | | | | 83.33% |

Product : Wireless module
 Test Item : Statistical Performance Check
 Radar Type : Type 3
 Test Mode : Normal (802.11ac-80 MHz)
 Test Date : 2024/01/05

| Trial # | Frequency (MHz) | Pulses/Burs | Pulse Width (us) | PRI (us) | 1= Detection 0= No Detection |
|---------------------------------|-----------------|-------------|------------------|----------|---------------------------------|
| 1 | 5530 | 16 | 7.8 | 362 | 1 |
| 2 | 5530 | 18 | 7.6 | 364 | 0 |
| 3 | 5530 | 18 | 9 | 244 | 1 |
| 4 | 5530 | 18 | 6.3 | 479 | 0 |
| 5 | 5530 | 17 | 6.6 | 313 | 1 |
| 6 | 5530 | 16 | 8.3 | 269 | 1 |
| 7 | 5530 | 16 | 6.6 | 499 | 1 |
| 8 | 5530 | 17 | 7.7 | 227 | 1 |
| 9 | 5530 | 18 | 6.4 | 352 | 1 |
| 10 | 5530 | 16 | 6.4 | 228 | 1 |
| 11 | 5530 | 16 | 7.6 | 415 | 0 |
| 12 | 5530 | 17 | 8.4 | 430 | 1 |
| 13 | 5530 | 18 | 8.7 | 201 | 1 |
| 14 | 5530 | 16 | 9.9 | 215 | 1 |
| 15 | 5530 | 17 | 8.5 | 226 | 1 |
| 16 | 5530 | 18 | 7.4 | 479 | 1 |
| 17 | 5530 | 16 | 9.6 | 325 | 1 |
| 18 | 5530 | 17 | 6.5 | 325 | 1 |
| 19 | 5530 | 16 | 7.8 | 267 | 1 |
| 20 | 5530 | 16 | 8.9 | 281 | 1 |
| 21 | 5530 | 17 | 9.4 | 340 | 1 |
| 22 | 5530 | 18 | 6.3 | 466 | 1 |
| 23 | 5530 | 17 | 8 | 444 | 1 |
| 24 | 5530 | 17 | 9.2 | 300 | 1 |
| 25 | 5530 | 18 | 7.8 | 265 | 1 |
| 26 | 5530 | 17 | 8.9 | 383 | 1 |
| 27 | 5530 | 17 | 8.1 | 464 | 1 |
| 28 | 5530 | 17 | 7 | 387 | 1 |
| 29 | 5530 | 18 | 7.1 | 444 | 0 |
| 30 | 5530 | 18 | 9.1 | 338 | 0 |
| Detection Percentage (%) | | | | | 83.33% |

Product : Wireless module
 Test Item : Statistical Performance Check
 Radar Type : Type 4
 Test Mode : Normal (802.11ac-80 MHz)
 Test Date : 2024/01/05

| Trial # | Frequency (MHz) | Pulses/Burs | Pulse Width (us) | PRI (us) | 1= Detection 0= No Detection |
|---------------------------------|-----------------|-------------|------------------|----------|---------------------------------|
| 1 | 5530 | 12 | 14 | 250 | 1 |
| 2 | 5530 | 12 | 13.6 | 487 | 1 |
| 3 | 5530 | 15 | 11.9 | 466 | 1 |
| 4 | 5530 | 14 | 11.5 | 285 | 1 |
| 5 | 5530 | 15 | 17.9 | 222 | 1 |
| 6 | 5530 | 14 | 13.6 | 379 | 0 |
| 7 | 5530 | 15 | 18 | 223 | 0 |
| 8 | 5530 | 14 | 11.1 | 476 | 1 |
| 9 | 5530 | 15 | 13.2 | 354 | 1 |
| 10 | 5530 | 15 | 12.3 | 458 | 1 |
| 11 | 5530 | 16 | 16.7 | 217 | 1 |
| 12 | 5530 | 13 | 16.8 | 313 | 1 |
| 13 | 5530 | 14 | 16.3 | 481 | 1 |
| 14 | 5530 | 13 | 12.4 | 400 | 1 |
| 15 | 5530 | 15 | 18.4 | 347 | 0 |
| 16 | 5530 | 16 | 19.7 | 322 | 1 |
| 17 | 5530 | 14 | 11.9 | 384 | 1 |
| 18 | 5530 | 13 | 16.2 | 469 | 0 |
| 19 | 5530 | 14 | 12.8 | 216 | 1 |
| 20 | 5530 | 14 | 14.5 | 231 | 1 |
| 21 | 5530 | 13 | 19.4 | 485 | 1 |
| 22 | 5530 | 14 | 12.6 | 327 | 1 |
| 23 | 5530 | 16 | 13.7 | 363 | 0 |
| 24 | 5530 | 14 | 12.6 | 295 | 1 |
| 25 | 5530 | 13 | 18.9 | 439 | 1 |
| 26 | 5530 | 15 | 17.7 | 485 | 1 |
| 27 | 5530 | 15 | 15.4 | 369 | 1 |
| 28 | 5530 | 15 | 15 | 437 | 1 |
| 29 | 5530 | 16 | 12.1 | 327 | 0 |
| 30 | 5530 | 14 | 14.6 | 420 | 1 |
| Detection Percentage (%) | | | | | 80.00% |

Product : Wireless module
 Test Item : Statistical Performance Check
 Radar Type : Type 5
 Test Mode : Normal (802.11ac-20 MHz)
 Test Date : 2024/01/05

| Center Freq: 5500MHz | | | Low Edge: 5491MHz | | High Edge: 5510MHz | |
|---------------------------------|-------|--------|---------------------|--|---------------------------------|--|
| Trial # | Chirp | Offset | VSG Frequency (MHz) | *Filename | 1= Detection 0= No Detection | |
| 1 | 16 | | 5500 | Statistical_Check_RandParm_For_Radar_Type_5_1_trail | 1 | |
| 2 | 15 | | 5500 | Statistical_Check_RandParm_For_Radar_Type_5_2_trail | 1 | |
| 3 | 15 | | 5500 | Statistical_Check_RandParm_For_Radar_Type_5_3_trail | 1 | |
| 4 | 9 | | 5500 | Statistical_Check_RandParm_For_Radar_Type_5_4_trail | 1 | |
| 5 | 8 | | 5500 | Statistical_Check_RandParm_For_Radar_Type_5_5_trail | 1 | |
| 6 | 17 | | 5500 | Statistical_Check_RandParm_For_Radar_Type_5_6_trail | 1 | |
| 7 | 10 | | 5500 | Statistical_Check_RandParm_For_Radar_Type_5_7_trail | 1 | |
| 8 | 8 | | 5500 | Statistical_Check_RandParm_For_Radar_Type_5_8_trail | 1 | |
| 9 | 11 | | 5500 | Statistical_Check_RandParm_For_Radar_Type_5_9_trail | 1 | |
| 10 | 11 | | 5500 | Statistical_Check_RandParm_For_Radar_Type_5_10_trail | 1 | |
| 11 | 7 | 2.8 | 5493.8 | Statistical_Check_RandParm_For_Radar_Type_5_11_trail | 1 | |
| 12 | 16 | 6.4 | 5497.4 | Statistical_Check_RandParm_For_Radar_Type_5_12_trail | 0 | |
| 13 | 6 | 2.4 | 5493.4 | Statistical_Check_RandParm_For_Radar_Type_5_13_trail | 1 | |
| 14 | 17 | 6.8 | 5497.8 | Statistical_Check_RandParm_For_Radar_Type_5_14_trail | 1 | |
| 15 | 7 | 2.8 | 5493.8 | Statistical_Check_RandParm_For_Radar_Type_5_15_trail | 1 | |
| 16 | 10 | 4 | 5495 | Statistical_Check_RandParm_For_Radar_Type_5_16_trail | 0 | |
| 17 | 13 | 5.2 | 5496.2 | Statistical_Check_RandParm_For_Radar_Type_5_17_trail | 0 | |
| 18 | 5 | 2 | 5493 | Statistical_Check_RandParm_For_Radar_Type_5_18_trail | 1 | |
| 19 | 16 | 6.4 | 5497.4 | Statistical_Check_RandParm_For_Radar_Type_5_19_trail | 0 | |
| 20 | 9 | 3.6 | 5494.6 | Statistical_Check_RandParm_For_Radar_Type_5_20_trail | 0 | |
| 21 | 8 | 3.2 | 5506.8 | Statistical_Check_RandParm_For_Radar_Type_5_21_trail | 1 | |
| 22 | 8 | 3.2 | 5506.8 | Statistical_Check_RandParm_For_Radar_Type_5_22_trail | 1 | |
| 23 | 10 | 4 | 5506 | Statistical_Check_RandParm_For_Radar_Type_5_23_trail | 1 | |
| 24 | 19 | 7.6 | 5502.4 | Statistical_Check_RandParm_For_Radar_Type_5_24_trail | 1 | |
| 25 | 6 | 2.4 | 5507.6 | Statistical_Check_RandParm_For_Radar_Type_5_25_trail | 1 | |
| 26 | 5 | 2 | 5508 | Statistical_Check_RandParm_For_Radar_Type_5_26_trail | 1 | |
| 27 | 8 | 3.2 | 5506.8 | Statistical_Check_RandParm_For_Radar_Type_5_27_trail | 1 | |
| 28 | 19 | 7.6 | 5502.4 | Statistical_Check_RandParm_For_Radar_Type_5_28_trail | 1 | |
| 29 | 11 | 4.4 | 5505.6 | Statistical_Check_RandParm_For_Radar_Type_5_29_trail | 1 | |
| 30 | 10 | 4 | 5506 | Statistical_Check_RandParm_For_Radar_Type_5_30_trail | 1 | |
| Detection Percentage (%) | | | | | 83.33 | |
| Limit | | | | | ≥ 80 | |


TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 1

Bursts in Trial: 9

| Burst | Number of Pulses | Pulse Width (µsec) | Chirp Width (MHz) | Pulse 1-to-2 PRI (µsec) | Pulse 2-to-3 PRI (µsec) | Start Location Within Interval (msec) |
|-------|------------------|--------------------|-------------------|-------------------------|-------------------------|---------------------------------------|
| 1 | 1 | 67.8 | 16 | | | 568.822 |
| 2 | 3 | 79.9 | 16 | 1298 | 1858 | 346.167 |
| 3 | 2 | 63.8 | 16 | 1125 | | 563.203 |
| 4 | 2 | 92 | 16 | 1162 | | 1247.95 |
| 5 | 2 | 71.4 | 16 | 1586 | | 680.367 |
| 6 | 3 | 72.7 | 16 | 1397 | 1716 | 944.433 |
| 7 | 3 | 85.7 | 16 | 1942 | 1069 | 277.56 |
| 8 | 3 | 99.8 | 16 | 1640 | 1518 | 693.867 |
| 9 | 3 | 89.7 | 16 | 1708 | 1337 | 162.633 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 2

Bursts in Trial: 16

| Burst | Number of Pulses | Pulse Width (µsec) | Chirp Width (MHz) | Pulse 1-to-2 PRI (µsec) | Pulse 2-to-3 PRI (µsec) | Start Location Within Interval (msec) |
|-------|------------------|--------------------|-------------------|-------------------------|-------------------------|---------------------------------------|
| 1 | 2 | 75 | 15 | 1741 | | 299.998 |
| 2 | 3 | 97.3 | 15 | 1163 | 1007 | 354.36 |
| 3 | 2 | 71.7 | 15 | 1833 | | 172.81 |
| 4 | 2 | 50.7 | 15 | 1940 | | 465.63 |
| 5 | 2 | 79.4 | 15 | 1151 | | 608.07 |
| 6 | 2 | 61.2 | 15 | 1670 | | 307.29 |
| 7 | 3 | 51.1 | 15 | 1094 | 1725 | 84.57 |
| 8 | 2 | 80 | 15 | 1894 | | 675.91 |
| 9 | 3 | 72.9 | 15 | 1036 | 1828 | 245.35 |
| 10 | 2 | 72.2 | 15 | 1228 | | 670.63 |
| 11 | 2 | 79.1 | 15 | 1189 | | 449.21 |
| 12 | 2 | 83.9 | 15 | 1242 | | 460.07 |
| 13 | 1 | 84 | 15 | | | 304.53 |
| 14 | 2 | 71.8 | 15 | 1459 | | 371.6 |
| 15 | 2 | 61.8 | 15 | 1639 | | 382.8 |
| 16 | 3 | 96.2 | 15 | 1017 | 1028 | 394.8 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 3

Bursts in Trial: 14

| Burst | Number of Pulses | Pulse Width (µsec) | Chirp Width (MHz) | Pulse 1-to-2 PRI (µsec) | Pulse 2-to-3 PRI (µsec) | Start Location Within Interval (msec) |
|-------|------------------|--------------------|-------------------|-------------------------|-------------------------|---------------------------------------|
| 1 | 1 | 77.4 | 15 | | | 273.081 |
| 2 | 2 | 81.1 | 15 | 1719 | | 297.747 |
| 3 | 1 | 51.9 | 15 | | | 783.534 |
| 4 | 2 | 81.4 | 15 | 1273 | | 571.121 |
| 5 | 2 | 58.9 | 15 | 1204 | | 190.559 |
| 6 | 2 | 85.9 | 15 | 1490 | | 353.306 |
| 7 | 3 | 88 | 15 | 1901 | 1923 | 119.353 |
| 8 | 2 | 87 | 15 | 1674 | | 652.96 |
| 9 | 3 | 82 | 15 | 1365 | 1531 | 609.357 |
| 10 | 3 | 82.1 | 15 | 1744 | 1172 | 170.854 |
| 11 | 2 | 83.8 | 15 | 1707 | | 291.221 |
| 12 | 1 | 79.8 | 15 | | | 404.069 |
| 13 | 2 | 64.7 | 15 | 1408 | | 148.686 |
| 14 | 3 | 69.5 | 15 | 1759 | 1713 | 674.943 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 4

Bursts in Trial: 9

| Burst | Number of Pulses | Pulse Width (µsec) | Chirp Width (MHz) | Pulse 1-to-2 PRI (µsec) | Pulse 2-to-3 PRI (µsec) | Start Location Within Interval (msec) |
|-------|------------------|--------------------|-------------------|-------------------------|-------------------------|---------------------------------------|
| 1 | 2 | 64 | 9 | 1483 | | 1301.93 |
| 2 | 3 | 69.2 | 9 | 1677 | 1165 | 388.357 |
| 3 | 2 | 71.5 | 9 | 1793 | | 1218.483 |
| 4 | 2 | 97.6 | 9 | 1728 | | 18.88 |
| 5 | 1 | 70.3 | 9 | | | 1091.447 |
| 6 | 3 | 76.2 | 9 | 1430 | 1686 | 804.453 |
| 7 | 2 | 96.6 | 9 | 1514 | | 343.8 |
| 8 | 1 | 98.5 | 9 | | | 768.367 |
| 9 | 2 | 79.6 | 9 | 1665 | | 642.933 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 5

Bursts in Trial: 12

| Burst | Number of Pulses | Pulse Width (µsec) | Chirp Width (MHz) | Pulse 1-to-2 PRI (µsec) | Pulse 2-to-3 PRI (µsec) | Start Location Within Interval (msec) |
|-------|------------------|--------------------|-------------------|-------------------------|-------------------------|---------------------------------------|
| 1 | 3 | 94.2 | 8 | 1079 | 1445 | 825.427 |
| 2 | 1 | 82 | 8 | | | 505.66 |
| 3 | 3 | 90.3 | 8 | 1927 | 1853 | 313.51 |
| 4 | 2 | 98 | 8 | 1689 | | 891.76 |
| 5 | 1 | 77.8 | 8 | | | 810.63 |
| 6 | 1 | 76.2 | 8 | | | 929.42 |
| 7 | 1 | 60.6 | 8 | | | 420.62 |
| 8 | 2 | 62.5 | 8 | 1825 | | 733.37 |
| 9 | 2 | 77.5 | 8 | 1137 | | 198.38 |
| 10 | 1 | 89.4 | 8 | | | 6.01 |
| 11 | 2 | 78.2 | 8 | 1264 | | 865.1 |
| 12 | 2 | 58.9 | 8 | 1064 | | 943.9 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 6

Bursts in Trial: 13

| Burst | Number of Pulses | Pulse Width (µsec) | Chirp Width (MHz) | Pulse 1-to-2 PRI (µsec) | Pulse 2-to-3 PRI (µsec) | Start Location Within Interval (msec) |
|-------|------------------|--------------------|-------------------|-------------------------|-------------------------|---------------------------------------|
| 1 | 2 | 76 | 17 | 1113 | | 320.642 |
| 2 | 2 | 90.4 | 17 | 1760 | | 723.603 |
| 3 | 3 | 93.1 | 17 | 1915 | 1579 | 498.976 |
| 4 | 3 | 55.6 | 17 | 1482 | 1307 | 414.049 |
| 5 | 2 | 82.1 | 17 | 1270 | | 505.862 |
| 6 | 1 | 60.3 | 17 | | | 156.445 |
| 7 | 2 | 96.7 | 17 | 1530 | | 323.598 |
| 8 | 2 | 77.6 | 17 | 1591 | | 148.362 |
| 9 | 2 | 54.6 | 17 | 1400 | | 369.005 |
| 10 | 2 | 71.4 | 17 | 1867 | | 143.628 |
| 11 | 2 | 99.7 | 17 | 1607 | | 236.051 |
| 12 | 2 | 84.9 | 17 | 1694 | | 1.254 |
| 13 | 2 | 89.2 | 17 | 1512 | | 860.877 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 7

Bursts in Trial: 20

| Burst | Number of Pulses | Pulse Width (µsec) | Chirp Width (MHz) | Pulse 1-to-2 PRI (µsec) | Pulse 2-to-3 PRI (µsec) | Start Location Within Interval (msec) |
|-------|------------------|--------------------|-------------------|-------------------------|-------------------------|---------------------------------------|
| 1 | 1 | 70.9 | 10 | | | 204.945 |
| 2 | 1 | 54.6 | 10 | | | 201.644 |
| 3 | 3 | 69.3 | 10 | 1561 | 1025 | 487.16 |
| 4 | 2 | 75 | 10 | 1240 | | 127.47 |
| 5 | 2 | 65.8 | 10 | 1631 | | 275.07 |
| 6 | 2 | 91.5 | 10 | 1240 | | 363.74 |
| 7 | 2 | 52.2 | 10 | 1089 | | 166.61 |
| 8 | 2 | 56.2 | 10 | 1005 | | 88.61 |
| 9 | 2 | 96.1 | 10 | 1414 | | 406.36 |
| 10 | 2 | 79.8 | 10 | 1567 | | 222.08 |
| 11 | 1 | 91 | 10 | | | 241.62 |
| 12 | 2 | 79.1 | 10 | 1233 | | 523.83 |
| 13 | 3 | 55.9 | 10 | 1724 | 1392 | 193.1 |
| 14 | 2 | 73.2 | 10 | 1266 | | 13.35 |
| 15 | 1 | 81.3 | 10 | | | 388.95 |
| 16 | 1 | 95.3 | 10 | | | 591.52 |
| 17 | 1 | 84 | 10 | | | 49.86 |
| 18 | 2 | 99.4 | 10 | 1385 | | 295.2 |
| 19 | 2 | 94 | 10 | 1969 | | 263.4 |
| 20 | 2 | 86 | 10 | 1030 | | 93.1 |



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 8

Bursts in Trial: 15

| Burst | Number of Pulses | Pulse Width (µsec) | Chirp Width (MHz) | Pulse 1-to-2 Spacing (µsec) | Pulse 2-to-3 PRI (µsec) | Start Location Within Interval (msec) |
|-------|------------------|--------------------|-------------------|-----------------------------|-------------------------|---------------------------------------|
| 1 | 1 | 70.8 | 8 | | | 93.994 |
| 2 | 2 | 59.1 | 8 | 1241 | | 665.91 |
| 3 | 3 | 59.4 | 8 | 1549 | 1207 | 402.4 |
| 4 | 2 | 62.8 | 8 | 1636 | | 662.66 |
| 5 | 2 | 73.2 | 8 | 1983 | | 544.41 |
| 6 | 2 | 58 | 8 | 1955 | | 198.53 |
| 7 | 2 | 53.3 | 8 | 1626 | | 350.31 |
| 8 | 2 | 68.8 | 8 | 1189 | | 789.23 |
| 9 | 1 | 86.4 | 8 | | | 253.45 |
| 10 | 3 | 79.9 | 8 | 1531 | 1133 | 527.71 |
| 11 | 2 | 99.1 | 8 | 1677 | | 348.92 |
| 12 | 3 | 77.9 | 8 | 1470 | 1356 | 249.79 |
| 13 | 3 | 59.3 | 8 | 1605 | 1743 | 485 |
| 14 | 2 | 66.5 | 8 | 1914 | | 566.8 |
| 15 | 2 | 89.9 | 8 | 1622 | | 239.2 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 9

Bursts in Trial: 15

| Burst | Number of Pulses | Pulse Width (µsec) | Chirp Width (MHz) | Pulse 1-to-2 PRI (µsec) | Pulse 2-to-3 PRI (µsec) | Start Location Within Interval (msec) |
|-------|------------------|--------------------|-------------------|-------------------------|-------------------------|---------------------------------------|
| 1 | 3 | 72.7 | 11 | 1692 | 1583 | 35.443 |
| 2 | 2 | 73.7 | 11 | 1246 | | 78.014 |
| 3 | 2 | 72.3 | 11 | 1340 | | 140.32 |
| 4 | 3 | 75.4 | 11 | 1728 | 1689 | 240.95 |
| 5 | 1 | 56.1 | 11 | | | 761.41 |
| 6 | 2 | 82.9 | 11 | 1532 | | 366.54 |
| 7 | 3 | 58.7 | 11 | 1546 | 1469 | 440.53 |
| 8 | 2 | 84.4 | 11 | 1305 | | 609.73 |
| 9 | 2 | 50.2 | 11 | 1863 | | 335.65 |
| 10 | 2 | 58.6 | 11 | 1908 | | 751.09 |
| 11 | 2 | 54.1 | 11 | 1599 | | 745.67 |
| 12 | 2 | 56 | 11 | 1906 | | 608.79 |
| 13 | 1 | 88 | 11 | | | 456.7 |
| 14 | 1 | 93 | 11 | | | 438.7 |
| 15 | 2 | 82.9 | 11 | 1146 | | 550.3 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 10

Bursts in Trial: 19

| Burst | Number of Pulses | Pulse Width (µsec) | Chirp Width (MHz) | Pulse 1-to-2 PRI (µsec) | Pulse 2-to-3 PRI (µsec) | Start Location Within Interval (msec) |
|-------|------------------|--------------------|-------------------|-------------------------|-------------------------|---------------------------------------|
| 1 | 3 | 84.6 | 11 | 1386 | 1359 | 527.818 |
| 2 | 2 | 58.4 | 11 | 1466 | | 140.853 |
| 3 | 2 | 69.2 | 11 | 1739 | | 257.562 |
| 4 | 3 | 77.8 | 11 | 1408 | 1422 | 139.003 |
| 5 | 1 | 56.7 | 11 | | | 157.684 |
| 6 | 2 | 51.1 | 11 | 1827 | | 554.595 |
| 7 | 1 | 57.7 | 11 | | | 563.736 |
| 8 | 2 | 89.5 | 11 | 1509 | | 40.497 |
| 9 | 2 | 95.1 | 11 | 1317 | | 378.528 |
| 10 | 3 | 61.9 | 11 | 1639 | 1152 | 200.689 |
| 11 | 3 | 92.6 | 11 | 1131 | 1811 | 499.461 |
| 12 | 2 | 60 | 11 | 1670 | | 471.732 |
| 13 | 2 | 82.8 | 11 | 1319 | | 540.203 |
| 14 | 2 | 99.1 | 11 | 1805 | | 211.674 |
| 15 | 2 | 68.9 | 11 | 1879 | | 503.015 |
| 16 | 2 | 51.2 | 11 | 1338 | | 293.506 |
| 17 | 2 | 54.9 | 11 | 1246 | | 136.537 |
| 18 | 2 | 59.1 | 11 | 1679 | | 355.058 |
| 19 | 3 | 83 | 11 | 1560 | 1607 | 263.579 |



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 11

Bursts in Trial: 13

| Burst | Number of Pulses | Pulse Width (µsec) | Chirp Width (MHz) | Pulse 1-to-2 PRI (µsec) | Pulse 2-to-3 PRI (µsec) | Start Location Within Interval (msec) |
|-------|------------------|--------------------|-------------------|-------------------------|-------------------------|---------------------------------------|
| 1 | 3 | 56.6 | 7 | 1115 | 1264 | 317.112 |
| 2 | 3 | 64.3 | 7 | 1714 | 1955 | 70.372 |
| 3 | 2 | 55.4 | 7 | 1131 | | 911.136 |
| 4 | 2 | 90.1 | 7 | 1363 | | 916.989 |
| 5 | 2 | 62.1 | 7 | 1986 | | 184.262 |
| 6 | 1 | 61 | 7 | | | 103.095 |
| 7 | 2 | 67 | 7 | 1815 | | 627.448 |
| 8 | 3 | 50.4 | 7 | 1427 | 1814 | 171.372 |
| 9 | 3 | 74.2 | 7 | 1619 | 1192 | 300.385 |
| 10 | 3 | 55.4 | 7 | 1910 | 1908 | 138.248 |
| 11 | 3 | 92 | 7 | 1221 | 1229 | 902.831 |
| 12 | 1 | 58.9 | 7 | | | 273.654 |
| 13 | 3 | 52.5 | 7 | 1079 | 1639 | 898.377 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 12

Bursts in Trial: 19

| Burst | Number of Pulses | Pulse Width (µsec) | Chirp Width (MHz) | Pulse 1-to-2 PRI (µsec) | Pulse 2-to-3 PRI (µsec) | Start Location Within Interval (msec) |
|-------|------------------|--------------------|-------------------|-------------------------|-------------------------|---------------------------------------|
| 1 | 3 | 65.8 | 16 | 1370 | 1781 | 506.742 |
| 2 | 2 | 89.1 | 16 | 1702 | | 463.591 |
| 3 | 2 | 92.8 | 16 | 1818 | | 2.552 |
| 4 | 3 | 92.5 | 16 | 1636 | 1464 | 264.283 |
| 5 | 2 | 74.1 | 16 | 1510 | | 381.874 |
| 6 | 2 | 69.2 | 16 | 1251 | | 158.395 |
| 7 | 2 | 53.2 | 16 | 1981 | | 114.986 |
| 8 | 2 | 94.7 | 16 | 1275 | | 538.847 |
| 9 | 2 | 67 | 16 | 1058 | | 387.398 |
| 10 | 2 | 97.7 | 16 | 1443 | | 142.159 |
| 11 | 2 | 91.7 | 16 | 1775 | | 534.841 |
| 12 | 1 | 99.8 | 16 | | | 286.302 |
| 13 | 2 | 70.8 | 16 | 1737 | | 46.183 |
| 14 | 1 | 85.1 | 16 | | | 451.024 |
| 15 | 3 | 55 | 16 | 1963 | 1051 | 620.495 |
| 16 | 2 | 57.3 | 16 | 1180 | | 27.476 |
| 17 | 2 | 97.7 | 16 | 1393 | | 180.237 |
| 18 | 3 | 85.2 | 16 | 1558 | 1497 | 126.358 |
| 19 | 2 | 61.3 | 16 | 1944 | | 264.779 |
| | | | | | | |



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 13

Bursts in Trial: 13

| Burst | Number of Pulses | Pulse Width (µsec) | Chirp Width (MHz) | Pulse 1-to-2 PRI (µsec) | Pulse 2-to-3 PRI (µsec) | Start Location Within Interval (msec) |
|-------|------------------|--------------------|-------------------|-------------------------|-------------------------|---------------------------------------|
| 1 | 2 | 72.9 | 6 | 1582 | | 857.999 |
| 2 | 2 | 53.5 | 6 | 1800 | | 307.153 |
| 3 | 2 | 86.2 | 6 | 1515 | | 299.446 |
| 4 | 1 | 69.9 | 6 | | | 825.929 |
| 5 | 2 | 54.7 | 6 | 1444 | | 375.512 |
| 6 | 2 | 57 | 6 | 1892 | | 684.505 |
| 7 | 2 | 61.4 | 6 | 1285 | | 501.838 |
| 8 | 1 | 73.9 | 6 | | | 572.762 |
| 9 | 2 | 53.1 | 6 | 1587 | | 141.855 |
| 10 | 1 | 78.7 | 6 | | | 106.848 |
| 11 | 2 | 84.4 | 6 | 1717 | | 441.771 |
| 12 | 2 | 87.9 | 6 | 1225 | | 312.054 |
| 13 | 2 | 70.1 | 6 | 1656 | | 611.177 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 14

Bursts in Trial: 8

| Burst | Number of Pulses | Pulse Width (µsec) | Chirp Width (MHz) | Pulse 1-to-2 PRI (µsec) | Pulse 2-to-3 PRI (µsec) | Start Location Within Interval (msec) |
|-------|------------------|--------------------|-------------------|-------------------------|-------------------------|---------------------------------------|
| 1 | 2 | 53.1 | 17 | 1044 | | 323.119 |
| 2 | 3 | 63.5 | 17 | 1735 | 1580 | 67.44 |
| 3 | 3 | 65.1 | 17 | 1512 | 1565 | 887.85 |
| 4 | 3 | 84.3 | 17 | 1071 | 1664 | 303.07 |
| 5 | 2 | 60.7 | 17 | 1139 | | 942.49 |
| 6 | 3 | 82.6 | 17 | 1013 | 1396 | 112.17 |
| 7 | 2 | 87.1 | 17 | 1516 | | 1434.6 |
| 8 | 3 | 56.5 | 17 | 1695 | 1797 | 1125.4 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 15

Bursts in Trial: 17

| Burst | Number of Pulses | Pulse Width (µsec) | Chirp Width (MHz) | Pulse 1-to-2 PRI (µsec) | Pulse 2-to-3 PRI (µsec) | Start Location Within Interval (msec) |
|-------|------------------|--------------------|-------------------|-------------------------|-------------------------|---------------------------------------|
| 1 | 3 | 92.3 | 7 | 1341 | 1090 | 575.501 |
| 2 | 2 | 92.7 | 7 | 1074 | | 304.628 |
| 3 | 1 | 70.1 | 7 | | | 48.425 |
| 4 | 3 | 56.1 | 7 | 1757 | 1801 | 452.433 |
| 5 | 2 | 81.5 | 7 | 1361 | | 480.591 |
| 6 | 1 | 64.9 | 7 | | | 565.558 |
| 7 | 1 | 80.7 | 7 | | | 7.286 |
| 8 | 1 | 92.5 | 7 | | | 143.824 |
| 9 | 2 | 59.9 | 7 | 1033 | | 652.101 |
| 10 | 1 | 90.4 | 7 | | | 413.319 |
| 11 | 2 | 78.1 | 7 | 1423 | | 552.196 |
| 12 | 2 | 50 | 7 | 1022 | | 688.994 |
| 13 | 3 | 97.6 | 7 | 1344 | 1582 | 544.282 |
| 14 | 2 | 73.1 | 7 | 1162 | | 497.979 |
| 15 | 2 | 86 | 7 | 1586 | | 633.347 |
| 16 | 2 | 84.6 | 7 | 1519 | | 595.065 |
| 17 | 2 | 58 | 7 | 1865 | | 307.582 |
| | | | | | | |
| | | | | | | |
| | | | | | | |



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 16

Bursts in Trial: 18

| Burst | Number of Pulses | Pulse Width (µsec) | Chirp Width (MHz) | Pulse 1-to-2 PRI (µsec) | Pulse 2-to-3 PRI (µsec) | Start Location Within Interval (msec) |
|-------|------------------|--------------------|-------------------|-------------------------|-------------------------|---------------------------------------|
| 1 | 2 | 58.4 | 10 | 1906 | | 419.953 |
| 2 | 1 | 66.5 | 10 | | | 399.613 |
| 3 | 2 | 58.2 | 10 | 1045 | | 580.947 |
| 4 | 2 | 71.5 | 10 | 1732 | | 527.18 |
| 5 | 2 | 68.5 | 10 | 1924 | | 318.793 |
| 6 | 2 | 70.9 | 10 | 1104 | | 607.277 |
| 7 | 2 | 77.7 | 10 | 1691 | | 425.37 |
| 8 | 2 | 68 | 10 | 1487 | | 643.153 |
| 9 | 2 | 77.4 | 10 | 1829 | | 651.417 |
| 10 | 2 | 58.9 | 10 | 1192 | | 469.41 |
| 11 | 1 | 78 | 10 | | | 627.773 |
| 12 | 2 | 97 | 10 | 1445 | | 24.347 |
| 13 | 3 | 70.6 | 10 | 1375 | 1198 | 345.11 |
| 14 | 3 | 60.1 | 10 | 1585 | 1259 | 623.973 |
| 15 | 1 | 97.9 | 10 | | | 303.137 |
| 16 | 2 | 87.4 | 10 | 1392 | | 180.1 |
| 17 | 2 | 77.1 | 10 | 1949 | | 648.833 |
| 18 | 2 | 95.1 | 10 | 1750 | | 59.367 |
| | | | | | | |
| | | | | | | |




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 17

Bursts in Trial: 10

| Burst | Number of Pulses | Pulse Width (µsec) | Chirp Width (MHz) | Pulse 1-to-2 PRI (µsec) | Pulse 2-to-3 PRI (µsec) | Start Location Within Interval (msec) |
|-------|------------------|--------------------|-------------------|-------------------------|-------------------------|---------------------------------------|
| 1 | 2 | 99.7 | 13 | 1607 | | 447.839 |
| 2 | 2 | 63.2 | 13 | 1463 | | 172.03 |
| 3 | 1 | 53.3 | 13 | | | 558.54 |
| 4 | 1 | 61.1 | 13 | | | 3.86 |
| 5 | 2 | 58.6 | 13 | 1663 | | 988.42 |
| 6 | 3 | 73.9 | 13 | 1634 | 1279 | 792.22 |
| 7 | 1 | 61.6 | 13 | | | 344.06 |
| 8 | 2 | 55.6 | 13 | 1763 | | 242.19 |
| 9 | 2 | 63.7 | 13 | 1861 | | 1124.2 |
| 10 | 2 | 88.6 | 13 | 1943 | | 641.4 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 18

Bursts in Trial: 18

| Burst | Number of Pulses | Pulse Width (µsec) | Chirp Width (MHz) | Pulse 1-to-2 PRI (µsec) | Pulse 2-to-3 PRI (µsec) | Start Location Within Interval (msec) |
|-------|------------------|--------------------|-------------------|-------------------------|-------------------------|---------------------------------------|
| 1 | 1 | 60.8 | 5 | | | 337.085 |
| 2 | 2 | 50.3 | 5 | 1038 | | 588.593 |
| 3 | 2 | 88.5 | 5 | 1902 | | 12.627 |
| 4 | 1 | 88.3 | 5 | | | 211.08 |
| 5 | 2 | 65.4 | 5 | 1433 | | 1.063 |
| 6 | 3 | 86.9 | 5 | 1479 | 1408 | 128.407 |
| 7 | 2 | 66.8 | 5 | 1016 | | 56.52 |
| 8 | 2 | 68.4 | 5 | 1646 | | 640.693 |
| 9 | 3 | 78.7 | 5 | 1805 | 1951 | 372.767 |
| 10 | 2 | 59.1 | 5 | 1766 | | 632.93 |
| 11 | 2 | 85.6 | 5 | 1765 | | 157.573 |
| 12 | 2 | 72.4 | 5 | 1700 | | 443.127 |
| 13 | 2 | 62.2 | 5 | 1062 | | 218.32 |
| 14 | 1 | 63.5 | 5 | | | 114.013 |
| 15 | 3 | 67.5 | 5 | 1725 | 1629 | 366.647 |
| 16 | 1 | 80.8 | 5 | | | 641.5 |
| 17 | 3 | 99 | 5 | 1971 | 1610 | 274.933 |
| 18 | 1 | 96.9 | 5 | | | 598.367 |
| | | | | | | |
| | | | | | | |




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 19

Bursts in Trial: 14

| Burst | Number of Pulses | Pulse Width (µsec) | Chirp Width (MHz) | Pulse 1-to-2 PRI (µsec) | Pulse 2-to-3 PRI (µsec) | Start Location Within Interval (msec) |
|-------|------------------|--------------------|-------------------|-------------------------|-------------------------|---------------------------------------|
| 1 | 1 | 95.5 | 16 | | | 613.907 |
| 2 | 2 | 63.9 | 16 | 1850 | | 101.075 |
| 3 | 2 | 64 | 16 | 1162 | | 226.054 |
| 4 | 3 | 93.9 | 16 | 1624 | 1383 | 293.061 |
| 5 | 1 | 96.3 | 16 | | | 781.879 |
| 6 | 1 | 87.4 | 16 | | | 250.506 |
| 7 | 2 | 60.6 | 16 | 1630 | | 18.133 |
| 8 | 3 | 67.2 | 16 | 1159 | 1139 | 509.77 |
| 9 | 2 | 76.9 | 16 | 1461 | | 284.427 |
| 10 | 2 | 84.6 | 16 | 1986 | | 76.674 |
| 11 | 3 | 75.1 | 16 | 1528 | 1361 | 658.931 |
| 12 | 2 | 66 | 16 | 1675 | | 778.629 |
| 13 | 2 | 52.1 | 16 | 1462 | | 398.086 |
| 14 | 3 | 75.9 | 16 | 1294 | 1577 | 832.943 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 20

Bursts in Trial: 14

| Burst | Number of Pulses | Pulse Width (µsec) | Chirp Width (MHz) | Pulse 1-to-2 PRI (µsec) | Pulse 2-to-3 PRI (µsec) | Start Location Within Interval (msec) |
|-------|------------------|--------------------|-------------------|-------------------------|-------------------------|---------------------------------------|
| 1 | 2 | 92.8 | 9 | 1374 | | 618.373 |
| 2 | 3 | 88.1 | 9 | 1298 | 1354 | 815.207 |
| 3 | 2 | 62 | 9 | 1632 | | 15.134 |
| 4 | 2 | 61.9 | 9 | 1474 | | 111.051 |
| 5 | 3 | 51.8 | 9 | 1332 | 1966 | 540.979 |
| 6 | 1 | 69.1 | 9 | | | 736.356 |
| 7 | 3 | 86.2 | 9 | 1059 | 1259 | 302.713 |
| 8 | 3 | 74.7 | 9 | 1179 | 1203 | 585.93 |
| 9 | 2 | 97 | 9 | 1107 | | 391.597 |
| 10 | 3 | 96.9 | 9 | 1404 | 1939 | 130.744 |
| 11 | 2 | 96.2 | 9 | 1076 | | 550.371 |
| 12 | 2 | 99.6 | 9 | 1587 | | 333.199 |
| 13 | 1 | 53.1 | 9 | | | 483.886 |
| 14 | 3 | 82.1 | 9 | 1279 | 1030 | 581.943 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 21

Bursts in Trial: 19

| Burst | Number of Pulses | Pulse Width (µsec) | Chirp Width (MHz) | Pulse 1-to-2 PRI (µsec) | Pulse 2-to-3 PRI (µsec) | Start Location Within Interval (msec) |
|-------|------------------|--------------------|-------------------|-------------------------|-------------------------|---------------------------------------|
| 1 | 2 | 76.3 | 8 | 1166 | | 359.301 |
| 2 | 1 | 51.8 | 8 | | | 432.191 |
| 3 | 2 | 90.4 | 8 | 1574 | | 153.282 |
| 4 | 1 | 76 | 8 | | | 509.163 |
| 5 | 3 | 90.9 | 8 | 1751 | 1818 | 518.204 |
| 6 | 2 | 78 | 8 | 1488 | | 602.315 |
| 7 | 2 | 90 | 8 | 1307 | | 544.596 |
| 8 | 1 | 85.5 | 8 | | | 354.347 |
| 9 | 3 | 61 | 8 | 1831 | 1787 | 553.088 |
| 10 | 2 | 61.3 | 8 | 1945 | | 490.349 |
| 11 | 3 | 77.6 | 8 | 1458 | 1278 | 246.591 |
| 12 | 3 | 98.7 | 8 | 1687 | 1781 | 412.382 |
| 13 | 1 | 96.7 | 8 | | | 437.113 |
| 14 | 1 | 79.6 | 8 | | | 314.424 |
| 15 | 2 | 59.1 | 8 | 1539 | | 527.025 |
| 16 | 2 | 98.2 | 8 | 1077 | | 198.546 |
| 17 | 2 | 85.5 | 8 | 1004 | | 18.237 |
| 18 | 1 | 91.2 | 8 | | | 131.758 |
| 19 | 2 | 96.4 | 8 | 1630 | | 2.779 |



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 22

Bursts in Trial: 9

| Burst | Number of Pulses | Pulse Width (µsec) | Chirp Width (MHz) | Pulse 1-to-2 PRI (µsec) | Pulse 2-to-3 PRI (µsec) | Start Location Within Interval (msec) |
|-------|------------------|--------------------|-------------------|-------------------------|-------------------------|---------------------------------------|
| 1 | 3 | 79.7 | 8 | 1197 | 1886 | 360.346 |
| 2 | 2 | 87.3 | 8 | 1038 | | 1012.267 |
| 3 | 2 | 65.5 | 8 | 1323 | | 209.173 |
| 4 | 3 | 84.3 | 8 | 1308 | 1316 | 644.29 |
| 5 | 3 | 69.8 | 8 | 1098 | 1838 | 393.277 |
| 6 | 1 | 55.8 | 8 | | | 1169.433 |
| 7 | 3 | 85.5 | 8 | 1512 | 1267 | 621.45 |
| 8 | 2 | 86.8 | 8 | 1009 | | 193.067 |
| 9 | 2 | 69.5 | 8 | 1708 | | 1077.033 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |

Empty rectangular box for additional parameters or notes.


TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 23

Bursts in Trial: 18

| Burst | Number of Pulses | Pulse Width (µsec) | Chirp Width (MHz) | Pulse 1-to-2 PRI (µsec) | Pulse 2-to-3 PRI (µsec) | Start Location Within Interval (msec) |
|-------|------------------|--------------------|-------------------|-------------------------|-------------------------|---------------------------------------|
| 1 | 1 | 71.3 | 10 | | | 120.172 |
| 2 | 1 | 65.9 | 10 | | | 69.892 |
| 3 | 1 | 87.4 | 10 | | | 203.547 |
| 4 | 2 | 81.3 | 10 | 1850 | | 572.23 |
| 5 | 2 | 66.2 | 10 | 1296 | | 246.943 |
| 6 | 3 | 92 | 10 | 1864 | 1805 | 527.537 |
| 7 | 3 | 55.3 | 10 | 1334 | 1630 | 517.33 |
| 8 | 2 | 55.2 | 10 | 1776 | | 177.513 |
| 9 | 3 | 87.8 | 10 | 1662 | 1695 | 510.027 |
| 10 | 2 | 67.8 | 10 | 1564 | | 232.92 |
| 11 | 2 | 71.3 | 10 | 1022 | | 150.563 |
| 12 | 2 | 92.2 | 10 | 1343 | | 78.637 |
| 13 | 3 | 83.5 | 10 | 1320 | 1729 | 211.58 |
| 14 | 2 | 89.5 | 10 | 1552 | | 501.493 |
| 15 | 2 | 58.5 | 10 | 1680 | | 367.177 |
| 16 | 1 | 79 | 10 | | | 98.2 |
| 17 | 2 | 97 | 10 | 1454 | | 433.333 |
| 18 | 3 | 93.7 | 10 | 1717 | 1141 | 607.067 |
| | | | | | | |
| | | | | | | |



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 24

Bursts in Trial: 11

| Burst | Number of Pulses | Pulse Width (µsec) | Chirp Width (MHz) | Pulse 1-to-2 PRI (µsec) | Pulse 2-to-3 PRI (µsec) | Start Location Within Interval (msec) |
|-------|------------------|--------------------|-------------------|-------------------------|-------------------------|---------------------------------------|
| 1 | 2 | 85.3 | 19 | 1656 | | 1040.42 |
| 2 | 1 | 72.6 | 19 | | | 661.231 |
| 3 | 2 | 76.2 | 19 | 1489 | | 806.532 |
| 4 | 3 | 55.9 | 19 | 1389 | 1417 | 393.663 |
| 5 | 2 | 81.6 | 19 | 1973 | | 282.044 |
| 6 | 1 | 83.8 | 19 | | | 1081.195 |
| 7 | 3 | 53.9 | 19 | 1071 | 1084 | 322.645 |
| 8 | 2 | 93.3 | 19 | 1918 | | 505.776 |
| 9 | 1 | 91.5 | 19 | | | 402.217 |
| 10 | 2 | 62.3 | 19 | 1236 | | 266.618 |
| 11 | 3 | 98 | 19 | 1222 | 1537 | 397.909 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 25

Bursts in Trial: 19

| Burst | Number of Pulses | Pulse Width (µsec) | Chirp Width (MHz) | Pulse 1-to-2 PRI (µsec) | Pulse 2-to-3 PRI (µsec) | Start Location Within Interval (msec) |
|-------|------------------|--------------------|-------------------|-------------------------|-------------------------|---------------------------------------|
| 1 | 2 | 50.5 | 6 | 1399 | | 329.126 |
| 2 | 2 | 79.4 | 6 | 1553 | | 232.639 |
| 3 | 2 | 69.3 | 6 | 1959 | | 203.412 |
| 4 | 3 | 83.8 | 6 | 1216 | 1501 | 350.783 |
| 5 | 2 | 56.2 | 6 | 1131 | | 217.664 |
| 6 | 1 | 95.4 | 6 | | | 586.705 |
| 7 | 1 | 76.9 | 6 | | | 220.676 |
| 8 | 2 | 65.9 | 6 | 1823 | | 200.837 |
| 9 | 1 | 82.1 | 6 | | | 623.348 |
| 10 | 2 | 64.8 | 6 | 1717 | | 448.649 |
| 11 | 2 | 64.9 | 6 | 1053 | | 464.841 |
| 12 | 2 | 74.5 | 6 | 1702 | | 507.062 |
| 13 | 2 | 93.6 | 6 | 1968 | | 60.883 |
| 14 | 2 | 60.2 | 6 | 1311 | | 417.744 |
| 15 | 2 | 75.4 | 6 | 1558 | | 571.825 |
| 16 | 1 | 69 | 6 | | | 618.716 |
| 17 | 1 | 79.6 | 6 | | | 259.037 |
| 18 | 2 | 56.9 | 6 | 1015 | | 259.358 |
| 19 | 2 | 68.3 | 6 | 1319 | | 609.579 |




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 26

Bursts in Trial: 19

| Burst | Number of Pulses | Pulse Width (µsec) | Chirp Width (MHz) | Pulse 1-to-2 PRI (µsec) | Pulse 2-to-3 PRI (µsec) | Start Location Within Interval (msec) |
|-------|------------------|--------------------|-------------------|-------------------------|-------------------------|---------------------------------------|
| 1 | 2 | 76 | 5 | 1314 | | 340.956 |
| 2 | 2 | 84.1 | 5 | 1863 | | 421.851 |
| 3 | 2 | 97.9 | 5 | 1573 | | 560.232 |
| 4 | 1 | 54 | 5 | | | 271.623 |
| 5 | 2 | 96.8 | 5 | 1495 | | 473.634 |
| 6 | 2 | 84.5 | 5 | 1142 | | 421.915 |
| 7 | 1 | 69.5 | 5 | | | 58.156 |
| 8 | 2 | 50.7 | 5 | 1380 | | 391.037 |
| 9 | 1 | 66.7 | 5 | | | 276.928 |
| 10 | 2 | 51.1 | 5 | 1092 | | 235.319 |
| 11 | 2 | 69.4 | 5 | 1173 | | 483.121 |
| 12 | 2 | 76.2 | 5 | 1405 | | 209.762 |
| 13 | 1 | 67.3 | 5 | | | 285.433 |
| 14 | 1 | 95.4 | 5 | | | 479.904 |
| 15 | 2 | 60.3 | 5 | 1046 | | 552.045 |
| 16 | 3 | 54.1 | 5 | 1058 | 1626 | 453.016 |
| 17 | 3 | 64.6 | 5 | 1370 | 1764 | 497.237 |
| 18 | 2 | 81 | 5 | 1330 | | 535.258 |
| 19 | 1 | 68.9 | 5 | | | 219.579 |



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 27

Bursts in Trial: 12

| Burst | Number of Pulses | Pulse Width (µsec) | Chirp Width (MHz) | Pulse 1-to-2 PRI (µsec) | Pulse 2-to-3 PRI (µsec) | Start Location Within Interval (msec) |
|-------|------------------|--------------------|-------------------|-------------------------|-------------------------|---------------------------------------|
| 1 | 1 | 50.1 | 8 | | | 102.645 |
| 2 | 2 | 87.8 | 8 | 1137 | | 470.64 |
| 3 | 2 | 71.1 | 8 | 1315 | | 281.9 |
| 4 | 2 | 87.2 | 8 | 1905 | | 965.29 |
| 5 | 2 | 78.9 | 8 | 1242 | | 547.64 |
| 6 | 2 | 95 | 8 | 1982 | | 113.19 |
| 7 | 2 | 75.5 | 8 | 1877 | | 932.61 |
| 8 | 2 | 90.4 | 8 | 1452 | | 539.06 |
| 9 | 2 | 71.6 | 8 | 1859 | | 193.73 |
| 10 | 3 | 85.3 | 8 | 1298 | 1098 | 244.31 |
| 11 | 3 | 64.4 | 8 | 1482 | 1415 | 314.4 |
| 12 | 1 | 66.4 | 8 | | | 334.6 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 28

Bursts in Trial: 19

| Burst | Number of Pulses | Pulse Width (µsec) | Chirp Width (MHz) | Pulse 1-to-2 PRI (µsec) | Pulse 2-to-3 PRI (µsec) | Start Location Within Interval (msec) |
|-------|------------------|--------------------|-------------------|-------------------------|-------------------------|---------------------------------------|
| 1 | 2 | 70.1 | 19 | 1821 | | 321.103 |
| 2 | 2 | 50.2 | 19 | 1131 | | 366.253 |
| 3 | 2 | 95.1 | 19 | 1836 | | 591.682 |
| 4 | 1 | 82.1 | 19 | | | 218.113 |
| 5 | 3 | 77.4 | 19 | 1953 | 1672 | 80.864 |
| 6 | 1 | 84.4 | 19 | | | 574.145 |
| 7 | 3 | 82.6 | 19 | 1041 | 1095 | 146.226 |
| 8 | 2 | 57.8 | 19 | 1489 | | 54.207 |
| 9 | 2 | 55.3 | 19 | 1640 | | 167.538 |
| 10 | 2 | 56.6 | 19 | 1904 | | 415.859 |
| 11 | 2 | 86.7 | 19 | 1605 | | 325.021 |
| 12 | 2 | 94.5 | 19 | 1510 | | 52.592 |
| 13 | 3 | 73.5 | 19 | 1289 | 1738 | 354.833 |
| 14 | 1 | 91.2 | 19 | | | 355.834 |
| 15 | 3 | 54.7 | 19 | 1108 | 1042 | 156.665 |
| 16 | 2 | 75.9 | 19 | 1842 | | 617.916 |
| 17 | 2 | 72.5 | 19 | 1796 | | 416.437 |
| 18 | 3 | 86.4 | 19 | 1867 | 1300 | 447.358 |
| 19 | 2 | 67.6 | 19 | 1181 | | 389.379 |




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 29

Bursts in Trial: 20

| Burst | Number of Pulses | Pulse Width (µsec) | Chirp Width (MHz) | Pulse 1-to-2 PRI (µsec) | Pulse 2-to-3 PRI (µsec) | Start Location Within Interval (msec) |
|-------|------------------|--------------------|-------------------|-------------------------|-------------------------|---------------------------------------|
| 1 | 1 | 62.5 | 11 | | | 167.425 |
| 2 | 3 | 87.1 | 11 | 1334 | 1398 | 185.521 |
| 3 | 2 | 70.4 | 11 | 1294 | | 299.29 |
| 4 | 3 | 79.1 | 11 | 1031 | 1413 | 249.57 |
| 5 | 3 | 64.1 | 11 | 1601 | 1392 | 416.11 |
| 6 | 3 | 63.6 | 11 | 1642 | 1191 | 52.23 |
| 7 | 3 | 59.6 | 11 | 1393 | 1305 | 476.84 |
| 8 | 3 | 66.1 | 11 | 1651 | 1066 | 137.69 |
| 9 | 1 | 59.1 | 11 | | | 487.68 |
| 10 | 1 | 90.9 | 11 | | | 86.61 |
| 11 | 3 | 96.8 | 11 | 1786 | 1237 | 46.32 |
| 12 | 2 | 97.9 | 11 | 1772 | | 355.07 |
| 13 | 2 | 71.5 | 11 | 1028 | | 583.67 |
| 14 | 2 | 64.5 | 11 | 1617 | | 218.93 |
| 15 | 2 | 82 | 11 | 1349 | | 360.73 |
| 16 | 2 | 65.2 | 11 | 1419 | | 148.28 |
| 17 | 2 | 54.2 | 11 | 1831 | | 274.15 |
| 18 | 2 | 92.7 | 11 | 1883 | | 232.5 |
| 19 | 1 | 72.6 | 11 | | | 539.6 |
| 20 | 2 | 62.2 | 11 | 1227 | | 469.2 |



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 30

Bursts in Trial: 15

| Burst | Number of Pulses | Pulse Width (µsec) | Chirp Width (MHz) | Pulse 1-to-2 PRI (µsec) | Pulse 2-to-3 PRI (µsec) | Start Location Within Interval (msec) |
|-------|------------------|--------------------|-------------------|-------------------------|-------------------------|---------------------------------------|
| 1 | 2 | 98.4 | 10 | 1468 | | 452.373 |
| 2 | 2 | 73.1 | 10 | 1576 | | 206.22 |
| 3 | 1 | 74 | 10 | | | 394.59 |
| 4 | 3 | 76.5 | 10 | 1898 | 1196 | 685.63 |
| 5 | 2 | 89.4 | 10 | 1292 | | 134.94 |
| 6 | 3 | 83.8 | 10 | 1703 | 1871 | 593.24 |
| 7 | 1 | 93.1 | 10 | | | 657.94 |
| 8 | 2 | 87 | 10 | 1276 | | 793.25 |
| 9 | 3 | 50.6 | 10 | 1360 | 1927 | 129.24 |
| 10 | 3 | 78.1 | 10 | 1876 | 1576 | 342.65 |
| 11 | 1 | 65 | 10 | | | 328.08 |
| 12 | 3 | 73 | 10 | 1429 | 1180 | 83.5 |
| 13 | 2 | 91.4 | 10 | 1993 | | 403.8 |
| 14 | 3 | 89 | 10 | 1003 | 1924 | 75.6 |
| 15 | 3 | 83.9 | 10 | 1510 | 1249 | 304.9 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |



Product : Wireless module
 Test Item : Statistical Performance Check
 Radar Type : Type 5
 Test Mode : Normal (802.11ac-40 MHz)
 Test Date : 2024/01/05

| Center Freq: 5510MHz | | | Low Edge: 5491MHz | | High Edge: 5529MHz | |
|---------------------------------|-------|--------|---------------------|--|---------------------------------|--|
| Trial # | Chirp | Offset | VSG Frequency (MHz) | *Filename | 1= Detection 0= No Detection | |
| 1 | 8 | | 5510 | Statistical_Check_RandParm_For_Radar_Type_5_1_trail | 1 | |
| 2 | 6 | | 5510 | Statistical_Check_RandParm_For_Radar_Type_5_2_trail | 1 | |
| 3 | 19 | | 5510 | Statistical_Check_RandParm_For_Radar_Type_5_3_trail | 1 | |
| 4 | 16 | | 5510 | Statistical_Check_RandParm_For_Radar_Type_5_4_trail | 1 | |
| 5 | 7 | | 5510 | Statistical_Check_RandParm_For_Radar_Type_5_5_trail | 1 | |
| 6 | 13 | | 5510 | Statistical_Check_RandParm_For_Radar_Type_5_6_trail | 1 | |
| 7 | 15 | | 5510 | Statistical_Check_RandParm_For_Radar_Type_5_7_trail | 1 | |
| 8 | 8 | | 5510 | Statistical_Check_RandParm_For_Radar_Type_5_8_trail | 1 | |
| 9 | 17 | | 5510 | Statistical_Check_RandParm_For_Radar_Type_5_9_trail | 1 | |
| 10 | 8 | | 5510 | Statistical_Check_RandParm_For_Radar_Type_5_10_trail | 1 | |
| 11 | 8 | 3.2 | 5494.2 | Statistical_Check_RandParm_For_Radar_Type_5_11_trail | 1 | |
| 12 | 13 | 5.2 | 5496.2 | Statistical_Check_RandParm_For_Radar_Type_5_12_trail | 0 | |
| 13 | 17 | 6.8 | 5497.8 | Statistical_Check_RandParm_For_Radar_Type_5_13_trail | 0 | |
| 14 | 7 | 2.8 | 5493.8 | Statistical_Check_RandParm_For_Radar_Type_5_14_trail | 1 | |
| 15 | 17 | 6.8 | 5497.8 | Statistical_Check_RandParm_For_Radar_Type_5_15_trail | 0 | |
| 16 | 8 | 3.2 | 5494.2 | Statistical_Check_RandParm_For_Radar_Type_5_16_trail | 0 | |
| 17 | 6 | 2.4 | 5493.4 | Statistical_Check_RandParm_For_Radar_Type_5_17_trail | 1 | |
| 18 | 13 | 5.2 | 5496.2 | Statistical_Check_RandParm_For_Radar_Type_5_18_trail | 0 | |
| 19 | 8 | 3.2 | 5494.2 | Statistical_Check_RandParm_For_Radar_Type_5_19_trail | 1 | |
| 20 | 14 | 5.6 | 5496.6 | Statistical_Check_RandParm_For_Radar_Type_5_20_trail | 0 | |
| 21 | 12 | 4.8 | 5524.2 | Statistical_Check_RandParm_For_Radar_Type_5_21_trail | 1 | |
| 22 | 8 | 3.2 | 5525.8 | Statistical_Check_RandParm_For_Radar_Type_5_22_trail | 1 | |
| 23 | 13 | 5.2 | 5523.8 | Statistical_Check_RandParm_For_Radar_Type_5_23_trail | 1 | |
| 24 | 17 | 6.8 | 5522.2 | Statistical_Check_RandParm_For_Radar_Type_5_24_trail | 1 | |
| 25 | 13 | 5.2 | 5523.8 | Statistical_Check_RandParm_For_Radar_Type_5_25_trail | 1 | |
| 26 | 18 | 7.2 | 5521.8 | Statistical_Check_RandParm_For_Radar_Type_5_26_trail | 1 | |
| 27 | 7 | 2.8 | 5526.2 | Statistical_Check_RandParm_For_Radar_Type_5_27_trail | 1 | |
| 28 | 6 | 2.4 | 5526.6 | Statistical_Check_RandParm_For_Radar_Type_5_28_trail | 1 | |
| 29 | 18 | 7.2 | 5521.8 | Statistical_Check_RandParm_For_Radar_Type_5_29_trail | 1 | |
| 30 | 11 | 4.4 | 5524.6 | Statistical_Check_RandParm_For_Radar_Type_5_30_trail | 1 | |
| Detection Percentage (%) | | | | | 80.00 | |
| Limit | | | | | ≥ 80 | |

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 1

Bursts in Trial: 14

| Burst | Number of Pulses | Pulse Width (µsec) | Chirp Width (MHz) | Pulse 1-to-2 PRI (µsec) | Pulse 2-to-3 PRI (µsec) | Start Location Within Interval (msec) |
|-------|------------------|--------------------|-------------------|-------------------------|-------------------------|---------------------------------------|
| 1 | 2 | 53.1 | 8 | 1756 | | 829.57 |
| 2 | 3 | 60.9 | 8 | 1309 | 1485 | 135.433 |
| 3 | 2 | 51.8 | 8 | 1100 | | 462.424 |
| 4 | 3 | 50.4 | 8 | 1436 | 1390 | 642.101 |
| 5 | 2 | 76.1 | 8 | 1135 | | 474.129 |
| 6 | 2 | 54 | 8 | 1372 | | 482.526 |
| 7 | 2 | 82 | 8 | 1525 | | 587.073 |
| 8 | 1 | 90.7 | 8 | | | 121.7 |
| 9 | 3 | 82.8 | 8 | 1407 | 1923 | 4.007 |
| 10 | 3 | 52 | 8 | 1087 | 1966 | 12.844 |
| 11 | 3 | 90.6 | 8 | 1653 | 1413 | 77.451 |
| 12 | 2 | 86 | 8 | 1390 | | 316.089 |
| 13 | 2 | 67.9 | 8 | 1469 | | 139.886 |
| 14 | 2 | 90.3 | 8 | 1484 | | 81.943 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 2

Bursts in Trial: 14

| Burst | Number of Pulses | Pulse Width (µsec) | Chirp Width (MHz) | Pulse 1-to-2 PRI (µsec) | Pulse 2-to-3 PRI (µsec) | Start Location Within Interval (msec) |
|-------|------------------|--------------------|-------------------|-------------------------|-------------------------|---------------------------------------|
| 1 | 2 | 52 | 6 | 1648 | | 314.481 |
| 2 | 1 | 54.4 | 6 | | | 278.917 |
| 3 | 2 | 54.4 | 6 | 1070 | | 387.414 |
| 4 | 2 | 98.6 | 6 | 1735 | | 397.231 |
| 5 | 1 | 89.3 | 6 | | | 499.809 |
| 6 | 2 | 68.3 | 6 | 1282 | | 122.316 |
| 7 | 2 | 59.5 | 6 | 1400 | | 405.073 |
| 8 | 2 | 52 | 6 | 1874 | | 168.04 |
| 9 | 2 | 66 | 6 | 1142 | | 803.417 |
| 10 | 2 | 56.7 | 6 | 1369 | | 496.104 |
| 11 | 2 | 81.7 | 6 | 1270 | | 615.631 |
| 12 | 1 | 51.7 | 6 | | | 134.499 |
| 13 | 2 | 86 | 6 | 1784 | | 557.486 |
| 14 | 3 | 69.7 | 6 | 1628 | 1705 | 677.043 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 3

Bursts in Trial: 15

| Burst | Number of Pulses | Pulse Width (µsec) | Chirp Width (MHz) | Pulse 1-to-2 PRI (µsec) | Pulse 2-to-3 PRI (µsec) | Start Location Within Interval (msec) |
|-------|------------------|--------------------|-------------------|-------------------------|-------------------------|---------------------------------------|
| 1 | 2 | 83.8 | 19 | 1929 | | 3.656 |
| 2 | 2 | 53.6 | 19 | 1861 | | 450.46 |
| 3 | 2 | 77.2 | 19 | 1174 | | 427.63 |
| 4 | 2 | 90.3 | 19 | 1862 | | 232.37 |
| 5 | 3 | 78.5 | 19 | 1992 | 1184 | 728.86 |
| 6 | 2 | 96.2 | 19 | 1216 | | 696.74 |
| 7 | 1 | 83.1 | 19 | | | 640.13 |
| 8 | 1 | 72.8 | 19 | | | 486.9 |
| 9 | 3 | 53.1 | 19 | 1627 | 1496 | 431.55 |
| 10 | 3 | 85.2 | 19 | 1800 | 1035 | 164.38 |
| 11 | 3 | 97.2 | 19 | 1807 | 1470 | 310.68 |
| 12 | 1 | 57.2 | 19 | | | 290.43 |
| 13 | 1 | 58.6 | 19 | | | 27.38 |
| 14 | 2 | 68.5 | 19 | 1513 | | 399.7 |
| 15 | 1 | 59.9 | 19 | | | 387.3 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 4

Bursts in Trial: 12

| Burst | Number of Pulses | Pulse Width (μ sec) | Chirp Width (MHz) | Pulse 1-to-2 PRI (μ sec) | Pulse 2-to-3 PRI (μ sec) | Start Location Within Interval (msec) |
|-------|------------------|--------------------------|-------------------|-------------------------------|-------------------------------|---------------------------------------|
| 1 | 3 | 89.8 | 16 | 1301 | 1735 | 263.011 |
| 2 | 2 | 59.3 | 16 | 1667 | | 932.79 |
| 3 | 2 | 74.8 | 16 | 1061 | | 715.64 |
| 4 | 2 | 53.7 | 16 | 1488 | | 660 |
| 5 | 1 | 59.2 | 16 | | | 158.01 |
| 6 | 3 | 93 | 16 | 1707 | 1547 | 765.59 |
| 7 | 1 | 95.5 | 16 | | | 159.88 |
| 8 | 2 | 79.4 | 16 | 1705 | | 267.43 |
| 9 | 2 | 64.3 | 16 | 1805 | | 920.39 |
| 10 | 1 | 89.5 | 16 | | | 632.28 |
| 11 | 2 | 64.5 | 16 | 1160 | | 559.9 |
| 12 | 2 | 69.1 | 16 | 1048 | | 907.6 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 5

Bursts in Trial: 17

| Burst | Number of Pulses | Pulse Width (µsec) | Chirp Width (MHz) | Pulse 1-to-2 PRI (µsec) | Pulse 2-to-3 PRI (µsec) | Start Location Within Interval (msec) |
|-------|------------------|--------------------|-------------------|-------------------------|-------------------------|---------------------------------------|
| 1 | 3 | 88.7 | 7 | 1949 | 1524 | 203.889 |
| 2 | 2 | 94.4 | 7 | 1186 | | 167.43 |
| 3 | 2 | 66.4 | 7 | 1596 | | 250.735 |
| 4 | 1 | 53.3 | 7 | | | 343.273 |
| 5 | 1 | 97.2 | 7 | | | 558.011 |
| 6 | 2 | 61.5 | 7 | 1065 | | 696.368 |
| 7 | 2 | 98.3 | 7 | 1147 | | 169.956 |
| 8 | 2 | 74 | 7 | 1668 | | 576.184 |
| 9 | 3 | 89.1 | 7 | 1862 | 1196 | 283.881 |
| 10 | 2 | 59.8 | 7 | 1965 | | 410.369 |
| 11 | 2 | 50.1 | 7 | 1634 | | 24.546 |
| 12 | 2 | 62.1 | 7 | 1660 | | 683.364 |
| 13 | 3 | 80.7 | 7 | 1257 | 1438 | 671.512 |
| 14 | 1 | 81.4 | 7 | | | 46.319 |
| 15 | 3 | 63.9 | 7 | 1868 | 1961 | 258.247 |
| 16 | 1 | 87.5 | 7 | | | 434.165 |
| 17 | 3 | 98.6 | 7 | 1145 | 1031 | 534.482 |
| | | | | | | |
| | | | | | | |
| | | | | | | |



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 6

Bursts in Trial: 13

| Burst | Number of Pulses | Pulse Width (µsec) | Chirp Width (MHz) | Pulse 1-to-2 PRI (µsec) | Pulse 2-to-3 PRI (µsec) | Start Location Within Interval (msec) |
|-------|------------------|--------------------|-------------------|-------------------------|-------------------------|---------------------------------------|
| 1 | 3 | 86.1 | 13 | 1729 | 1738 | 64.633 |
| 2 | 3 | 93 | 13 | 1183 | 1190 | 310.803 |
| 3 | 2 | 54.4 | 13 | 1903 | | 292.366 |
| 4 | 3 | 99 | 13 | 1961 | 1436 | 202.469 |
| 5 | 2 | 57.8 | 13 | 1709 | | 776.782 |
| 6 | 3 | 59.7 | 13 | 1534 | 1032 | 579.365 |
| 7 | 2 | 80.1 | 13 | 1863 | | 564.608 |
| 8 | 1 | 79.6 | 13 | | | 630.472 |
| 9 | 2 | 90.7 | 13 | 1009 | | 81.685 |
| 10 | 1 | 86.3 | 13 | | | 46.928 |
| 11 | 2 | 99.8 | 13 | 1142 | | 247.961 |
| 12 | 1 | 69.2 | 13 | | | 887.154 |
| 13 | 2 | 75.5 | 13 | 1114 | | 622.977 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 7

Bursts in Trial: 14

| Burst | Number of Pulses | Pulse Width (μsec) | Chirp Width (MHz) | Pulse 1-to-2 PRI (μsec) | Pulse 2-to-3 PRI (μsec) | Start Location Within Interval (msec) |
|-------|------------------|--------------------|-------------------|-------------------------|-------------------------|---------------------------------------|
| 1 | 1 | 86.1 | 15 | | | 42.163 |
| 2 | 1 | 51.3 | 15 | | | 242.127 |
| 3 | 3 | 52.9 | 15 | 1207 | 1847 | 26.414 |
| 4 | 3 | 80.4 | 15 | 1924 | 1539 | 242.591 |
| 5 | 2 | 65.3 | 15 | 1453 | | 242.099 |
| 6 | 2 | 80.3 | 15 | 1614 | | 553.076 |
| 7 | 3 | 84.6 | 15 | 1157 | 1285 | 15.403 |
| 8 | 1 | 89.8 | 15 | | | 467.84 |
| 9 | 2 | 74.1 | 15 | 1546 | | 18.557 |
| 10 | 2 | 81.1 | 15 | 1502 | | 262.084 |
| 11 | 3 | 77.1 | 15 | 1303 | 1433 | 210.341 |
| 12 | 2 | 63.7 | 15 | 1683 | | 817.429 |
| 13 | 2 | 52.4 | 15 | 1520 | | 551.186 |
| 14 | 1 | 71.7 | 15 | | | 607.143 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 8

Bursts in Trial: 11

| Burst | Number of Pulses | Pulse Width (μsec) | Chirp Width (MHz) | Pulse 1-to-2 Spacing (μsec) | Pulse 2-to-3 PRI (μsec) | Start Location Within Interval (msec) |
|-------|------------------|--------------------|-------------------|-----------------------------|-------------------------|---------------------------------------|
| 1 | 1 | 69 | 8 | | | 442.97 |
| 2 | 2 | 56.7 | 8 | 1257 | | 891.961 |
| 3 | 2 | 97.4 | 8 | 1176 | | 131.052 |
| 4 | 2 | 99.2 | 8 | 1965 | | 870.583 |
| 5 | 1 | 56.7 | 8 | | | 1045.004 |
| 6 | 2 | 88.6 | 8 | 1459 | | 253.515 |
| 7 | 2 | 58.8 | 8 | 1899 | | 502.605 |
| 8 | 1 | 82.3 | 8 | | | 406.886 |
| 9 | 2 | 96 | 8 | 1140 | | 746.657 |
| 10 | 1 | 97.7 | 8 | | | 750.318 |
| 11 | 2 | 97.4 | 8 | 1076 | | 668.609 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 9

Bursts in Trial: 8

| Burst | Number of Pulses | Pulse Width (µsec) | Chirp Width (MHz) | Pulse 1-to-2 PRI (µsec) | Pulse 2-to-3 PRI (µsec) | Start Location Within Interval (msec) |
|-------|------------------|--------------------|-------------------|-------------------------|-------------------------|---------------------------------------|
| 1 | 1 | 73.1 | 17 | | | 1323.73 |
| 2 | 2 | 75.9 | 17 | 1110 | | 1202.5 |
| 3 | 2 | 70.4 | 17 | 1254 | | 1382.29 |
| 4 | 2 | 96.6 | 17 | 1190 | | 1241.75 |
| 5 | 2 | 92.8 | 17 | 1997 | | 361.27 |
| 6 | 2 | 68.1 | 17 | 1553 | | 41.89 |
| 7 | 2 | 98.3 | 17 | 1348 | | 1083.8 |
| 8 | 3 | 51.8 | 17 | 1374 | 1274 | 82.2 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 10

Bursts in Trial: 16

| Burst | Number of Pulses | Pulse Width (µsec) | Chirp Width (MHz) | Pulse 1-to-2 PRI (µsec) | Pulse 2-to-3 PRI (µsec) | Start Location Within Interval (msec) |
|-------|------------------|--------------------|-------------------|-------------------------|-------------------------|---------------------------------------|
| 1 | 3 | 98.9 | 8 | 1432 | 1152 | 83.069 |
| 2 | 1 | 60.2 | 8 | | | 337.84 |
| 3 | 2 | 80.6 | 8 | 1471 | | 99.49 |
| 4 | 3 | 88.6 | 8 | 1139 | 1641 | 13.62 |
| 5 | 2 | 61.4 | 8 | 1572 | | 738.57 |
| 6 | 2 | 74.5 | 8 | 1518 | | 353.95 |
| 7 | 3 | 78.1 | 8 | 1983 | 1365 | 445.24 |
| 8 | 1 | 71.7 | 8 | | | 726.01 |
| 9 | 2 | 75.1 | 8 | 1477 | | 701.29 |
| 10 | 3 | 51.5 | 8 | 1242 | 1983 | 177.09 |
| 11 | 3 | 74.2 | 8 | 1174 | 1405 | 732.56 |
| 12 | 2 | 92.8 | 8 | 1950 | | 511.73 |
| 13 | 3 | 76.7 | 8 | 1348 | 1792 | 389.38 |
| 14 | 2 | 77.7 | 8 | 1044 | | 329 |
| 15 | 2 | 81.5 | 8 | 1536 | | 689.9 |
| 16 | 1 | 75.2 | 8 | | | 3.9 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 11

Bursts in Trial: 8

| Burst | Number of Pulses | Pulse Width (µsec) | Chirp Width (MHz) | Pulse 1-to-2 PRI (µsec) | Pulse 2-to-3 PRI (µsec) | Start Location Within Interval (msec) |
|-------|------------------|--------------------|-------------------|-------------------------|-------------------------|---------------------------------------|
| 1 | 3 | 69.4 | 8 | 1135 | 1355 | 77.178 |
| 2 | 2 | 58.1 | 8 | 1692 | | 892.37 |
| 3 | 1 | 67.1 | 8 | | | 368.35 |
| 4 | 1 | 63.9 | 8 | | | 645.58 |
| 5 | 2 | 94.7 | 8 | 1959 | | 1310.85 |
| 6 | 2 | 89.6 | 8 | 1822 | | 1440.37 |
| 7 | 3 | 96.6 | 8 | 1729 | 1972 | 505.59 |
| 8 | 2 | 67.2 | 8 | 1030 | | 226 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 12

Bursts in Trial: 15

| Burst | Number of Pulses | Pulse Width (µsec) | Chirp Width (MHz) | Pulse 1-to-2 PRI (µsec) | Pulse 2-to-3 PRI (µsec) | Start Location Within Interval (msec) |
|-------|------------------|--------------------|-------------------|-------------------------|-------------------------|---------------------------------------|
| 1 | 2 | 77 | 13 | 1246 | | 62.101 |
| 2 | 2 | 74 | 13 | 1174 | | 788.83 |
| 3 | 1 | 80.9 | 13 | | | 782.34 |
| 4 | 2 | 73.3 | 13 | 1422 | | 78.81 |
| 5 | 2 | 92.2 | 13 | 1727 | | 362.63 |
| 6 | 2 | 64.5 | 13 | 1650 | | 558 |
| 7 | 2 | 83.9 | 13 | 1633 | | 675.33 |
| 8 | 3 | 54.7 | 13 | 1833 | 1271 | 787.74 |
| 9 | 1 | 82.7 | 13 | | | 654.36 |
| 10 | 2 | 79.2 | 13 | 1421 | | 587.63 |
| 11 | 2 | 69.2 | 13 | 1462 | | 316.11 |
| 12 | 1 | 57.8 | 13 | | | 788.11 |
| 13 | 2 | 89.6 | 13 | 1089 | | 624.2 |
| 14 | 3 | 87.4 | 13 | 1887 | 1446 | 757.2 |
| 15 | 1 | 78.6 | 13 | | | 334.9 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 13

Bursts in Trial: 8

| Burst | Number of Pulses | Pulse Width (µsec) | Chirp Width (MHz) | Pulse 1-to-2 PRI (µsec) | Pulse 2-to-3 PRI (µsec) | Start Location Within Interval (msec) |
|-------|------------------|--------------------|-------------------|-------------------------|-------------------------|---------------------------------------|
| 1 | 1 | 50.2 | 17 | | | 483.592 |
| 2 | 2 | 89.1 | 17 | 1624 | | 705.7 |
| 3 | 1 | 82.7 | 17 | | | 1369.51 |
| 4 | 2 | 76.9 | 17 | 1737 | | 216.37 |
| 5 | 3 | 83.3 | 17 | 1329 | 1007 | 450.99 |
| 6 | 2 | 77.9 | 17 | 1256 | | 889.65 |
| 7 | 3 | 99.8 | 17 | 1746 | 1472 | 331.75 |
| 8 | 2 | 63.6 | 17 | 1412 | | 1040.6 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 14

Bursts in Trial: 14

| Burst | Number of Pulses | Pulse Width (µsec) | Chirp Width (MHz) | Pulse 1-to-2 PRI (µsec) | Pulse 2-to-3 PRI (µsec) | Start Location Within Interval (msec) |
|-------|------------------|--------------------|-------------------|-------------------------|-------------------------|---------------------------------------|
| 1 | 2 | 96.3 | 7 | 1920 | | 323.687 |
| 2 | 3 | 74.7 | 7 | 1617 | 1545 | 702.607 |
| 3 | 3 | 96.1 | 7 | 1905 | 1899 | 145.884 |
| 4 | 3 | 87.9 | 7 | 1240 | 1473 | 193.081 |
| 5 | 2 | 93.3 | 7 | 1868 | | 247.279 |
| 6 | 1 | 54.8 | 7 | | | 136.816 |
| 7 | 3 | 61.1 | 7 | 1373 | 1172 | 408.853 |
| 8 | 3 | 93.9 | 7 | 1960 | 1358 | 93.24 |
| 9 | 1 | 97.3 | 7 | | | 370.077 |
| 10 | 2 | 51.9 | 7 | 1221 | | 249.644 |
| 11 | 3 | 80.6 | 7 | 1349 | 1017 | 523.051 |
| 12 | 2 | 70.5 | 7 | 1254 | | 171.539 |
| 13 | 2 | 88.1 | 7 | 1917 | | 496.086 |
| 14 | 1 | 97.3 | 7 | | | 287.943 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 15

Bursts in Trial: 12

| Burst | Number of Pulses | Pulse Width (µsec) | Chirp Width (MHz) | Pulse 1-to-2 PRI (µsec) | Pulse 2-to-3 PRI (µsec) | Start Location Within Interval (msec) |
|-------|------------------|--------------------|-------------------|-------------------------|-------------------------|---------------------------------------|
| 1 | 1 | 76.9 | 17 | | | 279.595 |
| 2 | 3 | 92.7 | 17 | 1645 | 1772 | 673.8 |
| 3 | 2 | 74.1 | 17 | 1805 | | 56.26 |
| 4 | 2 | 75.2 | 17 | 1953 | | 308.59 |
| 5 | 3 | 51.4 | 17 | 1455 | 1215 | 919.43 |
| 6 | 2 | 55.4 | 17 | 1478 | | 492.71 |
| 7 | 2 | 88.8 | 17 | 1709 | | 679.28 |
| 8 | 1 | 96.1 | 17 | | | 295.53 |
| 9 | 1 | 81.2 | 17 | | | 348.86 |
| 10 | 3 | 88.4 | 17 | 1419 | 1021 | 855.94 |
| 11 | 2 | 87 | 17 | 1926 | | 592.1 |
| 12 | 2 | 89 | 17 | 1802 | | 989.1 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 16

Bursts in Trial: 19

| Burst | Number of Pulses | Pulse Width (µsec) | Chirp Width (MHz) | Pulse 1-to-2 PRI (µsec) | Pulse 2-to-3 PRI (µsec) | Start Location Within Interval (msec) |
|-------|------------------|--------------------|-------------------|-------------------------|-------------------------|---------------------------------------|
| 1 | 3 | 86.8 | 8 | 1836 | 1833 | 611.131 |
| 2 | 2 | 60.7 | 8 | 1782 | | 10.901 |
| 3 | 2 | 87.6 | 8 | 1740 | | 484.892 |
| 4 | 2 | 80.9 | 8 | 1219 | | 161.123 |
| 5 | 1 | 81.9 | 8 | | | 283.914 |
| 6 | 2 | 87.8 | 8 | 1846 | | 181.765 |
| 7 | 2 | 59.5 | 8 | 1578 | | 334.606 |
| 8 | 1 | 54.5 | 8 | | | 430.227 |
| 9 | 2 | 76.3 | 8 | 1996 | | 228.418 |
| 10 | 2 | 51.9 | 8 | 1899 | | 314.739 |
| 11 | 2 | 61 | 8 | 1961 | | 442.531 |
| 12 | 2 | 90.6 | 8 | 1526 | | 362.022 |
| 13 | 1 | 56.1 | 8 | | | 597.323 |
| 14 | 3 | 91.9 | 8 | 1184 | 1614 | 375.944 |
| 15 | 2 | 52.8 | 8 | 1153 | | 136.625 |
| 16 | 2 | 65.7 | 8 | 1335 | | 495.426 |
| 17 | 3 | 82 | 8 | 1587 | 1663 | 127.437 |
| 18 | 1 | 59.4 | 8 | | | 276.658 |
| 19 | 1 | 99.8 | 8 | | | 492.079 |




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 17

Bursts in Trial: 13

| Burst | Number of Pulses | Pulse Width (μ sec) | Chirp Width (MHz) | Pulse 1-to-2 PRI (μ sec) | Pulse 2-to-3 PRI (μ sec) | Start Location Within Interval (msec) |
|-------|------------------|--------------------------|-------------------|-------------------------------|-------------------------------|---------------------------------------|
| 1 | 3 | 65.5 | 6 | 1900 | 1383 | 218.64 |
| 2 | 2 | 59.2 | 6 | 1393 | | 679.013 |
| 3 | 2 | 66.9 | 6 | 1623 | | 594.676 |
| 4 | 3 | 71.6 | 6 | 1481 | 1938 | 128.779 |
| 5 | 1 | 68.9 | 6 | | | 284.472 |
| 6 | 1 | 59.9 | 6 | | | 488.305 |
| 7 | 2 | 81.8 | 6 | 1611 | | 557.158 |
| 8 | 2 | 66.7 | 6 | 1994 | | 48.352 |
| 9 | 3 | 56.2 | 6 | 1503 | 1886 | 147.835 |
| 10 | 2 | 92.4 | 6 | 1164 | | 505.598 |
| 11 | 2 | 87.4 | 6 | 1713 | | 761.941 |
| 12 | 3 | 86.4 | 6 | 1032 | 1611 | 91.554 |
| 13 | 3 | 77.3 | 6 | 1177 | 1510 | 886.577 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 18

Bursts in Trial: 18

| Burst | Number of Pulses | Pulse Width (µsec) | Chirp Width (MHz) | Pulse 1-to-2 PRI (µsec) | Pulse 2-to-3 PRI (µsec) | Start Location Within Interval (msec) |
|-------|------------------|--------------------|-------------------|-------------------------|-------------------------|---------------------------------------|
| 1 | 2 | 80.4 | 13 | 1874 | | 545.448 |
| 2 | 2 | 76.1 | 13 | 1220 | | 127.944 |
| 3 | 1 | 60 | 13 | | | 580.297 |
| 4 | 3 | 50.3 | 13 | 1559 | 1797 | 599.71 |
| 5 | 2 | 62 | 13 | 1305 | | 638.873 |
| 6 | 2 | 51.5 | 13 | 1202 | | 51.317 |
| 7 | 2 | 67.7 | 13 | 1922 | | 347.65 |
| 8 | 2 | 90.4 | 13 | 1350 | | 128.613 |
| 9 | 3 | 90 | 13 | 1706 | 1093 | 605.837 |
| 10 | 1 | 86.3 | 13 | | | 11.03 |
| 11 | 2 | 67.2 | 13 | 1971 | | 559.983 |
| 12 | 3 | 96.9 | 13 | 1178 | 1335 | 125.737 |
| 13 | 1 | 97.2 | 13 | | | 597.69 |
| 14 | 3 | 91.7 | 13 | 1426 | 1490 | 169.253 |
| 15 | 2 | 76.3 | 13 | 1703 | | 66.287 |
| 16 | 2 | 60.5 | 13 | 1342 | | 305.8 |
| 17 | 3 | 74 | 13 | 1495 | 1395 | 331.533 |
| 18 | 1 | 94.3 | 13 | | | 12.667 |
| | | | | | | |
| | | | | | | |



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 19

Bursts in Trial: 15

| Burst | Number of Pulses | Pulse Width (µsec) | Chirp Width (MHz) | Pulse 1-to-2 PRI (µsec) | Pulse 2-to-3 PRI (µsec) | Start Location Within Interval (msec) |
|-------|------------------|--------------------|-------------------|-------------------------|-------------------------|---------------------------------------|
| 1 | 2 | 77.8 | 8 | 1816 | | 105.519 |
| 2 | 3 | 80.9 | 8 | 1761 | 1233 | 98.331 |
| 3 | 3 | 64.5 | 8 | 1091 | 1760 | 501.45 |
| 4 | 2 | 54.5 | 8 | 1643 | | 562.41 |
| 5 | 1 | 95.6 | 8 | | | 178.44 |
| 6 | 1 | 97 | 8 | | | 486.19 |
| 7 | 3 | 81.9 | 8 | 1632 | 1474 | 756.62 |
| 8 | 1 | 75 | 8 | | | 371.69 |
| 9 | 2 | 78 | 8 | 1282 | | 240.33 |
| 10 | 2 | 99.4 | 8 | 1389 | | 170.43 |
| 11 | 3 | 79.5 | 8 | 1062 | 1609 | 110.57 |
| 12 | 2 | 69.8 | 8 | 1577 | | 14.32 |
| 13 | 2 | 75.6 | 8 | 1950 | | 283.19 |
| 14 | 2 | 67.5 | 8 | 1663 | | 569.3 |
| 15 | 1 | 66.5 | 8 | | | 280.1 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 20

Bursts in Trial: 15

| Burst | Number of Pulses | Pulse Width (µsec) | Chirp Width (MHz) | Pulse 1-to-2 PRI (µsec) | Pulse 2-to-3 PRI (µsec) | Start Location Within Interval (msec) |
|-------|------------------|--------------------|-------------------|-------------------------|-------------------------|---------------------------------------|
| 1 | 2 | 93.2 | 14 | 1796 | | 122.66 |
| 2 | 1 | 67.2 | 14 | | | 465.47 |
| 3 | 2 | 80.2 | 14 | 1583 | | 95.32 |
| 4 | 3 | 75.4 | 14 | 1824 | 1719 | 539.56 |
| 5 | 3 | 80 | 14 | 1518 | 1231 | 183.28 |
| 6 | 3 | 56.9 | 14 | 1093 | 1481 | 376.95 |
| 7 | 2 | 98.7 | 14 | 1031 | | 569.97 |
| 8 | 1 | 82.4 | 14 | | | 177.17 |
| 9 | 3 | 72 | 14 | 1169 | 1766 | 750 |
| 10 | 1 | 59.3 | 14 | | | 197.4 |
| 11 | 1 | 70 | 14 | | | 494.49 |
| 12 | 1 | 87.8 | 14 | | | 383.38 |
| 13 | 2 | 74.8 | 14 | 1836 | | 753 |
| 14 | 2 | 57 | 14 | 1871 | | 666.5 |
| 15 | 3 | 70.9 | 14 | 1399 | 1856 | 181.2 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 21

Bursts in Trial: 13

| Burst | Number of Pulses | Pulse Width (µsec) | Chirp Width (MHz) | Pulse 1-to-2 PRI (µsec) | Pulse 2-to-3 PRI (µsec) | Start Location Within Interval (msec) |
|-------|------------------|--------------------|-------------------|-------------------------|-------------------------|---------------------------------------|
| 1 | 1 | 71.2 | 12 | | | 591.793 |
| 2 | 1 | 70.3 | 12 | | | 111.563 |
| 3 | 3 | 51.7 | 12 | 1789 | 1454 | 110.526 |
| 4 | 3 | 94.7 | 12 | 1707 | 1166 | 753.989 |
| 5 | 2 | 74.9 | 12 | 1841 | | 851.152 |
| 6 | 2 | 51.5 | 12 | 1448 | | 243.405 |
| 7 | 3 | 82.3 | 12 | 1304 | 1180 | 554.528 |
| 8 | 2 | 78.8 | 12 | 1027 | | 432.442 |
| 9 | 2 | 96.4 | 12 | 1597 | | 157.275 |
| 10 | 1 | 57.9 | 12 | | | 109.008 |
| 11 | 3 | 72 | 12 | 1707 | 1513 | 152.051 |
| 12 | 2 | 87.6 | 12 | 1613 | | 875.054 |
| 13 | 1 | 86.2 | 12 | | | 647.977 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 22

Bursts in Trial: 13

| Burst | Number of Pulses | Pulse Width (µsec) | Chirp Width (MHz) | Pulse 1-to-2 PRI (µsec) | Pulse 2-to-3 PRI (µsec) | Start Location Within Interval (msec) |
|-------|------------------|--------------------|-------------------|-------------------------|-------------------------|---------------------------------------|
| 1 | 1 | 89.2 | 8 | | | 508.262 |
| 2 | 2 | 96.9 | 8 | 1074 | | 308.683 |
| 3 | 1 | 90.7 | 8 | | | 41.016 |
| 4 | 2 | 85 | 8 | 1588 | | 441.429 |
| 5 | 2 | 75.5 | 8 | 1120 | | 621.262 |
| 6 | 3 | 68.3 | 8 | 1884 | 1855 | 395.525 |
| 7 | 2 | 62.9 | 8 | 1771 | | 758.808 |
| 8 | 2 | 72.7 | 8 | 1078 | | 542.262 |
| 9 | 2 | 67 | 8 | 1729 | | 60.605 |
| 10 | 3 | 99.7 | 8 | 1488 | 1019 | 214.388 |
| 11 | 1 | 75.2 | 8 | | | 493.231 |
| 12 | 3 | 99.8 | 8 | 1090 | 1640 | 559.354 |
| 13 | 3 | 94.6 | 8 | 1246 | 1559 | 128.977 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 23

Bursts in Trial: 16

| Burst | Number of Pulses | Pulse Width (µsec) | Chirp Width (MHz) | Pulse 1-to-2 PRI (µsec) | Pulse 2-to-3 PRI (µsec) | Start Location Within Interval (msec) |
|-------|------------------|--------------------|-------------------|-------------------------|-------------------------|---------------------------------------|
| 1 | 2 | 74.3 | 13 | 1810 | | 85.682 |
| 2 | 3 | 60.3 | 13 | 1012 | 1724 | 641.17 |
| 3 | 2 | 89.3 | 13 | 1023 | | 375.14 |
| 4 | 2 | 75.7 | 13 | 1113 | | 180.92 |
| 5 | 2 | 93.3 | 13 | 1861 | | 351.22 |
| 6 | 1 | 89.1 | 13 | | | 349.52 |
| 7 | 1 | 56.1 | 13 | | | 396.39 |
| 8 | 2 | 93.2 | 13 | 1901 | | 286.39 |
| 9 | 2 | 99.1 | 13 | 1528 | | 520.46 |
| 10 | 2 | 96.1 | 13 | 1059 | | 200.4 |
| 11 | 1 | 92 | 13 | | | 380.41 |
| 12 | 3 | 66.9 | 13 | 1105 | 1749 | 606.51 |
| 13 | 2 | 70.1 | 13 | 1639 | | 669.67 |
| 14 | 1 | 87.4 | 13 | | | 201.75 |
| 15 | 1 | 53.9 | 13 | | | 367.8 |
| 16 | 1 | 67.9 | 13 | | | 433.7 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 24

Bursts in Trial: 17

| Burst | Number of Pulses | Pulse Width (µsec) | Chirp Width (MHz) | Pulse 1-to-2 PRI (µsec) | Pulse 2-to-3 PRI (µsec) | Start Location Within Interval (msec) |
|-------|------------------|--------------------|-------------------|-------------------------|-------------------------|---------------------------------------|
| 1 | 3 | 82.4 | 17 | 1821 | 1092 | 303.471 |
| 2 | 2 | 52.4 | 17 | 1302 | | 225.372 |
| 3 | 1 | 98 | 17 | | | 388.995 |
| 4 | 1 | 93.6 | 17 | | | 85.013 |
| 5 | 1 | 71.6 | 17 | | | 556.491 |
| 6 | 3 | 81.2 | 17 | 1107 | 1305 | 336.298 |
| 7 | 3 | 64.5 | 17 | 1508 | 1351 | 121.516 |
| 8 | 2 | 64.4 | 17 | 1861 | | 501.604 |
| 9 | 1 | 68.4 | 17 | | | 432.551 |
| 10 | 2 | 90.5 | 17 | 1256 | | 95.599 |
| 11 | 2 | 94.9 | 17 | 1701 | | 395.796 |
| 12 | 3 | 72.5 | 17 | 1134 | 1331 | 287.544 |
| 13 | 1 | 72.5 | 17 | | | 464.202 |
| 14 | 1 | 57.8 | 17 | | | 62.329 |
| 15 | 1 | 52.7 | 17 | | | 320.047 |
| 16 | 3 | 54.1 | 17 | 1634 | 1587 | 664.265 |
| 17 | 1 | 88.7 | 17 | | | 608.482 |
| | | | | | | |
| | | | | | | |
| | | | | | | |



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 25

Bursts in Trial: 12

| Burst | Number of Pulses | Pulse Width (µsec) | Chirp Width (MHz) | Pulse 1-to-2 PRI (µsec) | Pulse 2-to-3 PRI (µsec) | Start Location Within Interval (msec) |
|-------|------------------|--------------------|-------------------|-------------------------|-------------------------|---------------------------------------|
| 1 | 2 | 53.3 | 13 | 1381 | | 810.851 |
| 2 | 1 | 92.5 | 13 | | | 916.74 |
| 3 | 1 | 51.6 | 13 | | | 690.84 |
| 4 | 1 | 92.6 | 13 | | | 181.28 |
| 5 | 2 | 83.9 | 13 | 1234 | | 786.73 |
| 6 | 3 | 97.6 | 13 | 1622 | 1637 | 17.34 |
| 7 | 1 | 86.1 | 13 | | | 497.64 |
| 8 | 1 | 87.7 | 13 | | | 633.47 |
| 9 | 3 | 79.4 | 13 | 1744 | 1388 | 703.41 |
| 10 | 2 | 55.2 | 13 | 1689 | | 49.71 |
| 11 | 2 | 90.7 | 13 | 1199 | | 237.8 |
| 12 | 2 | 81.3 | 13 | 1591 | | 489.2 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 26

Bursts in Trial: 12

| Burst | Number of Pulses | Pulse Width (µsec) | Chirp Width (MHz) | Pulse 1-to-2 PRI (µsec) | Pulse 2-to-3 PRI (µsec) | Start Location Within Interval (msec) |
|-------|------------------|--------------------|-------------------|-------------------------|-------------------------|---------------------------------------|
| 1 | 3 | 63 | 18 | 1964 | 1933 | 503.697 |
| 2 | 3 | 78.7 | 18 | 1673 | 1676 | 650.38 |
| 3 | 3 | 73.3 | 18 | 1650 | 1144 | 299.21 |
| 4 | 3 | 55.4 | 18 | 1378 | 1784 | 324.72 |
| 5 | 2 | 59.3 | 18 | 1778 | | 422.13 |
| 6 | 2 | 53.7 | 18 | 1022 | | 563.24 |
| 7 | 3 | 81 | 18 | 1007 | 1265 | 650.86 |
| 8 | 2 | 88.1 | 18 | 1164 | | 970.1 |
| 9 | 2 | 93.1 | 18 | 1904 | | 424.03 |
| 10 | 2 | 59.9 | 18 | 1772 | | 894.63 |
| 11 | 3 | 50.3 | 18 | 1485 | 1873 | 332.3 |
| 12 | 1 | 64 | 18 | | | 379.1 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 27

Bursts in Trial: 15

| Burst | Number of Pulses | Pulse Width (µsec) | Chirp Width (MHz) | Pulse 1-to-2 PRI (µsec) | Pulse 2-to-3 PRI (µsec) | Start Location Within Interval (msec) |
|-------|------------------|--------------------|-------------------|-------------------------|-------------------------|---------------------------------------|
| 1 | 2 | 80.1 | 7 | 1183 | | 316.095 |
| 2 | 2 | 61.4 | 7 | 1005 | | 531.24 |
| 3 | 2 | 57.2 | 7 | 1488 | | 10.08 |
| 4 | 2 | 96.1 | 7 | 1281 | | 17.75 |
| 5 | 1 | 89.2 | 7 | | | 762.22 |
| 6 | 2 | 59.6 | 7 | 1412 | | 501.29 |
| 7 | 2 | 78.8 | 7 | 1523 | | 194.32 |
| 8 | 2 | 73.9 | 7 | 1117 | | 81.67 |
| 9 | 2 | 66.6 | 7 | 1793 | | 729.24 |
| 10 | 2 | 92.5 | 7 | 1059 | | 262.42 |
| 11 | 2 | 57.8 | 7 | 1964 | | 552.58 |
| 12 | 3 | 93.8 | 7 | 1601 | 1697 | 359.36 |
| 13 | 3 | 82.6 | 7 | 1737 | 1365 | 633.7 |
| 14 | 2 | 90.6 | 7 | 1335 | | 460.3 |
| 15 | 1 | 90.3 | 7 | | | 496.7 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 28

Bursts in Trial: 14

| Burst | Number of Pulses | Pulse Width (µsec) | Chirp Width (MHz) | Pulse 1-to-2 PRI (µsec) | Pulse 2-to-3 PRI (µsec) | Start Location Within Interval (msec) |
|-------|------------------|--------------------|-------------------|-------------------------|-------------------------|---------------------------------------|
| 1 | 3 | 65 | 6 | 1540 | 1197 | 302.353 |
| 2 | 3 | 98.4 | 6 | 1961 | 1222 | 829.787 |
| 3 | 2 | 63.2 | 6 | 1605 | | 621.474 |
| 4 | 3 | 61.8 | 6 | 1221 | 1143 | 282.861 |
| 5 | 2 | 74.9 | 6 | 1039 | | 480.039 |
| 6 | 1 | 62.2 | 6 | | | 537.266 |
| 7 | 2 | 69.5 | 6 | 1608 | | 533.333 |
| 8 | 2 | 86.8 | 6 | 1991 | | 154.34 |
| 9 | 2 | 70.2 | 6 | 1194 | | 359.667 |
| 10 | 1 | 69.3 | 6 | | | 551.664 |
| 11 | 2 | 57.1 | 6 | 1251 | | 412.381 |
| 12 | 2 | 67.3 | 6 | 1174 | | 680.329 |
| 13 | 2 | 70.7 | 6 | 1018 | | 322.886 |
| 14 | 2 | 72.3 | 6 | 1457 | | 840.143 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 29

Bursts in Trial: 13

| Burst | Number of Pulses | Pulse Width (µsec) | Chirp Width (MHz) | Pulse 1-to-2 PRI (µsec) | Pulse 2-to-3 PRI (µsec) | Start Location Within Interval (msec) |
|-------|------------------|--------------------|-------------------|-------------------------|-------------------------|---------------------------------------|
| 1 | 1 | 53.9 | 18 | | | 121.504 |
| 2 | 1 | 82.3 | 18 | | | 808.473 |
| 3 | 2 | 58.9 | 18 | 1123 | | 591.116 |
| 4 | 2 | 91.7 | 18 | 1041 | | 315.599 |
| 5 | 2 | 61.9 | 18 | 1203 | | 264.742 |
| 6 | 3 | 56.6 | 18 | 1308 | 1424 | 500.095 |
| 7 | 2 | 57.3 | 18 | 1512 | | 569.818 |
| 8 | 2 | 50.6 | 18 | 1286 | | 777.852 |
| 9 | 3 | 57 | 18 | 1854 | 1884 | 376.805 |
| 10 | 1 | 59.3 | 18 | | | 446.998 |
| 11 | 2 | 54.8 | 18 | 1280 | | 584.561 |
| 12 | 2 | 64.2 | 18 | 1129 | | 143.154 |
| 13 | 2 | 82 | 18 | 1167 | | 855.677 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 30

Bursts in Trial: 10

| Burst | Number of Pulses | Pulse Width (µsec) | Chirp Width (MHz) | Pulse 1-to-2 PRI (µsec) | Pulse 2-to-3 PRI (µsec) | Start Location Within Interval (msec) |
|-------|------------------|--------------------|-------------------|-------------------------|-------------------------|---------------------------------------|
| 1 | 3 | 52.6 | 11 | 1545 | 1951 | 298.529 |
| 2 | 1 | 96.5 | 11 | | | 904.71 |
| 3 | 3 | 75.1 | 11 | 1326 | 1390 | 232.5 |
| 4 | 2 | 66.7 | 11 | 1322 | | 872.64 |
| 5 | 3 | 90.3 | 11 | 1323 | 1113 | 15.55 |
| 6 | 1 | 57.6 | 11 | | | 865.44 |
| 7 | 3 | 92.3 | 11 | 1938 | 1208 | 430.99 |
| 8 | 2 | 75.8 | 11 | 1160 | | 383.11 |
| 9 | 1 | 64.3 | 11 | | | 339.47 |
| 10 | 2 | 95 | 11 | 1035 | | 939.2 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |



Product : Wireless module
 Test Item : Statistical Performance Check
 Radar Type : Type 5
 Test Mode : Normal (802.11ac-80 MHz)
 Test Date : 2024/01/05

| Center Freq: 5530MHz | | | Low Edge: 5491MHz | | High Edge: 5568MHz | |
|---------------------------------|-------|--------|---------------------|--|---------------------------------|--|
| Trial # | Chirp | Offset | VSG Frequency (MHz) | *Filename | 1= Detection 0= No Detection | |
| 1 | 8 | | 5530 | Statistical_Check_RandParm_For_Radar_Type_5_1_trail | 1 | |
| 2 | 16 | | 5530 | Statistical_Check_RandParm_For_Radar_Type_5_2_trail | 1 | |
| 3 | 9 | | 5530 | Statistical_Check_RandParm_For_Radar_Type_5_3_trail | 1 | |
| 4 | 19 | | 5530 | Statistical_Check_RandParm_For_Radar_Type_5_4_trail | 1 | |
| 5 | 16 | | 5530 | Statistical_Check_RandParm_For_Radar_Type_5_5_trail | 1 | |
| 6 | 15 | | 5530 | Statistical_Check_RandParm_For_Radar_Type_5_6_trail | 1 | |
| 7 | 8 | | 5530 | Statistical_Check_RandParm_For_Radar_Type_5_7_trail | 1 | |
| 8 | 14 | | 5530 | Statistical_Check_RandParm_For_Radar_Type_5_8_trail | 1 | |
| 9 | 19 | | 5530 | Statistical_Check_RandParm_For_Radar_Type_5_9_trail | 1 | |
| 10 | 17 | | 5530 | Statistical_Check_RandParm_For_Radar_Type_5_10_trail | 1 | |
| 11 | 5 | 2 | 5493 | Statistical_Check_RandParm_For_Radar_Type_5_11_trail | 1 | |
| 12 | 15 | 6 | 5497 | Statistical_Check_RandParm_For_Radar_Type_5_12_trail | 0 | |
| 13 | 6 | 2.4 | 5493.4 | Statistical_Check_RandParm_For_Radar_Type_5_13_trail | 0 | |
| 14 | 17 | 6.8 | 5497.8 | Statistical_Check_RandParm_For_Radar_Type_5_14_trail | 0 | |
| 15 | 7 | 2.8 | 5493.8 | Statistical_Check_RandParm_For_Radar_Type_5_15_trail | 1 | |
| 16 | 10 | 4 | 5495 | Statistical_Check_RandParm_For_Radar_Type_5_16_trail | 0 | |
| 17 | 7 | 2.8 | 5493.8 | Statistical_Check_RandParm_For_Radar_Type_5_17_trail | 1 | |
| 18 | 5 | 2 | 5493 | Statistical_Check_RandParm_For_Radar_Type_5_18_trail | 1 | |
| 19 | 5 | 2 | 5493 | Statistical_Check_RandParm_For_Radar_Type_5_19_trail | 1 | |
| 20 | 8 | 3.2 | 5494.2 | Statistical_Check_RandParm_For_Radar_Type_5_20_trail | 0 | |
| 21 | 13 | 5.2 | 5562.8 | Statistical_Check_RandParm_For_Radar_Type_5_21_trail | 1 | |
| 22 | 16 | 6.4 | 5561.6 | Statistical_Check_RandParm_For_Radar_Type_5_22_trail | 1 | |
| 23 | 17 | 6.8 | 5561.2 | Statistical_Check_RandParm_For_Radar_Type_5_23_trail | 1 | |
| 24 | 13 | 5.2 | 5562.8 | Statistical_Check_RandParm_For_Radar_Type_5_24_trail | 1 | |
| 25 | 11 | 4.4 | 5563.6 | Statistical_Check_RandParm_For_Radar_Type_5_25_trail | 1 | |
| 26 | 12 | 4.8 | 5563.2 | Statistical_Check_RandParm_For_Radar_Type_5_26_trail | 1 | |
| 27 | 5 | 2 | 5566 | Statistical_Check_RandParm_For_Radar_Type_5_27_trail | 1 | |
| 28 | 15 | 6 | 5562 | Statistical_Check_RandParm_For_Radar_Type_5_28_trail | 1 | |
| 29 | 13 | 5.2 | 5562.8 | Statistical_Check_RandParm_For_Radar_Type_5_29_trail | 1 | |
| 30 | 10 | 4 | 5564 | Statistical_Check_RandParm_For_Radar_Type_5_30_trail | 1 | |
| Detection Percentage (%) | | | | | 83.33 | |
| Limit | | | | | ≥ 80 | |


TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 1

Bursts in Trial: 15

| Burst | Number of Pulses | Pulse Width (µsec) | Chirp Width (MHz) | Pulse 1-to-2 PRI (µsec) | Pulse 2-to-3 PRI (µsec) | Start Location Within Interval (msec) |
|-------|------------------|--------------------|-------------------|-------------------------|-------------------------|---------------------------------------|
| 1 | 3 | 68.6 | 8 | 1492 | 1769 | 663.932 |
| 2 | 1 | 59.1 | 8 | | | 160.278 |
| 3 | 3 | 81.5 | 8 | 1474 | 1958 | 641.19 |
| 4 | 3 | 94.3 | 8 | 1503 | 1617 | 772.91 |
| 5 | 2 | 56.2 | 8 | 1353 | | 129.96 |
| 6 | 2 | 66.4 | 8 | 1966 | | 459.55 |
| 7 | 2 | 85.8 | 8 | 1552 | | 0.1 |
| 8 | 2 | 96.4 | 8 | 1297 | | 757.18 |
| 9 | 2 | 78.1 | 8 | 1962 | | 10.55 |
| 10 | 2 | 83 | 8 | 1492 | | 48.78 |
| 11 | 1 | 63.4 | 8 | | | 335.95 |
| 12 | 3 | 52.6 | 8 | 1641 | 1475 | 708.28 |
| 13 | 2 | 61.4 | 8 | 1325 | | 621.8 |
| 14 | 2 | 89.3 | 8 | 1615 | | 653.2 |
| 15 | 3 | 77.6 | 8 | 1905 | 1920 | 296.6 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 2

Bursts in Trial: 19

| Burst | Number of Pulses | Pulse Width (µsec) | Chirp Width (MHz) | Pulse 1-to-2 PRI (µsec) | Pulse 2-to-3 PRI (µsec) | Start Location Within Interval (msec) |
|-------|------------------|--------------------|-------------------|-------------------------|-------------------------|---------------------------------------|
| 1 | 2 | 59.2 | 16 | 1112 | | 505.146 |
| 2 | 3 | 88.8 | 16 | 1148 | 1859 | 4.725 |
| 3 | 3 | 97.4 | 16 | 1382 | 1524 | 393.912 |
| 4 | 1 | 80.8 | 16 | | | 614.633 |
| 5 | 3 | 64.9 | 16 | 1663 | 1707 | 13.034 |
| 6 | 1 | 69.2 | 16 | | | 510.775 |
| 7 | 2 | 97.9 | 16 | 1382 | | 281.486 |
| 8 | 1 | 74 | 16 | | | 173.067 |
| 9 | 2 | 80.4 | 16 | 1360 | | 620.138 |
| 10 | 3 | 99.4 | 16 | 1435 | 1441 | 69.069 |
| 11 | 2 | 89.3 | 16 | 1725 | | 509.921 |
| 12 | 2 | 63 | 16 | 1781 | | 230.722 |
| 13 | 3 | 73.4 | 16 | 1893 | 1551 | 232.533 |
| 14 | 2 | 73.1 | 16 | 1142 | | 620.484 |
| 15 | 2 | 85.2 | 16 | 1193 | | 392.245 |
| 16 | 2 | 97.5 | 16 | 1429 | | 566.716 |
| 17 | 3 | 80.3 | 16 | 1687 | 1340 | 412.737 |
| 18 | 2 | 95.2 | 16 | 1432 | | 163.458 |
| 19 | 1 | 87.1 | 16 | | | 312.379 |



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 3

Bursts in Trial: 10

| Burst | Number of Pulses | Pulse Width (µsec) | Chirp Width (MHz) | Pulse 1-to-2 PRI (µsec) | Pulse 2-to-3 PRI (µsec) | Start Location Within Interval (msec) |
|-------|------------------|--------------------|-------------------|-------------------------|-------------------------|---------------------------------------|
| 1 | 1 | 87 | 9 | | | 1155.42 |
| 2 | 2 | 63.5 | 9 | 1727 | | 1135.24 |
| 3 | 3 | 91.8 | 9 | 1644 | 1790 | 888.81 |
| 4 | 3 | 51.2 | 9 | 1821 | 1003 | 121.69 |
| 5 | 1 | 73.8 | 9 | | | 1072.46 |
| 6 | 1 | 76.8 | 9 | | | 42.13 |
| 7 | 3 | 55.5 | 9 | 1751 | 1462 | 1018.4 |
| 8 | 2 | 91.7 | 9 | 1279 | | 410.77 |
| 9 | 2 | 93.7 | 9 | 1735 | | 761.3 |
| 10 | 2 | 80.4 | 9 | 1241 | | 964.4 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |


TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 4

Bursts in Trial: 13

| Burst | Number of Pulses | Pulse Width (μ sec) | Chirp Width (MHz) | Pulse 1-to-2 PRI (μ sec) | Pulse 2-to-3 PRI (μ sec) | Start Location Within Interval (msec) |
|-------|------------------|--------------------------|-------------------|-------------------------------|-------------------------------|---------------------------------------|
| 1 | 2 | 77.9 | 19 | 1121 | | 420.134 |
| 2 | 3 | 53.4 | 19 | 1823 | 1483 | 433.203 |
| 3 | 3 | 76 | 19 | 1065 | 1341 | 853.756 |
| 4 | 2 | 60.7 | 19 | 1119 | | 296.089 |
| 5 | 1 | 64.5 | 19 | | | 217.272 |
| 6 | 1 | 68.4 | 19 | | | 358.905 |
| 7 | 2 | 99.7 | 19 | 1997 | | 295.398 |
| 8 | 2 | 71.4 | 19 | 1926 | | 85.082 |
| 9 | 1 | 98.9 | 19 | | | 343.885 |
| 10 | 3 | 89.5 | 19 | 1291 | 1577 | 386.788 |
| 11 | 1 | 87.6 | 19 | | | 587.191 |
| 12 | 3 | 98.9 | 19 | 1351 | 1900 | 888.554 |
| 13 | 2 | 66.4 | 19 | 1322 | | 539.877 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 5

Bursts in Trial: 10

| Burst | Number of Pulses | Pulse Width (µsec) | Chirp Width (MHz) | Pulse 1-to-2 PRI (µsec) | Pulse 2-to-3 PRI (µsec) | Start Location Within Interval (msec) |
|-------|------------------|--------------------|-------------------|-------------------------|-------------------------|---------------------------------------|
| 1 | 2 | 56.8 | 16 | 1695 | | 424.234 |
| 2 | 3 | 60.9 | 16 | 1017 | 1453 | 8.29 |
| 3 | 2 | 55.1 | 16 | 1559 | | 4.35 |
| 4 | 2 | 96 | 16 | 1692 | | 957.44 |
| 5 | 2 | 67.4 | 16 | 1749 | | 724.63 |
| 6 | 1 | 81.6 | 16 | | | 339.46 |
| 7 | 1 | 69.3 | 16 | | | 695.99 |
| 8 | 2 | 60.2 | 16 | 1833 | | 554.69 |
| 9 | 2 | 76.3 | 16 | 1037 | | 55.37 |
| 10 | 3 | 55.9 | 16 | 1632 | 1516 | 21.2 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 6

Bursts in Trial: 15

| Burst | Number of Pulses | Pulse Width (µsec) | Chirp Width (MHz) | Pulse 1-to-2 PRI (µsec) | Pulse 2-to-3 PRI (µsec) | Start Location Within Interval (msec) |
|-------|------------------|--------------------|-------------------|-------------------------|-------------------------|---------------------------------------|
| 1 | 3 | 87.5 | 15 | 1102 | 1947 | 654.412 |
| 2 | 3 | 83.9 | 15 | 1318 | 1640 | 495.2 |
| 3 | 1 | 81 | 15 | | | 203.28 |
| 4 | 1 | 95.7 | 15 | | | 318.24 |
| 5 | 2 | 52.9 | 15 | 1387 | | 248.38 |
| 6 | 3 | 75.3 | 15 | 1607 | 1576 | 730.49 |
| 7 | 1 | 78.3 | 15 | | | 24.69 |
| 8 | 2 | 82.6 | 15 | 1866 | | 546.91 |
| 9 | 3 | 74.5 | 15 | 1906 | 1730 | 554.75 |
| 10 | 3 | 75.2 | 15 | 1164 | 1883 | 194.97 |
| 11 | 1 | 55.3 | 15 | | | 50.32 |
| 12 | 1 | 70.1 | 15 | | | 492.88 |
| 13 | 3 | 57.9 | 15 | 1496 | 1682 | 194.08 |
| 14 | 3 | 56.7 | 15 | 1559 | 1262 | 693 |
| 15 | 3 | 67.9 | 15 | 1537 | 1964 | 286.5 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 7

Bursts in Trial: 17

| Burst | Number of Pulses | Pulse Width (µsec) | Chirp Width (MHz) | Pulse 1-to-2 PRI (µsec) | Pulse 2-to-3 PRI (µsec) | Start Location Within Interval (msec) |
|-------|------------------|--------------------|-------------------|-------------------------|-------------------------|---------------------------------------|
| 1 | 2 | 78.3 | 8 | 1528 | | 389.215 |
| 2 | 2 | 94.9 | 8 | 1111 | | 365.378 |
| 3 | 3 | 87 | 8 | 1004 | 1089 | 696.925 |
| 4 | 1 | 51.1 | 8 | | | 412.213 |
| 5 | 2 | 80 | 8 | 1258 | | 213.011 |
| 6 | 2 | 81.5 | 8 | 1338 | | 348.328 |
| 7 | 1 | 56.4 | 8 | | | 595.556 |
| 8 | 1 | 96.1 | 8 | | | 457.774 |
| 9 | 3 | 79.9 | 8 | 1899 | 1712 | 411.251 |
| 10 | 3 | 84.8 | 8 | 1130 | 1814 | 394.069 |
| 11 | 1 | 77.3 | 8 | | | 390.346 |
| 12 | 2 | 76 | 8 | 1765 | | 311.484 |
| 13 | 1 | 87.5 | 8 | | | 89.102 |
| 14 | 2 | 75.2 | 8 | 1055 | | 178.409 |
| 15 | 1 | 63.6 | 8 | | | 508.547 |
| 16 | 2 | 62.8 | 8 | 1546 | | 556.265 |
| 17 | 1 | 83.3 | 8 | | | 455.882 |
| | | | | | | |
| | | | | | | |
| | | | | | | |




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 8

Bursts in Trial: 19

| Burst | Number of Pulses | Pulse Width (µsec) | Chirp Width (MHz) | Pulse 1-to-2 Spacing (µsec) | Pulse 2-to-3 PRI (µsec) | Start Location Within Interval (msec) |
|-------|------------------|--------------------|-------------------|-----------------------------|-------------------------|---------------------------------------|
| 1 | 3 | 81.7 | 14 | 1854 | 1510 | 534.423 |
| 2 | 2 | 87.4 | 14 | 1553 | | 569.691 |
| 3 | 3 | 63.6 | 14 | 1681 | 1769 | 411.152 |
| 4 | 1 | 76.9 | 14 | | | 124.653 |
| 5 | 2 | 58.9 | 14 | 1605 | | 284.054 |
| 6 | 1 | 55.6 | 14 | | | 284.475 |
| 7 | 2 | 82.5 | 14 | 1712 | | 434.286 |
| 8 | 1 | 68.4 | 14 | | | 432.317 |
| 9 | 1 | 70.5 | 14 | | | 83.428 |
| 10 | 2 | 92.4 | 14 | 1528 | | 615.449 |
| 11 | 3 | 92.9 | 14 | 1336 | 1841 | 4.381 |
| 12 | 1 | 75.3 | 14 | | | 364.492 |
| 13 | 2 | 76.7 | 14 | 1898 | | 20.603 |
| 14 | 3 | 50.2 | 14 | 1574 | 1484 | 581.544 |
| 15 | 2 | 73.6 | 14 | 1949 | | 55.175 |
| 16 | 3 | 91.9 | 14 | 1878 | 1070 | 220.426 |
| 17 | 2 | 99.2 | 14 | 1998 | | 352.137 |
| 18 | 3 | 71.4 | 14 | 1770 | 1705 | 504.658 |
| 19 | 3 | 86.6 | 14 | 1244 | 1338 | 476.079 |



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 9

Bursts in Trial: 9

| Burst | Number of Pulses | Pulse Width (µsec) | Chirp Width (MHz) | Pulse 1-to-2 PRI (µsec) | Pulse 2-to-3 PRI (µsec) | Start Location Within Interval (msec) |
|-------|------------------|--------------------|-------------------|-------------------------|-------------------------|---------------------------------------|
| 1 | 3 | 81.1 | 19 | 1219 | 1240 | 1189.1 |
| 2 | 2 | 98 | 19 | 1146 | | 340.127 |
| 3 | 2 | 77.5 | 19 | 1181 | | 913.893 |
| 4 | 2 | 61.6 | 19 | 1194 | | 604.44 |
| 5 | 2 | 79.9 | 19 | 1155 | | 1128.407 |
| 6 | 2 | 88 | 19 | 1739 | | 64.193 |
| 7 | 3 | 52.1 | 19 | 1228 | 1888 | 546.21 |
| 8 | 3 | 55.8 | 19 | 1856 | 1705 | 637.597 |
| 9 | 3 | 55.7 | 19 | 1360 | 1531 | 844.733 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 10

Bursts in Trial: 20

| Burst | Number of Pulses | Pulse Width (µsec) | Chirp Width (MHz) | Pulse 1-to-2 PRI (µsec) | Pulse 2-to-3 PRI (µsec) | Start Location Within Interval (msec) |
|-------|------------------|--------------------|-------------------|-------------------------|-------------------------|---------------------------------------|
| 1 | 2 | 60.4 | 17 | 1567 | | 148.95 |
| 2 | 1 | 84.6 | 17 | | | 378.606 |
| 3 | 1 | 76.5 | 17 | | | 564.32 |
| 4 | 1 | 77.2 | 17 | | | 187.32 |
| 5 | 1 | 94.1 | 17 | | | 97.93 |
| 6 | 1 | 58.5 | 17 | | | 58.63 |
| 7 | 2 | 80.9 | 17 | 1435 | | 540.09 |
| 8 | 3 | 97.1 | 17 | 1469 | 1626 | 521.98 |
| 9 | 3 | 81.2 | 17 | 1231 | 1945 | 378.48 |
| 10 | 1 | 62.4 | 17 | | | 457.58 |
| 11 | 2 | 80.4 | 17 | 1158 | | 110.72 |
| 12 | 2 | 85.3 | 17 | 1282 | | 219.23 |
| 13 | 2 | 92.6 | 17 | 1665 | | 53.04 |
| 14 | 2 | 89.2 | 17 | 1527 | | 156.95 |
| 15 | 3 | 68.5 | 17 | 1897 | 1683 | 61.44 |
| 16 | 2 | 83.1 | 17 | 1191 | | 47.25 |
| 17 | 2 | 87.9 | 17 | 1548 | | 272.21 |
| 18 | 3 | 63.9 | 17 | 1372 | 1222 | 316.5 |
| 19 | 2 | 81.5 | 17 | 1818 | | 78.8 |
| 20 | 1 | 67 | 17 | | | 221.2 |




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 11

Bursts in Trial: 11

| Burst | Number of Pulses | Pulse Width (µsec) | Chirp Width (MHz) | Pulse 1-to-2 PRI (µsec) | Pulse 2-to-3 PRI (µsec) | Start Location Within Interval (msec) |
|-------|------------------|--------------------|-------------------|-------------------------|-------------------------|---------------------------------------|
| 1 | 2 | 71 | 5 | 1617 | | 980.643 |
| 2 | 2 | 64.6 | 5 | 1346 | | 787.771 |
| 3 | 2 | 84.2 | 5 | 1641 | | 277.342 |
| 4 | 1 | 96 | 5 | | | 205.733 |
| 5 | 2 | 71.5 | 5 | 1046 | | 738.084 |
| 6 | 1 | 70.4 | 5 | | | 330.385 |
| 7 | 2 | 66.9 | 5 | 1700 | | 255.755 |
| 8 | 3 | 97.3 | 5 | 1537 | 1563 | 101.216 |
| 9 | 3 | 79.1 | 5 | 1387 | 1595 | 494.477 |
| 10 | 2 | 60.3 | 5 | 1704 | | 829.618 |
| 11 | 1 | 58.4 | 5 | | | 569.909 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 12

Bursts in Trial: 8

| Burst | Number of Pulses | Pulse Width (µsec) | Chirp Width (MHz) | Pulse 1-to-2 PRI (µsec) | Pulse 2-to-3 PRI (µsec) | Start Location Within Interval (msec) |
|--------------|-------------------------|---------------------------|--------------------------|--------------------------------|--------------------------------|--|
| 1 | 1 | 52.3 | 15 | | | 1143.68 |
| 2 | 2 | 91.2 | 15 | 1983 | | 1219.91 |
| 3 | 1 | 67.7 | 15 | | | 1273.26 |
| 4 | 1 | 67.1 | 15 | | | 579.81 |
| 5 | 2 | 69.3 | 15 | 1778 | | 1121.21 |
| 6 | 3 | 59.9 | 15 | 1544 | 1081 | 258.96 |
| 7 | 2 | 79.5 | 15 | 1370 | | 292.88 |
| 8 | 2 | 67.3 | 15 | 1351 | | 869 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 13

Bursts in Trial: 13

| Burst | Number of Pulses | Pulse Width (µsec) | Chirp Width (MHz) | Pulse 1-to-2 PRI (µsec) | Pulse 2-to-3 PRI (µsec) | Start Location Within Interval (msec) |
|-------|------------------|--------------------|-------------------|-------------------------|-------------------------|---------------------------------------|
| 1 | 2 | 88.8 | 6 | 1693 | | 426.773 |
| 2 | 1 | 50.5 | 6 | | | 125.833 |
| 3 | 2 | 69.7 | 6 | 1563 | | 106.356 |
| 4 | 3 | 75.8 | 6 | 1464 | 1008 | 681.179 |
| 5 | 2 | 62.7 | 6 | 1555 | | 883.952 |
| 6 | 1 | 60.8 | 6 | | | 629.475 |
| 7 | 2 | 69.5 | 6 | 1418 | | 81.498 |
| 8 | 1 | 74 | 6 | | | 659.132 |
| 9 | 2 | 60.6 | 6 | 1845 | | 356.935 |
| 10 | 2 | 72.4 | 6 | 1998 | | 901.448 |
| 11 | 2 | 94.9 | 6 | 1067 | | 728.601 |
| 12 | 2 | 55.7 | 6 | 1274 | | 374.554 |
| 13 | 2 | 74.2 | 6 | 1127 | | 528.777 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 14

Bursts in Trial: 14

| Burst | Number of Pulses | Pulse Width (µsec) | Chirp Width (MHz) | Pulse 1-to-2 PRI (µsec) | Pulse 2-to-3 PRI (µsec) | Start Location Within Interval (msec) |
|-------|------------------|--------------------|-------------------|-------------------------|-------------------------|---------------------------------------|
| 1 | 2 | 73.8 | 17 | 1046 | | 765.027 |
| 2 | 2 | 55.9 | 17 | 1004 | | 257.267 |
| 3 | 2 | 94.4 | 17 | 1971 | | 705.734 |
| 4 | 2 | 51.2 | 17 | 1686 | | 144.441 |
| 5 | 2 | 50 | 17 | 1845 | | 213.609 |
| 6 | 2 | 61.3 | 17 | 1163 | | 86.296 |
| 7 | 3 | 53.1 | 17 | 1974 | 1109 | 337.873 |
| 8 | 3 | 56.8 | 17 | 1523 | 1887 | 263.84 |
| 9 | 3 | 87.9 | 17 | 1028 | 1617 | 208.427 |
| 10 | 2 | 99.7 | 17 | 1790 | | 458.944 |
| 11 | 2 | 92.5 | 17 | 1282 | | 577.001 |
| 12 | 1 | 50.4 | 17 | | | 754.829 |
| 13 | 3 | 83.9 | 17 | 1531 | 1279 | 339.286 |
| 14 | 2 | 81.8 | 17 | 1239 | | 537.943 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 15

Bursts in Trial: 16

| Burst | Number of Pulses | Pulse Width (µsec) | Chirp Width (MHz) | Pulse 1-to-2 PRI (µsec) | Pulse 2-to-3 PRI (µsec) | Start Location Within Interval (msec) |
|-------|------------------|--------------------|-------------------|-------------------------|-------------------------|---------------------------------------|
| 1 | 2 | 83 | 7 | 1719 | | 172.977 |
| 2 | 1 | 78.6 | 7 | | | 687.18 |
| 3 | 1 | 76.2 | 7 | | | 74.37 |
| 4 | 2 | 72.8 | 7 | 1014 | | 742.73 |
| 5 | 2 | 83.6 | 7 | 1314 | | 424.95 |
| 6 | 1 | 73.8 | 7 | | | 206.01 |
| 7 | 2 | 87.1 | 7 | 1756 | | 729.93 |
| 8 | 1 | 90.4 | 7 | | | 734.18 |
| 9 | 1 | 72.2 | 7 | | | 156.39 |
| 10 | 2 | 74.3 | 7 | 1270 | | 712.68 |
| 11 | 2 | 78.9 | 7 | 1278 | | 99.47 |
| 12 | 3 | 98.1 | 7 | 1548 | 1161 | 580.51 |
| 13 | 2 | 62.6 | 7 | 1340 | | 414.83 |
| 14 | 3 | 98.6 | 7 | 1080 | 1699 | 16.23 |
| 15 | 2 | 80.2 | 7 | 1667 | | 389.3 |
| 16 | 1 | 70.7 | 7 | | | 382.2 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 16

Bursts in Trial: 12

| Burst | Number of Pulses | Pulse Width (µsec) | Chirp Width (MHz) | Pulse 1-to-2 PRI (µsec) | Pulse 2-to-3 PRI (µsec) | Start Location Within Interval (msec) |
|-------|------------------|--------------------|-------------------|-------------------------|-------------------------|---------------------------------------|
| 1 | 2 | 81.1 | 10 | 1258 | | 413.392 |
| 2 | 3 | 72 | 10 | 1153 | 1301 | 695.14 |
| 3 | 3 | 73.3 | 10 | 1965 | 1214 | 258.83 |
| 4 | 2 | 59.7 | 10 | 1321 | | 173.95 |
| 5 | 2 | 93.7 | 10 | 1607 | | 488.67 |
| 6 | 3 | 72.3 | 10 | 1638 | 1467 | 295.9 |
| 7 | 2 | 86.2 | 10 | 1533 | | 396.31 |
| 8 | 2 | 54.6 | 10 | 1997 | | 821.95 |
| 9 | 2 | 72.4 | 10 | 1844 | | 252.99 |
| 10 | 3 | 94.4 | 10 | 1196 | 1862 | 187.9 |
| 11 | 3 | 53.6 | 10 | 1090 | 1537 | 681 |
| 12 | 2 | 68.8 | 10 | 1514 | | 686.1 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 17

Bursts in Trial: 19

| Burst | Number of Pulses | Pulse Width (µsec) | Chirp Width (MHz) | Pulse 1-to-2 PRI (µsec) | Pulse 2-to-3 PRI (µsec) | Start Location Within Interval (msec) |
|-------|------------------|--------------------|-------------------|-------------------------|-------------------------|---------------------------------------|
| 1 | 2 | 74.5 | 7 | 1665 | | 169.111 |
| 2 | 2 | 64.1 | 7 | 1549 | | 524.371 |
| 3 | 2 | 87.5 | 7 | 1896 | | 424.422 |
| 4 | 2 | 77.5 | 7 | 1649 | | 105.803 |
| 5 | 1 | 88.6 | 7 | | | 475.024 |
| 6 | 1 | 77.6 | 7 | | | 446.475 |
| 7 | 2 | 50.8 | 7 | 1602 | | 605.466 |
| 8 | 2 | 93 | 7 | 1418 | | 59.187 |
| 9 | 3 | 68 | 7 | 1627 | 1072 | 417.218 |
| 10 | 1 | 58.5 | 7 | | | 587.299 |
| 11 | 1 | 93.5 | 7 | | | 294.961 |
| 12 | 2 | 96 | 7 | 1575 | | 216.052 |
| 13 | 3 | 63.4 | 7 | 1652 | 1816 | 14.513 |
| 14 | 2 | 59.3 | 7 | 1098 | | 358.724 |
| 15 | 1 | 88.5 | 7 | | | 320.745 |
| 16 | 3 | 75.8 | 7 | 1396 | 1539 | 542.616 |
| 17 | 1 | 55.6 | 7 | | | 179.837 |
| 18 | 1 | 68.2 | 7 | | | 125.758 |
| 19 | 3 | 63.4 | 7 | 1425 | 1115 | 450.879 |



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 18

Bursts in Trial: 9

| Burst | Number of Pulses | Pulse Width (µsec) | Chirp Width (MHz) | Pulse 1-to-2 PRI (µsec) | Pulse 2-to-3 PRI (µsec) | Start Location Within Interval (msec) |
|-------|------------------|--------------------|-------------------|-------------------------|-------------------------|---------------------------------------|
| 1 | 2 | 87.4 | 5 | 1624 | | 292.806 |
| 2 | 2 | 90.5 | 5 | 1085 | | 170.277 |
| 3 | 1 | 84 | 5 | | | 1291.063 |
| 4 | 2 | 96.4 | 5 | 1314 | | 396.55 |
| 5 | 2 | 72.2 | 5 | 1313 | | 1030.077 |
| 6 | 3 | 99.6 | 5 | 1930 | 1152 | 334.863 |
| 7 | 2 | 81.9 | 5 | 1577 | | 1302.41 |
| 8 | 2 | 57.6 | 5 | 1388 | | 727.867 |
| 9 | 3 | 77.2 | 5 | 1693 | 1084 | 174.833 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 19

Bursts in Trial: 16

| Burst | Number of Pulses | Pulse Width (µsec) | Chirp Width (MHz) | Pulse 1-to-2 PRI (µsec) | Pulse 2-to-3 PRI (µsec) | Start Location Within Interval (msec) |
|-------|------------------|--------------------|-------------------|-------------------------|-------------------------|---------------------------------------|
| 1 | 2 | 57 | 5 | 1486 | | 187.288 |
| 2 | 2 | 85.8 | 5 | 1008 | | 485.07 |
| 3 | 2 | 57.7 | 5 | 1014 | | 612.04 |
| 4 | 1 | 97.5 | 5 | | | 459.88 |
| 5 | 2 | 85.9 | 5 | 1381 | | 112.99 |
| 6 | 2 | 71.6 | 5 | 1619 | | 142.96 |
| 7 | 3 | 77.5 | 5 | 1715 | 1276 | 534.94 |
| 8 | 1 | 84.2 | 5 | | | 694.94 |
| 9 | 3 | 66.2 | 5 | 1355 | 1933 | 99.73 |
| 10 | 3 | 96.3 | 5 | 1430 | 1163 | 552.1 |
| 11 | 2 | 84 | 5 | 1193 | | 355.77 |
| 12 | 1 | 88.3 | 5 | | | 150.87 |
| 13 | 2 | 83.9 | 5 | 1342 | | 541.27 |
| 14 | 1 | 64.1 | 5 | | | 13.73 |
| 15 | 2 | 81.4 | 5 | 1342 | | 630.5 |
| 16 | 2 | 58.9 | 5 | 1348 | | 189.4 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 20

Bursts in Trial: 11

| Burst | Number of Pulses | Pulse Width (µsec) | Chirp Width (MHz) | Pulse 1-to-2 PRI (µsec) | Pulse 2-to-3 PRI (µsec) | Start Location Within Interval (msec) |
|-------|------------------|--------------------|-------------------|-------------------------|-------------------------|---------------------------------------|
| 1 | 1 | 60.6 | 8 | | | 331.131 |
| 2 | 1 | 79 | 8 | | | 813.141 |
| 3 | 1 | 78.8 | 8 | | | 1068.802 |
| 4 | 1 | 87.6 | 8 | | | 663.703 |
| 5 | 2 | 85.1 | 8 | 1601 | | 308.744 |
| 6 | 2 | 83 | 8 | 1897 | | 257.255 |
| 7 | 1 | 78.4 | 8 | | | 81.195 |
| 8 | 3 | 99.5 | 8 | 1159 | 1194 | 519.576 |
| 9 | 2 | 69.8 | 8 | 1774 | | 911.877 |
| 10 | 3 | 87.1 | 8 | 1695 | 1664 | 59.888 |
| 11 | 2 | 54.6 | 8 | 1978 | | 137.909 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 21

Bursts in Trial: 12

| Burst | Number of Pulses | Pulse Width (µsec) | Chirp Width (MHz) | Pulse 1-to-2 PRI (µsec) | Pulse 2-to-3 PRI (µsec) | Start Location Within Interval (msec) |
|-------|------------------|--------------------|-------------------|-------------------------|-------------------------|---------------------------------------|
| 1 | 2 | 99.4 | 13 | 1823 | | 793.404 |
| 2 | 2 | 56.3 | 13 | 1716 | | 612.78 |
| 3 | 1 | 55.2 | 13 | | | 345.74 |
| 4 | 2 | 99.4 | 13 | 1952 | | 769.88 |
| 5 | 1 | 89.4 | 13 | | | 222.78 |
| 6 | 2 | 74.4 | 13 | 1312 | | 108.78 |
| 7 | 3 | 99.8 | 13 | 1083 | 1058 | 358.77 |
| 8 | 1 | 97.9 | 13 | | | 527.1 |
| 9 | 2 | 51.3 | 13 | 1902 | | 90.93 |
| 10 | 2 | 55.6 | 13 | 1944 | | 654.05 |
| 11 | 2 | 85 | 13 | 1467 | | 332.2 |
| 12 | 2 | 68.3 | 13 | 1841 | | 424.6 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 22

Bursts in Trial: 13

| Burst | Number of Pulses | Pulse Width (µsec) | Chirp Width (MHz) | Pulse 1-to-2 PRI (µsec) | Pulse 2-to-3 PRI (µsec) | Start Location Within Interval (msec) |
|-------|------------------|--------------------|-------------------|-------------------------|-------------------------|---------------------------------------|
| 1 | 3 | 80.7 | 16 | 1882 | 1891 | 405.183 |
| 2 | 2 | 64.6 | 16 | 1814 | | 556.693 |
| 3 | 3 | 70.8 | 16 | 1332 | 1399 | 74.236 |
| 4 | 3 | 80.7 | 16 | 1247 | 1144 | 71.899 |
| 5 | 2 | 57.9 | 16 | 1681 | | 174.522 |
| 6 | 1 | 63.2 | 16 | | | 174.015 |
| 7 | 1 | 62.3 | 16 | | | 383.118 |
| 8 | 2 | 66.5 | 16 | 1761 | | 44.732 |
| 9 | 2 | 71.1 | 16 | 1883 | | 302.035 |
| 10 | 2 | 89.4 | 16 | 1216 | | 585.768 |
| 11 | 3 | 55.2 | 16 | 1847 | 1931 | 844.931 |
| 12 | 2 | 54.5 | 16 | 1486 | | 308.854 |
| 13 | 2 | 98.5 | 16 | 1484 | | 489.277 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 23

Bursts in Trial: 18

| Burst | Number of Pulses | Pulse Width (µsec) | Chirp Width (MHz) | Pulse 1-to-2 PRI (µsec) | Pulse 2-to-3 PRI (µsec) | Start Location Within Interval (msec) |
|-------|------------------|--------------------|-------------------|-------------------------|-------------------------|---------------------------------------|
| 1 | 2 | 58.2 | 17 | 1028 | | 132.646 |
| 2 | 2 | 87.1 | 17 | 1105 | | 119.433 |
| 3 | 2 | 66.4 | 17 | 1016 | | 399.767 |
| 4 | 2 | 77.5 | 17 | 1892 | | 38.58 |
| 5 | 3 | 85.9 | 17 | 1857 | 1870 | 421.803 |
| 6 | 2 | 77 | 17 | 1912 | | 587.167 |
| 7 | 2 | 71.2 | 17 | 1859 | | 305.63 |
| 8 | 2 | 51.6 | 17 | 1323 | | 194.643 |
| 9 | 2 | 78.7 | 17 | 1271 | | 232.127 |
| 10 | 1 | 65.1 | 17 | | | 424.26 |
| 11 | 2 | 89.7 | 17 | 1215 | | 59.723 |
| 12 | 2 | 55.8 | 17 | 1388 | | 657.287 |
| 13 | 1 | 72.1 | 17 | | | 610.79 |
| 14 | 2 | 67.8 | 17 | 1528 | | 212.713 |
| 15 | 2 | 65.6 | 17 | 1499 | | 232.757 |
| 16 | 2 | 67.4 | 17 | 1105 | | 623.9 |
| 17 | 2 | 88.1 | 17 | 1868 | | 330.433 |
| 18 | 2 | 77.6 | 17 | 1074 | | 377.667 |
| | | | | | | |
| | | | | | | |



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 24

Bursts in Trial: 9

| Burst | Number of Pulses | Pulse Width (μsec) | Chirp Width (MHz) | Pulse 1-to-2 PRI (μsec) | Pulse 2-to-3 PRI (μsec) | Start Location Within Interval (msec) |
|-------|------------------|--------------------|-------------------|-------------------------|-------------------------|---------------------------------------|
| 1 | 3 | 52.3 | 13 | 1778 | 1959 | 882.084 |
| 2 | 1 | 69 | 13 | | | 1226.897 |
| 3 | 2 | 82.3 | 13 | 1168 | | 1155.403 |
| 4 | 1 | 83.5 | 13 | | | 59.02 |
| 5 | 3 | 96.8 | 13 | 1489 | 1754 | 973.767 |
| 6 | 2 | 79.2 | 13 | 1626 | | 713.073 |
| 7 | 2 | 93.8 | 13 | 1803 | | 27.22 |
| 8 | 1 | 57.8 | 13 | | | 998.267 |
| 9 | 2 | 61.3 | 13 | 1409 | | 960.233 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 25

Bursts in Trial: 14

| Burst | Number of Pulses | Pulse Width (µsec) | Chirp Width (MHz) | Pulse 1-to-2 PRI (µsec) | Pulse 2-to-3 PRI (µsec) | Start Location Within Interval (msec) |
|-------|------------------|--------------------|-------------------|-------------------------|-------------------------|---------------------------------------|
| 1 | 3 | 52.2 | 11 | 1972 | 1486 | 343.743 |
| 2 | 2 | 74.4 | 11 | 1318 | | 691.497 |
| 3 | 3 | 52 | 11 | 1784 | 1024 | 424.634 |
| 4 | 2 | 50.5 | 11 | 1157 | | 33.361 |
| 5 | 2 | 54.3 | 11 | 1959 | | 673.469 |
| 6 | 2 | 67.8 | 11 | 1761 | | 168.716 |
| 7 | 2 | 68 | 11 | 1110 | | 782.493 |
| 8 | 2 | 80.8 | 11 | 1877 | | 299.6 |
| 9 | 1 | 79.5 | 11 | | | 741.207 |
| 10 | 2 | 64.8 | 11 | 1020 | | 742.464 |
| 11 | 2 | 87.8 | 11 | 1898 | | 64.461 |
| 12 | 2 | 52.6 | 11 | 1806 | | 11.459 |
| 13 | 2 | 69.8 | 11 | 1802 | | 129.286 |
| 14 | 3 | 86.8 | 11 | 1323 | 1491 | 582.543 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 26

Bursts in Trial: 8

| Burst | Number of Pulses | Pulse Width (µsec) | Chirp Width (MHz) | Pulse 1-to-2 PRI (µsec) | Pulse 2-to-3 PRI (µsec) | Start Location Within Interval (msec) |
|-------|------------------|--------------------|-------------------|-------------------------|-------------------------|---------------------------------------|
| 1 | 2 | 62.6 | 12 | 1390 | | 1366.25 |
| 2 | 1 | 87.7 | 12 | | | 8.73 |
| 3 | 1 | 97.7 | 12 | | | 945.59 |
| 4 | 3 | 82.4 | 12 | 1485 | 1976 | 1179.53 |
| 5 | 1 | 94.7 | 12 | | | 809.19 |
| 6 | 3 | 91.1 | 12 | 1955 | 1751 | 1388.79 |
| 7 | 2 | 56.8 | 12 | 1074 | | 295.65 |
| 8 | 2 | 52.1 | 12 | 1716 | | 110.5 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |


TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 27

Bursts in Trial: 10

| Burst | Number of Pulses | Pulse Width (µsec) | Chirp Width (MHz) | Pulse 1-to-2 PRI (µsec) | Pulse 2-to-3 PRI (µsec) | Start Location Within Interval (msec) |
|-------|------------------|--------------------|-------------------|-------------------------|-------------------------|---------------------------------------|
| 1 | 2 | 90.7 | 5 | 1600 | | 712.776 |
| 2 | 2 | 60.8 | 5 | 1766 | | 840.44 |
| 3 | 1 | 61.7 | 5 | | | 199.3 |
| 4 | 2 | 70.1 | 5 | 1923 | | 605.19 |
| 5 | 1 | 56.4 | 5 | | | 452.22 |
| 6 | 2 | 98 | 5 | 1718 | | 787.39 |
| 7 | 1 | 74.2 | 5 | | | 813.8 |
| 8 | 2 | 64.4 | 5 | 1972 | | 779.57 |
| 9 | 2 | 59.4 | 5 | 1604 | | 267.57 |
| 10 | 1 | 93.3 | 5 | | | 592.3 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 28

Bursts in Trial: 13

| Burst | Number of Pulses | Pulse Width (µsec) | Chirp Width (MHz) | Pulse 1-to-2 PRI (µsec) | Pulse 2-to-3 PRI (µsec) | Start Location Within Interval (msec) |
|-------|------------------|--------------------|-------------------|-------------------------|-------------------------|---------------------------------------|
| 1 | 1 | 57.2 | 15 | | | 361.53 |
| 2 | 2 | 89.5 | 15 | 1561 | | 334.443 |
| 3 | 2 | 85.5 | 15 | 1432 | | 302.756 |
| 4 | 2 | 73.5 | 15 | 1652 | | 262.889 |
| 5 | 2 | 88.3 | 15 | 1973 | | 115.332 |
| 6 | 2 | 65.5 | 15 | 1550 | | 810.305 |
| 7 | 2 | 98.4 | 15 | 1259 | | 673.348 |
| 8 | 2 | 93.3 | 15 | 1815 | | 564.592 |
| 9 | 3 | 90.2 | 15 | 1960 | 1242 | 47.105 |
| 10 | 2 | 57.9 | 15 | 1321 | | 325.798 |
| 11 | 2 | 81.7 | 15 | 1307 | | 185.511 |
| 12 | 2 | 67.3 | 15 | 1992 | | 468.954 |
| 13 | 2 | 80.9 | 15 | 1056 | | 388.777 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 29

Bursts in Trial: 17

| Burst | Number of Pulses | Pulse Width (µsec) | Chirp Width (MHz) | Pulse 1-to-2 PRI (µsec) | Pulse 2-to-3 PRI (µsec) | Start Location Within Interval (msec) |
|-------|------------------|--------------------|-------------------|-------------------------|-------------------------|---------------------------------------|
| 1 | 2 | 59.1 | 13 | 1212 | | 25.957 |
| 2 | 3 | 62.9 | 13 | 1514 | 1438 | 238.104 |
| 3 | 2 | 50.4 | 13 | 1467 | | 246.115 |
| 4 | 2 | 55.4 | 13 | 1909 | | 614.643 |
| 5 | 2 | 65.6 | 13 | 1814 | | 3.901 |
| 6 | 3 | 82.9 | 13 | 1609 | 1048 | 614.598 |
| 7 | 2 | 93.8 | 13 | 1495 | | 427.856 |
| 8 | 3 | 72.1 | 13 | 1857 | 1511 | 2.964 |
| 9 | 2 | 58.4 | 13 | 1634 | | 169.731 |
| 10 | 3 | 98 | 13 | 1342 | 1316 | 528.599 |
| 11 | 2 | 92.7 | 13 | 1623 | | 60.366 |
| 12 | 2 | 65.5 | 13 | 1173 | | 459.174 |
| 13 | 3 | 57.7 | 13 | 1632 | 1321 | 661.312 |
| 14 | 3 | 78.8 | 13 | 1803 | 1641 | 620.259 |
| 15 | 1 | 91.4 | 13 | | | 108.607 |
| 16 | 2 | 61.5 | 13 | 1574 | | 306.265 |
| 17 | 2 | 71.8 | 13 | 1404 | | 84.282 |
| | | | | | | |
| | | | | | | |
| | | | | | | |




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 30

Bursts in Trial: 14

| Burst | Number of Pulses | Pulse Width (µsec) | Chirp Width (MHz) | Pulse 1-to-2 PRI (µsec) | Pulse 2-to-3 PRI (µsec) | Start Location Within Interval (msec) |
|-------|------------------|--------------------|-------------------|-------------------------|-------------------------|---------------------------------------|
| 1 | 2 | 76.2 | 10 | 1283 | | 729.662 |
| 2 | 2 | 80 | 10 | 1673 | | 813.997 |
| 3 | 3 | 69.9 | 10 | 1629 | 1008 | 640.354 |
| 4 | 2 | 86.3 | 10 | 1257 | | 525.791 |
| 5 | 2 | 69.8 | 10 | 1063 | | 308.449 |
| 6 | 2 | 81.2 | 10 | 1997 | | 370.556 |
| 7 | 3 | 59.8 | 10 | 1461 | 1903 | 850.573 |
| 8 | 2 | 56.5 | 10 | 1892 | | 674.77 |
| 9 | 1 | 57.9 | 10 | | | 126.497 |
| 10 | 3 | 61.1 | 10 | 1579 | 1200 | 127.074 |
| 11 | 1 | 81.7 | 10 | | | 695.781 |
| 12 | 2 | 59.8 | 10 | 1650 | | 797.129 |
| 13 | 2 | 88.2 | 10 | 1498 | | 183.986 |
| 14 | 1 | 80 | 10 | | | 512.043 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |



Product : Wireless module
 Test Item : Statistical Performance Check
 Radar Type : Type 6
 Test Mode : Normal (802.11ac-20 MHz)
 Test Date : 2024/01/05

| Trial # | Frequency (MHz) | *Filename | 1= Detection 0= No Detection |
|---------------------------------|-----------------|--|---------------------------------|
| 1 | 5500 | Statistical_Check_Hopping Frequency List_For_Radar_Type_6_1_trail | 1 |
| 2 | 5500 | Statistical_Check_Hopping Frequency List_For_Radar_Type_6_2_trail | 1 |
| 3 | 5500 | Statistical_Check_Hopping Frequency List_For_Radar_Type_6_3_trail | 1 |
| 4 | 5500 | Statistical_Check_Hopping Frequency List_For_Radar_Type_6_4_trail | 1 |
| 5 | 5500 | Statistical_Check_Hopping Frequency List_For_Radar_Type_6_5_trail | 1 |
| 6 | 5500 | Statistical_Check_Hopping Frequency List_For_Radar_Type_6_6_trail | 1 |
| 7 | 5500 | Statistical_Check_Hopping Frequency List_For_Radar_Type_6_7_trail | 1 |
| 8 | 5500 | Statistical_Check_Hopping Frequency List_For_Radar_Type_6_8_trail | 1 |
| 9 | 5500 | Statistical_Check_Hopping Frequency List_For_Radar_Type_6_9_trail | 1 |
| 10 | 5500 | Statistical_Check_Hopping Frequency List_For_Radar_Type_6_10_trail | 1 |
| 11 | 5500 | Statistical_Check_Hopping Frequency List_For_Radar_Type_6_11_trail | 1 |
| 12 | 5500 | Statistical_Check_Hopping Frequency List_For_Radar_Type_6_12_trail | 1 |
| 13 | 5500 | Statistical_Check_Hopping Frequency List_For_Radar_Type_6_13_trail | 1 |
| 14 | 5500 | Statistical_Check_Hopping Frequency List_For_Radar_Type_6_14_trail | 1 |
| 15 | 5500 | Statistical_Check_Hopping Frequency List_For_Radar_Type_6_15_trail | 1 |
| 16 | 5500 | Statistical_Check_Hopping Frequency List_For_Radar_Type_6_16_trail | 1 |
| 17 | 5500 | Statistical_Check_Hopping Frequency List_For_Radar_Type_6_17_trail | 1 |
| 18 | 5500 | Statistical_Check_Hopping Frequency List_For_Radar_Type_6_18_trail | 1 |
| 19 | 5500 | Statistical_Check_Hopping Frequency List_For_Radar_Type_6_19_trail | 1 |
| 20 | 5500 | Statistical_Check_Hopping Frequency List_For_Radar_Type_6_20_trail | 1 |
| 21 | 5500 | Statistical_Check_Hopping Frequency List_For_Radar_Type_6_21_trail | 1 |
| 22 | 5500 | Statistical_Check_Hopping Frequency List_For_Radar_Type_6_22_trail | 1 |
| 23 | 5500 | Statistical_Check_Hopping Frequency List_For_Radar_Type_6_23_trail | 1 |
| 24 | 5500 | Statistical_Check_Hopping Frequency List_For_Radar_Type_6_24_trail | 1 |
| 25 | 5500 | Statistical_Check_Hopping Frequency List_For_Radar_Type_6_25_trail | 1 |
| 26 | 5500 | Statistical_Check_Hopping Frequency List_For_Radar_Type_6_26_trail | 1 |
| 27 | 5500 | Statistical_Check_Hopping Frequency List_For_Radar_Type_6_27_trail | 1 |
| 28 | 5500 | Statistical_Check_Hopping Frequency List_For_Radar_Type_6_28_trail | 0 |
| 29 | 5500 | Statistical_Check_Hopping Frequency List_For_Radar_Type_6_29_trail | 1 |
| 30 | 5500 | Statistical_Check_Hopping Frequency List_For_Radar_Type_6_30_trail | 1 |
| Detection Percentage (%) | | | 96.67 |
| Limit | | | >70 |

TYPE 6 PARAMETER SHEET

Trial Number : 1

Bursts in Trial: 100

| Burst | Carrier (GHz) | Hop (GHz) | DUT BW (MHz) | Within RX |
|-------|---------------|-----------|--------------|-----------|
| 1 | 5.5 | 5.275 | 20 | |
| 2 | 5.5 | 5.508 | 20 | * |
| 3 | 5.5 | 5.494 | 20 | * |
| 4 | 5.5 | 5.679 | 20 | |
| 5 | 5.5 | 5.341 | 20 | |
| 6 | 5.5 | 5.462 | 20 | |
| 7 | 5.5 | 5.52 | 20 | |
| 8 | 5.5 | 5.503 | 20 | * |
| 9 | 5.5 | 5.612 | 20 | |
| 10 | 5.5 | 5.683 | 20 | |
| 11 | 5.5 | 5.585 | 20 | |
| 12 | 5.5 | 5.339 | 20 | |
| 13 | 5.5 | 5.43 | 20 | |
| 14 | 5.5 | 5.452 | 20 | |
| 15 | 5.5 | 5.386 | 20 | |
| 16 | 5.5 | 5.716 | 20 | |
| 17 | 5.5 | 5.471 | 20 | |
| 18 | 5.5 | 5.497 | 20 | * |
| 19 | 5.5 | 5.692 | 20 | |
| 20 | 5.5 | 5.674 | 20 | |
| 21 | 5.5 | 5.336 | 20 | |
| 22 | 5.5 | 5.398 | 20 | |
| 23 | 5.5 | 5.581 | 20 | |
| 24 | 5.5 | 5.255 | 20 | |
| 25 | 5.5 | 5.548 | 20 | |
| 26 | 5.5 | 5.607 | 20 | |
| 27 | 5.5 | 5.299 | 20 | |
| 28 | 5.5 | 5.304 | 20 | |
| 29 | 5.5 | 5.723 | 20 | |
| 30 | 5.5 | 5.685 | 20 | |
| 31 | 5.5 | 5.291 | 20 | |
| 32 | 5.5 | 5.518 | 20 | |
| 33 | 5.5 | 5.473 | 20 | |
| 34 | 5.5 | 5.421 | 20 | |
| 35 | 5.5 | 5.663 | 20 | |
| 36 | 5.5 | 5.547 | 20 | |
| 37 | 5.5 | 5.711 | 20 | |
| 38 | 5.5 | 5.475 | 20 | |
| 39 | 5.5 | 5.322 | 20 | |
| 40 | 5.5 | 5.713 | 20 | |
| 41 | 5.5 | 5.604 | 20 | |
| 42 | 5.5 | 5.426 | 20 | |
| 43 | 5.5 | 5.342 | 20 | |
| 44 | 5.5 | 5.632 | 20 | |
| 45 | 5.5 | 5.63 | 20 | |
| 46 | 5.5 | 5.382 | 20 | |
| 47 | 5.5 | 5.26 | 20 | |
| 48 | 5.5 | 5.538 | 20 | |
| 49 | 5.5 | 5.434 | 20 | |

| | | | | |
|-----|-----|-------|----|---|
| 50 | 5.5 | 5.682 | 20 | |
| 51 | 5.5 | 5.541 | 20 | |
| 52 | 5.5 | 5.375 | 20 | |
| 53 | 5.5 | 5.335 | 20 | |
| 54 | 5.5 | 5.392 | 20 | |
| 55 | 5.5 | 5.525 | 20 | |
| 56 | 5.5 | 5.379 | 20 | |
| 57 | 5.5 | 5.323 | 20 | |
| 58 | 5.5 | 5.4 | 20 | |
| 59 | 5.5 | 5.697 | 20 | |
| 60 | 5.5 | 5.664 | 20 | |
| 61 | 5.5 | 5.296 | 20 | |
| 62 | 5.5 | 5.506 | 20 | * |
| 63 | 5.5 | 5.457 | 20 | |
| 64 | 5.5 | 5.407 | 20 | |
| 65 | 5.5 | 5.499 | 20 | * |
| 66 | 5.5 | 5.294 | 20 | |
| 67 | 5.5 | 5.574 | 20 | |
| 68 | 5.5 | 5.283 | 20 | |
| 69 | 5.5 | 5.587 | 20 | |
| 70 | 5.5 | 5.512 | 20 | |
| 71 | 5.5 | 5.517 | 20 | |
| 72 | 5.5 | 5.404 | 20 | |
| 73 | 5.5 | 5.276 | 20 | |
| 74 | 5.5 | 5.485 | 20 | |
| 75 | 5.5 | 5.359 | 20 | |
| 76 | 5.5 | 5.546 | 20 | |
| 77 | 5.5 | 5.644 | 20 | |
| 78 | 5.5 | 5.354 | 20 | |
| 79 | 5.5 | 5.388 | 20 | |
| 80 | 5.5 | 5.3 | 20 | |
| 81 | 5.5 | 5.419 | 20 | |
| 82 | 5.5 | 5.27 | 20 | |
| 83 | 5.5 | 5.482 | 20 | |
| 84 | 5.5 | 5.498 | 20 | * |
| 85 | 5.5 | 5.706 | 20 | |
| 86 | 5.5 | 5.545 | 20 | |
| 87 | 5.5 | 5.295 | 20 | |
| 88 | 5.5 | 5.391 | 20 | |
| 89 | 5.5 | 5.454 | 20 | |
| 90 | 5.5 | 5.562 | 20 | |
| 91 | 5.5 | 5.62 | 20 | |
| 92 | 5.5 | 5.395 | 20 | |
| 93 | 5.5 | 5.645 | 20 | |
| 94 | 5.5 | 5.455 | 20 | |
| 95 | 5.5 | 5.654 | 20 | |
| 96 | 5.5 | 5.661 | 20 | |
| 97 | 5.5 | 5.303 | 20 | |
| 98 | 5.5 | 5.705 | 20 | |
| 99 | 5.5 | 5.33 | 20 | |
| 100 | 5.5 | 5.519 | 20 | |

TYPE 6 PARAMETER SHEET

Trial Number : 2

Bursts in Trial: 100

| Burst | Carrier (GHz) | Hop (GHz) | DUT BW (MHz) | Within RX |
|-------|---------------|-----------|--------------|-----------|
| 1 | 5.5 | 5.3 | 20 | |
| 2 | 5.5 | 5.651 | 20 | |
| 3 | 5.5 | 5.469 | 20 | |
| 4 | 5.5 | 5.391 | 20 | |
| 5 | 5.5 | 5.467 | 20 | |
| 6 | 5.5 | 5.331 | 20 | |
| 7 | 5.5 | 5.404 | 20 | |
| 8 | 5.5 | 5.615 | 20 | |
| 9 | 5.5 | 5.723 | 20 | |
| 10 | 5.5 | 5.271 | 20 | |
| 11 | 5.5 | 5.418 | 20 | |
| 12 | 5.5 | 5.686 | 20 | |
| 13 | 5.5 | 5.631 | 20 | |
| 14 | 5.5 | 5.413 | 20 | |
| 15 | 5.5 | 5.565 | 20 | |
| 16 | 5.5 | 5.591 | 20 | |
| 17 | 5.5 | 5.568 | 20 | |
| 18 | 5.5 | 5.514 | 20 | |
| 19 | 5.5 | 5.42 | 20 | |
| 20 | 5.5 | 5.511 | 20 | |
| 21 | 5.5 | 5.393 | 20 | |
| 22 | 5.5 | 5.526 | 20 | |
| 23 | 5.5 | 5.603 | 20 | |

TYPE 6 PARAMETER SHEET

Trial Number : 3

Bursts in Trial: 100

| Burst | Carrier (GHz) | Hop (GHz) | DUT BW (MHz) | Within RX |
|-------|---------------|-----------|--------------|-----------|
| 1 | 5.5 | 5.658 | 20 | |
| 2 | 5.5 | 5.3 | 20 | |
| 3 | 5.5 | 5.273 | 20 | |
| 4 | 5.5 | 5.259 | 20 | |
| 5 | 5.5 | 5.446 | 20 | |
| 6 | 5.5 | 5.643 | 20 | |
| 7 | 5.5 | 5.342 | 20 | |
| 8 | 5.5 | 5.503 | 20 | * |
| 9 | 5.5 | 5.31 | 20 | |
| 10 | 5.5 | 5.336 | 20 | |
| 11 | 5.5 | 5.663 | 20 | |
| 12 | 5.5 | 5.471 | 20 | |
| 13 | 5.5 | 5.693 | 20 | |
| 14 | 5.5 | 5.272 | 20 | |
| 15 | 5.5 | 5.363 | 20 | |
| 16 | 5.5 | 5.334 | 20 | |
| 17 | 5.5 | 5.474 | 20 | |
| 18 | 5.5 | 5.532 | 20 | |
| 19 | 5.5 | 5.679 | 20 | |
| 20 | 5.5 | 5.258 | 20 | |
| 21 | 5.5 | 5.566 | 20 | |
| 22 | 5.5 | 5.347 | 20 | |
| 23 | 5.5 | 5.607 | 20 | |

TYPE 6 PARAMETER SHEET

Trial Number : 4

Bursts in Trial: 100

| Burst | Carrier (GHz) | Hop (GHz) | DUT BW (MHz) | Within RX |
|-------|---------------|-----------|--------------|-----------|
| 1 | 5.5 | 5.395 | 20 | |
| 2 | 5.5 | 5.67 | 20 | |
| 3 | 5.5 | 5.654 | 20 | |
| 4 | 5.5 | 5.522 | 20 | |
| 5 | 5.5 | 5.588 | 20 | |
| 6 | 5.5 | 5.651 | 20 | |
| 7 | 5.5 | 5.579 | 20 | |
| 8 | 5.5 | 5.412 | 20 | |
| 9 | 5.5 | 5.451 | 20 | |
| 10 | 5.5 | 5.316 | 20 | |
| 11 | 5.5 | 5.284 | 20 | |
| 12 | 5.5 | 5.542 | 20 | |
| 13 | 5.5 | 5.278 | 20 | |
| 14 | 5.5 | 5.513 | 20 | |
| 15 | 5.5 | 5.29 | 20 | |
| 16 | 5.5 | 5.55 | 20 | |
| 17 | 5.5 | 5.311 | 20 | |
| 18 | 5.5 | 5.397 | 20 | |
| 19 | 5.5 | 5.424 | 20 | |
| 20 | 5.5 | 5.45 | 20 | |
| 21 | 5.5 | 5.577 | 20 | |
| 22 | 5.5 | 5.531 | 20 | |
| 23 | 5.5 | 5.648 | 20 | |

TYPE 6 PARAMETER SHEET

Trial Number : 5

Bursts in Trial: 100

| Burst | Carrier (GHz) | Hop (GHz) | DUT BW (MHz) | Within RX |
|-------|---------------|-----------|--------------|-----------|
| 1 | 5.5 | 5.714 | 20 | |
| 2 | 5.5 | 5.422 | 20 | |
| 3 | 5.5 | 5.63 | 20 | |
| 4 | 5.5 | 5.536 | 20 | |
| 5 | 5.5 | 5.684 | 20 | |
| 6 | 5.5 | 5.251 | 20 | |
| 7 | 5.5 | 5.477 | 20 | |
| 8 | 5.5 | 5.374 | 20 | |
| 9 | 5.5 | 5.396 | 20 | |
| 10 | 5.5 | 5.673 | 20 | |
| 11 | 5.5 | 5.606 | 20 | |
| 12 | 5.5 | 5.43 | 20 | |
| 13 | 5.5 | 5.404 | 20 | |
| 14 | 5.5 | 5.377 | 20 | |
| 15 | 5.5 | 5.692 | 20 | |
| 16 | 5.5 | 5.515 | 20 | |
| 17 | 5.5 | 5.445 | 20 | |
| 18 | 5.5 | 5.704 | 20 | |
| 19 | 5.5 | 5.351 | 20 | |
| 20 | 5.5 | 5.257 | 20 | |
| 21 | 5.5 | 5.419 | 20 | |
| 22 | 5.5 | 5.32 | 20 | |
| 23 | 5.5 | 5.616 | 20 | |

TYPE 6 PARAMETER SHEET

Trial Number : 6

Bursts in Trial: 100

| Burst | Carrier (GHz) | Hop (GHz) | DUT BW (MHz) | Within RX |
|-------|---------------|-----------|--------------|-----------|
| 1 | 5.5 | 5.312 | 20 | |
| 2 | 5.5 | 5.716 | 20 | |
| 3 | 5.5 | 5.478 | 20 | |
| 4 | 5.5 | 5.295 | 20 | |
| 5 | 5.5 | 5.409 | 20 | |
| 6 | 5.5 | 5.695 | 20 | |
| 7 | 5.5 | 5.574 | 20 | |
| 8 | 5.5 | 5.388 | 20 | |
| 9 | 5.5 | 5.519 | 20 | |
| 10 | 5.5 | 5.434 | 20 | |
| 11 | 5.5 | 5.315 | 20 | |
| 12 | 5.5 | 5.473 | 20 | |
| 13 | 5.5 | 5.621 | 20 | |
| 14 | 5.5 | 5.313 | 20 | |
| 15 | 5.5 | 5.414 | 20 | |
| 16 | 5.5 | 5.689 | 20 | |
| 17 | 5.5 | 5.4 | 20 | |
| 18 | 5.5 | 5.676 | 20 | |
| 19 | 5.5 | 5.659 | 20 | |
| 20 | 5.5 | 5.43 | 20 | |
| 21 | 5.5 | 5.405 | 20 | |
| 22 | 5.5 | 5.586 | 20 | |
| 23 | 5.5 | 5.298 | 20 | |

TYPE 6 PARAMETER SHEET

Trial Number : 7

Bursts in Trial: 100

| Burst | Carrier (GHz) | Hop (GHz) | DUT BW (MHz) | Within RX |
|-------|---------------|-----------|--------------|-----------|
| 1 | 5.5 | 5.483 | 20 | |
| 2 | 5.5 | 5.292 | 20 | |
| 3 | 5.5 | 5.425 | 20 | |
| 4 | 5.5 | 5.542 | 20 | |
| 5 | 5.5 | 5.405 | 20 | |
| 6 | 5.5 | 5.651 | 20 | |
| 7 | 5.5 | 5.537 | 20 | |
| 8 | 5.5 | 5.602 | 20 | |
| 9 | 5.5 | 5.454 | 20 | |
| 10 | 5.5 | 5.713 | 20 | |
| 11 | 5.5 | 5.488 | 20 | |
| 12 | 5.5 | 5.304 | 20 | |
| 13 | 5.5 | 5.279 | 20 | |
| 14 | 5.5 | 5.388 | 20 | |
| 15 | 5.5 | 5.605 | 20 | |
| 16 | 5.5 | 5.544 | 20 | |
| 17 | 5.5 | 5.474 | 20 | |
| 18 | 5.5 | 5.682 | 20 | |
| 19 | 5.5 | 5.362 | 20 | |
| 20 | 5.5 | 5.565 | 20 | |
| 21 | 5.5 | 5.532 | 20 | |
| 22 | 5.5 | 5.26 | 20 | |
| 23 | 5.5 | 5.556 | 20 | |

TYPE 6 PARAMETER SHEET

Trial Number : 8

Bursts in Trial: 100

| Burst | Carrier (GHz) | Hop (GHz) | DUT BW (MHz) | Within RX |
|-------|---------------|-----------|--------------|-----------|
| 1 | 5.5 | 5.658 | 20 | |
| 2 | 5.5 | 5.478 | 20 | |
| 3 | 5.5 | 5.266 | 20 | |
| 4 | 5.5 | 5.307 | 20 | |
| 5 | 5.5 | 5.547 | 20 | |
| 6 | 5.5 | 5.56 | 20 | |
| 7 | 5.5 | 5.691 | 20 | |
| 8 | 5.5 | 5.363 | 20 | |
| 9 | 5.5 | 5.346 | 20 | |
| 10 | 5.5 | 5.458 | 20 | |
| 11 | 5.5 | 5.461 | 20 | |
| 12 | 5.5 | 5.409 | 20 | |
| 13 | 5.5 | 5.576 | 20 | |
| 14 | 5.5 | 5.665 | 20 | |
| 15 | 5.5 | 5.502 | 20 | * |
| 16 | 5.5 | 5.415 | 20 | |
| 17 | 5.5 | 5.599 | 20 | |
| 18 | 5.5 | 5.602 | 20 | |
| 19 | 5.5 | 5.417 | 20 | |
| 20 | 5.5 | 5.539 | 20 | |
| 21 | 5.5 | 5.667 | 20 | |
| 22 | 5.5 | 5.329 | 20 | |
| 23 | 5.5 | 5.551 | 20 | |

TYPE 6 PARAMETER SHEET

Trial Number : 9

Bursts in Trial: 100

| Burst | Carrier (GHz) | Hop (GHz) | DUT BW (MHz) | Within RX |
|-------|---------------|-----------|--------------|-----------|
| 1 | 5.5 | 5.444 | 20 | |
| 2 | 5.5 | 5.365 | 20 | |
| 3 | 5.5 | 5.367 | 20 | |
| 4 | 5.5 | 5.68 | 20 | |
| 5 | 5.5 | 5.277 | 20 | |
| 6 | 5.5 | 5.42 | 20 | |
| 7 | 5.5 | 5.643 | 20 | |
| 8 | 5.5 | 5.472 | 20 | |
| 9 | 5.5 | 5.618 | 20 | |
| 10 | 5.5 | 5.499 | 20 | * |
| 11 | 5.5 | 5.296 | 20 | |
| 12 | 5.5 | 5.559 | 20 | |
| 13 | 5.5 | 5.544 | 20 | |
| 14 | 5.5 | 5.577 | 20 | |
| 15 | 5.5 | 5.606 | 20 | |
| 16 | 5.5 | 5.422 | 20 | |
| 17 | 5.5 | 5.314 | 20 | |
| 18 | 5.5 | 5.574 | 20 | |
| 19 | 5.5 | 5.672 | 20 | |
| 20 | 5.5 | 5.272 | 20 | |
| 21 | 5.5 | 5.386 | 20 | |
| 22 | 5.5 | 5.47 | 20 | |
| 23 | 5.5 | 5.527 | 20 | |

TYPE 6 PARAMETER SHEET

Trial Number : 10

Bursts in Trial: 100

| Burst | Carrier (GHz) | Hop (GHz) | DUT BW (MHz) | Within RX |
|-------|---------------|-----------|--------------|-----------|
| 1 | 5.5 | 5.669 | 20 | |
| 2 | 5.5 | 5.43 | 20 | |
| 3 | 5.5 | 5.551 | 20 | |
| 4 | 5.5 | 5.349 | 20 | |
| 5 | 5.5 | 5.436 | 20 | |
| 6 | 5.5 | 5.413 | 20 | |
| 7 | 5.5 | 5.256 | 20 | |
| 8 | 5.5 | 5.353 | 20 | |
| 9 | 5.5 | 5.677 | 20 | |
| 10 | 5.5 | 5.404 | 20 | |
| 11 | 5.5 | 5.665 | 20 | |
| 12 | 5.5 | 5.355 | 20 | |
| 13 | 5.5 | 5.498 | 20 | * |
| 14 | 5.5 | 5.595 | 20 | |
| 15 | 5.5 | 5.53 | 20 | |
| 16 | 5.5 | 5.648 | 20 | |
| 17 | 5.5 | 5.6 | 20 | |
| 18 | 5.5 | 5.602 | 20 | |
| 19 | 5.5 | 5.375 | 20 | |
| 20 | 5.5 | 5.386 | 20 | |
| 21 | 5.5 | 5.63 | 20 | |
| 22 | 5.5 | 5.456 | 20 | |
| 23 | 5.5 | 5.425 | 20 | |

TYPE 6 PARAMETER SHEET

Trial Number : 11

Bursts in Trial: 100

| Burst | Carrier (GHz) | Hop (GHz) | DUT BW (MHz) | Within RX |
|-------|---------------|-----------|--------------|-----------|
| 1 | 5.5 | 5.389 | 20 | |
| 2 | 5.5 | 5.703 | 20 | |
| 3 | 5.5 | 5.338 | 20 | |
| 4 | 5.5 | 5.524 | 20 | |
| 5 | 5.5 | 5.619 | 20 | |
| 6 | 5.5 | 5.588 | 20 | |
| 7 | 5.5 | 5.414 | 20 | |
| 8 | 5.5 | 5.408 | 20 | |
| 9 | 5.5 | 5.701 | 20 | |
| 10 | 5.5 | 5.616 | 20 | |
| 11 | 5.5 | 5.394 | 20 | |
| 12 | 5.5 | 5.351 | 20 | |
| 13 | 5.5 | 5.433 | 20 | |
| 14 | 5.5 | 5.561 | 20 | |
| 15 | 5.5 | 5.549 | 20 | |
| 16 | 5.5 | 5.47 | 20 | |
| 17 | 5.5 | 5.321 | 20 | |
| 18 | 5.5 | 5.302 | 20 | |
| 19 | 5.5 | 5.263 | 20 | |
| 20 | 5.5 | 5.372 | 20 | |
| 21 | 5.5 | 5.266 | 20 | |
| 22 | 5.5 | 5.641 | 20 | |
| 23 | 5.5 | 5.438 | 20 | |

TYPE 6 PARAMETER SHEET

Trial Number : 12

Bursts in Trial: 100

| Burst | Carrier (GHz) | Hop (GHz) | DUT BW (MHz) | Within RX |
|-------|---------------|-----------|--------------|-----------|
| 1 | 5.5 | 5.425 | 20 | |
| 2 | 5.5 | 5.671 | 20 | |
| 3 | 5.5 | 5.408 | 20 | |
| 4 | 5.5 | 5.26 | 20 | |
| 5 | 5.5 | 5.503 | 20 | * |
| 6 | 5.5 | 5.32 | 20 | |
| 7 | 5.5 | 5.402 | 20 | |
| 8 | 5.5 | 5.5 | 20 | * |
| 9 | 5.5 | 5.356 | 20 | |
| 10 | 5.5 | 5.679 | 20 | |
| 11 | 5.5 | 5.549 | 20 | |
| 12 | 5.5 | 5.522 | 20 | |
| 13 | 5.5 | 5.396 | 20 | |
| 14 | 5.5 | 5.452 | 20 | |
| 15 | 5.5 | 5.318 | 20 | |
| 16 | 5.5 | 5.664 | 20 | |
| 17 | 5.5 | 5.392 | 20 | |
| 18 | 5.5 | 5.354 | 20 | |
| 19 | 5.5 | 5.374 | 20 | |
| 20 | 5.5 | 5.35 | 20 | |
| 21 | 5.5 | 5.34 | 20 | |
| 22 | 5.5 | 5.608 | 20 | |
| 23 | 5.5 | 5.279 | 20 | |

TYPE 6 PARAMETER SHEET

Trial Number : 13

Bursts in Trial: 100

| Burst | Carrier (GHz) | Hop (GHz) | DUT BW (MHz) | Within RX |
|-------|---------------|-----------|--------------|-----------|
| 1 | 5.5 | 5.671 | 20 | |
| 2 | 5.5 | 5.353 | 20 | |
| 3 | 5.5 | 5.335 | 20 | |
| 4 | 5.5 | 5.684 | 20 | |
| 5 | 5.5 | 5.589 | 20 | |
| 6 | 5.5 | 5.602 | 20 | |
| 7 | 5.5 | 5.345 | 20 | |
| 8 | 5.5 | 5.305 | 20 | |
| 9 | 5.5 | 5.497 | 20 | * |
| 10 | 5.5 | 5.701 | 20 | |
| 11 | 5.5 | 5.624 | 20 | |
| 12 | 5.5 | 5.583 | 20 | |
| 13 | 5.5 | 5.618 | 20 | |
| 14 | 5.5 | 5.636 | 20 | |
| 15 | 5.5 | 5.417 | 20 | |
| 16 | 5.5 | 5.411 | 20 | |
| 17 | 5.5 | 5.617 | 20 | |
| 18 | 5.5 | 5.373 | 20 | |
| 19 | 5.5 | 5.351 | 20 | |
| 20 | 5.5 | 5.366 | 20 | |
| 21 | 5.5 | 5.433 | 20 | |
| 22 | 5.5 | 5.354 | 20 | |
| 23 | 5.5 | 5.458 | 20 | |

TYPE 6 PARAMETER SHEET

Trial Number : 14

Bursts in Trial: 100

| Burst | Carrier (GHz) | Hop (GHz) | DUT BW (MHz) | Within RX |
|-------|---------------|-----------|--------------|-----------|
| 1 | 5.5 | 5.415 | 20 | |
| 2 | 5.5 | 5.273 | 20 | |
| 3 | 5.5 | 5.697 | 20 | |
| 4 | 5.5 | 5.55 | 20 | |
| 5 | 5.5 | 5.453 | 20 | |
| 6 | 5.5 | 5.483 | 20 | |
| 7 | 5.5 | 5.253 | 20 | |
| 8 | 5.5 | 5.343 | 20 | |
| 9 | 5.5 | 5.266 | 20 | |
| 10 | 5.5 | 5.662 | 20 | |
| 11 | 5.5 | 5.46 | 20 | |
| 12 | 5.5 | 5.651 | 20 | |
| 13 | 5.5 | 5.502 | 20 | * |
| 14 | 5.5 | 5.532 | 20 | |
| 15 | 5.5 | 5.593 | 20 | |
| 16 | 5.5 | 5.666 | 20 | |
| 17 | 5.5 | 5.667 | 20 | |
| 18 | 5.5 | 5.698 | 20 | |
| 19 | 5.5 | 5.714 | 20 | |
| 20 | 5.5 | 5.563 | 20 | |
| 21 | 5.5 | 5.625 | 20 | |
| 22 | 5.5 | 5.595 | 20 | |
| 23 | 5.5 | 5.512 | 20 | |

TYPE 6 PARAMETER SHEET

Trial Number : 15

Bursts in Trial: 100

| Burst | Carrier (GHz) | Hop (GHz) | DUT BW (MHz) | Within RX |
|-------|---------------|-----------|--------------|-----------|
| 1 | 5.5 | 5.647 | 20 | |
| 2 | 5.5 | 5.331 | 20 | |
| 3 | 5.5 | 5.474 | 20 | |
| 4 | 5.5 | 5.656 | 20 | |
| 5 | 5.5 | 5.274 | 20 | |
| 6 | 5.5 | 5.56 | 20 | |
| 7 | 5.5 | 5.557 | 20 | |
| 8 | 5.5 | 5.485 | 20 | |
| 9 | 5.5 | 5.483 | 20 | |
| 10 | 5.5 | 5.62 | 20 | |
| 11 | 5.5 | 5.342 | 20 | |
| 12 | 5.5 | 5.595 | 20 | |
| 13 | 5.5 | 5.709 | 20 | |
| 14 | 5.5 | 5.279 | 20 | |
| 15 | 5.5 | 5.533 | 20 | |
| 16 | 5.5 | 5.678 | 20 | |
| 17 | 5.5 | 5.409 | 20 | |
| 18 | 5.5 | 5.519 | 20 | |
| 19 | 5.5 | 5.482 | 20 | |
| 20 | 5.5 | 5.491 | 20 | * |
| 21 | 5.5 | 5.564 | 20 | |
| 22 | 5.5 | 5.412 | 20 | |
| 23 | 5.5 | 5.288 | 20 | |

TYPE 6 PARAMETER SHEET

Trial Number : 16

Bursts in Trial: 100

| Burst | Carrier (GHz) | Hop (GHz) | DUT BW (MHz) | Within RX |
|-------|---------------|-----------|--------------|-----------|
| 1 | 5.5 | 5.306 | 20 | |
| 2 | 5.5 | 5.488 | 20 | |
| 3 | 5.5 | 5.311 | 20 | |
| 4 | 5.5 | 5.425 | 20 | |
| 5 | 5.5 | 5.365 | 20 | |
| 6 | 5.5 | 5.503 | 20 | * |
| 7 | 5.5 | 5.654 | 20 | |
| 8 | 5.5 | 5.523 | 20 | |
| 9 | 5.5 | 5.446 | 20 | |
| 10 | 5.5 | 5.258 | 20 | |
| 11 | 5.5 | 5.458 | 20 | |
| 12 | 5.5 | 5.724 | 20 | |
| 13 | 5.5 | 5.418 | 20 | |
| 14 | 5.5 | 5.457 | 20 | |
| 15 | 5.5 | 5.272 | 20 | |
| 16 | 5.5 | 5.661 | 20 | |
| 17 | 5.5 | 5.371 | 20 | |
| 18 | 5.5 | 5.645 | 20 | |
| 19 | 5.5 | 5.577 | 20 | |
| 20 | 5.5 | 5.426 | 20 | |
| 21 | 5.5 | 5.338 | 20 | |
| 22 | 5.5 | 5.411 | 20 | |
| 23 | 5.5 | 5.381 | 20 | |

TYPE 6 PARAMETER SHEET

Trial Number : 17

Bursts in Trial: 100

| Burst | Carrier (GHz) | Hop (GHz) | DUT BW (MHz) | Within RX |
|-------|---------------|-----------|--------------|-----------|
| 1 | 5.5 | 5.519 | 20 | |
| 2 | 5.5 | 5.388 | 20 | |
| 3 | 5.5 | 5.591 | 20 | |
| 4 | 5.5 | 5.425 | 20 | |
| 5 | 5.5 | 5.365 | 20 | |
| 6 | 5.5 | 5.443 | 20 | |
| 7 | 5.5 | 5.712 | 20 | |
| 8 | 5.5 | 5.603 | 20 | |
| 9 | 5.5 | 5.714 | 20 | |
| 10 | 5.5 | 5.565 | 20 | |
| 11 | 5.5 | 5.596 | 20 | |
| 12 | 5.5 | 5.566 | 20 | |
| 13 | 5.5 | 5.503 | 20 | * |
| 14 | 5.5 | 5.53 | 20 | |
| 15 | 5.5 | 5.694 | 20 | |
| 16 | 5.5 | 5.461 | 20 | |
| 17 | 5.5 | 5.467 | 20 | |
| 18 | 5.5 | 5.406 | 20 | |
| 19 | 5.5 | 5.312 | 20 | |
| 20 | 5.5 | 5.41 | 20 | |
| 21 | 5.5 | 5.293 | 20 | |
| 22 | 5.5 | 5.271 | 20 | |
| 23 | 5.5 | 5.645 | 20 | |

TYPE 6 PARAMETER SHEET

Trial Number : 18

Bursts in Trial: 100

| Burst | Carrier (GHz) | Hop (GHz) | DUT BW (MHz) | Within RX |
|-------|---------------|-----------|--------------|-----------|
| 1 | 5.5 | 5.673 | 20 | |
| 2 | 5.5 | 5.374 | 20 | |
| 3 | 5.5 | 5.72 | 20 | |
| 4 | 5.5 | 5.333 | 20 | |
| 5 | 5.5 | 5.293 | 20 | |
| 6 | 5.5 | 5.329 | 20 | |
| 7 | 5.5 | 5.714 | 20 | |
| 8 | 5.5 | 5.366 | 20 | |
| 9 | 5.5 | 5.672 | 20 | |
| 10 | 5.5 | 5.304 | 20 | |
| 11 | 5.5 | 5.679 | 20 | |
| 12 | 5.5 | 5.529 | 20 | |
| 13 | 5.5 | 5.516 | 20 | |
| 14 | 5.5 | 5.386 | 20 | |
| 15 | 5.5 | 5.336 | 20 | |
| 16 | 5.5 | 5.61 | 20 | |
| 17 | 5.5 | 5.685 | 20 | |
| 18 | 5.5 | 5.257 | 20 | |
| 19 | 5.5 | 5.512 | 20 | |
| 20 | 5.5 | 5.28 | 20 | |
| 21 | 5.5 | 5.448 | 20 | |
| 22 | 5.5 | 5.51 | 20 | * |
| 23 | 5.5 | 5.513 | 20 | |

TYPE 6 PARAMETER SHEET

Trial Number : 19

Bursts in Trial: 100

| Burst | Carrier (GHz) | Hop (GHz) | DUT BW (MHz) | Within RX |
|-------|---------------|-----------|--------------|-----------|
| 1 | 5.5 | 5.387 | 20 | |
| 2 | 5.5 | 5.333 | 20 | |
| 3 | 5.5 | 5.442 | 20 | |
| 4 | 5.5 | 5.586 | 20 | |
| 5 | 5.5 | 5.315 | 20 | |
| 6 | 5.5 | 5.53 | 20 | |
| 7 | 5.5 | 5.294 | 20 | |
| 8 | 5.5 | 5.671 | 20 | |
| 9 | 5.5 | 5.597 | 20 | |
| 10 | 5.5 | 5.602 | 20 | |
| 11 | 5.5 | 5.358 | 20 | |
| 12 | 5.5 | 5.356 | 20 | |
| 13 | 5.5 | 5.493 | 20 | * |
| 14 | 5.5 | 5.502 | 20 | * |
| 15 | 5.5 | 5.261 | 20 | |
| 16 | 5.5 | 5.437 | 20 | |
| 17 | 5.5 | 5.634 | 20 | |
| 18 | 5.5 | 5.393 | 20 | |
| 19 | 5.5 | 5.401 | 20 | |
| 20 | 5.5 | 5.398 | 20 | |
| 21 | 5.5 | 5.673 | 20 | |
| 22 | 5.5 | 5.709 | 20 | |
| 23 | 5.5 | 5.413 | 20 | |

TYPE 6 PARAMETER SHEET

Trial Number : 20

Bursts in Trial: 100

| Burst | Carrier (GHz) | Hop (GHz) | DUT BW (MHz) | Within RX |
|-------|---------------|-----------|--------------|-----------|
| 1 | 5.5 | 5.526 | 20 | |
| 2 | 5.5 | 5.293 | 20 | |
| 3 | 5.5 | 5.625 | 20 | |
| 4 | 5.5 | 5.556 | 20 | |
| 5 | 5.5 | 5.255 | 20 | |
| 6 | 5.5 | 5.347 | 20 | |
| 7 | 5.5 | 5.633 | 20 | |
| 8 | 5.5 | 5.413 | 20 | |
| 9 | 5.5 | 5.289 | 20 | |
| 10 | 5.5 | 5.598 | 20 | |
| 11 | 5.5 | 5.252 | 20 | |
| 12 | 5.5 | 5.492 | 20 | * |
| 13 | 5.5 | 5.35 | 20 | |
| 14 | 5.5 | 5.666 | 20 | |
| 15 | 5.5 | 5.509 | 20 | * |
| 16 | 5.5 | 5.561 | 20 | |
| 17 | 5.5 | 5.427 | 20 | |
| 18 | 5.5 | 5.288 | 20 | |
| 19 | 5.5 | 5.719 | 20 | |
| 20 | 5.5 | 5.622 | 20 | |
| 21 | 5.5 | 5.672 | 20 | |
| 22 | 5.5 | 5.407 | 20 | |
| 23 | 5.5 | 5.695 | 20 | |

TYPE 6 PARAMETER SHEET

Trial Number : 21

Bursts in Trial: 100

| Burst | Carrier (GHz) | Hop (GHz) | DUT BW (MHz) | Within RX |
|-------|---------------|-----------|--------------|-----------|
| 1 | 5.5 | 5.486 | 20 | |
| 2 | 5.5 | 5.43 | 20 | |
| 3 | 5.5 | 5.34 | 20 | |
| 4 | 5.5 | 5.555 | 20 | |
| 5 | 5.5 | 5.631 | 20 | |
| 6 | 5.5 | 5.337 | 20 | |
| 7 | 5.5 | 5.595 | 20 | |
| 8 | 5.5 | 5.27 | 20 | |
| 9 | 5.5 | 5.313 | 20 | |
| 10 | 5.5 | 5.457 | 20 | |
| 11 | 5.5 | 5.566 | 20 | |
| 12 | 5.5 | 5.602 | 20 | |
| 13 | 5.5 | 5.416 | 20 | |
| 14 | 5.5 | 5.434 | 20 | |
| 15 | 5.5 | 5.551 | 20 | |
| 16 | 5.5 | 5.395 | 20 | |
| 17 | 5.5 | 5.634 | 20 | |
| 18 | 5.5 | 5.539 | 20 | |
| 19 | 5.5 | 5.373 | 20 | |
| 20 | 5.5 | 5.527 | 20 | |
| 21 | 5.5 | 5.678 | 20 | |
| 22 | 5.5 | 5.562 | 20 | |
| 23 | 5.5 | 5.494 | 20 | * |

TYPE 6 PARAMETER SHEET

Trial Number : 22

Bursts in Trial: 100

| Burst | Carrier (GHz) | Hop (GHz) | DUT BW (MHz) | Within RX |
|-------|---------------|-----------|--------------|-----------|
| 1 | 5.5 | 5.572 | 20 | |
| 2 | 5.5 | 5.262 | 20 | |
| 3 | 5.5 | 5.697 | 20 | |
| 4 | 5.5 | 5.626 | 20 | |
| 5 | 5.5 | 5.718 | 20 | |
| 6 | 5.5 | 5.66 | 20 | |
| 7 | 5.5 | 5.531 | 20 | |
| 8 | 5.5 | 5.632 | 20 | |
| 9 | 5.5 | 5.361 | 20 | |
| 10 | 5.5 | 5.524 | 20 | |
| 11 | 5.5 | 5.624 | 20 | |
| 12 | 5.5 | 5.32 | 20 | |
| 13 | 5.5 | 5.468 | 20 | |
| 14 | 5.5 | 5.71 | 20 | |
| 15 | 5.5 | 5.658 | 20 | |
| 16 | 5.5 | 5.314 | 20 | |
| 17 | 5.5 | 5.426 | 20 | |
| 18 | 5.5 | 5.397 | 20 | |
| 19 | 5.5 | 5.362 | 20 | |
| 20 | 5.5 | 5.592 | 20 | |
| 21 | 5.5 | 5.574 | 20 | |
| 22 | 5.5 | 5.618 | 20 | |
| 23 | 5.5 | 5.582 | 20 | |

TYPE 6 PARAMETER SHEET

Trial Number : 23

Bursts in Trial: 100

| Burst | Carrier (GHz) | Hop (GHz) | DUT BW (MHz) | Within RX |
|-------|---------------|-----------|--------------|-----------|
| 1 | 5.5 | 5.421 | 20 | |
| 2 | 5.5 | 5.637 | 20 | |
| 3 | 5.5 | 5.425 | 20 | |
| 4 | 5.5 | 5.272 | 20 | |
| 5 | 5.5 | 5.691 | 20 | |
| 6 | 5.5 | 5.308 | 20 | |
| 7 | 5.5 | 5.715 | 20 | |
| 8 | 5.5 | 5.721 | 20 | |
| 9 | 5.5 | 5.325 | 20 | |
| 10 | 5.5 | 5.297 | 20 | |
| 11 | 5.5 | 5.447 | 20 | |
| 12 | 5.5 | 5.289 | 20 | |
| 13 | 5.5 | 5.458 | 20 | |
| 14 | 5.5 | 5.496 | 20 | * |
| 15 | 5.5 | 5.39 | 20 | |
| 16 | 5.5 | 5.373 | 20 | |
| 17 | 5.5 | 5.469 | 20 | |
| 18 | 5.5 | 5.677 | 20 | |
| 19 | 5.5 | 5.304 | 20 | |
| 20 | 5.5 | 5.72 | 20 | |
| 21 | 5.5 | 5.433 | 20 | |
| 22 | 5.5 | 5.681 | 20 | |
| 23 | 5.5 | 5.342 | 20 | |

TYPE 6 PARAMETER SHEET

Trial Number : 24

Bursts in Trial: 100

| Burst | Carrier (GHz) | Hop (GHz) | DUT BW (MHz) | Within RX |
|-------|---------------|-----------|--------------|-----------|
| 1 | 5.5 | 5.505 | 20 | * |
| 2 | 5.5 | 5.438 | 20 | |
| 3 | 5.5 | 5.352 | 20 | |
| 4 | 5.5 | 5.284 | 20 | |
| 5 | 5.5 | 5.572 | 20 | |
| 6 | 5.5 | 5.312 | 20 | |
| 7 | 5.5 | 5.44 | 20 | |
| 8 | 5.5 | 5.594 | 20 | |
| 9 | 5.5 | 5.668 | 20 | |
| 10 | 5.5 | 5.684 | 20 | |
| 11 | 5.5 | 5.309 | 20 | |
| 12 | 5.5 | 5.532 | 20 | |
| 13 | 5.5 | 5.283 | 20 | |
| 14 | 5.5 | 5.68 | 20 | |
| 15 | 5.5 | 5.322 | 20 | |
| 16 | 5.5 | 5.579 | 20 | |
| 17 | 5.5 | 5.311 | 20 | |
| 18 | 5.5 | 5.353 | 20 | |
| 19 | 5.5 | 5.423 | 20 | |
| 20 | 5.5 | 5.508 | 20 | * |
| 21 | 5.5 | 5.315 | 20 | |
| 22 | 5.5 | 5.295 | 20 | |
| 23 | 5.5 | 5.482 | 20 | |

TYPE 6 PARAMETER SHEET

Trial Number : 25

Bursts in Trial: 100

| Burst | Carrier (GHz) | Hop (GHz) | DUT BW (MHz) | Within RX |
|-------|---------------|-----------|--------------|-----------|
| 1 | 5.5 | 5.705 | 20 | |
| 2 | 5.5 | 5.649 | 20 | |
| 3 | 5.5 | 5.672 | 20 | |
| 4 | 5.5 | 5.272 | 20 | |
| 5 | 5.5 | 5.271 | 20 | |
| 6 | 5.5 | 5.541 | 20 | |
| 7 | 5.5 | 5.582 | 20 | |
| 8 | 5.5 | 5.526 | 20 | |
| 9 | 5.5 | 5.446 | 20 | |
| 10 | 5.5 | 5.437 | 20 | |
| 11 | 5.5 | 5.553 | 20 | |
| 12 | 5.5 | 5.311 | 20 | |
| 13 | 5.5 | 5.571 | 20 | |
| 14 | 5.5 | 5.336 | 20 | |
| 15 | 5.5 | 5.387 | 20 | |
| 16 | 5.5 | 5.392 | 20 | |
| 17 | 5.5 | 5.587 | 20 | |
| 18 | 5.5 | 5.292 | 20 | |
| 19 | 5.5 | 5.58 | 20 | |
| 20 | 5.5 | 5.303 | 20 | |
| 21 | 5.5 | 5.619 | 20 | |
| 22 | 5.5 | 5.673 | 20 | |
| 23 | 5.5 | 5.413 | 20 | |

TYPE 6 PARAMETER SHEET

Trial Number : 26

Bursts in Trial: 100

| Burst | Carrier (GHz) | Hop (GHz) | DUT BW (MHz) | Within RX |
|-------|---------------|-----------|--------------|-----------|
| 1 | 5.5 | 5.629 | 20 | |
| 2 | 5.5 | 5.427 | 20 | |
| 3 | 5.5 | 5.436 | 20 | |
| 4 | 5.5 | 5.374 | 20 | |
| 5 | 5.5 | 5.405 | 20 | |
| 6 | 5.5 | 5.575 | 20 | |
| 7 | 5.5 | 5.498 | 20 | * |
| 8 | 5.5 | 5.72 | 20 | |
| 9 | 5.5 | 5.588 | 20 | |
| 10 | 5.5 | 5.569 | 20 | |
| 11 | 5.5 | 5.687 | 20 | |
| 12 | 5.5 | 5.455 | 20 | |
| 13 | 5.5 | 5.506 | 20 | * |
| 14 | 5.5 | 5.377 | 20 | |
| 15 | 5.5 | 5.354 | 20 | |
| 16 | 5.5 | 5.538 | 20 | |
| 17 | 5.5 | 5.323 | 20 | |
| 18 | 5.5 | 5.435 | 20 | |
| 19 | 5.5 | 5.382 | 20 | |
| 20 | 5.5 | 5.561 | 20 | |
| 21 | 5.5 | 5.45 | 20 | |
| 22 | 5.5 | 5.486 | 20 | |
| 23 | 5.5 | 5.267 | 20 | |

TYPE 6 PARAMETER SHEET

Trial Number : 27

Bursts in Trial: 100

| Burst | Carrier (GHz) | Hop (GHz) | DUT BW (MHz) | Within RX |
|-------|---------------|-----------|--------------|-----------|
| 1 | 5.5 | 5.708 | 20 | |
| 2 | 5.5 | 5.292 | 20 | |
| 3 | 5.5 | 5.356 | 20 | |
| 4 | 5.5 | 5.666 | 20 | |
| 5 | 5.5 | 5.306 | 20 | |
| 6 | 5.5 | 5.697 | 20 | |
| 7 | 5.5 | 5.473 | 20 | |
| 8 | 5.5 | 5.647 | 20 | |
| 9 | 5.5 | 5.58 | 20 | |
| 10 | 5.5 | 5.336 | 20 | |
| 11 | 5.5 | 5.585 | 20 | |
| 12 | 5.5 | 5.339 | 20 | |
| 13 | 5.5 | 5.278 | 20 | |
| 14 | 5.5 | 5.676 | 20 | |
| 15 | 5.5 | 5.601 | 20 | |
| 16 | 5.5 | 5.651 | 20 | |
| 17 | 5.5 | 5.46 | 20 | |
| 18 | 5.5 | 5.316 | 20 | |
| 19 | 5.5 | 5.369 | 20 | |
| 20 | 5.5 | 5.61 | 20 | |
| 21 | 5.5 | 5.452 | 20 | |
| 22 | 5.5 | 5.718 | 20 | |
| 23 | 5.5 | 5.657 | 20 | |

TYPE 6 PARAMETER SHEET

Trial Number : 28

Bursts in Trial: 100

| Burst | Carrier (GHz) | Hop (GHz) | DUT BW (MHz) | Within RX |
|-------|---------------|-----------|--------------|-----------|
| 1 | 5.5 | 5.412 | 20 | |
| 2 | 5.5 | 5.295 | 20 | |
| 3 | 5.5 | 5.716 | 20 | |
| 4 | 5.5 | 5.265 | 20 | |
| 5 | 5.5 | 5.623 | 20 | |
| 6 | 5.5 | 5.576 | 20 | |
| 7 | 5.5 | 5.523 | 20 | |
| 8 | 5.5 | 5.711 | 20 | |
| 9 | 5.5 | 5.397 | 20 | |
| 10 | 5.5 | 5.57 | 20 | |
| 11 | 5.5 | 5.25 | 20 | |
| 12 | 5.5 | 5.556 | 20 | |
| 13 | 5.5 | 5.315 | 20 | |
| 14 | 5.5 | 5.591 | 20 | |
| 15 | 5.5 | 5.608 | 20 | |
| 16 | 5.5 | 5.533 | 20 | |
| 17 | 5.5 | 5.547 | 20 | |
| 18 | 5.5 | 5.609 | 20 | |
| 19 | 5.5 | 5.286 | 20 | |
| 20 | 5.5 | 5.386 | 20 | |
| 21 | 5.5 | 5.568 | 20 | |
| 22 | 5.5 | 5.572 | 20 | |
| 23 | 5.5 | 5.706 | 20 | |

TYPE 6 PARAMETER SHEET

Trial Number : 29

Bursts in Trial: 100

| Burst | Carrier (GHz) | Hop (GHz) | DUT BW (MHz) | Within RX |
|-------|---------------|-----------|--------------|-----------|
| 1 | 5.5 | 5.527 | 20 | |
| 2 | 5.5 | 5.347 | 20 | |
| 3 | 5.5 | 5.302 | 20 | |
| 4 | 5.5 | 5.418 | 20 | |
| 5 | 5.5 | 5.502 | 20 | * |
| 6 | 5.5 | 5.619 | 20 | |
| 7 | 5.5 | 5.512 | 20 | |
| 8 | 5.5 | 5.31 | 20 | |
| 9 | 5.5 | 5.528 | 20 | |
| 10 | 5.5 | 5.647 | 20 | |
| 11 | 5.5 | 5.373 | 20 | |
| 12 | 5.5 | 5.69 | 20 | |
| 13 | 5.5 | 5.576 | 20 | |
| 14 | 5.5 | 5.408 | 20 | |
| 15 | 5.5 | 5.72 | 20 | |
| 16 | 5.5 | 5.303 | 20 | |
| 17 | 5.5 | 5.299 | 20 | |
| 18 | 5.5 | 5.426 | 20 | |
| 19 | 5.5 | 5.401 | 20 | |
| 20 | 5.5 | 5.289 | 20 | |
| 21 | 5.5 | 5.582 | 20 | |
| 22 | 5.5 | 5.392 | 20 | |
| 23 | 5.5 | 5.433 | 20 | |

TYPE 6 PARAMETER SHEET

Trial Number : 30

Bursts in Trial: 100

| Burst | Carrier (GHz) | Hop (GHz) | DUT BW (MHz) | Within RX |
|-------|---------------|-----------|--------------|-----------|
| 1 | 5.5 | 5.477 | 20 | |
| 2 | 5.5 | 5.488 | 20 | |
| 3 | 5.5 | 5.444 | 20 | |
| 4 | 5.5 | 5.629 | 20 | |
| 5 | 5.5 | 5.314 | 20 | |
| 6 | 5.5 | 5.44 | 20 | |
| 7 | 5.5 | 5.647 | 20 | |
| 8 | 5.5 | 5.601 | 20 | |
| 9 | 5.5 | 5.269 | 20 | |
| 10 | 5.5 | 5.427 | 20 | |
| 11 | 5.5 | 5.384 | 20 | |
| 12 | 5.5 | 5.464 | 20 | |
| 13 | 5.5 | 5.592 | 20 | |
| 14 | 5.5 | 5.251 | 20 | |
| 15 | 5.5 | 5.585 | 20 | |
| 16 | 5.5 | 5.497 | 20 | * |
| 17 | 5.5 | 5.431 | 20 | |
| 18 | 5.5 | 5.706 | 20 | |
| 19 | 5.5 | 5.335 | 20 | |
| 20 | 5.5 | 5.33 | 20 | |
| 21 | 5.5 | 5.347 | 20 | |
| 22 | 5.5 | 5.3 | 20 | |
| 23 | 5.5 | 5.381 | 20 | |

Product : Wireless module
 Test Item : Statistical Performance Check
 Radar Type : Type 6
 Test Mode : Normal (802.11ac-40 MHz)
 Test Date : 2024/01/05

| Trial # | Frequency (MHz) | *Filename | 1= Detection 0= No Detection |
|---------------------------------|-----------------|--|---------------------------------|
| 1 | 5510 | Statistical_Check_Hopping Frequency List_For_Radar_Type_6_1_trail | 1 |
| 2 | 5510 | Statistical_Check_Hopping Frequency List_For_Radar_Type_6_2_trail | 0 |
| 3 | 5510 | Statistical_Check_Hopping Frequency List_For_Radar_Type_6_3_trail | 1 |
| 4 | 5510 | Statistical_Check_Hopping Frequency List_For_Radar_Type_6_4_trail | 1 |
| 5 | 5510 | Statistical_Check_Hopping Frequency List_For_Radar_Type_6_5_trail | 1 |
| 6 | 5510 | Statistical_Check_Hopping Frequency List_For_Radar_Type_6_6_trail | 1 |
| 7 | 5510 | Statistical_Check_Hopping Frequency List_For_Radar_Type_6_7_trail | 1 |
| 8 | 5510 | Statistical_Check_Hopping Frequency List_For_Radar_Type_6_8_trail | 1 |
| 9 | 5510 | Statistical_Check_Hopping Frequency List_For_Radar_Type_6_9_trail | 1 |
| 10 | 5510 | Statistical_Check_Hopping Frequency List_For_Radar_Type_6_10_trail | 1 |
| 11 | 5510 | Statistical_Check_Hopping Frequency List_For_Radar_Type_6_11_trail | 1 |
| 12 | 5510 | Statistical_Check_Hopping Frequency List_For_Radar_Type_6_12_trail | 1 |
| 13 | 5510 | Statistical_Check_Hopping Frequency List_For_Radar_Type_6_13_trail | 1 |
| 14 | 5510 | Statistical_Check_Hopping Frequency List_For_Radar_Type_6_14_trail | 1 |
| 15 | 5510 | Statistical_Check_Hopping Frequency List_For_Radar_Type_6_15_trail | 1 |
| 16 | 5510 | Statistical_Check_Hopping Frequency List_For_Radar_Type_6_16_trail | 1 |
| 17 | 5510 | Statistical_Check_Hopping Frequency List_For_Radar_Type_6_17_trail | 1 |
| 18 | 5510 | Statistical_Check_Hopping Frequency List_For_Radar_Type_6_18_trail | 0 |
| 19 | 5510 | Statistical_Check_Hopping Frequency List_For_Radar_Type_6_19_trail | 1 |
| 20 | 5510 | Statistical_Check_Hopping Frequency List_For_Radar_Type_6_20_trail | 1 |
| 21 | 5510 | Statistical_Check_Hopping Frequency List_For_Radar_Type_6_21_trail | 1 |
| 22 | 5510 | Statistical_Check_Hopping Frequency List_For_Radar_Type_6_22_trail | 0 |
| 23 | 5510 | Statistical_Check_Hopping Frequency List_For_Radar_Type_6_23_trail | 1 |
| 24 | 5510 | Statistical_Check_Hopping Frequency List_For_Radar_Type_6_24_trail | 1 |
| 25 | 5510 | Statistical_Check_Hopping Frequency List_For_Radar_Type_6_25_trail | 1 |
| 26 | 5510 | Statistical_Check_Hopping Frequency List_For_Radar_Type_6_26_trail | 1 |
| 27 | 5510 | Statistical_Check_Hopping Frequency List_For_Radar_Type_6_27_trail | 1 |
| 28 | 5510 | Statistical_Check_Hopping Frequency List_For_Radar_Type_6_28_trail | 1 |
| 29 | 5510 | Statistical_Check_Hopping Frequency List_For_Radar_Type_6_29_trail | 1 |
| 30 | 5510 | Statistical_Check_Hopping Frequency List_For_Radar_Type_6_30_trail | 1 |
| Detection Percentage (%) | | | 90.00 |
| Limit | | | >70 |

TYPE 6 PARAMETER SHEET

Trial Number : 1

Bursts in Trial: 100

| Burst | Carrier (GHz) | Hop (GHz) | DUT BW (MHz) | Within RX |
|-------|---------------|-----------|--------------|-----------|
| 1 | 5.51 | 5.304 | 40 | |
| 2 | 5.51 | 5.252 | 40 | |
| 3 | 5.51 | 5.596 | 40 | |
| 4 | 5.51 | 5.48 | 40 | |
| 5 | 5.51 | 5.702 | 40 | |
| 6 | 5.51 | 5.354 | 40 | |
| 7 | 5.51 | 5.677 | 40 | |
| 8 | 5.51 | 5.318 | 40 | |
| 9 | 5.51 | 5.605 | 40 | |
| 10 | 5.51 | 5.25 | 40 | |
| 11 | 5.51 | 5.595 | 40 | |
| 12 | 5.51 | 5.332 | 40 | |
| 13 | 5.51 | 5.337 | 40 | |
| 14 | 5.51 | 5.717 | 40 | |
| 15 | 5.51 | 5.69 | 40 | |
| 16 | 5.51 | 5.632 | 40 | |
| 17 | 5.51 | 5.536 | 40 | |
| 18 | 5.51 | 5.319 | 40 | |
| 19 | 5.51 | 5.699 | 40 | |
| 20 | 5.51 | 5.56 | 40 | |
| 21 | 5.51 | 5.38 | 40 | |
| 22 | 5.51 | 5.314 | 40 | |
| 23 | 5.51 | 5.441 | 40 | |
| 24 | 5.51 | 5.279 | 40 | |
| 25 | 5.51 | 5.507 | 40 | * |
| 26 | 5.51 | 5.266 | 40 | |
| 27 | 5.51 | 5.333 | 40 | |
| 28 | 5.51 | 5.4 | 40 | |
| 29 | 5.51 | 5.521 | 40 | * |
| 30 | 5.51 | 5.661 | 40 | |
| 31 | 5.51 | 5.303 | 40 | |
| 32 | 5.51 | 5.485 | 40 | |
| 33 | 5.51 | 5.585 | 40 | |
| 34 | 5.51 | 5.663 | 40 | |
| 35 | 5.51 | 5.543 | 40 | |
| 36 | 5.51 | 5.477 | 40 | |
| 37 | 5.51 | 5.339 | 40 | |
| 38 | 5.51 | 5.424 | 40 | |
| 39 | 5.51 | 5.461 | 40 | |
| 40 | 5.51 | 5.306 | 40 | |
| 41 | 5.51 | 5.504 | 40 | * |
| 42 | 5.51 | 5.412 | 40 | |
| 43 | 5.51 | 5.679 | 40 | |
| 44 | 5.51 | 5.46 | 40 | |
| 45 | 5.51 | 5.35 | 40 | |
| 46 | 5.51 | 5.499 | 40 | * |
| 47 | 5.51 | 5.298 | 40 | |
| 48 | 5.51 | 5.271 | 40 | |
| 49 | 5.51 | 5.296 | 40 | |

| | | | | |
|-----|------|-------|----|---|
| 50 | 5.51 | 5.478 | 40 | |
| 51 | 5.51 | 5.607 | 40 | |
| 52 | 5.51 | 5.63 | 40 | |
| 53 | 5.51 | 5.531 | 40 | |
| 54 | 5.51 | 5.523 | 40 | * |
| 55 | 5.51 | 5.675 | 40 | |
| 56 | 5.51 | 5.668 | 40 | |
| 57 | 5.51 | 5.662 | 40 | |
| 58 | 5.51 | 5.514 | 40 | * |
| 59 | 5.51 | 5.369 | 40 | |
| 60 | 5.51 | 5.449 | 40 | |
| 61 | 5.51 | 5.525 | 40 | * |
| 62 | 5.51 | 5.505 | 40 | * |
| 63 | 5.51 | 5.587 | 40 | |
| 64 | 5.51 | 5.316 | 40 | |
| 65 | 5.51 | 5.274 | 40 | |
| 66 | 5.51 | 5.345 | 40 | |
| 67 | 5.51 | 5.312 | 40 | |
| 68 | 5.51 | 5.465 | 40 | |
| 69 | 5.51 | 5.593 | 40 | |
| 70 | 5.51 | 5.411 | 40 | |
| 71 | 5.51 | 5.529 | 40 | * |
| 72 | 5.51 | 5.722 | 40 | |
| 73 | 5.51 | 5.394 | 40 | |
| 74 | 5.51 | 5.256 | 40 | |
| 75 | 5.51 | 5.36 | 40 | |
| 76 | 5.51 | 5.542 | 40 | |
| 77 | 5.51 | 5.647 | 40 | |
| 78 | 5.51 | 5.511 | 40 | * |
| 79 | 5.51 | 5.386 | 40 | |
| 80 | 5.51 | 5.719 | 40 | |
| 81 | 5.51 | 5.701 | 40 | |
| 82 | 5.51 | 5.532 | 40 | |
| 83 | 5.51 | 5.47 | 40 | |
| 84 | 5.51 | 5.665 | 40 | |
| 85 | 5.51 | 5.428 | 40 | |
| 86 | 5.51 | 5.513 | 40 | * |
| 87 | 5.51 | 5.352 | 40 | |
| 88 | 5.51 | 5.28 | 40 | |
| 89 | 5.51 | 5.43 | 40 | |
| 90 | 5.51 | 5.682 | 40 | |
| 91 | 5.51 | 5.277 | 40 | |
| 92 | 5.51 | 5.615 | 40 | |
| 93 | 5.51 | 5.402 | 40 | |
| 94 | 5.51 | 5.617 | 40 | |
| 95 | 5.51 | 5.357 | 40 | |
| 96 | 5.51 | 5.5 | 40 | * |
| 97 | 5.51 | 5.398 | 40 | |
| 98 | 5.51 | 5.621 | 40 | |
| 99 | 5.51 | 5.713 | 40 | |
| 100 | 5.51 | 5.447 | 40 | |

TYPE 6 PARAMETER SHEET

Trial Number : 2

Bursts in Trial: 100

| Burst | Carrier (GHz) | Hop (GHz) | DUT BW (MHz) | Within RX |
|-------|---------------|-----------|--------------|-----------|
| 1 | 5.51 | 5.446 | 40 | |
| 2 | 5.51 | 5.314 | 40 | |
| 3 | 5.51 | 5.473 | 40 | |
| 4 | 5.51 | 5.634 | 40 | |
| 5 | 5.51 | 5.271 | 40 | |
| 6 | 5.51 | 5.367 | 40 | |
| 7 | 5.51 | 5.548 | 40 | |
| 8 | 5.51 | 5.616 | 40 | |
| 9 | 5.51 | 5.393 | 40 | |
| 10 | 5.51 | 5.338 | 40 | |
| 11 | 5.51 | 5.629 | 40 | |
| 12 | 5.51 | 5.486 | 40 | |
| 13 | 5.51 | 5.708 | 40 | |
| 14 | 5.51 | 5.465 | 40 | |
| 15 | 5.51 | 5.571 | 40 | |
| 16 | 5.51 | 5.435 | 40 | |
| 17 | 5.51 | 5.684 | 40 | |
| 18 | 5.51 | 5.696 | 40 | |
| 19 | 5.51 | 5.31 | 40 | |
| 20 | 5.51 | 5.462 | 40 | |
| 21 | 5.51 | 5.319 | 40 | |
| 22 | 5.51 | 5.299 | 40 | |
| 23 | 5.51 | 5.601 | 40 | |

TYPE 6 PARAMETER SHEET

Trial Number : 3

Bursts in Trial: 100

| Burst | Carrier (GHz) | Hop (GHz) | DUT BW (MHz) | Within RX |
|-------|---------------|-----------|--------------|-----------|
| 1 | 5.51 | 5.647 | 40 | |
| 2 | 5.51 | 5.386 | 40 | |
| 3 | 5.51 | 5.628 | 40 | |
| 4 | 5.51 | 5.639 | 40 | |
| 5 | 5.51 | 5.545 | 40 | |
| 6 | 5.51 | 5.338 | 40 | |
| 7 | 5.51 | 5.349 | 40 | |
| 8 | 5.51 | 5.638 | 40 | |
| 9 | 5.51 | 5.693 | 40 | |
| 10 | 5.51 | 5.382 | 40 | |
| 11 | 5.51 | 5.36 | 40 | |
| 12 | 5.51 | 5.723 | 40 | |
| 13 | 5.51 | 5.7 | 40 | |
| 14 | 5.51 | 5.284 | 40 | |
| 15 | 5.51 | 5.533 | 40 | |
| 16 | 5.51 | 5.564 | 40 | |
| 17 | 5.51 | 5.402 | 40 | |
| 18 | 5.51 | 5.358 | 40 | |
| 19 | 5.51 | 5.346 | 40 | |
| 20 | 5.51 | 5.577 | 40 | |
| 21 | 5.51 | 5.507 | 40 | * |
| 22 | 5.51 | 5.421 | 40 | |
| 23 | 5.51 | 5.566 | 40 | |

TYPE 6 PARAMETER SHEET

Trial Number : 4

Bursts in Trial: 100

| Burst | Carrier (GHz) | Hop (GHz) | DUT BW (MHz) | Within RX |
|-------|---------------|-----------|--------------|-----------|
| 1 | 5.51 | 5.502 | 40 | * |
| 2 | 5.51 | 5.401 | 40 | |
| 3 | 5.51 | 5.677 | 40 | |
| 4 | 5.51 | 5.712 | 40 | |
| 5 | 5.51 | 5.687 | 40 | |
| 6 | 5.51 | 5.581 | 40 | |
| 7 | 5.51 | 5.675 | 40 | |
| 8 | 5.51 | 5.709 | 40 | |
| 9 | 5.51 | 5.257 | 40 | |
| 10 | 5.51 | 5.585 | 40 | |
| 11 | 5.51 | 5.52 | 40 | * |
| 12 | 5.51 | 5.338 | 40 | |
| 13 | 5.51 | 5.564 | 40 | |
| 14 | 5.51 | 5.59 | 40 | |
| 15 | 5.51 | 5.57 | 40 | |
| 16 | 5.51 | 5.279 | 40 | |
| 17 | 5.51 | 5.648 | 40 | |
| 18 | 5.51 | 5.55 | 40 | |
| 19 | 5.51 | 5.322 | 40 | |
| 20 | 5.51 | 5.673 | 40 | |
| 21 | 5.51 | 5.373 | 40 | |
| 22 | 5.51 | 5.295 | 40 | |
| 23 | 5.51 | 5.259 | 40 | |

TYPE 6 PARAMETER SHEET

Trial Number : 5

Bursts in Trial: 100

| Burst | Carrier (GHz) | Hop (GHz) | DUT BW (MHz) | Within RX |
|-------|---------------|-----------|--------------|-----------|
| 1 | 5.51 | 5.509 | 40 | * |
| 2 | 5.51 | 5.689 | 40 | |
| 3 | 5.51 | 5.687 | 40 | |
| 4 | 5.51 | 5.339 | 40 | |
| 5 | 5.51 | 5.382 | 40 | |
| 6 | 5.51 | 5.419 | 40 | |
| 7 | 5.51 | 5.629 | 40 | |
| 8 | 5.51 | 5.639 | 40 | |
| 9 | 5.51 | 5.295 | 40 | |
| 10 | 5.51 | 5.334 | 40 | |
| 11 | 5.51 | 5.588 | 40 | |
| 12 | 5.51 | 5.429 | 40 | |
| 13 | 5.51 | 5.402 | 40 | |
| 14 | 5.51 | 5.583 | 40 | |
| 15 | 5.51 | 5.471 | 40 | |
| 16 | 5.51 | 5.304 | 40 | |
| 17 | 5.51 | 5.465 | 40 | |
| 18 | 5.51 | 5.264 | 40 | |
| 19 | 5.51 | 5.258 | 40 | |
| 20 | 5.51 | 5.683 | 40 | |
| 21 | 5.51 | 5.381 | 40 | |
| 22 | 5.51 | 5.426 | 40 | |
| 23 | 5.51 | 5.487 | 40 | |

TYPE 6 PARAMETER SHEET

Trial Number : 6

Bursts in Trial: 100

| Burst | Carrier (GHz) | Hop (GHz) | DUT BW (MHz) | Within RX |
|-------|---------------|-----------|--------------|-----------|
| 1 | 5.51 | 5.571 | 40 | |
| 2 | 5.51 | 5.443 | 40 | |
| 3 | 5.51 | 5.425 | 40 | |
| 4 | 5.51 | 5.266 | 40 | |
| 5 | 5.51 | 5.405 | 40 | |
| 6 | 5.51 | 5.346 | 40 | |
| 7 | 5.51 | 5.388 | 40 | |
| 8 | 5.51 | 5.302 | 40 | |
| 9 | 5.51 | 5.256 | 40 | |
| 10 | 5.51 | 5.546 | 40 | |
| 11 | 5.51 | 5.645 | 40 | |
| 12 | 5.51 | 5.273 | 40 | |
| 13 | 5.51 | 5.706 | 40 | |
| 14 | 5.51 | 5.342 | 40 | |
| 15 | 5.51 | 5.34 | 40 | |
| 16 | 5.51 | 5.379 | 40 | |
| 17 | 5.51 | 5.717 | 40 | |
| 18 | 5.51 | 5.651 | 40 | |
| 19 | 5.51 | 5.423 | 40 | |
| 20 | 5.51 | 5.432 | 40 | |
| 21 | 5.51 | 5.412 | 40 | |
| 22 | 5.51 | 5.439 | 40 | |
| 23 | 5.51 | 5.653 | 40 | |

TYPE 6 PARAMETER SHEET

Trial Number : 7

Bursts in Trial: 100

| Burst | Carrier (GHz) | Hop (GHz) | DUT BW (MHz) | Within RX |
|-------|---------------|-----------|--------------|-----------|
| 1 | 5.51 | 5.405 | 40 | |
| 2 | 5.51 | 5.29 | 40 | |
| 3 | 5.51 | 5.45 | 40 | |
| 4 | 5.51 | 5.375 | 40 | |
| 5 | 5.51 | 5.38 | 40 | |
| 6 | 5.51 | 5.485 | 40 | |
| 7 | 5.51 | 5.472 | 40 | |
| 8 | 5.51 | 5.461 | 40 | |
| 9 | 5.51 | 5.548 | 40 | |
| 10 | 5.51 | 5.688 | 40 | |
| 11 | 5.51 | 5.608 | 40 | |
| 12 | 5.51 | 5.494 | 40 | * |
| 13 | 5.51 | 5.621 | 40 | |
| 14 | 5.51 | 5.716 | 40 | |
| 15 | 5.51 | 5.547 | 40 | |
| 16 | 5.51 | 5.294 | 40 | |
| 17 | 5.51 | 5.552 | 40 | |
| 18 | 5.51 | 5.542 | 40 | |
| 19 | 5.51 | 5.712 | 40 | |
| 20 | 5.51 | 5.591 | 40 | |
| 21 | 5.51 | 5.651 | 40 | |
| 22 | 5.51 | 5.569 | 40 | |
| 23 | 5.51 | 5.435 | 40 | |

TYPE 6 PARAMETER SHEET

Trial Number : 8

Bursts in Trial: 100

| Burst | Carrier (GHz) | Hop (GHz) | DUT BW (MHz) | Within RX |
|-------|---------------|-----------|--------------|-----------|
| 1 | 5.51 | 5.612 | 40 | |
| 2 | 5.51 | 5.317 | 40 | |
| 3 | 5.51 | 5.628 | 40 | |
| 4 | 5.51 | 5.705 | 40 | |
| 5 | 5.51 | 5.625 | 40 | |
| 6 | 5.51 | 5.637 | 40 | |
| 7 | 5.51 | 5.523 | 40 | * |
| 8 | 5.51 | 5.322 | 40 | |
| 9 | 5.51 | 5.346 | 40 | |
| 10 | 5.51 | 5.297 | 40 | |
| 11 | 5.51 | 5.427 | 40 | |
| 12 | 5.51 | 5.357 | 40 | |
| 13 | 5.51 | 5.709 | 40 | |
| 14 | 5.51 | 5.253 | 40 | |
| 15 | 5.51 | 5.57 | 40 | |
| 16 | 5.51 | 5.618 | 40 | |
| 17 | 5.51 | 5.449 | 40 | |
| 18 | 5.51 | 5.351 | 40 | |
| 19 | 5.51 | 5.704 | 40 | |
| 20 | 5.51 | 5.692 | 40 | |
| 21 | 5.51 | 5.555 | 40 | |
| 22 | 5.51 | 5.29 | 40 | |
| 23 | 5.51 | 5.483 | 40 | |

TYPE 6 PARAMETER SHEET

Trial Number : 9

Bursts in Trial: 100

| Burst | Carrier (GHz) | Hop (GHz) | DUT BW (MHz) | Within RX |
|-------|---------------|-----------|--------------|-----------|
| 1 | 5.51 | 5.362 | 40 | |
| 2 | 5.51 | 5.511 | 40 | * |
| 3 | 5.51 | 5.722 | 40 | |
| 4 | 5.51 | 5.63 | 40 | |
| 5 | 5.51 | 5.418 | 40 | |
| 6 | 5.51 | 5.255 | 40 | |
| 7 | 5.51 | 5.406 | 40 | |
| 8 | 5.51 | 5.27 | 40 | |
| 9 | 5.51 | 5.594 | 40 | |
| 10 | 5.51 | 5.724 | 40 | |
| 11 | 5.51 | 5.462 | 40 | |
| 12 | 5.51 | 5.454 | 40 | |
| 13 | 5.51 | 5.433 | 40 | |
| 14 | 5.51 | 5.585 | 40 | |
| 15 | 5.51 | 5.642 | 40 | |
| 16 | 5.51 | 5.596 | 40 | |
| 17 | 5.51 | 5.435 | 40 | |
| 18 | 5.51 | 5.714 | 40 | |
| 19 | 5.51 | 5.679 | 40 | |
| 20 | 5.51 | 5.455 | 40 | |
| 21 | 5.51 | 5.257 | 40 | |
| 22 | 5.51 | 5.603 | 40 | |
| 23 | 5.51 | 5.69 | 40 | |

TYPE 6 PARAMETER SHEET

Trial Number : 10

Bursts in Trial: 100

| Burst | Carrier (GHz) | Hop (GHz) | DUT BW (MHz) | Within RX |
|-------|---------------|-----------|--------------|-----------|
| 1 | 5.51 | 5.295 | 40 | |
| 2 | 5.51 | 5.695 | 40 | |
| 3 | 5.51 | 5.701 | 40 | |
| 4 | 5.51 | 5.391 | 40 | |
| 5 | 5.51 | 5.703 | 40 | |
| 6 | 5.51 | 5.716 | 40 | |
| 7 | 5.51 | 5.632 | 40 | |
| 8 | 5.51 | 5.445 | 40 | |
| 9 | 5.51 | 5.647 | 40 | |
| 10 | 5.51 | 5.465 | 40 | |
| 11 | 5.51 | 5.294 | 40 | |
| 12 | 5.51 | 5.685 | 40 | |
| 13 | 5.51 | 5.424 | 40 | |
| 14 | 5.51 | 5.586 | 40 | |
| 15 | 5.51 | 5.545 | 40 | |
| 16 | 5.51 | 5.456 | 40 | |
| 17 | 5.51 | 5.291 | 40 | |
| 18 | 5.51 | 5.405 | 40 | |
| 19 | 5.51 | 5.408 | 40 | |
| 20 | 5.51 | 5.641 | 40 | |
| 21 | 5.51 | 5.686 | 40 | |
| 22 | 5.51 | 5.617 | 40 | |
| 23 | 5.51 | 5.481 | 40 | |

TYPE 6 PARAMETER SHEET

Trial Number : 11

Bursts in Trial: 100

| Burst | Carrier (GHz) | Hop (GHz) | DUT BW (MHz) | Within RX |
|-------|---------------|-----------|--------------|-----------|
| 1 | 5.51 | 5.276 | 40 | |
| 2 | 5.51 | 5.422 | 40 | |
| 3 | 5.51 | 5.306 | 40 | |
| 4 | 5.51 | 5.646 | 40 | |
| 5 | 5.51 | 5.489 | 40 | |
| 6 | 5.51 | 5.6 | 40 | |
| 7 | 5.51 | 5.364 | 40 | |
| 8 | 5.51 | 5.524 | 40 | * |
| 9 | 5.51 | 5.397 | 40 | |
| 10 | 5.51 | 5.29 | 40 | |
| 11 | 5.51 | 5.431 | 40 | |
| 12 | 5.51 | 5.254 | 40 | |
| 13 | 5.51 | 5.444 | 40 | |
| 14 | 5.51 | 5.283 | 40 | |
| 15 | 5.51 | 5.69 | 40 | |
| 16 | 5.51 | 5.485 | 40 | |
| 17 | 5.51 | 5.707 | 40 | |
| 18 | 5.51 | 5.723 | 40 | |
| 19 | 5.51 | 5.402 | 40 | |
| 20 | 5.51 | 5.382 | 40 | |
| 21 | 5.51 | 5.471 | 40 | |
| 22 | 5.51 | 5.672 | 40 | |
| 23 | 5.51 | 5.698 | 40 | |

TYPE 6 PARAMETER SHEET

Trial Number : 12

Bursts in Trial: 100

| Burst | Carrier (GHz) | Hop (GHz) | DUT BW (MHz) | Within RX |
|-------|---------------|-----------|--------------|-----------|
| 1 | 5.51 | 5.297 | 40 | |
| 2 | 5.51 | 5.467 | 40 | |
| 3 | 5.51 | 5.65 | 40 | |
| 4 | 5.51 | 5.577 | 40 | |
| 5 | 5.51 | 5.624 | 40 | |
| 6 | 5.51 | 5.437 | 40 | |
| 7 | 5.51 | 5.335 | 40 | |
| 8 | 5.51 | 5.481 | 40 | |
| 9 | 5.51 | 5.268 | 40 | |
| 10 | 5.51 | 5.484 | 40 | |
| 11 | 5.51 | 5.611 | 40 | |
| 12 | 5.51 | 5.531 | 40 | |
| 13 | 5.51 | 5.431 | 40 | |
| 14 | 5.51 | 5.326 | 40 | |
| 15 | 5.51 | 5.513 | 40 | * |
| 16 | 5.51 | 5.406 | 40 | |
| 17 | 5.51 | 5.53 | 40 | * |
| 18 | 5.51 | 5.354 | 40 | |
| 19 | 5.51 | 5.709 | 40 | |
| 20 | 5.51 | 5.722 | 40 | |
| 21 | 5.51 | 5.336 | 40 | |
| 22 | 5.51 | 5.565 | 40 | |
| 23 | 5.51 | 5.476 | 40 | |

TYPE 6 PARAMETER SHEET

Trial Number : 13

Bursts in Trial: 100

| Burst | Carrier (GHz) | Hop (GHz) | DUT BW (MHz) | Within RX |
|-------|---------------|-----------|--------------|-----------|
| 1 | 5.51 | 5.607 | 40 | |
| 2 | 5.51 | 5.504 | 40 | * |
| 3 | 5.51 | 5.487 | 40 | |
| 4 | 5.51 | 5.567 | 40 | |
| 5 | 5.51 | 5.602 | 40 | |
| 6 | 5.51 | 5.551 | 40 | |
| 7 | 5.51 | 5.454 | 40 | |
| 8 | 5.51 | 5.518 | 40 | * |
| 9 | 5.51 | 5.72 | 40 | |
| 10 | 5.51 | 5.695 | 40 | |
| 11 | 5.51 | 5.303 | 40 | |
| 12 | 5.51 | 5.492 | 40 | * |
| 13 | 5.51 | 5.647 | 40 | |
| 14 | 5.51 | 5.59 | 40 | |
| 15 | 5.51 | 5.437 | 40 | |
| 16 | 5.51 | 5.297 | 40 | |
| 17 | 5.51 | 5.354 | 40 | |
| 18 | 5.51 | 5.32 | 40 | |
| 19 | 5.51 | 5.58 | 40 | |
| 20 | 5.51 | 5.549 | 40 | |
| 21 | 5.51 | 5.433 | 40 | |
| 22 | 5.51 | 5.593 | 40 | |
| 23 | 5.51 | 5.512 | 40 | * |

TYPE 6 PARAMETER SHEET

Trial Number : 14

Bursts in Trial: 100

| Burst | Carrier (GHz) | Hop (GHz) | DUT BW (MHz) | Within RX |
|-------|---------------|-----------|--------------|-----------|
| 1 | 5.51 | 5.695 | 40 | |
| 2 | 5.51 | 5.51 | 40 | * |
| 3 | 5.51 | 5.396 | 40 | |
| 4 | 5.51 | 5.666 | 40 | |
| 5 | 5.51 | 5.475 | 40 | |
| 6 | 5.51 | 5.642 | 40 | |
| 7 | 5.51 | 5.273 | 40 | |
| 8 | 5.51 | 5.557 | 40 | |
| 9 | 5.51 | 5.282 | 40 | |
| 10 | 5.51 | 5.426 | 40 | |
| 11 | 5.51 | 5.662 | 40 | |
| 12 | 5.51 | 5.284 | 40 | |
| 13 | 5.51 | 5.668 | 40 | |
| 14 | 5.51 | 5.388 | 40 | |
| 15 | 5.51 | 5.39 | 40 | |
| 16 | 5.51 | 5.616 | 40 | |
| 17 | 5.51 | 5.627 | 40 | |
| 18 | 5.51 | 5.361 | 40 | |
| 19 | 5.51 | 5.447 | 40 | |
| 20 | 5.51 | 5.635 | 40 | |
| 21 | 5.51 | 5.526 | 40 | * |
| 22 | 5.51 | 5.425 | 40 | |
| 23 | 5.51 | 5.705 | 40 | |

TYPE 6 PARAMETER SHEET

Trial Number : 15

Bursts in Trial: 100

| Burst | Carrier (GHz) | Hop (GHz) | DUT BW (MHz) | Within RX |
|-------|---------------|-----------|--------------|-----------|
| 1 | 5.51 | 5.254 | 40 | |
| 2 | 5.51 | 5.376 | 40 | |
| 3 | 5.51 | 5.69 | 40 | |
| 4 | 5.51 | 5.463 | 40 | |
| 5 | 5.51 | 5.706 | 40 | |
| 6 | 5.51 | 5.558 | 40 | |
| 7 | 5.51 | 5.633 | 40 | |
| 8 | 5.51 | 5.489 | 40 | |
| 9 | 5.51 | 5.699 | 40 | |
| 10 | 5.51 | 5.722 | 40 | |
| 11 | 5.51 | 5.262 | 40 | |
| 12 | 5.51 | 5.661 | 40 | |
| 13 | 5.51 | 5.538 | 40 | |
| 14 | 5.51 | 5.556 | 40 | |
| 15 | 5.51 | 5.257 | 40 | |
| 16 | 5.51 | 5.42 | 40 | |
| 17 | 5.51 | 5.454 | 40 | |
| 18 | 5.51 | 5.615 | 40 | |
| 19 | 5.51 | 5.636 | 40 | |
| 20 | 5.51 | 5.264 | 40 | |
| 21 | 5.51 | 5.578 | 40 | |
| 22 | 5.51 | 5.539 | 40 | |
| 23 | 5.51 | 5.366 | 40 | |

TYPE 6 PARAMETER SHEET

Trial Number : 16

Bursts in Trial: 100

| Burst | Carrier (GHz) | Hop (GHz) | DUT BW (MHz) | Within RX |
|-------|---------------|-----------|--------------|-----------|
| 1 | 5.51 | 5.621 | 40 | |
| 2 | 5.51 | 5.601 | 40 | |
| 3 | 5.51 | 5.523 | 40 | * |
| 4 | 5.51 | 5.473 | 40 | |
| 5 | 5.51 | 5.469 | 40 | |
| 6 | 5.51 | 5.609 | 40 | |
| 7 | 5.51 | 5.293 | 40 | |
| 8 | 5.51 | 5.683 | 40 | |
| 9 | 5.51 | 5.707 | 40 | |
| 10 | 5.51 | 5.495 | 40 | * |
| 11 | 5.51 | 5.277 | 40 | |
| 12 | 5.51 | 5.62 | 40 | |
| 13 | 5.51 | 5.689 | 40 | |
| 14 | 5.51 | 5.396 | 40 | |
| 15 | 5.51 | 5.562 | 40 | |
| 16 | 5.51 | 5.533 | 40 | |
| 17 | 5.51 | 5.658 | 40 | |
| 18 | 5.51 | 5.535 | 40 | |
| 19 | 5.51 | 5.603 | 40 | |
| 20 | 5.51 | 5.328 | 40 | |
| 21 | 5.51 | 5.423 | 40 | |
| 22 | 5.51 | 5.401 | 40 | |
| 23 | 5.51 | 5.447 | 40 | |

TYPE 6 PARAMETER SHEET

Trial Number : 17

Bursts in Trial: 100

| Burst | Carrier (GHz) | Hop (GHz) | DUT BW (MHz) | Within RX |
|-------|---------------|-----------|--------------|-----------|
| 1 | 5.51 | 5.251 | 40 | |
| 2 | 5.51 | 5.347 | 40 | |
| 3 | 5.51 | 5.706 | 40 | |
| 4 | 5.51 | 5.622 | 40 | |
| 5 | 5.51 | 5.717 | 40 | |
| 6 | 5.51 | 5.37 | 40 | |
| 7 | 5.51 | 5.602 | 40 | |
| 8 | 5.51 | 5.263 | 40 | |
| 9 | 5.51 | 5.53 | 40 | * |
| 10 | 5.51 | 5.285 | 40 | |
| 11 | 5.51 | 5.486 | 40 | |
| 12 | 5.51 | 5.707 | 40 | |
| 13 | 5.51 | 5.721 | 40 | |
| 14 | 5.51 | 5.586 | 40 | |
| 15 | 5.51 | 5.67 | 40 | |
| 16 | 5.51 | 5.56 | 40 | |
| 17 | 5.51 | 5.352 | 40 | |
| 18 | 5.51 | 5.504 | 40 | * |
| 19 | 5.51 | 5.418 | 40 | |
| 20 | 5.51 | 5.517 | 40 | * |
| 21 | 5.51 | 5.547 | 40 | |
| 22 | 5.51 | 5.604 | 40 | |
| 23 | 5.51 | 5.385 | 40 | |

TYPE 6 PARAMETER SHEET

Trial Number : 18

Bursts in Trial: 100

| Burst | Carrier (GHz) | Hop (GHz) | DUT BW (MHz) | Within RX |
|-------|---------------|-----------|--------------|-----------|
| 1 | 5.51 | 5.708 | 40 | |
| 2 | 5.51 | 5.402 | 40 | |
| 3 | 5.51 | 5.421 | 40 | |
| 4 | 5.51 | 5.657 | 40 | |
| 5 | 5.51 | 5.701 | 40 | |
| 6 | 5.51 | 5.308 | 40 | |
| 7 | 5.51 | 5.383 | 40 | |
| 8 | 5.51 | 5.272 | 40 | |
| 9 | 5.51 | 5.29 | 40 | |
| 10 | 5.51 | 5.529 | 40 | * |
| 11 | 5.51 | 5.512 | 40 | * |
| 12 | 5.51 | 5.299 | 40 | |
| 13 | 5.51 | 5.568 | 40 | |
| 14 | 5.51 | 5.263 | 40 | |
| 15 | 5.51 | 5.533 | 40 | |
| 16 | 5.51 | 5.682 | 40 | |
| 17 | 5.51 | 5.422 | 40 | |
| 18 | 5.51 | 5.532 | 40 | |
| 19 | 5.51 | 5.387 | 40 | |
| 20 | 5.51 | 5.304 | 40 | |
| 21 | 5.51 | 5.415 | 40 | |
| 22 | 5.51 | 5.58 | 40 | |
| 23 | 5.51 | 5.497 | 40 | * |

TYPE 6 PARAMETER SHEET

Trial Number : 19

Bursts in Trial: 100

| Burst | Carrier (GHz) | Hop (GHz) | DUT BW (MHz) | Within RX |
|-------|---------------|-----------|--------------|-----------|
| 1 | 5.51 | 5.471 | 40 | |
| 2 | 5.51 | 5.506 | 40 | * |
| 3 | 5.51 | 5.685 | 40 | |
| 4 | 5.51 | 5.702 | 40 | |
| 5 | 5.51 | 5.665 | 40 | |
| 6 | 5.51 | 5.549 | 40 | |
| 7 | 5.51 | 5.428 | 40 | |
| 8 | 5.51 | 5.42 | 40 | |
| 9 | 5.51 | 5.452 | 40 | |
| 10 | 5.51 | 5.315 | 40 | |
| 11 | 5.51 | 5.486 | 40 | |
| 12 | 5.51 | 5.658 | 40 | |
| 13 | 5.51 | 5.577 | 40 | |
| 14 | 5.51 | 5.262 | 40 | |
| 15 | 5.51 | 5.707 | 40 | |
| 16 | 5.51 | 5.676 | 40 | |
| 17 | 5.51 | 5.45 | 40 | |
| 18 | 5.51 | 5.395 | 40 | |
| 19 | 5.51 | 5.646 | 40 | |
| 20 | 5.51 | 5.298 | 40 | |
| 21 | 5.51 | 5.417 | 40 | |
| 22 | 5.51 | 5.581 | 40 | |
| 23 | 5.51 | 5.391 | 40 | |

TYPE 6 PARAMETER SHEET

Trial Number : 20

Bursts in Trial: 100

| Burst | Carrier (GHz) | Hop (GHz) | DUT BW (MHz) | Within RX |
|-------|---------------|-----------|--------------|-----------|
| 1 | 5.51 | 5.372 | 40 | |
| 2 | 5.51 | 5.596 | 40 | |
| 3 | 5.51 | 5.401 | 40 | |
| 4 | 5.51 | 5.703 | 40 | |
| 5 | 5.51 | 5.275 | 40 | |
| 6 | 5.51 | 5.281 | 40 | |
| 7 | 5.51 | 5.472 | 40 | |
| 8 | 5.51 | 5.45 | 40 | |
| 9 | 5.51 | 5.384 | 40 | |
| 10 | 5.51 | 5.366 | 40 | |
| 11 | 5.51 | 5.499 | 40 | * |
| 12 | 5.51 | 5.432 | 40 | |
| 13 | 5.51 | 5.452 | 40 | |
| 14 | 5.51 | 5.317 | 40 | |
| 15 | 5.51 | 5.524 | 40 | * |
| 16 | 5.51 | 5.27 | 40 | |
| 17 | 5.51 | 5.501 | 40 | * |
| 18 | 5.51 | 5.337 | 40 | |
| 19 | 5.51 | 5.569 | 40 | |
| 20 | 5.51 | 5.673 | 40 | |
| 21 | 5.51 | 5.688 | 40 | |
| 22 | 5.51 | 5.582 | 40 | |
| 23 | 5.51 | 5.448 | 40 | |

TYPE 6 PARAMETER SHEET

Trial Number : 21

Bursts in Trial: 100

| Burst | Carrier (GHz) | Hop (GHz) | DUT BW (MHz) | Within RX |
|-------|---------------|-----------|--------------|-----------|
| 1 | 5.51 | 5.683 | 40 | |
| 2 | 5.51 | 5.525 | 40 | * |
| 3 | 5.51 | 5.577 | 40 | |
| 4 | 5.51 | 5.52 | 40 | * |
| 5 | 5.51 | 5.341 | 40 | |
| 6 | 5.51 | 5.406 | 40 | |
| 7 | 5.51 | 5.483 | 40 | |
| 8 | 5.51 | 5.626 | 40 | |
| 9 | 5.51 | 5.507 | 40 | * |
| 10 | 5.51 | 5.646 | 40 | |
| 11 | 5.51 | 5.275 | 40 | |
| 12 | 5.51 | 5.37 | 40 | |
| 13 | 5.51 | 5.628 | 40 | |
| 14 | 5.51 | 5.71 | 40 | |
| 15 | 5.51 | 5.287 | 40 | |
| 16 | 5.51 | 5.335 | 40 | |
| 17 | 5.51 | 5.302 | 40 | |
| 18 | 5.51 | 5.393 | 40 | |
| 19 | 5.51 | 5.284 | 40 | |
| 20 | 5.51 | 5.303 | 40 | |
| 21 | 5.51 | 5.617 | 40 | |
| 22 | 5.51 | 5.285 | 40 | |
| 23 | 5.51 | 5.522 | 40 | * |

TYPE 6 PARAMETER SHEET

Trial Number : 22

Bursts in Trial: 100

| Burst | Carrier (GHz) | Hop (GHz) | DUT BW (MHz) | Within RX |
|-------|---------------|-----------|--------------|-----------|
| 1 | 5.51 | 5.482 | 40 | |
| 2 | 5.51 | 5.342 | 40 | |
| 3 | 5.51 | 5.487 | 40 | |
| 4 | 5.51 | 5.676 | 40 | |
| 5 | 5.51 | 5.686 | 40 | |
| 6 | 5.51 | 5.375 | 40 | |
| 7 | 5.51 | 5.367 | 40 | |
| 8 | 5.51 | 5.343 | 40 | |
| 9 | 5.51 | 5.358 | 40 | |
| 10 | 5.51 | 5.407 | 40 | |
| 11 | 5.51 | 5.685 | 40 | |
| 12 | 5.51 | 5.497 | 40 | * |
| 13 | 5.51 | 5.509 | 40 | * |
| 14 | 5.51 | 5.364 | 40 | |
| 15 | 5.51 | 5.473 | 40 | |
| 16 | 5.51 | 5.386 | 40 | |
| 17 | 5.51 | 5.674 | 40 | |
| 18 | 5.51 | 5.583 | 40 | |
| 19 | 5.51 | 5.537 | 40 | |
| 20 | 5.51 | 5.441 | 40 | |
| 21 | 5.51 | 5.4 | 40 | |
| 22 | 5.51 | 5.299 | 40 | |
| 23 | 5.51 | 5.413 | 40 | |

TYPE 6 PARAMETER SHEET

Trial Number : 23

Bursts in Trial: 100

| Burst | Carrier (GHz) | Hop (GHz) | DUT BW (MHz) | Within RX |
|-------|---------------|-----------|--------------|-----------|
| 1 | 5.51 | 5.517 | 40 | * |
| 2 | 5.51 | 5.291 | 40 | |
| 3 | 5.51 | 5.602 | 40 | |
| 4 | 5.51 | 5.627 | 40 | |
| 5 | 5.51 | 5.34 | 40 | |
| 6 | 5.51 | 5.44 | 40 | |
| 7 | 5.51 | 5.42 | 40 | |
| 8 | 5.51 | 5.427 | 40 | |
| 9 | 5.51 | 5.29 | 40 | |
| 10 | 5.51 | 5.326 | 40 | |
| 11 | 5.51 | 5.433 | 40 | |
| 12 | 5.51 | 5.678 | 40 | |
| 13 | 5.51 | 5.416 | 40 | |
| 14 | 5.51 | 5.422 | 40 | |
| 15 | 5.51 | 5.358 | 40 | |
| 16 | 5.51 | 5.425 | 40 | |
| 17 | 5.51 | 5.593 | 40 | |
| 18 | 5.51 | 5.531 | 40 | |
| 19 | 5.51 | 5.253 | 40 | |
| 20 | 5.51 | 5.333 | 40 | |
| 21 | 5.51 | 5.613 | 40 | |
| 22 | 5.51 | 5.473 | 40 | |
| 23 | 5.51 | 5.632 | 40 | |

TYPE 6 PARAMETER SHEET

Trial Number : 24

Bursts in Trial: 100

| Burst | Carrier (GHz) | Hop (GHz) | DUT BW (MHz) | Within RX |
|-------|---------------|-----------|--------------|-----------|
| 1 | 5.51 | 5.64 | 40 | |
| 2 | 5.51 | 5.251 | 40 | |
| 3 | 5.51 | 5.541 | 40 | |
| 4 | 5.51 | 5.302 | 40 | |
| 5 | 5.51 | 5.516 | 40 | * |
| 6 | 5.51 | 5.484 | 40 | |
| 7 | 5.51 | 5.518 | 40 | * |
| 8 | 5.51 | 5.596 | 40 | |
| 9 | 5.51 | 5.286 | 40 | |
| 10 | 5.51 | 5.311 | 40 | |
| 11 | 5.51 | 5.269 | 40 | |
| 12 | 5.51 | 5.555 | 40 | |
| 13 | 5.51 | 5.437 | 40 | |
| 14 | 5.51 | 5.28 | 40 | |
| 15 | 5.51 | 5.572 | 40 | |
| 16 | 5.51 | 5.652 | 40 | |
| 17 | 5.51 | 5.344 | 40 | |
| 18 | 5.51 | 5.418 | 40 | |
| 19 | 5.51 | 5.442 | 40 | |
| 20 | 5.51 | 5.574 | 40 | |
| 21 | 5.51 | 5.329 | 40 | |
| 22 | 5.51 | 5.39 | 40 | |
| 23 | 5.51 | 5.542 | 40 | |

TYPE 6 PARAMETER SHEET

Trial Number : 25

Bursts in Trial: 100

| Burst | Carrier (GHz) | Hop (GHz) | DUT BW (MHz) | Within RX |
|-------|---------------|-----------|--------------|-----------|
| 1 | 5.51 | 5.537 | 40 | |
| 2 | 5.51 | 5.358 | 40 | |
| 3 | 5.51 | 5.687 | 40 | |
| 4 | 5.51 | 5.668 | 40 | |
| 5 | 5.51 | 5.624 | 40 | |
| 6 | 5.51 | 5.305 | 40 | |
| 7 | 5.51 | 5.646 | 40 | |
| 8 | 5.51 | 5.484 | 40 | |
| 9 | 5.51 | 5.411 | 40 | |
| 10 | 5.51 | 5.438 | 40 | |
| 11 | 5.51 | 5.616 | 40 | |
| 12 | 5.51 | 5.65 | 40 | |
| 13 | 5.51 | 5.673 | 40 | |
| 14 | 5.51 | 5.564 | 40 | |
| 15 | 5.51 | 5.439 | 40 | |
| 16 | 5.51 | 5.493 | 40 | * |
| 17 | 5.51 | 5.479 | 40 | |
| 18 | 5.51 | 5.413 | 40 | |
| 19 | 5.51 | 5.383 | 40 | |
| 20 | 5.51 | 5.498 | 40 | * |
| 21 | 5.51 | 5.634 | 40 | |
| 22 | 5.51 | 5.586 | 40 | |
| 23 | 5.51 | 5.678 | 40 | |

TYPE 6 PARAMETER SHEET

Trial Number : 26

Bursts in Trial: 100

| Burst | Carrier (GHz) | Hop (GHz) | DUT BW (MHz) | Within RX |
|-------|---------------|-----------|--------------|-----------|
| 1 | 5.51 | 5.67 | 40 | |
| 2 | 5.51 | 5.632 | 40 | |
| 3 | 5.51 | 5.419 | 40 | |
| 4 | 5.51 | 5.499 | 40 | * |
| 5 | 5.51 | 5.492 | 40 | * |
| 6 | 5.51 | 5.421 | 40 | |
| 7 | 5.51 | 5.344 | 40 | |
| 8 | 5.51 | 5.401 | 40 | |
| 9 | 5.51 | 5.605 | 40 | |
| 10 | 5.51 | 5.384 | 40 | |
| 11 | 5.51 | 5.501 | 40 | * |
| 12 | 5.51 | 5.263 | 40 | |
| 13 | 5.51 | 5.406 | 40 | |
| 14 | 5.51 | 5.314 | 40 | |
| 15 | 5.51 | 5.278 | 40 | |
| 16 | 5.51 | 5.342 | 40 | |
| 17 | 5.51 | 5.493 | 40 | * |
| 18 | 5.51 | 5.529 | 40 | * |
| 19 | 5.51 | 5.34 | 40 | |
| 20 | 5.51 | 5.533 | 40 | |
| 21 | 5.51 | 5.528 | 40 | * |
| 22 | 5.51 | 5.438 | 40 | |
| 23 | 5.51 | 5.659 | 40 | |

TYPE 6 PARAMETER SHEET

Trial Number : 27

Bursts in Trial: 100

| Burst | Carrier (GHz) | Hop (GHz) | DUT BW (MHz) | Within RX |
|-------|---------------|-----------|--------------|-----------|
| 1 | 5.51 | 5.629 | 40 | |
| 2 | 5.51 | 5.271 | 40 | |
| 3 | 5.51 | 5.558 | 40 | |
| 4 | 5.51 | 5.687 | 40 | |
| 5 | 5.51 | 5.615 | 40 | |
| 6 | 5.51 | 5.379 | 40 | |
| 7 | 5.51 | 5.296 | 40 | |
| 8 | 5.51 | 5.414 | 40 | |
| 9 | 5.51 | 5.285 | 40 | |
| 10 | 5.51 | 5.426 | 40 | |
| 11 | 5.51 | 5.654 | 40 | |
| 12 | 5.51 | 5.555 | 40 | |
| 13 | 5.51 | 5.712 | 40 | |
| 14 | 5.51 | 5.513 | 40 | * |
| 15 | 5.51 | 5.478 | 40 | |
| 16 | 5.51 | 5.417 | 40 | |
| 17 | 5.51 | 5.335 | 40 | |
| 18 | 5.51 | 5.353 | 40 | |
| 19 | 5.51 | 5.323 | 40 | |
| 20 | 5.51 | 5.442 | 40 | |
| 21 | 5.51 | 5.613 | 40 | |
| 22 | 5.51 | 5.722 | 40 | |
| 23 | 5.51 | 5.561 | 40 | |

TYPE 6 PARAMETER SHEET

Trial Number : 28

Bursts in Trial: 100

| Burst | Carrier (GHz) | Hop (GHz) | DUT BW (MHz) | Within RX |
|-------|---------------|-----------|--------------|-----------|
| 1 | 5.51 | 5.44 | 40 | |
| 2 | 5.51 | 5.477 | 40 | |
| 3 | 5.51 | 5.446 | 40 | |
| 4 | 5.51 | 5.577 | 40 | |
| 5 | 5.51 | 5.313 | 40 | |
| 6 | 5.51 | 5.612 | 40 | |
| 7 | 5.51 | 5.55 | 40 | |
| 8 | 5.51 | 5.455 | 40 | |
| 9 | 5.51 | 5.315 | 40 | |
| 10 | 5.51 | 5.458 | 40 | |
| 11 | 5.51 | 5.409 | 40 | |
| 12 | 5.51 | 5.62 | 40 | |
| 13 | 5.51 | 5.536 | 40 | |
| 14 | 5.51 | 5.632 | 40 | |
| 15 | 5.51 | 5.524 | 40 | * |
| 16 | 5.51 | 5.281 | 40 | |
| 17 | 5.51 | 5.322 | 40 | |
| 18 | 5.51 | 5.635 | 40 | |
| 19 | 5.51 | 5.489 | 40 | |
| 20 | 5.51 | 5.266 | 40 | |
| 21 | 5.51 | 5.38 | 40 | |
| 22 | 5.51 | 5.426 | 40 | |
| 23 | 5.51 | 5.653 | 40 | |

TYPE 6 PARAMETER SHEET

Trial Number : 29

Bursts in Trial: 100

| Burst | Carrier (GHz) | Hop (GHz) | DUT BW (MHz) | Within RX |
|-------|---------------|-----------|--------------|-----------|
| 1 | 5.51 | 5.615 | 40 | |
| 2 | 5.51 | 5.311 | 40 | |
| 3 | 5.51 | 5.706 | 40 | |
| 4 | 5.51 | 5.295 | 40 | |
| 5 | 5.51 | 5.713 | 40 | |
| 6 | 5.51 | 5.389 | 40 | |
| 7 | 5.51 | 5.71 | 40 | |
| 8 | 5.51 | 5.547 | 40 | |
| 9 | 5.51 | 5.585 | 40 | |
| 10 | 5.51 | 5.645 | 40 | |
| 11 | 5.51 | 5.559 | 40 | |
| 12 | 5.51 | 5.616 | 40 | |
| 13 | 5.51 | 5.532 | 40 | |
| 14 | 5.51 | 5.523 | 40 | * |
| 15 | 5.51 | 5.614 | 40 | |
| 16 | 5.51 | 5.464 | 40 | |
| 17 | 5.51 | 5.335 | 40 | |
| 18 | 5.51 | 5.657 | 40 | |
| 19 | 5.51 | 5.634 | 40 | |
| 20 | 5.51 | 5.362 | 40 | |
| 21 | 5.51 | 5.692 | 40 | |
| 22 | 5.51 | 5.672 | 40 | |
| 23 | 5.51 | 5.604 | 40 | |

TYPE 6 PARAMETER SHEET

Trial Number : 30

Bursts in Trial: 100

| Burst | Carrier (GHz) | Hop (GHz) | DUT BW (MHz) | Within RX |
|-------|---------------|-----------|--------------|-----------|
| 1 | 5.51 | 5.626 | 40 | |
| 2 | 5.51 | 5.427 | 40 | |
| 3 | 5.51 | 5.44 | 40 | |
| 4 | 5.51 | 5.37 | 40 | |
| 5 | 5.51 | 5.504 | 40 | * |
| 6 | 5.51 | 5.706 | 40 | |
| 7 | 5.51 | 5.369 | 40 | |
| 8 | 5.51 | 5.576 | 40 | |
| 9 | 5.51 | 5.548 | 40 | |
| 10 | 5.51 | 5.683 | 40 | |
| 11 | 5.51 | 5.676 | 40 | |
| 12 | 5.51 | 5.478 | 40 | |
| 13 | 5.51 | 5.486 | 40 | |
| 14 | 5.51 | 5.366 | 40 | |
| 15 | 5.51 | 5.373 | 40 | |
| 16 | 5.51 | 5.4 | 40 | |
| 17 | 5.51 | 5.41 | 40 | |
| 18 | 5.51 | 5.569 | 40 | |
| 19 | 5.51 | 5.323 | 40 | |
| 20 | 5.51 | 5.299 | 40 | |
| 21 | 5.51 | 5.294 | 40 | |
| 22 | 5.51 | 5.603 | 40 | |
| 23 | 5.51 | 5.562 | 40 | |

Product : Wireless module
 Test Item : Statistical Performance Check
 Radar Type : Type 6
 Test Mode : Normal (802.11ac-80 MHz)
 Test Date : 2024/01/05

| Trial # | Frequency (MHz) | *Filename | 1= Detection 0= No Detection |
|---------------------------------|-----------------|--|---------------------------------|
| 1 | 5530 | Statistical_Check_Hopping Frequency List_For_Radar_Type_6_1_trail | 1 |
| 2 | 5530 | Statistical_Check_Hopping Frequency List_For_Radar_Type_6_2_trail | 1 |
| 3 | 5530 | Statistical_Check_Hopping Frequency List_For_Radar_Type_6_3_trail | 1 |
| 4 | 5530 | Statistical_Check_Hopping Frequency List_For_Radar_Type_6_4_trail | 1 |
| 5 | 5530 | Statistical_Check_Hopping Frequency List_For_Radar_Type_6_5_trail | 1 |
| 6 | 5530 | Statistical_Check_Hopping Frequency List_For_Radar_Type_6_6_trail | 1 |
| 7 | 5530 | Statistical_Check_Hopping Frequency List_For_Radar_Type_6_7_trail | 1 |
| 8 | 5530 | Statistical_Check_Hopping Frequency List_For_Radar_Type_6_8_trail | 1 |
| 9 | 5530 | Statistical_Check_Hopping Frequency List_For_Radar_Type_6_9_trail | 1 |
| 10 | 5530 | Statistical_Check_Hopping Frequency List_For_Radar_Type_6_10_trail | 1 |
| 11 | 5530 | Statistical_Check_Hopping Frequency List_For_Radar_Type_6_11_trail | 1 |
| 12 | 5530 | Statistical_Check_Hopping Frequency List_For_Radar_Type_6_12_trail | 0 |
| 13 | 5530 | Statistical_Check_Hopping Frequency List_For_Radar_Type_6_13_trail | 1 |
| 14 | 5530 | Statistical_Check_Hopping Frequency List_For_Radar_Type_6_14_trail | 1 |
| 15 | 5530 | Statistical_Check_Hopping Frequency List_For_Radar_Type_6_15_trail | 1 |
| 16 | 5530 | Statistical_Check_Hopping Frequency List_For_Radar_Type_6_16_trail | 1 |
| 17 | 5530 | Statistical_Check_Hopping Frequency List_For_Radar_Type_6_17_trail | 1 |
| 18 | 5530 | Statistical_Check_Hopping Frequency List_For_Radar_Type_6_18_trail | 1 |
| 19 | 5530 | Statistical_Check_Hopping Frequency List_For_Radar_Type_6_19_trail | 1 |
| 20 | 5530 | Statistical_Check_Hopping Frequency List_For_Radar_Type_6_20_trail | 1 |
| 21 | 5530 | Statistical_Check_Hopping Frequency List_For_Radar_Type_6_21_trail | 1 |
| 22 | 5530 | Statistical_Check_Hopping Frequency List_For_Radar_Type_6_22_trail | 1 |
| 23 | 5530 | Statistical_Check_Hopping Frequency List_For_Radar_Type_6_23_trail | 1 |
| 24 | 5530 | Statistical_Check_Hopping Frequency List_For_Radar_Type_6_24_trail | 1 |
| 25 | 5530 | Statistical_Check_Hopping Frequency List_For_Radar_Type_6_25_trail | 0 |
| 26 | 5530 | Statistical_Check_Hopping Frequency List_For_Radar_Type_6_26_trail | 1 |
| 27 | 5530 | Statistical_Check_Hopping Frequency List_For_Radar_Type_6_27_trail | 1 |
| 28 | 5530 | Statistical_Check_Hopping Frequency List_For_Radar_Type_6_28_trail | 1 |
| 29 | 5530 | Statistical_Check_Hopping Frequency List_For_Radar_Type_6_29_trail | 1 |
| 30 | 5530 | Statistical_Check_Hopping Frequency List_For_Radar_Type_6_30_trail | 1 |
| Detection Percentage (%) | | | 93.33 |
| Limit | | | >70 |

TYPE 6 PARAMETER SHEET

Trial Number : 1

Bursts in Trial: 100

| Burst | Carrier (GHz) | Hop (GHz) | DUT BW (MHz) | Within RX |
|-------|---------------|-----------|--------------|-----------|
| 1 | 5.53 | 5.624 | 80 | |
| 2 | 5.53 | 5.564 | 80 | * |
| 3 | 5.53 | 5.656 | 80 | |
| 4 | 5.53 | 5.561 | 80 | * |
| 5 | 5.53 | 5.362 | 80 | |
| 6 | 5.53 | 5.548 | 80 | * |
| 7 | 5.53 | 5.43 | 80 | |
| 8 | 5.53 | 5.706 | 80 | |
| 9 | 5.53 | 5.703 | 80 | |
| 10 | 5.53 | 5.641 | 80 | |
| 11 | 5.53 | 5.422 | 80 | |
| 12 | 5.53 | 5.531 | 80 | * |
| 13 | 5.53 | 5.588 | 80 | |
| 14 | 5.53 | 5.523 | 80 | * |
| 15 | 5.53 | 5.618 | 80 | |
| 16 | 5.53 | 5.387 | 80 | |
| 17 | 5.53 | 5.412 | 80 | |
| 18 | 5.53 | 5.625 | 80 | |
| 19 | 5.53 | 5.4 | 80 | |
| 20 | 5.53 | 5.424 | 80 | |
| 21 | 5.53 | 5.557 | 80 | * |
| 22 | 5.53 | 5.559 | 80 | * |
| 23 | 5.53 | 5.658 | 80 | |
| 24 | 5.53 | 5.392 | 80 | |
| 25 | 5.53 | 5.278 | 80 | |
| 26 | 5.53 | 5.563 | 80 | * |
| 27 | 5.53 | 5.721 | 80 | |
| 28 | 5.53 | 5.616 | 80 | |
| 29 | 5.53 | 5.501 | 80 | * |
| 30 | 5.53 | 5.313 | 80 | |
| 31 | 5.53 | 5.294 | 80 | |
| 32 | 5.53 | 5.323 | 80 | |
| 33 | 5.53 | 5.527 | 80 | * |
| 34 | 5.53 | 5.295 | 80 | |
| 35 | 5.53 | 5.433 | 80 | |
| 36 | 5.53 | 5.611 | 80 | |
| 37 | 5.53 | 5.499 | 80 | * |
| 38 | 5.53 | 5.686 | 80 | |
| 39 | 5.53 | 5.453 | 80 | |
| 40 | 5.53 | 5.556 | 80 | * |
| 41 | 5.53 | 5.361 | 80 | |
| 42 | 5.53 | 5.312 | 80 | |
| 43 | 5.53 | 5.504 | 80 | * |
| 44 | 5.53 | 5.45 | 80 | |
| 45 | 5.53 | 5.613 | 80 | |
| 46 | 5.53 | 5.46 | 80 | |
| 47 | 5.53 | 5.332 | 80 | |
| 48 | 5.53 | 5.353 | 80 | |
| 49 | 5.53 | 5.372 | 80 | |

| | | | | |
|-----|------|-------|----|---|
| 50 | 5.53 | 5.62 | 80 | |
| 51 | 5.53 | 5.525 | 80 | * |
| 52 | 5.53 | 5.636 | 80 | |
| 53 | 5.53 | 5.363 | 80 | |
| 54 | 5.53 | 5.354 | 80 | |
| 55 | 5.53 | 5.374 | 80 | |
| 56 | 5.53 | 5.321 | 80 | |
| 57 | 5.53 | 5.543 | 80 | * |
| 58 | 5.53 | 5.536 | 80 | * |
| 59 | 5.53 | 5.631 | 80 | |
| 60 | 5.53 | 5.386 | 80 | |
| 61 | 5.53 | 5.629 | 80 | |
| 62 | 5.53 | 5.607 | 80 | |
| 63 | 5.53 | 5.614 | 80 | |
| 64 | 5.53 | 5.615 | 80 | |
| 65 | 5.53 | 5.26 | 80 | |
| 66 | 5.53 | 5.286 | 80 | |
| 67 | 5.53 | 5.663 | 80 | |
| 68 | 5.53 | 5.601 | 80 | |
| 69 | 5.53 | 5.443 | 80 | |
| 70 | 5.53 | 5.722 | 80 | |
| 71 | 5.53 | 5.437 | 80 | |
| 72 | 5.53 | 5.645 | 80 | |
| 73 | 5.53 | 5.447 | 80 | |
| 74 | 5.53 | 5.677 | 80 | |
| 75 | 5.53 | 5.595 | 80 | |
| 76 | 5.53 | 5.446 | 80 | |
| 77 | 5.53 | 5.651 | 80 | |
| 78 | 5.53 | 5.27 | 80 | |
| 79 | 5.53 | 5.672 | 80 | |
| 80 | 5.53 | 5.574 | 80 | |
| 81 | 5.53 | 5.262 | 80 | |
| 82 | 5.53 | 5.56 | 80 | * |
| 83 | 5.53 | 5.445 | 80 | |
| 84 | 5.53 | 5.409 | 80 | |
| 85 | 5.53 | 5.498 | 80 | * |
| 86 | 5.53 | 5.364 | 80 | |
| 87 | 5.53 | 5.293 | 80 | |
| 88 | 5.53 | 5.528 | 80 | * |
| 89 | 5.53 | 5.389 | 80 | |
| 90 | 5.53 | 5.69 | 80 | |
| 91 | 5.53 | 5.396 | 80 | |
| 92 | 5.53 | 5.406 | 80 | |
| 93 | 5.53 | 5.716 | 80 | |
| 94 | 5.53 | 5.705 | 80 | |
| 95 | 5.53 | 5.466 | 80 | |
| 96 | 5.53 | 5.407 | 80 | |
| 97 | 5.53 | 5.366 | 80 | |
| 98 | 5.53 | 5.67 | 80 | |
| 99 | 5.53 | 5.415 | 80 | |
| 100 | 5.53 | 5.259 | 80 | |



TYPE 6 PARAMETER SHEET

Trial Number : 2

Bursts in Trial: 100

| Burst | Carrier (GHz) | Hop (GHz) | DUT BW (MHz) | Within RX |
|-------|---------------|-----------|--------------|-----------|
| 1 | 5.53 | 5.659 | 80 | |
| 2 | 5.53 | 5.603 | 80 | |
| 3 | 5.53 | 5.685 | 80 | |
| 4 | 5.53 | 5.436 | 80 | |
| 5 | 5.53 | 5.313 | 80 | |
| 6 | 5.53 | 5.633 | 80 | |
| 7 | 5.53 | 5.665 | 80 | |
| 8 | 5.53 | 5.427 | 80 | |
| 9 | 5.53 | 5.467 | 80 | |
| 10 | 5.53 | 5.446 | 80 | |
| 11 | 5.53 | 5.532 | 80 | * |
| 12 | 5.53 | 5.629 | 80 | |
| 13 | 5.53 | 5.631 | 80 | |
| 14 | 5.53 | 5.635 | 80 | |
| 15 | 5.53 | 5.602 | 80 | |
| 16 | 5.53 | 5.279 | 80 | |
| 17 | 5.53 | 5.261 | 80 | |
| 18 | 5.53 | 5.712 | 80 | |
| 19 | 5.53 | 5.46 | 80 | |
| 20 | 5.53 | 5.389 | 80 | |
| 21 | 5.53 | 5.543 | 80 | * |
| 22 | 5.53 | 5.599 | 80 | |
| 23 | 5.53 | 5.287 | 80 | |

TYPE 6 PARAMETER SHEET

Trial Number : 3

Bursts in Trial: 100

| Burst | Carrier (GHz) | Hop (GHz) | DUT BW (MHz) | Within RX |
|-------|---------------|-----------|--------------|-----------|
| 1 | 5.53 | 5.307 | 80 | |
| 2 | 5.53 | 5.354 | 80 | |
| 3 | 5.53 | 5.624 | 80 | |
| 4 | 5.53 | 5.629 | 80 | |
| 5 | 5.53 | 5.704 | 80 | |
| 6 | 5.53 | 5.581 | 80 | |
| 7 | 5.53 | 5.495 | 80 | * |
| 8 | 5.53 | 5.411 | 80 | |
| 9 | 5.53 | 5.409 | 80 | |
| 10 | 5.53 | 5.42 | 80 | |
| 11 | 5.53 | 5.58 | 80 | |
| 12 | 5.53 | 5.506 | 80 | * |
| 13 | 5.53 | 5.558 | 80 | * |
| 14 | 5.53 | 5.649 | 80 | |
| 15 | 5.53 | 5.473 | 80 | |
| 16 | 5.53 | 5.438 | 80 | |
| 17 | 5.53 | 5.711 | 80 | |
| 18 | 5.53 | 5.537 | 80 | * |
| 19 | 5.53 | 5.365 | 80 | |
| 20 | 5.53 | 5.528 | 80 | * |
| 21 | 5.53 | 5.608 | 80 | |
| 22 | 5.53 | 5.475 | 80 | |
| 23 | 5.53 | 5.716 | 80 | |

TYPE 6 PARAMETER SHEET

Trial Number : 4

Bursts in Trial: 100

| Burst | Carrier (GHz) | Hop (GHz) | DUT BW (MHz) | Within RX |
|-------|---------------|-----------|--------------|-----------|
| 1 | 5.53 | 5.67 | 80 | |
| 2 | 5.53 | 5.433 | 80 | |
| 3 | 5.53 | 5.595 | 80 | |
| 4 | 5.53 | 5.563 | 80 | * |
| 5 | 5.53 | 5.494 | 80 | * |
| 6 | 5.53 | 5.576 | 80 | |
| 7 | 5.53 | 5.708 | 80 | |
| 8 | 5.53 | 5.543 | 80 | * |
| 9 | 5.53 | 5.616 | 80 | |
| 10 | 5.53 | 5.591 | 80 | |
| 11 | 5.53 | 5.286 | 80 | |
| 12 | 5.53 | 5.309 | 80 | |
| 13 | 5.53 | 5.472 | 80 | |
| 14 | 5.53 | 5.553 | 80 | * |
| 15 | 5.53 | 5.268 | 80 | |
| 16 | 5.53 | 5.503 | 80 | * |
| 17 | 5.53 | 5.654 | 80 | |
| 18 | 5.53 | 5.56 | 80 | * |
| 19 | 5.53 | 5.618 | 80 | |
| 20 | 5.53 | 5.383 | 80 | |
| 21 | 5.53 | 5.513 | 80 | * |
| 22 | 5.53 | 5.288 | 80 | |
| 23 | 5.53 | 5.334 | 80 | |

TYPE 6 PARAMETER SHEET

Trial Number : 5

Bursts in Trial: 100

| Burst | Carrier (GHz) | Hop (GHz) | DUT BW (MHz) | Within RX |
|-------|---------------|-----------|--------------|-----------|
| 1 | 5.53 | 5.355 | 80 | |
| 2 | 5.53 | 5.257 | 80 | |
| 3 | 5.53 | 5.517 | 80 | * |
| 4 | 5.53 | 5.537 | 80 | * |
| 5 | 5.53 | 5.433 | 80 | |
| 6 | 5.53 | 5.514 | 80 | * |
| 7 | 5.53 | 5.617 | 80 | |
| 8 | 5.53 | 5.585 | 80 | |
| 9 | 5.53 | 5.494 | 80 | * |
| 10 | 5.53 | 5.442 | 80 | |
| 11 | 5.53 | 5.611 | 80 | |
| 12 | 5.53 | 5.669 | 80 | |
| 13 | 5.53 | 5.387 | 80 | |
| 14 | 5.53 | 5.268 | 80 | |
| 15 | 5.53 | 5.557 | 80 | * |
| 16 | 5.53 | 5.304 | 80 | |
| 17 | 5.53 | 5.666 | 80 | |
| 18 | 5.53 | 5.561 | 80 | * |
| 19 | 5.53 | 5.707 | 80 | |
| 20 | 5.53 | 5.309 | 80 | |
| 21 | 5.53 | 5.362 | 80 | |
| 22 | 5.53 | 5.28 | 80 | |
| 23 | 5.53 | 5.59 | 80 | |

TYPE 6 PARAMETER SHEET

Trial Number : 6

Bursts in Trial: 100

| Burst | Carrier (GHz) | Hop (GHz) | DUT BW (MHz) | Within RX |
|-------|---------------|-----------|--------------|-----------|
| 1 | 5.53 | 5.329 | 80 | |
| 2 | 5.53 | 5.416 | 80 | |
| 3 | 5.53 | 5.54 | 80 | * |
| 4 | 5.53 | 5.624 | 80 | |
| 5 | 5.53 | 5.489 | 80 | |
| 6 | 5.53 | 5.575 | 80 | |
| 7 | 5.53 | 5.476 | 80 | |
| 8 | 5.53 | 5.557 | 80 | * |
| 9 | 5.53 | 5.676 | 80 | |
| 10 | 5.53 | 5.648 | 80 | |
| 11 | 5.53 | 5.254 | 80 | |
| 12 | 5.53 | 5.301 | 80 | |
| 13 | 5.53 | 5.291 | 80 | |
| 14 | 5.53 | 5.658 | 80 | |
| 15 | 5.53 | 5.452 | 80 | |
| 16 | 5.53 | 5.651 | 80 | |
| 17 | 5.53 | 5.253 | 80 | |
| 18 | 5.53 | 5.576 | 80 | |
| 19 | 5.53 | 5.494 | 80 | * |
| 20 | 5.53 | 5.612 | 80 | |
| 21 | 5.53 | 5.584 | 80 | |
| 22 | 5.53 | 5.533 | 80 | * |
| 23 | 5.53 | 5.426 | 80 | |

TYPE 6 PARAMETER SHEET

Trial Number : 7

Bursts in Trial: 100

| Burst | Carrier (GHz) | Hop (GHz) | DUT BW (MHz) | Within RX |
|-------|---------------|-----------|--------------|-----------|
| 1 | 5.53 | 5.588 | 80 | |
| 2 | 5.53 | 5.294 | 80 | |
| 3 | 5.53 | 5.674 | 80 | |
| 4 | 5.53 | 5.563 | 80 | * |
| 5 | 5.53 | 5.417 | 80 | |
| 6 | 5.53 | 5.6 | 80 | |
| 7 | 5.53 | 5.354 | 80 | |
| 8 | 5.53 | 5.564 | 80 | * |
| 9 | 5.53 | 5.403 | 80 | |
| 10 | 5.53 | 5.363 | 80 | |
| 11 | 5.53 | 5.476 | 80 | |
| 12 | 5.53 | 5.632 | 80 | |
| 13 | 5.53 | 5.541 | 80 | * |
| 14 | 5.53 | 5.723 | 80 | |
| 15 | 5.53 | 5.492 | 80 | * |
| 16 | 5.53 | 5.321 | 80 | |
| 17 | 5.53 | 5.598 | 80 | |
| 18 | 5.53 | 5.692 | 80 | |
| 19 | 5.53 | 5.702 | 80 | |
| 20 | 5.53 | 5.577 | 80 | |
| 21 | 5.53 | 5.559 | 80 | * |
| 22 | 5.53 | 5.487 | 80 | |
| 23 | 5.53 | 5.361 | 80 | |

TYPE 6 PARAMETER SHEET

Trial Number : 8

Bursts in Trial: 100

| Burst | Carrier (GHz) | Hop (GHz) | DUT BW (MHz) | Within RX |
|-------|---------------|-----------|--------------|-----------|
| 1 | 5.53 | 5.617 | 80 | |
| 2 | 5.53 | 5.722 | 80 | |
| 3 | 5.53 | 5.342 | 80 | |
| 4 | 5.53 | 5.519 | 80 | * |
| 5 | 5.53 | 5.636 | 80 | |
| 6 | 5.53 | 5.48 | 80 | |
| 7 | 5.53 | 5.466 | 80 | |
| 8 | 5.53 | 5.451 | 80 | |
| 9 | 5.53 | 5.5 | 80 | * |
| 10 | 5.53 | 5.269 | 80 | |
| 11 | 5.53 | 5.486 | 80 | |
| 12 | 5.53 | 5.718 | 80 | |
| 13 | 5.53 | 5.344 | 80 | |
| 14 | 5.53 | 5.315 | 80 | |
| 15 | 5.53 | 5.667 | 80 | |
| 16 | 5.53 | 5.439 | 80 | |
| 17 | 5.53 | 5.546 | 80 | * |
| 18 | 5.53 | 5.297 | 80 | |
| 19 | 5.53 | 5.445 | 80 | |
| 20 | 5.53 | 5.657 | 80 | |
| 21 | 5.53 | 5.53 | 80 | * |
| 22 | 5.53 | 5.573 | 80 | |
| 23 | 5.53 | 5.545 | 80 | * |

TYPE 6 PARAMETER SHEET

Trial Number : 9

Bursts in Trial: 100

| Burst | Carrier (GHz) | Hop (GHz) | DUT BW (MHz) | Within RX |
|-------|---------------|-----------|--------------|-----------|
| 1 | 5.53 | 5.498 | 80 | * |
| 2 | 5.53 | 5.652 | 80 | |
| 3 | 5.53 | 5.385 | 80 | |
| 4 | 5.53 | 5.487 | 80 | |
| 5 | 5.53 | 5.303 | 80 | |
| 6 | 5.53 | 5.687 | 80 | |
| 7 | 5.53 | 5.642 | 80 | |
| 8 | 5.53 | 5.633 | 80 | |
| 9 | 5.53 | 5.641 | 80 | |
| 10 | 5.53 | 5.402 | 80 | |
| 11 | 5.53 | 5.258 | 80 | |
| 12 | 5.53 | 5.265 | 80 | |
| 13 | 5.53 | 5.288 | 80 | |
| 14 | 5.53 | 5.442 | 80 | |
| 15 | 5.53 | 5.638 | 80 | |
| 16 | 5.53 | 5.573 | 80 | |
| 17 | 5.53 | 5.564 | 80 | * |
| 18 | 5.53 | 5.45 | 80 | |
| 19 | 5.53 | 5.627 | 80 | |
| 20 | 5.53 | 5.643 | 80 | |
| 21 | 5.53 | 5.366 | 80 | |
| 22 | 5.53 | 5.526 | 80 | * |
| 23 | 5.53 | 5.44 | 80 | |

TYPE 6 PARAMETER SHEET

Trial Number : 10

Bursts in Trial: 100

| Burst | Carrier (GHz) | Hop (GHz) | DUT BW (MHz) | Within RX |
|-------|---------------|-----------|--------------|-----------|
| 1 | 5.53 | 5.336 | 80 | |
| 2 | 5.53 | 5.586 | 80 | |
| 3 | 5.53 | 5.26 | 80 | |
| 4 | 5.53 | 5.631 | 80 | |
| 5 | 5.53 | 5.657 | 80 | |
| 6 | 5.53 | 5.486 | 80 | |
| 7 | 5.53 | 5.277 | 80 | |
| 8 | 5.53 | 5.409 | 80 | |
| 9 | 5.53 | 5.488 | 80 | |
| 10 | 5.53 | 5.566 | 80 | * |
| 11 | 5.53 | 5.308 | 80 | |
| 12 | 5.53 | 5.537 | 80 | * |
| 13 | 5.53 | 5.33 | 80 | |
| 14 | 5.53 | 5.266 | 80 | |
| 15 | 5.53 | 5.417 | 80 | |
| 16 | 5.53 | 5.709 | 80 | |
| 17 | 5.53 | 5.64 | 80 | |
| 18 | 5.53 | 5.52 | 80 | * |
| 19 | 5.53 | 5.605 | 80 | |
| 20 | 5.53 | 5.693 | 80 | |
| 21 | 5.53 | 5.316 | 80 | |
| 22 | 5.53 | 5.285 | 80 | |
| 23 | 5.53 | 5.458 | 80 | |

TYPE 6 PARAMETER SHEET

Trial Number : 11

Bursts in Trial: 100

| Burst | Carrier (GHz) | Hop (GHz) | DUT BW (MHz) | Within RX |
|-------|---------------|-----------|--------------|-----------|
| 1 | 5.53 | 5.447 | 80 | |
| 2 | 5.53 | 5.524 | 80 | * |
| 3 | 5.53 | 5.251 | 80 | |
| 4 | 5.53 | 5.622 | 80 | |
| 5 | 5.53 | 5.348 | 80 | |
| 6 | 5.53 | 5.517 | 80 | * |
| 7 | 5.53 | 5.287 | 80 | |
| 8 | 5.53 | 5.651 | 80 | |
| 9 | 5.53 | 5.625 | 80 | |
| 10 | 5.53 | 5.278 | 80 | |
| 11 | 5.53 | 5.63 | 80 | |
| 12 | 5.53 | 5.435 | 80 | |
| 13 | 5.53 | 5.709 | 80 | |
| 14 | 5.53 | 5.45 | 80 | |
| 15 | 5.53 | 5.513 | 80 | * |
| 16 | 5.53 | 5.264 | 80 | |
| 17 | 5.53 | 5.588 | 80 | |
| 18 | 5.53 | 5.701 | 80 | |
| 19 | 5.53 | 5.372 | 80 | |
| 20 | 5.53 | 5.354 | 80 | |
| 21 | 5.53 | 5.596 | 80 | |
| 22 | 5.53 | 5.493 | 80 | * |
| 23 | 5.53 | 5.538 | 80 | * |

TYPE 6 PARAMETER SHEET

Trial Number : 12

Bursts in Trial: 100

| Burst | Carrier (GHz) | Hop (GHz) | DUT BW (MHz) | Within RX |
|-------|---------------|-----------|--------------|-----------|
| 1 | 5.53 | 5.44 | 80 | |
| 2 | 5.53 | 5.54 | 80 | * |
| 3 | 5.53 | 5.259 | 80 | |
| 4 | 5.53 | 5.71 | 80 | |
| 5 | 5.53 | 5.613 | 80 | |
| 6 | 5.53 | 5.443 | 80 | |
| 7 | 5.53 | 5.284 | 80 | |
| 8 | 5.53 | 5.646 | 80 | |
| 9 | 5.53 | 5.419 | 80 | |
| 10 | 5.53 | 5.454 | 80 | |
| 11 | 5.53 | 5.384 | 80 | |
| 12 | 5.53 | 5.518 | 80 | * |
| 13 | 5.53 | 5.709 | 80 | |
| 14 | 5.53 | 5.567 | 80 | * |
| 15 | 5.53 | 5.427 | 80 | |
| 16 | 5.53 | 5.602 | 80 | |
| 17 | 5.53 | 5.582 | 80 | |
| 18 | 5.53 | 5.354 | 80 | |
| 19 | 5.53 | 5.644 | 80 | |
| 20 | 5.53 | 5.424 | 80 | |
| 21 | 5.53 | 5.385 | 80 | |
| 22 | 5.53 | 5.625 | 80 | |
| 23 | 5.53 | 5.368 | 80 | |

TYPE 6 PARAMETER SHEET

Trial Number : 13

Bursts in Trial: 100

| Burst | Carrier (GHz) | Hop (GHz) | DUT BW (MHz) | Within RX |
|-------|---------------|-----------|--------------|-----------|
| 1 | 5.53 | 5.25 | 80 | |
| 2 | 5.53 | 5.583 | 80 | |
| 3 | 5.53 | 5.281 | 80 | |
| 4 | 5.53 | 5.263 | 80 | |
| 5 | 5.53 | 5.513 | 80 | * |
| 6 | 5.53 | 5.417 | 80 | |
| 7 | 5.53 | 5.548 | 80 | * |
| 8 | 5.53 | 5.46 | 80 | |
| 9 | 5.53 | 5.686 | 80 | |
| 10 | 5.53 | 5.4 | 80 | |
| 11 | 5.53 | 5.672 | 80 | |
| 12 | 5.53 | 5.256 | 80 | |
| 13 | 5.53 | 5.384 | 80 | |
| 14 | 5.53 | 5.394 | 80 | |
| 15 | 5.53 | 5.447 | 80 | |
| 16 | 5.53 | 5.652 | 80 | |
| 17 | 5.53 | 5.414 | 80 | |
| 18 | 5.53 | 5.33 | 80 | |
| 19 | 5.53 | 5.392 | 80 | |
| 20 | 5.53 | 5.636 | 80 | |
| 21 | 5.53 | 5.562 | 80 | * |
| 22 | 5.53 | 5.604 | 80 | |
| 23 | 5.53 | 5.393 | 80 | |

TYPE 6 PARAMETER SHEET

Trial Number : 14

Bursts in Trial: 100

| Burst | Carrier (GHz) | Hop (GHz) | DUT BW (MHz) | Within RX |
|-------|---------------|-----------|--------------|-----------|
| 1 | 5.53 | 5.393 | 80 | |
| 2 | 5.53 | 5.301 | 80 | |
| 3 | 5.53 | 5.422 | 80 | |
| 4 | 5.53 | 5.25 | 80 | |
| 5 | 5.53 | 5.37 | 80 | |
| 6 | 5.53 | 5.311 | 80 | |
| 7 | 5.53 | 5.375 | 80 | |
| 8 | 5.53 | 5.427 | 80 | |
| 9 | 5.53 | 5.704 | 80 | |
| 10 | 5.53 | 5.336 | 80 | |
| 11 | 5.53 | 5.481 | 80 | |
| 12 | 5.53 | 5.58 | 80 | |
| 13 | 5.53 | 5.423 | 80 | |
| 14 | 5.53 | 5.664 | 80 | |
| 15 | 5.53 | 5.517 | 80 | * |
| 16 | 5.53 | 5.511 | 80 | * |
| 17 | 5.53 | 5.529 | 80 | * |
| 18 | 5.53 | 5.621 | 80 | |
| 19 | 5.53 | 5.399 | 80 | |
| 20 | 5.53 | 5.691 | 80 | |
| 21 | 5.53 | 5.445 | 80 | |
| 22 | 5.53 | 5.47 | 80 | |
| 23 | 5.53 | 5.582 | 80 | |

TYPE 6 PARAMETER SHEET

Trial Number : 15

Bursts in Trial: 100

| Burst | Carrier (GHz) | Hop (GHz) | DUT BW (MHz) | Within RX |
|-------|---------------|-----------|--------------|-----------|
| 1 | 5.53 | 5.374 | 80 | |
| 2 | 5.53 | 5.339 | 80 | |
| 3 | 5.53 | 5.29 | 80 | |
| 4 | 5.53 | 5.53 | 80 | * |
| 5 | 5.53 | 5.534 | 80 | * |
| 6 | 5.53 | 5.342 | 80 | |
| 7 | 5.53 | 5.666 | 80 | |
| 8 | 5.53 | 5.427 | 80 | |
| 9 | 5.53 | 5.575 | 80 | |
| 10 | 5.53 | 5.514 | 80 | * |
| 11 | 5.53 | 5.518 | 80 | * |
| 12 | 5.53 | 5.367 | 80 | |
| 13 | 5.53 | 5.704 | 80 | |
| 14 | 5.53 | 5.724 | 80 | |
| 15 | 5.53 | 5.503 | 80 | * |
| 16 | 5.53 | 5.398 | 80 | |
| 17 | 5.53 | 5.624 | 80 | |
| 18 | 5.53 | 5.542 | 80 | * |
| 19 | 5.53 | 5.622 | 80 | |
| 20 | 5.53 | 5.526 | 80 | * |
| 21 | 5.53 | 5.257 | 80 | |
| 22 | 5.53 | 5.306 | 80 | |
| 23 | 5.53 | 5.348 | 80 | |

TYPE 6 PARAMETER SHEET

Trial Number : 16

Bursts in Trial: 100

| Burst | Carrier (GHz) | Hop (GHz) | DUT BW (MHz) | Within RX |
|-------|---------------|-----------|--------------|-----------|
| 1 | 5.53 | 5.285 | 80 | |
| 2 | 5.53 | 5.64 | 80 | |
| 3 | 5.53 | 5.498 | 80 | * |
| 4 | 5.53 | 5.567 | 80 | * |
| 5 | 5.53 | 5.331 | 80 | |
| 6 | 5.53 | 5.373 | 80 | |
| 7 | 5.53 | 5.602 | 80 | |
| 8 | 5.53 | 5.476 | 80 | |
| 9 | 5.53 | 5.427 | 80 | |
| 10 | 5.53 | 5.617 | 80 | |
| 11 | 5.53 | 5.583 | 80 | |
| 12 | 5.53 | 5.408 | 80 | |
| 13 | 5.53 | 5.5 | 80 | * |
| 14 | 5.53 | 5.404 | 80 | |
| 15 | 5.53 | 5.349 | 80 | |
| 16 | 5.53 | 5.478 | 80 | |
| 17 | 5.53 | 5.681 | 80 | |
| 18 | 5.53 | 5.671 | 80 | |
| 19 | 5.53 | 5.453 | 80 | |
| 20 | 5.53 | 5.519 | 80 | * |
| 21 | 5.53 | 5.264 | 80 | |
| 22 | 5.53 | 5.287 | 80 | |
| 23 | 5.53 | 5.318 | 80 | |

TYPE 6 PARAMETER SHEET

Trial Number : 17

Bursts in Trial: 100

| Burst | Carrier (GHz) | Hop (GHz) | DUT BW (MHz) | Within RX |
|-------|---------------|-----------|--------------|-----------|
| 1 | 5.53 | 5.329 | 80 | |
| 2 | 5.53 | 5.54 | 80 | * |
| 3 | 5.53 | 5.65 | 80 | |
| 4 | 5.53 | 5.303 | 80 | |
| 5 | 5.53 | 5.345 | 80 | |
| 6 | 5.53 | 5.313 | 80 | |
| 7 | 5.53 | 5.52 | 80 | * |
| 8 | 5.53 | 5.62 | 80 | |
| 9 | 5.53 | 5.595 | 80 | |
| 10 | 5.53 | 5.323 | 80 | |
| 11 | 5.53 | 5.294 | 80 | |
| 12 | 5.53 | 5.531 | 80 | * |
| 13 | 5.53 | 5.615 | 80 | |
| 14 | 5.53 | 5.354 | 80 | |
| 15 | 5.53 | 5.565 | 80 | * |
| 16 | 5.53 | 5.396 | 80 | |
| 17 | 5.53 | 5.445 | 80 | |
| 18 | 5.53 | 5.251 | 80 | |
| 19 | 5.53 | 5.499 | 80 | * |
| 20 | 5.53 | 5.383 | 80 | |
| 21 | 5.53 | 5.403 | 80 | |
| 22 | 5.53 | 5.47 | 80 | |
| 23 | 5.53 | 5.683 | 80 | |

TYPE 6 PARAMETER SHEET

Trial Number : 18

Bursts in Trial: 100

| Burst | Carrier (GHz) | Hop (GHz) | DUT BW (MHz) | Within RX |
|-------|---------------|-----------|--------------|-----------|
| 1 | 5.53 | 5.406 | 80 | |
| 2 | 5.53 | 5.704 | 80 | |
| 3 | 5.53 | 5.664 | 80 | |
| 4 | 5.53 | 5.382 | 80 | |
| 5 | 5.53 | 5.341 | 80 | |
| 6 | 5.53 | 5.689 | 80 | |
| 7 | 5.53 | 5.395 | 80 | |
| 8 | 5.53 | 5.292 | 80 | |
| 9 | 5.53 | 5.405 | 80 | |
| 10 | 5.53 | 5.597 | 80 | |
| 11 | 5.53 | 5.279 | 80 | |
| 12 | 5.53 | 5.475 | 80 | |
| 13 | 5.53 | 5.299 | 80 | |
| 14 | 5.53 | 5.534 | 80 | * |
| 15 | 5.53 | 5.52 | 80 | * |
| 16 | 5.53 | 5.55 | 80 | * |
| 17 | 5.53 | 5.501 | 80 | * |
| 18 | 5.53 | 5.542 | 80 | * |
| 19 | 5.53 | 5.596 | 80 | |
| 20 | 5.53 | 5.548 | 80 | * |
| 21 | 5.53 | 5.332 | 80 | |
| 22 | 5.53 | 5.373 | 80 | |
| 23 | 5.53 | 5.512 | 80 | * |

TYPE 6 PARAMETER SHEET

Trial Number : 19

Bursts in Trial: 100

| Burst | Carrier (GHz) | Hop (GHz) | DUT BW (MHz) | Within RX |
|-------|---------------|-----------|--------------|-----------|
| 1 | 5.53 | 5.692 | 80 | |
| 2 | 5.53 | 5.321 | 80 | |
| 3 | 5.53 | 5.391 | 80 | |
| 4 | 5.53 | 5.708 | 80 | |
| 5 | 5.53 | 5.44 | 80 | |
| 6 | 5.53 | 5.25 | 80 | |
| 7 | 5.53 | 5.693 | 80 | |
| 8 | 5.53 | 5.383 | 80 | |
| 9 | 5.53 | 5.677 | 80 | |
| 10 | 5.53 | 5.261 | 80 | |
| 11 | 5.53 | 5.398 | 80 | |
| 12 | 5.53 | 5.457 | 80 | |
| 13 | 5.53 | 5.348 | 80 | |
| 14 | 5.53 | 5.467 | 80 | |
| 15 | 5.53 | 5.562 | 80 | * |
| 16 | 5.53 | 5.302 | 80 | |
| 17 | 5.53 | 5.671 | 80 | |
| 18 | 5.53 | 5.58 | 80 | |
| 19 | 5.53 | 5.52 | 80 | * |
| 20 | 5.53 | 5.616 | 80 | |
| 21 | 5.53 | 5.563 | 80 | * |
| 22 | 5.53 | 5.351 | 80 | |
| 23 | 5.53 | 5.327 | 80 | |

TYPE 6 PARAMETER SHEET

Trial Number : 20

Bursts in Trial: 100

| Burst | Carrier (GHz) | Hop (GHz) | DUT BW (MHz) | Within RX |
|-------|---------------|-----------|--------------|-----------|
| 1 | 5.53 | 5.313 | 80 | |
| 2 | 5.53 | 5.392 | 80 | |
| 3 | 5.53 | 5.411 | 80 | |
| 4 | 5.53 | 5.675 | 80 | |
| 5 | 5.53 | 5.525 | 80 | * |
| 6 | 5.53 | 5.336 | 80 | |
| 7 | 5.53 | 5.682 | 80 | |
| 8 | 5.53 | 5.379 | 80 | |
| 9 | 5.53 | 5.529 | 80 | * |
| 10 | 5.53 | 5.427 | 80 | |
| 11 | 5.53 | 5.63 | 80 | |
| 12 | 5.53 | 5.305 | 80 | |
| 13 | 5.53 | 5.344 | 80 | |
| 14 | 5.53 | 5.521 | 80 | * |
| 15 | 5.53 | 5.637 | 80 | |
| 16 | 5.53 | 5.671 | 80 | |
| 17 | 5.53 | 5.41 | 80 | |
| 18 | 5.53 | 5.673 | 80 | |
| 19 | 5.53 | 5.363 | 80 | |
| 20 | 5.53 | 5.502 | 80 | * |
| 21 | 5.53 | 5.31 | 80 | |
| 22 | 5.53 | 5.527 | 80 | * |
| 23 | 5.53 | 5.608 | 80 | |

TYPE 6 PARAMETER SHEET

Trial Number : 21

Bursts in Trial: 100

| Burst | Carrier (GHz) | Hop (GHz) | DUT BW (MHz) | Within RX |
|-------|---------------|-----------|--------------|-----------|
| 1 | 5.53 | 5.665 | 80 | |
| 2 | 5.53 | 5.603 | 80 | |
| 3 | 5.53 | 5.606 | 80 | |
| 4 | 5.53 | 5.338 | 80 | |
| 5 | 5.53 | 5.599 | 80 | |
| 6 | 5.53 | 5.653 | 80 | |
| 7 | 5.53 | 5.499 | 80 | * |
| 8 | 5.53 | 5.578 | 80 | |
| 9 | 5.53 | 5.669 | 80 | |
| 10 | 5.53 | 5.274 | 80 | |
| 11 | 5.53 | 5.605 | 80 | |
| 12 | 5.53 | 5.492 | 80 | * |
| 13 | 5.53 | 5.376 | 80 | |
| 14 | 5.53 | 5.526 | 80 | * |
| 15 | 5.53 | 5.588 | 80 | |
| 16 | 5.53 | 5.698 | 80 | |
| 17 | 5.53 | 5.425 | 80 | |
| 18 | 5.53 | 5.516 | 80 | * |
| 19 | 5.53 | 5.656 | 80 | |
| 20 | 5.53 | 5.333 | 80 | |
| 21 | 5.53 | 5.593 | 80 | |
| 22 | 5.53 | 5.294 | 80 | |
| 23 | 5.53 | 5.633 | 80 | |

TYPE 6 PARAMETER SHEET

Trial Number : 22

Bursts in Trial: 100

| Burst | Carrier (GHz) | Hop (GHz) | DUT BW (MHz) | Within RX |
|-------|---------------|-----------|--------------|-----------|
| 1 | 5.53 | 5.534 | 80 | * |
| 2 | 5.53 | 5.675 | 80 | |
| 3 | 5.53 | 5.378 | 80 | |
| 4 | 5.53 | 5.373 | 80 | |
| 5 | 5.53 | 5.269 | 80 | |
| 6 | 5.53 | 5.358 | 80 | |
| 7 | 5.53 | 5.536 | 80 | * |
| 8 | 5.53 | 5.405 | 80 | |
| 9 | 5.53 | 5.562 | 80 | * |
| 10 | 5.53 | 5.699 | 80 | |
| 11 | 5.53 | 5.522 | 80 | * |
| 12 | 5.53 | 5.64 | 80 | |
| 13 | 5.53 | 5.548 | 80 | * |
| 14 | 5.53 | 5.654 | 80 | |
| 15 | 5.53 | 5.705 | 80 | |
| 16 | 5.53 | 5.516 | 80 | * |
| 17 | 5.53 | 5.3 | 80 | |
| 18 | 5.53 | 5.67 | 80 | |
| 19 | 5.53 | 5.423 | 80 | |
| 20 | 5.53 | 5.714 | 80 | |
| 21 | 5.53 | 5.66 | 80 | |
| 22 | 5.53 | 5.713 | 80 | |
| 23 | 5.53 | 5.592 | 80 | |

TYPE 6 PARAMETER SHEET

Trial Number : 23

Bursts in Trial: 100

| Burst | Carrier (GHz) | Hop (GHz) | DUT BW (MHz) | Within RX |
|-------|---------------|-----------|--------------|-----------|
| 1 | 5.53 | 5.281 | 80 | |
| 2 | 5.53 | 5.636 | 80 | |
| 3 | 5.53 | 5.4 | 80 | |
| 4 | 5.53 | 5.375 | 80 | |
| 5 | 5.53 | 5.586 | 80 | |
| 6 | 5.53 | 5.423 | 80 | |
| 7 | 5.53 | 5.551 | 80 | * |
| 8 | 5.53 | 5.36 | 80 | |
| 9 | 5.53 | 5.462 | 80 | |
| 10 | 5.53 | 5.583 | 80 | |
| 11 | 5.53 | 5.717 | 80 | |
| 12 | 5.53 | 5.616 | 80 | |
| 13 | 5.53 | 5.398 | 80 | |
| 14 | 5.53 | 5.354 | 80 | |
| 15 | 5.53 | 5.576 | 80 | |
| 16 | 5.53 | 5.406 | 80 | |
| 17 | 5.53 | 5.558 | 80 | * |
| 18 | 5.53 | 5.262 | 80 | |
| 19 | 5.53 | 5.469 | 80 | |
| 20 | 5.53 | 5.313 | 80 | |
| 21 | 5.53 | 5.26 | 80 | |
| 22 | 5.53 | 5.545 | 80 | * |
| 23 | 5.53 | 5.588 | 80 | |

TYPE 6 PARAMETER SHEET

Trial Number : 24

Bursts in Trial: 100

| Burst | Carrier (GHz) | Hop (GHz) | DUT BW (MHz) | Within RX |
|-------|---------------|-----------|--------------|-----------|
| 1 | 5.53 | 5.315 | 80 | |
| 2 | 5.53 | 5.67 | 80 | |
| 3 | 5.53 | 5.272 | 80 | |
| 4 | 5.53 | 5.584 | 80 | |
| 5 | 5.53 | 5.609 | 80 | |
| 6 | 5.53 | 5.499 | 80 | * |
| 7 | 5.53 | 5.633 | 80 | |
| 8 | 5.53 | 5.443 | 80 | |
| 9 | 5.53 | 5.486 | 80 | |
| 10 | 5.53 | 5.7 | 80 | |
| 11 | 5.53 | 5.696 | 80 | |
| 12 | 5.53 | 5.665 | 80 | |
| 13 | 5.53 | 5.338 | 80 | |
| 14 | 5.53 | 5.547 | 80 | * |
| 15 | 5.53 | 5.286 | 80 | |
| 16 | 5.53 | 5.628 | 80 | |
| 17 | 5.53 | 5.441 | 80 | |
| 18 | 5.53 | 5.573 | 80 | |
| 19 | 5.53 | 5.583 | 80 | |
| 20 | 5.53 | 5.302 | 80 | |
| 21 | 5.53 | 5.663 | 80 | |
| 22 | 5.53 | 5.592 | 80 | |
| 23 | 5.53 | 5.351 | 80 | |

TYPE 6 PARAMETER SHEET

Trial Number : 25

Bursts in Trial: 100

| Burst | Carrier (GHz) | Hop (GHz) | DUT BW (MHz) | Within RX |
|-------|---------------|-----------|--------------|-----------|
| 1 | 5.53 | 5.656 | 80 | |
| 2 | 5.53 | 5.469 | 80 | |
| 3 | 5.53 | 5.419 | 80 | |
| 4 | 5.53 | 5.465 | 80 | |
| 5 | 5.53 | 5.41 | 80 | |
| 6 | 5.53 | 5.342 | 80 | |
| 7 | 5.53 | 5.293 | 80 | |
| 8 | 5.53 | 5.637 | 80 | |
| 9 | 5.53 | 5.723 | 80 | |
| 10 | 5.53 | 5.276 | 80 | |
| 11 | 5.53 | 5.525 | 80 | * |
| 12 | 5.53 | 5.612 | 80 | |
| 13 | 5.53 | 5.713 | 80 | |
| 14 | 5.53 | 5.459 | 80 | |
| 15 | 5.53 | 5.441 | 80 | |
| 16 | 5.53 | 5.703 | 80 | |
| 17 | 5.53 | 5.62 | 80 | |
| 18 | 5.53 | 5.31 | 80 | |
| 19 | 5.53 | 5.601 | 80 | |
| 20 | 5.53 | 5.526 | 80 | * |
| 21 | 5.53 | 5.607 | 80 | |
| 22 | 5.53 | 5.697 | 80 | |
| 23 | 5.53 | 5.371 | 80 | |

TYPE 6 PARAMETER SHEET

Trial Number : 26

Bursts in Trial: 100

| Burst | Carrier (GHz) | Hop (GHz) | DUT BW (MHz) | Within RX |
|-------|---------------|-----------|--------------|-----------|
| 1 | 5.53 | 5.272 | 80 | |
| 2 | 5.53 | 5.266 | 80 | |
| 3 | 5.53 | 5.284 | 80 | |
| 4 | 5.53 | 5.638 | 80 | |
| 5 | 5.53 | 5.692 | 80 | |
| 6 | 5.53 | 5.675 | 80 | |
| 7 | 5.53 | 5.484 | 80 | |
| 8 | 5.53 | 5.382 | 80 | |
| 9 | 5.53 | 5.388 | 80 | |
| 10 | 5.53 | 5.703 | 80 | |
| 11 | 5.53 | 5.442 | 80 | |
| 12 | 5.53 | 5.671 | 80 | |
| 13 | 5.53 | 5.416 | 80 | |
| 14 | 5.53 | 5.28 | 80 | |
| 15 | 5.53 | 5.446 | 80 | |
| 16 | 5.53 | 5.401 | 80 | |
| 17 | 5.53 | 5.418 | 80 | |
| 18 | 5.53 | 5.719 | 80 | |
| 19 | 5.53 | 5.601 | 80 | |
| 20 | 5.53 | 5.694 | 80 | |
| 21 | 5.53 | 5.659 | 80 | |
| 22 | 5.53 | 5.263 | 80 | |
| 23 | 5.53 | 5.605 | 80 | |

TYPE 6 PARAMETER SHEET

Trial Number : 27

Bursts in Trial: 100

| Burst | Carrier (GHz) | Hop (GHz) | DUT BW (MHz) | Within RX |
|-------|---------------|-----------|--------------|-----------|
| 1 | 5.53 | 5.552 | 80 | * |
| 2 | 5.53 | 5.346 | 80 | |
| 3 | 5.53 | 5.493 | 80 | * |
| 4 | 5.53 | 5.612 | 80 | |
| 5 | 5.53 | 5.306 | 80 | |
| 6 | 5.53 | 5.544 | 80 | * |
| 7 | 5.53 | 5.648 | 80 | |
| 8 | 5.53 | 5.272 | 80 | |
| 9 | 5.53 | 5.446 | 80 | |
| 10 | 5.53 | 5.681 | 80 | |
| 11 | 5.53 | 5.601 | 80 | |
| 12 | 5.53 | 5.458 | 80 | |
| 13 | 5.53 | 5.304 | 80 | |
| 14 | 5.53 | 5.468 | 80 | |
| 15 | 5.53 | 5.719 | 80 | |
| 16 | 5.53 | 5.574 | 80 | |
| 17 | 5.53 | 5.467 | 80 | |
| 18 | 5.53 | 5.664 | 80 | |
| 19 | 5.53 | 5.706 | 80 | |
| 20 | 5.53 | 5.676 | 80 | |
| 21 | 5.53 | 5.331 | 80 | |
| 22 | 5.53 | 5.436 | 80 | |
| 23 | 5.53 | 5.63 | 80 | |

TYPE 6 PARAMETER SHEET

Trial Number : 28

Bursts in Trial: 100

| Burst | Carrier (GHz) | Hop (GHz) | DUT BW (MHz) | Within RX |
|-------|---------------|-----------|--------------|-----------|
| 1 | 5.53 | 5.312 | 80 | |
| 2 | 5.53 | 5.543 | 80 | * |
| 3 | 5.53 | 5.279 | 80 | |
| 4 | 5.53 | 5.396 | 80 | |
| 5 | 5.53 | 5.483 | 80 | |
| 6 | 5.53 | 5.315 | 80 | |
| 7 | 5.53 | 5.367 | 80 | |
| 8 | 5.53 | 5.264 | 80 | |
| 9 | 5.53 | 5.265 | 80 | |
| 10 | 5.53 | 5.262 | 80 | |
| 11 | 5.53 | 5.431 | 80 | |
| 12 | 5.53 | 5.257 | 80 | |
| 13 | 5.53 | 5.695 | 80 | |
| 14 | 5.53 | 5.544 | 80 | * |
| 15 | 5.53 | 5.465 | 80 | |
| 16 | 5.53 | 5.533 | 80 | * |
| 17 | 5.53 | 5.445 | 80 | |
| 18 | 5.53 | 5.273 | 80 | |
| 19 | 5.53 | 5.456 | 80 | |
| 20 | 5.53 | 5.715 | 80 | |
| 21 | 5.53 | 5.573 | 80 | |
| 22 | 5.53 | 5.555 | 80 | * |
| 23 | 5.53 | 5.491 | 80 | * |

TYPE 6 PARAMETER SHEET

Trial Number : 29

Bursts in Trial: 100

| Burst | Carrier (GHz) | Hop (GHz) | DUT BW (MHz) | Within RX |
|-------|---------------|-----------|--------------|-----------|
| 1 | 5.53 | 5.399 | 80 | |
| 2 | 5.53 | 5.498 | 80 | * |
| 3 | 5.53 | 5.716 | 80 | |
| 4 | 5.53 | 5.261 | 80 | |
| 5 | 5.53 | 5.276 | 80 | |
| 6 | 5.53 | 5.385 | 80 | |
| 7 | 5.53 | 5.301 | 80 | |
| 8 | 5.53 | 5.641 | 80 | |
| 9 | 5.53 | 5.35 | 80 | |
| 10 | 5.53 | 5.704 | 80 | |
| 11 | 5.53 | 5.354 | 80 | |
| 12 | 5.53 | 5.421 | 80 | |
| 13 | 5.53 | 5.265 | 80 | |
| 14 | 5.53 | 5.405 | 80 | |
| 15 | 5.53 | 5.536 | 80 | * |
| 16 | 5.53 | 5.667 | 80 | |
| 17 | 5.53 | 5.472 | 80 | |
| 18 | 5.53 | 5.451 | 80 | |
| 19 | 5.53 | 5.298 | 80 | |
| 20 | 5.53 | 5.268 | 80 | |
| 21 | 5.53 | 5.592 | 80 | |
| 22 | 5.53 | 5.283 | 80 | |
| 23 | 5.53 | 5.717 | 80 | |

TYPE 6 PARAMETER SHEET

Trial Number : 30

Bursts in Trial: 100

| Burst | Carrier (GHz) | Hop (GHz) | DUT BW (MHz) | Within RX |
|-------|---------------|-----------|--------------|-----------|
| 1 | 5.53 | 5.648 | 80 | |
| 2 | 5.53 | 5.448 | 80 | |
| 3 | 5.53 | 5.57 | 80 | * |
| 4 | 5.53 | 5.41 | 80 | |
| 5 | 5.53 | 5.588 | 80 | |
| 6 | 5.53 | 5.621 | 80 | |
| 7 | 5.53 | 5.481 | 80 | |
| 8 | 5.53 | 5.339 | 80 | |
| 9 | 5.53 | 5.273 | 80 | |
| 10 | 5.53 | 5.641 | 80 | |
| 11 | 5.53 | 5.642 | 80 | |
| 12 | 5.53 | 5.424 | 80 | |
| 13 | 5.53 | 5.547 | 80 | * |
| 14 | 5.53 | 5.501 | 80 | * |
| 15 | 5.53 | 5.419 | 80 | |
| 16 | 5.53 | 5.712 | 80 | |
| 17 | 5.53 | 5.566 | 80 | * |
| 18 | 5.53 | 5.674 | 80 | |
| 19 | 5.53 | 5.664 | 80 | |
| 20 | 5.53 | 5.461 | 80 | |
| 21 | 5.53 | 5.48 | 80 | |
| 22 | 5.53 | 5.698 | 80 | |
| 23 | 5.53 | 5.699 | 80 | |

Mode 1 – 802.11ax20

| Total Type 1~4 Radar Statistical Performance (5500MHz) | | | |
|--|--------------------------|-----------|--------|
| Radar Type | Detection Percentage (%) | Limit (%) | Result |
| 1 | 86.67 | >60% | Pass |
| 2 | 90.00 | >60% | Pass |
| 3 | 86.67 | >60% | Pass |
| 4 | 83.33 | >60% | Pass |
| Total Type 1~4 | 86.67 | >80% | Pass |
| 5 | 83.33 | ≥80% | Pass |
| 6 | 96.67 | ≥70% | Pass |

Mode 2 – 802.11ax40

| Total Type 1~4 Radar Statistical Performance (5510MHz) | | | |
|--|--------------------------|-----------|--------|
| Radar Type | Detection Percentage (%) | Limit (%) | Result |
| 1 | 90.00 | >60% | Pass |
| 2 | 90.00 | >60% | Pass |
| 3 | 86.67 | >60% | Pass |
| 4 | 86.67 | >60% | Pass |
| Total Type 1~4 | 88.33 | >80% | Pass |
| 5 | 80.00 | ≥80% | Pass |
| 6 | 90.00 | ≥70% | Pass |

Mode 3 – 802.11ax80

| Total Type 1~4 Radar Statistical Performance (5530MHz) | | | |
|--|--------------------------|-----------|--------|
| Radar Type | Detection Percentage (%) | Limit (%) | Result |
| 1 | 83.33 | >60% | Pass |
| 2 | 83.33 | >60% | Pass |
| 3 | 83.33 | >60% | Pass |
| 4 | 80.00 | >60% | Pass |
| Total Type 1~4 | 82.50 | >80% | Pass |
| 5 | 83.33 | ≥80% | Pass |
| 6 | 93.33 | ≥70% | Pass |