

FCC Test Report

Applicant : Shenzhen Qianyan Technology LTD

Address : No.3301,Block C,Section 1,Chuangzhi
Yuncheng, Building,Liuxian Avenue,Xili
Community, Xili Street, Nanshan District,
Shenzhen, 518000, China

Product Name : Govee RGBIC LED Neon Rope Light for desks

Report Date : Jul. 20, 2023

Shenzhen Anbotek Compliance Laboratory Limited



Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community,
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.
Tel: (86) 0755-26066440 Fax: (86) 0755-26014772 Email: service@anbotek.com

Code: AB-RF-05-b



Hotline

400-003-0500

www.anbotek.com.cn



Contents

1. General Information	5
1.1. Client Information	5
1.2. Description of Device (EUT)	5
1.3. Auxilliary Equipment Used During Test	6
1.4. Description of Test Configuration	6
1.5. Description Of Test Setup	7
1.6. Test Equipment List	8
1.7. Measurement Uncertainty	9
1.8. Description of Test Facility	9
2. Summary of Test Results	10
3. Conducted Emission Test	11
3.1. Test Standard and Limit	11
3.2. Test Setup	11
3.3. Test Procedure	11
3.4. Test Data	11
4. Radiation Spurious Emission and Band Edge	16
4.1. Test Standard and Limit	16
4.2. Test Setup	16
4.3. Test Procedure	17
4.4. Test Data	18
5. Maximum Peak Output Power Test	29
5.1. Test Standard and Limit	29
5.2. Test Setup	29
5.3. Test Procedure	29
5.4. Test Data	29
6. Antenna Requirement	30
6.1. Test Standard and Requirement	30
6.2. Antenna Connected Construction	30
APPENDIX I -- TEST SETUP PHOTOGRAPH	31
APPENDIX II -- EXTERNAL PHOTOGRAPH	31
APPENDIX III -- INTERNAL PHOTOGRAPH	31



TEST REPORT

Applicant : Shenzhen Qianyan Technology LTD
Manufacturer : Shenzhen Qianyan Technology LTD
Product Name : Govee RGBIC LED Neon Rope Light for desks
Model No. : H61C5, H61C2
Trade Mark : Govee
Rating(s) : H61C2 Input: 24V \Rightarrow 1A
H61C5 Input: 24V \Rightarrow 2A
Test Standard(s) : **FCC Part15 Subpart C, Section 15.247**
Test Method(s) : **ANSI C63.10: 2020, KDB 558074 D01 15.247 Meas Guidance v05r02**

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Receipt

Jun. 02, 2023

Date of Test

Jun. 02 ~ Jul. 07, 2023

Prepared by

Nian Xiu Chen

(Nianxiu Chen)

Approved & Authorized Signer

Kingkong Jin

(Kingkong Jin)



Revision History

Report Version	Description	Issued Date
R00	Original Issue.	Jul. 20, 2023

Note 1:

This is a Class II application which was based on the original report 18220WC30025002. The difference between the original device and current one described as following:

1. Change the model name to "H61C5, H61C2".

Base on the changes, models have different strip lengths and inputs, only conducted emission and spurious emission were retested. The changes will not related with the other RF parameters.



1. General Information

1.1. Client Information

Applicant	:	Shenzhen Qianyan Technology LTD
Address	:	No.3301,Block C,Section 1,Chuangzhi Yuncheng, Building,Liuxian Avenue,Xili Community, Xili Street, Nanshan District, Shenzhen, 518000, China
Manufacturer	:	Shenzhen Qianyan Technology LTD
Address	:	No.3301,Block C,Section 1,Chuangzhi Yuncheng, Building,Liuxian Avenue,Xili Community, Xili Street, Nanshan District, Shenzhen, 518000, China

1.2. Description of Device (EUT)

Product Name	:	Govee RGBIC LED Neon Rope Light for desks
Model No.	:	H61C5, H61C2 (Note: All samples are the same except the model number, Lamp strip length and input, so we prepare all models for test.)
Trade Mark	:	Govee
Test Power Supply	:	AC 120V, 60Hz for Adapter
Test Sample No.	:	1-2-1(Normal Sample), 1-2-2(Engineering Sample)
Adapter(H61C5 for Light strip length 5m)	:	Model No.: CW2402000US Input: 100-240V~50/60Hz 1.2A MAX Output: 24V= 2000mA
Adapter(H61C2 for Light strip length 2m)	:	Model No.: BI24GL-240100-AdU Input: 100-240V~50/60Hz 0.8A Output : 24V= 1A
RF Specification		
Operation Mode	:	<input checked="" type="checkbox"/> 802.11b <input checked="" type="checkbox"/> 802.11g <input checked="" type="checkbox"/> 802.11n(HT20) <input type="checkbox"/> 802.11n(HT40)
Operation Frequency	:	2412~2462MHz
Number of Channel	:	11 Channel for 20MHz bandwidth (2412~2462MHz)
Modulation Type	:	<input checked="" type="checkbox"/> 802.11b: DSSS (CCK, DQPSK, DBPSK) <input checked="" type="checkbox"/> 802.11g: OFDM (BPSK, QPSK, 16QAM, 64QAM) <input checked="" type="checkbox"/> 802.11n: OFDM (BPSK, QPSK, 16QAM, 64QAM)
Antenna Type	:	PCB Antenna



Antenna Gain(Peak)	:	3.85dBi (Provided by customer)
Remark: 1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.		

1.3. Auxiliary Equipment Used During Test

Description	Rating(s)
--	--

1.4. Description of Test Configuration

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		


Note:

- The engineering test program was provided and the EUT was programmed to be in continuously transmitting mode.
- For 802.11b, 802.11g, and 802.11n(HT20) modes were test with channel 1, 6, 11.




1.5. Description Of Test Setup

CE

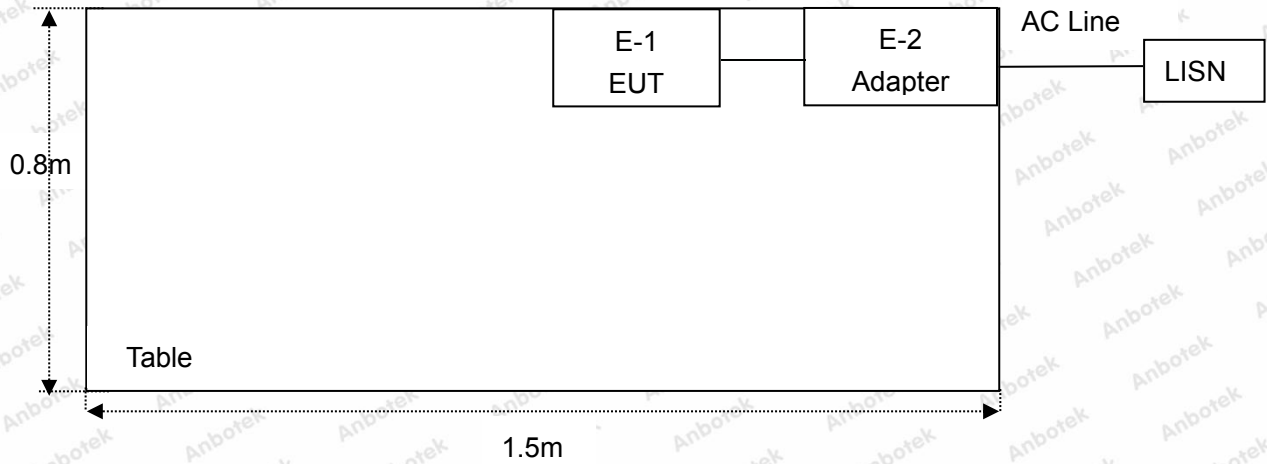

RE

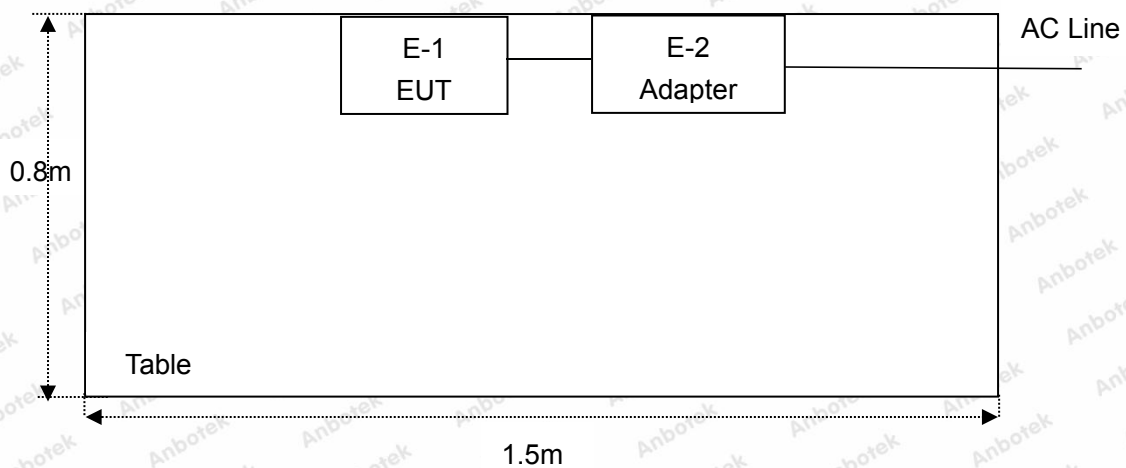

1.6. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	Rohde & Schwarz	ENV216	100055	Oct. 23, 2022	1 Year
2.	Three Phase V-type Artificial Power Network	CYBERTEK	EM5040DT	E215040DT001	Jul. 05, 2023	1 Year
3.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Oct. 13, 2022	1 Year
4.	EMI Test Receiver	Rohde & Schwarz	ESR26	101481	Oct. 23, 2022	1 Year
5.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Oct. 22, 2022	1 Year
6.	MXA Spectrum Analysis	Agilent	N9020A	MY51170037	Oct. 13, 2022	1 Year
7.	EMI Preamplifier	SKET Electronic	LNPA-0118G -45	SKET-PA-002	Oct. 13, 2022	1 Year
8.	Double Ridged Horn Antenna	SCHWARZBECK	BBHA 9120D	02555	Oct. 16, 2022	3 Year
9.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	345	Oct. 23, 2022	3 Year
10.	Loop Antenna	Schwarzbeck	FMZB1519B	00053	Oct. 23, 2022	1 Year
11.	Horn Antenna	A-INFO	LB-180400-K F	J211060628	Oct. 23, 2022	1 Year
12.	Pre-amplifier	SONOMA	310N	186860	Oct. 23, 2022	1 Year
13.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
14.	MXA Spectrum Analysis	KEYSIGHT	N9020A	MY53280032	Oct. 13, 2022	1 Year
15.	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	Oct. 13, 2022	1 Year
16.	Signal Generator	Agilent	E4421B	MY41000743	Oct. 13, 2022	1 Year
17.	DC Power Supply	IVYTECH	IV3605	1804D360510	Oct. 22, 2022	1 Year
18.	Constant Temperature Humidity Chamber	ZHONGJIAN	ZJ-KHWS80 B	N/A	Oct. 19, 2022	1 Year
19.	Power Meter	Agilent	N1914A	MY50001102	Oct.26, 2022	1 Year



1.7. Measurement Uncertainty

Radiation Uncertainty	:	Ur = 3.9 dB (Horizontal)
	:	Ur = 3.8 dB (Vertical)
Conduction Uncertainty	:	Uc = 3.4 dB

1.8. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 184111

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111.

ISED-Registration No.: 8058A

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A.

Test Location

Shenzhen Anbotek Compliance Laboratory Limited.

1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.518102



2. Summary of Test Results

Standard Section	Test Item	Result
15.203/15.247(c)	Antenna Requirement	PASS
15.207	Conducted Emission	PASS
15.205/15.209	Spurious Emission	PASS
15.247(b)(3)	Conducted Peak Output Power	PASS
Remark: "N/A" is an abbreviation for Not Applicable.		




3. Conducted Emission Test

3.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.207		
Test Limit	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
5MHz~30MHz	60	50	

Remark: (1) *Decreasing linearly with logarithm of the frequency.
 (2) The lower limit shall apply at the transition frequency.

3.2. Test Setup

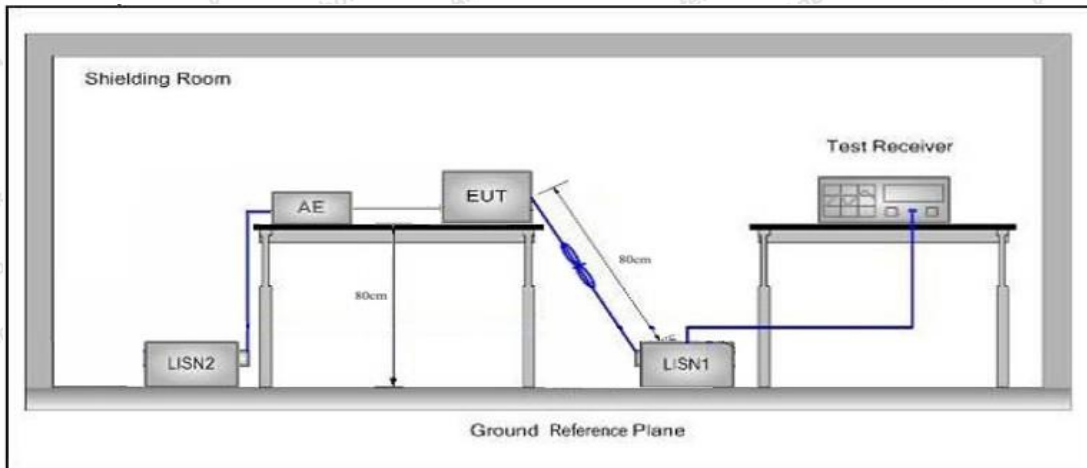

3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10: 2020 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

3.4. Test Data

During the test, pre-scan all modes, only the worst case is recorded in the report.


AC conducted emission pre-test at both at AC 120V/60Hz and AC 240V/60Hz modes, recorded worst case AC 120V/60Hz.

Please to see the following pages.



Conducted Emission Test Data

Test Site: 1# Shielded Room
 Operating Condition: 802.11g 2462MHz
 Test Specification: AC 120V, 60Hz for Adapter
 Comment: Live Line
 Temp.(°C)/Hum.(%RH): 22.5°C/49%RH
 Model: H61C5

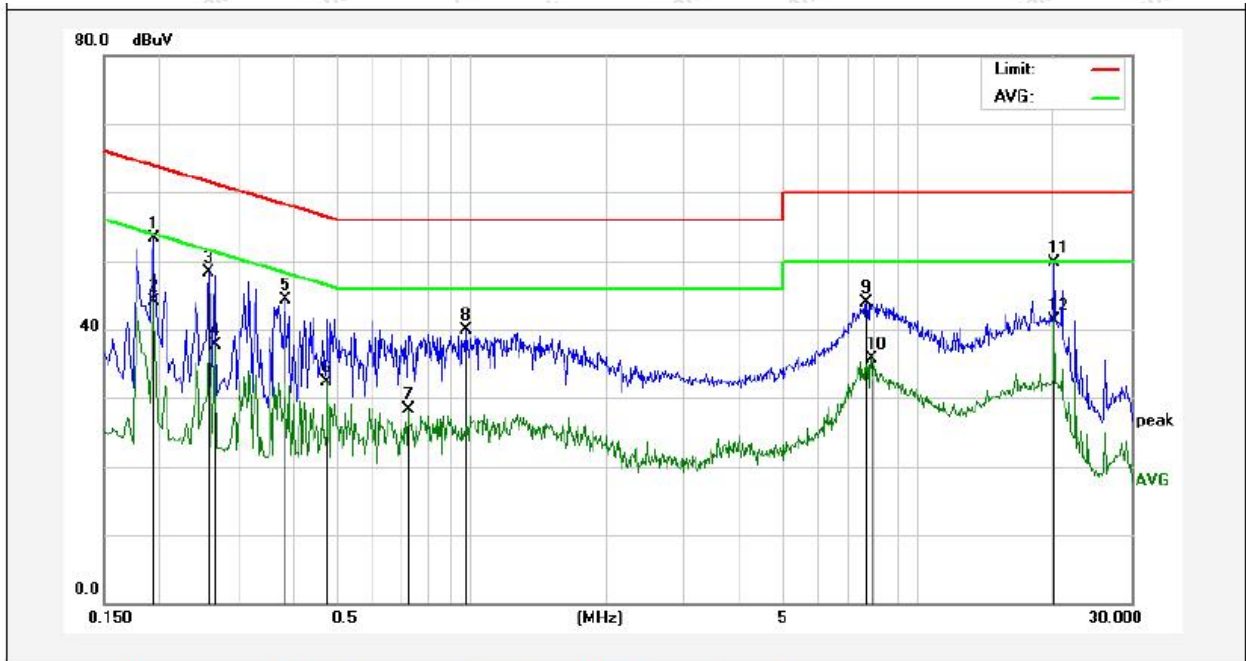


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1940	43.48	9.83	53.31	63.86	-10.55	QP	
2	0.1940	34.21	9.83	44.04	53.86	-9.82	AVG	
3	0.2580	38.38	9.83	48.21	61.49	-13.28	QP	
4	0.2660	27.78	9.83	37.61	51.24	-13.63	AVG	
5	0.3820	34.56	9.81	44.37	58.23	-13.86	QP	
6	0.4740	22.43	9.84	32.27	46.44	-14.17	AVG	
7	0.7220	18.45	9.87	28.32	46.00	-17.68	AVG	
8	0.9700	30.13	9.85	39.98	56.00	-16.02	QP	
9	7.6580	34.06	9.89	43.95	60.00	-16.05	QP	
10	7.8380	25.88	9.90	35.78	50.00	-14.22	AVG	
11	20.2500	39.33	10.34	49.67	60.00	-10.33	QP	
12	20.2500	31.03	10.34	41.37	50.00	-8.63	AVG	



Conducted Emission Test Data

Test Site: 1# Shielded Room
 Operating Condition: 802.11g 2462MHz
 Test Specification: AC 120V, 60Hz for Adapter
 Comment: Neutral Line
 Temp.(°C)/Hum.(%RH): 22.5°C/49%RH
 Model: H61C5

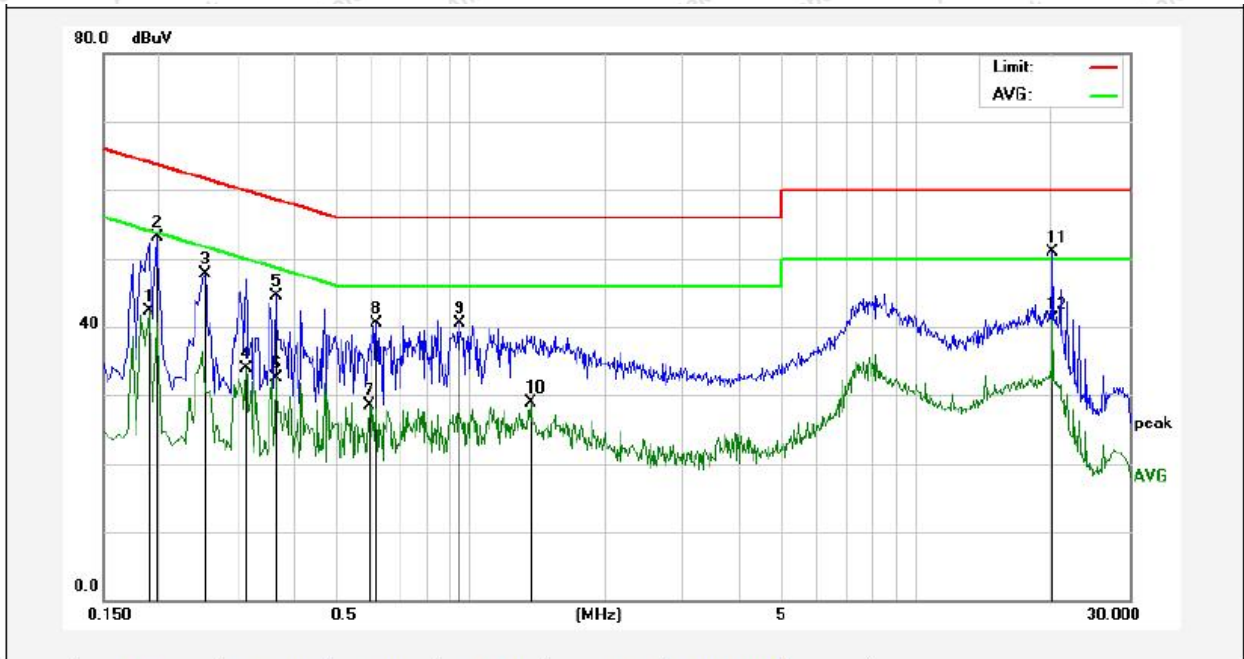


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1900	32.41	9.83	42.24	54.03	-11.79	AVG	
2	0.1980	43.29	9.83	53.12	63.69	-10.57	QP	
3	0.2540	37.81	9.83	47.64	61.62	-13.98	QP	
4	0.3140	24.02	9.83	33.85	49.86	-16.01	AVG	
5	0.3660	34.62	9.82	44.44	58.59	-14.15	QP	
6	0.3660	22.78	9.82	32.60	48.59	-15.99	AVG	
7	0.5940	18.63	9.86	28.49	46.00	-17.51	AVG	
8	0.6140	30.58	9.86	40.44	56.00	-15.56	QP	
9	0.9460	30.64	9.85	40.49	56.00	-15.51	QP	
10	1.3619	19.13	9.84	28.97	46.00	-17.03	AVG	
11	20.2500	40.47	10.34	50.81	60.00	-9.19	QP	
12	20.2500	30.74	10.34	41.08	50.00	-8.92	AVG	



Conducted Emission Test Data

Test Site: 1# Shielded Room
 Operating Condition: 802.11g 2462MHz
 Test Specification: AC 120V, 60Hz for Adapter
 Comment: Live Line
 Temp.(°C)/Hum.(%RH): 22.5°C/49%RH
 Model: H61C2

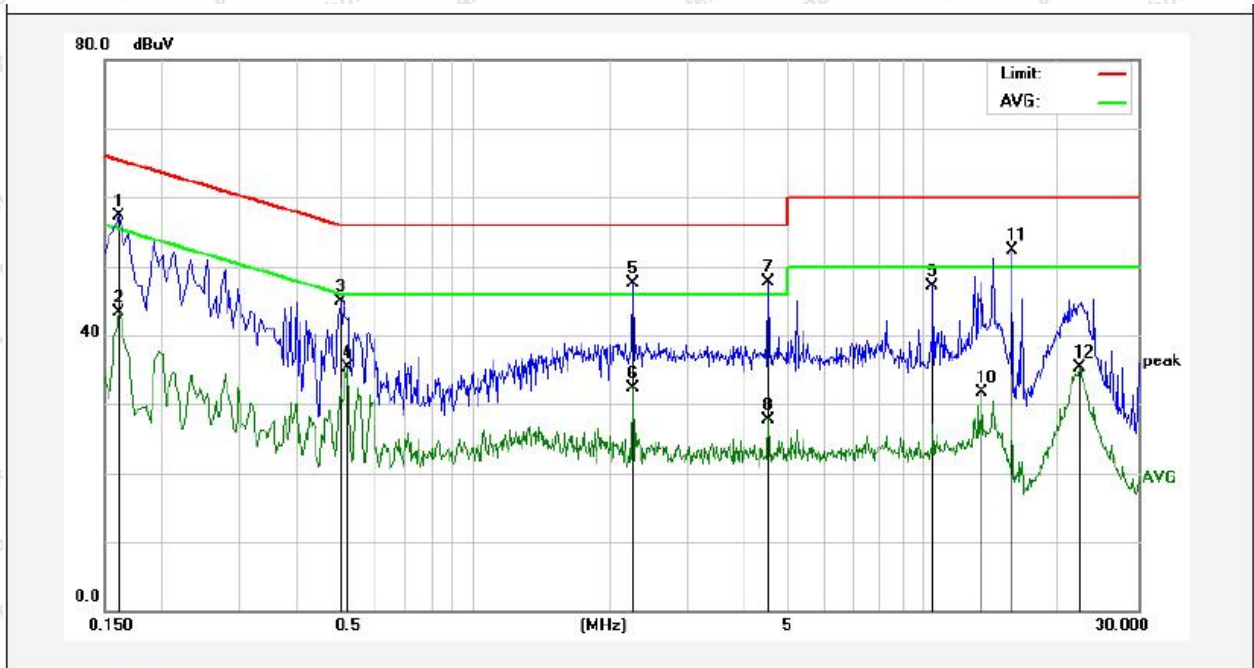


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1620	47.53	9.83	57.36	65.36	-8.00	QP	
2	0.1620	33.41	9.83	43.24	55.36	-12.12	AVG	
3	0.5060	35.00	9.85	44.85	56.00	-11.15	QP	
4	0.5220	25.51	9.85	35.36	46.00	-10.64	AVG	
5	2.2500	37.60	9.83	47.43	56.00	-8.57	QP	
6	2.2500	22.53	9.83	32.36	46.00	-13.64	AVG	
7	4.5020	37.95	9.85	47.80	56.00	-8.20	QP	
8	4.5020	17.76	9.85	27.61	46.00	-18.39	AVG	
9	10.4940	37.21	9.99	47.20	60.00	-12.80	QP	
10	13.4980	21.59	10.11	31.70	50.00	-18.30	AVG	
11	15.7500	42.03	10.19	52.22	60.00	-7.78	QP	
12	22.2099	24.71	10.67	35.38	50.00	-14.62	AVG	



Conducted Emission Test Data

Test Site: 1# Shielded Room
 Operating Condition: 802.11g 2462MHz
 Test Specification: AC 120V, 60Hz for Adapter
 Comment: Neutral Line
 Temp.(°C)/Hum.(%RH): 22.5°C/49%RH
 Model: H61C2

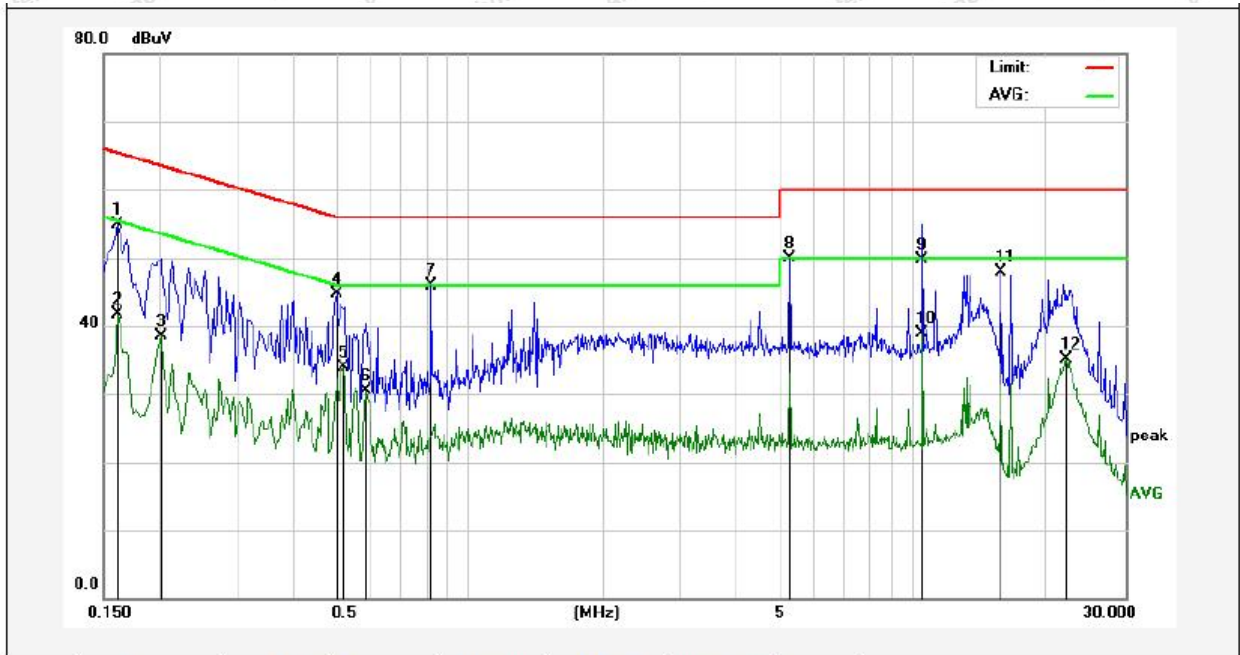

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1620	45.16	9.83	54.99	65.36	-10.37	QP	
2	0.1620	31.85	9.83	41.68	55.36	-13.68	AVG	
3	0.2020	28.68	9.83	38.51	53.52	-15.01	AVG	
4	0.5020	34.80	9.85	44.65	56.00	-11.35	QP	
5	0.5220	24.03	9.85	33.88	46.00	-12.12	AVG	
6	0.5860	20.71	9.86	30.57	46.00	-15.43	AVG	
7	0.8220	36.14	9.86	46.00	56.00	-10.00	QP	
8	5.2500	40.12	9.85	49.97	60.00	-10.03	QP	
9	10.4980	39.75	9.99	49.74	60.00	-10.26	QP	
10	10.4980	29.00	9.99	38.99	50.00	-11.01	AVG	
11	15.7540	37.69	10.19	47.88	60.00	-12.12	QP	
12	22.1060	24.46	10.65	35.11	50.00	-14.89	AVG	



4. Radiation Spurious Emission and Band Edge

4.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.209 and 15.205				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
-		74.0	Peak	3	

Remark:

(1)The lower limit shall apply at the transition frequency.

(2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

4.2. Test Setup

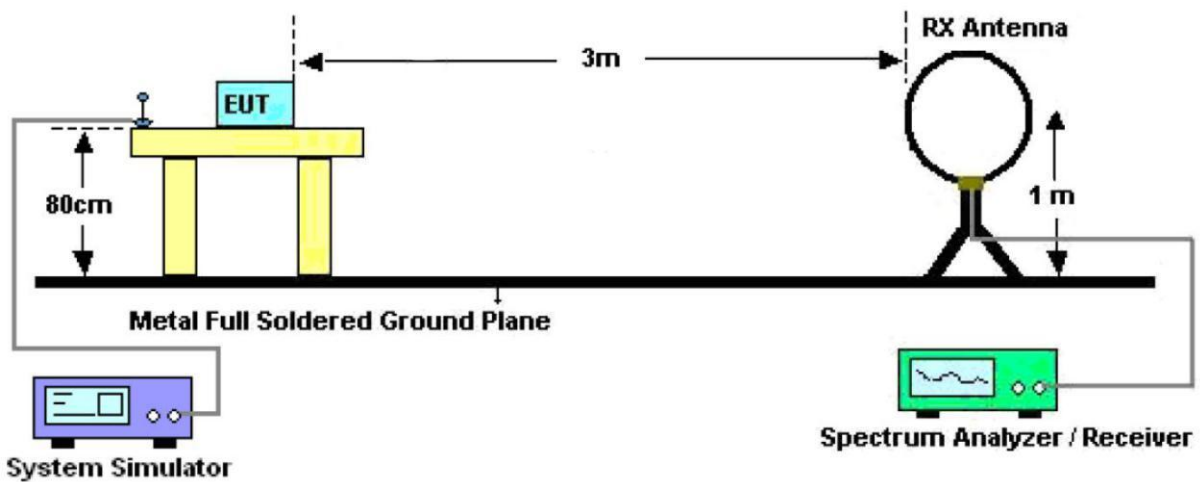


Figure 1. Below 30MHz



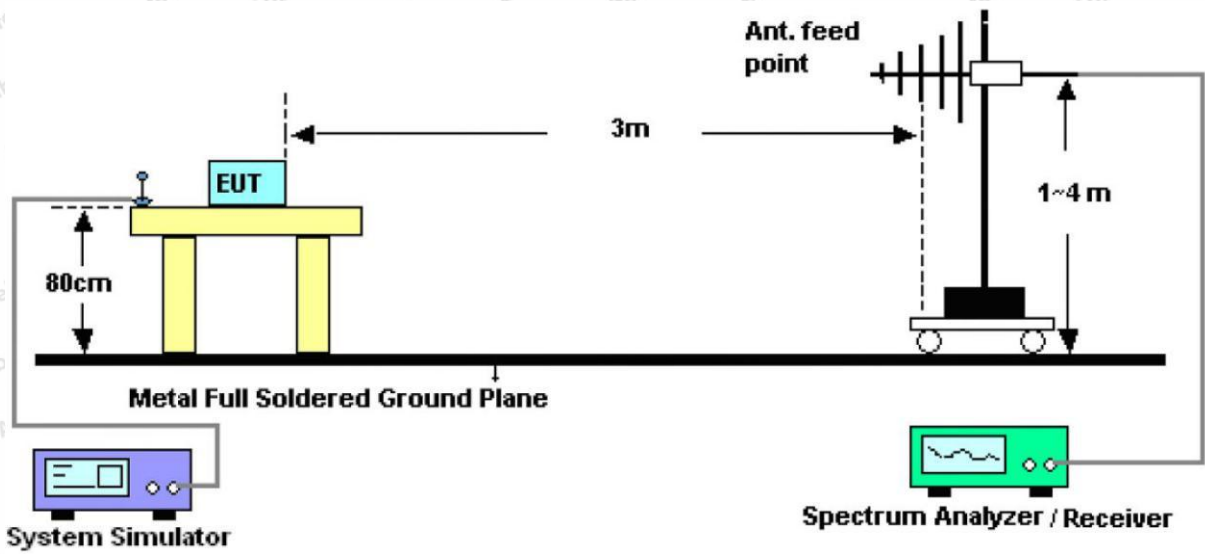


Figure 2. 30MHz to 1GHz

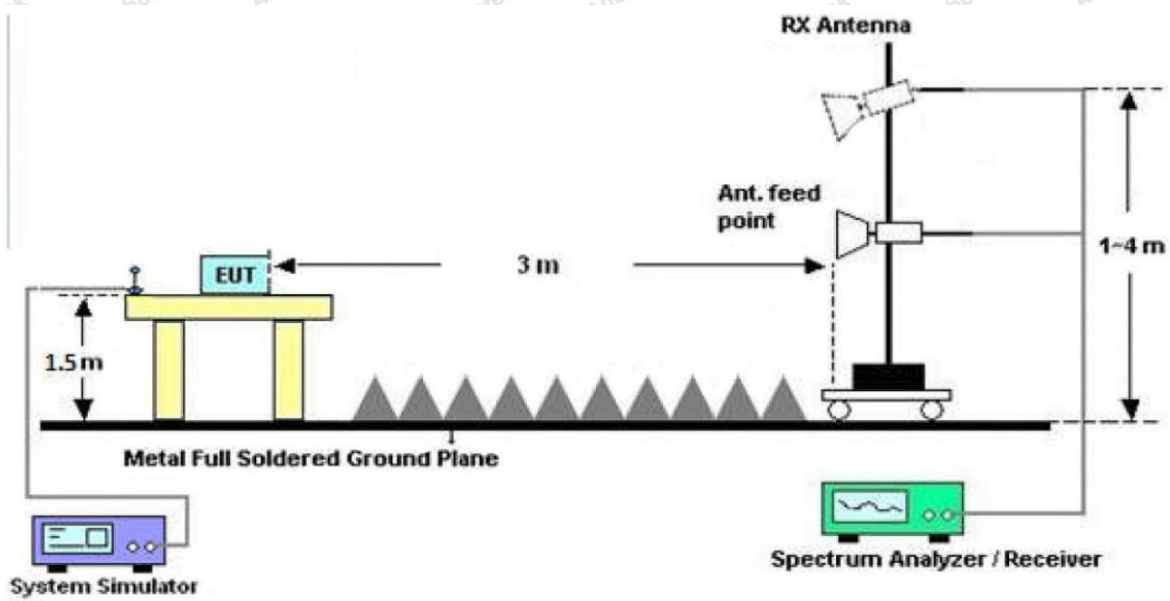


Figure 3. Above 1 GHz

4.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.

For above 1GHz: The EUT is placed on a turntable, which is 1.5m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on an antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9*6*6 Chamber. The device is evaluated in xyz orientation.



For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW =1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9KHz, VBW =30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 100kHz, VBW =300kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For above 1GHz,Set the spectrum analyzer as:

RBW =1MHz, VBW =1MHz, Detector= Peak, Trace mode= Max hold, Sweep- auto couple.

For average measurement:

–VBW=10Hz, When duty cycle is no less than 98 percent

–VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation, so refer to this clause 5.4 duty cycle.

4.4. Test Data

PASS

During the test, Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the X-axis is the worst case.


The test results of 9kHz-30MHz was attenuated more than 20dB below the permissible limits, so the results don't record in the report.

During the test, pre-scan all modes, only the worst case is recorded in the report.



Test Results (30~1000MHz)

Test Mode: 802.11g 2462MHz
 Power Source: AC 120V, 60Hz for Adapter
 Polarization: Horizontal
 Temp.(°C)/Hum.(%RH): 24.5°C/57%RH
 Model: H61C5

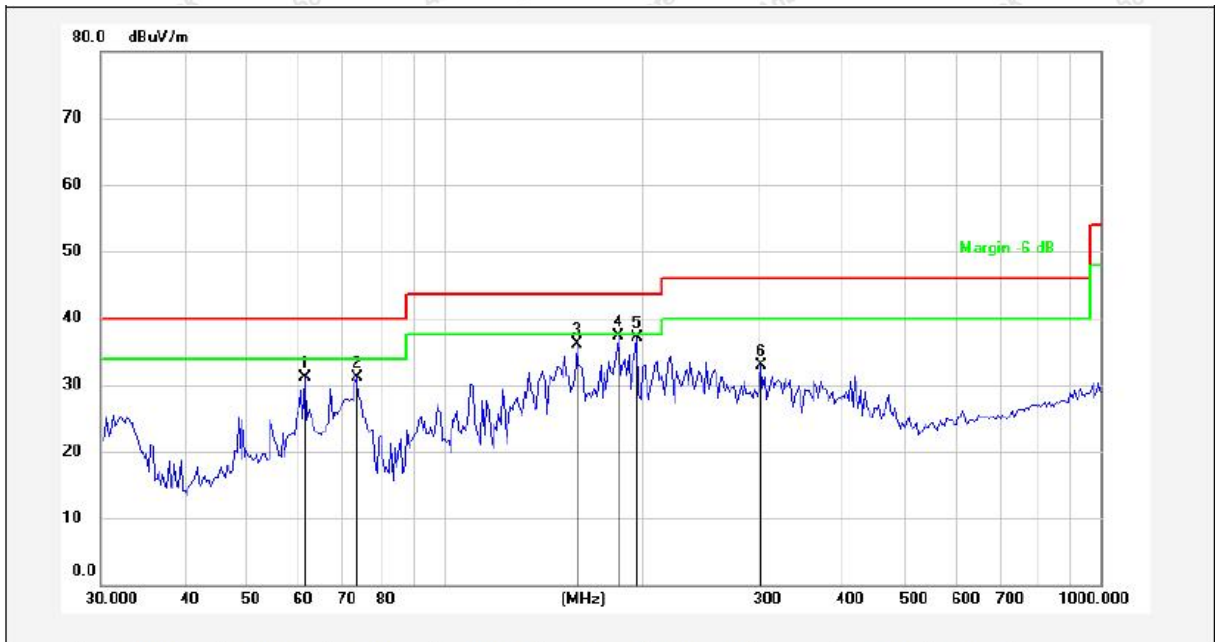


No.	Freq. (MHz)	Reading (dBuV)	Factor ()	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	61.3462	49.39	-18.23	31.16	40.00	-8.84	QP			
2	73.6170	52.76	-21.67	31.09	40.00	-8.91	QP			
3	159.2247	56.74	-20.57	36.17	43.50	-7.33	QP			
4	184.4898	56.31	-19.09	37.22	43.50	-6.28	QP			
5	196.5098	55.42	-18.39	37.03	43.50	-6.47	QP			
6	303.5437	47.66	-14.76	32.90	46.00	-13.10	QP			



Test Results (30~1000MHz)

Test Mode: 802.11g 2462MHz
 Power Source: AC 120V, 60Hz for Adapter
 Polarization: Vertical
 Temp.(°C)/Hum.(%RH): 24.5°C/57%RH
 Model: H61C5

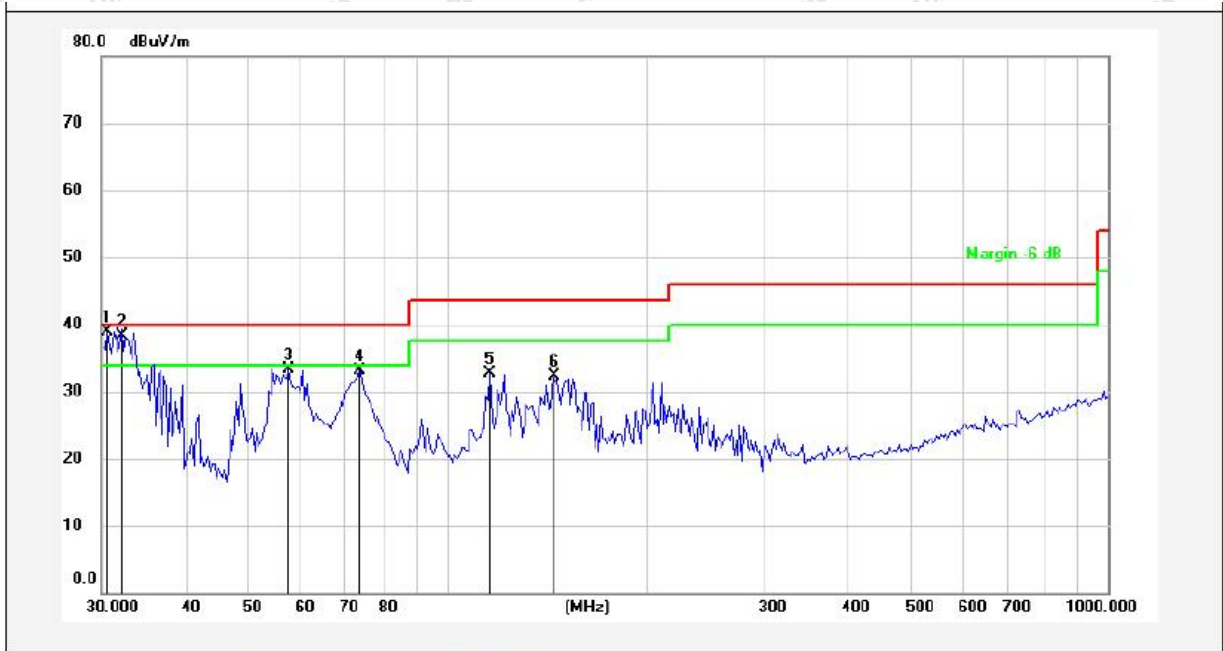


No.	Freq. (MHz)	Reading (dBuV)	Factor ()	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	30.6371	56.88	-18.04	38.84	40.00	-1.16	QP			
2	32.1794	56.38	-18.04	38.34	40.00	-1.66	QP			
3	57.5938	50.95	-17.58	33.37	40.00	-6.63	QP			
4	73.6170	54.78	-21.67	33.11	40.00	-6.89	QP			
5	116.1320	51.75	-19.05	32.70	43.50	-10.80	QP			
6	144.3348	53.54	-21.25	32.29	43.50	-11.21	QP			



Test Results (30~1000MHz)

Test Mode: 802.11g 2462MHz
 Power Source: AC 120V, 60Hz for Adapter
 Polarization: Horizontal
 Temp.(°C)/Hum.(%RH): 24.5°C/57%RH
 Model: H61C2

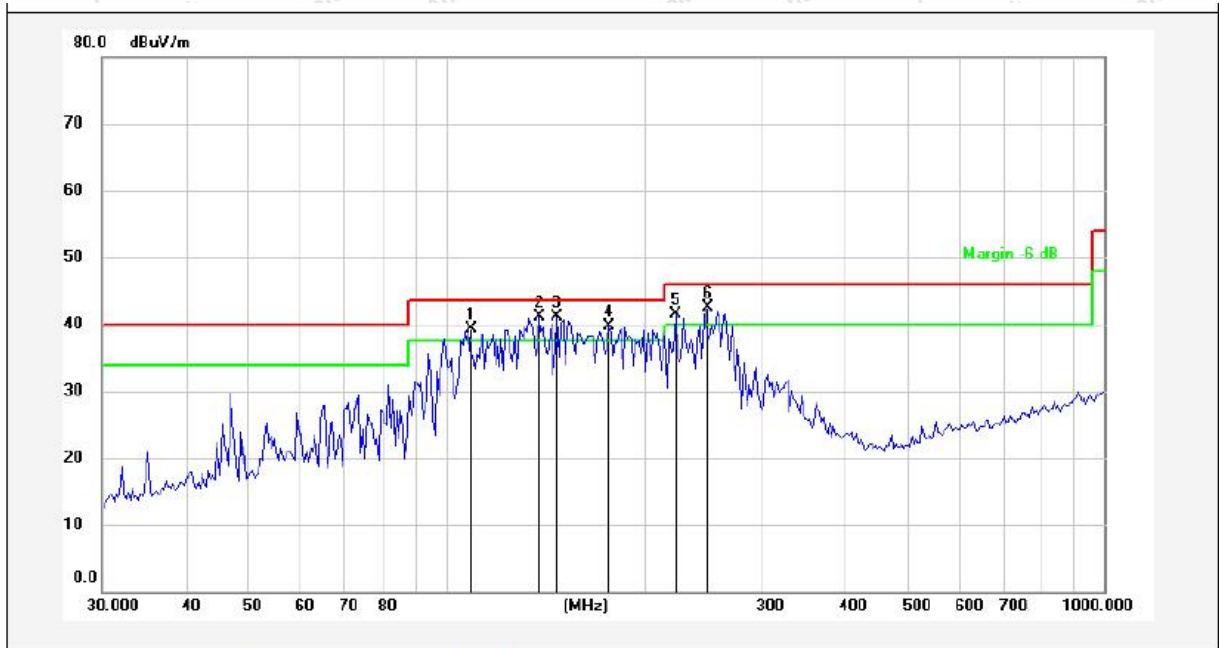

No.	Freq. (MHz)	Reading (dBuV)	Factor ()	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	108.2667	57.33	-18.03	39.30	43.50	-4.20	QP			
2	138.3873	62.43	-21.27	41.16	43.50	-2.34	QP			
3	147.4036	62.31	-21.18	41.13	43.50	-2.37	QP			
4	176.8874	59.23	-19.54	39.69	43.50	-3.81	QP			
5	222.9500	58.65	-17.21	41.44	46.00	-4.56	QP			
6	247.6819	58.71	-16.16	42.55	46.00	-3.45	QP			



Test Results (30~1000MHz)

Test Mode: 802.11g 2462MHz
 Power Source: AC 120V, 60Hz for Adapter
 Polarization: Vertical
 Temp.(°C)/Hum.(%RH): 24.5°C/57%RH
 Model: H61C2



No.	Freq. (MHz)	Reading (dBuV)	Factor ()	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	32.1794	53.88	-18.04	35.84	40.00	-4.16	QP			
2	46.9947	53.06	-17.07	35.99	40.00	-4.01	QP			
3	93.4402	56.38	-17.85	38.53	43.50	-4.97	QP			
4	122.8340	58.98	-19.91	39.07	43.50	-4.43	QP			
5	129.9225	61.27	-20.80	40.47	43.50	-3.03	QP			
6	185.7880	60.15	-19.02	41.13	43.50	-2.37	QP			



Test Results (Above 1000MHz)

Test Mode: 802.11g Mode				Test channel: Lowest		
Peak value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824.00	27.12	15.31	42.43	74.00	-31.57	Vertical
7236.00	28.87	18.06	46.93	74.00	-27.07	Vertical
9648.00	28.37	23.77	52.14	74.00	-21.86	Vertical
12060.00	*			74.00		Vertical
14472.00	*			74.00		Vertical
4824.00	26.66	15.31	41.97	74.00	-32.03	Horizontal
7236.00	28.64	18.06	46.70	74.00	-27.30	Horizontal
9648.00	27.62	23.77	51.39	74.00	-22.61	Horizontal
12060.00	*			74.00		Horizontal
14472.00	*			74.00		Horizontal
Average value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824.00	19.14	15.31	34.45	54.00	-19.55	Vertical
7236.00	20.65	18.06	38.71	54.00	-15.29	Vertical
9648.00	20.27	23.77	44.04	54.00	-9.96	Vertical
12060.00	*			54.00		Vertical
14472.00	*			54.00		Vertical
4824.00	19.17	15.31	34.48	54.00	-19.52	Horizontal
7236.00	21.21	18.06	39.27	54.00	-14.73	Horizontal
9648.00	19.36	23.77	43.13	54.00	-10.87	Horizontal
12060.00	*			54.00		Horizontal
14472.00	*			54.00		Horizontal



Test Results (Above 1000MHz)

Test Mode: 802.11g Mode				Test channel: Middle		
Peak value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	27.07	15.41	42.48	74.00	-31.52	Vertical
7311.00	27.22	18.01	45.23	74.00	-28.77	Vertical
9748.00	28.31	23.79	52.10	74.00	-21.90	Vertical
12185.00	*			74.00		Vertical
14622.00	*			74.00		Vertical
4874.00	26.46	15.41	41.87	74.00	-32.13	Horizontal
7311.00	27.56	18.01	45.57	74.00	-28.43	Horizontal
9748.00	27.92	23.79	51.71	74.00	-22.29	Horizontal
12185.00	*			74.00		Horizontal
14622.00	*			74.00		Horizontal
Average value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	17.89	15.41	33.30	54.00	-20.70	Vertical
7311.00	18.12	18.01	36.13	54.00	-17.87	Vertical
9748.00	18.56	23.79	42.35	54.00	-11.65	Vertical
12185.00	*			54.00		Vertical
14622.00	*			54.00		Vertical
4874.00	17.56	15.41	32.97	54.00	-21.03	Horizontal
7311.00	17.64	18.01	35.65	54.00	-18.35	Horizontal
9748.00	18.63	23.79	42.42	54.00	-11.58	Horizontal
12185.00	*			54.00		Horizontal
14622.00	*			54.00		Horizontal



Test Results (Above 1000MHz)

Test Mode: 802.11g Mode				Test channel: Highest		
Peak value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924.00	26.93	15.51	42.44	74.00	-31.56	Vertical
7386.00	27.16	17.97	45.13	74.00	-28.87	Vertical
9848.00	27.75	23.82	51.57	74.00	-22.43	Vertical
12310.00	*			74.00		Vertical
14772.00	*			74.00		Vertical
4924.00	27.12	15.51	42.63	74.00	-31.37	Horizontal
7386.00	27.91	17.97	45.88	74.00	-28.12	Horizontal
9848.00	28.42	23.82	52.24	74.00	-21.76	Horizontal
12310.00	*			74.00		Horizontal
14772.00	*			74.00		Horizontal
Average value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924.00	17.72	15.51	33.23	54.00	-20.77	Vertical
7386.00	17.56	17.97	35.53	54.00	-18.47	Vertical
9848.00	19.00	23.82	42.82	54.00	-11.18	Vertical
12310.00	*			54.00		Vertical
14772.00	*			54.00		Vertical
4924.00	17.37	15.51	32.88	54.00	-21.12	Horizontal
7386.00	18.02	17.97	35.99	54.00	-18.01	Horizontal
9848.00	18.86	23.82	42.68	54.00	-11.32	Horizontal
12310.00	*			54.00		Horizontal
14772.00	*			54.00		Horizontal

Remark:

1. During the test, pre-scan the 802.11b,g,n(HT20) mode, and found the 802.11g mode is worse case , the report only record this mode.
2. Result=Reading + Factor
3. "*" means the test results were attenuated more than 20dB below the permissible limits, so the results don't record in the report.



Radiated Band Edge:

Test Mode: 802.11b Mode				Test channel: Lowest		
Peak value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	37.66	9.58	47.24	74.00	-26.76	Horizontal
2390.00	40.34	9.73	50.07	74.00	-23.93	Horizontal
2310.00	38.86	9.58	48.44	74.00	-25.56	Vertical
2390.00	45.87	9.73	55.60	74.00	-18.40	Vertical
Average value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	28.27	9.58	37.85	54.00	-16.15	Horizontal
2390.00	35.42	9.73	45.15	54.00	-8.85	Horizontal
2310.00	29.78	9.58	39.36	54.00	-14.64	Vertical
2390.00	37.74	9.73	47.47	54.00	-6.53	Vertical

Test Mode: 802.11b Mode				Test channel: Highest		
Peak value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	46.03	9.91	55.94	74.00	-18.06	Horizontal
2500.00	39.77	9.94	49.71	74.00	-24.29	Horizontal
2483.50	46.39	9.91	56.30	74.00	-17.70	Vertical
2500.00	39.38	9.94	49.32	74.00	-24.68	Vertical
Average value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	37.07	9.91	46.98	54.00	-7.02	Horizontal
2500.00	28.78	9.94	38.72	54.00	-15.28	Horizontal
2483.50	38.47	9.91	48.38	54.00	-5.62	Vertical
2500.00	29.33	9.94	39.27	54.00	-14.73	Vertical

Remark: 1. Result=Reading + Factor



Radiated Band Edge:

Test Mode: 802.11g Mode				Test channel: Lowest		
Peak value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	36.54	9.58	46.12	74.00	-27.88	Horizontal
2390.00	40.04	9.73	49.77	74.00	-24.23	Horizontal
2310.00	38.21	9.58	47.79	74.00	-26.21	Vertical
2390.00	41.74	9.73	51.47	74.00	-22.53	Vertical
Average value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	28.54	9.58	38.12	54.00	-15.88	Horizontal
2390.00	34.56	9.73	44.29	54.00	-9.71	Horizontal
2310.00	29.63	9.58	39.21	54.00	-14.79	Vertical
2390.00	35.55	9.73	45.28	54.00	-8.72	Vertical

Test Mode: 802.11g Mode				Test channel: Highest		
Peak value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	46.01	9.91	55.92	74.00	-18.08	Horizontal
2500.00	39.64	9.94	49.58	74.00	-24.42	Horizontal
2483.50	46.11	9.91	56.02	74.00	-17.98	Vertical
2500.00	39.27	9.94	49.21	74.00	-24.79	Vertical
Average value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	35.24	9.91	45.15	54.00	-8.85	Horizontal
2500.00	27.88	9.94	37.82	54.00	-16.18	Horizontal
2483.50	37.42	9.91	47.33	54.00	-6.67	Vertical
2500.00	28.86	9.94	38.80	54.00	-15.20	Vertical

Remark: 1. Result=Reading + Factor



Radiated Band Edge:

Test Mode: 802.11n (HT20) Mode				Test channel: Lowest		
Peak value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	34.54	9.58	44.12	74.00	-29.88	Horizontal
2390.00	38.04	9.73	47.77	74.00	-26.23	Horizontal
2310.00	37.21	9.58	46.79	74.00	-27.21	Vertical
2390.00	39.74	9.73	49.47	74.00	-24.53	Vertical
Average value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	27.22	9.58	36.80	54.00	-17.20	Horizontal
2390.00	32.50	9.73	42.23	54.00	-11.77	Horizontal
2310.00	27.24	9.58	36.82	54.00	-17.18	Vertical
2390.00	33.55	9.73	43.28	54.00	-10.72	Vertical

Test Mode: 802.11n (HT20) Mode				Test channel: Highest		
Peak value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	43.80	9.91	53.71	74.00	-20.29	Horizontal
2500.00	37.77	9.94	47.71	74.00	-26.29	Horizontal
2483.50	45.39	9.91	55.30	74.00	-18.70	Vertical
2500.00	39.38	9.94	49.32	74.00	-24.68	Vertical
Average value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	33.22	9.91	43.13	54.00	-10.87	Horizontal
2500.00	28.03	9.94	37.97	54.00	-16.03	Horizontal
2483.50	34.24	9.91	44.15	54.00	-9.85	Vertical
2500.00	29.00	9.94	38.94	54.00	-15.06	Vertical

Remark: 1. Result=Reading + Factor




5. Maximum Peak Output Power Test

5.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (b)(3)
Test Limit	1W (30dBm)

5.2. Test Setup



5.3. Test Procedure

1. The Transmitter output (antenna port) was connected to the power meter.
2. Turn on the EUT and power meter and then record the power value.
3. Repeat above procedures on all channels needed to be tested.

Note: The cable loss and attenuator loss were offset into measure device as amplitude offset.

5.4. Test Data

Pass

Note: For pre-scan, the result is equal to original, so the original data is referenced.

Test Mode	Antenna	Frequency[MHz]	Peak Power[dBm]	Conducted Limit[dBm]
11B	Ant1	2412	17.39	≤30.00
		2437	17.58	≤30.00
		2462	17.82	≤30.00
11G	Ant1	2412	17.90	≤30.00
		2437	18.19	≤30.00
		2462	18.46	≤30.00
11N20	Ant1	2412	17.85	≤30.00
		2437	18.17	≤30.00
		2462	18.34	≤30.00



6. Antenna Requirement

6.1. Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203 /247(c)
Requirement	<p>1) 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p>2) 15.247(c) (1)(i) requirement: Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.</p>

6.2. Antenna Connected Construction

The antenna is a PCB Antenna which permanently attached, and the best case gain of the antenna is 3.85dBi It complies with the standard requirement.



APPENDIX I -- TEST SETUP PHOTOGRAPH

Please refer to separated files Appendix I -- Test Setup Photograph

APPENDIX II -- EXTERNAL PHOTOGRAPH

Please refer to separated files Appendix II -- External Photograph

APPENDIX III -- INTERNAL PHOTOGRAPH

Please refer to separated files Appendix III -- Internal Photograph

----- End of Report -----

