

Quick ▶▶▶▶▶ installation guide

Start here first ▶

IEEE 802.11b/g
Adjustable **WiFi** Signal Booster

HSB1

HI-GAIN24
SERIES



Website: www.hawkingtech.com

E-Mail: techsupport@hawkingtech.com

© Copyright 2004 Hawking Technologies, Inc. All rights reserved.

LIMITED WARRANTY

Hawking Technology guarantees that every HSB1 WiFi 802.11b/g Adjustable WiFi Signal Booster and HWBA54G is free from physical defects in material and workmanship under normal use for two (2) years from the date of purchase.

The kit contains three units, Hawking HWBA54G (Wireless Access Point), RF cable and HSB1 (Signal Booster). RF Cable and HSB1 are designed to operate only with Hawking HWBA54G as a single system, more systems may be certified at a later time. Please visit Hawking Technologies website or contact by phone for any future certifications of different systems using the HSB1.

If the product proves defective during this two-year warranty period, call Hawking Customer Service in order to obtain a Return Authorization number. Warranty is for repair or replacement only. Hawking Technology does not issue any refunds. BE SURE TO HAVE YOUR PROOF OF PURCHASE. RETURN REQUESTS CAN NOT BE PROCESSED WITHOUT PROOF OF PURCHASE. When returning a product, mark the Return Authorization number clearly on the outside of the package and include your original proof of purchase.

IN NO EVENT SHALL HAWKING TECHNOLOGY'S LIABILITY EXCEED THE PRICE PAID FOR THE PRODUCT FROM DIRECT, INDIRECT, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES RESULTING FROM THE USE OF THE PRODUCT, ITS ACCOMPANYING SOFTWARE OR ITS DOCUMENTATION.

Hawking Technology makes no warranty or representation, expressed, implied or statutory, with respect to its products or the contents or use of this documentation and all accompanying software, and specifically disclaims its quality, performance, merchantability, or fitness for any particular purpose. Hawking Technology reserves the right to revise or updates its products, software, or documentation without obligation to notify any individual or entity. Please direct all inquiries to: techsupport@hawkingtech.com

Trademarks & Copyright

All brands and product names are trademarks of their respective companies.

No part of this publication may be reproduced in any form or by any means or used to make any derivative (such as translation, transformation or adaptation) without the express written consent of the manufacturer as stipulated by the United States Copyright Act of 1976.

Warning Statement:

**Federal Communication
Commission Interference Statement
Federal Communications
Commission (FCC) Requirements,
Part 15**

- 1. Reorient or relocate the receiving antenna.**
- 2. Increase the separation between the equipment and receiver.**
- 3. Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.**
- 4. Consult the dealer or an experienced radio/TV technician for help.**

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference.**
- (2) This device must accept any interference received, including interference that may cause undesired operation.**

FCC Caution:

FCC RF Exposure Statement:

This Transmitter must not be co-located or operating in conjunction with any other antenna or transmitter. This equipment complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20 centimeters between the radiator and your body. Unauthorized antenna, modification, or attachments could damage the transmitter and may violate FCC regulations.

Regulatory information/Disclaimers:

Any changes or modifications (including the antennas) made to this device that are not expressly approved by the manufacturer may void the user's authority to operate the equipment.

Step

1

Check the Requirements for Installation



HSB1

Hi-Gain 802.11b/g Adjustable WiFi Signal Booster

This QIG Will Guide You Through
the Initial Setup of your Product

Check Your Package Contents:



Hi-Gain Adjustable
Signal Booster



Wireless Antenna



Power Adapter




Booster Connector
Cable



Mounting Screws

TYPICAL NETWORK DIAGRAM for the HSB1

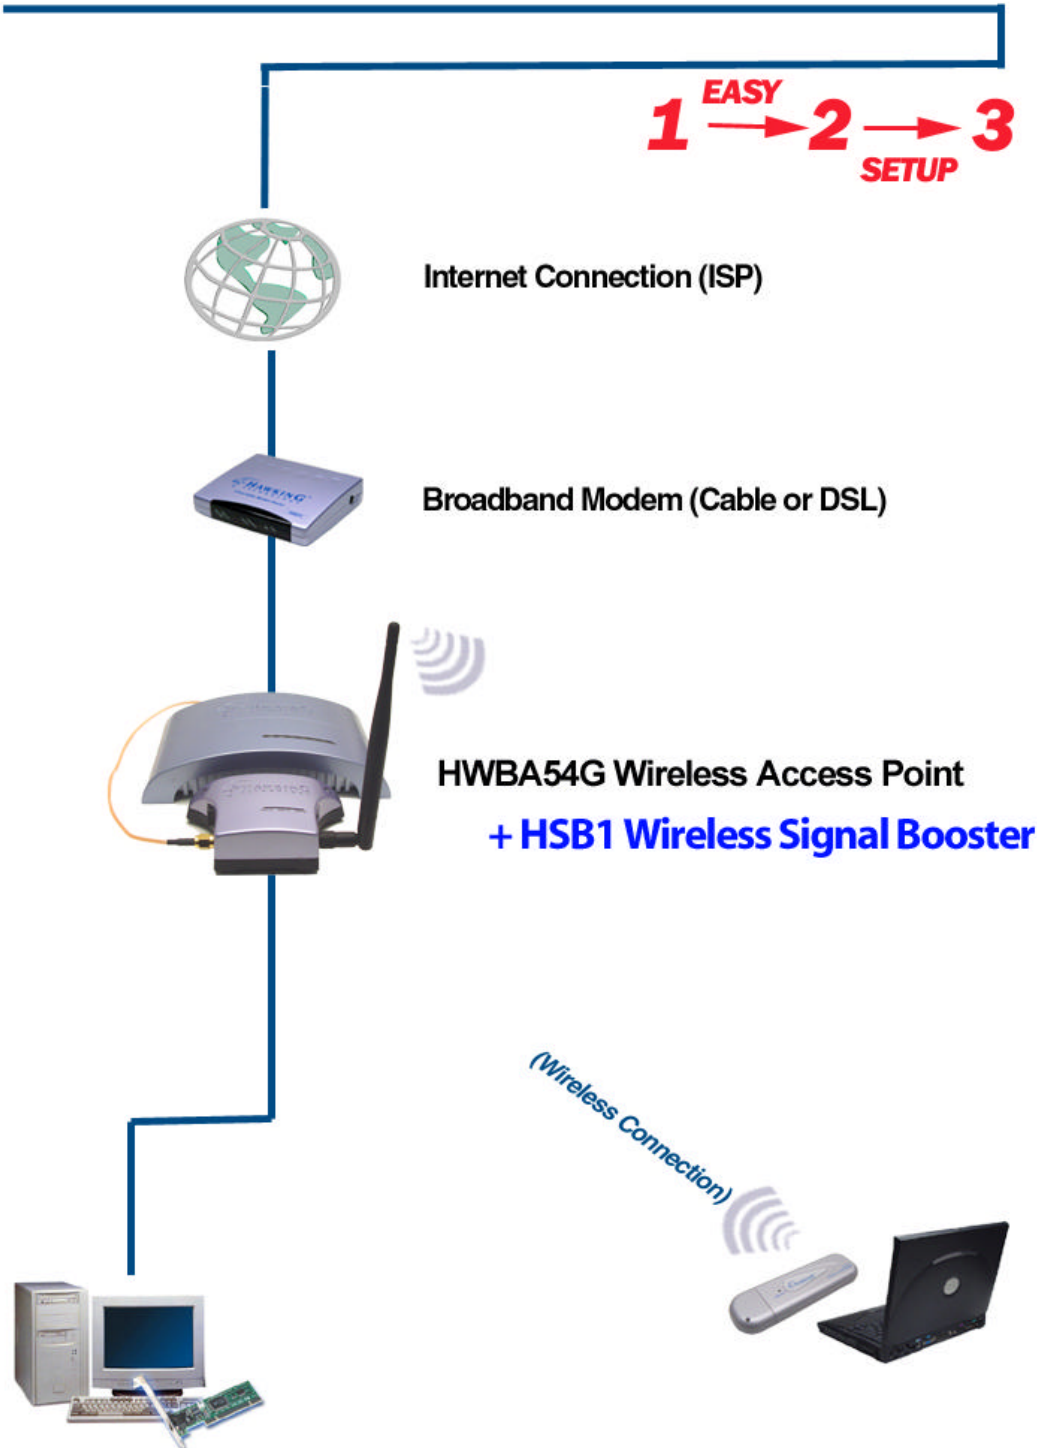


Each computer/laptop must have a network adapter to connect with the router.



HSB1

Product Overview

Front

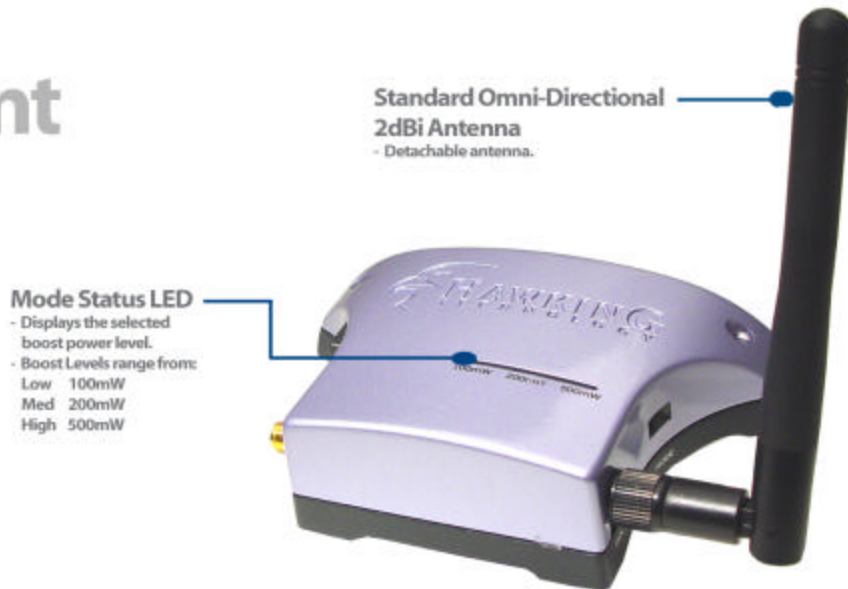

Standard Omni-Directional 2dBi Antenna
- Detachable antenna.

Mode Status LED
- Displays the selected boost power level.
- Boost Levels range from:
Low 100mW
Med 200mW
High 500mW

Left Side



Power Adapter
- DC Plug input

Input Connector
- Connects Wireless Access Point to the Signal Booster.
- Use the provided Connector Cable to connect the Signal Booster to the antenna port of the wireless device.

Right Side



Antenna Connector
- Reverse Plug SMA Antenna Connector

Mode Selection Switch
- Adjusts the boost power level of the signal booster.
- Boost Levels range from:
Low 100mW
Med 200mW
High 500mW

Step

2

Connecting the Signal Booster


1

Remove the original antenna from the Wireless Access Point that you plan to use the Signal Booster with. The wireless device must have a detachable antenna to work with the Signal Booster. To remove the antenna, unscrew from the base of the antenna in a counter clockwise motion until the antenna is completely removed.



2

Connect the Signal Booster to the Wireless Access Point using the included color coded Connector Cable. Connect the grey end to the **INPUT** connector on the left side of the Signal Booster. Connect the white end to the antenna connector on the wireless device.

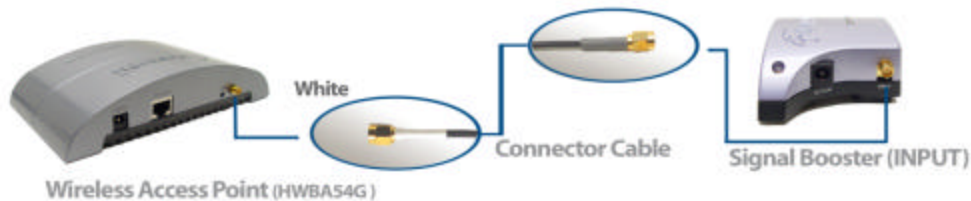

After you have connected the Signal Booster to the Wireless Access Point, find the included Wireless Antenna from the package contents and connect it to the Antenna Connector on the right side of the Signal Booster. Screw the antenna base in clockwise until the antenna is firmly connected to the Booster.




3

Power on the Signal Booster by connecting the Power Adapter to the DC Plug port on the HSB1.



4

Adjust the Boost Level of the Signal Booster according to your application.

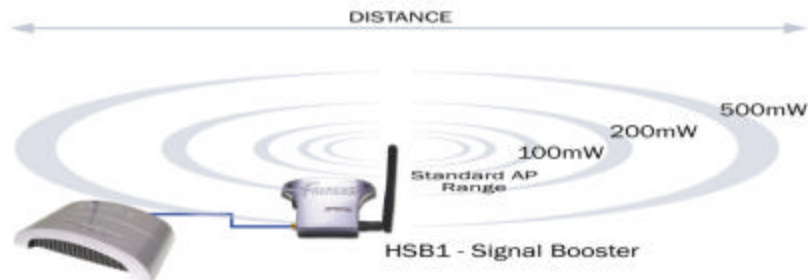

Hawking Wireless-G Access Point

On the right side of the Signal Booster there is a switch that lets you select the Mode of your signal booster. The Modes range from:



100mW - Low Boost Level

200mW - Medium Boost Level

500mW - Maximum Boost Level



After you have selected your Power Mode, place the Signal Booster in the highest location possible for the best signal. You may also choose to mount it on a wall using the included mounting screws.



HSB1

Product Specifications

Network/Operating Range:

IEEE 802.11b WLAN Standard
IEEE 802.11g WLAN Standard
2400 - 2500 MHz

Transmit Gain: up to 27dB

Frequency Response: +/- 1 dB

Output Power: 100/200/500mW

Input Gain:

Receiver Gain: 10-13 dBm, 12 dBm Typical
Noise Figure: 3.5 dB typical

Connectors:

Input: SMA Jack
Antenna: Reverse SMA Jack

Power: External Power Adapter
DC Surge Protection: Available

Cable Type, Length: ½ Meter



HSB1

Networking Terms

Ethernet

A networking standard using cables (Category 5) to create a network.

Network Adapter - Also known as a NIC (Network Interface Card). Used to provide PC's or laptops with an Ethernet port or wireless access to the network.

Broadband Modem - A device that allows broadband connection to the internet. Broadband connections include speeds faster than 56k (dial up modem speed). The two most common types of Broadband connections are DSL and Cable. Cable modem relies on the bandwidth of cable television lines while DSL modems rely on the telephone lines operating at DSL speeds.

Router - A device used to share internet access from one user to multiple users. By taking one IP address (Addresses used by ISP's to assign broadband services to your computer) the Router distributes the services of your broadband access among multiple users and IP's.

Wireless

Wireless Device – Any WiFi device (802.11b/g) that communicates wirelessly using the IEEE802.11 wireless standard. These devices can range from wireless access points to wireless routers to wireless PCI client cards.

IEEE 802.11 – Wireless Network Specifications

- **802.11** -- applies to wireless LANs (Networks) and provides 1 or 2 Mbps transmission in the 2.4 GHz band using either frequency hopping spread spectrum (FHSS) or direct sequence spread spectrum (DSSS).
- **802.11b** (also referred to as *802.11 High Rate* or *Wi-Fi*) -- an extension to 802.11 that applies to wireless LANs and provides 11 Mbps transmission (with a fallback to 5.5, 2 and 1 Mbps) in the 2.4 GHz band. 802.11b uses only DSSS. 802.11b was a 1999 ratification to the original 802.11 standard, allowing wireless functionality comparable to Ethernet.
- **802.11g** -- applies to wireless LANs and provides 54 Mbps in the 2.4 GHz band. Backwards compatible with IEEE 802.11b products.

Hi-Gain WiFi Device

High powered antenna or device used to increase the distance of your WiFi network.

dBi (decibel) - A unit of measurement used to determine the gain level of wireless antennas.

mW (MilliWatt) - A unit of measurement used to determine the power level of wireless devices.



Contact Information / Tech Support

Thank you for purchasing the Hawking Technologies HSB1 - 802.11b/g Adjustable Signal Booster

NOTE: As of 12/01/2004 the HSB1 has been certified by the FCC to operate as a single system with Hawking's HWBA54G Wireless-G Access Point. (FCC ID: SOYHSB1) More systems will be certified at a later time. Please visit the Hawking Technologies website for notification of future certifications with different systems using the HSB1.
If you wish to view the entire system manual. You may go check www.hawkingtech.com for the latest product manual.

If you are having technical difficulties using the product, Hawking Technologies offers free technical support to assist you.

Technical Support (For US and Canada):

Phone: 949-790-0810

Email: techsupport@hawkingtech.com

Website: <http://www.hawkingtech.com/servicesupport.php>

RMA Information (For Warranty Issues / Returns)

Website: <http://www.hawkingtech.com/rma.php>



Thank You for choosing Hawking Technologies.