

Test Report 3768-156-155 RFX

Equipment Under Test: Module, SONA NX611S, 1 RF Trace Pin / 2 RF Trace Pin

Requirement(s): FCC: 1.1307, 1.1310

ISED: RSS-102

Test Date(s): 7/31/2024

Ezurio


Prepared for:
Attn: Brian Petted
W66 N220 Commerce Ct.
Cedarburg, WI 53012

Report Issued by: Dylan Rosenfeldt, EMC Engineer

Signature: 

Date: 9/12/2024

Report Reviewed by: Adam Alger, Manager EMC Laboratory

Signature: 

Date: 9/12/2024

Report Constructed by: Dylan Rosenfeldt, EMC Engineer

Signature: 

Date: 9/09/2024

This test report may not be reproduced, except in full, without approval of Ezurio

Company: Ezurio	Page 1 of 73	Name: Module, SONA NX 611 SIP, 1 RF Trace Pin / 2 RF Trace Pin
Report: TR 3768 156 155 RFX		Model: SONA NX611S
Job: C-3768		Serial: 00033 00027, 00020 00016

CONTENTS

Contents.....	2
Ezurio Test Services in Review	6
1 Test Report Summary	7
2 Client Information.....	8
2.1 Equipment Under Test (EUT) Information.....	8
2.2 Product Description.....	8
2.3 Modifications Incorporated for Compliance	8
2.4 Deviations and Exclusions from Test Specifications.....	8
2.5 EUT Information	8
2.6 Ancillary Equipment	9
2.7 Antenna Information.....	9
2.8 Test Channels 2.4 GHz WLAN	9
2.9 Test Channels 5 GHz WLAN	10
2.10 Test Channels BLE.....	11
2.11 Test Channels BT Classic.....	11
3 References	12
4 Uncertainty Summary	13
5 Test Data	14
5.1 Antenna Port Conducted Emissions	14
6 FCC SAR Exclusion – 2.4GHz WLAN.....	51
6.1 SAR Exclusion Limit.....	51
6.2 Distance	51
6.3 Power Calculation.....	51
6.4 SAR Test Exclusion Calculation	51
6.5 Result	51
7 FCC SAR Exclusion – BLE.....	52
7.1 SAR Exclusion Limit.....	52
7.2 Distance	52
7.3 Power Calculation.....	52
7.4 SAR Test Exclusion Calculation	52
7.5 Result	52
8 FCC SAR Exclusion – Bluetooth Classic.....	53

Company: Ezurio	Page 2 of 73	Name: Module, SONA NX 611 SIP, 1 RF Trace Pin / 2 RF Trace Pin
Report: TR 3768 156 155 RFX		Model: SONA NX611S
Job: C-3768		Serial: 00033 00027, 00020 00016

8.1	SAR Exclusion Limit.....	53
8.2	Distance	53
8.3	Power Calculation.....	53
8.4	SAR Test Exclusion Calculation	53
8.5	Result.....	53
9	FCC SAR Exclusion – 5GHz WLAN	54
9.1	SAR Exclusion Limit.....	54
9.2	Distance	54
9.3	Power Calculation.....	54
9.4	SAR Test Exclusion Calculation	54
9.5	Result.....	54
10	ISED SAR Exemption – 2.4GHz WLAN	55
10.1	SAR Exemption Limit.....	55
10.2	Distance	55
10.3	Power Calculation.....	55
10.4	SAR Test Exclusion Calculation	55
10.5	Result.....	55
11	ISED SAR Exemption – BLE	56
11.1	SAR Exemption Limit.....	56
11.2	Distance	56
11.3	Power Calculation.....	56
11.4	SAR Test Exclusion Calculation	56
11.5	Result.....	56
12	ISED SAR Exemption – Bluetooth Classic	57
12.1	SAR Exemption Limit.....	57
12.2	Distance	57
12.3	Power Calculation.....	57
12.4	SAR Test Exclusion Calculation	57
12.5	Result.....	57
13	ISED RF Exposure Calculation – 5GHz WLAN	58
13.1	RF field strength and power density limits for devices used by the general public.....	58
13.2	Determining power density for antenna (simple far-field model)	58
13.3	Distance	59

Company: Ezurio	Page 3 of 73	Name: Module, SONA NX 611 SIP, 1 RF Trace Pin / 2 RF Trace Pin
Report: TR 3768 156 155 RFX		Model: SONA NX611S
Job: C-3768		Serial: 00033 00027, 00020 00016

13.4	Power Density Limit.....	59
13.5	Power Density Calculation.....	59
13.6	Result.....	59
14	FCC MPE Calculation – Simultaneous TX (453-0156).....	60
14.1	Information.....	60
14.2	MPE Limit.....	60
14.3	Determining power density for antenna (simple far-field model)	60
14.4	Distance	61
14.5	Power Density Limit.....	61
14.6	Power Density Calculation 5GHz WLAN	61
14.7	Power Density Calculation BLE	61
14.8	Power Density Calculation Bluetooth Classic	62
14.9	MPE Ratio	62
14.10	Result.....	62
15	FCC MPE Calculation – Simultaneous TX (453-0155).....	63
15.1	Information.....	63
15.2	MPE Limit.....	63
15.3	Determining power density for antenna (simple far-field model)	63
15.4	Distance	64
15.5	Power Density Limit.....	64
15.6	Power Density Calculation 5GHz WLAN	64
15.7	Power Density Calculation 2.4GHz WLAN	64
15.8	Power Density Calculation BLE	65
15.9	Power Density Calculation Bluetooth Classic	65
15.10	MPE Ratio	65
15.11	Result.....	65
16	ISED MPE Calculation – Simultaneous TX (453-0156).....	66
16.1	Information.....	66
16.2	RF field strength and power density limits for devices used by the general public.....	66
16.3	Determining power density for antenna (simple far-field model)	66
16.4	Distance	67
16.5	Power Density Limit.....	67
16.6	Power Density Calculation 5GHz WLAN	67

Company: Ezurio	Page 4 of 73	Name: Module, SONA NX 611 SIP, 1 RF Trace Pin / 2 RF Trace Pin
Report: TR 3768 156 155 RFX		Model: SONA NX611S
Job: C-3768		Serial: 00033 00027, 00020 00016

16.7	Power Density Calculation BLE	67
16.8	Power Density Calculation Bluetooth Classic	68
16.9	MPE Ratio	68
16.10	Result.....	68
17	ISED MPE Calculation – Simultaneous TX (453-0155).....	69
17.1	Information.....	69
17.2	RF field strength and power density limits for devices used by the general public.....	69
17.3	Determining power density for antenna (simple far-field model)	69
17.4	Distance	70
17.5	Power Density Limit.....	70
17.6	Power Density Calculation 5GHz WLAN	70
17.7	Power Density Calculation 2.4GHz WLAN	70
17.8	Power Density Calculation BLE	71
17.9	Power Density Calculation Bluetooth Classic	71
17.10	MPE Ratio	72
17.11	Result.....	72
18	Revision History	73

Company: Ezurio	Page 5 of 73	Name: Module, SONA NX 611 SIP, 1 RF Trace Pin / 2 RF Trace Pin
Report: TR 3768 156 155 RFX		Model: SONA NX611S
Job: C-3768		Serial: 00033 00027, 00020 00016

Ezurio Test Services in Review

The Ezurio laboratory located at W66 N220 Commerce Court Cedarburg, Wisconsin, 53012 USA is recognized through the following organizations:



A2LA – American Association for Laboratory Accreditation

Accreditation based on ISO/IEC 17025:2017 with Electrical (EMC) Scope

A2LA Certificate Number: 1255.01

Scope of accreditation includes all test methods listed herein unless otherwise noted



Federal Communications Commission (FCC) – USA

Accredited Test Firm Registration Number: 953492

Recognition of two 3 meter Semi-Anechoic Chambers



Government
of Canada

Innovation, Science and Economic Development Canada

Accredited U.S. Identification Number: US0218

Recognition of two 3 meter Semi-Anechoic Chambers

Company: Ezurio	Page 6 of 73	Name: Module, SONA NX 611 SIP, 1 RF Trace Pin / 2 RF Trace Pin
Report: TR 3768 156 155 RFX		Model: SONA NX611S
Job: C-3768		Serial: 00033 00027, 00020 00016

1 TEST REPORT SUMMARY

During **7/31/2024** the Equipment Under Test (EUT), **Module, SONA NX611 SIP, 1 RF Trace Pin and 2 RF Trace Pin**, as provided by **Ezurio** was tested to the following requirements:

Requirements	Description	Method	Compliant
FCC Part 1.1310, 2.1093	Radio Frequency Radiation Exposure Evaluation	KDB 447498 D01	Yes
ISED RSS-102	Radio Frequency Exposure Compliance of Radiocommunication Apparatus	RSS-102	Yes

Notice:

The results relate only to the item tested as configured and described in this report. Any additional configurations, modes of operation, or modifications made to the equipment under test after the specified test date(s) are at the decision of the client and may not apply to the data seen in this test report.

The decision rule for Pass / Fail assessment to the specification or standard listed in this test report has been agreed upon by the client and laboratory to be as follows:

Measurement Type	Rule
Emissions – Amplitude	1 dB below specified limit
Emissions – Frequency	1% less than the specification
Immunity	Tested at specified level

Company: Ezurio	Page 7 of 73	Name: Module, SONA NX 611 SIP, 1 RF Trace Pin / 2 RF Trace Pin
Report: TR 3768 156 155 RFX		Model: SONA NX611S
Job: C-3768		Serial: 00033 00027, 00020 00016

2 CLIENT INFORMATION

Company Name	Ezurio
Contact Person	Brian Petted
Address	W66 N220 Commerce Ct. Cedarburg, WI 53012

2.1 Equipment Under Test (EUT) Information

The following information has been supplied by the client

Product Name	Module, SONA NX611 SIP, 1 RF Trace Pin Module, SONA NX611 SIP, 2 RF Trace Pin
Part Number	453-00156, 453-00155
Serial Number	00033 00027, 00020 00016
FCC ID	SQG-SONANX611S
IC ID	3147A-SONANX611S

2.2 Product Description

The NX611 is based upon NXP IW611 Wi-Fi 6 chipset. Feature-set includes 802.11 a/b/g/n/ac/ax Wi-Fi 6 and Dual-Mode Bluetooth v5.3 (BDR + EDR + BLE).

2.3 Modifications Incorporated for Compliance

None noted at time of test

2.4 Deviations and Exclusions from Test Specifications

None noted at time of test

2.5 EUT Information

Power Supply – INPUT:100-240VAC 50/60 Hz 0.3A

OUTPUT: 5VDC 2A

Firmware - sduart_nw61x_v1.bin.se

Sduart_nw61x_v1_mfg.bin.se

Company: Ezurio	Page 8 of 73	Name: Module, SONA NX 611 SIP, 1 RF Trace Pin / 2 RF Trace Pin
Report: TR 3768 156 155 RFX		Model: SONA NX611S
Job: C-3768		Serial: 00033 00027, 00020 00016

2.6 Ancillary Equipment

Equipment used for EUT programming (not part of the EUT)

Development Kit, SU60-SOMC 6.0

P/N: 463-00138-K1 Rev 1

Power Supply: INPUT: 100-240 VAC 50/60Hz 0.7A

OUTPUT: 12VDC 2A

HP Elitebook 840G1

Labtool Version: 1.0.0.45.6

2.7 Antenna Information

Manufacturer	Model	Part Number	Dimension	Type	Peak Gain (dBi)	
					2400-2500 MHz	4900-5925 MHz
Laird Connectivity	FlexMIMO 6E	EFD2471A3S-10MH4L	39.5mm X 39.5mm X 4.7mm	PIFA	2.2	3.8
Laird Connectivity	FlexPIFA 6E	EFB2471A3S-10MH4L	16mm X 36mm X 2.5mm	PIFA	2.2	3.9
Laird Connectivity	Mini NanoBlade Flex 6E	EMF2471A3S-10MH4L	36mm X 12mm X 0.3mm	PCB Dipole	2.4	4.4
Joymax Electronics	N/A	TWX-100BRS3B	137mm X 13mm	Dipole	2.0	4.0
Laird Connectivity	FlexPIFA	001-0021	38.5mm X 12.7mm X 2.5mm	PIFA	2.5	3.0

2.8 Test Channels 2.4 GHz WLAN

Channel	Frequency (MHz)	Bandwidth (MHz)	Data Rates
1	2402	20	
6	2437	20	802.11b – 1 and 11 Mbps
11	2462	20	802.11g – 6 and 54 Mbps
3	2422	40	802.11n – MCS0 and MCS7
6	2437	40	802.11ax – MCS0 and MCS11
9	2452	40	

Company: Ezurio	Page 9 of 73	Name: Module, SONA NX 611 SIP, 1 RF Trace Pin / 2 RF Trace Pin
Report: TR 3768 156 155 RFX		Model: SONA NX611S
Job: C-3768		Serial: 00033 00027, 00020 00016

2.9 Test Channels 5 GHz WLAN

Channel	Frequency (MHz)	Bandwidth (MHz)	Data Rates
36	5180	20	
40	5200	20	
48	5240	20	
38	5190	40	
46	5230	40	
42	5210	80	
52	5260	20	
56	5280	20	
64	5320	20	
54	5270	40	
62	5310	40	
58	5290	80	
100	5500	20	802.11a – 6 and 54 Mbps
120	5600	20	802.11n – MCS0 and MCS7
144	5700	20	802.11ac – MCS0 and MCS9
102	5510	40	802.11ax – MCS0 and MCS11
118	5590	40	
142	5710	40	
106	5530	80	
138	5610	80	
149	5745	20	
157	5785	20	
165	5825	20	
151	5755	40	
159	5795	40	
155	5775	80	

2.10 Test Channels BLE

Channel	Frequency (MHz)	Data Rates
0	2402	
19	2440	125k, 500k, 1M and 2M
39	2480	

2.11 Test Channels BT Classic

Channel	Frequency (MHz)	Data Rates
0	2402	
39	2441	DH5, 2DH5, and 3DH5
78	2480	

3 REFERENCES

Publication	Edition	Date	AMD 1	AMD 2
eCFR	-	2024	-	-
RSS-102	6	2023	-	-
KDB 447498 D01	v06	2015	-	-
IEEE 95.3	-	2021	-	-

Company: Ezurio	Page 12 of 73	Name: Module, SONA NX 611 SIP, 1 RF Trace Pin / 2 RF Trace Pin
Report: TR 3768 156 155 RFX		Model: SONA NX611S
Job: C-3768		Serial: 00033 00027, 00020 00016

4 UNCERTAINTY SUMMARY

Using the guidance of the following publications the calculated measurement uncertainty represents an expanded uncertainty expressed at approximately the 95 % confidence level, using a coverage factor of k = 2.

References
CISPR 16-4-1
CISPR 16-4-2
CISPR 32
ANSI C63.23
A2LA P103
A2LA P103c
ETSI TR 100-028

Measurement Type	Configuration	Uncertainty ±
Radiated Emissions	Biconical Antenna	5.0 dB
Radiated Emissions	Log Periodic Antenna	5.3 dB
Radiated Emissions	Horn Antenna	4.7 dB
AC Line Conducted Emissions	Artificial Mains Network	3.4 dB
Telecom Conducted Emissions	Asymmetric Artificial Network	4.9 dB
Disturbance Power Emissions	Absorbing Clamp	4.1 dB
Radiated Immunity	3 Volts/meter	2.2 dB
Conducted Immunity	CDN/EM/BCI	2.4/3.5/3.4 dB
EFT Burst/Surge	Peak pulse voltage	164 volts
ESD Immunity	15 kV level	1377 Volts

Parameter	ETSI U.C. ±	U.C. ±
Radio Frequency, from F0	1×10^{-7}	0.55×10^{-7}
Occupied Channel Bandwidth	5 %	2 %
RF conducted Power (Power Meter)	1.5 dB	1.2 dB
RF conducted emissions (Spectrum Analyzer)	3.0 dB	1.7 dB
All emissions, radiated	6.0 dB	5.3 dB
Temperature	1° C	0.65° C
Humidity	5 %	2.9 %
Supply voltages	3 %	1 %


Company: Ezurio	Page 13 of 73	Name: Module, SONA NX 611 SIP, 1 RF Trace Pin / 2 RF Trace Pin
Report: TR 3768 156 155 RFX		Model: SONA NX611S
Job: C-3768		Serial: 00033 00027, 00020 00016

5 TEST DATA

5.1 Antenna Port Conducted Emissions

Description of Measurement	<p>The direct measurement of emissions at the antenna port of the EUT is achieved by use of a RF connection to a spectrum analyzer or power meter.</p> <p>The cable and attenuator factors are loaded into the analyzer or power meter allowing for direct measurement readings without the need for further corrections.</p>
Example Calculations	<p>Measurement (dBm) + Cable factor (dB) + External Attenuator (dB) = Corrected Reading (dBm)</p> <p>Margin (dB) = Limit (dBm) – Corrected Reading (dBm)</p>

Block Diagram

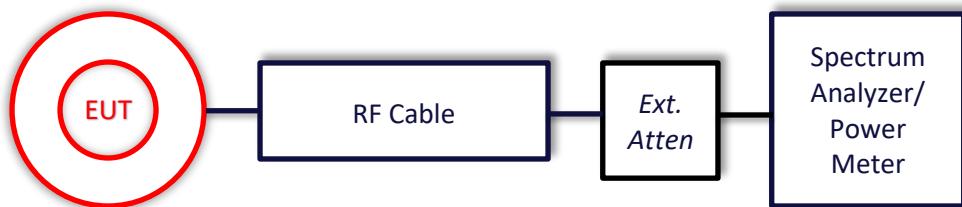

Company: Ezurio	Page 14 of 73	Name: Module, SONA NX 611 SIP, 1 RF Trace Pin / 2 RF Trace Pin
Report: TR 3768 156 155 RFX		Model: SONA NX611S
Job: C-3768		Serial: 00033 00027, 00020 00016

5.1.1 Antenna Port Conducted Emissions – RF Output Power 2.4GHz WLAN (453-0156)

Nominal BW	Channel	Mode	MCS	Average Output Power (dBm)	Duty Cycle Correction (dB)	Corrected Output Value (dBm)	Limit (dBm)	Margin (dB)	PWR Setting
20	1	802.11b	CCK-1	17.3		17.3	30.0	12.7	18
	6	802.11b	CCK-1	18.7		18.7	30.0	11.3	18
	11	802.11b	CCK-1	19.5		19.5	30.0	10.5	18
	1	802.11b	CCK-11	17.3		17.3	30.0	12.7	18
	6	802.11b	CCK-11	19.1		19.1	30.0	10.9	18
	11	802.11b	CCK-11	19.6		19.6	30.0	10.4	18
	1	802.11g	OFDM-6	13.2		13.2	30.0	16.8	14
	6	802.11g	OFDM-6	14.1		14.1	30.0	15.9	14
	11	802.11g	OFDM-6	14.0		14.0	30.0	16.0	14
	1	802.11g	OFDM-54	13.5		13.5	30.0	16.5	14
	6	802.11g	OFDM-54	13.8		13.8	30.0	16.2	14
	11	802.11g	OFDM-54	13.7		13.7	30.0	16.3	14
	1	802.11n	MCS0	12.4		12.4	30.0	17.6	13
	6	802.11n	MCS0	13.1		13.1	30.0	16.9	13
	11	802.11n	MCS0	13.0		13.0	30.0	17.0	13
	1	802.11n	MCS7	12.1	0.4	12.5	30.0	17.5	13
	6	802.11n	MCS7	12.3	0.4	12.7	30.0	17.3	13
	11	802.11n	MCS7	12.2	0.4	12.6	30.0	17.4	13
	1	802.11ax	MCS0	12.6		12.6	30.0	17.4	13
	6	802.11ax	MCS0	12.7		12.7	30.0	17.3	13
	11	802.11ax	MCS0	12.8		12.8	30.0	17.2	13
	1	802.11ax	MCS7	12.1	0.4	12.5	30.0	17.5	13
	6	802.11ax	MCS7	12.5	0.4	12.9	30.0	17.1	13
	11	802.11ax	MCS7	12.4	0.4	12.8	30.0	17.2	13
	1	802.11ax	MCS9	12.3		12.3	30.0	17.7	13
	6	802.11ax	MCS9	12.4		12.4	30.0	17.6	13
	11	802.11ax	MCS9	12.3		12.3	30.0	17.7	13
	1	802.11ax	MCS11	12.1	0.5	12.6	30.0	17.4	13
	6	802.11ax	MCS11	13.1	0.5	13.6	30.0	16.4	13
	11	802.11ax	MCS11	13.5	0.5	14.0	30.0	16.0	13
40	3	802.11n	MCS0	11.6	0.1	11.7	30.0	18.3	12
	6	802.11n	MCS0	11.9	0.1	12.0	30.0	18.0	12
	9	802.11n	MCS0	11.8	0.1	11.9	30.0	18.1	12
	3	802.11n	MCS7	11.3	0.6	11.9	30.0	18.1	12
	6	802.11n	MCS7	11.4	0.6	12.0	30.0	18.0	12
	9	802.11n	MCS7	11.4	0.6	12.0	30.0	18.0	12
	3	802.11ax	MCS0	12.7	0.1	12.8	30.0	17.2	13
	6	802.11ax	MCS0	12.8	0.1	12.9	30.0	17.1	13
	9	802.11ax	MCS0	12.8	0.1	12.9	30.0	17.1	13
	3	802.11ax	MCS7	12.3	0.6	12.9	30.0	17.1	13
	6	802.11ax	MCS7	12.4	0.6	13.0	30.0	17.0	13
	9	802.11ax	MCS7	12.4	0.6	13.0	30.0	17.0	13
	3	802.11ax	MCS9	12.1	0.6	12.7	30.0	17.3	13
	6	802.11ax	MCS9	12.3	0.6	12.9	30.0	17.1	13
	9	802.11ax	MCS9	12.3	0.6	12.9	30.0	17.1	13
	3	802.11ax	MCS11	10.4	0.7	11.1	30.0	18.9	11
	6	802.11ax	MCS11	10.6	0.7	11.3	30.0	18.7	11
	9	802.11ax	MCS11	10.5	0.7	11.2	30.0	18.8	11

Nominal BW	Channel	Mode	MCS	Average Output Power (dBm)	Duty Cycle Correction (dB)	Corrected Output Value (dBm)	Limit (dBm)	Margin (dB)	PWR Setting	
20	1	802.11ax	MCS0 RU26	12.9	0.2	13.1	30.0	16.9	13	
	6			14.1	0.2	14.3	30.0	15.7	13	
	11			12.5	0.2	12.7	30.0	17.3	13	
	1		MCS0 RU52	12.7	0.2	12.9	30.0	17.1	13	
	6			13.5	0.2	13.7	30.0	16.3	13	
	11			12.4	0.2	12.6	30.0	17.4	13	
	1		MCS0 RU106	13.0	0.2	13.2	30.0	16.8	13	
	6			13.4	0.2	13.6	30.0	16.4	13	
	11			12.7	0.2	12.9	30.0	17.1	13	
40	3	802.11ax	MCS0 RU26	12.0	0.2	12.2	30.0	17.8	13	
	6			13.4	0.2	13.6	30.0	16.4	13	
	9			12.4	0.2	12.6	30.0	17.4	13	
	3	MCS0 RU52	MCS0 RU52	12.8	0.2	13.0	30.0	17.0	13	
	6			13.7	0.2	13.9	30.0	16.1	13	
	9			13.0	0.2	13.2	30.0	16.8	13	
	3	MCS0 RU106		12.9	0.2	13.1	30.0	17.0	13	
	6			13.8	0.2	14.0	30.0	16.0	13	
	9			12.9	0.2	13.1	30.0	16.9	13	
	3	MCS0 RU242	MCS0 RU242	13.1	0.2	13.3	30.0	16.7	13	
	6			13.6	0.2	13.8	30.0	16.2	13	
	9			13.2	0.2	13.4	30.0	16.7	13	

5.1.2 Antenna Port Conducted Emissions – RF Output Power 2.4GHz WLAN (453-0155)

Nominal BW	Channel	Mode	MCS	Avg Output Power (dBm)	Duty Cycle Correction (dB)	Corrected Output Value (dBm)	Limit (dBm)	Margin (dB)	Power Setting
20	1	802.11b	CCK-1	17.6		17.6	30.0	12.4	18
	6	802.11b	CCK-1	18.0		18.0	30.0	12.0	18
	11	802.11b	CCK-1	17.8		17.8	30.0	12.2	18
	1	802.11b	CCK-11	17.6		17.6	30.0	12.4	18
	6	802.11b	CCK-11	17.8		17.8	30.0	12.2	18
	11	802.11b	CCK-11	17.8		17.8	30.0	12.2	18
	1	802.11g	OFDM-6	14.7		14.7	30.0	15.3	15
	6	802.11g	OFDM-6	14.9		14.9	30.0	15.1	15
	11	802.11g	OFDM-6	14.6		14.6	30.0	15.4	15
	1	802.11g	OFDM-54	14.3	0.4	14.7	30.0	15.3	15
	6	802.11g	OFDM-54	14.6	0.4	15.0	30.0	15.0	15
	11	802.11g	OFDM-54	14.4	0.4	14.8	30.0	15.2	15
	1	802.11n	MCS0	14.5		14.5	30.0	15.5	15
	6	802.11n	MCS0	14.8		14.8	30.0	15.2	15
	11	802.11n	MCS0	14.6		14.6	30.0	15.4	15
	1	802.11n	MCS7	14.3	0.4	14.7	30.0	15.3	15
	6	802.11n	MCS7	14.6	0.4	15.0	30.0	15.0	15
	11	802.11n	MCS7	13.8	0.4	14.2	30.0	15.8	15
	1	802.11ax	MCS0	13.9		13.9	30.0	16.1	14
	6	802.11ax	MCS0	14.1		14.1	30.0	15.9	14
	11	802.11ax	MCS0	13.9		13.9	30.0	16.1	14
	1	802.11ax	MCS7	13.5	0.4	13.9	30.0	16.1	14
	6	802.11ax	MCS7	13.8	0.4	14.2	30.0	15.8	14
	11	802.11ax	MCS7	13.7	0.4	14.1	30.0	15.9	14
	1	802.11ax	MCS9	13.2	0.5	13.7	30.0	16.3	14
	6	802.11ax	MCS9	13.7	0.5	14.2	30.0	15.8	14
	11	802.11ax	MCS9	13.5	0.5	14.0	30.0	16.0	14
	1	802.11ax	MCS11	12.4	0.5	12.9	30.0	17.1	13
	6	802.11ax	MCS11	12.6	0.5	13.1	30.0	16.9	13
	11	802.11ax	MCS11	12.3	0.5	12.8	30.0	17.2	13
40	3	802.11n	MCS0	13.7	0.1	13.8	30.0	16.2	14
	6	802.11n	MCS0	13.8	0.1	13.9	30.0	16.1	14
	9	802.11n	MCS0	13.1	0.1	13.2	30.0	16.8	14
	3	802.11n	MCS7	14.2	0.6	14.8	30.0	15.2	15
	6	802.11n	MCS7	14.4	0.6	15.0	30.0	15.0	15
	9	802.11n	MCS7	14.3	0.6	14.9	30.0	15.1	15
	3	802.11ax	MCS0	15.0	0.1	15.1	30.0	14.9	15
	6	802.11ax	MCS0	15.2	0.1	15.3	30.0	14.7	15
	9	802.11ax	MCS0	15.1	0.1	15.2	30.0	14.8	15
	3	802.11ax	MCS7	13.5	0.6	14.1	30.0	15.9	14
	6	802.11ax	MCS7	13.7	0.6	14.3	30.0	15.7	14
	9	802.11ax	MCS7	13.7	0.6	14.3	30.0	15.7	14
	3	802.11ax	MCS9	13.5	0.6	14.1	30.0	15.9	14
	6	802.11ax	MCS9	13.6	0.6	14.2	30.0	15.8	14
	9	802.11ax	MCS9	13.0	0.6	13.6	30.0	16.4	14
	3	802.11ax	MCS11	12.2	0.7	12.9	30.0	17.1	13
	6	802.11ax	MCS11	12.5	0.7	13.2	30.0	16.8	13
	9	802.11ax	MCS11	12.5	0.7	13.2	30.0	16.8	13

Nominal BW	Channel	Mode	MCS	Average Output Power (dBm)	Duty Cycle Correction (dB)	Corrected Output Value (dBm)	Limit (dBm)	Margin (dB)	PWR Setting
20	1	802.11ax	MCS0 RU26	13.3	0.2	13.5	30.0	16.5	14
	6			14.0	0.2	14.2	30.0	15.8	14
	11			13.4	0.2	13.6	30.0	16.4	14
	1		MCS0 RU52	13.2	0.2	13.4	30.0	16.6	14
	6			13.7	0.2	13.9	30.0	16.1	14
	11			13.4	0.2	13.6	30.0	16.4	14
	1		MCS0 RU106	13.5	0.2	13.7	30.0	16.3	14
	6			13.5	0.2	13.7	30.0	16.3	14
	11			13.4	0.2	13.6	30.0	16.4	14
40	3	802.11ax	MCS0 RU26	12.4	0.2	12.6	30.0	17.4	14
	6			13.9	0.2	14.1	30.0	15.9	14
	9			12.3	0.2	12.5	30.0	17.5	14
	3	MCS0 RU52	MCS0 RU52	13.2	0.2	13.4	30.0	16.6	14
	6			14.1	0.2	14.3	30.0	15.7	14
	9			13.2	0.2	13.4	30.0	16.6	14
	3	MCS0 RU106	MCS0 RU106	13.3	0.2	13.5	30.0	16.5	14
	6			14.3	0.2	14.5	30.0	15.5	14
	9			13.4	0.2	13.6	30.0	16.4	14
	3	MCS0 RU242	MCS0 RU242	13.6	0.2	13.8	30.0	16.2	14
	6			13.9	0.2	14.1	30.0	15.9	14
	9			13.4	0.2	13.6	30.0	16.4	14

Company: Ezurio	Page 18 of 73	Name: Module, SONA NX 611 SIP, 1 RF Trace Pin / 2 RF Trace Pin
Report: TR 3768 156 155 RFX		Model: SONA NX611S
Job: C-3768		Serial: 00033 00027, 00020 00016

5.1.3 Antenna Port Conducted Emissions – RF Output Power 5GHz WLAN (453-0156)

UNII 1									
Nominal BW	Channel	Mode	MCS	Avg Output Power (dBm)	Duty Cycle Correction (dB)	Corrected Output Value (dBm)	Limit (dBm)	Margin (dB)	Power Setting
20	36	802.11a	OFDM-6	17.1		17.1	24.0	6.9	16
	40			17.2		17.2	24.0	6.8	
	48			17.1		17.1	24.0	6.9	
	36	802.11a	OFDM-54	16.7	0.4	17.1	24.0	6.9	16
	40			16.9	0.4	17.3	24.0	6.7	
	48			16.8	0.4	17.2	24.0	6.8	
	36	802.11n	MCS0	15.1		15.1	24.0	8.9	14
	40			15.2		15.2	24.0	8.8	
	48			15.2		15.2	24.0	8.8	
	36	802.11n	MCS7	14.8	0.4	15.2	24.0	8.8	14
	40			14.9	0.4	15.3	24.0	8.7	
	48			14.9	0.4	15.3	24.0	8.7	
	36	802.11ac	MCS0	15.1		15.1	24.0	8.9	14
	40			15.3		15.3	24.0	8.7	
	48			15.2		15.2	24.0	8.8	
	36	802.11ac	MCS7	14.8	0.4	15.2	24.0	8.8	14
	40			15.0	0.4	15.4	24.0	8.6	
	48			14.9	0.4	15.3	24.0	8.7	
	36	802.11ac	MCS8	14.7	0.4	15.1	24.0	8.9	14
	40			14.9	0.4	15.3	24.0	8.7	
	48			14.8	0.4	15.2	24.0	8.8	
	36	802.11ax	MCS0	15.3		15.3	24.0	8.7	14
	40			15.5		15.5	24.0	8.5	
	48			15.4		15.4	24.0	8.6	
	36	802.11ax	MCS7	15.0	0.4	15.4	24.0	8.6	14
	40			15.1	0.4	15.5	24.0	8.5	
	48			14.9	0.4	15.3	24.0	8.7	
	36	802.11ax	MCS9	12.8	0.5	13.3	24.0	10.7	12
	40			13.0	0.5	13.5	24.0	10.5	
	48			12.9	0.5	13.4	24.0	10.6	
	36	802.11ax	MCS11	10.6	0.5	11.1	24.0	12.9	10
	40			10.8	0.5	11.3	24.0	12.7	
	48			10.8	0.5	11.3	24.0	12.7	

Company: Ezurio	Page 19 of 73	Name: Module, SONA NX 611 SIP, 1 RF Trace Pin / 2 RF Trace Pin
Report: TR 3768 156 155 RFX		Model: SONA NX611S
Job: C-3768		Serial: 00033 00027, 00020 00016

40	38	802.11n	MCS0	15.0	0.1	15.1	24.0	8.9	14
	46			15.1	0.1	15.2	24.0	8.8	
	38	802.11n	MCS7	14.5	0.6	15.1	24.0	8.9	14
	46			14.6	0.6	15.2	24.0	8.8	
	38	802.11ac	MCS0	14.9	0.1	15.0	24.0	9.0	14
	46			15.1	0.1	15.2	24.0	8.8	
	38	802.11ac	MCS7	14.6	0.6	15.2	24.0	8.8	14
	46			14.6	0.6	15.2	24.0	8.8	
	38	802.11ac	MCS9	12.5	0.7	13.2	24.0	10.8	12
	46			12.6	0.7	13.3	24.0	10.7	
	38	802.11ax	MCS0	15.3	0.1	15.4	24.0	8.6	14
	46			15.4	0.1	15.5	24.0	8.5	
	38	802.11ax	MCS7	14.8	0.6	15.4	24.0	8.6	14
	46			14.9	0.6	15.5	24.0	8.5	
	38	802.11ax	MCS9	12.7	0.6	13.3	24.0	10.7	12
	46			12.9	0.6	13.5	24.0	10.5	
	38	802.11ax	MCS11	10.6	0.7	11.3	24.0	12.7	10
	46			10.8	0.7	11.5	24.0	12.5	
80	42	802.11ac	MCS0	15.4	0.2	15.6	24.0	8.4	14
	42	802.11ac	MCS7	14.8	0.9	15.7	24.0	8.3	14
	42	802.11ac	MCS9	12.7	1.0	13.7	24.0	10.3	12
	42	802.11ax	MCS0	15.6	0.2	15.8	24.0	8.2	14
	42	802.11ax	MCS7	15.1	0.8	15.9	24.0	8.1	14
	42	802.11ax	MCS9	13.1	0.8	13.9	24.0	10.1	12
	42	802.11ax	MCS11	10.9	0.8	11.7	24.0	12.3	10

Company: Ezurio	Page 20 of 73	Name: Module, SONA NX 611 SIP, 1 RF Trace Pin / 2 RF Trace Pin
Report: TR 3768 156 155 RFX		Model: SONA NX611S
Job: C-3768		Serial: 00033 00027, 00020 00016

UNII 2A									
Nominal BW	Channel	Mode	MCS	Avg Output Power (dBm)	Duty Cycle Correction (dB)	Corrected Output Value (dBm)	Limit (dBm)	Margin (dB)	Power Setting
20	52	802.11a	OFDM-6	16.5		16.5	23.9	7.4	16
	56			16.3		16.3	23.9	7.6	
	64			16.0		16.0	23.9	7.9	
	52	802.11a	OFDM-54	16.2	0.4	16.6	23.9	7.3	16
	56			16.0	0.4	16.4	23.9	7.5	
	64			15.8	0.4	16.2	23.9	7.7	
	52	802.11n	MCS0	14.5		14.5	24.0	9.5	14
	56			14.3		14.3	24.0	9.7	
	64			14.1		14.1	24.0	9.9	
	52	802.11n	MCS7	14.3	0.4	14.7	24.0	9.3	14
	56			14.1	0.4	14.5	24.0	9.5	
	64			13.8	0.4	14.2	24.0	9.8	
	52	802.11ac	MCS0	14.5		14.5	24.0	9.5	14
	56			14.3		14.3	24.0	9.7	
	64			14.1		14.1	24.0	9.9	
	52	802.11ac	MCS7	14.3	0.4	14.7	24.0	9.3	14
	56			14.1	0.4	14.5	24.0	9.5	
	64			13.8	0.4	14.2	24.0	9.8	
	52	802.11ac	MCS8	14.2	0.4	14.6	24.0	9.4	14
	56			14.0	0.4	14.4	24.0	9.6	
	64			13.7	0.4	14.1	24.0	9.9	
	52	802.11ax	MCS0	14.8		14.8	24.0	9.2	14
	56			14.6		14.6	24.0	9.4	
	64			14.3		14.3	24.0	9.7	
	52	802.11ax	MCS7	14.4	0.4	14.8	24.0	9.2	14
	56			14.3	0.4	14.7	24.0	9.3	
	64			13.9	0.4	14.3	24.0	9.7	
	52	802.11ax	MCS9	12.3	0.5	12.8	24.0	11.2	12
	56			12.2	0.5	12.7	24.0	11.3	
	64			11.9	0.5	12.4	24.0	11.6	
	52	802.11ax	MCS11	10.3	0.5	10.8	24.0	13.2	10
	56			10.1	0.5	10.6	24.0	13.4	
	64			9.9	0.5	10.4	24.0	13.6	

Company: Ezurio	Page 21 of 73	Name: Module, SONA NX 611 SIP, 1 RF Trace Pin / 2 RF Trace Pin
Report: TR 3768 156 155 RFX		Model: SONA NX611S
Job: C-3768		Serial: 00033 00027, 00020 00016

40	54	802.11n	MCS0	14.6	0.1	14.7	24.0	9.3	14
	62			14.3	0.1	14.4	24.0	9.6	
	54	802.11n	MCS7	14.2	0.6	14.8	24.0	9.2	14
	62			13.8	0.6	14.4	24.0	9.6	
	54	802.11ac	MCS0	14.6	0.1	14.7	24.0	9.3	14
	62			14.3	0.1	14.4	24.0	9.6	
	54	802.11ac	MCS7	14.2	0.6	14.8	24.0	9.2	14
	62			13.8	0.6	14.4	24.0	9.6	
	54	802.11ac	MCS9	12.1	0.7	12.8	24.0	11.2	12
	62			12.1	0.7	12.8	24.0	11.2	
	54	802.11ax	MCS0	14.9	0.1	15.0	24.0	9.0	14
	62			14.6	0.1	14.7	24.0	9.3	
	54	802.11ax	MCS7	14.4	0.6	15.0	24.0	9.0	14
	62			14.1	0.6	14.7	24.0	9.3	
	54	802.11ax	MCS9	12.4	0.6	13.0	24.0	11.0	12
	62			12.1	0.6	12.7	24.0	11.3	
	54	802.11ax	MCS11	10.3	0.7	11.0	24.0	13.0	10
	62			10.0	0.7	10.7	24.0	13.3	
80	58	802.11ac	MCS0	14.6	0.2	14.8	24.0	9.2	14
	58	802.11ac	MCS7	14.0	0.9	14.9	24.0	9.1	14
	58	802.11ac	MCS9	11.9	1.0	12.9	24.0	11.1	12
	58	802.11ax	MCS0	14.9	0.2	15.1	24.0	8.9	14
	58	802.11ax	MCS7	14.3	0.8	15.1	24.0	8.9	14
	58	802.11ax	MCS9	12.3	0.8	13.1	24.0	10.9	12
	58	802.11ax	MCS11	10.3	0.8	11.1	24.0	12.9	10

Company: Ezurio	Page 22 of 73	Name: Module, SONA NX 611 SIP, 1 RF Trace Pin / 2 RF Trace Pin
Report: TR 3768 156 155 RFX		Model: SONA NX611S
Job: C-3768		Serial: 00033 00027, 00020 00016

UNII 2C									
Nominal BW	Channel	Mode	MCS	Avg Output Power (dBm)	Duty Cycle Correction (dB)	Corrected Output Value (dBm)	Limit (dBm)	Margin (dB)	Power Setting
20	100	802.11a	OFDM-6	17.5		17.5	23.9	6.4	16
	120			17.6		17.6	23.9	6.3	
	140			17.3		17.3	23.9	6.6	
	100	802.11a	OFDM-54	17.2	0.4	17.6	23.9	6.3	16
	120			17.3	0.4	17.7	23.9	6.2	
	140			16.9	0.4	17.3	23.9	6.6	
	100	802.11n	MCS0	15.7		15.7	24.0	8.3	14
	120			15.8		15.8	24.0	8.2	
	140			15.4		15.4	24.0	8.6	
	100	802.11n	MCS7	15.4	0.4	15.8	24.0	8.2	14
	120			15.5	0.4	15.9	24.0	8.1	
	140			15.1	0.4	15.5	24.0	8.5	
	100	802.11ac	MCS0	15.7		15.7	24.0	8.3	14
	120			15.8		15.8	24.0	8.2	
	140			15.4		15.4	24.0	8.6	
	100	802.11ac	MCS7	15.4	0.4	15.8	24.0	8.2	14
	120			15.5	0.4	15.9	24.0	8.1	
	140			15.1	0.4	15.5	24.0	8.5	
	100	802.11ac	MCS8	15.3	0.4	15.7	24.0	8.3	14
	120			15.4	0.4	15.8	24.0	8.2	
	140			15.1	0.4	15.5	24.0	8.5	
	100	802.11ax	MCS0	15.9		15.9	24.0	8.1	14
	120			16.1		16.1	24.0	7.9	
	140			15.7		15.7	24.0	8.3	
	100	802.11ax	MCS7	15.6	0.4	16.0	24.0	8.0	14
	120			15.7	0.4	16.1	24.0	7.9	
	140			15.3	0.4	15.7	24.0	8.3	
	100	802.11ax	MCS9	13.5	0.5	14.0	24.0	10.0	12
	120			13.6	0.5	14.1	24.0	9.9	
	140			13.1	0.5	13.6	24.0	10.4	
	100	802.11ax	MCS11	11.4	0.5	11.9	24.0	12.1	10
	120			11.5	0.5	12.0	24.0	12.0	
	140			11.0	0.5	11.5	24.0	12.5	

Company: Ezurio	Page 23 of 73	Name: Module, SONA NX 611 SIP, 1 RF Trace Pin / 2 RF Trace Pin
Report: TR 3768 156 155 RFX		Model: SONA NX611S
Job: C-3768		Serial: 00033 00027, 00020 00016

40	102	802.11n	MCS0	15.7	0.1	15.8	24.0	8.2	14
	134			16.2	0.1	16.3	24.0	7.7	
	142			15.6	0.1	15.7	24.0	8.3	
	102	802.11n	MCS7	15.5	0.6	16.1	24.0	7.9	14
	134			15.7	0.6	16.3	24.0	7.7	
	142			15.1	0.6	15.7	24.0	8.3	
	102	802.11ac	MCS0	15.9	0.1	16.0	24.0	8.0	14
	134			16.1	0.1	16.2	24.0	7.8	
	142			15.5	0.1	15.6	24.0	8.4	
	102	802.11ac	MCS7	15.4	0.6	16.0	24.0	8.0	14
	134			15.6	0.6	16.2	24.0	7.8	
	142			15.1	0.6	15.7	24.0	8.3	
	102	802.11ac	MCS9	13.4	0.7	14.1	24.0	9.9	12
	134			13.6	0.7	14.3	24.0	9.7	
	142			13.0	0.7	13.7	24.0	10.3	
	102	802.11ax	MCS0	16.2	0.1	16.3	24.0	7.7	14
	134			16.4	0.1	16.5	24.0	7.5	
	142			15.8	0.1	15.9	24.0	8.1	
	102	802.11ax	MCS7	15.7	0.6	16.3	24.0	7.7	14
	134			15.9	0.6	16.5	24.0	7.5	
	142			15.4	0.6	16.0	24.0	8.0	
	102	802.11ax	MCS9	13.6	0.6	14.2	24.0	9.8	12
	134			13.8	0.6	14.4	24.0	9.6	
	142			13.2	0.6	13.8	24.0	10.2	
	102	802.11ax	MCS11	11.5	0.7	12.2	24.0	11.8	10
	134			11.7	0.7	12.4	24.0	11.6	
	142			11.1	0.7	11.8	24.0	12.2	

Company: Ezurio	Page 24 of 73	Name: Module, SONA NX 611 SIP, 1 RF Trace Pin / 2 RF Trace Pin
Report: TR 3768 156 155 RFX		Model: SONA NX611S
Job: C-3768		Serial: 00033 00027, 00020 00016

80	106	802.11ac	MCS0	16.2	0.2	16.4	24.0	7.6	14
	122			16.4	0.2	16.6	24.0	7.4	14
	138			16.4	0.2	16.6	24.0	7.4	14
	106		MCS7	15.6	0.9	16.5	24.0	7.5	14
	122			15.7	0.9	16.6	24.0	7.4	14
	138			15.7	0.9	16.6	24.0	7.4	14
	106		MCS9	13.5	1.0	14.5	24.0	9.5	12
	122			13.6	1.0	14.6	24.0	9.4	12
	138			13.6	1.0	14.6	24.0	9.4	12
	106		802.11ax	16.5	0.2	16.7	24.0	7.3	14
	122			16.6	0.2	16.8	24.0	7.2	14
	138			16.7	0.2	16.9	24.0	7.1	14
	106			15.9	0.8	16.7	24.0	7.3	14
	122			16.0	0.8	16.8	24.0	7.2	14
	138			16.1	0.8	16.9	24.0	7.1	14
	106		MCS9	13.8	0.8	14.6	24.0	9.4	12
	122			14.0	0.8	14.8	24.0	9.2	12
	138			14.0	0.8	14.8	24.0	9.2	12
	106		MCS11	11.8	0.8	12.6	24.0	11.4	10
	122			11.9	0.8	12.7	24.0	11.3	10
	138			11.9	0.8	12.7	24.0	11.3	10

Company: Ezurio	Page 25 of 73	Name: Module, SONA NX 611 SIP, 1 RF Trace Pin / 2 RF Trace Pin
Report: TR 3768 156 155 RFX		Model: SONA NX611S
Job: C-3768		Serial: 00033 00027, 00020 00016

UNII 2C (ISED)									
Nominal BW	Channel	Mode	MCS	Avg Output Power (dBm)	Duty Cycle Correction (dB)	Corrected Output Value (dBm)	Limit (dBm)	Margin (dB)	Power Setting
20	116	802.11a	OFDM-6	16.6	0.0	16.6	23.9	7.3	15
			OFDM-54	16.3	0.4	16.7	23.9	7.2	15
		802.11n	MCS0	15.4	0.0	15.4	24	8.6	14
			MCS7	15.1	0.4	15.5	24	8.5	14
		802.11ac	MCS0	15.4	0.0	15.4	24	8.6	14
			MCS7	15.1	0.4	15.5	24	8.5	14
			MCS8	15	0.4	15.4	24	8.6	14
		802.11ax	MCS0	10.5	0.0	10.5	24	13.5	9
			MCS7	10.1	0.4	10.5	24	13.5	9
			MCS9	10	0.5	10.5	24	13.5	9
			MCS11	9.9	0.5	10.4	24	13.6	9
40	110	802.11n	MCS0	13.3	0.1	13.4	24	10.6	12
			MCS7	12.8	0.6	13.4	24	10.6	12
		802.11ac	MCS0	14.4	0.1	14.5	24	9.5	13
			MCS7	13.8	0.6	14.4	24	9.6	13
			MCS9	11.7	0.7	12.4	24	11.6	11
		802.11ax	MCS0	11.6	0.1	11.7	24	12.3	10
			MCS7	11	0.6	11.6	24	12.4	10
			MCS9	11	0.6	11.6	24	12.4	10
			MCS11	10.9	0.7	11.6	24	12.4	10

Mid channels used for ISED Canada

Company: Ezurio	Page 26 of 73	Name: Module, SONA NX 611 SIP, 1 RF Trace Pin / 2 RF Trace Pin
Report: TR 3768 156 155 RFX		Model: SONA NX611S
Job: C-3768		Serial: 00033 00027, 00020 00016

UNII 3									
Nominal BW	Channel	Mode	MCS	Avg Output Power (dBm)	Duty Cycle Correction (dB)	Corrected Output Value (dBm)	Limit (dBm)	Margin (dB)	Power Setting
20	149	802.11a	OFDM-6	16.8		16.8	30.0	13.2	16
	157			16.8		16.8	30.0	13.2	
	165			16.4		16.4	30.0	13.6	
	149	802.11a	OFDM-54	16.7	0.4	17.1	30.0	12.9	16
	157			16.4	0.4	16.8	30.0	13.2	
	165			16.1	0.4	16.5	30.0	13.5	
	149	802.11n	MCS0	14.8		14.8	30.0	15.2	14
	157			14.8		14.8	30.0	15.2	
	165			14.3		14.3	30.0	15.7	
	149	802.11n	MCS7	14.4	0.4	14.8	30.0	15.2	14
	157			14.6	0.4	15.0	30.0	15.0	
	165			14.0	0.4	14.4	30.0	15.6	
	149	802.11ac	MCS0	14.8		14.8	30.0	15.2	14
	157			14.8		14.8	30.0	15.2	
	165			14.4		14.4	30.0	15.6	
	149	802.11ac	MCS7	14.5	0.4	14.9	30.0	15.1	14
	157			14.5	0.4	14.9	30.0	15.1	
	165			14.0	0.4	14.4	30.0	15.6	
	149	802.11ac	MCS8	14.5	0.4	14.9	30.0	15.1	14
	157			14.5	0.4	14.9	30.0	15.1	
	165			14.0	0.4	14.4	30.0	15.6	
	149	802.11ax	MCS0	15.1		15.1	30.0	14.9	14
	157			15.1		15.1	30.0	14.9	
	165			14.6		14.6	30.0	15.4	
	149	802.11ax	MCS7	14.7	0.4	15.1	30.0	14.9	14
	157			14.7	0.4	15.1	30.0	14.9	
	165			14.2	0.4	14.6	30.0	15.4	
	149	802.11ax	MCS9	12.5	0.5	13.0	30.0	17.0	12
	157			12.6	0.5	13.1	30.0	16.9	
	165			12.1	0.5	12.6	30.0	17.4	
	149	802.11ax	MCS11	10.4	0.5	10.9	30.0	19.1	10
	157			10.4	0.5	10.9	30.0	19.1	
	165			9.9	0.5	10.4	30.0	19.6	

Company: Ezurio	Page 27 of 73	Name: Module, SONA NX 611 SIP, 1 RF Trace Pin / 2 RF Trace Pin
Report: TR 3768 156 155 RFX		Model: SONA NX611S
Job: C-3768		Serial: 00033 00027, 00020 00016

40	151	802.11n	MCS0	14.9	0.1	15.0	30.0	15.0	14
	159			14.9	0.1	15.0	30.0	15.0	
	151	802.11n	MCS7	14.4	0.6	15.0	30.0	15.0	14
	159			14.3	0.6	14.9	30.0	15.1	
	151	802.11ac	MCS0	15.0	0.1	15.1	30.0	14.9	14
	159			14.8	0.1	14.9	30.0	15.1	
	151	802.11ac	MCS7	14.5	0.6	15.1	30.0	14.9	14
	159			14.4	0.6	15.0	30.0	15.0	
	151	802.11ac	MCS9	12.4	0.7	13.1	30.0	16.9	12
	159			12.2	0.7	12.9	30.0	17.1	
	151	802.11ax	MCS0	15.2	0.1	15.3	30.0	14.7	14
	159			15.1	0.1	15.2	30.0	14.8	
	151	802.11ax	MCS7	14.7	0.6	15.3	30.0	14.7	14
	159			14.6	0.6	15.2	30.0	14.8	
	151	802.11ax	MCS9	12.6	0.6	13.2	30.0	16.8	12
	159			12.5	0.6	13.1	30.0	16.9	
	151	802.11ax	MCS11	10.4	0.7	11.1	30.0	18.9	10
	159			10.3	0.7	11.0	30.0	19.0	
80	155	802.11ac	MCS0	15.3	0.2	15.5	30.0	14.5	14
	155	802.11ac	MCS7	14.7	0.9	15.6	30.0	14.4	14
	155	802.11ac	MCS9	12.5	1.0	13.5	30.0	16.5	12
	155	802.11ax	MCS0	15.5	0.2	15.7	30.0	14.3	14
	155	802.11ax	MCS7	15.0	0.8	15.8	30.0	14.2	14
	155	802.11ax	MCS9	12.9	0.8	13.7	30.0	16.3	12
	155	802.11ax	MCS11	10.8	0.8	11.6	30.0	18.4	10

Company: Ezurio	Page 28 of 73	Name: Module, SONA NX 611 SIP, 1 RF Trace Pin / 2 RF Trace Pin
Report: TR 3768 156 155 RFX		Model: SONA NX611S
Job: C-3768		Serial: 00033 00027, 00020 00016

UNII 1									
Nominal BW	Channel	Mode	MCS	Avg Output Power (dBm)	Duty Cycle Correction (dB)	Corrected Output Value (dBm)	Limit (dBm)	Margin (dB)	Power Setting
20	36	802.11ax	MCS0 RU26	10.1	0.2	10.3	24.0	13.7	9
	40			10.1	0.2	10.3	24.0	13.7	
	48			10.2	0.2	10.4	24.0	13.6	
	36	MCS0 RU52	MCS0 RU52	10.0	0.2	10.2	24.0	13.8	9
	40			10.2	0.2	10.4	24.0	13.6	
	48			10.4	0.2	10.6	24.0	13.5	
	36	MCS0 RU106	MCS0 RU106	10.1	0.2	10.3	24.0	13.7	9
	40			10.1	0.2	10.3	24.0	13.7	
	48			10.2	0.2	10.4	24.0	13.6	
40	38	MCS0 RU26	MCS0 RU26	10.0	0.2	10.2	24.0	13.8	10
	46			10.3	0.2	10.5	24.0	13.5	
	38	MCS0 RU52	MCS0 RU52	10.9	0.2	11.1	24.0	12.9	10
	46			11.1	0.2	11.3	24.0	12.7	
	38	MCS0 RU106	MCS0 RU106	10.9	0.2	11.1	24.0	12.9	10
	46			11.2	0.2	11.4	24.0	12.6	
	38	MCS0 RU242	MCS0 RU242	11.3	0.2	11.5	24.0	12.5	10
	46			11.5	0.2	11.7	24.0	12.3	
80	42	MCS0 RU26	MCS0 RU26	11.1	0.2	11.3	24.0	12.7	8
	42	MCS0 RU52	MCS0 RU52	11.1	0.2	11.3	24.0	12.7	8
	42	MCS0 RU106	MCS0 RU106	10.8	0.2	11.0	24.0	13.0	8
	42	MCS0 RU242	MCS0 RU242	10.9	0.2	11.1	24.0	12.9	8
	42	MCS0 RU484	MCS0 RU484	10.8	0.2	11.0	24.0	13.0	8

Company: Ezurio	Page 29 of 73	Name: Module, SONA NX 611 SIP, 1 RF Trace Pin / 2 RF Trace Pin
Report: TR 3768 156 155 RFX		Model: SONA NX611S
Job: C-3768		Serial: 00033 00027, 00020 00016

UNII 2A									
Nominal BW	Channel	Mode	MCS	Avg Output Power (dBm)	Duty Cycle Correction (dB)	Corrected Output Value (dBm)	Limit (dBm)	Margin (dB)	Power Setting
20	52	802.11ax	MCS0 RU26	9.8	0.2	10.0	24.0	14.0	9
	56			9.6	0.2	9.8	24.0	14.2	
	64			9.5	0.2	9.7	24.0	14.3	
	52	802.11ax	MCS0 RU52	9.9	0.2	10.1	24.0	13.9	9
	56			9.8	0.2	10.0	24.0	14.0	
	64			9.7	0.2	9.9	24.0	14.1	
	52	802.11ax	MCS0 RU106	9.8	0.2	10.0	24.0	14.0	9
	56			9.6	0.2	9.8	24.0	14.2	
	64			9.6	0.2	9.8	24.0	14.2	
40	54	802.11ax	MCS0 RU26	9.8	0.2	10.0	24.0	14.0	10
	62			9.6	0.2	9.8	24.0	14.2	
	54	802.11ax	MCS0 RU52	10.7	0.2	10.9	24.0	13.1	10
	62			10.5	0.2	10.7	24.0	13.3	
	54	802.11ax	MCS0 RU106	10.6	0.2	10.8	24.0	13.2	10
	62			10.5	0.2	10.7	24.0	13.3	
	54	802.11ax	MCS0 RU242	11.0	0.2	11.2	24.0	12.8	10
	62			10.8	0.2	11.0	24.0	13.0	
80	58	802.11ax	MCS0 RU26	10.7	0.2	10.9	24.0	13.1	8
	58		MCS0 RU52	10.7	0.2	10.9	24.0	13.1	8
	58		MCS0 RU106	10.4	0.2	10.6	24.0	13.4	8
	58		MCS0 RU242	10.4	0.2	10.6	24.0	13.4	8
	58		MCS0 RU484	10.2	0.2	10.4	24.0	13.6	8

Company: Ezurio	Page 30 of 73	Name: Module, SONA NX 611 SIP, 1 RF Trace Pin / 2 RF Trace Pin
Report: TR 3768 156 155 RFX		Model: SONA NX611S
Job: C-3768		Serial: 00033 00027, 00020 00016

UNII 2C									
Nominal BW	Channel	Mode	MCS	Avg Output Power (dBm)	Duty Cycle Correction (dB)	Corrected Output Value (dBm)	Limit (dBm)	Margin (dB)	Power Setting
20	100	802.11ax	MCS0 RU26	10.7	0.2	10.9	30.0	19.1	9
	120			11.1	0.2	11.3	30.0	18.7	
	144			10.8	0.2	11.0	30.0	19.0	
	100		MCS0 RU52	10.7	0.2	10.9	30.0	19.1	9
	120			11.2	0.2	11.4	30.0	18.6	
	144			10.6	0.2	10.8	30.0	19.2	
	100		MCS0 RU106	10.7	0.2	10.9	30.0	19.1	9
	120			11.3	0.2	11.5	30.0	18.5	
	144			10.8	0.2	11.0	30.0	19.0	
40	102	802.11ax	MCS0 RU26	10.8	0.2	11.0	30.0	19.0	10
	118			11.6	0.2	11.8	30.0	18.2	
	142			11.9	0.2	12.1	30.0	17.9	
	102		MCS0 RU52	11.9	0.2	12.1	30.0	17.9	10
	118			12.6	0.2	12.8	30.0	17.2	
	142			12.7	0.2	12.9	30.0	17.1	
	102		MCS0 RU106	12.0	0.2	12.2	30.0	17.8	10
	118			12.5	0.2	12.7	30.0	17.3	
	142			12.7	0.2	12.9	30.0	17.1	
	102		MCS0 RU242	12.2	0.2	12.4	30.0	17.6	10
	118			12.7	0.2	12.9	30.0	17.1	
	142			12.8	0.2	13.0	30.0	17.0	
40	106	802.11ax	MCS0 RU26	11.1	0.2	11.3	30.0	18.7	8
	122			11.7	0.2	11.9	30.0	18.1	
	138			11.3	0.2	11.5	30.0	18.5	
	106		MCS0 RU52	11.0	0.2	11.2	30.0	18.8	8
	122			12.1	0.2	12.3	30.0	17.7	
	138			11.5	0.2	11.7	30.0	18.3	
	106		MCS0 RU106	11.0	0.2	11.2	30.0	18.8	8
	122			12.0	0.2	12.2	30.0	17.8	
	138			11.3	0.2	11.5	30.0	18.5	
	106		MCS0 RU242	11.1	0.2	11.3	30.0	18.7	8
	122			11.9	0.2	12.1	30.0	17.9	
	138			11.3	0.2	11.5	30.0	18.5	
	106		MCS0 RU484	11.4	0.2	11.6	30.0	18.4	8
	122			11.9	0.2	12.1	30.0	17.9	
	138			11.5	0.2	11.7	30.0	18.3	

Company: Ezurio	Page 31 of 73	Name: Module, SONA NX 611 SIP, 1 RF Trace Pin / 2 RF Trace Pin
Report: TR 3768 156 155 RFX		Model: SONA NX611S
Job: C-3768		Serial: 00033 00027, 00020 00016

UNII 2C (ISED)									
Nominal BW	Channel	Mode	MCS0	Avg Output Power (dBm)	Duty Cycle Correction (dB)	Corrected Output Value (dBm)	Limit (dBm)	Margin (dB)	Power Setting
20	116	802.11ax	RU26	10.1	0.2	10.3	24	13.7	9
		802.11ax	RU52	10.4	0.2	10.6	24	13.4	9
		802.11ax	RU106	10.4	0.2	10.6	24	13.4	9
40	110	802.11ax	RU26	10.3	0.2	10.5	24	13.5	10
		802.11ax	RU52	11.2	0.2	11.4	24	12.6	10
		802.11ax	RU106	11.3	0.2	11.5	24	12.5	10
		802.11ax	RU242	11.6	0.2	11.8	24	12.2	10

Mid channels used for ISED Canada

Company: Ezurio	Page 32 of 73	Name: Module, SONA NX 611 SIP, 1 RF Trace Pin / 2 RF Trace Pin
Report: TR 3768 156 155 RFX		Model: SONA NX611S
Job: C-3768		Serial: 00033 00027, 00020 00016

UNII 3									
Nominal BW	Channel	Mode	MCS	Avg Output Power (dBm)	Duty Cycle Correction (dB)	Corrected Output Value (dBm)	Limit (dBm)	Margin (dB)	Power Setting
20	149	802.11ax	MCS0 RU26	10.3	0.2	10.5	24.0	13.5	9
	157			10.5	0.2	10.7	24.0	13.3	
	165			9.9	0.2	10.1	24.0	13.9	
	149		MCS0 RU52	10.3	0.2	10.5	24.0	13.5	9
	157			10.5	0.2	10.7	24.0	13.3	
	165			10.0	0.2	10.2	24.0	13.8	
	149		MCS0 RU106	10.5	0.2	10.7	24.0	13.3	9
	157			10.6	0.2	10.8	24.0	13.2	
	165			10.0	0.2	10.2	24.0	13.8	
40	151	802.11ax	MCS0 RU26	10.9	0.2	11.1	24.0	12.9	10
	159			10.7	0.2	10.9	24.0	13.1	
	151		MCS0 RU52	11.6	0.2	11.8	24.0	12.2	10
	159			11.7	0.2	11.9	24.0	12.1	
	151		MCS0 RU106	11.7	0.2	11.9	24.0	12.1	10
	159			11.6	0.2	11.8	24.0	12.2	
	151		MCS0 RU242	11.8	0.2	12.0	24.0	12.0	10
	159			11.9	0.2	12.1	24.0	11.9	
80	155	802.11ax	MCS0 RU26	9.4	0.2	9.6	24.0	14.4	8
	155		MCS0 RU52	8.9	0.2	9.1	24.0	14.9	8
	155		MCS0 RU106	9.2	0.2	9.4	24.0	14.6	8
	155		MCS0 RU242	8.3	0.2	8.5	24.0	15.5	8
	155		MCS0 RU484	8.2	0.2	8.4	24.0	15.6	8

Company: Ezurio	Page 33 of 73	Name: Module, SONA NX 611 SIP, 1 RF Trace Pin / 2 RF Trace Pin
Report: TR 3768 156 155 RFX		Model: SONA NX611S
Job: C-3768		Serial: 00033 00027, 00020 00016

5.1.4 Antenna Port Conducted Emissions – RF Output Power 5GHz WLAN (453-0155)

UNII 1									
Nominal BW	Channel	Mode	MCS	Avg Output Power (dBm)	Duty Cycle Correction (dB)	Corrected Output Value (dBm)	Limit (dBm)	Margin (dB)	Power Setting
20	36	802.11a	OFDM-6	16.8		16.8	24.0	7.2	16
	40			16.9		16.9	24.0	7.1	
	48			16.6		16.6	24.0	7.4	
	36	802.11a	OFDM-54	16.5	0.4	16.9	24.0	7.1	16
	40			16.6	0.4	17.0	24.0	7.0	
	48			16.3	0.4	16.7	24.0	7.3	
	36	802.11n	MCS0	14.9		14.9	24.0	9.1	14
	40			15.0		15.0	24.0	9.0	
	48			14.7		14.7	24.0	9.3	
	36	802.11n	MCS7	14.6	0.4	15.0	24.0	9.0	14
	40			14.6	0.4	15.0	24.0	9.0	
	48			14.5	0.4	14.9	24.0	9.1	
	36	802.11ac	MCS0	14.8		14.8	24.0	9.2	14
	40			15.0		15.0	24.0	9.0	
	48			14.7		14.7	24.0	9.3	
	36	802.11ac	MCS7	14.5	0.4	14.9	24.0	9.1	14
	40			14.6	0.4	15.0	24.0	9.0	
	48			14.5	0.4	14.9	24.0	9.1	
	36	802.11ac	MCS8	14.5	0.4	14.9	24.0	9.1	14
	40			14.6	0.4	15.0	24.0	9.0	
	48			14.4	0.4	14.8	24.0	9.2	
	36	802.11ax	MCS0	15.1		15.1	24.0	8.9	14
	40			15.2		15.2	24.0	8.8	
	48			15.0		15.0	24.0	9.0	
	36	802.11ax	MCS7	14.7	0.4	15.1	24.0	8.9	14
	40			14.8	0.4	15.2	24.0	8.8	
	48			14.7	0.4	15.1	24.0	8.9	
	36	802.11ax	MCS9	12.6	0.5	13.1	24.0	10.9	12
	40			12.7	0.5	13.2	24.0	10.8	
	48			12.5	0.5	13.0	24.0	11.0	
	36	802.11ax	MCS11	10.3	0.5	10.8	24.0	13.2	10
	40			10.4	0.5	10.9	24.0	13.1	
	48			10.4	0.5	10.9	24.0	13.1	

Company: Ezurio	Page 34 of 73	Name: Module, SONA NX 611 SIP, 1 RF Trace Pin / 2 RF Trace Pin
Report: TR 3768 156 155 RFX		Model: SONA NX611S
Job: C-3768		Serial: 00033 00027, 00020 00016

40	38	802.11n	MCS0	14.8	0.1	14.9	24.0	9.1	14
	46			14.8	0.1	14.9	24.0	9.1	
	38	802.11n	MCS7	14.4	0.6	15.0	24.0	9.0	14
	46			14.4	0.6	15.0	24.0	9.0	
	38	802.11ac	MCS0	14.8	0.1	14.9	24.0	9.1	14
	46			14.8	0.1	14.9	24.0	9.1	
	38	802.11ac	MCS7	14.4	0.6	15.0	24.0	9.0	14
	46			14.4	0.6	15.0	24.0	9.0	
	38	802.11ac	MCS9	12.3	0.7	13.0	24.0	11.0	12
	46			12.3	0.7	13.0	24.0	11.0	
	38	802.11ax	MCS0	15.2	0.1	15.3	24.0	8.7	14
	46			15.1	0.1	15.2	24.0	8.8	
	38	802.11ax	MCS7	14.8	0.6	15.4	24.0	8.6	14
	46			14.6	0.6	15.2	24.0	8.8	
	38	802.11ax	MCS9	12.6	0.6	13.2	24.0	10.8	12
	46			12.6	0.6	13.2	24.0	10.8	
	38	802.11ax	MCS11	10.3	0.7	11.0	24.0	13.0	10
	46			10.4	0.7	11.1	24.0	12.9	
80	42	802.11ac	MCS0	15.2	0.2	15.4	24.0	8.6	14
	42	802.11ac	MCS7	14.6	0.9	15.5	24.0	8.5	14
	42	802.11ac	MCS9	12.6	1.0	13.6	24.0	10.4	12
	42	802.11ax	MCS0	15.5	0.2	15.7	24.0	8.3	14
	42	802.11ax	MCS7	14.9	0.8	15.7	24.0	8.3	14
	42	802.11ax	MCS9	12.9	0.8	13.7	24.0	10.3	12
	42	802.11ax	MCS11	10.7	0.8	11.5	24.0	12.5	10

Company: Ezurio	Page 35 of 73	Name: Module, SONA NX 611 SIP, 1 RF Trace Pin / 2 RF Trace Pin
Report: TR 3768 156 155 RFX		Model: SONA NX611S
Job: C-3768		Serial: 00033 00027, 00020 00016

UNII 2A									
Nominal BW	Channel	Mode	MCS	Avg Output Power (dBm)	Duty Cycle Correction (dB)	Corrected Output Value (dBm)	Limit (dBm)	Margin (dB)	Power Setting
20	52	802.11a	OFDM-6	16.2		16.2	24.0	7.8	16
	56			16.1		16.1	24.0	7.9	
	64			16.0		16.0	24.0	8.0	
	52	802.11a	OFDM-54	15.9	0.4	16.3	24.0	7.7	16
	56			15.7	0.4	16.1	24.0	7.9	
	64			15.7	0.4	16.1	24.0	7.9	
	52	802.11n	MCS0	14.3		14.3	24.0	9.7	14
	56			14.1		14.1	24.0	9.9	
	64			14.0		14.0	24.0	10.0	
	52	802.11n	MCS7	14.0	0.4	14.4	24.0	9.6	14
	56			13.8	0.4	14.2	24.0	9.8	
	64			13.8	0.4	14.2	24.0	9.8	
	52	802.11ac	MCS0	14.3		14.3	24.0	9.7	14
	56			14.1		14.1	24.0	9.9	
	64			14.0		14.0	24.0	10.0	
	52	802.11ac	MCS7	14.0	0.4	14.4	24.0	9.6	14
	56			13.8	0.4	14.2	24.0	9.8	
	64			13.8	0.4	14.2	24.0	9.8	
	52	802.11ac	MCS8	13.9	0.4	14.3	24.0	9.7	14
	56			13.8	0.4	14.2	24.0	9.8	
	64			13.7	0.4	14.1	24.0	9.9	
	52	802.11ax	MCS0	14.5		14.5	24.0	9.5	14
	56			14.3		14.3	24.0	9.7	
	64			14.3		14.3	24.0	9.7	
	52	802.11ax	MCS7	14.1	0.4	14.5	24.0	9.5	14
	56			14.0	0.4	14.4	24.0	9.6	
	64			13.9	0.4	14.3	24.0	9.7	
	52	802.11ax	MCS9	12.0	0.5	12.5	24.0	11.5	12
	56			11.9	0.5	12.4	24.0	11.6	
	64			11.8	0.5	12.3	24.0	11.7	
	52	802.11ax	MCS11	9.8	0.5	10.3	24.0	13.7	10
	56			9.7	0.5	10.2	24.0	13.8	
	64			9.7	0.5	10.2	24.0	13.8	

Company: Ezurio	Page 36 of 73	Name: Module, SONA NX 611 SIP, 1 RF Trace Pin / 2 RF Trace Pin
Report: TR 3768 156 155 RFX		Model: SONA NX611S
Job: C-3768		Serial: 00033 00027, 00020 00016

40	54	802.11n	MCS0	14.0	0.1	14.1	24.0	9.9	14
	62			13.9	0.1	14.0	24.0	10.0	
	54	802.11n	MCS7	13.5	0.6	14.1	24.0	9.9	14
	62			13.5	0.6	14.1	24.0	9.9	
	54	802.11ac	MCS0	14.0	0.1	14.1	24.0	9.9	14
	62			13.9	0.1	14.0	24.0	10.0	
	54	802.11ac	MCS7	13.6	0.6	14.2	24.0	9.8	14
	62			13.5	0.6	14.1	24.0	9.9	
	54	802.11ac	MCS9	11.8	0.7	12.5	24.0	11.5	12
	62			11.4	0.7	12.1	24.0	11.9	
	54	802.11ax	MCS0	14.4	0.1	14.5	24.0	9.5	14
	62			14.3	0.1	14.4	24.0	9.6	
	54	802.11ax	MCS7	13.9	0.6	14.5	24.0	9.5	14
	62			13.8	0.6	14.4	24.0	9.6	
	54	802.11ax	MCS9	11.9	0.6	12.5	24.0	11.5	12
	62			11.7	0.6	12.3	24.0	11.7	
	54	802.11ax	MCS11	9.6	0.7	10.3	24.0	13.7	10
	62			9.6	0.7	10.3	24.0	13.7	
80	58	802.11ac	MCS0	14.2	0.2	14.4	24.0	9.6	14
	58	802.11ac	MCS7	13.6	0.9	14.5	24.0	9.5	14
	58	802.11ac	MCS9	11.5	1.0	12.5	24.0	11.5	12
	58	802.11ax	MCS0	14.5	0.2	14.7	24.0	9.3	14
	58	802.11ax	MCS7	14.0	0.8	14.8	24.0	9.2	14
	58	802.11ax	MCS9	11.9	0.8	12.7	24.0	11.3	12
	58	802.11ax	MCS11	9.7	0.8	10.5	24.0	13.5	10

Company: Ezurio	Page 37 of 73	Name: Module, SONA NX 611 SIP, 1 RF Trace Pin / 2 RF Trace Pin
Report: TR 3768 156 155 RFX		Model: SONA NX611S
Job: C-3768		Serial: 00033 00027, 00020 00016

UNII 2C									
Nominal BW	Channel	Mode	MCS	Avg Output Power (dBm)	Duty Cycle Correction (dB)	Corrected Output Value (dBm)	Limit (dBm)	Margin (dB)	Power Setting
20	100	802.11a	OFDM-6	17.3		17.3	23.9	6.6	16
	120			17.5		17.5	23.9	6.4	
	144			17.0		17.0	23.9	6.9	
	100	802.11a	OFDM-54	17.1	0.4	17.5	23.9	6.4	16
	120			17.2	0.4	17.6	23.9	6.3	
	144			16.7	0.4	17.1	23.9	6.8	
	100	802.11n	MCS0	15.4		15.4	24.0	8.6	14
	120			15.7		15.7	24.0	8.3	
	144			14.9		14.9	24.0	9.1	
	100	802.11n	MCS7	15.1	0.4	15.5	24.0	8.5	14
	120			15.4	0.4	15.8	24.0	8.2	
	144			14.6	0.4	15.0	24.0	9.0	
	100	802.11ac	MCS0	15.4		15.4	24.0	8.6	14
	120			15.7		15.7	24.0	8.3	
	144			14.9		14.9	24.0	9.1	
	100	802.11ac	MCS7	15.0	0.4	15.4	24.0	8.6	14
	120			15.4	0.4	15.8	24.0	8.2	
	144			14.7	0.4	15.1	24.0	8.9	
	100	802.11ac	MCS8	14.9	0.4	15.3	24.0	8.7	14
	120			15.3	0.4	15.7	24.0	8.3	
	144			14.6	0.4	15.0	24.0	9.0	
	100	802.11ax	MCS0	15.6		15.6	24.0	8.4	14
	120			16.0		16.0	24.0	8.0	
	144			14.8		14.8	24.0	9.2	
	100	802.11ax	MCS7	15.2	0.4	15.6	24.0	8.4	14
	120			15.5	0.4	15.9	24.0	8.1	
	144			14.8	0.4	15.2	24.0	8.8	
	100	802.11ax	MCS9	13.1	0.5	13.6	24.0	10.4	12
	120			13.4	0.5	13.9	24.0	10.1	
	144			12.8	0.5	13.3	24.0	10.7	
	100	802.11ax	MCS11	11.1	0.5	11.6	24.0	12.4	10
	120			11.4	0.5	11.9	24.0	12.1	
	144			10.7	0.5	11.2	24.0	12.8	

Company: Ezurio	Page 38 of 73	Name: Module, SONA NX 611 SIP, 1 RF Trace Pin / 2 RF Trace Pin
Report: TR 3768 156 155 RFX		Model: SONA NX611S
Job: C-3768		Serial: 00033 00027, 00020 00016

40	102	802.11n	MCS0	15.5	0.1	15.6	24.0	8.4	14
	118			15.9	0.1	16.0	24.0	8.0	
	142			15.6	0.1	15.7	24.0	8.3	
	102	802.11n	MCS7	15.0	0.6	15.6	24.0	8.4	14
	118			15.3	0.6	15.9			
	142			15.1	0.6	15.7	24.0	8.3	
	102	802.11ac	MCS0	15.5	0.1	15.6	24.0	8.4	14
	118			15.8	0.1	15.9	24.0	8.1	
	142			15.6	0.1	15.7	24.0	8.3	
	102	802.11ac	MCS7	15.1	0.6	15.7	24.0	8.3	14
	118			15.3	0.6	15.9			
	142			15.2	0.6	15.8	24.0	8.2	
	102	802.11ac	MCS9	13.0	0.7	13.7	24.0	10.3	12
	118			13.3	0.7	14.0	24.0	10.0	
	142			13.3	0.7	14.0	24.0	10.0	
	102	802.11ax	MCS0	15.9	0.1	16.0	24.0	8.0	14
	118			16.1	0.1	16.2	24.0	7.8	
	142			15.9	0.1	16.0	24.0	8.0	
	102	802.11ax	MCS7	15.3	0.6	15.9	24.0	8.1	14
	118			15.6	0.6	16.2			
	142			15.4	0.6	16.0	24.0	8.0	
	102	802.11ax	MCS9	13.2	0.6	13.8	24.0	10.2	12
	118			13.5	0.6	14.1			
	142			13.6	0.6	14.2	24.0	9.8	
	102	802.11ax	MCS11	11.1	0.7	11.8	24.0	12.2	10
	118			11.4	0.7	12.1	24.0	11.9	
	142			11.3	0.7	12.0	24.0	12.0	

Company: Ezurio	Page 39 of 73	Name: Module, SONA NX 611 SIP, 1 RF Trace Pin / 2 RF Trace Pin
Report: TR 3768 156 155 RFX		Model: SONA NX611S
Job: C-3768		Serial: 00033 00027, 00020 00016

80	106	802.11ac	MCS0	15.8	0.2	16.0	24.0	8.0	14
	122			16.0	0.2	16.2	24.0	7.8	14
	138			16.3	0.2	16.5	24.0	7.5	14
	106		MCS7	15.2	0.9	16.1	24.0	7.9	14
	122			15.3	0.9	16.2	24.0	7.8	14
	138			15.7	0.9	16.6	24.0	7.4	14
	106		MCS9	13.1	1.0	14.1	24.0	9.9	12
	122			13.1	1.0	14.1	24.0	9.9	12
	138			13.8	1.0	14.8	24.0	9.2	12
	106		MCS0	16.1	0.2	16.3	24.0	7.7	14
	122			16.2	0.2	16.4	24.0	7.6	14
	138			16.5	0.2	16.7	24.0	7.3	14
	106		MCS7	15.6	0.8	16.4	24.0	7.6	14
	122			15.6	0.8	16.4	24.0	7.6	14
	138			16.1	0.8	16.9	24.0	7.1	14
	106		MCS9	13.5	0.8	14.3	24.0	9.7	12
	122			13.5	0.8	14.3	24.0	9.7	12
	138			14.2	0.8	15.0	24.0	9.0	12
	106		MCS11	11.4	0.8	12.2	24.0	11.8	10
	122			11.5	0.8	12.3	24.0	11.7	10
	138			12.0	0.8	12.8	24.0	11.2	10

Company: Ezurio	Page 40 of 73	Name: Module, SONA NX 611 SIP, 1 RF Trace Pin / 2 RF Trace Pin
Report: TR 3768 156 155 RFX		Model: SONA NX611S
Job: C-3768		Serial: 00033 00027, 00020 00016

UNII 2C (ISED)									
Nominal BW	Channel	Mode	MCS	Avg Output Power (dBm)	Duty Cycle Correction (dB)	Corrected Output Value (dBm)	Limit (dBm)	Margin (dB)	Power Setting
20	116	802.11a	OFDM-6	17.8	0.0	17.8	23.9	6.1	16
			OFDM-54	17.6	0.4	18.0	23.9	5.9	16
		802.11n	MCS0	15.9	0.0	15.9	24	8.1	14
			MCS7	15.7	0.4	16.1	24	7.9	14
		802.11ac	MCS0	15.9	0.0	15.9	24	8.1	14
			MCS7	15.6	0.4	16.0	24	8.0	14
			MCS8	15.6	0.4	16.0	24	8.0	14
		802.11ax	MCS0	13.2	0.0	13.2	24	10.8	11
			MCS7	12.6	0.4	13.0	24	11.0	11
			MCS9	12.5	0.5	13.0	24	11.0	11
			MCS11	11.5	0.5	12.0	24	12.0	10
40	110	802.11n	MCS0	15.1	0.1	15.2	24	8.8	13
			MCS7	14.4	0.6	15.0	24	9.0	13
		802.11ac	MCS0	15.1	0.1	15.2	24	8.8	13
			MCS7	14.7	0.6	15.3	24	8.7	13
			MCS9	13.4	0.7	14.1	24	9.9	12
		802.11ax	MCS0	13.3	0.1	13.4	24	10.6	11
			MCS7	12.7	0.6	13.3	24	10.7	11
			MCS9	12.7	0.6	13.3	24	10.7	11
			MCS11	11.6	0.7	12.3	24	11.7	10

Mid channels used for ISED Canada

Company: Ezurio	Page 41 of 73	Name: Module, SONA NX 611 SIP, 1 RF Trace Pin / 2 RF Trace Pin
Report: TR 3768 156 155 RFX		Model: SONA NX611S
Job: C-3768		Serial: 00033 00027, 00020 00016

UNII 3									
Nominal BW	Channel	Mode	MCS	Avg Output Power (dBm)	Duty Cycle Correction (dB)	Corrected Output Value (dBm)	Limit (dBm)	Margin (dB)	Power Setting
20	149	802.11a	OFDM-6	16.7		16.7	30.0	13.3	16
	157			16.9		16.9	30.0	13.1	
	165			15.8		15.8	30.0	14.2	
	149	802.11a	OFDM-54	16.4	0.4	16.8	30.0	13.2	16
	157			16.5	0.4	16.9	30.0	13.1	
	165			15.5	0.4	15.9	30.0	14.1	
	149	802.11n	MCS0	14.7		14.7	30.0	15.3	14
	157			14.7		14.7	30.0	15.3	
	165			13.9		13.9	30.0	16.1	
	149	802.11n	MCS7	14.3	0.4	14.7	30.0	15.3	14
	157			14.4	0.4	14.8	30.0	15.2	
	165			13.6	0.4	14.0	30.0	16.0	
	149	802.11ac	MCS0	14.6		14.6	30.0	15.4	14
	157			14.8		14.8	30.0	15.2	
	165			14.0		14.0	30.0	16.0	
	149	802.11ac	MCS7	14.3	0.4	14.7	30.0	15.3	14
	157			14.4	0.4	14.8	30.0	15.2	
	165			13.6	0.4	14.0	30.0	16.0	
	149	802.11ac	MCS8	14.3	0.4	14.7	30.0	15.3	14
	157			14.4	0.4	14.8	30.0	15.2	
	165			13.6	0.4	14.0	30.0	16.0	
	149	802.11ax	MCS0	14.9		14.9	30.0	15.1	14
	157			15.0		15.0	30.0	15.0	
	165			14.2		14.2	30.0	15.8	
	149	802.11ax	MCS7	14.5	0.4	14.9	30.0	15.1	14
	157			14.6	0.4	15.0	30.0	15.0	
	165			13.9	0.4	14.3	30.0	15.7	
	149	802.11ax	MCS9	12.6	0.5	13.1	30.0	16.9	12
	157			12.6	0.5	13.1	30.0	16.9	
	165			11.7	0.5	12.2	30.0	17.8	
	149	802.11ax	MCS11	10.5	0.5	11.0	30.0	19.0	10
	157			10.4	0.5	10.9	30.0	19.1	
	165			9.5	0.5	10.0	30.0	20.0	

Company: Ezurio	Page 42 of 73	Name: Module, SONA NX 611 SIP, 1 RF Trace Pin / 2 RF Trace Pin
Report: TR 3768 156 155 RFX		Model: SONA NX611S
Job: C-3768		Serial: 00033 00027, 00020 00016

40	151	802.11n	MCS0	14.7	0.1	14.8	30.0	15.2	14
	159			14.6	0.1	14.7	30.0	15.3	
	151	802.11n	MCS7	14.3	0.6	14.9	30.0	15.1	14
	159			14.1	0.6	14.7	30.0	15.3	
	151	802.11ac	MCS0	14.7	0.1	14.8	30.0	15.2	14
	159			14.5	0.1	14.6	30.0	15.4	
	151	802.11ac	MCS7	14.3	0.6	14.9	30.0	15.1	14
	159			14.1	0.6	14.7	30.0	15.3	
	151	802.11ac	MCS9	12.3	0.7	13.0	30.0	17.0	12
	159			12.2	0.7	12.9	30.0	17.1	
	151	802.11ax	MCS0	15.0	0.1	15.1	30.0	14.9	14
	159			14.9	0.1	15.0	30.0	15.0	
	151	802.11ax	MCS7	14.5	0.6	15.1	30.0	14.9	14
	159			14.4	0.6	15.0	30.0	15.0	
	151	802.11ax	MCS9	12.6	0.6	13.2	30.0	16.8	12
	159			12.5	0.6	13.1	30.0	16.9	
	151	802.11ax	MCS11	10.5	0.7	11.2	30.0	18.8	10
	159			10.3	0.7	11.0	30.0	19.0	
80	155	802.11ac	MCS0	15.1	0.2	15.3	30.0	14.7	14
	155	802.11ac	MCS7	14.6	0.9	15.5	30.0	14.5	14
	155	802.11ac	MCS9	12.6	1.0	13.6	30.0	16.4	12
	155	802.11ax	MCS0	15.6	0.2	15.8	30.0	14.2	14
	155	802.11ax	MCS7	15.0	0.8	15.8	30.0	14.2	14
	155	802.11ax	MCS9	13.0	0.8	13.8	30.0	16.2	12
	155	802.11ax	MCS11	10.8	0.8	11.6	30.0	18.4	10

Company: Ezurio	Page 43 of 73	Name: Module, SONA NX 611 SIP, 1 RF Trace Pin / 2 RF Trace Pin
Report: TR 3768 156 155 RFX		Model: SONA NX611S
Job: C-3768		Serial: 00033 00027, 00020 00016

UNII 1									
Nominal BW	Channel	Mode	MCS	Avg Output Power (dBm)	Duty Cycle Correction (dB)	Corrected Output Value (dBm)	Limit (dBm)	Margin (dB)	Power Setting
20	36	802.11ax	MCS0 RU26	11.2	0.2	11.4	24.0	12.6	11
	40			11.6	0.2	11.8	24.0	12.2	
	48			11.6	0.2	11.8	24.0	12.2	
	36	MCS0 RU52	MCS0 RU52	11.5	0.2	11.7	24.0	12.4	11
	40			11.7	0.2	11.9	24.0	12.1	
	48			11.6	0.2	11.8	24.0	12.2	
	36	MCS0 RU106	MCS0 RU106	11.6	0.2	11.8	24.0	12.2	11
	40			11.7	0.2	11.9	24.0	12.1	
	48			11.6	0.2	11.8	24.0	12.2	
40	38	802.11ax	MCS0 RU26	10.6	0.2	10.8	24.0	13.2	11
	46			10.9	0.2	11.1	24.0	12.9	
	38	MCS0 RU52	MCS0 RU52	11.6	0.2	11.8	24.0	12.2	11
	46			11.8	0.2	12.0	24.0	12.0	
	38	MCS0 RU106	MCS0 RU106	11.5	0.2	11.7	24.0	12.3	11
	46			11.7	0.2	11.9	24.0	12.2	
	38	MCS0 RU242	MCS0 RU242	11.7	0.2	11.9	24.0	12.1	11
	46			11.9	0.2	12.1	24.0	11.9	
80	42	802.11ax	MCS0 RU26	10.3	0.2	10.5	24.0	13.5	9
	42		MCS0 RU52	10.1	0.2	10.3	24.0	13.7	9
	42		MCS0 RU106	10.0	0.2	10.2	24.0	13.8	9
	42		MCS0 RU242	10.2	0.2	10.4	24.0	13.6	9
	42		MCS0 RU484	9.9	0.2	10.1	24.0	13.9	9

Company: Ezurio	Page 44 of 73	Name: Module, SONA NX 611 SIP, 1 RF Trace Pin / 2 RF Trace Pin
Report: TR 3768 156 155 RFX		Model: SONA NX611S
Job: C-3768		Serial: 00033 00027, 00020 00016

UNII 2A									
Nominal BW	Channel	Mode	MCS	Avg Output Power (dBm)	Duty Cycle Correction (dB)	Corrected Output Value (dBm)	Limit (dBm)	Margin (dB)	Power Setting
20	52	802.11ax	MCS0 RU26	10.8	0.2	11.0	24.0	13.0	11
	56			10.7	0.2	10.9	24.0	13.1	
	64			10.5	0.2	10.7	24.0	13.3	
	52	802.11ax	MCS0 RU52	10.8	0.2	11.0	24.0	13.0	11
	56			10.7	0.2	10.9	24.0	13.1	
	64			10.7	0.2	10.9	24.0	13.1	
	52	802.11ax	MCS0 RU106	11.0	0.2	11.2	24.0	12.9	11
	56			10.8	0.2	11.0	24.0	13.0	
	64			10.8	0.2	11.0	24.0	13.0	
40	54	802.11ax	MCS0 RU26	10.3	0.2	10.5	24.0	13.5	11
	62			9.9	0.2	10.1	24.0	13.9	
	54	802.11ax	MCS0 RU52	11.0	0.2	11.2	24.0	12.8	11
	62			10.8	0.2	11.0	24.0	13.0	
	54	802.11ax	MCS0 RU106	10.9	0.2	11.1	24.0	12.9	11
	62			10.8	0.2	11.0	24.0	13.1	
	54	802.11ax	MCS0 RU242	11.0	0.2	11.2	24.0	12.8	11
	62			10.9	0.2	11.1	24.0	12.9	
80	58	802.11ax	MCS0 RU26	9.7	0.2	9.9	24.0	14.1	9
	58		MCS0 RU52	9.4	0.2	9.6	24.0	14.4	9
	58		MCS0 RU106	9.5	0.2	9.7	24.0	14.3	9
	58		MCS0 RU242	9.2	0.2	9.4	24.0	14.6	9
	58		MCS0 RU484	9.4	0.2	9.6	24.0	14.4	9

Company: Ezurio	Page 45 of 73	Name: Module, SONA NX 611 SIP, 1 RF Trace Pin / 2 RF Trace Pin
Report: TR 3768 156 155 RFX		Model: SONA NX611S
Job: C-3768		Serial: 00033 00027, 00020 00016

UNII 2C									
Nominal BW	Channel	Mode	MCS	Avg Output Power (dBm)	Duty Cycle Correction (dB)	Corrected Output Value (dBm)	Limit (dBm)	Margin (dB)	Power Setting
20	100	802.11ax	MCS0 RU26	11.6	0.2	11.8	23.9	12.1	11
	120			12.0	0.2	12.2	23.9	11.7	
	144			11.7	0.2	11.9	23.9	12.0	
	100		MCS0 RU52	11.8	0.2	12.0	23.9	12.0	11
	120			12.2	0.2	12.4	23.9	11.5	
	144			11.7	0.2	11.9	23.9	12.0	
	100		MCS0 RU106	11.9	0.2	12.1	24.0	11.9	11
	120			12.3	0.2	12.5	24.0	11.5	
	144			11.9	0.2	12.1	24.0	11.9	
40	102	802.11ax	MCS0 RU26	11.2	0.2	11.4	23.9	12.5	11
	118			11.8	0.2	12.0	23.9	11.9	
	142			12.2	0.2	12.4	23.9	11.5	
	102		MCS0 RU52	11.9	0.2	12.1	23.9	11.8	11
	118			12.7	0.2	12.9	23.9	11.0	
	142			12.9	0.2	13.1	23.9	10.8	
	102		MCS0 RU106	12.0	0.2	12.2	24.0	11.8	11
	118			12.5	0.2	12.7	24.0	11.3	
	142			12.8	0.2	13.0	24.0	11.0	
	102		MCS0 RU242	12.1	0.2	12.3	24.0	11.7	11
	118			12.7	0.2	12.9	24.0	11.2	
	142			12.8	0.2	13.0	24.0	11.0	
80	106	802.11ax	MCS0 RU26	10.4	0.2	10.6	23.9	13.3	9
	122			11.2	0.2	11.4	23.9	12.5	
	138			11.7	0.2	11.9	23.9	12.0	
	106		MCS0 RU52	10.1	0.2	10.3	23.9	13.6	9
	122			11.4	0.2	11.6	23.9	12.3	
	138			11.8	0.2	12.0	23.9	11.9	
	106		MCS0 RU106	9.9	0.2	10.1	24.0	13.9	9
	122			11.2	0.2	11.4	24.0	12.6	
	138			11.5	0.2	11.7	24.0	12.3	
	106		MCS0 RU242	9.9	0.2	10.1	24.0	13.9	9
	122			11.2	0.2	11.4	24.0	12.6	
	138			11.5	0.2	11.7	24.0	12.3	
	106		MCS0 RU484	10.2	0.2	10.4	24.0	13.6	9
	122			10.9	0.2	11.1	24.0	12.9	
	138			11.5	0.2	11.7	24.0	12.3	

Company: Ezurio	Page 46 of 73	Name: Module, SONA NX 611 SIP, 1 RF Trace Pin / 2 RF Trace Pin
Report: TR 3768 156 155 RFX		Model: SONA NX611S
Job: C-3768		Serial: 00033 00027, 00020 00016

UNII 2C (ISED)									
Nominal BW	Channel	Mode	MCS0	Avg Output Power (dBm)	Duty Cycle Correction (dB)	Corrected Output Value (dBm)	Limit (dBm)	Margin (dB)	Power Setting
20	116	802.11ax	RU26	13	0.2	13.2	24	10.8	11
		802.11ax	RU52	13	0.2	13.2	24	10.8	11
		802.11ax	RU106	13.1	0.2	13.3	24	10.7	11
40	110	802.11ax	RU26	11.5	0.2	11.7	24	12.3	11
		802.11ax	RU52	12.3	0.2	12.5	24	11.5	11
		802.11ax	RU106	12.2	0.2	12.4	24	11.6	11
		802.11ax	RU242	12.5	0.2	12.7	24	11.3	11

Mid channels used for ISED Canada

Company: Ezurio	Page 47 of 73	Name: Module, SONA NX 611 SIP, 1 RF Trace Pin / 2 RF Trace Pin
Report: TR 3768 156 155 RFX		Model: SONA NX611S
Job: C-3768		Serial: 00033 00027, 00020 00016

UNII 3									
Nominal BW	Channel	Mode	MCS	Avg Output Power (dBm)	Duty Cycle Correction (dB)	Corrected Output Value (dBm)	Limit (dBm)	Margin (dB)	Power Setting
20	149	802.11ax	MCS0 RU26	11.2	0.2	11.4	30.0	18.6	11
	157			11.2	0.2	11.4	30.0	18.6	
	165			10.7	0.2	10.9	30.0	19.1	
	149	802.11ax	MCS0 RU52	11.2	0.2	11.4	30.0	18.6	11
	157			11.2	0.2	11.4	30.0	18.6	
	165			10.5	0.2	10.7	30.0	19.3	
	149	802.11ax	MCS0 RU106	11.3	0.2	11.5	30.0	18.5	11
	157			11.4	0.2	11.6	30.0	18.4	
	165			10.7	0.2	10.9	30.0	19.1	
40	151	802.11ax	MCS0 RU26	10.7	0.2	10.9	30.0	19.1	11
	159			10.6	0.2	10.8	30.0	19.2	
	151	802.11ax	MCS0 RU52	11.5	0.2	11.7	30.0	18.3	11
	159			11.6	0.2	11.8	30.0	18.2	
	151	802.11ax	MCS0 RU106	11.3	0.2	11.5	30.0	18.5	11
	159			11.4	0.2	11.6	30.0	18.4	
	151	802.11ax	MCS0 RU242	11.4	0.2	11.6	30.0	18.4	11
	159			11.5	0.2	11.7	30.0	18.3	
80	155	802.11ax	MCS0 RU26	10.3	0.2	10.5	30.0	19.5	9
	155		MCS0 RU52	10.0	0.2	10.2	30.0	19.8	9
	155		MCS0 RU106	10.2	0.2	10.4	30.0	19.6	9
	155		MCS0 RU242	10.1	0.2	10.3	30.0	19.7	9
	155		MCS0 RU484	10.3	0.2	10.5	30.0	19.5	9

Company: Ezurio	Page 48 of 73	Name: Module, SONA NX 611 SIP, 1 RF Trace Pin / 2 RF Trace Pin
Report: TR 3768 156 155 RFX		Model: SONA NX611S
Job: C-3768		Serial: 00033 00027, 00020 00016

5.1.5 Antenna Port Conducted Emissions – RF Output Power BLE (453-0156)

Channel	Mode	Peak Output Power (dBm)	Limit (dBm)	Margin (dB)
0	1M	7.5	30	22.5
19	1M	7.8	30	22.2
39	1M	7.7	30	22.3
0	2M	7.6	30	22.4
19	2M	7.8	30	22.2
39	2M	7.8	30	22.2
0	500k	7.5	30	22.5
19	500k	7.8	30	22.2
39	500k	7.7	30	22.3
0	125k	7.5	30	22.5
19	125k	7.8	30	22.2
39	125k	7.7	30	22.3

5.1.6 Antenna Port Conducted Emissions – RF Output Power BLE (453-0155)

Channel	Mode	Peak Output Power (dBm)	Limit (dBm)	Margin (dB)
0	1M	5.9	30	24.1
19	1M	5.9	30	24.1
39	1M	5.7	30	24.3
0	2M	5.9	30	24.1
19	2M	5.9	30	24.1
39	2M	5.7	30	24.3
0	500k	5.9	30	24.1
19	500k	5.9	30	24.1
39	500k	5.7	30	24.3
0	125k	5.9	30	24.1
19	125k	5.9	30	24.1
39	125k	5.7	30	24.3

Company: Ezurio	Page 49 of 73	Name: Module, SONA NX 611 SIP, 1 RF Trace Pin / 2 RF Trace Pin
Report: TR 3768 156 155 RFX		Model: SONA NX611S
Job: C-3768		Serial: 00033 00027, 00020 00016

5.1.7 Antenna Port Conducted Emissions – RF Output Power BT Classic (453-0156)

Channel	Mode	Peak Output Power (dBm)	Limit (dBm)	Margin (dB)
0	DH5	7.3	30	22.7
39	DH5	7.7	30	22.3
78	DH5	7.6	30	22.4
0	2DH5	5.8	30	24.2
39	2DH5	5.8	30	24.2
78	2DH5	5.6	30	24.4
0	3DH5	6.1	30	23.9
39	3DH5	6.1	30	23.9
78	3DH5	5.9	30	24.1

5.1.8 Antenna Port Conducted Emissions – RF Output Power BT Classic (453-0155)

Channel	Mode	Peak Output Power (dBm)	Limit (dBm)	Margin (dB)
0	DH5	7.0	30	23.0
39	DH5	7.0	30	23.0
78	DH5	6.9	30	23.1
0	2DH5	7.7	30	22.3
39	2DH5	7.8	30	22.2
78	2DH5	7.8	30	22.2
0	3DH5	7.9	30	22.1
39	3DH5	8.0	30	22.0
78	3DH5	8.1	30	21.9

6 FCC SAR EXCLUSION – 2.4GHz WLAN

6.1 SAR Exclusion Limit

For separation distance of 50mm or less

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for 1-g SAR}$$

- $F(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison
- The value 3.0 is referred to as numeric thresholds

For separation distance of greater than 50 mm

$$\{[\text{Power allowed at numeric threshold for 50 mm}] + [(\text{test separation distance} - 50 \text{ mm}) \cdot 10]\} \text{ mW, for } > 1500 \text{ MHz and } \leq 6 \text{ GHz}$$

KDB 447498 D01

6.2 Distance

$\geq 65 \text{ mm}$

6.3 Power Calculation

Max Power of Channel = 19.6 dBm (802.11b, cck-11, channel 11)

Tune-up Tolerance = 1.00 dB

Antenna Gain = 2.5 dBi

Total Power = 19.6 dBm + Tune-up Tolerance + Gain = 23.1 dBm = 204.2 mW

6.4 SAR Test Exclusion Calculation

$$\left[\frac{(X \text{ mW})}{(50 \text{ mm})} \right] \times \sqrt{2.462} = 3.0$$

$X = 95.6 \text{ mW}$

$$\{[95.6 \text{ mW} + [(65 \text{ mm} - 50 \text{ mm}) \times 10]\} = 245.6 \text{ mW}$$

6.5 Result

The EUT is excluded from SAR testing for WLAN in the 2.4GHz band at $\geq 65 \text{ mm}$ as 204.2 mW is less than the limit of 245.6 mW.

Company: Ezurio	Page 51 of 73	Name: Module, SONA NX 611 SIP, 1 RF Trace Pin / 2 RF Trace Pin
Report: TR 3768 156 155 RFX		Model: SONA NX611S
Job: C-3768		Serial: 00033 00027, 00020 00016

7 FCC SAR EXCLUSION – BLE

7.1 SAR Exclusion Limit

For separation distance of 50mm or less

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for 1-g SAR}$$

- $F(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison
- The value 3.0 is referred to as numeric thresholds

For separation distance of greater than 50 mm

$$\{[\text{Power allowed at numeric threshold for 50 mm}] + [(\text{test separation distance} - 50 \text{ mm}) \cdot 10]\} \text{ mW, for } > 1500 \text{ MHz and } \leq 6 \text{ GHz}$$

KDB 447498 D01

7.2 Distance

$\geq 8 \text{ mm}$

7.3 Power Calculation

Max Power of Channel = 7.8 dBm (125k, channel 19)

Tune-up Tolerance = 1.00 dB

Antenna Gain = 2.5 dBi

Total Power = 7.8 dBm + Tune-up Tolerance + Gain = 11.3 dBm = 13.5 mW

7.4 SAR Test Exclusion Calculation

$$\left[\frac{(13.5 \text{ mW})}{(8 \text{ mm})} \right] \times \sqrt{2.440} = 2.6$$

$2.9 \leq 3.0$

7.5 Result

The EUT is excluded from SAR testing at $\geq 8 \text{ mm}$ for BLE in the 2.4GHz band as 2.6 is less than 3.0.

Company: Ezurio	Page 52 of 73	Name: Module, SONA NX 611 SIP, 1 RF Trace Pin / 2 RF Trace Pin
Report: TR 3768 156 155 RFX		Model: SONA NX611S
Job: C-3768		Serial: 00033 00027, 00020 00016

8 FCC SAR EXCLUSION – BLUETOOTH CLASSIC

8.1 SAR Exclusion Limit

For separation distance of 50mm or less

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for 1-g SAR}$$

- $F(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison
- The value 3.0 is referred to as numeric thresholds

For separation distance of greater than 50 mm

$$\{[\text{Power allowed at numeric threshold for 50 mm}] + [(\text{test separation distance} - 50 \text{ mm}) \cdot 10]\} \text{ mW, for } > 1500 \text{ MHz and } \leq 6 \text{ GHz}$$

KDB 447498 D01

8.2 Distance

$\geq 8 \text{ mm}$

8.3 Power Calculation

Max Power of Channel = 8.1 dBm (3DH5, channel 78)

Tune-up Tolerance = 1.00 dB

Antenna Gain = 2.5 dBi

Total Power = 8.1 dBm + Tune-up Tolerance + Gain = 11.6 dBm = 14.5 mW

8.4 SAR Test Exclusion Calculation

$$\left[\frac{(14.5 \text{ mW})}{(8 \text{ mm})} \right] \times \sqrt{2.480} = 2.9$$

$2.9 \leq 3.0$

8.5 Result

The EUT is excluded from SAR testing at $\geq 8 \text{ mm}$ for Bluetooth classic in the 2.4GHz band as 2.9 is less than 3.0.

Company: Ezurio	Page 53 of 73	Name: Module, SONA NX 611 SIP, 1 RF Trace Pin / 2 RF Trace Pin
Report: TR 3768 156 155 RFX		Model: SONA NX611S
Job: C-3768		Serial: 00033 00027, 00020 00016

9 FCC SAR EXCLUSION – 5GHz WLAN

9.1 SAR Exclusion Limit

For separation distance of 50mm or less

$\left[\frac{(\text{max. power of channel, including tune-up tolerance, mW})}{(\text{min. test separation distance, mm})} \right] \cdot \sqrt{f(\text{GHz})} \leq 3.0$ for 1-g SAR

- $F(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison
- The value 3.0 is referred to as numeric thresholds

For separation distance of greater than 50 mm

$\{[\text{Power allowed at numeric threshold for 50 mm}] + [(\text{test separation distance} - 50 \text{ mm}) \cdot 10]\}$ mW, for > 1500 MHz and ≤ 6 GHz

KDB 447498 D01

9.2 Distance

≥ 66 mm

9.3 Power Calculation

Max Power of Channel = 18.0 dBm (802.11a, OFDM-54, channel 116)

Tune-up Tolerance = 1.00 dB

Antenna Gain = 4.4 dBi

Total Power = 18.0 dBm + Tune-up Tolerance + Gain = 23.4 dBm = 218.8 mW

9.4 SAR Test Exclusion Calculation

$$\left[\frac{(X \text{ mW})}{(50 \text{ mm})} \right] \times \sqrt{5.580} = 3.0$$

X = 63.5 mW

$$\{[63.5 \text{ mW} + [(66 \text{ mm} - 50 \text{ mm}) \times 10]\} = 223.5 \text{ mW}$$

9.5 Result

The EUT is excluded from SAR testing for WLAN in the 5GHz band at ≥ 66 mm as 218.8 mW is less than the limit of 223.5 mW.

Company: Ezurio	Page 54 of 73	Name: Module, SONA NX 611 SIP, 1 RF Trace Pin / 2 RF Trace Pin
Report: TR 3768 156 155 RFX		Model: SONA NX611S
Job: C-3768		Serial: 00033 00027, 00020 00016

10 ISED SAR EXEMPTION – 2.4GHz WLAN

10.1 SAR Exemption Limit

Frequency (MHz)	≤ 5 mm (mW)	10 mm (mW)	15 mm (mW)	20 mm (mW)	25 mm (mW)	30 mm (mW)	35 mm (mW)	40 mm (mW)	45 mm (mW)	> 50 mm (mW)
≤ 300	45	116	139	163	189	216	246	280	319	362
450	32	71	87	104	124	147	175	208	248	296
835	21	32	41	54	72	96	129	172	228	298
1900	6	10	18	33	57	92	138	194	257	323
2450	3	7	16	32	56	89	128	170	209	245
3500	2	6	15	29	50	72	94	114	134	158
5800	1	5	13	23	32	41	54	74	102	128

Power Limits for exemption from SAR evaluation RSS-102

10.2 Distance

45 mm

10.3 Power Calculation

Max Power of Channel = 19.6 dBm (802.11b, cck-11, channel 11)

Tune-up Tolerance = 1.00 dB

Antenna Gain = 2.5 dBi

Total Power = 19.6 dBm + Tune-up Tolerance + Gain = 23.1 dBm = 204.2 mW

10.4 SAR Test Exclusion Calculation

The exemption limit at 45 mm is 209 mW. The total power of the EUT is 204.2 mW.

$204.2 \text{ mW} \leq 209 \text{ mW}$.

10.5 Result

The EUT is exempt from routine SAR testing at ≥45 mm as 204.2 mW is less than 209 mW.

Company: Ezurio	Page 55 of 73	Name: Module, SONA NX 611 SIP, 1 RF Trace Pin / 2 RF Trace Pin
Report: TR 3768 156 155 RFX		Model: SONA NX611S
Job: C-3768		Serial: 00033 00027, 00020 00016

11 ISED SAR EXEMPTION – BLE

11.1 SAR Exemption Limit

Frequency (MHz)	≤ 5 mm (mW)	10 mm (mW)	15 mm (mW)	20 mm (mW)	25 mm (mW)	30 mm (mW)	35 mm (mW)	40 mm (mW)	45 mm (mW)	> 50 mm (mW)
≤ 300	45	116	139	163	189	216	246	280	319	362
450	32	71	87	104	124	147	175	208	248	296
835	21	32	41	54	72	96	129	172	228	298
1900	6	10	18	33	57	92	138	194	257	323
2450	3	7	16	32	56	89	128	170	209	245
3500	2	6	15	29	50	72	94	114	134	158
5800	1	5	13	23	32	41	54	74	102	128

Power Limits for exemption from SAR evaluation RSS-102

11.2 Distance

15 mm

11.3 Power Calculation

Max Power of Channel = 7.0 dBm (125k, channel 19)

Tune-up Tolerance = 1.00 dB

Antenna Gain = 2.5 dBi

Total Power = 7.0 dBm + Tune-up Tolerance + Gain = 10.5 dBm = 11.2 mW

11.4 SAR Test Exclusion Calculation

The exemption limit at 15 mm is 16 mW. The total power of the EUT is 11.2 mW.

11.2 mW ≤ 16 mW.

11.5 Result

The EUT is exempt from routine SAR testing at ≥15 mm as 11.2 mW is less than 16 mW.

Company: Ezurio	Page 56 of 73	Name: Module, SONA NX 611 SIP, 1 RF Trace Pin / 2 RF Trace Pin
Report: TR 3768 156 155 RFX		Model: SONA NX611S
Job: C-3768		Serial: 00033 00027, 00020 00016

12 ISED SAR EXEMPTION – BLUETOOTH CLASSIC

12.1 SAR Exemption Limit

Frequency (MHz)	≤ 5 mm (mW)	10 mm (mW)	15 mm (mW)	20 mm (mW)	25 mm (mW)	30 mm (mW)	35 mm (mW)	40 mm (mW)	45 mm (mW)	> 50 mm (mW)
≤ 300	45	116	139	163	189	216	246	280	319	362
450	32	71	87	104	124	147	175	208	248	296
835	21	32	41	54	72	96	129	172	228	298
1900	6	10	18	33	57	92	138	194	257	323
2450	3	7	16	32	56	89	128	170	209	245
3500	2	6	15	29	50	72	94	114	134	158
5800	1	5	13	23	32	41	54	74	102	128

Power Limits for exemption from SAR evaluation RSS-102

12.2 Distance

15 mm

12.3 Power Calculation

Max Power of Channel = 7.0 dBm (3DH5, channel 39)

Tune-up Tolerance = 1.00 dB

Antenna Gain = 2.5 dBi

Total Power = 7.0 dBm + Tune-up Tolerance + Gain = 10.5 dBm = 11.2 mW

12.4 SAR Test Exclusion Calculation

The exemption limit at 15 mm is 16 mW. The total power of the EUT is 11.2 mW.

11.2 mW ≤ 16 mW.

12.5 Result

The EUT is exempt from routine SAR testing at ≥15 mm as 11.2 mW is less than 16 mW.

Company: Ezurio	Page 57 of 73	Name: Module, SONA NX 611 SIP, 1 RF Trace Pin / 2 RF Trace Pin
Report: TR 3768 156 155 RFX		Model: SONA NX611S
Job: C-3768		Serial: 00033 00027, 00020 00016

13 ISED RF EXPOSURE CALCULATION – 5GHz WLAN

13.1 RF field strength and power density limits for devices used by the general public

Frequency range (MHz)	Electric field (V _{RMS} /m)	Magnetic field (A _{RMS} /m)	Power density (W/m ²)	Reference period (minutes)
10-20	27.46	0.0728	2	6
20-48	58.07 / $f^{0.25}$	0.1540 / $f^{0.25}$	8.944 / $f^{0.5}$	6
48-300	22.06	0.05852	1.291	6
300-6000	3.142 $f^{0.3417}$	0.008335 $f^{0.3417}$	0.02619 $f^{0.6834}$	6
6000-15000	61.4	0.163	10	6
15000-150000	61.4	0.163	10	616000/ $f^{1.2}$
150000-300000	0.158 $f^{0.5}$	$4.21 \times 10^{-4} f^{0.5}$	$6.67 \times 10^{-5} f$	616000/ $f^{1.2}$

Note: f is frequency in MHz.

13.2 Determining power density for antenna (simple far-field model)

$$S_{FF} = \frac{G_i(\theta, \phi) P_{in}}{4\pi d^2}$$

IEEE Std C95.3-2021

where

S_{FF} is the far-field power density (W/m²)

$G_i(\theta, \phi)$ is the far-field antenna gain in direction (θ, ϕ) spherical coordinates (power ratio with respect to isotropic).

P_{in} is the power into the antenna (W)

d is the distance to the antenna (m)

Company: Ezurio	Page 58 of 73	Name: Module, SONA NX 611 SIP, 1 RF Trace Pin / 2 RF Trace Pin
Report: TR 3768 156 155 RFX		Model: SONA NX611S
Job: C-3768		Serial: 00033 00027, 00020 00016

13.3 Distance

≥60 mm

13.4 Power Density Limit

The power density limit at 5580 MHz is 9.52 W/m².

13.5 Power Density Calculation

Max Power of Channel = 18.0 dBm (802.11a, OFDM-54, channel 116)

Tune-up Tolerance = 1.00 dB

Antenna Gain = 4.4 dBi

Total Power = 18.0 dBm + Tune-up Tolerance + Gain = 23.4 dBm = 218.8 mW

$$S = \frac{0.2188W}{4\pi(0.060)^2}$$

$$S = 4.84 \text{ W/m}^2$$

13.6 Result

The power density limit is 9.52 W/m², and the calculated power density at 60mm is 4.12 W/m².

The EUT meet the Power Density Requirement for devices used by the general public at a separation distance of 60 mm.

Company: Ezurio	Page 59 of 73	Name: Module, SONA NX 611 SIP, 1 RF Trace Pin / 2 RF Trace Pin
Report: TR 3768 156 155 RFX		Model: SONA NX611S
Job: C-3768		Serial: 00033 00027, 00020 00016

14 FCC MPE CALCULATION – SIMULTANEOUS TX (453-0156)

14.1 Information

The 1 RF Trace Pin model of the SONA NX 611 SIP is capable of transmitting Bluetooth Classic and Bluetooth Low Energy Simultaneously with 5GHz WLAN.

14.2 MPE Limit

(ii) LIMITS FOR GENERAL POPULATION/UNCONTROLLED EXPOSURE				
0.3-1.34	614	1.63	*(100)	<30
1.34-30	824/f	2.19/f	*(180/f ²)	<30
30-300	27.5	0.073	0.2	<30
300-1,500			f/1500	<30
1,500-100,000			1.0	<30

*f = frequency in MHz. * = Plane-wave equivalent power density.*

eCFR 1.1310

14.3 Determining power density for antenna (simple far-field model)

$$S_{FF} = \frac{G_i(\theta, \phi) P_{in}}{4\pi d^2}$$

IEEE Std C95.3-2021

where

S_{FF} is the far-field power density (W/m^2)

$G_i(\theta, \phi)$ is the far-field antenna gain in direction (θ, ϕ) spherical coordinates (power ratio with respect to isotropic).

P_{in} is the power into the antenna (W)

d is the distance to the antenna (m)

Company: Ezurio	Page 60 of 73	Name: Module, SONA NX 611 SIP, 1 RF Trace Pin / 2 RF Trace Pin
Report: TR 3768 156 155 RFX		Model: SONA NX611S
Job: C-3768		Serial: 00033 00027, 00020 00016

14.4 Distance

$\geq 60 \text{ mm}$

14.5 Power Density Limit

The power density limit from 1,500 – 100,000 MHz is 1 mW/cm^2 .

14.6 Power Density Calculation 5GHz WLAN

Max Power of Channel = 17.7 dBm (802.11a, OFDM-54, channel 120)

Tune-up Tolerance = 1.00 dB

Antenna Gain = 4.4 dBi

Total Power = 17.7 dBm + Tune-up Tolerance + Gain = 23.1 dBm = 204.2 mW

$$S = \frac{0.2042W}{4\pi(0.060)^2}$$

$$S = 4.51 \text{ W/m}^2 = 0.45 \text{ mW/cm}^2$$

14.7 Power Density Calculation BLE

Max Power of Channel = 7.8 dBm (125k, channel 19)

Tune-up Tolerance = 1.00 dB

Antenna Gain = 2.5 dBi

Total Power = 7.8 dBm + Tune-up Tolerance + Gain = 11.3 dBm = 13.5 mW

$$S = \frac{0.0135W}{4\pi(0.060)^2}$$

$$S = 0.30 \text{ W/m}^2 = 0.03 \text{ mW/cm}^2$$

Company: Ezurio	Page 61 of 73	Name: Module, SONA NX 611 SIP, 1 RF Trace Pin / 2 RF Trace Pin
Report: TR 3768 156 155 RFX		Model: SONA NX611S
Job: C-3768		Serial: 00033 00027, 00020 00016

14.8 Power Density Calculation Bluetooth Classic

Max Power of Channel = 7.7 dBm (1DH5, channel 39)

Tune-up Tolerance = 1.00 dB

Antenna Gain = 2.5 dBi

Total Power = 7.7 dBm + Tune-up Tolerance + Gain = 11.2 dBm = 13.2 mW

$$S = \frac{0.0132W}{4\pi(0.060)^2}$$

$$S = 0.29 \text{ W/m}^2 = 0.03 \text{ mW/cm}^2$$

14.9 MPE Ratio

MPE ratio = (calculated power density) / (power density limit)

5GHz WLAN = 0.45

BLE = 0.03

BT Classic = 0.03

The sum of the power density ratios must be less than 1 to be exempt from SAR testing.

5GHz WLAN + BLE = 0.48

5GHz WLAN + BT Classic = 0.48

14.10 Result

The EUT is exempt from routine SAR testing at ≥ 60 mm as the MPE ratio is ≤ 1.0

Company: Ezurio	Page 62 of 73	Name: Module, SONA NX 611 SIP, 1 RF Trace Pin / 2 RF Trace Pin
Report: TR 3768 156 155 RFX		Model: SONA NX611S
Job: C-3768		Serial: 00033 00027, 00020 00016

15 FCC MPE CALCULATION – SIMULTANEOUS TX (453-0155)

15.1 Information

The 2 RF Trace Pin model of the SONA NX 611 SIP is capable of transmitting Bluetooth Classic, Bluetooth Low Energy, or 2.4GHz WLAN Simultaneously with 5GHz WLAN.

15.2 MPE Limit

(ii) LIMITS FOR GENERAL POPULATION/UNCONTROLLED EXPOSURE				
0.3-1.34	614	1.63	*(100)	<30
1.34-30	824/f	2.19/f	*(180/f ²)	<30
30-300	27.5	0.073	0.2	<30
300-1,500			f/1500	<30
1,500-100,000			1.0	<30

*f = frequency in MHz. * = Plane-wave equivalent power density.*

eCFR 1.1310

15.3 Determining power density for antenna (simple far-field model)

$$S_{FF} = \frac{G_i(\theta, \phi) P_{in}}{4\pi d^2}$$

IEEE Std C95.3-2021

where

S_{FF} is the far-field power density (W/m^2)

$G_i(\theta, \phi)$ is the far-field antenna gain in direction (θ, ϕ) spherical coordinates (power ratio with respect to isotropic).

P_{in} is the power into the antenna (W)

d is the distance to the antenna (m)

Company: Ezurio	Page 63 of 73	Name: Module, SONA NX 611 SIP, 1 RF Trace Pin / 2 RF Trace Pin
Report: TR 3768 156 155 RFX		Model: SONA NX611S
Job: C-3768		Serial: 00033 00027, 00020 00016

15.4 Distance

$\geq 60 \text{ mm}$

15.5 Power Density Limit

The power density limit from 1,500 – 100,000 MHz is 1 mW/cm^2 .

15.6 Power Density Calculation 5GHz WLAN

Max Power of Channel = 18.0 dBm (802.11a, OFDM-54, channel 116)

Tune-up Tolerance = 1.00 dB

Antenna Gain = 4.4 dBi

Total Power = 18.0 dBm + Tune-up Tolerance + Gain = 23.4 dBm = 218.8 mW

$$S = \frac{0.2188W}{4\pi(0.060)^2}$$

$$S = 4.84 \text{ W/m}^2 = 0.48 \text{ mW/cm}^2$$

15.7 Power Density Calculation 2.4GHz WLAN

Max Power of Channel = 18.0 dBm (802.11b, CCK-1, channel 6)

Tune-up Tolerance = 1.00 dB

Antenna Gain = 4.4 dBi

Total Power = 18.0 dBm + Tune-up Tolerance + Gain = 23.4 dBm = 218.8 mW

$$S = \frac{0.2188W}{4\pi(0.060)^2}$$

$$S = 4.84 \text{ W/m}^2 = 0.48 \text{ mW/cm}^2$$

Company: Ezurio	Page 64 of 73	Name: Module, SONA NX 611 SIP, 1 RF Trace Pin / 2 RF Trace Pin
Report: TR 3768 156 155 RFX		Model: SONA NX611S
Job: C-3768		Serial: 00033 00027, 00020 00016

15.8 Power Density Calculation BLE

Max Power of Channel = 5.9 dBm (125k, channel 19)

Tune-up Tolerance = 1.00 dB

Antenna Gain = 2.5 dBi

Total Power = 5.9 dBm + Tune-up Tolerance + Gain = 9.4 dBm = 8.7 mW

$$S = \frac{0.0087W}{4\pi(0.060)^2}$$

$$S = 0.19 W/m^2 = 0.02 mW/cm^2$$

15.9 Power Density Calculation Bluetooth Classic

Max Power of Channel = 8.1 dBm (3DH5, channel 78)

Tune-up Tolerance = 1.00 dB

Antenna Gain = 2.5 dBi

Total Power = 8.1 dBm + Tune-up Tolerance + Gain = 11.6 dBm = 14.5 mW

$$S = \frac{0.0145W}{4\pi(0.060)^2}$$

$$S = 0.32 W/m^2 = 0.03 mW/cm^2$$

15.10 MPE Ratio

MPE ratio = (calculated power density) / (power density limit)

5GHz WLAN = 0.48

2GHz WLAN = 0.48

BLE = 0.03

BT Classic = 0.03

The sum of the power density ratios must be less than 1 to be exempt from SAR testing.

5GHz WLAN + 2.4GHz WLAN = 0.96

5GHz WLAN + BLE = 0.48

5GHz WLAN + BT Classic = 0.48

15.11 Result

The EUT is exempt from routine SAR testing at ≥ 60 mm as the MPE ratio is ≤ 1.0

Company: Ezurio	Page 65 of 73	Name: Module, SONA NX 611 SIP, 1 RF Trace Pin / 2 RF Trace Pin
Report: TR 3768 156 155 RFX		Model: SONA NX611S
Job: C-3768		Serial: 00033 00027, 00020 00016

16 ISED MPE CALCULATION – SIMULTANEOUS TX (453-0156)

16.1 Information

The 1 RF Trace Pin model of the SONA NX 611 SIP is capable of transmitting Bluetooth Classic and Bluetooth Low Energy Simultaneously with 5GHz WLAN.

16.2 RF field strength and power density limits for devices used by the general public

Frequency range (MHz)	Electric field (V _{RMS} /m)	Magnetic field (A _{RMS} /m)	Power density (W/m ²)	Reference period (minutes)
10-20	27.46	0.0728	2	6
20-48	58.07 / $f^{0.25}$	0.1540 / $f^{0.25}$	8.944 / $f^{0.5}$	6
48-300	22.06	0.05852	1.291	6
300-6000	3.142 $f^{0.3417}$	0.008335 $f^{0.3417}$	0.02619 $f^{0.6834}$	6
6000-15000	61.4	0.163	10	6
15000-150000	61.4	0.163	10	616000/ $f^{1.2}$
150000-300000	0.158 $f^{0.5}$	$4.21 \times 10^{-4} f^{0.5}$	$6.67 \times 10^{-5} f$	616000/ $f^{1.2}$

Note: f is frequency in MHz.

16.3 Determining power density for antenna (simple far-field model)

$$S_{FF} = \frac{G_i(\theta, \phi) P_{in}}{4\pi d^2}$$

IEEE Std C95.3-2021

where

S_{FF} is the far-field power density (W/m²)

$G_i(\theta, \phi)$ is the far-field antenna gain in direction (θ, ϕ) spherical coordinates (power ratio with respect to isotropic).

P_{in} is the power into the antenna (W)

d is the distance to the antenna (m)

Company: Ezurio	Page 66 of 73	Name: Module, SONA NX 611 SIP, 1 RF Trace Pin / 2 RF Trace Pin
Report: TR 3768 156 155 RFX		Model: SONA NX611S
Job: C-3768		Serial: 00033 00027, 00020 00016

16.4 Distance

≥ 60 mm

16.5 Power Density Limit

The power density limit from 300 – 6000 MHz is $0.02619 * f^{0.6834}$ where f is the frequency in MHz.

16.6 Power Density Calculation 5GHz WLAN

Max Power of Channel = 17.7 dBm (802.11a, OFDM-54, channel 120)

Tune-up Tolerance = 1.00 dB

Antenna Gain = 4.4 dBi

Total Power = 17.7 dBm + Tune-up Tolerance + Gain = 23.1 dBm = 204.2 mW

$$S = \frac{0.2042W}{4\pi(0.060)^2}$$

$$S = 4.51 \text{ W/m}^2$$

$$Limit = 9.54 \text{ W/m}^2$$

$$Ratio = \frac{4.51}{9.54} = 0.47$$

16.7 Power Density Calculation BLE

Max Power of Channel = 7.8 dBm (125k, channel 19)

Tune-up Tolerance = 1.00 dB

Antenna Gain = 2.5 dBi

Total Power = 7.8 dBm + Tune-up Tolerance + Gain = 11.3 dBm = 13.5 mW

$$S = \frac{0.0135W}{4\pi(0.060)^2}$$

$$S = 0.30 \text{ W/m}^2$$

$$Limit = 5.41 \text{ W/m}^2$$

$$Ratio = \frac{0.30}{5.41} = 0.06$$

Company: Ezurio	Page 67 of 73	Name: Module, SONA NX 611 SIP, 1 RF Trace Pin / 2 RF Trace Pin
Report: TR 3768 156 155 RFX		Model: SONA NX611S
Job: C-3768		Serial: 00033 00027, 00020 00016

16.8 Power Density Calculation Bluetooth Classic

Max Power of Channel = 7.7 dBm (1DH5, channel 39)

Tune-up Tolerance = 1.00 dB

Antenna Gain = 2.5 dBi

Total Power = 7.7 dBm + Tune-up Tolerance + Gain = 11.2 dBm = 13.2 mW

$$S = \frac{0.0132W}{4\pi(0.060)^2}$$

$$S = 0.29 \text{ W/m}^2$$

$$Limit = 5.41 \text{ W/m}^2$$

$$Ratio = \frac{0.29}{5.41} = 0.05$$

16.9 MPE Ratio

MPE ratio = (calculated power density) / (power density limit)

5GHz WLAN = 0.47

BLE = 0.06

BT Classic = 0.05

The sum of the power density ratios must be less than 1 to comply with Power Density Exposure Limits.

5GHz WLAN + BLE = 0.53

5GHz WLAN + BT Classic = 0.52

16.10 Result

The EUT complies with Power Density Exposure Limits at ≥ 60 mm as the MPE ratio is ≤ 1.0

Company: Ezurio	Page 68 of 73	Name: Module, SONA NX 611 SIP, 1 RF Trace Pin / 2 RF Trace Pin
Report: TR 3768 156 155 RFX		Model: SONA NX611S
Job: C-3768		Serial: 00033 00027, 00020 00016

17 ISED MPE CALCULATION – SIMULTANEOUS TX (453-0155)

17.1 Information

The 2 RF Trace Pin model of the SONA NX 611 SIP is capable of transmitting Bluetooth Classic, Bluetooth Low Energy, or 2.4GHz WLAN Simultaneously with 5GHz WLAN.

17.2 RF field strength and power density limits for devices used by the general public

Frequency range (MHz)	Electric field (V _{RMS} /m)	Magnetic field (A _{RMS} /m)	Power density (W/m ²)	Reference period (minutes)
10-20	27.46	0.0728	2	6
20-48	58.07 / $f^{0.25}$	0.1540 / $f^{0.25}$	8.944 / $f^{0.5}$	6
48-300	22.06	0.05852	1.291	6
300-6000	3.142 $f^{0.3417}$	0.008335 $f^{0.3417}$	0.02619 $f^{0.6834}$	6
6000-15000	61.4	0.163	10	6
15000-150000	61.4	0.163	10	616000/ $f^{1.2}$
150000-300000	0.158 $f^{0.5}$	$4.21 \times 10^{-4} f^{0.5}$	$6.67 \times 10^{-5} f$	616000/ $f^{1.2}$

Note: f is frequency in MHz.

17.3 Determining power density for antenna (simple far-field model)

$$S_{FF} = \frac{G_i(\theta, \phi) P_{in}}{4\pi d^2}$$

IEEE Std C95.3-2021

where

S_{FF} is the far-field power density (W/m²)

$G_i(\theta, \phi)$ is the far-field antenna gain in direction (θ, ϕ) spherical coordinates (power ratio with respect to isotropic).

P_{in} is the power into the antenna (W)

d is the distance to the antenna (m)

Company: Ezurio	Page 69 of 73	Name: Module, SONA NX 611 SIP, 1 RF Trace Pin / 2 RF Trace Pin
Report: TR 3768 156 155 RFX		Model: SONA NX611S
Job: C-3768		Serial: 00033 00027, 00020 00016

17.4 Distance

$\geq 75 \text{ mm}$

17.5 Power Density Limit

The power density limit from 300 – 6000 MHz is $0.02619 * f^{0.6834}$ where f is the frequency in MHz.

17.6 Power Density Calculation 5GHz WLAN

Max Power of Channel = 18.0 dBm (802.11a, OFDM-54, channel 116)

Tune-up Tolerance = 1.00 dB

Antenna Gain = 4.4 dBi

Total Power = 18.0 dBm + Tune-up Tolerance + Gain = 23.4 dBm = 218.8 mW

$$S = \frac{0.2188W}{4\pi(0.075)^2}$$

$$S = 3.10 \text{ W/m}^2$$

$$Limit = 9.52 \text{ W/m}^2$$

$$Ratio = \frac{3.10}{9.52} = 0.33$$

17.7 Power Density Calculation 2.4GHz WLAN

Max Power of Channel = 18.0 dBm (802.11b, CCK-1, channel 6)

Tune-up Tolerance = 1.00 dB

Antenna Gain = 4.4 dBi

Total Power = 18.0 dBm + Tune-up Tolerance + Gain = 23.4 dBm = 218.8 mW

$$S = \frac{0.2188W}{4\pi(0.075)^2}$$

$$S = 3.10 \text{ W/m}^2$$

$$Limit = 5.40 \text{ W/m}^2$$

$$Ratio = \frac{3.10}{5.40} = 0.57$$

Company: Ezurio	Page 70 of 73	Name: Module, SONA NX 611 SIP, 1 RF Trace Pin / 2 RF Trace Pin
Report: TR 3768 156 155 RFX		Model: SONA NX611S
Job: C-3768		Serial: 00033 00027, 00020 00016

17.8 Power Density Calculation BLE

Max Power of Channel = 5.9 dBm (125k, channel 19)

Tune-up Tolerance = 1.00 dB

Antenna Gain = 2.5 dBi

Total Power = 5.9 dBm + Tune-up Tolerance + Gain = 9.4 dBm = 8.7 mW

$$S = \frac{0.0087W}{4\pi(0.075)^2}$$

$$S = 0.12 W/m^2$$

$$Limit = 5.41 W/m^2$$

$$Ratio = \frac{0.12}{5.41} = 0.02$$

17.9 Power Density Calculation Bluetooth Classic

Max Power of Channel = 8.1 dBm (3DH5, channel 78)

Tune-up Tolerance = 1.00 dB

Antenna Gain = 2.5 dBi

Total Power = 8.1 dBm + Tune-up Tolerance + Gain = 11.6 dBm = 14.5 mW

$$S = \frac{0.0145W}{4\pi(0.075)^2}$$

$$S = 0.21 W/m^2$$

$$Limit = 5.47 W/m^2$$

$$Ratio = \frac{0.21}{5.47} = 0.04$$

Company: Ezurio	Page 71 of 73	Name: Module, SONA NX 611 SIP, 1 RF Trace Pin / 2 RF Trace Pin
Report: TR 3768 156 155 RFX		Model: SONA NX611S
Job: C-3768		Serial: 00033 00027, 00020 00016

17.10 MPE Ratio

MPE ratio = (calculated power density) / (power density limit)

5GHz WLAN = 0.33

2GHz WLAN = 0.57

BLE = 0.02

BT Classic = 0.04

The sum of the power density ratios must be less than 1 to comply with Power Density Exposure Limits.

5GHz WLAN + 2.4GHz WLAN = 0.96

5GHz WLAN + BLE = 0.48

5GHz WLAN + BT Classic = 0.48

17.11 Result

The EUT complies with Power Density Exposure Limits at ≥ 75 mm as the MPE ratio is ≤ 1.0

Company: Ezurio	Page 72 of 73	Name: Module, SONA NX 611 SIP, 1 RF Trace Pin / 2 RF Trace Pin
Report: TR 3768 156 155 RFX		Model: SONA NX611S
Job: C-3768		Serial: 00033 00027, 00020 00016

18 REVISION HISTORY

Version	Date	Notes	Person
0	5/23/2024	Initial Draft	Dylan Rosenfeldt
1	7/31/2024	Combined Models 453-0156 and 453-0155	Dylan Rosenfeldt
2	8/05/2024	Added WLAN RU Output Power to Table	Dylan Rosenfeldt
3	8/06/2024	Final Draft	Dylan Rosenfeldt
4	9/9/2024	Fixed TCB comments, added simultaneous TX	Dylan Rosenfeldt

END OF REPORT

Company: Ezurio	Page 73 of 73	Name: Module, SONA NX 611 SIP, 1 RF Trace Pin / 2 RF Trace Pin
Report: TR 3768 156 155 RFX		Model: SONA NX611S
Job: C-3768		Serial: 00033 00027, 00020 00016