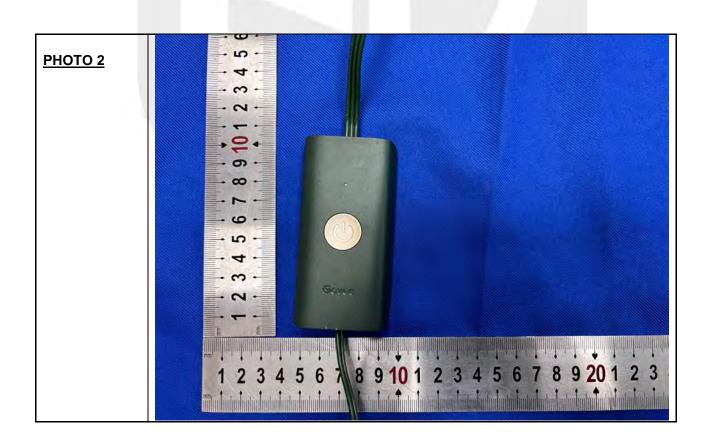


ANNEX B EXTERNAL PHOTOS

(Model No.: H6810)

PHOTO 1



SHENZHEN EU TESTING LABORATORY LIMITED

Report No.: 8229EU013101W-AB

Page 2 of 10 Report No.: 8229EU013101W-AB

<u>РНОТО 3</u>



PHOTO 4



Page 3 of 10 Report No.: 8229EU013101W-AB

PHOTO 5

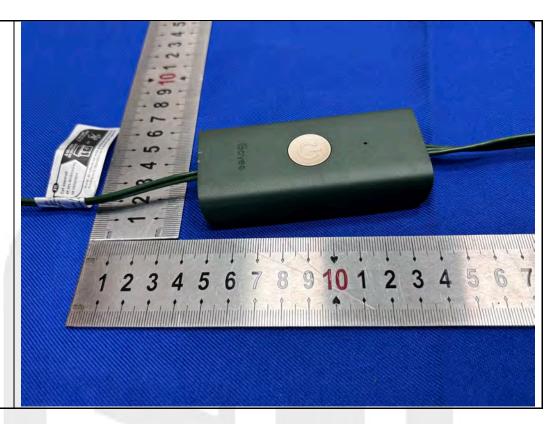


PHOTO 6



Page 4 of 10 Report No.: 8229EU013101W-AB

PHOTO 7



PHOTO 8









SHENZHEN EU TESTING LABORATORY LIMITED

Report No.: 8229EU013101W-AB



Report No.: 8229EU013101W-AB

(Model No.: H6811)





Report No.: 8229EU013101W-AB





PHOTO 14



Page 8 of 10 Report No.: 8229EU013101W-AB

PHOTO 15



PHOTO 16

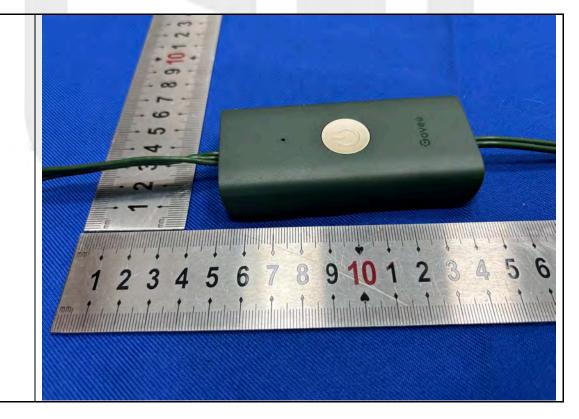






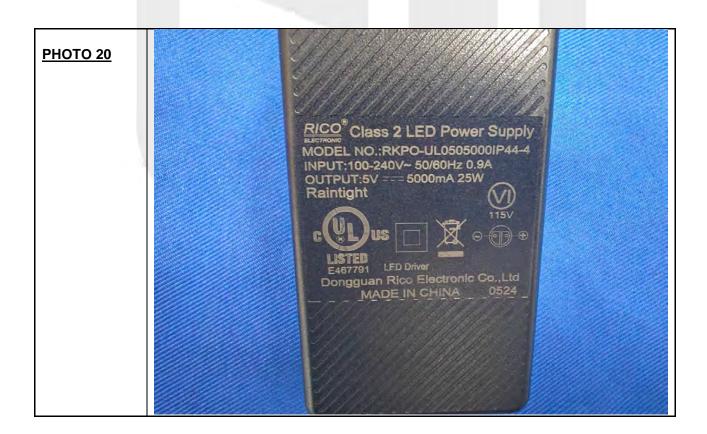


PHOTO 18



Page 10 of 10 Report No.: 8229EU013101W-AB

WARNING: Risk of Electro: Shock Install only to a covered Class A GFC receptable that has an enclosure that is weatherproof with the attachment plug cap inserted or removed. Mount the unit at height greater than 1 foot from the ground surface, Not for use with receptable that are weatherproof only when the receptable is covered. See instruction manual for use in countries other than the U.S.A. DO NOT REMOVE THIS TAG.



--- End ---