



HAC TEST REPORT

Applicant	ZTE Corporation
FCC ID	SRQ-A2023PG
Product	5G NR Multi model smart phone
Model	ZTE A2023PG
Report No.	R2205A0428-H1
Issue Date	June 20, 2022

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **ANSI C63.19-2011.** The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

forgy in West

Prepared by: Fangying Wei

Guangchang Fan

Approved by: Guangchang Fan

TA Technology (Shanghai) Co., Ltd.

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China TEL: +86-021-50791141/2/3 FAX: +86-021-50791141/2/3-8000



Table of Contents

1	Test	t Laboratory	. 3
	1.1	Notes of the Test Report	. 3
	1.2.	Test facility	. 3
	1.2	Testing Location	. 3
	1.3	Laboratory Environment	. 4
2	Stat	ement of Compliance	. 5
3	Des	cription of Equipment under Test	. 6
4	Test	t Specification and Operational Conditions	. 9
	4.1	Test Specification	. 9
5	Test	Information	10
	5.1	Operational Conditions during Test	10
	5.1.1	General Description of Test Procedures	10
	5.2	HAC RF Measurements System Configuration	10
	5.2.1	HAC Measurement Set-up	10
	5.2.2	Probe System	12
	5.2.3	Test Arch Phantom & Phone Positioner	13
	5.3	RF Test Procedures	14
	5.4	System Check	16
	5.5	Modulation Interference Factor	17
	5.6	Justification of Held to Ear Modes Tested	18
	5.6.1	Analysis of RF Air Interface Technologies	18
	5.6.2	Average Antenna Input Power & Evaluation for Low-power Exemption	18
6	Test	t Results	20
	6.1	ANSI C63.19-2011 Limits	20
	6.2	Summary Test Results	21
7	Mea	asurement Uncertainty	22
8	Mai	n Test Instruments	23
A	NNEX	A: System Check Results	24
A	NNEX	B: Graph Results	30
A	NNEX	C: E-Probe Calibration Certificate	60
A	NNEX	D: CD835V3 Dipole Calibration Certificate	82
A	NNEX	E: CD1880V3 Dipole Calibration Certificate	87
A	NNEX	F: CD2450V3 Dipole Calibration Certificate	92
		G: CD2600V3 Dipole Calibration Certificate	
		H: CD5500V3 Dipole Calibration Certificate1	
A	NNEX	I: DAE4 Calibration Certificate1	07
A	NNEX	J: The EUT Appearances1	12
A	NNEX	K: Test Setup Photos1	13

1 Test Laboratory

1.1 Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **TA Technology (Shanghai) Co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein .Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

1.2. Test facility

FCC (Designation number: CN1179, Test Firm Registration Number: 446626)

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform measurements.

A2LA (Certificate Number: 3857.01)

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform measurement.

1.2 Testing Location

Company:	TA Technology (Shanghai) Co., Ltd.		
Address:	No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China		
City:	Shanghai		
Post code:	201201		
Country:	P. R. China		
Contact:	Fan Guangchang		
Contact: Telephone:	Fan Guangchang +86-021-50791141/2/3		
Telephone:	+86-021-50791141/2/3		



HAC Test Report

1.3 Laboratory Environment

Temperature Min. = 18°C, Max. = 28 °C				
Relative humidity Min. = 0%, Max. = 80%				
Ground system resistance $< 0.5 \Omega$				
Ambient noise is checked and found very low and in compliance with requirement of standards.				
Reflection of surrounding objects is minimized and in compliance with requirement of standards.				

2 Statement of Compliance

Table 2.1: The Total M-rating of each tested band

Mode Rating					
GSM 850 M4					
GSM 1900 M4					
LTE TDD 38 M4					
WCDMA & LTE – FDD M4					
Wi-Fi 2.4G M4					
Wi-Fi 5G M4					
The Total M-rating is M4					
Date of Testing: April 9, 2022					
Date of Sample Receiving: March 17, 2022					
Note: 1. Refer to section 7 Evaluation for Low-power Exemption. RF Emission testing for this device is required only for GSM voice modes, LTE TDD modes and Wi-Fi 2.4G 802.11g/ Wi-Fi 5G 802.11a modes. WCDMA modes, LTE FDD mode and Wi-Fi 2.4G 802.11b/n/ Wi-Fi 5G 802.11ac/ax applicable air-interfaces are exempt from testing in accordance with C63.19-2011 Clause 4.4 and are rated M4.					
2. All indications of Pass/Fail in this report are opinions expressed by TA Technology (Shanghai)					

Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.



3 Description of Equipment under Test

Client Information

Applicant	ZTE Corporation		
Applicant address	ZTE Plaza, #55 Keji Road South, Hi-Tech Industrial Park, Nanshan District, Shenzhen, China		
Manufacturer	ZTE Corporation		
Manufacturer address	ZTE Plaza, #55 Keji Road South, Hi-Tech Industrial Park, Nanshan District, Shenzhen, China		

General Technologies

Device Type:	Portable Device					
State of Sample:	Prototype Unit					
Model:	ZTE A2023PG	ZTE A2023PG				
SN:	327324440042					
Hardware Version:	ZTE A2023PGHW1.0					
Software Version:	MyOS12.0.2_A2023PG_GLB					
Antenna Type:	Internal Antenna					
Power Class:	GSM 850: 4 GSM 1900: 1 WCDMA Band II/V: 3 LTE FDD 2/4/5/7/12/28/66: 3 LTE FDD 38: 3					
Power Level	GSM 850: level 5 GSM 1900: level 0 WCDMA Band II/V: All up bits LTE FDD 2/4/5/7/12/28/66: max power LTE FDD 38/: max power					
Test Modulation:	(GSM)GMSK; (WCDMA) QPSK,16QAM; (LTE) QPSK, 16QAM, 64QAM;					
	Mode	Tx (MHz)				
	GSM 850	824 ~ 849				
	GSM 1900 1850 ~ 1910					
	WCDMA Band II 1850 ~ 1910					
Operating Frequency	WCDMA Band V 824 ~ 849					
Range(s):	LTE FDD 2 1850 ~ 1910					
	LTE FDD 4 1710 ~ 1755					
	LTE FDD 5 824 ~ 849					
	LTE FDD 7	2500 ~ 2570				
	LTE FDD 12	699 ~ 716				



HAC Test Report

Report No.: R2205A0428-H1

	LTE FDD 28	703 ~ 748		
	LTE TDD 38	2570 ~ 2620		
	LTE FDD 66	1710 ~ 1780		
	Wi-Fi 2.4G	2412 ~ 2462		
	Wi-Fi 5G U-NII-1	5150 ~ 5250		
	Wi-Fi 5G U-NII-3	5725 ~ 5850		
	Bluetooth	2402 ~2480		
Accessory Equipment				
	Manufacturer: Zhuhai Cosmx Battery Co.,	Ltd.		
i y	Model: Li3949T44P8h806459			
Note: The EUT is sent from the applicant to TA and the information of the EUT is declared by				
the applicant.				
ery : The EUT is sent fr	Wi-Fi 5G U-NII-1 Wi-Fi 5G U-NII-3 Bluetooth Accessory Equipment Manufacturer: Zhuhai Cosmx Battery Co., Model: Li3949T44P8h806459	5150 ~ 5250 5725 ~ 5850 2402 ~2480 Ltd.		

HAC Test Report

74

Report No.: R2205A0428-H1

	HAC Test Report Report No.: R2205A0428-H1						
Air- Interface	Band (MHz)	Туре	ANSI C63.19 tested	Simultaneous Transmissions	Voice over Digital Transport OTT Capability	Name of Voice Service	Power Reduction
	850						
GSM	1900	VO	Yes	Yes	N/A	#	No
	GPRS/EGPRS	DT	No	BT or Wi-Fi	No		
	Band II				N1/A		
WCDMA	Band V	VO	Yes	Yes	N/A	#	No
	HSPA	DT	No	BT or Wi-Fi	No		
	Band 2						
	Band 4						
	Band 5						No
	Band 7		Yes	Yes BT or Wi-Fi	No	Yes##	
LTE	Band 12	VD					
	Band 28						
	Band 38						
	Band 66						
	2450	VD	Yes	Yes GSM, WCDMA, LTE,	N/A	VoWi-Fi	No
Wi-Fi	5200 (U-NII-1)	VD	Yes	Yes GSM, WCDMA, LTE,	N/A	VoWi-Fi	No
	5800 (U-NII-3)	VD	Yes	Yes GSM, WCDMA, LTE,	N/A	VoWi-Fi	No
Bluetooth (BT)	2450	DT	No	Yes GSM, WCDMA, LTE,	N/A	NA	No
DT= Digital T VD= IP voice #: Ref Lev in ##: Ref Lev in Remark:	Cellular Voice Serv ransport only (no v service over digita accordance with 7 n accordance with he low power exer	voice) al transpor 7.4.2.1 of <i>F</i> the July 2	rt. ANSI C63.1 012 VoLTE	interpretation.	3.19-2011		

1. It applies the low power exemption based on ANSI C63.19-2011



4 Test Specification and Operational Conditions

4.1 Test Specification

The tests documented in this report were performed in accordance with the following:

FCC CFR47 Part 20.19 ANSI C63.19-2011 KDB 285076 D01 HAC Guidance v05r01 KDB 285076 D02 T-Coil Testing v03r01



5 Test Information

5.1 Operational Conditions during Test

5.1.1 General Description of Test Procedures

The phone was tested in all normal configurations for the ear use. The EUT is mounted in the device holder equivalent as for classic dosimeter measurements. The acoustic output of the EUT shall coincide with the center point of the area formed by the dielectric wire and the middle bar of the arch's top frame The EUT shall be moved vertically upwards until it touches the frame. The fine adjustment is possible by sliding the complete. The EUT holder is on the yellow base plate of the Test Arch phantom. These test configurations are tested at the high, middle and low frequency channels of each applicable operating mode.

A communication link is set up with a System Simulator (SS) by air link, and a call is established. The EUT is commanded to operate at maximum transmitting power.

5.2 HAC RF Measurements System Configuration

5.2.1 HAC Measurement Set-up

These measurements are performed using the DASY5 automated dosimetric assessment system. It is made by Schmid & Partner Engineering AG (SPEAG) in Zurich, Switzerland. It consists of high precision robotics system (Stäubli), robot controller, Intel Core2 computer, near-field probe, probe alignment sensor. The robot is a six-axis industrial robot performing precise movements. Cell controller systems contain the power supply, robot controller, teach pendant (Joystick) and remote control, and are used to drive the robot motors. The Stäubli Robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification; signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC plug-in card.

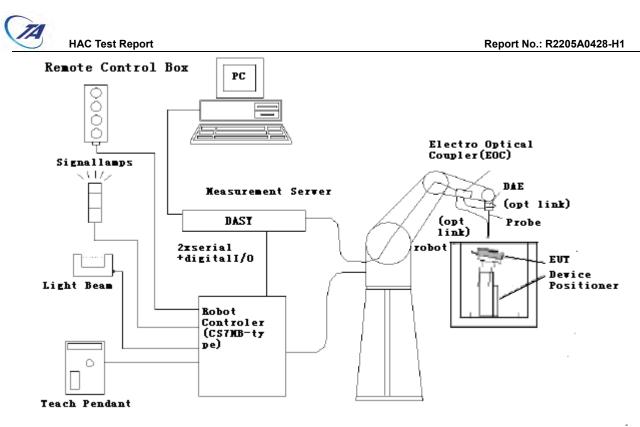


Figure 1 HAC Test Measurement Set-up

The DAE4 consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer.



5.2.2 Probe System

The HAC measurements were conducted with the E-Field Probe ER3DV6 and the H-Field Probe H3DV6 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation.

E-Field Probe Description

Construction	One dipole parallel, two dipoles normal to probe axis Built-in shielding against static charges PEEK enclosure material	ITE
Calibration	In air from 100 MHz to 3.0 GHz (absolute accuracy ±6.0%, k=2)	
Frequency	40 MHz to > 6 GHz (can be extended to < 20 MHz) Linearity: ± 0.2 dB (100 MHz to 3 GHz)	Figure 2 ER3DV6 E-field Probe
Directivity	± 0.2 dB in air (rotation around probe axis) ± 0.4 dB in air (rotation normal to probe axis)	
Dynamic Range	2 V/m to > 1000 V/m; Linearity: ± 0.2 dB	
Dimensions	Overall length: 330 mm (Tip: 16 mm) Tip diameter: 8 mm (Body: 12 mm) Distance from probe tip to dipole centers: 2.5 mm	
Application	General near-field measurements up to 6 GHz Field component measurements Fast automatic scanning in phantoms	



5.2.3 Test Arch Phantom & Phone Positioner

The Test Arch phantom should be positioned horizontally on a stable surface. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot. It enables easy and well defined positioning of the phone and validation dipoles as well as simple teaching of the robot (Dimensions: 370 x 370 x 370 mm). The Device reference point is set for the EUT at 6.3 mm, the Grid reference point is on the upper surface at the origin of the coordinates, and the "user point \Height Check 0.5 mm" is 0.5mm above the center, allowing verication of the gap of 0.5mm while the probe is positioned there.

The Phone Positioner supports accurate and reliable positioning of any phone with effect on near field $<\pm0.5$ dB.




Figure 3 HAC Phantom & Device Holder

5.3 RF Test Procedures

The evaluation was performed with the following procedure:

- 1. Confirm proper operation of the field probe, probe measurement system and other instrumentation and the positioning system.
- 2. Position the WD in its intended test position. The gauge block can simplify this positioning. Note that a separate E-field gauge block will be needed if the center of the probe sensor elements is at different distances from the tip of the probe.
- 3. Configure the WD normal operation for maximum rated RF output power, at the desired channel and other operating parameters (e.g., test mode), as intended for the test.
- 4. The center sub-grid shall center on the center of the axial measurement point or the acoustic output, as appropriate. Locate the field probe at the initial test position in the 50 mm by 50 mm grid, which is contained in the measurement plane. If the field alignment method is used, align the probe for maximum field reception.
- 5. Record the reading.
- 6. Scan the entire 50 mm by 50 mm region in equally spaced increments and record the reading at each measurement point. The grid is 5 cm by 5 cm area that is divided into 9 evenly sized blocks or sub-grids. The distance between measurement points shall be sufficient to assure the identification of the maximum reading.
- 7. Identify the five contiguous sub-grids around the center sub-grid with the lowest maximum field strength readings. Thus the six areas to be used to determine the WD's highest emissions are identified and outlined for the final manual scan. Please note that a maximum of five blocks can be excluded for both E-field measurements for the WD output being measured. Stated another way, the center sub-grid and three others must be common to both the E-field measurements.
- 8. Identify the maximum field reading within the non-excluded sub-grids identified in Step 7.
- 9. Convert the maximum field strength reading identified in Step 8 to V/m or A/m, as appropriate. For probes which require a probe modulation factor, this conversion shall be done using the appropriate probe modulation factor and the calibration.
- 10. Repeat Step 1 through Step 10 for both the E-field measurements.
- 11. Compare this reading to the categories in ANSI C63.19 Clause 8 and record the resulting category. The lowest category number listed in 8.2, Table 8.3 obtained in Step 10 for either E-field determines the M category for the audio coupling mode assessment. Record the WD category rating.





Figure 4 WD reference and plane for RF emission measurements



5.4 System Check

Validation Procedure

Place a dipole antenna meeting the requirements given in ANSI C63.19 D.11 in the position normally occupied by the WD. The dipole antenna serves as a known source for an electrical output. Position the E-field probe so that:

The probes and their cables are parallel to the coaxial feed of the dipole antenna.

The probe cables and the coaxial feed of the dipole antenna approach the measurement area from opposite directions.

Position the E-field probe at a 15 mm distance from the center of the probe element to the top surface. Validation was performed to verify that measured E-field is within +/-18% from the target reference values provided by the manufacturer. "Values within +/-18% are acceptable. Of which 12% is deviation and 13% is measurement uncertainty."

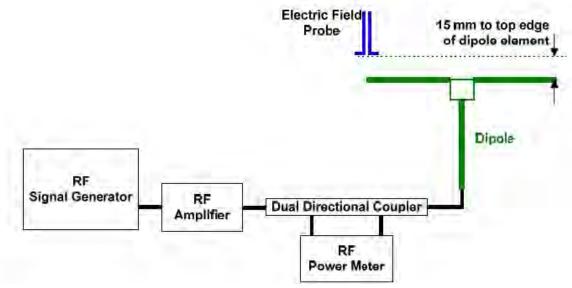


Figure 5 Dipole Validation Setup

Frequency (MHz)	Input Power (mW)	Target ¹ Value (V/m)	Measured ² Value (V/m)	Deviation ³ (%)	Test Date
835	100	106.6	107.3	-0.65	2022/4/9
1880	100	90.5	92.1	1.77	2022/4/9
2450	100	90.7	91.4	-0.77	2022/4/9
2600	100	87.3	87.4	0.11	2022/4/9
5500	100	94.7	100.9	6.55	2022/4/9



5.5 Modulation Interference Factor

For any specific fixed and repeatable modulated signal, a modulation interference factor (MIF, expressed in dB) may be developed that relates its interference potential to its steady-state rms signal level or average power level. This factor is a function only of the audio-frequency amplitude modulation characteristics of the signal and is the same for field-strength and conducted power measurements. It is important to emphasize that the MIF is valid only for a specific repeatable audio-frequency amplitude modulation characteristic. Any change in modulation characteristic requires determination and application of a new MIF

The MIF may be determined using a radiated RF field or a conducted RF signal,

b) Using RF illumination or conducted coupling, apply the specific modulated signal in question to the measurement system at a level within its confirmed operating dynamic range.

c) Measure the steady-state rms level at the output of the fast probe or sensor.

d) Measure the steady-state average level at the weighting output.

e) Without changing the square-law detector or weighting system, and using RF illumination or conducted coupling, substitute for the specific modulated signal a 1kHz, 80% amplitude modulated carrier at the same frequency and adjust its strength until the level at the weighting output equals the step d) measurement.

f) Without changing the carrier level from step e), remove the 1 kHz modulation and again measure the steady-state ms level indicated at the output of the fast probe or sensor.

g) The MIF for the specific modulation characteristic is provided by the ratio of the step f) measurement to the step c) measurement, expressed in dB (20 x log(step f)/step c)).

Based on the KDB285076 D01v05, the handset can also use the MIF values predetermined by the test equipment manufacturer, and the following table lists the MIF values evaluated by DASY manufacturer (SPEAG), and the test result will be calculated with the MIF parameter automatically.

SPEAG UID	UID version	Communication system	MIF(dB)
10021	DAC	GSM-FDD (TDMA, GMSK)	3.63
10011	CAB	UMTS-FDD (WCDMA)	-27.23
10175	CAG	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	-15.63
10169	CAE	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	-15.63
10172	CAG	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	-1.62
10012	CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps)	-5.9
10013	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps)	-3.16
10591	AAC	IEEE 802.11n (HT Mixed, 20MHz, MCS0, 90pc duty cycle)	-5.59
10069	CAD	IEEE 802.11a/n WiFi 5 GHz (OFDM, 54 Mbps)	-3.15
10525	AAC	IEEE 802.11ac WiFi (20MHz, MCS0, 99pc duty cycle)	-12.23
10671	AAA	IEEE 802.11ax (20MHz, MCS0, 90pc duty cycle)	-5.58



LTE TDD B38

Justification of Held to Ear Modes Tested

5.6.1 Analysis of RF Air Interface Technologies

a. According to the April 2013 TCB workshop slides, LTE and other OTT data services are outside the current definition of a managed CMRS service and are currently not required to be evaluated.

b. No associated T-coil measurements for VoIP over WIFI CMRS have been made in accordance with the guidance issued by OET in KDB publication 285076 D02 T-Coil testing for CMRS IP.

c. An analysis was performed, following the guidance of 4.3 and 4.4 of the ANSI standard, of the RF air interface technologies being evaluated. The factors that will affect the RF interference potential were evaluated, and the worst case operating modes were identified and used in the evaluation. A WD's interference potential is a function both of the WD's average near-field field strength and of the signal's audio-frequency amplitude modulation characteristics. Per 4.4, RF air interface technologies that have low power have been found to produce sufficiently low RF interference potential, So it is possible to exempt them from the product testing specified in Clause 5 of the ANSI standard. An RF air interface technology of a device is exempt from testing when its average antenna input power plus its MIF is <17dBm for all of its operating modes. RF air interface technologies exempted from testing in this manner are automatically assigned an M4 rating to be used in determining the overall rating for the WD.

The worst case MIF plus the worst case average antenna input power for all modes are investigated below to determine the testing requirements for this device.

power plus its MIF is \leq 17 dBm for any of its operating modes. If a device supports multiple RF air nterfaces, each RF air interface shall be evaluated individually.					
Band	Maximum Average Antenna Input Power (dBm)	Worst Case MIF (dB)	Maximum Average Antenna Input Power + MIF (dBm)	Low power exemption	
GSM 850	33.00	3.63	36.63	Yes	
GSM 1900	30.50	3.63	34.13	Yes	
WCDMA Band II	25.00	-27.23	-2.23	No	
WCDMA Band V	25.00	-27.23	-2.23	No	
LTE FDD B2	25.00	-15.63	9.37	No	
LTE FDD B4	25.00	-15.63	9.37	No	
LTE FDD B5	26.00	-15.63	10.37	No	
LTE FDD B7	24.50	-15.63	8.87	No	
LTE FDD B12	26.00	-15.63	10.37	No	
LTE FDD B28	25.00	-15.63	9.37	No	

5.6.2 Average Antenna Input Power & Evaluation for Low-power Exemption

An RF air interface technology of a device is exempt from testing when its average antenna input

TA Technology (Shanghai) Co., Ltd. TA-MB-04-001H Page 18 of 113 This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

-1.62

23.38

Yes

25.00

TA

HAC Test Report

Report No.: R2205A0428-H1

LTE FDD B66	25.00	-15.63	9.37	No	
802.11b	22.00	-5.90	16.10	No	
802.11g	21.50	-3.16	18.34	Yes	
802.11n	21.00	-5.59	15.41	No	
802.11a	21.50	-3.15	18.35	Yes	
802.11ac	20.50	-12.23	8.27	No	
802.11ax	20.50	-5.58	14.92	No	
Note: 1. MIF values applied in this test report were provided by the HAC equipment provider,					
SPEAG.					



6 Test Results


6.1 ANSI C63.19-2011 Limits

Category	Telephone RF parameters < 960 MHz	Telephone RF parameters > 960 MHz
Near field	E-field e	missions
Category M1	50 to 55 dB (V/m)	40 to 45 dB (V/m)
Category M2	45 to 50 dB (V/m)	35 to 40 dB (V/m)
Category M3	40 to 45 dB (V/m)	30 to 35 dB (V/m)
Category M4	< 40 dB (V/m)	< 30 dB (V/m)



6.2 Summary Test Results

Band	Channel /Frenqucy (MHz)	MIF (dB)	E-field (dBV/m)	Power Drift (dB)	Category	Graph Results
	128/824.2	3.63	35.15	-0.05	M4	1
GSM 850	190/836.6	3.63	35.48	-0.07	M4	2
	251/848.8	3.63	35.39	-0.03	M4	3
	512/1850.2	3.63	16.51	-0.77	M4	4
GSM 1900	661/1880	3.63	25.53	-0.20	M4	5
	810/1909.8	3.63	17.14	-0.01	M4	6
	37850/2580	-1.62	13.43	-0.94	M4	7
LTE Band 38	38000/2595	-1.62	14.76	-0.47	M4	8
	38150/2610	-1.62	14.36	-0.13	M4	9
	1/2412	-3.16	17.11	0.65	M4	10
802.11g	6/2437	-3.16	20.13	-8.56	M4	11
	11/2462	-3.16	-4.92	2.42	M4	12
	36/5180	-3.15	2.16	-10.44	M4	13
802.11a	40/5200	-3.15	1.54	-0.12	M4	14
	48/5240	-3.15	2.55	-0.88	M4	15





7 Measurement Uncertainty

							Standard	Degree of
Error source	Туре	Uncertainty Prob. k c _{i/}	c _{i/} E	ci/E ci\H	Uncertainty	freedom		
	-	Value (± %)	Dist.				ui (± %) E	Veff or vi
Measurement system							1	
Probe Calibration	В	5.1	N	1	1	1	5.1	∞
Axial Isotropy	В	4.7	R	1.732	1	1	2.7	∞
Sensor Displacement	В	16.5	R	1.732	1	0.145	9.5	∞
Boundary Effects	В	2.4	R	1.732	1	1	1.4	∞
Test Arch	В	7.2	R	1.732	1	0	4.2	∞
Linearity	В	4.7	R	1.732	1	1	2.7	∞
Scaling to Peak Envelope Power	в	2.0	R	1.732	1	1	1.2	∞
System Detection Limit	В	1.0	R	1.732	1	1	0.6	∞
Readout Electronics	В	0.3	N	1	1	1	0.3	∞
Response Time	В	0.8	R	1.732	1	1	0.5	∞
Integration Time	В	2.6	R	1.732	1	1	1.5	∞
RF Ambient Conditions	В	3.0	R	1.732	1	1	1.7	∞
RF Reflections	В	12.0	R	1.732	1	1	6.9	∞
Probe Positioner	В	1.2	R	1.732	1	0.67	0.7	∞
Probe Positioning	А	4.7	R	1.732	1	0.67	2.7	∞
Extra. And Interpolation	В	1.0	R	1.732	1	1	0.6	∞
Test sample related								
Device Positioning Vertical	В	4.7	R	1.732	1	0.67	2.7	∞
Device Positioning Lateral	В	1.0	R	1.732	1	1	0.6	ø
Device Holder and	В	24	R	1 722	1	1	1.4	×
Phantom	D	2.4	ĸ	1.732	1	1	1.4	w
Power Drift	В	5.0	R	1.732	1	1	2.9	×
Phantom and Setup related	d							
Phantom Thickness	В	2.4	R	1.732	1	0.67	1.4	∞
Combined standard uncertai	inty (%)						15.3	
Expanded Std. uncertainty o	n power (K=2)					30.6	
Expanded Std. uncertainty o	n field (K	=2)					15.3	

Measurement uncertainty evaluation template for DUT HAC RF test



8 Main Test Instruments

Name	Manufacturer	Туре	Serial Number	Calibration Date	Expiration Time
Power meter	Agilent	E4417A	GB41291714	2021-05-15	2022-05-14
Power sensor	Agilent	N8481H	MY50350004	2021-05-15	2022-05-14
Signal Generator	Agilent	N5181A	MY50140143	2021-05-15	2022-05-14
Amplifier	INDEXSAR	IXA-020	0401	2021-05-15	2022-05-14
Wideband radio communication tester	R&S	CMW500	146734	2021-05-15	2022-05-14
E-Field Probe	SPEAG	EF3DV3	4048	2022-03-04	2023-03-03
DAE	SPEAG	DAE4	1648	2021-05-17	2022-05-16
Validation Kit 835MHz	SPEAG	CD835V3	1133	2020-10-12	2023-10-11
Validation Kit 1880MHz	SPEAG	CD1880V3	1115	2020-10-12	2023-10-11
Validation Kit 2450MHz	SPEAG	CD2450V3	1111	2020-10-12	2023-10-11
Validation Kit 2600MHz	SPEAG	CD2600V3	1016	2021-01-18	2024-01-17
Validation Kit 5GHz	SPEAG	CD5500V3	1011	2021-01-18	2024-01-17
Hygrothermograph	Anymetr	NT-311	20150731	2021-05-18	2022-05-17
HAC Phantom	SPEAG	SD HAC P01 BB	1117	1	1
Software for Test	Speag	DASY5	/	/	/
Software for Tissue	Agilent	85070	/	/	/

*****END OF REPORT *****



ANNEX A: System Check Results

HAC_System Performance Check at 835MHz_E

DUT: Dipole 835 MHz; Type: CD835V3; SN:1023 Date: 2022/4/9 Communication System: CW; Frequency: 835 MHz;Duty Cycle: 1:1 Phantom section: RF Section DASY5 Configuration: Sensor-Surface: 4mm (Mechanical Surface Detection) Probe: EF3DV3 – SN4048; ConvF(1, 1, 1); Calibrated: 2022/3/4 Electronics: DAE4 Sn1648; Calibrated: 2021/5/17 Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

E Scan - measurement distance from the probe sensor center to CD835 Dipole = 15mm

2/Hearing Aid Compatibility Test (41x361x1): Measurement grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 91 V/m; Power Drift = 0.003 dB

Applied MIF = 0.00 dB

Maximum value of peak Total field = 107.3 V/m

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Grid 1	Grid 2	Grid 3			
101.2 M4	104.3 M4	101.5 M4			
Grid 4	Grid 5	Grid 6			
61.2 M4	64.23 M4	62.39 M4			
Grid 7	Grid 8	Grid 9			
104.5 M4	107.3 M4	104.3 M4			

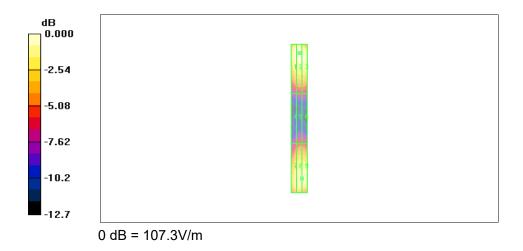

Peak E-field in V/m



HAC_System Performance Check at 1880MHz_E DUT: Dipole 1880 MHz; Type: CD1880V3; SN: 1018 Date: 2022/4/9 Communication System: CW; Frequency: 1880 MHz;Duty Cycle: 1:1 Phantom section: RF Section DASY5 Configuration: Sensor-Surface: 4mm (Mechanical Surface Detection) Probe: EF3DV3 – SN4048; ConvF(1, 1, 1); Calibrated: 2022/3/4 Electronics: DAE4 Sn1648; Calibrated: 2021/5/17 Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

E Scan - measurement distance from the probe sensor center to CD1880 Dipole =

15mm/Hearing Aid Compatibility Test (41x181x1): Measurement grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 86V/m; Power Drift = 0.002 dB

Applied MIF = 0.00 dB

Maximum value of peak Total field = 92.1 V/m

Hearing Aid Near-Field Category: M2 (AWF 0 dB)

Grid 1	Grid 2	Grid 3
91.78 M2	98.10 M2	93.42M2
Grid 4	Grid 5	Grid 6
71.76 M3	73.56 M3	71.17 M3
Grid 7	Grid 8	Grid 9
87.15 M2	89.46 M2	89.01 M2

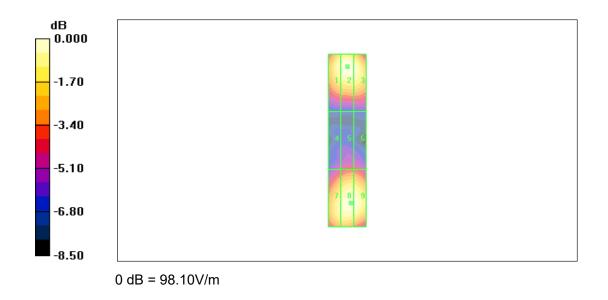



HAC_System Performance Check at 2450MHz_E DUT: Dipole 2450 MHz; Type: CD2450V3; SN: 1111 Date: 2022/4/9 Communication System: CW; Frequency: 2450 MHz;Duty Cycle: 1:1 Phantom section: RF Section DASY5 Configuration: Sensor-Surface: 0mm (Mechanical Surface Detection) Probe: EF3DV3 – SN4048; ConvF(1, 1, 1); Calibrated: 2022/3/4 Electronics: DAE4 Sn1648; Calibrated: 2021/5/17 Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

E Scan - measurement distance from the probe sensor center to CD2450 Dipole =

15mm/Hearing Aid Compatibility Test (41x181x1): Measurement grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 83.71V/m; Power Drift = 0.019 dB

Applied MIF = 0.00 dB

Maximum value of peak Total field = 91.4 V/m

Hearing Aid Near-Field Category: M2 (AWF 0 dB)

Peak E-field in V/m					
Grid 1	Grid 2 Grid 3				
88.9 M2	91.40 M2	90.73M2			
Grid 4	Grid 5 Grid 6				
88.20 M3	88.56 M3	87.39 M3			
Grid 7	Grid 8	Grid 9			
88.34 M2	88.05 M2	88.16 M2			

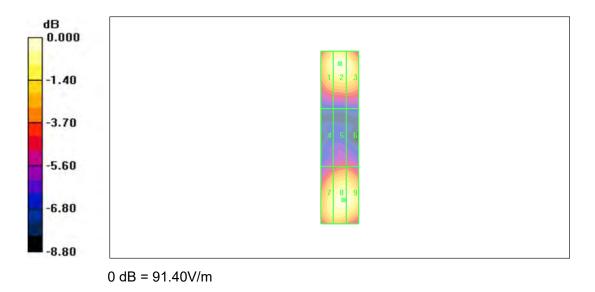



HAC_System Performance Check at 2600MHz_E DUT: Dipole 2600 MHz; Type: CD2600V3; SN: 1016 Date: 2022/4/9 Communication System: CW; Frequency: 2600 MHz;Duty Cycle: 1:1 Ambient Temperature:22.3 °C Phantom section: RF Section DASY5 Configuration: Sensor-Surface: 0mm (Mechanical Surface Detection) Probe: EF3DV3 – SN4048; ConvF(1, 1, 1); Calibrated: 2022/3/4 Electronics: DAE4 Sn1648; Calibrated: 2021/5/17 Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

E Scan - measurement distance from the probe sensor center to CD2600 Dipole =

15mm/Hearing Aid Compatibility Test (41x181x1): Measurement grid: dx=0.5000 mm, dy=0.5000 mm

Maximum value of peak Total field = 87.40 V/m

Applied MIF = 0.00 dB


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 71.52V/m; Power Drift = 0.01 dB

Hearing Aid Near-Field Category: M2 (AWF 0 dB)

Peak	E-field	in	V/m
------	---------	----	-----

Grid 1	Grid 2	Grid 3
83.35 M2	86.32 M2	85.70M2
Grid 4	Grid 5	Grid 6
79.62 M3	81.46 M3	81.15 M3
Grid 7	Grid 8	Crid 0
	Gilu o	Grid 9

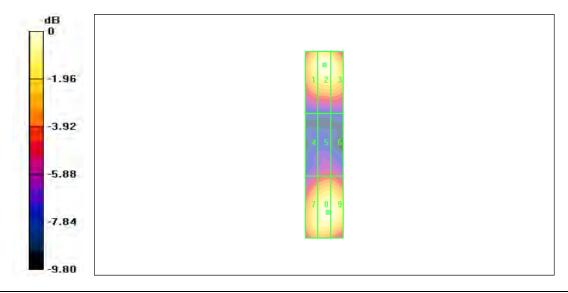



HAC Test Report

HAC_System Performance Check at 5500MHz_E DUT: Dipole 5500 MHz; Type: CD5500V3; SN: 1011 Date: 2022/4/9 Communication System: UID 0, CW (0); Frequency: 5500 MHz;Duty Cycle: 1:1 Medium parameters used: $\sigma = 0$ S/m, $\varepsilon_r = 1$; $\rho = 1000$ kg/m³ Ambient Temperature:22.3 °C Liquid Temperature: 21.5 °C Phantom section: RF Section DASY5 Configuration: Sensor-Surface: 1.4mm (Mechanical Surface Detection) Probe: EF3DV3 – SN4048; ConvF(1, 1, 1); Calibrated: 2022/3/4 Electronics: DAE4 Sn1648; Calibrated: 2021/5/17 Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

E Scan - measurement distance from the probe sensor center to CD5500 Dipole = 15mm /Hearing Aid Compatibility Test (41x121x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 29.33 V/m; Power Drift = 0.06 dB

PMR not calibrated. PMF = 1.000 is applied.

E-field emissions = 100.9 V/m


Near-field category: M3 (AWF 0 dB)

PMF scaled E-field

Grid 1 M3	Grid 2 M3	Grid 3 M3
89.45 V/m	94.82 V/m	92.22 V/m
Grid 4 M3	Grid 5 M3	Grid 6 M3
98.09 V/m	100.9 V/m	99.3 V/m
Grid 7 M3	Grid 8 M3	Grid 9 M3
89.78 V/m	94.06 V/m	91.55 V/m

Cursor:

Total = 100.9 V/m E Category: M3 Location: -0.5, -8.5, 3.7 mm

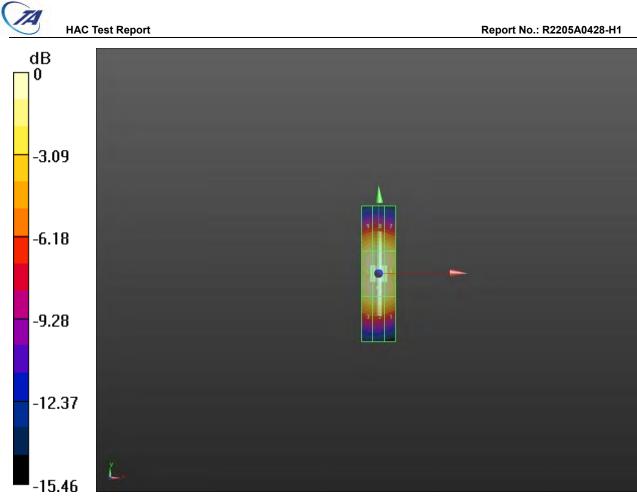

0 dB = 100.9 V/m



ANNEX B: Graph Results

Plot 1 HAC RF E-Field GSM 850 Low

Date: 2022/4/9 Communication System: UID 0, GSM HAC (0); Frequency: 824.2 MHz;Duty Cycle: 1:8.30042 Medium parameters used: $\sigma = 0$ S/m, $\varepsilon_r = 1$; $\rho = 1000$ kg/m³ Ambient Temperature:22.3 °C Liquid Temperature: 21.5 °C Phantom section: RF Section DASY5 Configuration: Sensor-Surface: 0mm (Mechanical Surface Detection) Probe: EF3DV3 – SN4048; ConvF(1, 1, 1); Calibrated: 2022/3/4 Electronics: DAE4 Sn1648; Calibrated: 2021/5/17 Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

HAC RF E-Field/E Scan - ER3D: 15 mm from Probe Center to the Device High/Hearing Aid


Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm Device Reference Point: 0, 0, -6.3 mm Reference Value = 53.45 V/m; Power Drift = -0.05 dB Applied MIF = 3.63 dB RF audio interference level = 35.15 dBV/m Emission category: M4

MIF scaled E-field

Grid 1 M4 35.64 dBV/m		
Grid 4 M4 34.29 dBV/m		
Grid 7 M4		
32.99 dBV/m	34.13 dBV/m	33.82 dBV/m

Cursor:

Total = 36.22 dBV/m E Category: M4 Location: 0.5, -25, 7.7 mm

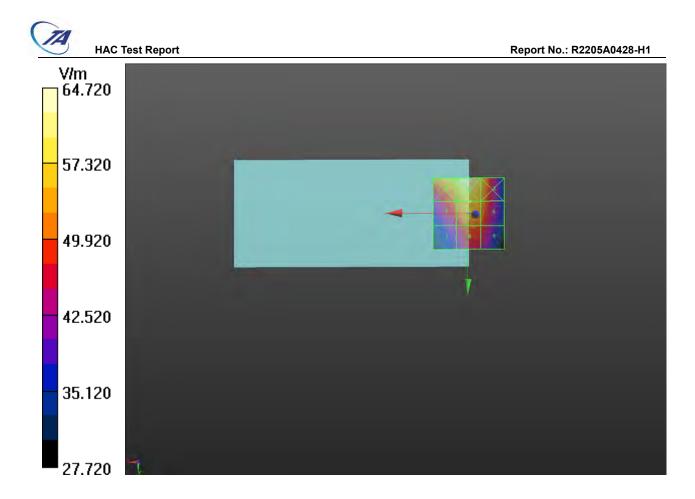



Plot 2 HAC RF E-Field GSM 850 Middle

Date: 2022/4/9 Communication System: UID 0, GSM HAC (0); Frequency: 836.6 MHz;Duty Cycle: 1:8.30042 Medium parameters used: $\sigma = 0$ S/m, $\varepsilon_r = 1$; $\rho = 1000$ kg/m³ Ambient Temperature:22.3 °C Liquid Temperature: 21.5 °C Phantom section: RF Section DASY5 Configuration: Sensor-Surface: 1.4mm (Mechanical Surface Detection) Probe: EF3DV3 – SN4048; ConvF(1, 1, 1); Calibrated: 2022/3/4 Electronics: DAE4 Sn1648; Calibrated: 2021/5/17 Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

GSM 850 HAC RF E-Field/E Scan - ER3D: 15 mm from Probe Center to the Device Middle/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 56.11 V/m; Power Drift = -0.07 dB

Applied MIF = 3.63 dB

RF audio interference level = 35.48 dBV/m


Emission category: M4

MIF scaled E-field

Grid 1 M4	Grid 2 M4	Grid 3 M4
36.23 dBV/m	36.58 dBV/m	35.63 dBV/m
Grid 4 M4	Grid 5 M4	Grid 6 M4
34.98 dBV/m	35.48 dBV/m	34.86 dBV/m
Grid 7 M4	Grid 8 M4	Grid 9 M4
33.67 dBV/m	34.32 dBV/m	33.91 dBV/m

Cursor:

Total = 36.58 dBV/m E Category: M4 Location: 1.5, -25, 7.7 mm

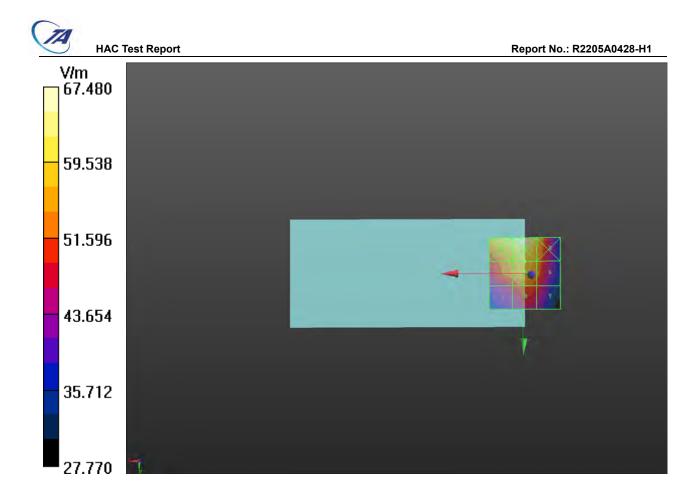



Plot 3 HAC RF E-Field GSM 850 High

Date: 2022/4/9 Communication System: UID 0, GSM HAC (0); Frequency: 848.8 MHz;Duty Cycle: 1:8.30042 Medium parameters used: $\sigma = 0$ S/m, $\varepsilon_r = 1$; $\rho = 1000$ kg/m³ Ambient Temperature:22.3 °C Liquid Temperature: 21.5 °C Phantom section: RF Section DASY5 Configuration: Sensor-Surface: 0mm (Mechanical Surface Detection) Probe: EF3DV3 – SN4048; ConvF(1, 1, 1); Calibrated: 2022/3/4 Electronics: DAE4 Sn1648; Calibrated: 2021/5/17 Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

HAC RF E-Field/E Scan - ER3D: 15 mm from Probe Center to the Device Low/Hearing Aid

Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 54.69 V/m; Power Drift = -0.03 dB

Applied MIF = 3.63 dB

RF audio interference level = 35.39 dBV/m


Emission category: M4

MIF scaled E-field

Grid 1 M4	Grid 2 M4	Grid 3 M4
35.87 dBV/m	36.43 dBV/m	35.63 dBV/m
Grid 4 M4	Grid 5 M4	Grid 6 M4
34.52 dBV/m	35.39 dBV/m	34.93 dBV/m
Grid 7 M4	Grid 8 M4	Grid 9 M4
33.17 dBV/m	34.32 dBV/m	33.99 dBV/m

Cursor:

Total = 36.43 dBV/m E Category: M4 Location: 1, -25, 7.7 mm

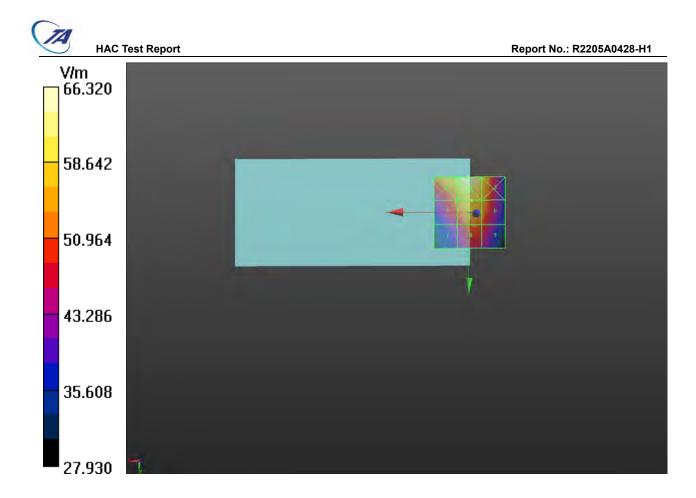



Plot 4 HAC RF E-Field GSM 1900 Low

Date: 2022/4/9 Communication System: UID 0, GSM HAC (0); Frequency: 1850.2 MHz;Duty Cycle: 1:8.30042 Medium parameters used: $\sigma = 0$ S/m, $\varepsilon_r = 1$; $\rho = 1000$ kg/m³ Ambient Temperature:22.3 °C Liquid Temperature: 21.5 °C Phantom section: RF Section DASY5 Configuration: Sensor-Surface: 0mm (Mechanical Surface Detection) Probe: EF3DV3 – SN4048; ConvF(1, 1, 1); Calibrated: 2022/3/4 Electronics: DAE4 Sn1648; Calibrated: 2021/5/17 Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

HAC RF E-Field/E Scan - ER3D: 15 mm from Probe Center to the Device Low/Hearing Aid

Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 5.022 V/m; Power Drift = -0.77 dB

Applied MIF = 3.63 dB

RF audio interference level = 16.51 dBV/m


Emission category: M4

MIF scaled E-field

Grid 1 M4	Grid 2 M4	Grid 3 M4
17.11 dBV/m	15.98 dBV/m	11.81 dBV/m
Grid 4 M4	Grid 5 M4	Grid 6 M4
15.72 dBV/m	15.07 dBV/m	13.6 dBV/m
Grid 7 M4	Grid 8 M4	Grid 9 M4
15.36 dBV/m	16.51 dBV/m	15.88 dBV/m

Cursor:

Total = 17.11 dBV/m E Category: M4 Location: 25, -15, 7.7 mm

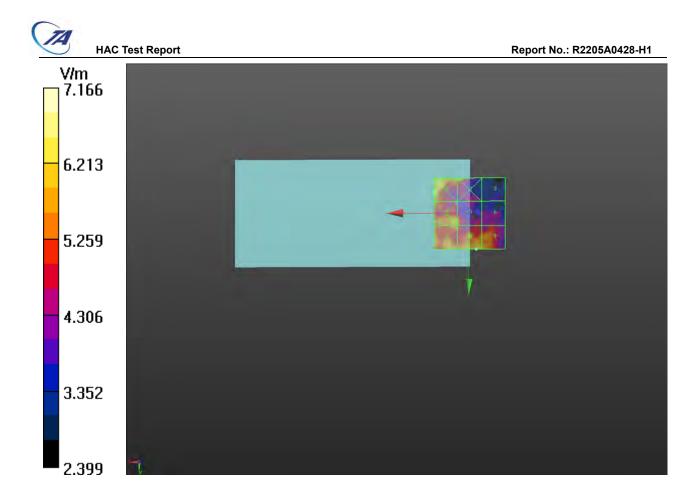



Plot 5 HAC RF E-Field GSM 1900 Middle

Date: 2022/4/9 Communication System: UID 0, GSM HAC (0); Frequency: 1880 MHz;Duty Cycle: 1:8.30042 Medium parameters used: $\sigma = 0$ S/m, $\varepsilon_r = 1$; $\rho = 1000$ kg/m³ Ambient Temperature:22.3 °C Liquid Temperature: 21.5 °C Phantom section: RF Section DASY5 Configuration: Sensor-Surface: 0mm (Mechanical Surface Detection) Probe: EF3DV3 – SN4048; ConvF(1, 1, 1); Calibrated: 2022/3/4 Electronics: DAE4 Sn1648; Calibrated: 2021/5/17 Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

HAC RF E-Field/E Scan - ER3D: 15 mm from Probe Center to the Device Middle/Hearing Aid

Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm Device Reference Point: 0, 0, -6.3 mm

Reference Value = 13.43 V/m; Power Drift = -0.20 dB

Applied MIF = 3.63 dB

RF audio interference level = 25.53 dBV/m


Emission category: M4

MIF scaled E-field

Grid 1 M4	Grid 2 M4	Grid 3 M4
27.21 dBV/m	24.88 dBV/m	16.13 dBV/m
Grid 4 M4	Grid 5 M4	Grid 6 M4
27.61 dBV/m	25.53 dBV/m	17.27 dBV/m
Grid 7 M4	Grid 8 M4	Grid 9 M4
27.2 dBV/m	24.83 dBV/m	18.72 dBV/m

Cursor:

Total = 27.61 dBV/m E Category: M4 Location: 25, -0.5, 7.7 mm

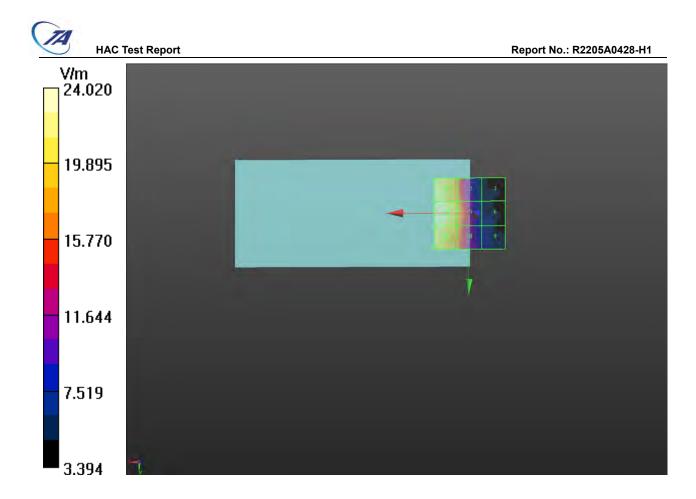



Plot 6 HAC RF E-Field GSM 1900 High

Date: 2022/4/9 Communication System: UID 0, GSM HAC (0); Frequency: 1909.8 MHz;Duty Cycle: 1:8.30042 Medium parameters used: $\sigma = 0$ S/m, $\varepsilon_r = 1$; $\rho = 1000$ kg/m³ Ambient Temperature:22.3 °C Liquid Temperature: 21.5 °C Phantom section: RF Section DASY5 Configuration: Sensor-Surface: 1.4mm (Mechanical Surface Detection) Probe: EF3DV3 – SN4048; ConvF(1, 1, 1); Calibrated: 2022/3/4 Electronics: DAE4 Sn1648; Calibrated: 2021/5/17 Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

HAC RF E-Field/E Scan - ER3D: 15 mm from Probe Center to the Device High/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 4.364 V/m; Power Drift = -0.01 dB

Applied MIF = 3.63 dB

RF audio interference level = 17.14 dBV/m


Emission category: M4

MIF scaled E-field

Grid 1 M4	Grid 2 M4	Grid 3 M4
16.56 dBV/m	17.12 dBV/m	15.1 dBV/m
Grid 4 M4	Grid 5 M4	Grid 6 M4
19.1 dBV/m	15.59 dBV/m	16.29 dBV/m
Grid 7 M4	Grid 8 M4	Grid 9 M4
18.07 dBV/m	17.75 dBV/m	17.14 dBV/m

Cursor:

Total = 19.10 dBV/m E Category: M4 Location: 20, -5, 7.7 mm

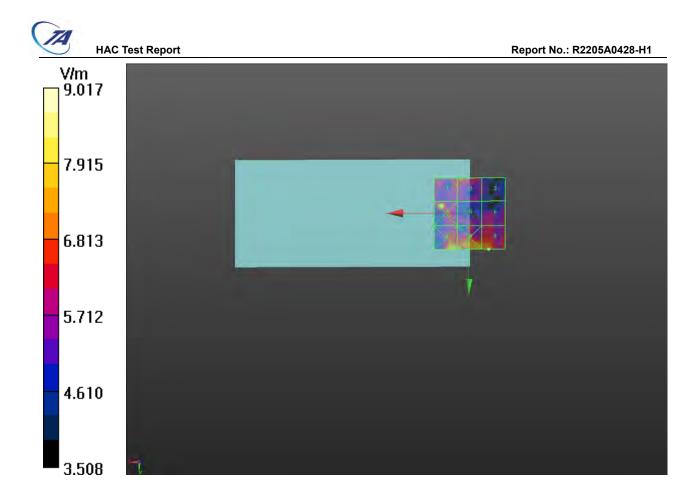



Plot 7 HAC RF E-Field LTE Band 38 Low

Date: 2022/4/9 Communication System: UID 10172 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2580 MHz;Duty Cycle: 1:8.33105 Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³ Ambient Temperature:22.3 °C Liquid Temperature: 21.5 °C Phantom section: RF Section DASY5 Configuration: Sensor-Surface: 1.4mm (Mechanical Surface Detection) Probe: EF3DV3 – SN4048; ConvF(1, 1, 1); Calibrated: 2022/3/4 Electronics: DAE4 Sn1648; Calibrated: 2021/5/17 Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

HAC RF E-Field/E Scan - ER3D: 15 mm from Probe Center to the Device Middle/Hearing Aid

Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 5.802 V/m; Power Drift = -0.94 dB

Applied MIF = -1.62 dB

RF audio interference level = 13.43 dBV/m


Emission category: M4

MIF scaled E-field

Grid 1 M4	Grid 2 M4	Grid 3 M4
13.9 dBV/m	17.28 dBV/m	17.12 dBV/m
Grid 4 M4	Grid 5 M4	Grid 6 M4
12.99 dBV/m	13.34 dBV/m	13.43 dBV/m
Grid 7 M4	Grid 8 M4	Grid 9 M4
13.2 dBV/m	13.07 dBV/m	13.29 dBV/m

Cursor:

Total = 17.28 dBV/m E Category: M4 Location: -6.5, -25, 7.7 mm

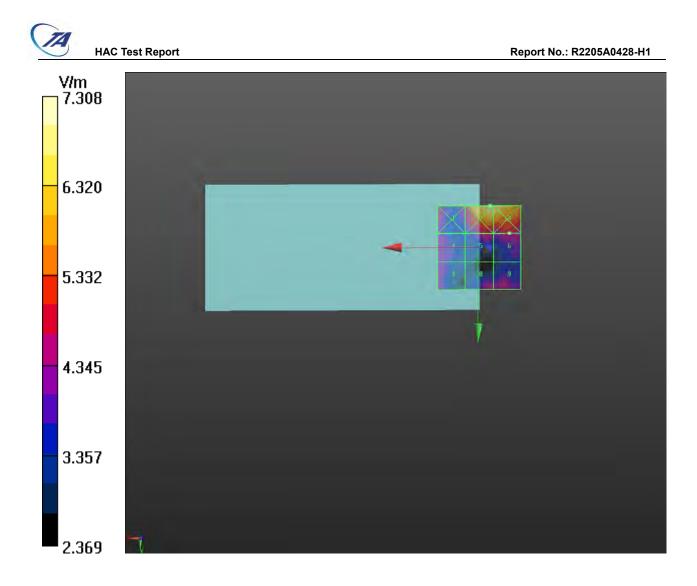



Plot 8 HAC RF E-Field LTE Band 38 Middle

Date: 2022/4/9 Communication System: UID 10172 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2595 MHz;Duty Cycle: 1:8.33105 Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³ Ambient Temperature:22.3 °C Liquid Temperature: 21.5 °C Phantom section: RF Section DASY5 Configuration: Sensor-Surface: 0mm (Mechanical Surface Detection) Probe: EF3DV3 – SN4048; ConvF(1, 1, 1); Calibrated: 2022/3/4 Electronics: DAE4 Sn1648; Calibrated: 2021/5/17 Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

HAC RF E-Field/E Scan - ER3D: 15 mm from Probe Center to the Device High/Hearing Aid

Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 6.421 V/m; Power Drift = -0.47 dB

Applied MIF = -1.62 dB

RF audio interference level = 14.76 dBV/m


Emission category: M4

MIF scaled E-field

Grid 1 M4	Grid 2 M4	Grid 3 M4
14.85 dBV/m	17.78 dBV/m	17.3 dBV/m
Grid 4 M4	Grid 5 M4	Grid 6 M4
13.23 dBV/m	14.76 dBV/m	14.55 dBV/m
Grid 7 M4	Grid 8 M4	Grid 9 M4
13.27 dBV/m	13.6 dBV/m	13.26 dBV/m

Cursor:

Total = 17.78 dBV/m E Category: M4 Location: -5, -25, 7.7 mm

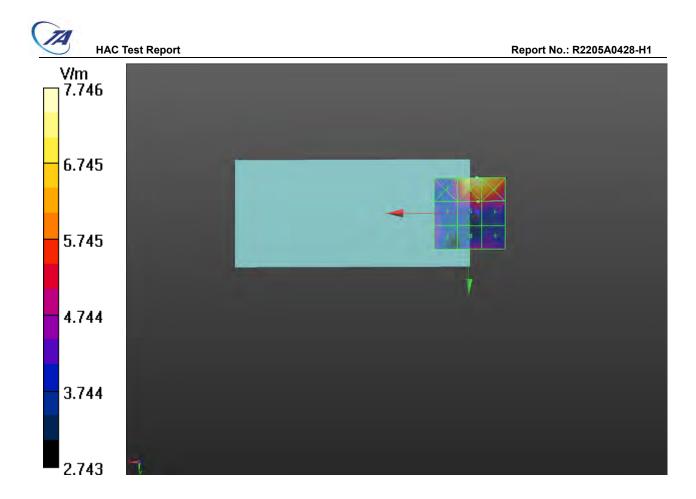



Plot 9 HAC RF E-Field LTE Band 38 High

Date: 2022/4/9 Communication System: UID 10172 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2610 MHz;Duty Cycle: 1:8.33105 Medium parameters used: $\sigma = 0$ S/m, $\varepsilon_r = 1$; $\rho = 1000$ kg/m³ Ambient Temperature:22.3 °C Liquid Temperature: 21.5 °C Phantom section: RF Section DASY5 Configuration: Sensor-Surface: 1.4mm (Mechanical Surface Detection) Probe: EF3DV3 – SN4048; ConvF(1, 1, 1); Calibrated: 2022/3/4 Electronics: DAE4 Sn1648; Calibrated: 2021/5/17 Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

HAC RF E-Field/E Scan - ER3D: 15 mm from Probe Center to the Device Low/Hearing Aid

Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 6.697 V/m; Power Drift = -0.13 dB

Applied MIF = -1.62 dB

RF audio interference level = 14.36 dBV/m


Emission category: M4

MIF scaled E-field

Grid 1 M4	Grid 2 M4	Grid 3 M4
14.39 dBV/m	16.92 dBV/m	16.89 dBV/m
Grid 4 M4	Grid 5 M4	Grid 6 M4
12.65 dBV/m	14.36 dBV/m	14.07 dBV/m
Grid 7 M4	Grid 8 M4	Grid 9 M4
13.77 dBV/m	12.03 dBV/m	12.64 dBV/m

Cursor:

Total = 16.92 dBV/m E Category: M4 Location: -7, -25, 7.7 mm

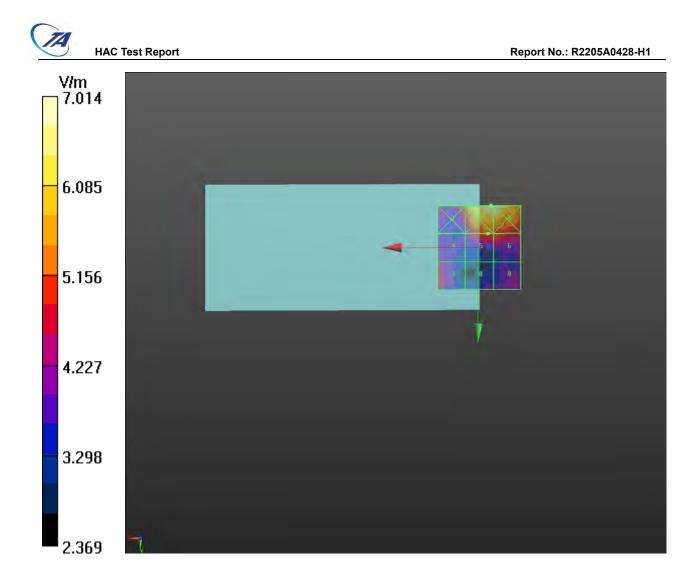



Plot 10 HAC RF E-Field 802.11g Low

Date: 2022/4/9 Communication System: UID 10575 - AAA, IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 90pc duty cycle); Frequency: 2412 MHz;Duty Cycle: 1:7.22936 Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³ Ambient Temperature:22.3 °C Liquid Temperature: 21.5 °C Phantom section: RF Section DASY5 Configuration: Sensor-Surface: 0mm (Mechanical Surface Detection) Probe: EF3DV3 – SN4048; ConvF(1, 1, 1); Calibrated: 2022/3/4 Electronics: DAE4 Sn1648; Calibrated: 2021/5/17 Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

HAC RF E-Field/E Scan - ER3D: 15 mm from Probe Center to the Device Middle/Hearing Aid

Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 15.38 V/m; Power Drift = 0.65 dB

Applied MIF = -6.10 dB

RF audio interference level = 17.11 dBV/m


Emission category: M4

MIF scaled E-field

Grid 1 M4	Grid 2 M4	Grid 3 M4
18.67 dBV/m	16.74 dBV/m	7.47 dBV/m
Grid 4 M4	Grid 5 M4	Grid 6 M4
18.9 dBV/m	17.11 dBV/m	8.26 dBV/m
Grid 7 M4	Grid 8 M4	Grid 9 M4
18.5 dBV/m	16.5 dBV/m	8.53 dBV/m

Cursor:

Total = 18.90 dBV/m E Category: M4 Location: 24.5, -0.5, 7.7 mm

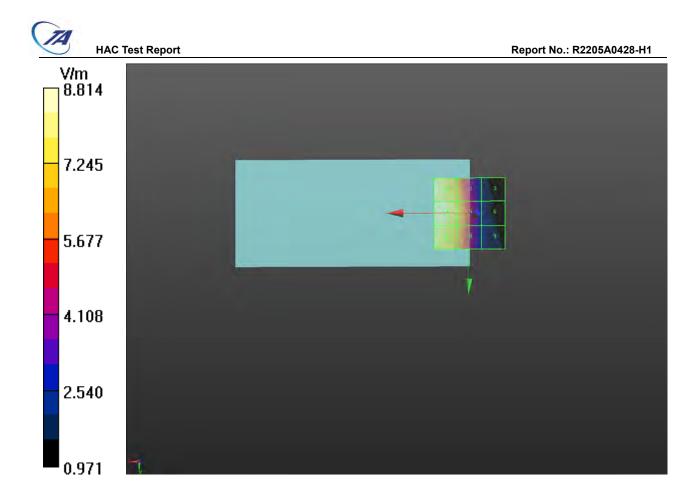



Plot 11 HAC RF E-Field 802.11g Middle

Date: 2022/4/9 Communication System: UID 10013 - CAB, IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps); Frequency: 2437 MHz;Duty Cycle: 1:8.82673 Medium parameters used: $\sigma = 0$ S/m, $\varepsilon_r = 1$; $\rho = 1000$ kg/m³ Ambient Temperature:22.3 °C Liquid Temperature: 21.5 °C Phantom section: RF Section DASY5 Configuration: Sensor-Surface: 0mm (Mechanical Surface Detection) Probe: EF3DV3 – SN4048; ConvF(1, 1, 1); Calibrated: 2022/3/4 Electronics: DAE4 Sn1648; Calibrated: 2021/5/17 Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

HAC RF E-Field/E Scan - ER3D: 15 mm from Probe Center to the Device High/Hearing Aid

Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 16.45 V/m; Power Drift = -8.56 dB

Applied MIF = -3.16 dB

RF audio interference level = 20.13 dBV/m


Emission category: M4

MIF scaled E-field

Grid 1 M4	Grid 2 M4	Grid 3 M4
21.45 dBV/m	19.65 dBV/m	10.06 dBV/m
Grid 4 M4	Grid 5 M4	Grid 6 M4
21.66 dBV/m	20.13 dBV/m	10.98 dBV/m
Grid 7 M4	Grid 8 M4	Grid 9 M4
21.34 dBV/m	19.63 dBV/m	11.26 dBV/m

Cursor:

Total = 21.66 dBV/m E Category: M4 Location: 23, -2, 7.7 mm

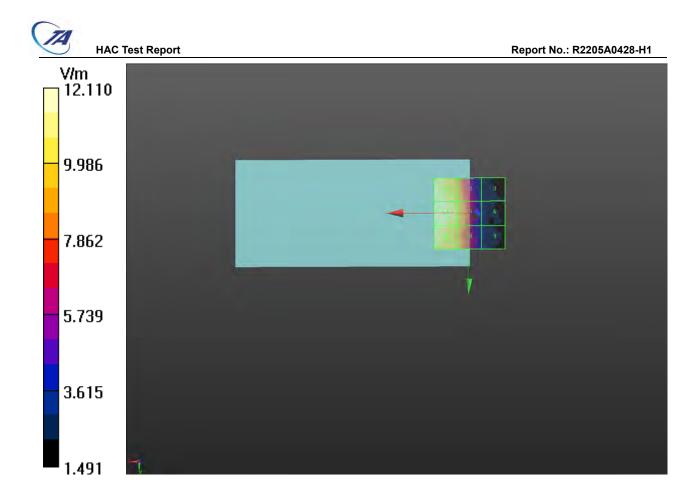



Plot 12 HAC RF E-Field 802.11g High

Date: 2022/4/9 Communication System: UID 10419 - AAA, IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc duty cycle, Short preambule); Frequency: 2462 MHz;Duty Cycle: 1:6.59781 Medium parameters used: $\sigma = 0$ S/m, $\varepsilon_r = 1$; $\rho = 1000$ kg/m³ Ambient Temperature:22.3 °C Liquid Temperature: 21.5 °C Phantom section: RF Section DASY5 Configuration: Sensor-Surface: 0mm (Mechanical Surface Detection) Probe: EF3DV3 – SN4048; ConvF(1, 1, 1); Calibrated: 2022/3/4 Electronics: DAE4 Sn1648; Calibrated: 2021/5/17 Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

HAC RF E-Field/E Scan - ER3D: 15 mm from Probe Center to the Device Low/Hearing Aid

Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 5.134 V/m; Power Drift = 2.42 dB

Applied MIF = -18.31 dB

RF audio interference level = -4.92 dBV/m


Emission category: M4

MIF scaled E-field

Grid 1 M4	Grid 2 M4	Grid 3 M4
-5.97 dBV/m	-5.79 dBV/m	-7.87 dBV/m
Grid 4 M4	Grid 5 M4	Grid 6 M4
-5.84 dBV/m	-4.92 dBV/m	-7.02 dBV/m
Grid 7 M4	Grid 8 M4	Grid 9 M4
-3.79 dBV/m	-3.03 dBV/m	-6.29 dBV/m

Cursor:

Total = -3.03 dBV/m E Category: M4 Location: 2, 23, 7.7 mm

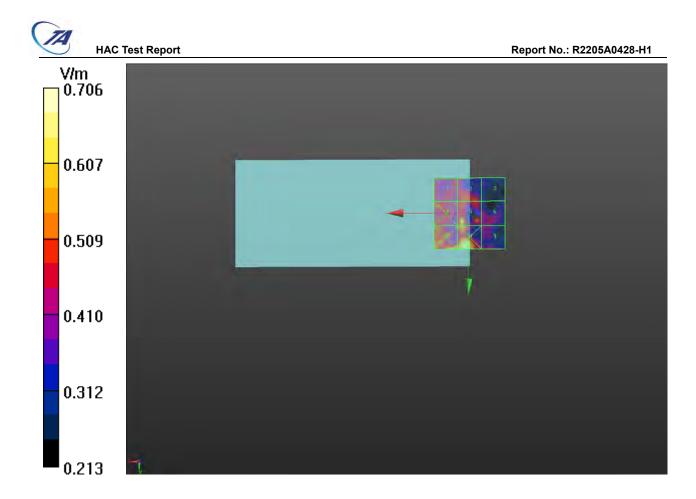



Plot 13 HAC RF E-Field 802.11a Low

Date: 2022/4/9 Communication System: UID 10317 - AAC, IEEE 802.11a WiFi 5 GHz (OFDM, 6 Mbps, 96pc duty cycle); Frequency: 5180 MHz;Duty Cycle: 1:6.85962 Medium parameters used: $\sigma = 0$ S/m, $\varepsilon_r = 1$; $\rho = 1000$ kg/m³ Ambient Temperature:22.3 °C Liquid Temperature: 21.5 °C Phantom section: RF Section DASY5 Configuration: Sensor-Surface: 0mm (Mechanical Surface Detection) Probe: EF3DV3 – SN4048; ConvF(1, 1, 1); Calibrated: 2022/3/4 Electronics: DAE4 Sn1648; Calibrated: 2021/5/17 Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

HAC RF E-Field/E Scan - ER3D: 15 mm from Probe Center to the Device Middle/Hearing Aid

Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 13.96 V/m; Power Drift = -10.44 dB

Applied MIF = -9.82 dB

RF audio interference level = 2.16 dBV/m


Emission category: M4

MIF scaled E-field

Grid 1 M4	Grid 2 M4	Grid 3 M4
17.72 dBV/m	1.98 dBV/m	0.44 dBV/m
Grid 4 M4	Grid 5 M4	Grid 6 M4
18.25 dBV/m	1.99 dBV/m	0.22 dBV/m
Grid 7 M4	Grid 8 M4	Grid 9 M4
17.62 dBV/m	2.16 dBV/m	0.62 dBV/m

Cursor:

Total = 18.25 dBV/m E Category: M4 Location: 23, -3, 7.7 mm

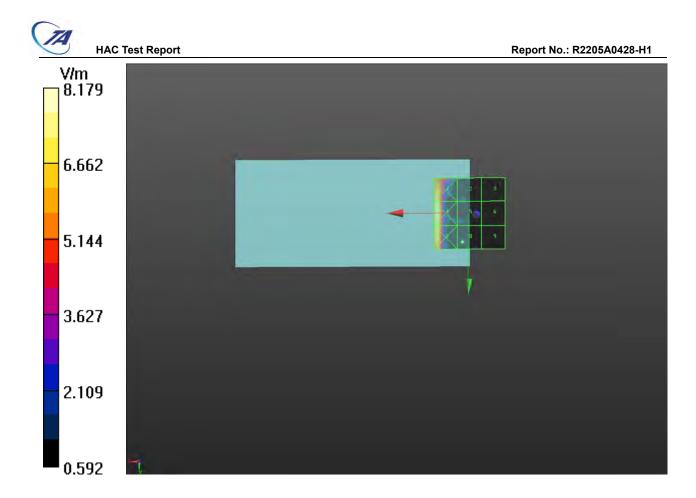



Plot 14 HAC RF E-Field 802.11a Middle

Date: 2022/4/9 Communication System: UID 10317 - AAC, IEEE 802.11a WiFi 5 GHz (OFDM, 6 Mbps, 96pc duty cycle); Frequency: 5200 MHz;Duty Cycle: 1:6.85962 Medium parameters used: $\sigma = 0$ S/m, $\varepsilon_r = 1$; $\rho = 1000$ kg/m³ Ambient Temperature:22.3 °C Liquid Temperature: 21.5 °C Phantom section: RF Section DASY5 Configuration: Sensor-Surface: 0mm (Mechanical Surface Detection) Probe: EF3DV3 – SN4048; ConvF(1, 1, 1); Calibrated: 2022/3/4 Electronics: DAE4 Sn1648; Calibrated: 2021/5/17 Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

HAC RF E-Field/E Scan - ER3D: 15 mm from Probe Center to the Device High/Hearing Aid

Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 4.687 V/m; Power Drift = -0.12 dB

Applied MIF = -9.82 dB

RF audio interference level = 1.54 dBV/m


Emission category: M4

MIF scaled E-field

Grid 1 M4	Grid 2 M4	Grid 3 M4
1.54 dBV/m	1.29 dBV/m	-0.63 dBV/m
Grid 4 M4	Grid 5 M4	Grid 6 M4
1.58 dBV/m	1.37 dBV/m	0.19 dBV/m
Grid 7 M4	Grid 8 M4	Grid 9 M4
2.08 dBV/m	2.13 dBV/m	0.78 dBV/m

Cursor:

Total = 2.13 dBV/m E Category: M4 Location: 5.5, 14.5, 7.7 mm

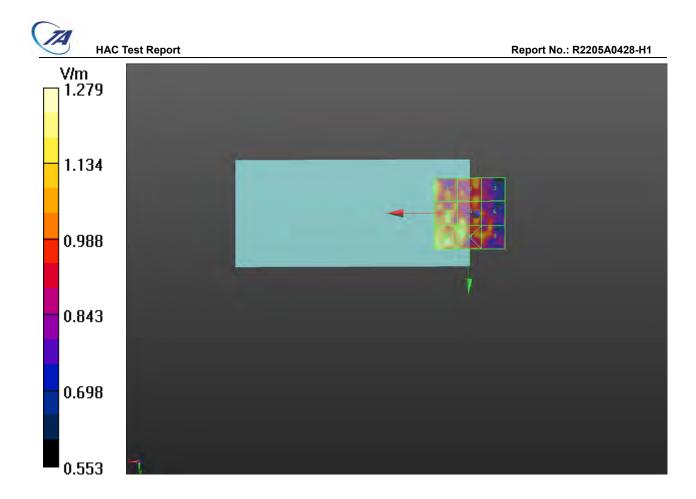



Plot 15 HAC RF E-Field 802.11a High

Date: 2022/4/9 Communication System: UID 10317 - AAC, IEEE 802.11a WiFi 5 GHz (OFDM, 6 Mbps, 96pc duty cycle); Frequency: 5240 MHz;Duty Cycle: 1:6.85962 Medium parameters used: $\sigma = 0$ S/m, $\varepsilon_r = 1$; $\rho = 1000$ kg/m³ Ambient Temperature:22.3 °C Liquid Temperature: 21.5 °C Phantom section: RF Section DASY5 Configuration: Sensor-Surface: 0mm (Mechanical Surface Detection) Probe: EF3DV3 – SN4048; ConvF(1, 1, 1); Calibrated: 2022/3/4 Electronics: DAE4 Sn1648; Calibrated: 2021/5/17 Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

HAC RF E-Field/E Scan - ER3D: 15 mm from Probe Center to the Device Low/Hearing Aid

Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 4.567 V/m; Power Drift = -0.88 dB

Applied MIF = -9.82 dB

RF audio interference level = 2.55 dBV/m


Emission category: M4

MIF scaled E-field

Grid 1 M4	Grid 2 M4	Grid 3 M4
2.1 dBV/m	0.54 dBV/m	0.21 dBV/m
Grid 4 M4	Grid 5 M4	Grid 6 M4
2.48 dBV/m	1.39 dBV/m	2.12 dBV/m
Grid 7 M4	Grid 8 M4	Grid 9 M4
3.21 dBV/m	1.16 dBV/m	2.55 dBV/m

Cursor:

Total = 3.21 dBV/m E Category: M4 Location: 25, 25, 7.7 mm

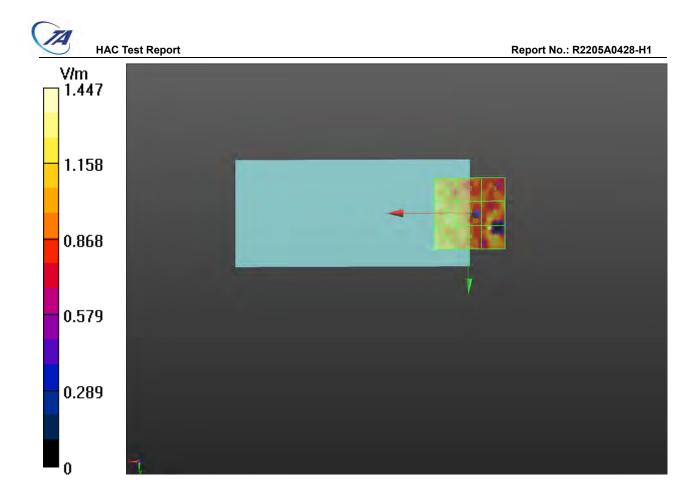



ANNEX C: E-Probe Calibration Certificate

	ich, Switzerland	S Sand Sand S	Swiss Calibration Service
accredited by the Swiss Accredi the Swiss Accreditation Servi Aultilateral Agreement for the	ice is one of the signatories	to the EA	creditation No.: SCS 0108
Client TA-SH (Auder	n)	Certificate No:	EF3-4048_Mar22
CALIBRATION	CERTIFICATE		
Object	EF3DV3- SN:4048		
Calibration procedure(s)	QA CAL-02.v9, QA Calibration proced evaluations in air	A CAL-25.v7 ure for E-field probes optimized f	or close near field
Calibration date:	March 4, 2022		
the measurements and the unit	certainties with confidence pro	bability are given on the following pages and	are part of the certificate.
All calibrations have been cond	lucted in the closed laboratory	bability are given on the following pages and : facility: environment temperature (22 \pm 3)°C a	
All calibrations have been cond Calibration Equipment used (M	lucted in the closed laboratory &TE critical for calibration)	facility: environment temperature (22 ± 3)°C a	and humidity < 70%.
All calibrations have been cond Calibration Equipment used (M Primary Standards	lucted in the closed laboratory		
All calibrations have been cond Calibration Equipment used (M Primary Standards Power meter NRP	lucted in the closed laboratory &TE critical for calibration)	facility: environment temperature (22 ± 3)°C a	and humidity < 70%.
All calibrations have been cond Calibration Equipment used (M Primary Standards Power meter NRP Power sensor NRP-Z91	Iucted in the closed laboratory &TE critical for calibration) ID SN: 104778	facility: environment temperature (22 ± 3)°C a Cal Date (Certificate No.) 09-Apr-21 (No. 217-03291/03292)	and humidity < 70%. Scheduled Calibration Apr-22
All calibrations have been cond Calibration Equipment used (M Primary Standards Power meter NRP Power sensor NRP-Z91 Power sensor NRP-Z91	Iucted in the closed laboratory &TE critical for calibration) ID SN: 104778 SN: 103244	facility: environment temperature (22 ± 3)°C a Cal Date (Certificate No.) 09-Apr-21 (No. 217-03291/03292) 09-Apr-21 (No. 217-03291)	And humidity < 70%. Scheduled Calibration Apr-22 Apr-22
All calibrations have been cond Calibration Equipment used (M Primary Standards Power meter NRP Power sensor NRP-Z91 Power sensor NRP-Z91 Reference 20 dB Attenuator	Iucted in the closed laboratory &TE critical for calibration) ID SN: 104778 SN: 103244 SN: 103245	facility: environment temperature (22 ± 3)°C a Cal Date (Certificate No.) 09-Apr-21 (No. 217-03291/03292) 09-Apr-21 (No. 217-03291) 09-Apr-21 (No. 217-03292)	And humidity < 70%. Scheduled Calibration Apr-22 Apr-22 Apr-22
All calibrations have been cond Calibration Equipment used (M Primary Standards Power sensor NRP-Z91 Power sensor NRP-Z91 Reference 20 dB Attenuator DAE4	Iucted in the closed laboratory &TE critical for calibration) ID SN: 104778 SN: 103244 SN: 103245 SN: CC2552 (20x)	facility: environment temperature (22 ± 3)°C a Cal Date (Certificate No.) 09-Apr-21 (No. 217-03291/03292) 09-Apr-21 (No. 217-03291) 09-Apr-21 (No. 217-03292) 09-Apr-21 (No. 217-03343)	Apr-22 Apr-22 Apr-22 Apr-22 Apr-22 Apr-22
All calibrations have been cond Calibration Equipment used (M Primary Standards Power meter NRP Power sensor NRP-Z91 Power sensor NRP-Z91 Reference 20 dB Attenuator DAE4 Reference Probe ER3DV6	Iucted in the closed laboratory &TE critical for calibration) ID SN: 104778 SN: 103244 SN: 103245 SN: CC2552 (20x) SN: 789	facility: environment temperature (22 ± 3)°C a Cal Date (Certificate No.) 09-Apr-21 (No. 217-03291/03292) 09-Apr-21 (No. 217-03291) 09-Apr-21 (No. 217-03292) 09-Apr-21 (No. 217-03343) 24-Dec-21 (No. DAE4-789_Dec21)	Apr-22 Apr-22 Apr-22 Apr-22 Apr-22 Apr-22 Apr-22 Dec-22
All calibrations have been cond Calibration Equipment used (M Primary Standards Power meter NRP Power sensor NRP-291 Power sensor NRP-291 Reference 20 dB Attenuator DAE4 Reference Probe ER3DV6 Secondary Standards	Incled in the closed laboratory &TE critical for calibration) ID SN: 104776 SN: 103244 SN: 103245 SN: CC2552 (20x) SN: 789 SN: 2328	facility: environment temperature (22 ± 3)°C a Cal Date (Certificate No.) 09-Apr-21 (No. 217-03291/03292) 09-Apr-21 (No. 217-03291) 09-Apr-21 (No. 217-03292) 09-Apr-21 (No. 217-03343) 24-Dec-21 (No. DAE4-789_Dec21) 08-Oct-21 (No. ER3-2328_Oct21)	and humidity < 70%. Scheduled Calibration Apr-22 Apr-22 Apr-22 Apr-22 Apr-22 Dec-22 Oct-22
All calibrations have been cond Calibration Equipment used (M Primary Standards Power meter NRP Power sensor NRP-Z91 Power sensor NRP-Z91 Reference 20 dB Attenuator DAE4 Reference Probe ER3DV6 Secondary Standards Power meter E4419B	Incled in the closed laboratory &TE critical for calibration) ID SN: 104776 SN: 103244 SN: 103245 SN: CC2552 (20x) SN: 789 SN: 2328 ID	facility: environment temperature (22 ± 3)°C a Cal Date (Certificate No.) 09-Apr-21 (No. 217-03291/03292) 09-Apr-21 (No. 217-03291) 09-Apr-21 (No. 217-03292) 09-Apr-21 (No. 217-03343) 24-Dec-21 (No. DAE4-789_Dec21) 08-Oct-21 (No. ER3-2328_Oct21) Check Date (in house)	and humidity < 70%. Scheduled Calibration Apr-22 Apr-22 Apr-22 Apr-22 Dec-22 Oct-22 Scheduled Check
All calibrations have been cond Calibration Equipment used (M Primary Standards Power sensor NRP-Z91 Power sensor NRP-Z91 Power sensor NRP-Z91 Reference 20 dB Attenuator DAE4 Reference Probe ER3DV6 Secondary Standards Power meter E4419B Power sensor E4412A Power sensor E4412A	Iucted in the closed laboratory &TE critical for calibration) ID SN: 104778 SN: 103245 SN: 103245 SN: CC2552 (20x) SN: 789 SN: 2328 ID SN: GB41293874 SN: GB41293874 SN: MY41498087 SN: 000110210	facility: environment temperature (22 ± 3)°C a Cal Date (Certificate No.) 09-Apr-21 (No. 217-03291/03292) 09-Apr-21 (No. 217-03291) 09-Apr-21 (No. 217-03292) 09-Apr-21 (No. 217-03343) 24-Dec-21 (No. DAE4-789_Dec21) 08-Oct-21 (No. ER3-2328_Oct21) 	and humidity < 70%. Scheduled Calibration Apr-22 Apr-22 Apr-22 Dec-22 Dec-22 Oct-22 Scheduled Check In house check: Jun-22
All calibrations have been cond Calibration Equipment used (M Primary Standards Power meter NRP Power sensor NRP-Z91 Power sensor NRP-Z91 Reference 20 dB Attenuator DAE4 Reference Probe ER3DV6 Secondary Standards Power meter E4419B Power sensor E4412A Power sensor E4412A RF generator HP 8648C	Iucted in the closed laboratory &TE critical for calibration) ID SN: 104778 SN: 103245 SN: 103245 SN: CC2552 (20x) SN: 789 SN: 2328 ID SN: GB41293874 SN: GB41293874 SN: MY41498087 SN: 000110210 SN: US3642U01700	facility: environment temperature (22 ± 3)°C a Cal Date (Certificate No.) 09-Apr-21 (No. 217-03291/03292) 09-Apr-21 (No. 217-03291) 09-Apr-21 (No. 217-03292) 09-Apr-21 (No. 217-03343) 24-Dec-21 (No. DAE4-789_Dec21) 08-Oct-21 (No. ER3-2328_Oct21) 	and humidity < 70%. Scheduled Calibration Apr-22 Apr-22 Apr-22 Dec-22 Dec-22 Oct-22 Scheduled Check In house check: Jun-22 In house check: Jun-22 In house check: Jun-22 In house check: Jun-22
All calibrations have been cond Calibration Equipment used (M Primary Standards Power meter NRP Power sensor NRP-Z91 Power sensor NRP-Z91 Reference 20 dB Attenuator DAE4 Reference Probe ER3DV6 Secondary Standards Power meter E4419B Power sensor E4412A Power sensor E4412A RF generator HP 8648C	Iucted in the closed laboratory &TE critical for calibration) ID SN: 104778 SN: 103245 SN: 103245 SN: CC2552 (20x) SN: 789 SN: 2328 ID SN: GB41293874 SN: GB41293874 SN: MY41498087 SN: 000110210	facility: environment temperature (22 ± 3)°C a Cal Date (Certificate No.) 09-Apr-21 (No. 217-03291/03292) 09-Apr-21 (No. 217-03291) 09-Apr-21 (No. 217-03292) 09-Apr-21 (No. 217-03343) 24-Dec-21 (No. DAE4-789_Dec21) 08-Oct-21 (No. ER3-2328_Oct21) 	and humidity < 70%. Scheduled Calibration Apr-22 Apr-22 Apr-22 Dec-22 Dec-22 Oct-22 Scheduled Check In house check: Jun-22 In house check: Jun-22 In house check: Jun-22
All calibrations have been cond Calibration Equipment used (M Primary Standards Power sensor NRP-Z91 Power sensor NRP-Z91 Reference 20 dB Attenuator DAE4 Reference Probe ER3DV6 Secondary Standards Power meter E44198 Power sensor E4412A Power sensor E4412A RF generator HP 8648C Network Analyzer E8358A	Iucted in the closed laboratory &TE critical for calibration) ID SN: 104778 SN: 103244 SN: 103245 SN: CC2552 (20x) SN: 789 SN: 2328 ID SN: GB41293874 SN: MY41498087 SN: 000110210 SN: US3642U01700 SN: US3642U01700 SN: US41080477 Name	facility: environment temperature (22 ± 3)°C a Cal Date (Certificate No.) 09-Apr-21 (No. 217-03291/03292) 09-Apr-21 (No. 217-03291) 09-Apr-21 (No. 217-03292) 09-Apr-21 (No. 217-03343) 24-Dec-21 (No. ER3-2328_Oct21) 06-Oct-21 (No. ER3-2328_Oct21) Check Date (in house) 06-Apr-16 (in house check Jun-20) 06-Apr-16 (in house check Jun-20) 06-Apr-16 (in house check Jun-20) 04-Aug-99 (in house check Jun-20) 04-Aug-99 (in house check Jun-20) 31-Mar-14 (in house check Oct-20) Function	and humidity < 70%. Scheduled Calibration Apr-22 Apr-22 Apr-22 Dec-22 Dec-22 Oct-22 Scheduled Check In house check: Jun-22 In house check: Jun-22 In house check: Jun-22 In house check: Jun-22
All calibrations have been cond Calibration Equipment used (M Primary Standards Power meter NRP Power sensor NRP-Z91 Power sensor NRP-Z91 Reference 20 dB Attenuator DAE4 Reference Probe ER3DV6 Secondary Standards Power meter E4419B Power sensor E4412A Power sensor E4412A RF generator HP 8648C	Iucted in the closed laboratory &TE critical for calibration) ID SN: 104778 SN: 103244 SN: 103245 SN: CC2552 (20x) SN: 789 SN: 2328 ID SN: GB41293874 SN: 000110210 SN: US3642U01700 SN: US41080477	facility: environment temperature (22 ± 3)°C a Cal Date (Certificate No.) 09-Apr-21 (No. 217-03291/03292) 09-Apr-21 (No. 217-03291) 09-Apr-21 (No. 217-03292) 09-Apr-21 (No. 217-03343) 24-Dec-21 (No. DAE4-789_Dec21) 08-Oct-21 (No. ER3-2328_Oct21) Check Date (in house) 06-Apr-16 (in house check Jun-20) 06-Apr-16 (in house check Jun-20) 06-Apr-16 (in house check Jun-20) 04-Aug-99 (in house check Jun-20) 31-Mar-14 (in house check Oct-20)	Apr-22 Apr-22 Apr-22 Apr-22 Dec-22 Oct-22 Scheduled Check In house check: Jun-22 In house check: Jun-22
All calibrations have been cond Calibration Equipment used (M Primary Standards Power sensor NRP-Z91 Power sensor NRP-Z91 Reference 20 dB Attenuator DAE4 Reference Probe ER3DV6 Secondary Standards Power meter E44198 Power sensor E4412A Power sensor E4412A RF generator HP 8648C Network Analyzer E8358A	Iucted in the closed laboratory &TE critical for calibration) ID SN: 104778 SN: 103244 SN: 103245 SN: CC2552 (20x) SN: 789 SN: 2328 ID SN: GB41293874 SN: MY41498087 SN: 000110210 SN: US3642U01700 SN: US3642U01700 SN: US41080477 Name	facility: environment temperature (22 ± 3)°C a Cal Date (Certificate No.) 09-Apr-21 (No. 217-03291/03292) 09-Apr-21 (No. 217-03291) 09-Apr-21 (No. 217-03291) 09-Apr-21 (No. 217-03343) 24-Dec-21 (No. ER3-2328_Oct21) 06-Oct-21 (No. ER3-2328_Oct21) Check Date (in house) 06-Apr-16 (in house check Jun-20) 06-Apr-16 (in house check Jun-20) 06-Apr-16 (in house check Jun-20) 04-Aug-99 (in house check Jun-20) 04-Aug-99 (in house check Jun-20) 31-Mar-14 (in house check Oct-20) Function	Apr-22 Apr-22 Apr-22 Apr-22 Dec-22 Oct-22 Scheduled Check In house check: Jun-22 In house check: Jun-22
All calibrations have been cond Calibration Equipment used (M Primary Standards Power meter NRP Power sensor NRP-Z91 Power sensor NRP-Z91 Reference 20 dB Attenuator DAE4 Reference Probe ER3DV6 Secondary Standards Power sensor E44198 Power sensor E4412A Power sensor E4412A RF generator HP 8648C Network Analyzer E8358A Calibrated by:	Iucted in the closed laboratory &TE critical for calibration) ID SN: 104778 SN: 103244 SN: 103245 SN: 202552 (20x) SN: 789 SN: 2328 ID SN: GB41293874 SN: GB41293874 SN: MY41498087 SN: 00110210 SN: US3642U01700 SN: US3642U01700 SN: US41080477 Name Aidonia Georgiadou	facility: environment temperature (22 ± 3)°C a Cal Date (Certificate No.) 09-Apr-21 (No. 217-03291/03292) 09-Apr-21 (No. 217-03291) 09-Apr-21 (No. 217-03292) 09-Apr-21 (No. 217-03343) 24-Dec-21 (No. DAE4-789_Dec21) 08-Oct-21 (No. ER3-2328_Oct21) Check Date (in house) 06-Apr-16 (in house check Jun-20) 06-Apr-16 (in house check Jun-20) 06-Apr-16 (in house check Jun-20) 04-Aug-99 (in house check Jun-20) 31-Mar-14 (in house check Jun-20) Function Laboratory Technician	Apr-22 Apr-22 Apr-22 Apr-22 Dec-22 Oct-22 Scheduled Check In house check: Jun-22 In house check: Jun-22

Page 1 of 22



Calibration Laboratory of Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland



S S

Schweizerischer Kallbrierdienst Service suisse d'étaionnage Servizio svizzero di taratura

Swiss Calibration Service

Accreditation No.: SCS 0108

Accredited by the Swiss Accreditation Service (SAS) The Swiss Accreditation Service Is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Glossary:

probe axis (at measurement center),
r X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1309-2005, "IEEE Standard for calibration of electromagnetic field sensors and probes, excluding antennas, from 9 kHz to 40 GHz", December 2005
- b) CTIA Test Plan for Hearing Aid Compatibility, Rev 3.1.1, May 2017

Methods Applied and Interpretation of Parameters:

- NORMx,y,z: Assessed for E-field polarization θ = 0 for XY sensors and θ = 90 for Z sensor (f ≤ 900 MHz in TEM-cell; f > 1800 MHz; R22 waveguide).
- NORM(f)x,y,z = NORMx,y,z * frequency_response (see Frequency Response Chart).
- DCPx,y,z: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- Ax,y,z; Bx,y,z; Cx,y,z; Dx,y,z; VRx,y,z: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- Spherical Isotropy (3D deviation from Isotropy): in a locally homogeneous field realized using an open waveguide setup.
- Sensor Offset: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle: The angle is assessed using the information gained by determining the NORMx (no uncertainty required).

Certificate No: EF3-4048_Mar22

Page 2 of 22



March 4, 2022

DASY/EASY - Parameters of Probe: EF3DV3 - SN:4048

Basic Calibration Parameters

a weather the second second second	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm (µV/(V/m)2)	0.62	0.60	1.13	± 10.1 %
DCP (mV) ^B	102.7	101.2	96.0	

Calibration results for Frequency Response (30 MHz - 6 GHz)

Frequency MHz	Target E-Field V/m	Measured E-field (En) V/m	Deviation E-normal in %	Measured E-field (Ep) V/m	Deviation E-normal in %	Unc (k=2) %
30	77.3	77.4	0.2%	77.6	0.4%	± 5.1 %
100	77.1	78.2	1.4%	77.5	0.6%	± 5.1 %
450	77.2	78.3	1.4%	77.9	0.9%	± 5.1 %
600	77.1	77.8	1.0%	77.4	0.4%	± 5.1 %
750	77.2	77.7	0.7%	77.2	0.1%	± 5.1 %
1800	142.5	138.8	-2.6%	140.0	-1.8%	± 5.1 %
2000	135.2	131.6	-2.6%	132.2	-2.2%	± 5.1 %
2200	127.8	123.6	-3.3%	125.1	-2.1%	± 5.1 %
2500	125.6	122.5	-2.4%	124.1	-1.1%	± 5.1 %
3000	79.3	75.6	-4.7%	77.1	-2.8%	± 5.1 %
3500	257.2	248.3	-3.5%	246.2	-4.3%	± 5.1 %
3700	249.6	239.2	-4.2%	238.3	-4.5%	± 5.1 %
5200	50.8	51.4	1.3%	51.4	1.3%	± 5.1 %
5500	49.6	49.3	-0.5%	48.0	-3.3%	± 5.1 %
5800	48.9	48.6	-0.7%	49.6	1.5%	± 5.1 %

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^B Numerical linearization parameter: uncertainty not required.
 ^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

Certificate No: EF3-4048_Mar22

Page 3 of 22



March 4, 2022

DASY/EASY - Parameters of Probe: EF3DV3 - SN:4048

Calibration Results for Modulation Response

UID	Communication System Name		A dB	B dBõV	c	D dB	VR mV	Max dev.	Max Unc ^E (k=2)
0	CW	X	0.00	0.00	1.00	0.00	197.5	± 3.0 %	± 4.7 %
		Y	0.00	0.00	1.00	1000	192.9	1.000	
	Carrier and the second second	Z 0.00 0.00 1.00			162.7		1.0		
10352-	Pulse Waveform (200Hz, 10%)	X	3.22	67.12	10.90	10.00	60.0	±0.9%	± 9.6 %
AAA	A CONTRACTOR AND A CARD AND	Y	9.03	80,70	18.44	AT ST.D	60.0	000000	- FAT 28
	Land, same a second second	Z	20.00	92.14	22.11		60.0	1	
10353-	Pulse Waveform (200Hz, 20%)	X	1.94	65.32	9.08	6.99	80.0	± 1.0 %	± 9.6 %
AAA		Y	20.00	90.63	20.14	2077	80.0		
	the second se	Z	20.00	93.23	21.31	e sallari k	80.0		1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 -
10354-	Pulse Waveform (200Hz, 40%)	X	1.05	64.19	7.65	3.98	95.0	± 1.0 %	± 9.6 %
AAA	A STATE OF A STATE AND A STATE A	Y	20.00	91.09	18.81	95.0 95.0			
11 M.		Z	20.00	98.06	22.15			1	
10355-	Pulse Waveform (200Hz, 60%)	Pulse Waveform (200Hz, 60%) X	0.88	65.89	7.73	2.22	120.0	± 1.1 %	± 9.6 %
AAA		Y	20.00	93.18	18.50		120.0		
		Z	20.00	112.58	27.62	1	120.0	1	1000
10387-	QPSK Waveform, 1 MHz	X	1.93	69.63	16.86	1.00	150.0	.0 ± 1.0 %	± 9.6 %
AAA		Y	2.00	67.90	16.54		150.0		
	and the second sec	Z	2.57	74.71	20.31		150.0		
10388-	QPSK Waveform, 10 MHz	X	2.58	71.02	17.48	0.00	150.0	± 0.7 %	± 9.6 %
AAA	and a second	Y	2.78	71.20	17.38	10000	150.0		1
1979. A. 19		Z	3.72	77.82	21.13		150.0		
10396-	64-QAM Waveform, 100 kHz	X	3.12	74.00	20.62	3.01	150.0	±0.6 %	± 9.6 %
AAA		Y	3.98	74.91	20.74		150.0	and the second	
	Contraction of the second	Z	3.30	73.51	20.91		150.0		
10399-	64-QAM Waveform, 40 MHz	X	3.63	68.00	16.45	0.00	150.0	±0.8%	± 9.6 %
AAA		Y	3.75	68.07	16.43		150.0	1	
	States and the second states	Z	4.05	70.04	17.94	1. C. 1.	150.0	a la composition de la composi	-
10414-	WLAN CCDF, 64-QAM, 40MHz	X	4.91	66.12	15.96	0.00	150.0	±1.1%	±9.6%
AAA	the box of a second state of the second	Y	5.13	66.06	15.91		150.0	100.00	0.000
		Z	5.18	66.77	16.68		150.0		

Note: For details on UID parameters see Appendix

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Numerical linearization parameter: uncertainty not required.

E Uncertainty is determined using the max, deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

Certificate No: EF3-4048 Mar22

Page 4 of 22



March 4, 2022

DASY/EASY - Parameters of Probe: EF3DV3 - SN:4048

Sensor Frequency Model Parameters

Sensor X	Sensor Y	Sensor Z
0.00	0.04	5.80
2.82	2.82	2.82
	0.00	0.00 0.04

Sensor Model Parameters

	C1 fF	C2 fF	ά	T1 ms.V ⁻²	T2 ms.V ⁻¹	T3 ms	T4	T5 V-1	T6
Х	46.2	300.95	36.02	8.14	0.40	4.95	1.67	0.00	1.00
Y	70.3	462.16	36.58	17.98	1.11	5.01	1.08	0.42	1.01
Z	57.3	384.37	38.30	14.54	0.86	5.05	0.22	0.44	1.00

Other Probe Parameters


Sensor Arrangement	Rectangular
Connector Angle (°)	157
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	12 mm
Tip Length	25 mm
Tip Diameter	4 mm
Probe Tip to Sensor X Calibration Point	1.5 mm
Probe Tip to Sensor Y Calibration Point	1.5 mm
Probe Tip to Sensor Z Calibration Point	1.5 mm

Certificate No: EF3-4048_Mar22


Page 5 of 22




March 4, 2022

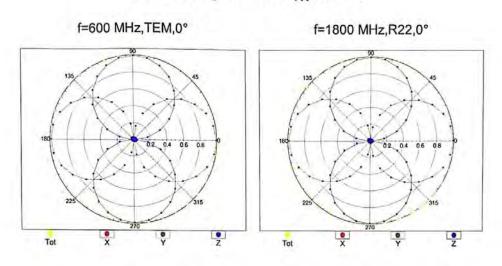


Receiving Pattern (ϕ), $\vartheta = 0^{\circ}$

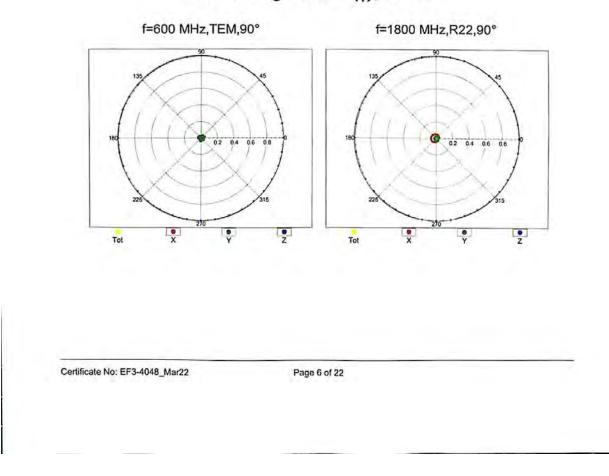






March 4, 2022

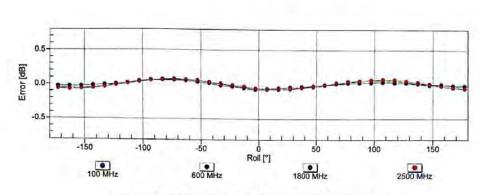

Uncertainty of Axial Isotropy Assessment: ± 0.5% (k=2)

Receiving Pattern (ϕ), $\vartheta = 90^{\circ}$

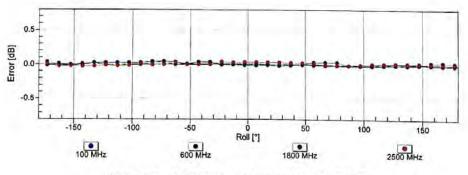

Uncertainty of Axial Isotropy Assessment: ± 0.5% (k=2)

Certificate No: EF3-4048_Mar22

Page 7 of 22




Report No.: R2205A0428-H1

EF3DV3 - SN:4048

March 4, 2022

Dynamic Range f(E-field) (TEM cell, f = 900 MHz)

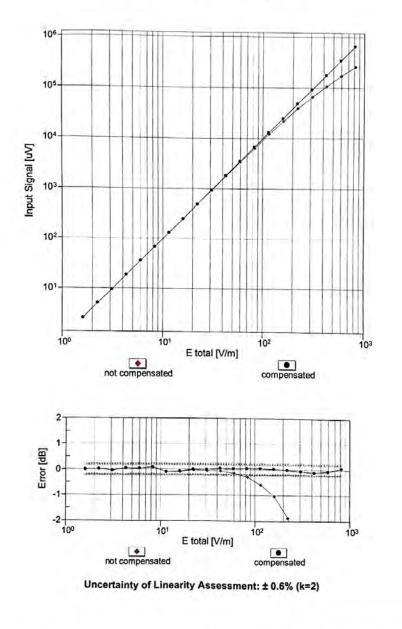


Certificate No: EF3-4048_Mar22

Page 8 of 22



March 4, 2022

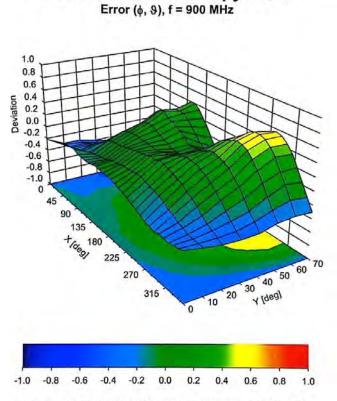

Deviation from Isotropy in Air

Uncertainty of Spherical Isotropy Assessment: ± 2.6% (k=2)

Certificate No: EF3-4048_Mar22

Page 9 of 22



March 4, 2022

Appendix: Modulation Calibration Parameters

UID	Rev	Communication System Name	Group	PAR (dB)	Unc ^E (k=2)
0		CW	CW	0.00	± 4.7 %
10010	CAA	SAR Validation (Square, 100ms, 10ms)	Test	10.00	± 9.6 %
10011	CAB	UMTS-FDD (WCDMA)	WCDMA	2.91	± 9.6 %
10012	CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps)	WLAN	1.87	± 9.6 %
10013	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps)	WLAN	9.46	± 9.6 %
10021	DAC	GSM-FDD (TDMA, GMSK)	GSM	9.39	± 9.6 %
10023	DAC	GPRS-FDD (TDMA, GMSK, TN 0)	GSM	9.57	± 9.6 %
10024	DAC	GPRS-FDD (TDMA, GMSK, TN 0-1)	GSM	6.56	± 9.6 %
10025	DAC	EDGE-FDD (TDMA, 8PSK, TN 0)	GSM	12.62	± 9.6 %
10026	DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1)	GSM	9.55	± 9.6 %
10027	DAC	GPRS-FDD (TDMA, GMSK, TN 0-1-2)	GSM	4.80	± 9.6 %
10028	DAC	GPRS-FDD (TDMA, GMSK, TN 0-1-2-3)	GSM	3.55	± 9.6 %
10029	DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1-2)	GSM	7.78	± 9.6 %
10030	CAA	IEEE 802.15.1 Bluetooth (GFSK, DH1)	Bluetooth	5.30	± 9.6 %
10031	CAA	IEEE 802.15.1 Bluetooth (GFSK, DH3)	Bluetooth	1.87	± 9.6 %
10032	CAA	IEEE 802.15.1 Bluetooth (GFSK, DH5)	Bluetooth	1.16	± 9.6 %
10033	CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH1)	Bluetooth	7.74	± 9.6 %
10034	CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH3)	Bluetooth	4.53	± 9.6 %
10035	CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH5)	Bluetooth	3.83	± 9.6 %
10036	CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH1)	Bluetooth	8.01	± 9.6 %
10037	CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH3)	Bluetooth	4.77	± 9.6 %
10038	CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH5)	Bluetooth	4.10	± 9.6 %
10039	CAB	CDMA2000 (1xRTT, RC1)	CDMA2000	4.57	± 9.6 %
10042	CAB	IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Halfrate)	AMPS	7.78	± 9.6 %
10044	CAA	IS-91/EIA/TIA-553 FDD (FDMA, FM)	AMPS	0.00	± 9.6 %
10048	CAA	DECT (TDD, TDMA/FDM, GFSK, Full Slot, 24)	DECT	13.80	±9.6%
10049	CAA	DECT (TDD, TDMA/FDM, GFSK, Double Slot, 12)	DECT	10.79	± 9.6 %
10056	CAA	UMTS-TDD (TD-SCDMA, 1.28 Mcps)	TD-SCDMA	11.01	± 9.6 %
10058	DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1-2-3)	GSM	6.52	± 9.6 %
10059	CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps)	WLAN	2.12	± 9.6 %
10060	CAB	IEEE 802.11b WiFI 2.4 GHz (DSSS, 5.5 Mbps)	WLAN	2.83	
10061	CAB	IEEE 802.11b WIFI 2.4 GHz (DSSS, 11 Mbps)	WLAN	3.60	± 9.6 %
10062	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps)	WLAN	8.68	± 9.6 %
10063	CAD	IEEE 802.11a/h WIFI 5 GHz (OFDM, 9 Mbps)	WLAN		± 9.6 %
10064	CAD	IEEE 802.11a/h WIFI 5 GHz (OFDM, 12 Mbps)	WLAN	8.63	± 9.6 %
10065	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps)	WLAN	9.09	± 9.6 %
10066	CAD	IEEE 802.11a/h WiFI 5 GHz (OFDM, 24 Mbps)	WLAN	9.00	± 9.6 %
10067	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps)	WLAN	9.38	± 9.6 %
10068	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps)	WLAN	10.12	± 9.6 %
10069	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps)	WLAN	10.24	± 9.6 %
10071	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 9 Mbps)		10.56	±9.6%
10072		IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 12 Mbps)	WLAN	9.83	±9.6 %
10072	CAB	IEEE 802.11g WIFI 2.4 GHz (DSSS/OFDM, 12 Mbps)	WLAN	9.62	± 9.6 %
10073	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 18 Mbps)	WLAN	9.94	± 9.6 %
10075	CAB	IEEE 802.11g WIFI 2.4 GHz (DSSS/OFDM, 24 Mbps)	WLAN	10.30	± 9.6 %
10076	CAB		WLAN	10.77	± 9.6 %
10076	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 48 Mbps)	WLAN	10.94	± 9.6 %
10081	CAB	IEEE 802.11g WiFI 2.4 GHz (DSSS/OFDM, 54 Mbps)	WLAN	11.00	± 9.6 %
10082	CAB	CDMA2000 (1xRTT, RC3)	CDMA2000	3.97	± 9.6 %
10082	CAB	IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Fullrate)	AMPS	4.77	±9.6%
	DAC	GPRS-FDD (TDMA, GMSK, TN 0-4)	GSM	6.56	±9.6%
10097	CAC	UMTS-FDD (HSDPA)	WCDMA	3.98	±9.6%
10098	DAC	UMTS-FDD (HSUPA, Subtest 2)	WCDMA	3.98	± 9.6 %
10099	CAC	EDGE-FDD (TDMA, 8PSK, TN 0-4)	GSM	9.55	± 9.6 %

Certificate No: EF3-4048_Mar22

Page 10 of 22




March 4, 2022

10100	CAC	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	LTE-FDD	5.67	± 9.6 %
10101	CAB	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)	LTE-FDD	6.42	±9.6%
10102	CAB	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)	LTE-FOD	6.60	± 9.6 %
10103	DAC	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	LTE-TDD	9.29	± 9.6 %
10104	CAE	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)	LTE-TDD	9.97	± 9.6 %
10105	CAE	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)	LTE-TOD	10.01	± 9.6 %
10108	CAE	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	LTE-FDD	5.80	±9.6 %
10109	CAG	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)	LTE-FDD	6.43	± 9.6 %
10110	CAG	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, QPSK)	LTE-FDD	5.75	±9.6 %
10111	CAG	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)	LTE-FDD	6.44	±9.6 %
10112	CAG	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)	LTE-FDD	6.59	± 9.6 %
10113	CAG	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)	LTE-FDD	6.62	± 9.6 %
10114	CAG	IEEE 802.11n (HT Greenfield, 13.5 Mbps, BPSK)	WLAN	8.10	±9.6 %
10115	CAG	IEEE 802.11n (HT Greenfield, 81 Mbps, 16-QAM)	WLAN	8.46	± 9.6 %
10116	CAG	IEEE 802.11n (HT Greenfield, 135 Mbps, 64-QAM)	WLAN	8.15	± 9.6 %
10117	CAG	IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK)	WLAN	8.07	± 9.6 %
10118	CAD	IEEE 802.11n (HT Mixed, 81 Mbps, 16-QAM)	WLAN	8.59	±9.6 %
10119	CAD	IEEE 802.11n (HT Mixed, 135 Mbps, 64-QAM)	WLAN	8.13	± 9.6 9
10140	CAD	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)	LTE-FDD	6.49	± 9.6 %
10141	CAD	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)	LTE-FDD	6.53	±9.6%
10142	CAD	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, QPSK)	LTE-FDD	5.73	±9.6 %
10143	CAD	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)	LTE-FDD	6.35	± 9.6 %
10144	CAC	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)	LTE-FDD	6.65	± 9.6 %
10145	CAC	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)	LTE-FDD	5.76	±9.6 %
10146	CAC	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)	LTE-FDD	6.41	± 9.6 9
10147	CAC	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)	LTE-FDD	6.72	± 9.6 9
10149	CAE	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)	LTE-FDD	6.42	± 9.6 9
10150	CAE	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)	LTE-FDD	6.60	± 9.6 %
10151	CAE	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TDD	9.28	± 9.6 %
10152	CAE	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)	LTE-TDD	9.92	± 9.6 9
10153	CAE	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)	LTE-TDD	10.05	± 9.6 4
10154	CAF	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	LTE-FDD	5.75	± 9.6 9
10155	CAF	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)	LTE-FDD	6.43	± 9.6 9
10156	CAF	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, QPSK)	LTE-FDD	5.79	± 9.6 9
10157	CAE	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)	LTE-FDD	6.49	± 9.6 9
10158	CAE	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)	LTE-FDD	6.62	± 9.6 9
10159	CAG	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)	LTE-FDD	6.56	± 9.6
10160	CAG	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	LTE-FDD	5.82	± 9.6 9
10161	CAG	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)	LTE-FDD	6.43	±9.69
10162	CAG	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)	LTE-FDD	6.58	± 9.6 9
10166	CAG	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)	LTE-FDD	5.46	± 9.6 9
10167	CAG	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM)	LTE-FDD	6.21	± 9.6 %
10168	CAG	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM)	LTE-FDD	6.79	± 9.6 9
10169		LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	LTE-FDD	5.73	± 9.6 %
10170	CAG	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)	LTE-FDD	6.52	±9.6 %
10171	CAE	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)	LTE-FDD	6.49	±9.6 %
10172		LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	LTE-TDD	9.21	±9.69
10173	CAE	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)	LTE-TDD	9.48	± 9.6 9
10174		LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)	LTE-TDD	10.25	± 9.6 %
10175	CAF	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	LTE-FDD	5.72	± 9.6 %
10176		LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)	LTE-FDD	6.52	± 9.6 %
10177	CAF	LTE-FDD (SC-FDMA, 1 RB, 10 MHZ, 10-CAM)	LTE-FDD	5.73	± 9.6 %
10178	CAE		LTE-FDD	6.52	± 9.6 %
10179	CAE	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM) LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)	LTE-FDD	6.50	± 9.6 %
10180	AAE	LTE-FDD (SC-FDMA, 1 RB, 10 MHZ, 64-QAM)	LTE-FDD	6.50	± 9.6 %
10100	CAG	LILTOD (SCHDWA, TKB, SWITZ, 04-QAW)	LIL-IUU	0.50	1 3.0 /

Certificate No: EF3-4048_Mar22

Page 11 of 22





10182	CAG	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)	LTE-FDD	6.52	± 9.6 %
0183	CAG	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)	LTE-FDD	6.50	± 9.6 %
0184	CAG	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, QPSK)	LTE-FDD	5.73	± 9.6 %
0185	CAL	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)	LTE-FDD	6.51	± 9.6 %
0186	CAG	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	LTE-FDD	6.50	± 9.6 %
10187	CAG	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)	LTE-FDD	5.73	± 9.6 %
10188	CAG	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)	LTE-FDD	6.52	± 9.6 %
10189	CAE	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)	LTE-FDD	6,50	± 9.6 %
10193	CAE	IEEE 802.11n (HT Greenfield, 6.5 Mbps, BPSK)	WLAN	8.09	± 9.6 %
10194	AAD	IEEE 802.11n (HT Greenfield, 39 Mbps, 16-QAM)	WLAN	8.12	± 9.6 %
10195	CAE	IEEE 802.11n (HT Greenfield, 65 Mbps, 64-QAM)	WLAN	8.21	± 9.6 %
10196	CAE	IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK)	WLAN	8.10	± 9.6 %
10197	AAE	IEEE 802.11n (HT Mixed, 39 Mbps, 16-QAM)	WLAN	8.13	± 9.6 %
10198	CAF	IEEE 802.11n (HT Mixed, 65 Mbps, 64-QAM)	WLAN	8.27	±9.6 %
10219	CAF	IEEE 802.11n (HT Mixed, 7.2 Mbps, BPSK)	WLAN	8.03	± 9.6 %
10220	AAF	IEEE 802.11n (HT Mixed, 43.3 Mbps, 16-QAM)	WLAN	8.13	± 9.6 %
10221	CAC	IEEE 802.11n (HT Mixed, 72.2 Mbps, 64-QAM)	WLAN	8.27	± 9.6 %
10222	CAC	IEEE 802.11n (HT Mixed, 15 Mbps, BPSK)	WLAN	8.06	± 9.6 %
0223	CAD	IEEE 802.11n (HT Mixed, 90 Mbps, 16-QAM)	WLAN	8,48	± 9.6 %
0224	CAD	IEEE 802.11n (HT Mixed, 150 Mbps, 64-QAM)	WLAN	8.08	± 9.6 %
0225	CAD	UMTS-FDD (HSPA+)	WCDMA	5,97	± 9.6 %
0226	CAD	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)	LTE-TDD	9.49	± 9.6 %
0227	CAD	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)	LTE-TDD	10.26	± 9.6 %
10228	CAD	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)	LTE-TDD	9.22	± 9.6 %
0229	DAC	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)	LTE-TDD	9.48	± 9.6 %
0230	CAC	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	LTE-TDD	10.25	± 9.6 %
0231	CAC	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK)	LTE-TDD	9.19	± 9.6 %
0232	CAD	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM)	LTE-TDD	9.48	± 9.6 %
0233	CAD	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM)	LTE-TDD	10.25	± 9.6 %
0234	CAD	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK)	LTE-TOD	9.21	± 9.6 %
0235	CAD	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)	LTE-TDD	9.48	± 9.6 %
0236	CAD	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)	LTE-TDD	10.25	± 9.6 %
0237	CAD	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	LTE-TDD	9.21	± 9.6 %
0238	CAB	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)	LTE-TDD	9.48	± 9.6 %
0239	CAB	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)	LTE-TDD	10.25	± 9.6 %
0240	CAB	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	LTE-TDD	9.21	± 9.6 %
0241	CAB	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM)	LTE-TDD	9.82	± 9.6 %
0242	CAD	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM) LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)	LTE-TDD	9.86	± 9.6 %
0243	CAD	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)	LTE-TDD	9.46	± 9.6 %
0245	CAD	The second s	LTE-TDD	10.06	± 9.6 %
0245	CAG	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM) LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK)	LTE-TDD	10.06	± 9.6 %
0240	CAG	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK)	LTE-TDD	9,30	± 9.6 %
0248	CAG	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)	LTE-TDD	9.91	± 9.6 %
0249	CAG	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 04-QAM)	LTE-TDD	10.09	± 9.6 %
0250		LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)	LTE-TDD	9.29	± 9.6 %
0251	CAG	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)	LTE-TDD	9.81	± 9.6 %
0252	CAF	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	LTE-TDD	10.17	± 9.6 %
0253	CAF	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)	LTE-TDD	9.24	± 9.6 %
0254	CAB	LTE-TDD (SC-FDMA, 50% RB, 15 MHZ, 16-QAM)	LTE-TDD	9.90	± 9.6 %
0255	CAB	LTE-TDD (SC-FDMA, 50% RB, 15 MHZ, 04-QAM)	LTE-TDD	10.14	± 9.6 %
0256	CAB	LTE-TDD (SC-FDMA, 30% RB, 15 MHZ, QPSK)	LTE-TDD	9.20	± 9.6 %
0257	CAD	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 10-QAM)	LTE-TDD	9.96	± 9.6 %
0258	CAD	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM) LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)	LTE-TOD	10.08	± 9.6 %
0259	CAD	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)	LTE-TDD	9.34	± 9.6 %
0260	UNU	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM) LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)	LTE-TDD	9.98	±9.6%

Certificate No: EF3-4048_Mar22

Page 12 of 22



March 4, 2022

10261	CAG	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK)	LTE-TDD	9.24	± 9.6 %
10262	CAG	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)	LTE-TDD	9.83	± 9.6 %
10263	CAG	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)	LTE-TDD	10.16	± 9.6 %
10264	CAG	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK)	LTE-TDD	9.23	± 9.6 %
10265	CAG	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)	LTE-TOD	9.92	±9.6 %
10266	CAF	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)	LTE-TOD	10.07	± 9.6 %
10267	CAF	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	LTE-TDD	9.30	± 9.6 %
10268	CAF	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)	LTE-TDD	10.06	± 9.6 %
10269	CAB	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)	LTE-TDD	10.13	± 9.6 %
10270	CAB	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	LTE-TDD	9.58	±9.6%
10274	CAB	UMTS-FDD (HSUPA, Sublest 5, 3GPP Rel8.10)	WCDMA	4.87	± 9.6 %
10275	CAD	UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.4)	WCDMA	3.96	± 9.6 %
10277	CAD	PHS (QPSK)	PHS	11.81	±9.6 9
10278	CAD	PHS (QPSK, BW 884MHz, Rolloff 0.5)	PHS	11.81	± 9.6 %
10279	CAG	PHS (QPSK, BW 884MHz, Rolloff 0.38)	PHS	12.18	± 9.6 %
10290	CAG	CDMA2000, RC1, SO55, Full Rate	CDMA2000	3.91	± 9.6 %
10291	CAG	CDMA2000, RC3, SO55, Full Rate	CDMA2000	3.46	± 9.6 %
10292	CAG	CDMA2000, RC3, SO32, Full Rate	CDMA2000	3.39	±9.6%
10293	CAG	CDMA2000, RC3, SO3, Full Rate	CDMA2000	3.50	± 9.6 %
10295	CAG	CDMA2000, RC1, SO3, 1/8th Rate 25 fr.	CDMA2000	12.49	± 9.6 %
10297	CAF	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-FDD	5.81	± 9.6 %
10298	CAF	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, QPSK)	LTE-FDD	5.72	± 9.6 %
10299	CAF	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 16-OAM)	LTE-FDD	6.39	± 9.6 %
10300	CAC	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)	LTE-FDD	6.60	± 9.6 %
10301		IEEE 802.16e WIMAX (29:18, 5ms, 10MHz, QPSK, PUSC)	WIMAX		-
10302	CAC	IEEE 802.16e WIMAX (29:18, 5ms, 10MHz, QPSK, PUSC, 3CTRL)		12.03	± 9.6 %
10303	CAB	IEEE 802.16e WIMAX (29.18, 5ms, 10MHz, QPSK, PUSC, 3CTRL)	WIMAX	12.57	± 9.6 %
10304	CAB	IEEE 802.16e WIMAX (31.13, 5ms, 10MHz, 640AW, PUSC)	WIMAX	12.52	± 9.6 %
10305	CAA	IEEE 802.16e WIMAX (2518, 5ms, 10MHz, 64QAM, PUSC)	WIMAX	11.86	± 9.6 %
10306	CAA	IEEE 802.16e WIMAX (29:18, 10ms, 10MHz, 64QAM, PUSC)	WIMAX	15.24	± 9.6 %
10307	CAA	IEEE 802.16e WIMAX (29:18, 10ms, 10MHz, 040AM, PUSC)	WIMAX	14.67	± 9.6 %
10308	AAB	IEEE 802.16e WIMAX (29:18, 10ms, 10MHz, 16QAM, PUSC)	WIMAX	14.49	± 9.6 %
10309	AAB	IEEE 802.16e WIMAX (29:18, 10ms, 10MHz, 16QAM, POSC)	WIMAX	14.46	± 9.6 %
10310	AAB	IEEE 802.16e WIMAX (29:18, 10ms, 10MHz, 16CAM, AMC 2X3)	WIMAX	14.58	± 9.6 %
10311	AAB	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	WIMAX	14.57	± 9.6 %
10313	AAB	IDEN 1:3	LTE-FDD	6.06	± 9.6 %
10314	AAD	IDEN 1.5	IDEN	10.51	± 9.6 %
10315	AAD	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 96pc dc)	IDEN	13.48	± 9.6 %
10316	AAD	IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 96pc dc)	WLAN	1.71	± 9.6 %
10317	AAD	IEEE 802.11g WIF12.4 GHz (ERF-OFDIM, 6 Mbps, 96pc dc)	WLAN	8.36	± 9.6 %
10352	AAA	Pulse Waveform (200Hz, 10%)	WLAN	8.36	± 9.6 %
0352	AAA	Pulse Waveform (200Hz, 10%) Pulse Waveform (200Hz, 20%)	Generic	10.00	± 9.6 %
0354	AAA	Pulse Waveform (200Hz, 40%)	Generic	6.99	± 9.6 %
0355	AAA	Pulse Waveform (200Hz, 40%)	Generic	3.98	± 9.6 %
0356	AAA	Pulse Waveform (200Hz, 80%)	Generic	2.22	± 9.6 %
10387	AAA	QPSK Waveform, 1 MHz	Generic	0.97	±9.6 %
0388	AAA		Generic	5.10	± 9.6 %
0396	AAA	QPSK Waveform, 10 MHz	Generic	5.22	± 9.6 %
0399	AAA	64-QAM Waveform, 100 kHz	Generic	6.27	±9.6%
0399	AAA	64-QAM Waveform, 40 MHz	Generic	6.27	± 9.6 %
0400	AAD	IEEE 802.11ac WiFi (20MHz, 64-QAM, 99pc dc)	WLAN	8.37	± 9.6 %
0401	AAA	IEEE 802.11ac WiFi (40MHz, 64-QAM, 99pc dc)	WLAN	8.60	± 9.6 %
0402	AAA	IEEE 802.11ac WiFi (80MHz, 64-QAM, 99pc dc)	WLAN	8.53	±9.6 %
	AAB	CDMA2000 (1xEV-DO, Rev. 0)	CDMA2000	3.76	± 9.6 %
10404 10406	AAB	CDMA2000 (1xEV-DO, Rev. A)	CDMA2000	3.77	± 9.6 %
	AAD	CDMA2000, RC3, SO32, SCH0, Full Rate	CDMA2000	5.22	± 9.6 %
10410	AAA	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Sub=2,3,4,7,8,9)	LTE-TDD	7.82	± 9.6 %

Certificate No: EF3-4048_Mar22

Page 13 of 22



March 4, 2022

10414	AAA	WLAN CCDF, 64-QAM, 40MHz	Generic	8.54	± 9.6 %
10415	AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc dc)	WLAN	1.54	± 9.6 %
10416	AAA	IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 99pc dc)	WLAN	8.23	± 9.6 %
10417	AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 99pc dc)	WLAN	8.23	± 9.6 %
10418	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc, Long)	WLAN	8.14	± 9.6 %
10419	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc, Short)	WLAN	8.19	± 9.6 %
10422	AAA	IEEE 802.11n (HT Greenfield, 7.2 Mbps, BPSK)	WLAN	8.32	± 9.6 %
10423	AAA	IEEE 802.11n (HT Greenfield, 43.3 Mbps, 16-QAM)	WLAN	8.47	± 9.6 %
10424	AAE	IEEE 802.11n (HT Greenfield, 72.2 Mbps, 64-QAM)	WLAN	8.40	± 9.6 %
10425	AAE	IEEE 802.11n (HT Greenfield, 15 Mbps, BPSK)	WLAN	8.41	± 9.6 %
10426	AAE	IEEE 802.11n (HT Greenfield, 90 Mbps, 16-QAM)	WLAN	8.45	± 9.6 %
10427	AAB	IEEE 802.11n (HT Greenfield, 150 Mbps, 64-QAM)	WLAN	8.41	± 9.6 %
10430	AAB	LTE-FDD (OFDMA, 5 MHz, E-TM 3.1)	LTE-FDD	8.28	± 9.6 %
10431	AAC	LTE-FDD (OFDMA, 10 MHz, E-TM 3.1)	LTE-FDD	8.38	± 9.6 %
10432	AAB	LTE-FDD (OFDMA, 15 MHz, E-TM 3.1)	LTE-FDD	8.34	± 9.6 %
10433	AAC	LTE-FDD (OFDMA, 20 MHz, E-TM 3.1)	LTE-FDD	8.34	± 9.6 %
10434	AAG	W-CDMA (BS Test Model 1, 64 DPCH)	WCDMA	8.60	± 9.6 %
10435	AAA	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Sub)	LTE-TDD	7.82	± 9.6 %
10447	AAA	LTE-FDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%)	LTE-FDD	7.56	± 9.6 %
10448	AAA	LTE-FDD (OFDMA, 10 MHz, E-TM 3.1, Clippin 44%)	LTE-FDD	7.53	± 9.6 %
10449	AAC	LTE-FDD (OFDMA, 15 MHz, E-TM 3.1, Cliping 44%)	LTE-FDD	7.51	± 9.6 %
10450	AAA	LTE-FDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%)	LTE-FDD	7.48	± 9.6 %
10451	AAA	W-CDMA (BS Test Model 1, 64 DPCH, Clipping 44%)	WCDMA	7.59	± 9.6 %
10453	AAC	Validation (Square, 10ms, 1ms)	Test	10.00	± 9.6 %
10456	AAC	IEEE 802.11ac WiFi (160MHz, 64-QAM, 99pc dc)	WLAN	8.63	± 9.6 %
10457	AAC	UMTS-FDD (DC-HSDPA)	WCDMA	6.62	± 9.6 %
10458	AAC	CDMA2000 (1xEV-DO, Rev. B, 2 carriers)	CDMA2000	6.55	and the second sec
10459	AAC	CDMA2000 (1xEV-DO, Rev. B. 3 carriers)	CDMA2000	8.25	± 9.6 %
10460	AAC	UMTS-FDD (WCDMA, AMR)	WCDMA	2.39	± 9.6 %
10461	AAC	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK, UL Sub)	LTE-TDD	7.82	± 9.6 %
10462	AAC	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM, UL Sub)	LTE-TDD	and the second se	± 9.6 %
10463	AAD	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM, UL Sub)	LTE-TDD	8.30	± 9.6 %
10464	AAD	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK, UL Sub)	LTE-TDD	7.82	± 9.6 %
10465	AAC	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM, UL Sub)	LTE-TDD		± 9.6 %
10466	AAC	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM, UL Sub)	LTE-TDD	8.32	± 9.6 %
10467	AAA	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Sub)	LTE-TDD	8.57	± 9.6 9
10468	AAF	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM, UL Sub)	LTE-TDD	7.82	± 9.6 9
10469	AAD	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM, UL Sub)	LTE-TDD	8.32	± 9.6 °
10470	AAD	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Sub)	LTE-TDD	8.56	± 9.6 9
10471	AAC	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM, UL Sub)	A strand in his second second second	7.82	± 9.6 %
10472		LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM, UL Sub)	LTE-TDD	8.32	± 9.6 9
10473	AAC	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK, UL Sub)	LTE-TDD	8.57	± 9.6 %
10474	AAA		LTE-TDD	7.82	± 9.6 %
10475	AAC	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM, UL Sub)	LTE-TDD	8.32	± 9.6 %
10477	AAD	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM, UL Sub)	LTE-TDD	8.57	± 9.6 %
10477	AAC	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM, UL Sub)	LTE-TDD	8.32	± 9.6 %
0478	AAC	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM, UL Sub)	LTE-TDD	8.57	± 9.6 %
a second as	AAC	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK, UL Sub)	LTE-TDD	7.74	± 9.6 %
0480	AAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM, UL Sub)	LTE-TDD	8.18	± 9.6 %
0481	AAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM, UL Sub)	LTE-TDD	8.45	± 9.6 %
0482	AAA	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK, UL Sub)	LTE-TDD	7.71	± 9.6 %
0483	AAA	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM, Sub)	LTE-TDD	8.39	± 9.6 %
0484	AAB	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM, UL Sub)	LTE-TDD	8.47	± 9.6 %
10485	AAB	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK, UL Sub)	LTE-TDD	7.59	± 9.6 %
0486	AAB	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM, UL Sub)	LTE-TDD	8.38	± 9.6 %
10487	AAC	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM, UL Sub)	LTE-TDD	8.60	± 9.6 %
0488	AAC	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK, UL Sub)	LTE-TDD	7.70	± 9.6 %

Certificate No: EF3-4048_Mar22

Page 14 of 22

TA Technology (Shanghai) Co., Ltd.TA-MB-04-001HPage 73 of 113This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.



March 4, 2022

10489	AAC	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM, UL Sub)	LTE-TDD	8.31	± 9.6 %
10490	AAF	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM, UL Sub)	LTE-TDD	8.54	± 9.6 %
10491	AAF	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK, UL Sub)	LTE-TDD	7.74	± 9.6 %
10492	AAF	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM, UL Sub)	LTE-TDD	8.41	± 9.6 %
10493	AAF	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM, UL Sub)	LTE-TDD	8.55	± 9.6 %
10494	AAF	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK, UL Sub)	LTE-TDD	7.74	± 9.6 %
10495	AAF	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM, UL Sub)	LTE-TDD	8.37	± 9.6 %
10496	AAE	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM, UL Sub)	LTE-TDD	8.54	± 9.6 %
10497	AAE	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK, UL Sub)	LTE-TDD	7.67	± 9.6 %
10498	AAE	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM, UL Sub)	LTE-TDD	8.40	± 9.6 %
10499	AAC	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM, UL Sub)	LTE-TDD	8.68	± 9.6 %
10500	AAF	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK, UL Sub)	LTE-TDD	7.67	± 9.6 %
10501	AAF	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM, UL Sub)	LTE-TDD	8.44	± 9.6 %
10502	AAB	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM, UL Sub)	LTE-TDD	8.52	± 9.6 %
10503	AAB	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK, UL Sub)	LTE-TDD	7.72	± 9.6 %
10504	AAB	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM, UL Sub)	LTE-TDD	8.31	± 9.6 %
10505	AAC	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM, UL Sub)	LTE-TDD	8.54	± 9.6 %
10506	AAC	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK, UL Sub)	LTE-TDD	7.74	± 9.6 %
10507	AAC	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM, UL Sub)	LTE-TDD	8.36	± 9.6 %
10508	AAF	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM, UL Sub)	LTE-TDD	8.55	± 9.6 %
10509	AAF	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK, UL Sub)	LTE-TDD	7.99	± 9.6 %
10510	AAF	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM, UL Sub)	LTE-TDD	8.49	± 9.6 %
10511	AAF	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM, UL Sub)	LTE-TDD	8.51	± 9.6 %
10512	AAF	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK, UL Sub)	LTE-TDD	7.74	± 9.6 %
10513	AAF	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM, UL Sub)	LTE-TDD	8.42	± 9.6 %
10514	AAE	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM, UL Sub)	LTE-TDD	8.45	± 9.6 %
10515	AAE	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 99pc dc)	WLAN	1.58	± 9.6 %
10516	AAE	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 99pc dc)	WLAN	1.57	± 9.6 %
10517	AAF	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 99pc dc)	WLAN	1.58	± 9.6 %
10518	AAF	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 99pc dc)	WLAN	8.23	± 9.6 %
10519	AAF	IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 99pc dc)	WLAN	8.39	± 9.6 %
10520	AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 99pc dc)	WLAN	8.39	± 9.6 %
10521	AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 99pc dc)	WLAN	7.97	
10522	AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 99pc dc)	WLAN	8.45	± 9.6 %
10523	AAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 99pc dc)	WLAN		± 9.6 %
10524	AAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 99pc dc)	WLAN	8.08	± 9.6 %
10525	AAC	IEEE 802.11ac WiFi (20MHz, MCS0, 99pc dc)	WLAN	8.27	± 9.6 %
10526	AAF	IEEE 802.11ac WiFi (20MHz, MCS1, 99pc dc)	WLAN	8.36	± 9.6 %
10527	AAF	IEEE 802.11ac WiFI (20MHz, MCS2, 99pc dc)	WLAN	8.42	± 9.6 %
10528		IEEE 802.11ac WiFi (20MHz, MCS3, 99pc dc)	WLAN	8.21	± 9.6 %
10529	AAF	IEEE 802.11ac WiFi (20MHz, MCS4, 99pc dc)	WLAN	8.36	± 9.6 %
10531	AAF	IEEE 802.11ac WiFi (20MHz, MCS6, 99pc dc)	WLAN	8.36	± 9.6 %
10532	AAF	IEEE 802.11ac WiFi (20MHz, MCS7, 99pc dc)	WLAN	8.43	± 9.6 %
10533	AAF	IEEE 802.11ac WiFi (20MHz, MCS8, 99pc dc)	WLAN	8.29	± 9.6 %
10534	AAE			8.38	± 9.6 %
10535	AAE	IEEE 802.11ac WiFi (40MHz, MCS0, 99pc dc)	WLAN	8.45	± 9.6 %
10536	AAE	IEEE 802.11ac WiFi (40MHz, MCS1, 99pc dc)	WLAN	8.45	± 9.6 %
10536	AAF	IEEE 802.11ac WiFi (40MHz, MCS2, 99pc dc)	WLAN	8.32	± 9.6 %
10537	AAF	IEEE 802.11ac WiFi (40MHz, MCS3, 99pc dc)	WLAN	8.44	± 9.6 %
10538	AAF	IEEE 802.11ac WiFI (40MHz, MCS4, 99pc dc)	WLAN	8.54	± 9.6 %
10540	AAA	IEEE 802.11ac WiFi (40MHz, MCS6, 99pc dc)	WLAN	8.39	± 9.6 %
and the second s	AAA	IEEE 802.11ac WiFI (40MHz, MCS7, 99pc dc)	WLAN	8.46	± 9.6 %
10542	AAA	IEEE 802.11ac WiFi (40MHz, MCS8, 99pc dc)	WLAN	8.65	± 9.6 %
10543	AAC	IEEE 802.11ac WiFi (40MHz, MCS9, 99pc dc)	WLAN	8.65	± 9.6 %
10544	AAC	IEEE 802.11ac WiFi (80MHz, MCS0, 99pc dc)	WLAN	8.47	± 9.6 %
10545	AAC	IEEE 802.11ac WiFi (80MHz, MCS1, 99pc dc)	WLAN	8.55	± 9.6 %
10546	AAC	IEEE 802.11ac WiFi (80MHz, MCS2, 99pc dc)	WLAN	8.35	± 9.6 %

Certificate No: EF3-4048_Mar22

Page 15 of 22



March 4, 2022

10547	AAC	IEEE 802.11ac WiFI (80MHz, MCS3, 99pc dc)	WLAN	8.49	± 9.6 %
10548	AAC	IEEE 802.11ac WiFI (80MHz, MCS4, 99pc dc)	WLAN	8.37	± 9.6 %
10550	AAC	IEEE 802.11ac WiFi (80MHz, MCS6, 99pc dc)	WLAN	8.38	± 9.6 %
10551	AAC	IEEE 802.11ac WiFi (80MHz, MCS7, 99pc dc)	WLAN	8.50	± 9.6 %
10552	AAC	IEEE 802.11ac WiFi (80MHz, MCS8, 99pc dc)	WLAN	8.42	± 9.6 %
10553	AAC	IEEE 802.11ac WiFi (80MHz, MCS9, 99pc dc)	WLAN	8,45	± 9.6 %
10554	AAC	IEEE 802.11ac WIFI (160MHz, MCS0, 99pc dc)	WLAN	8.48	± 9.6 %
10555	AAC	IEEE 802.11ac WiFi (160MHz, MCS1, 99pc dc)	WLAN	8,47	± 9.6 %
10556	AAC	IEEE 802.11ac WiFi (160MHz, MCS2, 99pc dc)	WLAN	8.50	± 9.6 %
10557	AAC	IEEE 802.11ac WiFi (160MHz, MCS3, 99pc dc)	WLAN	8.52	± 9.6 %
10558	AAC	IEEE 802.11ac WiFi (160MHz, MCS4, 99pc dc)	WLAN	8.61	± 9.6 %
10560	AAC	IEEE 802.11ac WIFi (160MHz, MCS6, 99pc dc)	WLAN	8.73	±9.6%
10561	AAC	IEEE 802.11ac WiFi (160MHz, MCS7, 99pc dc)	WLAN	8.56	± 9.6 %
10562	AAC	IEEE 802.11ac WiFi (160MHz, MCS8, 99pc dc)	WLAN	8.69	± 9.6 %
10563	AAC	IEEE 802.11ac WIFI (160MHz, MCS9, 99pc dc)	WLAN	8.77	±9.6%
10564	AAC	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 9 Mbps, 99pc dc)	WLAN	8.25	± 9.6 %
10565	AAC	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 12 Mbps, 99pc dc)	WLAN	8.45	±9.6%
10566	AAC	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 18 Mbps, 99pc dc)	WLAN	8.13	±9.6%
10567	AAC	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 24 Mbps, 99pc dc)	WLAN	8.00	±9.6%
10568	AAC	IEEE 802.11g WIFI 2.4 GHz (DSSS-OFDM, 36 Mbps, 99pc dc)	WLAN	8.37	± 9.6 %
10569	AAC	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 48 Mbps, 99pc dc)	WLAN	8.10	± 9.6 %
10570	AAC	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 54 Mbps, 99pc dc)	WLAN	8.30	± 9.6 %
10571	AAC	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 90pc dc)	WLAN	1.99	± 9.6 %
10572	AAC	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 90pc dc)	WLAN	1.99	± 9.6 %
10573	AAC	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 90pc dc)	WLAN	1.98	± 9.6 %
10574	AAC	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 90pc dc)	WLAN	1.98	± 9.6 %
10575	AAC	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 90pc dc)	WLAN	8.59	± 9.6 %
10576	AAC	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 9 Mbps, 90pc dc)	WLAN	8.60	± 9.6 %
10577	AAC	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 12 Mbps, 90pc dc)	WLAN	8.70	± 9.6 %
10578	AAD	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 18 Mbps, 90pc dc)	WLAN	8.49	± 9.6 %
10579	AAD	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 24 Mbps, 90pc dc)	WLAN	8.36	±9.6%
10580	AAD	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 36 Mbps, 90pc dc)	WLAN	8.76	±9.6%
10581	AAD	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 48 Mbps, 90pc dc)	WLAN	8.35	±9.69
10582	AAD	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 54 Mbps, 90pc dc)	WLAN	8.67	±9.6 %
10583	AAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 90pc dc)	WLAN	8.59	± 9.6 %
10584	AAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 90pc dc)	WLAN	8.60	± 9.6 %
10585	AAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 90pc dc)	WLAN	8.70	±9.69
10586	AAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 90pc dc)	WLAN	8.49	± 9.6 9
10587	AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 90pc dc)	WLAN	8.36	±9.69
10588	AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 90pc dc)	WLAN	8.76	± 9.6%
10589	AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 90pc dc)	WLAN	8.35	±9.6%
10590	AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 90pc dc)	WLAN	8.67	±9.6%
10591	AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS0, 90pc dc)	WLAN	8.63	± 9.6 %
10592	AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS1, 90pc dc)	WLAN	8.79	± 9.6 %
10593	AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS2, 90pc dc)	WLAN	8.64	± 9.6 %
10594	AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS3, 90pc dc)	WLAN	8.74	± 9.6 %
10595	AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS4, 90pc dc)	WLAN	8.74	±9.6%
10596	AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS5, 90pc dc)	WLAN	8.71	±9.6 %
10597	AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS6, 90pc dc)	WLAN	8.72	± 9.6 %
10598	AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS7, 90pc dc)	WLAN	8.50	± 9.6 %
10599	AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS0, 90pc dc)	WLAN	8.79	± 9.6 %
10600	AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS1, 90pc dc)	WLAN	8.88	± 9.6 %
10601	AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS2, 90pc dc)	WLAN	8.82	± 9.6 %
10602	AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS3, 90pc dc)	WLAN	8.94	± 9.6 %
10603	AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS4, 90pc dc)	WLAN	9.03	± 9.6 %
10604	AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS5, 90pc dc)	WLAN	8.76	± 9.6 %

Certificate No: EF3-4048_Mar22

Page 16 of 22



March 4, 2022

10605	AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS6, 90pc dc)	WLAN	8.97	± 9.6 %
10606	AAC	IEEE 802.11n (HT Mixed, 40MHz, MCS7, 90pc dc)	WLAN	8.82	± 9.6 %
10607	AAC	IEEE 802.11ac WiFI (20MHz, MCS0, 90pc dc)	WLAN	8.64	± 9.6 %
10608	AAC	IEEE 802.11ac WiFi (20MHz, MCS1, 90pc dc)	WLAN	8.77	± 9.6 %
10609	AAC	IEEE 802.11ac WIFI (20MHz, MCS2, 90pc dc)	WLAN	8.57	± 9.6 %
10610	AAC	IEEE 802,11ac WIFI (20MHz, MCS3, 90pc dc)	WLAN	8.78	± 9.6 %
10611	AAC	IEEE 802.11ac WiFI (20MHz, MCS4, 90pc dc)	WLAN	8.70	± 9.6 %
10612	AAC	IEEE 802.11ac WIFI (20MHz, MCS5, 90pc dc)	WLAN	8.77	± 9.6 %
10613	AAC	IEEE 802.11ac WiFi (20MHz, MCS6, 90pc dc)	WLAN	8.94	± 9.6 %
10614	AAC	IEEE 802.11ac WiFi (20MHz, MCS7, 90pc dc)	WLAN	8.59	± 9.6 %
10615	AAC	IEEE 802,11ac WiFI (20MHz, MCS8, 90pc dc)	WLAN	8.82	± 9.6 %
10616	AAC	IEEE 802.11ac WiFi (40MHz, MCS0, 90pc dc)	WLAN	8.82	± 9.6 %
10617	AAC	IEEE 802.11ac WIFI (40MHz, MCS1, 90pc dc)	WLAN	8.81	± 9.6 %
10618	AAC	IEEE 802,11ac WiFi (40MHz, MCS2, 90pc dc)	WLAN	8.58	± 9.6 9
10619	AAC	IEEE 802.11ac WiFI (40MHz, MCS3, 90pc dc)	WLAN	8.86	± 9.6 9
10620	AAC	IEEE 802.11ac WiFi (40MHz, MCS4, 90pc dc)	WLAN	8.87	±9.69
0621	AAC	IEEE 802.11ac WiFi (40MHz, MCS5, 90pc dc)	WLAN	8.77	± 9.6 9
0622	AAC	IEEE 802,11ac WiFi (40MHz, MCS6, 90pc dc)	WLAN	8.68	± 9.6 9
0623	AAC	IEEE 802,11ac WiFi (40MHz, MCS7, 90pc dc)	WLAN	8.82	± 9.6 9
0624	AAC	IEEE 802.11ac WiFi (40MHz, MCS8, 90pc dc)	WLAN	8.96	± 9.6 9
0625	AAC	IEEE 802.11ac WiFi (40MHz, MCS9, 90pc dc)	WLAN	8.96	± 9.6 9
0626	AAC	IEEE 802.11ac WiFi (80MHz, MCS0, 90pc dc)	WLAN	8.83	±9.69
0627	AAC	IEEE 802.11ac WiFI (80MHz, MCS1, 90pc dc)	WLAN	8.88	±9.69
0628	AAC	IEEE 802.11ac WiFi (80MHz, MCS2, 90pc dc)	WLAN	8.71	±9.6 %
0629	AAC	IEEE 802,11ac WiFi (80MHz, MCS3, 90pc dc)	WLAN	8.85	± 9.6 %
0630	AAC	IEEE 802.11ac WiFi (80MHz, MCS4, 90pc dc)	WLAN	8.72	± 9.6 9
0631	AAC	IEEE 802.11ac WiFi (80MHz, MCS5, 90pc dc)	WLAN	8.81	±9.6%
0632	AAC	IEEE 802.11ac WiFI (80MHz, MCS6, 90pc dc)	WLAN	8.74	± 9.6 %
0633	AAC	IEEE 802.11ac WiFi (80MHz, MCS7, 90pc dc)	WLAN	8.83	±9.6%
0634	AAC	IEEE 802.11ac WiFi (80MHz, MCS8, 90pc dc)	WLAN	8.80	± 9.6 %
0635	AAC	IEEE 802.11ac WiFi (80MHz, MCS9, 90pc dc)	WLAN	8.81	± 9.6 %
0636	AAC	IEEE 802.11ac WiFi (160MHz, MCS0, 90pc dc)	WLAN	8.83	± 9.6 9
0637	AAC	IEEE 802.11ac WiFi (160MHz, MCS1, 90pc dc)	WLAN	8.79	± 9.6 %
0638	AAC	IEEE 802.11ac WiFi (160MHz, MCS2, 90pc dc)	WLAN	8.86	±9.6 9
0639	AAC	IEEE 802.11ac WiFi (160MHz, MCS3, 90pc dc)	WLAN	8.85	±9.6 9
0640	AAC	IEEE 802.11ac WIFI (160MHz, MCS4, 90pc dc)	WLAN	8.98	± 9.6 %
0641	AAC	IEEE 802.11ac WiFi (160MHz, MCS5, 90pc dc)	WLAN	9.06	± 9.6 %
0642	AAC	IEEE 802.11ac WiFi (160MHz, MCS6, 90pc dc)	WLAN	9.06	±9.69
0643	AAC	IEEE 802.11ac WiFi (160MHz, MCS7, 90pc dc)	WLAN	8.89	±9.6 %
0644	AAC	IEEE 802.11ac WiFi (160MHz, MCS8, 90pc dc)	WLAN	9.05	±9.6%
0645	AAC	IEEE 802.11ac WiFi (160MHz, MCS9, 90pc dc)	WLAN	9.03	-
0646	AAC	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Sub=2,7)	LTE-TDD	11.96	± 9.6 %
0647	AAC	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Sub=2,7)	LTE-TDD	11.96	±9.6%
0648	AAC	CDMA2000 (1x Advanced)	CDMA2000	3.45	± 9.6 %
0652	AAC	LTE-TDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%)	LTE-TDD	6.91	± 9.6 %
0653	AAC	LTE-TDD (OFDMA, 10 MHz, E-TM 3.1, Clipping 44%)	LTE-TDD	7.42	± 9.6 %
0654	AAC	LTE-TDD (OFDMA, 15 MHz, E-TM 3.1, Clipping 44%)	LTE-TDD	6.96	± 9.6 %
0655	AAC	LTE-TDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%)	LTE-TDD	7.21	±9.6%
0658	AAC	Pulse Waveform (200Hz, 10%)	Test	10.00	± 9.6 %
0659	AAC	Pulse Waveform (200Hz, 20%)	Test	6.99	± 9.6 %
0660	AAC	Pulse Waveform (200Hz, 40%)	Test	3.98	
0661	AAC	Pulse Waveform (200Hz, 60%)	Test	2.22	±9.6%
0662	AAC	Pulse Waveform (200Hz, 80%)	Test	0.97	±9.6%
0670	AAC	Bluetooth Low Energy	Bluetooth		± 9.6 %
0671	AAD	IEEE 802.11ax (20MHz, MCS0, 90pc dc)	WLAN	2.19	± 9.6 %
0672	AAD	IEEE 802.11ax (20MHz, MCS1, 90pc dc)	WLAN	9.09	± 9.6 %

Certificate No: EF3-4048_Mar22

Page 17 of 22




10673	AAD	IEEE 802.11ax (20MHz, MCS2, 90pc dc)	WLAN	8.78	± 9.6 %
0674	AAD	IEEE 802.11ax (20MHz, MCS3, 90pc dc)	WLAN	8.74	± 9.6 %
0675	AAD	IEEE 802.11ax (20MHz, MCS4, 90pc dc)	WLAN	8.90	± 9.6 %
0676	AAD	IEEE 802.11ax (20MHz, MCS5, 90pc dc)	WLAN	8.77	
0677	AAD	IEEE 802.11ax (20MHz, MCS6, 90pc dc)	WLAN	8.73	± 9.6 %
0678	AAD	IEEE 802.11ax (20MHz, MCS7, 90pc dc)	WLAN	8.78	± 9.6 %
0679	AAD	IEEE 802.11ax (20MHz, MCS8, 90pc dc)	WLAN	8.89	± 9.6 %
0680	AAD	IEEE 802,11ax (20MHz, MCS9, 90pc dc)	WLAN	8.80	
0681	AAG	IEEE 802.11ax (20MHz, MCS10, 90pc dc)	WLAN	8.62	± 9.6 %
0682	AAF	IEEE 802.11ax (20MHz, MCS11, 90pc dc)	WLAN	8.83	± 9.6 %
0683	AAA	IEEE 802.11ax (20MHz, MCS0, 99pc dc)	WLAN	8.42	
0684	AAC	IEEE 802.11ax (20MHz, MCS1, 99pc dc)	WLAN	8.26	± 9.6 %
0685	AAC	IEEE 802.11ax (20MHz, MCS2, 99pc dc)	WLAN	8.33	± 9.6 %
0686	AAC	IEEE 802.11ax (20MHz, MCS3, 99pc dc)	WLAN		± 9.6 %
0687	AAE	IEEE 802.11ax (20MHz, MCS4, 99pc dc)	WLAN	8.28	± 9.6 %
0688	AAE	IEEE 802.11ax (20MHz, MCS5, 99pc dc)	WLAN	8.45	± 9.6 %
0689	AAD	IEEE 802.11ax (20MHz, MCS6, 99pc dc)		8.29	± 9.6 %
0690	AAE	IEEE 802.11ax (20MHz, MCS7, 99pc dc)	WLAN	8.55	± 9.6 %
0691	AAB	IEEE 802.11ax (20MHz, MCS8, 99pc dc)	WLAN	8.29	± 9.6 %
0692	AAA	IEEE 802.11ax (20MHz, MCS9, 99pc dc)	WLAN	8.25	± 9.6 %
0693	AAA	IEEE 802.11ax (20MHz, MCS10, 99pc dc)	WLAN	8.29	± 9.6 %
0694	AAA	IEEE 802.11ax (20MHz, MCS11, 99pc dc)	WLAN	8.25	± 9.6 %
0695	AAA	IEEE 802.11ax (40MHz, MCS0, 90pc dc)	WLAN	8.57	± 9.6 %
0696	AAA	IEEE 802.11ax (40MHz, MCS1, 90pc dc)	WLAN	8.78	±9.6 %
0697	AAA	IEEE 802.11ax (40MHz, MCS2, 90pc dc)	WLAN	8.91	± 9.6 %
0698	AAA	IEEE 802.11ax (40MHz, MCS3, 90pc dc)	WLAN	8.61	±9.6 %
0699	AAA	IEEE 802.11ax (40MHz, MCS4, 90pc dc)	WLAN	8.89	±9.6 %
0700	AAA	IEEE 802.11ax (40MHz, MCS5, 90pc dc)	WLAN	8.82	± 9.6 %
0701	AAA	IEEE 802.11ax (40MHz, MCS6, 90pc dc)	WLAN	8.73	± 9.6 %
0702	AAA	IEEE 802.11ax (40MHz, MCS7, 90pc dc)	WLAN	8.86	± 9.6 %
0703	AAA	IEEE 802.11ax (40MHz, MCS8, 90pc dc)	WLAN	8.70	± 9.6 %
0704	AAA	IEEE 802.11ax (40MHz, MCS9, 90pc dc)	WLAN	8.82	± 9.6 %
0705	AAA	IEEE 802.11ax (40MHz, MCS10, 90pc dc)	WLAN	8.56	± 9.6 %
0706	AAC	IEEE 802.11ax (40MHz, MCS10, 90pc dc)	WLAN	8.69	± 9.6 %
0707	AAC	IEEE 802.11ax (40MHz, MCS0, 99pc dc)	WLAN	8.66	± 9.6 %
0708	AAC	IEEE 802.11ax (40MHz, MCS0, 99pc dc)	WLAN	8.32	± 9.6 %
0709	AAC	IEEE 802.11ax (40MHz, MCS1, 99pc dc)	WLAN	8.55	± 9.6 %
0710		IEEE 802.11ax (40MHz, MCS2, 99pc dc)	WLAN	8.33	±9.6%
0711	AAC	IEEE 802.11ax (40MHz, MCS3, 99pc dc)	WLAN	8.29	± 9.6 %
0712	AAC	IEEE 802.11ax (40MHz, MCS4, 99pc dc)	WLAN	8.39	± 9.6 %
0713	AAC	IEEE 802.11ax (40MHz, MCS5, 99pc dc)	WLAN	8.67	± 9.6 %
0714	AAC		WLAN	8.33	± 9.6 %
0715	AAC	IEEE 802.11ax (40MHz, MCS7, 99pc dc) IEEE 802.11ax (40MHz, MCS8, 99pc dc)	WLAN	8.26	± 9.6 %
0716	AAC	IEEE 802.11ax (40MHz, MCS8, 99pc dc)	WLAN	8.45	± 9.6 %
0717	AAC		WLAN	8.30	± 9.6 %
0718	AAC	IEEE 802.11ax (40MHz, MCS10, 99pc dc)	WLAN	8.48	± 9.6 %
0719	AAC	IEEE 802.11ax (40MHz, MCS11, 99pc dc)	WLAN	8.24	± 9.6 %
0720	AAC	IEEE 802.11ax (80MHz, MCS0, 90pc dc)	WLAN	8.81	± 9.6 %
0721	AAC	IEEE 802.11ax (80MHz, MCS1, 90pc dc)	WLAN	8.87	± 9.6 %
0722	AAC	IEEE 802.11ax (80MHz, MCS2, 90pc dc)	WLAN	8.76	± 9.6 %
0723	AAC	IEEE 802.11ax (80MHz, MCS3, 90pc dc)	WLAN	8.55	± 9.6 %
0724	AAC	IEEE 802.11ax (80MHz, MCS4, 90pc dc)	WLAN	8.70	± 9.6 %
0725	AAC	IEEE 802.11ax (80MHz, MCS5, 90pc dc)	WLAN	8.90	± 9.6 %
0726	AAC	IEEE 802.11ax (80MHz, MCS6, 90pc dc)	WLAN	8.74	± 9.6 %
0727	AAC	IEEE 802.11ax (80MHz, MCS7, 90pc dc)	WLAN	8.72	± 9.6 %
0728	AAC	IEEE 802.11ax (80MHz, MCS8, 90pc dc)	WLAN	8.66	±9.6%
120	AAC	IEEE 802.11ax (80MHz, MCS9, 90pc dc)	WLAN	8.65	± 9.6 %

Certificate No: EF3-4048_Mar22

Page 18 of 22

March 4, 2022



EF3DV3 - SN:4048

10729	AAC	IEEE 802.11ax (80MHz, MCS10, 90pc dc)	WLAN	8.64	± 9.6 %
10730	AAC	IEEE 802.11ax (80MHz, MCS11, 90pc dc)	WLAN	8.67	± 9.6 %
10731	AAC	IEEE 802.11ax (80MHz, MCS0, 99pc dc)	WLAN	8.42	± 9.6 %
10732	AAC	IEEE 802.11ax (80MHz, MCS1, 99pc dc)	WLAN	8.46	± 9.6 %
10733	AAC	IEEE 802.11ax (80MHz, MCS2, 99pc dc)	WLAN	8.40	± 9.6 %
10734	AAC	IEEE 802.11ax (80MHz, MCS3, 99pc dc)	WLAN	8.25	± 9.6 %
10735	AAC	IEEE 802.11ax (80MHz, MCS4, 99pc dc)	WLAN	8.33	± 9.6 %
10736	AAC	IEEE 802.11ax (80MHz, MCS5, 99pc dc)	WLAN	8.27	± 9.6 %
10737	AAC	IEEE 802.11ax (80MHz, MCS6, 99pc dc)	WLAN	8.36	± 9.6 %
10738	AAC	IEEE 802.11ax (80MHz, MCS7, 99pc dc)	WLAN	8.42	± 9.6 %
10739	AAC	IEEE 802.11ax (80MHz, MCS8, 99pc dc)	WLAN	8.29	± 9.6 %
10740	AAC	IEEE 802.11ax (80MHz, MCS9, 99pc dc)	WLAN	8.48	± 9.6 %
10741	AAC	IEEE 802.11ax (80MHz, MCS10, 99pc dc)	WLAN	8.40	± 9.6 %
10742	AAC	IEEE 802.11ax (80MHz, MCS11, 99pc dc)	WLAN	8.43	± 9.6 %
10743	AAC	IEEE 802.11ax (160MHz, MCS0, 90pc dc)	WLAN	8.94	± 9.6 %
10744	AAC	IEEE 802.11ax (160MHz, MCS1, 90pc dc)	WLAN	9.16	± 9.6 %
0745	AAC	IEEE 802.11ax (160MHz, MCS2, 90pc dc)	WLAN	8.93	± 9.6 %
10746	AAC	IEEE 802.11ax (160MHz, MCS3, 90pc dc)	WLAN	9.11	± 9.6 %
10747	AAC	IEEE 802.11ax (160MHz, MCS4, 90pc dc)	WLAN	9.04	± 9.6 %
10748	AAC	IEEE 802.11ax (160MHz, MCS5, 90pc dc)	WLAN	8.93	± 9.6 %
10749	AAC	IEEE 802.11ax (160MHz, MCS6, 90pc dc)	WLAN	8.90	± 9.6 %
10750	AAC	IEEE 802.11ax (160MHz, MCS7, 90pc dc)	WLAN	8.79	± 9.6 %
10751	AAC	IEEE 802.11ax (160MHz, MCS8, 90pc dc)	WLAN	8.82	± 9.6 %
10752	AAC	IEEE 802.11ax (160MHz, MCS9, 90pc dc)	WLAN	8.81	± 9.6 %
10753	AAC	IEEE 802.11ax (160MHz, MCS10, 90pc dc)	WLAN	9.00	± 9.6 %
10754	AAC	IEEE 802.11ax (160MHz, MCS11, 90pc dc)	WLAN	8.94	± 9.6 %
10755	AAC	IEEE 802.11ax (160MHz, MCS0, 99pc dc)	WLAN	8.64	± 9.6 %
10756	AAC	IEEE 802.11ax (160MHz, MCS1, 99pc dc)	WLAN	8.77	± 9.6 %
10757	AAC	IEEE 802.11ax (160MHz, MCS2, 99pc dc)	WLAN	8.77	± 9.6 %
10758	AAC	IEEE 802.11ax (160MHz, MCS3, 99pc dc)	WLAN	8.69	± 9.6 %
10759	AAC	IEEE 802.11ax (160MHz, MCS4, 99pc dc)	WLAN	8.58	± 9.6 %
10760	AAC	IEEE 802.11ax (160MHz, MCS5, 99pc dc)	WLAN	8.49	± 9.6 %
10761	AAC	IEEE 802.11ax (160MHz, MCS6, 99pc dc)	WLAN	8.58	± 9.6 %
10762	AAC	IEEE 802.11ax (160MHz, MCS7, 99pc dc)	WLAN	8.49	± 9.6 %
10763	AAC	IEEE 802.11ax (160MHz, MCS8, 99pc dc)	WLAN	8.53	± 9.6 %
10764	AAC	IEEE 802.11ax (160MHz, MCS9, 99pc dc)	WLAN	8.54	± 9.6 %
10765	AAC	IEEE 802.11ax (160MHz, MCS10, 99pc dc)	WLAN	8.54	± 9.6 %
10766	AAC	IEEE 802.11ax (160MHz, MCS11, 99pc dc)	WLAN	8.51	
10767	AAC	5G NR (CP-OFDM, 1 RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	7.99	± 9.6 %
10768	AAC	5G NR (CP-OFDM, 1 RB, 10 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.01	± 9.6 %
10769	AAC	5G NR (CP-OFDM, 1 RB, 15 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.01	± 9.6 %
10770	AAC	5G NR (CP-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.02	± 9.6 %
10771	AAC	5G NR (CP-OFDM, 1 RB, 25 MHz, QPSK, 15 kHz)	5G NR FR1 TDD		± 9.6 %
10772	AAC	5G NR (CP-OFDM, 1 RB, 30 MHz, QPSK, 15 KHz)	5G NR FR1 TDD	8.02	± 9.6 %
10773	AAC	5G NR (CP-OFDM, 1 RB, 40 MHz, QPSK, 15 kHz)	5G NR FR1 TDD		± 9.6 %
10774	AAC	5G NR (CP-OFDM, 1 RB, 50 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.03	± 9.6 %
10775	AAC	5G NR (CP-OFDM, 50% RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.02	± 9.6 %
10776	AAC	5G NR (CP-OFDM, 50% RB, 10 MHz, QPSK, 15 kHz)		8.31	± 9.6 %
0777	AAC	5G NR (CP-OFDM, 50% RB, 15 MHz, QPSK, 15 kHz)	5G NR FR1 TDD 5G NR FR1 TDD	8.30	± 9.6 %
0778	AAC	5G NR (CP-OFDM, 50% RB, 20 MHz, QPSK, 15 kHz)		8.30	± 9.6 %
0779	AAC	5G NR (CP-OFDM, 50% RB, 25 MHz, QPSK, 15 KHz)	5G NR FR1 TDD	8.34	± 9.6 %
0780	AAC	5G NR (CP-OFDM, 50% RB, 30 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.42	± 9.6 %
10781	AAC	5G NR (CP-OFDM, 50% RB, 40 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.38	± 9.6 %
10782	AAC	5G NR (CP-OFDM, 50% RB, 50 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.38	± 9.6 %
10783	AAC	5G NR (CP-OFDM, 100% RB, 50 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.43	± 9.6 %
10784	AAC	5G NR (CP-OFDM, 100% RB, 10 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.31	± 9.6 %
	Inno	1	5G NR FR1 TDD	8.29	± 9.6 %

Certificate No: EF3-4048_Mar22

Page 19 of 22



March 4, 2022

10785	AAC	5G NR (CP-OFDM, 100% RB, 15 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.40	± 9.6 %
10786	AAC	5G NR (CP-OFDM, 100% RB, 20 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.35	± 9.6 %
10787	AAC	5G NR (CP-OFDM, 100% RB, 25 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.44	± 9.6 %
10788	AAC	5G NR (CP-OFDM, 100% RB, 30 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.39	± 9.6 %
10789	AAC	5G NR (CP-OFDM, 100% RB, 40 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.37	± 9.6 %
10790	AAC	5G NR (CP-OFDM, 100% RB, 50 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.39	± 9.6 %
10791	AAC	5G NR (CP-OFDM, 1 RB, 5 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.83	± 9.6 %
10792	AAC	5G NR (CP-OFDM, 1 RB, 10 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.92	± 9.6 %
10793	AAC	5G NR (CP-OFDM, 1 RB, 15 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.95	± 9.6 %
10794	AAC	5G NR (CP-OFDM, 1 RB, 20 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.82	± 9.6 %
10795	AAC	5G NR (CP-OFDM, 1 RB, 25 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.84	± 9.6 %
10796	AAC	5G NR (CP-OFDM, 1 RB, 30 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.82	± 9.6 %
10797	AAC	5G NR (CP-OFDM, 1 RB, 40 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.01	± 9.6 %
10798	AAC	5G NR (CP-OFDM, 1 RB, 50 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.89	± 9.6 %
10799	AAC	5G NR (CP-OFDM, 1 RB, 60 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.93	
10801	AAC	5G NR (CP-OFDM, 1 RB, 80 MHz, QPSK, 30 KHz)	5G NR FR1 TDD		± 9.6 %
10802		5G NR (CP-OFDM, 1 RB, 90 MHz, QPSK, 30 KHz)		7.89	± 9.6 %
10803	AAC		5G NR FR1 TDD	7.87	± 9.6 %
10805	AAE	5G NR (CP-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.93	± 9.6 %
10805	AAD	5G NR (CP-OFDM, 50% RB, 10 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.34	± 9.6 %
10809	AAD	5G NR (CP-OFDM, 50% RB, 15 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.37	± 9.6 %
	AAD	5G NR (CP-OFDM, 50% RB, 30 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.34	± 9.6 %
10810	AAD	5G NR (CP-OFDM, 50% RB, 40 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.34	± 9.6 %
10812	AAD	5G NR (CP-OFDM, 50% RB, 60 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.35	± 9.6 %
10817	AAD	5G NR (CP-OFDM, 100% RB, 5 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.35	± 9.6 %
10818	AAD	5G NR (CP-OFDM, 100% RB, 10 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.34	± 9.6 %
10819	AAD	5G NR (CP-OFDM, 100% RB, 15 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.33	± 9.6 %
10820	AAD	5G NR (CP-OFDM, 100% RB, 20 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.30	± 9.6 %
10821	AAC	5G NR (CP-OFDM, 100% RB, 25 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.41	± 9.6 %
10822	AAD	5G NR (CP-OFDM, 100% RB, 30 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.41	± 9.6 %
10823	AAC	5G NR (CP-OFDM, 100% RB, 40 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.36	± 9.6 %
10824	AAD	5G NR (CP-OFDM, 100% RB, 50 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.39	± 9.6 %
10825	AAD	5G NR (CP-OFDM, 100% RB, 60 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.41	± 9.6 %
10827	AAD	5G NR (CP-OFDM, 100% RB, 80 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.42	± 9.6 %
10828	AAE	5G NR (CP-OFDM, 100% RB, 90 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.43	± 9.6 %
10829	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.40	± 9.6 %
10830	AAD	5G NR (CP-OFDM, 1 RB, 10 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.63	± 9.6 %
10831	AAD	5G NR (CP-OFDM, 1 RB, 15 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.73	± 9.6 %
10832	AAD	5G NR (CP-OFDM, 1 RB, 20 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.74	± 9.6 %
10833	AAD	5G NR (CP-OFDM, 1 RB, 25 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.70	± 9.6 %
10834	AAD	5G NR (CP-OFDM, 1 RB, 30 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.75	± 9.6 %
10835	AAD	5G NR (CP-OFDM, 1 RB, 40 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.70	± 9.6 %
10836	AAE	5G NR (CP-OFDM, 1 RB, 50 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.66	± 9.6 %
10837	AAD	5G NR (CP-OFDM, 1 RB, 60 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.68	± 9.6 %
10839	AAD	5G NR (CP-OFDM, 1 RB, 80 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.70	± 9.6 %
10840	AAD	5G NR (CP-OFDM, 1 RB, 90 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.67	± 9.6 %
10841	AAD	5G NR (CP-OFDM, 1 RB, 100 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.71	± 9.6 %
10843	AAD	5G NR (CP-OFDM, 50% RB, 15 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.49	± 9.6 %
10844	AAD	5G NR (CP-OFDM, 50% RB, 20 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.34	± 9.6 %
10846	AAD	5G NR (CP-OFDM, 50% RB, 30 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.41	± 9.6 %
10854	AAD	5G NR (CP-OFDM, 100% RB, 10 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.34	± 9.6 %
10855	AAD	5G NR (CP-OFDM, 100% RB, 15 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.36	± 9.6 %
10856	AAD	5G NR (CP-OFDM, 100% RB, 20 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.37	± 9.6 %
10857	AAD	5G NR (CP-OFDM, 100% RB, 25 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.35	± 9.6 %
10858	AAD	5G NR (CP-OFDM, 100% RB, 30 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.36	± 9.6 %
	100				
10859	AAD	5G NR (CP-OFDM, 100% RB, 40 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.34	± 9.6 %

Certificate No: EF3-4048_Mar22

Page 20 of 22





March 4, 2022

10861	AAD	5G NR (CP-OFDM, 100% RB, 60 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.40	± 9.6 %
10863	AAD	5G NR (CP-OFDM, 100% RB, 80 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.41	± 9.6 %
10864	AAE	5G NR (CP-OFDM, 100% RB, 90 MHz, QPSK, 60 KHz)	5G NR FR1 TDD	8.37	± 9.6 %
10865	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.41	± 9.6 %
10866	AAD	5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	± 9.6 %
0868	AAD	5G NR (DFT-s-OFDM, 100% RB, 100 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.89	± 9.6 9
0869	AAD	5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	5.75	± 9.6 9
0870	AAD	5G NR (DFT-s-OFDM, 100% RB, 100 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	5.86	± 9.6 %
10871	AAD	5G NR (DFT-s-OFDM, 1 RB, 100 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	5.75	± 9.6 9
10872	AAD	5G NR (DFT-s-OFDM, 100% RB, 100 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	6.52	± 9.6 9
10873	AAD	5G NR (DFT-s-OFDM, 1 RB, 100 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	6.61	± 9.6 %
10874	AAD	5G NR (DFT-s-OFDM, 100% RB, 100 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	6.65	± 9.6 9
10875	AAD	5G NR (CP-OFDM, 1 RB, 100 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	7.78	± 9.6 9
10876	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	8.39	± 9.6 9
10877	AAD	5G NR (CP-OFDM, 1 RB, 100 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	7.95	± 9.6 %
10878	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	8,41	± 9.6 %
10879	AAD	5G NR (CP-OFDM, 1 RB, 100 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	8.12	± 9.6 %
10880	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	8.38	±9.6 %
10881	AAD	5G NR (DFT-s-OFDM, 1 RB, 50 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	5.75	± 9.6 %
10882	AAD	5G NR (DFT-s-OFDM, 100% RB, 50 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	5.96	± 9.6 %
10883	AAD	5G NR (DFT-s-OFDM, 1 RB, 50 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	6.57	± 9.6 9
10884	AAD	5G NR (DFT-s-OFDM, 100% RB, 50 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	6.53	± 9.6 9
10885	AAD	5G NR (DFT-s-OFDM, 1 RB, 50 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	6.61	± 9.6 9
10886	AAD	5G NR (DFT-s-OFDM, 100% RB, 50 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	6.65	± 9.6 %
10887	AAD	5G NR (CP-OFDM, 1 RB, 50 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	7.78	± 9.6 %
10888	AAD	5G NR (CP-OFDM, 100% RB, 50 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	8.35	± 9.6 %
10889	AAD	5G NR (CP-OFDM, 1 RB, 50 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	8.02	± 9.6 %
10890	AAD	5G NR (CP-OFDM, 100% RB, 50 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	8.40	± 9.6 %
10891	AAD	5G NR (CP-OFDM, 1 RB, 50 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	8.13	± 9.6 9
10892	AAD	5G NR (CP-OFDM, 100% RB, 50 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	8.41	±9.6 %
10897	AAD	5G NR (DFT-s-OFDM, 1 RB, 5 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.66	± 9.6 %
10898	AAD	5G NR (DFT-s-OFDM, 1 RB, 10 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.67	± 9.6 %
10899	AAD	5G NR (DFT-s-OFDM, 1 RB, 15 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.67	± 9.6 9
10900	AAD	5G NR (DFT-s-OFDM, 1 RB, 20 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	± 9.6 %
10901	AAD	5G NR (DFT-s-OFDM, 1 RB, 25 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	± 9.6 9
10902	AAD	5G NR (DFT-s-OFDM, 1 RB, 30 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	± 9.6 9
10903	AAD	5G NR (DFT-s-OFDM, 1 RB, 40 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	± 9.6 %
10904	AAD	5G NR (DFT-s-OFDM, 1 RB, 50 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	± 9.6 9
10905	AAD	5G NR (DFT-s-OFDM, 1 RB, 60 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	± 9.6 %
10906	AAD	5G NR (DFT-s-OFDM, 1 RB, 80 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	± 9.6 %
10907	AAD	5G NR (DFT-s-OFDM, 50% RB, 5 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.78	± 9.6 %
10908	AAD	5G NR (DFT-s-OFDM, 50% RB, 10 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.93	± 9.6 %
10909	AAD	5G NR (DFT-s-OFDM, 50% RB, 15 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.96	±9.6 %
10910	AAD	5G NR (DFT-s-OFDM, 50% RB, 20 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.83	±9.69
10911	AAD	5G NR (DFT-s-OFDM, 50% RB, 25 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.93	± 9.6 9
10912	AAD	5G NR (DFT-s-OFDM, 50% RB, 30 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.84	± 9.6 %
10913	AAD	5G NR (DFT-s-OFDM, 50% RB, 40 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.84	± 9.6 %
10914	AAD	5G NR (DFT-s-OFDM, 50% RB, 50 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.85	± 9.6 %
10915	AAD	5G NR (DFT-s-OFDM, 50% RB, 60 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.83	± 9.6 %
10916	AAD	5G NR (DFT-s-OFDM, 50% RB, 80 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.87	± 9.6 9
10917	AAD	5G NR (DFT-s-OFDM, 50% RB, 100 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.94	± 9.6 9
10918	AAD	5G NR (DFT-s-OFDM, 100% RB, 5 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.86	± 9.6 9
10919	AAD	5G NR (DFT-s-OFDM, 100% RB, 10 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.86	± 9.6 %
10920	AAD	5G NR (DFT-s-OFDM, 100% RB, 15 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.87	± 9.6 %
10921	AAD	5G NR (DFT-s-OFDM, 100% RB, 20 MHz, QPSK, 30 KHz)	5G NR FR1 TDD	5.84	± 9.6 %
10922	AAD	5G NR (DFT-s-OFDM, 100% RB, 25 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.82	± 9.6 %

Certificate No: EF3-4048_Mar22

Page 21 of 22



March 4, 2022

10923	AAD	5G NR (DFT-s-OFDM, 100% RB, 30 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.84	± 9.6 %
10924	AAD	5G NR (DFT-s-OFDM, 100% RB, 40 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.84	± 9.6 %
10925	AAD	5G NR (DFT-s-OFDM, 100% RB, 50 MHz, OPSK, 30 kHz)	5G NR FR1 TDD	5.95	± 9.6 %
10926	AAD	5G NR (DFT-s-OFDM, 100% RB, 60 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.84	± 9.6 %
10927	AAD	5G NR (DFT-s-OFDM, 100% RB, 80 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.94	± 9.6 %
10928	AAD	5G NR (DFT-s-OFDM, 1 RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.52	± 9.6 %
10929	AAD	5G NR (DFT-s-OFDM, 1 RB, 10 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.52	± 9.6 %
10930	AAD	5G NR (DFT-s-OFDM, 1 RB, 15 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.52	± 9.6 %
10931	AAD	5G NR (DFT-s-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.51	± 9.6 %
10932	AAB	5G NR (DFT-s-OFDM, 1 RB, 25 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.51	± 9.6 %
10933	AAA	5G NR (DFT-s-OFDM, 1 RB, 30 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.51	± 9.6 %
10934	AAA	5G NR (DFT-s-OFDM, 1 RB, 40 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.51	± 9.6 %
10935	AAA	5G NR (DFT-s-OFDM, 1 RB, 50 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.51	± 9.6 %
10936	AAC	5G NR (DFT-s-OFDM, 50% RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.90	± 9.6 %
10937	AAB	5G NR (DFT-s-OFDM, 50% RB, 10 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.77	± 9.6 %
10938	AAB	5G NR (DFT-s-OFDM, 50% RB, 15 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.90	± 9.6 %
10939	AAB	5G NR (DFT-s-OFDM, 50% RB, 20 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.82	± 9.6 %
10940	AAB	5G NR (DFT-s-OFDM, 50% RB, 25 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.89	± 9.6 %
10941	AAB	5G NR (DFT-s-OFDM, 50% RB, 30 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.83	± 9.6 %
10942	AAB	5G NR (DFT-s-OFDM, 50% RB, 40 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.85	± 9.6 %
10943	AAB	5G NR (DFT-s-OFDM, 50% RB, 50 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.95	±9.6 %
10944	AAB	5G NR (DFT-s-OFDM, 100% RB, 5 MHz, OPSK, 15 kHz)	5G NR FR1 FDD	5.81	± 9.6 %
10945	AAB	5G NR (DFT-s-OFDM, 100% RB, 10 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.85	± 9.6 %
10946	AAC	5G NR (DFT-s-OFDM, 100% RB, 15 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.83	± 9.6 %
10947	AAB	5G NR (DFT-s-OFDM, 100% RB, 20 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.87	± 9.6 %
10948	AAB	5G NR (DFT-s-OFDM, 100% RB, 25 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.94	± 9.6 %
10949	AAB	5G NR (DFT-s-OFDM, 100% RB, 30 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.87	± 9.6 %
10950	AAB	5G NR (DFT-s-OFDM, 100% RB, 40 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.94	± 9.6 %
10951	AAB	5G NR (DFT-s-OFDM, 100% RB, 50 MHz, QPSK, 15 KHz)	5G NR FR1 FDD	5.92	± 9.6 %
10952	AAB	5G NR DL (CP-OFDM, TM 3.1, 5 MHz, 64-QAM, 15 kHz)	5G NR FR1 FDD	8.25	± 9.6 %
10953	AAB	5G NR DL (CP-OFDM, TM 3.1, 10 MHz, 64-QAM, 15 KHz)	5G NR FR1 FDD	8.15	± 9.6 %
10954	AAB	5G NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 15 KHz)	5G NR FR1 FDD	8.23	
10955	AAB	5G NR DL (CP-OFDM, TM 3.1, 20 MHz, 64-QAM, 15 KHz)	5G NR FR1 FDD	8.42	± 9.6 %
10956	AAB	5G NR DL (CP-OFDM, TM 3.1, 5 MHz, 64-QAM, 30 kHz)	5G NR FR1 FDD	8.14	± 9.6 %
10957	AAC	5G NR DL (CP-OFDM, TM 3.1, 10 MHz, 64-QAM, 30 kHz)	5G NR FR1 FDD		±9.6%
10958	AAB	5G NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 30 kHz)	5G NR FR1 FDD	8.31	± 9.6 %
10959	AAB	5G NR DL (CP-OFDM, TM 3.1, 20 MHz, 64-QAM, 30 kHz)	5G NR FR1 FDD		± 9,6 %
10960	AAB	5G NR DL (CP-OFDM, TM 3.1, 5 MHz, 64-QAM, 15 kHz)	5G NR FR1 TDD	8.33	± 9.6 %
10961	AAB	5G NR DL (CP-OFDM, TM 3.1, 10 MHz, 64-QAM, 15 KHz)	5G NR FR1 TDD	9.32	± 9.6 %
10962	AAB	5G NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 15 KHz)	5G NR FR1 TDD	9,36	± 9.6 %
10963	AAB	5G NR DL (CP-OFDM, TM 3.1, 20 MHz, 64-QAM, 15 kHz)	5G NR FR1 TDD	9.40	± 9.6 %
10964	AAB	5G NR DL (CP-OFDM, TM 3.1, 5 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.55	± 9.6 %
10965	AAB	5G NR DL (CP-OFDM, TM 3.1, 10 MHz, 64-QAM, 30 KHz)	5G NR FR1 TDD	9.29	± 9.6 %
10966	AAB	5G NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.37	± 9.6 %
10967	AAB	5G NR DL (CP-OFDM, TM 3.1, 20 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.55	± 9.6 %
10968	AAB	5G NR DL (CP-OFDM, TM 3.1, 100 MHz, 64-QAM, 30 kHz)	and the second sec	9,42	±9.6%
10972	-		5G NR FR1 TDD	9.49	± 9.6 %
10972	AAB	5G NR (CP-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	11.59	± 9.6 %
10973	AAB	5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	9.06	± 9.6 %
10974	AAB	5G NR (CP-OFDM, 100% RB, 100 MHz, 256-QAM, 30 kHz)	5G NR FR1 TDD	10.28	± 9.6 %
	AAA	ULLA BDR	ULLA	2.23	± 9.6 %
10979	AAA	ULLA HDR4	ULLA	7.02	± 9.6 %
10980	AAA	ULLA HDR8 ULLA HDRp4	ULLA	8.82	± 9.6 %
10981	AAA		ULLA	1.50	± 9.6 %

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

Certificate No: EF3-4048_Mar22

Page 22 of 22





ANNEX D: CD835V3 Dipole Calibration Certificate

Schmid & Partner Engineering AG œughausstrasse 43, 8004 Zurich,	Of Switzerland	S S S S S S S S S S S S S S S S S S S	
ccredited by the Swiss Accreditatio he Swiss Accreditation Service is fulfilateral Agreement for the reco	s one of the signatories	s to the EA	ccreditation No.: SCS 0108
lient TA-SH (Auden)			cD835V3-1133_Oct20
CALIBRATION C	ERTIFICATI	E	
Object	CD835V3 - SN: '	1133	
Calibration procedure(s)	QA CAL-20.v7 Calibration Proce	edure for Validation Sources in ai	r
Calibration date:	October 12, 2020)	
The measurements and the uncertaints and the uncertaints and the uncertaints have been conducted and the second se	ainties with confidence p ed in the closed laborator	onal standards, which realize the physical un robability are given on the following pages an ry facility: environment temperature (22 ± 3)*0	d are part of the certificate.
The measurements and the uncert All calibrations have been conducte Calibration Equipment used (M&TE Primary Standards	ainties with confidence p ed in the closed laborato critical for calibration) D #	robability are given on the following pages an ry facility: environment temperature (22 ± 3)*(Cal Date (Certificate No.)	id are part of the certificate. C and humidity < 70%. Scheduled Calibration
The measurements and the uncert All calibrations have been conducte Calibration Equipment used (M&TE	ainties with confidence p ad in the closed laborato critical for calibration)	robability are given on the following pages an ry facility: environment temperature (22 ± 3)*(Cal Date (Certificate No.) 01-Apr-20 (No. 217-03100/03101)	d are part of the certificate. C and humidity < 70%. Scheduled Calibration Apr-21
The measurements and the uncert All calibrations have been conduct Calibration Equipment used (M&TE Primary Standards Power meter NRP	ainties with confidence p ad in the closed laborator critical for calibration) ID # SN: 104778	robability are given on the following pages an ry facility: environment temperature (22 ± 3)*(Cal Date (Certificate No.)	d are part of the certificate. C and humidity < 70%. Scheduled Calibration Apr-21 Apr-21
The measurements and the uncert All calibrations have been conduct Calibration Equipment used (M&TE Primary Standards Power sensor NRP-Z91 Power sensor NRP-Z91 Reference 20 dB Attenuator	ainties with confidence p ad in the closed laborator critical for calibration) ID # SN: 104778 SN: 103244	robability are given on the following pages an ry facility: environment temperature (22 ± 3)*0 Cal Date (Certificate No.) 01-Apr-20 (No. 217-03100/03101) 01-Apr-20 (No. 217-03100) 01-Apr-20 (No. 217-03101) 31-Mar-20 (No. 217-03106)	d are part of the certificate. C and humidity < 70%. Scheduled Calibration Apr-21
The measurements and the uncert All calibrations have been conduct Calibration Equipment used (M&TE Primary Standards Power sensor NRP-Z91 Power sensor NRP-Z91 Reference 20 dB Attenuator Type-N mismatch combination	ainties with confidence p ed in the closed laborator critical for calibration) ID # SN: 104778 SN: 103244 SN: 103245 SN: 103245 SN: 8H9394 (20k) SN: 310982 / 06327	robability are given on the following pages an ry facility: environment temperature (22 ± 3)*0 Cal Date (Certificate No.) 01-Apr-20 (No. 217-03100/03101) 01-Apr-20 (No. 217-03100) 01-Apr-20 (No. 217-03101) 31-Mar-20 (No. 217-03104)	d are part of the certificate. C and humidity < 70%. Scheduled Calibration Apr-21 Apr-21 Apr-21
The measurements and the uncert All calibrations have been conduct Calibration Equipment used (M&TE Primary Standards Power meter NRP Power sensor NRP-291 Power sensor NRP-291 Reference 20 dB Attenuator Type-N mismatch combination Probe EF3DV3	ainties with confidence p ad in the closed laborator critical for calibration) ID # SN: 104778 SN: 103244 SN: 103245 SN: 8H9394 (20k) SN: 310982 / 06327 SN: 4013	robability are given on the following pages an ry facility: environment temperature (22 ± 3)*0 Cal Date (Certificate No.) 01-Apr-20 (No. 217-03100/03101) 01-Apr-20 (No. 217-03100) 01-Apr-20 (No. 217-03101) 31-Mar-20 (No. 217-03106) 31-Mar-20 (No. 217-03104) 31-Dec-19 (No. EF3-4013_Dec19)	d are part of the certificate. C and humidity < 70%. Scheduled Calibration Apr-21 Apr-21 Apr-21 Apr-21 Apr-21 Dec-20
The measurements and the uncert All calibrations have been conduct Calibration Equipment used (M&TE Primary Standards Power meter NRP Power sensor NRP-Z91 Power sensor NRP-Z91	ainties with confidence p ed in the closed laborator critical for calibration) ID # SN: 104778 SN: 103244 SN: 103245 SN: 103245 SN: 8H9394 (20k) SN: 310982 / 06327	robability are given on the following pages an ry facility: environment temperature (22 ± 3)*0 Cal Date (Certificate No.) 01-Apr-20 (No. 217-03100/03101) 01-Apr-20 (No. 217-03100) 01-Apr-20 (No. 217-03101) 31-Mar-20 (No. 217-03104)	d are part of the certificate. C and humidity < 70%. Scheduled Calibration Apr-21 Apr-21 Apr-21 Apr-21 Apr-21 Apr-21
The measurements and the uncert All calibrations have been conduct Calibration Equipment used (M&TE Primary Standards Power meter NRP Power sensor NRP-Z91 Power sensor NRP-Z91 Reference 20 dB Attenuator Type-N mismatch combination Probe EF3DV3 DAE4	ainties with confidence p ad in the closed laborator critical for calibration) ID # SN: 104778 SN: 103244 SN: 103245 SN: 8H9394 (20k) SN: 310982 / 06327 SN: 4013	robability are given on the following pages an ry facility: environment temperature (22 ± 3)*0 Cal Date (Certificate No.) 01-Apr-20 (No. 217-03100/03101) 01-Apr-20 (No. 217-03100) 01-Apr-20 (No. 217-03101) 31-Mar-20 (No. 217-03106) 31-Mar-20 (No. 217-03104) 31-Dec-19 (No. EF3-4013_Dec19)	d are part of the certificate. C and humidity < 70%. Scheduled Calibration Apr-21 Apr-21 Apr-21 Apr-21 Apr-21 Dec-20 Dec-20
The measurements and the uncert All calibrations have been conduct Calibration Equipment used (M&TE Primary Standards Power meter NRP Power sensor NRP-291 Reference 20 dB Attenuator Type-N mismatch combination Probe EF3DV3 DAE4 Secondary Standards Power meter Agilent 4419B	ainties with confidence p ed in the closed laborator critical for calibration) ID # SN: 104778 SN: 103244 SN: 103245 SN: 103245 SN: 103245 SN: 310982 / 06327 SN: 4013 SN: 781 ID # SN: GB42420191	robability are given on the following pages an ry facility: environment temperature (22 ± 3)*0 Cal Date (Certificate No.) 01-Apr-20 (No. 217-03100/03101) 01-Apr-20 (No. 217-03100) 01-Apr-20 (No. 217-03106) 31-Mar-20 (No. 217-03104) 31-Dec-19 (No. EF3-4013_Dec19) 27-Dec-19 (No. DAE4-781_Dec19)	Id are part of the certificate. C and humidity < 70%. Scheduled Calibration Apr-21 Apr-21 Apr-21 Apr-21 Apr-21 Dec-20
The measurements and the uncert All calibrations have been conduct Calibration Equipment used (M&TE Primary Standards Power sensor NRP-291 Power sensor NRP-291 Reference 20 dB Attenuator Type-N mismatch combination Probe EF3DV3 DAE4 Secondary Standards Power meter Agilent 4419B Power sensor HP E4412A	ainties with confidence p ed in the closed laborator critical for calibration) ID # SN: 104778 SN: 103244 SN: 103245 SN: 8H9394 (20k) SN: 310982 / 06327 SN: 4013 SN: 781 ID # SN: GB42420191 SN: US38485102	robability are given on the following pages an ry facility: environment temperature (22 ± 3)*0 Cal Date (Certificate No.) 01-Apr-20 (No. 217-03100/03101) 01-Apr-20 (No. 217-03100) 01-Apr-20 (No. 217-03100) 31-Mar-20 (No. 217-03104) 31-Mar-20 (No. 217-03104) 31-Dec-19 (No. EF3-4013_Dec19) 27-Dec-19 (No. DAE4-781_Dec19) Check Date (in house) 09-Oct-09 (in house check Oct-20) 05-Jan-10 (in house check Oct-20)	d are part of the certificate. C and humidity < 70%. Scheduled Calibration Apr-21 Apr-21 Apr-21 Apr-21 Apr-21 Dec-20 Dec-20 Scheduled Check
The measurements and the uncert All calibrations have been conduct Calibration Equipment used (M&TE Primary Standards Power meter NRP Power sensor NRP-291 Reference 20 dB Attenuator Type-N mismatch combination Probe EF3DV3 DAE4 Secondary Standards Power meter Agilent 4419B Power sensor HP E4412A Power sensor HP 8482A	ainties with confidence p ed in the closed laborator critical for calibration) ID # SN: 104778 SN: 103244 SN: 103245 SN: 8H9394 (20k) SN: 310982 / 06327 SN: 4013 SN: 781 ID # SN: GB42420191 SN: US38485102 SN: US37295597	cal Date (Certificate No.) 01-Apr-20 (No. 217-03100/03101) 01-Apr-20 (No. 217-03100) 01-Apr-20 (No. 217-03100) 01-Apr-20 (No. 217-03100) 01-Apr-20 (No. 217-03100) 01-Apr-20 (No. 217-03101) 31-Mar-20 (No. 217-03104) 31-Mar-20 (No. 217-03104) 31-Dec-19 (No. E73-4013_Dec19) 27-Dec-19 (No. DAE4-781_Dec19) Check Date (in house) 09-Oct-09 (in house check Oct-20) 05-Jan-10 (in house check Oct-20) 09-Oct-09 (in house check Oct-20) 09-Oct-09 (in house check Oct-20)	d are part of the certificate. C and humidity < 70%. Scheduled Calibration Apr-21 Apr-21 Apr-21 Apr-21 Dec-20 Dec-20 Scheduled Check In house check: Oct-23 In house check: Oct-23 In house check: Oct-23
The measurements and the uncert All calibrations have been conduct Calibration Equipment used (M&TE Primary Standards Power meter NRP Power sensor NRP-291 Power sensor NRP-291 Reference 20 dB Attenuator Type-N mismatch combination Probe EF3DV3	ainties with confidence p ed in the closed laborator critical for calibration) ID # SN: 104778 SN: 103244 SN: 103245 SN: 8H9394 (20k) SN: 310982 / 06327 SN: 4013 SN: 781 ID # SN: GB42420191 SN: US38485102	robability are given on the following pages an ry facility: environment temperature (22 ± 3)*0 Cal Date (Certificate No.) 01-Apr-20 (No. 217-03100/03101) 01-Apr-20 (No. 217-03100) 01-Apr-20 (No. 217-03100) 31-Mar-20 (No. 217-03104) 31-Mar-20 (No. 217-03104) 31-Dec-19 (No. EF3-4013_Dec19) 27-Dec-19 (No. DAE4-781_Dec19) Check Date (in house) 09-Oct-09 (in house check Oct-20) 05-Jan-10 (in house check Oct-20)	d are part of the certificate. C and humidity < 70%. Scheduled Calibration Apr-21 Apr-21 Apr-21 Apr-21 Dec-20 Dec-20 Scheduled Check In house check: Oct-23 In house check: Oct-23
The measurements and the uncert All calibrations have been conduct Calibration Equipment used (M&TE Primary Standards Power meter NRP Power sensor NRP-291 Reference 20 dB Attenuator Type-N mismatch combination Probe EF3DV3 DAE4 Secondary Standards Power meter Agilent 4419B Power sensor HP E4412A Power sensor HP E4412A Power sensor HP 8482A RF generator R&S SMT-06 Network Analyzer Agilent E8358A	ainties with confidence p ed in the closed laborator critical for calibration) ID # SN: 104778 SN: 103244 SN: 103245 SN: 8H9394 (20k) SN: 310982 / 06327 SN: 4013 SN: 781 ID # ID # SN: GB42420191 SN: US38485102 SN: US37295597 SN: 837633/005 SN: US41080477 Name	robability are given on the following pages an ry facility: environment temperature (22 ± 3)*0 Cal Date (Certificate No.) 01-Apr-20 (No. 217-03100/03101) 01-Apr-20 (No. 217-03100) 01-Apr-20 (No. 217-03100) 31-Mar-20 (No. 217-03106) 31-Mar-20 (No. 217-03104) 31-Dec-19 (No. EF3-4013_Dec19) 27-Dec-19 (No. DAE4-781_Dec19) Check Date (in house) 09-Oct-09 (in house check Oct-20) 05-Jan-10 (in house check Oct-20) 09-Oct-09 (in house check Oct-20) 10-Jan-19 (in house check Oct-20)	d are part of the certificate. C and humidity < 70%. Scheduled Calibration Apr-21 Apr-21 Apr-21 Apr-21 Dec-20 Dec-20 Scheduled Check In house check: Oct-23 In house check: Oct-23
The measurements and the uncert All calibrations have been conduct Calibration Equipment used (M&TE Primary Standards Power meter NRP Power sensor NRP-291 Power sensor NRP-291 Reference 20 dB Attenuator Type-N mismatch combination Probe EF3DV3 DAE4 Secondary Standards Power meter Agilent 4419B Power sensor HP E4412A Power sensor HP 8482A RF generator R&S SMT-06	ainties with confidence p ed in the closed laborator critical for calibration) ID # SN: 104778 SN: 103244 SN: 103245 SN: 103245 SN: 103245 SN: 103245 SN: 103245 SN: 103245 SN: 310982 / 06327 SN: 4013 SN: 781 ID # SN: 05842420191 SN: US37295597 SN: 837633/005 SN: US41080477	robability are given on the following pages an ry facility: environment temperature (22 ± 3)*0 Cal Date (Certificate No.) 01-Apr-20 (No. 217-03100/03101) 01-Apr-20 (No. 217-03100) 01-Apr-20 (No. 217-03106) 31-Mar-20 (No. 217-03106) 31-Dec-19 (No. EF3-4013_Dec19) 27-Dec-19 (No. DAE4-781_Dec19) 27-Dec-19 (No. DAE4-781_Dec19) 09-Oct-09 (in house check Oct-20) 05-Jan-10 (in house check Oct-20) 09-Jan-19 (in house check Oct-20) 10-Jan-19 (in house check Oct-20) 31-Mar-14 (in house check Oct-20)	d are part of the certificate. C and humidity < 70%. Scheduled Calibration Apr-21 Apr-21 Apr-21 Apr-21 Dec-20 Dec-20 Scheduled Check In house check: Oct-23 In hous
The measurements and the uncert All calibrations have been conduct Calibration Equipment used (M&TE Primary Standards Power meter NRP Power sensor NRP-291 Reference 20 dB Attenuator Type-N mismatch combination Probe EF3DV3 DAE4 Secondary Standards Power meter Agilent 4419B Power sensor HP E4412A Power sensor HP E4412A Power sensor HP 8482A RF generator R&S SMT-06 Network Analyzer Agilent E8358A	ainties with confidence p ed in the closed laborator critical for calibration) ID # SN: 104778 SN: 103244 SN: 103245 SN: 8H9394 (20k) SN: 310982 / 06327 SN: 4013 SN: 781 ID # ID # SN: GB42420191 SN: US38485102 SN: US37295597 SN: 837633/005 SN: US41080477 Name	robability are given on the following pages an ry facility: environment temperature (22 ± 3)*0 Cal Date (Certificate No.) 01-Apr-20 (No. 217-03100/03101) 01-Apr-20 (No. 217-03100) 01-Apr-20 (No. 217-03101) 31-Mar-20 (No. 217-03104) 31-Dec-19 (No. EF3-4013_Dec19) 27-Dec-19 (No. DAE4-781_Dec19) 27-Dec-19 (No. DAE4-781_Dec19) 09-Oct-09 (in house check Oct-20) 05-Jan-10 (in house check Oct-20) 09-Jan-19 (in house check Oct-20) 10-Jan-19 (in house check Oct-20) 31-Mar-14 (in house check Oct-20) Function	d are part of the certificate. C and humidity < 70%. Scheduled Calibration Apr-21 Apr-21 Apr-21 Apr-21 Dec-20 Dec-20 Scheduled Check In house check: Oct-23 In hous



Calibration Laboratory of Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





S Schweizerischer Kalibrierdienst Service sulsse d'étalonnage

C Service suisse d'étalonnage S Servizio svizzero di taratura Swiss Calibration Service

Accreditation No.: SCS 0108

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

References

[1] ANSI-C63.19-2011

American National Standard, Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids.

Methods Applied and Interpretation of Parameters:

- Coordinate System: y-axis is in the direction of the dipole arms, z-axis is from the basis of the antenna (mounted on the table) towards its feed point between the two dipole arms, x-axis is normal to the other axes. In coincidence with the standards [1], the measurement planes (probe sensor center) are selected to be at a distance of 15 mm above the top metal edge of the dipole arms.
- Measurement Conditions: Further details are available from the hardcopies at the end of the certificate. All
 figures stated in the certificate are valid at the frequency indicated. The forward power to the dipole connector
 is set with a calibrated power meter connected and monitored with an auxiliary power meter connected to a
 directional coupler. While the dipole under test is connected, the forward power is adjusted to the same level.
- Antenna Positioning: The dipole is mounted on a HAC Test Arch phantom using the matching dipole positioner with the arms horizontal and the feeding cable coming from the floor. The measurements are performed in a shielded room with absorbers around the setup to reduce the reflections. It is verified before the mounting of the dipole under the Test Arch phantom, that its arms are perfectly in a line. It is installed on the HAC dipole positioner with its arms parallel below the dielectric reference wire and able to move elastically in vertical direction without changing its relative position to the top center of the Test Arch phantom. The vertical distance to the probe is adjusted after dipole mounting with a DASY5 Surface Check job. Before the measurement, the distance between phantom surface and probe tip is verified. The proper measurement distance is selected by choosing the matching section of the HAC Test Arch phantom with the proper device reference point (upper surface of the dipole) and the matching grid reference point (tip of the probe) considering the probe sensor offset. The vertical distance to the probe is essential for the accuracy.
- Feed Point Impedance and Return Loss: These parameters are measured using a Vector Network Analyzer. The impedance is specified at the SMA connector of the dipole. The influence of reflections was eliminating by applying the averaging function while moving the dipole in the air, at least 70cm away from any obstacles.
- E-field distribution: E field is measured in the x-y-plane with an isotropic E-field probe with 100 mW forward power to the antenna feed point. In accordance with [1], the scan area is 20mm wide, its length exceeds the dipole arm length (180 or 90mm). The sensor center is 15 mm (in z) above the metal top of the dipole arms. Two 3D maxima are available near the end of the dipole arms. Assuming the dipole arms are perfectly in one line, the average of these two maxima (in subgrid 2 and subgrid 8) is determined to compensate for any non-parallelity to the measurement plane as well as the sensor displacement. The E-field value stated as calibration value represents the maximum of the interpolated 3D-E-field, in the plane above the dipole surface.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Certificate No: CD835V3-1133_Oct20

Page 2 of 5

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.4
Phantom	HAC Test Arch	
Distance Dipole Top - Probe Center	15 mm	
Scan resolution	dx, dy = 5 mm	
Frequency	835 MHz ± 1 MHz	
Input power drift	< 0.05 dB	

Maximum Field values at 835 MHz

E-field 15 mm above dipole surface	condition	Interpolated maximum	
Maximum measured above high end	100 mW input power	109.2 V/m = 40.76 dBV/m	
Maximum measured above low end	100 mW input power	106.6 V/m = 40.56 dBV/m	
Averaged maximum above arm	100 mW input power	107.9 V/m ± 12.8 % (k=2)	

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters

Frequency	Return Loss	Impedance
800 MHz	16.0 dB	40.2 Ω - 10.6 jΩ
835 MHz	28.4 dB	52.3 Ω + 3.1 jΩ
880 MHz	17.8 dB	58.2 Ω - 11.3 jΩ
900 MHz	17.4 dB	50,4 Ω - 13.7 jΩ
945 MHz	21.7 dB	45.6 Ω + 6.5 ϳΩ

3.2 Antenna Design and Handling

The calibration dipole has a symmetric geometry with a built-in two stub matching network, which leads to the enhanced bandwidth.

The dipole is built of standard semirigid coaxial cable. The internal matching line is open ended. The antenna is therefore open for DC signals.

Do not apply force to dipole arms, as they are liable to bend. The soldered connections near the feedpoint may be damaged. After excessive mechanical stress or overheating, check the impedance characteristics to ensure that the internal matching network is not affected.


After long term use with 40W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

Certificate No: CD835V3-1133_Oct20

Page 3 of 5



Impedance Measurement Plot

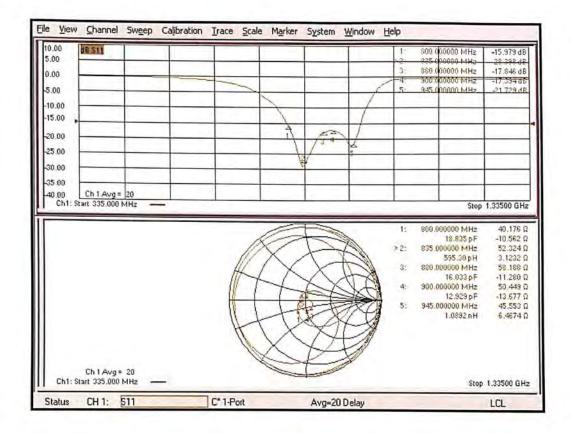

Page 4 of 5



Date: 12.10.2020

DASY5 E-field Result

Test Laboratory: SPEAG Lab2

DUT: HAC-Dipole 835 MHz; Type: CD835V3; Serial: CD835V3 - SN: 1133

Communication System: UID 0 - CW ; Frequency: 835 MHz Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³ Phantom section: RF Section Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EF3DV3 SN4013; ConvF(1, 1, 1) @ 835 MHz; Calibrated: 31.12.2019
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn781; Calibrated: 27.12.2019
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1070

N


DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Dipole E-Field measurement @ 835MHz/E-Scan - 835MHz d=15mm/Hearing Aid Compatibility Test (41x361x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm Device Reference Point: 0, 0, -6.3 mm Reference Value = 134.1 V/m; Power Drift = 0.01 dB Applied MIF = 0.00 dB RF audio interference level = 40.76 dBV/m

Emission category: M3

IIF scaled E-field	۱IF	sca	led	E-1	fiel	d	
--------------------	-----	-----	-----	-----	------	---	--

The second second	Grid 2 M3 40.56 dBV/m	Grid 3 M3 40.53 dBV/m
	Grid 5 M4 36.09 dBV/m	Grid 6 M4 36.07 dBV/m
	Grid 8 M3 40.76 dBV/m	Grid 9 M3 40.71 dBV/m

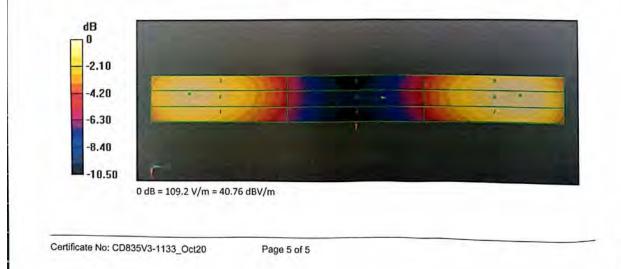



ANNEX E: CD1880V3 Dipole Calibration Certificate

	Switzerland	S S	Swiss Calibration Service
credited by the Swiss Accreditation re Swiss Accreditation Service is ultilateral Agreement for the reco	one of the signatories	to the EA	creditation No.: SCS 0108
ent TA-SH (Auden)			CD1880V3-1115_Oct20
CALIBRATION C	ERTIFICATE		
Dbject	CD1880V3 - SN:	1115	
Calibration procedure(s)	QA CAL-20.v7 Calibration Proce	dure for Validation Sources in air	
Calibration date:	October 12, 2020)	
The measurements and the uncertain	ainties with confidence pr	onal standards, which realize the physical uni robability are given on the following pages an	d are part of the certificate.
		y facility: environment temperature (22 \pm 3)°C	and humidity < 70%.
Calibration Equipment used (M&TE		y facility: environment temperature (22 ± 3)*C Cal Date (Certificate No.)	and humidity < 70%. Scheduled Galibration
Calibration Equipment used (M&TE Primary Standards Power meter NRP	critical for calibration)		
Calibration Equipment used (M&TE Primary Standards Power meter NRP Power sensor NRP-Z91	Critical for calibration) ID # SN: 104778 SN: 103244	Cal Date (Certificate No.)	Scheduled Calibration
Calibration Equipment used (M&TE Primary Standards Power meter NRP Power sensor NRP-Z91 Power sensor NRP-Z91	critical for calibration) ID # SN: 104778 SN: 103244 SN: 103245	Cal Date (Certificate No.) 01-Apr-20 (No. 217-03100/03101) 01-Apr-20 (No. 217-03100) 01-Apr-20 (No. 217-03101)	Scheduled Calibration Apr-21
Calibration Equipment used (M&TE Primary Standards Power meter NRP Power sensor NRP-Z91 Power sensor NRP-Z91 Reference 20 dB Attenuator	critical for calibration) ID # SN: 104778 SN: 103244 SN: 103245 SN: BH9394 (20k)	Cal Date (Certificate No.) 01-Apr-20 (No. 217-03100/03101) 01-Apr-20 (No. 217-03100) 01-Apr-20 (No. 217-03101) 31-Mar-20 (No. 217-03105)	Scheduled Calibration Apr-21 Apr-21 Apr-21 Apr-21
Calibration Equipment used (M&TE Primary Standards Power meter NRP Power sensor NRP-Z91 Power sensor NRP-Z91 Reference 20 dB Attenuator Type-N mismatch combination	critical for calibration) ID # SN: 104778 SN: 103244 SN: 103245 SN: 8H9394 (20k) SN: 310982 / 06327	Cal Date (Certificate No.) 01-Apr-20 (No. 217-03100/03101) 01-Apr-20 (No. 217-03100) 01-Apr-20 (No. 217-03101) 31-Mar-20 (No. 217-03106) 31-Mar-20 (No. 217-03104)	Scheduled Calibration Apr-21 Apr-21 Apr-21 Apr-21 Apr-21 Apr-21
Calibration Equipment used (M&TE Primary Standards Power meter NRP Power sensor NRP-Z91 Power sensor NRP-Z91 Reference 20 dB Attenuator Type-N mismatch combination Probe EF3DV3	critical for calibration) ID # SN: 104778 SN: 103244 SN: 103245 SN: BH9394 (20k)	Cal Date (Certificate No.) 01-Apr-20 (No. 217-03100/03101) 01-Apr-20 (No. 217-03100) 01-Apr-20 (No. 217-03101) 31-Mar-20 (No. 217-03105)	Scheduled Calibration Apr-21 Apr-21 Apr-21 Apr-21
Calibration Equipment used (M&TE Primary Standards Power meter NRP Power sensor NRP-Z91 Power sensor NRP-Z91 Reference 20 dB Attenuator Type-N mismatch combination Probe EF3DV3 DAE4	critical for calibration) ID # SN: 104778 SN: 103244 SN: 103245 SN: BH9394 (20k) SN: 310982 / 06327 SN: 4013	Cal Date (Certificate No.) 01-Apr-20 (No. 217-03100/03101) 01-Apr-20 (No. 217-03100) 01-Apr-20 (No. 217-03101) 31-Mar-20 (No. 217-03104) 31-Mar-20 (No. 217-03104) 31-Dec-19 (No. EF3-4013_Dec19) 27-Dec-19 (No. DAE4-781_Dec19)	Scheduled Calibration Apr-21 Apr-21 Apr-21 Apr-21 Apr-21 Dec-20 Dec-20 Dec-20
Calibration Equipment used (M&TE Primary Standards Power meter NRP Power sensor NRP-Z91 Power sensor NRP-Z91 Reference 20 dB Attenuator Type-N mismatch combination Probe EF3DV3 DAE4 Secondary Standards	critical for calibration) ID # SN: 104778 SN: 103244 SN: 103245 SN: BH9394 (20k) SN: 310982 / 06327 SN: 4013 SN: 781	Cal Date (Certificate No.) 01-Apr-20 (No. 217-03100/03101) 01-Apr-20 (No. 217-03100) 01-Apr-20 (No. 217-03101) 31-Mar-20 (No. 217-03105) 31-Mar-20 (No. 217-03104) 31-Dec-19 (No. EF3-4013_Dec19)	Scheduled Calibration Apr-21 Apr-21 Apr-21 Apr-21 Apr-21 Dec-20 Dec-20 Scheduled Check
Calibration Equipment used (M&TE Primary Standards Power meter NRP Power sensor NRP-Z91 Power sensor NRP-Z91 Reference 20 dB Attenuator Type-N mismatch combination Probe EF3DV3 DAE4 Secondary Standards Power meter Agilent 4419B	critical for calibration) ID # SN: 104778 SN: 103244 SN: 103245 SN: BH9394 (20k) SN: 310982 / 06327 SN: 4013 SN: 781 ID #	Cal Date (Certificate No.) 01-Apr-20 (No. 217-03100/03101) 01-Apr-20 (No. 217-03100) 01-Apr-20 (No. 217-03101) 31-Mar-20 (No. 217-03104) 31-Dec-19 (No. EF3-4013_Dec19) 27-Dec-19 (No. DAE4-781_Dec19) Check Date (in house)	Scheduled Calibration Apr-21 Apr-21 Apr-21 Apr-21 Apr-21 Des-20 Des-20 Des-20
Calibration Equipment used (M&TE Primary Standards Power sensor NRP-Z91 Power sensor NRP-Z91 Reference 20 dB Attenuator Type-N mismatch combination Probe EF3DV3 DAE4 Secondary Standards Power meter Agilent 4419B Power sensor HP E4412A	critical for calibration) ID # SN: 104778 SN: 103244 SN: 103245 SN: 8H9394 (20k) SN: 310982 / 06327 SN: 4013 SN: 781 ID # SN: GB42420191	Cal Date (Certificate No.) 01-Apr-20 (No. 217-03100/03101) 01-Apr-20 (No. 217-03100) 01-Apr-20 (No. 217-03101) 31-Mar-20 (No. 217-03104) 31-Dec-19 (No. EF3-4013_Dec19) 27-Dec-19 (No. DAE4-781_Dec19) Check Date (in house) 09-Oct-09 (in house check Oct-20)	Scheduled Calibration Apr-21 Apr-21 Apr-21 Apr-21 Apr-21 Dec-20 Dec-20 Dec-20 Scheduled Check In house check: Oct-23
Calibration Equipment used (M&TE Primary Standards Power meter NRP Power sensor NRP-Z91 Power sensor NRP-Z91 Reference 20 dB Attenuator Type-N mismatch combination Probe EF3DV3 DAE4 Secondary Standards Power meter Agilent 4419B Power sensor HP E4412A Power sensor HP E4412A Power sensor HP 8482A RF generator R&S SMT-08	Critical for calibration) ID # SN: 104778 SN: 103244 SN: 103245 SN: B49394 (20k) SN: 310982 / 06327 SN: 4013 SN: 781 ID # SN: GB42420191 SN: US38485102 SN: US37295597 SN: 837633/005	Cal Date (Certificate No.) 01-Apr-20 (No. 217-03100/03101) 01-Apr-20 (No. 217-03100) 01-Apr-20 (No. 217-03101) 31-Mar-20 (No. 217-03108) 31-Mar-20 (No. 217-03104) 31-Dec-19 (No. EF3-4013_Dec19) 27-Dec-19 (No. DAE4-781_Dec19) Check Date (in house) 09-Oct-09 (in house check Oct-20) 05-Jan-10 (in house check Oct-20)	Scheduled Calibration Apr-21 Apr-21 Apr-21 Apr-21 Apr-21 Dec-20 Dec-20 Scheduled Check In house check: Oct-23 In house check: Oct-23
Calibration Equipment used (M&TE Primary Standards Power meter NRP Power sensor NRP-Z91 Power sensor NRP-Z91 Reference 20 dB Attenuator Type-N mismatch combination Probe EF3DV3 DAE4 Secondary Standards Power meter Agilent 4419B Power sensor HP E4412A Power sensor HP 8482A RF generator R&S SMT-08	Critical for calibration) ID # SN: 104778 SN: 103245 SN: 103245 SN: 8109394 (20k) SN: 310982 / 06327 SN: 4013 SN: 781 ID # SN: GB42420191 SN: US38485102 SN: US37295597	Cal Date (Certificate No.) 01-Apr-20 (No. 217-03100/03101) 01-Apr-20 (No. 217-03100) 01-Apr-20 (No. 217-03100) 31-Mar-20 (No. 217-03104) 31-Dec-19 (No. EF3-4013_Dec19) 27-Dec-19 (No. DAE4-781_Dec19) Check Date (in house) 09-Oct-09 (in house check Oct-20) 05-Jan-10 (in house check Oct-20) 09-Oct-09 (in house check Oct-20)	Scheduled Calibration Apr-21 Apr-21 Apr-21 Apr-21 Dec-20 Dec-20 Scheduled Check In house check: Oct-23 In house check: Oct-23 In house check: Oct-23
Calibration Equipment used (M&TE Primary Standards Power sensor NRP-Z91 Power sensor NRP-Z91 Reference 20 dB Attenuator Type-N mismatch combination Probe EF3DV3 DAE4 Secondary Standards Power meter Agilent 4419B Power sensor HP E4412A Power sensor HP E4412A Power sensor HP 8482A RF generator R&S SMT-06 Network Analyzer Agilent E8358A	critical for calibration) ID # SN: 104778 SN: 103244 SN: 103245 SN: 8H9394 (20k) SN: 310982 / 06327 SN: 4013 SN: 781 ID # SN: GB42420191 SN: US37295597 SN: 837633/005 SN: US41080477 Name	Cal Date (Certificate No.) 01-Apr-20 (No. 217-03100/03101) 01-Apr-20 (No. 217-03100) 01-Apr-20 (No. 217-03101) 31-Mar-20 (No. 217-03104) 31-Dec-19 (No. EF3-4013_Dec19) 27-Dec-19 (No. DAE4-781_Dec19) Check Date (in house) 09-Oct-09 (in house check Oct-20) 05-Jan-10 (in house check Oct-20) 09-Oct-09 (in house check Oct-20) 10-Jan-19 (in house check Oct-20) 31-Mar-14 (in house check Oct-20) Function	Scheduled Calibration Apr-21 Apr-21 Apr-21 Apr-21 Dec-20 Dec-20 Dec-20 Scheduled Check In house check: Oct-23 In house check: Oct-23 In house check: Oct-23 In house check: Oct-23 In house check: Oct-23
Calibration Equipment used (M&TE Primary Standards Power sensor NRP-Z91 Power sensor NRP-Z91 Reference 20 dB Attenuator Type-N mismatch combination Probe EF3DV3 DAE4 Secondary Standards Power meter Agilent 4419B Power sensor HP E4412A Power sensor HP E4412A Power sensor HP 8482A RF generator R&S SMT-06 Network Analyzer Agilent E8358A	critical for calibration) ID # SN: 104778 SN: 103244 SN: 103245 SN: 8H9394 (20k) SN: 310982 / 06327 SN: 4013 SN: 781 ID # ID # SN: GB42420191 SN: US37295597 SN: 837633/005 SN: US41080477	Cal Date (Certificate No.) 01-Apr-20 (No. 217-03100/03101) 01-Apr-20 (No. 217-03100) 01-Apr-20 (No. 217-03101) 31-Mar-20 (No. 217-03104) 31-Dec-19 (No. EF3-4013_Dec19) 27-Dec-19 (No. DAE4-781_Dec19) Check Date (in house) 09-Oct-09 (in house check Oct-20) 05-Jan-10 (in house check Oct-20) 09-Oct-09 (in house check Oct-20) 10-Jan-19 (in house check Oct-20) 31-Mar-14 (in house check Oct-20)	Scheduled Calibration Apr-21 Apr-21 Apr-21 Apr-21 Apr-21 Dec-20 Dec-20 Scheduled Check In house check: Oct-23 In house check: Oct-21 Signature
Calibration Equipment used (M&TE Primary Standards Power meter NRP Power sensor NRP-Z91 Reference 20 dB Attenuator Type-N mismatch combination Probe EF3DV3 DAE4 Secondary Standards Power meter Agilent 4419B Power sensor HP E4412A Power sensor HP E4412A Power sensor HP 8482A RF generator R&S SMT-06 Network Analyzer Agilent E8358A Calibrated by:	critical for calibration) ID # SN: 104778 SN: 103244 SN: 103245 SN: 8H9394 (20k) SN: 310982 / 06327 SN: 4013 SN: 781 ID # SN: GB42420191 SN: US37295597 SN: 837633/005 SN: US41080477 Name	Cal Date (Certificate No.) 01-Apr-20 (No. 217-03100/03101) 01-Apr-20 (No. 217-03100) 01-Apr-20 (No. 217-03101) 31-Mar-20 (No. 217-03104) 31-Dec-19 (No. EF3-4013_Dec19) 27-Dec-19 (No. DAE4-781_Dec19) Check Date (in house) 09-Oct-09 (in house check Oct-20) 05-Jan-10 (in house check Oct-20) 09-Oct-09 (in house check Oct-20) 10-Jan-19 (in house check Oct-20) 31-Mar-14 (in house check Oct-20) Function	Schieduled Calibration Apr-21 Apr-21 Apr-21 Apr-21 Apr-21 Dec-20 Dec-20 Dec-20 Scheduled Check In house check: Oct-23 In house check: Oct-23
All calibrations have been conduct Calibration Equipment used (M&TE Primary Standards Power meter NRP Power sensor NRP-291 Power sensor NRP-291 Reference 20 dB Attenuator Type-N mismatch combination Probe EF3DV3 DAE4 Secondary Standards Power meter Agilent 4419B Power sensor HP E4412A Power sensor HP E4412A RF generator R&S SMT-06 Network Analyzer Agilent E8358A Calibrated by: Approved by:	critical for calibration) ID # SN: 104778 SN: 103245 SN: 103245 SN: 8109394 (20k) SN: 310982 / 06327 SN: 4013 SN: 781 ID # SN: GB42420191 SN: US38485102 SN: US37295597 SN: 837633/005 SN: US41080477 Name Leif Klysner	Cal Date (Certificate No.) 01-Apr-20 (No. 217-03100/03101) 01-Apr-20 (No. 217-03100) 01-Apr-20 (No. 217-03100) 01-Apr-20 (No. 217-03108) 31-Mar-20 (No. 217-03104) 31-Dec-19 (No. EF3-4013_Dec19) 27-Dec-19 (No. DAE4-781_Dec19) Check Date (in house) 09-Oct-09 (in house check Oct-20) 05-Jan-10 (in house check Oct-20) 10-Jan-19 (in house check Oct-20) 31-Mar-14 (in house check Oct-20) 31-Mar-14 (in house check Oct-20)	Scheduled Calibration Apr-21 Apr-21 Apr-21 Apr-21 Apr-21 Dec-20 Dec-20 Scheduled Check In house check: Oct-23 In house check: Oct-21 Signature
Calibration Equipment used (M&TE Primary Standards Power meter NRP Power sensor NRP-Z91 Reference 20 dB Attenuator Type-N mismatch combination Probe EF3DV3 DAE4 Secondary Standards Power meter Agilent 4419B Power sensor HP E4412A Power sensor HP E4412A RF generator R&S SMT-06 Network Analyzer Agilent E8358A Calibrated by:	critical for calibration) ID # SN: 104778 SN: 103245 SN: 103245 SN: 8109394 (20k) SN: 310982 / 06327 SN: 4013 SN: 781 ID # SN: GB42420191 SN: US38485102 SN: US37295597 SN: 837633/005 SN: US41080477 Name Leif Klysner	Cal Date (Certificate No.) 01-Apr-20 (No. 217-03100/03101) 01-Apr-20 (No. 217-03100) 01-Apr-20 (No. 217-03100) 01-Apr-20 (No. 217-03108) 31-Mar-20 (No. 217-03104) 31-Dec-19 (No. EF3-4013_Dec19) 27-Dec-19 (No. DAE4-781_Dec19) Check Date (in house) 09-Oct-09 (in house check Oct-20) 05-Jan-10 (in house check Oct-20) 10-Jan-19 (in house check Oct-20) 31-Mar-14 (in house check Oct-20) 31-Mar-14 (in house check Oct-20)	Scheduled Calibration Apr-21 Apr-21 Apr-21 Apr-21 Apr-21 Dec-20 Dec-20 Scheduled Check In house check: Oct-23 In house check: Oct-21 Signature

Certificate No: CD1880V3-1115_Oct20 Page 1 of 5



Calibration Laboratory of Schmid & Partner

Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland IDC MRA



s

С

Schweizerischer Kalibrierdienst Service suisse d'étalonnage

- Servizio svizzero di taratura
- S Swiss Calibration Service

Accreditation No.: SCS 0108

Accredited by the Swiss Accreditation Service (SAS) The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

References

[1] ANSI-C63.19-2011

American National Standard, Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids.

Methods Applied and Interpretation of Parameters:

- Coordinate System: y-axis is in the direction of the dipole arms. z-axis is from the basis of the antenna (mounted on the table) towards its feed point between the two dipole arms. x-axis is normal to the other axes. In coincidence with the standards [1], the measurement planes (probe sensor center) are selected to be at a distance of 15 mm above the top metal edge of the dipole arms.
- Measurement Conditions: Further details are available from the hardcopies at the end of the certificate. All
 figures stated in the certificate are valid at the frequency indicated. The forward power to the dipole connector
 is set with a calibrated power meter connected and monitored with an auxiliary power meter connected to a
 directional coupler. While the dipole under test is connected, the forward power is adjusted to the same level.
- Antenna Positioning: The dipole is mounted on a HAC Test Arch phantom using the matching dipole positioner with the arms horizontal and the feeding cable coming from the floor. The measurements are performed in a shielded room with absorbers around the setup to reduce the reflections. It is verified before the mounting of the dipole under the Test Arch phantom, that its arms are perfectly in a line. It is installed on the HAC dipole positioner with its arms parallel below the dielectric reference wire and able to move elastically in vertical direction without changing its relative position to the top center of the Test Arch phantom. The vertical distance to the probe is adjusted after dipole mounting with a DASY5 Surface Check job. Before the measurement, the distance between phantom surface and probe tip is verified. The proper measurement distance is selected by choosing the matching section of the HAC Test Arch phantom with the proper device reference point (upper surface of the dipole) and the matching grid reference point (tip of the probe) considering the probe sensor offset. The vertical distance to the probe is essential for the accuracy.
- Feed Point Impedance and Return Loss: These parameters are measured using a Vector Network Analyzer.
 The impedance is specified at the SMA connector of the dipole. The influence of reflections was eliminating by applying the averaging function while moving the dipole in the air, at least 70cm away from any obstacles.
- E-field distribution: E field is measured in the x-y-plane with an isotropic E-field probe with 100 mW forward power to the antenna feed point. In accordance with [1], the scan area is 20mm wide, its length exceeds the dipole arm length (180 or 90mm). The sensor center is 15 mm (in z) above the metal top of the dipole arms. Two 3D maxima are available near the end of the dipole arms. Assuming the dipole arms are perfectly in one line, the average of these two maxima (in subgrid 2 and subgrid 8) is determined to compensate for any non-parallelity to the measurement plane as well as the sensor displacement. The E-field value stated as calibration value represents the maximum of the interpolated 3D-E-field, in the plane above the dipole surface.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Certificate No: CD1880V3-1115_Oct20

Page 2 of 5

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.4
Phantom	HAC Test Arch	
Distance Dipole Top - Probe Center	15 mm	
Scan resolution	dx, dy = 5 mm	
Frequency	1880 MHz ± 1 MHz	
Input power drift	< 0.05 dB	

Maximum Field values at 1880 MHz

E-field 15 mm above dipole surface	condition	Interpolated maximum
Maximum measured above high end	100 mW input power	87.4 V/m = 38.83 dBV/m
Maximum measured above low end	100 mW input power	86.8 V/m = 38.77 dBV/m
Averaged maximum above arm	100 mW input power	87.1 V/m ± 12.8 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters

Frequency	Return Loss	Impedance
1730 MHz	30.4 dB	53.0 Ω - 0.9 jΩ
1880 MHz	21.2 dB	52.3 Ω + 8.6 jΩ
1900 MHz	22.1 dB	54.1 Ω + 7.1 jΩ
1950 MHz	29.6 dB	52.0 Ω + 2.7 jΩ
2000 MHz	18.7 dB	47.0 Ω + 10.9 jΩ

3.2 Antenna Design and Handling

The calibration dipole has a symmetric geometry with a built-in two stub matching network, which leads to the enhanced bandwidth.

The dipole is built of standard semirigid coaxial cable. The internal matching line is open ended. The antenna is therefore open for DC signals.


Do not apply force to dipole arms, as they are liable to bend. The soldered connections near the feedpoint may be damaged. After excessive mechanical stress or overheating, check the impedance characteristics to ensure that the internal matching network is not affected.

After long term use with 40W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

Page 3 of 5

HAC Test Report

Impedance Measurement Plot

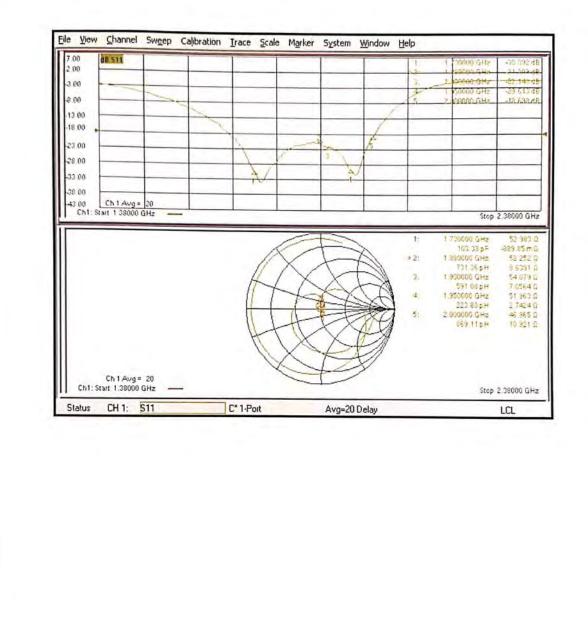

Page 4 of 5





Date: 12.10.2020

DASY5 E-field Result

Test Laboratory: SPEAG Lab2

DUT: HAC Dipole 1880 MHz; Type: CD1880V3; Serial: CD1880V3 - SN: 1115

Communication System: UID 0 - CW ; Frequency: 1880 MHz Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³ Phantom section: RF Section Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)


DASY52 Configuration:

- Probe: EF3DV3 SN4013; ConvF(1, 1, 1) @ 1880 MHz; Calibrated: 31.12.2019
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn781; Calibrated: 27.12.2019
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1070
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Dipole E-Field measurement @ 1880MHz/E-Scan - 1880MHz d=15mm/Hearing Aid Compatibility Test (41x181x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm Device Reference Point: 0, 0, -6.3 mm Reference Value = 155.3 V/m; Power Drift = 0.02 dB Applied MIF = 0.00 dB RF audio interference level = 38.83 dBV/m Emission category: M2

MIF scaled E-field

	Grid 2 M2 38.77 dBV/m	Grid 3 M2 38.68 dBV/m
and a series of the series of	Grid 5 M2 36.17 dBV/m	Grid 6 M2 36.14 dBV/m
March Contraction of the	Grid 8 M2 38.83 dBV/m	Grid 9 M2 38.75 dBV/m

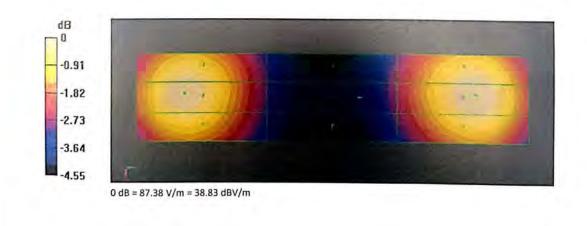

Certificate No: CD1880V3-1115_Oct20 Page 5 of 5



ANNEX F: CD2450V3 Dipole Calibration Certificate

Schmid & Partner Engineering AG _{Zeughausstrasse} 43, 8004 Zurich		BOCMER SC S	Schweizerischer Kallbrierdienst Service suisse d'étalonnage Servizio svizzero di taratura Swiss Calibration Service
Accredited by the Swiss Accreditation The Swiss Accreditation Service Multilateral Agreement for the rec Client TA-SH (Auden)	is one of the signatories	to the EA certificates	coreditation No.: SCS 0108
CALIBRATION C	ERTIFICATI	Low go and a	: CD2450V3-1111_Oct20
Object	CD2450V3 - SN:	1111	
Calibration procedure(s)	QA CAL-20.v7 Calibration Proce	dure for Validation Sources in air	
Calibration date:	October 12, 2020		
	ed in the closed laborator	obability are given on the following pages and y facility: environment temperature $(22 \pm 3)^{\circ}$ C	
Primary Standards	D#	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	01-Apr-20 (No. 217-03100/03101)	Apr-21
Power sensor NRP-Z91	SN: 103244	01-Apr-20 (No. 217-03100)	Apr-21
Power sensor NRP-Z91	SN: 103245	01-Apr-20 (No. 217-03101)	Apr-21
Reference 20 dB Attenuator Type-N mismatch combination	SN: BH9394 (20k) SN: 310982 / 06327	31-Mar-20 (No. 217-03106)	Apr-21
Probe EF3DV3	SN: 4013	31-Mar-20 (No. 217-03104) 31-Dec-19 (No. EF3-4013_Dec19)	Apr-21 Dec-20
DAE4	SN: 781	27-Dec-19 (No. DAE4-781_Dec19)	Dec-20
	ID#	Check Date (in house)	Scheduled Check
	SN: GB42420191	09-Oct-09 (in house check Oct-20)	In house check: Oct-23
Power meter Agilent 4419B	Chi-LIC2040F400		
Power meter Agilent 4419B Power sensor HP E4412A	SN: US38485102 SN: US37295597	05-Jan-10 (in house check Oct-20) 09-Oct-09 (in house check Oct-20)	In house check: Oct-23
Power meter Agilent 4419B Power sensor HP E4412A Power sensor HP 8482A	SN: US38485102 SN: US37295597 SN: 837633/005	05-Jan-10 (in house check Oct-20) 09-Oct-09 (in house check Oct-20) 10-Jan-19 (in house check Oct-20)	In house check: Oct-23
Power meter Agilent 4419B Power sensor HP E4412A Power sensor HP 8482A RF generator R&S SMT-06	SN: US37295597	09-Oct-09 (in house check Oct-20)	
Power meter Agilent 4419B Power sensor HP E4412A Power sensor HP 8482A RF generator R&S SMT-06 Network Analyzer Agilent E8358A	SN: US37295597 SN: 837633/005 SN: US41080477 Name	09-Oct-09 (in house check Oct-20) 10-Jan-19 (in house check Oct-20) 31-Mar-14 (in house check Oct-20) Function	In house check: Oct-23 In house check: Oct-23
Power meter Agilent 4419B Power sensor HP E4412A Power sensor HP 8482A RF generator R&S SMT-06 Network Analyzer Agilent E8358A	SN: US37295597 SN: 837633/005 SN: US41080477	09-Oct-09 (in house check Oct-20) 10-Jan-19 (in house check Oct-20) 31-Mar-14 (in house check Oct-20)	In house check: Oct-23 In house check: Oct-23 In house check: Oct-21
Secondary Standards Power meter Agilent 4419B Power sensor HP E4412A Power sensor HP 8482A RF generator R&S SMT-06 Network Analyzer Agilent E8358A Calibrated by:	SN: US37295597 SN: 837633/005 SN: US41080477 Name	09-Oct-09 (in house check Oct-20) 10-Jan-19 (in house check Oct-20) 31-Mar-14 (in house check Oct-20) Function	In house check: Oct-23 In house check: Oct-23 In house check: Oct-21
Power meter Agilent 4419B Power sensor HP E4412A Power sensor HP 8482A RF generator R&S SMT-06 Network Analyzer Agilent E8358A Calibrated by:	SN: US37295597 SN: 837633/005 SN: US41080477 Name Leif Klysner	09-Oct-09 (in house check Oct-20) 10-Jan-19 (in house check Oct-20) 31-Mar-14 (in house check Oct-20) Function Laboratory Technician	In house check: Oct-23 In house check: Oct-23 In house check: Oct-21
Power meter Agilent 4419B Power sensor HP E4412A Power sensor HP 8482A RF generator R&S SMT-06 Network Analyzer Agilent E8358A Calibrated by:	SN: US37295597 SN: 837633/005 SN: US41080477 Name Leif Klysner	09-Oct-09 (in house check Oct-20) 10-Jan-19 (in house check Oct-20) 31-Mar-14 (in house check Oct-20) Function Laboratory Technician Technical Manager	In house check: Oct-23 In house check: Oct-23 In house check: Oct-21 Signature Say Magan Magan Issued: October 13, 2020
Power meter Agilent 4419B Power sensor HP E4412A Power sensor HP 8482A RF generator R&S SMT-06 Network Analyzer Agilent E8358A Calibrated by:	SN: US37295597 SN: 837633/005 SN: US41080477 Name Leif Klysner	09-Oct-09 (in house check Oct-20) 10-Jan-19 (in house check Oct-20) 31-Mar-14 (in house check Oct-20) Function Laboratory Technician	In house check: Oct-23 In house check: Oct-23 In house check: Oct-21 Signature Say Magan Magan Issued: October 13, 2020



Calibration Laboratory of Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





s

Schweizerischer Kalibrierdienst С

Service sulsse d'étalonnage

Servizio svizzero di taratura S Swiss Calibration Service

Accreditation No.; SCS 0108

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service Is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

References

[1] ANSI-C63.19-2011

American National Standard, Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids.

Methods Applied and Interpretation of Parameters:

- Coordinate System: y-axis is in the direction of the dipole arms. z-axis is from the basis of the antenna (mounted on the table) towards its feed point between the two dipole arms. x-axis is normal to the other axes. In coincidence with the standards [1], the measurement planes (probe sensor center) are selected to be at a distance of 15 mm above the top metal edge of the dipole arms.
- Measurement Conditions: Further details are available from the hardcopies at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated. The forward power to the dipole connector is set with a calibrated power meter connected and monitored with an auxiliary power meter connected to a directional coupler. While the dipole under test is connected, the forward power is adjusted to the same level.
- Antenna Positioning: The dipole is mounted on a HAC Test Arch phantom using the matching dipole positioner with the arms horizontal and the feeding cable coming from the floor. The measurements are performed in a shielded room with absorbers around the setup to reduce the reflections. It is verified before the mounting of the dipole under the Test Arch phantom, that its arms are perfectly in a line. It is installed on the HAC dipole positioner with its arms parallel below the dielectric reference wire and able to move elastically in vertical direction without changing its relative position to the top center of the Test Arch phantom. The vertical distance to the probe is adjusted after dipole mounting with a DASY5 Surface Check job. Before the measurement, the distance between phantom surface and probe tip is verified. The proper measurement distance is selected by choosing the matching section of the HAC Test Arch phantom with the proper device reference point (upper surface of the dipole) and the matching grid reference point (tip of the probe) considering the probe sensor offset. The vertical distance to the probe is essential for the accuracy
- Feed Point Impedance and Return Loss: These parameters are measured using a Vector Network Analyzer. The impedance is specified at the SMA connector of the dipole. The influence of reflections was eliminating by applying the averaging function while moving the dipole in the air, at least 70cm away from any obstacles.
- E-field distribution: E field is measured in the x-y-plane with an isotropic E-field probe with 100 mW forward power to the antenna feed point. In accordance with [1], the scan area is 20mm wide, its length exceeds the dipole arm length (180 or 90mm). The sensor center is 15 mm (in z) above the metal top of the dipole arms. Two 3D maxima are available near the end of the dipole arms. Assuming the dipole arms are perfectly in one line, the average of these two maxima (in subgrid 2 and subgrid 8) is determined to compensate for any nonparallelity to the measurement plane as well as the sensor displacement. The E-field value stated as calibration value represents the maximum of the interpolated 3D-E-field, in the plane above the dipole surface.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Certificate No: CD2450V3-1111_Oct20

Page 2 of 5

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.4
Phantom	HAC Test Arch	
Distance Dipole Top - Probe Center	15 mm	
Scan resolution	dx, dy = 5 mm	
Frequency	2450 MHz ± 1 MHz	
Input power drift	< 0.05 dB	

Maximum Field values at 2450 MHz

E-field 15 mm above dipole surface	condition	Interpolated maximum
Maximum measured above high end	100 mW input power	86.3 V/m = 38.72 dBV/m
Maximum measured above low end	100 mW input power	85.8 V/m = 38.67 dBV/m
Averaged maximum above arm	100 mW input power	86.0 V/m ± 12.8 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters

Frequency	Return Loss	Impedance
2250 MHz	18.6 dB	61.3 Ω + 6.8 jΩ
2350 MHz	28.8 dB	53.7 Ω + 1.0 jΩ
2450 MHz	25.0 dB	55.9 Ω - 0.6 jΩ
2550 MHz	30.2 dB	51.0 Ω - 2.9 jΩ
2650 MHz	19.5 dB	60.7 Ω - 4.9 jΩ

3.2 Antenna Design and Handling

The calibration dipole has a symmetric geometry with a built-in two stub matching network, which leads to the enhanced bandwidth.

The dipole is built of standard semirigid coaxial cable. The internal matching line is open ended. The antenna is therefore open for DC signals.

Do not apply force to dipole arms, as they are liable to bend. The soldered connections near the feedpoint may be damaged. After excessive mechanical stress or overheating, check the impedance characteristics to ensure that the internal matching network is not affected.


After long term use with 40W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

Certificate No: CD2450V3-1111_Oct20

Page 3 of 5



Impedance Measurement Plot

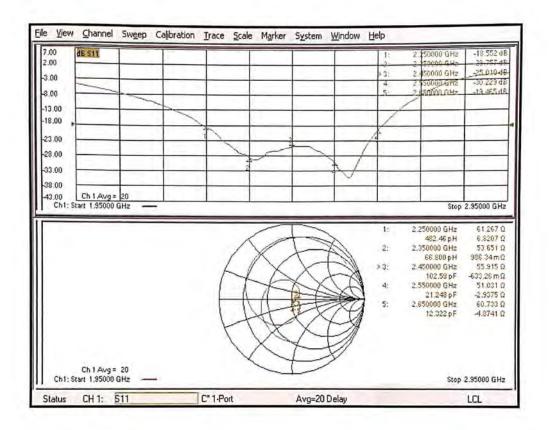

Certificate No: CD2450V3-1111_Oct20

Page 4 of 5

TA Technology (Shanghai) Co., Ltd.TA-MB-04-001HPage 95 of 113This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.



DASY5 E-field Result

Date: 12.10.2020

Test Laboratory: SPEAG Lab2

DUT: HAC Dipole 2450 MHz; Type: CD2450V3; Serial: CD2450V3 - SN: 1111

 $\begin{array}{l} Communication \ System: \ UID \ 0 - CW \ ; \ Frequency: \ 2450 \ MHz \\ Medium \ parameters \ used: \ \sigma = 0 \ S/m, \ \epsilon_r = 1; \ \rho = 0 \ kg/m^3 \\ Phantom \ section: \ RF \ Section \\ Measurement \ Standard: \ DASY5 \ (IEEE/IEC/ANSI \ C63.19-2011) \\ \end{array}$


DASY52 Configuration:

- Probe: EF3DV3 SN4013; ConvF(1, 1, 1) @ 2450 MHz; Calibrated: 31.12.2019
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn781; Calibrated: 27.12.2019
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1070
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Dipole E-Field measurement @ 2450MHz/E-Scan - 2450MHz d=15mm/Hearing Aid Compatibility Test (41x181x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm Device Reference Point: 0, 0, -6.3 mm Reference Value = 74.93 V/m; Power Drift = 0.01 dB Applied MIF = 0.00 dB RF audio interference level = 38.72 dBV/m Emission category: M2

MIF scaled E-field

and a second second	Grid 2 M2 38.67 dBV/m	Grid 3 M2
Grid 4 M2	Grid 5 M2	Grid 6 M2
	37.84 dBV/m	
	Grid 8 M2 38.72 dBV/m	Grid 9 M2 38.6 dBV/m

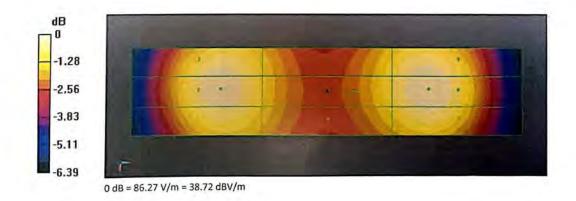

Certificate No: CD2450V3-1111_Oct20

Page 5 of 5





ANNEX G: CD2600V3 Dipole Calibration Certificate

ccredited by the Swiss Accreditation e Swiss Accreditation Service			
and a recent of the rec	ognition of calibration	s to the EA	ccreditation No.: SCS 0108
ient TA-SH (Auden)		Certificate N	: CD2600V3-1016_Jan2
CALIBRATION C	ERTIFICATI		TO THE PARTY
Object	CD2600\/2_ CN	1010	
Object	CD2600V3 - SN:	1016	and the second states
Calibration procedure(s)	QA CAL-20.v7 Calibration Proce	edure for Validation Sources in a	r
Calibration date:	January 18, 2021	1	
		y facility: environment temperature (22 \pm 3)°(C and humidity < 70%.
Calibration Equipment used (M&T Primary Standards Power meter NRP	E critical for calibration) ID # SN: 104778	Cal Date (Certificate No.) 01-Apr-20 (No. 217-03100/03101)	Scheduled Calibration Apr-21
Calibration Equipment used (M&T Primary Standards Power meter NRP Power sensor NRP-291	E critical for calibration) ID # SN: 104778 SN: 103244	Cal Date (Certificate No.) 01-Apr-20 (No. 217-03100/03101) 01-Apr-20 (No. 217-03100)	Scheduled Calibration Apr-21 Apr-21
Calibration Equipment used (M&T Primary Standards Power meter NRP Power sensor NRP-Z91 Power sensor NRP-Z91	E critical for calibration) ID # SN: 104778	Cal Date (Certificate No.) 01-Apr-20 (No. 217-03100/03101)	Scheduled Calibration Apr-21
Calibration Equipment used (M&T Primary Standards Power meter NRP Power sensor NRP-Z91 Power sensor NRP-Z91 Reference 20 dB Attenuator Type-N mismatch combination	E critical for calibration) ID # SN: 104778 SN: 103244 SN: 103245 SN: BH9394 (20k) SN: 310982 / 06327	Cal Date (Certificate No.) 01-Apr-20 (No. 217-03100/03101) 01-Apr-20 (No. 217-03100) 01-Apr-20 (No. 217-03101)	Scheduled Calibration Apr-21 Apr-21 Apr-21
Calibration Equipment used (M&T Primary Standards Power meter NRP Power sensor NRP-Z91 Power sensor NRP-Z91 Reference 20 dB Attenuator Type-N mismatch combination Probe EF3DV3	E critical for calibration) ID # SN: 104778 SN: 103244 SN: 103245 SN: BH9394 (20k) SN: 310982 / 06327 SN: 4013	Cal Date (Certificate No.) 01-Apr-20 (No. 217-03100/03101) 01-Apr-20 (No. 217-03100) 01-Apr-20 (No. 217-03101) 31-Mar-20 (No. 217-03106) 31-Mar-20 (No. 217-03104) 28-Dec-20 (No. EF3-4013_Dec20)	Scheduled Calibration Apr-21 Apr-21 Apr-21 Apr-21 Apr-21 Apr-21 Dec-21
Calibration Equipment used (M&T Primary Standards Power meter NRP Power sensor NRP-Z91 Power sensor NRP-Z91 Reference 20 dB Attenuator Type-N mismatch combination Probe EF3DV3	E critical for calibration) ID # SN: 104778 SN: 103244 SN: 103245 SN: BH9394 (20k) SN: 310982 / 06327	Cal Date (Certificate No.) 01-Apr-20 (No. 217-03100/03101) 01-Apr-20 (No. 217-03100) 01-Apr-20 (No. 217-03101) 31-Mar-20 (No. 217-03106) 31-Mar-20 (No. 217-03104)	Scheduled Calibration Apr-21 Apr-21 Apr-21 Apr-21 Apr-21 Apr-21
Calibration Equipment used (M&T Primary Standards Power meter NRP Power sensor NRP-Z91 Power sensor NRP-Z91 Reference 20 dB Attenuator Type-N mismatch combination Probe EF3DV3 DAE4	E critical for calibration) ID # SN: 104778 SN: 103244 SN: 103245 SN: BH9394 (20k) SN: 310982 / 06327 SN: 4013	Cal Date (Certificate No.) 01-Apr-20 (No. 217-03100/03101) 01-Apr-20 (No. 217-03100) 01-Apr-20 (No. 217-03101) 31-Mar-20 (No. 217-03106) 31-Mar-20 (No. 217-03104) 28-Dec-20 (No. EF3-4013_Dec20)	Scheduled Calibration Apr-21 Apr-21 Apr-21 Apr-21 Apr-21 Dec-21 Dec-21
Calibration Equipment used (M&T Primary Standards Power meter NRP Power sensor NRP-Z91 Power sensor NRP-Z91 Reference 20 dB Attenuator Type-N mismatch combination Probe EF3DV3 DAE4 Secondary Standards Power meter Agilent 4419B	E critical for calibration) ID # SN: 104778 SN: 103244 SN: 103245 SN: 8H9394 (20k) SN: 310982 / 06327 SN: 4013 SN: 781	Cal Date (Certificate No.) 01-Apr-20 (No. 217-03100/03101) 01-Apr-20 (No. 217-03100) 01-Apr-20 (No. 217-03101) 31-Mar-20 (No. 217-03106) 31-Mar-20 (No. 217-03104) 28-Dec-20 (No. EF3-4013_Dec20) 23-Dec-20 (No. DAE4-781_Dec20)	Scheduled Calibration Apr-21 Apr-21 Apr-21 Apr-21 Apr-21 Apr-21 Dec-21
Calibration Equipment used (M&T Primary Standards Power meter NRP Power sensor NRP-Z91 Power sensor NRP-Z91 Reference 20 dB Attenuator Type-N mismatch combination Probe EF3DV3 DAE4 Secondary Standards Power meter Agilent 4419B Power sensor HP E4412A	E critical for calibration) ID # SN: 104778 SN: 103244 SN: 103245 SN: 310982 / 06327 SN: 4013 SN: 781 ID # SN: GB42420191 SN: US38485102	Cal Date (Certificate No.) 01-Apr-20 (No. 217-03100/03101) 01-Apr-20 (No. 217-03100) 01-Apr-20 (No. 217-03101) 31-Mar-20 (No. 217-03106) 31-Mar-20 (No. 217-03104) 28-Dec-20 (No. EF3-4013_Dec20) 23-Dec-20 (No. DAE4-781_Dec20) Check Date (in house) 09-Oct-09 (in house check Oct-20) 05-Jan-10 (in house check Oct-20)	Scheduled Calibration Apr-21 Apr-21 Apr-21 Apr-21 Apr-21 Dec-21 Dec-21 Dec-21 Scheduled Check
Calibration Equipment used (M&T Primary Standards Power meter NRP Power sensor NRP-Z91 Power sensor NRP-Z91 Reference 20 dB Attenuator Type-N mismatch combination Probe EF3DV3 DAE4 Secondary Standards Power meter Agilent 4419B Power sensor HP E4412A Power sensor HP 8482A	E critical for calibration) ID # SN: 104778 SN: 103244 SN: 103245 SN: 310982 / 06327 SN: 4013 SN: 781 ID # SN: GB42420191 SN: US38485102 SN: US37295597	Cal Date (Certificate No.) 01-Apr-20 (No. 217-03100/03101) 01-Apr-20 (No. 217-03100) 01-Apr-20 (No. 217-03100) 31-Mar-20 (No. 217-03106) 31-Mar-20 (No. 217-03104) 28-Dec-20 (No. EF3-4013_Dec20) 23-Dec-20 (No. DAE4-781_Dec20) Check Date (in house) 09-Oct-09 (in house check Oct-20) 05-Jan-10 (in house check Oct-20)	Scheduled Calibration Apr-21 Apr-21 Apr-21 Apr-21 Dec-21 Dec-21 Dec-21 Scheduled Check In house check: Oct-23 In house check: Oct-23 In house check: Oct-23
Calibration Equipment used (M&T Primary Standards Power meter NRP Power sensor NRP-Z91 Power sensor NRP-Z91 Reference 20 dB Attenuator Type-N mismatch combination Probe EF3DV3 DAE4 Secondary Standards Power meter Agilent 4419B Power sensor HP E4412A Power sensor HP 8482A RF generator R&S SMT-06	E critical for calibration) ID # SN: 104778 SN: 103244 SN: 103245 SN: 8H9394 (20k) SN: 310982 / 06327 SN: 4013 SN: 781 ID # SN: GB42420191 SN: US38485102 SN: US37295597 SN: 837633/005	Cal Date (Certificate No.) 01-Apr-20 (No. 217-03100/03101) 01-Apr-20 (No. 217-03100) 01-Apr-20 (No. 217-03101) 31-Mar-20 (No. 217-03104) 28-Dec-20 (No. EF3-4013_Dec20) 23-Dec-20 (No. DAE4-781_Dec20) Check Date (in house) 09-Oct-09 (in house check Oct-20) 05-Jan-10 (in house check Oct-20) 09-Oct-09 (in house check Oct-20) 09-Oct-09 (in house check Oct-20) 10-Jan-19 (in house check Oct-20)	Scheduled Calibration Apr-21 Apr-21 Apr-21 Apr-21 Dec-21 Dec-21 Dec-21 Scheduled Check In house check: Oct-23 In house check: Oct-23 In house check: Oct-23 In house check: Oct-23 In house check: Oct-23
Calibration Equipment used (M&T Primary Standards Power meter NRP Power sensor NRP-Z91 Power sensor NRP-Z91 Reference 20 dB Attenuator Type-N mismatch combination Probe EF3DV3 DAE4 Secondary Standards Power meter Agilent 4419B Power sensor HP E4412A Power sensor HP 8482A RF generator R&S SMT-06	E critical for calibration) ID # SN: 104778 SN: 103244 SN: 103245 SN: 310982 / 06327 SN: 4013 SN: 781 ID # SN: GB42420191 SN: US38485102 SN: US37295597	Cal Date (Certificate No.) 01-Apr-20 (No. 217-03100/03101) 01-Apr-20 (No. 217-03100) 01-Apr-20 (No. 217-03100) 31-Mar-20 (No. 217-03106) 31-Mar-20 (No. 217-03104) 28-Dec-20 (No. EF3-4013_Dec20) 23-Dec-20 (No. DAE4-781_Dec20) Check Date (in house) 09-Oct-09 (in house check Oct-20) 05-Jan-10 (in house check Oct-20)	Scheduled Calibration Apr-21 Apr-21 Apr-21 Apr-21 Dec-21 Dec-21 Dec-21 Scheduled Check In house check: Oct-23 In house check: Oct-23 In house check: Oct-23
Calibration Equipment used (M&T Primary Standards Power meter NRP Power sensor NRP-Z91 Reference 20 dB Attenuator Type-N mismatch combination Probe EF3DV3 DAE4 Secondary Standards Power meter Agilent 4419B Power sensor HP E4412A Power sensor HP 8482A RF generator R&S SMT-06	E critical for calibration) ID # SN: 104778 SN: 103244 SN: 103245 SN: 8H9394 (20k) SN: 310982 / 06327 SN: 4013 SN: 781 ID # SN: GB42420191 SN: US38485102 SN: US37295597 SN: 837633/005	Cal Date (Certificate No.) 01-Apr-20 (No. 217-03100/03101) 01-Apr-20 (No. 217-03100) 01-Apr-20 (No. 217-03101) 31-Mar-20 (No. 217-03104) 28-Dec-20 (No. EF3-4013_Dec20) 23-Dec-20 (No. DAE4-781_Dec20) Check Date (in house) 09-Oct-09 (in house check Oct-20) 05-Jan-10 (in house check Oct-20) 09-Oct-09 (in house check Oct-20) 09-Oct-09 (in house check Oct-20) 10-Jan-19 (in house check Oct-20)	Scheduled Calibration Apr-21 Apr-21 Apr-21 Apr-21 Dec-21 Dec-21 Dec-21 Scheduled Check In house check: Oct-23 In house check: Oct-23 In house check: Oct-23 In house check: Oct-23 In house check: Oct-23
Calibration Equipment used (M&T Primary Standards Power meter NRP Power sensor NRP-Z91 Power sensor NRP-Z91 Reference 20 dB Attenuator Type-N mismatch combination Probe EF3DV3 DAE4 Secondary Standards Power meter Agilent 4419B Power sensor HP E4412A Power sensor HP 8482A RF generator R&S SMT-06 Network Analyzer Agilent E8358A	E critical for calibration) ID # SN: 104778 SN: 103244 SN: 103245 SN: 8H9394 (20k) SN: 310982 / 06327 SN: 4013 SN: 781 ID # ID # SN: GB42420191 SN: US38485102 SN: US37295597 SN: 837633/005 SN: US41080477	Cal Date (Certificate No.) 01-Apr-20 (No. 217-03100/03101) 01-Apr-20 (No. 217-03100) 01-Apr-20 (No. 217-03101) 31-Mar-20 (No. 217-03106) 31-Mar-20 (No. 217-03104) 28-Dec-20 (No. EF3-4013_Dec20) 23-Dec-20 (No. DAE4-781_Dec20) Check Date (in house) 09-Oct-09 (in house check Oct-20) 05-Jan-10 (in house check Oct-20) 10-Jan-19 (in house check Oct-20) 31-Mar-14 (in house check Oct-20)	Scheduled Calibration Apr-21 Apr-21 Apr-21 Apr-21 Dec-21 Dec-21 Scheduled Check In house check: Oct-23 In house check: Oct-23
Calibration Equipment used (M&T Primary Standards Power meter NRP Power sensor NRP-Z91 Power sensor NRP-Z91 Reference 20 dB Attenuator Type-N mismatch combination Probe EF3DV3 DAE4 Secondary Standards Power meter Agilent 4419B Power sensor HP E4412A Power sensor HP 8482A RF generator R&S SMT-06 Network Analyzer Agilent E8358A	E critical for calibration) ID # SN: 104778 SN: 103244 SN: 103245 SN: 8H9394 (20k) SN: 310982 / 06327 SN: 4013 SN: 781 ID # SN: GB42420191 SN: US38485102 SN: US37295597 SN: 837633/005 SN: US41080477 Name	Cal Date (Certificate No.) 01-Apr-20 (No. 217-03100/03101) 01-Apr-20 (No. 217-03100) 01-Apr-20 (No. 217-03101) 31-Mar-20 (No. 217-03104) 28-Dec-20 (No. EF3-4013_Dec20) 23-Dec-20 (No. DAE4-781_Dec20) 23-Dec-20 (No. DAE4-781_Dec20) 09-Oct-09 (in house check Oct-20) 05-Jan-10 (in house check Oct-20) 09-Oct-09 (in house check Oct-20) 10-Jan-19 (in house check Oct-20) 31-Mar-14 (in house check Oct-20) Function	Scheduled Calibration Apr-21 Apr-21 Apr-21 Apr-21 Dec-21 Dec-21 Scheduled Check In house check: Oct-23 In house check: Oct-23
Calibration Equipment used (M&T Primary Standards Power sensor NRP-Z91 Power sensor NRP-Z91 Reference 20 dB Attenuator Type-N mismatch combination Probe EF3DV3 DAE4 Secondary Standards Power meter Agilent 4419B Power sensor HP E4412A Power sensor HP E4412A Power sensor HP E4412A Power sensor HP E4412A Power sensor HP 8482A RF generator R&S SMT-06 Network Analyzer Agilent E8358A	E critical for calibration) ID # SN: 104778 SN: 103244 SN: 103245 SN: 8H9394 (20k) SN: 310982 / 06327 SN: 4013 SN: 781 ID # SN: GB42420191 SN: US38485102 SN: US37295597 SN: 837633/005 SN: US41080477 Name	Cal Date (Certificate No.) 01-Apr-20 (No. 217-03100/03101) 01-Apr-20 (No. 217-03100) 01-Apr-20 (No. 217-03101) 31-Mar-20 (No. 217-03104) 28-Dec-20 (No. EF3-4013_Dec20) 23-Dec-20 (No. DAE4-781_Dec20) 23-Dec-20 (No. DAE4-781_Dec20) 09-Oct-09 (in house check Oct-20) 05-Jan-10 (in house check Oct-20) 09-Oct-09 (in house check Oct-20) 10-Jan-19 (in house check Oct-20) 31-Mar-14 (in house check Oct-20) Function	Scheduled Calibration Apr-21 Apr-21 Apr-21 Apr-21 Dec-21 Dec-21 Scheduled Check In house check: Oct-23 In house check: Oct-23
	E critical for calibration) ID # SN: 104778 SN: 103244 SN: 103245 SN: 310982 / 06327 SN: 4013 SN: 781 ID # SN: GB42420191 SN: US38485102 SN: US37295597 SN: 837633/005 SN: US41080477 Name Lelf Klysner	Cal Date (Certificate No.) 01-Apr-20 (No. 217-03100/03101) 01-Apr-20 (No. 217-03100) 01-Apr-20 (No. 217-03101) 31-Mar-20 (No. 217-03106) 31-Mar-20 (No. 217-03104) 28-Dec-20 (No. EF3-4013_Dec20) 23-Dec-20 (No. DAE4-781_Dec20) 23-Dec-20 (No. DAE4-781_Dec20) 09-Oct-09 (in house) 09-Oct-09 (in house check Oct-20) 09-Oct-09 (in house check Oct-20) 10-Jan-19 (in house check Oct-20) 31-Mar-14 (in house check Oct-20) S1-Mar-14 (in house check Oct-20) Function Laboratory Technician	Scheduled Calibration Apr-21 Apr-21 Apr-21 Apr-21 Dec-21 Dec-21 Scheduled Check In house check: Oct-23 In house check: Oct-23

Certificate No: CD2600V3-1016_Jan21

Page 1 of 5

HAC Test Report

Calibration Laboratory of Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





S Schweizerischer Kallbrierdienst Service suisse d'étalonnage Servizio svizzero di taratura Swiss Calibration Service

Accreditation No.: SCS 0108

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

References

[1] ANSI-C63.19-2011

American National Standard, Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids.

Methods Applied and Interpretation of Parameters:

- Coordinate System: y-axis is in the direction of the dipole arms. z-axis is from the basis of the antenna (mounted on the table) towards its feed point between the two dipole arms. x-axis is normal to the other axes. In coincidence with the standards [1], the measurement planes (probe sensor center) are selected to be at a distance of 15 mm above the top metal edge of the dipole arms.
- Measurement Conditions: Further details are available from the hardcopies at the end of the certificate. All
 figures stated in the certificate are valid at the frequency indicated. The forward power to the dipole connector
 is set with a calibrated power meter connected and monitored with an auxiliary power meter connected to a
 directional coupler. While the dipole under test is connected, the forward power is adjusted to the same level.
- Antenna Positioning: The dipole is mounted on a HAC Test Arch phantom using the matching dipole positioner with the arms horizontal and the feeding cable coming from the floor. The measurements are performed in a shielded room with absorbers around the setup to reduce the reflections. It is verified before the mounting of the dipole under the Test Arch phantom, that its arms are perfectly in a line. It is installed on the HAC dipole positioner with its arms parallel below the dielectric reference wire and able to move elastically in vertical direction without changing its relative position to the top center of the Test Arch phantom. The vertical distance to the probe is adjusted after dipole mounting with a DASY5 Surface Check job. Before the measurement, the distance between phantom surface and probe tip is verified. The proper measurement distance is selected by choosing the matching section of the HAC Test Arch phantom with the proper device reference point (upper surface of the dipole) and the matching grid reference point (tip of the probe) considering the probe sensor offset. The vertical distance to the probe is essential for the accuracy.
- Feed Point Impedance and Return Loss: These parameters are measured using a Vector Network Analyzer. The impedance is specified at the SMA connector of the dipole. The influence of reflections was eliminating by applying the averaging function while moving the dipole in the air, at least 70cm away from any obstacles.
- E-field distribution: E field is measured in the x-y-plane with an isotropic E-field probe with 100 mW forward power to the antenna feed point. In accordance with [1], the scan area is 20mm wide, its length exceeds the dipole arm length (180 or 90mm). The sensor center is 15 mm (in z) above the metal top of the dipole arms. Two 3D maxima are available near the end of the dipole arms. Assuming the dipole arms are perfectly in one line, the average of these two maxima (in subgrid 2 and subgrid 8) is determined to compensate for any non-parallelity to the measurement plane as well as the sensor displacement. The E-field value stated as calibration value represents the maximum of the interpolated 3D-E-field, in the plane above the dipole surface.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Certificate No: CD2600V3-1016_Jan21

Page 2 of 5

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.4
Phantom	HAC Test Arch	
Distance Dipole Top - Probe Center	15 mm	
Scan resolution	dx, dy = 5 mm	
Frequency	2600 MHz ± 1 MHz	
Input power drift	< 0.05 dB	

Maximum Field values at 2600 MHz

E-field 15 mm above dipole surface	condition	Interpolated maximum
Maximum measured above high end	100 mW input power	86.7 V/m = 38.76 dBV/m
Maximum measured above low end	100 mW input power	85.7 V/m = 38.66 dBV/m
Averaged maximum above arm	100 mW input power	86.2 V/m ± 12.8 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters

Frequency	Return Loss	Impedance
2450 MHz	20.9 dB	43.5 Ω - 5.3 jΩ
2550 MHz	30.8 dB	48.5 Ω + 2.4 jΩ
2600 MHz	35.9 dB	50.9 Ω + 1.4 jΩ
2650 MHz	35.8 dB	51.6 Ω - 0.1 jΩ
2750 MHz	22.5 dB	48.8 Ω - 7.4 jΩ

3.2 Antenna Design and Handling

The calibration dipole has a symmetric geometry with a built-in two stub matching network, which leads to the enhanced bandwidth.

The dipole is built of standard semirigid coaxial cable. The internal matching line is open ended. The antenna is therefore open for DC signals.

Do not apply force to dipole arms, as they are liable to bend. The soldered connections near the feedpoint may be damaged. After excessive mechanical stress or overheating, check the impedance characteristics to ensure that the internal matching network is not affected.


After long term use with 40W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

Certificate No: CD2600V3-1016_Jan21

Page 3 of 5



Impedance Measurement Plot

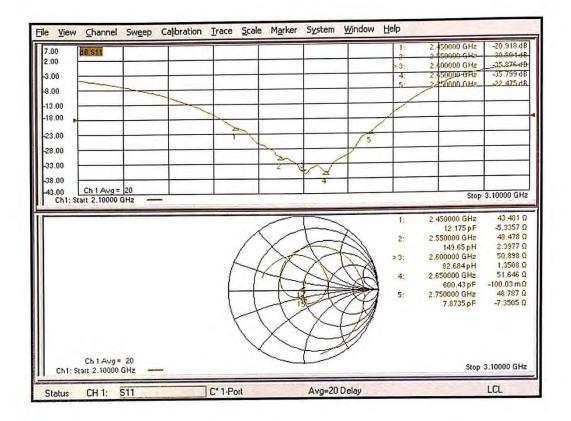

Certificate No: CD2600V3-1016_Jan21

Page 4 of 5



DASY5 E-field Result

Date: 18.01.2021

Test Laboratory: SPEAG Lab2

DUT: HAC Dipole 2600 MHz; Type: CD2600V3; Serial: CD2600V3 - SN: 1016

Communication System: UID 0 - CW; Frequency: 2600 MHz Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³ Phantom section: RF Section Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)


DASY52 Configuration:

- Probe: EF3DV3 SN4013; ConvF(1, 1, 1) @ 2600 MHz; Calibrated: 28.12.2020
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn781; Calibrated: 23.12.2020
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1070
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Dipole E-Field measurement @ 2600MHz/E-Scan - 2600MHz d=15mm/Hearing Aid Compatibility Test (41x181x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm Device Reference Point: 0, 0, -6.3 mm Reference Value = 69.15 V/m; Power Drift = -0.01 dB Applied MIF = 0.00 dB RF audio interference level = 38.76 dBV/m

Emission category: M2

Grid 1 M2 38.51 dBV/m	Grid 2 M2 38.66 dBV/m	Grid 3 M2 38.46 dBV/m
	Grid 5 M2 38.05 dBV/m	Grid 6 M2 37.87 dBV/m
	Grid 8 M2 38.76 dBV/m	Grid 9 M2 38.5 dBV/m

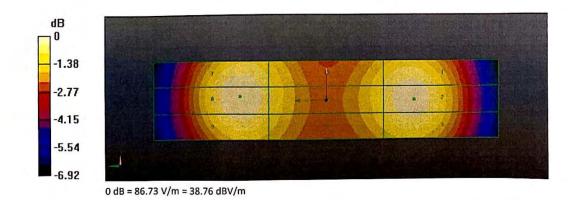

Certificate No: CD2600V3-1016_Jan21

Page 5 of 5





ANNEX H: CD5500V3 Dipole Calibration Certificate

in and in a second second second second	ognition of calibration of	to the EA	
ent TA-SH (Auden)	ognition of calibration of		: CD5500V3-1011_Jan21
ALIBRATION C	ERTIFICATE		
bject	CD5500V3 - SN:	1011	
Calibration procedure(s)	QA CAL-20.v7 Calibration Proce	dure for Validation Sources in ai	r
Calibration date:	January 18, 2021	in the second	
		onal standards, which realize the physical uni robability are given on the following pages an	
All calibrations have been conduct	ed in the closed laborator	y facility: environment temperature (22 \pm 3)°C	C and humidity < 70%.
Calibration Equipment used (M&TE			
rimary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
	SN: 104778	01-Apr-20 (No. 217-03100/03101)	Apr-21
ower meter NRP ower sensor NRP-Z91	SN: 104778 SN: 103244	01-Apr-20 (No. 217-03100/03101) 01-Apr-20 (No. 217-03100)	Apr-21 Apr-21
ower meter NRP ower sensor NRP-Z91 ower sensor NRP-Z91	SN: 104778 SN: 103244 SN: 103245	01-Apr-20 (No. 217-03100/03101) 01-Apr-20 (No. 217-03100) 01-Apr-20 (No. 217-03101)	Apr-21 Apr-21 Apr-21
ower meter NRP ower sensor NRP-Z91 ower sensor NRP-Z91 eference 20 dB Attenuator	SN: 104778 SN: 103244 SN: 103245 SN: BH9394 (20k)	01-Apr-20 (No. 217-03100/03101) 01-Apr-20 (No. 217-03100) 01-Apr-20 (No. 217-03101) 31-Mar-20 (No. 217-03106)	Apr-21 Apr-21
ower meter NRP ower sensor NRP-Z91 ower sensor NRP-Z91 eference 20 dB Attenuator ype-N mismatch combination	SN: 104778 SN: 103244 SN: 103245	01-Apr-20 (No. 217-03100/03101) 01-Apr-20 (No. 217-03100) 01-Apr-20 (No. 217-03101)	Apr-21 Apr-21 Apr-21 Apr-21
ower meter NRP ower sensor NRP-Z91 ower sensor NRP-Z91 Reference 20 dB Attenuator ype-N mismatch combination robe EF3DV3	SN: 104778 SN: 103244 SN: 103245 SN: BH9394 (20k) SN: 310982 / 06327	01-Apr-20 (No. 217-03100/03101) 01-Apr-20 (No. 217-03100) 01-Apr-20 (No. 217-03101) 31-Mar-20 (No. 217-03106) 31-Mar-20 (No. 217-03104)	Apr-21 Apr-21 Apr-21 Apr-21 Apr-21
Power meter NRP Power sensor NRP-Z91 Power sensor NRP-Z91 Reference 20 dB Attenuator Type-N mismatch combination Probe EF3DV3 DAE4	SN: 104778 SN: 103244 SN: 103245 SN: BH9394 (20k) SN: 310982 / 06327 SN: 4013	01-Apr-20 (No. 217-03100/03101) 01-Apr-20 (No. 217-03100) 01-Apr-20 (No. 217-03101) 31-Mar-20 (No. 217-03106) 31-Mar-20 (No. 217-03104) 28-Dec-20 (No. EF3-4013_Dec20)	Apr-21 Apr-21 Apr-21 Apr-21 Apr-21 Dec-21
ower meter NRP ower sensor NRP-Z91 ower sensor NRP-Z91 leference 20 dB Attenuator ype-N mismatch combination robe EF3DV3 AE4	SN: 104778 SN: 103244 SN: 103245 SN: BH9394 (20k) SN: 310982 / 06327 SN: 4013 SN: 781 ID # SN: GB42420191	01-Apr-20 (No. 217-03100/03101) 01-Apr-20 (No. 217-03100) 01-Apr-20 (No. 217-03100) 01-Apr-20 (No. 217-03101) 31-Mar-20 (No. 217-03106) 31-Mar-20 (No. 217-03104) 28-Dec-20 (No. EF3-4013_Dec20) 23-Dec-20 (No. DAE4-781_Dec20) Check Date (in house) 09-Oct-09 (in house check Oct-20)	Apr-21 Apr-21 Apr-21 Apr-21 Apr-21 Dec-21 Dec-21 Dec-21 Scheduled Check In house check: Oct-23
ower meter NRP ower sensor NRP-Z91 ower sensor NRP-Z91 eference 20 dB Attenuator ype-N mismatch combination robe EF3DV3 AE4 econdary Standards ower meter Agilent 4419B ower sensor HP E4412A	SN: 104778 SN: 103244 SN: 103245 SN: BH9394 (20k) SN: 310982 / 06327 SN: 4013 SN: 781 ID # SN: GB42420191 SN: US38485102	01-Apr-20 (No. 217-03100/03101) 01-Apr-20 (No. 217-03100) 01-Apr-20 (No. 217-03100) 01-Apr-20 (No. 217-03101) 31-Mar-20 (No. 217-03104) 28-Dec-20 (No. EF3-4013_Dec20) 23-Dec-20 (No. DAE4-781_Dec20) Check Date (in house) 09-Oct-09 (in house check Oct-20) 05-Jan-10 (in house check Oct-20)	Apr-21 Apr-21 Apr-21 Apr-21 Apr-21 Dec-21 Dec-21 Scheduled Check In house check: Oct-23 In house check: Oct-23
ower meter NRP ower sensor NRP-Z91 ower sensor NRP-Z91 eference 20 dB Attenuator ype-N mismatch combination robe EF3DV3 AE4 econdary Standards ower meter Agilent 4419B ower sensor HP E4412A ower sensor HP 8482A	SN: 104778 SN: 103244 SN: 103245 SN: BH9394 (20k) SN: 310982 / 06327 SN: 4013 SN: 781 ID # SN: GB42420191 SN: US38485102 SN: US37295597	01-Apr-20 (No. 217-03100/03101) 01-Apr-20 (No. 217-03100) 01-Apr-20 (No. 217-03100) 01-Apr-20 (No. 217-03101) 31-Mar-20 (No. 217-03106) 31-Mar-20 (No. 217-03104) 28-Dec-20 (No. EF3-4013_Dec20) 23-Dec-20 (No. DAE4-781_Dec20) Check Date (In house) 09-Oct-09 (In house check Oct-20) 09-Oct-09 (In house check Oct-20) 09-Oct-09 (In house check Oct-20)	Apr-21 Apr-21 Apr-21 Apr-21 Dec-21 Dec-21 Scheduled Check In house check: Oct-23 In house check: Oct-23 In house check: Oct-23
ower meter NRP ower sensor NRP-Z91 ower sensor NRP-Z91 leference 20 dB Attenuator ype-N mismatch combination robe EF3DV3 JAE4 econdary Standards ower meter Agilent 4419B rower sensor HP E4412A ower sensor HP E4412A ower sensor HP 8482A IF generator R&S SMT-06	SN: 104778 SN: 103244 SN: 103245 SN: BH9394 (20k) SN: 310982 / 06327 SN: 4013 SN: 781 ID # SN: GB42420191 SN: US38485102	01-Apr-20 (No. 217-03100/03101) 01-Apr-20 (No. 217-03100) 01-Apr-20 (No. 217-03100) 01-Apr-20 (No. 217-03101) 31-Mar-20 (No. 217-03104) 28-Dec-20 (No. EF3-4013_Dec20) 23-Dec-20 (No. DAE4-781_Dec20) Check Date (in house) 09-Oct-09 (in house check Oct-20) 05-Jan-10 (in house check Oct-20)	Apr-21 Apr-21 Apr-21 Apr-21 Apr-21 Dec-21 Dec-21 Scheduled Check In house check: Oct-23 In house check: Oct-23
Power meter NRP Power sensor NRP-Z91 Power sensor NRP-Z91 Power sensor NRP-Z91 Power sensor NRP-Z91 Power Sensor Antipathon Probe EF3DV3 Power sensor HP E412A Power sensor HP E482A RF generator R&S SMT-06	SN: 104778 SN: 103244 SN: 103245 SN: BH9394 (20k) SN: 310982 / 06327 SN: 4013 SN: 781 ID # SN: GB42420191 SN: US38485102 SN: US37295597 SN: 837633/005	01-Apr-20 (No. 217-03100/03101) 01-Apr-20 (No. 217-03100) 01-Apr-20 (No. 217-03100) 01-Apr-20 (No. 217-03101) 31-Mar-20 (No. 217-03104) 28-Dec-20 (No. EF3-4013_Dec20) 23-Dec-20 (No. DAE4-781_Dec20) Check Date (in house) 09-Oct-09 (in house check Oct-20) 05-Jan-10 (in house check Oct-20) 09-Oct-09 (In house check Oct-20) 10-Jan-19 (in house check Oct-20) 31-Mar-14 (in house check Oct-20) Function	Apr-21 Apr-21 Apr-21 Apr-21 Dec-21 Dec-21 Dec-21 Scheduled Check In house check: Oct-23 In house check: Oct-23 In house check: Oct-23 In house check: Oct-23
Primary Standards Power meter NRP Power sensor NRP-Z91 Power sensor NRP-Z91 Reference 20 dB Attenuator Yype-N mismatch combination Probe EF3DV3 DAE4 Secondary Standards Power meter Agilent 44198 Power sensor HP E4412A Power sensor HP 8482A RF generator R&S SMT-06 Network: Analyzer Agilent E8358A Calibrated by:	SN: 104778 SN: 103244 SN: 103245 SN: BH9394 (20k) SN: 310982 / 06327 SN: 4013 SN: 781 ID # SN: GB42420191 SN: US38485102 SN: US37295597 SN: 837633005 SN: US41080477	01-Apr-20 (No. 217-03100/03101) 01-Apr-20 (No. 217-03100) 01-Apr-20 (No. 217-03100) 01-Apr-20 (No. 217-03101) 31-Mar-20 (No. 217-03104) 28-Dec-20 (No. EF3-4013_Dec20) 23-Dec-20 (No. DAE4-781_Dec20) Check Date (in house) 09-Oct-09 (in house check Oct-20) 09-Oct-09 (in house check Oct-20) 10-Jan-19 (in house check Oct-20) 31-Mar-14 (in house check Oct-20)	Apr-21 Apr-21 Apr-21 Apr-21 Dec-21 Dec-21 Dec-21 Scheduled Check In house check: Oct-23 In house check: Oct-21
Power meter NRP Power sensor NRP-Z91 Power sensor NRP-Z91 Reference 20 dB Attenuator Type-N mismatch combination Probe EF3DV3 DAE4 Secondary Standards Power meter Agilent 44198 Power sensor HP E4412A Power sensor HP E4412A RF generator R&S SMT-06 Network Analyzer Agilent E8358A	SN: 104778 SN: 103244 SN: 103245 SN: BH9394 (20k) SN: 310982 / 06327 SN: 4013 SN: 781 ID # SN: GB42420191 SN: US38485102 SN: US37295597 SN: 837633/005 SN: US41080477 Name	01-Apr-20 (No. 217-03100/03101) 01-Apr-20 (No. 217-03100) 01-Apr-20 (No. 217-03100) 01-Apr-20 (No. 217-03101) 31-Mar-20 (No. 217-03104) 28-Dec-20 (No. EF3-4013_Dec20) 23-Dec-20 (No. DAE4-781_Dec20) Check Date (in house) 09-Oct-09 (in house check Oct-20) 05-Jan-10 (in house check Oct-20) 09-Oct-09 (In house check Oct-20) 10-Jan-19 (in house check Oct-20) 31-Mar-14 (in house check Oct-20) Function	Apr-21 Apr-21 Apr-21 Apr-21 Apr-21 Dec-21 Dec-21 Dec-21 Scheduled Check In house check: Oct-23 In house check: Oct-21 Signature
Power meter NRP Power sensor NRP-Z91 Power sensor NRP-Z91 Reference 20 dB Attenuator Type-N mismatch combination Probe EF3DV3 DAE4 Secondary Standards Power sensor HP E4412A Power sensor HP E4412A Power sensor HP E482A RF generator R&S SMT-06 Network Analyzer Agilent E8358A Calibrated by:	SN: 104778 SN: 103244 SN: 103245 SN: BH9394 (20k) SN: 310982 (06327 SN: 4013 SN: 781 ID # SN: GB42420191 SN: US38485102 SN: US37295597 SN: US37295597 SN: US310804777 Name Leif Klyšner	01-Apr-20 (No. 217-03100/03101) 01-Apr-20 (No. 217-03100) 01-Apr-20 (No. 217-03100) 01-Apr-20 (No. 217-03106) 31-Mar-20 (No. 217-03104) 28-Dec-20 (No. EF3-4013_Dec20) 23-Dec-20 (No. DAE4-781_Dec20) 23-Dec-20 (No. DAE4-781_Dec20) 09-Oct-09 (in house check Oct-20) 09-Oct-09 (in house check Oct-20) 09-Oct-09 (in house check Oct-20) 09-Oct-09 (in house check Oct-20) 10-Jan-19 (in house check Oct-20) 31-Mar-14 (in house check Oct-20) Function Laboratory Techniclan	Apr-21 Apr-21 Apr-21 Apr-21 Apr-21 Dec-21 Dec-21 Scheduled Check In house check: Oct-23 In house check: Oct-21 Signature



Calibration Laboratory of Schmid & Partner **Engineering AG** Zeughausstrasse 43, 8004 Zurich, Switzerland





Schweizerischer Kalibrierdienst S Service suisse d'étalonnage С Servizio svizzero di taratura S

Swiss Calibration Service

Accreditation No.: SCS 0108

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

References

ANSI-C63.19-2011 [1]

American National Standard, Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids.

Methods Applied and Interpretation of Parameters:

- Coordinate System: y-axis is in the direction of the dipole arms. z-axis is from the basis of the antenna (mounted on the table) towards its feed point between the two dipole arms. x-axis is normal to the other axes. In coincidence with the standards [1], the measurement planes (probe sensor center) are selected to be at a distance of 15 mm above the top metal edge of the dipole arms.
- Measurement Conditions: Further details are available from the hardcopies at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated. The forward power to the dipole connector is set with a calibrated power meter connected and monitored with an auxiliary power meter connected to a directional coupler. While the dipole under test is connected, the forward power is adjusted to the same level.
- Antenna Positioning: The dipole is mounted on a HAC Test Arch phantom using the matching dipole positioner with the arms horizontal and the feeding cable coming from the floor. The measurements are performed in a shielded room with absorbers around the setup to reduce the reflections. It is verified before the mounting of the dipole under the Test Arch phantom, that its arms are perfectly in a line. It is installed on the HAC dipole positioner with its arms parallel below the dielectric reference wire and able to move elastically in vertical direction without changing its relative position to the top center of the Test Arch phantom. The vertical distance to the probe is adjusted after dipole mounting with a DASY5 Surface Check job. Before the measurement, the distance between phantom surface and probe tip is verified. The proper measurement distance is selected by choosing the matching section of the HAC Test Arch phantom with the proper device reference point (upper surface of the dipole) and the matching grid reference point (tip of the probe) considering the probe sensor offset. The vertical distance to the probe is essential for the accuracy.
- Feed Point Impedance and Return Loss: These parameters are measured using a Vector Network Analyzer. The impedance is specified at the SMA connector of the dipole. The influence of reflections was eliminating by applying the averaging function while moving the dipole in the air, at least 70cm away from any obstacles.
- E-field distribution: E field is measured in the x-y-plane with an isotropic E-field probe with 100 mW forward power to the antenna feed point. In accordance with [1], the scan area is 20mm wide, its length exceeds the dipole arm length (180 or 90mm). The sensor center is 15 mm (in z) above the metal top of the dipole arms. Two 3D maxima are available near the end of the dipole arms. Assuming the dipole arms are perfectly in one line, the average of these two maxima (in subgrid 2 and subgrid 8) is determined to compensate for any nonparallelity to the measurement plane as well as the sensor displacement. The E-field value stated as calibration value represents the maximum of the interpolated 3D-E-field, in the plane above the dipole surface.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Certificate No: CD5500V3-1011_Jan21

Page 2 of 5

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.4
Phantom	HAC Test Arch	
Distance Dipole Top - Probe Center	15 mm	
Scan resolution	dx, dy = 5 mm	
Frequency	5500 MHz ± 1 MHz	
Input power drift	< 0.05 dB	

Maximum Field values at 5500 MHz

E-field 15 mm above dipole surface	condition	Interpolated maximum
Maximum above arm	100 mW input power	102.1 V/m ± 12.8 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters

Frequency	Return Loss	Impedance
5000 MHz	18.0 dB	39.1 Ω - 2.3 jΩ
5200 MHz	28.1 dB	52.9 Ω + 2.8 jΩ
5500 MHz	31.5 dB	50.7 Ω + 2.6 jΩ
5800 MHz	19.7 dB	40.6 Ω - 0.6 jΩ
5900 MHz	18.6 dB	42.3 Ω + 7.6 jΩ

3.2 Antenna Design and Handling

The calibration dipole has a symmetric geometry with a built-in two stub matching network, which leads to the enhanced bandwidth.

The dipole is built of standard semirigid coaxial cable. The internal matching line is open ended. The antenna is therefore open for DC signals.

Do not apply force to dipole arms, as they are liable to bend. The soldered connections near the feedpoint may be damaged. After excessive mechanical stress or overheating, check the impedance characteristics to ensure that the internal matching network is not affected.


After long term use with 40W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

Certificate No: CD5500V3-1011_Jan21

Page 3 of 5



Impedance Measurement Plot

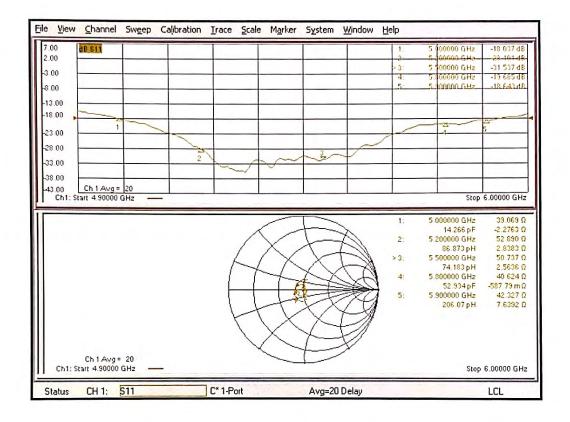



DASY5 E-field Result

Date: 18.01.2021

Test Laboratory: SPEAG Lab2

DUT: HAC Dipole 5500 MHz; Type: CD5500V3; Serial: CD5500V3 - SN: 1011

Communication System: UID 0 - CW ; Frequency: 5500 MHz Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³ Phantom section: RF Section Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EF3DV3 SN4013; ConvF(1, 1, 1) @ 5500 MHz; Calibrated: 28.12.2020
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn781; Calibrated: 23.12.2020
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1070
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)


Dipole E-Field measurement @ 5500MHz/E-Scan - 5500MHz d=15mm/Hearing Aid Compatibility Test (41x121x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm Device Reference Point: 0, 0, -6.3 mm

Reference Value = 134.2 V/m; Power Drift = 0.02 dBApplied MIF = 0.00 dBRF audio interference level = 40.18 dBV/m

Emission category: M1

MIF scaled E-field

Grid 1 M2	Grid 2 M2	Grid 3 M2
39.49 dBV/m	39.75 dBV/m	39.62 dBV/m
Grid 4 M2	Grid 5 M1	Grid 6 M1
39.89 dBV/m	40.18 dBV/m	40.09 dBV/m
Grid 7 M2	Grid 8 M2	Grid 9 M2
39.38 dBV/m	39.6 dBV/m	39.47 dBV/m

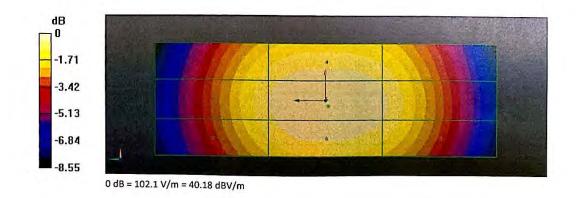

Certificate No: CD5500V3-1011_Jan21

Page 5 of 5



ANNEX I: DAE4 Calibration Certificate

	Sugar States S	Servizio svizzero di taratura Swiss Calibration Service
ation Service (SAS) e is one of the signatories t ecognition of calibration ce	to the EA	No.: SCS 0108
		DAE4-1648_May21
A state of the second se	and the second day	225
QA CAL-06.v30 Calibration proced	lure for the data acquisition elect	ronics (DAE)
May 17, 2021		
TE critical for calibration)		
SN: 0810278		Scheduled Calibration Sep-21
	the second second second	contract in the second se
line a	ALCON ADVISION OF A	the state of the s
ID # SE UWS 053 AA 1001	Check Date (in house) 07-Jan-21 (in house check)	Scheduled Check
ID # SE UWS 053 AA 1001 SE UMS 006 AA 1002	07-Jan-21 (in house check)	Scheduled Check In house check: Jan-22 In house check: Jan-22
SE UWS 053 AA 1001 SE UMS 006 AA 1002	07-Jan-21 (in house check) 07-Jan-21 (in house check)	In house check: Jan-22 In house check: Jan-22
SE UWS 053 AA 1001	07-Jan-21 (in house check)	In house check: Jan-22 In house check: Jan-22 Signature
SE UWS 053 AA 1001 SE UMS 006 AA 1002 Name	07-Jan-21 (in house check) 07-Jan-21 (in house check) Function	In house check: Jan-22 In house check: Jan-22
	DAE4 - SD 000 DO QA CAL-06.v30 Calibration proced May 17, 2021 May 17, 2021	CERTIFICATE DAE4 - SD 000 D04 BO - SN: 1648 QA CAL-06.v30 Calibration procedure for the data acquisition elect May 17, 2021 nents the traceability to national standards, which realize the physical unit ertainties with confidence probability are given on the following pages and acted in the closed laboratory facility: environment temperature (22 ± 3)°C atte critical for calibration) ID # Cal Date (Certificate No.)

Certificate No: DAE4-1648_May21

Page 1 of 5



Calibration Laboratory of Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland



Schweizerischer Kalibrierdienst Service suisse d'étalonnage Servizio svizzero di taratura Swiss Calibration Service

S

C

S

Accreditation No.: SCS 0108

Accredited by the Swiss Accreditation Service (SAS) The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Glossary

DAE data acquisition electronics Connector angle information used in DASY system to align probe sensor X to the robot coordinate system.

Methods Applied and Interpretation of Parameters

- DC Voltage Measurement: Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- Connector angle: The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The following parameters as documented in the Appendix contain technical information as a
 result from the performance test and require no uncertainty.
 - DC Voltage Measurement Linearity: Verification of the Linearity at +10% and -10% of the nominal calibration voltage. Influence of offset voltage is included in this measurement.
 - Common mode sensitivity: Influence of a positive or negative common mode voltage on the differential measurement.
 - Channel separation: Influence of a voltage on the neighbor channels not subject to an input voltage.
 - AD Converter Values with inputs shorted: Values on the internal AD converter corresponding to zero input voltage
 - Input Offset Measurement: Output voltage and statistical results over a large number of zero voltage measurements.
 - Input Offset Current: Typical value for information; Maximum channel input offset current, not considering the input resistance.
 - Input resistance: Typical value for information: DAE input resistance at the connector, during internal auto-zeroing and during measurement.
 - Low Battery Alarm Voltage: Typical value for information. Below this voltage, a battery alarm signal is generated.
 - Power consumption: Typical value for information. Supply currents in various operating modes.

Certificate No: DAE4-1648_May21

Page 2 of 5



DC Voltage Measurement

A/D - Conv	verter Resol	ution nominal
------------	--------------	---------------

 High Range:
 1LSB =
 6.1μV ,
 full range =
 +100...+300 mV

 Low Range:
 1LSB =
 61nV ,
 full range =
 +1....+300 mV

 DASY measurement parameters:
 Auto Zero Time: 3 sec;
 Measuring time: 3 sec

Calibration Eastern

Calibration Factors	x	Y	7
High Range	404.614 ± 0.02% (k=2)	404 114 + 0 02% (1-2)	101 700 0 000 0 0
Low Range	3.97861 ± 1.50% (k=2)	3 96109 + 1 50% (k=2)	404.720 ± 0.02% (k=2)
	(K=2)	3.30103 ± 1.50% (K=2)	3.96677 ± 1.50% (k=2)

Connector Angle

° ± 1 °
5

Certificate No: DAE4-1648_May21

Page 3 of 5



Appendix (Additiona	assessments outside the scope of SCS0108)
---------------------	---

1. DC Voltage Linearity

High Range	Reading (µV)	Difference (µV)	Error (%)
Channel X + Input	200028.04	-2.38	-0.00
Channel X + Input	20005.54	0.45	0.00
Channel X - Input	-20003.97	1.16	-0.01
Channel Y + Input	200029.27	-1.40	-0.00
Channel Y + Input	20003.19	-1.81	-0.01
Channel Y - Input	-20007.57	-2.28	0.01
Channel Z + Input	200027.91	-2.31	-0.00
Channel Z + Input	20003.29	-1.60	-0.01 -
Channel Z - Input	-20006.93	-1.60	0.01

Low Range	Reading (µV)	Difference (µV)	Error (%)
Channel X + Input	2001.22	-0.04	-0.00
Channel X + Input	201.07	-0.06	-0.03
Channel X - Input	-198.89	-0.05	0.03
Channel Y + Input	2001.16	0.02	0.00
Channel Y + Input	199.98	-1.02	-0.51
Channel Y - Input	-200.02	-1.09	0.55
Channel Z + Input	2001.00	-0.14	-0.01
Channel Z + Input	199.91	-1.16	-0.58
Channel Z - Input	-200.24	-1.25	0.63

2. Common mode sensitivity

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Common mode Input Voltage (mV)	High Range Average Reading (µV)	Low Range Average Reading (µV)
Channel X	200	-2.69	-4.88
	- 200	5.12	3.63
Channel Y	200	1.53	1.30
	- 200	-2.71	-3.54
Channel Z	200	4.47	4.60
	- 200	-7.08	-6.79

3. Channel separation

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

1	Input Voltage (mV)	Channel X (µV)	Channel Y (µV)	Channel Z (µV)
Channel X	200		-0.77	-4.03
Channel Y	200	5.85		1.12
Channel Z	200	9.86	3.76	1. C.

Certificate No: DAE4-1648_May21

Page 4 of 5

4. AD-Converter Values with inputs shorted

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

1	High Range (LSB)	Low Range (LSB)
Channel X	16032	14241
Channel Y	15926	16185
Channel Z	16183	17314

5. Input Offset Measurement

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Input 10MΩ

	Average (µV)	min. Offset (μV)	max. Offset (µV)	Std. Deviation (µV)
Channel X	-0.43	-1.44	1.89	0.42
Channel Y	-0.59	-1.57	0.75	0.39
Channel Z	-0.66	-1.93	0.34	0.36

6. Input Offset Current

Nominal Input circuitry offset current on all channels: <25fA

7. Input Resistance (Typical values for information)

	Zeroing (kOhm)	Measuring (MOhm)
Channel X	200	200
Channel Y	200	200
Channel Z	200	200

8. Low Battery Alarm Voltage (Typical values for information)

Typical values	Alarm Level (VDC)
Supply (+ Vcc)	+7.9
Supply (- Vcc)	-7.6

9. Power Consumption (Typical values for information)

Typical values	Switched off (mA)	Stand by (mA)	Transmitting (mA)
Supply (+ Vcc)	+0.01	+6	+14
Supply (- Vcc)	-0.01	-8	-9

Certificate No: DAE4-1648_May21

Page 5 of 5



ANNEX J: The EUT Appearances

The EUT Appearance is submitted separately.



ANNEX K: Test Setup Photos

The Test Setup Photos is submitted separately.