



# RF TEST REPORT

**Applicant** ZTE Corporation  
**FCC ID** SRQ-T3000  
**Product** WiFi6 Router  
**Model** T3000  
**Report No.** R2201A0022-R2  
**Issue Date** March 14, 2022

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 15E (2021)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Prepared by: Peng Tao

Approved by: Kai Xu

---

**TA Technology (Shanghai) Co., Ltd.**

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000



## TABLE OF CONTENT

1. Test Laboratory .....	4
1.1. Notes of the test report.....	4
1.2. Test facility .....	4
1.3. Testing Location .....	4
2. General Description of Equipment under Test.....	5
2.1. Applicant and Manufacturer Information.....	5
2.2. General information.....	5
3. Applied Standards .....	7
4. Test Configuration .....	8
5. Test Case Results .....	10
5.1. Occupied Bandwidth .....	10
5.2. Average Power Output.....	25
5.3. Frequency Stability.....	35
5.4. Power Spectral Density.....	38
5.5. Unwanted Emission .....	78
5.6. Conducted Emission .....	154
6. Main Test Instruments.....	157
ANNEX A: The EUT Appearance .....	158
ANNEX B: Test Setup Photos .....	159



## Summary of measurement results

Number	Test Case	Clause in FCC rules	Verdict
1	Average output power	15.407(a)	PASS
2	Occupied bandwidth	15.407(e)	PASS
3	Frequency stability	15.407(g)	PASS
4	Power spectral density	15.407(a)	PASS
5	Unwanted Emissions	15.407(b)	PASS
6	Conducted Emissions	15.207	PASS

Date of Testing: January 12, 2022~ March 14, 2022  
Date of Sample Received: January 6, 2022

Note: PASS: The EUT complies with the essential requirements in the standard.  
FAIL: The EUT does not comply with the essential requirements in the standard.  
All indications of Pass/Fail in this report are opinions expressed by TA Technology (Shanghai) Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.



## 1. Test Laboratory

### 1.1. Notes of the test report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

### 1.2. Test facility

#### **FCC (Designation number: CN1179, Test Firm Registration Number: 446626)**

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

#### **A2LA (Certificate Number: 3857.01)**

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

### 1.3. Testing Location

Company: TA Technology (Shanghai) Co., Ltd.  
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong  
City: Shanghai  
Post code: 201201  
Country: P. R. China  
Contact: Xu Kai  
Telephone: +86-021-50791141/2/3  
Fax: +86-021-50791141/2/3-8000  
Website: <http://www.ta-shanghai.com>  
E-mail: [xukai@ta-shanghai.com](mailto:xukai@ta-shanghai.com)

## 2. General Description of Equipment under Test

### 2.1. Applicant and Manufacturer Information

<b>Applicant</b>	ZTE Corporation
<b>Applicant address</b>	ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China
<b>Manufacturer</b>	ZTE Corporation
<b>Manufacturer address</b>	ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

### 2.2. General information

EUT Description	
Model	T3000
SN	324215830103
Hardware Version	T3000GHW1.0
Software Version	T3000GV0.0.0B01
Power Supply	AC adapter
Antenna Type	Internal Antenna
Antenna Gain	Antenna 1: 6.20 dBi Antenna 2: 6.10 dBi
Directional Gain	For Power: 6.20 dBi For PSD: 9.21dBi
Operating Frequency Range(s)	U-NII-1: 5150MHz-5250MHz U-NII-3: 5725MHz -5850MHz
Modulation Type	802.11a/n (HT20/HT40) : OFDM 802.11ac (VHT20/VHT40/VHT80/VHT160): OFDM 802.11ax (HE20/HE40/HE80/HE160): OFDM
Max. Conducted Power	24.21 dBm
Testing temperature range:	-20 ° C to 50° C
Operating temperature range:	0 ° C to 45° C
Operating voltage range:	10.8 V to 13.2 V
State DC voltage:	12V
EUT Accessory	
Adapter 1	Manufacturer: BAIJUNDA Model: STC-A1215C55A-Z
Adapter 2	Manufacturer: RUIJING Model: STC-A1215C55A-Z



Note: 1. The EUT is sent from the applicant to TA and the information of the EUT is declared by the applicant.

2. This device support automatically discontinue transmission, while the device is not transmitting any information, the device can automatically discontinue transmission and become standby mode for power saving. The device can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.

3. There is more than one Adapter, each one should be applied throughout the compliance test respectively, and however, only the worst case (Adapter 2) will be recorded in this report.



### 3. Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**Test standards:**

**FCC CFR47 Part 15E (2021)** Unlicensed National Information Infrastructure Devices

**ANSI C63.10 (2013)**

**Reference standard:**

**KDB 789033 D02 General UNII Test Procedures New Rules v02r01**

**KDB 662911 D01 Multiple Transmitter Output v02r01**

## 4. Test Configuration

### Test Mode

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (Z axis) and the worst case was recorded.

In order to find the worst case condition, Pre-tests are needed at the presence of different data rate. Preliminary tests have been done on all the configuration for confirming worst case. Data rate below means worst-case rate of each test item.

Worst-case data rates are shown as following table.

Mode	Data Rate		
	Antenna 1	Antenna 2	MIMO
802.11a	6 Mbps	6 Mbps	6 Mbps
802.11n HT20	MCS0	MCS0	MCS8
802.11n HT40	MCS0	MCS0	MCS8
802.11ac VHT20	MCS0	MCS0	MCS0
802.11ac VHT40	MCS0	MCS0	MCS0
802.11ac VHT80	MCS0	MCS0	MCS0
802.11ac VHT160	MCS0	MCS0	MCS0
802.11ax HE20	MCS0	MCS0	MCS0
802.11ax HE40	MCS0	MCS0	MCS0
802.11ax HE80	MCS0	MCS0	MCS0
802.11ax HE160	MCS0	MCS0	MCS0

The worst case Antenna mode for each of the following tests for Wi-Fi:

Test Cases	Antenna 1	Antenna 2	CDD
Average conducted output power	O	O	O
Occupied bandwidth	--	--	O
Frequency stability	--	--	802.11a
Power Spectral Density	O	O	O
Unwanted Emissions	--	--	O
Conducted Emissions	--	--	O
Note: "O": test all bands			



**Wireless Technology and Frequency Range**

Wireless Technology		Bandwidth	Channel	Frequency	
Wi-Fi	U-NII-1	20 MHz	36	5180MHz	
			40	5200MHz	
			44	5220MHz	
			48	5240MHz	
		40 MHz	38	5190MHz	
			46	5230MHz	
	U-NII-3	80 MHz	42	5210MHz	
			20 MHz	149	5745MHz
				153	5765MHz
		157		5785MHz	
		161		5805MHz	
		165		5825MHz	
		40 MHz	151	5755MHz	
			159	5795MHz	
80 MHz	155	5775MHz			

Does this device support TPC Function? Yes No

## 5. Test Case Results

### 5.1. Occupied Bandwidth

#### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

#### Method of Measurement

The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable.


For U-NII-1, set RBW  $\approx$  1% OCB kHz, VBW  $\geq$  3  $\times$  RBW, measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 26 dB relative to the maximum level measured in the fundamental emission.

For U-NII-3, Set RBW = 100 kHz, VBW  $\geq$  3  $\times$  RBW, measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described above.

Use the 99 % power bandwidth function of the instrument

#### Test Setup



#### Limits

Rule FCC Part §15.407(e)

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

#### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 936$  Hz.

**Test Results:****U-NII-1**

Mode	Carrier frequency (MHz)	99% bandwidth (MHz)	Minimum 26 dB bandwidth (MHz)	Conclusion
802.11a	5180	16.54	22.65	PASS
	5200	16.77	29.78	PASS
	5240	16.57	28.21	PASS
802.11n HT20	5180	17.72	21.50	PASS
	5200	17.72	20.82	PASS
	5240	17.71	20.84	PASS
802.11n HT40	5190	36.42	43.32	PASS
	5230	36.39	42.34	PASS
802.11ac VHT20	5180	17.73	22.94	PASS
	5200	17.73	21.18	PASS
	5240	17.78	29.20	PASS
802.11ac VHT40	5190	36.48	57.47	PASS
	5230	36.39	42.36	PASS
802.11ac VHT80	5210	76.01	85.98	PASS
802.11ac VHT160	5250	155.04	169.50	PASS
802.11ax HE20	5180	19.04	22.07	PASS
	5200	19.05	21.90	PASS
	5240	19.03	22.20	PASS
802.11ax HE40	5190	38.05	42.51	PASS
	5230	37.99	41.73	PASS
802.11ax HE80	5210	77.53	84.84	PASS
802.11ax HE160	5250	156.69	187.20	PASS




## U-NII-3


Mode	Carrier frequency (MHz)	99% bandwidth (MHz)	Minimum 6 dB bandwidth (MHz)	Limit (kHz)	Conclusion
802.11a	5745	16.52	16.39	500	PASS
	5785	16.51	16.39	500	PASS
	5825	16.61	16.38	500	PASS
802.11n HT20	5745	17.70	17.64	500	PASS
	5785	17.72	17.66	500	PASS
	5825	17.76	17.61	500	PASS
802.11n HT40	5755	36.41	36.51	500	PASS
	5795	36.37	36.36	500	PASS
802.11ac VHT20	5745	17.70	17.71	500	PASS
	5785	17.72	17.62	500	PASS
	5825	17.76	17.68	500	PASS
802.11ac VHT40	5755	36.44	36.38	500	PASS
	5795	36.39	36.35	500	PASS
802.11ac VHT80	5775	76.04	76.35	500	PASS
802.11ax HE20	5745	19.06	18.96	500	PASS
	5785	19.03	18.88	500	PASS
	5825	19.09	18.99	500	PASS
802.11ax HE40	5755	37.95	38.12	500	PASS
	5795	37.96	38.26	500	PASS
802.11ax HE80	5775	77.59	78.01	500	PASS




U-NII-1, 802.11a  
Carrier frequency (MHz): 5180

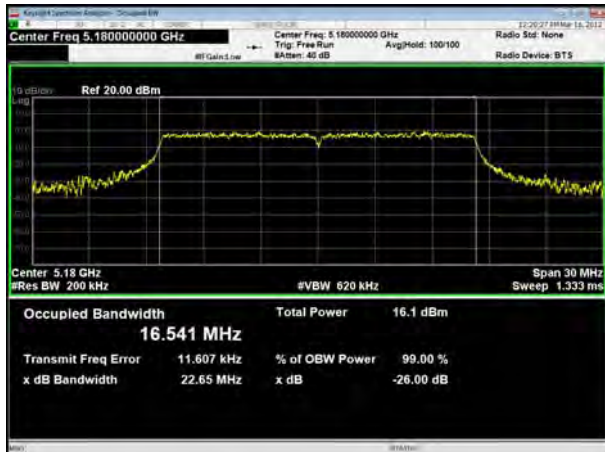


U-NII-1, 802.11n HT20  
Carrier frequency (MHz): 5180

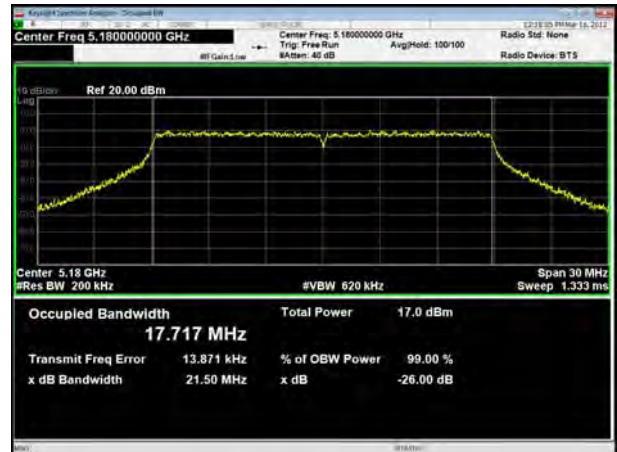


U-NII-1, 802.11a  
Carrier frequency (MHz): 5200

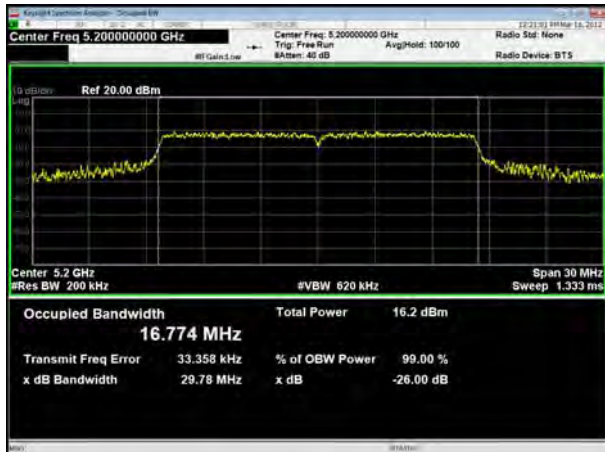


U-NII-1, 802.11n HT20  
Carrier frequency (MHz): 5200

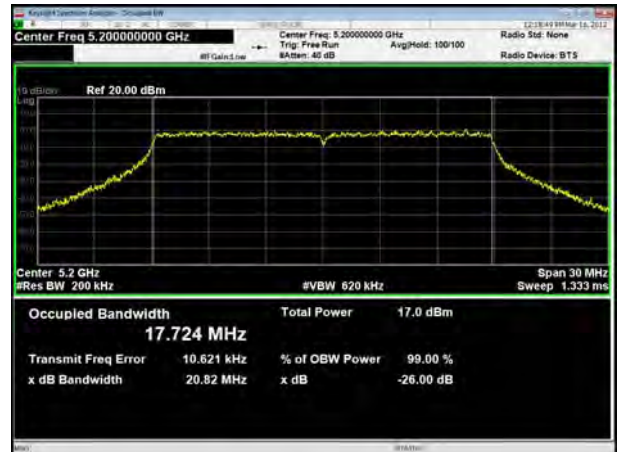

U-NII-1, 802.11a  
Carrier frequency (MHz):5240

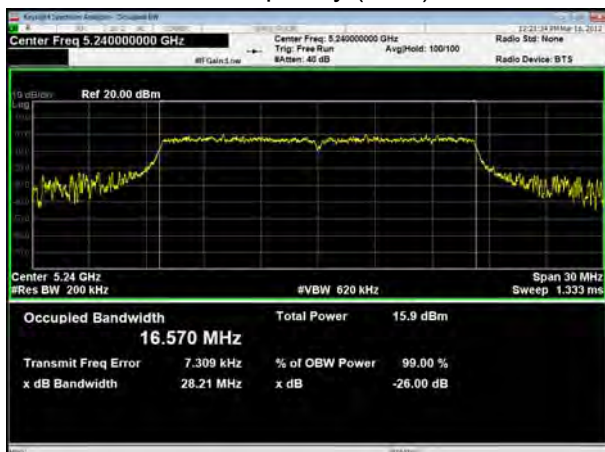

U-NII-1, 802.11n HT20  
Carrier frequency (MHz):5240

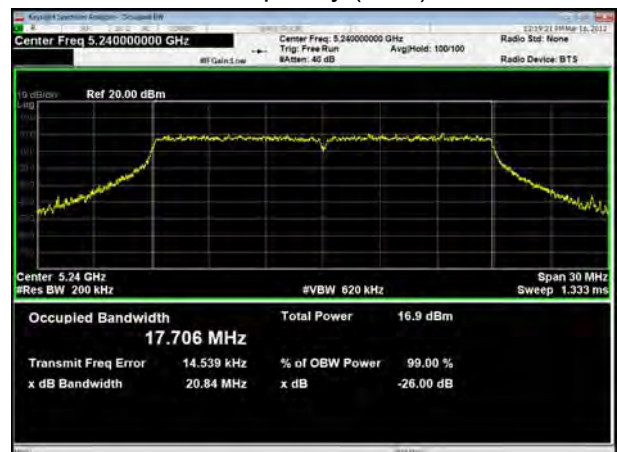



U-NII-1, 802.11n HT40  
Carrier frequency (MHz): 5190




U-NII-1, 802.11n HT40  
Carrier frequency (MHz): 5230



U-NII-1, 802.11ac VHT20  
Carrier frequency (MHz): 5180



U-NII-1, 802.11ax HE20  
Carrier frequency (MHz): 5180

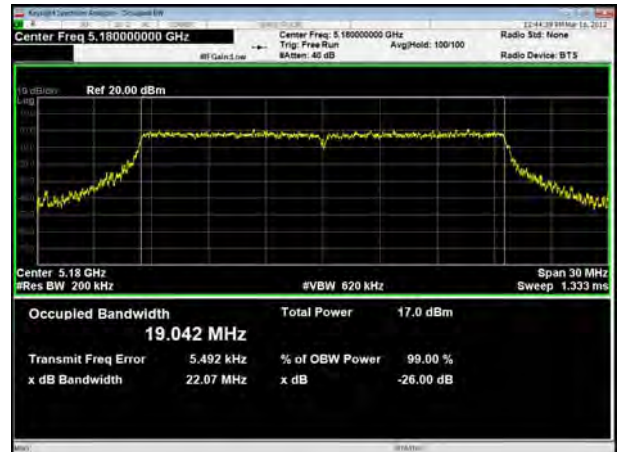

U-NII-1, 802.11ac VHT20  
Carrier frequency (MHz): 5200




U-NII-1, 802.11ax HE20  
Carrier frequency (MHz): 5200





U-NII-1, 802.11ac VHT20  
Carrier frequency (MHz):5240

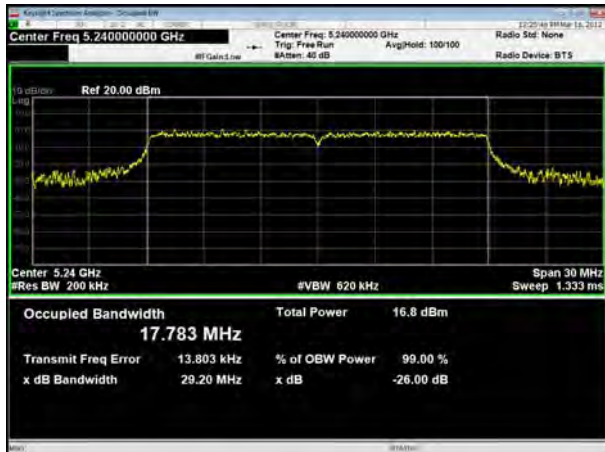


U-NII-1, 802.11ax HE20  
Carrier frequency (MHz):5240



U-NII-1, 802.11ac VHT40  
Carrier frequency (MHz): 5190



U-NII-1, 802.11ax HE40  
Carrier frequency (MHz): 5190

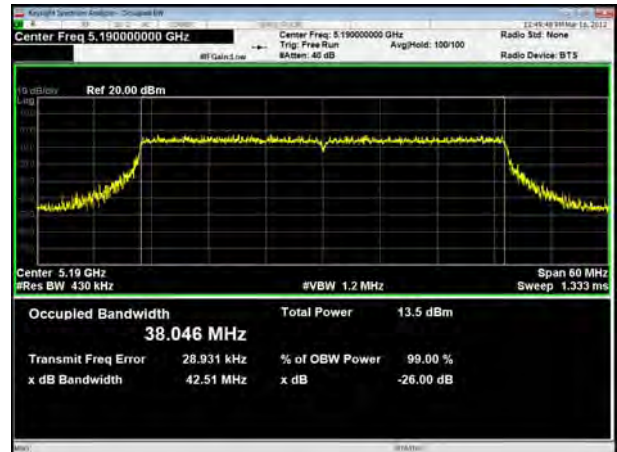

U-NII-1, 802.11ac VHT40  
Carrier frequency (MHz): 5230




U-NII-1, 802.11ax HE40  
Carrier frequency (MHz): 5230







U-NII-1, 802.11ac VHT80  
Carrier frequency (MHz): 5210

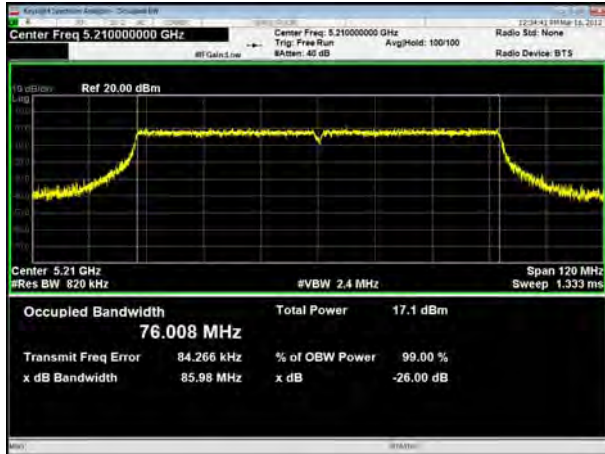


U-NII-1, 802.11ax HE80  
Carrier frequency (MHz): 5210

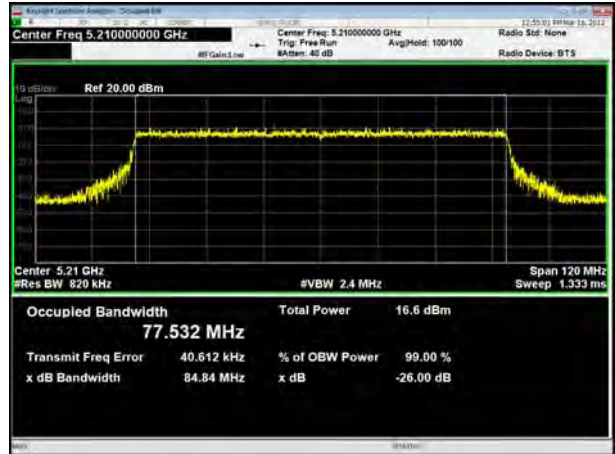

U-NII-1, 802.11ac VHT160  
Carrier frequency (MHz): 5250

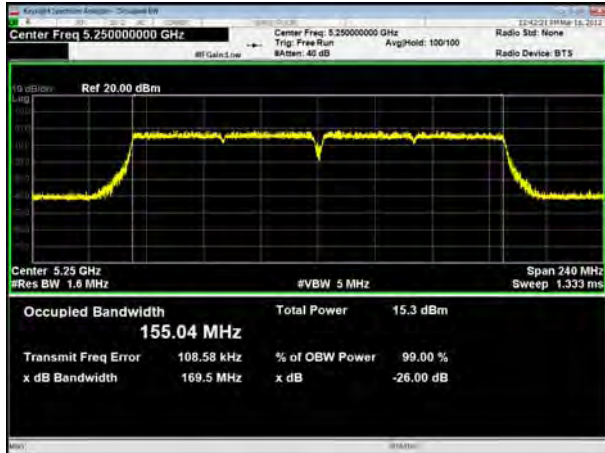

U-NII-1, 802.11ax HE160  
Carrier frequency (MHz): 5250

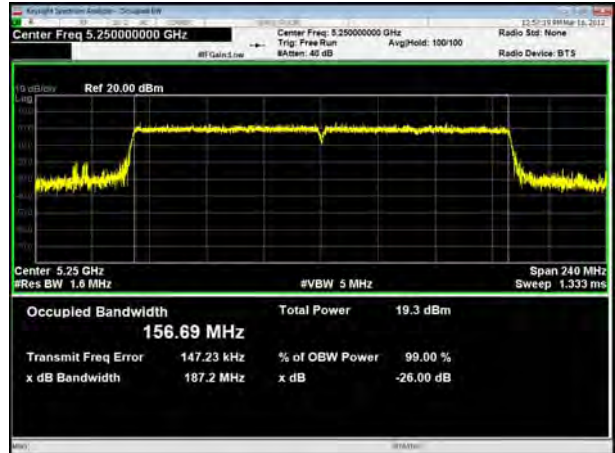







99% bandwidth


U-NII-3, 802.11a  
Carrier frequency (MHz): 5745

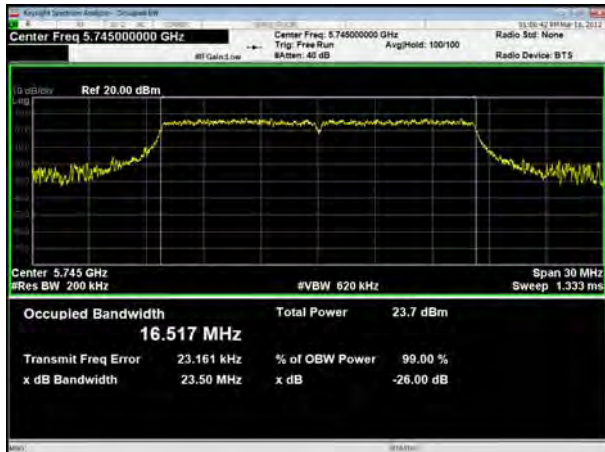


U-NII-3, 802.11n HT20  
Carrier frequency (MHz): 5745

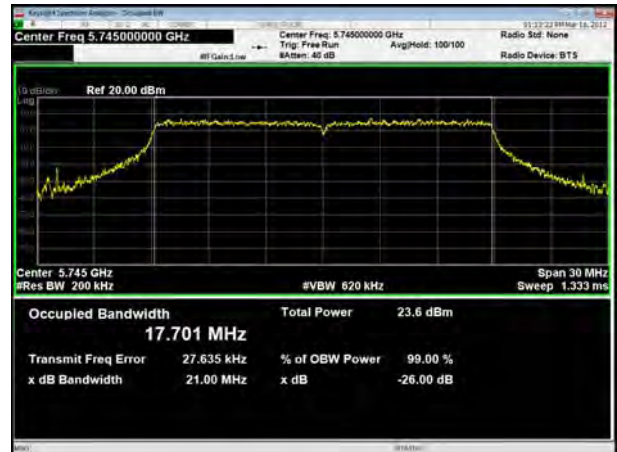


U-NII-3, 802.11a  
Carrier frequency (MHz): 5785

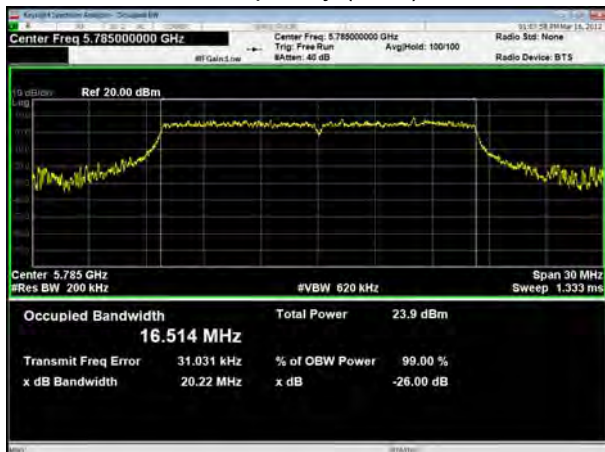


U-NII-3, 802.11n HT20  
Carrier frequency (MHz): 5785

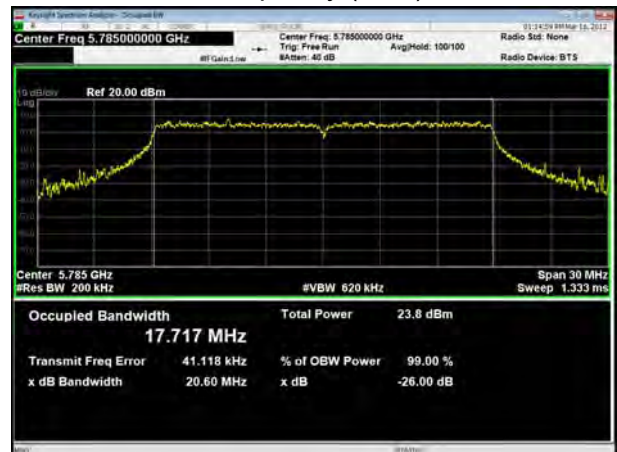

U-NII-3, 802.11a  
Carrier frequency (MHz): 5825

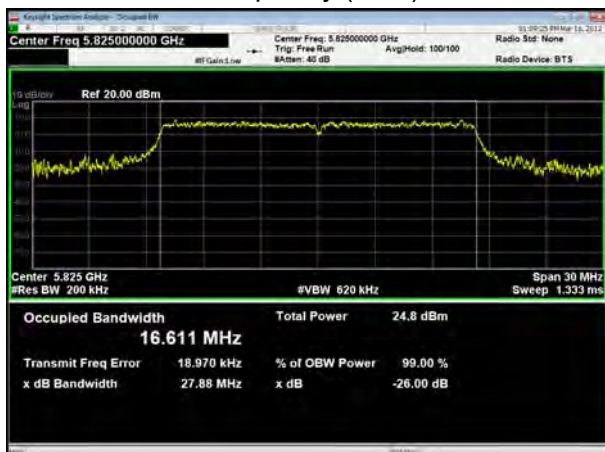


U-NII-3, 802.11n HT20  
Carrier frequency (MHz): 5825

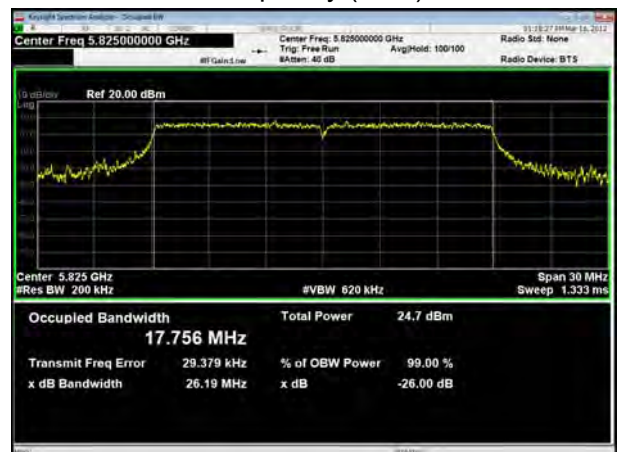

U-NII-3, 802.11n HT40  
Carrier frequency (MHz): 5755




U-NII-3, 802.11n HT40  
Carrier frequency (MHz): 5795

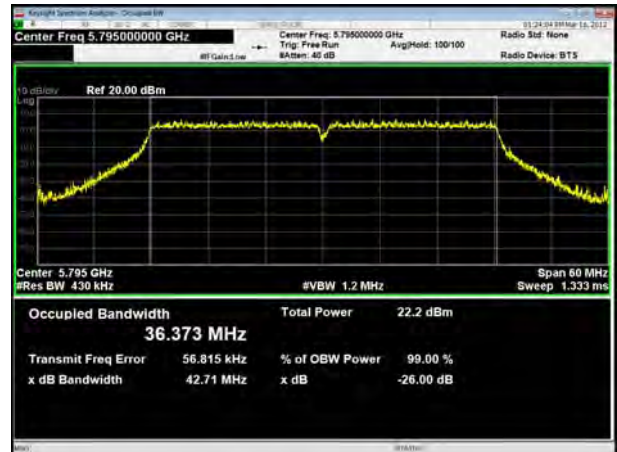

U-NII-3, 802.11ac VHT20  
Carrier frequency (MHz): 5745




U-NII-3, 802.11ax HE20  
Carrier frequency (MHz): 5745

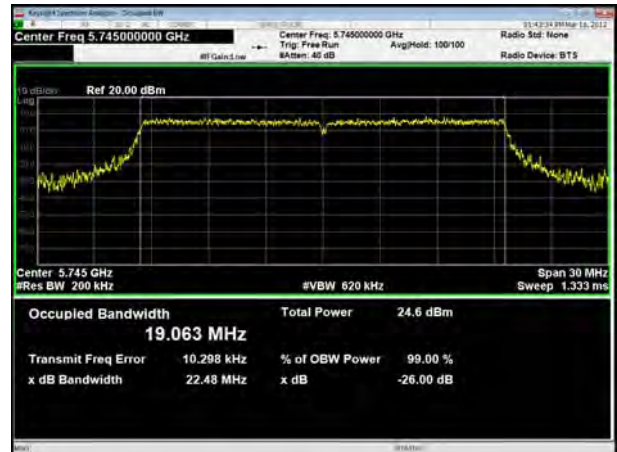


U-NII-3, 802.11ac VHT20  
Carrier frequency (MHz): 5785




U-NII-3, 802.11ax HE20  
Carrier frequency (MHz): 5785

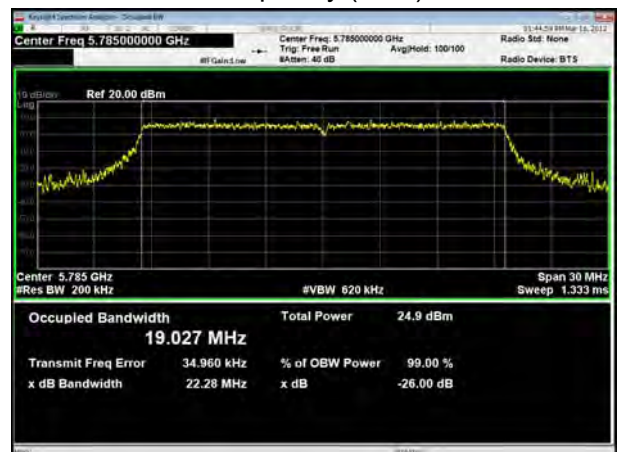

U-NII-3, 802.11ac VHT20  
Carrier frequency (MHz): 5825

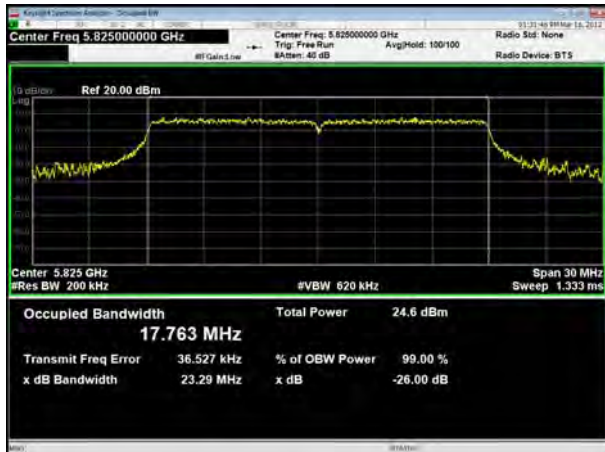

U-NII-3, 802.11ax HE20  
Carrier frequency (MHz): 5825

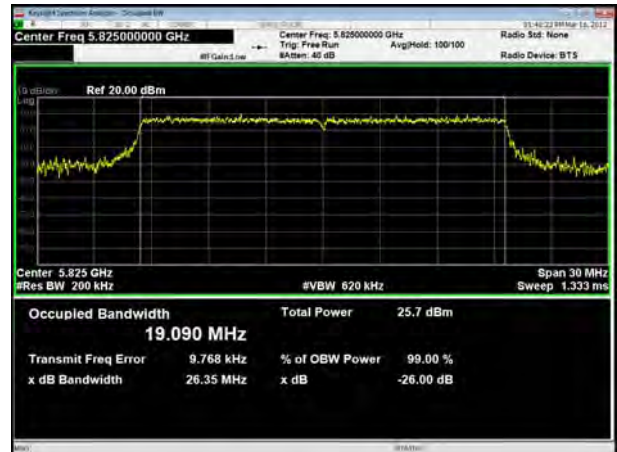


U-NII-3, 802.11ac VHT40  
Carrier frequency (MHz): 5755



U-NII-3, 802.11ax HE40  
Carrier frequency (MHz): 5755



U-NII-3, 802.11ac VHT40  
Carrier frequency (MHz): 5795

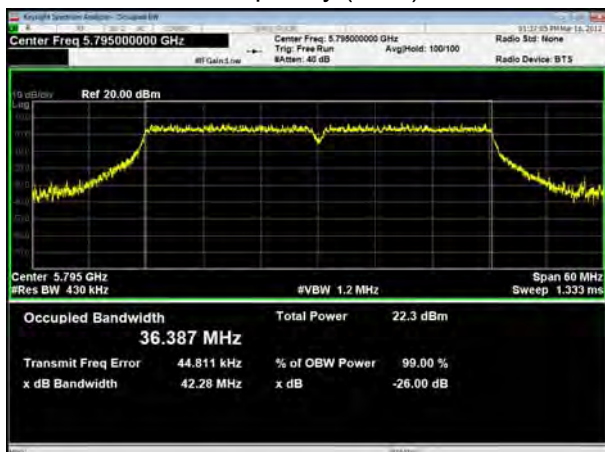


U-NII-3, 802.11ax HE40  
Carrier frequency (MHz): 5795






U-NII-3, 802.11ac VHT80  
Carrier frequency (MHz): 5775

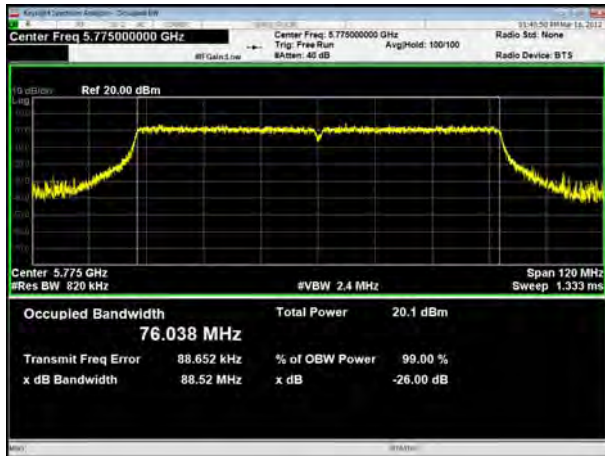


U-NII-3, 802.11ax HE80  
Carrier frequency (MHz): 5775

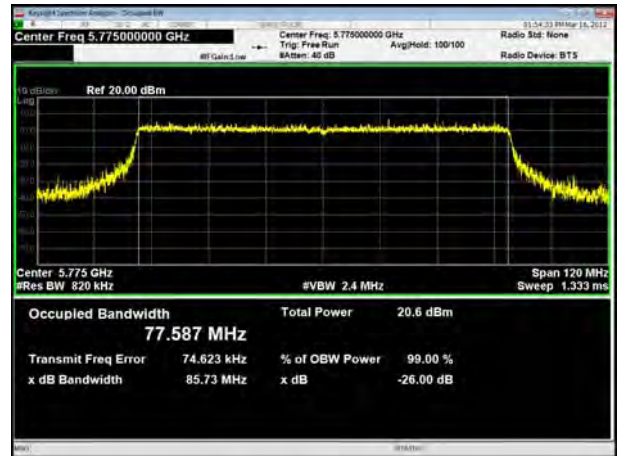




Minimum 6 dB bandwidth

U-NII-3, 802.11a  
Carrier frequency (MHz): 5745

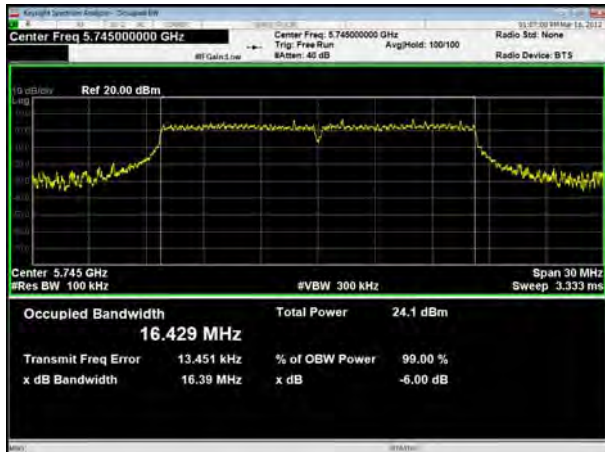


U-NII-3, 802.11n HT20  
Carrier frequency (MHz): 5745

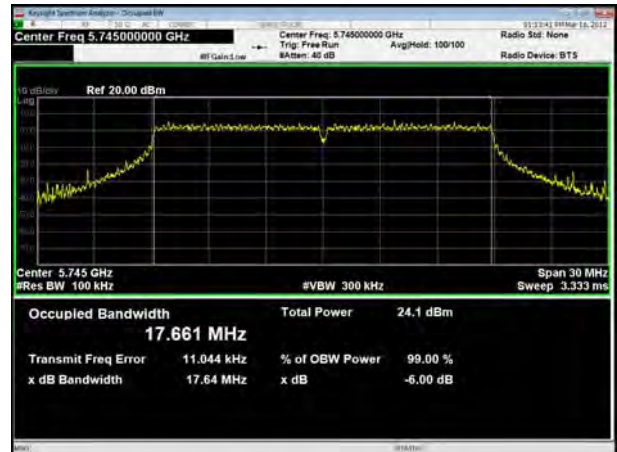

U-NII-3, 802.11a  
Carrier frequency (MHz): 5785



U-NII-3, 802.11n HT20  
Carrier frequency (MHz): 5785

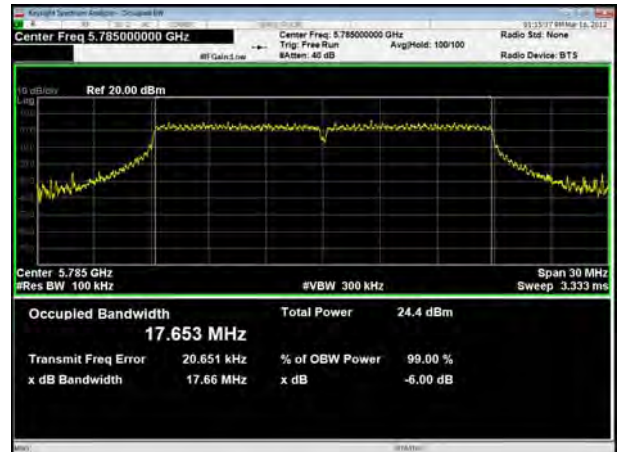

U-NII-3, 802.11a  
Carrier frequency (MHz): 5825



U-NII-3, 802.11n HT20  
Carrier frequency (MHz): 5825



U-NII-3, 802.11n HT40  
Carrier frequency (MHz): 5755



U-NII-3, 802.11n HT40  
Carrier frequency (MHz): 5795



U-NII-3, 802.11ac VHT20  
Carrier frequency (MHz): 5745




U-NII-3, 802.11ax HE20  
Carrier frequency (MHz): 5745




U-NII-3, 802.11ac VHT20  
Carrier frequency (MHz): 5785



U-NII-3, 802.11ax HE20  
Carrier frequency (MHz): 5785

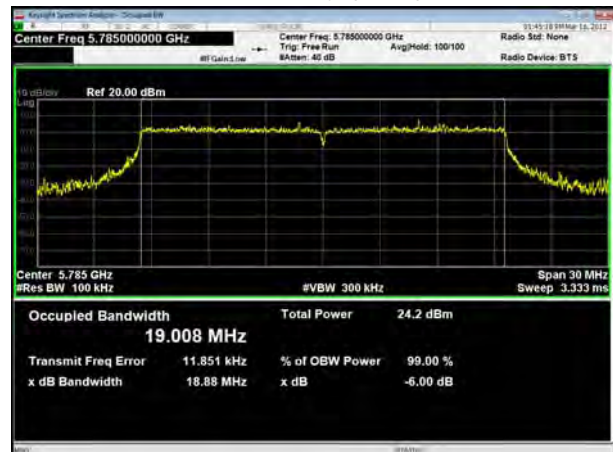


U-NII-3, 802.11ac VHT20  
Carrier frequency (MHz): 5825

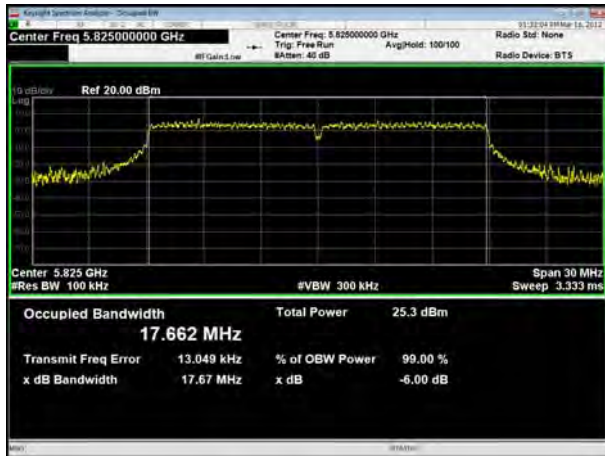

U-NII-3, 802.11ax HE20  
Carrier frequency (MHz): 5825



U-NII-3, 802.11ac VHT40  
Carrier frequency (MHz): 5755

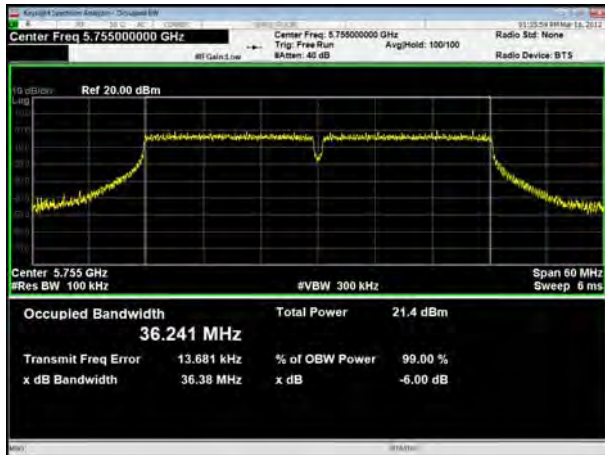

U-NII-3, 802.11ax HE40  
Carrier frequency (MHz): 5755



U-NII-3, 802.11ac VHT40  
Carrier frequency (MHz): 5795




U-NII-3, 802.11ax HE40  
Carrier frequency (MHz): 5795






U-NII-3, 802.11ac VHT80  
Carrier frequency (MHz): 5775

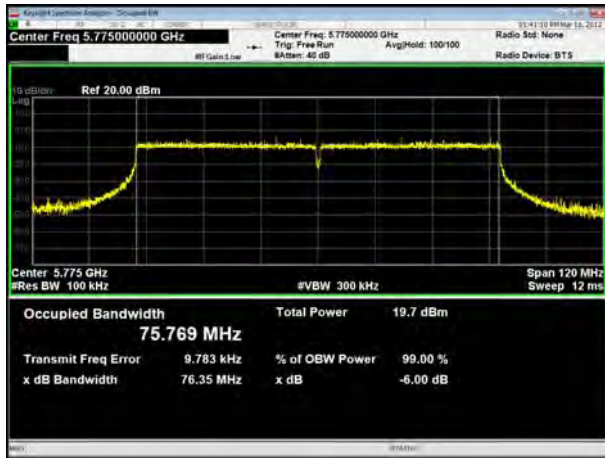

U-NII-3, 802.11ax HE80  
Carrier frequency (MHz): 5775

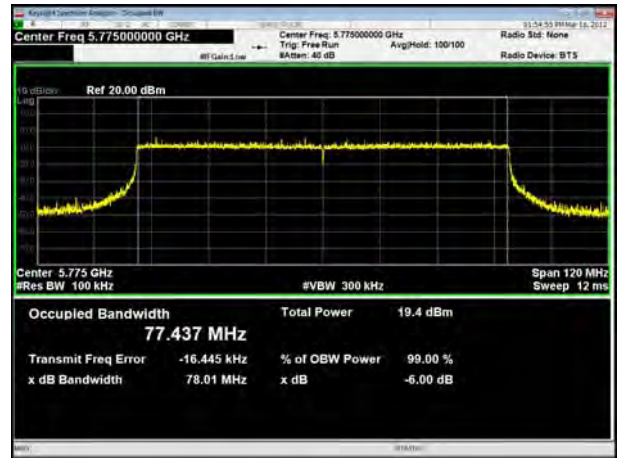



## 5.2. Average Power Output

### Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

### Methods of Measurement

During the process of the testing, The EUT was connected to the average power meter through an external attenuator and a known loss cable. The EUT is max power transmission with proper modulation. We use Maximum average Conducted Output Power Level Method in KDB789033 for this test

The conducted Power is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically.

### Test Setup



### Limits

Rule FCC Part 15.407(a)(1) (3)

(1) For the band 5.15-5.25 GHz.

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23



dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### **Measurement Uncertainty**

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 0.44$  dB.

**Test Results**

Mode	T <sub>on</sub> (ms)	T <sub>(on+off)</sub> (ms)	Duty cycle	Duty cycle correction Factor(dB)
802.11a	1.97	2.13	0.93	0.32
802.11n HT20	5.22	5.76	0.91	0.41
802.11n HT40	5.20	5.98	0.87	0.60
802.11ac VHT20	5.20	5.82	0.89	0.51
802.11ac VHT40	5.20	5.88	0.88	0.56
802.11ac VHT80	5.20	5.92	0.88	0.56
802.11ac VHT160	5.44	6.10	0.89	0.51
802.11ax HE20	5.24	5.78	0.91	0.41
802.11ax HE40	5.22	5.80	0.90	0.46
802.11ax HE80	5.24	5.80	0.90	0.46
802.11ax HE160	5.44	6.12	0.89	0.51

Note: when Duty cycle  $\geq 0.98$ , Duty cycle correction Factor not required.



SISO Antenna 1 Power Index														
Channel	802.11a	802.11n HT20	802.11ac VHT20	802.11ax HE20	Channel	802.11n HT40	802.11ac VHT40	802.11ax HE40	Channel	802.11ac VHT80	802.11ax HE80	Channel	802.11ac VHT160	802.11ax HE160
CH36	12	13	13	12	CH38	12	12	11	CH42	12	11	CH50	10	15
CH40	12	13	13	12	CH46	12	12	11	/	/	/	/	/	/
CH48	12	13	13	12	/	/	/	/	/	/	/	/	/	/
CH149	21	21	21	21	CH151	18	18	16	CH155	16	16	/	/	/
CH157	21	21	21	21	CH159	18	18	16	/	/	/	/	/	/
CH165	21	21	21	21	/	/	/	/	/	/	/	/	/	/
SISO Antenna 2 Power Index														
Channel	802.11a	802.11n HT20	802.11ac VHT20	802.11ax HE20	Channel	802.11n HT40	802.11ac VHT40	802.11ax HE40	Channel	802.11ac VHT80	802.11ax HE80	Channel	802.11ac VHT160	802.11ax HE160
CH36	12	13	13	12	CH38	12	12	11	CH42	12	11	CH50	10	13
CH40	12	13	13	12	CH46	12	12	11	/	/	/	/	/	/
CH48	12	13	13	12	/	/	/	/	/	/	/	/	/	/
CH149	21	21	21	21	CH151	18	18	16	CH155	16	16	/	/	/
CH157	21	21	21	21	CH159	18	18	16	/	/	/	/	/	/
CH165	21	21	21	21	/	/	/	/	/	/	/	/	/	/
CDD Antenna Power Index														
Channel	802.11a	802.11n HT20	802.11ac VHT20	802.11ax HE20	Channel	802.11n HT40	802.11ac VHT40	802.11ax HE40	Channel	802.11ac VHT80	802.11ax HE80	Channel	802.11ac VHT160	802.11ax HE160
CH36	12	13	13	12	CH38	12	12	11	CH42	12	11	CH50	10	13
CH40	12	13	13	12	CH46	12	12	11	/	/	/	/	/	/
CH48	12	13	13	12	/	/	/	/	/	/	/	/	/	/
CH149	21	21	21	21	CH151	18	18	16	CH155	16	16	/	/	/
CH157	21	21	21	21	CH159	18	18	16	/	/	/	/	/	/
CH165	21	21	21	21	/	/	/	/	/	/	/	/	/	/



## SISO Antenna 1

## U-NII-1

Test Mode	Channel/ Frequency (MHz)	Average Power Measured (dBm)	Average Power with duty factor (dBm)	Limit (dBm)	Conclusion
802.11a	36/5180	12.03	12.35	30.00	PASS
	40/5200	12.23	12.55	30.00	PASS
	48/5240	12.17	12.49	30.00	PASS
802.11n HT20	36/5180	13.25	13.66	30.00	PASS
	40/5200	13.11	13.52	30.00	PASS
	48/5240	13.16	13.57	30.00	PASS
802.11n HT40	38/5190	12.15	12.75	30.00	PASS
	46/5230	12.18	12.78	30.00	PASS
802.11ac VHT20	36/5180	13.22	13.73	30.00	PASS
	40/5200	13.18	13.69	30.00	PASS
	48/5240	13.27	13.78	30.00	PASS
802.11ac VHT40	38/5190	12.08	12.64	30.00	PASS
	46/5230	12.09	12.65	30.00	PASS
802.11ac VHT80	42/5210	12.24	12.80	30.00	PASS
802.11ac VHT160	50/5250	10.21	10.72	30.00	PASS
802.11ax HE20	36/5180	12.07	12.48	30.00	PASS
	40/5200	12.21	12.62	30.00	PASS
	48/5240	12.28	12.69	30.00	PASS
802.11ax HE40	38/5190	11.27	11.73	30.00	PASS
	46/5230	11.09	11.55	30.00	PASS
802.11ax HE80	42/5210	11.22	11.68	30.00	PASS
802.11ax HE160	50/5250	14.89	15.40	30.00	PASS
Note: Average Power with duty factor = Average Power Measured +Duty cycle correction factor					



## U-NII-3

Test Mode	Channel/ Frequency (MHz)	Average Power Measured (dBm)	Average Power with duty factor (dBm)	Limit (dBm)	Conclusion
802.11a	149/5745	20.23	20.55	30.00	PASS
	157/5785	20.15	20.47	30.00	PASS
	165/5825	20.16	20.48	30.00	PASS
802.11n HT20	149/5745	20.31	20.72	30.00	PASS
	157/5785	20.26	20.67	30.00	PASS
	165/5825	20.51	20.92	30.00	PASS
802.11n HT40	151/5755	16.89	17.49	30.00	PASS
	159/5795	16.81	17.41	30.00	PASS
802.11ac VHT20	149/5745	20.41	20.92	30.00	PASS
	157/5785	20.17	20.68	30.00	PASS
	165/5825	20.18	20.69	30.00	PASS
802.11ac VHT40	151/5755	16.86	17.42	30.00	PASS
	159/5795	16.76	17.32	30.00	PASS
802.11ac VHT80	155/5775	14.64	15.20	30.00	PASS
802.11ax HE20	149/5745	20.33	20.74	30.00	PASS
	157/5785	20.51	20.92	30.00	PASS
	165/5825	20.03	20.44	30.00	PASS
802.11ax HE40	151/5755	14.93	15.39	30.00	PASS
	159/5795	15.09	15.55	30.00	PASS
802.11ax HE80	155/5775	14.99	15.45	30.00	PASS

Note: Average Power with duty factor = Average Power Measured +Duty cycle correction factor



## SISO Antenna 2

## U-NII-1

Test Mode	Channel/ Frequency (MHz)	Average Power Measured (dBm)	Average Power with duty factor (dBm)	Limit (dBm)	Conclusion
802.11a	36/5180	12.64	12.96	30.00	PASS
	40/5200	12.64	12.96	30.00	PASS
	48/5240	11.81	12.13	30.00	PASS
802.11n HT20	36/5180	13.34	13.75	30.00	PASS
	40/5200	13.52	13.93	30.00	PASS
	48/5240	13.09	13.50	30.00	PASS
802.11n HT40	38/5190	12.60	13.20	30.00	PASS
	46/5230	11.79	12.39	30.00	PASS
802.11ac VHT20	36/5180	13.40	13.91	30.00	PASS
	40/5200	13.43	13.94	30.00	PASS
	48/5240	13.03	13.54	30.00	PASS
802.11ac VHT40	38/5190	12.52	13.08	30.00	PASS
	46/5230	11.77	12.33	30.00	PASS
802.11ac VHT80	42/5210	12.03	12.59	30.00	PASS
802.11ac VHT160	50/5250	10.03	10.54	30.00	PASS
802.11ax HE20	36/5180	12.24	12.65	30.00	PASS
	40/5200	12.16	12.57	30.00	PASS
	48/5240	11.98	12.39	30.00	PASS
802.11ax HE40	38/5190	11.16	11.62	30.00	PASS
	46/5230	11.41	11.87	30.00	PASS
802.11ax HE80	42/5210	11.21	11.67	30.00	PASS
802.11ax HE160	50/5250	13.74	14.25	30.00	PASS
Note: Average Power with duty factor = Average Power Measured +Duty cycle correction factor					



## U-NII-3

Test Mode	Channel/ Frequency (MHz)	Average Power Measured (dBm)	Average Power with duty factor (dBm)	Limit (dBm)	Conclusion
802.11a	149/5745	20.35	20.67	30.00	PASS
	157/5785	20.12	20.44	30.00	PASS
	165/5825	20.19	20.51	30.00	PASS
802.11n HT20	149/5745	20.35	20.76	30.00	PASS
	157/5785	19.89	20.30	30.00	PASS
	165/5825	21.20	21.61	30.00	PASS
802.11n HT40	151/5755	17.16	17.76	30.00	PASS
	159/5795	17.83	18.43	30.00	PASS
802.11ac VHT20	149/5745	20.33	20.84	30.00	PASS
	157/5785	20.12	20.63	30.00	PASS
	165/5825	21.00	21.51	30.00	PASS
802.11ac VHT40	151/5755	17.15	17.71	30.00	PASS
	159/5795	17.90	18.46	30.00	PASS
802.11ac VHT80	155/5775	15.15	15.71	30.00	PASS
802.11ax HE20	149/5745	20.37	20.78	30.00	PASS
	157/5785	20.04	20.45	30.00	PASS
	165/5825	21.01	21.42	30.00	PASS
802.11ax HE40	151/5755	15.06	15.52	30.00	PASS
	159/5795	15.86	16.32	30.00	PASS
802.11ax HE80	155/5775	15.08	15.54	30.00	PASS

Note: Average Power with duty factor = Average Power Measured +Duty cycle correction factor





## CDD

## U-NII-1

Test Mode	Channel/ Frequency (MHz)	MIMO Antenna 1		MIMO Antenna 2		Total Power (dBm)	Limit (dBm)	Conclusion
		Average Power Measured (dBm)	Average Power with duty factor (dBm)	Average Power Measured (dBm)	Average Power with duty factor (dBm)			
802.11a	36/5180	12.25	12.57	12.45	12.77	15.68	29.80	PASS
	44/5220	12.25	12.57	12.55	12.87	15.73	29.80	PASS
	48/5240	12.22	12.54	12.21	12.53	15.54	29.80	PASS
802.11n HT20	36/5180	13.12	13.53	13.44	13.85	16.70	29.80	PASS
	44/5220	13.33	13.74	13.69	14.10	16.93	29.80	PASS
	48/5240	12.93	13.34	12.79	13.20	16.28	29.80	PASS
802.11n HT40	38/5190	11.99	12.59	12.48	13.08	15.86	29.80	PASS
	46/5230	12.14	12.74	12.18	12.78	15.78	29.80	PASS
802.11ac VHT20	36/5180	12.94	13.45	13.20	13.71	16.59	29.80	PASS
	44/5220	12.72	13.23	13.46	13.97	16.62	29.80	PASS
	48/5240	12.91	13.42	12.90	13.41	16.42	29.80	PASS
802.11ac VHT40	38/5190	11.30	11.86	12.34	12.90	15.42	29.80	PASS
	46/5230	12.34	12.90	11.89	12.45	15.69	29.80	PASS
802.11ac VHT80	42/5210	12.25	12.81	11.71	12.27	15.55	29.80	PASS
802.11ac VHT160	50/5250	10.09	10.60	10.12	10.63	13.62	29.80	PASS
802.11ax HE20	36/5180	12.29	12.70	12.28	12.69	15.70	29.80	PASS
	44/5220	12.14	12.55	12.34	12.75	15.66	29.80	PASS
	48/5240	12.41	12.82	12.39	12.80	15.82	29.80	PASS
802.11ax HE40	38/5190	11.68	12.14	11.28	11.74	14.95	29.80	PASS
	46/5230	11.17	11.63	10.98	11.44	14.54	29.80	PASS
802.11ax HE80	42/5210	11.23	11.69	10.85	11.31	14.51	29.80	PASS
802.11ax HE160	50/5250	13.37	13.88	13.68	14.19	17.04	29.80	PASS

Note: 1. For Total Power, according to KDB 662911 D01 Multiple Transmitter Output v02r01 1),

The Total Power =  $10\log(10^{(\text{Power antenna1 in dBm}/10)} + 10^{(\text{Power antenna2 in dBm}/10)})$ .

2. The manufacturer declared the transmitter output signals is CDD mode And Nss=1. According to KDB 662911 D01 Multiple Transmitter Output v02r01 F)2)f)(ii): If antenna gains are not equal, the user may use either of the following methods to calculate directional gain, provided that each transmit antenna is driven by only one spatial stream: Directional gain may be calculated by using the formulas applicable to equal gain antennas with  $G_{\text{ANT}}$  set equal to the gain of the antenna having the highest gain.

Directional gain =  $G_{\text{ANT MAX}} + \text{Array Gain}$ , For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for  $N_{\text{ANT}} \leq 4$ ;

Array Gain = 0 dB (i.e., no array gain) for channel widths  $\geq 40$  MHz for any  $N_{\text{ANT}}$ ;



Array Gain =  $5 \log(N_{ANT}/N_{SS})$  dB or 3 dB, whichever is less, for 20-MHz channel widths with  $N_{ANT} \geq 5$ .

So directional gain =  $G_{ANT MAX} + \text{Array Gain} = 6.2 + 0 = 6.2 \text{ dBi} > 6 \text{ dBi}$ . So the power limit is  $30 - (\text{directional gain} - 6 \text{ dBi}) = 29.80 \text{ dBm}$

## U-NII-3

Test Mode	Channel/ Frequency (MHz)	MIMO Antenna 1		MIMO Antenna 2		Total Power (dBm)	Limit (dBm)	Conclusion
		Average Power Measured (dBm)	Average Power with duty factor (dBm)	Average Power Measured (dBm)	Average Power with duty factor (dBm)			
802.11a	149/5745	20.30	20.62	20.05	20.37	23.50	29.80	PASS
	157/5785	20.05	20.37	20.27	20.59	23.49	29.80	PASS
	165/5825	20.31	20.63	21.14	21.46	24.07	29.80	PASS
802.11n HT20	149/5745	20.15	20.56	19.64	20.05	23.32	29.80	PASS
	157/5785	19.86	20.27	20.26	20.67	23.48	29.80	PASS
	165/5825	20.08	20.49	20.71	21.12	23.83	29.80	PASS
802.11n HT40	151/5755	16.78	17.38	16.97	17.57	20.49	29.80	PASS
	159/5795	17.30	17.90	17.87	18.47	21.21	29.80	PASS
802.11ac VHT20	149/5745	20.05	20.56	20.18	20.69	23.63	29.80	PASS
	157/5785	19.89	20.40	20.24	20.75	23.58	29.80	PASS
	165/5825	20.03	20.54	20.90	21.41	24.00	29.80	PASS
802.11ac VHT40	151/5755	16.77	17.33	16.92	17.48	20.41	29.80	PASS
	159/5795	17.30	17.86	17.88	18.44	21.17	29.80	PASS
802.11ac VHT80	155/5775	15.11	15.67	15.04	15.60	18.64	29.80	PASS
802.11ax HE20	149/5745	20.35	20.81	20.09	20.50	23.67	29.80	PASS
	157/5785	20.30	20.76	20.13	20.54	23.66	29.80	PASS
	165/5825	20.38	20.84	21.12	21.53	24.21	29.80	PASS
802.11ax HE40	151/5755	15.71	16.22	14.93	15.39	18.83	29.80	PASS
	159/5795	15.35	15.86	16.30	16.76	19.34	29.80	PASS
802.11ax HE80	155/5775	15.15	15.15	15.13	15.59	18.38	29.80	PASS

Note: 1. For Total Power, according to KDB 662911 D01 Multiple Transmitter Output v02r01 1),

The Total Power =  $10 \log(10^{(\text{Power antenna1 in dBm}/10)} + 10^{(\text{Power antenna2 in dBm}/10)})$ .

2. The manufacturer declared the transmitter output signals is CDD mode And Nss=1. According to KDB 662911 D01

Multiple Transmitter Output v02r01 F)2)f)(ii): If antenna gains are not equal, the user may use either of the following methods to calculate directional gain, provided that each transmit antenna is driven by only one spatial stream: Directional gain may be calculated by using the formulas applicable to equal gain antennas with GANT set equal to the gain of the antenna having the highest gain.

Directional gain =  $G_{ANT MAX} + \text{Array Gain}$ ,

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for  $N_{ANT} \leq 4$ ;

Array Gain = 0 dB (i.e., no array gain) for channel widths  $\geq 40$  MHz for any  $N_{ANT}$ ;

Array Gain =  $5 \log(N_{ANT}/N_{SS})$  dB or 3 dB, whichever is less, for 20-MHz channel widths with  $N_{ANT} \geq 5$ .

So directional gain =  $G_{ANT MAX} + \text{Array Gain} = 6.2 + 0 = 6.2 \text{ dBi} > 6 \text{ dBi}$ . So the power limit is  $30 - (\text{directional gain} - 6 \text{ dBi}) = 29.80 \text{ dBm}$

### 5.3. Frequency Stability

#### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

#### Method of Measurement

##### 1. Frequency stability with respect to ambient temperature

a) Supply the EUT with a nominal ac voltage or install a new or fully charged battery in the EUT. If possible, a dummy load shall be connected to the EUT because an antenna near the metallic walls of an environmental test chamber could affect the output frequency of the EUT. If the EUT is equipped with a permanently attached, adjustable-length antenna, then the EUT shall be placed in the center of the chamber with the antenna adjusted to the shortest length possible. Turn ON the EUT and tune it to one of the number of frequencies shown in 5.6.

b) Couple the unlicensed wireless device output to the measuring instrument by connecting an antenna to the measuring instrument with a suitable length of coaxial cable and placing the measuring antenna near the EUT (e.g., 15 cm away), or by connecting a dummy load to the measuring instrument, through an attenuator if necessary.

c) Adjust the location of the measurement antenna and the controls on the measurement instrument to obtain a suitable signal level (i.e., a level that will not overload the measurement instrument but is strong enough to allow measurement of the operating or fundamental frequency of the EUT).

d) Turn the EUT OFF and place it inside the environmental temperature chamber. For devices that have oscillator heaters, energize only the heater circuit.

e) Set the temperature control on the chamber to the highest specified in the regulatory requirements for the type of device and allow the oscillator heater and the chamber temperature to stabilize.

f) While maintaining a constant temperature inside the environmental chamber, turn the EUT ON and record the operating frequency at startup, and at 2 minutes, 5 minutes, and 10 minutes after the EUT is energized. Four measurements in total are made.

g) Measure the frequency at each of frequencies specified in 5.6.

h) Switch OFF the EUT but do not switch OFF the oscillator heater.

i) Lower the chamber temperature by not more than 10°C, and allow the temperature inside the chamber to stabilize.

j) Repeat step f) through step i) down to the lowest specified temperature.

##### 2. Frequency stability when varying supply voltage

Unless otherwise specified, these tests shall be made at ambient room temperature (+15°C to +25 °C). An antenna shall be connected to the antenna output terminals of the EUT if possible. If the EUT is equipped with or uses an adjustable-length antenna, then it shall be fully extended.

a) Supply the EUT with nominal voltage or install a new or fully charged battery in the EUT. Turn ON the EUT and couple its output to a frequency counter or other frequency-measuring instrument.



- b) Tune the EUT to one of the number of frequencies required in 5.6. Adjust the location of the measurement antenna and the controls on the measurement instrument to obtain a suitable signal level (i.e., a level that will not overload the measurement instrument but is strong enough to allow measurement of the operating or fundamental frequency of the EUT).
- c) Measure the frequency at each of the frequencies specified in 5.6.
- d) Repeat the above procedure at 85% and 115% of the nominal supply voltage.

**Limit**

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

**Measurement Uncertainty**

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 936\text{Hz}$

**Test Results**

Voltage (V)	Temperature (°C)	U-NII-1 Test Results			
		5200MHz			
		1min	2min	5min	10min
12	-20	5200.000561	5199.997089	5199.990886	5199.983726
12	-10	5200.000745	5199.992471	5199.984168	5199.982967
12	0	5199.994382	5199.987670	5199.983341	5199.979216
12	10	5199.984855	5199.983406	5199.981088	5199.969511
12	20	5199.980290	5199.980579	5199.975074	5199.961816
12	30	5199.977891	5199.974836	5199.973429	5199.952302
12	40	5199.971097	5199.969448	5199.967965	5199.950300
12	50	5199.967509	5199.967568	5199.958395	5199.942075
10.8	20	5199.967049	5199.960293	5199.954071	5199.938869
13.2	20	5199.962378	5199.953813	5199.948955	5199.928916
Max. ΔMHz		-0.03762222	-0.046187026	-0.051044634	-0.071083763
PPM		-7.235042302	-8.882120371	-9.81627585	-13.66995441

Voltage (V)	Temperature (°C)	U-NII-3 Test Results			
		5785MHz			
		1min	2min	5min	10min
12	-20	5784.994727	5784.989973	5784.982857	5784.975560
12	-10	5784.985024	5784.980132	5784.977757	5784.967779
12	0	5784.984673	5784.976494	5784.976692	5784.966952
12	10	5784.978751	5784.972150	5784.971672	5784.958524
12	20	5784.972611	5784.969904	5784.971160	5784.950854
12	30	5784.966839	5784.962182	5784.965088	5784.945347
12	40	5784.965840	5784.955716	5784.964667	5784.941578
12	50	5784.965827	5784.946231	5784.956989	5784.935546
10.8	20	5784.965617	5784.946166	5784.953743	5784.933280
13.2	20	5784.964268	5784.941165	5784.944437	5784.924850
Max. ΔMHz		-0.035731996	-0.058834832	-0.055563106	-0.075149732
PPM		-6.17666317	-10.17023894	-9.60468557	-12.99044629

## 5.4. Power Spectral Density

### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

### Method of Measurement


The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable.

Set RBW = 1MHz, VBW =3MHz for the band 5.150-5.250GHz.

Set RBW = 470kHz, VBW =1.5MHz for the band 5.725-5.850GHz

The conducted PSD is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically.

### Test setup



### Limits

Rule FCC Part 15.407(a)(1)/ Part 15.407(a)(2) / Part 15.407(a)(3)

For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.



Frequency Bands/MHz	Limits
5150-5250	17dBm/MHz
5725-5850	30dBm/500kHz

### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 0.75\text{dB}$ .

**Test Results:**

Note: Power Spectral Density =Read Value+Duty cycle correction factor

**SISO Antenna 1****U-NII-1**

Mode	Channel Number	Read Value (dBm /MHz)	Power Spectral Density (dBm /MHz)	Limit (dBm /MHz)	Conclusion
802.11a	36	-0.34	-0.02	17	PASS
	40	-0.25	0.07	17	PASS
	48	-0.62	-0.30	17	PASS
802.11n HT20	36	0.65	1.06	17	PASS
	40	0.27	0.68	17	PASS
	48	0.04	0.45	17	PASS
802.11n HT40	38	-3.75	-3.15	17	PASS
	46	-4.15	-3.55	17	PASS
802.11ac VHT20	36	0.96	1.47	17	PASS
	40	0.98	1.49	17	PASS
	48	1.01	1.52	17	PASS
802.11ac VHT40	38	-2.56	-2.00	17	PASS
	46	-2.67	-2.11	17	PASS
802.11ac VHT80	42	-7.37	-6.81	17	PASS
802.11ac VHT160	50	-11.57	-11.06	17	PASS
802.11ax HE20	36	-0.37	0.04	17	PASS
	40	-0.77	-0.36	17	PASS
	48	-0.94	-0.53	17	PASS
802.11ax HE40	38	-4.46	-4.00	17	PASS
	46	-3.01	-2.55	17	PASS
802.11ax HE80	42	-7.49	-7.03	17	PASS
802.11ax HE160	50	-5.77	-5.26	17	PASS





## U-NII-3

Mode	Channel Number	Read Value (dBm/470kHz)	Power Spectral Density (dBm/500kHz)	Limit (dBm/500kHz)	Conclusion
802.11a	149	6.10	6.69	30	PASS
	157	5.91	6.50	30	PASS
	165	6.34	6.93	30	PASS
802.11n HT20	149	5.97	6.65	30	PASS
	157	5.67	6.35	30	PASS
	165	5.73	6.41	30	PASS
802.11n HT40	151	-0.41	0.46	30	PASS
	159	-0.29	0.58	30	PASS
802.11ac VHT20	149	5.92	6.70	30	PASS
	157	5.66	6.44	30	PASS
	165	5.75	6.53	30	PASS
802.11ac VHT40	151	-0.24	0.59	30	PASS
	159	-0.22	0.61	30	PASS
802.11ac VHT80	155	-5.63	-4.80	30	PASS
802.11ax HE20	149	5.70	6.38	30	PASS
	157	6.33	7.01	30	PASS
	165	5.90	6.58	30	PASS
802.11ax HE40	151	-2.49	-1.76	30	PASS
	159	-1.96	-1.23	30	PASS
802.11ax HE80	155	-5.60	-4.87	30	PASS

Note: PSD=Read Value+ Duty cycle+10\*log(500/470) correction factor



## SISO Antenna 2

## U-NII-1

Mode	Channel Number	Read Value (dBm /MHz)	Power Spectral Density (dBm /MHz)	Limit (dBm /MHz)	Conclusion
802.11a	36	2.19	2.51	17	PASS
	40	2.19	2.51	17	PASS
	48	1.49	1.81	17	PASS
802.11n HT20	36	2.94	3.35	17	PASS
	40	2.64	3.05	17	PASS
	48	2.23	2.64	17	PASS
802.11n HT40	38	-1.16	-0.56	17	PASS
	46	-1.95	-1.35	17	PASS
802.11ac VHT20	36	2.84	3.35	17	PASS
	40	2.84	3.35	17	PASS
	48	2.27	2.78	17	PASS
802.11ac VHT40	38	-1.09	-0.53	17	PASS
	46	-2.07	-1.51	17	PASS
802.11ac VHT80	42	-4.65	-4.09	17	PASS
802.11ac VHT160	50	-10.33	-9.82	17	PASS
802.11ax HE20	36	1.10	1.51	17	PASS
	40	1.25	1.66	17	PASS
	48	0.36	0.77	17	PASS
802.11ax HE40	38	-2.96	-2.50	17	PASS
	46	-4.02	-3.56	17	PASS
802.11ax HE80	42	-5.67	-5.21	17	PASS
802.11ax HE160	50	-5.43	-4.92	17	PASS



## U-NII-3

Mode	Channel Number	Read Value (dBm/470kHz)	Power Spectral Density (dBm/500kHz)	Limit (dBm/500kHz)	Conclusion
802.11a	149	6.31	6.90	30	PASS
	157	6.11	6.70	30	PASS
	165	6.50	7.09	30	PASS
802.11n HT20	149	6.44	7.12	30	PASS
	157	6.04	6.72	30	PASS
	165	7.19	7.87	30	PASS
802.11n HT40	151	0.04	0.91	30	PASS
	159	0.53	1.40	30	PASS
802.11ac VHT20	149	6.19	6.97	30	PASS
	157	5.93	6.71	30	PASS
	165	7.06	7.84	30	PASS
802.11ac VHT40	151	-0.20	0.63	30	PASS
	159	0.11	0.94	30	PASS
802.11ac VHT80	155	-5.46	-4.63	30	PASS
802.11ax HE20	149	5.88	6.56	30	PASS
	157	5.69	6.37	30	PASS
	165	6.67	7.35	30	PASS
802.11ax HE40	151	-2.68	-1.95	30	PASS
	159	-1.24	-0.51	30	PASS
802.11ax HE80	155	-5.43	-4.70	30	PASS

Note: PSD=Read Value+ Duty cycle+10\*log(500/470) correction factor



## CDD

## U-NII-1

Mode	Channel/ Frequency (MHz)	Power Spectral Density					Limit (dBm /MHz)	Conclusion
		Antenna 1		Antenna 2		Total Power (dBm /MHz)		
		Read Value (dBm/MHz)	PSD (dBm/MHz)	Read Value (dBm/MHz)	PSD (dBm/MHz)			
802.11a	36/5180	2.01	2.33	1.87	2.19	5.27	13.79	PASS
	40/5200	2.23	2.55	1.96	2.28	5.42	13.79	PASS
	48/5240	1.95	2.27	1.54	1.86	5.08	13.79	PASS
802.11n HT20	36/5180	2.29	2.70	2.15	2.56	5.64	13.79	PASS
	40/5200	2.04	2.45	2.41	2.82	5.65	13.79	PASS
	48/5240	2.09	2.50	2.27	2.68	5.60	13.79	PASS
802.11n HT40	38/5190	-1.40	-0.80	-1.76	-1.16	2.04	13.79	PASS
	46/5230	-1.65	-1.05	-2.13	-1.53	1.73	13.79	PASS
802.11ac VHT20	36/5180	2.38	2.89	2.61	3.12	6.01	13.79	PASS
	40/5200	2.13	2.64	2.71	3.22	5.95	13.79	PASS
	48/5240	1.84	2.35	2.29	2.80	5.59	13.79	PASS
802.11ac VHT40	38/5190	-1.72	-1.16	-1.87	6.00	6.76	13.79	PASS
	46/5230	-1.72	-1.16	-1.93	-1.37	1.74	13.79	PASS
802.11ac VHT80	42/5210	-4.67	-4.11	-5.51	-4.95	-1.50	13.79	PASS
802.11ac VHT160	50/5250	-9.68	-9.17	-10.24	-9.73	-6.43	13.79	PASS
802.11ax HE20	36/5180	1.29	1.70	1.33	1.74	4.73	13.79	PASS
	40/5200	1.26	1.67	1.33	1.74	4.72	13.79	PASS
	48/5240	1.12	1.53	0.96	1.37	4.46	13.79	PASS
802.11ax HE40	38/5190	-2.78	-2.32	-2.59	-2.13	0.78	13.79	PASS
	46/5230	-2.76	-2.30	-2.94	-2.48	0.62	13.79	PASS
802.11ax HE80	42/5210	-5.68	-5.22	-6.13	-5.67	-2.43	13.79	PASS
802.11ax HE160	50/5250	-6.40	-5.89	-6.69	-6.18	-3.03	13.79	PASS

Note: 1. Power Spectral Density = Read Value + Duty cycle correction factor

2. For Total PSD, according to KDB 662911 D01 Multiple Transmitter Output v02r01 2)a), the power spectral density =  $10\log(10^{(\text{PSD antenna1 in dBm/10})} + 10^{(\text{PSD antenna2 in dBm/10})})$

3. The manufacturer declared the transmitter output signals is CDD mode And Nss=1. According to KDB 662911 D01 Multiple Transmitter Output v02r01 F)2)f)(ii): If antenna gains are not equal, the user may use either of the following methods to calculate directional gain, provided that each transmit antenna is driven by only one spatial stream: Directional gain may be calculated by using the formulas applicable to equal gain antennas with  $G_{\text{ANT}}$  set equal to the gain of the antenna having the highest gain.

Directional gain =  $G_{\text{ANT MAX}} + \text{Array Gain}$ , For PSD measurements on all devices,

Array Gain =  $10\log(\text{Nant}/\text{Nss})\text{dB}$ ,

so directional gain =  $G_{\text{ANT MAX}} + \text{Array Gain} = 6.2 + 10\log(2/1) = 9.21 > 6 \text{ dBi}$ .



So the PSD limit is  $17 - (\text{directional gain} - 6 \text{ dBi}) = 17 - (9.21 - 6) = 13.79 \text{ dBm}$ .

## U-NII-3

Mode	Channel /Frequency (MHz)	Power Spectral Density				Total PSD (dBm/MHz)	Limit (dBm /MHz)	Conclusion
		ANT1		ANT2				
		Read Value (dBm/470kHz)	PSD (dBm/5000kHz)	Read Value (dBm/470kHz)	PSD (dBm/5000kHz)			
802.11a	149/5745	6.45	7.04	6.48	7.07	10.06	26.79	PASS
	157/5785	6.46	7.05	6.65	7.24	10.15	26.79	PASS
	165/5825	6.50	7.09	7.32	7.91	10.52	26.79	PASS
802.11n HT20	149/5745	5.63	6.31	5.56	6.24	9.29	26.79	PASS
	157/5785	5.78	6.46	5.72	6.40	9.44	26.79	PASS
	165/5825	5.83	6.51	6.75	7.43	10.00	26.79	PASS
802.11n HT40	151/5755	-0.24	0.63	-0.41	0.46	3.56	26.79	PASS
	159/5795	-0.15	0.72	0.59	1.46	4.12	26.79	PASS
802.11 ac VHT20	149/5745	5.57	6.35	5.82	6.60	9.48	26.79	PASS
	157/5785	5.74	6.52	5.76	6.54	9.54	26.79	PASS
	165/5825	5.81	6.59	6.72	7.50	10.08	26.79	PASS
802.11 ac VHT40	151/5755	-0.02	0.81	-0.41	0.42	3.62	26.79	PASS
	159/5795	-0.08	0.75	0.63	1.46	4.12	26.79	PASS
802.11ac VHT80	155/5775	-5.29	-4.46	-5.77	-4.94	-1.69	26.79	PASS
802.11 ax HE20	149/5745	5.88	6.56	5.79	6.47	9.53	26.79	PASS
	157/5785	6.40	7.08	5.85	6.53	9.82	26.79	PASS
	165/5825	6.08	6.76	6.75	7.43	10.12	26.79	PASS
802.11 ax HE40	151/5755	-1.91	-1.18	-2.55	-1.82	1.52	26.79	PASS
	159/5795	-2.01	-1.28	-1.47	-0.74	2.01	26.79	PASS
802.11ax HE80	155/5775	-5.41	-4.68	-5.38	-4.65	-1.66	26.79	PASS

Note: 1. For Total PSD, according to KDB 662911 D01 Multiple Transmitter Output v02r01 2)a), the power spectral density =  $10 \log(10^{(\text{PSD antenna1 in dBm}/10)} + 10^{(\text{PSD antenna2 in dBm}/10)})$

2. The manufacturer declared the transmitter output signals is CDD mode And Nss=1. According to KDB 662911 D01 Multiple Transmitter Output v02r01 F)2)f)(ii): If antenna gains are not equal, the user may use either of the following methods to calculate directional gain, provided that each transmit antenna is driven by only one spatial stream:

Directional gain may be calculated by using the formulas applicable to equal gain antennas with  $G_{\text{ANT}}$  set equal to the gain of the antenna having the highest gain.

Directional gain =  $G_{\text{ANT MAX}} + \text{Array Gain}$ , For PSD measurements on all devices,

Array Gain =  $10 \log(\text{Nant}/\text{Nss}) \text{ dB}$ ,


so directional gain =  $G_{\text{ANT MAX}} + \text{Array Gain} = 6.2 + 10 \log(2/1) = 9.21 > 6 \text{ dBi}$ .

So the PSD limit is  $30 - (\text{directional gain} - 6 \text{ dBi}) = 30 - (9.21 - 6) = 26.79 \text{ dBm}$ .




SISO Antenna 1


U-NII-1, 802.11a, Channel No.: 36

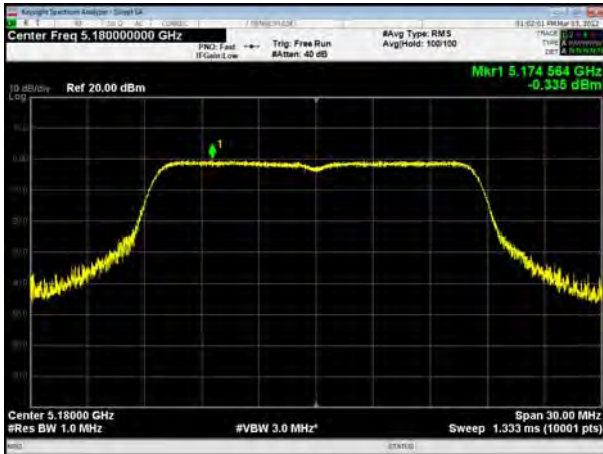


U-NII-1, 802.11n HT20, Channel No.: 36

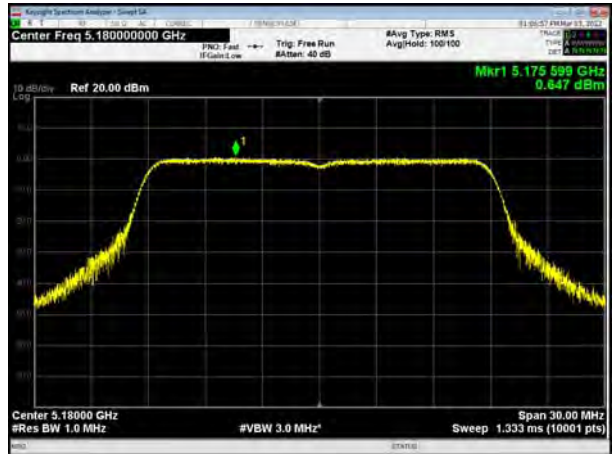


U-NII-1, 802.11a, Channel No.: 40

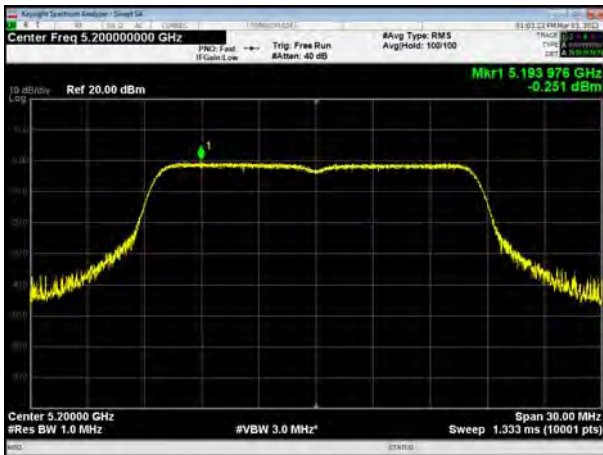


U-NII-1, 802.11n HT20, Channel No.: 40

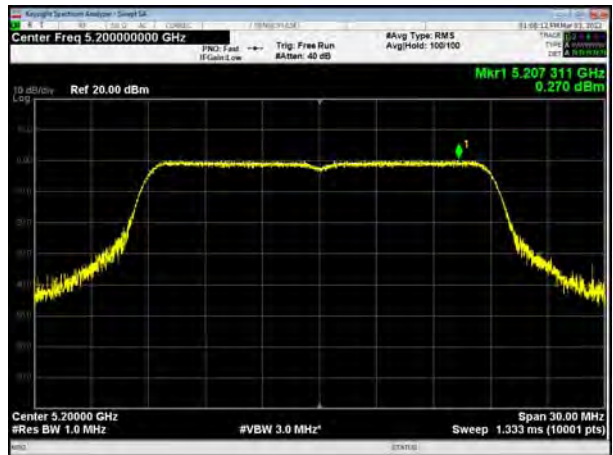


U-NII-1, 802.11a, Channel No.: 48

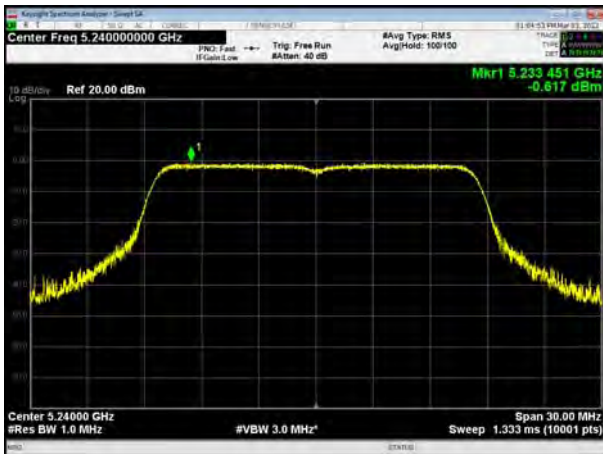

U-NII-1, 802.11n HT20, Channel No.: 48

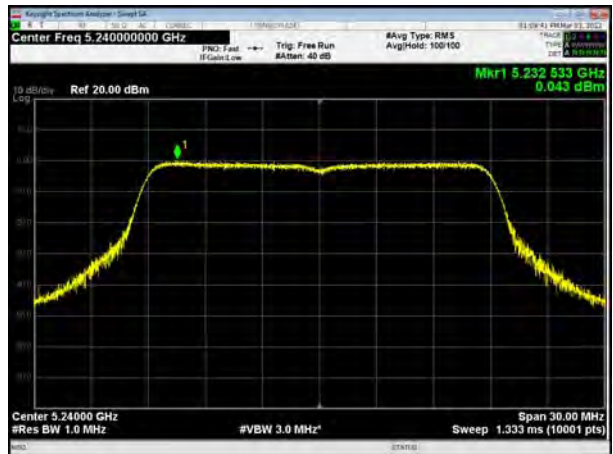


U-NII-1, 802.11n HT40, Channel No.: 38

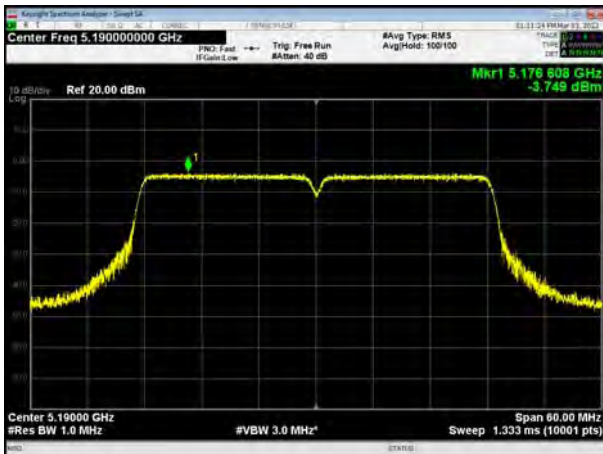


U-NII-1, 802.11n HT40, Channel No.: 46




U-NII-1, 802.11ac VHT20, Channel No.: 36

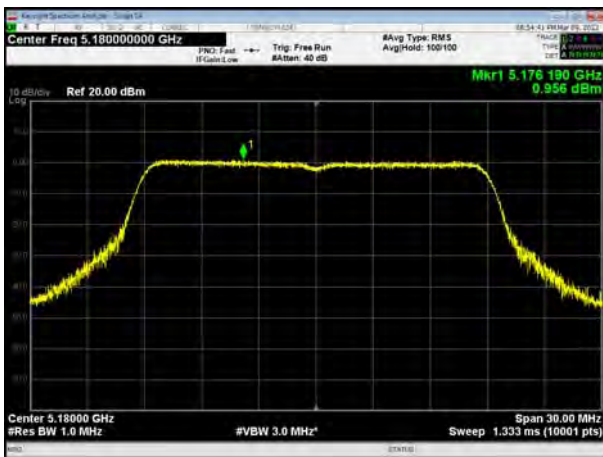


U-NII-1, 802.11ax HE20, Channel No.: 36

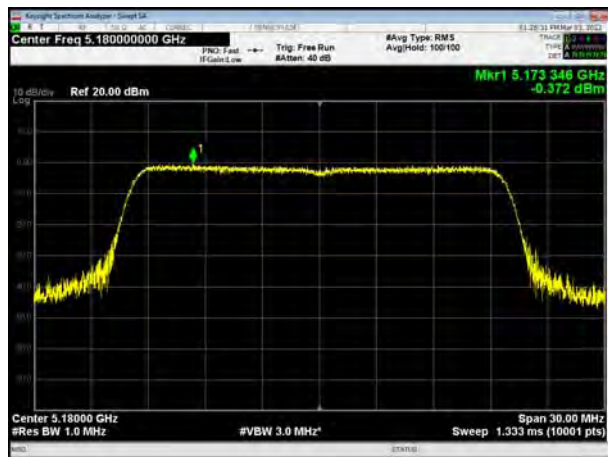


U-NII-1, 802.11ac VHT20, Channel No.: 40

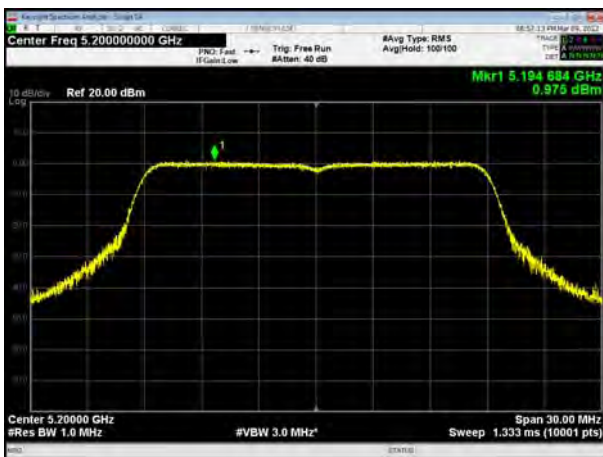


U-NII-1, 802.11ax HE20, Channel No.: 40

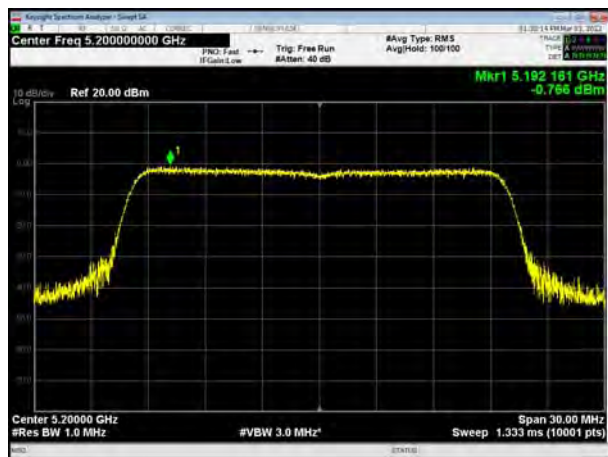


U-NII-1, 802.11ac VHT20, Channel No.: 48

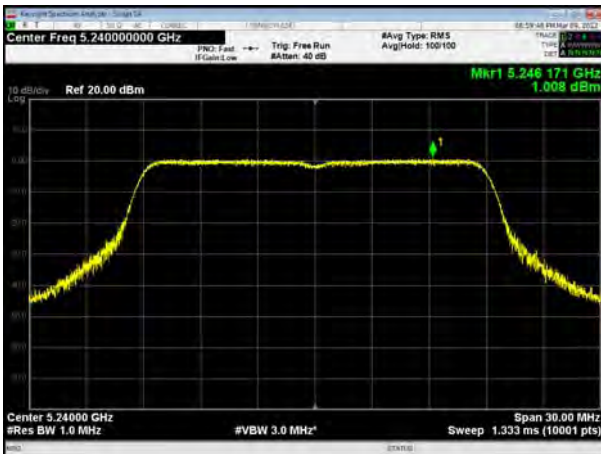


U-NII-1, 802.11ax HE20, Channel No.: 48

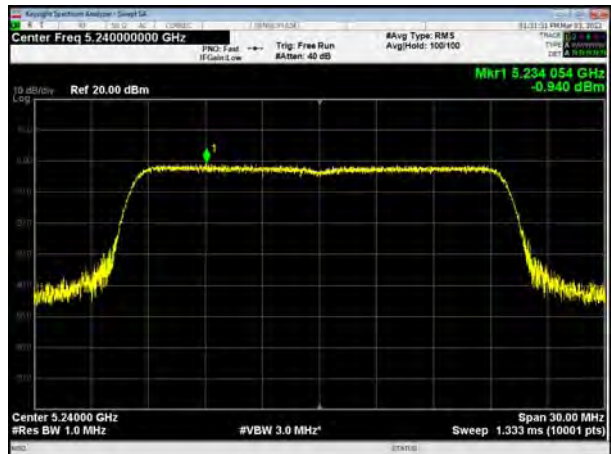


U-NII-1, 802.11ac VHT40, Channel No.: 38

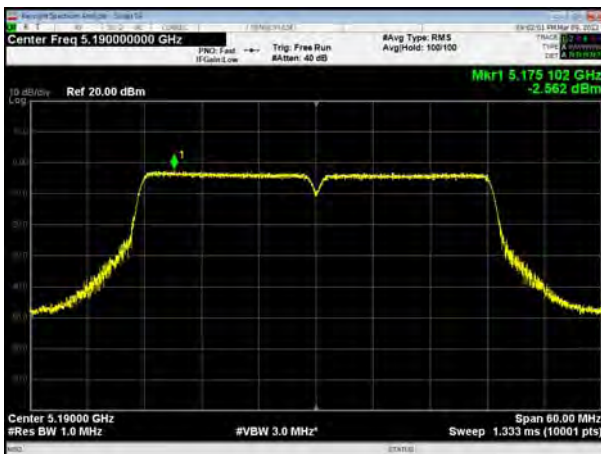

U-NII-1, 802.11ax HE40, Channel No.: 38

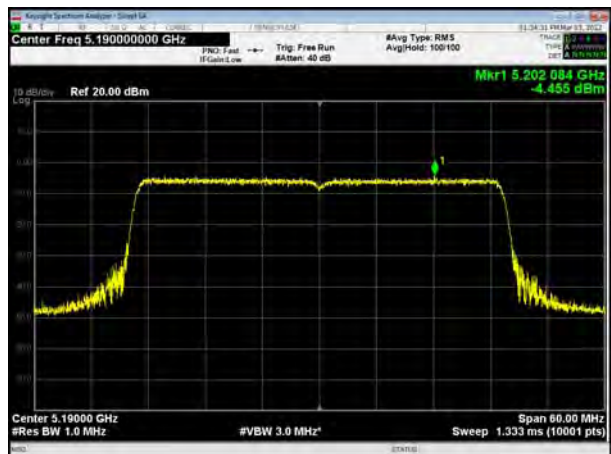

U-NII-1, 802.11ac VHT40, Channel No.: 46

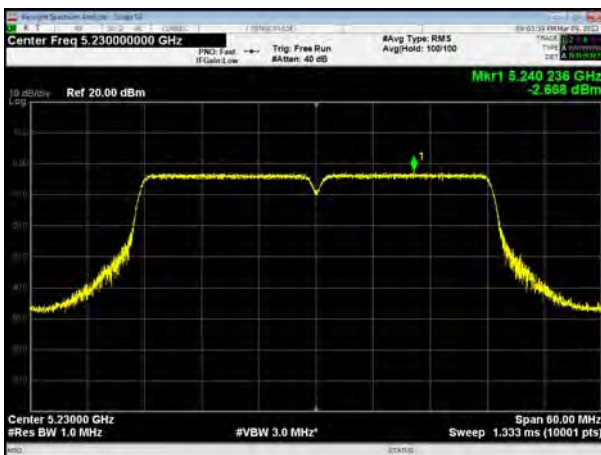


U-NII-1, 802.11ax HE40, Channel No.: 46









U-NII-1, 802.11ac VHT80, Channel No.: 42

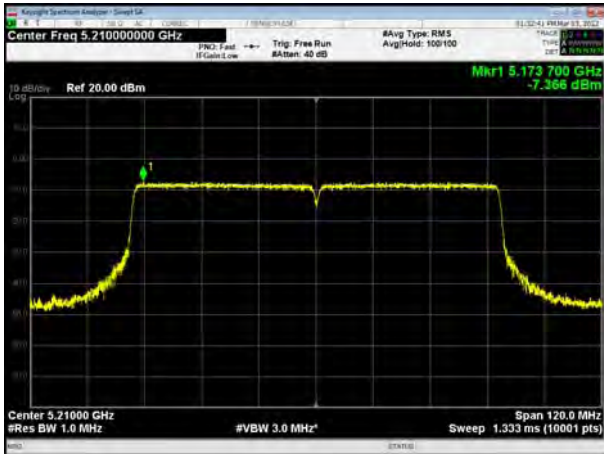

U-NII-1, 802.11ax HE80, Channel No.: 42

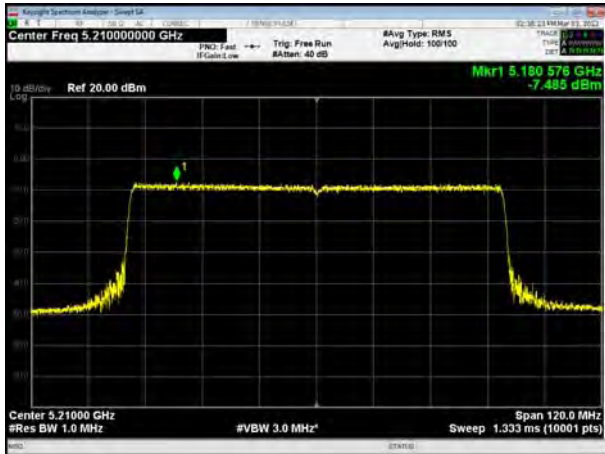

U-NII-1, 802.11ac VHT160, Channel No.: 50

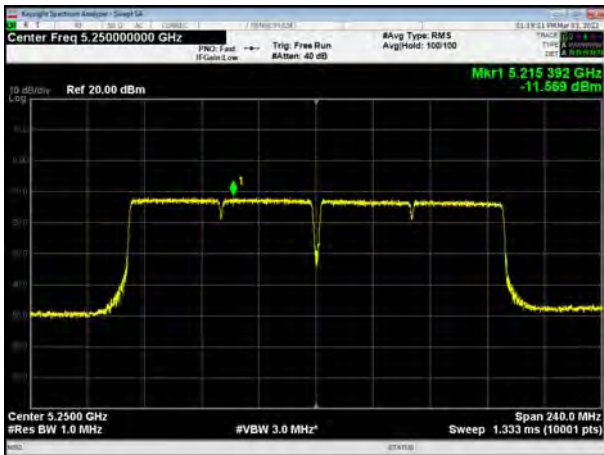


U-NII-1, 802.11ax HE160, Channel No.: 50



U-NII-3, 802.11a, Channel No.: 149




U-NII-3, 802.11n HT20, Channel No.: 149

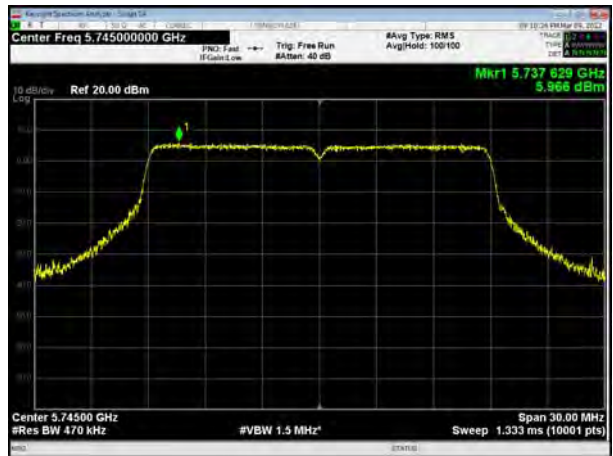


U-NII-3, 802.11a, Channel No.: 157



U-NII-3, 802.11n HT20, Channel No.: 157

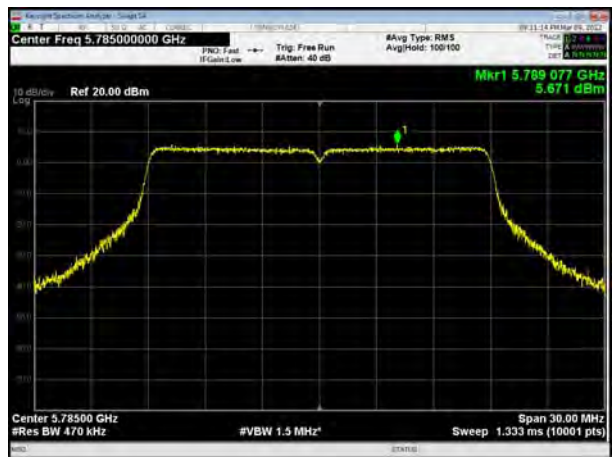


U-NII-3, 802.11a, Channel No.: 165

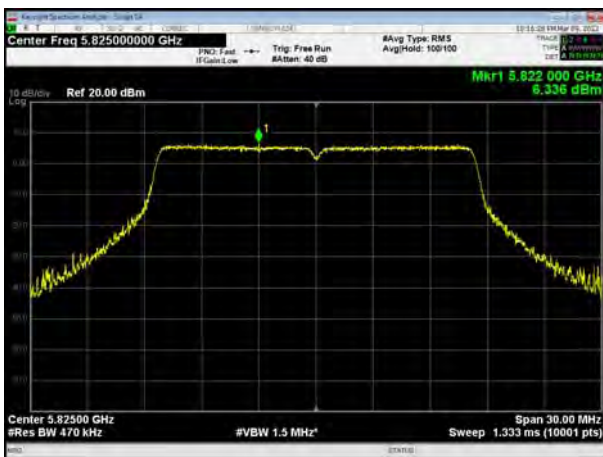


U-NII-3, 802.11n HT20, Channel No.: 165



U-NII-3, 802.11n HT40, Channel No.: 151

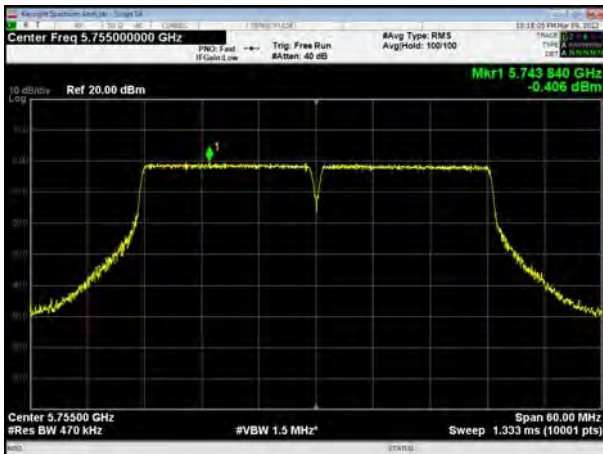


U-NII-3, 802.11n HT40, Channel No.: 159

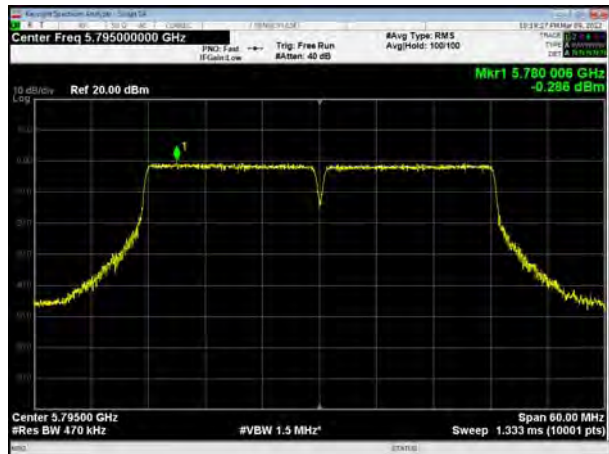

U-NII-3, 802.11ac VHT20, Channel No.: 149



U-NII-3, 802.11ax HE20, Channel No.: 149

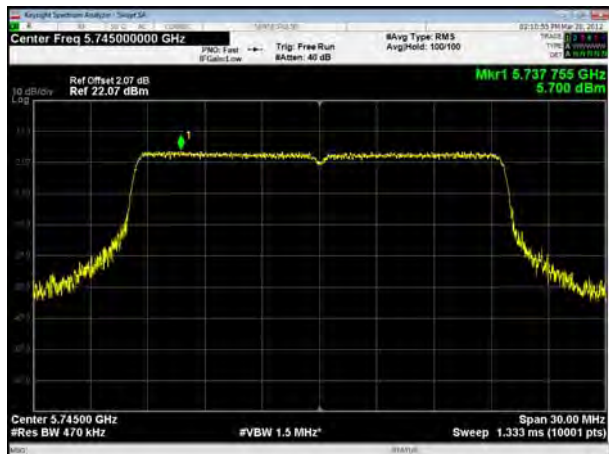

U-NII-3, 802.11ac VHT20, Channel No.: 157



U-NII-3, 802.11ax HE20, Channel No.: 157



U-NII-3, 802.11ac VHT20, Channel No.: 165




U-NII-3, 802.11ax HE20, Channel No.: 165




U-NII-3, 802.11ac VHT40, Channel No.: 151



U-NII-3, 802.11ax HE40, Channel No.: 151

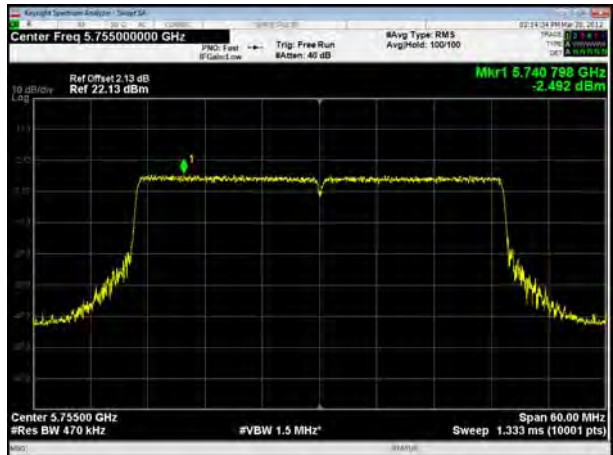

U-NII-3, 802.11ac VHT40, Channel No.: 159

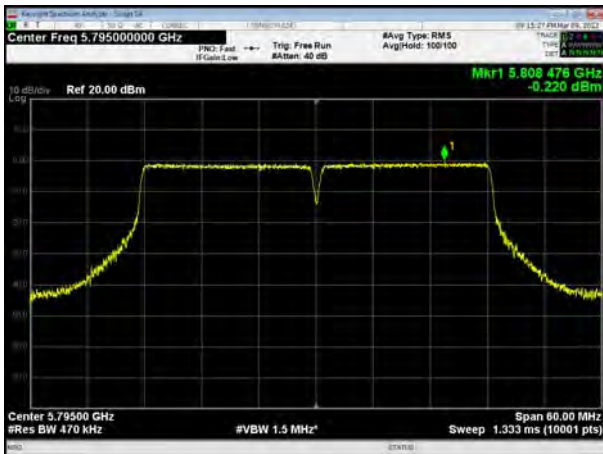


U-NII-3, 802.11ax HE40, Channel No.: 159






U-NII-3, 802.11ac VHT80, Channel No.: 155

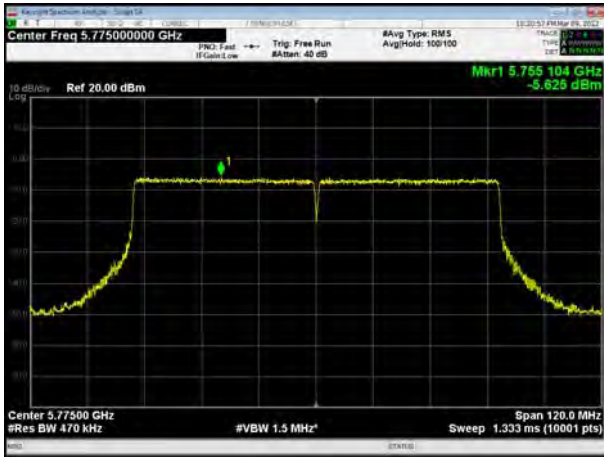


U-NII-3, 802.11ax HE80, Channel No.: 155

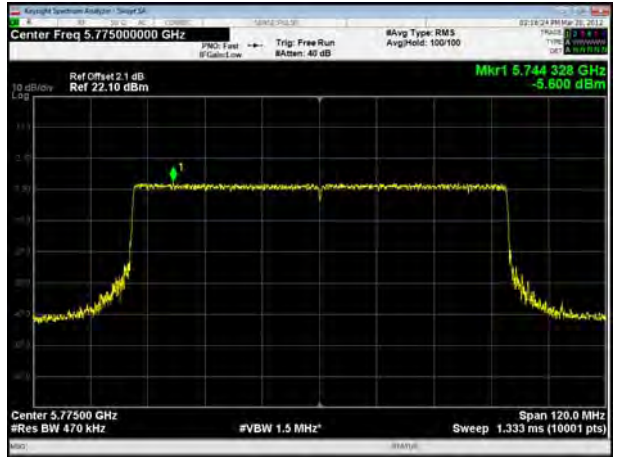




SISO Antenna 2


U-NII-1, 802.11a, Channel No.: 36

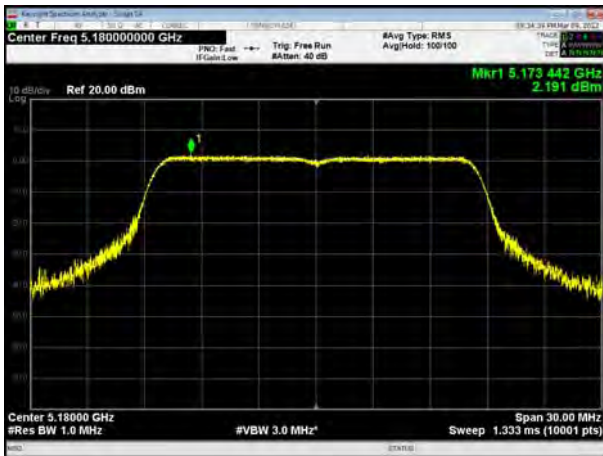

U-NII-1, 802.11n HT20, Channel No.: 36

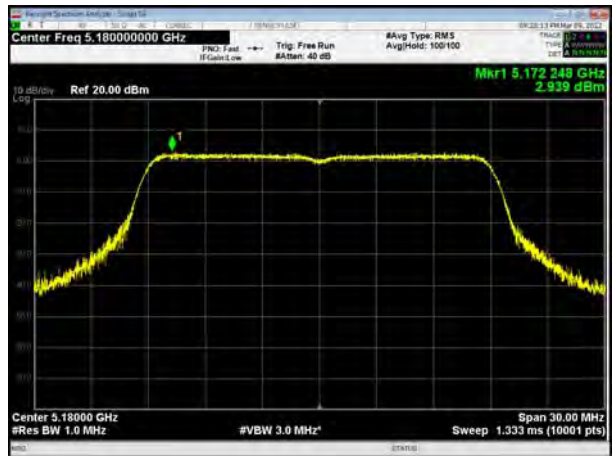


U-NII-1, 802.11a, Channel No.: 40

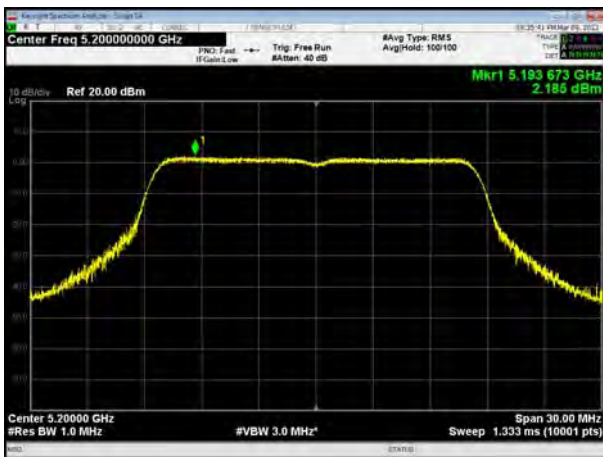


U-NII-1, 802.11n HT20, Channel No.: 40



U-NII-1, 802.11a, Channel No.: 48

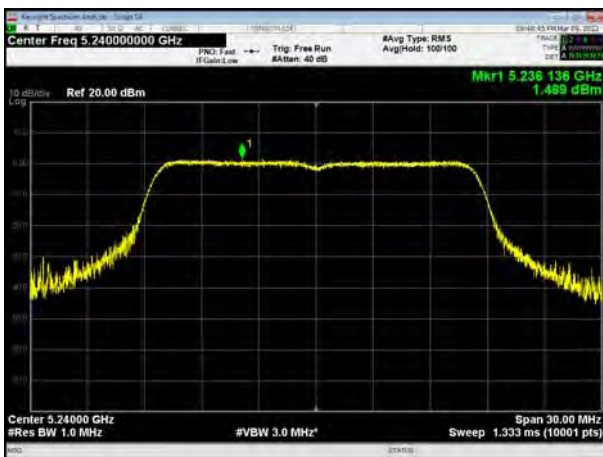


U-NII-1, 802.11n HT20, Channel No.: 48

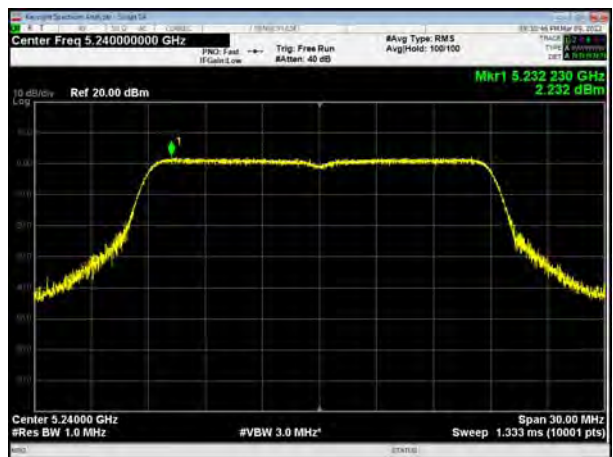





U-NII-1, 802.11n HT40, Channel No.: 38

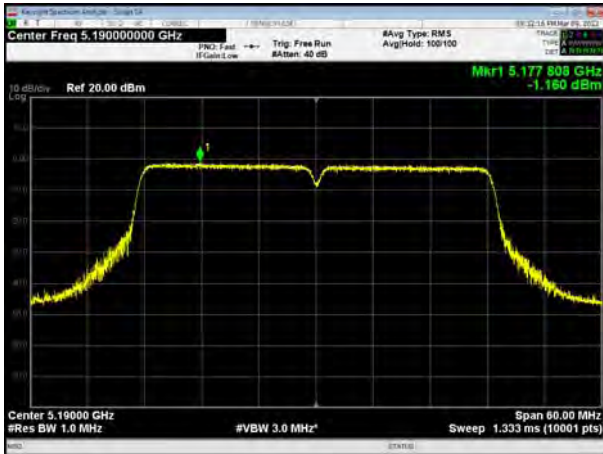


U-NII-1, 802.11n HT40, Channel No.: 46

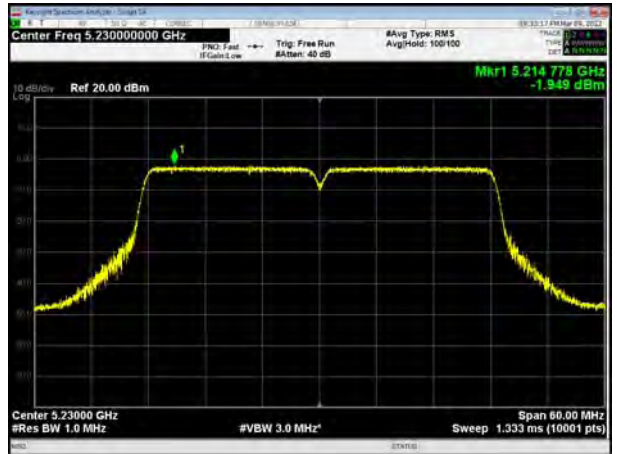


U-NII-1, 802.11ac VHT20, Channel No.: 36

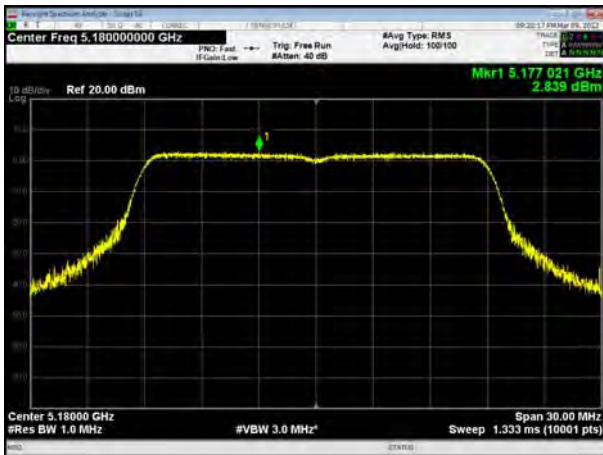


U-NII-1, 802.11ax HE20, Channel No.: 36

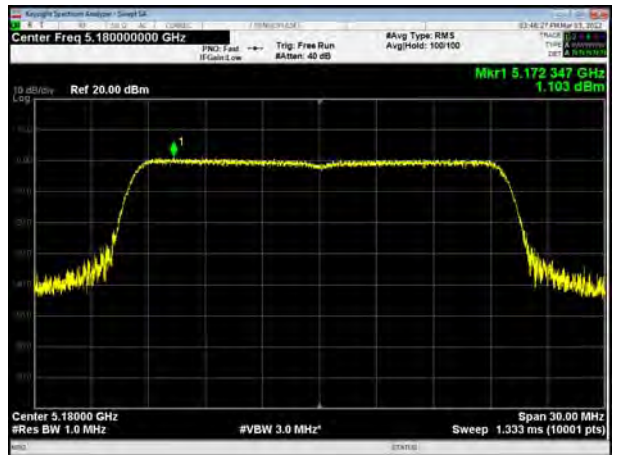


U-NII-1, 802.11ac VHT20, Channel No.: 40

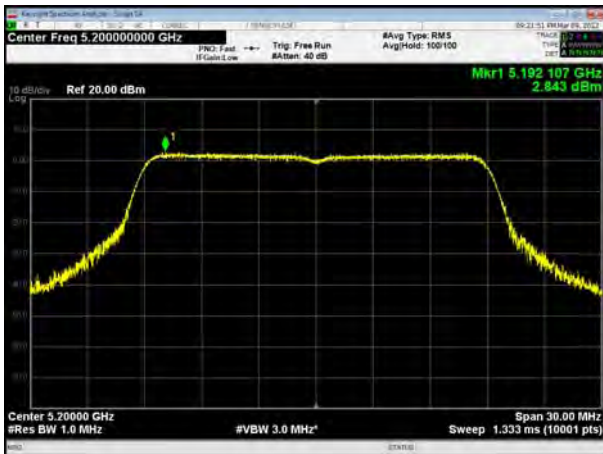


U-NII-1, 802.11ax HE20, Channel No.: 40

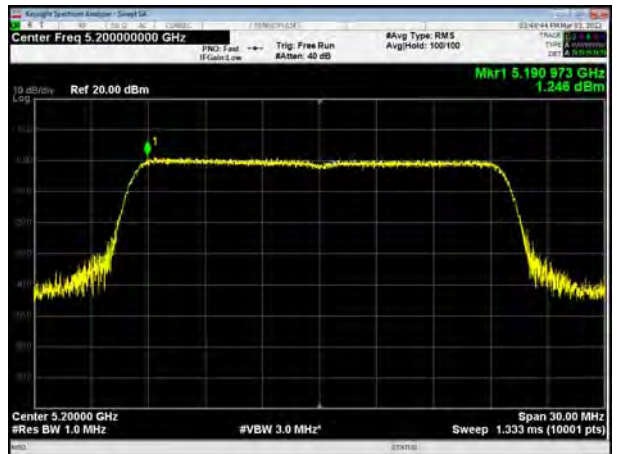


U-NII-1, 802.11ac VHT20, Channel No.: 48

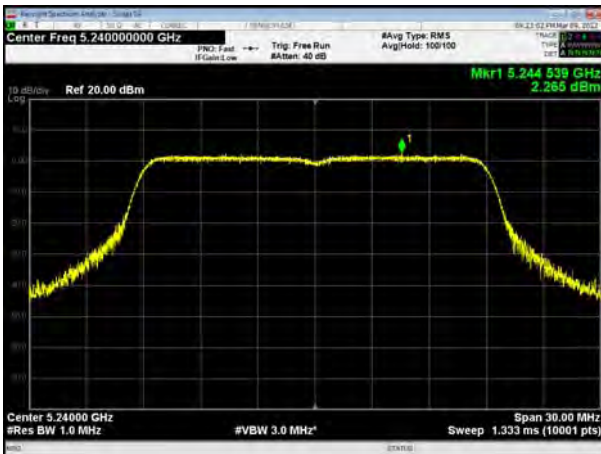


U-NII-1, 802.11ax HE20, Channel No.: 48

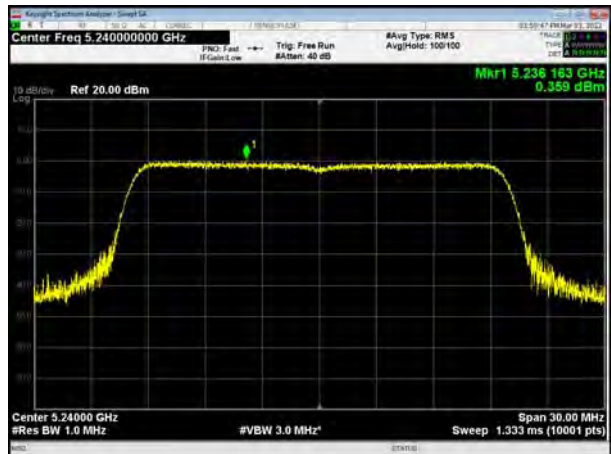


U-NII-1, 802.11ac VHT40, Channel No.: 38

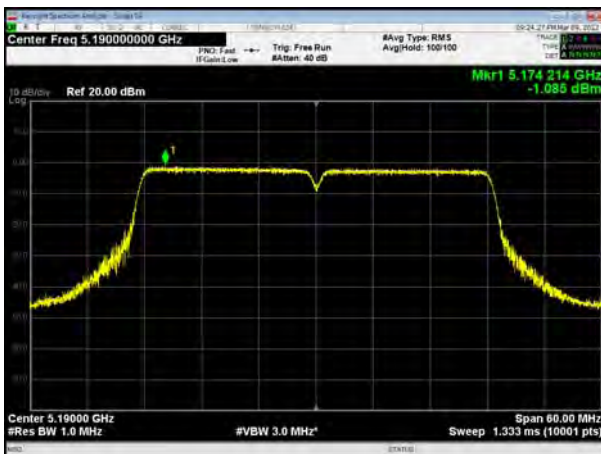


U-NII-1, 802.11ax HE40, Channel No.: 38

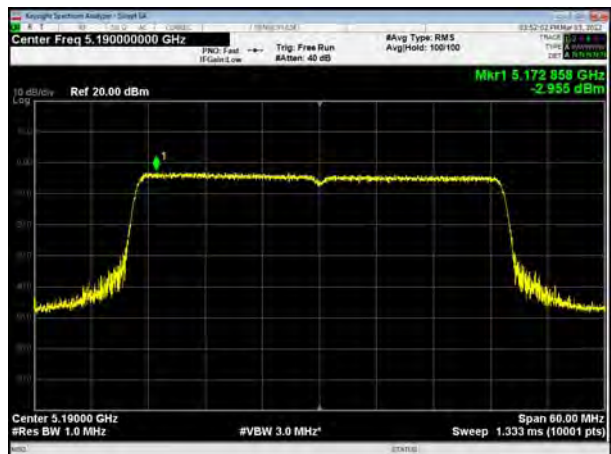

U-NII-1, 802.11ac VHT40, Channel No.: 46

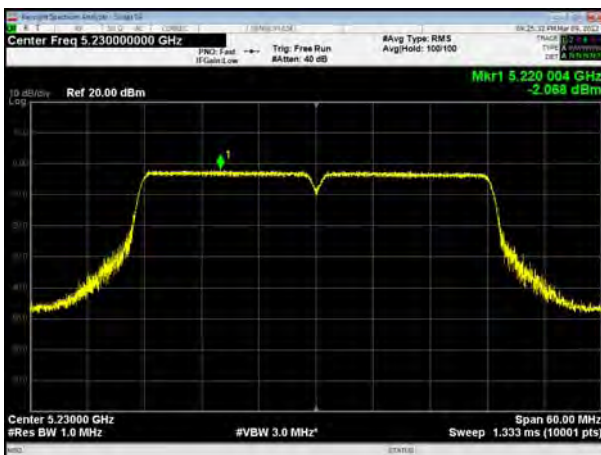

U-NII-1, 802.11ax HE40, Channel No.: 46

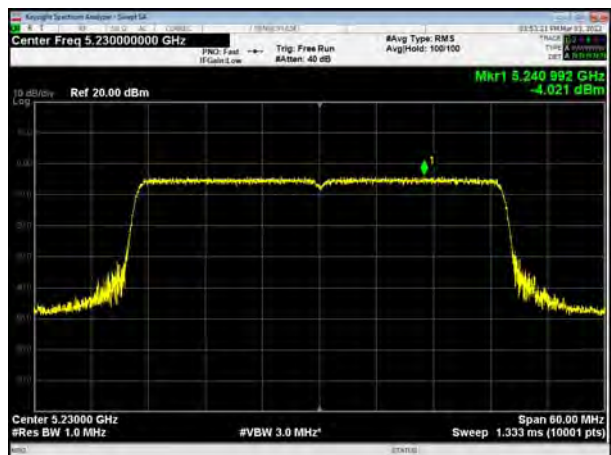







U-NII-1, 802.11ac VHT80, Channel No.: 42




U-NII-1, 802.11ax HE80, Channel No.: 42

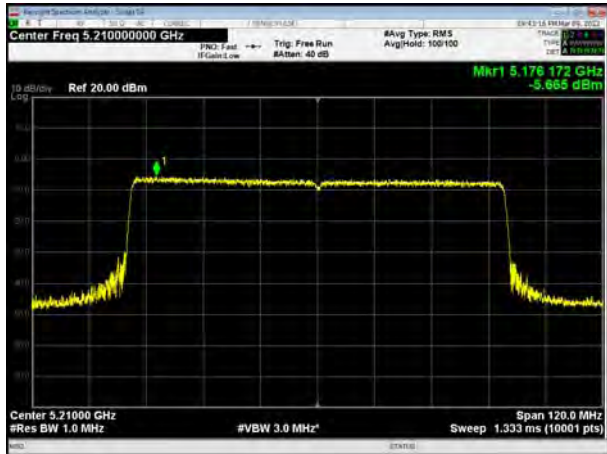

U-NII-1, 802.11ac VHT160, Channel No.: 50

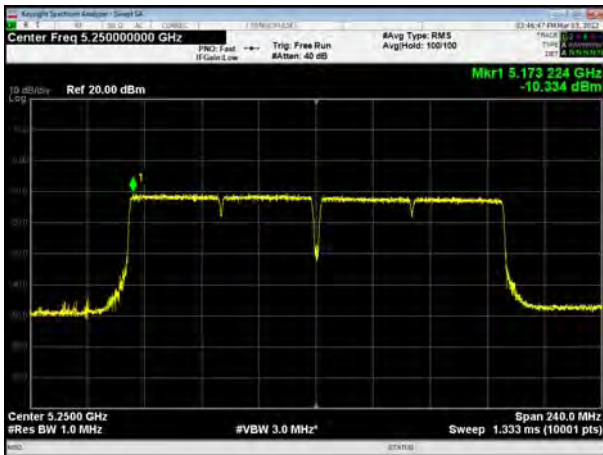

U-NII-1, 802.11ax HE160, Channel No.: 50

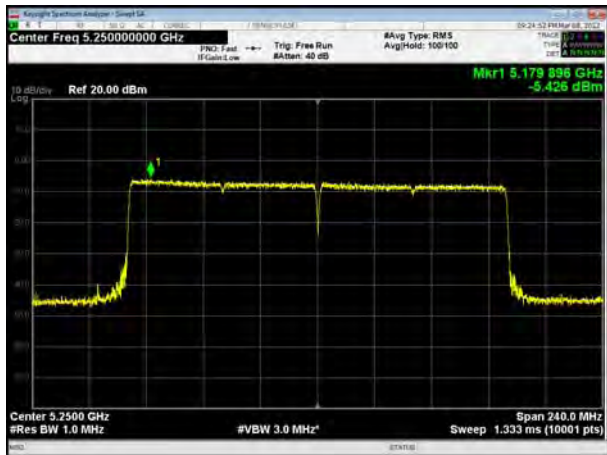




U-NII-3, 802.11a, Channel No.: 149




U-NII-3, 802.11n HT20, Channel No.: 149

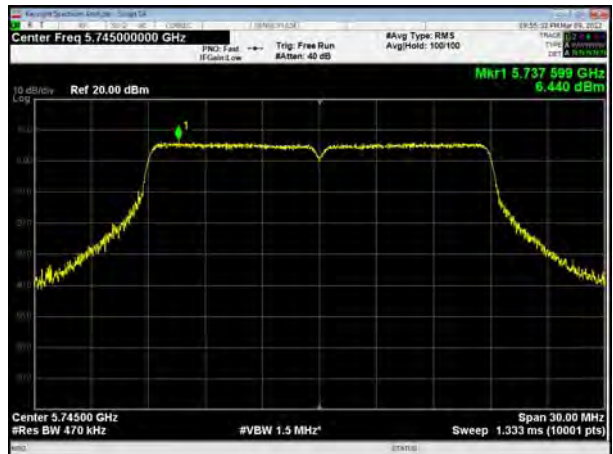

U-NII-3, 802.11a, Channel No.: 157



U-NII-3, 802.11n HT20, Channel No.: 157

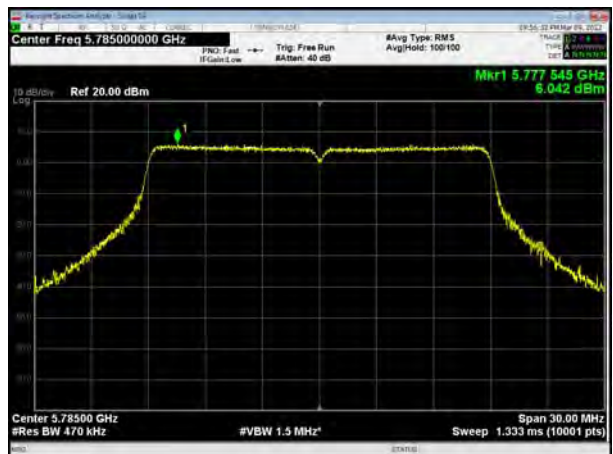


U-NII-3, 802.11a, Channel No.: 165




U-NII-3, 802.11n HT20, Channel No.: 165




U-NII-3, 802.11n HT40, Channel No.: 151

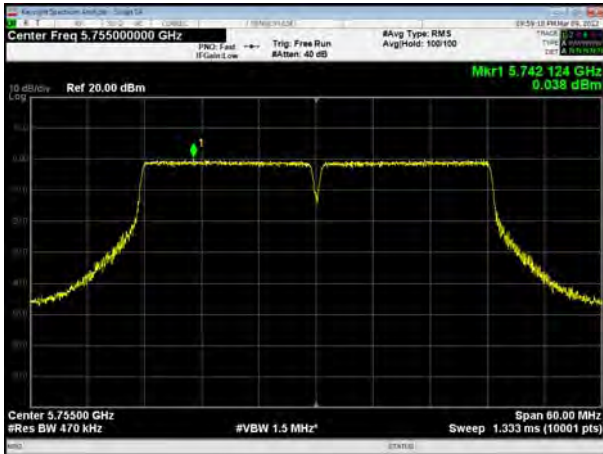


U-NII-3, 802.11n HT40, Channel No.: 159

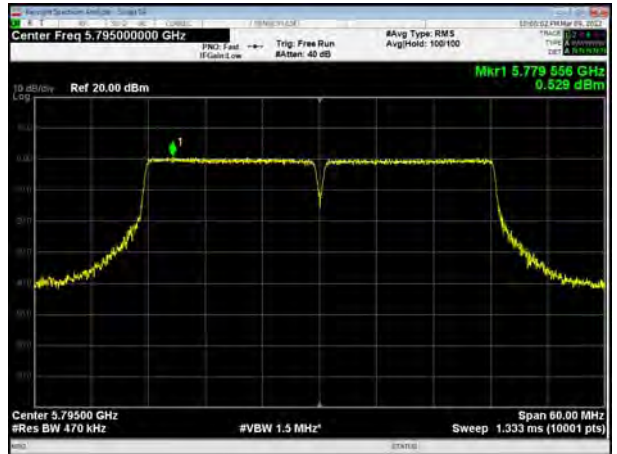


U-NII-3, 802.11ac VHT20, Channel No.: 149

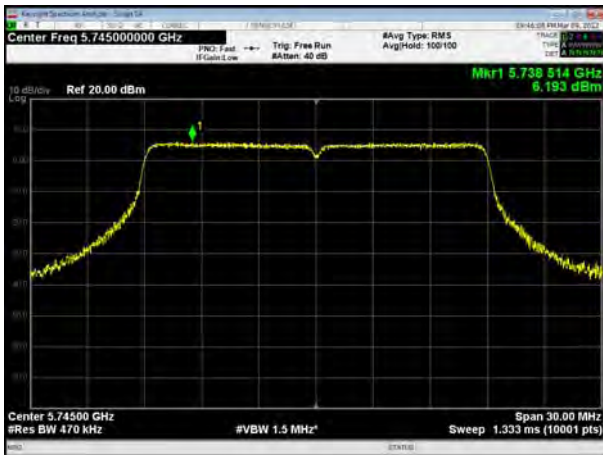


U-NII-3, 802.11ax HE20, Channel No.: 149

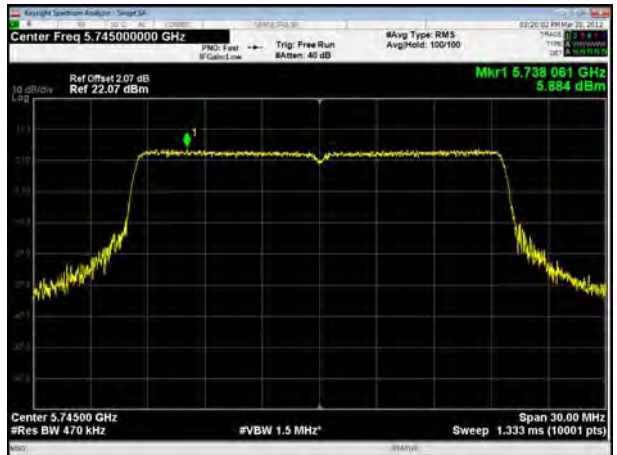

U-NII-3, 802.11ac VHT20, Channel No.: 157

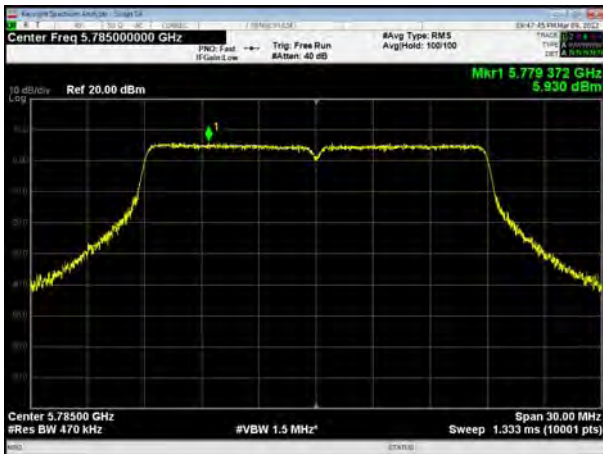

U-NII-3, 802.11ax HE20, Channel No.: 157

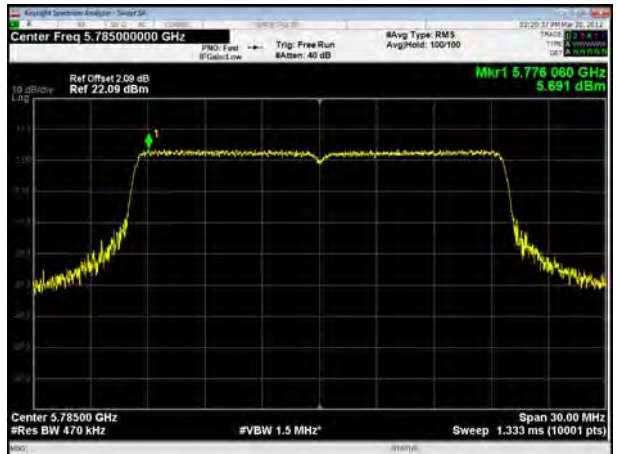





U-NII-3, 802.11ac VHT20, Channel No.: 165




U-NII-3, 802.11ax HE20, Channel No.: 165

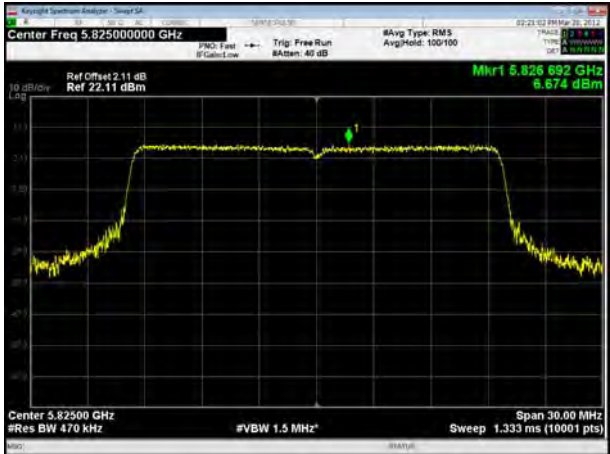


U-NII-3, 802.11ac VHT40, Channel No.: 151

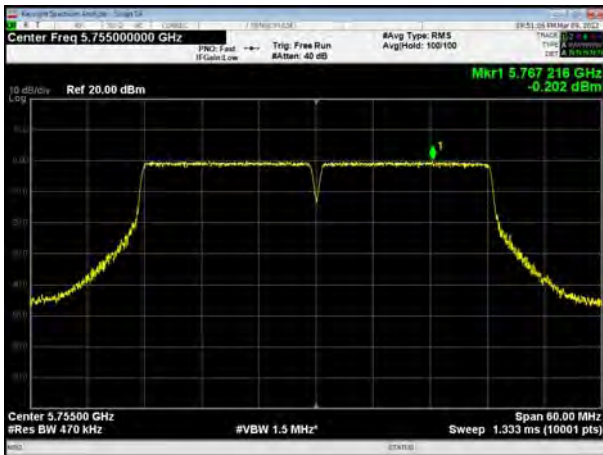


U-NII-3, 802.11ax HE40, Channel No.: 151

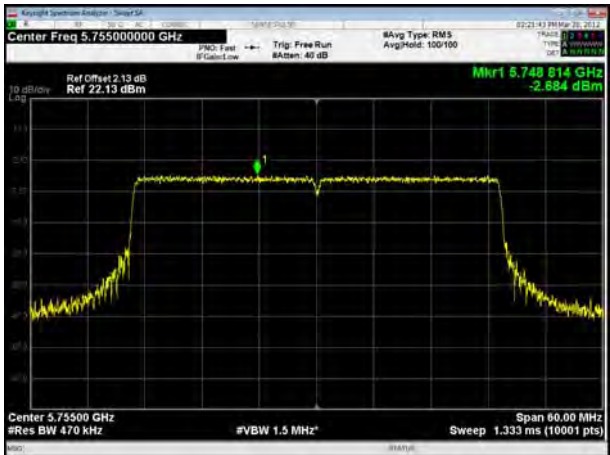


U-NII-3, 802.11ac VHT40, Channel No.: 159

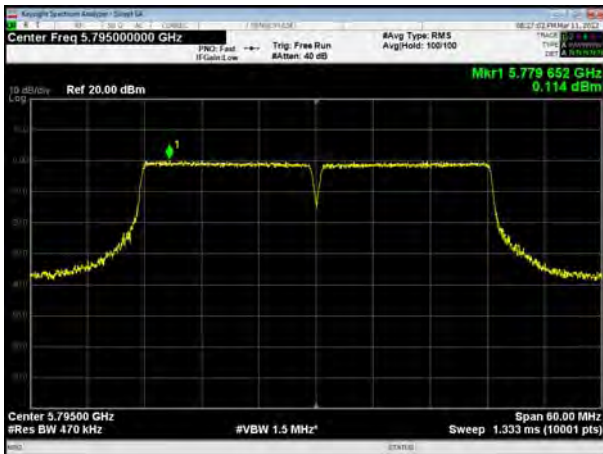

U-NII-3, 802.11ax HE40, Channel No.: 159

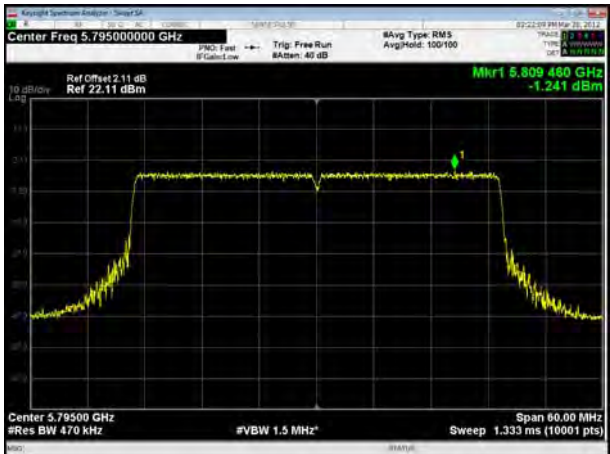


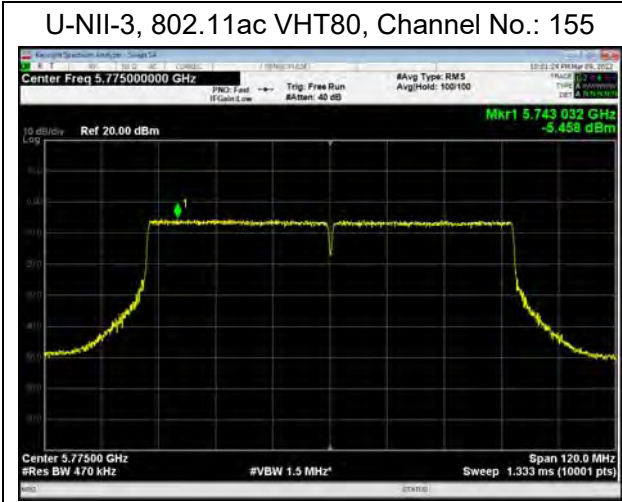




CDD Antenna 1


U-NII-1, 802.11a, Channel No.: 36

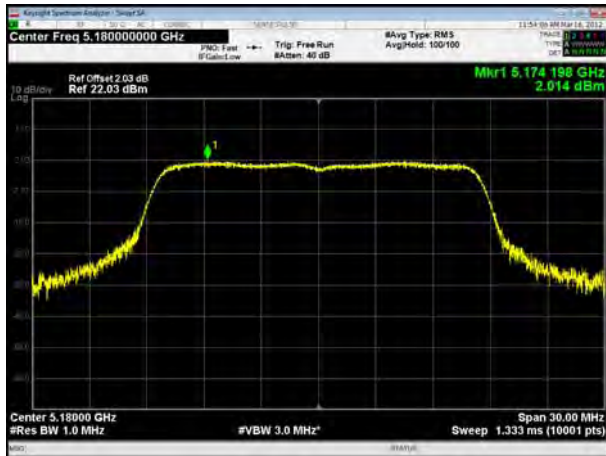


U-NII-1, 802.11n HT20, Channel No.: 36

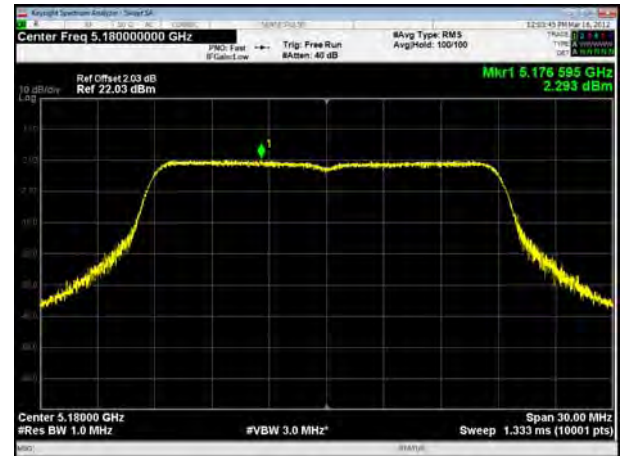

U-NII-1, 802.11a, Channel No.: 40

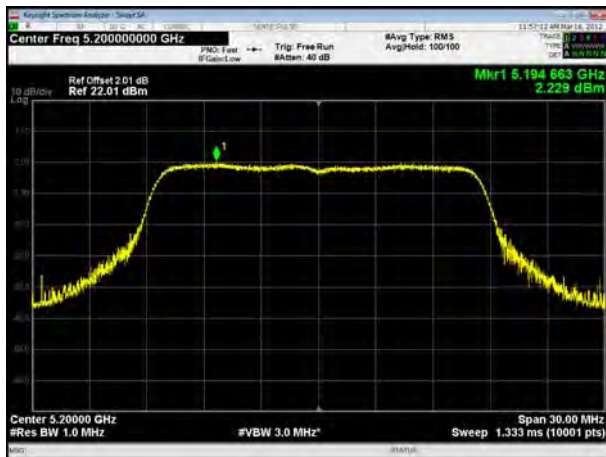


U-NII-1, 802.11n HT20, Channel No.: 40

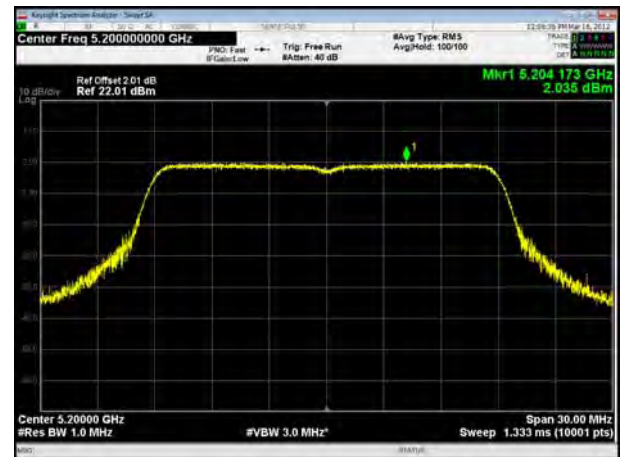


U-NII-1, 802.11a, Channel No.: 48




U-NII-1, 802.11n HT20, Channel No.: 48

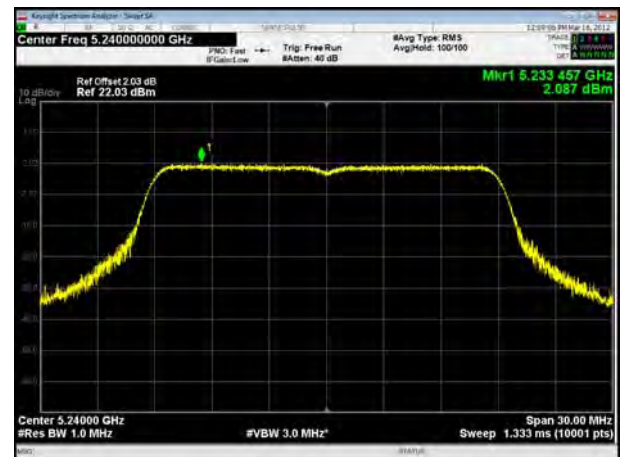


U-NII-1, 802.11n HT40, Channel No.: 38

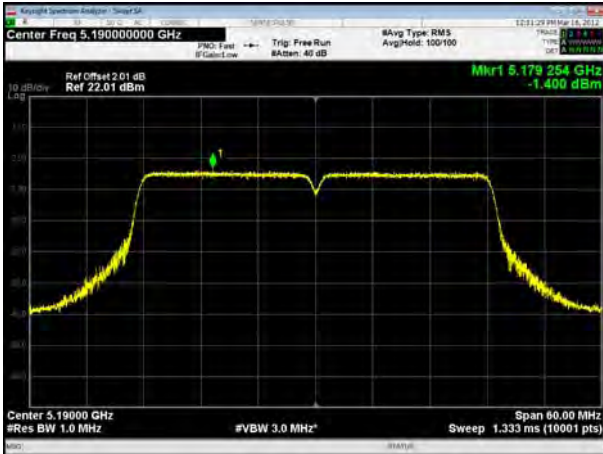


U-NII-1, 802.11n HT40, Channel No.: 46

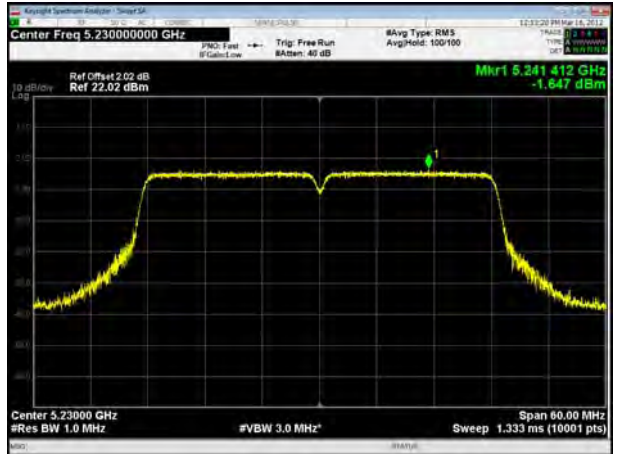


U-NII-1, 802.11ac VHT20, Channel No.: 36

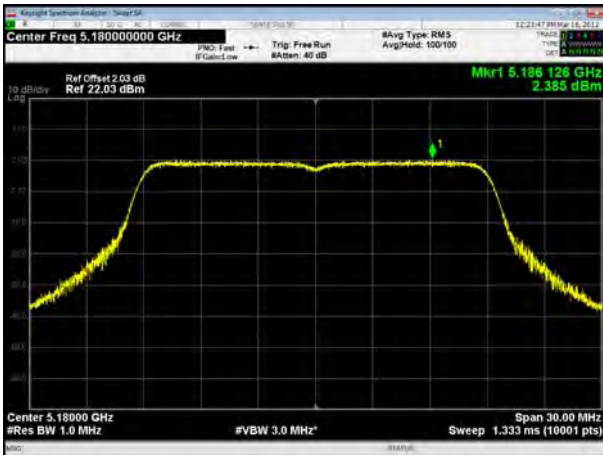


U-NII-1, 802.11ax HE20, Channel No.: 36

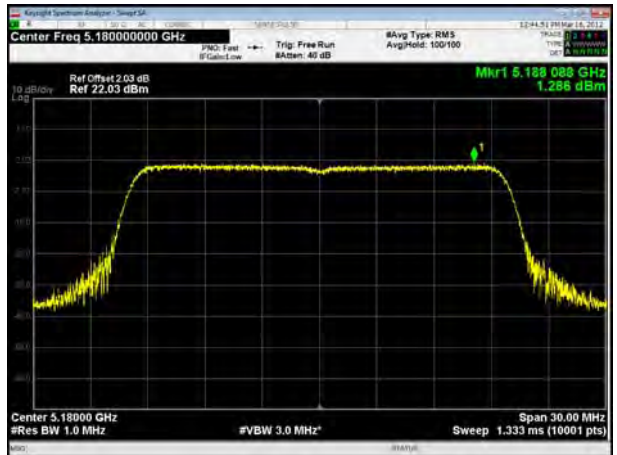


U-NII-1, 802.11ac VHT20, Channel No.: 40

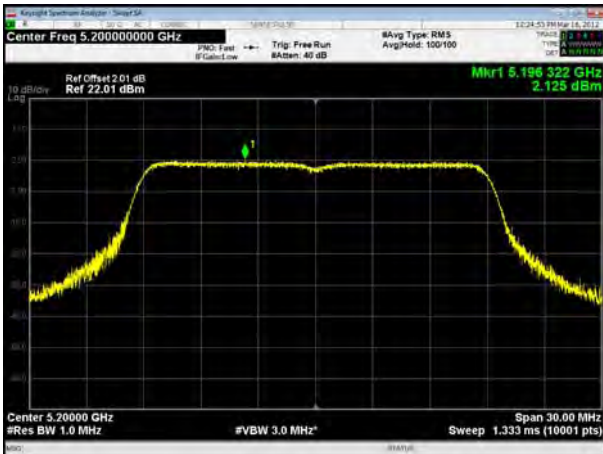


U-NII-1, 802.11ax HE20, Channel No.: 40

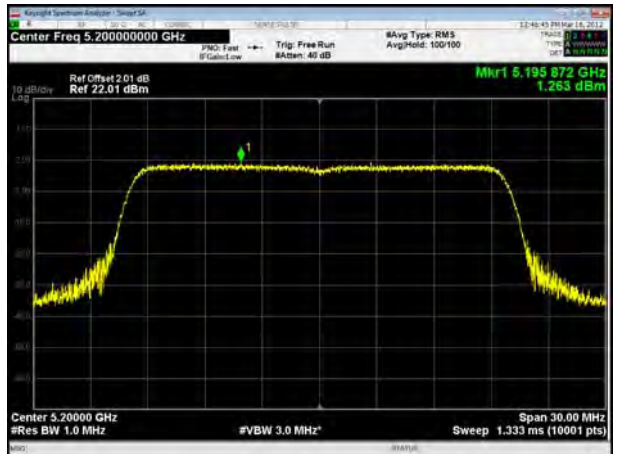

U-NII-1, 802.11ac VHT20, Channel No.: 48

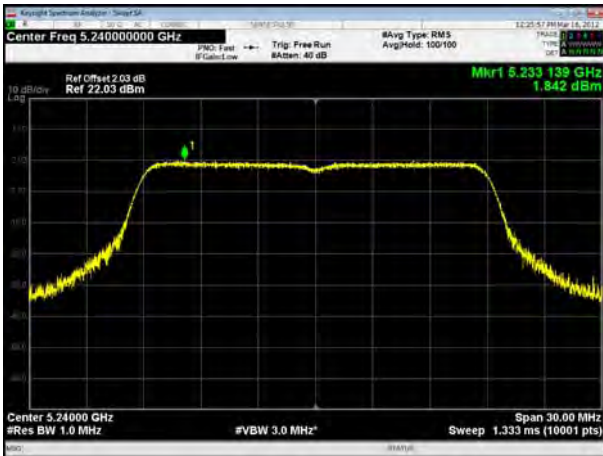


U-NII-1, 802.11ax HE20, Channel No.: 48

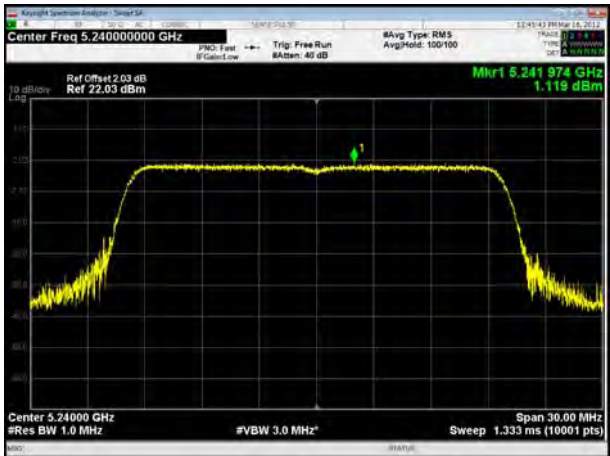


U-NII-1, 802.11ac VHT40, Channel No.: 38




U-NII-1, 802.11ax HE40, Channel No.: 38

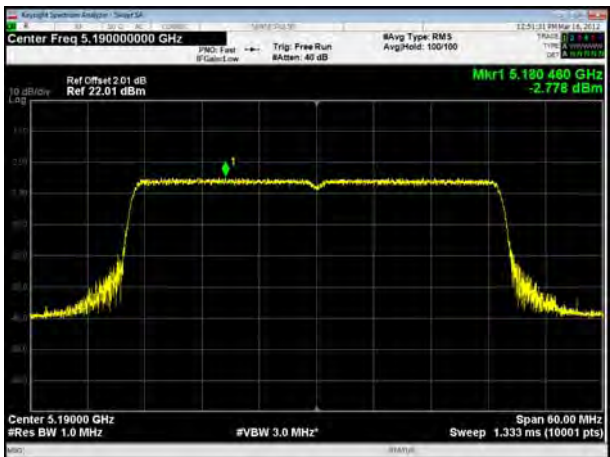

U-NII-1, 802.11ac VHT40, Channel No.: 46

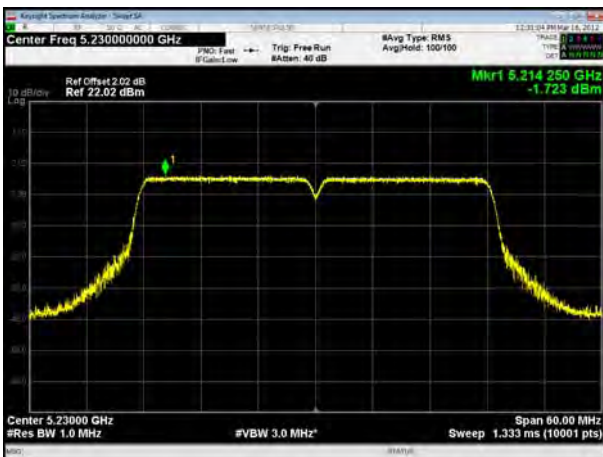


U-NII-1, 802.11ax HE40, Channel No.: 46

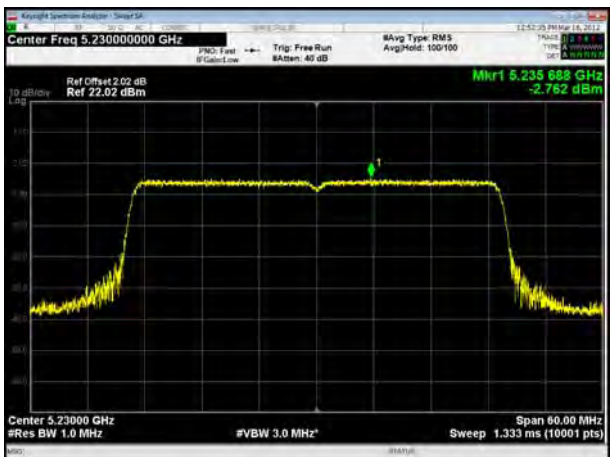







U-NII-1, 802.11ac VHT80, Channel No.: 42

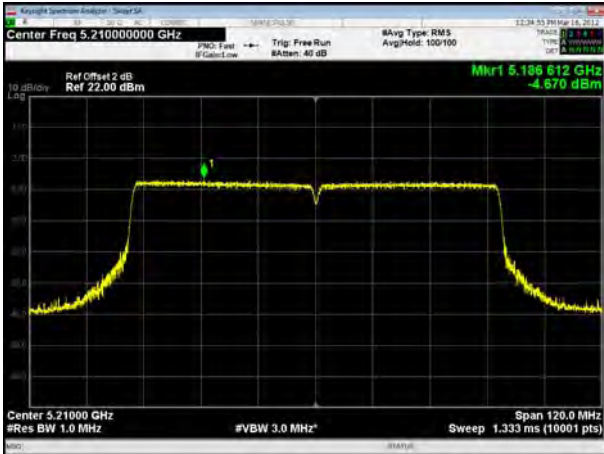


U-NII-1, 802.11ax HE80, Channel No.: 42

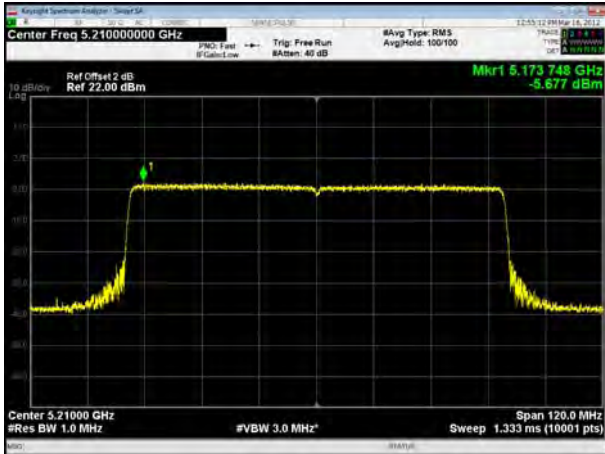

U-NII-1, 802.11ac VHT160, Channel No.: 50

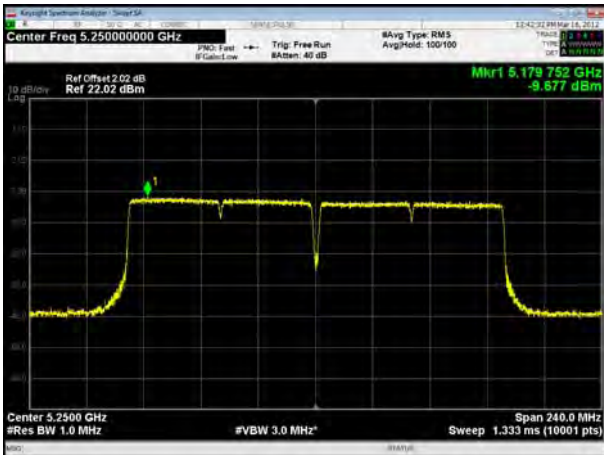


U-NII-1, 802.11ax HE160, Channel No.: 50

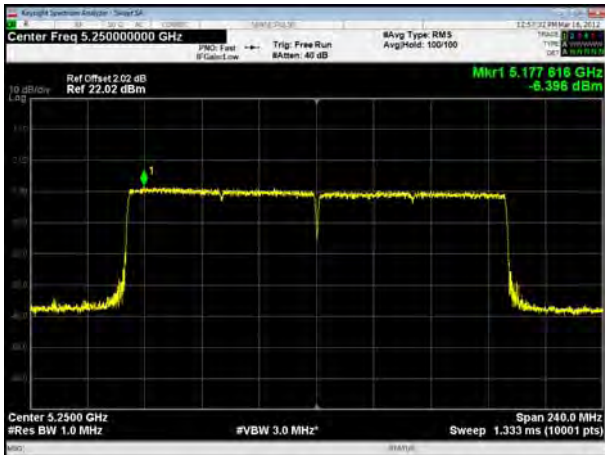





U-NII-3, 802.11a, Channel No.: 149

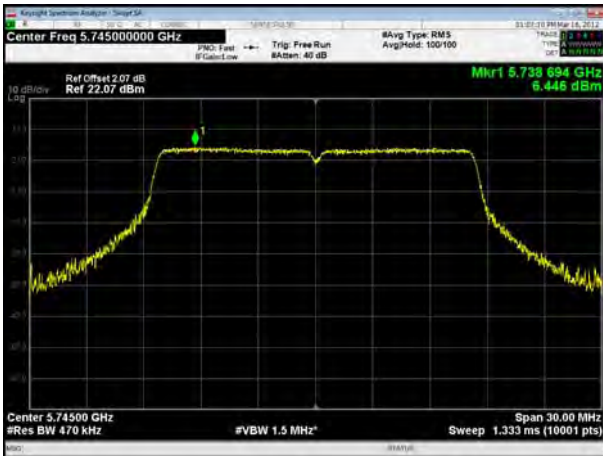


U-NII-3, 802.11n HT20, Channel No.: 149

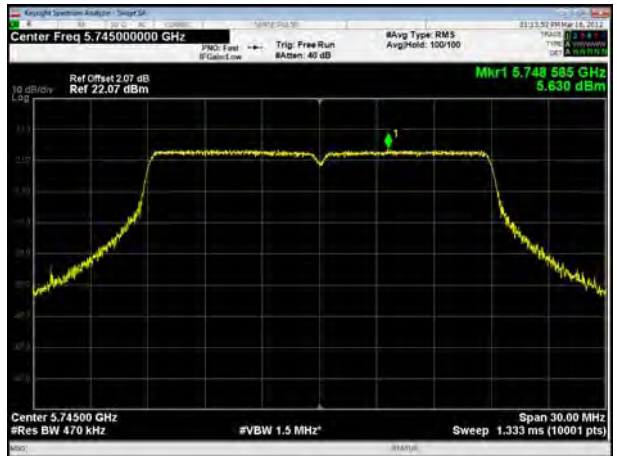


U-NII-3, 802.11a, Channel No.: 157

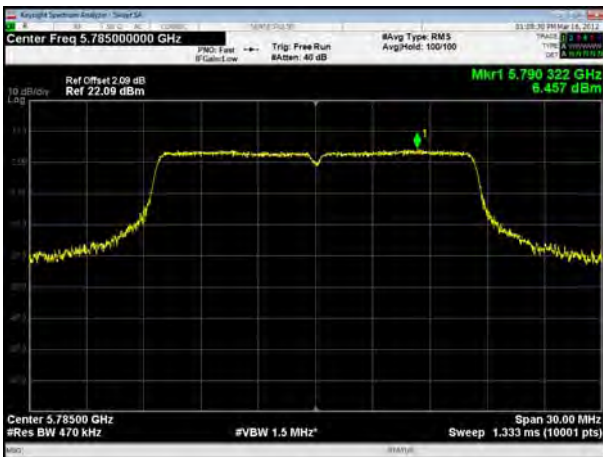


U-NII-3, 802.11n HT20, Channel No.: 157

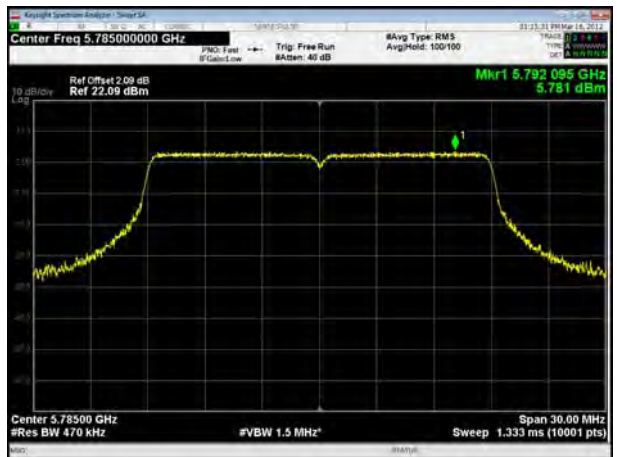


U-NII-3, 802.11a, Channel No.: 165

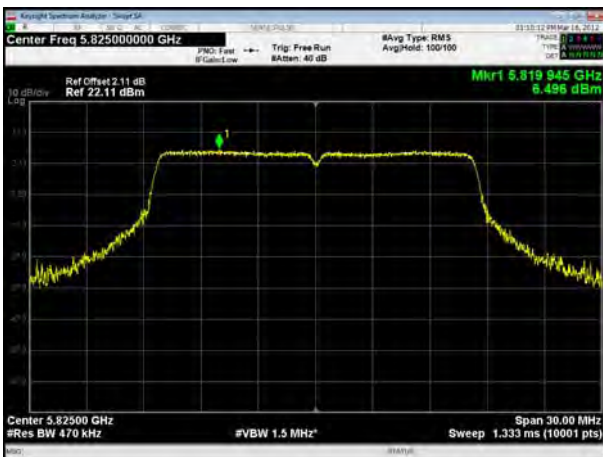


U-NII-3, 802.11n HT20, Channel No.: 165

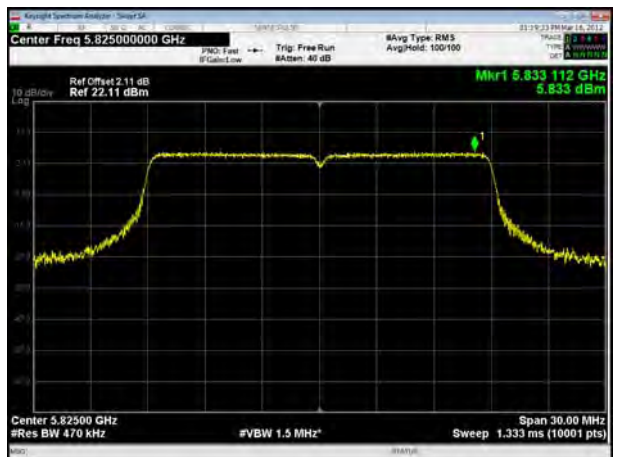

U-NII-3, 802.11n HT40, Channel No.: 151

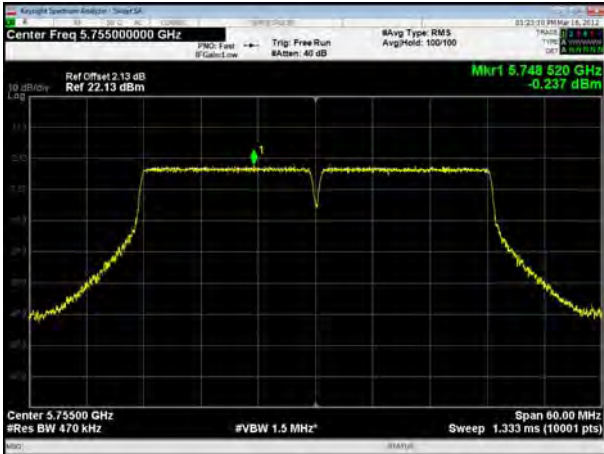


U-NII-3, 802.11n HT40, Channel No.: 159

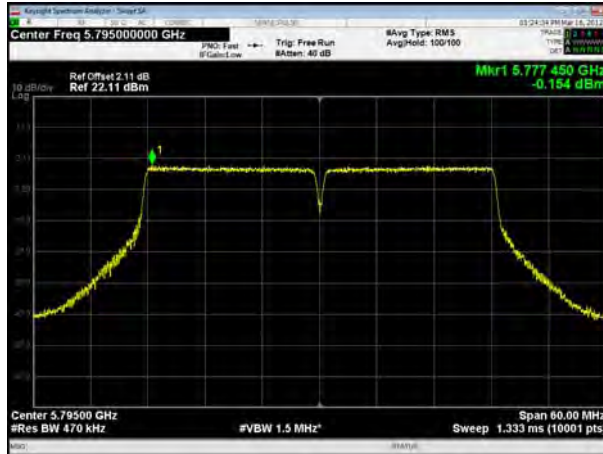


U-NII-3, 802.11ac VHT20, Channel No.: 149




U-NII-3, 802.11ax HE20, Channel No.: 149

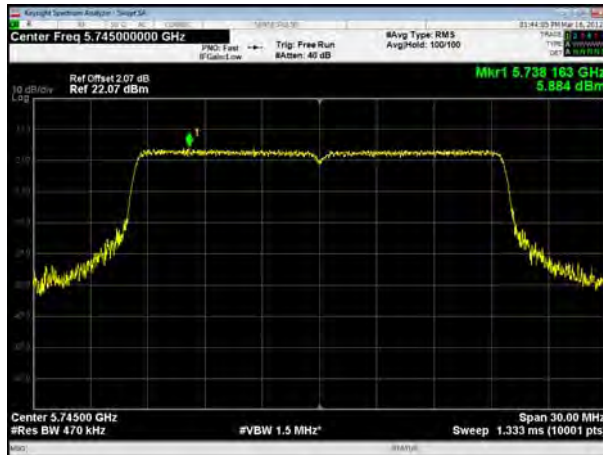

U-NII-3, 802.11ac VHT20, Channel No.: 157

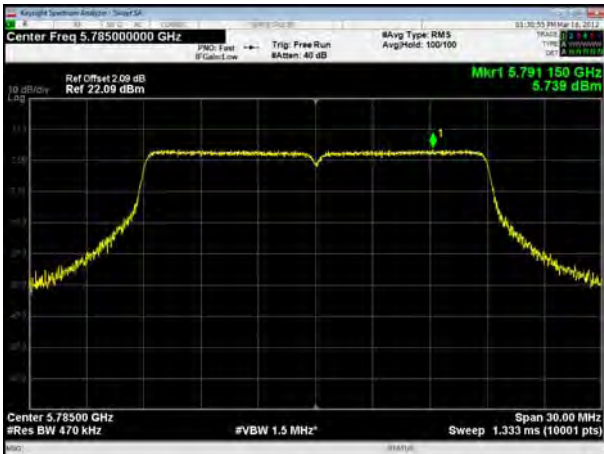

U-NII-3, 802.11ax HE20, Channel No.: 157

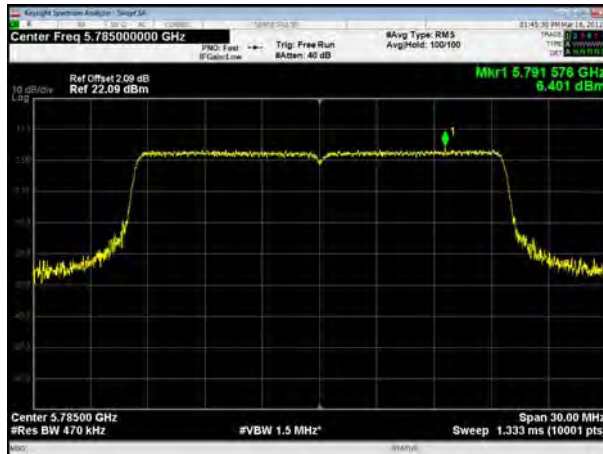





U-NII-3, 802.11ac VHT20, Channel No.: 165




U-NII-3, 802.11ax HE20, Channel No.: 165

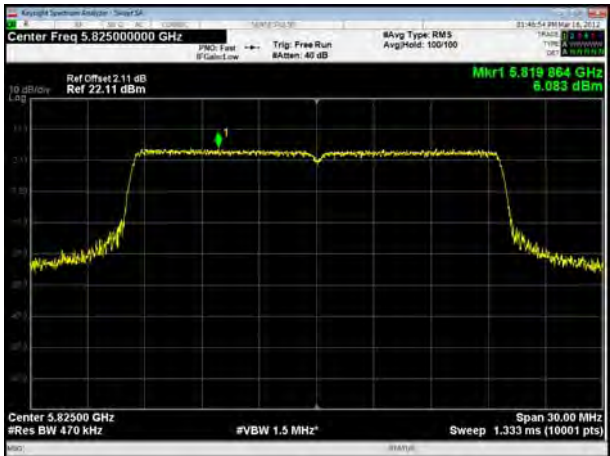


U-NII-3, 802.11ac VHT40, Channel No.: 151

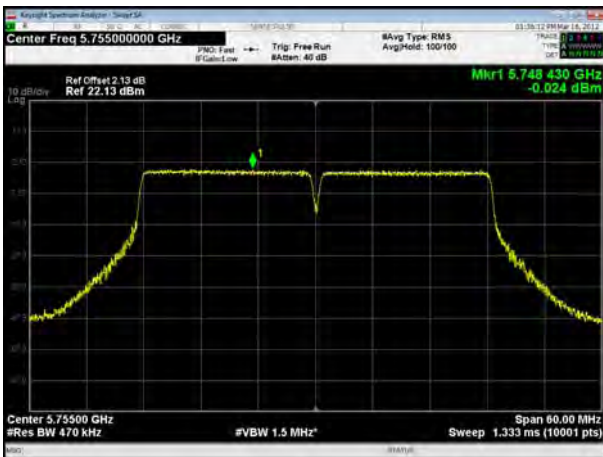

U-NII-3, 802.11ax HE40, Channel No.: 151

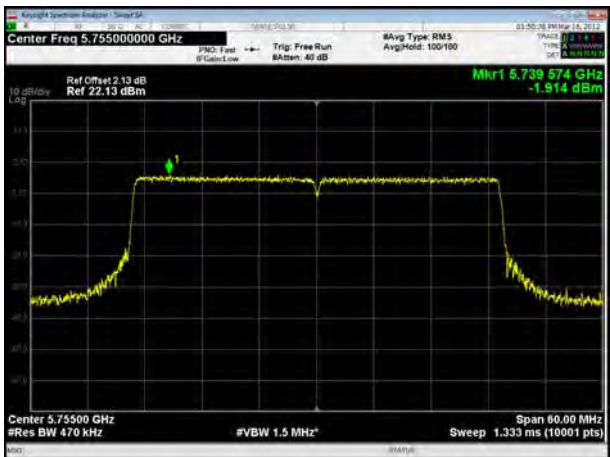

U-NII-3, 802.11ac VHT40, Channel No.: 159

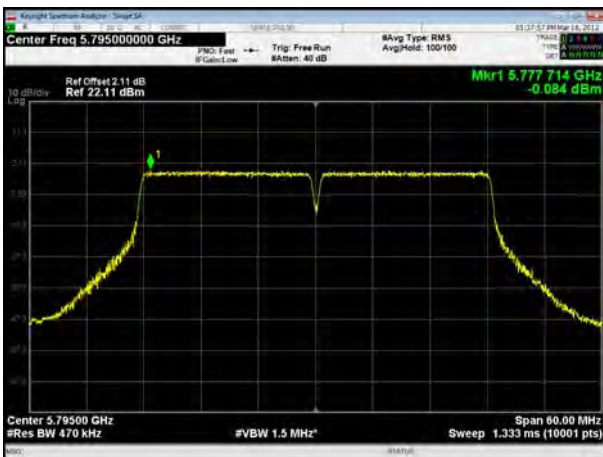

U-NII-3, 802.11ax HE40, Channel No.: 159









CDD Antenna 2


U-NII-1, 802.11a, Channel No.: 36

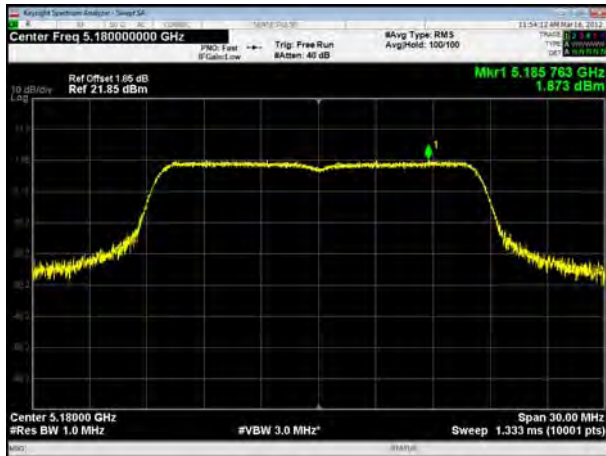


U-NII-1, 802.11n HT20, Channel No.: 36

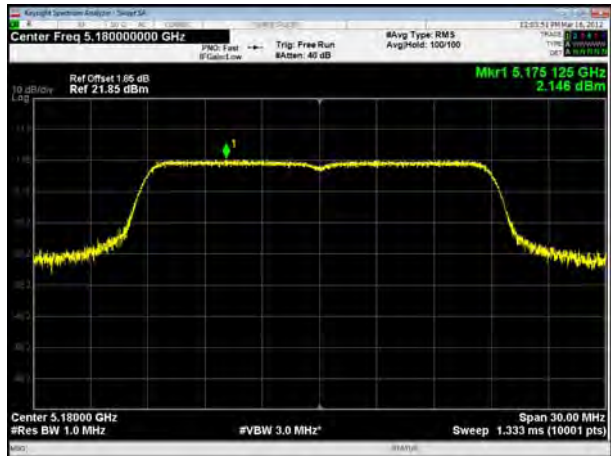

U-NII-1, 802.11a, Channel No.: 40

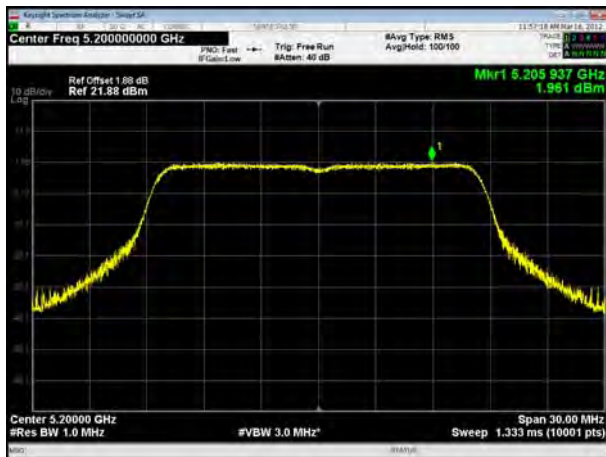


U-NII-1, 802.11n HT20, Channel No.: 40

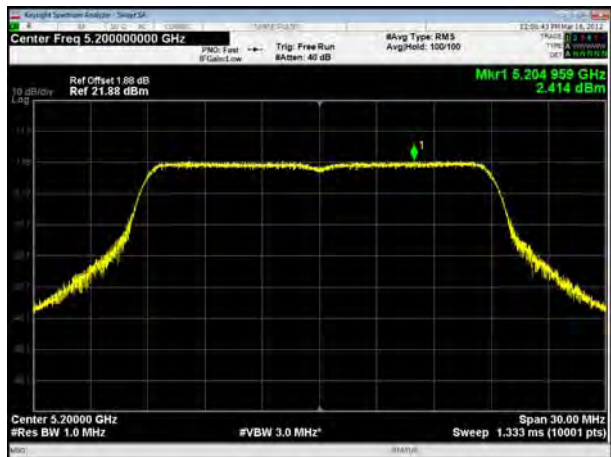

U-NII-1, 802.11a, Channel No.: 48




U-NII-1, 802.11n HT20, Channel No.: 48

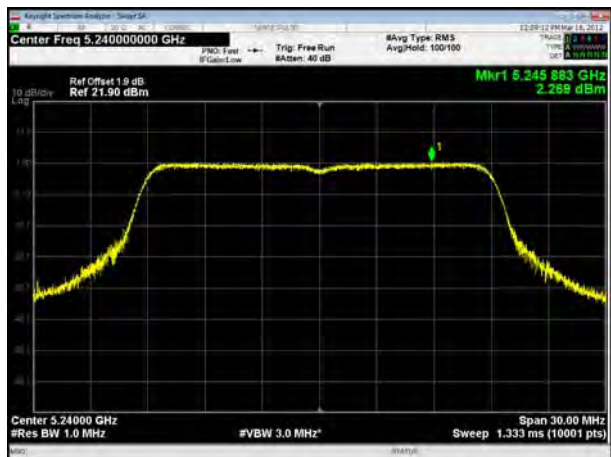





U-NII-1, 802.11n HT40, Channel No.: 38

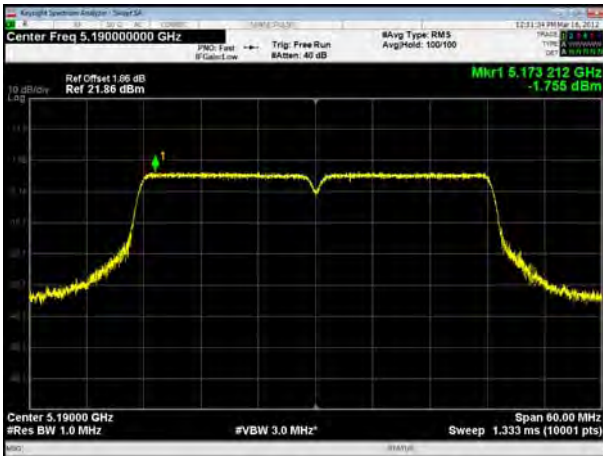


U-NII-1, 802.11n HT40, Channel No.: 46

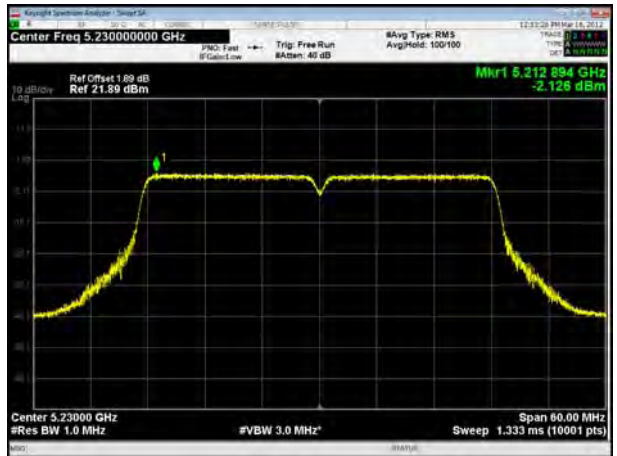


U-NII-1, 802.11ac VHT20, Channel No.: 36

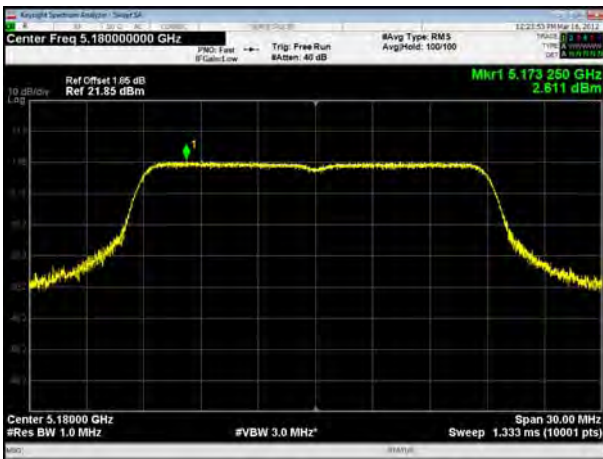


U-NII-1, 802.11ax HE20, Channel No.: 36

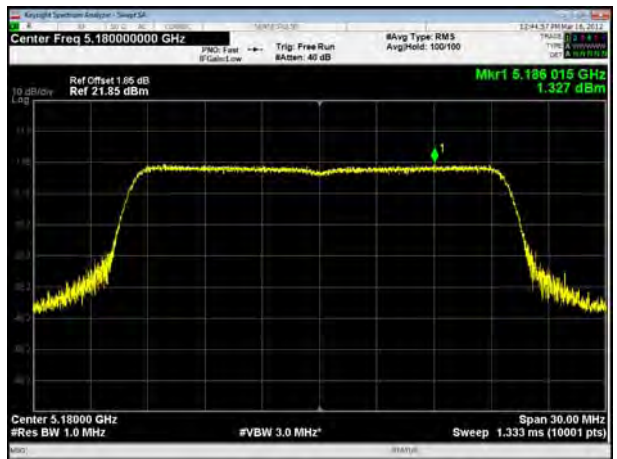


U-NII-1, 802.11ac VHT20, Channel No.: 40

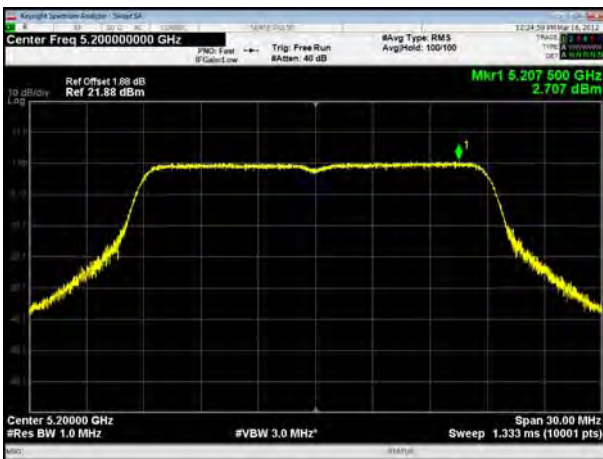


U-NII-1, 802.11ax HE20, Channel No.: 40

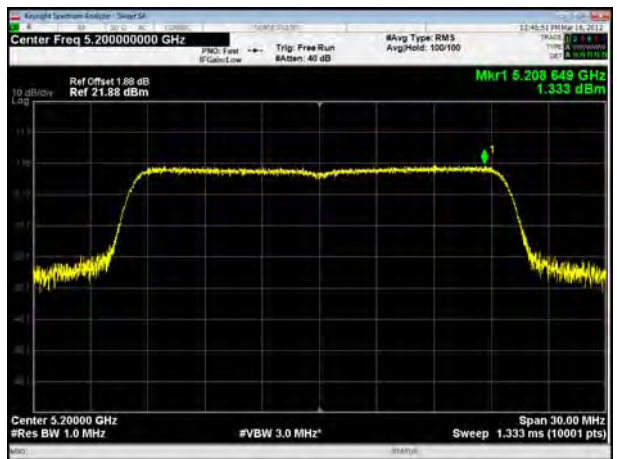


U-NII-1, 802.11ac VHT20, Channel No.: 48

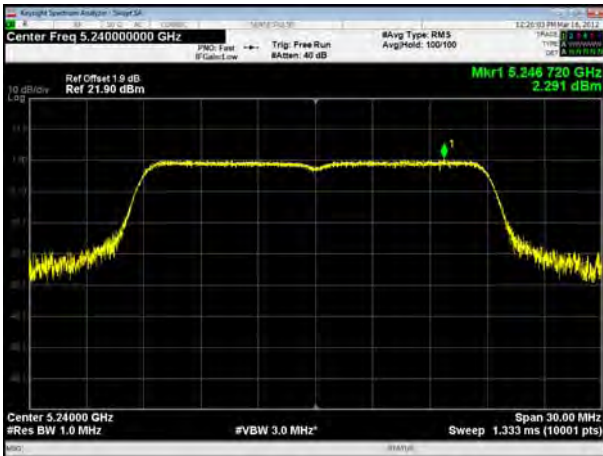


U-NII-1, 802.11ax HE20, Channel No.: 48

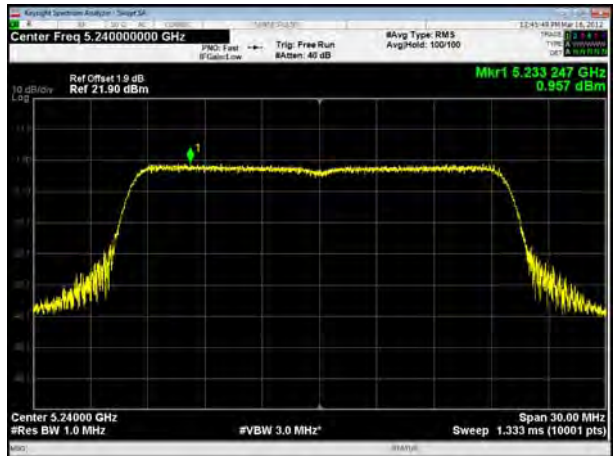


U-NII-1, 802.11ac VHT40, Channel No.: 38

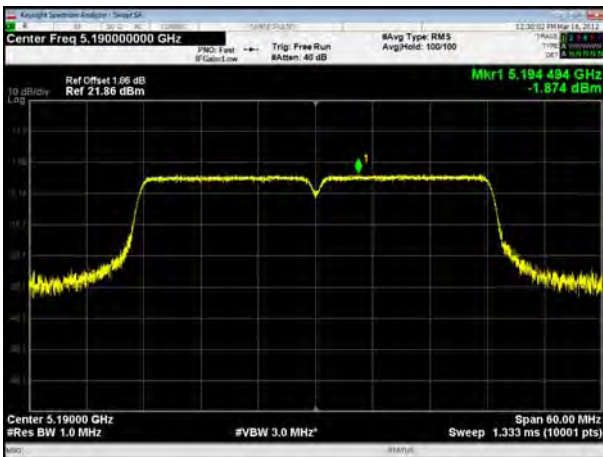


U-NII-1, 802.11ax HE40, Channel No.: 38

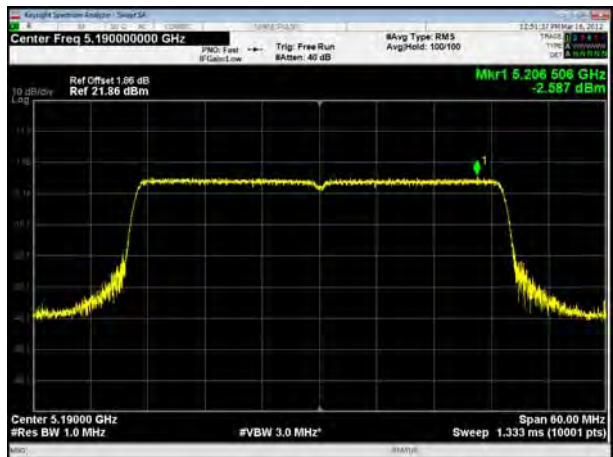

U-NII-1, 802.11ac VHT40, Channel No.: 46

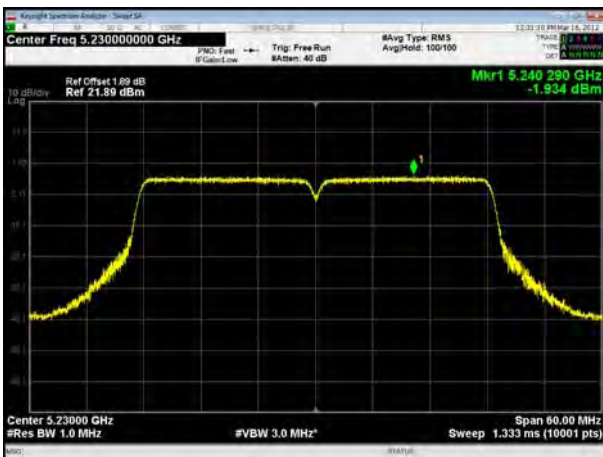


U-NII-1, 802.11ax HE40, Channel No.: 46

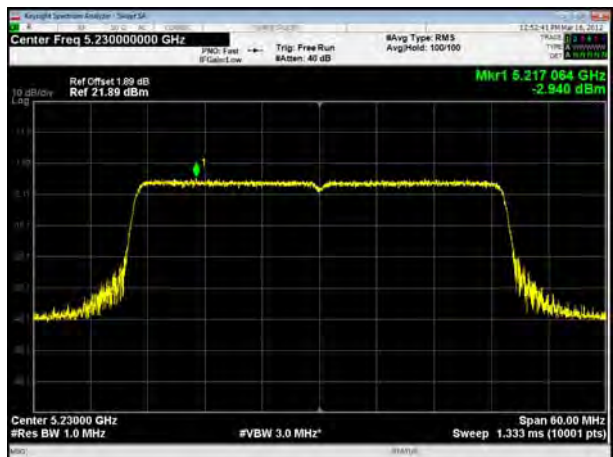







U-NII-1, 802.11ac VHT80, Channel No.: 42

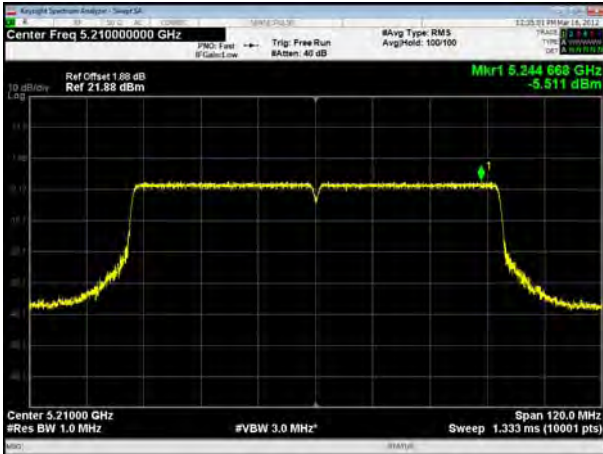


U-NII-1, 802.11ax HE80, Channel No.: 42

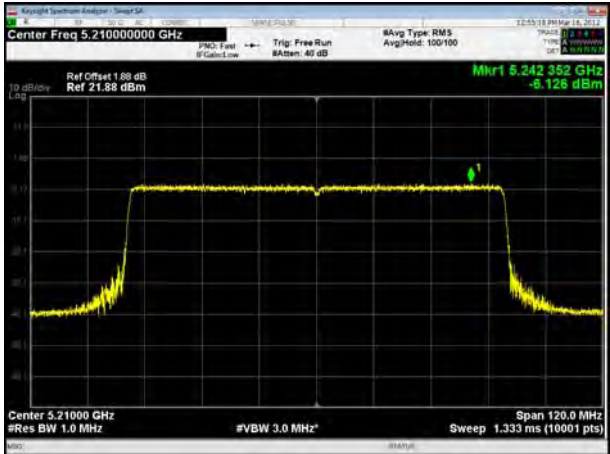

U-NII-1, 802.11ac VHT160, Channel No.: 50

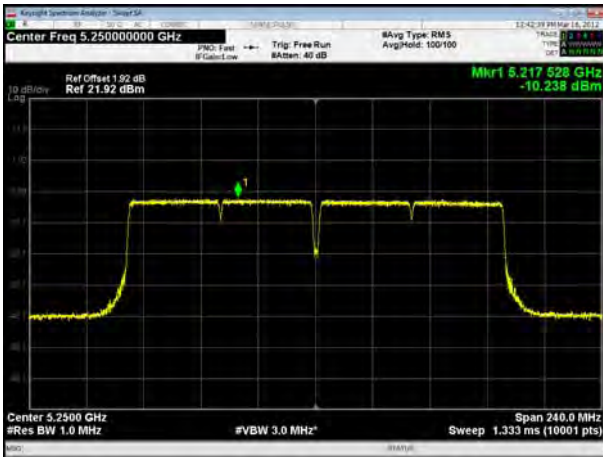


U-NII-1, 802.11ax HE160, Channel No.: 50

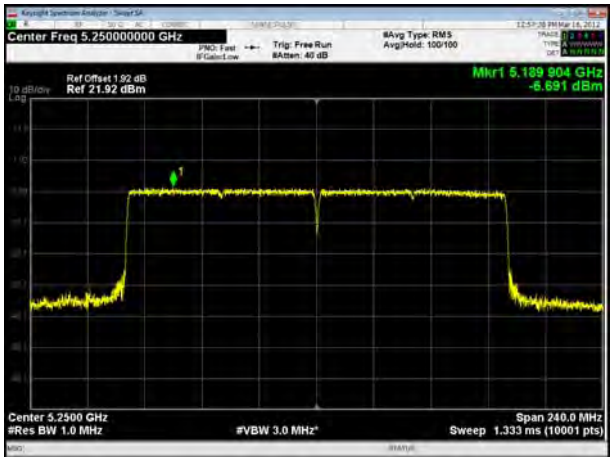





U-NII-3, 802.11a, Channel No.: 149

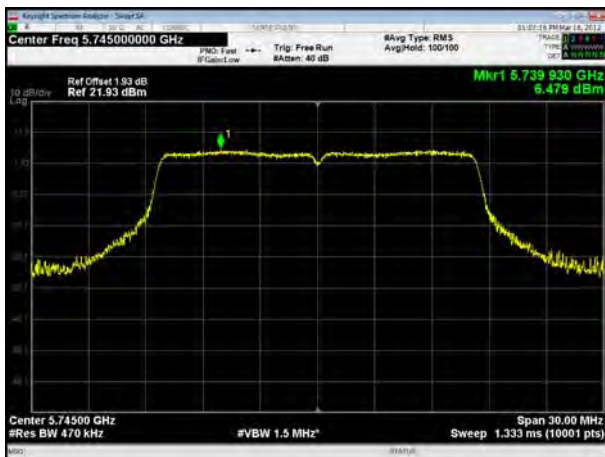


U-NII-3, 802.11n HT20, Channel No.: 149

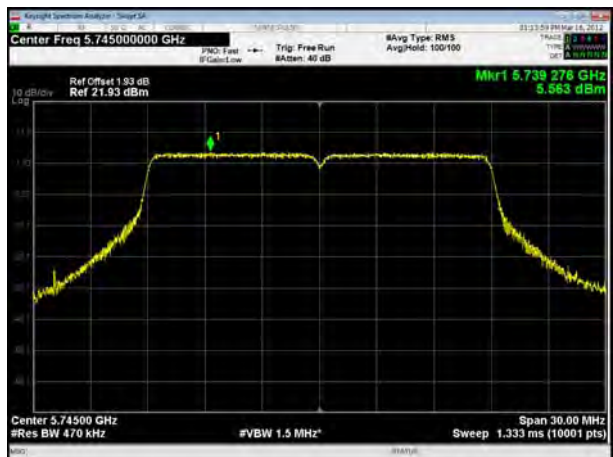


U-NII-3, 802.11a, Channel No.: 157

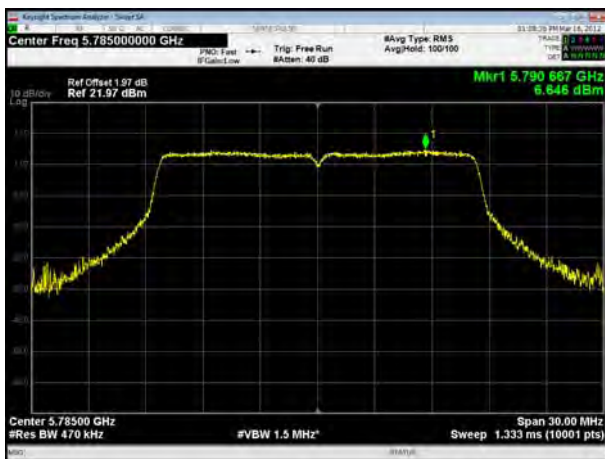


U-NII-3, 802.11n HT20, Channel No.: 157

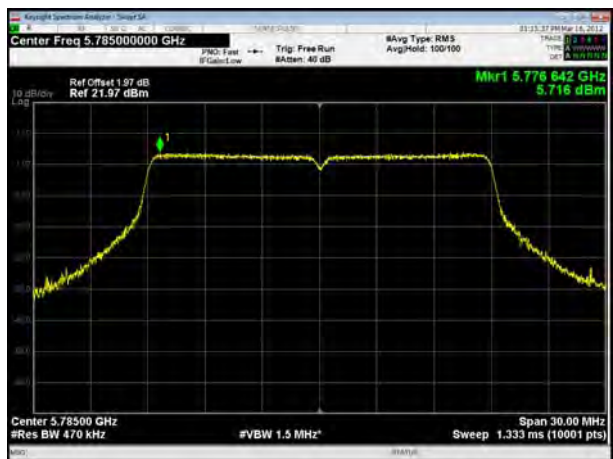

U-NII-3, 802.11a, Channel No.: 165

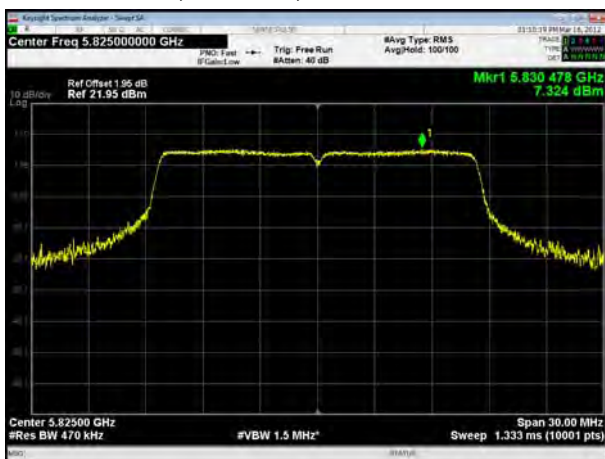


U-NII-3, 802.11n HT20, Channel No.: 165

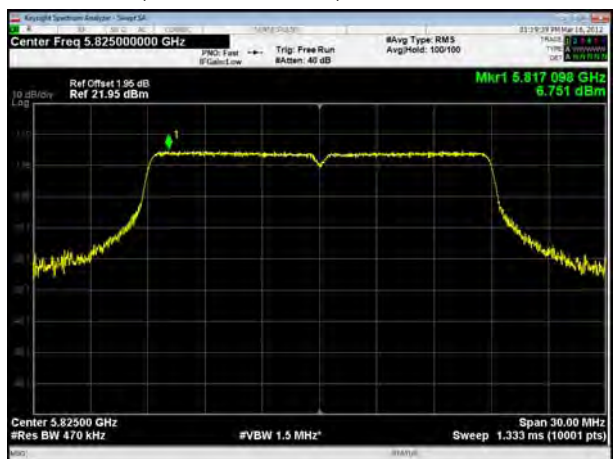





U-NII-3, 802.11n HT40, Channel No.: 151

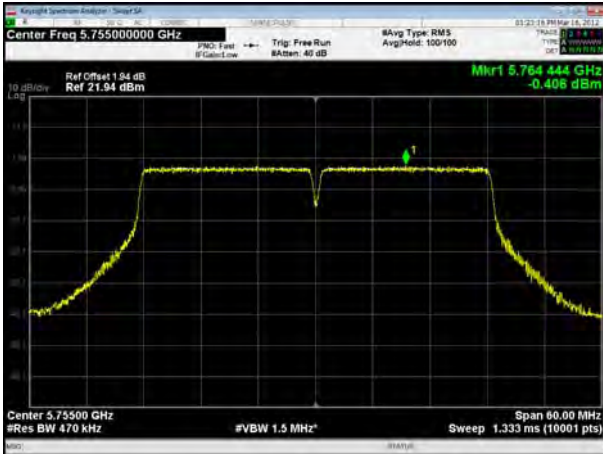


U-NII-3, 802.11n HT40, Channel No.: 159

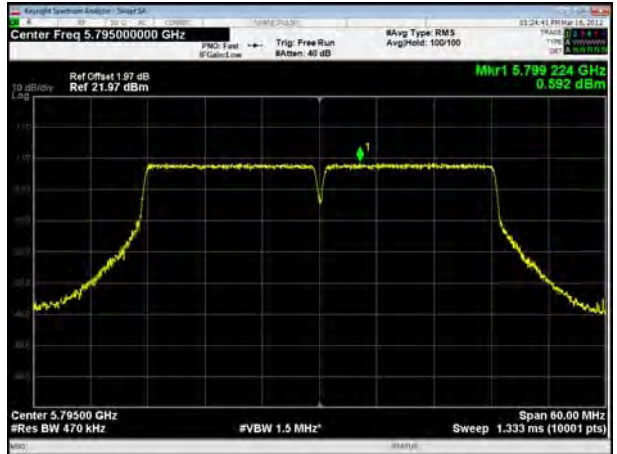

U-NII-3, 802.11ac VHT20, Channel No.: 149

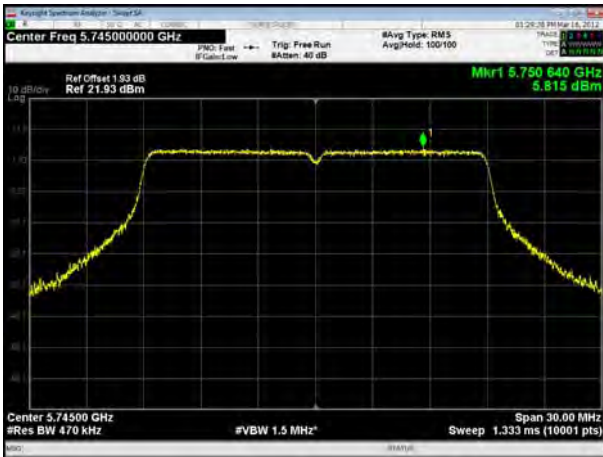


U-NII-3, 802.11ax HE20, Channel No.: 149

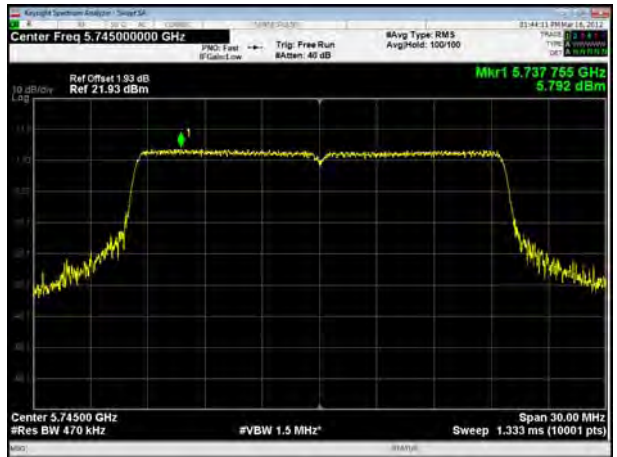

U-NII-3, 802.11ac VHT20, Channel No.: 157




U-NII-3, 802.11ax HE20, Channel No.: 157

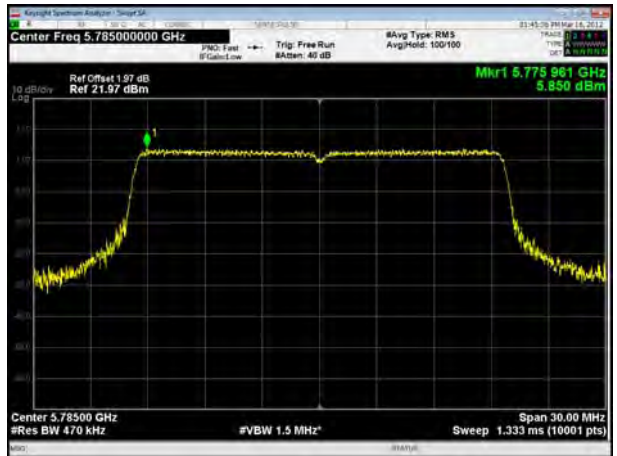





U-NII-3, 802.11ac VHT20, Channel No.: 165

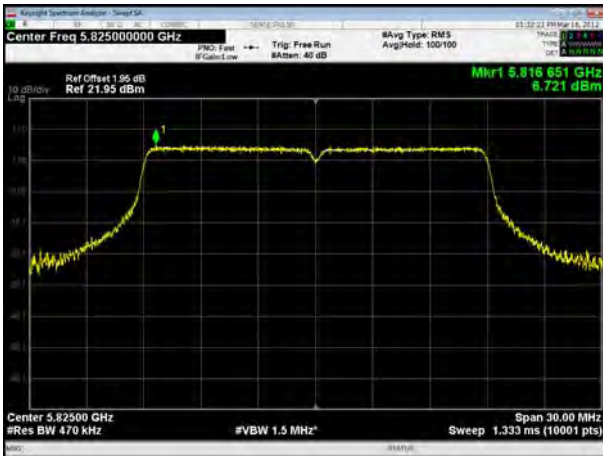


U-NII-3, 802.11ax HE20, Channel No.: 165

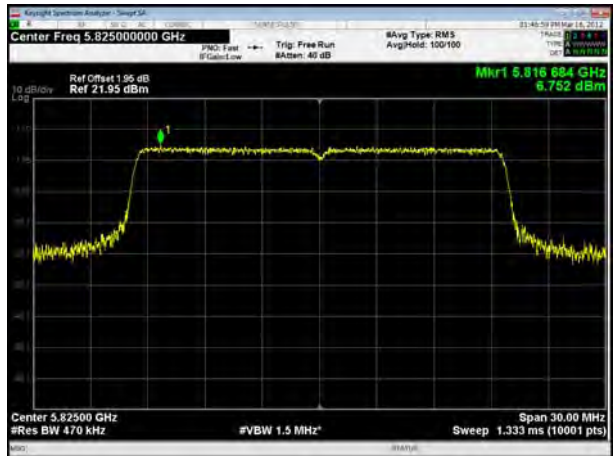


U-NII-3, 802.11ac VHT40, Channel No.: 151

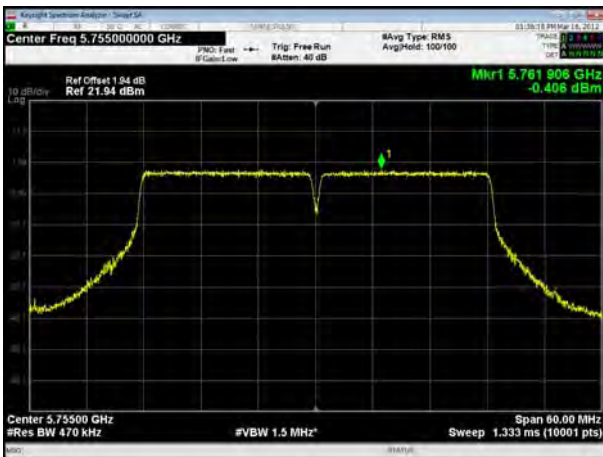


U-NII-3, 802.11ax HE40, Channel No.: 151

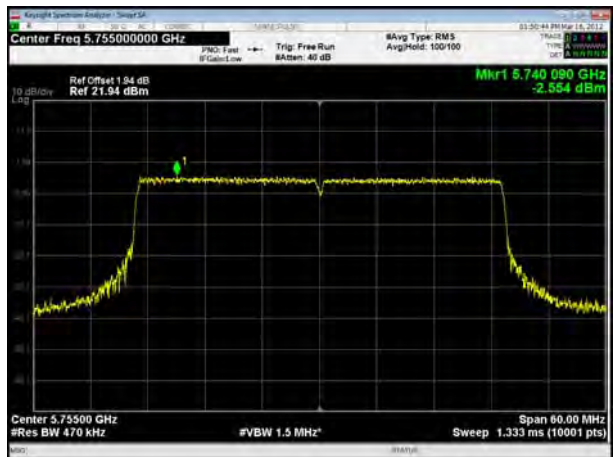


U-NII-3, 802.11ac VHT40, Channel No.: 159

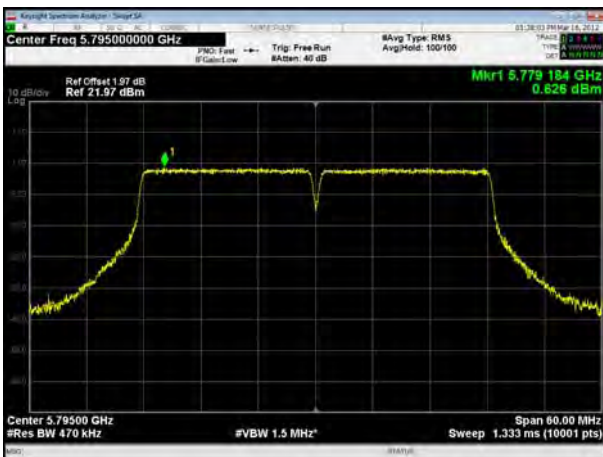

U-NII-3, 802.11ax HE40, Channel No.: 159

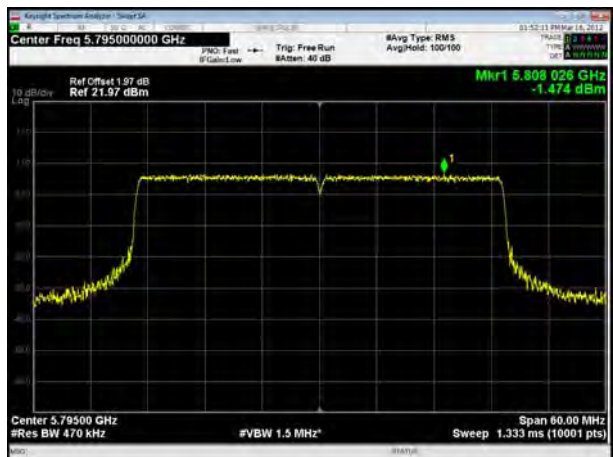

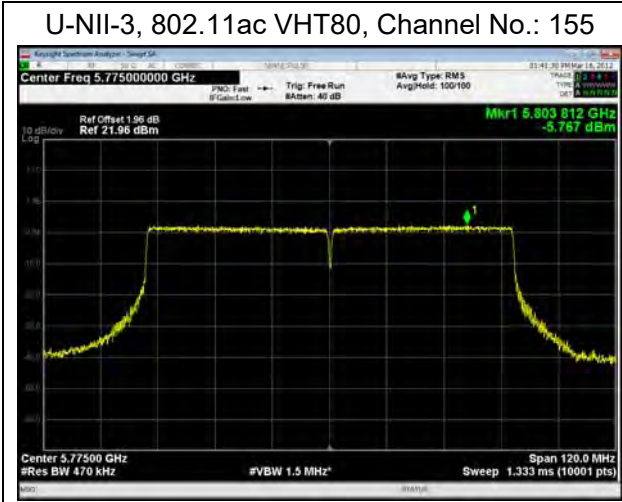



## 5.5. Unwanted Emission

### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

### Method of Measurement

The test set-up was made in accordance to the general provisions of ANSI C63.10. The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber. The test was performed at the distance of 3 m between the EUT and the receiving antenna. The radiated emissions measurements were made in a typical installation configuration.

Sweep the whole frequency band range from 9kHz to the 10th harmonic of the carrier, and the emissions less than 20 dB below the permissible value are reported.

During the test, the height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turntable shall be rotated from 0 to 360 degrees for detecting the maximum of radiated spurious signal level. The measurements shall be repeated with orthogonal polarization of the test antenna. The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing.

Set the spectrum analyzer in the following:

9kHz~150 kHz

RBW=200Hz, VBW=1kHz/ Sweep=AUTO

150 kHz~30MHz

RBW=9KHz, VBW=30KHz,/ Sweep=AUTO

Below 1GHz

RBW=100kHz / VBW=300kHz / Sweep=AUTO

a) Peak emission levels are measured by setting the instrument as follows:

Above 1GHz

PEAK: RBW=1MHz VBW=3MHz/ Sweep=AUTO

b) Average emission levels are measured by setting the instrument as follows:

Above 1GHz

AVERAGE: RBW=1MHz / VBW=3MHz / Sweep=AUTO

c) Detector: The measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

d) Averaging type = power (i.e., rms) (As an alternative, the detector and averaging type may be set for linear voltage averaging. Some instruments require linear display mode to use linear voltage averaging. Log or dB averaging shall not be used.)

e) Sweep time = auto.

f) Perform a trace average of at least 100 traces if the transmission is continuous. If the transmission is not continuous, then the number of traces shall be increased by a factor of  $1 / D$ , where  $D$  is the duty cycle. For example, with 50% duty cycle, at least 200 traces shall be averaged. (If a specific



emission is demonstrated to be continuous—i.e., 100% duty cycle—then rather than turning ON and OFF with the transmit cycle, at least 100 traces shall be averaged.)

g) If tests are performed with the EUT transmitting at a duty cycle less than 98%, then a correction factor shall be added to the measurement results prior to comparing with the emission limit, to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:

1) If power averaging (rms) mode was used in the preceding step e), then the correction factor is  $[10 \log (1 / D)]$ , where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 3 dB shall be added to the measured emission levels.

2) If linear voltage averaging mode was used in the preceding step e), then the correction factor is  $[20 \log (1 / D)]$ , where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 6 dB shall be added to the measured emission levels.


3) If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission.

Reduce the video bandwidth until no significant variations in the displayed signal are observed in subsequent traces, provided the video bandwidth is no less than 1 Hz. For regulatory requirements that specify averaging only over the transmit duration (e.g., digital transmission system [DTS] and Unlicensed National Information Infrastructure [U-NII]), the video bandwidth shall be greater than  $[1 / (\text{minimum transmitter on time})]$  and no less than 1 Hz.


The field strength of spurious emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (Z axis) and the loop antenna is vertical, others antenna are vertical and horizontal.

The test is in transmitting mode.


9KHz~~~30MHz

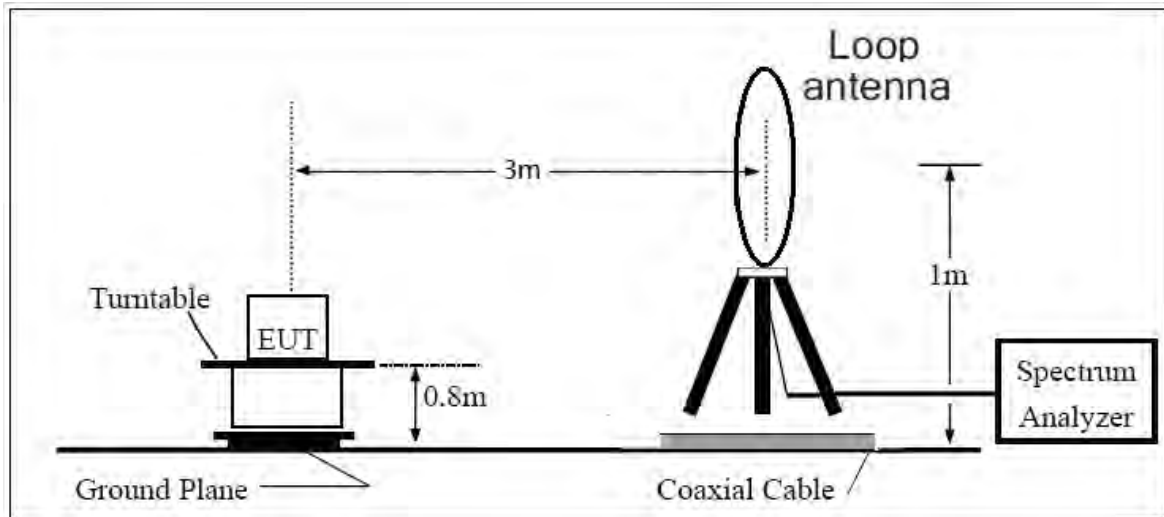

30MHz~~~ 1GHz

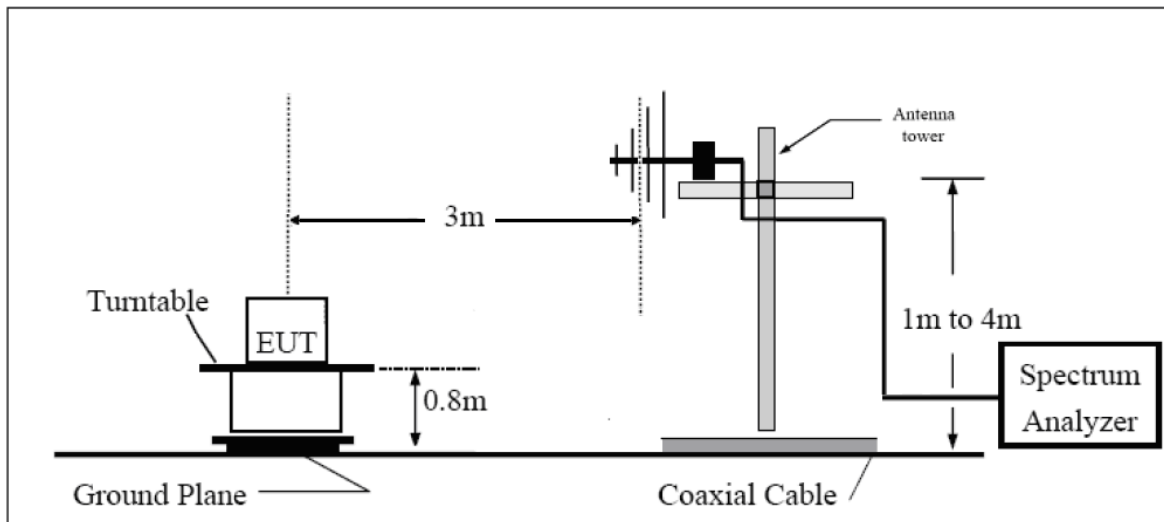

Above 1GHz

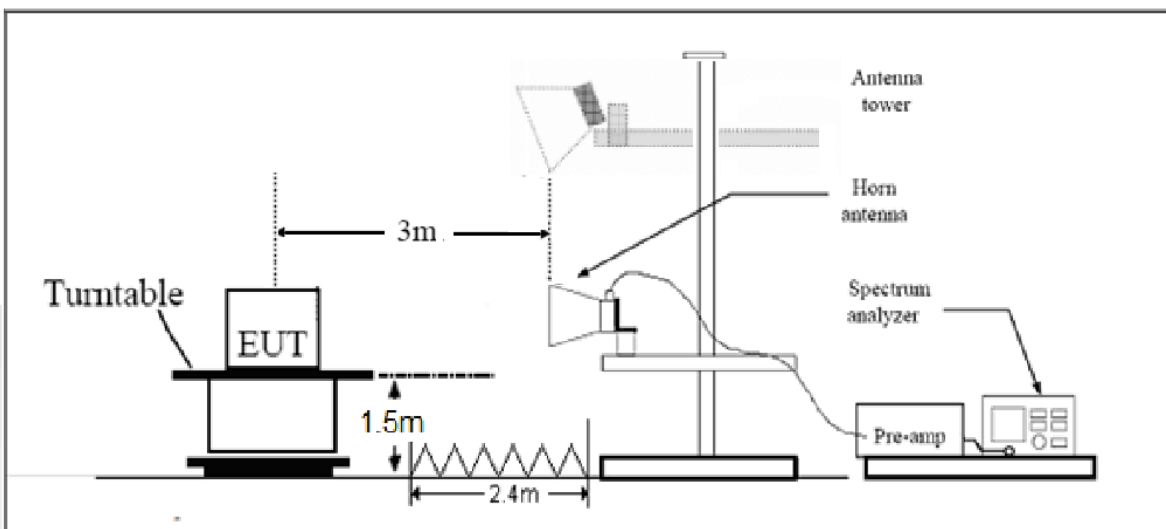

Note: Area side:2.4mX3.6m



**Limits**

- (1) For transmitters operating in the 5725-5850 MHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
- (2) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz(68.2dBμV/m).
- (3) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz(68.2dBμV/m).
- (4) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz(68.2dBμV/m).

Note: the following formula is used to convert the EIRP to field strength

§1、  $E[\text{dB}\mu\text{V}/\text{m}] = \text{EIRP}[\text{dBm}] - 20 \log(d[\text{meters}]) + 104.77$ , where E = field strength and

d = distance at which field strength limit is specified in the rules;

§2、  $E[\text{dB}\mu\text{V}/\text{m}] = \text{EIRP}[\text{dBm}] + 95.2$ , for d = 3 meters

- (5) Unwanted spurious emissions fallen in restricted bands per FCC Part15.205 shall comply with the general field strength limits set forth in § 15.209 as below table.

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
0.009–0.490	2400/F(kHz)	/
0.490–1.705	24000/F(kHz)	/
1.705–30.0	30	/
30-88	100	40
88-216	150	43.5
216-960	200	46
Above960	500	54



MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41			

### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ .

Frequency	Uncertainty
9KHz-30MHz	3.55 dB
30MHz-200MHz	4.17 dB
200MHz-1GHz	4.84 dB
1-18GHz	4.35 dB
18-26.5GHz	5.90 dB
26.5GHz~40GHz	5.92 dB



**Test Results:**


The modulation and bandwidth are similar for 802.11n mode for 20MHz/40MHz and 802.11ac mode for V20MHz/V40MHz, therefore investigated worst case to representative mode in test report.

A font (dB<sub>μV/m</sub>) in the test plot = (dB μ V/m)


The signal beyond the limit is carrier.

**U-NII-1**


**802.11a-Channel 36: Peak & Average**

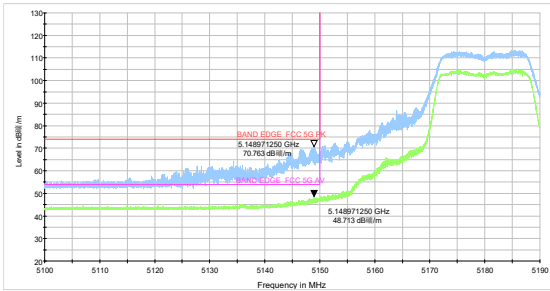


**802.11a-Channel 48: Peak & Average**

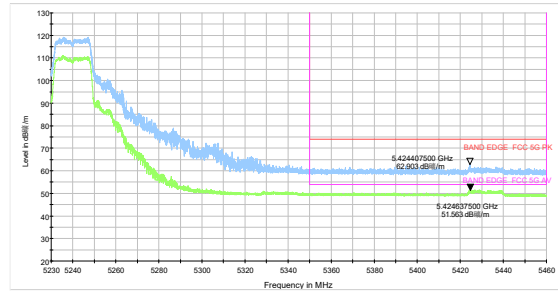


**802.11n HT20 -Channel 36: Peak & Average**

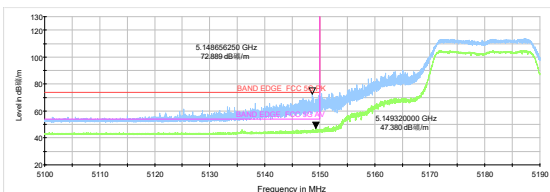


**802.11n HT20 -Channel 48: Peak & Average**

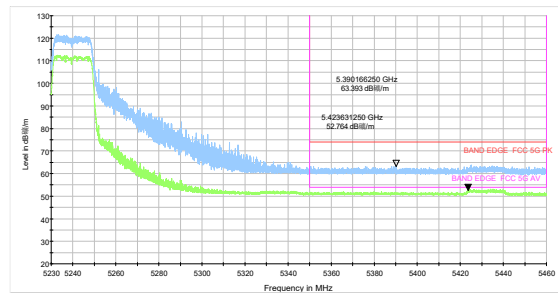


**802.11n HT40-Channel 38: Peak & Average**

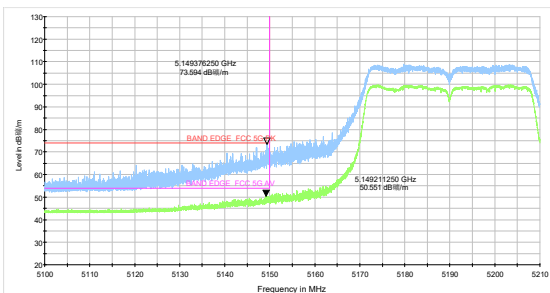


**802.11n HT40-Channel 46: Peak & Average**

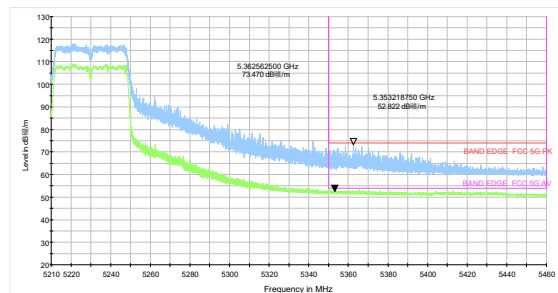

**802.11ac VHT80-Channel 42: Peak & Average**


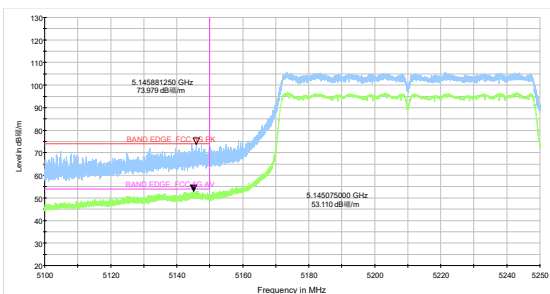


**802.11ac VHT160-Channel 50: Peak & Average**

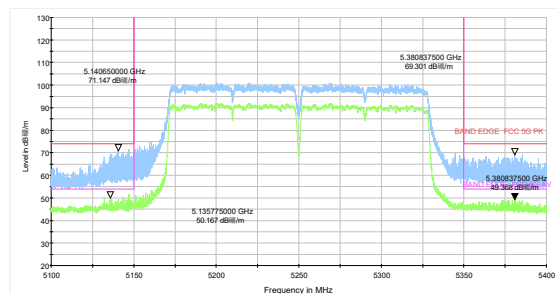



**802.11ax HE20 -Channel 36: Peak & Average**

**802.11ax HE20 -Channel 48: Peak & Average**

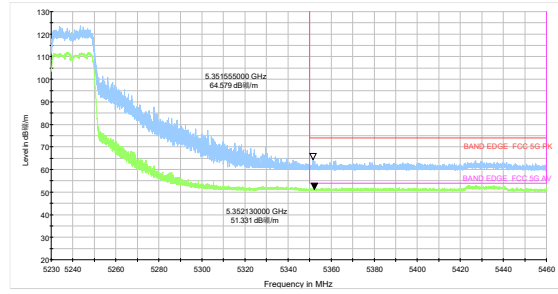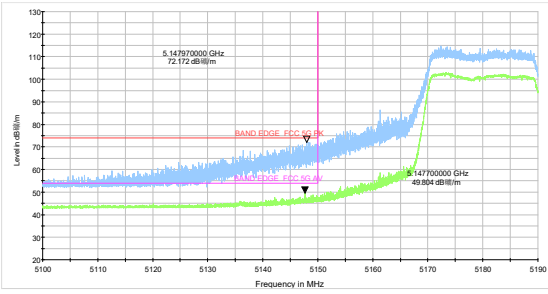



802.11ax HE40-Channel 38: Peak & Average

802.11ax HE40-Channel 46: Peak & Average

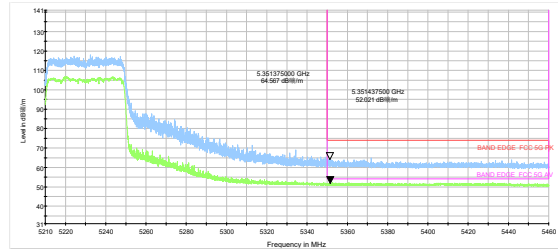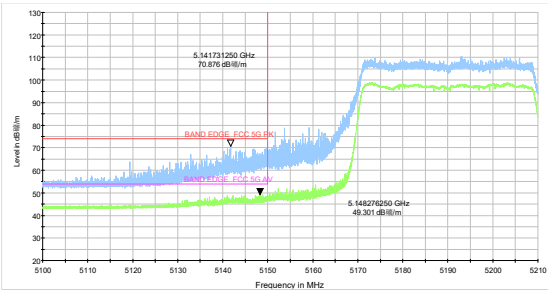

802.11ax HE80-Channel 42: Peak & Average


802.11ax HE160-Channel 50: Peak & Average

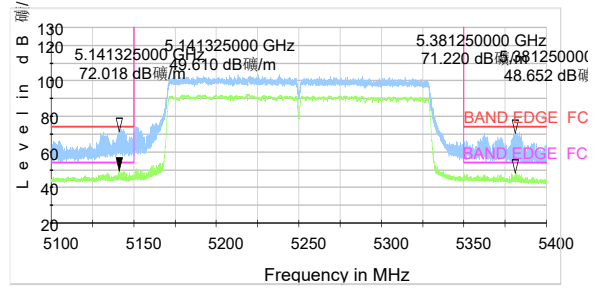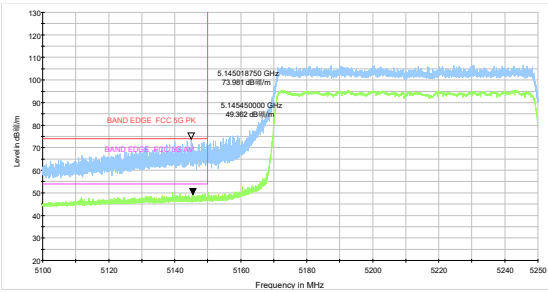




U-NII-3


802.11a-Channel 149: Peak

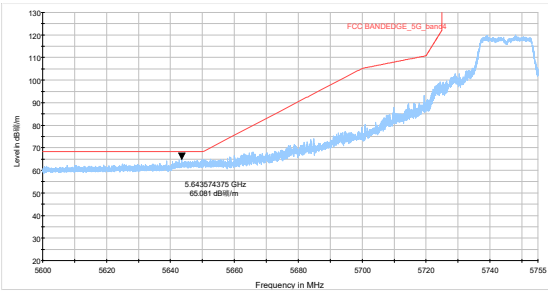


802.11a-Channel 165: Peak & Average

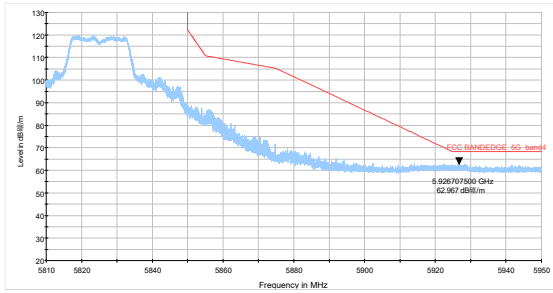


802.11n HT20-Channel 149: Peak

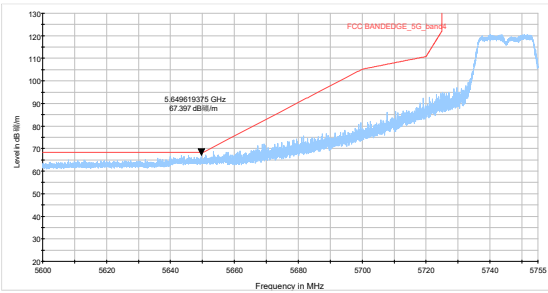


802.11n HT20-Channel 165: Peak

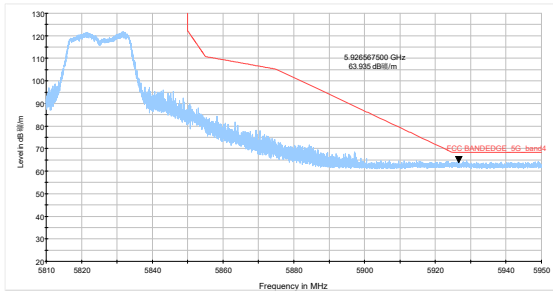


802.11n HT40-Channel 151: Peak

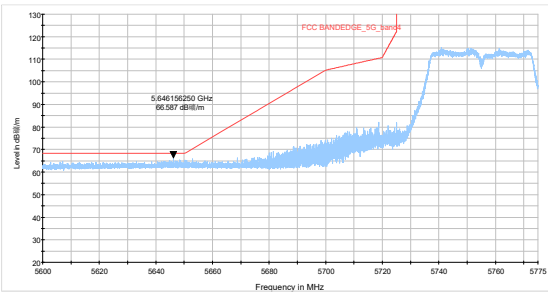

802.11n HT40-Channel 159: Peak

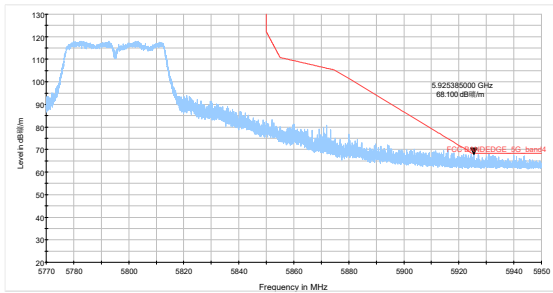


802.11ac VHT80- Channel 155: Peak

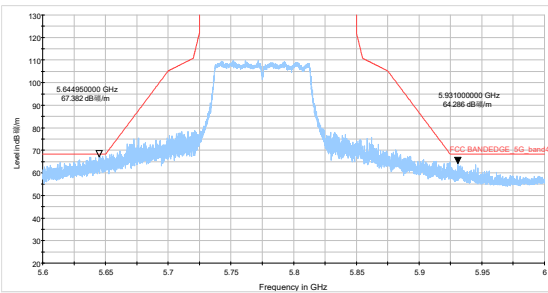





### 802.11ax HE20-Channel 149: Peak

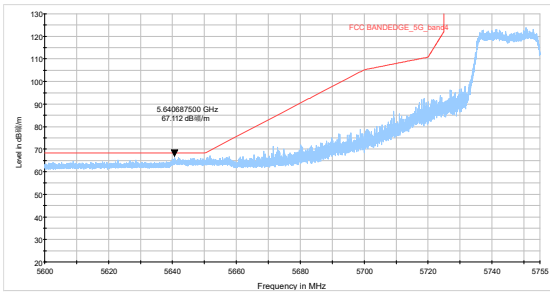


### 802.11ax HE20-Channel 165: Peak

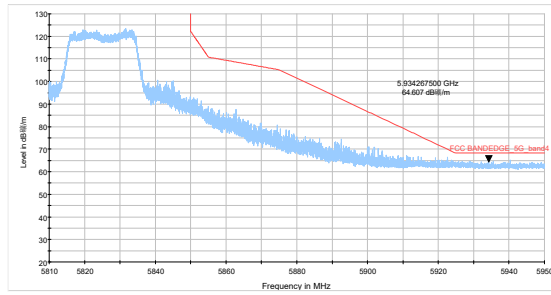


### 802.11ax HE40-Channel 151: Peak

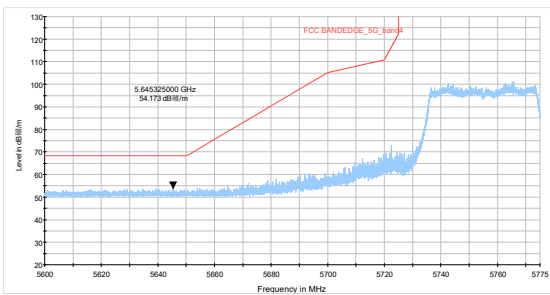

### 802.11ax HE40-Channel 159: Peak

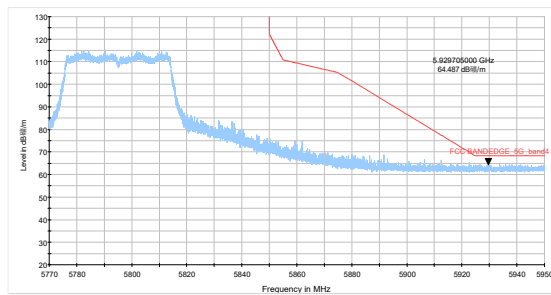

### 802.11ax HE80- Channel 155: Peak

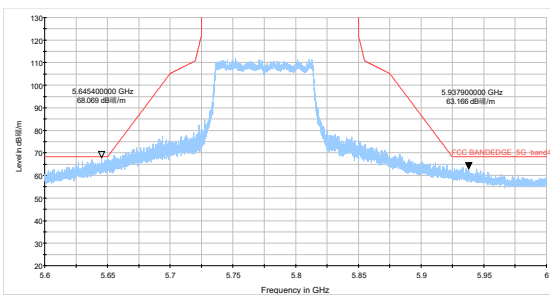

**Result of RE****Test result**

Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, the Emissions in the frequency band 9kHz-30MHz are more than 20dB below the limit are not reported.


**After the pretest, CDD was selected as the worst antenna.**

A font (Level in dB $\mu$ V/m) in the test plot =(level in dB  $\mu$  V/m)

A font (Level in dB $\mu$ V/ ) in the test plot =(level in dB  $\mu$  V/m)

A font (Level in dB V/ ) in the test plot =(level in dB  $\mu$  V/m)

During the test, the Radiates Emission from 30MHz to 1GHz was performed in all modes with all channels, 802.11n (HT40) CH46 are selected as the worst condition. The test data of the worst-case condition was recorded in this report.

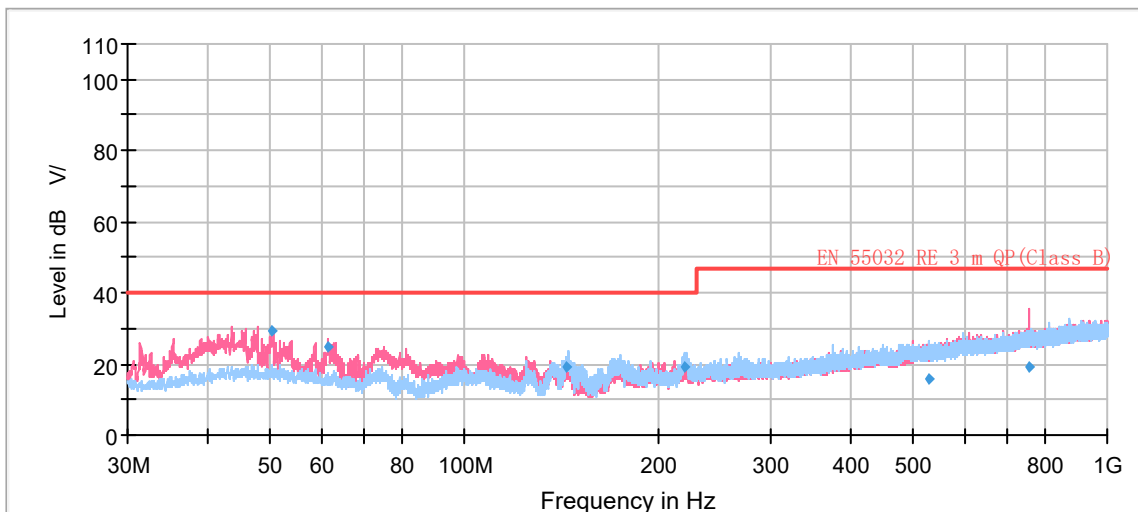**Continuous TX mode:**

Radiates Emission from 30MHz to 1GHz


Frequency (MHz)	Quasi-Peak (dB $\mu$ V/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dB $\mu$ V/m)
50.43	29.20	100.0	V	22.00	21	10.80	40.00
61.59	24.96	100.0	V	7.00	19	15.04	40.00
144.73	19.24	225.0	H	243.00	15	20.76	40.00
220.45	19.19	125.0	H	30.00	18	20.81	40.00
526.95	16.07	175.0	H	188.00	25	30.93	47.00
755.91	18.98	184.0	V	7.00	29	28.02	47.00

**Remark: 1. Correction Factor = Antenna factor+ Insertion loss(cable loss+amplifier gain)**

**2. Margin = Limit – Quasi-Peak**



802.11a CH36

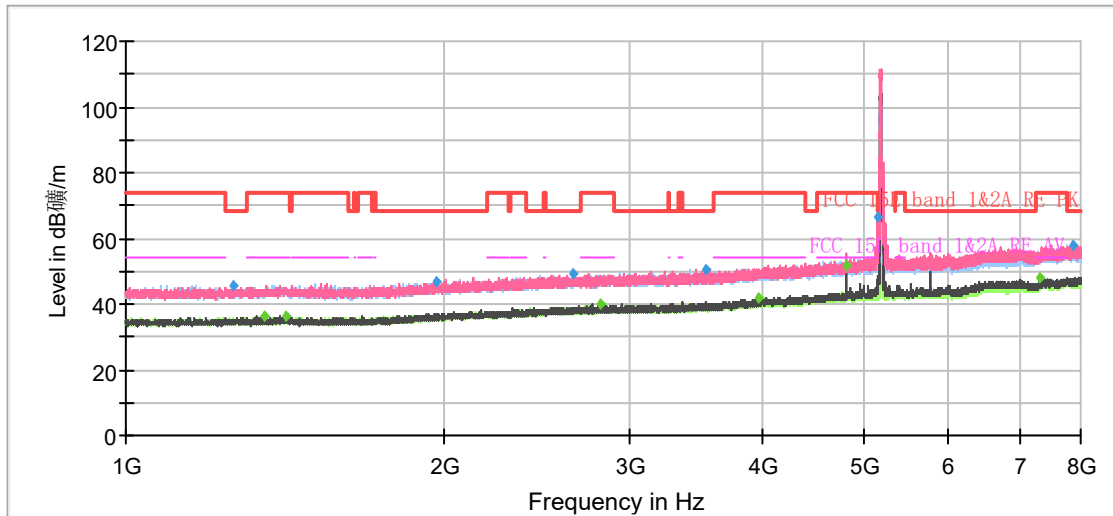


Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 8GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1263.67	45.26	---	68.20	22.94	100.0	V	86.00	-8
1350.47	---	36.12	54.00	17.88	200.0	H	217.00	-7
1414.63	---	36.09	54.00	17.91	200.0	V	108.00	-7
1967.17	46.59	---	68.20	21.61	200.0	V	122.00	-5
2652.00	49.14	---	68.20	19.06	200.0	V	149.00	-4
2809.03	---	40.03	54.00	13.97	100.0	V	0.00	-3
3542.87	50.31	---	68.20	17.89	100.0	V	201.00	-3
3959.13	---	41.55	54.00	12.45	100.0	V	349.00	-1
4800.07	---	51.91	54.00	2.09	100.0	V	160.00	1
5148.67	66.47	---	74.00	7.53	100.0	V	160.00	2
7305.13	---	47.80	54.00	6.20	100.0	V	114.00	7
7849.03	57.90	---	68.20	10.30	100.0	V	228.00	7

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



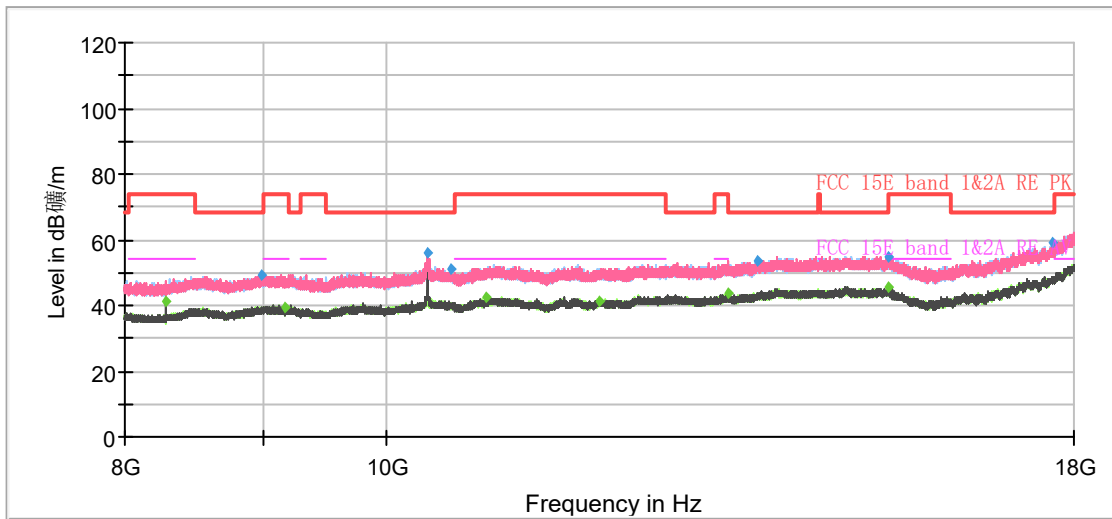


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
8287.67	---	41.11	54.00	12.89	200.0	V	199.00	-3
8995.67	49.21	---	68.20	18.99	200.0	H	0.00	-2
9180.33	---	39.35	54.00	14.65	200.0	H	276.00	-2
10359.67	56.00	---	68.20	12.20	100.0	V	163.00	0
10571.33	51.24	---	68.20	16.96	200.0	H	14.00	0
10894.67	---	42.61	54.00	11.39	100.0	V	94.00	0
11997.67	---	41.46	54.00	12.54	100.0	V	6.00	1
13393.67	---	43.60	54.00	10.40	100.0	V	121.00	3
13735.00	53.41	---	68.20	14.79	100.0	H	254.00	4
15349.67	55.02	---	68.20	13.18	200.0	H	0.00	4
15352.00	---	45.23	54.00	8.77	200.0	V	128.00	4
17685.33	59.02	---	68.20	9.18	100.0	V	4.00	7

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)




802.11a CH40

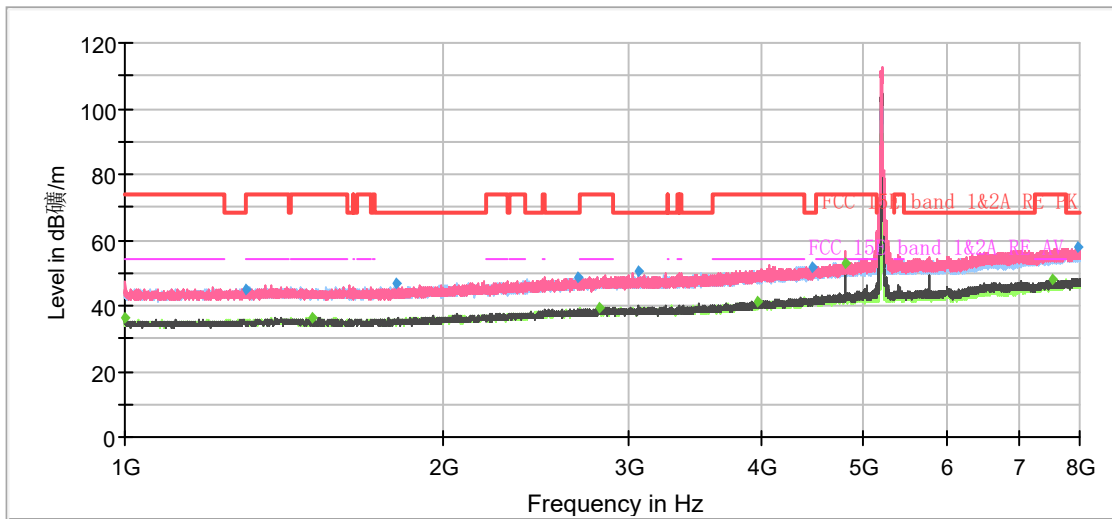

Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 8GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1002.10	---	36.41	54.00	17.59	200.0	V	190.00	-10
1299.37	45.07	---	68.20	23.13	100.0	V	166.00	-8
1503.53	---	36.33	54.00	17.67	100.0	H	351.00	-7
1809.20	46.51	---	68.20	21.69	100.0	H	312.00	-6
2687.70	48.34	---	68.20	19.86	200.0	H	125.00	-4
2813.23	---	39.43	54.00	14.57	200.0	V	0.00	-3
3053.80	50.23	---	68.20	17.97	200.0	H	0.00	-3
3968.70	---	41.36	54.00	12.64	200.0	V	190.00	-1
4476.67	51.65	---	68.20	16.55	200.0	H	21.00	0
4800.07	---	52.91	54.00	1.09	100.0	V	206.00	1
7524.23	---	47.73	54.00	6.27	200.0	V	358.00	7
7980.87	57.55	---	68.20	10.65	100.0	V	140.00	8

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

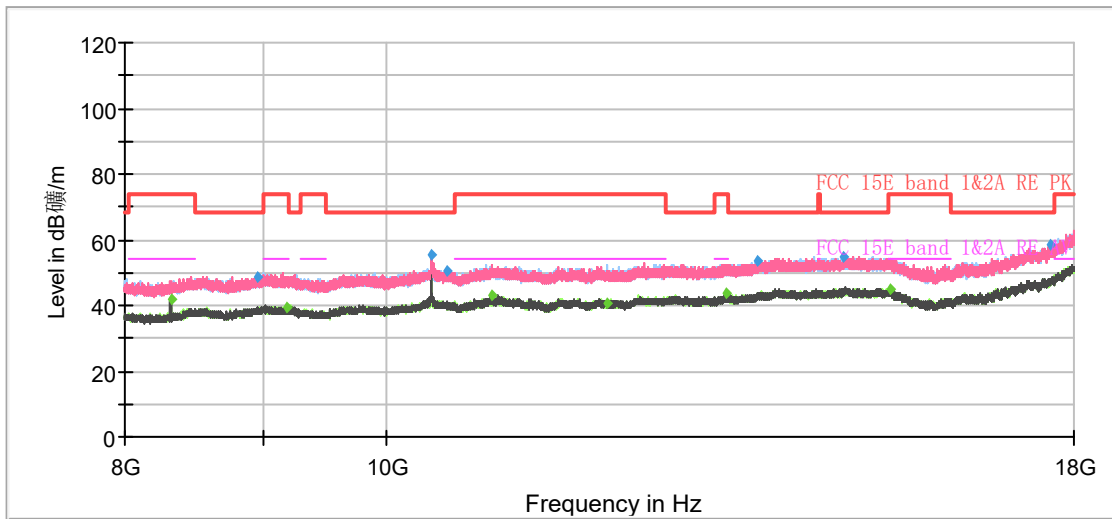


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
8320.00	---	41.89	54.00	12.11	100.0	V	42.00	-3
8954.33	48.84	---	68.20	19.36	200.0	H	66.00	-2
9194.67	---	39.18	54.00	14.82	200.0	H	276.00	-2
10400.00	55.66	---	68.20	12.54	100.0	V	164.00	-1
10528.00	50.55	---	68.20	17.65	100.0	V	248.00	0
10947.67	---	42.91	54.00	11.09	100.0	H	211.00	0
12084.00	---	40.75	54.00	13.25	100.0	H	238.00	1
13369.67	---	43.54	54.00	10.46	100.0	H	298.00	3
13731.00	53.47	---	68.20	14.73	200.0	H	263.00	4
14791.33	55.02	---	68.20	13.18	200.0	H	0.00	5
15375.67	---	44.88	54.00	9.12	200.0	H	108.00	4
17644.67	58.34	---	68.20	9.86	100.0	V	42.00	7

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)




## 802.11a CH48

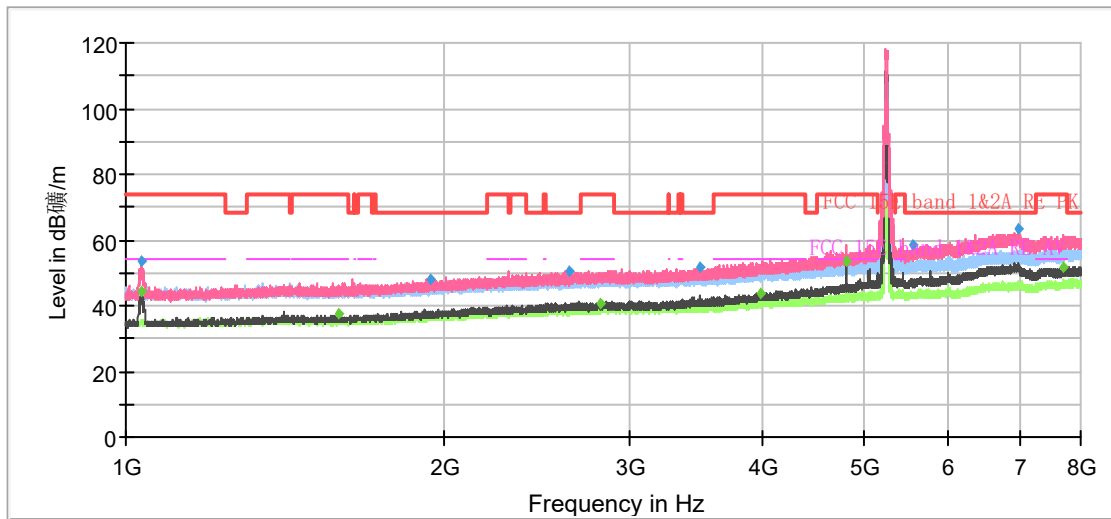

Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 8GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1033.60	53.84	---	74.00	20.16	100.0	V	0.00	-10
1036.40	---	44.39	54.00	9.61	200.0	V	12.00	-10
1588.47	---	37.51	54.00	16.49	200.0	V	260.00	-6
1940.80	48.28	---	68.20	19.92	100.0	V	135.00	-5
2623.07	50.29	---	68.20	17.91	100.0	V	249.00	-4
2810.20	---	40.82	54.00	13.18	200.0	V	356.00	-3
3492.23	51.97	---	68.20	16.23	100.0	H	0.00	-3
3988.53	---	43.56	54.00	10.44	100.0	V	54.00	-1
4800.07	---	53.25	54.00	0.75	100.0	V	135.00	1
5550.47	58.44	---	68.20	9.76	100.0	V	4.00	3
6973.33	63.59	---	68.20	4.61	200.0	V	231.00	7
7705.77	---	51.47	54.00	2.53	100.0	V	264.00	7

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

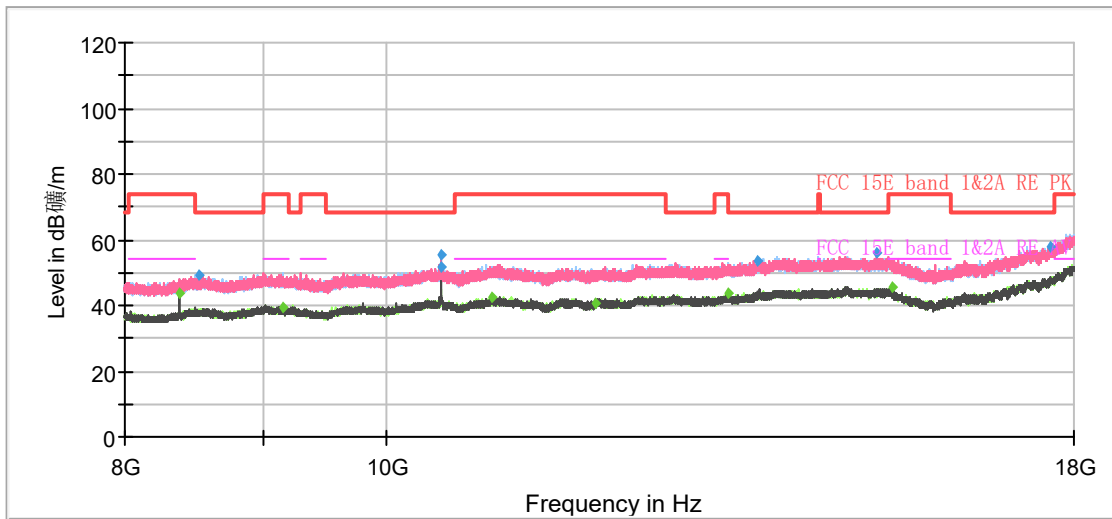


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
8384.00	---	43.48	54.00	10.52	100.0	V	49.00	-3
8519.33	49.25	---	68.20	18.95	200.0	V	0.00	-2
9163.67	---	39.42	54.00	14.58	200.0	V	155.00	-2
10480.33	55.54	---	68.20	12.66	100.0	V	316.00	0
10487.67	51.83	---	68.20	16.37	100.0	V	8.00	0
10956.67	---	42.71	54.00	11.29	200.0	H	3.00	0
11969.00	---	40.85	54.00	13.15	100.0	H	0.00	1
13387.00	---	43.91	54.00	10.09	100.0	H	26.00	3
13727.00	53.57	---	68.20	14.63	100.0	H	0.00	4
15203.67	55.91	---	68.20	12.29	200.0	V	358.00	4
15410.67	---	45.41	54.00	8.59	100.0	H	0.00	4
17648.00	57.84	---	68.20	10.36	200.0	V	168.00	7

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)




## 802.11a CH149

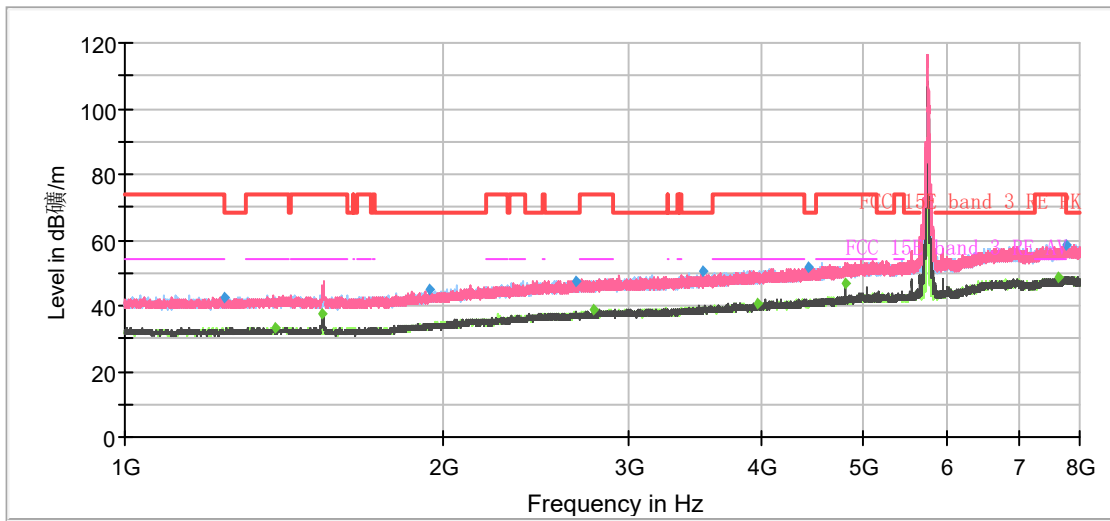

Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 8GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1241.97	42.52	---	68.20	25.68	200.0	V	359.00	6
1388.03	---	33.49	54.00	20.51	200.0	H	352.00	7
1539.23	---	37.56	54.00	16.44	200.0	V	259.00	7
1941.73	44.93	---	68.20	23.27	200.0	V	177.00	9
2669.27	47.64	---	68.20	20.56	100.0	H	22.00	11
2778.70	---	38.56	54.00	15.44	200.0	H	300.00	11
3526.77	50.37	---	68.20	17.83	100.0	H	236.00	12
3971.73	---	40.78	54.00	13.22	100.0	V	234.00	13
4432.80	51.39	---	68.20	16.81	200.0	H	218.00	14
4800.07	---	47.06	54.00	6.94	100.0	V	165.00	14
7625.73	---	48.66	54.00	5.34	100.0	H	358.00	22
7761.53	58.44	---	68.20	9.76	200.0	H	355.00	22

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

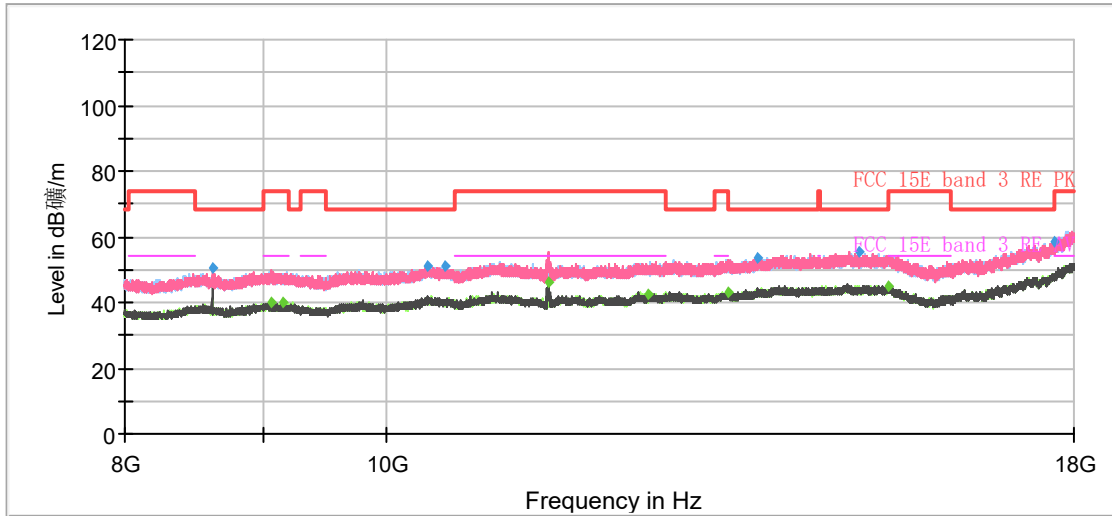


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
8617.67	50.56	---	68.20	17.64	100.0	V	10.00	-3
9071.33	---	39.74	54.00	14.26	100.0	H	237.00	-2
9158.00	---	39.78	54.00	14.22	100.0	V	350.00	-2
10366.33	51.20	---	68.20	17.00	200.0	H	1.00	0
10522.00	50.81	---	68.20	17.39	100.0	H	182.00	0
11490.33	---	46.45	54.00	7.55	100.0	V	1.00	1
12509.33	---	42.20	54.00	11.80	200.0	V	335.00	2
13387.00	---	42.89	54.00	11.11	100.0	H	141.00	3
13731.00	53.58	---	68.20	14.62	200.0	H	1.00	4
14982.67	55.47	---	68.20	12.73	100.0	V	6.00	5
15367.33	---	44.81	54.00	9.19	200.0	V	355.00	4
17689.67	58.18	---	68.20	10.02	100.0	V	189.00	7

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11a CH157

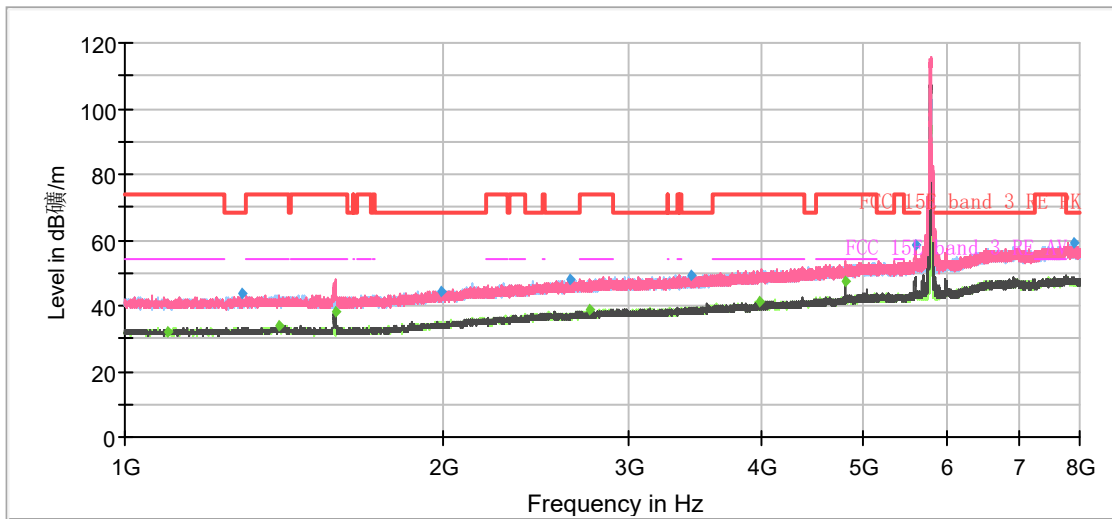


Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 8GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1099.17	---	31.75	54.00	22.25	200.0	H	82.00	5
1292.37	43.51	---	68.20	24.69	200.0	H	218.00	6
1402.03	---	33.89	54.00	20.11	100.0	H	98.00	7
1580.07	---	37.97	54.00	16.03	200.0	V	208.00	8
1992.37	44.56	---	68.20	23.64	200.0	H	300.00	9
2639.63	47.87	---	68.20	20.33	200.0	V	0.00	11
2757.00	---	38.53	54.00	15.47	200.0	H	359.00	11
3435.07	49.50	---	68.20	18.70	200.0	H	346.00	12
3989.23	---	41.04	54.00	12.96	100.0	V	357.00	13
4799.83	---	47.54	54.00	6.46	100.0	V	164.00	14
5591.30	58.17	---	68.20	10.03	200.0	V	335.00	16
7886.83	58.83	---	68.20	9.37	200.0	H	352.00	22

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



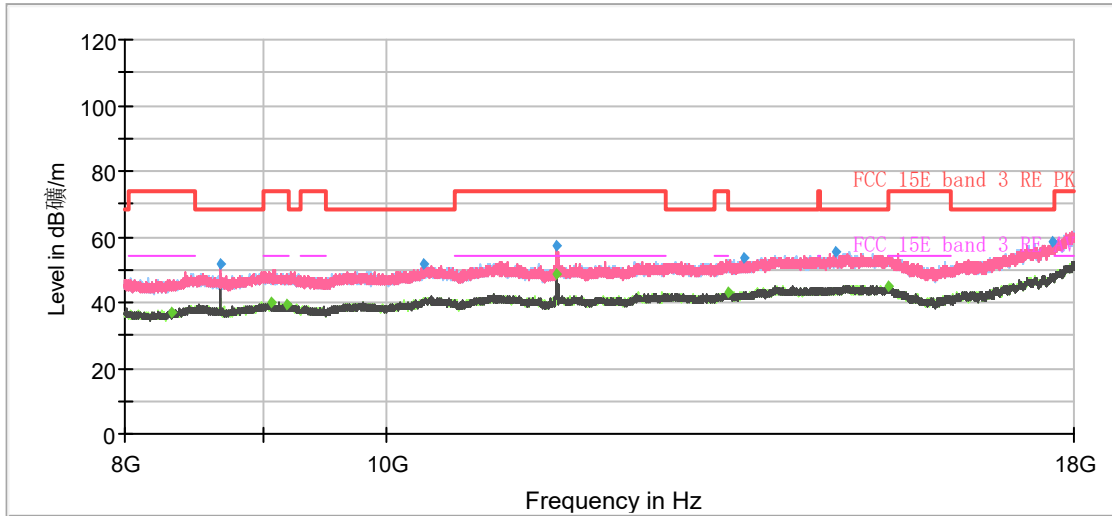


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
8333.67	---	37.01	54.00	16.99	200.0	H	189.00	-3
8677.33	51.73	---	68.20	16.47	100.0	V	10.00	-3
9070.33	---	40.04	54.00	13.96	100.0	V	175.00	-2
9192.67	---	39.26	54.00	14.74	200.0	V	351.00	-2
10325.33	51.70	---	68.20	16.50	100.0	H	2.00	0
11569.00	57.48	---	74.00	16.52	100.0	V	10.00	1
11569.33	---	48.53	54.00	5.47	100.0	V	6.00	1
13397.67	---	43.05	54.00	10.95	200.0	V	141.00	3
13581.00	53.50	---	68.20	14.70	100.0	V	318.00	3
14689.00	55.23	---	68.20	12.97	200.0	H	38.00	5
15371.00	---	44.87	54.00	9.13	200.0	H	65.00	4
17674.67	58.39	---	68.20	9.81	200.0	V	84.00	7

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



## 802.11a CH165

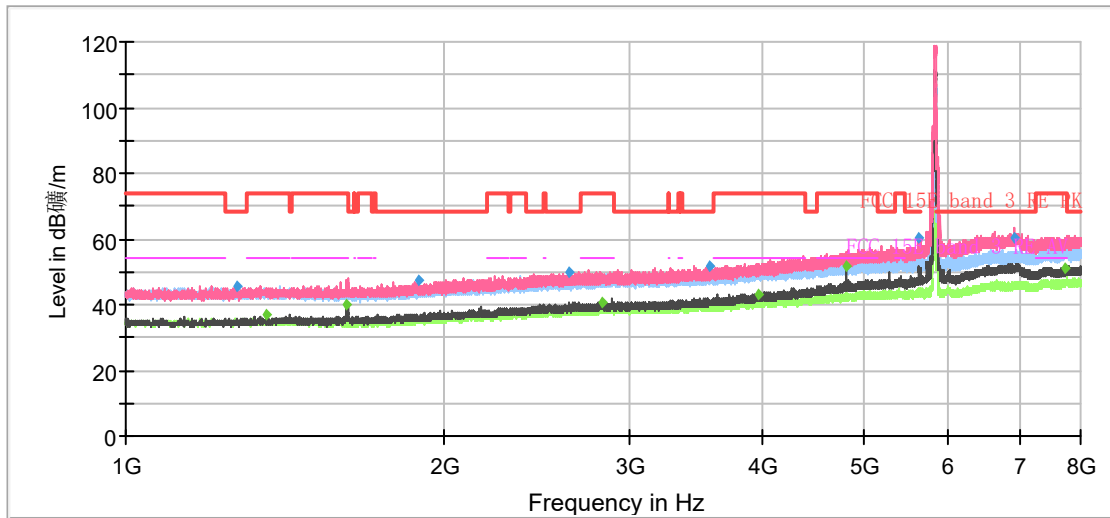


N

ote: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 8GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1274.40	45.41	---	68.20	22.79	200.0	V	2.00	-8
1357.47	---	36.78	54.00	17.22	200.0	V	2.00	-7
1618.33	---	39.87	54.00	14.13	200.0	V	0.00	-6
1893.43	47.68	---	68.20	20.52	200.0	V	111.00	-5
2624.93	49.66	---	68.20	18.54	200.0	V	20.00	-4
2821.40	---	40.51	54.00	13.49	200.0	V	193.00	-3
3562.93	51.62	---	68.20	16.58	200.0	V	1.00	-3
3969.87	---	43.35	54.00	10.65	200.0	V	137.00	-1
4800.07	---	51.63	54.00	2.37	100.0	V	128.00	1
5629.33	60.45	---	68.20	7.75	200.0	V	193.00	3
6919.20	60.56	---	68.20	7.64	200.0	V	12.00	7
7743.80	---	51.27	54.00	2.73	200.0	V	193.00	7

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

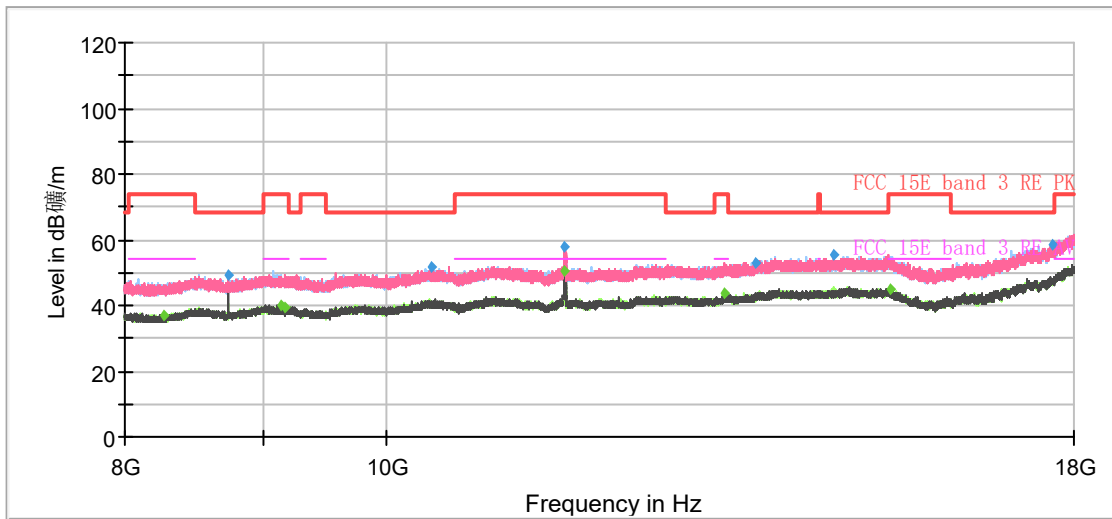


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
8266.67	---	36.90	54.00	17.10	200.0	V	187.00	-3
8737.33	49.53	---	68.20	18.67	100.0	V	9.00	-3
9135.00	---	40.29	54.00	13.71	100.0	H	270.00	-2
9169.67	---	39.30	54.00	14.70	200.0	V	346.00	-2
10402.00	51.55	---	68.20	16.65	200.0	V	337.00	-1
11649.33	58.15	---	74.00	15.85	100.0	V	5.00	1
11654.00	---	50.23	54.00	3.77	100.0	V	9.00	1
13346.67	---	43.58	54.00	10.42	200.0	V	1.00	3
13702.67	53.02	---	68.20	15.18	100.0	H	73.00	4
14655.00	55.21	---	68.20	12.99	200.0	V	358.00	5
15376.67	---	44.91	54.00	9.09	100.0	H	215.00	4
17682.00	58.44	---	68.20	9.76	200.0	H	306.00	7

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



## 802.11n (HT20) CH36

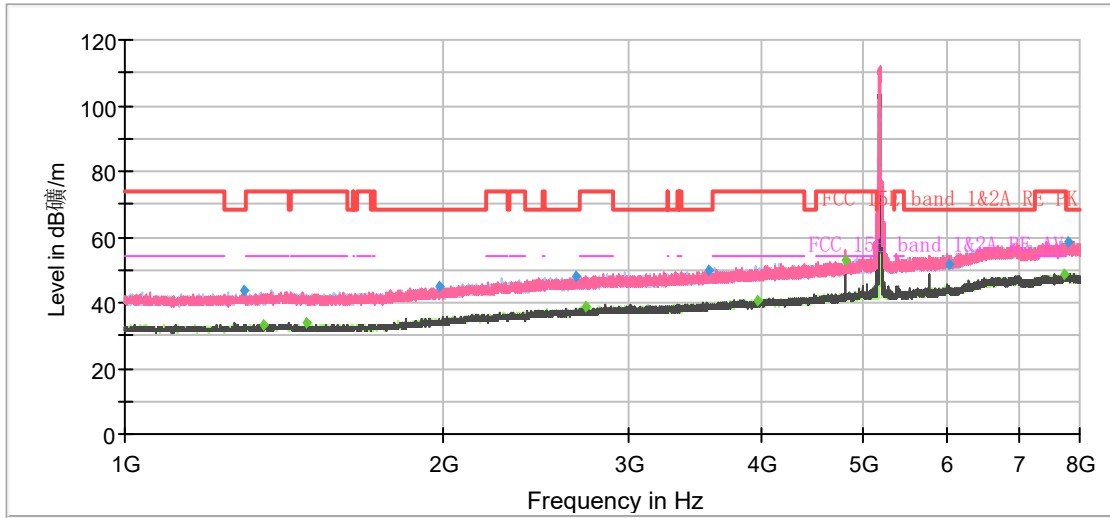

Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 8GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1293.77	43.46	---	68.20	24.74	200.0	V	180.00	6
1354.43	---	33.50	54.00	20.50	100.0	H	40.00	7
1487.67	---	33.65	54.00	20.35	100.0	H	54.00	7
1987.00	44.85	---	68.20	23.35	200.0	H	205.00	9
2666.47	48.02	---	68.20	20.18	100.0	V	151.00	11
2724.80	---	38.70	54.00	15.30	100.0	H	180.00	11
3562.23	49.56	---	68.20	18.64	100.0	V	338.00	12
3958.43	---	40.83	54.00	13.17	100.0	H	134.00	13
4800.07	---	52.71	54.00	1.29	100.0	V	192.00	14
6005.23	51.97	---	68.20	16.23	100.0	H	291.00	18
7739.83	---	48.89	54.00	5.11	200.0	H	351.00	22
7785.10	58.72	---	68.20	9.48	100.0	H	95.00	22

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)