

S

T

S

L

A

B



RADIO TEST REPORT

Report No.: STS2002187W01

Issued for


ZTE Corporation

ZTE Plaza, Keji Road South, Shenzhen, China

| | |
|-----------------------|--------------------------|
| Product Name: | Mobile Phone |
| Brand Name: | ZTE |
| Model Name: | ZTE Z2316 |
| Series Model: | N/A |
| FCC ID: | SRQ-ZTEZ2316 |
| Test Standard: | FCC Part 22H and 24E, 27 |

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from STS, All Test Data Presented in this report is only applicable to presented Test sample.

Shenzhen STS Test Services Co., Ltd.
A 1/F, Building B, Zhuoke Science Park, No.190 Chongqing Road, HepingShequ,
Fuyong Sub-District, Bao'an District, Shenzhen, Guang Dong, China
TEL: +86-755 3688 6288 FAX: +86-755 3688 6277 E-mail:sts@stsapp.com





TEST RESULT CERTIFICATION


Applicant's Name: ZTE Corporation
 Address: ZTE Plaza, Keji Road South, Shenzhen, China
 Manufacture's Name: ZTE Corporation
 Address: ZTE Plaza, Keji Road South, Shenzhen, China

Product Description


Product Name: Mobile Phone
 Brand Name: ZTE
 Model Name: ZTE Z2316
 Series Model: N/A
 Test Standards: FCC Part 22H and 24E, 27
 Test Procedure: KDB 971168 D01 v03r01,ANSI C63.26(2015)

This device described above has been tested by STS, the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.
 This report shall not be reproduced except in full, without the written approval of STS, this document may be altered or revised by STS, personal only, and shall be noted in the revision of the document..


Date of Test.....:
 Date of receipt of test item.....: 27 Feb. 2020
 Date (s) of performance of tests.: 27 Feb. 2020 ~ 25 Mar. 2020
 Date of Issue: 25 Mar. 2020
 Test Result: Pass

Testing Engineer : 

 (Chris Chen)

Technical Manager : 

 (Sean she)

Authorized Signatory : 

 (Vita Li)





| Table of Contents | Page |
|--|-----------|
| 1 INTRODUCTION | 6 |
| 1.1 TEST FACTORY | 6 |
| 1.2 MEASUREMENT UNCERTAINTY | 6 |
| 2 PRODUCT INFORMATION | 7 |
| 3 TEST CONFIGURATION OF EQUIPMENT UNDER TEST | 9 |
| 4 MEASUREMENT INSTRUMENTS | 10 |
| 5 TEST ITEMS | 11 |
| 5.1 CONDUCTED OUTPUT POWER | 11 |
| 5.2 PEAK TO AVERAGE RATIO | 12 |
| 5.3 TRANSMITTER RADIATED POWER (EIRP/ERP) | 13 |
| 5.4 OCCUPIED BANDWIDTH | 14 |
| 5.5 FREQUENCY STABILITY | 15 |
| 5.6 SPURIOUS EMISSIONS AT ANTENNA TERMINALS | 16 |
| 5.7 BAND EDGE | 17 |
| 5.8 FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT | 18 |
| APPENDIX A.TESTRESULT | 20 |
| A1.CONDUCTED OUTPUT POWER | 20 |
| A2. PEAK-TO-AVERAGE RADIO | 25 |
| A3. TRANSMITTER RADIATED POWER (EIRP/ERP) | 37 |
| A4. OCCUPIED BANDWIDTH (99% OCCUPIED BANDWIDTH/26DB BANDWIDTH) | 40 |
| A5.FREQUENCY STABILITY | 51 |
| A6. SPURIOUS EMISSIONS AT ANTENNA TERMINALS | 56 |
| A7. BAND EDGE | 66 |
| A8. FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT | 71 |
| APPENDIX-PHOTOS OF TEST SETUP | 86 |



Revision History

| Rev. | Issue Date | Report NO. | Effect Page | Contents |
|------|--------------|---------------|-------------|---------------|
| 00 | 25 Mar. 2020 | STS2002187W01 | ALL | Initial Issue |
| | | | | |





SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

The radiated emission testing was performed according to the procedures of KDB 971168 D01 v03r01 and ANSI C63.26(2015)

| FCC Rules | Test Description | Test Limit | Test Result | Reference |
|-------------------------------------|--|---|-------------|-----------|
| 2.1046 | Conducted OutputPower | Reporting Only | PASS | |
| 22.913d 24.232d | Peak-to-AverageRatio | < 13 dB | PASS | |
| 2.1046 22.913 24.232 27.50 | Effective Radiated Power/Equivalent Isotropic Radiated Power | < 7 Watts max. ERP(Part 22) < 2 Watts max. EIRP(Part 24) <1 Watts max. EIRP(Part 27) | PASS | |
| 2.1049 22.917 24.238 27.53 | Occupied Bandwidth | Reporting Only | PASS | |
| 2.1055 22.355 24.235 27.54 | Frequency Stability | < 2.5 ppm (Part 22) Emission must remain in band (Part 24) Emission must remain in band (Part 27) | PASS | |
| 2.1051 22.917 24.238 27.53 | Spurious Emission at Antenna Terminals | < 43+10log10(P[Watts]) | PASS | |
| 2.1053 22.917 24.238 27.53 | Field Strength of Spurious Radiation | < 43+10log10(P[Watts]) | PASS | |
| 2.1051 22.917 24.238 27.53 | Band Edge | < 43+10log10(P[Watts]) | PASS | |



1 INTRODUCTION

1.1 TEST FACTORY

SHENZHEN STS TEST SERVICES CO., LTD

Add. : A 1/F, Building B, Zhuoke Science Park, No.190 Chongqing Road, HepingShequ, Fuyong Sub-District, Bao'an District, Shenzhen, Guang Dong, China

FCC test Firm Registration Number: 625569

IC test Firm Registration Number: 12108A

A2LA Certificate No.: 4338.01

1.2 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement data shown herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

| No. | Item | Uncertainty |
|-----|-----------------------------------|----------------------|
| 1 | RF output power, conducted | $\pm 0.68\text{dB}$ |
| 2 | Unwanted Emissions, conducted | $\pm 2.988\text{dB}$ |
| 3 | All emissions, radiated 30-1GHz | $\pm 6.7\text{dB}$ |
| 4 | All emissions, radiated 1G-6GHz | $\pm 5.5\text{dB}$ |
| 5 | All emissions, radiated >6G | $\pm 5.8\text{dB}$ |
| 6 | Conducted Emission (9KHz-150KHz) | $\pm 4.43\text{dB}$ |
| 7 | Conducted Emission (150KHz-30MHz) | $\pm 5\text{dB}$ |



2 PRODUCT INFORMATION

| | |
|-----------------------------|---|
| Product Name | Mobile Phone |
| Trade Name | ZTE |
| Model Name | ZTE Z2316 |
| Series Model | N/A |
| Model Difference | N/A |
| Tx Frequency: | GSM/GPRS/EDGE: 850: 824 MHz ~ 849MHz 1900: 1850 MHz ~ 1910MHz WCDMA: Band V: 824 MHz ~ 849 MHz Band II: 1850 MHz ~ 1910 MHz Band IV: 1710 MHz ~ 1755 MHz |
| Rx Frequency: | GSM/GPRS/EDGE: 850: 869 MHz ~ 894 MHz 1900: 1930 MHz ~ 1990MHz WCDMA: Band V: 869 MHz ~ 894 MHz Band II: 1930 MHz ~ 1990 MHz Band IV: 2110 MHz ~ 2155 MHz |
| Max RF Output Power: | GSM 850:31.25dBm, GSM 1900:27.18dBm GPRS850(1-Slot):31.28dBm, GPRS1900(1-Slot):27.12dBm GPRS850(2-Slot):30.80dBm, GPRS1900(2-Slot):26.63Bm GPRS850(3-Slot):30.32dBm, GPRS1900(3-Slot):26.21dBm GPRS850(4-Slot):29.89dBm, GPRS1900(4-Slot):25.73dBm EDGE 850(1-Slot):31.51dBm, EDGE 1900(1-Slot):27.91dBm EDGE 850(2-Slot):30.78dBm, EDGE 1900(2-Slot):27.12dBm EDGE 850(3-Slot):30.07dBm, EDGE 1900(3-Slot):26.33dBm EDGE 850(4-Slot):29.33dBm, EDGE 1900(4-Slot):25.55dBm WCDMA Band V:21.61dBm, WCDMA Band II:21.15dBm WCDMA Band IV:22.91dBm |
| Type of Emission: | GSM(850): 324KGXW; GSM(1900): 323KGXW GPRS(850): 318KGXW; GPRS(1900): 320KGXW EDGE(850): 317KG7W; EDGE(1900): 313KG7W WCDMA850: 4M67F9W WCDMA1900: 4M65F9W WCDMA1700: 4M65F9W |
| Modulation Characteristics: | GMSK for GSM/GPRS; GMSK and 8PSK for EDGE WCDMA: QPSK; HSDPA:QPSK/16QAM; HSUPA:BPSK |
| SIM Card: | Only support single SIM Card. |
| Antenna: | PIFA |
| Antenna gain: | GSM 850: 2.33dBi, PCS 1900:1.24dBi, WCDMA 850: 2.33dBi, WCDMA1900: 1.24dBi, WCDMA1700:-0.68dBi |



| | |
|---|---|
| Battery parameter: | Rated Voltage: 3.7V Charge Limit: 4.2V Capacity: 1400mAh |
| Adapter: | Adapter 1: Input: AC 100-240V,50/60Hz 0.15A Output: DC 5V500mA Adapter 2: Input: AC 100-240V,50/60Hz 0.2A Output: DC 5V500mA |
| GPRS/EDGE Class: | Multi-Class12 |
| Extreme Vol. Limits: | DC 3.33V~ DC 4.07V(Normal: DC 3.7V) |
| Extreme Temp. Tolerance: | -30°C to +50°C |
| Hardware version number: | S82M020 |
| Software version number: | CO-CLARO-S-P920F50V1.0.0B03T |
| ** Note: The High Voltage 4.07V and Low Voltage 3.33V was declared by manufacturer, The EUT couldn't be operate normally with higher or lower voltage. | |



3 TEST CONFIGURATION OF EQUIPMENT UNDER TEST

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 and ANSI C63.26 2015 Power Meas. License Digital Systems with maximum output power.

Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission.

Radiated emissions were investigated as following frequency range:

1. 30 MHz to 10th harmonic for GSM850 and WCDMA Band V.
2. 30 MHz to 10th harmonic for WCDMA Band IV.
3. 30 MHz to 10th harmonic for GSM1900 and WCDMA Band II.

All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

| BAND | TEST MODES | |
|---------------|-------------------------------------|-------------------------------------|
| | RADIATED TCS | CONDUCTED TCS |
| GSM 850 | GSM LINK GPRS/EDGE CLASS 12 LINK | GSM LINK GPRS/EDGE CLASS 12 LINK |
| GSM 1900 | GSM LINK GPRS/EDGE CLASS 12 LINK | GSM LINK GPRS/EDGE CLASS 12 LINK |
| WCDMA BAND V | RMC 12.2KBPS LINK | RMC 12.2KBPS LINK |
| WCDMA BAND II | RMC 12.2KBPS LINK | RMC 12.2KBPS LINK |
| WCDMA BAND IV | RMC 12.2KBPS LINK | RMC 12.2KBPS LINK |



4 MEASUREMENT INSTRUMENTS

Radiation Test equipment

| Kind of Equipment | Manufacturer | Type No. | Serial No. | Last calibration | Calibrated until |
|----------------------------------|--------------|------------------|--------------|------------------|------------------|
| Test Receiver | R&S | ESCI | 101427 | 2019.07.29 | 2020.07.28 |
| Signal Analyzer | Agilent | N9020A | MY51110105 | 2020.03.05 | 2021.03.04 |
| Wireless Communications Test Set | R&S | CMW 500 | 133884 | 2020.03.05 | 2021.03.04 |
| Bilog Antenna | TESEQ | CBL6111D | 34678 | 2017.11.02 | 2020.11.01 |
| Horn Antenna | SCHWARZBECK | BBHA 9120D(1201) | 9120D-1343 | 2018.10.19 | 2021.10.18 |
| Bilog Antenna | TESEQ | CBL6111D | 45873 | 2018.10.26 | 2021.10.15 |
| Horn Antenna | SCHWARZBECK | BBHA 9120D(1201) | 9120D-2014 | 2019.10.15 | 2022.10.14 |
| SHF-EHF Horn Antenna (18G-40GHz) | A-INFO | LB-180400-KF | J211020657 | 2018.03.11 | 2021.03.10 |
| Pre-Amplifier (0.1M-3GHz) | EM | EM330 | 060665 | 2019.10.09 | 2020.10.08 |
| Pre-Amplifier (1G-18GHz) | SKET | LNPA-01018G-45 | SK2018080901 | 2019.10.12 | 2020.10.11 |
| Turn table | EM | SC100_1 | 60531 | N/A | N/A |
| Antenna mast | EM | SC100 | N/A | N/A | N/A |
| Temperature & Humidity | HH660 | Mieo | N/A | 2019.10.12 | 2020.10.11 |
| Test SW | BULUN | BL410-E/18.905 | | | |

RF Connected Test

| Kind of Equipment | Manufacturer | Type No. | Serial No. | Last calibration | Calibrated until |
|--------------------------------------|--------------|-----------------|------------|------------------|------------------|
| Universal Radio communication tester | R&S | CMU200 | 11764 | 2019.10.11 | 2020.10.10 |
| Wireless Communications Test Set | R&S | CMW 500 | 133884 | 2020.03.05 | 2021.03.04 |
| Signal Analyzer | Agilent | N9020A | MY49100060 | 2019.10.09 | 2020.10.08 |
| Temperature & Humidity | HH660 | Mieo | N/A | 2019.10.12 | 2020.10.11 |
| Test SW | FARAD | LZ-RF /LzRf-3A3 | | | |

Equipment with a calibration date of "NCR" shown in this list was not used to make direct calibrated measurements.

5 TEST ITEMS

5.1 CONDUCTED OUTPUT POWER


Test overview

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

Test procedures

1. The transmitter output port was connected to the system simulator.
2. Set eut at maximum power through the system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.

Test setup

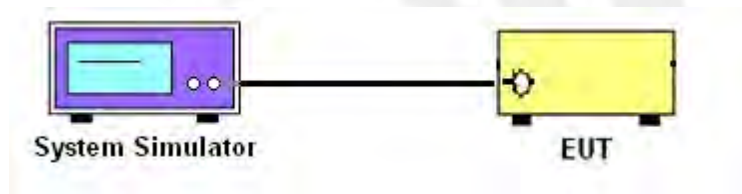

5.2 PEAK TO AVERAGE RATIO


TEST OVERVIEW

According to §24.232(d), power measurements for transmissions by stations authorized under this section may be made either in accordance with a commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of §24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 db.

TEST PROCEDURES

1. The testing follows fckdb 971168 v03r01 section
2. The eut was connected to the and peak and av system simulator& spectrum analysis reads
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Set the test probe and measure average power of the spectrum analysis

TEST SETUP

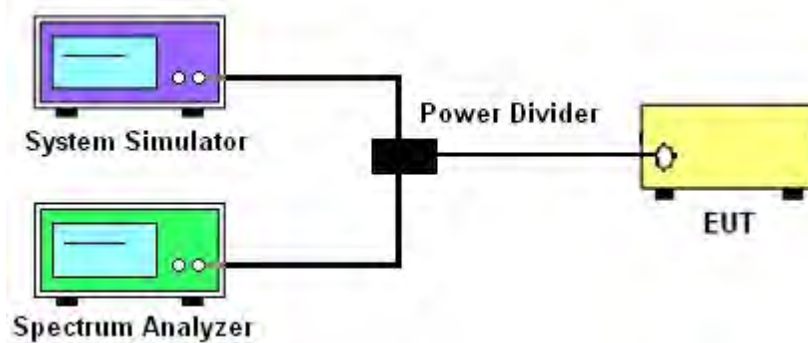



5.3 TRANSMITTER RADIATED POWER (EIRP/ERP)

TEST OVERVIEW

Effective Radiated Power (ERP) and Equivalent Isotropic Radiated Power (EIRP) measurements are performed using the substitution method described in ANSI C63.26 2015 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically polarized broadband horn antennas. All measurements are performed as RMS average measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

TEST PROCEDURE

1. The testing follows FCC KDB 971168 Section 5.8 and ANSI C63.26-2015 Section 5.2.
2. The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.
3. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
4. The frequency range up to tenth harmonic of the fundamental frequency was investigated.
5. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a nonradiating cable. The absolute levels of the spurious emissions were measured by the substitution.
6. Effective Isotropic Radiated Power (EIRP) was measured by substitution method according to ANSI C63.26-2015. The EUT was replaced by the substitution antenna at same location, and then a known power from S.G. was applied into the dipole antenna through a Tx cable, and then recorded the maximum Analyzer reading through raised and lowered the test antenna.
The correction factor (in dB) = S.G. - Tx Cable loss + Substitution antenna gain – Analyzer reading.
Then the EUT's EIRP/ERP was calculated with the correction factor, $ERP/EIRP = P.SG + GT - LC$
ERP/EIRP = effective or equivalent radiated power, respectively (expressed in the same units as P_{Meas} as, typically dBW or dBm);
P_{Meas}(PK) = measured transmitter output power or PSD, in dBm or dBW;
GT = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);
LC = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

5.4 OCCUPIED BANDWIDTH

TEST OVERVIEW

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured.


The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

All modes of operation were investigated and the worst case configuration results are reported in this section.

TEST PROCEDURE

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

TEST SETUP

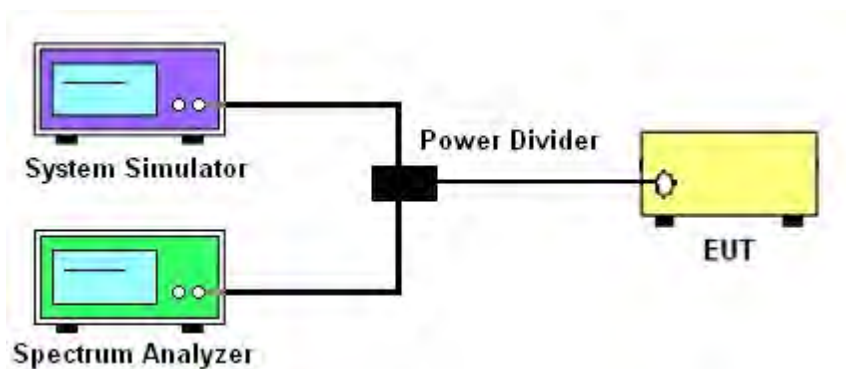

5.5 FREQUENCY STABILITY

Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26 2015. The frequency stability of the transmitter is measured by:

- a.) Temperature: The temperature is varied from -30°C to $+50^{\circ}\text{C}$ in 10°C increments using an environmental chamber.
- b.) Primary Supply Voltage: The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

For Part 22, the frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ (± 2.5 ppm) of the center frequency. For Part 24 the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

Test Procedure


Temperature Variation

1. The testing follows fccdb 971168 D01 section 9.0
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C steps up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

Voltage Variation

1. The testing follows FCC KDB 971168 D01 Section 9.0.
2. The EUT was placed in a temperature chamber at $25\pm 5^{\circ}\text{C}$ and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
4. The variation in frequency was measured for the worst case.

TEST SETUP

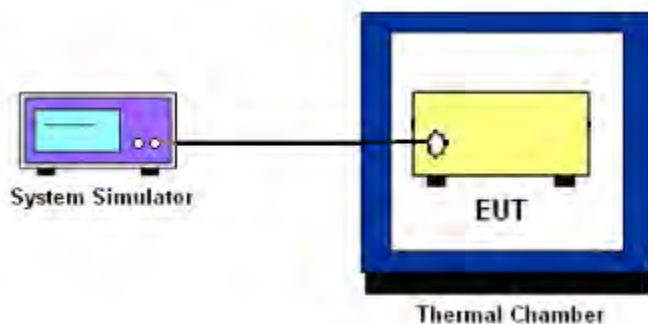

5.6 SPURIOUS EMISSIONS AT ANTENNA TERMINALS

Test Overview

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

Test procedure

1. The testing FCC KDB 971168 D01 v03r01 Section 6.0. and ANSI C63.26-2015-Section 5.5
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


7. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

$$= P(W) - [43 + 10\log(P)] \text{ (dB)}$$

$$= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$$

$$= -13\text{dBm.}$$

Test Setup

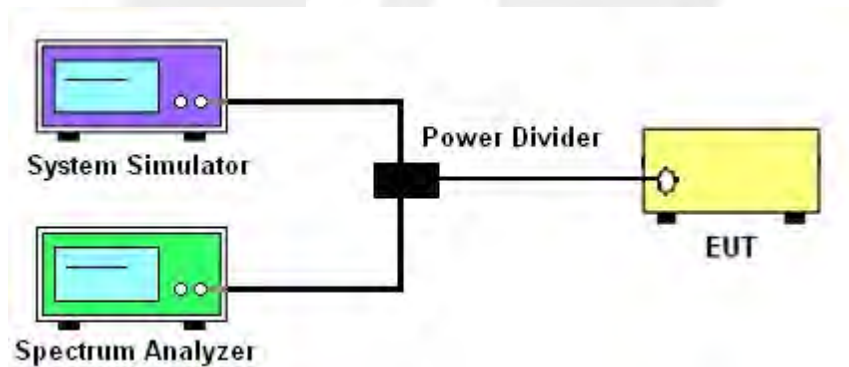

5.7 BAND EDGE

OVERVIEW

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is $43 + \log_{10}(P[\text{Watts}])$, where P is the transmitter power in Watts.

TEST PROCEDURE

1. The testing FCC KDB 971168 D01 v03r01 Section 6.0. and ANSI C63.26-2015-Section 5.7
2. Start and stop frequency were set such that the band edge would be placed in the center of the Plot.
3. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
4. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
5. The band edges of low and high channels for the highest RF powers were measured.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


7. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

$$= P(\text{W}) - [43 + 10\log(P)] (\text{dB})$$

$$= [30 + 10\log(P)] (\text{dBm}) - [43 + 10\log(P)] (\text{dB})$$

$$= -13\text{dBm}.$$

TEST SETUP

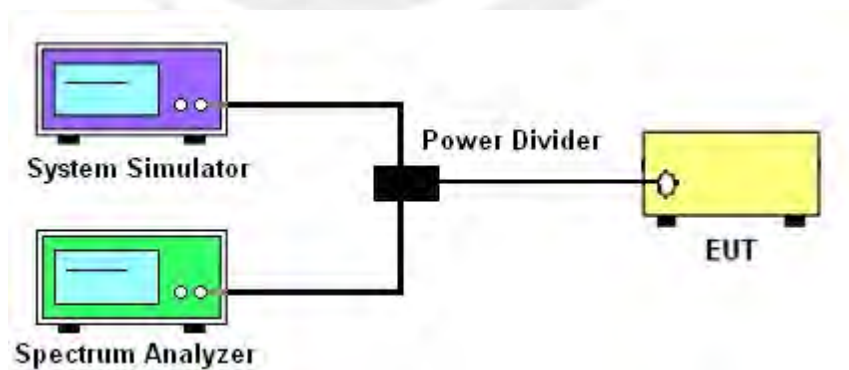



5.8 FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT

Test overview

Radiated spurious emissions measurements are performed using the substitution method described in ANSI C63.26-2015 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using horizontally and vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized horn antennas. All measurements are performed as peak measurements while the EUT is operating at maximum power and at the appropriate frequencies.


It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

Test procedure


1. The testing FCC KDB 971168 D01 Section 5.8 and ANSI C63.26-2015-Section 5.5.
2. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
3. VBW $\geq 3 \times$ RBW
4. Span = 1.5 times the OBW
5. No. of sweep points $> 2 \times$ span/RBW
6. Detector = Peak
7. Trace mode = max hold
8. The trace was allowed to stabilize
9. Effective Isotropic Spurious Radiation was measured by substitution method according to TIA/EIA-603-D. The EUT was replaced by the substitution antenna at same location, and then a known power from S.G. was applied into the dipole antenna through a Tx cable, and then recorded the maximum Analyzer reading through raised and lowered the test antenna.
The correction factor (in dB) = S.G. - Tx Cable loss + Substitution antenna gain - Analyzer reading. Then the EUT's EIRP/ERP was calculated with the correction factor, $ERP/EIRP = P.SG + GT - LC$
ERP/EIRP = effective or equivalent radiated power, respectively (expressed in the same units as P_{Meas}, typically dBW or dBm);
P.SG = measured transmitter output power or PSD, in dBm or dBW;
GT = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);
LC = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

TEST SETUP

For radiated test from 30MHz to 1GHz

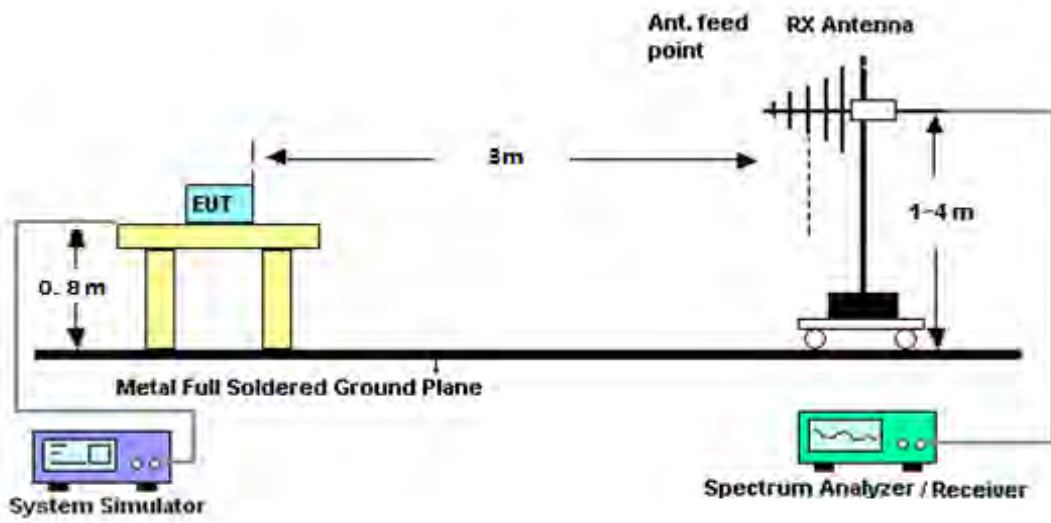

For radiated test from above 1GHz

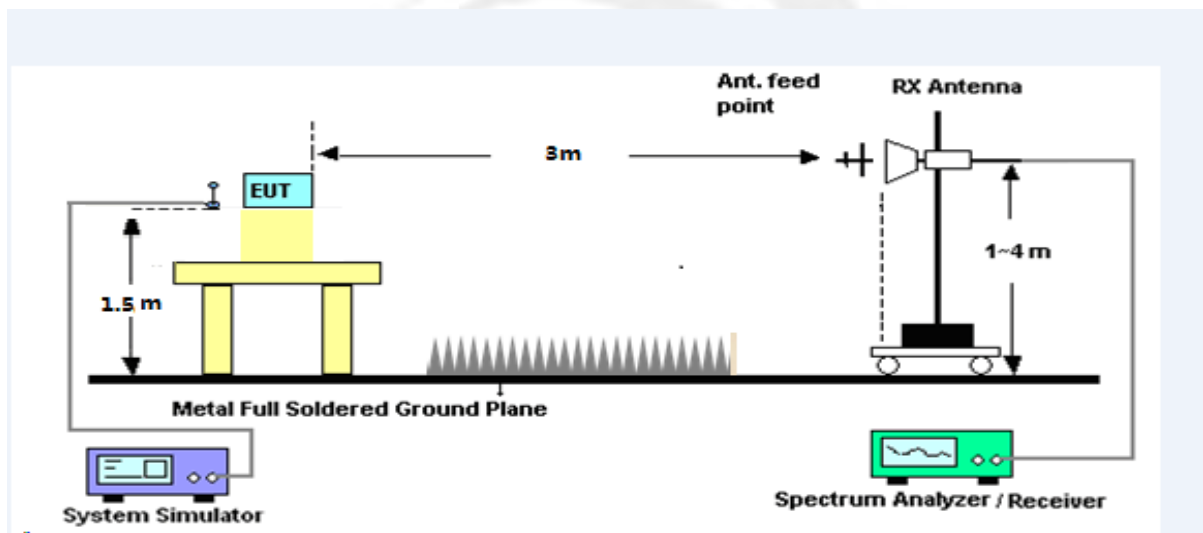



APPENDIX A.TESTRESULT
A1.CONDUCTED OUTPUT POWER

GSM 850:

| GSM 850 | | |
|------------------------|-----------------|----------------|
| Mode | Frequency (MHz) | AVG Power(dBm) |
| GSM (GMSK,1-Slot) | 824.2 | 30.43 |
| | 836.6 | 30.92 |
| | 848.8 | 31.25 |
| GPRS (GMSK,1-Slot) | 824.2 | 30.45 |
| | 836.6 | 30.92 |
| | 848.8 | 31.28 |
| GPRS (GMSK,2-Slot) | 824.2 | 29.96 |
| | 836.6 | 30.52 |
| | 848.8 | 30.80 |
| GPRS (GMSK,3-Slot) | 824.2 | 29.52 |
| | 836.6 | 30.09 |
| | 848.8 | 30.32 |
| GPRS (GMSK,4-Slot) | 824.2 | 29.08 |
| | 836.6 | 29.67 |
| | 848.8 | 29.89 |
| EGPRS (8PSK,1-Slot) | 824.2 | 30.61 |
| | 836.6 | 31.11 |
| | 848.8 | 31.51 |
| EGPRS (8PSK,2-Slot) | 824.2 | 29.89 |
| | 836.6 | 30.31 |
| | 848.8 | 30.78 |
| EGPRS (8PSK,3-Slot) | 824.2 | 29.12 |
| | 836.6 | 29.56 |
| | 848.8 | 30.07 |
| EGPRS (8PSK,4-Slot) | 824.2 | 28.35 |
| | 836.6 | 28.81 |
| | 848.8 | 29.33 |



PCS 1900:

| PCS 1900 | | |
|------------------------|-----------------|----------------|
| Mode | Frequency (MHz) | AVG Power(dBm) |
| GSM (GMSK,1-Slot) | 1850.2 | 27.09 |
| | 1880.0 | 27.18 |
| | 1909.8 | 26.47 |
| GPRS (GMSK,1-Slot) | 1850.2 | 26.96 |
| | 1880.0 | 26.79 |
| | 1909.8 | 27.12 |
| GPRS (GMSK,2-Slot) | 1850.2 | 26.47 |
| | 1880.0 | 26.29 |
| | 1909.8 | 26.63 |
| GPRS (GMSK,3-Slot) | 1850.2 | 25.98 |
| | 1880.0 | 25.86 |
| | 1909.8 | 26.21 |
| GPRS (GMSK,4-Slot) | 1850.2 | 25.48 |
| | 1880.0 | 25.45 |
| | 1909.8 | 25.73 |
| EGPRS (8PSK,1-Slot) | 1850.2 | 27.62 |
| | 1880.0 | 27.12 |
| | 1909.8 | 27.91 |
| EGPRS (8PSK,2-Slot) | 1850.2 | 26.90 |
| | 1880.0 | 26.40 |
| | 1909.8 | 27.12 |
| EGPRS (8PSK,3-Slot) | 1850.2 | 26.10 |
| | 1880.0 | 25.65 |
| | 1909.8 | 26.33 |
| EGPRS (8PSK,4-Slot) | 1850.2 | 25.32 |
| | 1880.0 | 24.92 |
| | 1909.8 | 25.55 |



UMTS BAND V

| UMTS BAND V | | |
|--------------------|----------------|-----------|
| Mode | Frequency(MHz) | AVG Power |
| WCDMA 850 RMC | 826.4 | 21.58 |
| | 836.6 | 21.34 |
| | 846.6 | 21.61 |
| HSDPA Subtest 1 | 826.4 | 20.70 |
| | 836.6 | 20.66 |
| | 846.6 | 20.42 |
| HSDPA Subtest 2 | 826.4 | 20.30 |
| | 836.6 | 20.22 |
| | 846.6 | 20.02 |
| HSDPA Subtest 3 | 826.4 | 19.93 |
| | 836.6 | 19.73 |
| | 846.6 | 19.62 |
| HSDPA Subtest 4 | 826.4 | 19.54 |
| | 836.6 | 19.23 |
| | 846.6 | 19.21 |
| HSUPA Subtest 1 | 826.4 | 20.23 |
| | 836.6 | 20.13 |
| | 846.6 | 20.37 |
| HSUPA Subtest 2 | 826.4 | 19.25 |
| | 836.6 | 19.19 |
| | 846.6 | 19.44 |
| HSUPA Subtest 3 | 826.4 | 19.13 |
| | 836.6 | 18.74 |
| | 846.6 | 19.10 |
| HSUPA Subtest 4 | 826.4 | 18.77 |
| | 836.6 | 18.39 |
| | 846.6 | 18.78 |
| HSUPA Subtest 5 | 826.4 | 17.35 |
| | 836.6 | 16.98 |
| | 846.6 | 17.31 |



UMTS BAND II

| UMTS BAND II | | |
|--------------------|----------------|-----------|
| Mode | Frequency(MHz) | AVG Power |
| WCDMA 1900 RMC | 1852.4 | 21.02 |
| | 1880 | 21.05 |
| | 1907.6 | 21.15 |
| HSDPA Subtest 1 | 1852.4 | 20.53 |
| | 1880 | 20.25 |
| | 1907.6 | 20.48 |
| HSDPA Subtest 2 | 1852.4 | 20.10 |
| | 1880 | 19.80 |
| | 1907.6 | 20.03 |
| HSDPA Subtest 3 | 1852.4 | 19.72 |
| | 1880 | 19.38 |
| | 1907.6 | 19.69 |
| HSDPA Subtest 4 | 1852.4 | 19.39 |
| | 1880 | 19.01 |
| | 1907.6 | 19.31 |
| HSUPA Subtest 1 | 1852.4 | 20.05 |
| | 1880 | 18.93 |
| | 1907.6 | 19.89 |
| HSUPA Subtest 2 | 1852.4 | 19.20 |
| | 1880 | 17.96 |
| | 1907.6 | 18.93 |
| HSUPA Subtest 3 | 1852.4 | 19.00 |
| | 1880 | 17.53 |
| | 1907.6 | 18.59 |
| HSUPA Subtest 4 | 1852.4 | 18.65 |
| | 1880 | 17.08 |
| | 1907.6 | 18.11 |
| HSUPA Subtest 5 | 1852.4 | 17.24 |
| | 1880 | 15.62 |
| | 1907.6 | 16.69 |



UMTS BAND IV

| UMTS BAND IV | | |
|--------------------|----------------|-----------|
| Mode | Frequency(MHz) | AVG Power |
| WCDMA 1700 RMC | 1712.6 | 22.53 |
| | 1740 | 22.82 |
| | 1752.4 | 22.91 |
| HSDPA Subtest 1 | 1712.6 | 22.23 |
| | 1740 | 22.30 |
| | 1752.4 | 22.22 |
| HSDPA Subtest 2 | 1712.6 | 21.74 |
| | 1740 | 21.86 |
| | 1752.4 | 21.73 |
| HSDPA Subtest 3 | 1712.6 | 21.36 |
| | 1740 | 21.42 |
| | 1752.4 | 21.36 |
| HSDPA Subtest 4 | 1712.6 | 20.88 |
| | 1740 | 21.03 |
| | 1752.4 | 20.93 |
| HSUPA Subtest 1 | 1712.6 | 21.87 |
| | 1740 | 21.56 |
| | 1752.4 | 21.38 |
| HSUPA Subtest 2 | 1712.6 | 21.01 |
| | 1740 | 20.62 |
| | 1752.4 | 20.40 |
| HSUPA Subtest 3 | 1712.6 | 20.97 |
| | 1740 | 20.18 |
| | 1752.4 | 20.08 |
| HSUPA Subtest 4 | 1712.6 | 20.64 |
| | 1740 | 19.72 |
| | 1752.4 | 19.64 |
| HSUPA Subtest 5 | 1712.6 | 19.24 |
| | 1740 | 18.29 |
| | 1752.4 | 18.18 |



A2. PEAK-TO-AVERAGE RADIO


| GSM 850 | | |
|-----------|-----------------|------|
| Mode | Frequency (MHz) | PAR |
| GSM 850 | 824.2 | 0.10 |
| | 836.6 | 0.10 |
| | 848.8 | 0.11 |
| GPRS 850 | 824.2 | 0.10 |
| | 836.6 | 0.11 |
| | 848.8 | 0.11 |
| EGPRS 850 | 824.2 | 2.92 |
| | 836.6 | 3.24 |
| | 848.8 | 2.94 |
| PCS 1900 | | |
| Mode | Frequency (MHz) | PAR |
| PCS1900 | 1850.2 | 0.12 |
| | 1880 | 0.11 |
| | 1909.8 | 0.11 |
| GPRS1900 | 1850.2 | 0.12 |
| | 1880 | 0.12 |
| | 1909.8 | 0.11 |
| EGPRS1900 | 1850.2 | 2.76 |
| | 1880 | 2.73 |
| | 1909.8 | 2.99 |




| UMTS Band II | | |
|-------------------|-----------------|------|
| Mode | Frequency (MHz) | PAR |
| WCDMA 1900 RMC | 1852.4 | 3.08 |
| | 1880 | 3.08 |
| | 1907.6 | 3.04 |
| HSDPA 1900 | 1852.4 | 3.19 |
| | 1880 | 3.28 |
| | 1907.6 | 3.21 |
| HSUPA 1900 | 1852.4 | 3.80 |
| | 1880 | 4.03 |
| | 1907.6 | 3.76 |

| UMTS Band V | | |
|------------------|-----------------|------|
| Mode | Frequency (MHz) | PAR |
| WCDMA 850 RMC | 826.4 | 3.06 |
| | 836.6 | 2.94 |
| | 846.6 | 2.94 |
| HSDPA 850 | 826.4 | 3.78 |
| | 836.6 | 3.10 |
| | 846.6 | 3.18 |
| HSUPA 850 | 826.4 | 3.78 |
| | 836.6 | 3.17 |
| | 846.6 | 3.61 |


| UMTS Band IV | | |
|-------------------|-----------------|------|
| Mode | Frequency (MHz) | PAR |
| WCDMA 1700 RMC | 1712.6 | 3.02 |
| | 1740 | 3.04 |
| | 1752.4 | 3.07 |
| HSDPA 1700 | 1712.6 | 4.03 |
| | 1740 | 3.33 |
| | 1752.4 | 3.19 |
| HSUPA 1700 | 1712.6 | 3.74 |
| | 1740 | 3.16 |
| | 1752.4 | 3.79 |

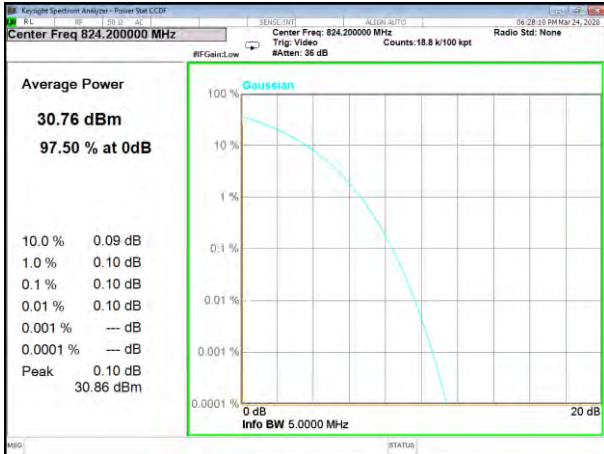


GSM850_Lower

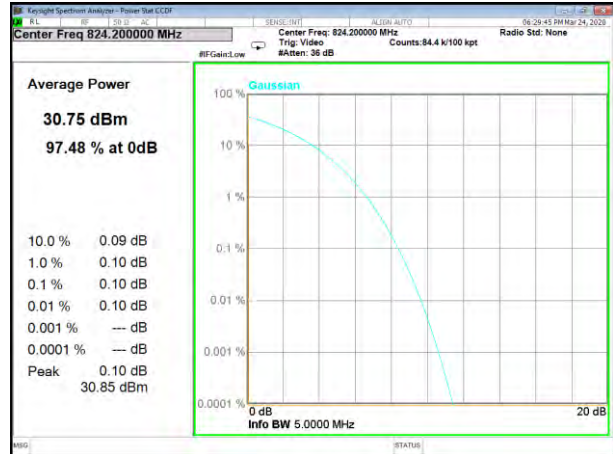


GPRS850_Lower

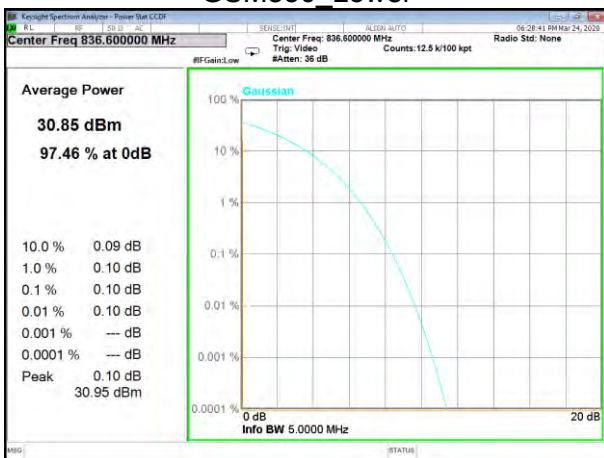


GSM850_Middle

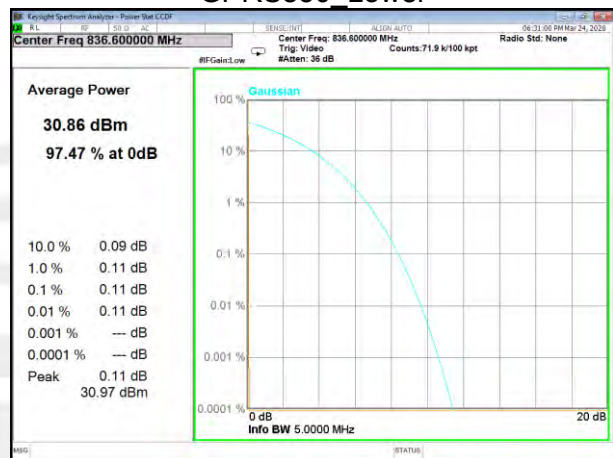


GPRS850_Middle

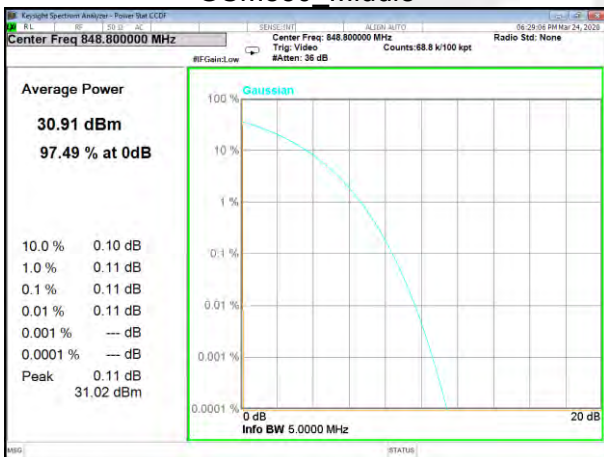


GSM850_Higher

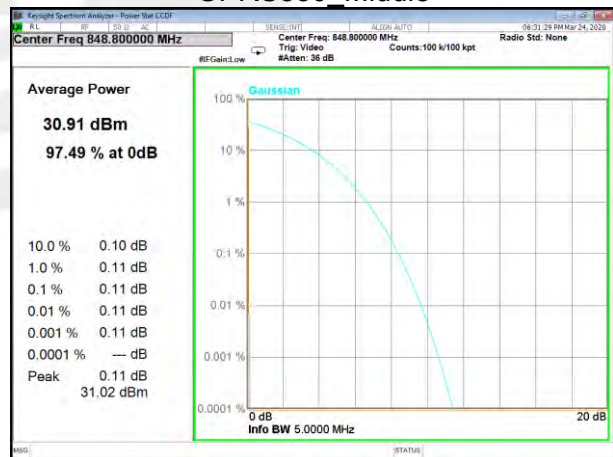


GPRS850_Higher

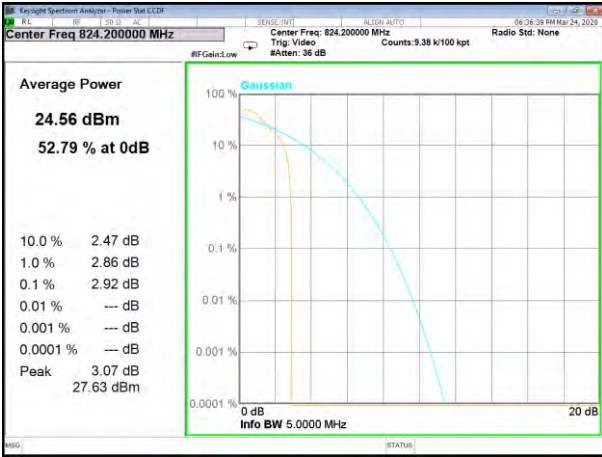


EGPRS850_Lower

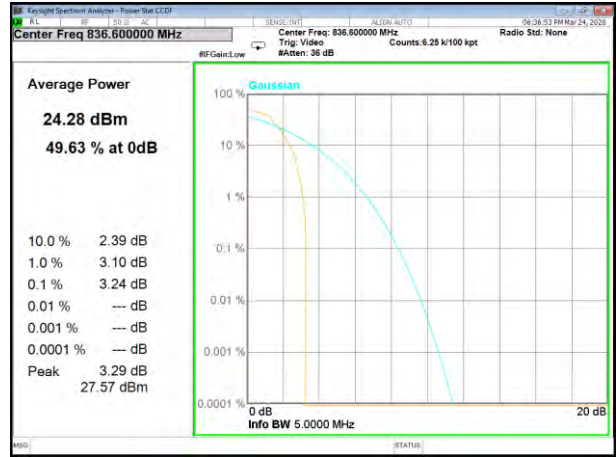


EGPRS850_Middle

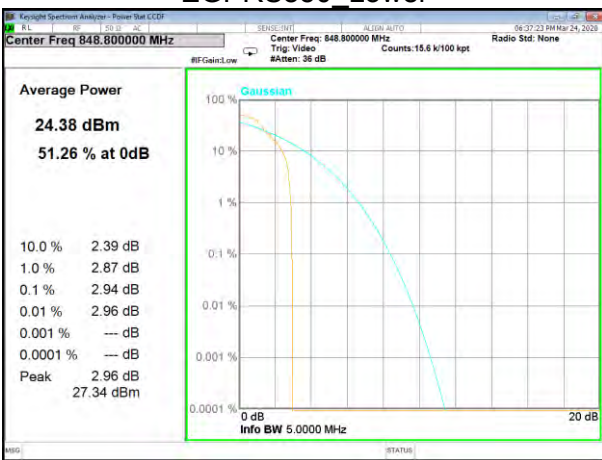


EGPRS850_Higher

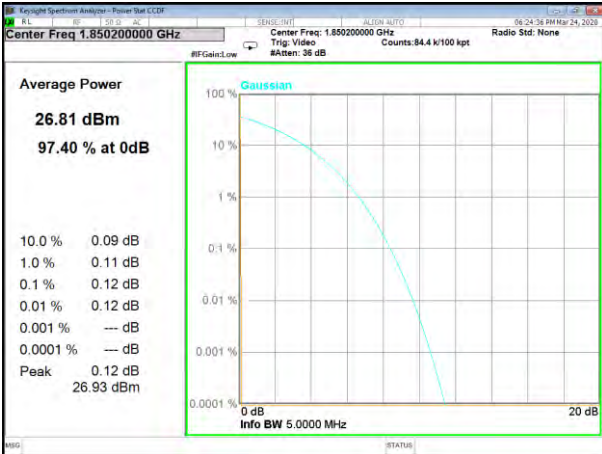


GSM1900_Lower

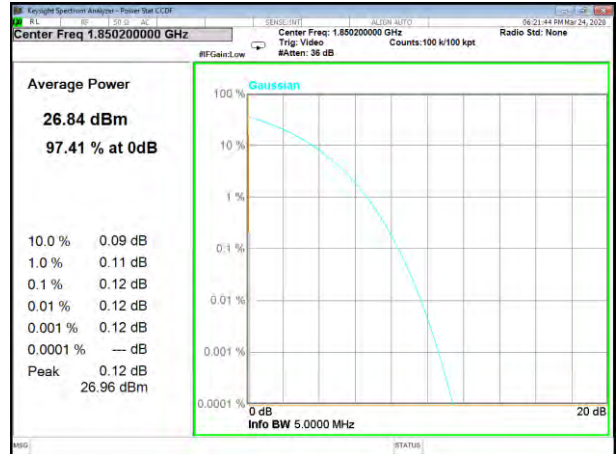


GPRS1900_Lower

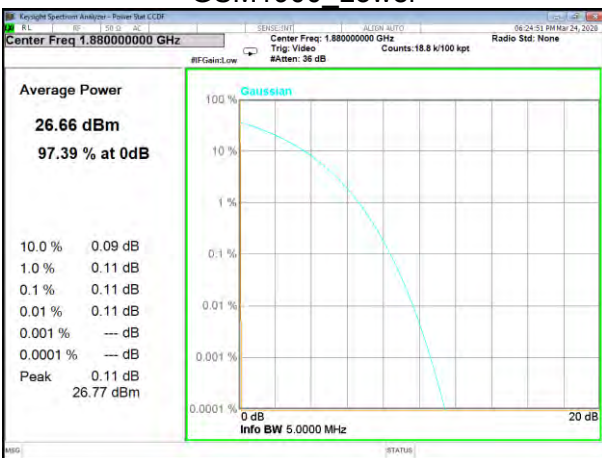


GSM1900_Middle

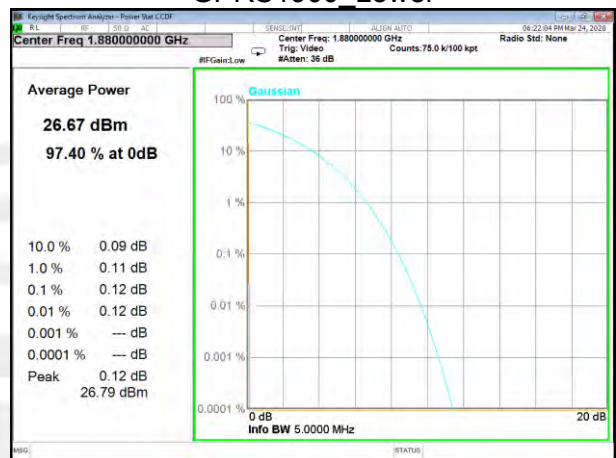


GPRS1900_Middle

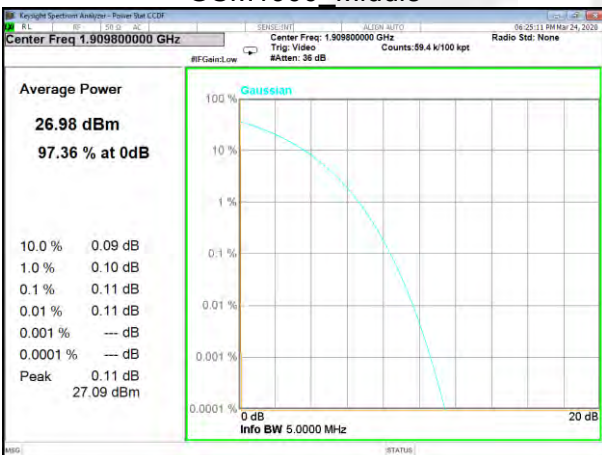


GSM1900_Higher

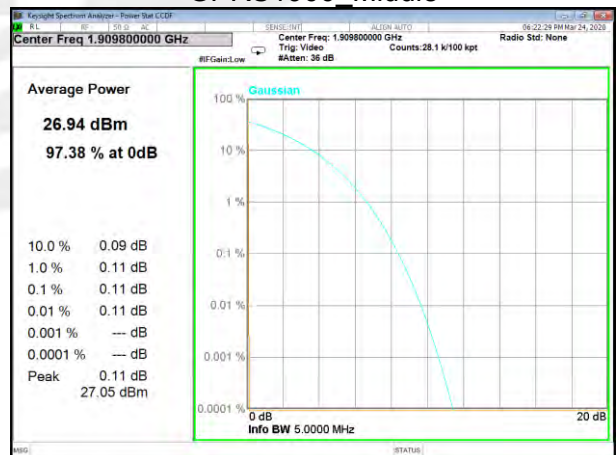


GPRS1900_Higher

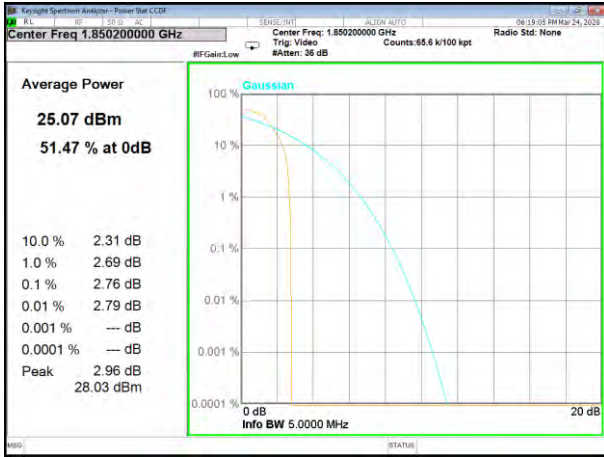


EGPRS1900_Lower

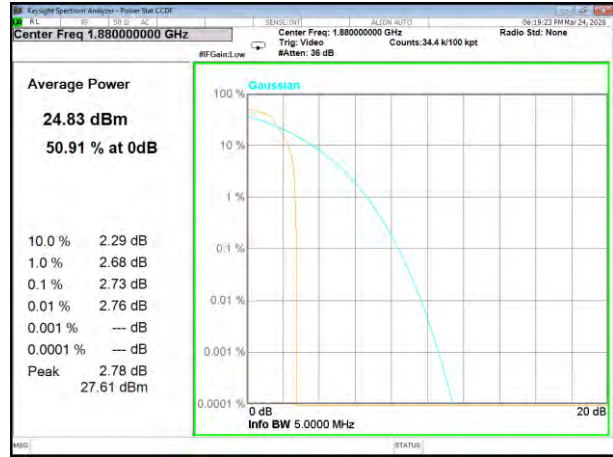


EGPRS1900_Middle

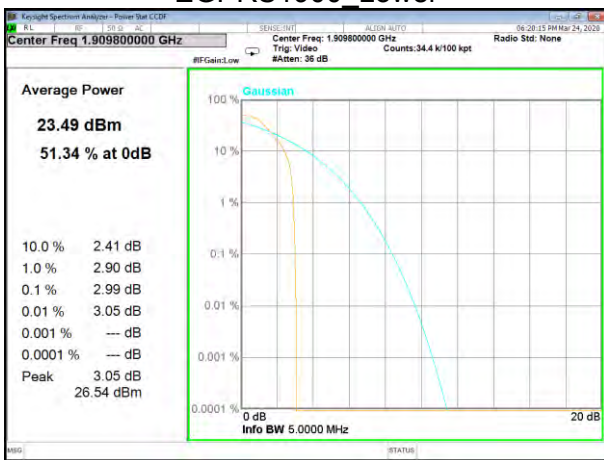


EGPRS1900_Higher

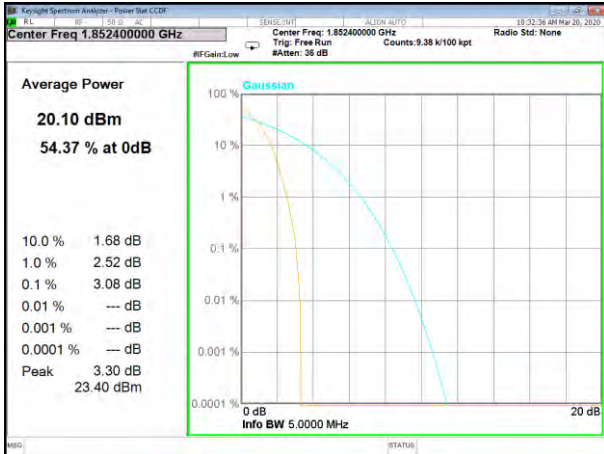


WCDMA2_Lower

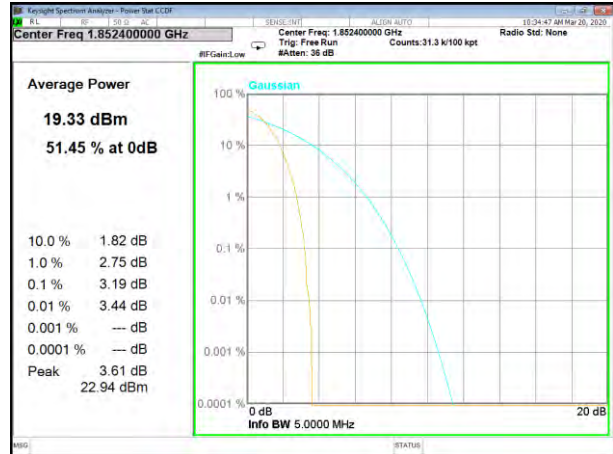


HSDPA2_Lower

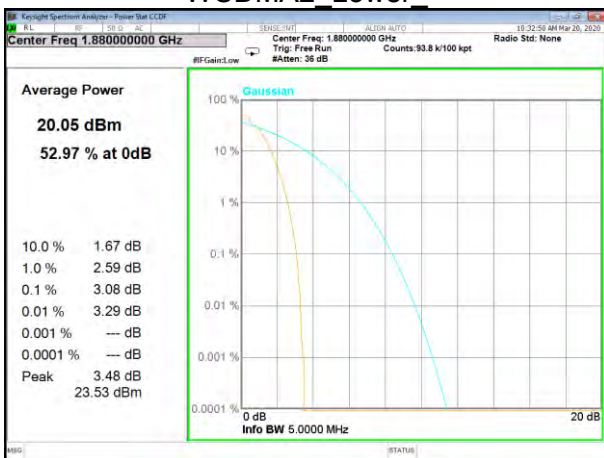


WCDMA2_Middle

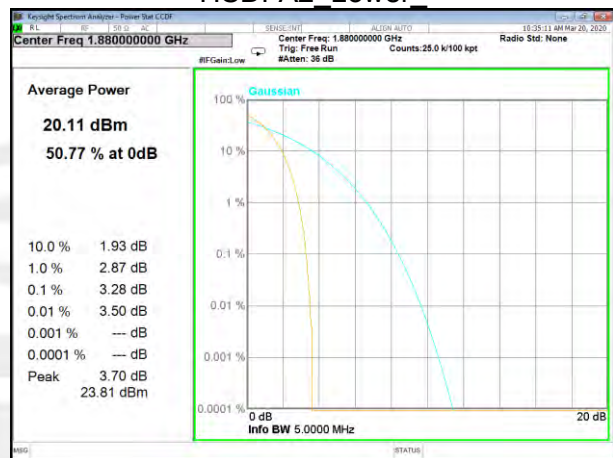


HSDPA2_Middle

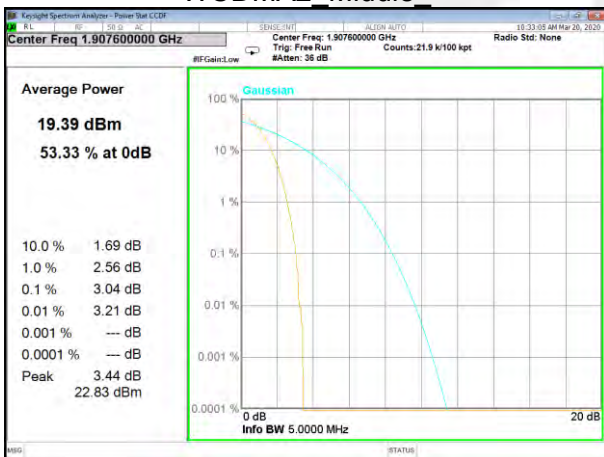


WCDMA2_Higher_

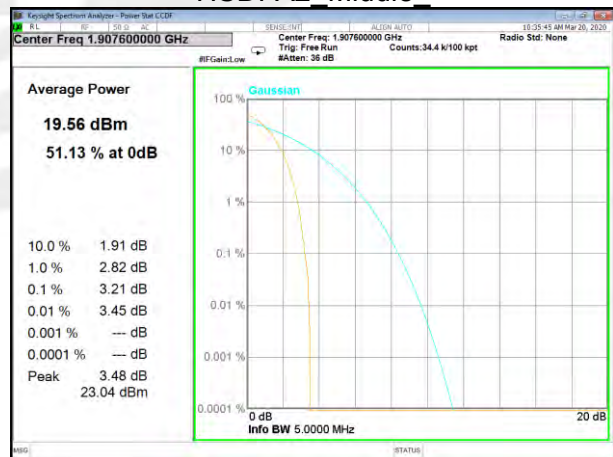


HSDPA2_Higher_

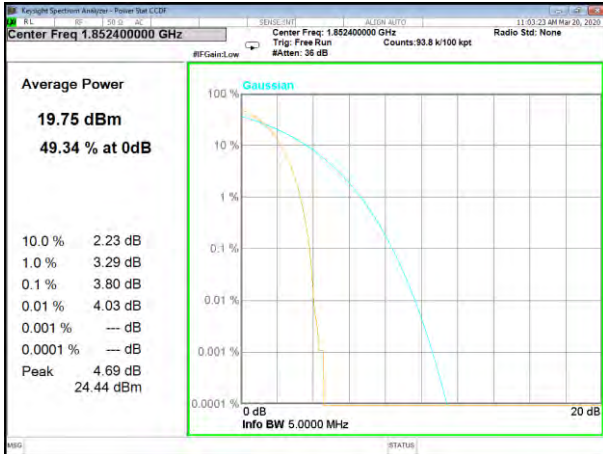


HSUPA2_Lower

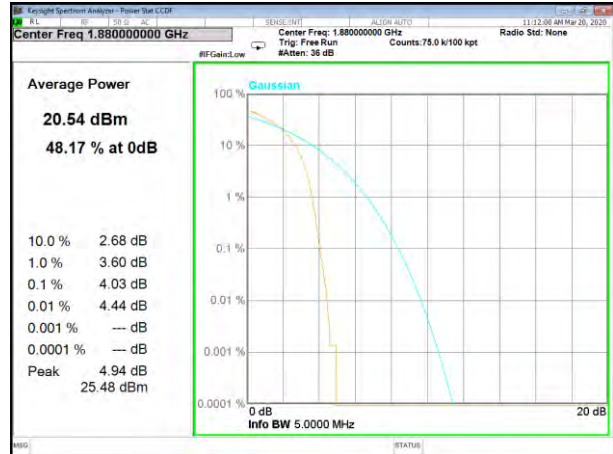


HSUPA2_Middle_

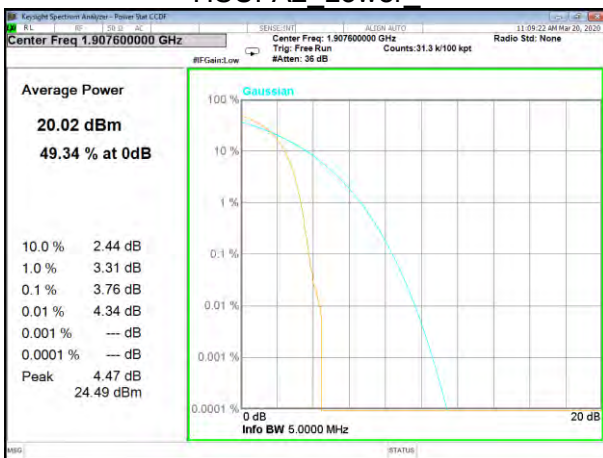


HSUPA2_Higher_

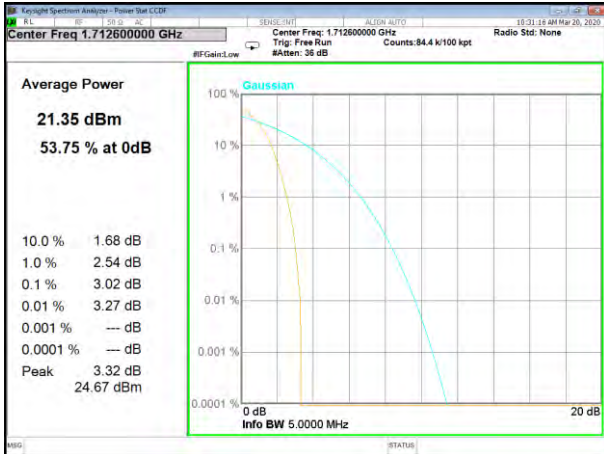


WCDMA4 Lower

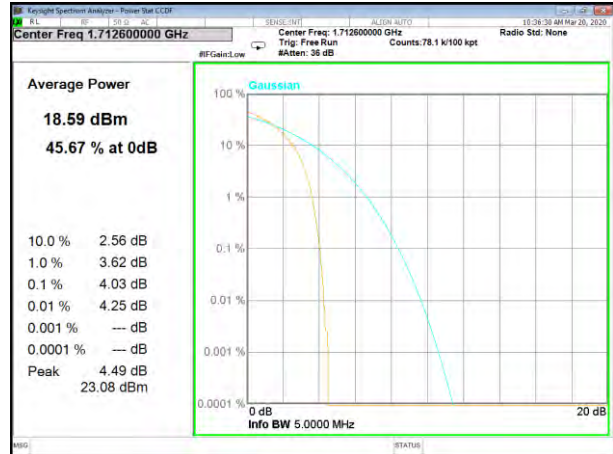


HSDPA4 Lower

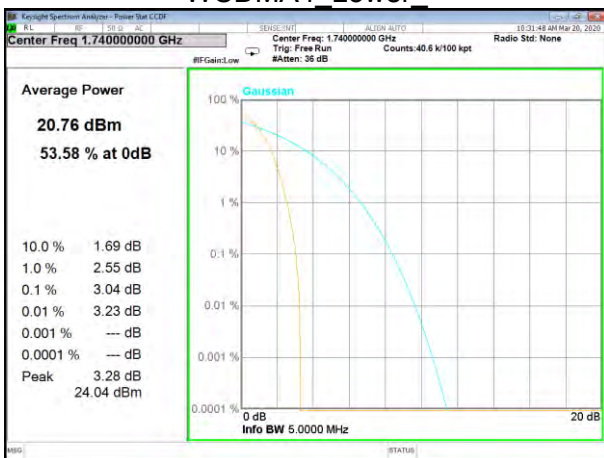


WCDMA4 Middle

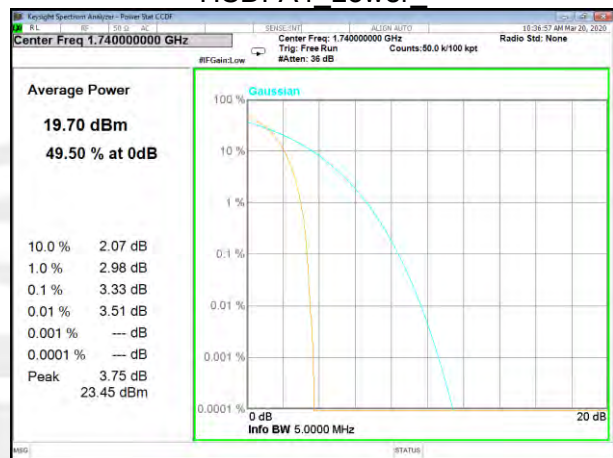


HSDPA4 Middle

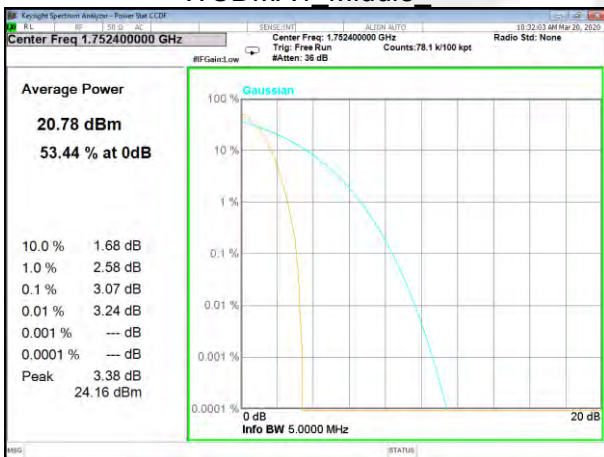


WCDMA4_Higher_

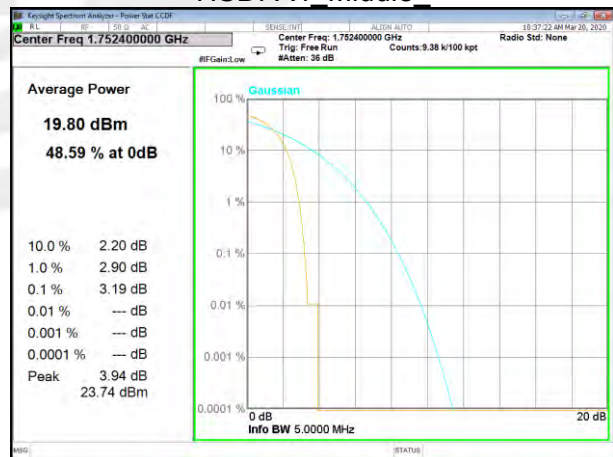


HSDPA4_Higher_

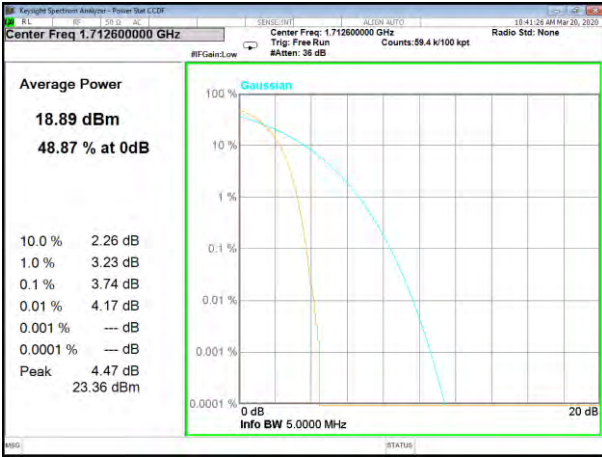


HSUPA4_Lower

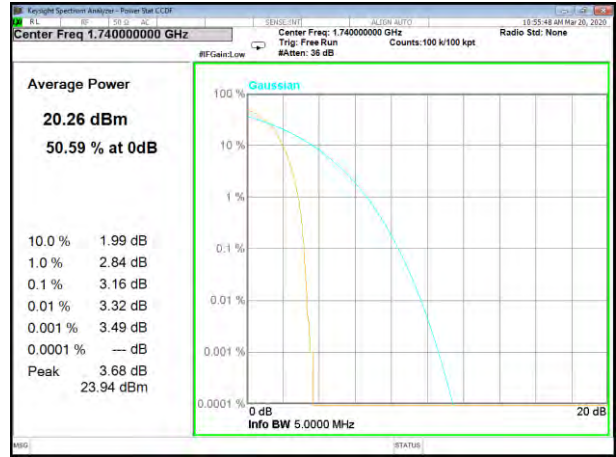


HSUPA4_Middle_

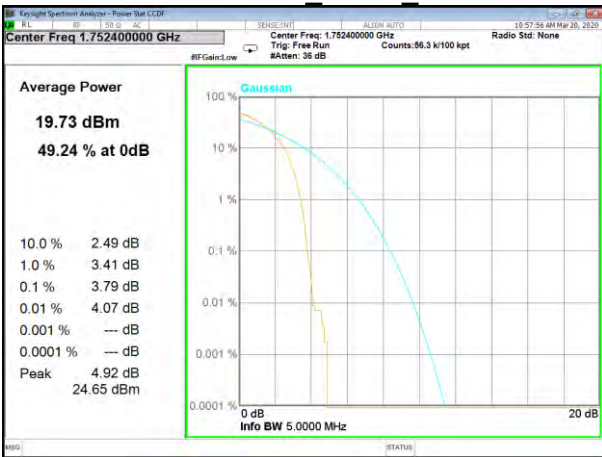


HSUPA4_Higher_

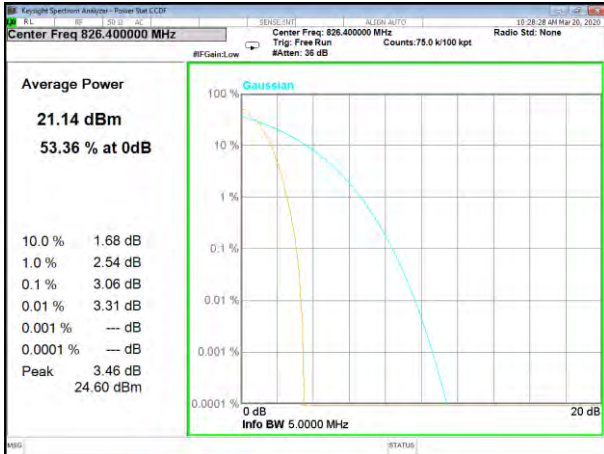


WCDMA5_Lower

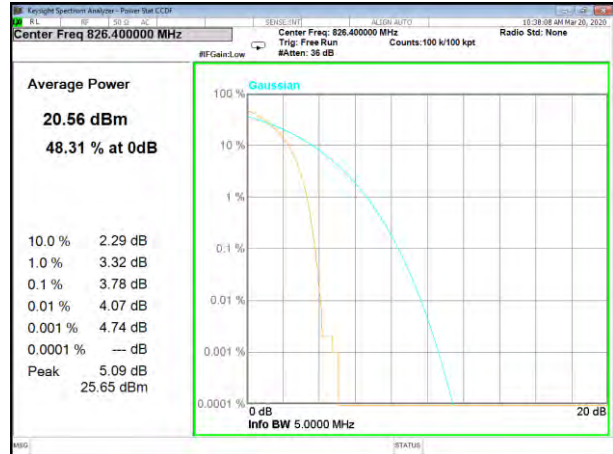


HSDPA5_Lower

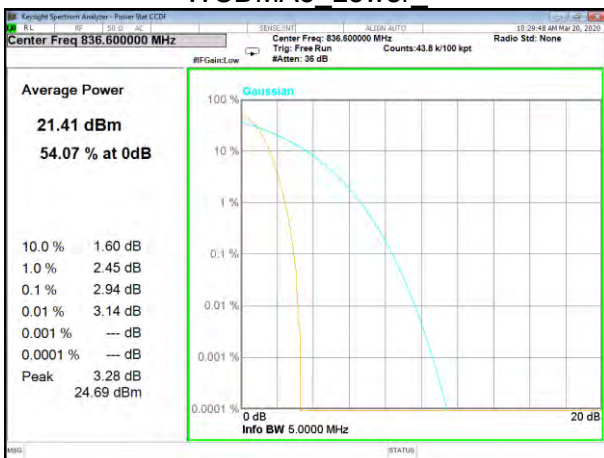


WCDMA5_Middle

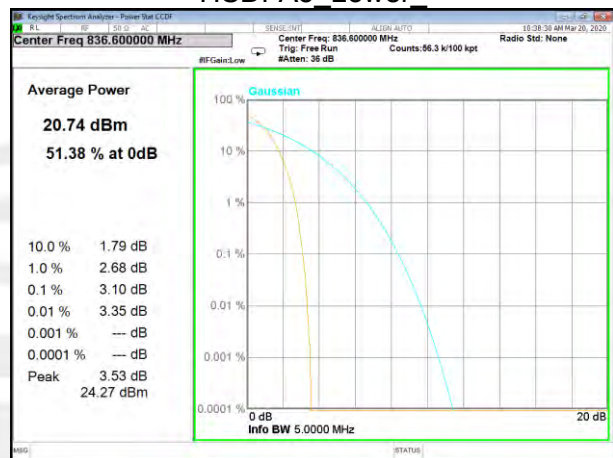


HSDPA5_Middle

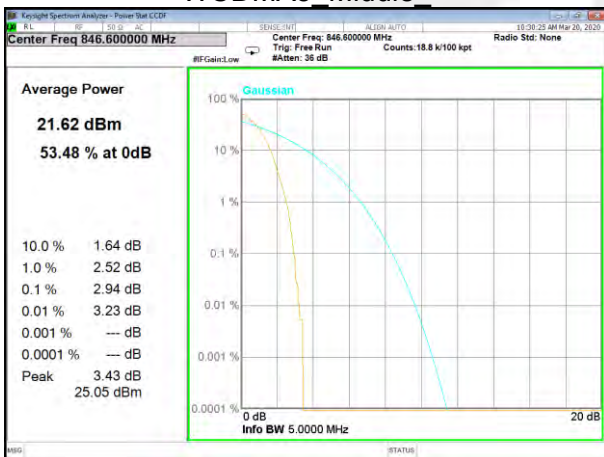


WCDMA5_Higher

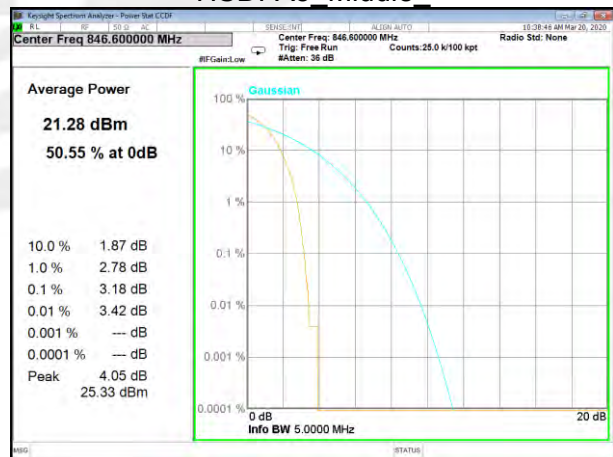


HSDPA5_Higher

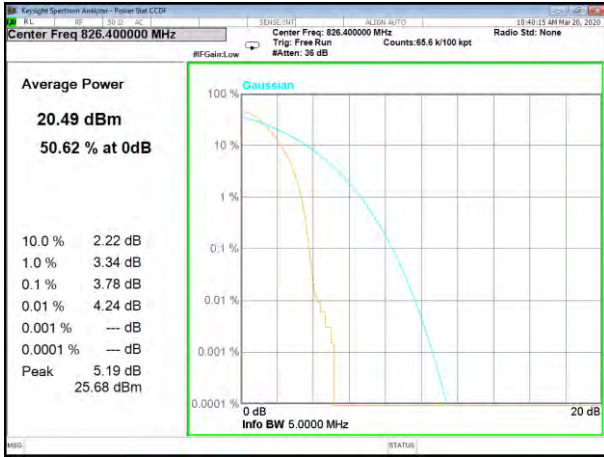

HSUPA5_Lower

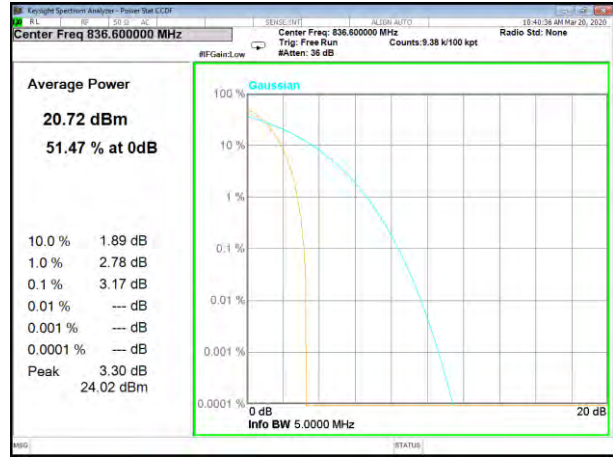

HSUPA5_Middle_

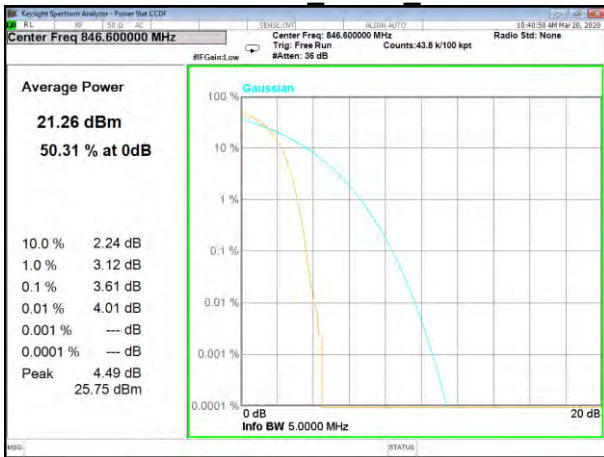

HSUPA5_Higher_



A3. TRANSMITTER RADIATED POWER (EIRP/ERP)

| Radiated Power (ERP) for GSM 850 MHZ | | | | | | | | |
|--------------------------------------|-----------------|-----------------|------------|-----------|-----------------------|------------------|--------------------------|------------|
| Mode | Frequency | Result | | | | | | Conclusion |
| | | S G.Level (dBm) | Cable loss | Gain(dBi) | correction factor(dB) | PMeas E.R.P(dBm) | Polarization Of Max. ERP | |
| GSM850 | 824.2 | 21.57 | 0.44 | 6.5 | 2.15 | 25.48 | Horizontal | Pass |
| | 824.2 | 23.51 | 0.44 | 6.5 | 2.15 | 27.42 | Vertical | Pass |
| | 836.6 | 22.28 | 0.45 | 6.5 | 2.15 | 26.18 | Horizontal | Pass |
| | 836.6 | 23.98 | 0.45 | 6.5 | 2.15 | 27.88 | Vertical | Pass |
| | 848.8 | 22.73 | 0.46 | 6.5 | 2.15 | 26.62 | Horizontal | Pass |
| | 848.8 | 24.62 | 0.46 | 6.5 | 2.15 | 28.51 | Vertical | Pass |
| GPRS850 | 824.2 | 21.46 | 0.44 | 6.5 | 2.15 | 25.37 | Horizontal | Pass |
| | 824.2 | 23.71 | 0.44 | 6.5 | 2.15 | 27.62 | Vertical | Pass |
| | 836.6 | 21.90 | 0.45 | 6.5 | 2.15 | 25.80 | Horizontal | Pass |
| | 836.6 | 24.07 | 0.45 | 6.5 | 2.15 | 27.97 | Vertical | Pass |
| | 848.8 | 22.38 | 0.46 | 6.5 | 2.15 | 26.27 | Horizontal | Pass |
| | 848.8 | 24.66 | 0.46 | 6.5 | 2.15 | 28.55 | Vertical | Pass |
| EGPRS850 | 824.2 | 21.81 | 0.44 | 6.5 | 2.15 | 25.72 | Horizontal | Pass |
| | 824.2 | 24.00 | 0.44 | 6.5 | 2.15 | 27.91 | Vertical | Pass |
| | 836.6 | 22.21 | 0.45 | 6.5 | 2.15 | 26.11 | Horizontal | Pass |
| | 836.6 | 24.32 | 0.45 | 6.5 | 2.15 | 28.22 | Vertical | Pass |
| | 848.8 | 22.36 | 0.46 | 6.5 | 2.15 | 26.25 | Horizontal | Pass |
| | 848.8 | 24.73 | 0.46 | 6.5 | 2.15 | 28.62 | Vertical | Pass |
| Limit | ERP<7W=38.45dBm | | | | | | | |

| Radiated Power (EIRP) for PCS 1900 MHZ | | | | | | | | |
|--|---------------|-----------------|------------|------------|---------------------|------------|--------------------------|------------|
| Mode | Frequency | Result | | | | | Polarization Of Max. ERP | Conclusion |
| | | S G.Level (dBm) | Cable loss | Gain (dBi) | PMeas E.I.R.P.(dBm) | | | |
| PCS1900 | 1850.2 | 16.54 | 2.41 | 10.35 | 24.48 | Horizontal | Pass | |
| | 1850.2 | 18.36 | 2.41 | 10.35 | 26.3 | Vertical | Pass | |
| | 1880 | 16.88 | 2.42 | 10.35 | 24.81 | Horizontal | Pass | |
| | 1880 | 18.75 | 2.42 | 10.35 | 26.68 | Vertical | Pass | |
| | 1909.8 | 15.85 | 2.43 | 10.35 | 23.77 | Horizontal | Pass | |
| | 1909.8 | 17.84 | 2.43 | 10.35 | 25.76 | Vertical | Pass | |
| GPRS1900 | 1850.2 | 15.99 | 2.41 | 10.35 | 23.93 | Horizontal | Pass | |
| | 1850.2 | 18 | 2.41 | 10.35 | 25.94 | Vertical | Pass | |
| | 1880 | 15.19 | 2.42 | 10.35 | 23.12 | Horizontal | Pass | |
| | 1880 | 17.65 | 2.42 | 10.35 | 25.58 | Vertical | Pass | |
| | 1909.8 | 15.66 | 2.43 | 10.35 | 23.58 | Horizontal | Pass | |
| | 1909.8 | 18.13 | 2.43 | 10.35 | 26.05 | Vertical | Pass | |
| EGPRS1900 | 1850.2 | 16.71 | 2.41 | 10.35 | 24.65 | Horizontal | Pass | |
| | 1850.2 | 19.03 | 2.41 | 10.35 | 26.97 | Vertical | Pass | |
| | 1880 | 16.46 | 2.42 | 10.35 | 24.39 | Horizontal | Pass | |
| | 1880 | 18.5 | 2.42 | 10.35 | 26.43 | Vertical | Pass | |
| | 1909.8 | 17.06 | 2.43 | 10.35 | 24.98 | Horizontal | Pass | |
| | 1909.8 | 19.41 | 2.43 | 10.35 | 27.33 | Vertical | Pass | |
| Limit | EIRP<2W=33dBm | | | | | | | |



| Radiated Power (EIRP) for WCDMA Band II | | | | | | | | |
|---|---------------|--------------------|---------------|---------------|------------------------|------------|--------------------------------|------------|
| Mode | Frequency | Result | | | | | Polarization Of Max. ERP | Conclusion |
| | | S G.Level (dBm) | Cable loss | Gain (dBi) | PMeas E.I.R.P.(dBm) | | | |
| WCDMA | 1852.4 | 10.74 | 2.41 | 10.35 | 18.68 | Horizontal | Pass | |
| | 1852.4 | 12.58 | 2.41 | 10.35 | 20.52 | Vertical | Pass | |
| | 1880 | 10.71 | 2.42 | 10.35 | 18.64 | Horizontal | Pass | |
| | 1880 | 12.58 | 2.42 | 10.35 | 20.51 | Vertical | Pass | |
| | 1907.4 | 10.79 | 2.43 | 10.35 | 18.71 | Horizontal | Pass | |
| | 1907.4 | 12.72 | 2.43 | 10.35 | 20.64 | Vertical | Pass | |
| HSUPA | 1852.4 | 10.05 | 2.41 | 10.35 | 17.99 | Horizontal | Pass | |
| | 1852.4 | 11.95 | 2.41 | 10.35 | 19.89 | Vertical | Pass | |
| | 1880 | 9.88 | 2.42 | 10.35 | 17.81 | Horizontal | Pass | |
| | 1880 | 11.67 | 2.42 | 10.35 | 19.60 | Vertical | Pass | |
| | 1907.4 | 9.76 | 2.43 | 10.35 | 17.68 | Horizontal | Pass | |
| | 1907.4 | 11.75 | 2.43 | 10.35 | 19.67 | Vertical | Pass | |
| HSDPA | 1852.4 | 9.59 | 2.41 | 10.35 | 17.53 | Horizontal | Pass | |
| | 1852.4 | 11.43 | 2.41 | 10.35 | 19.37 | Vertical | Pass | |
| | 1880 | 8.2 | 2.42 | 10.35 | 16.13 | Horizontal | Pass | |
| | 1880 | 10.18 | 2.42 | 10.35 | 18.11 | Vertical | Pass | |
| | 1907.4 | 9.5 | 2.43 | 10.35 | 17.42 | Horizontal | Pass | |
| | 1907.4 | 11.23 | 2.43 | 10.35 | 19.15 | Vertical | Pass | |
| Limit | EIRP<2W=33dBm | | | | | | | |

| Radiated Power (ERP) for WCDMA Band V | | | | | | | | |
|---------------------------------------|-----------------|-----------------------|---------------|---------------|--------------------------|----------------------|--------------------------------|------------|
| Mode | Frequency | Result | | | | | Polarization Of Max. ERP | Conclusion |
| | | S G.Level (dBm) | Cable loss | Gain (dBi) | correction factor(dB) | PMeas E.R.P.(dBm) | | |
| WCDMA | 826.4 | 13.16 | 0.44 | 6.5 | 2.15 | 17.07 | Horizontal | Pass |
| | 826.4 | 14.95 | 0.44 | 6.5 | 2.15 | 18.86 | Vertical | Pass |
| | 836.6 | 12.82 | 0.45 | 6.5 | 2.15 | 16.72 | Horizontal | Pass |
| | 836.6 | 14.59 | 0.45 | 6.5 | 2.15 | 18.49 | Vertical | Pass |
| | 846.4 | 13.20 | 0.46 | 6.5 | 2.15 | 17.09 | Horizontal | Pass |
| | 846.4 | 15.04 | 0.46 | 6.5 | 2.15 | 18.93 | Vertical | Pass |
| HSUPA | 826.4 | 12.23 | 0.44 | 6.5 | 2.15 | 16.14 | Horizontal | Pass |
| | 826.4 | 13.99 | 0.44 | 6.5 | 2.15 | 17.90 | Vertical | Pass |
| | 836.6 | 12.15 | 0.45 | 6.5 | 2.15 | 16.05 | Horizontal | Pass |
| | 836.6 | 14.06 | 0.45 | 6.5 | 2.15 | 17.96 | Vertical | Pass |
| | 846.4 | 11.95 | 0.46 | 6.5 | 2.15 | 15.84 | Horizontal | Pass |
| | 846.4 | 13.68 | 0.46 | 6.5 | 2.15 | 17.57 | Vertical | Pass |
| HSDPA | 826.4 | 11.72 | 0.44 | 6.5 | 2.15 | 15.63 | Horizontal | Pass |
| | 826.4 | 13.42 | 0.44 | 6.5 | 2.15 | 17.33 | Vertical | Pass |
| | 836.6 | 11.43 | 0.45 | 6.5 | 2.15 | 15.33 | Horizontal | Pass |
| | 836.6 | 13.42 | 0.45 | 6.5 | 2.15 | 17.32 | Vertical | Pass |
| | 846.4 | 11.94 | 0.46 | 6.5 | 2.15 | 15.83 | Horizontal | Pass |
| | 846.4 | 13.82 | 0.46 | 6.5 | 2.15 | 17.71 | Vertical | Pass |
| Limit | ERP<7W=38.45dBm | | | | | | | |



| Radiated Power (EIRP) for WCDMA Band IV | | | | | | | |
|---|------------------|-----------------|------------|------------|---------------------|--------------------------|------------|
| Mode | Frequency | Result | | | | | Conclusion |
| | | S G.Level (dBm) | Cable loss | Gain (dBi) | PMeas E.I.R.P.(dBm) | Polarization Of Max. ERP | |
| WCDMA | 1712.6 | 11.95 | 2.07 | 10.13 | 20.01 | Horizontal | Pass |
| | 1712.6 | 13.87 | 2.07 | 10.13 | 21.93 | Vertical | Pass |
| | 1740 | 12.11 | 2.08 | 10.13 | 20.16 | Horizontal | Pass |
| | 1740 | 14.02 | 2.08 | 10.13 | 22.07 | Vertical | Pass |
| | 1752.4 | 12.27 | 2.09 | 10.13 | 20.31 | Horizontal | Pass |
| | 1752.4 | 14.11 | 2.09 | 10.13 | 22.15 | Vertical | Pass |
| HSUPA | 1712.6 | 11.47 | 2.07 | 10.13 | 19.53 | Horizontal | Pass |
| | 1712.6 | 13.41 | 2.07 | 10.13 | 21.47 | Vertical | Pass |
| | 1740 | 11.59 | 2.08 | 10.13 | 19.64 | Horizontal | Pass |
| | 1740 | 13.36 | 2.08 | 10.13 | 21.41 | Vertical | Pass |
| | 1752.4 | 11.55 | 2.09 | 10.13 | 19.59 | Horizontal | Pass |
| | 1752.4 | 13.3 | 2.09 | 10.13 | 21.34 | Vertical | Pass |
| HSDPA | 1712.6 | 11.4 | 2.07 | 10.13 | 19.46 | Horizontal | Pass |
| | 1712.6 | 13.13 | 2.07 | 10.13 | 21.19 | Vertical | Pass |
| | 1740 | 11.1 | 2.08 | 10.13 | 19.15 | Horizontal | Pass |
| | 1740 | 12.88 | 2.08 | 10.13 | 20.93 | Vertical | Pass |
| | 1752.4 | 10.78 | 2.09 | 10.13 | 18.82 | Horizontal | Pass |
| | 1752.4 | 12.61 | 2.09 | 10.13 | 20.65 | Vertical | Pass |
| Limit | EIRP<3W=34.78dBm | | | | | | |

Note: Test is divided into three directions, X/Y/Z. X pattern for the worst



A4. OCCUPIED BANDWIDTH (99% OCCUPIED BANDWIDTH/26dB BANDWIDTH)


| GSM Bandwidth [KHz] | | | | | | |
|---------------------|--------|---------|--------|---------|---------|---------|
| Mode | Lowest | | Middle | | Highest | |
| | 99% BW | 26dB BW | 99% BW | 26dB BW | 99% BW | 26dB BW |
| GSM850 | 247.75 | 317.6 | 244.45 | 307.9 | 249.09 | 323.8 |
| GPRS850 | 238.35 | 315.4 | 243.48 | 318.1 | 241.07 | 314.2 |
| EGPRS850 | 238.31 | 311.7 | 236.78 | 314.7 | 237.02 | 316.5 |

| GSM Bandwidth [KHz] | | | | | | |
|---------------------|--------|---------|--------|---------|---------|---------|
| Mode | Lowest | | Middle | | Highest | |
| | 99% BW | 26dB BW | 99% BW | 26dB BW | 99% BW | 26dB BW |
| GSM1900 | 245.48 | 314.3 | 243.86 | 323 | 248.15 | 319.2 |
| GPRS1900 | 244.88 | 318.9 | 241.77 | 317.7 | 247.06 | 320.3 |
| EGPRS1900 | 246 | 312.3 | 244.53 | 312.7 | 240.89 | 305.3 |


| WCDMA Bandwidth [MHz] | | | | | | |
|-----------------------|--------|---------|--------|---------|---------|---------|
| Mode | Lowest | | Middle | | Highest | |
| | 99% BW | 26dB BW | 99% BW | 26dB BW | 99% BW | 26dB BW |
| WCDMA II | 4.148 | 4.638 | 4.132 | 4.645 | 4.132 | 4.631 |
| HSDPA II | 4.145 | 4.632 | 4.141 | 4.629 | 4.141 | 4.634 |
| HSUPA II | 4.147 | 4.633 | 4.141 | 4.629 | 4.137 | 4.616 |

| WCDMA Bandwidth [MHz] | | | | | | |
|-----------------------|--------|---------|--------|---------|---------|---------|
| Mode | Lowest | | Middle | | Highest | |
| | 99% BW | 26dB BW | 99% BW | 26dB BW | 99% BW | 26dB BW |
| WCDMA V | 4.158 | 4.643 | 4.15 | 4.663 | 4.145 | 4.664 |
| HSDPA V | 4.1593 | 4.667 | 4.149 | 4.663 | 4.146 | 4.65 |
| HSUPA V | 4.151 | 4.658 | 4.1532 | 4.653 | 4.15 | 4.652 |


| WCDMA Bandwidth [MHz] | | | | | | |
|-----------------------|--------|---------|--------|---------|---------|---------|
| Mode | Lowest | | Middle | | Highest | |
| | 99% BW | 26dB BW | 99% BW | 26dB BW | 99% BW | 26dB BW |
| WCDMA IV | 4.15 | 4.646 | 4.141 | 4.63 | 4.147 | 4.634 |
| HSDPA IV | 4.152 | 4.635 | 4.152 | 4.637 | 4.144 | 4.638 |
| HSUPA IV | 4.146 | 4.642 | 4.155 | 4.62 | 4.143 | 4.633 |

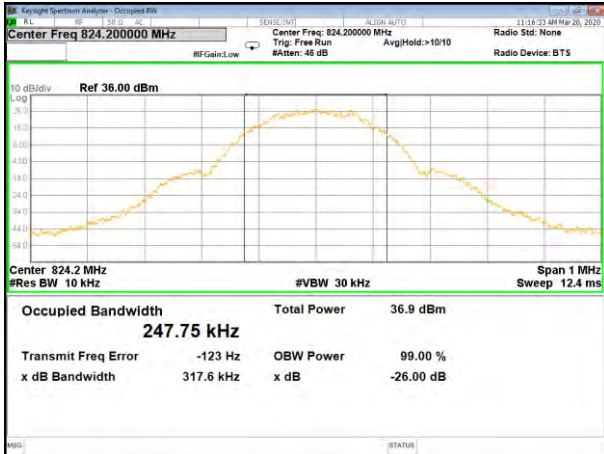


GSM 850 Lower 26BW and 99%

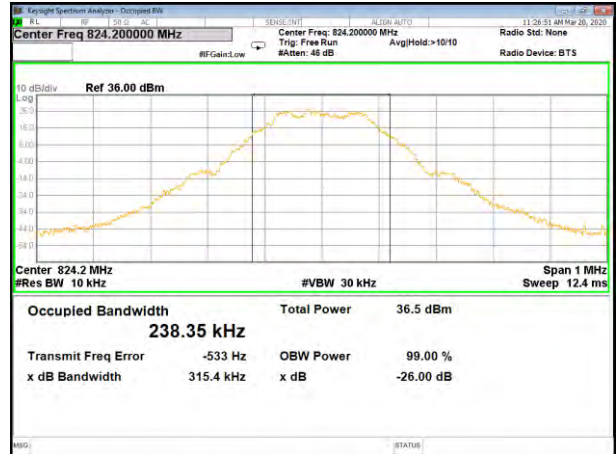


GPRS 850 Lower 26BW and 99%

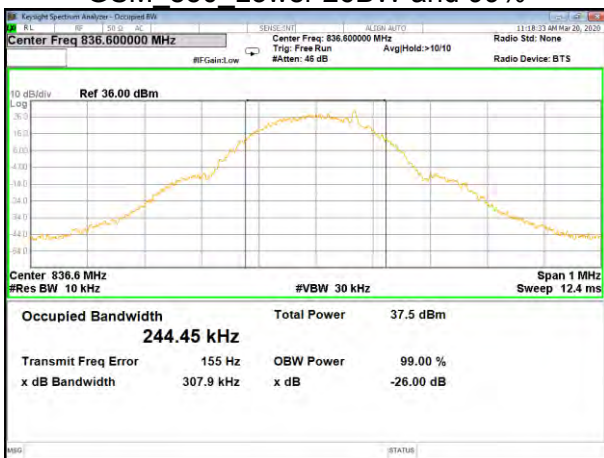


GSM 850 Middle 26BW and 99%

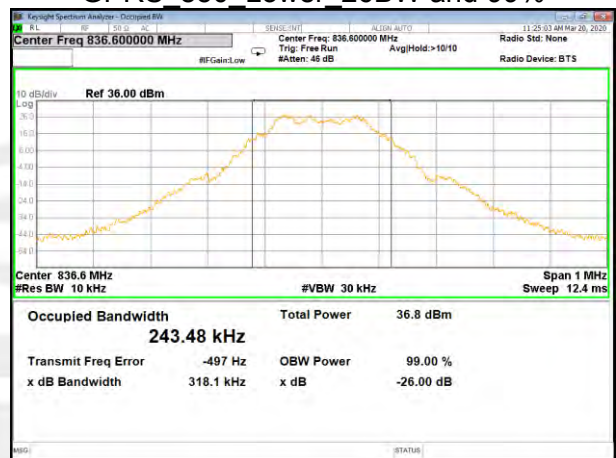


GPRS 850 Middle 26BW and 99%

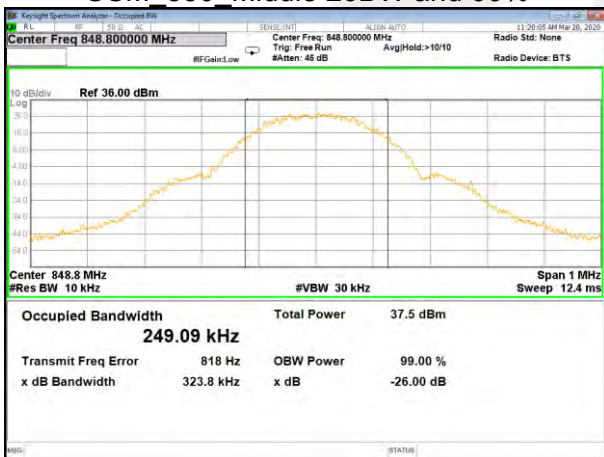


GSM_850_Higher 26BW and 99%

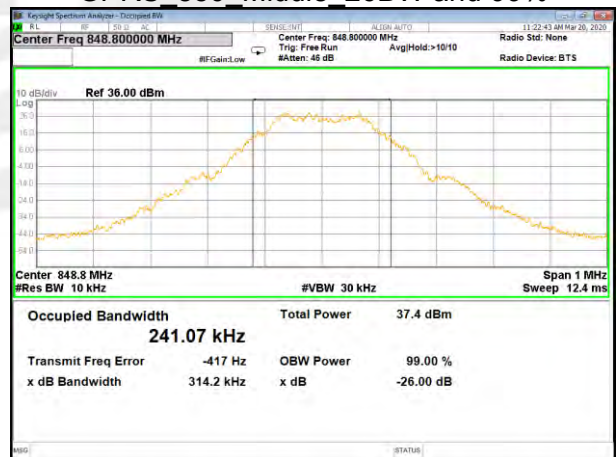


GPRS_850_Higher_26BW and 99%

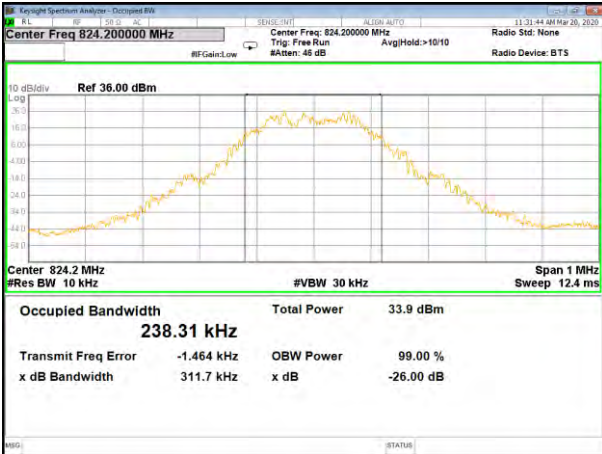


EGPRS 850 Lower 26BW and 99%

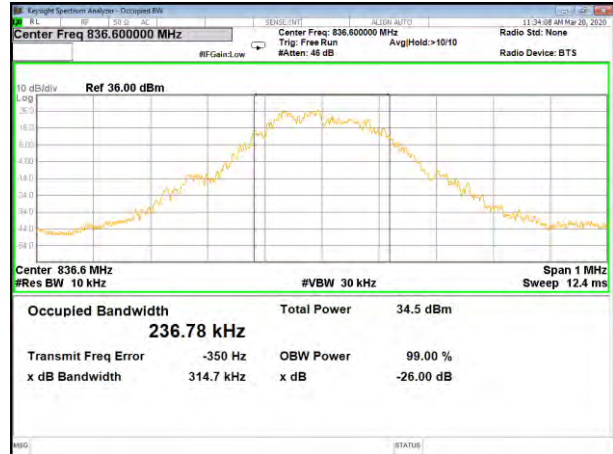


EGPRS_850_Middle_26BW and 99%

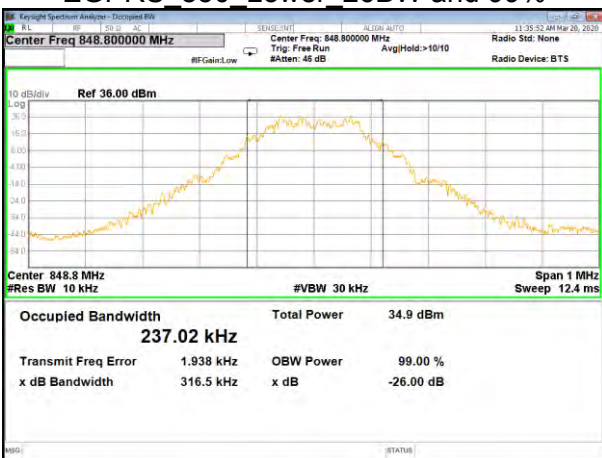


EGPRS_850_Higher_26BW and 99%

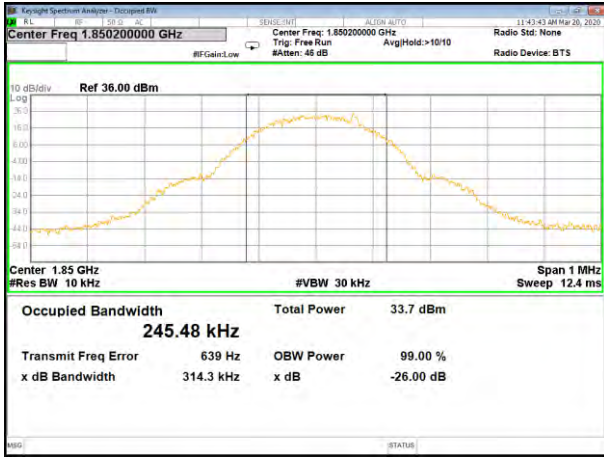


GSM 1900 Lower 26BW and 99%

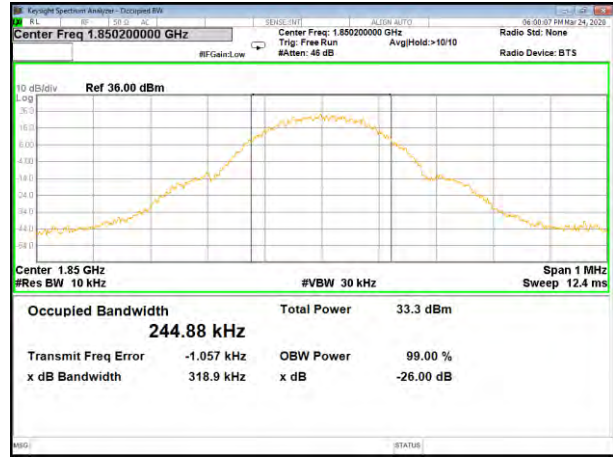


GPRS 1900 Lower 26BW and 99%

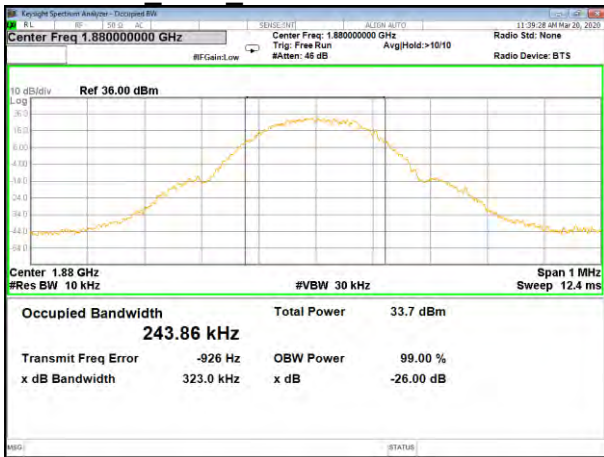

GSM 1900 Middle 26BW and 99%

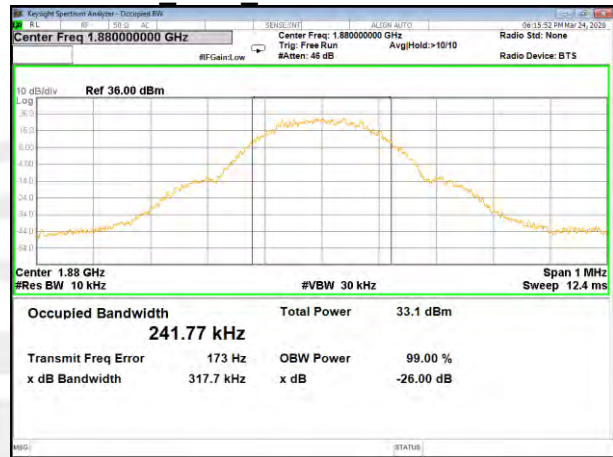


GPRS 1900 Middle 26BW and 99%

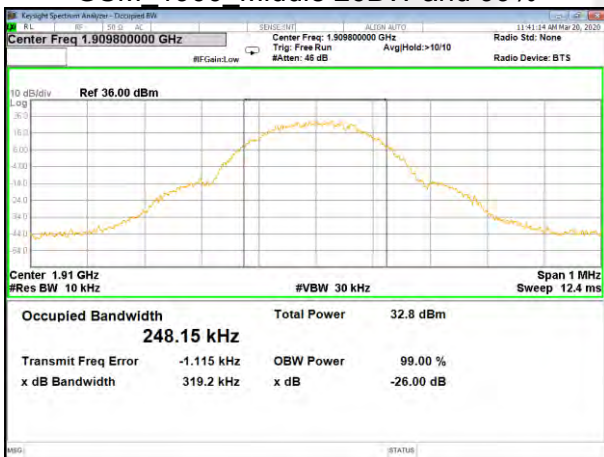


GSM 1900 Higher 26BW and 99%



GPRS 1900 Higher 26BW and 99%

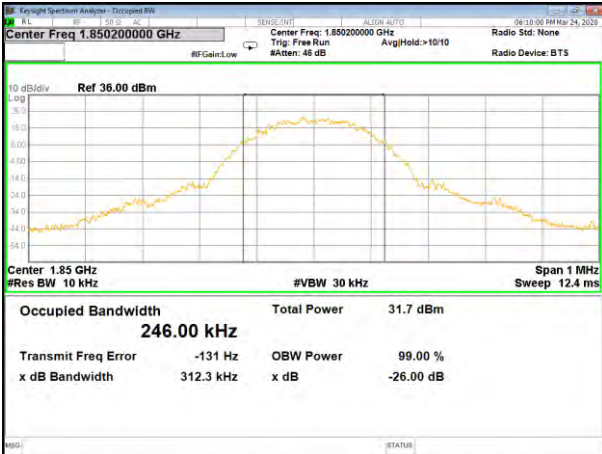


EGPRS_1900_Lower 26BW and 99%

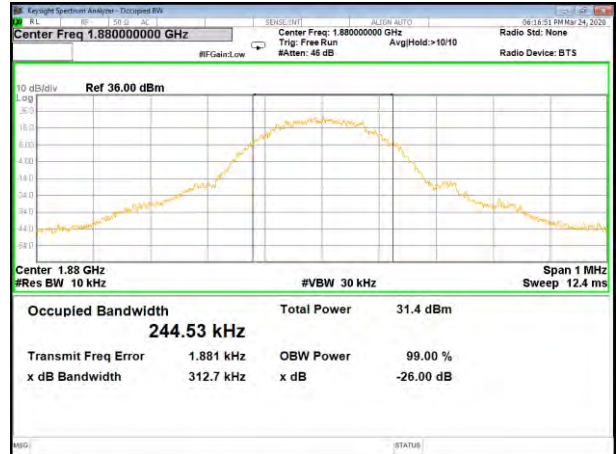


EGPRS_1900_Middle_26BW and 99%




EGPRS_1900_Higher 26BW and 99%

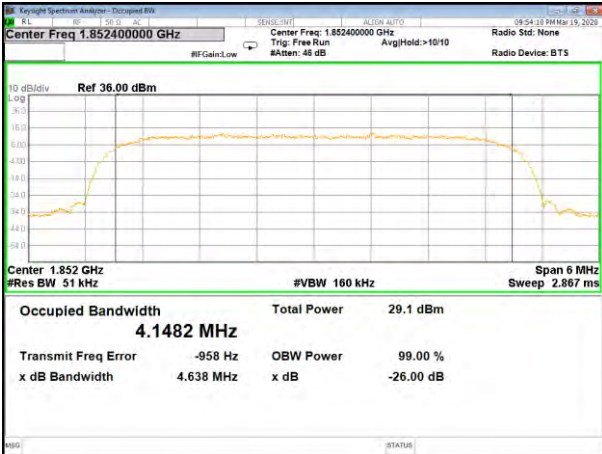


B2_WCDMA Lower 26BW and 99%

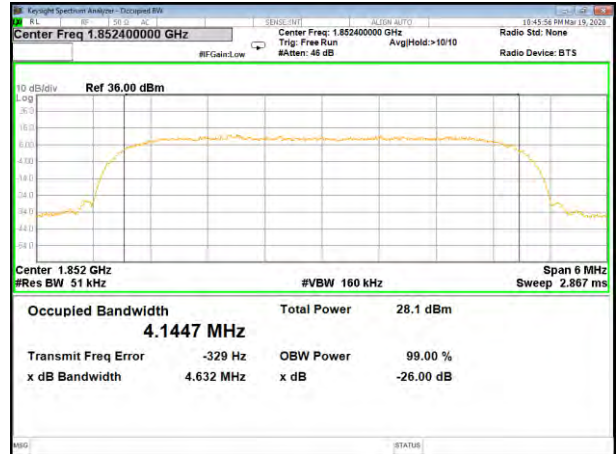


B2_HSDPA Lower 26BW and 99%

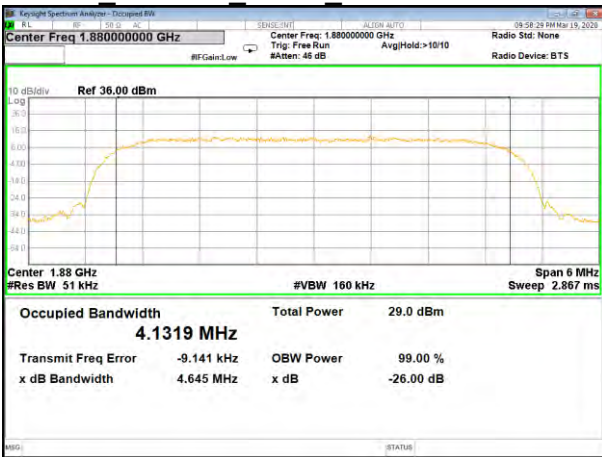


B2_WCDMA Middle 26BW and 99%

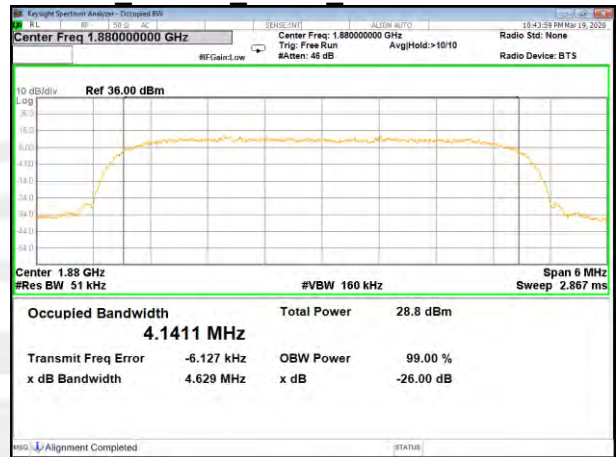


B2_HSDPA Middle 26BW and 99%

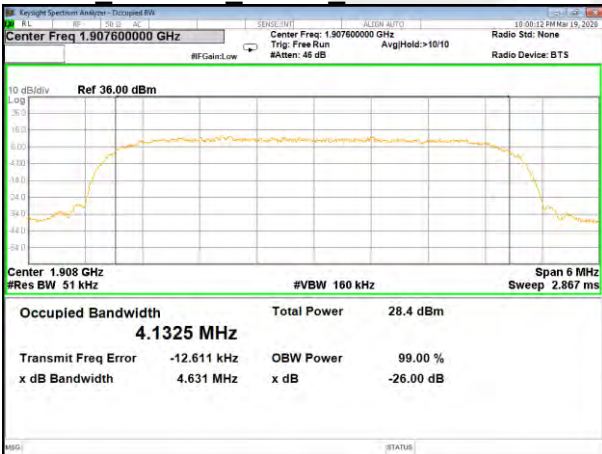


B2_WCDMA Higher 26BW and 99%

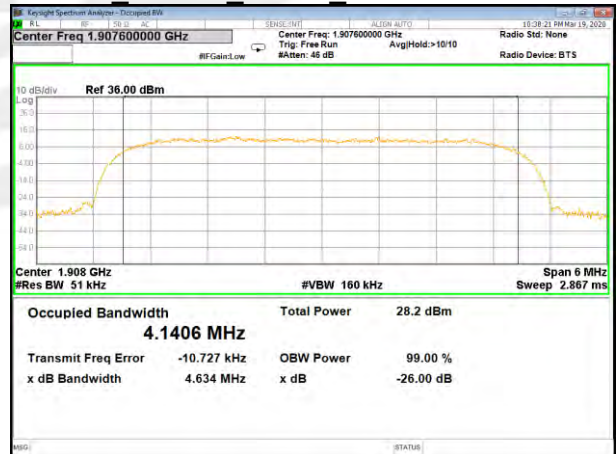


B2_HSDPA Higher 26BW and 99%

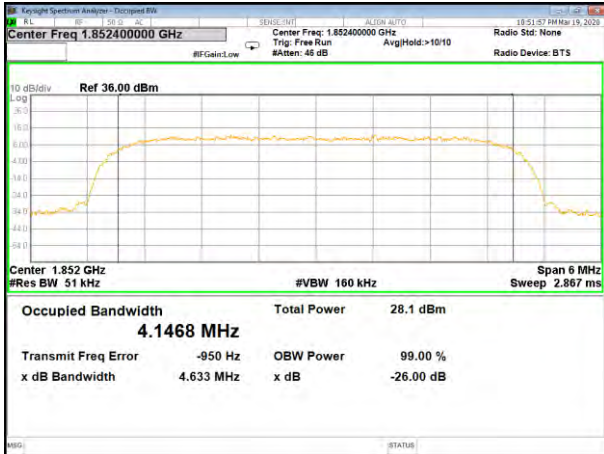


B2_HSUPA_Lower_26BW and 99%

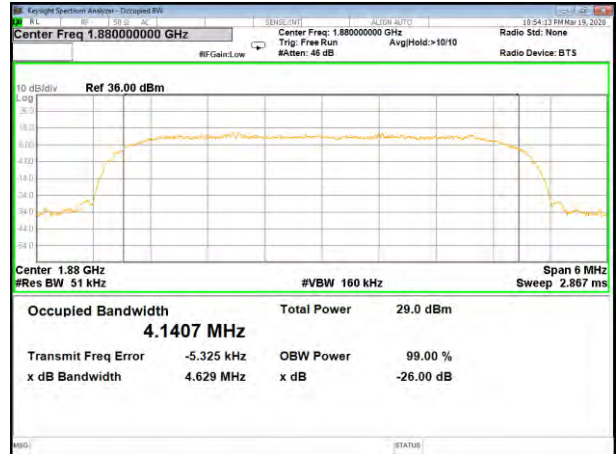


B2_HSUPA_Middle_26BW and 99%

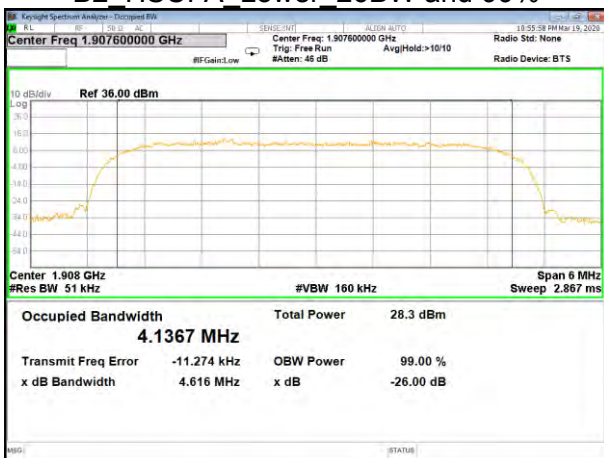


B2_HSUPA_Higher_26BW and 99%

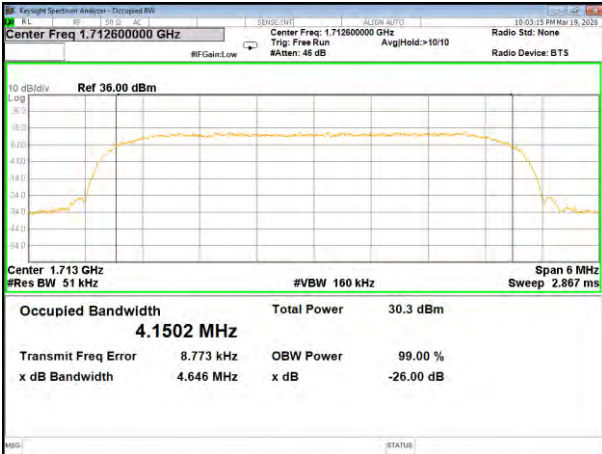


B4 WCDMA Lower 26BW and 99%

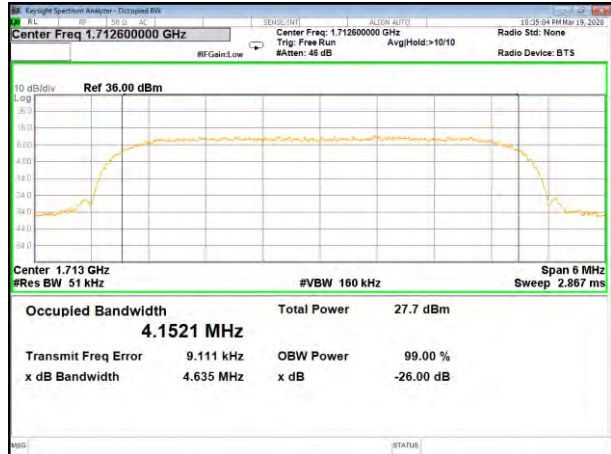


B4 HSDPA Lower 26BW and 99%

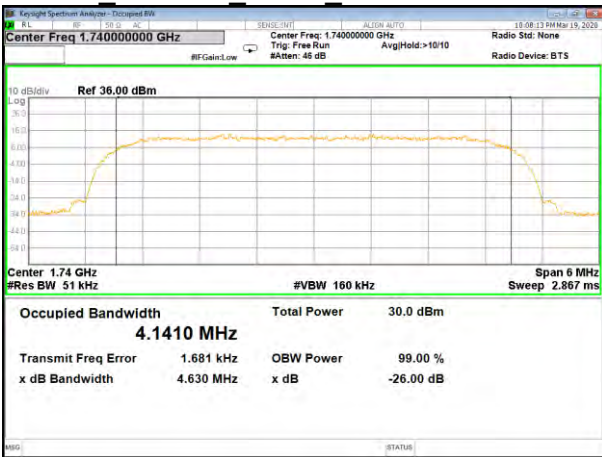


B4 WCDMA Middle 26BW and 99%

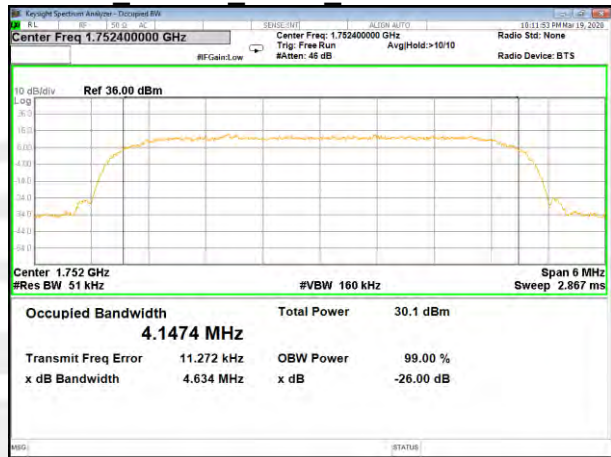


B4 WCDMA Higher 26BW and 99%

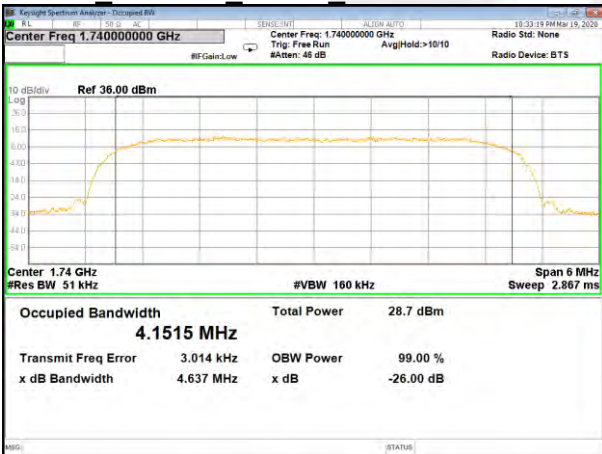


B4_HSDPA_Middle_26BW and 99%

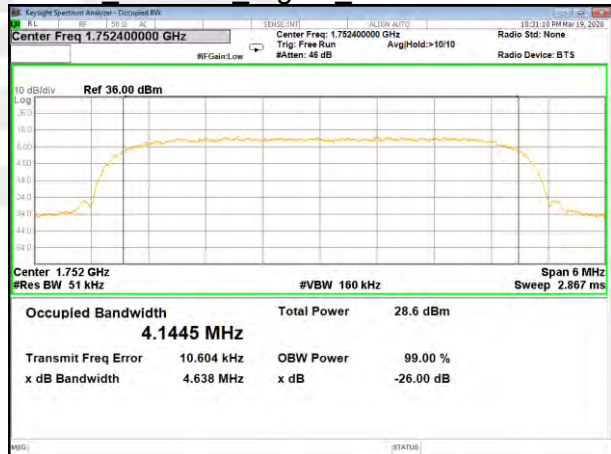


B4_HSDPA_Higher_26BW and 99%

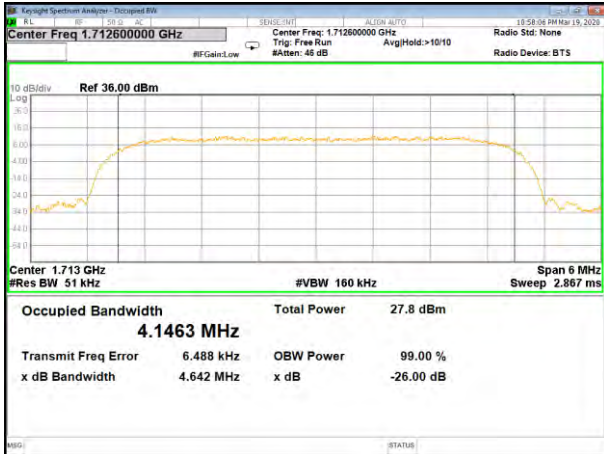


B4_HSUPA_Lower_26BW and 99%

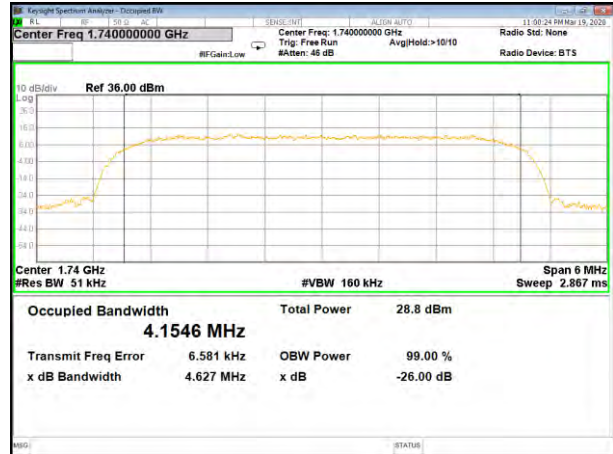


B4_HSUPA_Middle_26BW and 99%

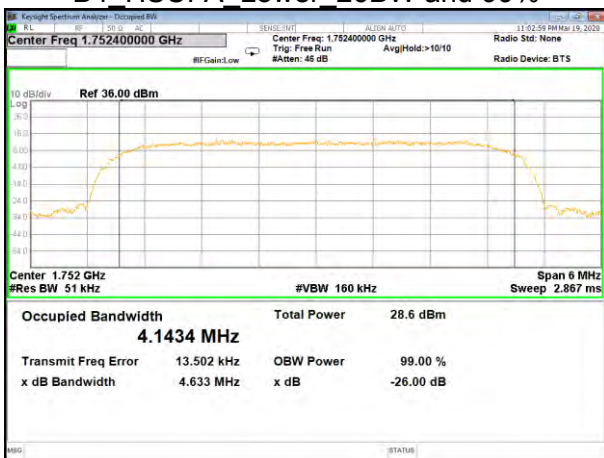


B4_HSUPA_Higher_26BW and 99%

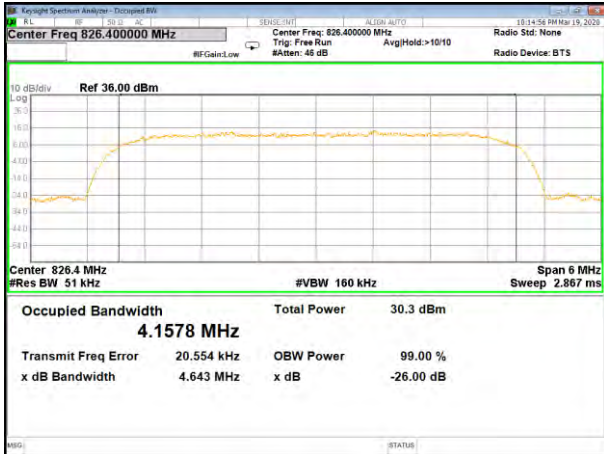


B5_WCDMA_Lower_26BW and 99%

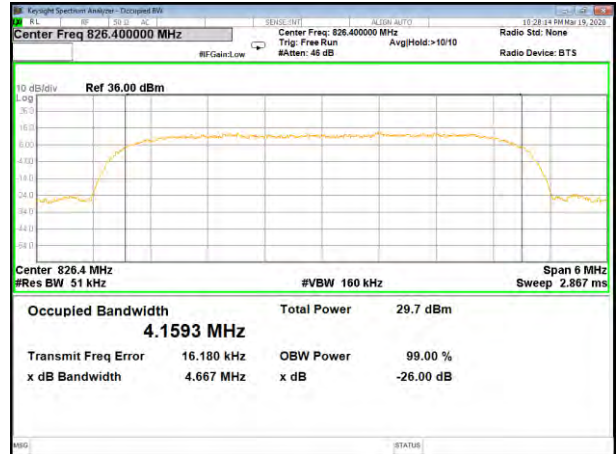


B5_HSDPA_Lower_26BW and 99%

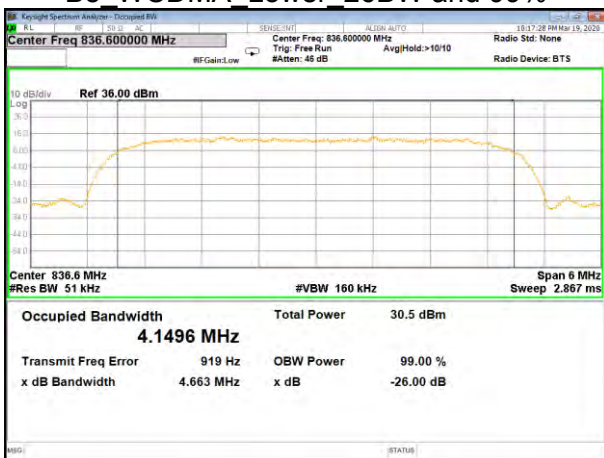


B5_WCDMA_Middle_26BW and 99%

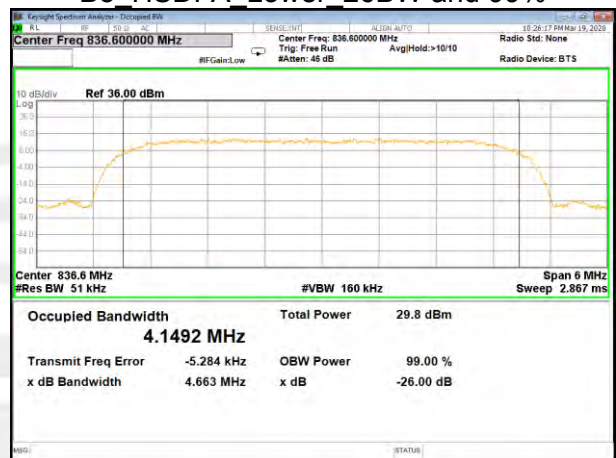


B5_HSDPA_Middle_26BW and 99%

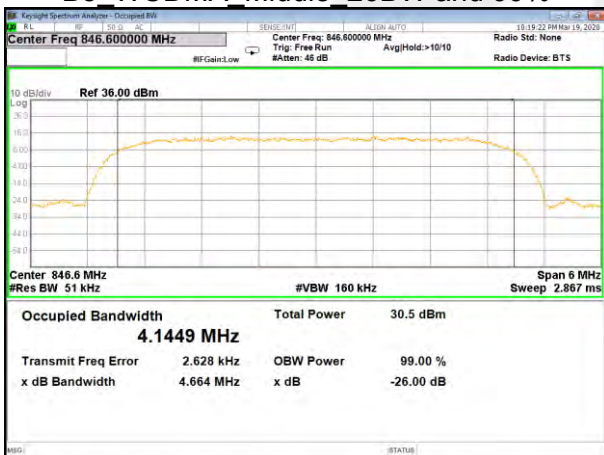


B5_WCDMA_Higher_26BW and 99%

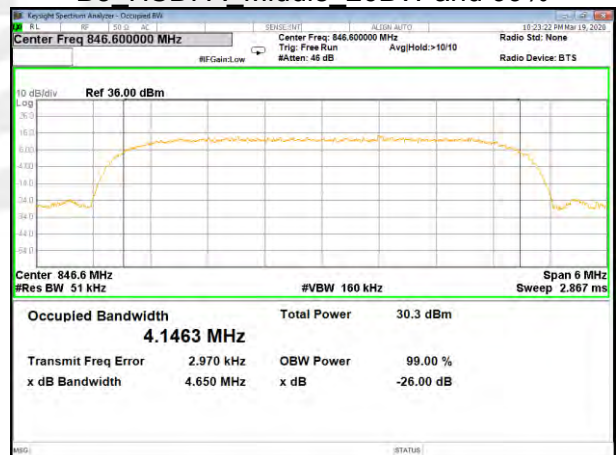


B5_HSDPA_Higher_26BW and 99%

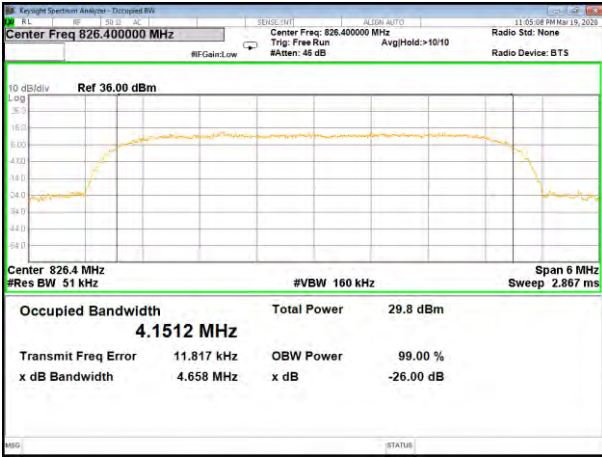

B5_HSUPA_Lower_26BW and 99%

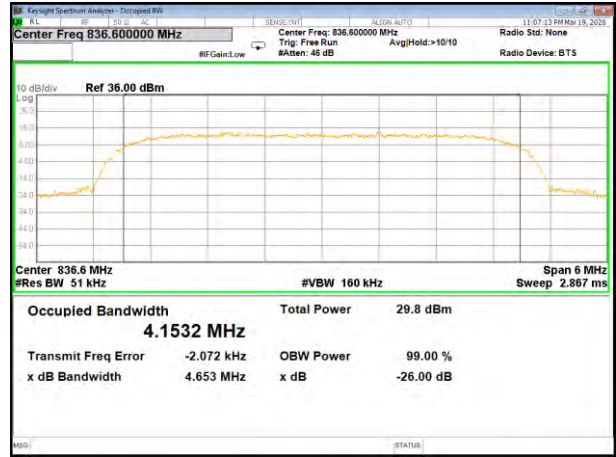

B5_HSUPA_Middle_26BW and 99%

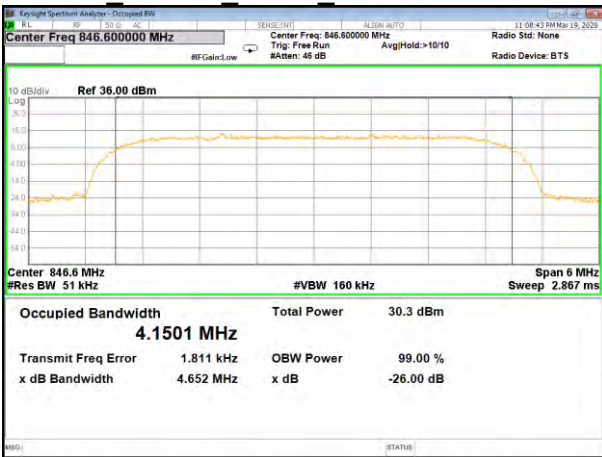

B5_HSUPA_Higher_26BW and 99%



A5.FREQUENCY STABILITY

Normal Voltage = 3.7V; Battery End Point (BEP) = 3.33V; Maximum Voltage =4.07V

| GSM 850 /836.6MHz | | | | | |
|-------------------|----------------|-----------------|------------|--------|--------|
| Temperature (°C) | Voltage | Freq. Dev. | Freq. Dev. | Limit | Result |
| | (Volt) | (Hz) | (ppm) | | |
| 50 | Normal Voltage | 21.31 | 0.025 | 2.5ppm | PASS |
| 40 | | 29.66 | 0.035 | | |
| 30 | | 12.80 | 0.015 | | |
| 20 | | 30.69 | 0.037 | | |
| 10 | | 21.67 | 0.026 | | |
| 0 | | 23.31 | 0.028 | | |
| -10 | | 13.11 | 0.016 | | |
| -20 | | 27.93 | 0.033 | | |
| -30 | | 21.92 | 0.026 | | |
| 25 | | Maximum Voltage | 13.55 | | |
| 25 | BEP | 17.71 | 0.021 | | |

| GPRS 850 /836.6MHz | | | | | |
|--------------------|----------------|-----------------|------------|--------|--------|
| Temperature (°C) | Voltage | Freq. Dev. | Freq. Dev. | Limit | Result |
| | (Volt) | (Hz) | (ppm) | | |
| 50 | Normal Voltage | 16.32 | 0.020 | 2.5ppm | PASS |
| 40 | | 26.04 | 0.031 | | |
| 30 | | 23.47 | 0.028 | | |
| 20 | | 11.87 | 0.014 | | |
| 10 | | 29.94 | 0.036 | | |
| 0 | | 35.43 | 0.042 | | |
| -10 | | 27.21 | 0.033 | | |
| -20 | | 23.97 | 0.029 | | |
| -30 | | 13.90 | 0.017 | | |
| 25 | | Maximum Voltage | 19.79 | | |
| 25 | BEP | 13.68 | 0.016 | | |

| EGPRS 850 /836.6MHz | | | | | |
|---------------------|----------------|-----------------|------------|--------|--------|
| Temperature (°C) | Voltage | Freq. Dev. | Freq. Dev. | Limit | Result |
| | (Volt) | (Hz) | (ppm) | | |
| 50 | Normal Voltage | 31.07 | 0.037 | 2.5ppm | PASS |
| 40 | | 34.10 | 0.041 | | |
| 30 | | 11.77 | 0.014 | | |
| 20 | | 32.11 | 0.038 | | |
| 10 | | 22.09 | 0.026 | | |
| 0 | | 26.01 | 0.031 | | |
| -10 | | 29.54 | 0.035 | | |
| -20 | | 21.89 | 0.026 | | |
| -30 | | 23.56 | 0.028 | | |
| 25 | | Maximum Voltage | 25.60 | | |
| 25 | BEP | 15.08 | 0.018 | | |



| GSM 1900 / 1880MHz | | | | | |
|--------------------|----------------|-----------------|------------|------------------------|--------|
| Temperature (°C) | Voltage | Freq. Dev. | Freq. Dev. | Limit | Result |
| | (Volt) | (Hz) | (ppm) | | |
| 50 | Normal Voltage | 23.68 | 0.013 | Within Authorized Band | PASS |
| 40 | | 17.91 | 0.010 | | |
| 30 | | 28.45 | 0.015 | | |
| 20 | | 28.57 | 0.015 | | |
| 10 | | 33.42 | 0.018 | | |
| 0 | | 30.04 | 0.016 | | |
| -10 | | 30.93 | 0.016 | | |
| -20 | | 18.23 | 0.010 | | |
| -30 | | 20.17 | 0.011 | | |
| 25 | | Maximum Voltage | 12.82 | | |
| 25 | BEP | 20.32 | 0.011 | | |

| GPRS 1900 / 1880MHz | | | | | |
|---------------------|----------------|-----------------|------------|------------------------|--------|
| Temperature (°C) | Voltage | Freq. Dev. | Freq. Dev. | Limit | Result |
| | (Volt) | (Hz) | (ppm) | | |
| 50 | Normal Voltage | 30.42 | 0.016 | Within Authorized Band | PASS |
| 40 | | 23.55 | 0.013 | | |
| 30 | | 20.13 | 0.011 | | |
| 20 | | 17.09 | 0.009 | | |
| 10 | | 36.16 | 0.019 | | |
| 0 | | 29.49 | 0.016 | | |
| -10 | | 26.66 | 0.014 | | |
| -20 | | 24.31 | 0.013 | | |
| -30 | | 13.90 | 0.007 | | |
| 25 | | Maximum Voltage | 36.26 | | |
| 25 | BEP | 20.87 | 0.011 | | |

| EGPRS 1900 / 1880MHz | | | | | |
|----------------------|----------------|-----------------|------------|------------------------|--------|
| Temperature (°C) | Voltage | Freq. Dev. | Freq. Dev. | Limit | Result |
| | (Volt) | (Hz) | (ppm) | | |
| 50 | Normal Voltage | 33.89 | 0.018 | Within Authorized Band | PASS |
| 40 | | 12.08 | 0.006 | | |
| 30 | | 29.63 | 0.016 | | |
| 20 | | 27.73 | 0.015 | | |
| 10 | | 15.54 | 0.008 | | |
| 0 | | 16.58 | 0.009 | | |
| -10 | | 29.52 | 0.016 | | |
| -20 | | 35.62 | 0.019 | | |
| -30 | | 27.50 | 0.015 | | |
| 25 | | Maximum Voltage | 15.62 | | |
| 25 | BEP | 23.42 | 0.012 | | |



| UMTS Band II /1880MHz | | | | | |
|-----------------------|----------------|-----------------|------------|------------------------|--------|
| Temperature (°C) | Voltage | Freq. Dev. | Freq. Dev. | Limit | Result |
| | (Volt) | (Hz) | (ppm) | | |
| 50 | Normal Voltage | 17.65 | 0.009 | Within Authorized Band | PASS |
| 40 | | 31.47 | 0.017 | | |
| 30 | | 20.90 | 0.011 | | |
| 20 | | 28.95 | 0.015 | | |
| 10 | | 11.51 | 0.006 | | |
| 0 | | 13.86 | 0.007 | | |
| -10 | | 12.23 | 0.007 | | |
| -20 | | 12.74 | 0.007 | | |
| -30 | | 20.61 | 0.011 | | |
| 25 | | Maximum Voltage | 14.21 | | |
| 25 | BEP | 32.76 | 0.017 | | |

| HSDPA Band II /1880MHz | | | | | |
|------------------------|----------------|-----------------|------------|------------------------|--------|
| Temperature (°C) | Voltage | Freq. Dev. | Freq. Dev. | Limit | Result |
| | (Volt) | (Hz) | (ppm) | | |
| 50 | Normal Voltage | 29.06 | 0.015 | Within Authorized Band | PASS |
| 40 | | 18.89 | 0.010 | | |
| 30 | | 35.02 | 0.019 | | |
| 20 | | 29.93 | 0.016 | | |
| 10 | | 29.96 | 0.016 | | |
| 0 | | 33.39 | 0.018 | | |
| -10 | | 31.74 | 0.017 | | |
| -20 | | 13.27 | 0.007 | | |
| -30 | | 28.93 | 0.015 | | |
| 25 | | Maximum Voltage | 14.02 | | |
| 25 | BEP | 12.27 | 0.007 | | |

| HSUPA Band II /1880MHz | | | | | |
|------------------------|----------------|-----------------|------------|------------------------|--------|
| Temperature (°C) | Voltage | Freq. Dev. | Freq. Dev. | Limit | Result |
| | (Volt) | (Hz) | (ppm) | | |
| 50 | Normal Voltage | 23.96 | 0.013 | Within Authorized Band | PASS |
| 40 | | 26.99 | 0.014 | | |
| 30 | | 24.22 | 0.013 | | |
| 20 | | 27.82 | 0.015 | | |
| 10 | | 35.97 | 0.019 | | |
| 0 | | 29.05 | 0.015 | | |
| -10 | | 14.16 | 0.008 | | |
| -20 | | 12.02 | 0.006 | | |
| -30 | | 25.69 | 0.014 | | |
| 25 | | Maximum Voltage | 20.00 | | |
| 25 | BEP | 16.75 | 0.009 | | |



| UMTS Band V / 836.6MHz | | | | | |
|------------------------|----------------|-----------------|------------|--------|--------|
| Temperature (°C) | Voltage | Freq. Dev. | Freq. Dev. | Limit | Result |
| | (Volt) | (Hz) | (ppm) | | |
| 50 | Normal Voltage | 21.56 | 0.026 | 2.5ppm | PASS |
| 40 | | 30.80 | 0.037 | | |
| 30 | | 14.15 | 0.017 | | |
| 20 | | 15.19 | 0.018 | | |
| 10 | | 19.98 | 0.024 | | |
| 0 | | 13.91 | 0.017 | | |
| -10 | | 27.06 | 0.032 | | |
| -20 | | 21.84 | 0.026 | | |
| -30 | | 18.15 | 0.022 | | |
| 25 | | Maximum Voltage | 20.02 | | |
| 25 | BEP | 24.19 | 0.029 | | |

| HSDPA Band V / 836.6MHz | | | | | |
|-------------------------|----------------|-----------------|------------|--------|--------|
| Temperature (°C) | Voltage | Freq. Dev. | Freq. Dev. | Limit | Result |
| | (Volt) | (Hz) | (ppm) | | |
| 50 | Normal Voltage | 24.53 | 0.029 | 2.5ppm | PASS |
| 40 | | 12.83 | 0.015 | | |
| 30 | | 14.72 | 0.018 | | |
| 20 | | 29.69 | 0.035 | | |
| 10 | | 12.86 | 0.015 | | |
| 0 | | 26.94 | 0.032 | | |
| -10 | | 13.94 | 0.017 | | |
| -20 | | 11.70 | 0.014 | | |
| -30 | | 27.85 | 0.033 | | |
| 25 | | Maximum Voltage | 35.81 | | |
| 25 | BEP | 29.26 | 0.035 | | |

| HSUPA Band V / 836.6MHz | | | | | |
|-------------------------|----------------|-----------------|------------|--------|--------|
| Temperature (°C) | Voltage | Freq. Dev. | Freq. Dev. | Limit | Result |
| | (Volt) | (Hz) | (ppm) | | |
| 50 | Normal Voltage | 17.95 | 0.021 | 2.5ppm | PASS |
| 40 | | 15.81 | 0.019 | | |
| 30 | | 29.74 | 0.036 | | |
| 20 | | 19.16 | 0.023 | | |
| 10 | | 16.75 | 0.020 | | |
| 0 | | 32.13 | 0.038 | | |
| -10 | | 15.17 | 0.018 | | |
| -20 | | 27.09 | 0.032 | | |
| -30 | | 22.84 | 0.027 | | |
| 25 | | Maximum Voltage | 20.24 | | |
| 25 | BEP | 31.43 | 0.038 | | |



| UMTS Band IV /1740MHz | | | | | |
|-----------------------|----------------|-----------------|------------|------------------------|--------|
| Temperature (°C) | Voltage | Freq. Dev. | Freq. Dev. | Limit | Result |
| | (Volt) | (Hz) | (ppm) | | |
| 50 | Normal Voltage | 34.97 | 0.019 | Within Authorized Band | PASS |
| 40 | | 28.60 | 0.015 | | |
| 30 | | 33.65 | 0.018 | | |
| 20 | | 17.81 | 0.009 | | |
| 10 | | 24.91 | 0.013 | | |
| 0 | | 13.19 | 0.007 | | |
| -10 | | 16.60 | 0.009 | | |
| -20 | | 21.01 | 0.011 | | |
| -30 | | 24.32 | 0.013 | | |
| 25 | | Maximum Voltage | 26.69 | | |
| 25 | BEP | 30.03 | 0.016 | | |


| HSDPA Band IV /1740MHz | | | | | |
|------------------------|----------------|-----------------|------------|------------------------|--------|
| Temperature (°C) | Voltage | Freq. Dev. | Freq. Dev. | Limit | Result |
| | (Volt) | (Hz) | (ppm) | | |
| 50 | Normal Voltage | 29.74 | 0.016 | Within Authorized Band | PASS |
| 40 | | 27.74 | 0.015 | | |
| 30 | | 29.22 | 0.016 | | |
| 20 | | 18.77 | 0.010 | | |
| 10 | | 30.61 | 0.016 | | |
| 0 | | 31.14 | 0.017 | | |
| -10 | | 17.30 | 0.009 | | |
| -20 | | 25.78 | 0.014 | | |
| -30 | | 28.88 | 0.015 | | |
| 25 | | Maximum Voltage | 20.23 | | |
| 25 | BEP | 19.76 | 0.011 | | |

| HSUPA Band IV /1740MHz | | | | | |
|------------------------|----------------|-----------------|------------|------------------------|--------|
| Temperature (°C) | Voltage | Freq. Dev. | Freq. Dev. | Limit | Result |
| | (Volt) | (Hz) | (ppm) | | |
| 50 | Normal Voltage | 29.57 | 0.016 | Within Authorized Band | PASS |
| 40 | | 28.19 | 0.015 | | |
| 30 | | 23.05 | 0.012 | | |
| 20 | | 34.02 | 0.018 | | |
| 10 | | 35.86 | 0.019 | | |
| 0 | | 18.51 | 0.010 | | |
| -10 | | 25.92 | 0.014 | | |
| -20 | | 14.44 | 0.008 | | |
| -30 | | 30.97 | 0.016 | | |
| 25 | | Maximum Voltage | 29.11 | | |
| 25 | BEP | 20.44 | 0.011 | | |


1. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.




A6. SPURIOUS EMISSIONS AT ANTENNA TERMINALS

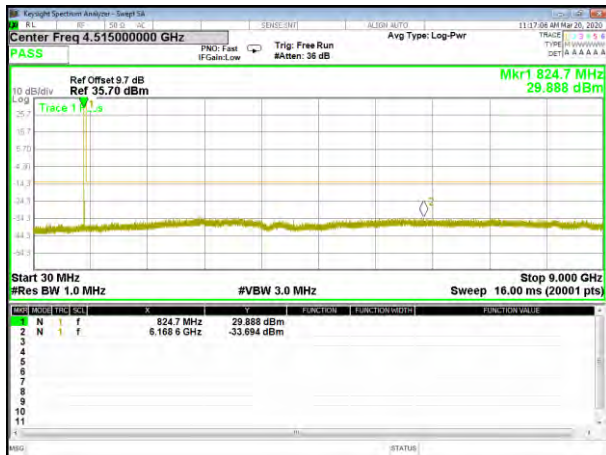


GSM 850 Lower Conducted Spurious

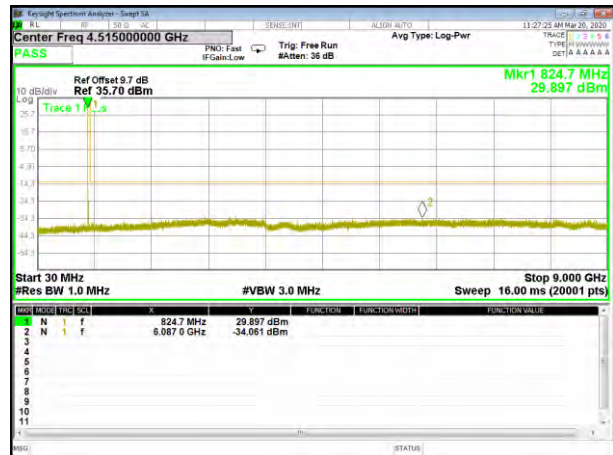


GPRS 850 Lower Conducted Spurious

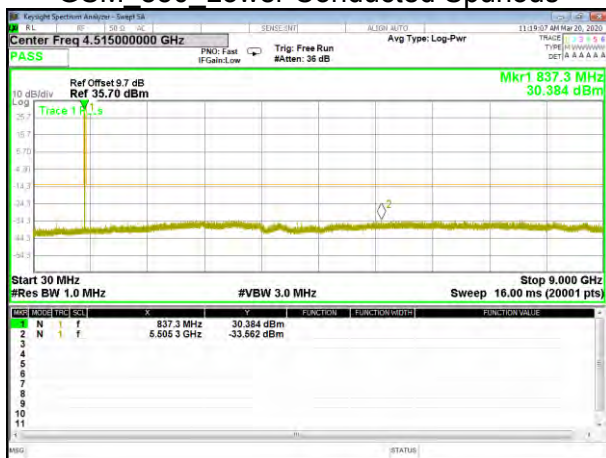


GSM 850 Middle Conducted Spurious

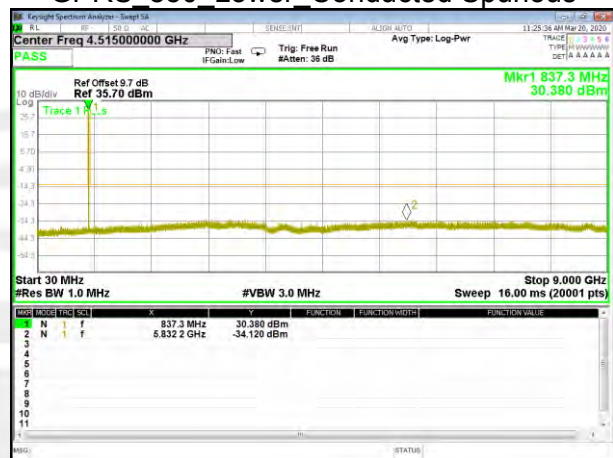


GPRS 850 Middle Conducted Spurious

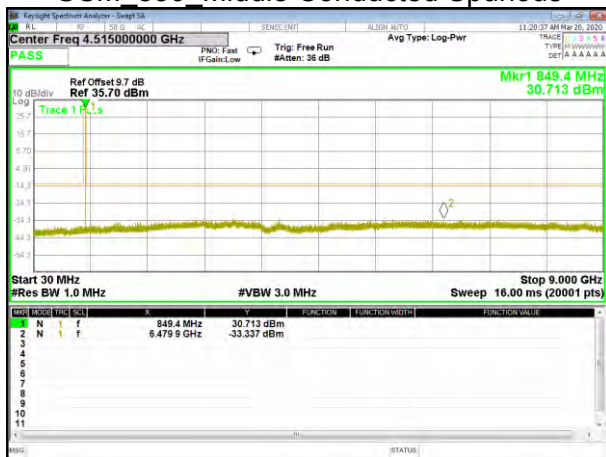


GSM_850_Higher Conducted Spurious

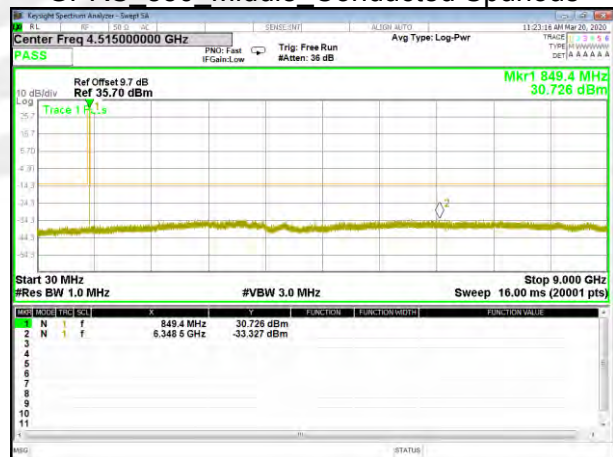

GPRS_850_Higher Conducted Spurious

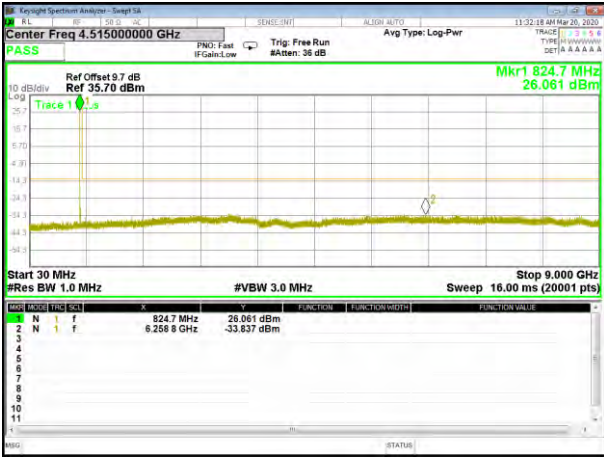

EGPRS_850_Lower_Conducted Spurious

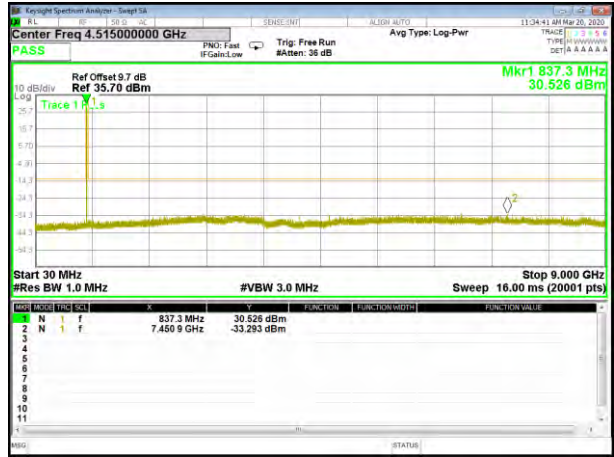

EGPRS_850_Middle_Conducted Spurious




EGPRS_850_Higher_Conducted Spurious




GSM_1900 Lower Conducted Spurious




GPRS_1900 Lower Conducted Spurious

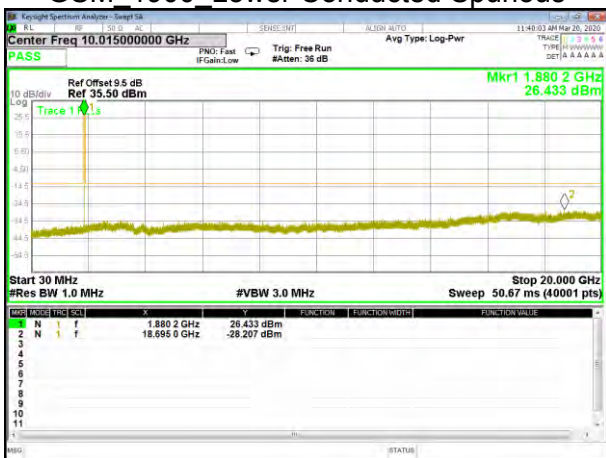


GSM_1900 Middle Conducted Spurious

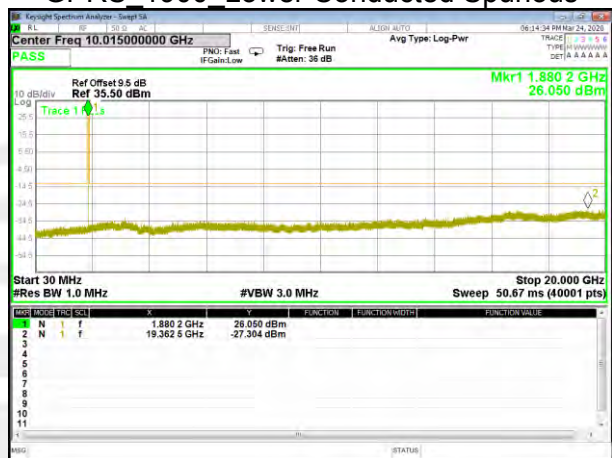

GPRS_1900 Middle Conducted Spurious

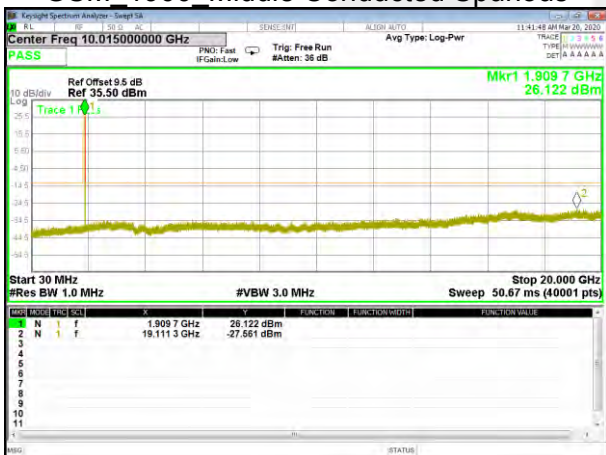


GSM_1900_Higher Conducted Spurious

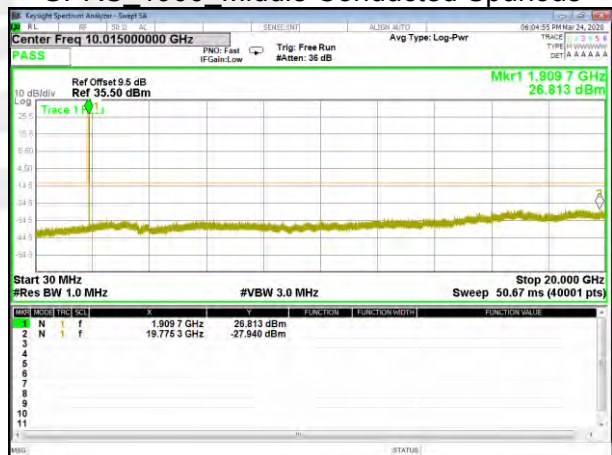


GPRS_1900_Higher Conducted Spurious




EGPRS_1900_Lower Conducted Spurious

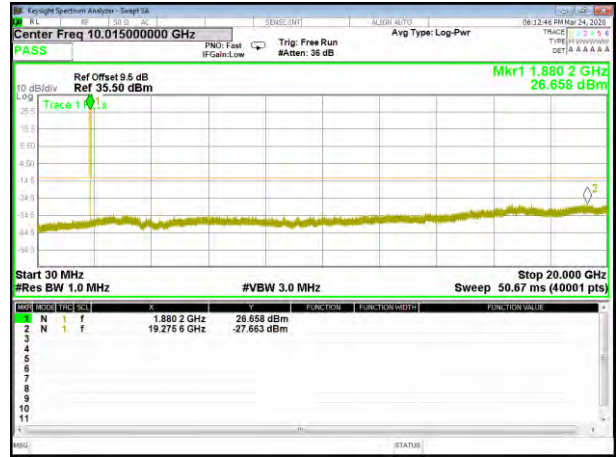


EGPRS_1900_Middle Conducted Spurious

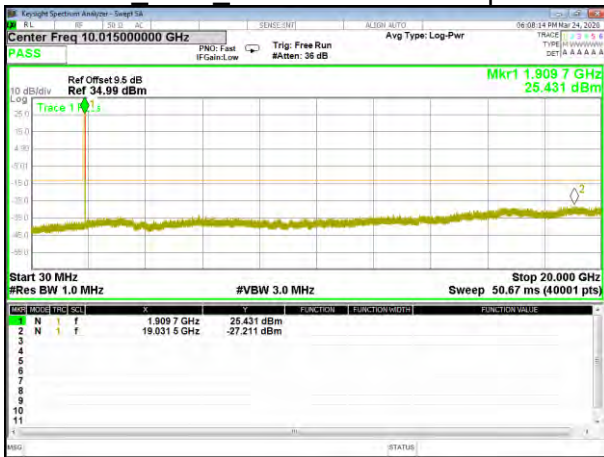


EGPRS_1900_Higher Conducted Spurious

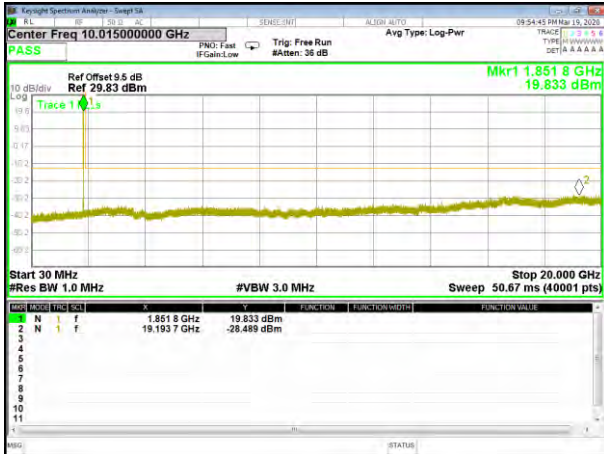


B2_WCDMA Lower Conducted Spurious

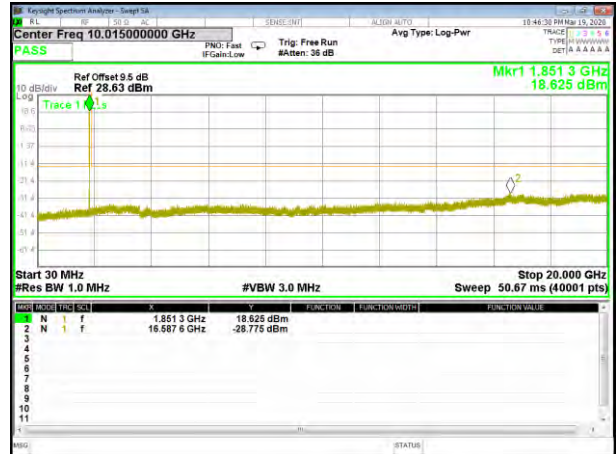


B2_HSDPA Lower Conducted Spurious

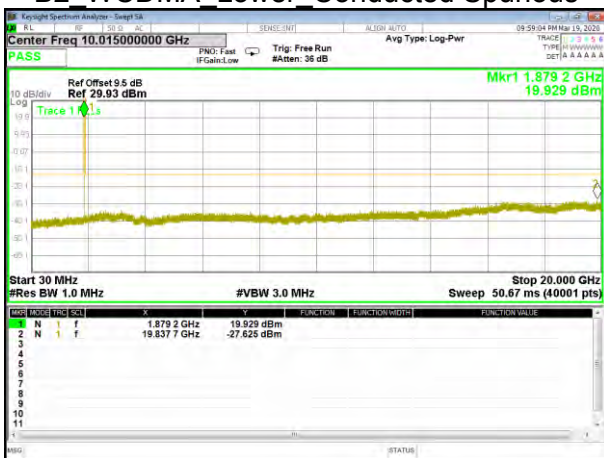


B2_WCDMA Middle Conducted Spurious

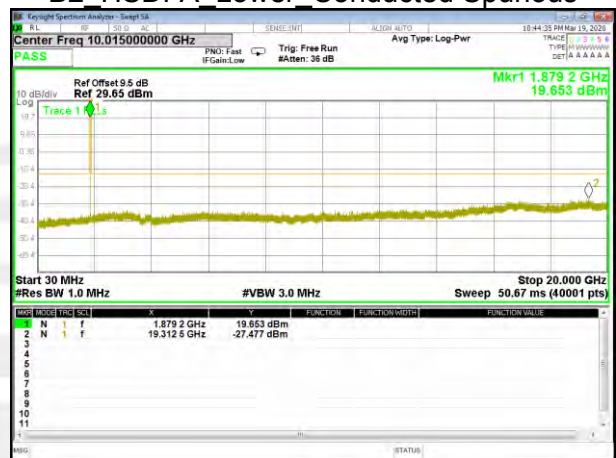

B2_HSDPA Middle Conducted Spurious

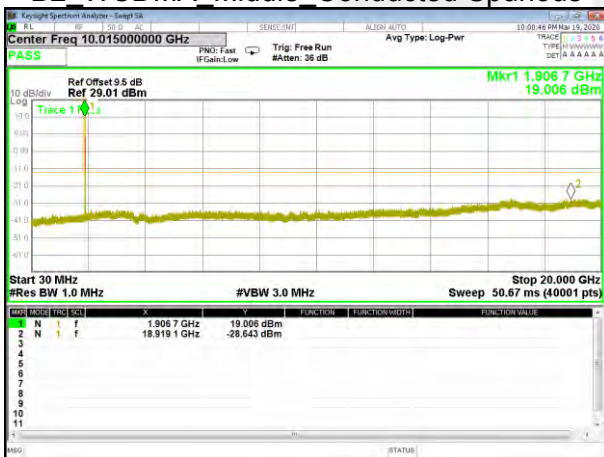


B2_WCDMA_Higher_Conducted Spurious

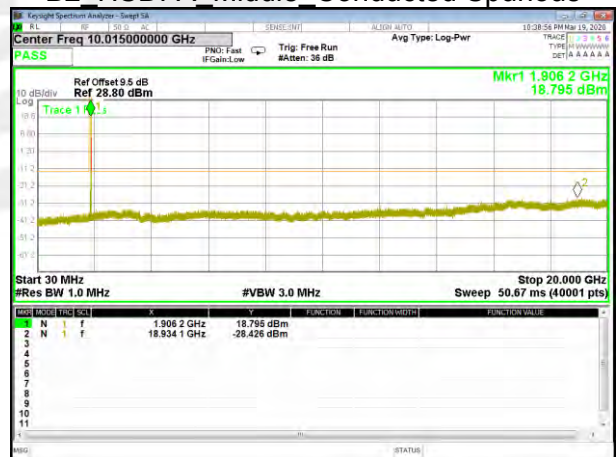

B2_HSDPA_Higher_Conducted Spurious




B2_HSUPA_Lower_Conducted Spurious

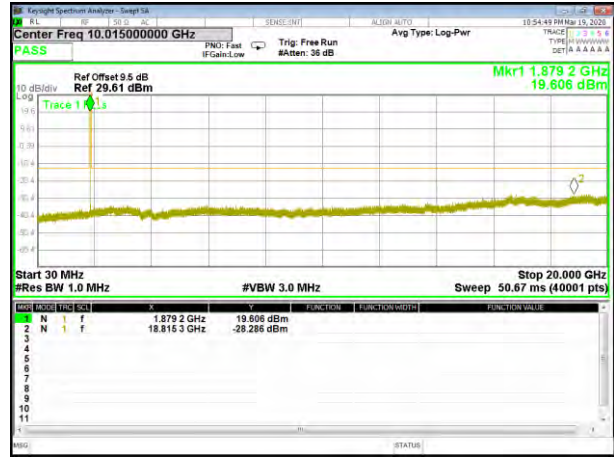


B2_HSUPA_Middle_Conducted Spurious



B2_HSUPA_Higher_Conducted Spurious

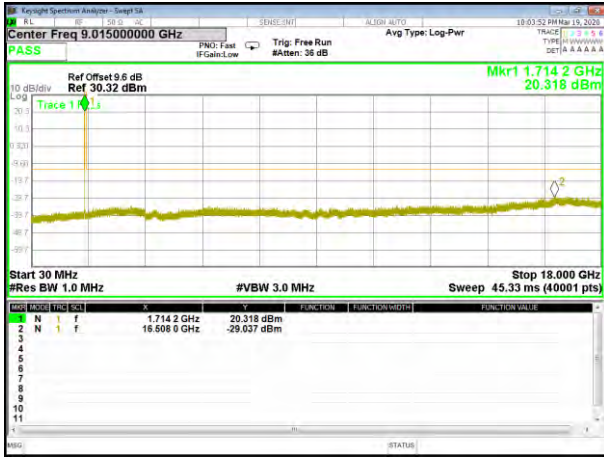


B4 WCDMA Lower Conducted Spurious

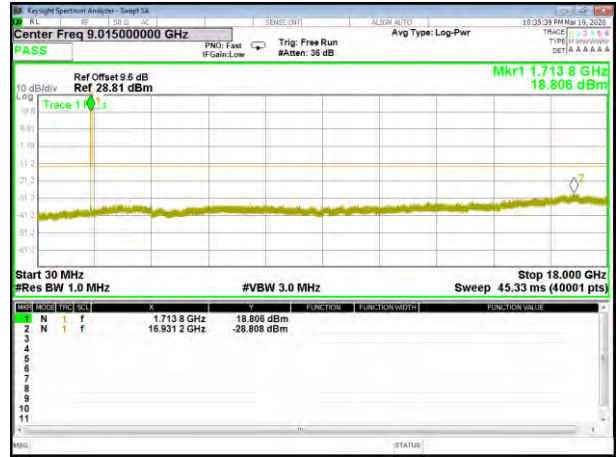


B4 HSDPA Lower Conducted Spurious



B4 WCDMA Middle Conducted Spurious

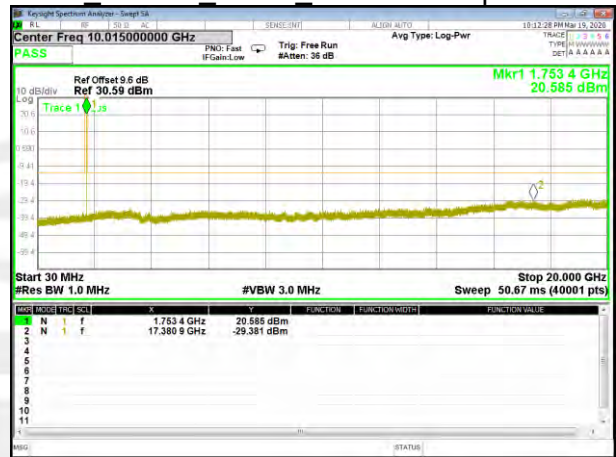

B4 WCDMA Higher Conducted Spurious

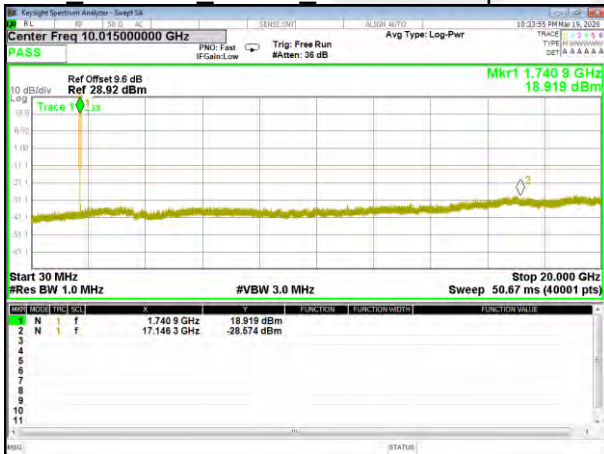


B4_HSDPA_Middle_Conducted Spurious



B4_HSDPA_Higher_Conducted Spurious



B4_HSUPA_Lower_Conducted_Spurious

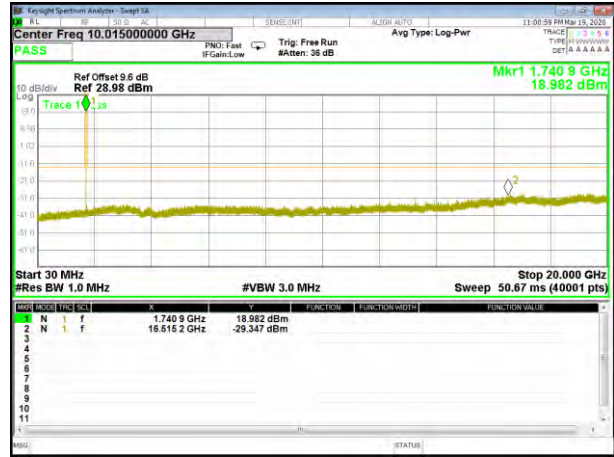


B4_HSUPA_Middle_Conducted_Spurious



B4_HSUPA_Higher_Conducted_Spurious



B5_WCDMA_Lower_Conducted_Spurious

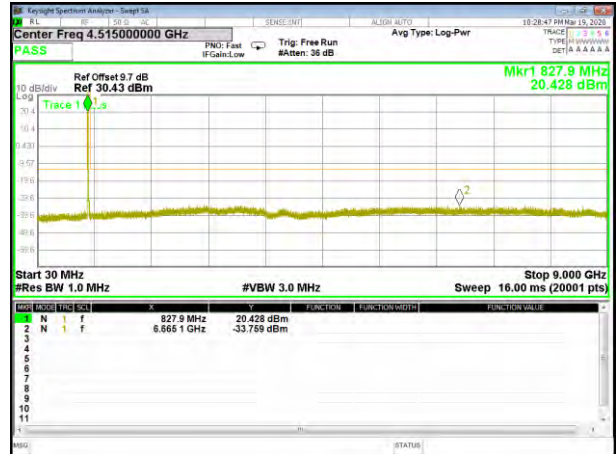


B5_HSDPA_Lower_Conducted_Spurious




B5_WCDMA_Middle_Conducted_Spurious




B5_HSDPA_Middle_Conducted_Spurious

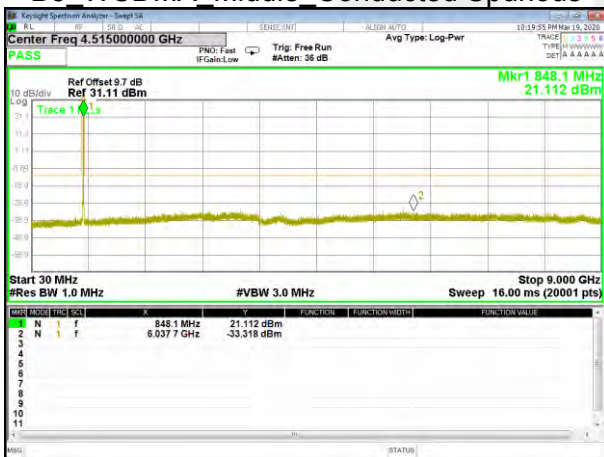


B5_WCDMA_Higher_Conducted_Spurious

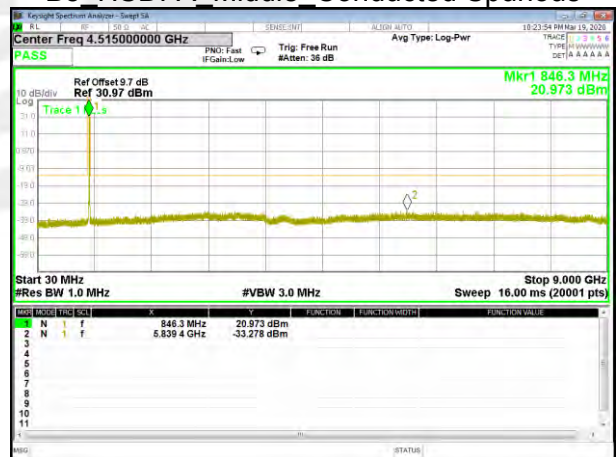

B5_HSDPA_Higher_Conducted_Spurious

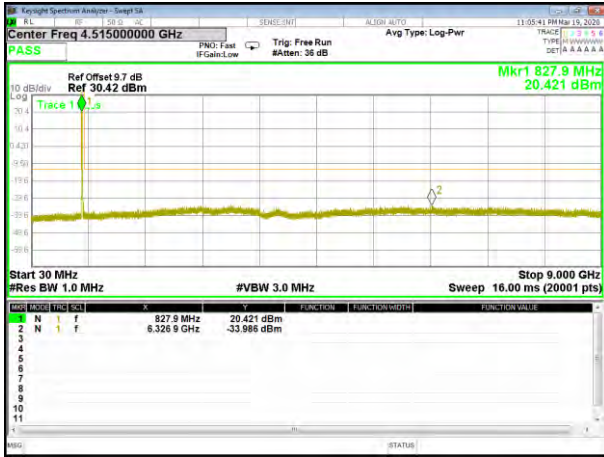

B5_HSUPA_Lower_Conducted Spurious

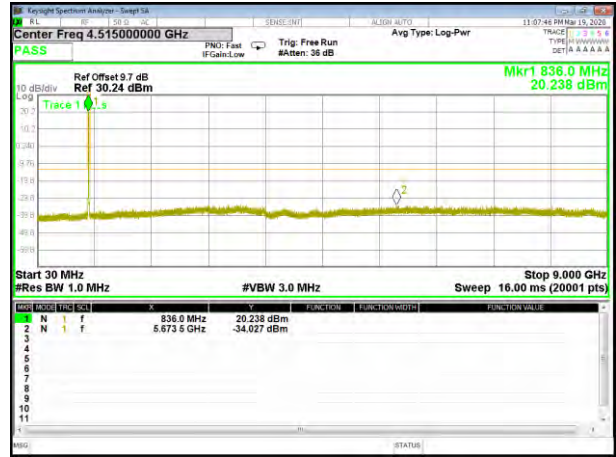


B5_HSUPA_Middle_Conducted Spurious




B5_HSUPA_Higher_Conducted Spurious



A7. BAND EDGE

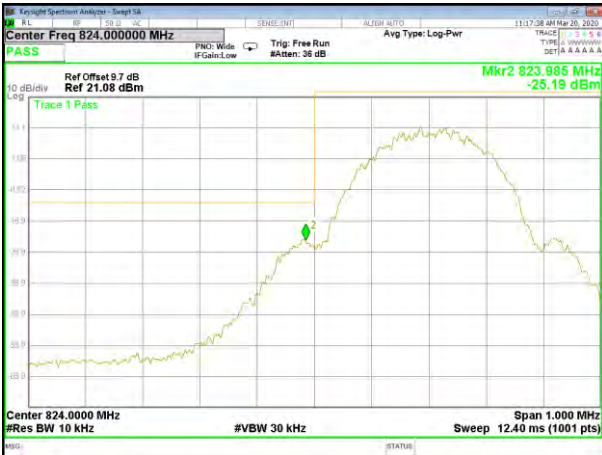

GSM 850 Lower Band edge

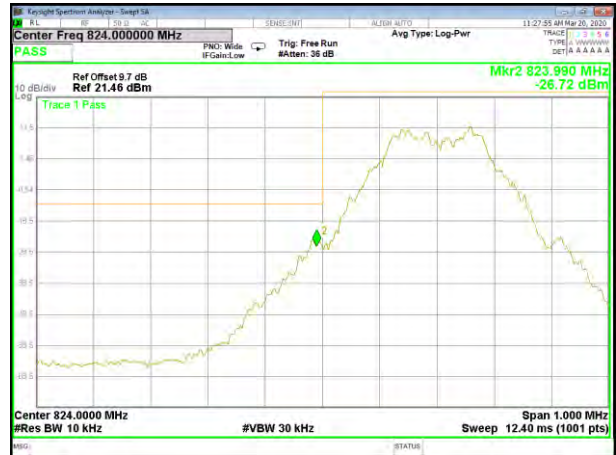

GPRS 850 Lower Band edge



GSM 850 Higher Band edge




GPRS 850 Higher Band edge




EGPRS_850_Lower_Band edge



EGPRS_850_Higher_Band edge

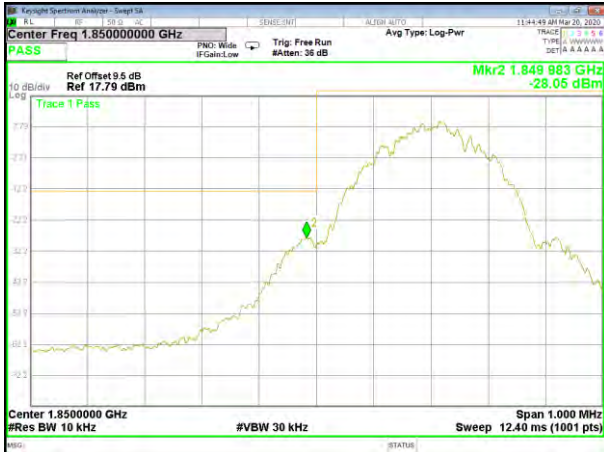

GSM 1900 Lower Band edge

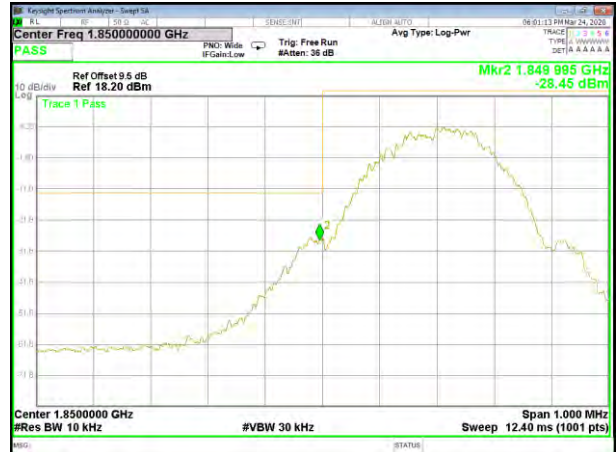


GPRS 1900 Lower Band edge



GSM 1900 Higher Band edge




GPRS 1900 Higher Band edge

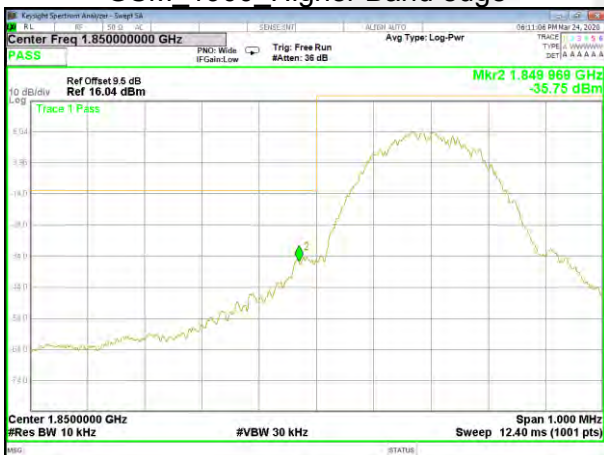


EGPRS_1900_Lower Band edge




EGPRS_1900_Higher Band edge

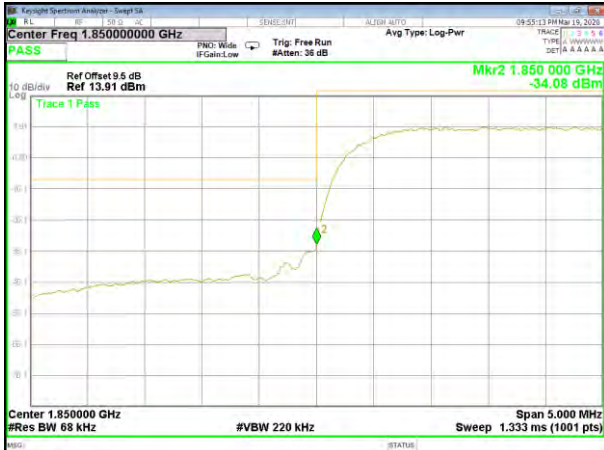

B2 WCDMA Lower Band edge

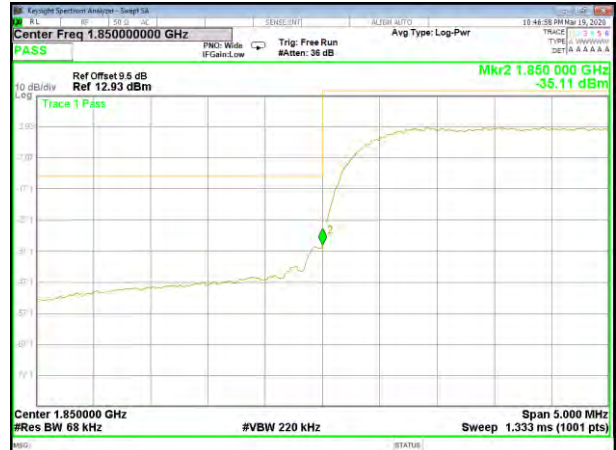


B2 HSDPA Lower Band edge

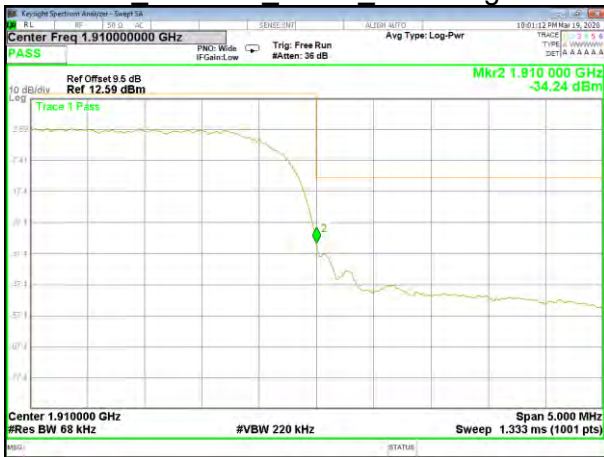

B2 WCDMA Higher Band edge



B2 HSDPA Higher Band edge

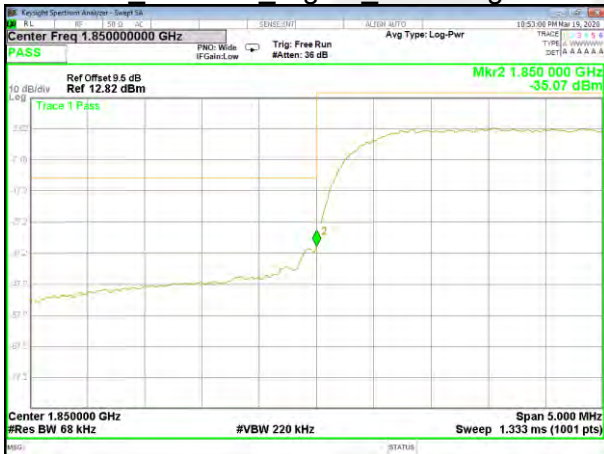

B2_HSUPA_Lower_Band edge



B2_HSUPA_Higher_Band edge



B4 WCDMA Lower Band edge




B4 HSDPA Lower Band edge



B4 WCDMA Higher Band edge



B4 HSDPA Higher Band edge

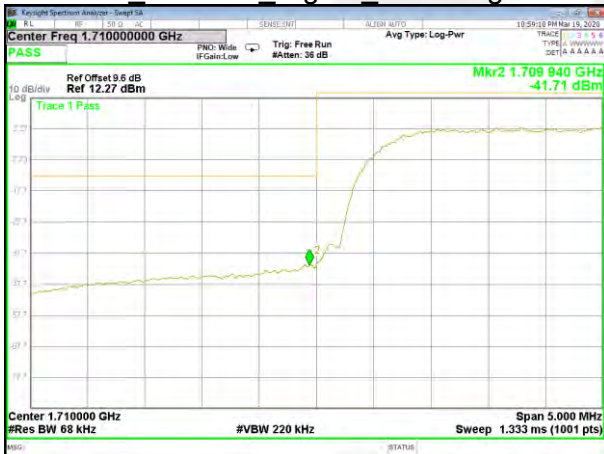

B4_HSUPA_Lower_Band edge




B4_HSUPA_Higher_Band edge



B5 WCDMA Lower Band edge



B5 HSDPA Lower Band edge

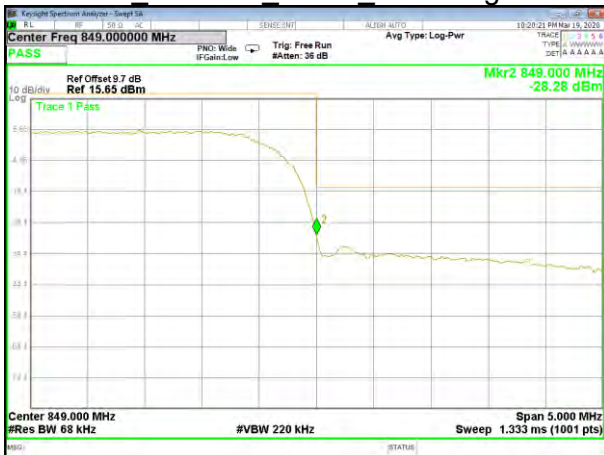

B5 WCDMA Higher Band edge



B5 HSDPA Higher Band edge



B5_HSUPA_Lower_Band edge



B5_HSUPA_Higher_Band edge



A8. FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT

Note: (1) Below 30MHz no Spurious found is the worst condition.

(2) Above 3.5GHz amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value

(3) Test is divided into three directions, X/Y/Z. X pattern for the worst.

| GSM 850: (30-9000)MHz | | | | | | | |
|--|-------------|----------|-------|--------|--------|--------|----------|
| The Worst Test Results Channel 128/824.2 MHz | | | | | | | |
| Frequency(MHz) | S | Ant(dBi) | Loss | PMea | Limit | Margin | Polarity |
| | G.Lev (dBm) | | | (dBm) | (dBm) | (dBm) | |
| 1648.06 | -41.14 | 9.40 | 4.75 | -36.49 | -13.00 | -23.49 | H |
| 2472.38 | -40.21 | 10.60 | 8.39 | -38.00 | -13.00 | -25.00 | H |
| 3296.70 | -32.06 | 12.00 | 11.79 | -31.85 | -13.00 | -18.85 | H |
| 1648.49 | -44.15 | 9.40 | 4.75 | -39.50 | -13.00 | -26.50 | V |
| 2472.27 | -45.38 | 10.60 | 8.39 | -43.17 | -13.00 | -30.17 | V |
| 3296.91 | -43.02 | 12.00 | 11.79 | -42.81 | -13.00 | -29.81 | V |
| The Worst Test Results Channel 190/836.6 MHz | | | | | | | |
| Frequency(MHz) | S | Ant(dBi) | Loss | PMea | Limit | Margin | Polarity |
| | G.Lev (dBm) | | | (dBm) | (dBm) | (dBm) | |
| 1673.13 | -40.92 | 9.50 | 4.76 | -36.18 | -13.00 | -23.18 | H |
| 2509.84 | -39.71 | 10.70 | 8.40 | -37.41 | -13.00 | -24.41 | H |
| 3346.14 | -30.89 | 12.20 | 11.80 | -30.49 | -13.00 | -17.49 | H |
| 1672.79 | -43.25 | 9.40 | 4.75 | -38.60 | -13.00 | -25.60 | V |
| 2509.88 | -44.06 | 10.60 | 8.39 | -41.85 | -13.00 | -28.85 | V |
| 3346.12 | -42.52 | 12.20 | 11.82 | -42.14 | -13.00 | -29.14 | V |
| The Worst Test Results Channel 251/848.8 MHz | | | | | | | |
| Frequency(MHz) | S | Ant(dBi) | Loss | PMea | Limit | Margin | Polarity |
| | G.Lev (dBm) | | | (dBm) | (dBm) | (dBm) | |
| 1697.44 | -40.67 | 9.60 | 4.77 | -35.84 | -13.00 | -22.84 | H |
| 2546.27 | -40.29 | 10.80 | 8.50 | -37.99 | -13.00 | -24.99 | H |
| 3395.02 | -32.33 | 12.50 | 11.90 | -31.73 | -13.00 | -18.73 | H |
| 1697.20 | -44.63 | 9.60 | 4.77 | -39.80 | -13.00 | -26.80 | V |
| 2546.46 | -45.06 | 10.80 | 8.50 | -42.76 | -13.00 | -29.76 | V |
| 3394.90 | -43.62 | 12.50 | 11.90 | -43.02 | -13.00 | -30.02 | V |



| GPRS 850: (30-9000)MHz | | | | | | | |
|--|-------------|----------|-------|--------|--------|--------|----------|
| The Worst Test Results Channel 128/824.2 MHz | | | | | | | |
| Frequency(MHz) | S | Ant(dBi) | Loss | PMea | Limit | Margin | Polarity |
| | G.Lev (dBm) | | | (dBm) | (dBm) | (dBm) | |
| 1648.11 | -40.70 | 9.40 | 4.75 | -36.05 | -13.00 | -23.05 | H |
| 2472.49 | -40.25 | 10.60 | 8.39 | -38.04 | -13.00 | -25.04 | H |
| 3296.85 | -30.85 | 12.00 | 11.79 | -30.64 | -13.00 | -17.64 | H |
| 1648.25 | -44.38 | 9.40 | 4.75 | -39.73 | -13.00 | -26.73 | V |
| 2472.24 | -44.28 | 10.60 | 8.39 | -42.07 | -13.00 | -29.07 | V |
| 3296.64 | -43.95 | 12.00 | 11.79 | -43.74 | -13.00 | -30.74 | V |
| The Worst Test Results Channel 190/836.6 MHz | | | | | | | |
| Frequency(MHz) | S | Ant(dBi) | Loss | PMea | Limit | Margin | Polarity |
| | G.Lev (dBm) | | | (dBm) | (dBm) | (dBm) | |
| 1673.13 | -40.92 | 9.50 | 4.76 | -36.18 | -13.00 | -23.18 | H |
| 2509.57 | -39.88 | 10.70 | 8.40 | -37.58 | -13.00 | -24.58 | H |
| 3346.19 | -30.97 | 12.20 | 11.80 | -30.57 | -13.00 | -17.57 | H |
| 1672.89 | -43.26 | 9.40 | 4.75 | -38.61 | -13.00 | -25.61 | V |
| 2509.60 | -44.52 | 10.60 | 8.39 | -42.31 | -13.00 | -29.31 | V |
| 3346.14 | -43.34 | 12.20 | 11.82 | -42.96 | -13.00 | -29.96 | V |
| The Worst Test Results Channel 251/848.8 MHz | | | | | | | |
| Frequency(MHz) | S | Ant(dBi) | Loss | PMea | Limit | Margin | Polarity |
| | G.Lev (dBm) | | | (dBm) | (dBm) | (dBm) | |
| 1697.36 | -40.70 | 9.60 | 4.77 | -35.87 | -13.00 | -22.87 | H |
| 2546.52 | -40.15 | 10.80 | 8.50 | -37.85 | -13.00 | -24.85 | H |
| 3395.28 | -31.97 | 12.50 | 11.90 | -31.37 | -13.00 | -18.37 | H |
| 1697.19 | -44.50 | 9.60 | 4.77 | -39.67 | -13.00 | -26.67 | V |
| 2546.14 | -44.36 | 10.80 | 8.50 | -42.06 | -13.00 | -29.06 | V |
| 3394.95 | -43.63 | 12.50 | 11.90 | -43.03 | -13.00 | -30.03 | V |



| EGPRS 850: (30-9000)MHz | | | | | | | |
|--|-------------|----------|-------|--------|--------|--------|----------|
| The Worst Test Results Channel 128/824.2 MHz | | | | | | | |
| Frequency(MHz) | S | Ant(dBi) | Loss | PMea | Limit | Margin | Polarity |
| | G.Lev (dBm) | | | (dBm) | (dBm) | (dBm) | |
| 1648.04 | -41.56 | 9.40 | 4.75 | -36.91 | -13.00 | -23.91 | H |
| 2472.53 | -40.14 | 10.60 | 8.39 | -37.93 | -13.00 | -24.93 | H |
| 3296.54 | -31.07 | 12.00 | 11.79 | -30.86 | -13.00 | -17.86 | H |
| 1648.05 | -43.79 | 9.40 | 4.75 | -39.14 | -13.00 | -26.14 | V |
| 2472.44 | -44.75 | 10.60 | 8.39 | -42.54 | -13.00 | -29.54 | V |
| 3296.71 | -42.75 | 12.00 | 11.79 | -42.54 | -13.00 | -29.54 | V |
| The Worst Test Results Channel 190/836.6 MHz | | | | | | | |
| Frequency(MHz) | S | Ant(dBi) | Loss | PMea | Limit | Margin | Polarity |
| | G.Lev (dBm) | | | (dBm) | (dBm) | (dBm) | |
| 1672.79 | -40.81 | 9.50 | 4.76 | -36.07 | -13.00 | -23.07 | H |
| 2509.76 | -39.63 | 10.70 | 8.40 | -37.33 | -13.00 | -24.33 | H |
| 3346.11 | -32.07 | 12.20 | 11.80 | -31.67 | -13.00 | -18.67 | H |
| 1672.82 | -43.98 | 9.40 | 4.75 | -39.33 | -13.00 | -26.33 | V |
| 2509.52 | -44.13 | 10.60 | 8.39 | -41.92 | -13.00 | -28.92 | V |
| 3346.03 | -43.84 | 12.20 | 11.82 | -43.46 | -13.00 | -30.46 | V |
| The Worst Test Results Channel 251/848.8 MHz | | | | | | | |
| Frequency(MHz) | S | Ant(dBi) | Loss | PMea | Limit | Margin | Polarity |
| | G.Lev (dBm) | | | (dBm) | (dBm) | (dBm) | |
| 1697.65 | -41.30 | 9.60 | 4.77 | -36.47 | -13.00 | -23.47 | H |
| 2546.20 | -39.20 | 10.80 | 8.50 | -36.90 | -13.00 | -23.90 | H |
| 3395.30 | -30.98 | 12.50 | 11.90 | -30.38 | -13.00 | -17.38 | H |
| 1697.30 | -43.58 | 9.60 | 4.77 | -38.75 | -13.00 | -25.75 | V |
| 2546.36 | -44.70 | 10.80 | 8.50 | -42.40 | -13.00 | -29.40 | V |
| 3394.89 | -43.63 | 12.50 | 11.90 | -43.03 | -13.00 | -30.03 | V |



| DCS 1900: (30-20000)MHz | | | | | | | |
|--|-------------|----------|-------|--------|--------|--------|----------|
| The Worst Test Results for Channel 512/1850.2MHz | | | | | | | |
| Frequency(MHz) | S | Ant(dBi) | Loss | PMea | Limit | Margin | Polarity |
| | G.Lev (dBm) | | | (dBm) | (dBm) | (dBm) | |
| 3700.36 | -33.50 | 12.60 | 12.93 | -33.83 | -13.00 | -20.83 | H |
| 5550.50 | -34.51 | 13.10 | 17.11 | -38.52 | -13.00 | -25.52 | H |
| 7400.80 | -32.26 | 11.50 | 22.20 | -42.96 | -13.00 | -29.96 | H |
| 3700.39 | -35.89 | 12.60 | 12.93 | -36.22 | -13.00 | -23.22 | V |
| 5550.66 | -34.84 | 13.10 | 17.11 | -38.85 | -13.00 | -25.85 | V |
| 7400.60 | -32.47 | 11.50 | 22.20 | -43.17 | -13.00 | -30.17 | V |
| The Worst Test Results for Channel 661/1880.0MHz | | | | | | | |
| Frequency(MHz) | S | Ant(dBi) | Loss | PMea | Limit | Margin | Polarity |
| | G.Lev (dBm) | | | (dBm) | (dBm) | (dBm) | |
| 3759.78 | -33.95 | 12.60 | 12.93 | -34.28 | -13.00 | -21.28 | H |
| 5640.22 | -35.14 | 13.10 | 17.11 | -39.15 | -13.00 | -26.15 | H |
| 7519.92 | -33.00 | 11.50 | 22.20 | -43.70 | -13.00 | -30.70 | H |
| 3759.99 | -35.83 | 12.60 | 12.93 | -36.16 | -13.00 | -23.16 | V |
| 5639.90 | -35.07 | 13.10 | 17.11 | -39.08 | -13.00 | -26.08 | V |
| 7520.31 | -32.83 | 11.50 | 22.20 | -43.53 | -13.00 | -30.53 | V |
| The Worst Test Results for Channel 810/1909.8MHz | | | | | | | |
| Frequency(MHz) | S | Ant(dBi) | Loss | PMea | Limit | Margin | Polarity |
| | G.Lev (dBm) | | | (dBm) | (dBm) | (dBm) | |
| 3819.39 | -34.69 | 12.60 | 12.93 | -35.02 | -13.00 | -22.02 | H |
| 5729.31 | -34.14 | 13.10 | 17.11 | -38.15 | -13.00 | -25.15 | H |
| 7639.21 | -32.91 | 11.50 | 22.20 | -43.61 | -13.00 | -30.61 | H |
| 3819.36 | -34.72 | 12.60 | 12.93 | -35.05 | -13.00 | -22.05 | V |
| 5729.33 | -35.19 | 13.10 | 17.11 | -39.20 | -13.00 | -26.20 | V |
| 7638.98 | -31.81 | 11.50 | 22.20 | -42.51 | -13.00 | -29.51 | V |



| GPRS1900: (30-20000)MHz | | | | | | | |
|--|-------------|----------|-------|--------|--------|--------|----------|
| The Worst Test Results for Channel 512/1850.2MHz | | | | | | | |
| Frequency(MHz) | S | Ant(dBi) | Loss | PMea | Limit | Margin | Polarity |
| | G.Lev (dBm) | | | (dBm) | (dBm) | (dBm) | |
| 3700.35 | -34.49 | 12.60 | 12.93 | -34.82 | -13.00 | -21.82 | H |
| 5550.60 | -34.18 | 13.10 | 17.11 | -38.19 | -13.00 | -25.19 | H |
| 7400.91 | -32.97 | 11.50 | 22.20 | -43.67 | -13.00 | -30.67 | H |
| 3700.49 | -35.63 | 12.60 | 12.93 | -35.96 | -13.00 | -22.96 | V |
| 5550.28 | -34.41 | 13.10 | 17.11 | -38.42 | -13.00 | -25.42 | V |
| 7400.67 | -31.81 | 11.50 | 22.20 | -42.51 | -13.00 | -29.51 | V |
| The Worst Test Results for Channel 661/1880.0MHz | | | | | | | |
| Frequency(MHz) | S | Ant(dBi) | Loss | PMea | Limit | Margin | Polarity |
| | G.Lev (dBm) | | | (dBm) | (dBm) | (dBm) | |
| 3760.26 | -34.91 | 12.60 | 12.93 | -35.24 | -13.00 | -22.24 | H |
| 5640.00 | -35.06 | 13.10 | 17.11 | -39.07 | -13.00 | -26.07 | H |
| 7520.02 | -32.29 | 11.50 | 22.20 | -42.99 | -13.00 | -29.99 | H |
| 3760.34 | -35.23 | 12.60 | 12.93 | -35.56 | -13.00 | -22.56 | V |
| 5639.84 | -34.11 | 13.10 | 17.11 | -38.12 | -13.00 | -25.12 | V |
| 7519.84 | -32.03 | 11.50 | 22.20 | -42.73 | -13.00 | -29.73 | V |
| The Worst Test Results for Channel 810/1909.8MHz | | | | | | | |
| Frequency(MHz) | S | Ant(dBi) | Loss | PMea | Limit | Margin | Polarity |
| | G.Lev (dBm) | | | (dBm) | (dBm) | (dBm) | |
| 3819.51 | -33.65 | 12.60 | 12.93 | -33.98 | -13.00 | -20.98 | H |
| 5729.12 | -34.15 | 13.10 | 17.11 | -38.16 | -13.00 | -25.16 | H |
| 7638.95 | -33.05 | 11.50 | 22.20 | -43.75 | -13.00 | -30.75 | H |
| 3819.62 | -35.62 | 12.60 | 12.93 | -35.95 | -13.00 | -22.95 | V |
| 5729.49 | -34.22 | 13.10 | 17.11 | -38.23 | -13.00 | -25.23 | V |
| 7638.97 | -33.09 | 11.50 | 22.20 | -43.79 | -13.00 | -30.79 | V |



| EGPRS 1900: (30-20000)MHz | | | | | | | |
|--|-------------|----------|-------|--------|--------|--------|----------|
| The Worst Test Results for Channel 512/1850.2MHz | | | | | | | |
| Frequency(MHz) | S | Ant(dBi) | Loss | PMea | Limit | Margin | Polarity |
| | G.Lev (dBm) | | | (dBm) | (dBm) | (dBm) | |
| 3700.25 | -33.75 | 12.60 | 12.93 | -34.08 | -13.00 | -21.08 | H |
| 5550.50 | -35.20 | 13.10 | 17.11 | -39.21 | -13.00 | -26.21 | H |
| 7400.90 | -32.53 | 11.50 | 22.20 | -43.23 | -13.00 | -30.23 | H |
| 3700.02 | -34.65 | 12.60 | 12.93 | -34.98 | -13.00 | -21.98 | V |
| 5550.61 | -34.72 | 13.10 | 17.11 | -38.73 | -13.00 | -25.73 | V |
| 7400.69 | -33.05 | 11.50 | 22.20 | -43.75 | -13.00 | -30.75 | V |
| The Worst Test Results for Channel 661/1880.0MHz | | | | | | | |
| Frequency(MHz) | S | Ant(dBi) | Loss | PMea | Limit | Margin | Polarity |
| | G.Lev (dBm) | | | (dBm) | (dBm) | (dBm) | |
| 3759.86 | -34.50 | 12.60 | 12.93 | -34.83 | -13.00 | -21.83 | H |
| 5640.26 | -34.10 | 13.10 | 17.11 | -38.11 | -13.00 | -25.11 | H |
| 7520.11 | -33.32 | 11.50 | 22.20 | -44.02 | -13.00 | -31.02 | H |
| 3760.19 | -34.53 | 12.60 | 12.93 | -34.86 | -13.00 | -21.86 | V |
| 5640.34 | -35.23 | 13.10 | 17.11 | -39.24 | -13.00 | -26.24 | V |
| 7519.95 | -31.78 | 11.50 | 22.20 | -42.48 | -13.00 | -29.48 | V |
| The Worst Test Results for Channel 810/1909.8MHz | | | | | | | |
| Frequency(MHz) | S | Ant(dBi) | Loss | PMea | Limit | Margin | Polarity |
| | G.Lev (dBm) | | | (dBm) | (dBm) | (dBm) | |
| 3819.52 | -34.61 | 12.60 | 12.93 | -34.94 | -13.00 | -21.94 | H |
| 5729.03 | -34.13 | 13.10 | 17.11 | -38.14 | -13.00 | -25.14 | H |
| 7638.88 | -33.07 | 11.50 | 22.20 | -43.77 | -13.00 | -30.77 | H |
| 3819.74 | -35.87 | 12.60 | 12.93 | -36.20 | -13.00 | -23.20 | V |
| 5729.22 | -34.98 | 13.10 | 17.11 | -38.99 | -13.00 | -25.99 | V |
| 7639.06 | -32.04 | 11.50 | 22.20 | -42.74 | -13.00 | -29.74 | V |



| WCDMA Band V: (30-9000)MHz | | | | | | | |
|--|-------------|----------|-------|--------|--------|--------|----------|
| The most testresults channel 4132/826.4MHz | | | | | | | |
| Frequency(MHz) | S | Ant(dBi) | Loss | PMea | Limit | Margin | Polarity |
| | G.Lev (dBm) | | | (dBm) | (dBm) | (dBm) | |
| 1652.34 | -40.65 | 9.40 | 4.75 | -36.00 | -13.00 | -23.00 | H |
| 2479.38 | -40.52 | 10.60 | 8.39 | -38.31 | -13.00 | -25.31 | H |
| 3305.91 | -31.02 | 12.00 | 11.79 | -30.81 | -13.00 | -17.81 | H |
| 1652.26 | -43.17 | 9.40 | 4.75 | -38.52 | -13.00 | -25.52 | V |
| 2479.57 | -45.22 | 10.60 | 8.39 | -43.01 | -13.00 | -30.01 | V |
| 3305.55 | -43.91 | 12.00 | 11.79 | -43.70 | -13.00 | -30.70 | V |
| The Worst Test Results Channel 4183/836.6MHz | | | | | | | |
| Frequency(MHz) | S | Ant(dBi) | Loss | PMea | Limit | Margin | Polarity |
| | G.Lev (dBm) | | | (dBm) | (dBm) | (dBm) | |
| 1672.82 | -40.82 | 9.50 | 4.76 | -36.08 | -13.00 | -23.08 | H |
| 2509.69 | -39.81 | 10.70 | 8.40 | -37.51 | -13.00 | -24.51 | H |
| 3346.35 | -31.16 | 12.20 | 11.80 | -30.76 | -13.00 | -17.76 | H |
| 1673.02 | -43.90 | 9.40 | 4.75 | -39.25 | -13.00 | -26.25 | V |
| 2509.70 | -45.32 | 10.60 | 8.39 | -43.11 | -13.00 | -30.11 | V |
| 3346.40 | -43.72 | 12.20 | 11.82 | -43.34 | -13.00 | -30.34 | V |
| The Worst Test Results Channel 4233/846.6MHz | | | | | | | |
| Frequency(MHz) | S | Ant(dBi) | Loss | PMea | Limit | Margin | Polarity |
| | G.Lev (dBm) | | | (dBm) | (dBm) | (dBm) | |
| 1693.40 | -41.21 | 9.60 | 4.77 | -36.38 | -13.00 | -23.38 | H |
| 2539.30 | -40.58 | 10.80 | 8.50 | -38.28 | -13.00 | -25.28 | H |
| 3386.28 | -31.83 | 12.50 | 11.90 | -31.23 | -13.00 | -18.23 | H |
| 1693.64 | -43.38 | 9.60 | 4.77 | -38.55 | -13.00 | -25.55 | V |
| 2539.23 | -44.24 | 10.80 | 8.50 | -41.94 | -13.00 | -28.94 | V |
| 3385.88 | -43.63 | 12.50 | 11.90 | -43.03 | -13.00 | -30.03 | V |



| HSUPA Band V: (30-9000)MHz | | | | | | | |
|--|-------------|----------|-------|--------|--------|--------|----------|
| The most testresults channel 4132/826.4MHz | | | | | | | |
| Frequency(MHz) | S | Ant(dBi) | Loss | PMea | Limit | Margin | Polarity |
| | G.Lev (dBm) | | | (dBm) | (dBm) | (dBm) | |
| 1652.28 | -40.85 | 9.40 | 4.75 | -36.20 | -13.00 | -23.20 | H |
| 2479.48 | -39.27 | 10.60 | 8.39 | -37.06 | -13.00 | -24.06 | H |
| 3305.74 | -31.66 | 12.00 | 11.79 | -31.45 | -13.00 | -18.45 | H |
| 1652.40 | -43.29 | 9.40 | 4.75 | -38.64 | -13.00 | -25.64 | V |
| 2479.53 | -45.25 | 10.60 | 8.39 | -43.04 | -13.00 | -30.04 | V |
| 3305.52 | -42.98 | 12.00 | 11.79 | -42.77 | -13.00 | -29.77 | V |
| The Worst Test Results Channel 4183/836.6MHz | | | | | | | |
| Frequency(MHz) | S | Ant(dBi) | Loss | PMea | Limit | Margin | Polarity |
| | G.Lev (dBm) | | | (dBm) | (dBm) | (dBm) | |
| 1672.92 | -40.92 | 9.50 | 4.76 | -36.18 | -13.00 | -23.18 | H |
| 2509.69 | -40.09 | 10.70 | 8.40 | -37.79 | -13.00 | -24.79 | H |
| 3346.06 | -31.23 | 12.20 | 11.80 | -30.83 | -13.00 | -17.83 | H |
| 1673.20 | -44.59 | 9.40 | 4.75 | -39.94 | -13.00 | -26.94 | V |
| 2509.62 | -45.11 | 10.60 | 8.39 | -42.90 | -13.00 | -29.90 | V |
| 3346.36 | -43.68 | 12.20 | 11.82 | -43.30 | -13.00 | -30.30 | V |
| The Worst Test Results Channel 4233/846.6MHz | | | | | | | |
| Frequency(MHz) | S | Ant(dBi) | Loss | PMea | Limit | Margin | Polarity |
| | G.Lev (dBm) | | | (dBm) | (dBm) | (dBm) | |
| 1693.32 | -41.46 | 9.60 | 4.77 | -36.63 | -13.00 | -23.63 | H |
| 2539.35 | -39.39 | 10.80 | 8.50 | -37.09 | -13.00 | -24.09 | H |
| 3386.08 | -32.02 | 12.50 | 11.90 | -31.42 | -13.00 | -18.42 | H |
| 1693.21 | -44.26 | 9.60 | 4.77 | -39.43 | -13.00 | -26.43 | V |
| 2539.25 | -45.09 | 10.80 | 8.50 | -42.79 | -13.00 | -29.79 | V |
| 3385.97 | -43.85 | 12.50 | 11.90 | -43.25 | -13.00 | -30.25 | V |



| HSDPA Band V: (30-9000)MHz | | | | | | | |
|--|-------------|----------|-------|--------|---------|--------|----------|
| The most testresults channel 4132/826.4MHz | | | | | | | |
| Frequency(MHz) | S | Ant(dBi) | Loss | PMea | Limit | Margin | Polarity |
| | G.Lev (dBm) | | | (dBm) | (dBm) | (dBm) | |
| 1652.39 | -40.57 | 9.40 | 4.75 | -35.92 | -13.00 | -22.92 | H |
| 2479.22 | -39.78 | 10.60 | 8.39 | -37.57 | -13.00 | -24.57 | H |
| 3305.62 | -31.25 | 12.00 | 11.79 | -31.04 | -13.00 | -18.04 | H |
| 1652.13 | -44.31 | 9.40 | 4.75 | -39.66 | -13.00 | -26.66 | V |
| 2479.44 | -45.10 | 10.60 | 8.39 | -42.89 | -13.00 | -29.89 | V |
| 3305.54 | -43.64 | 12.00 | 11.79 | -43.43 | -13.00 | -30.43 | V |
| The Worst Test Results Channel 4183/836.6MHz | | | | | | | |
| Frequency(MHz) | S | Ant(dBi) | Loss | PMea | Limit | Margin | Polarity |
| | G.Lev (dBm) | | | (dBm) | (dBm) | (dBm) | |
| 1672.99 | -41.03 | 9.50 | 4.76 | -36.29 | -13.00 | -23.29 | H |
| 2509.77 | -40.66 | 10.70 | 8.40 | -38.36 | -13.00 | -25.36 | H |
| 3346.03 | -31.07 | 12.20 | 11.80 | -30.67 | -13.00 | -17.67 | H |
| 1673.17 | -44.01 | 9.40 | 4.75 | -39.36 | -13.00 | -26.36 | V |
| 2509.62 | -44.71 | 10.60 | 8.39 | -42.50 | -13.00 | -29.50 | V |
| 3346.06 | -42.73 | 12.20 | 11.82 | -42.35 | -13.00 | -29.35 | V |
| The Worst Test Results Channel 4233/846.6MHz | | | | | | | |
| Frequency(MHz) | S | Ant(dBi) | Loss | PMea | Limit | Margin | Polarity |
| | G.Lev (dBm) | | | (dBm) | (dBm) | (dBm) | |
| 1693.40 | -40.68 | 9.60 | 4.77 | -35.85 | -13.00 | -22.85 | H |
| 2539.34 | -40.25 | 10.80 | 8.50 | -37.95 | -13.00 | -24.95 | H |
| 3386.08 | -32.28 | 12.50 | 11.90 | -31.68 | -13.00 | -18.68 | H |
| 1693.46 | -44.58 | 9.60 | 4.77 | -39.75 | -13.00 | -26.75 | V |
| 2539.51 | -44.53 | 10.80 | 8.50 | -42.23 | -13.00 | -29.23 | V |
| 3386.24 | -43.37 | 12.50 | 11.90 | -42.77 | -13.00 | -29.77 | V |



| WCDMA Band II: (30-20000)MHz | | | | | | | |
|---|-------------|----------|-------|--------|--------|--------|----------|
| The Worst Test Results for Channel 9262/1852.4MHz | | | | | | | |
| Frequency(MHz) | S | Ant(dBi) | Loss | PMea | Limit | Margin | Polarity |
| | G.Lev (dBm) | | | (dBm) | (dBm) | (dBm) | |
| 3704.19 | -33.46 | 12.60 | 12.93 | -33.79 | -13.00 | -20.79 | H |
| 5557.30 | -34.60 | 13.10 | 17.11 | -38.61 | -13.00 | -25.61 | H |
| 7409.80 | -33.49 | 11.50 | 22.20 | -44.19 | -13.00 | -31.19 | H |
| 3704.01 | -35.72 | 12.60 | 12.93 | -36.05 | -13.00 | -23.05 | V |
| 5557.60 | -34.30 | 13.10 | 17.11 | -38.31 | -13.00 | -25.31 | V |
| 7409.90 | -33.03 | 11.50 | 22.20 | -43.73 | -13.00 | -30.73 | V |
| The Worst Test Results for Channel 9400/1880MHz | | | | | | | |
| Frequency(MHz) | S | Ant(dBi) | Loss | PMea | Limit | Margin | Polarity |
| | G.Lev (dBm) | | | (dBm) | (dBm) | (dBm) | |
| 3760.04 | -34.37 | 12.60 | 12.93 | -34.70 | -13.00 | -21.70 | H |
| 5639.97 | -35.38 | 13.10 | 17.11 | -39.39 | -13.00 | -26.39 | H |
| 7520.01 | -33.55 | 11.50 | 22.20 | -44.25 | -13.00 | -31.25 | H |
| 3760.29 | -35.00 | 12.60 | 12.93 | -35.33 | -13.00 | -22.33 | V |
| 5640.31 | -34.30 | 13.10 | 17.11 | -38.31 | -13.00 | -25.31 | V |
| 7519.86 | -32.23 | 11.50 | 22.20 | -42.93 | -13.00 | -29.93 | V |
| The Worst Test Results for Channel 9538/1907.6MHz | | | | | | | |
| Frequency(MHz) | S | Ant(dBi) | Loss | PMea | Limit | Margin | Polarity |
| | G.Lev (dBm) | | | (dBm) | (dBm) | (dBm) | |
| 3815.55 | -33.68 | 12.60 | 12.93 | -34.01 | -13.00 | -21.01 | H |
| 5722.46 | -34.49 | 13.10 | 17.11 | -38.50 | -13.00 | -25.50 | H |
| 7630.13 | -32.50 | 11.50 | 22.20 | -43.20 | -13.00 | -30.20 | H |
| 3815.55 | -35.45 | 12.60 | 12.93 | -35.78 | -13.00 | -22.78 | V |
| 5722.07 | -34.76 | 13.10 | 17.11 | -38.77 | -13.00 | -25.77 | V |
| 7629.89 | -32.18 | 11.50 | 22.20 | -42.88 | -13.00 | -29.88 | V |



| HSUPA Band II: (30-20000)MHz | | | | | | | |
|---|-------------|----------|-------|--------|--------|--------|----------|
| The Worst Test Results for Channel 9262/1852.4MHz | | | | | | | |
| Frequency(MHz) | S | Ant(dBi) | Loss | PMea | Limit | Margin | Polarity |
| | G.Lev (dBm) | | | (dBm) | (dBm) | (dBm) | |
| 3704.04 | -33.96 | 12.60 | 12.93 | -34.29 | -13.00 | -21.29 | H |
| 5557.50 | -35.36 | 13.10 | 17.11 | -39.37 | -13.00 | -26.37 | H |
| 7409.67 | -33.05 | 11.50 | 22.20 | -43.75 | -13.00 | -30.75 | H |
| 3704.03 | -35.60 | 12.60 | 12.93 | -35.93 | -13.00 | -22.93 | V |
| 5557.65 | -34.53 | 13.10 | 17.11 | -38.54 | -13.00 | -25.54 | V |
| 7409.77 | -32.19 | 11.50 | 22.20 | -42.89 | -13.00 | -29.89 | V |
| The Worst Test Results for Channel 9400/1880MHz | | | | | | | |
| Frequency(MHz) | S | Ant(dBi) | Loss | PMea | Limit | Margin | Polarity |
| | G.Lev (dBm) | | | (dBm) | (dBm) | (dBm) | |
| 3760.13 | -34.20 | 12.60 | 12.93 | -34.53 | -13.00 | -21.53 | H |
| 5640.10 | -34.81 | 13.10 | 17.11 | -38.82 | -13.00 | -25.82 | H |
| 7520.27 | -32.40 | 11.50 | 22.20 | -43.10 | -13.00 | -30.10 | H |
| 3760.12 | -35.66 | 12.60 | 12.93 | -35.99 | -13.00 | -22.99 | V |
| 5640.11 | -33.93 | 13.10 | 17.11 | -37.94 | -13.00 | -24.94 | V |
| 7519.98 | -31.74 | 11.50 | 22.20 | -42.44 | -13.00 | -29.44 | V |
| The Worst Test Results for Channel 9538/1907.6MHz | | | | | | | |
| Frequency(MHz) | S | Ant(dBi) | Loss | PMea | Limit | Margin | Polarity |
| | G.Lev (dBm) | | | (dBm) | (dBm) | (dBm) | |
| 3815.30 | -33.51 | 12.60 | 12.93 | -33.84 | -13.00 | -20.84 | H |
| 5722.04 | -34.94 | 13.10 | 17.11 | -38.95 | -13.00 | -25.95 | H |
| 7629.94 | -33.43 | 11.50 | 22.20 | -44.13 | -13.00 | -31.13 | H |
| 3815.65 | -35.51 | 12.60 | 12.93 | -35.84 | -13.00 | -22.84 | V |
| 5722.16 | -34.53 | 13.10 | 17.11 | -38.54 | -13.00 | -25.54 | V |
| 7630.20 | -31.83 | 11.50 | 22.20 | -42.53 | -13.00 | -29.53 | V |



| HSDPA Band II: (30-20000)MHz | | | | | | | |
|---|-------------|----------|-------|--------|--------|--------|----------|
| The Worst Test Results for Channel 9262/1852.4MHz | | | | | | | |
| Frequency(MHz) | S | Ant(dBi) | Loss | PMea | Limit | Margin | Polarity |
| | G.Lev (dBm) | | | (dBm) | (dBm) | (dBm) | |
| 3704.30 | -34.09 | 12.60 | 12.93 | -34.42 | -13.00 | -21.42 | H |
| 5557.24 | -35.33 | 13.10 | 17.11 | -39.34 | -13.00 | -26.34 | H |
| 7409.77 | -33.27 | 11.50 | 22.20 | -43.97 | -13.00 | -30.97 | H |
| 3704.03 | -34.92 | 12.60 | 12.93 | -35.25 | -13.00 | -22.25 | V |
| 5557.51 | -34.38 | 13.10 | 17.11 | -38.39 | -13.00 | -25.39 | V |
| 7409.88 | -32.90 | 11.50 | 22.20 | -43.60 | -13.00 | -30.60 | V |
| The Worst Test Results for Channel 9400/1880MHz | | | | | | | |
| Frequency(MHz) | S | Ant(dBi) | Loss | PMea | Limit | Margin | Polarity |
| | G.Lev (dBm) | | | (dBm) | (dBm) | (dBm) | |
| 3759.95 | -34.57 | 12.60 | 12.93 | -34.90 | -13.00 | -21.90 | H |
| 5640.23 | -35.25 | 13.10 | 17.11 | -39.26 | -13.00 | -26.26 | H |
| 7520.29 | -32.44 | 11.50 | 22.20 | -43.14 | -13.00 | -30.14 | H |
| 3760.05 | -35.95 | 12.60 | 12.93 | -36.28 | -13.00 | -23.28 | V |
| 5640.19 | -35.13 | 13.10 | 17.11 | -39.14 | -13.00 | -26.14 | V |
| 7519.85 | -31.75 | 11.50 | 22.20 | -42.45 | -13.00 | -29.45 | V |
| The Worst Test Results for Channel 9538/1907.6MHz | | | | | | | |
| Frequency(MHz) | S | Ant(dBi) | Loss | PMea | Limit | Margin | Polarity |
| | G.Lev (dBm) | | | (dBm) | (dBm) | (dBm) | |
| 3815.58 | -34.03 | 12.60 | 12.93 | -34.36 | -13.00 | -21.36 | H |
| 5722.45 | -34.99 | 13.10 | 17.11 | -39.00 | -13.00 | -26.00 | H |
| 7630.32 | -32.75 | 11.50 | 22.20 | -43.45 | -13.00 | -30.45 | H |
| 3815.47 | -35.22 | 12.60 | 12.93 | -35.55 | -13.00 | -22.55 | V |
| 5722.50 | -33.92 | 13.10 | 17.11 | -37.93 | -13.00 | -24.93 | V |
| 7629.83 | -32.62 | 11.50 | 22.20 | -43.32 | -13.00 | -30.32 | V |



| WCDMA Band IV: (30-20000)MHz | | | | | | | |
|---|-------------|----------|-------|--------|--------|--------|----------|
| The Worst Test Results for Channel 1313/1712.6MHz | | | | | | | |
| Frequency(MHz) | S | Ant(dBi) | Loss | PMea | Limit | Margin | Polarity |
| | G.Lev (dBm) | | | (dBm) | (dBm) | (dBm) | |
| 3425.13 | -33.52 | 12.90 | 12.05 | -32.67 | -13.00 | -19.67 | H |
| 5137.36 | -34.01 | 12.80 | 16.27 | -37.48 | -13.00 | -24.48 | H |
| 6850.29 | -32.75 | 12.30 | 20.13 | -40.58 | -13.00 | -27.58 | H |
| 3425.07 | -35.33 | 12.90 | 12.05 | -34.48 | -13.00 | -21.48 | V |
| 5137.44 | -33.80 | 12.80 | 16.27 | -37.27 | -13.00 | -24.27 | V |
| 6850.34 | -32.46 | 12.30 | 20.13 | -40.29 | -13.00 | -27.29 | V |
| The Worst Test Results for Channel 1450/1740.0MHz | | | | | | | |
| Frequency(MHz) | S | Ant(dBi) | Loss | PMea | Limit | Margin | Polarity |
| | G.Lev (dBm) | | | (dBm) | (dBm) | (dBm) | |
| 3479.96 | -34.92 | 12.90 | 12.05 | -34.07 | -13.00 | -21.07 | H |
| 5219.68 | -34.87 | 12.80 | 16.27 | -38.34 | -13.00 | -25.34 | H |
| 6959.76 | -32.74 | 12.30 | 20.13 | -40.57 | -13.00 | -27.57 | H |
| 3479.73 | -34.92 | 12.90 | 12.05 | -34.07 | -13.00 | -21.07 | V |
| 5219.57 | -34.67 | 12.80 | 16.27 | -38.14 | -13.00 | -25.14 | V |
| 6959.69 | -32.44 | 12.30 | 20.13 | -40.27 | -13.00 | -27.27 | V |
| The Worst Test Results for Channel 1512/1752.4MHz | | | | | | | |
| Frequency(MHz) | S | Ant(dBi) | Loss | PMea | Limit | Margin | Polarity |
| | G.Lev (dBm) | | | (dBm) | (dBm) | (dBm) | |
| 3504.59 | -34.49 | 12.90 | 12.05 | -33.64 | -13.00 | -20.64 | H |
| 5257.19 | -34.64 | 12.80 | 16.27 | -38.11 | -13.00 | -25.11 | H |
| 7009.40 | -32.45 | 12.30 | 20.13 | -40.28 | -13.00 | -27.28 | H |
| 3504.53 | -35.07 | 12.90 | 12.05 | -34.22 | -13.00 | -21.22 | V |
| 5256.86 | -35.19 | 12.80 | 16.27 | -38.66 | -13.00 | -25.66 | V |
| 7009.31 | -31.72 | 12.30 | 20.13 | -39.55 | -13.00 | -26.55 | V |



| HSUPA Band IV: (30-20000)MHz | | | | | | | |
|---|-------------|----------|-------|--------|--------|--------|----------|
| The Worst Test Results for Channel 1313/1712.6MHz | | | | | | | |
| Frequency(MHz) | S | Ant(dBi) | Loss | PMea | Limit | Margin | Polarity |
| | G.Lev (dBm) | | | (dBm) | (dBm) | (dBm) | |
| 3424.96 | -33.57 | 12.90 | 12.05 | -32.72 | -13.00 | -19.72 | H |
| 5137.70 | -34.25 | 12.80 | 16.27 | -37.72 | -13.00 | -24.72 | H |
| 6849.97 | -33.04 | 12.30 | 20.13 | -40.87 | -13.00 | -27.87 | H |
| 3424.73 | -34.96 | 12.90 | 12.05 | -34.11 | -13.00 | -21.11 | V |
| 5137.54 | -33.94 | 12.80 | 16.27 | -37.41 | -13.00 | -24.41 | V |
| 6850.29 | -33.18 | 12.30 | 20.13 | -41.01 | -13.00 | -28.01 | V |
| The Worst Test Results for Channel 1450/1740.0MHz | | | | | | | |
| Frequency(MHz) | S | Ant(dBi) | Loss | PMea | Limit | Margin | Polarity |
| | G.Lev (dBm) | | | (dBm) | (dBm) | (dBm) | |
| 3479.94 | -34.63 | 12.90 | 12.05 | -33.78 | -13.00 | -20.78 | H |
| 5219.55 | -35.24 | 12.80 | 16.27 | -38.71 | -13.00 | -25.71 | H |
| 6959.78 | -33.37 | 12.30 | 20.13 | -41.20 | -13.00 | -28.20 | H |
| 3479.70 | -35.72 | 12.90 | 12.05 | -34.87 | -13.00 | -21.87 | V |
| 5219.77 | -34.83 | 12.80 | 16.27 | -38.30 | -13.00 | -25.30 | V |
| 6959.59 | -32.30 | 12.30 | 20.13 | -40.13 | -13.00 | -27.13 | V |
| The Worst Test Results for Channel 1512/1752.4MHz | | | | | | | |
| Frequency(MHz) | S | Ant(dBi) | Loss | PMea | Limit | Margin | Polarity |
| | G.Lev (dBm) | | | (dBm) | (dBm) | (dBm) | |
| 3504.55 | -33.78 | 12.90 | 12.05 | -32.93 | -13.00 | -19.93 | H |
| 5256.98 | -35.08 | 12.80 | 16.27 | -38.55 | -13.00 | -25.55 | H |
| 7009.40 | -32.39 | 12.30 | 20.13 | -40.22 | -13.00 | -27.22 | H |
| 3504.42 | -35.64 | 12.90 | 12.05 | -34.79 | -13.00 | -21.79 | V |
| 5256.84 | -35.00 | 12.80 | 16.27 | -38.47 | -13.00 | -25.47 | V |
| 7009.15 | -31.73 | 12.30 | 20.13 | -39.56 | -13.00 | -26.56 | V |



| HSDPA Band IV: (30-20000)MHz | | | | | | | |
|---|-------------|----------|-------|--------|--------|--------|----------|
| The Worst Test Results for Channel 1313/1712.6MHz | | | | | | | |
| Frequency(MHz) | S | Ant(dBi) | Loss | PMea | Limit | Margin | Polarity |
| | G.Lev (dBm) | | | (dBm) | (dBm) | (dBm) | |
| 3425.10 | -34.49 | 12.90 | 12.05 | -33.64 | -13.00 | -20.64 | H |
| 5137.32 | -34.35 | 12.80 | 16.27 | -37.82 | -13.00 | -24.82 | H |
| 6850.14 | -33.29 | 12.30 | 20.13 | -41.12 | -13.00 | -28.12 | H |
| 3424.99 | -35.02 | 12.90 | 12.05 | -34.17 | -13.00 | -21.17 | V |
| 5137.56 | -33.76 | 12.80 | 16.27 | -37.23 | -13.00 | -24.23 | V |
| 6850.08 | -32.54 | 12.30 | 20.13 | -40.37 | -13.00 | -27.37 | V |
| The Worst Test Results for Channel 1450/1740.0MHz | | | | | | | |
| Frequency(MHz) | S | Ant(dBi) | Loss | PMea | Limit | Margin | Polarity |
| | G.Lev (dBm) | | | (dBm) | (dBm) | (dBm) | |
| 3479.55 | -34.11 | 12.90 | 12.05 | -33.26 | -13.00 | -20.26 | H |
| 5219.57 | -34.68 | 12.80 | 16.27 | -38.15 | -13.00 | -25.15 | H |
| 6959.82 | -33.01 | 12.30 | 20.13 | -40.84 | -13.00 | -27.84 | H |
| 3479.72 | -34.64 | 12.90 | 12.05 | -33.79 | -13.00 | -20.79 | V |
| 5219.73 | -33.82 | 12.80 | 16.27 | -37.29 | -13.00 | -24.29 | V |
| 6959.67 | -32.40 | 12.30 | 20.13 | -40.23 | -13.00 | -27.23 | V |
| The Worst Test Results for Channel 1512/1752.4MHz | | | | | | | |
| Frequency(MHz) | S | Ant(dBi) | Loss | PMea | Limit | Margin | Polarity |
| | G.Lev (dBm) | | | (dBm) | (dBm) | (dBm) | |
| 3504.60 | -33.73 | 12.90 | 12.05 | -32.88 | -13.00 | -19.88 | H |
| 5256.88 | -35.26 | 12.80 | 16.27 | -38.73 | -13.00 | -25.73 | H |
| 7009.31 | -33.48 | 12.30 | 20.13 | -41.31 | -13.00 | -28.31 | H |
| 3504.78 | -35.89 | 12.90 | 12.05 | -35.04 | -13.00 | -22.04 | V |
| 5256.88 | -34.61 | 12.80 | 16.27 | -38.08 | -13.00 | -25.08 | V |
| 7009.41 | -32.53 | 12.30 | 20.13 | -40.36 | -13.00 | -27.36 | V |



APPENDIX-PHOTOS OF TEST SETUP

Note: See test photos in setup photo document for the actual connections between Product and support equipment.

*****END OF THE REPORT*****

