
1. WM260 UAV SDR RB ANT0


1.1 Basic Specifications

No.	Specification	Descriptions	Notes	
1	Antenna Name	WM260 UAV SDR RB ANT0		
2	Brand	DJI		
3	Operation Frequency	2.4~2.483GHz; 5.725~5.85GHz		
4	Connector Type	1代 IPEX		
5	Impedance	50ohm		
6	Gain	1.5 dBi@2.4~2.483GHz 3 dBi@5.725~5.85GHz		
7	Efficiency	$\geq 50\%$		
8	VSWR	≤ 2.5		
9	Polarization type	Linear		
10	3dB Beamwidth	Omnidirectional Vertical		
11	Weight			


1.2 radiation pattern

Frequency	Efficiency()	E Total. dB(dB)
2400MHz	51%	1.43649
2420MHz	52%	1.466
2440MHz	53%	1.48475
2460MHz	53%	1.4676
2480MHz	51%	1.37426
5725MHz	52%	2.81937
5775MHz	52%	2.92576
5800MHz	52%	2.85842
5850MHz	50%	2.73477


2.4G 水平面

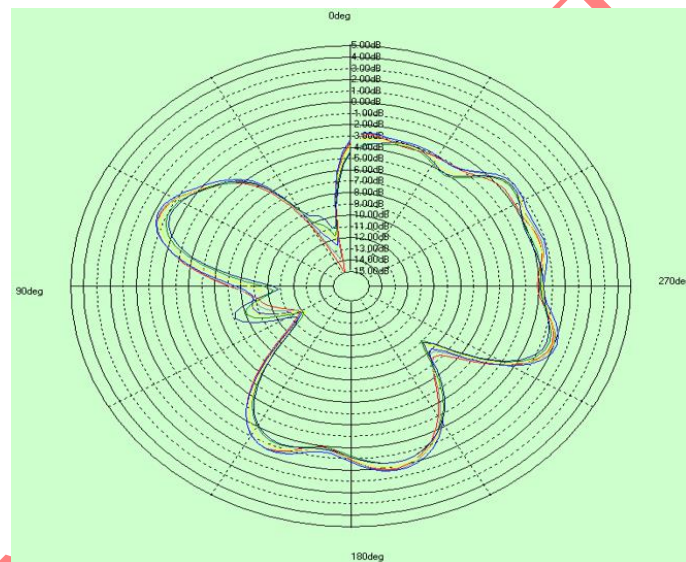


2.4G 俯仰面

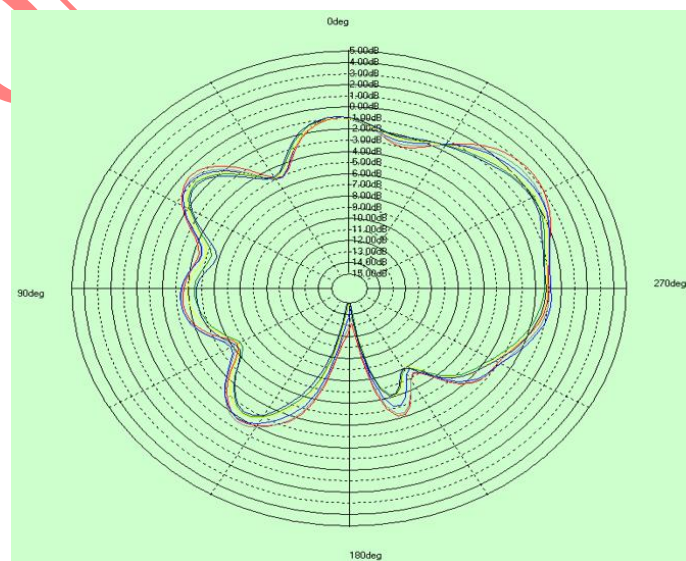


5.8G 水平面

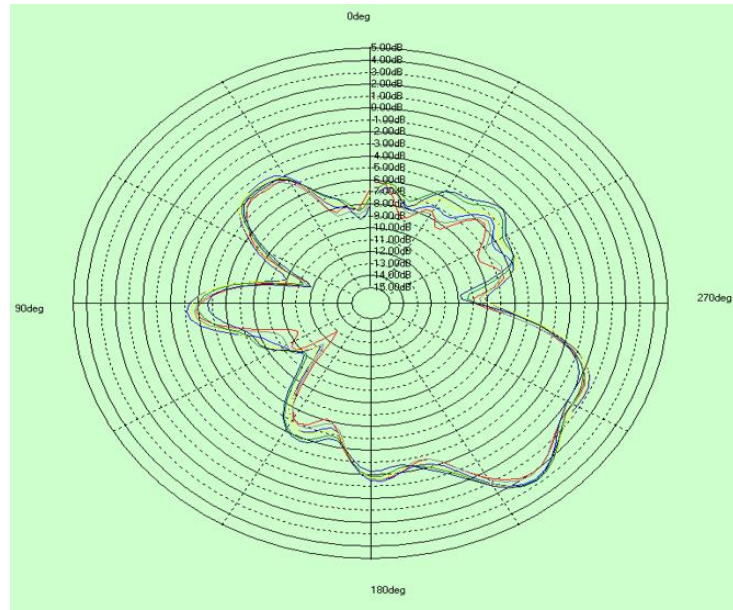

5.8G 俯仰面

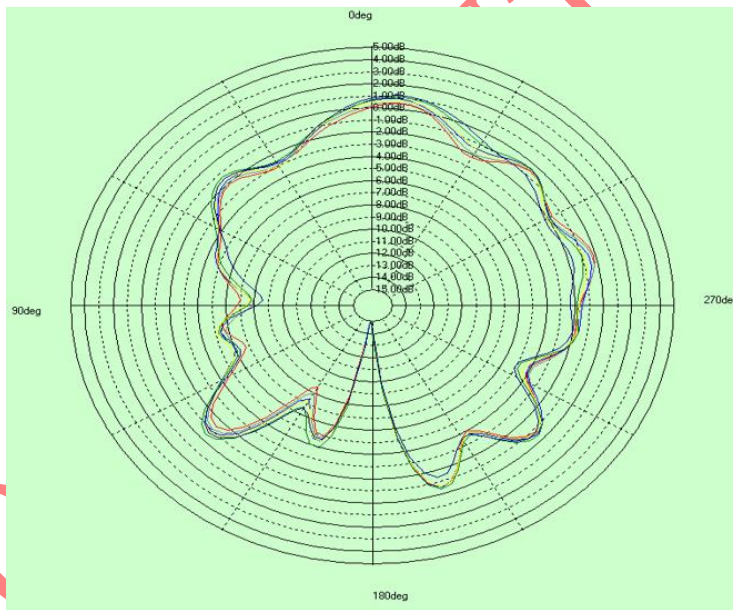

2.3 Structure drawing

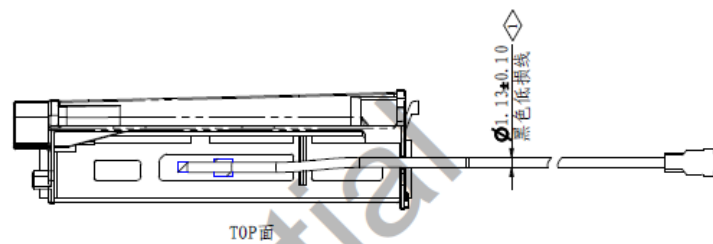



2. WM260 UAV SDR LF ANT1


2.1 Basic Specifications

No.	Specification	Descriptions	Notes	
1	Antenna Name	WM260 UAV SDR LF ANT1		
2	Brand	DJI		
3	Operation Frequency	2.4~2.483GHz; 5.725~5.85GHz		
4	Connector Type	1代 IPEX		
5	Impedance	50ohm		
6	Gain	2 dBi@2.4~2.483GHz 2.5 dBi@5.725~5.85GHz		
7	Efficiency	$\geq 50\%$		
8	VSWR	≤ 2.5		
9	Polarization type	Linear		
10	3dB Beamwidth	Omnidirectional horizontal		
11	Weight			


2.2 radiation pattern

Frequency	Efficiency()	E Total. dB(dB)
2400MHz	61%	1.78888
2420MHz	62%	1.78554
2440MHz	63%	1.93675
2460MHz	61%	1.63152
2480MHz	59%	1.59199
5725MHz	54%	2.35058
5775MHz	55%	2.40539
5800MHz	56%	2.47963
5850MHz	54%	2.41271


2.4G 水平面

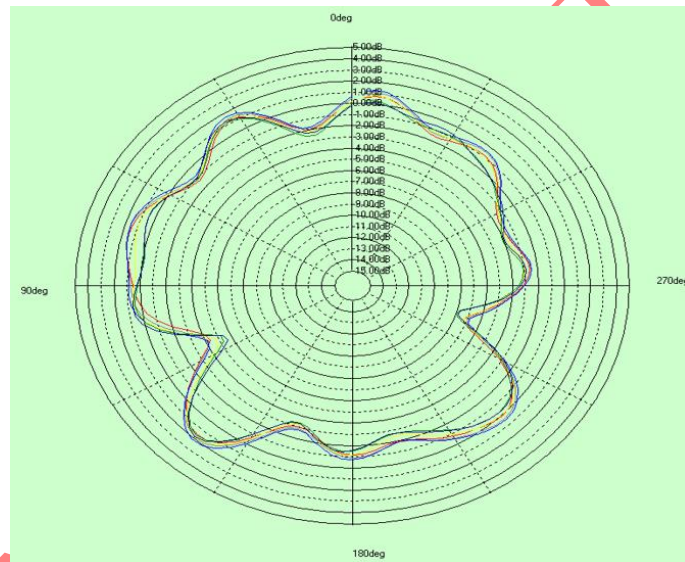


2.4G 俯仰面

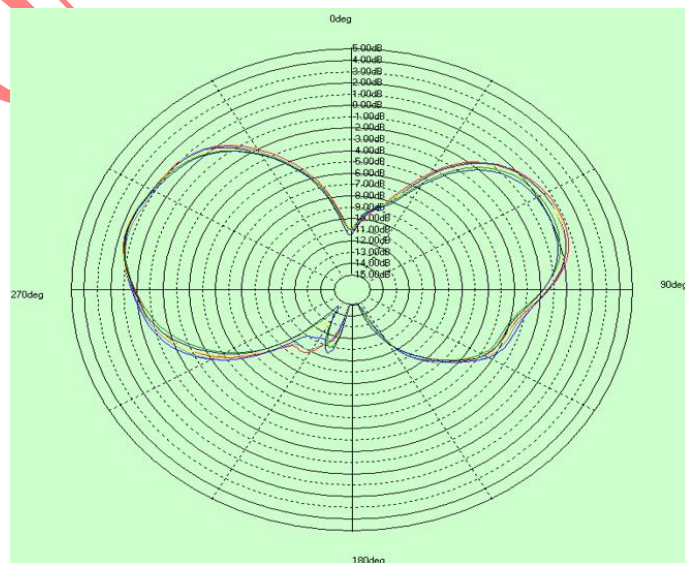


5.8G 水平面

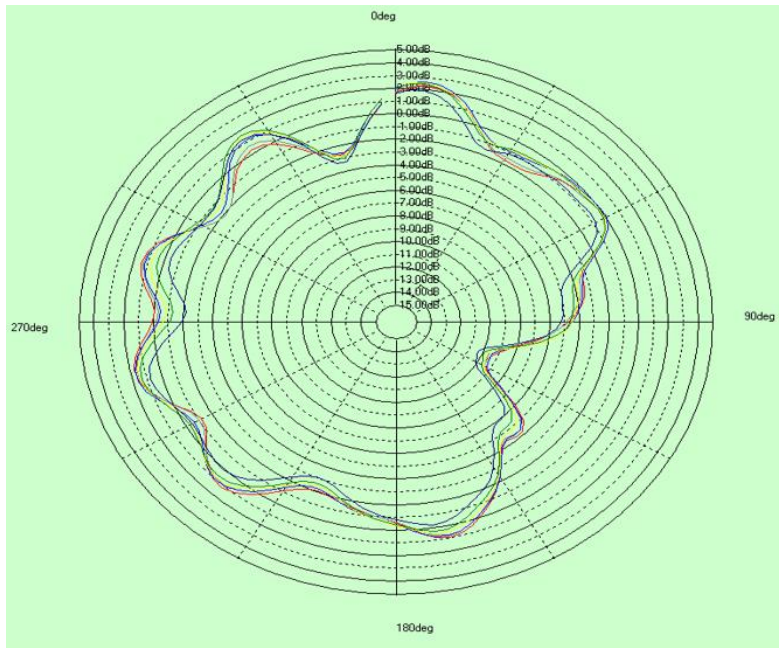

5.8G 俯仰面

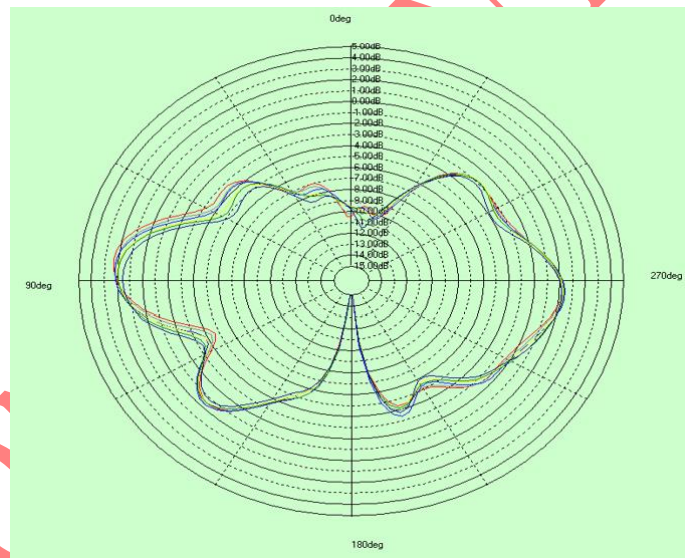

2.3 Structure drawing

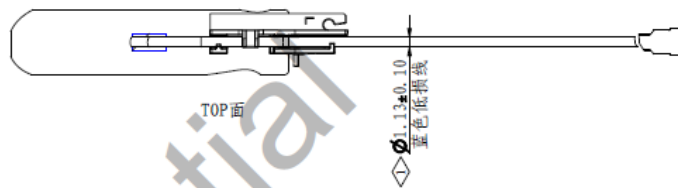



3. WM260 UAV SDR RF ANT2


3.1 Basic Specifications

No.	Specification	Descriptions	Notes	
1	Antenna Name	WM260 UAV SDR RF ANT2		
2	Brand	DJI		
3	Operation Frequency	2.4~2.483GHz; 5.725~5.85GHz		
4	Connector Type	1代 IPEX		
5	Impedance	50ohm		
6	Gain	2 dBi@2.4~2.483GHz 2.5 dBi@5.725~5.85GHz		
7	Efficiency	$\geq 50\%$		
8	VSWR	≤ 2.5		
9	Polarization type	Linear		
10	3dB Beamwidth	Omnidirectional horizontal		
11	Weight			


3.2 radiation pattern

Frequency	Efficiency()	E Total. dB(dB)
2400MHz	59%	1.64122
2420MHz	60%	1.87162
2440MHz	61%	1.84796
2460MHz	62%	1.99157
2480MHz	61%	1.70693
5725MHz	54%	2.48951
5775MHz	53%	2.40645
5800MHz	52%	2.34776
5850MHz	53%	2.39765


2.4G 水平面

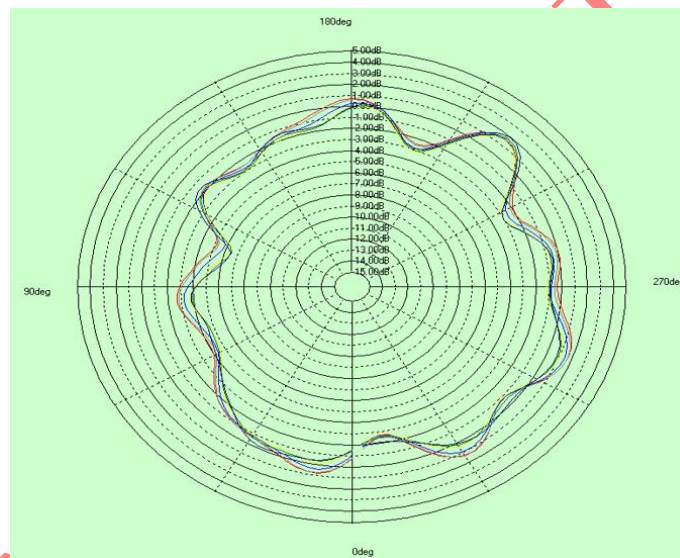


2.4G 俯仰面

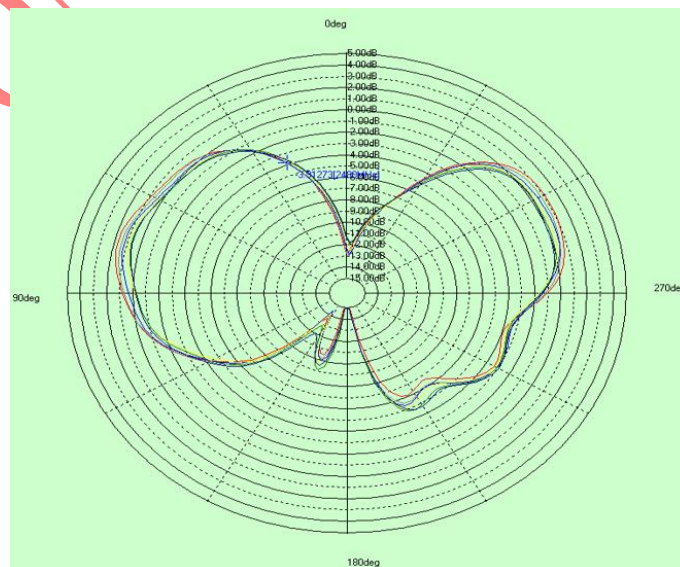


5.8G 水平面

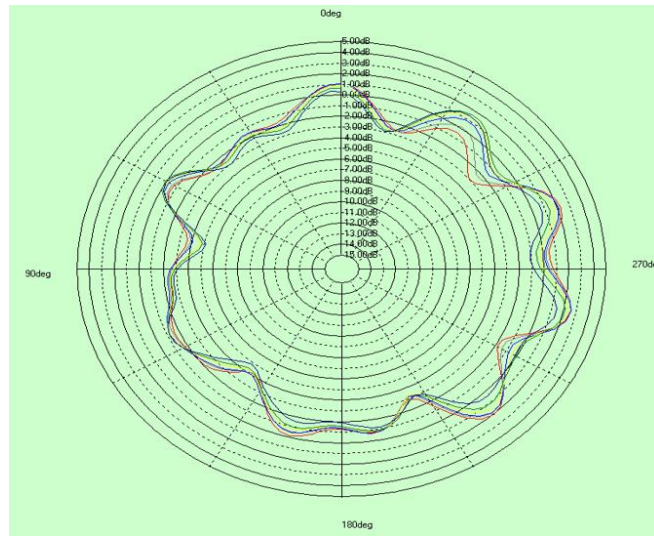

5.8G 俯仰面

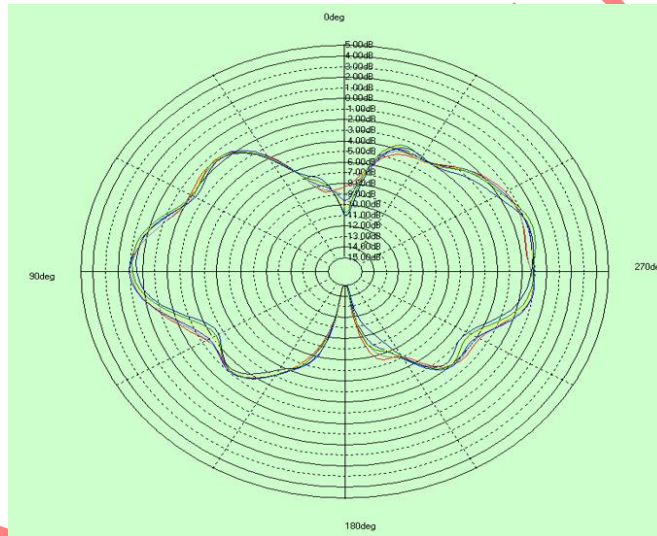

3.3 Structure drawing

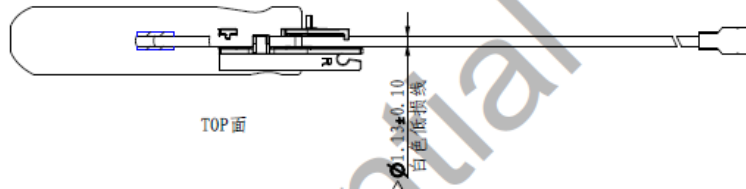



4. WM260 UAV SDR LB ANT3


4.1 Basic Specifications

No.	Specification	Descriptions	Notes	
1	Antenna Name	WM260 UAV SDR LB ANT3		
2	Brand	DJI		
3	Operation Frequency	2.4~2.483GHz; 5.725~5.85GHz		
4	Connector Type	1代 IPEX		
5	Impedance	50ohm		
6	Gain	1.5 dBi@2.4~2.483GHz 3 dBi@5.725~5.85GHz		
7	Efficiency	$\geq 50\%$		
8	VSWR	≤ 2.5		
9	Polarization type	Linear		
10	3dB Beamwidth	Omnidirectional Vertical		
11	Weight			


4.2 radiation pattern

Frequency	Efficiency()	E Total. dB(dB)
2400MHz	53%	1.42422
2420MHz	54%	1.45707
2440MHz	55%	1.49203
2460MHz	52%	1.44166
2480MHz	51%	1.39642
5725MHz	50%	2.65794
5775MHz	53%	2.92507
5800MHz	52%	2.71814
5850MHz	50%	2.67981


2.4G 水平面

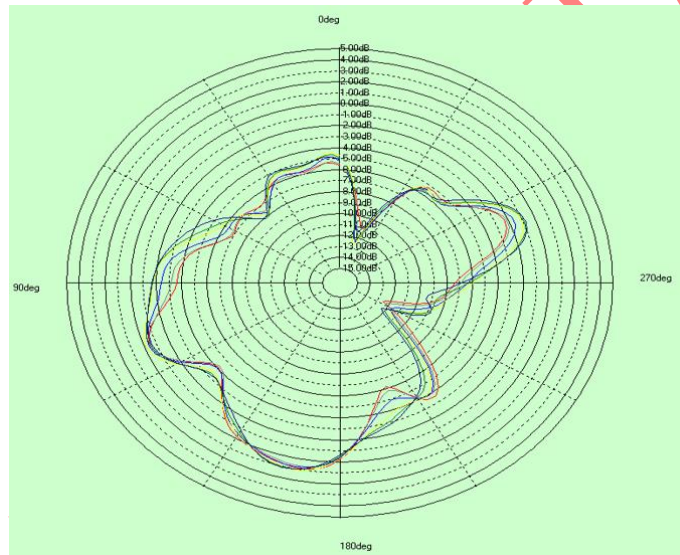


2.4G 俯仰面

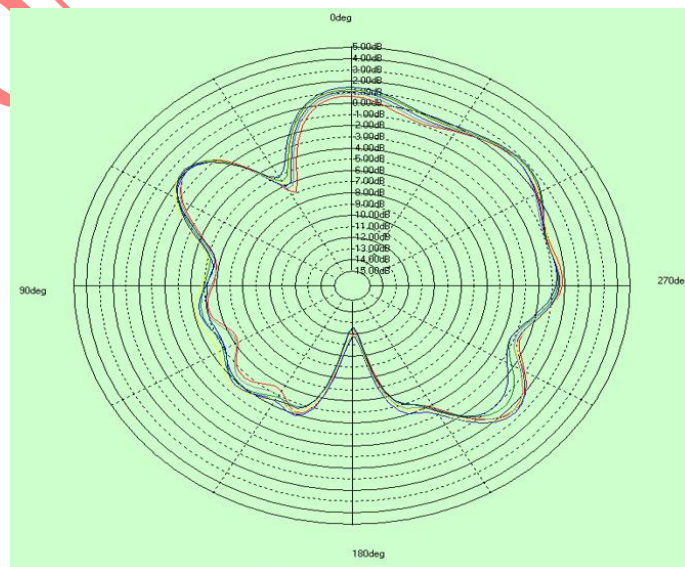

5.8G 水平面

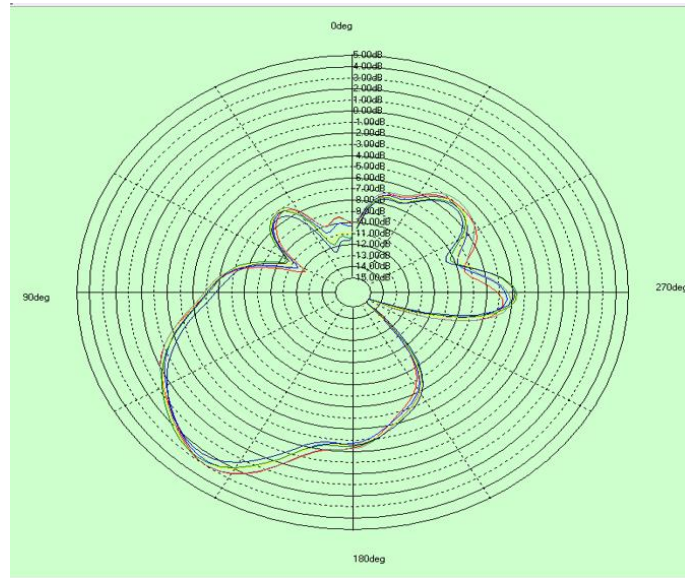

5.8G 俯仰面

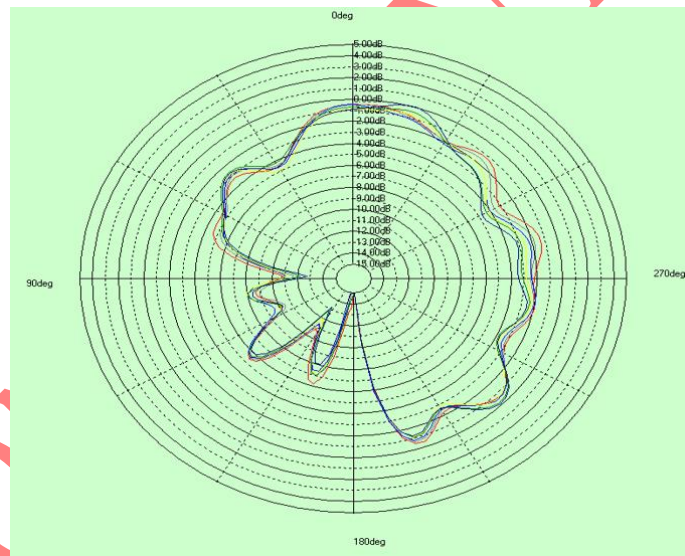

3.3 Structure drawing

