




BUREAU VERITAS

Reference No.: W7L-P24040002RF03

MIMO Antenna 9_802.11ax (HE40)

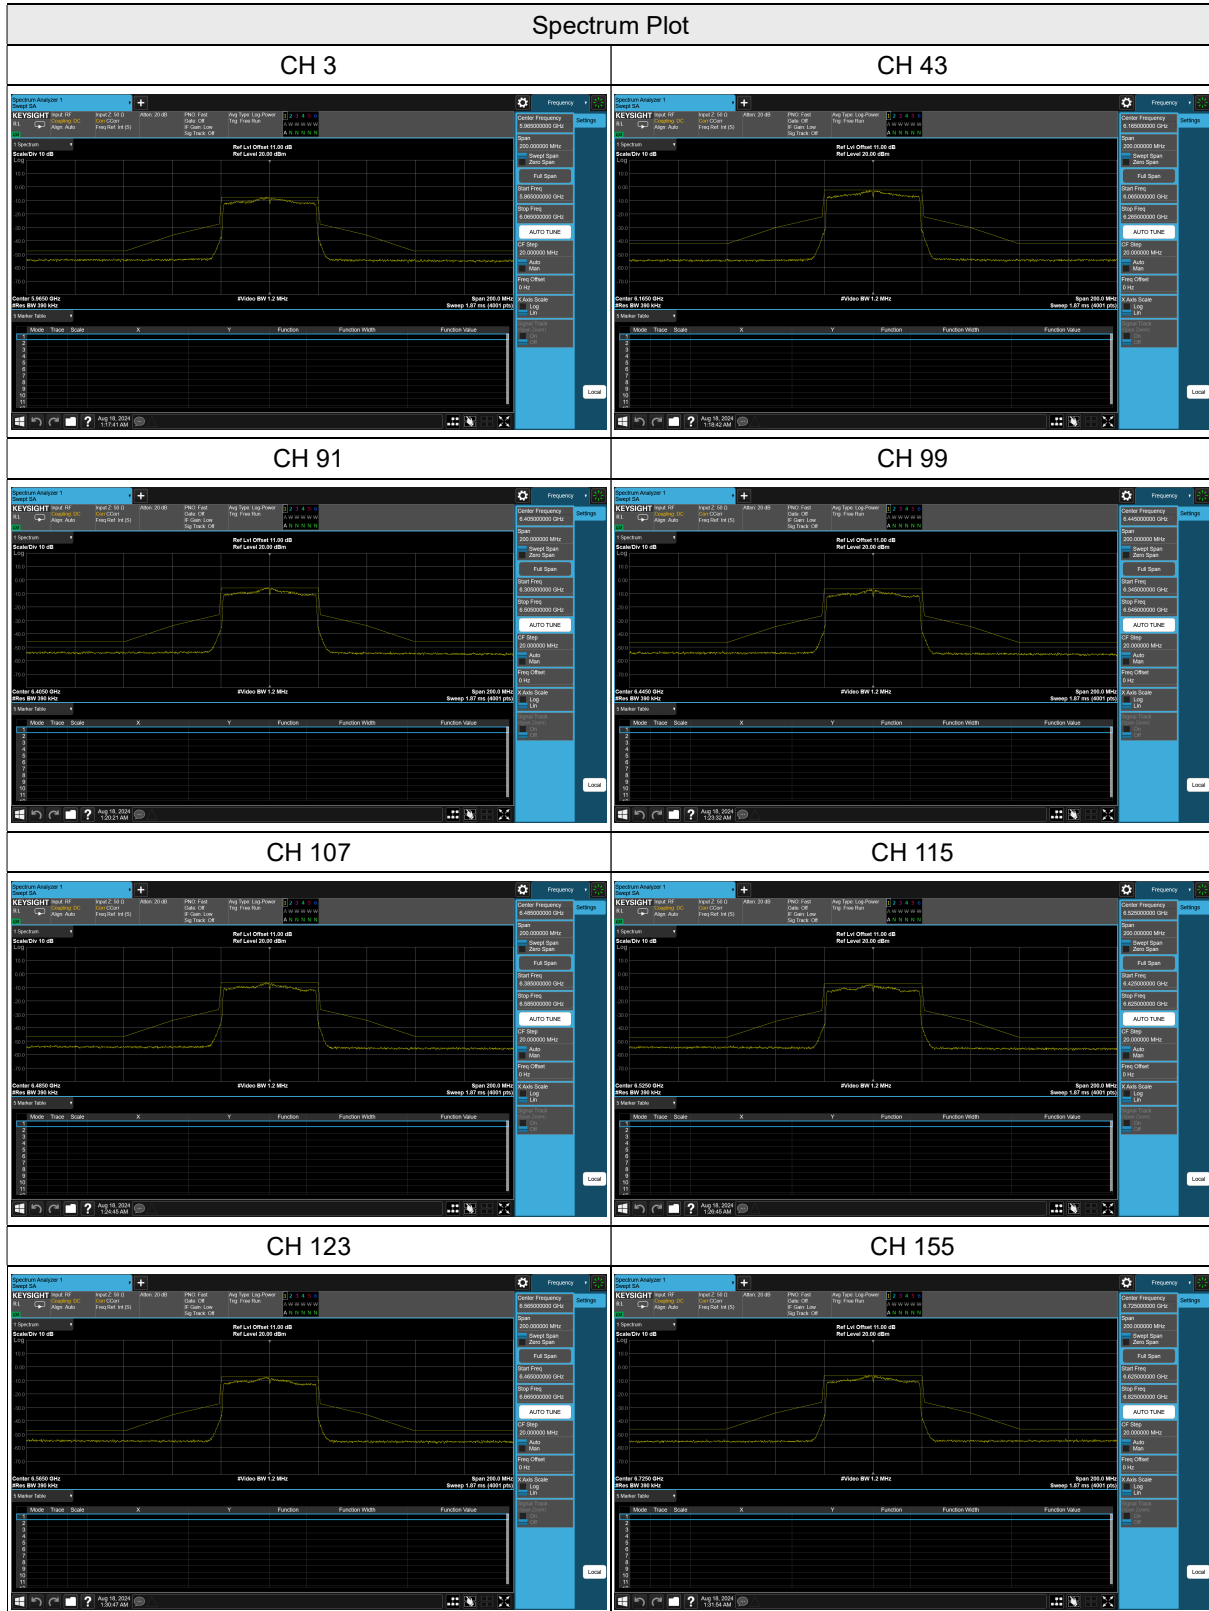

BV 7Layers Communications Technology (Shenzhen) Co., Ltd


Room B37, Warehouse A5, No.3 Chiwan 4th Road, Zhaoshang Street, Nanshan District Shenzhen, Guangdong, People's Republic of China

Tel: +86 755 8869 6566
Fax: +86 755 8869 6577
Email: customerservice.sw@bureauveritas.com




BUREAU VERITAS

Reference No.: W7L-P24040002RF03

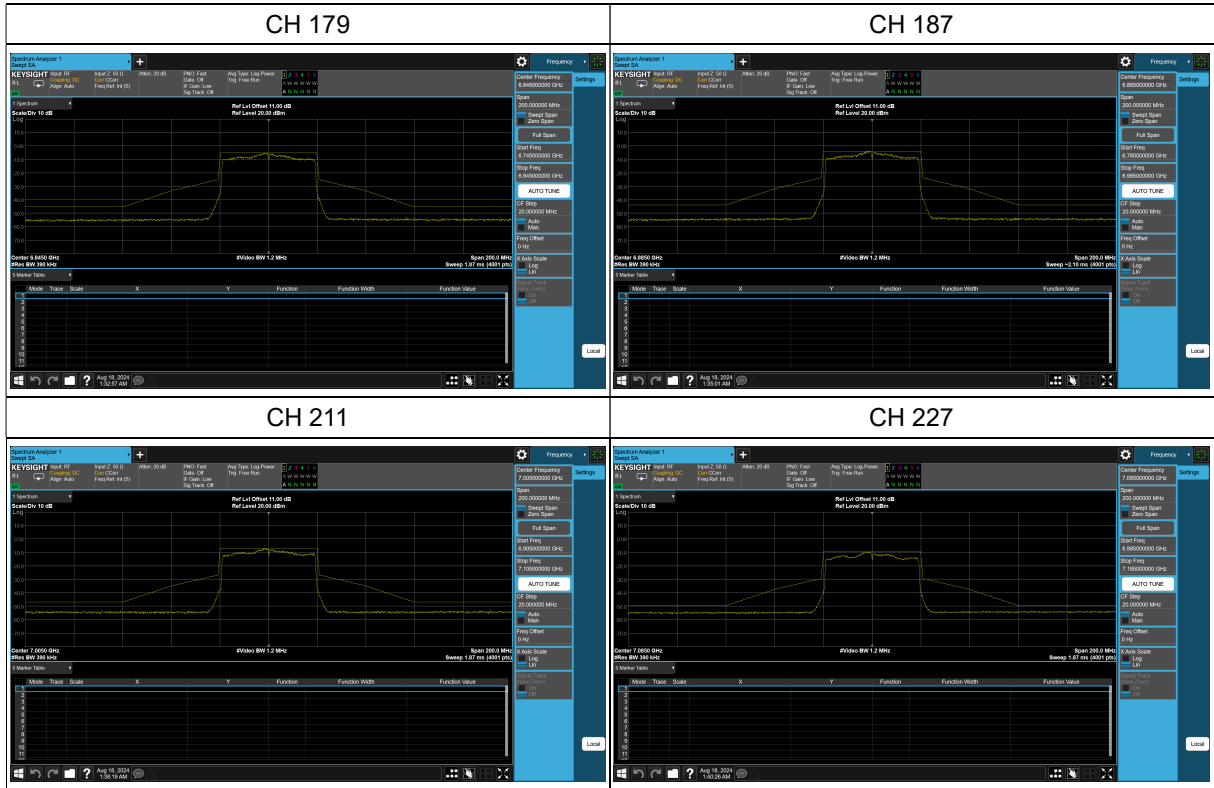

MIMO Antenna 9_802.11ax (HE80)

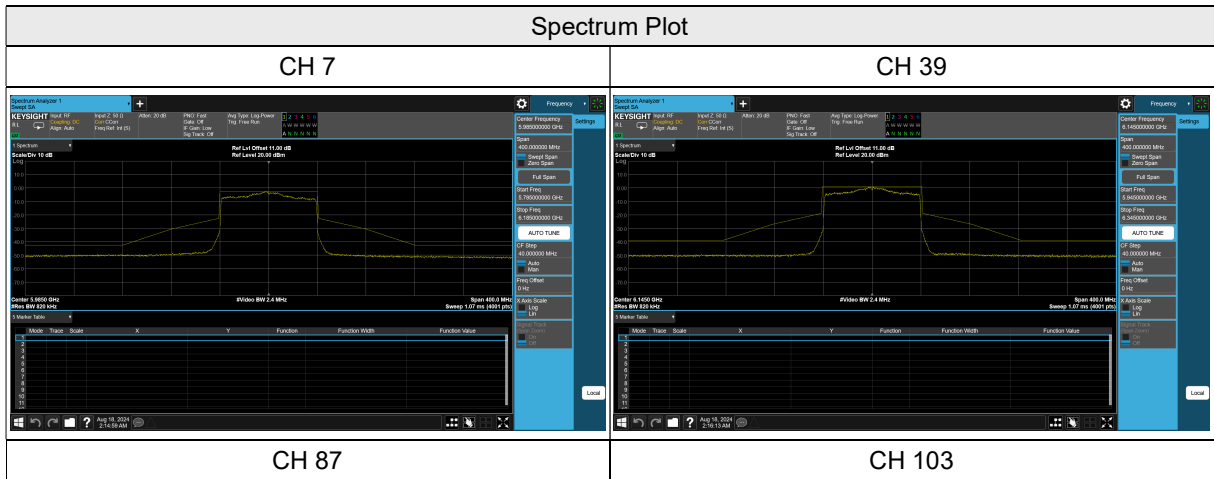

BV 7Layers Communications Technology (Shenzhen) Co., Ltd



Room B37, Warehouse A5, No.3 Chiwan 4th Road, Zhaoshang Street, Nanshan District Shenzhen, Guangdong, People's Republic of China

Tel: +86 755 8869 6566
Fax: +86 755 8869 6577
Email: customerservice.sw@bureauveritas.com



BUREAU VERITAS


Reference No.: W7L-P24040002RF03

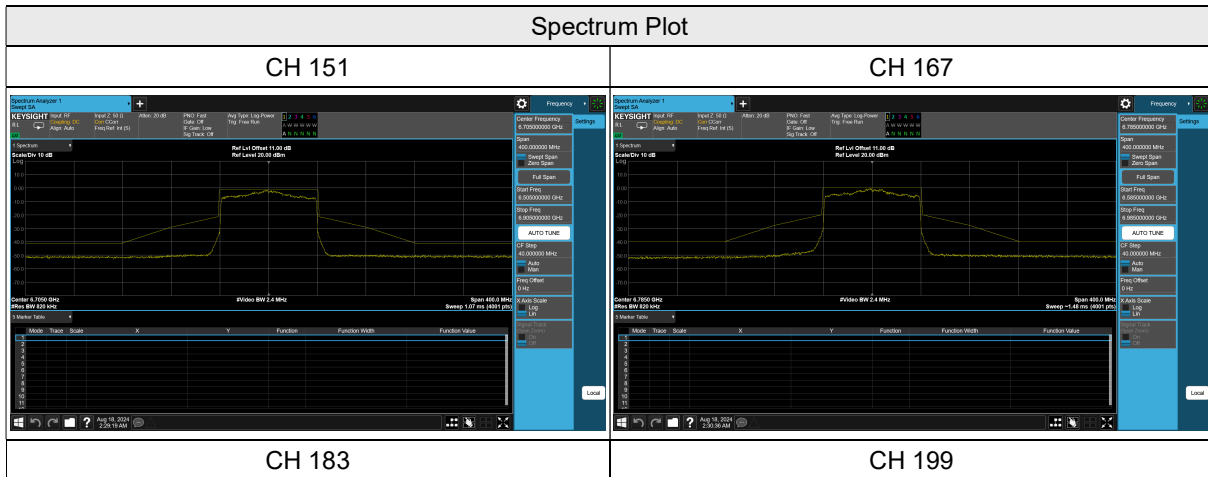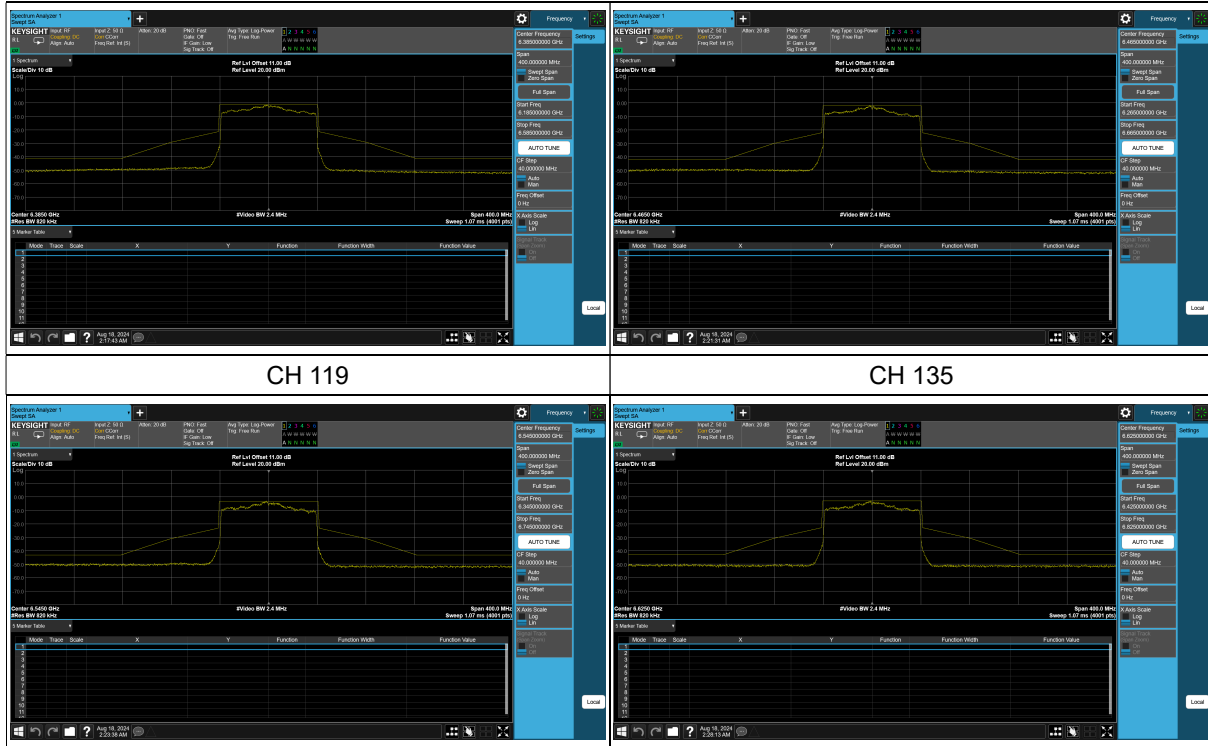




BUREAU VERITAS

Reference No.: W7L-P24040002RF03

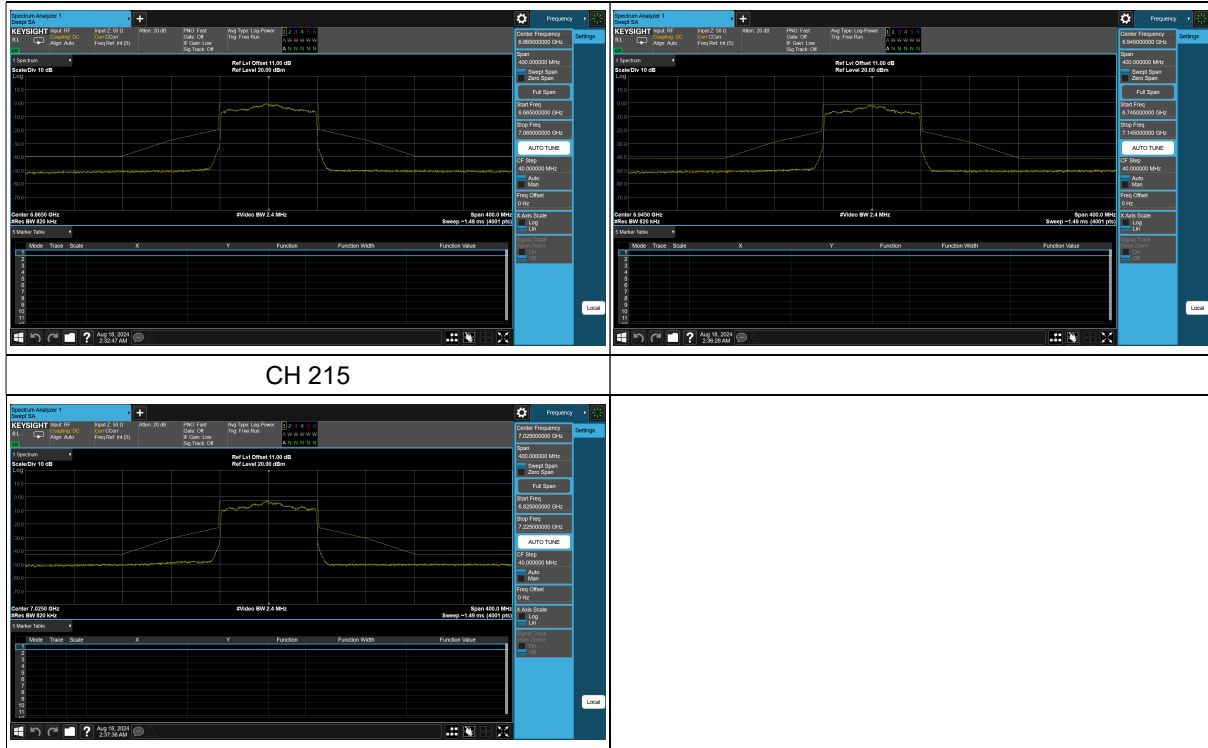


MIMO Antenna 9_802.11ax (HE160)

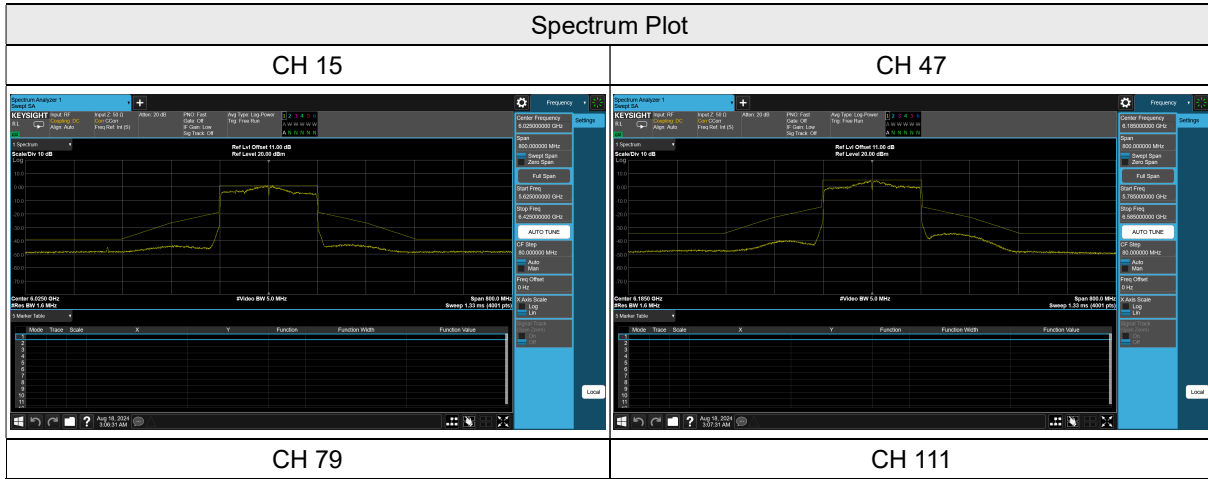




BUREAU VERITAS

Reference No.: W7L-P24040002RF03

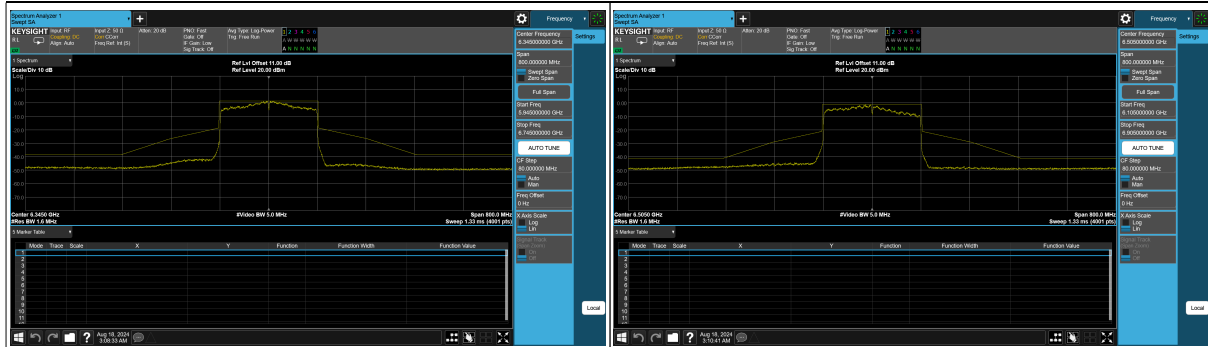


CH 143

CH 175

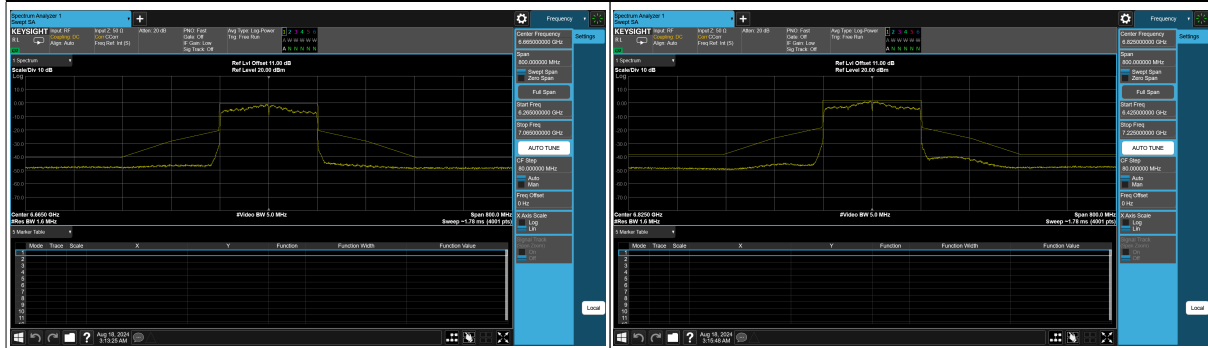

CH 207

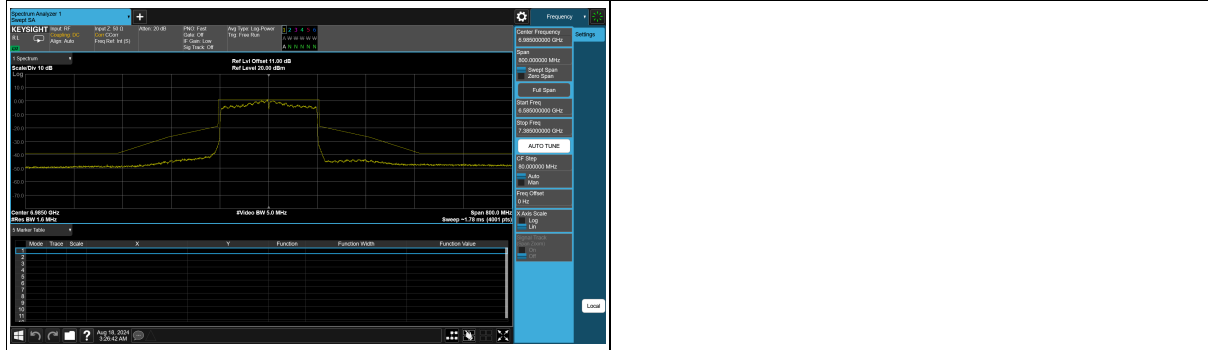


1.3 Transmit Power Measurement

1.3.1 Limits of Transmit Power Measurement

Operation Band	EUT Category	Limit
		Max Average Power
U-NII-5 U-NII-6 U-NII-7 U-NII-8	Client Devices (controlled of an indoor AP)	EIRP 24 dBm
U-NII-5 U-NII-7	Client Devices (controlled of a Standard Power AP)	EIRP 30 dBm

1.3.2 Test Setup

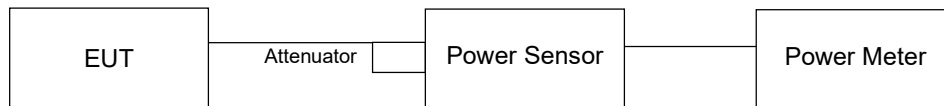

1.3.3 Test Procedure

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

1.3.4 Deviation from Test Standard

No deviation.

1.3.5 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



1.3.6 Test Result

Under control of Indoor AP:

802.11a

Chan.	Chan. Freq. (MHz)	Chain	Result (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	Pass / Fail
1	5955	SISO 8	1.92	1.5	3.42	24.00	PASS
		SISO 9	1.92	-0.82	1.1	24.00	PASS
		MIMO 8	3.29	/	/	/	/
		MIMO 9	0.1	/	/	/	/
		Combined 8+9	4.99	1.5	6.49	24.00	PASS
45	6175	SISO 8	1.81	1.5	3.31	24.00	PASS
		SISO 9	2.14	-0.82	1.32	24.00	PASS
		MIMO 8	1.4	/	/	/	/
		MIMO 9	2.49	/	/	/	/
		Combined 8+9	4.99	1.5	6.49	24.00	PASS
93	6415	SISO 8	1.83	1.5	3.33	24.00	PASS
		SISO 9	2.03	-0.82	1.21	24.00	PASS
		MIMO 8	3.72	/	/	/	/
		MIMO 9	-0.03	/	/	/	/
		Combined 8+9	5.25	1.5	6.75	24.00	PASS
97	6435	SISO 8	1.96	0.94	2.9	24.00	PASS
		SISO 9	1.98	-7.91	-5.93	24.00	PASS
		MIMO 8	3.92	/	/	/	/
		MIMO 9	-0.83	/	/	/	/
		Combined 8+9	5.17	0.94	6.11	24.00	PASS
105	6475	SISO 8	2.01	0.94	2.95	24.00	PASS
		SISO 9	2.23	-7.91	-5.68	24.00	PASS
		MIMO 8	3.91	/	/	/	/
		MIMO 9	-0.59	/	/	/	/
		Combined 8+9	5.23	0.94	6.17	24.00	PASS
113	6515	SISO 8	1.92	0.94	2.86	24.00	PASS
		SISO 9	2.18	-7.91	-5.73	24.00	PASS
		MIMO 8	3.97	/	/	/	/
		MIMO 9	-0.54	/	/	/	/
		Combined 8+9	5.29	0.94	6.23	24.00	PASS
117	6535	SISO 8	2.14	1.51	3.65	24.00	PASS
		SISO 9	1.61	-5.07	-3.46	24.00	PASS
		MIMO 8	3.56	/	/	/	/