

## FCC 47 CFR PART 15 SUBPART E

### DFS Test Report

Applicant : Ubiquiti Networks, Inc.  
Address : 2580 Orchard Parkway, San Jose, California, United States, 95131  
Product Type : Access Point  
Trade Name : UBIQUITI  
Model Number : UAP-AC-LR  
Applicable Standard : FCC 47 CFR PART 15 SUBPART E: Oct., 2014  
ANSI C63.10-2013  
Receive Date : Apr. 20, 2015  
Test Period : Sep. 23 ~ Oct. 16, 2015  
Issue Date : Nov. 04, 2015

#### Issue by

A Test Lab Techno Corp.  
No. 140-1, Changan Street, Bade City,  
Taoyuan County 334, Taiwan R.O.C.  
Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330

**Note:** This report shall not be reproduced except in full, without the written approval of A Test Lab Techno Corp. This document may be altered or revised by A Test Lab Techno Corp. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, or any government agencies. The test results in the report only apply to the tested sample.

---

**Revision History**

Rev.	Issue Date	Revisions	Revised By
00	Nov. 04, 2015	Initial Issue	

## Verification of Compliance

Issued Date: 11/04/2015

Applicant : Ubiquiti Networks, Inc.  
Address : 2580 Orchard Parkway, San Jose, California, United States, 95131  
Product Type : Access Point  
Trade Name : UBIQUITI  
Model Number : UAP-AC-LR  
FCC ID : SWX-UAPACLR  
EUT Rated Voltage : DC 24V, 0.5A  
Test Voltage : 120 Vac / 60 Hz  
Applicable Standard : FCC 47 CFR PART 15 SUBPART E: Oct., 2014  
ANSI C63.10-2013  
Test Result : Complied  
Application Purpose : Class II Permissive Change  
Performing Lab. :

A Test Lab Techno Corp.  
No. 140-1, Changan Street, Bade City,  
Taoyuan County 334, Taiwan R.O.C.  
Tel : +886-3-2710188 / Fax : +886-3-2710190  
Taiwan Accreditation Foundation accreditation number: 1330  
<http://www.atl-lab.com.tw/e-index.htm>



A Test Lab Techno Corp. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by A Test Lab Techno Corp. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Approved By : Fly Lu Reviewed By : Eric Ou Yang  
(Manager) (Fly Lu) (Testing Engineer) (Eric Ou Yang)

**TABLE OF CONTENTS**

<b>1</b>	<b>EUT Description.....</b>	<b>5</b>
<b>2</b>	<b>Test Methodology.....</b>	<b>5</b>
<b>3</b>	<b>Dynamic Frequency Selection .....</b>	<b>6</b>
	3.1. Limits .....	6
	3.2. Test and Measurement System .....	10
	3.3. Test Instruments .....	11
<b>4</b>	<b>Test Methodology.....</b>	<b>12</b>
	4.1. Mode of Operation.....	12
	4.2. EUT Exercise Software .....	12
	4.3. Test Site Environment.....	12
<b>5</b>	<b>Test Results .....</b>	<b>13</b>
	5.1. Radar Waveforms and Traffic Measurement .....	13
	5.2. Traffic Plots.....	21
	5.3. Channel Availability Check Time Measurement.....	23
	5.4. Move and Closing Time Measurement .....	38
	5.5. Non-Occupancy Period Measurement.....	40
	5.6. Detection Bandwidth Measurement.....	41
	5.7. In-Service Monitoring Measurement.....	45

## 1 EUT Description

Applicant	Ubiquiti Networks, Inc. 2580 Orchard Parkway, San Jose, California, United States, 95131			
Manufacturer	Ubiquiti Networks, Inc. 2580 Orchard Parkway, San Jose, California, United States, 95131			
Product Type	Access Point			
Trade Name	UBIQUITI			
Model Number	UAP-AC-LR			
FCC ID	SWX-UAPACLR			
Class II Permissive Change	Add U-NII Band II function by software control. The change reference Class II Permissive Change Letter in detail.			
Operate Frequency	Frequency Band		Frequency Range (MHz)	Number of Channels
	IEEE 802.11a	U-NII Band II-A	5260 – 5320	4
		U-NII Band II-C	5500 – 5700	11
	IEEE 802.11n 5GHz 20 MHz	U-NII Band II-A	5260 – 5320	4
		U-NII Band II-C	5500 – 5700	11
	IEEE 802.11n 5GHz 40 MHz	U-NII Band II-A	5270 – 5310	2
		U-NII Band II-C	5510 – 5670	5
	IEEE 802.11ac 80 MHz	U-NII Band II-A	5290	1
U-NII Band II-C		5530 – 5610	2	
Modulation Type	OFDM			
Equipment Type (DFS)	Master			
Antenna Type	Dual band tri pol antenna			
Max. Antenna Gain	3 dBi			
Antenna Delivery	2TX + 2RX			

## 2 Test Methodology

The tests documented in this report were performed in accordance with ANSI C63.10-2013, FCC CFR 47 Part 2, FCC CFR 47 Part 15.

The tests documented in this report were performed in accordance with FCC KDB request:

- FCC KDB 443999 D01 Approval of DFS UNII Devices v01r04
- FCC KDB 905462 D02 UNII DFS Compliance Procedures New Rules v01r02

### 3 Dynamic Frequency Selection

#### 3.1. Limits

§15.407 (h) and FCC KDB 905462 D02 UNII DFS Compliance Procedures New Rules v01r02 Compliance measurement procedures for unlicensed-national information infrastructure devcies operating in the 5250-5350 MHZ and 5470-5725 MHZ bands incorporating dynamic frequency selection.

Table 1: Applicability of DFS Requirements Prior to Use of a Channel			
Requirement	Operational Mode		
	Master	Client (without DFS )	Client (with DFS)
Non-Occupancy Period	Yes	Not required	Yes
DFS Detection Threshold	Yes	Not required	Yes
Channel Availability Check Time	Yes	Not required	Not required
U-NII Detection Bandwidth	Yes	Not required	Yes

Table 2: Applicability of DFS requirements during normal operation		
Requirement	Operational Mode	
	Master Device or Client With Radar Detection	Client without Radar Detection
DFS Detection Threshold	Yes	Not required
Channel Closing Transmission Time	Yes	Yes
Channel Move Time	Yes	Yes
U-NII Detection Bandwidth	Yes	Not required

Additional requirements for devices with multiple bandwidth modes	Master Device or Client With Radar Detection	Client without Radar Detection
U-NII Detection Bandwidth and Statistical Performance Check	All BW modes must be tested	Not required
Channel Move Time and Channel Closing Transmission Time	Test using widest BW mode available	Test using the widest BW mode available for the link
All other tests	Any single BW mode	Not required

Note: Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.

Table 3: DFS Detection Thresholds for Master Devices and Client Devices With Radar Detection	
Maximum Transmit Power	Value (See Notes 1,2 and 3)
EIRP $\geq$ 200 milliwatt	-64 dBm
EIRP < 200 milliwatt and Power spectral density < 10 dBm/MHz	-62 dBm
EIRP < 200 milliwatt that do not meet the power spectral density requirement	-64 dBm
<p>Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.</p> <p>Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.</p> <p>Note 3: EIRP is based on the highest antenna gain. For MIMO devices refer to FCC KDB Publication 662911 D01.</p>	

Table 4: DFS Response Requirement Values	
Parameter	Value
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds See Note 1.
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
U-NII Detection Bandwidth	Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3.
<p>Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.</p> <p>Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.</p> <p>Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.</p>	

Table 5: Short Pulse Radar Test Waveforms					
Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a <hr/> Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A	$\text{Roundup} \left\{ \begin{array}{l} \left( \frac{1}{360} \right) \cdot \\ \left( \frac{19 \cdot 10^6}{\text{PRI}_{\mu\text{sec}}} \right) \end{array} \right\}$	60%	30
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120
Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.					



Table 5a: Pulse Repetition Intervals Values for Test A		
Pulse Repetition Frequency Number	Pulse Repetition Frequency (Pulses Per Second)	Pulse Repetition Interval (Microseconds)
1	1930.5	518
2	1858.7	538
3	1792.1	558
4	1730.1	578
5	1672.2	598
6	1618.1	618
7	1567.4	638
8	1519.8	658
9	1474.9	678
10	1432.7	698
11	1392.8	718
12	1355	738
13	1319.3	758
14	1285.3	778
15	1253.1	798
16	1222.5	818
17	1193.3	838
18	1165.6	858
19	1139	878
20	1113.6	898
21	1089.3	918
22	1066.1	938
23	326.2	3066


Table 6 – Long Pulse Radar Test Signal							
Radar Waveform	Bursts	Pulses per Burst	Pulse Width (µsec)	Chirp Width (MHz)	PRI (µsec)	Minimum Percentage of Successful Detection	Minimum Trials
5	8-20	1-3	50-100	5-20	1000-2000	80%	30

Table 7 – Frequency Hopping Radar Test Signal							
Radar Waveform	Pulse Width (µsec)	PRI (µsec)	Burst Length (ms)	Pulses per Hop	Hopping Rate (kHz)	Minimum Percentage of Successful Detection	Minimum Trials
6	1	333	300	9	0.333	70%	30

### 3.2. Test and Measurement System

#### 3.2.1. Setup for Master with injection at the Master

Example Conducted Setup where UUT is a Master and Radar Test Waveforms are injected into the Master

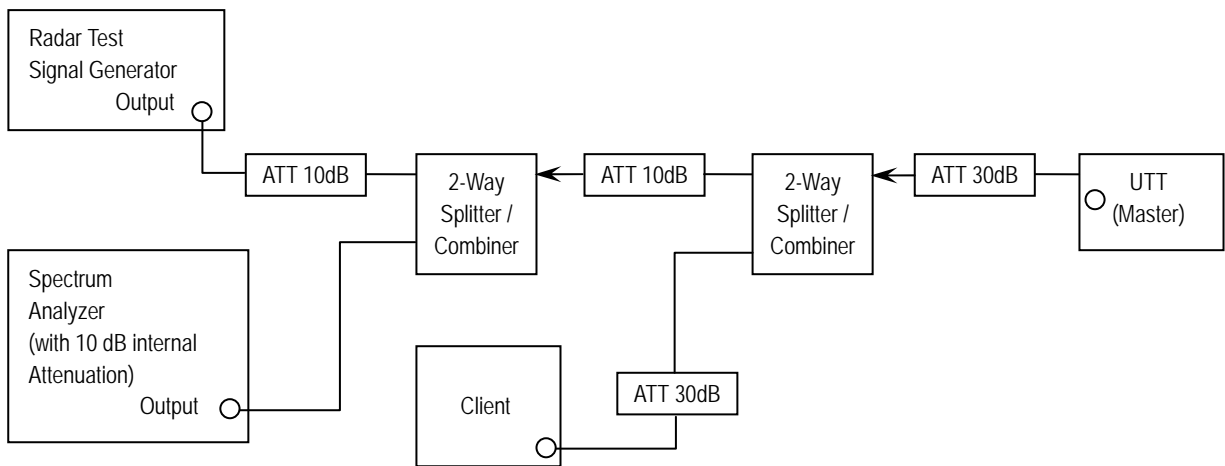

#### 3.2.2. System Calibration

The short pulse and long pulse signal generating system utilizes the NTIA software. The Vector Signal Generator has been validated by the NTIA. The hopping signal generating system utilizes the A Test lab techno. Corp. simulated hopping method and system, which has been validated by the DoD, FCC and NTIA. The software selects waveform parameters from within the bounds of the signal type on a random basis using uniform distribution.

The short pulse types 0, 1, 2, 3 and 4, and the long pulse type 5 parameters are randomized at run-time. The hopping type 6 pulse parameters are fixed while the hopping sequence is based on the August 2005 NTIA Hopping Frequency List. The initial starting point randomized at run-time and each subsequent starting point is incremented by 475. Each frequency in the 100-length segment is compared to the boundaries of the EUT Detection Bandwidth and the software creates a hopping burst pattern in accordance with Section 7.4.1.3 Method #2 Simulated Frequency Hopping Radar Waveform Generating Subsystem of FCC KDB 905462 D02 UNII DFS Compliance Procedures New Rules v01r02. The frequency of the signal generator is incremented in 1 MHz steps from FL to FH for each successive trial. This incremental sequence is repeated as required to generate a minimum of 30 total trials and to maintain a uniform frequency distribution over the entire Detection Bandwidth.

The signal monitoring equipment consists of a spectrum analyzer. The aggregate ON time is calculated by multiplying the number of bins above a threshold during a particular observation period by the dwell time per bin, with the analyzer set to peak detection and max hold.

### 3.2.3. System Calibration

A 50-ohm load is connected in place of the spectrum analyzer, and the spectrum analyzer is connected to a horn antenna via a coaxial cable, with the reference level offset set to (horn antenna gain – coaxial cable loss). The signal generator is set to CW mode. The amplitude of the signal generator is adjusted to yield a level of -64 dBm as measured on the spectrum analyzer.

Without changing any of the instrument settings, the spectrum analyzer is reconnected to the Common port of the Spectrum Analyzer Combiner/Divider. The Reference Level Offset of the spectrum analyzer is adjusted so that the displayed amplitude of the signal is -64 dBm.

The spectrum analyzer displays the level of the signal generator as received at the antenna ports of the Master Device. The interference detection threshold may be varied from the calibrated value of -64 dBm and the spectrum analyzer will still indicate the level as received by the Master Device.

### 3.2.4. Adjustment of Displayed Traffic Level

A link is established between the Master and Slave and the distance between the units is adjusted as needed to provide a suitable received level at the Master and Slave devices. The video test file is streamed to generate WLAN traffic. The monitoring antenna is adjusted so that the WLAN traffic level, as displayed on the spectrum analyzer, is at lower amplitude than the radar detection threshold.

## 3.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
Spectrum Analyzer	Agilent	E4446A	MY46180578	07/27/2015	1 year
Signal Generator	Agilent	N5182B	MY53050382	05/28/2015	1 year
Test Site	ATL	TE02	TE02	N.C.R.	-----

Note N.C.R. = No Calibration Request.

## 4 Test Methodology

### 4.1. Mode of Operation

Decision of Test ATL has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
Mode 1: IEEE 802.11n 5GHz (20MHz) link mode
Mode 2: IEEE 802.11n 5GHz (40MHz) link mode
Mode 3: IEEE 802.11ac 80MHz link mode

Software used to control the EUT for staying in continuous transmitting mode was programmed.

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz and power line conducted emissions below 30MHz, which worst case was in normal link mode only.

Test Mode	Band	Test Channel
Mode 1	U-NII Band II-A	64
	U-NII Band II-C	112
Mode 2	U-NII Band II-A	62
	U-NII Band II-C	134
Mode 3	U-NII Band II-A	58
	U-NII Band II-C	106

### 4.2. EUT Exercise Software

1.	Setup the EUT shown on 3.3.
2.	Turn on the power of all equipment.
3.	Turn on Wi-Fi function link to Notebook.
4.	EUT run test program.


### 4.3. Test Site Environment

Items	Required (IEC 60068-1)	Actual
Temperature (°C)	15-35	26
Humidity (%RH)	25-75	60
Barometric pressure (mbar)	860-1060	950


## 5 Test Results

### 5.1. Radar Waveforms and Traffic Measurement


#### ■ Test Graphs

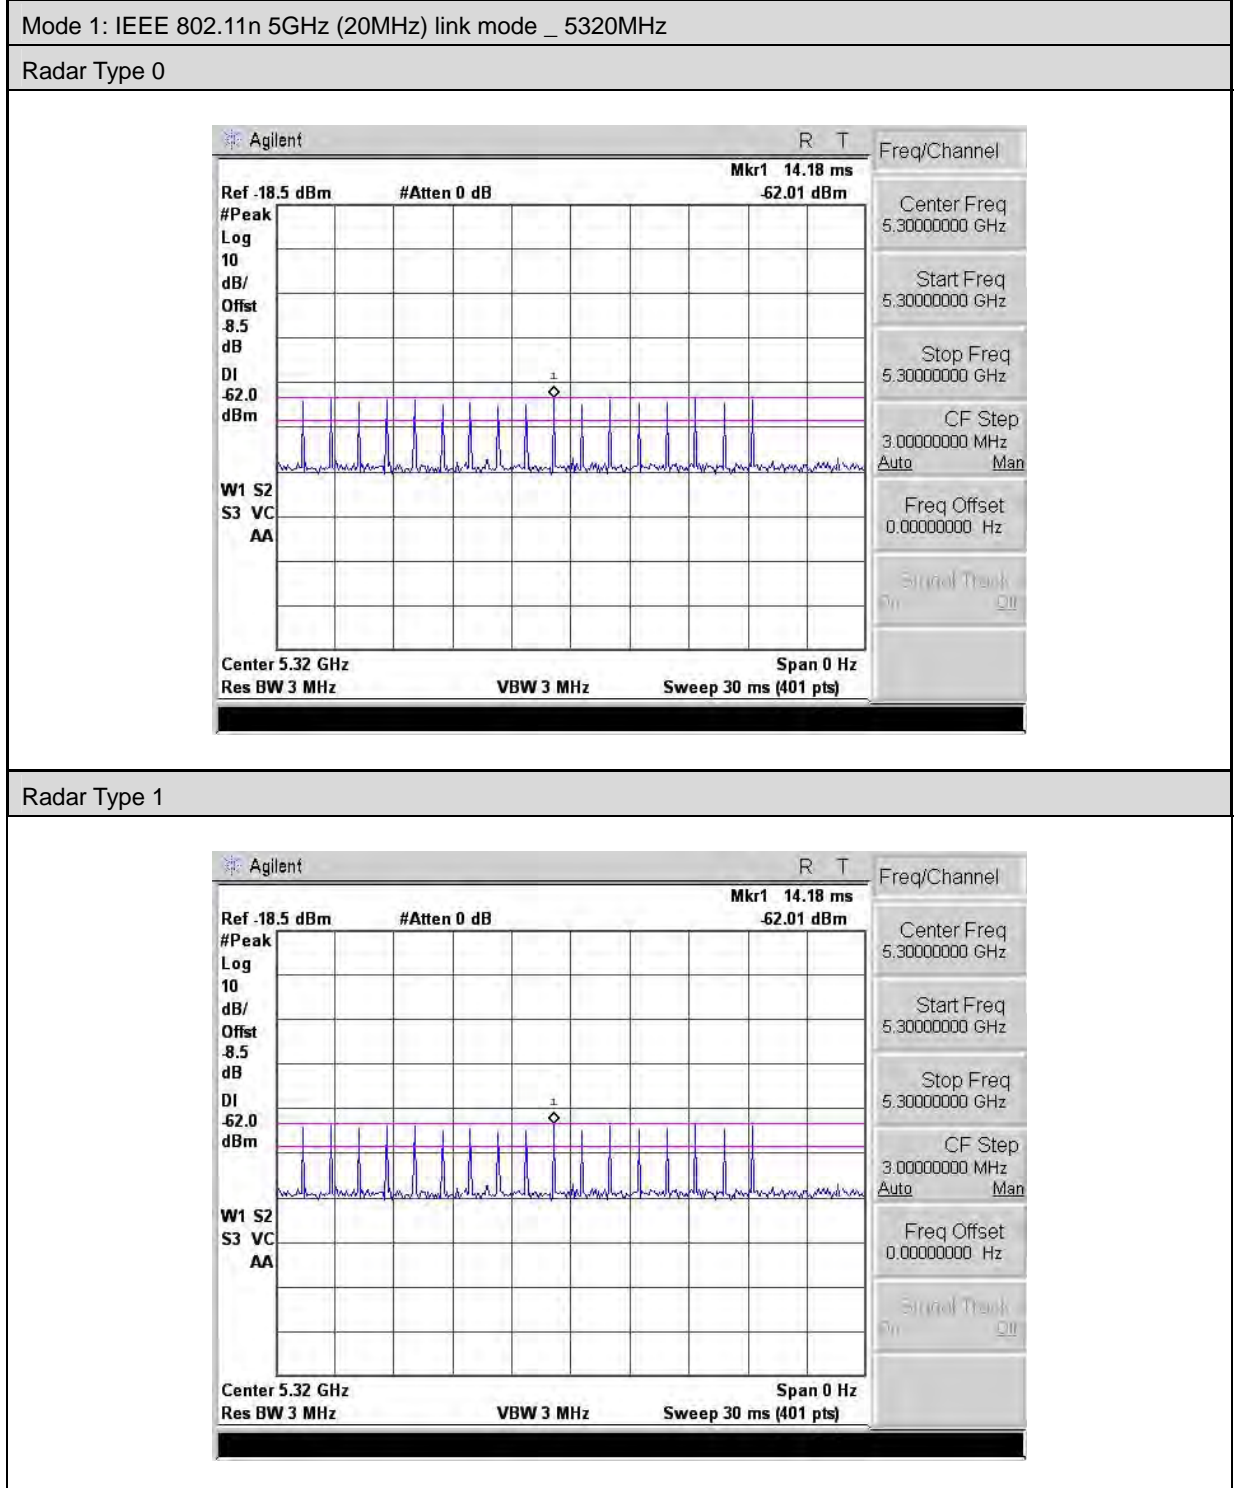

Mode 1: IEEE 802.11n 5GHz (20MHz) link mode \_ 5320MHz  
 Radar Type 2

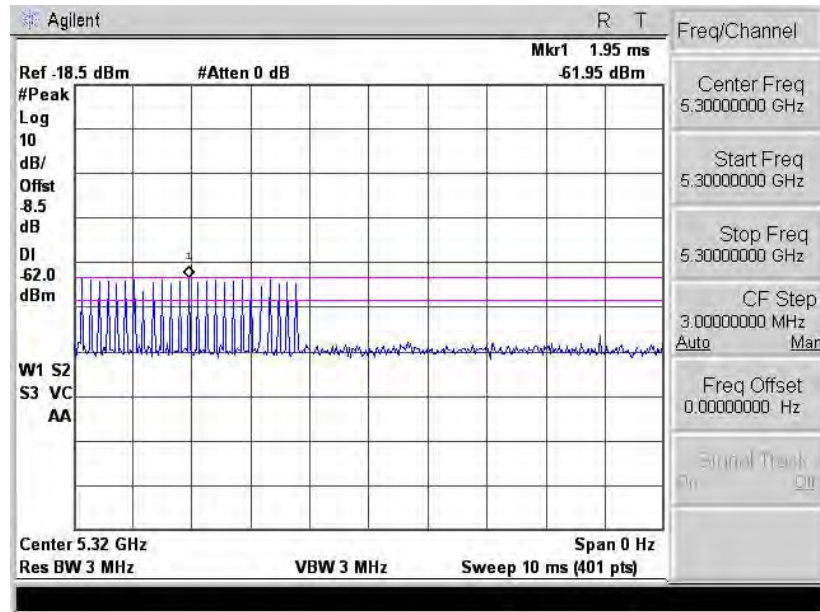


Radar Type 3

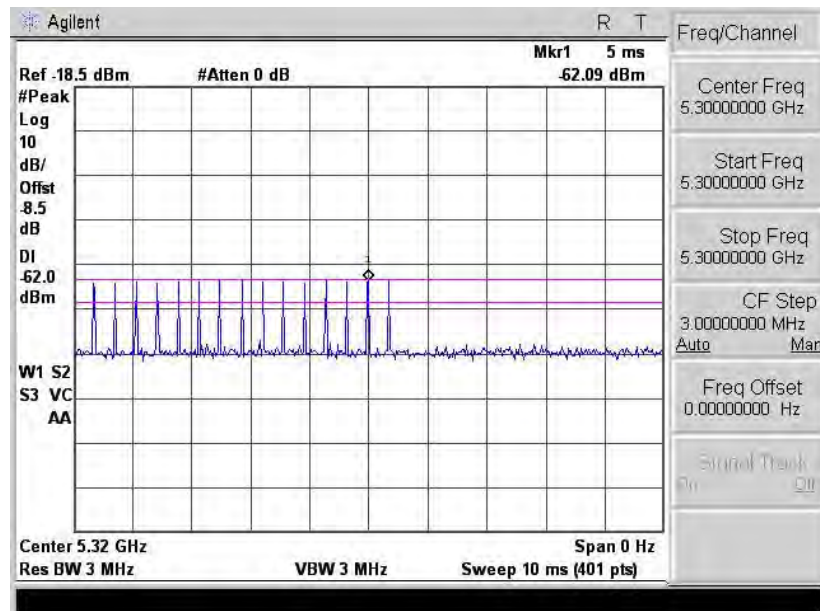



Mode 1: IEEE 802.11n 5GHz (20MHz) link mode \_ 5320MHz

Radar Type 4

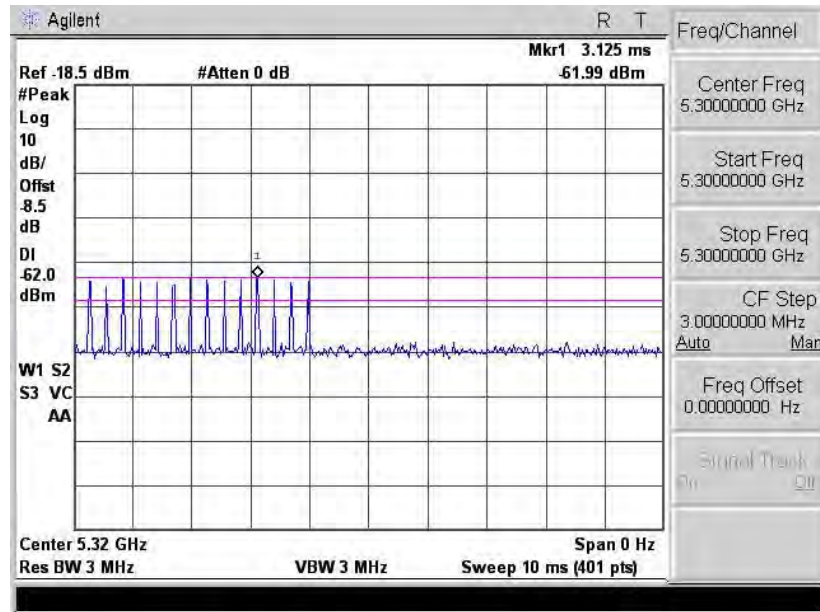

Radar Type 5

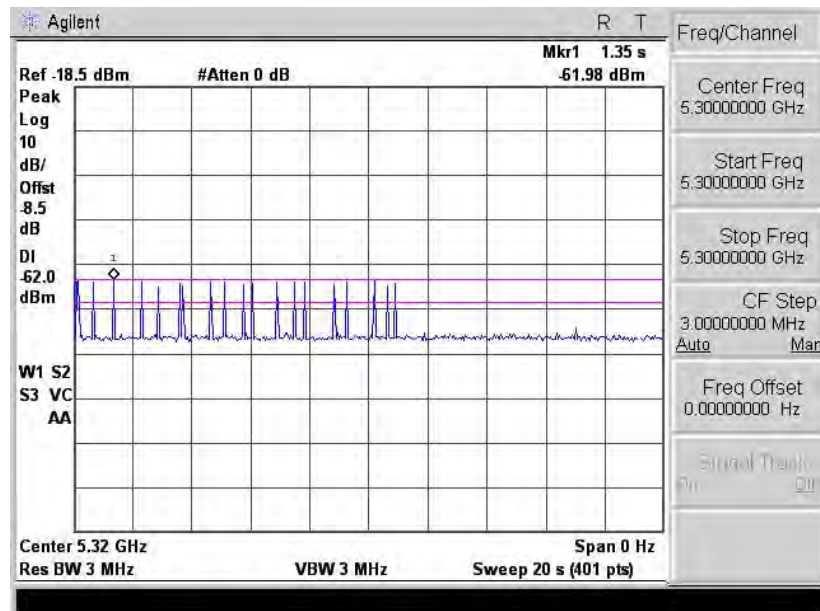


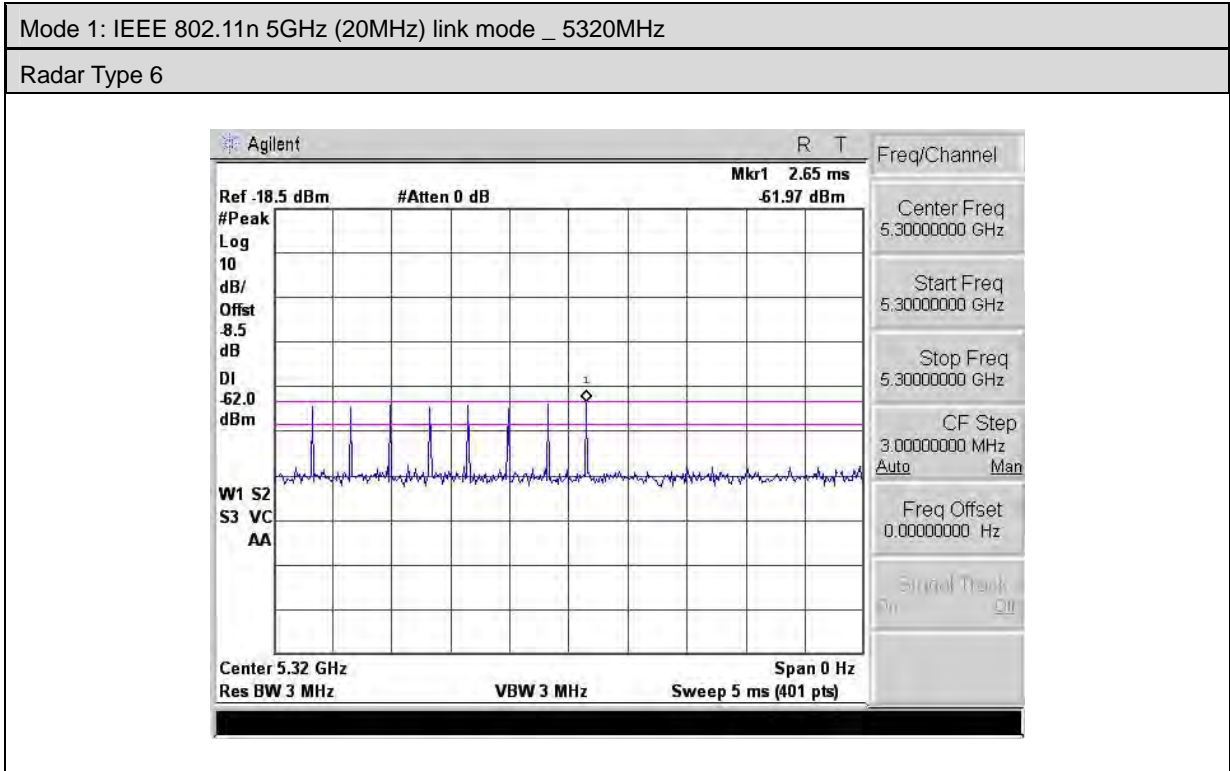




Mode 1: IEEE 802.11n 5GHz (20MHz) link mode \_ 5560MHz


Radar Type 0

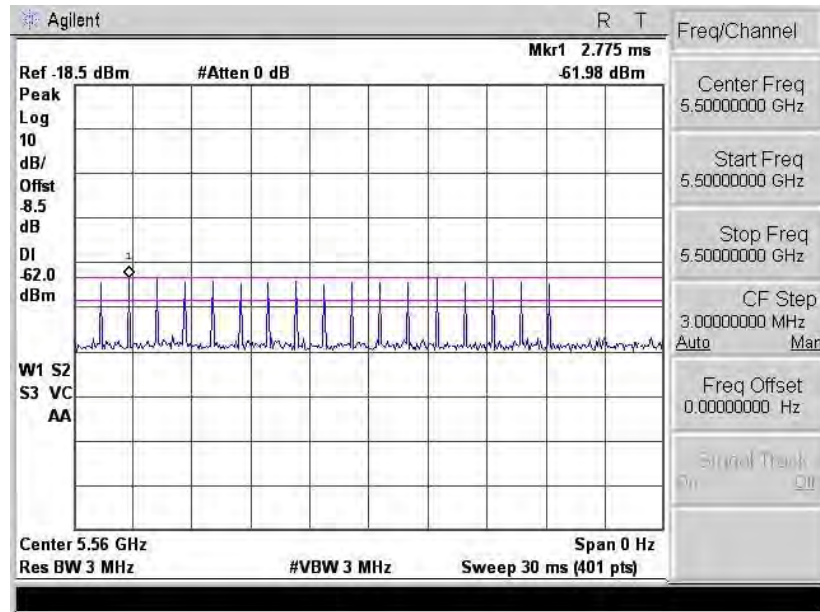


Radar Type 1

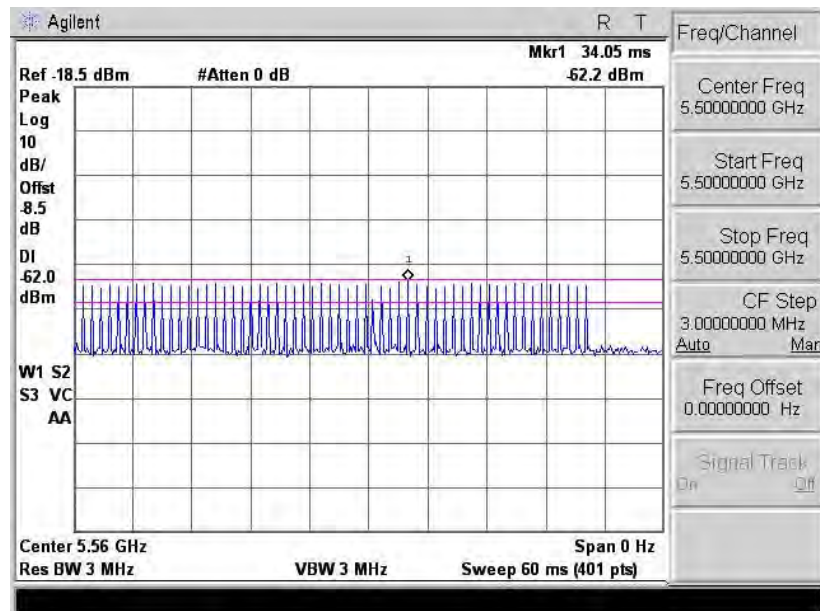


Mode 1: IEEE 802.11n 5GHz (20MHz) link mode \_ 5560MHz  
 Radar Type 2

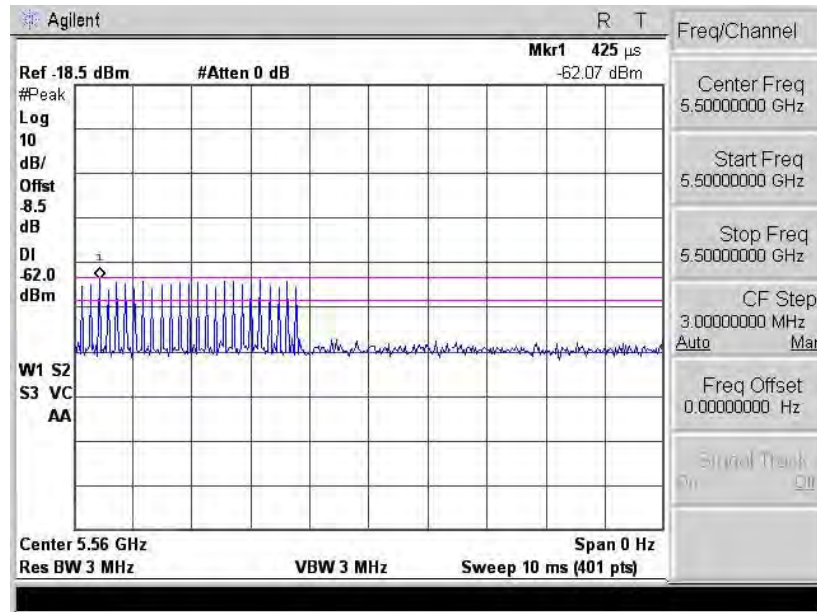


Radar Type 3

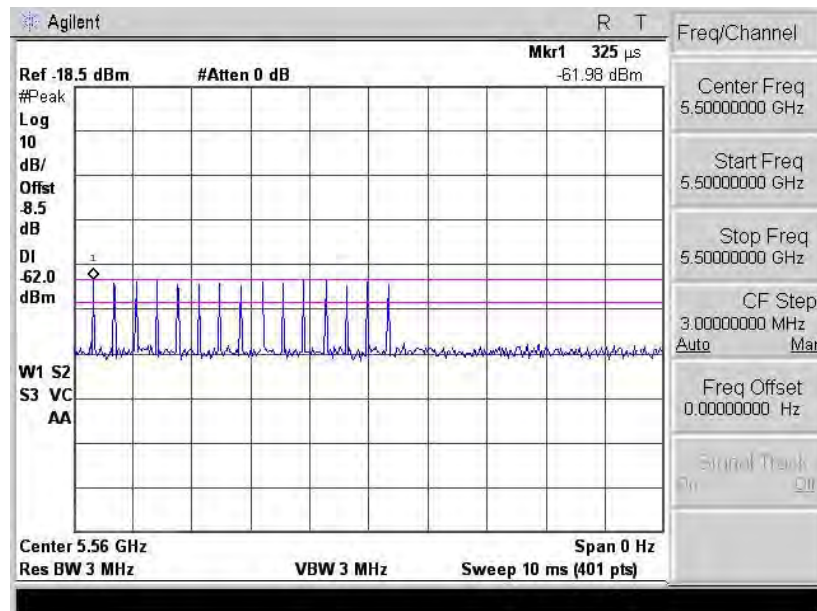


Mode 1: IEEE 802.11n 5GHz (20MHz) link mode \_ 5560MHz  
 Radar Type 4

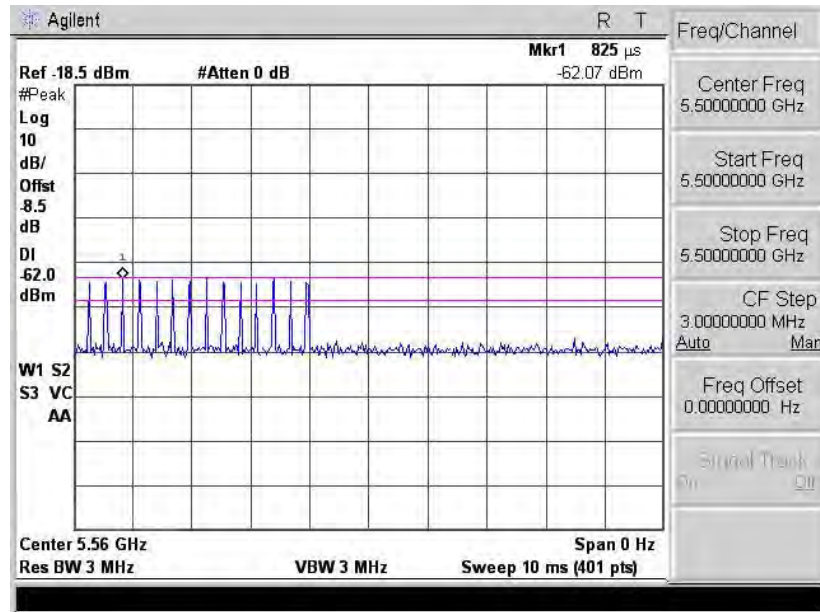



Radar Type 5

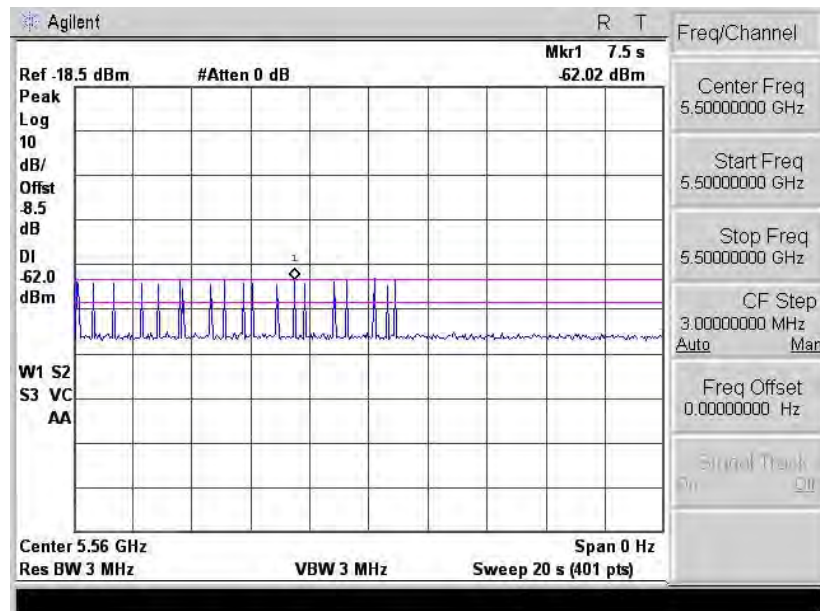


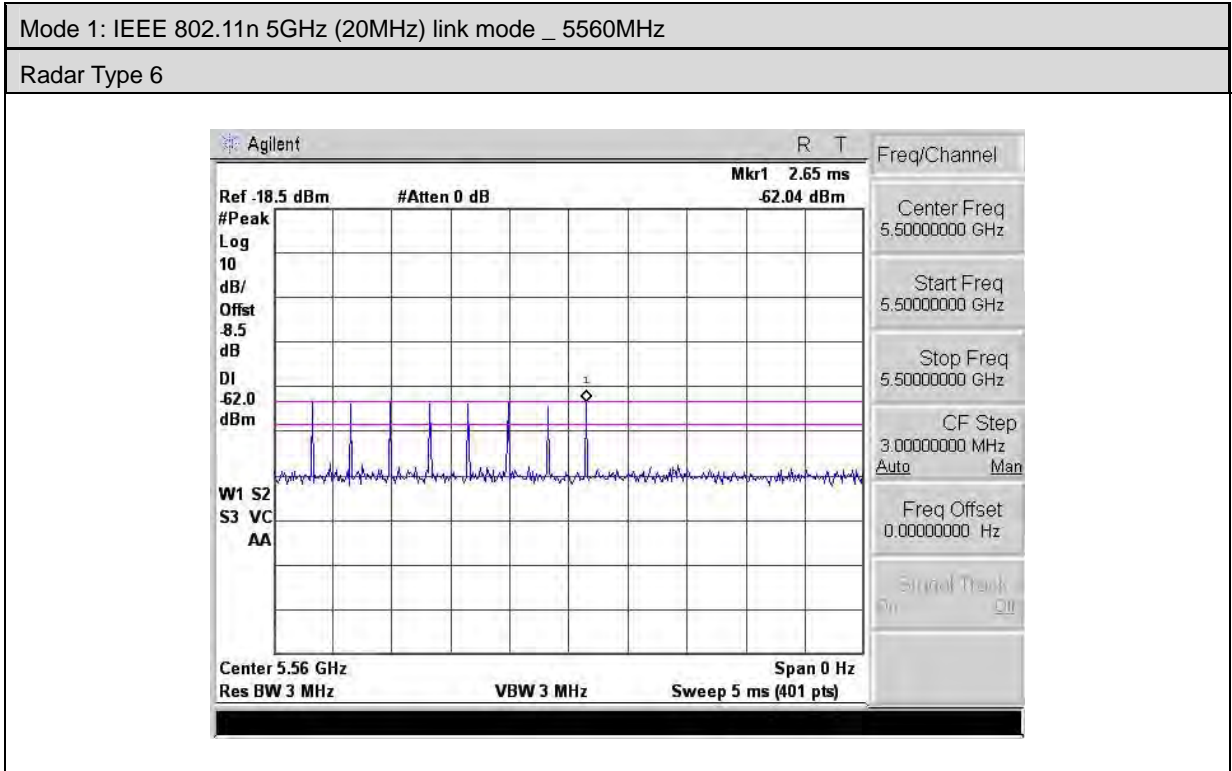

## 5.2. Traffic Plots

### ■ Duty cycle $\geq 17\%$

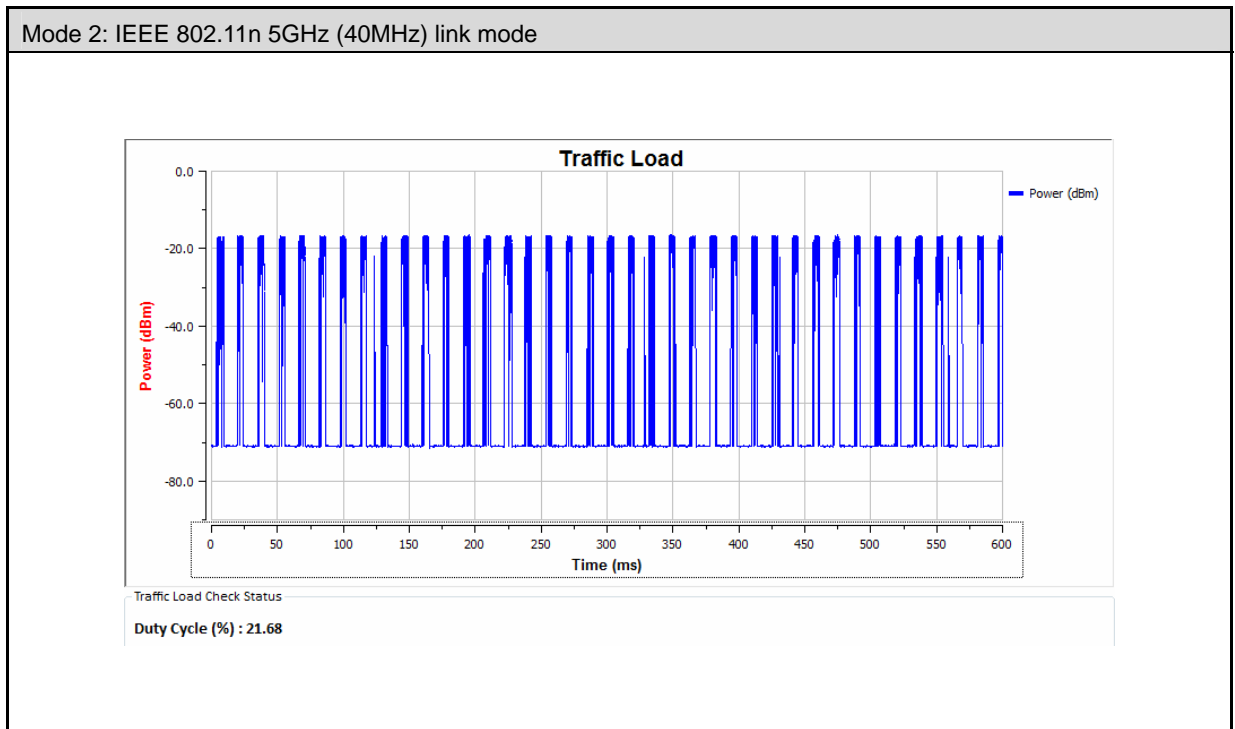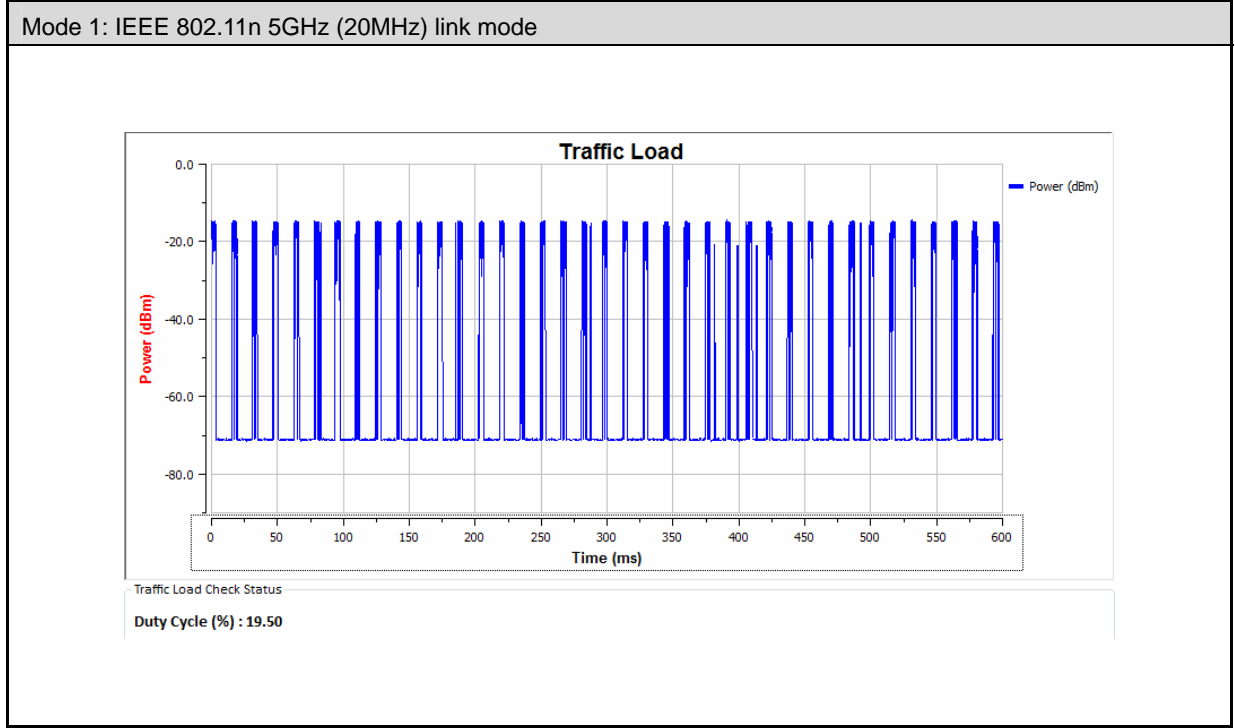

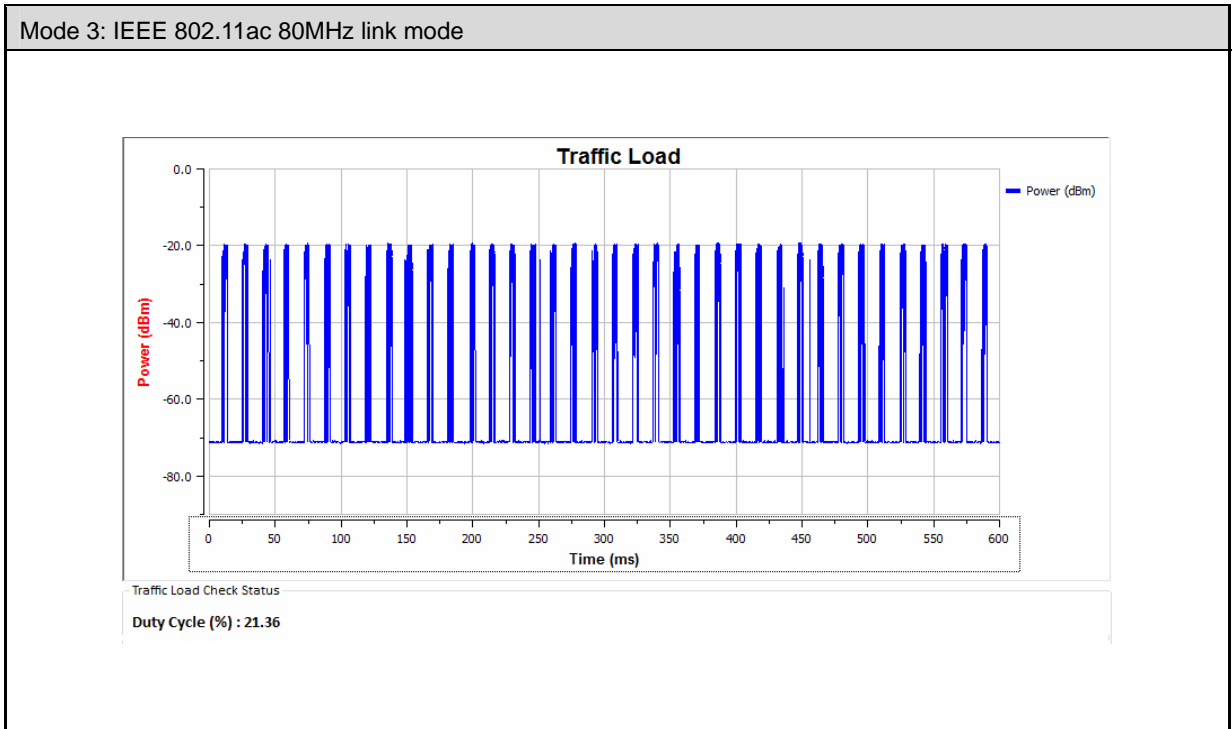

### 5.3. Channel Availability Check Time Measurement

#### ■ Procedure to Determine Initial Power-Up Cycle Time

A link was established on channel then the EUT was rebooted. The time from the cessation of traffic to the re-initialization of traffic was measured as the time required for the EUT to complete the total power-up cycle. The time to complete the initial power-up period is 60 seconds less than this total power-up time.

#### ■ Procedure for Timing of Radar Burst

With a link established on channel, the EUT was rebooted. A radar signal was triggered within 0 to 6 seconds after the initial power-up period, and transmissions on the channel were monitored on the spectrum analyzer.

The Non-Occupancy list was cleared. With a link established on channel, the EUT was rebooted. A radar signal was triggered within 54 to 60 seconds after the initial power-up period, and transmissions on the channel were monitored on the spectrum analyzer.

#### ■ Test Results


Model Number	UAP-AC-LR				
Test Item	Channel Availability Check Time				
Test Mode	Mode 1: IEEE 802.11n 5GHz (20MHz) link mode				
Radar Type	Type 0				
Date of Test	09/23/2015				
No Radar Triggered					
Frequency (MHz)	Timing of Reboot (sec)	Delta (sec)	Timing of Start of Traffic (sec)	Total Power-up Cycle Time (sec)	Initial Power-up Cycle Time (sec)
5320	5.352	95.1	100.452	95.10	35.10
5560	3.324	94.44	97.764	94.44	34.44
Radar Near Beginning of CAC					
Frequency (MHz)	Timing of Reboot (sec)	Timing of Radar Burst (sec)	Radar Relative to Reboot (sec)	Radar Relative to Start of CAC (sec)	
5320	5.352	41.27	35.918	0.818	
5560	3.324	38.32	34.996	0.556	
Radar Near End of CAC					
Frequency (MHz)	Timing of Radar Burst (sec)	Radar Relative to Reboot (sec)	Radar Relative to Start of CAC (sec)	Radar Relative to Start of CAC (sec)	
5320	5.352	97.01	91.658	56.558	
5560	3.324	92.47	89.146	54.706	


Model Number	UAP-AC-LR				
Test Item	Channel Availability Check Time				
Test Mode	Mode 2: IEEE 802.11n 5GHz (40MHz) link mode				
Radar Type	Type 0				
Date of Test	09/23/2015				
No Radar Triggered					
Frequency (MHz)	Timing of Reboot (sec)	Delta (sec)	Timing of Start of Traffic (sec)	Total Power-up Cycle Time (sec)	Initial Power-up Cycle Time (sec)
5310	8.055	94.98	103.035	94.98	34.98
5670	5.118	93.39	98.508	93.39	33.39
Radar Near Beginning of CAC					
Frequency (MHz)	Timing of Reboot (sec)	Timing of Radar Burst (sec)	Radar Relative to Reboot (sec)	Radar Relative to Start of CAC (sec)	
5310	8.055	43.62	35.565	0.585	
5670	5.118	39.39	34.272	0.882	
Radar Near End of CAC					
Frequency (MHz)	Timing of Radar Burst (sec)	Radar Relative to Reboot (sec)	Radar Relative to Start of CAC (sec)	Radar Relative to Start of CAC (sec)	
5310	8.055	97.65	89.595	54.615	
5670	5.118	93.37	88.252	54.862	





Model Number	UAP-AC-LR				
Test Item	Channel Availability Check Time				
Test Mode	Mode 3: IEEE 802.11ac 80MHz link mode				
Radar Type	Type 0				
Date of Test	09/23/2015				
No Radar Triggered					
Frequency (MHz)	Timing of Reboot (sec)	Delta (sec)	Timing of Start of Traffic (sec)	Total Power-up Cycle Time (sec)	Initial Power-up Cycle Time (sec)
5290	5.055	94.83	99.885	94.83	34.83
5530	5.316	94.6	99.916	94.6	34.6
Radar Near Beginning of CAC					
Frequency (MHz)	Timing of Reboot (sec)	Timing of Radar Burst (sec)	Radar Relative to Reboot (sec)	Radar Relative to Start of CAC (sec)	
5290	5.055	40.61	35.555	0.725	
5530	5.316	40.6	35.284	0.684	
Radar Near End of CAC					
Frequency (MHz)	Timing of Radar Burst (sec)	Radar Relative to Reboot (sec)	Radar Relative to Start of CAC (sec)	Radar Relative to Start of CAC (sec)	
5290	5.055	94.98	89.925	55.095	
5530	5.316	95.49	90.174	55.574	


■ Test Graphs

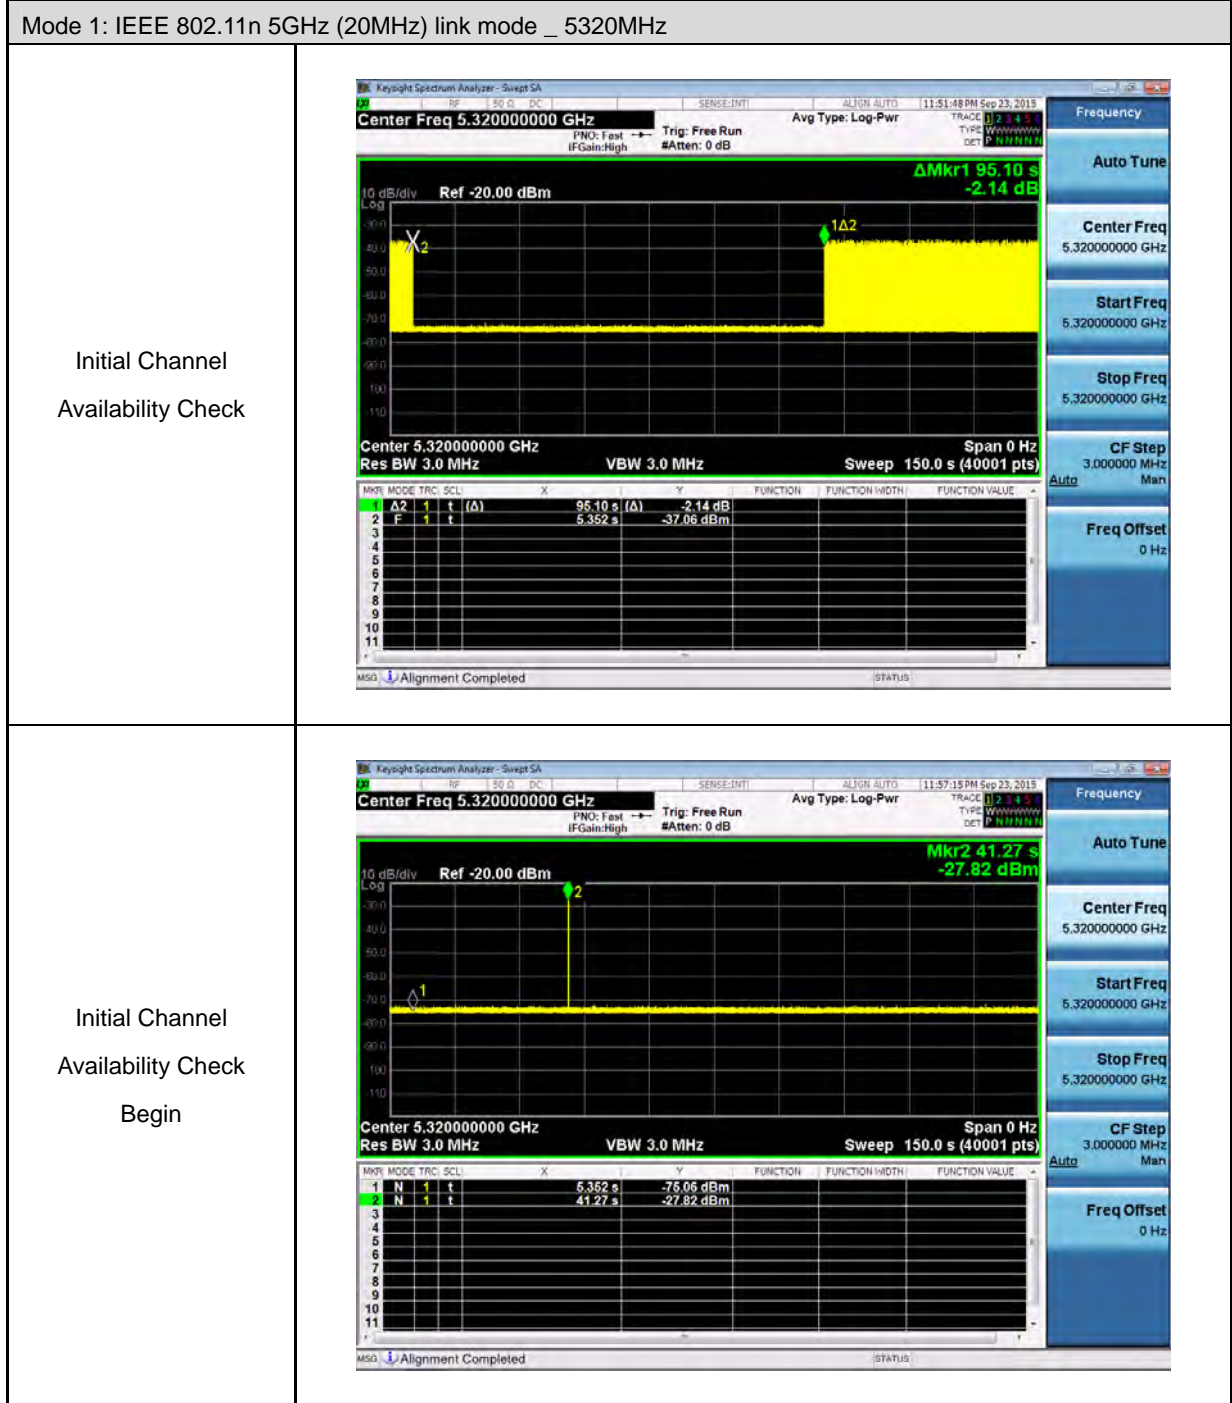


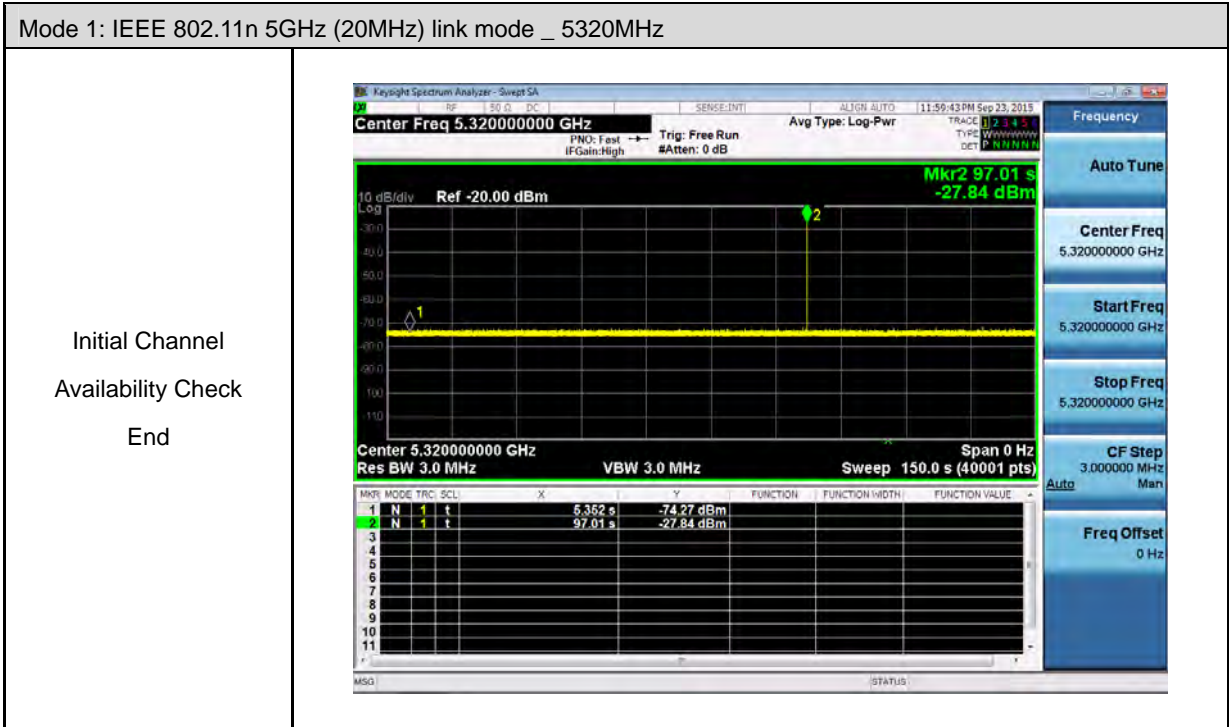


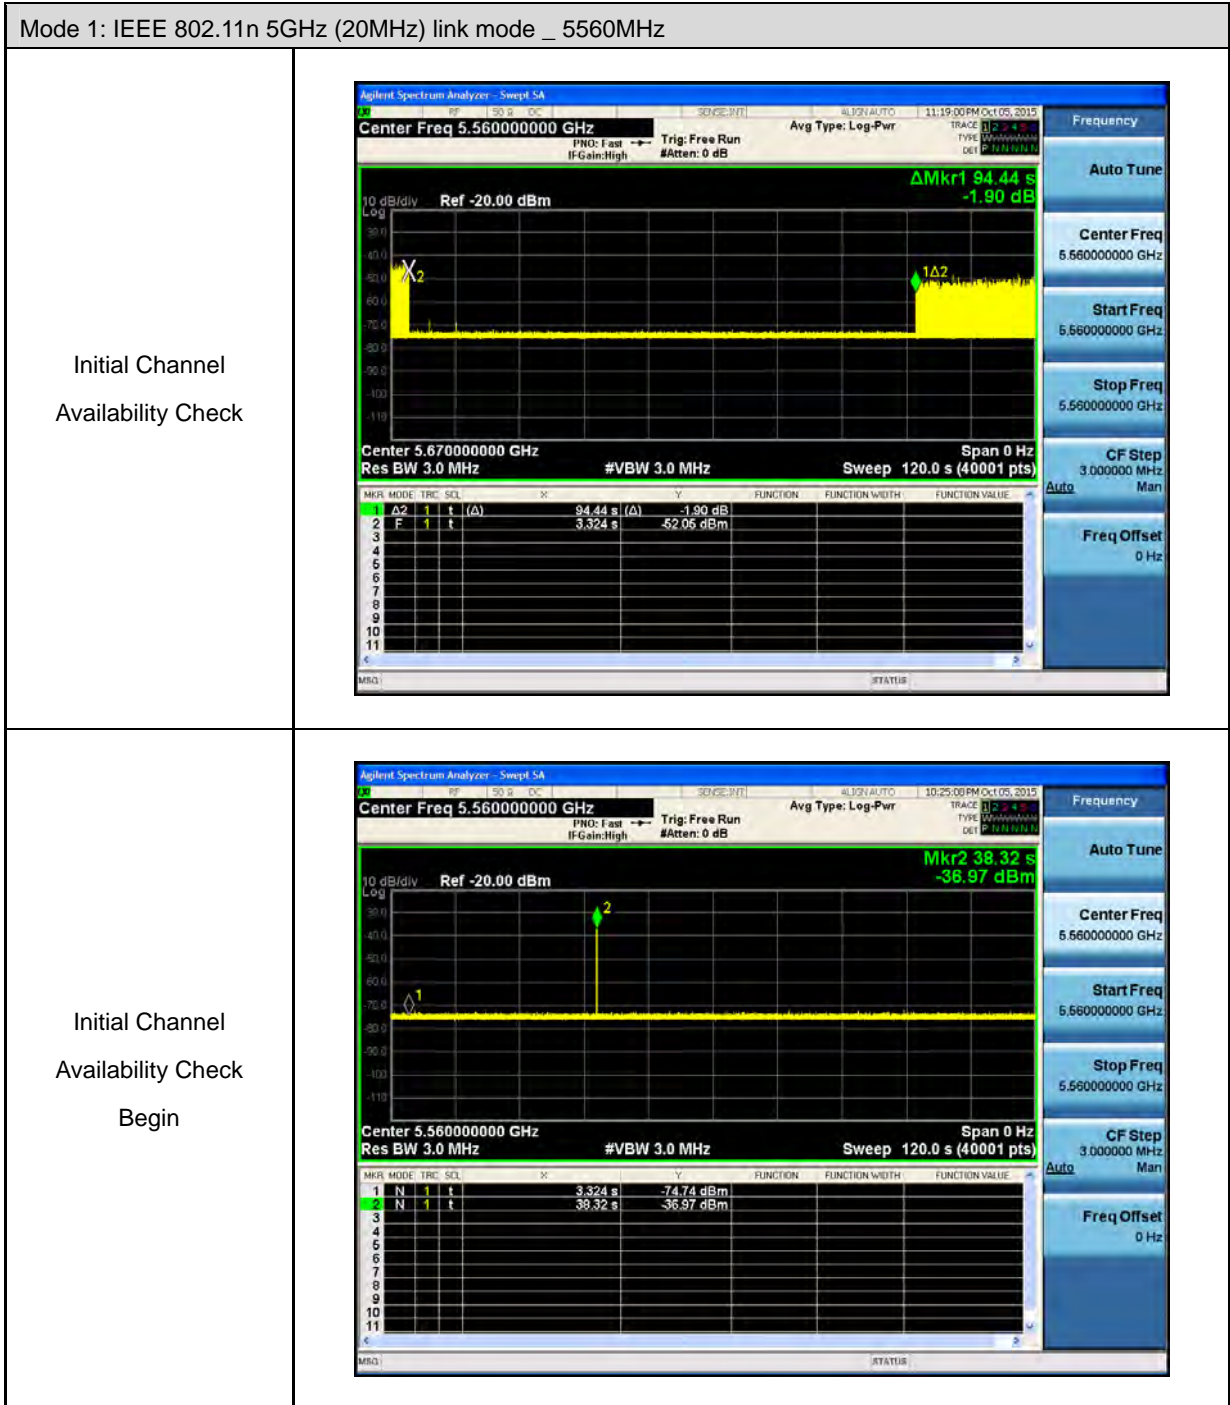

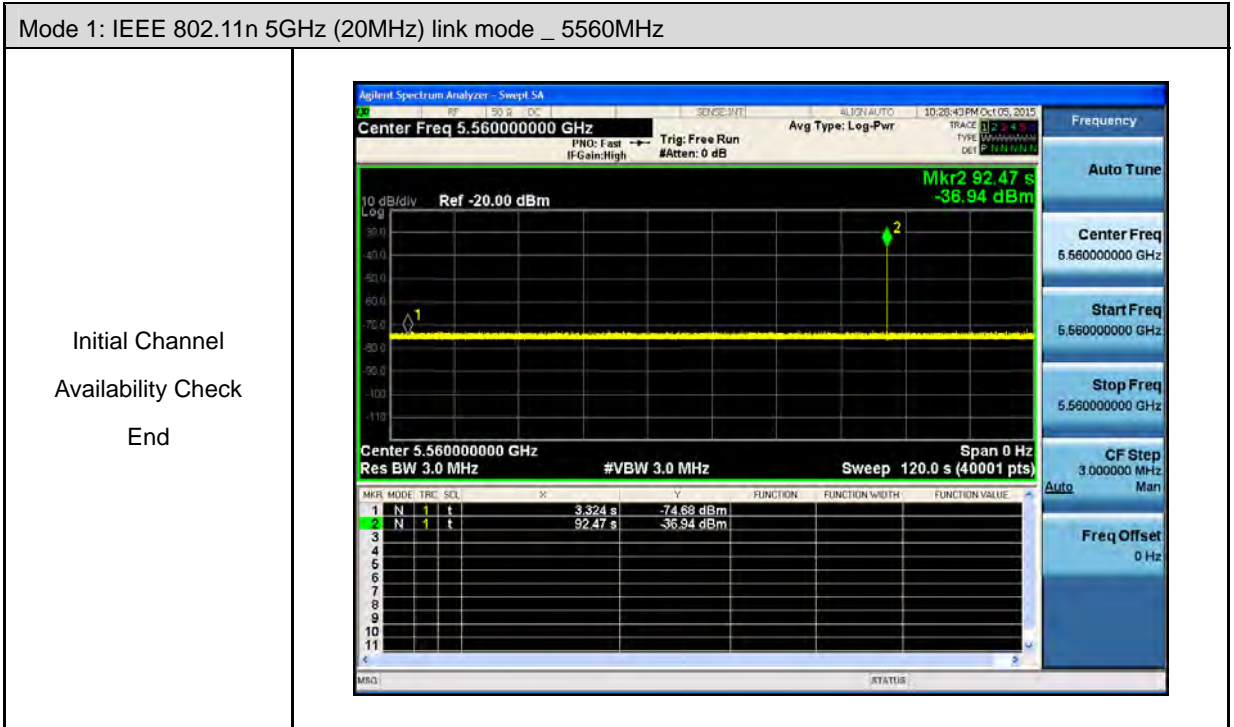


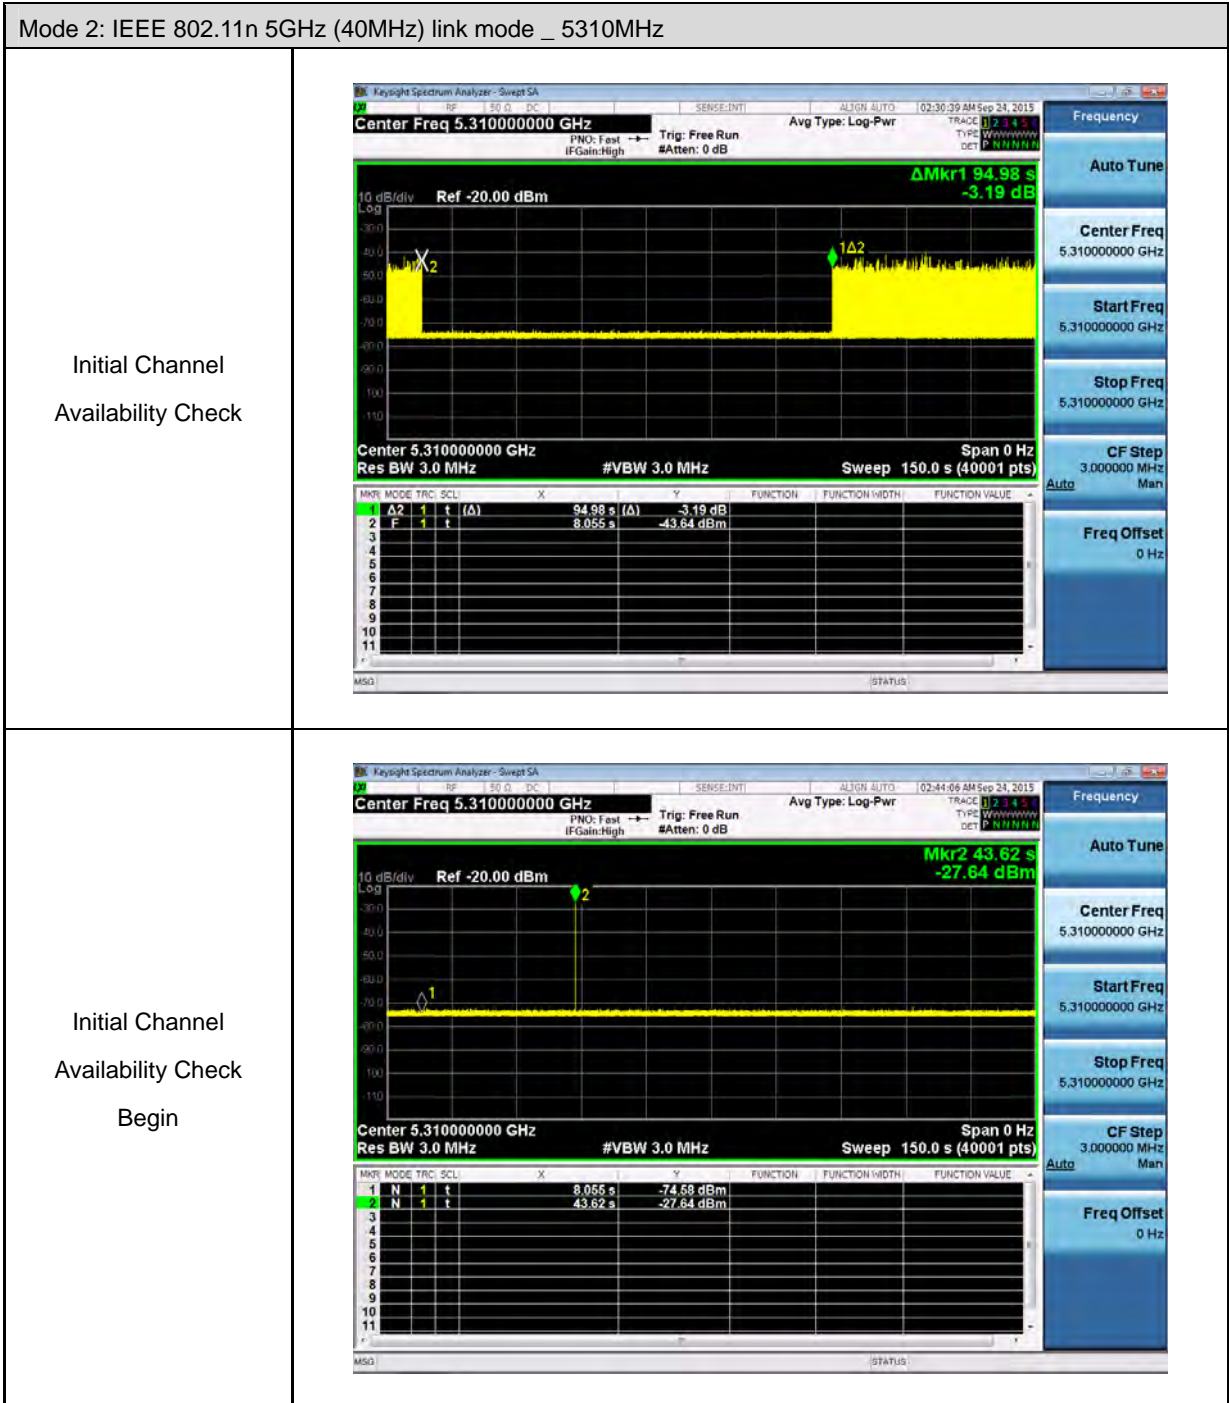


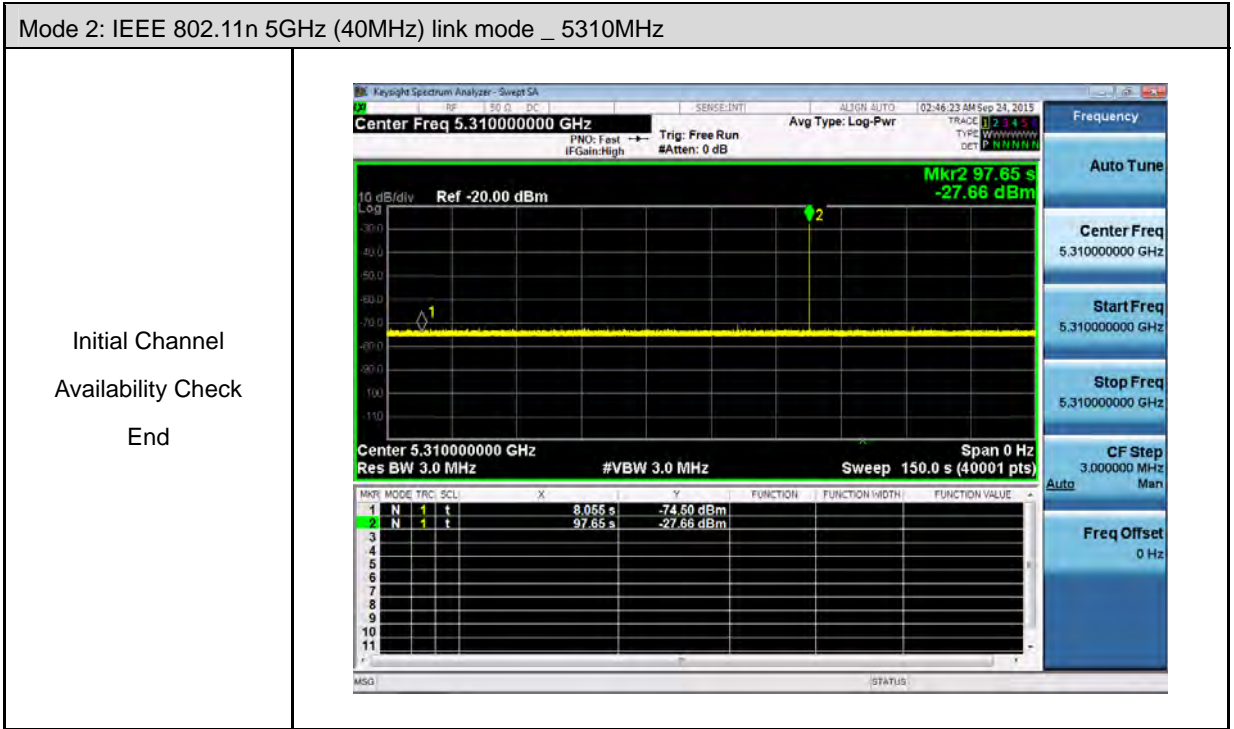


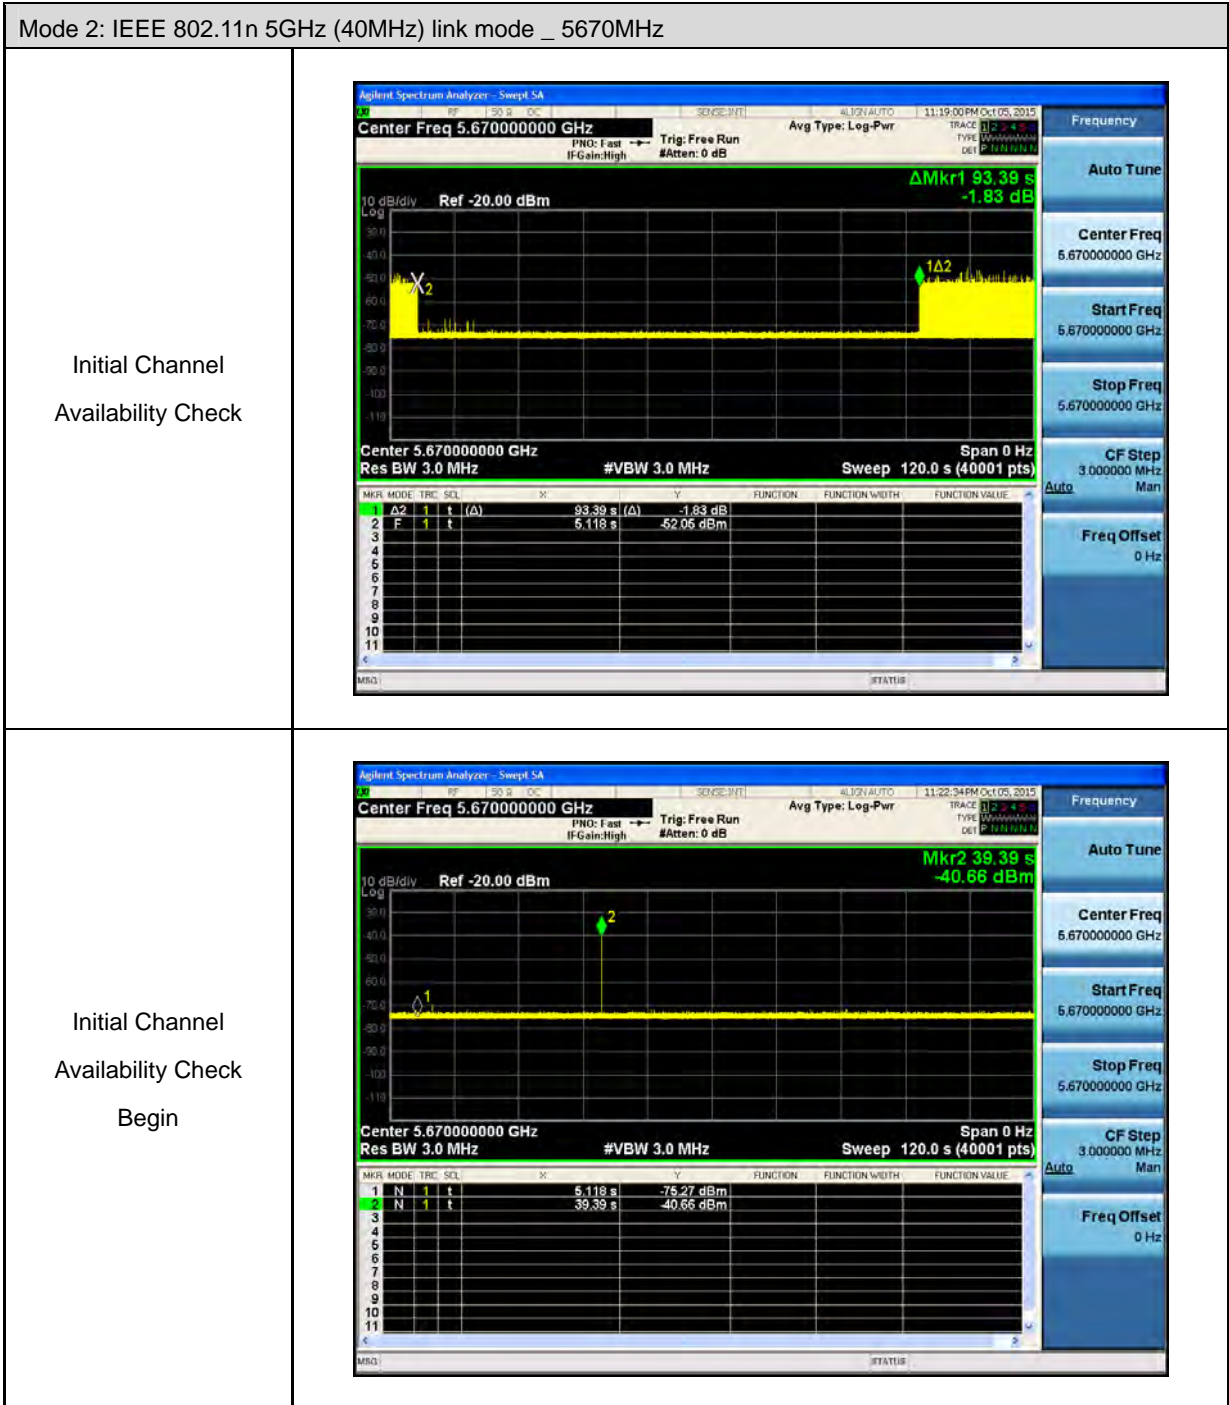




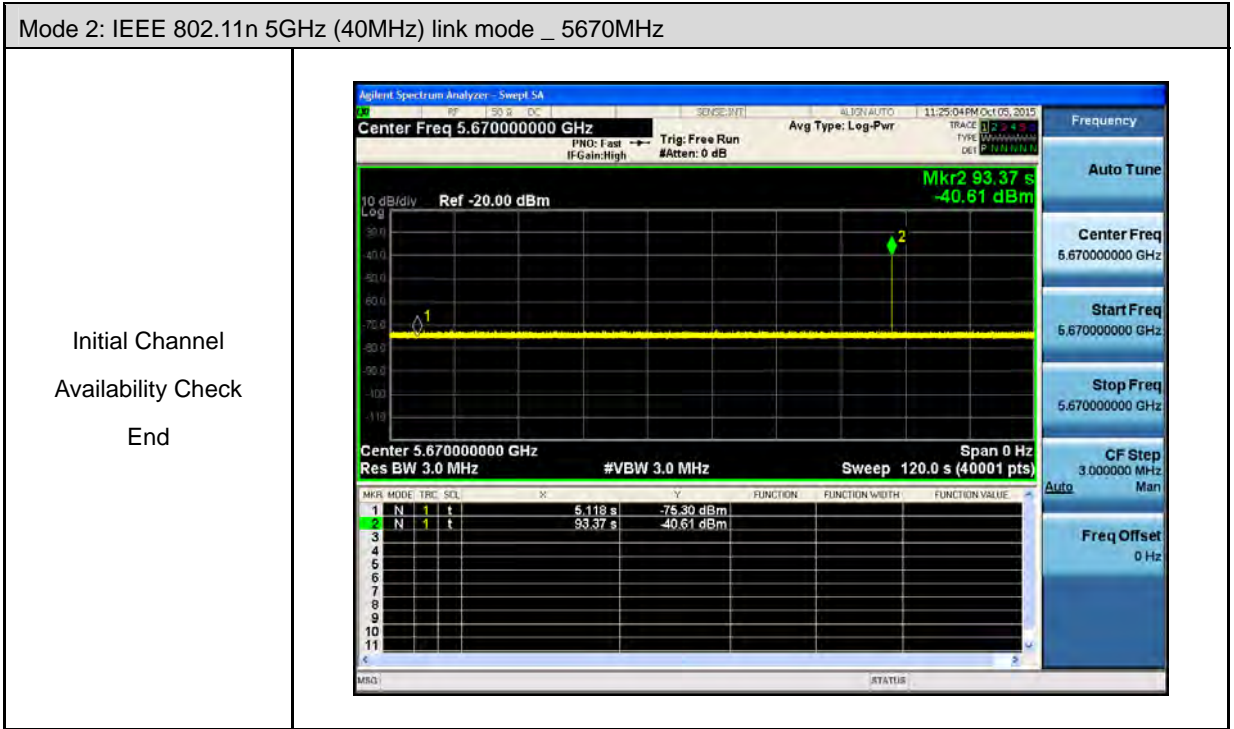

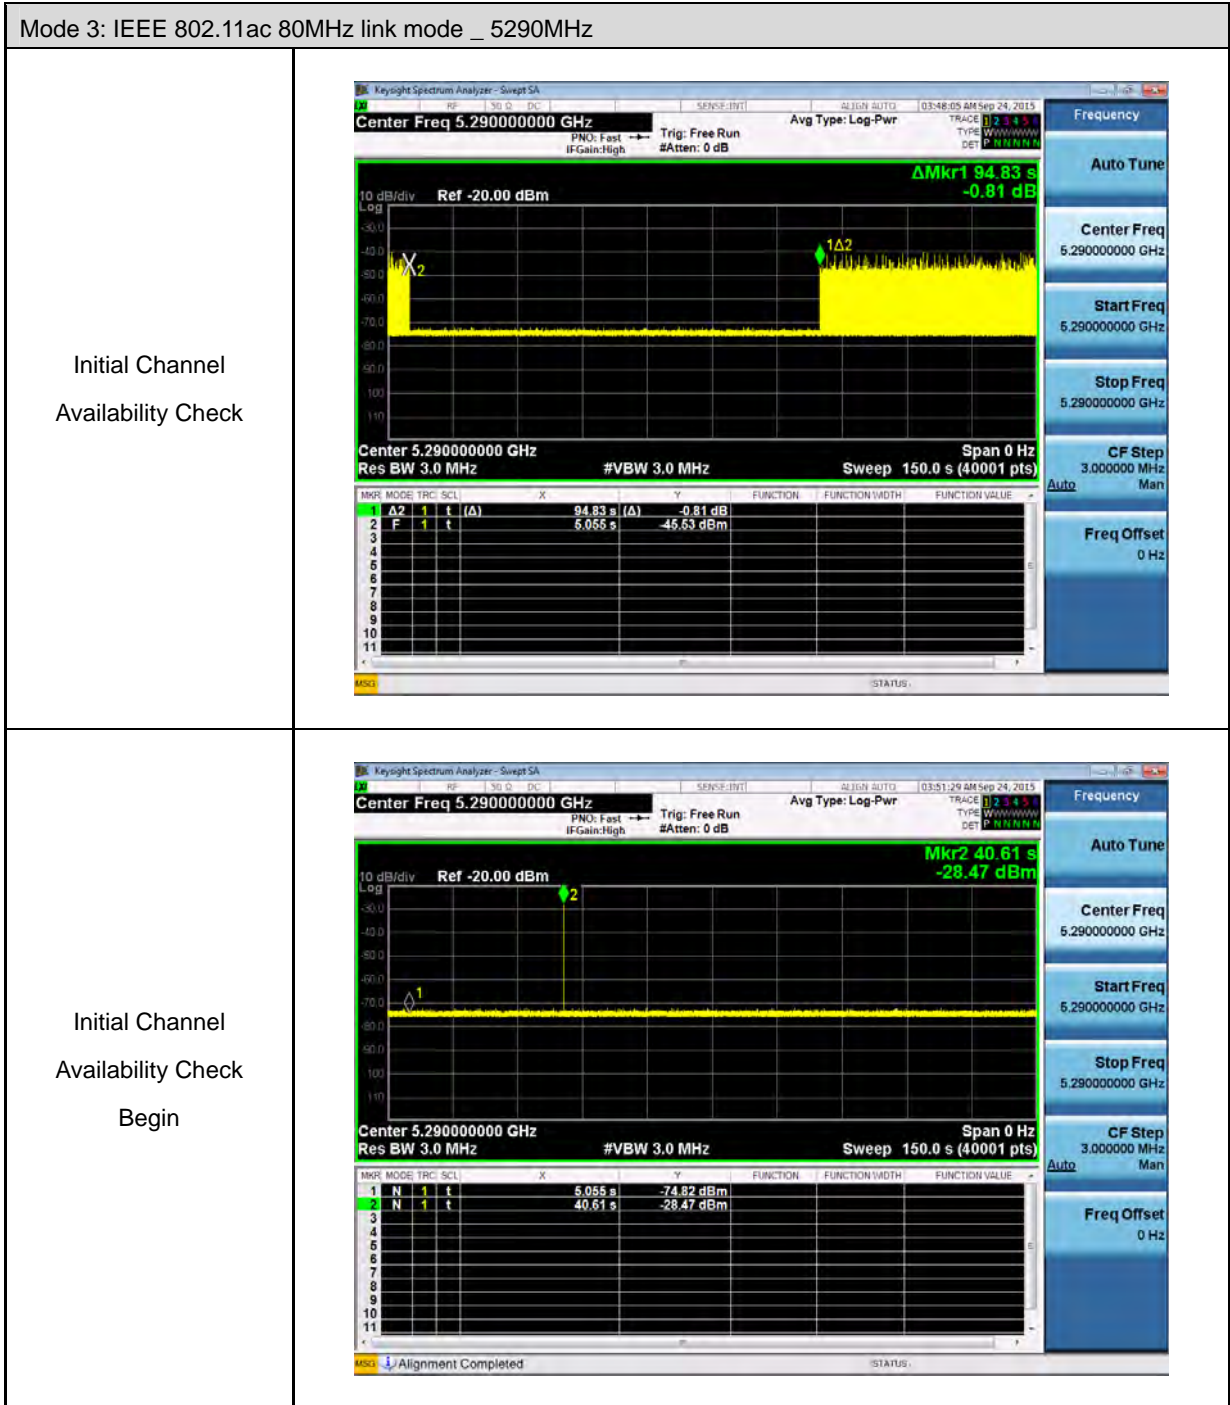

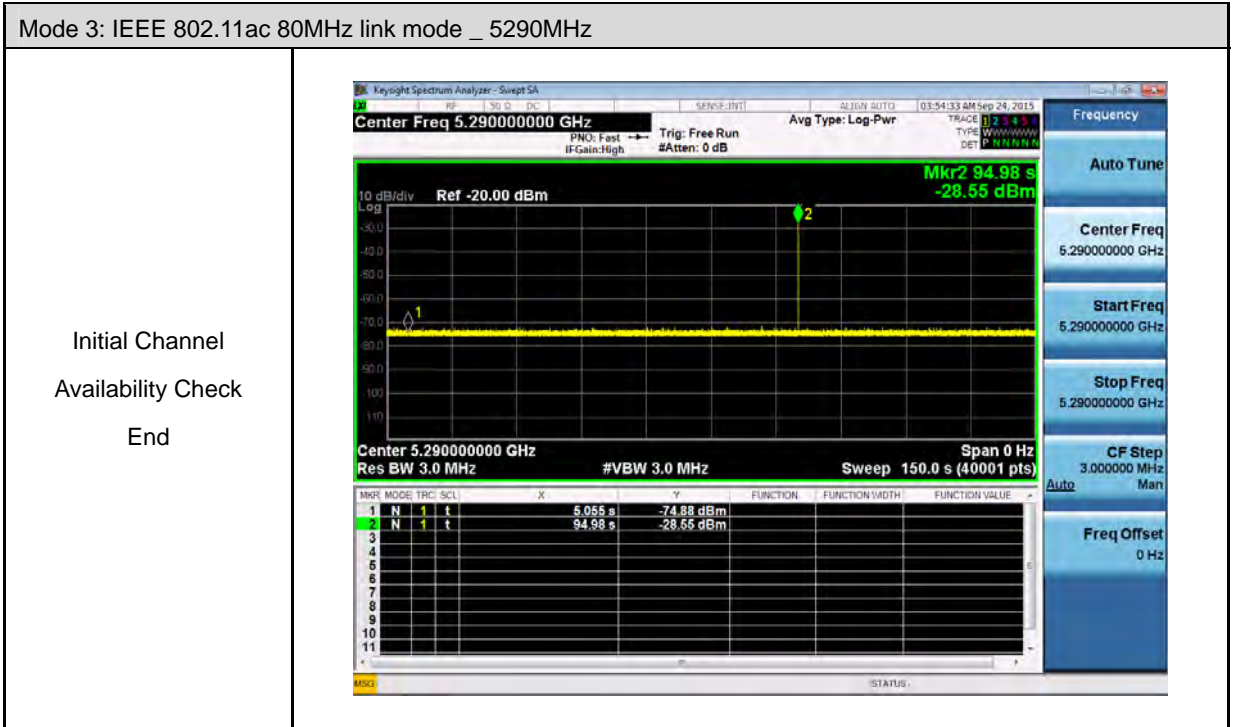

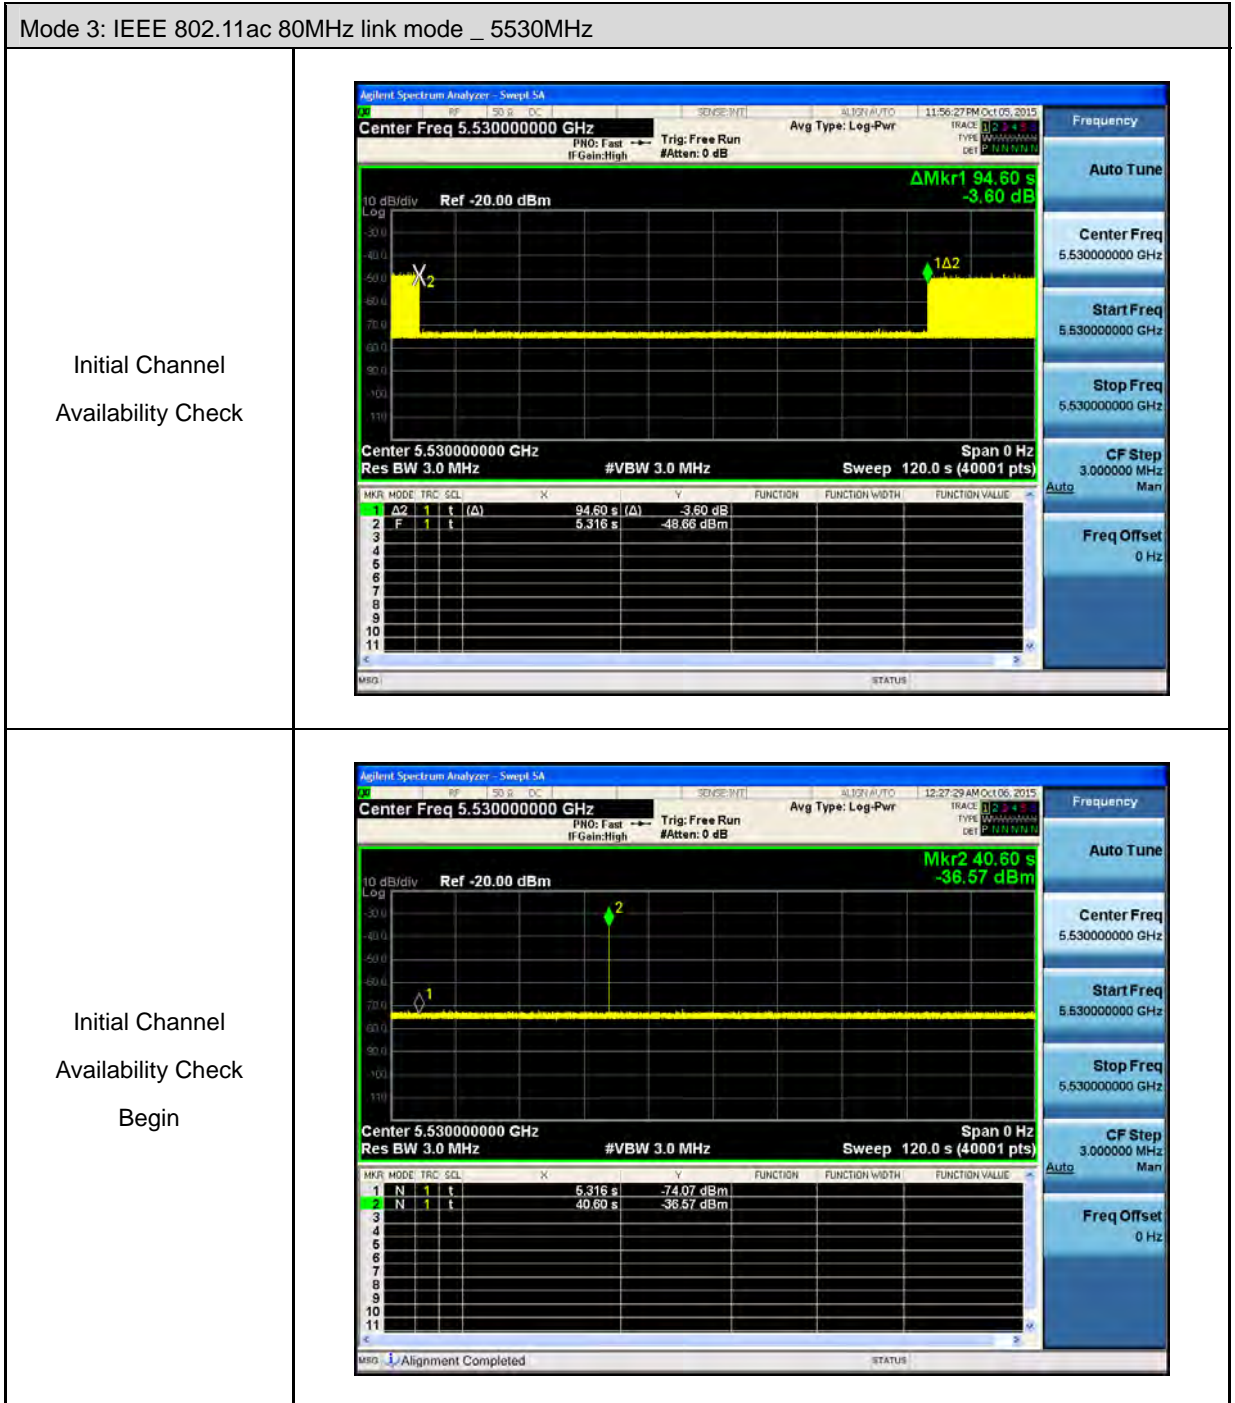

Mode 3: IEEE 802.11ac 80MHz link mode \_ 5530MHz

Initial Channel  
Availability Check  
End

The screenshot shows the Agilent Spectrum Analyzer interface. The main display shows a spectrum plot with a yellow trace. Two markers are visible: Marker 1 at 5.5316 GHz (-74.24 dBm) and Marker 2 at 5.5395 GHz (-36.92 dBm). The reference level is set to -20.00 dBm. The center frequency is 5.530000000 GHz, resolution bandwidth is 3.0 MHz, and span is 0 Hz. The sweep time is 120.0 s (40001 pts).

MKR	MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N	1	t	5.316 s	-74.24 dBm			
2	N	1	t	95.49 s	-36.92 dBm			
3								
4								
5								
6								
7								
8								
9								
10								
11								

## 5.4. Move and Closing Time Measurement

### ■ Reporting Notes

The reference marker is set at the end of last radar pulse.

The delta marker is set at the end of the last WLAN transmission following the radar pulse.  
This delta is the channel move time.

The aggregate channel closing transmission time is calculated as follows:



Aggregate Transmission Time = (Number of analyzer bins showing transmission) \* (dwell time per bin)

The observation period over which the FCC aggregate time is calculated begins at (Reference Marker + 200 msec) and ends no earlier than (Reference Marker + 10 sec).

### ■ Test Results

Model Number	UAP-AC-LR		
Test Item	Move and Closing Time		
Test Mode	Mode 3: IEEE 802.11ac 80MHz link mode		
Radar Type	Type 0		
Date of Test	10/08/2015		
Frequency (MHz)	Radar Type	Channel Move Time (msec)	Limit (sec)
5290	Type 0	472.2400	10
5530	Type 0	472.4882	10
Frequency (MHz)	Radar Type	Aggregate Channel Closing Transmission Time (msec)	Limit (msec)
5290	Type 0	2.5013	60
5530	Type 0	2.4999	60



■ Test Graphs

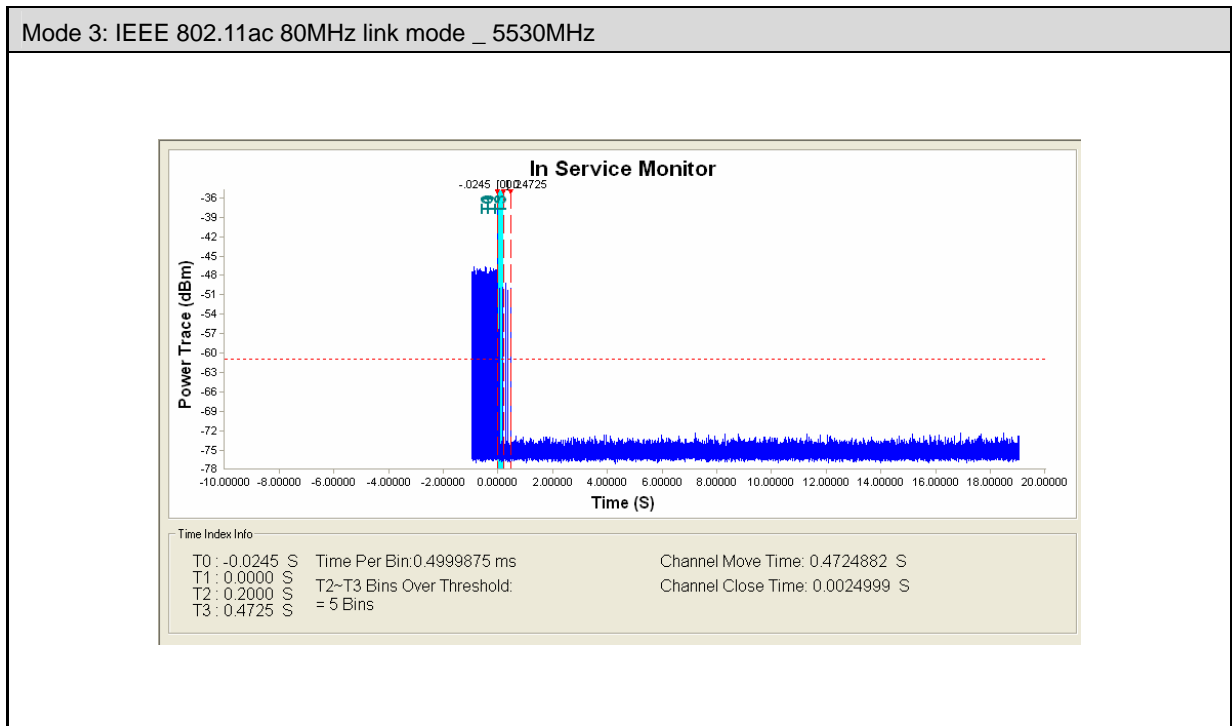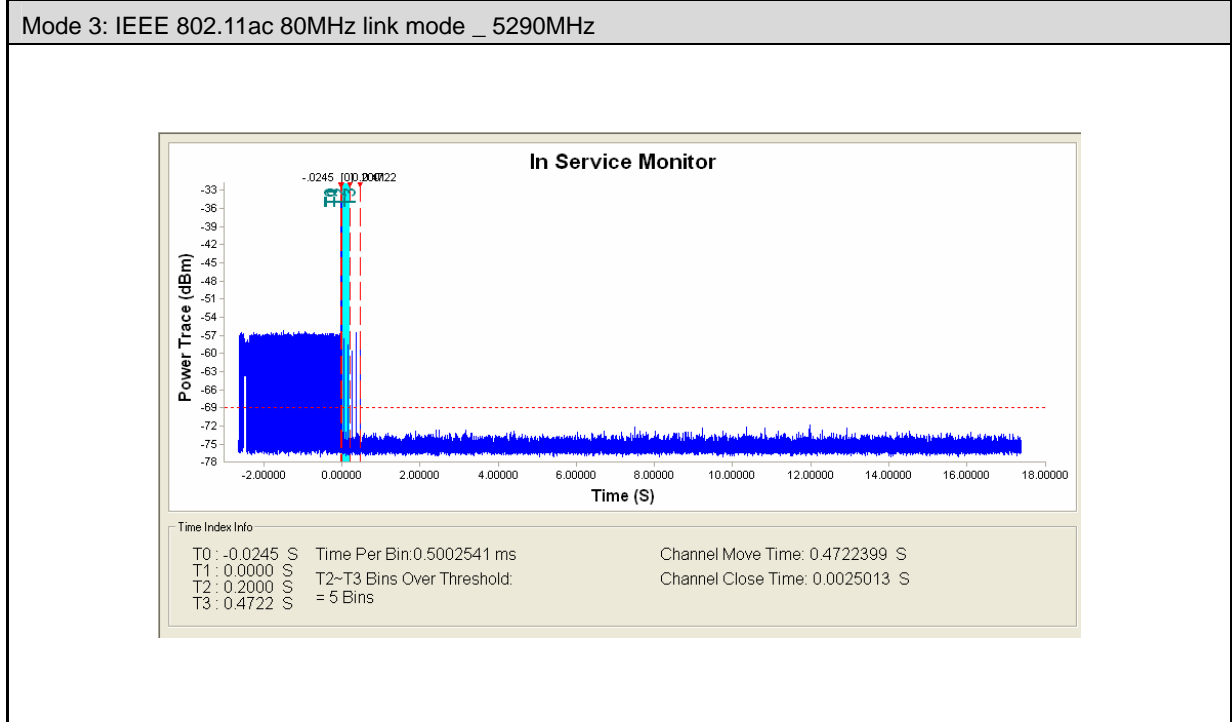

### 5.5. Non-Occupancy Period Measurement

#### ■ Test Graphs

No EUT transmissions were observed on the test channel during the 30-minute observation time.

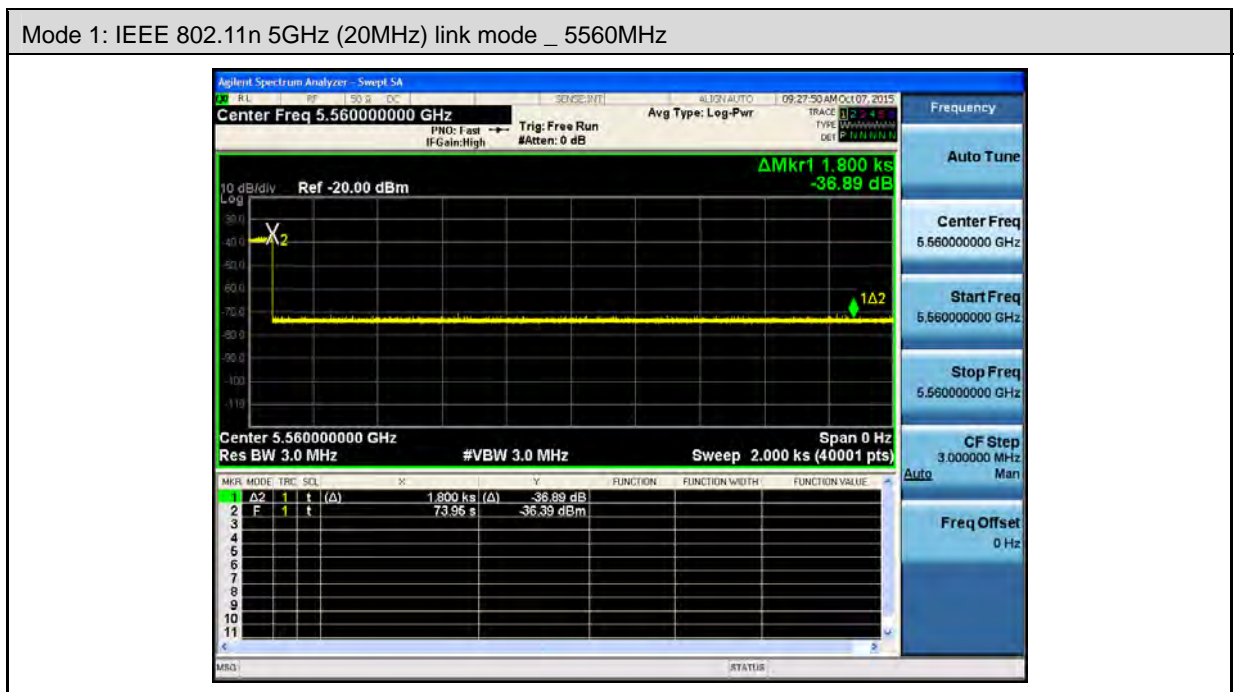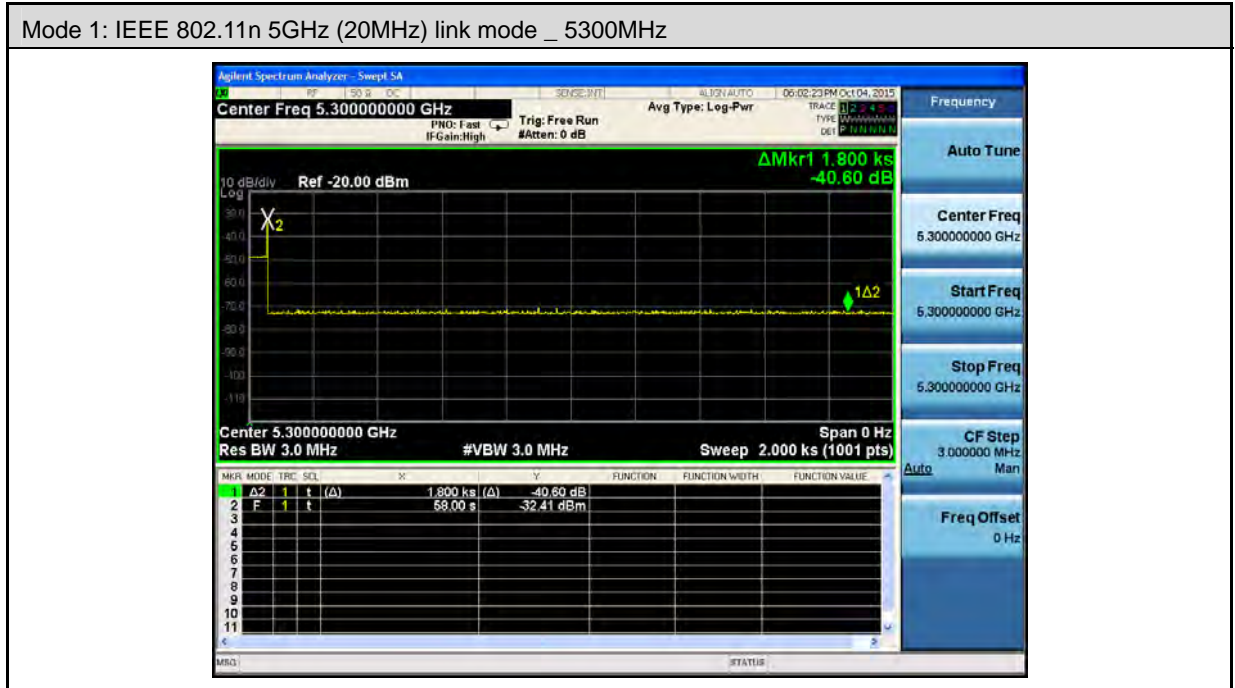



## 5.6. Detection Bandwidth Measurement



### ■ Test Results



Model Number	UAP-AC-LR					
Test Item	Detection Bandwidth					
Test Mode	Mode 1: IEEE 802.11n 5GHz (20MHz) link mode					
Date of Test	10/05/2015					
Frequency (MHz)	FL (MHz)	FH (MHz)	Detection Bandwidth (MHz)	99% Power Bandwidth (MHz)	Ratio of Detection BW to 99% Power BW (%)	Minimum Limit (%)
5320	5310	5330	20	17.882	111.84	$\geq 100$
5560	5550	5570	20	17.792	112.41	$\geq 100$



Model Number	UAP-AC-LR					
Test Item	Detection Bandwidth					
Test Mode	Mode 2: IEEE 802.11n 5GHz (40MHz) link mode					
Date of Test	10/05/2015					
Frequency (MHz)	FL (MHz)	FH (MHz)	Detection Bandwidth (MHz)	99% Power Bandwidth (MHz)	Ratio of Detection BW to 99% Power BW (%)	Minimum Limit (%)
5310	5291	5330	39	36.145	107.90	$\geq 100$
5550	5530	5569	39	36.792	106.00	$\geq 100$

Model Number	UAP-AC-LR					
Test Item	Detection Bandwidth					
Test Mode	Mode 3: IEEE 802.11ac 80MHz link mode					
Date of Test	10/05/2015					
Frequency (MHz)	FL (MHz)	FH (MHz)	Detection Bandwidth (MHz)	99% Power Bandwidth (MHz)	Ratio of Detection BW to 99% Power BW (%)	Minimum Limit (%)
5290	5250	5330	80	75.456	106.02	$\geq 100$
5530	5490	5570	80	75.302	106.24	$\geq 100$

■ Test Graphs

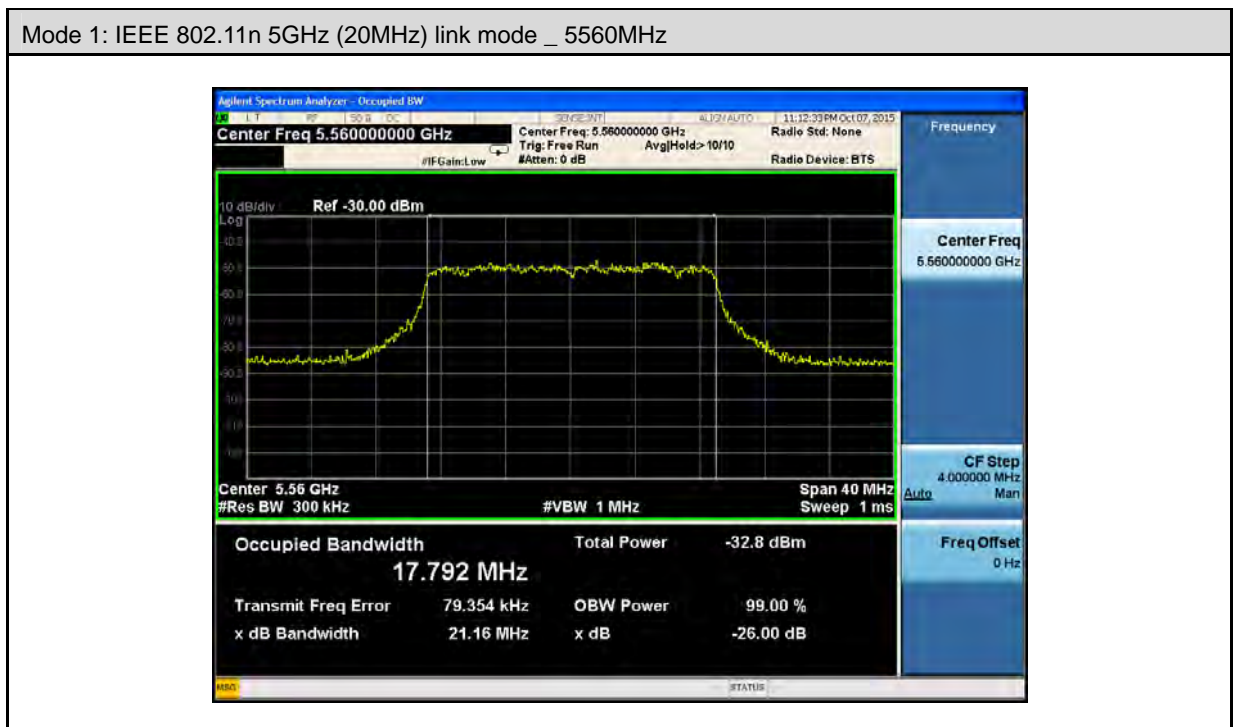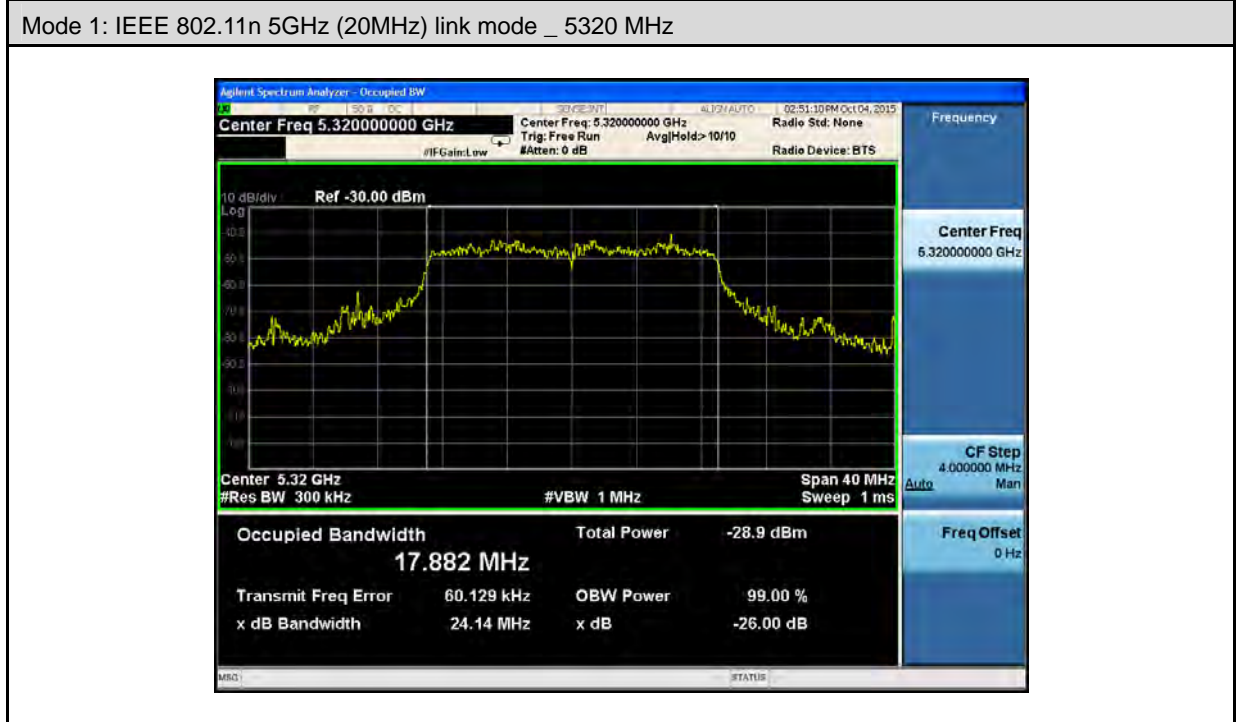

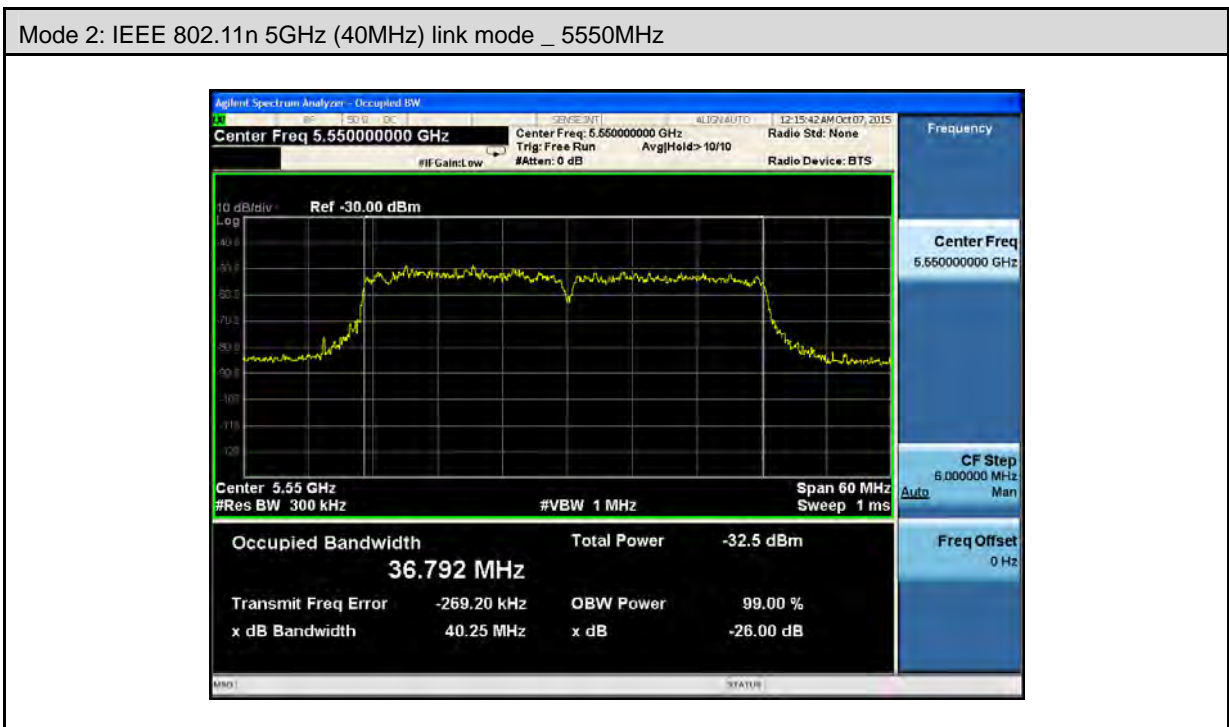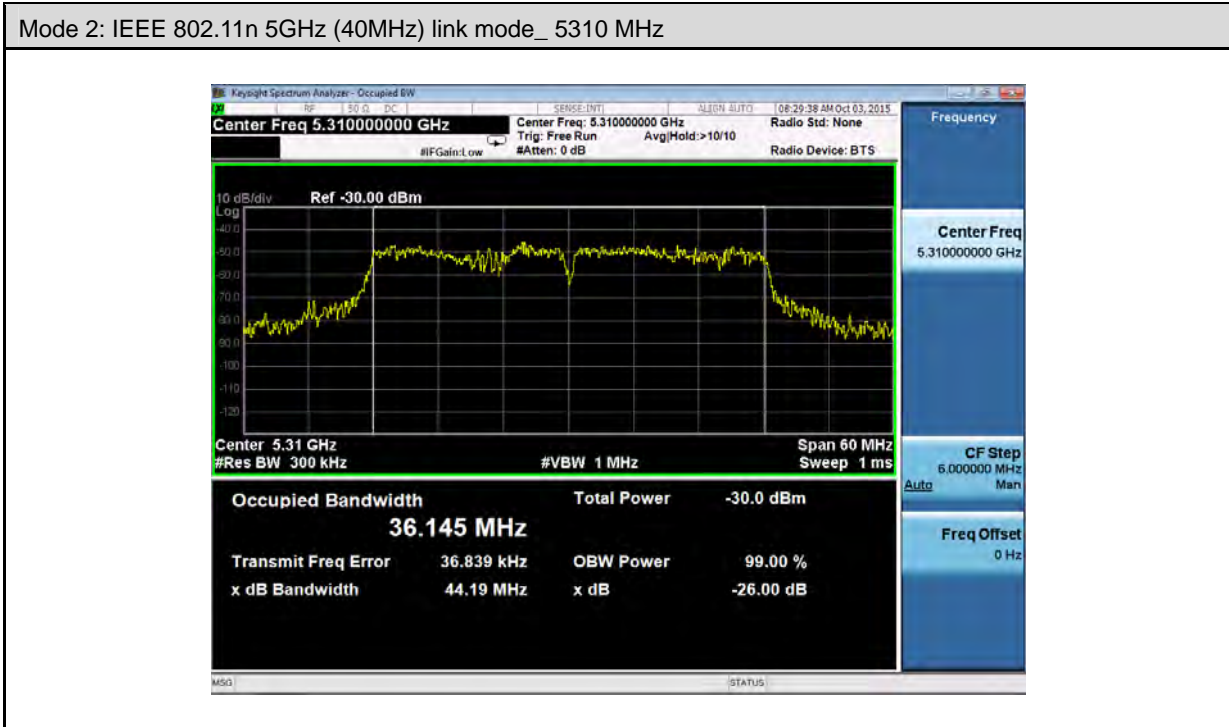

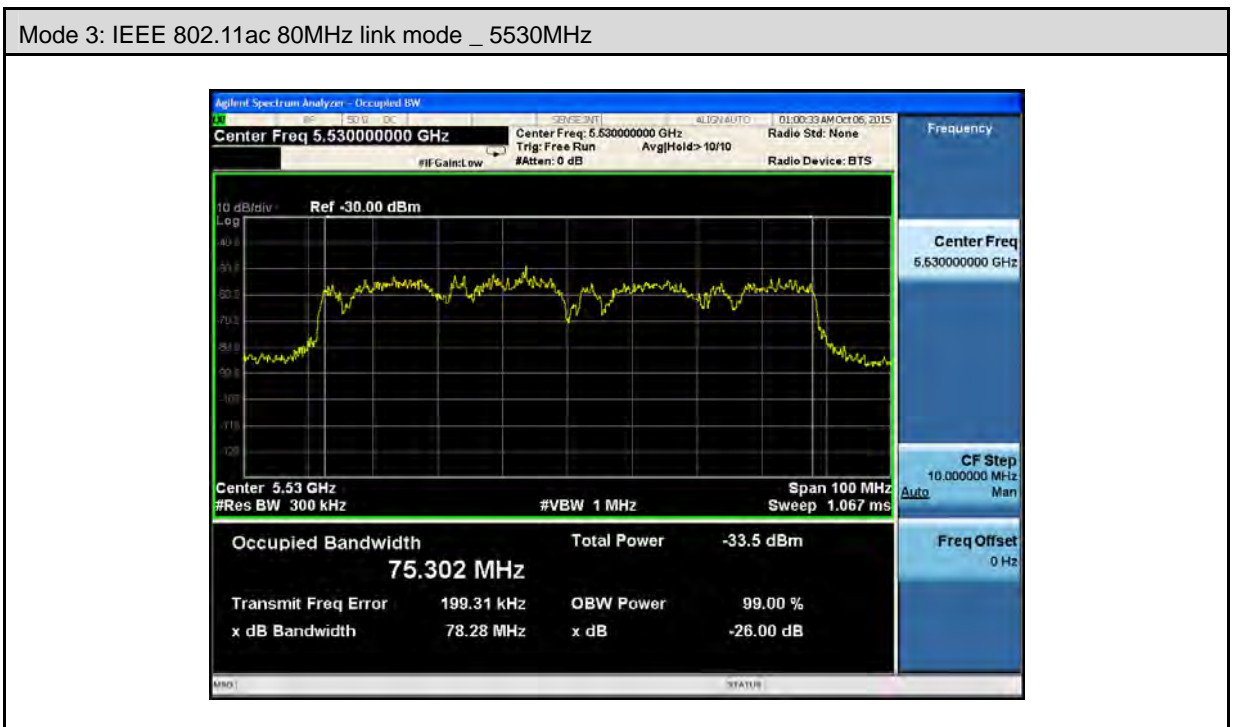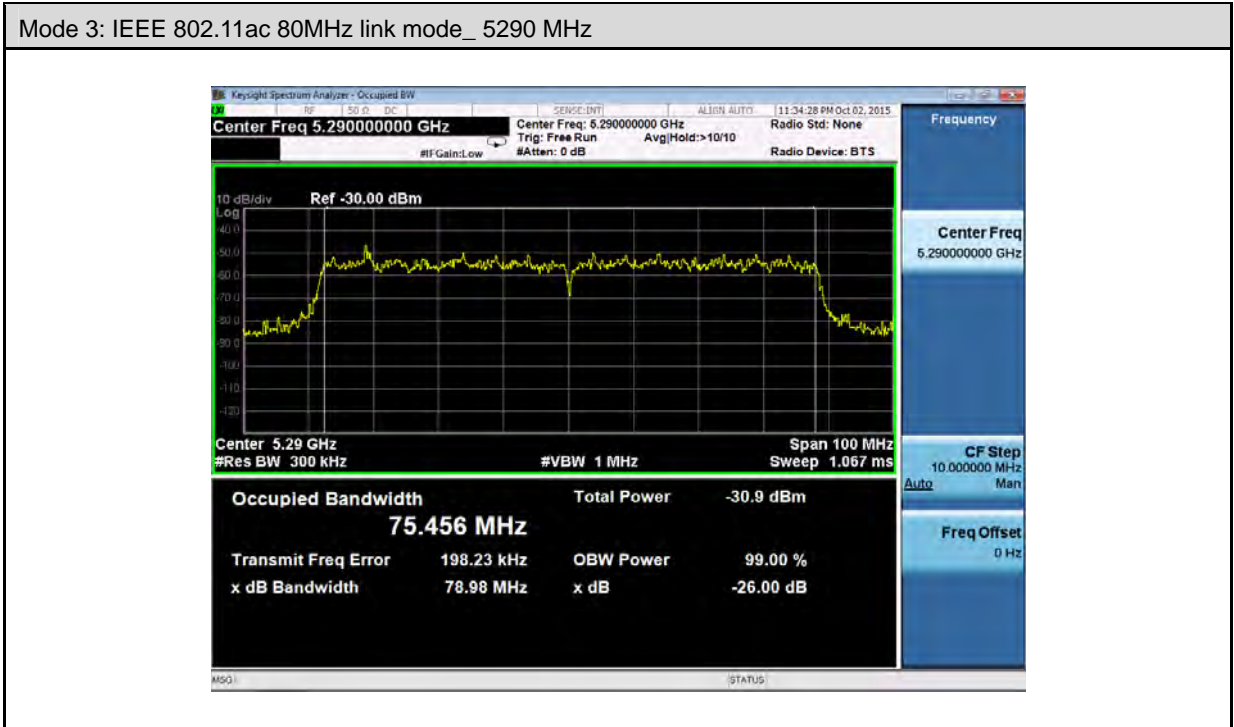

## 5.7. In-Service Monitoring Measurement

### ■ Test Results

Model Number	UAP-AC-LR							
Test Item	In-Service Monitoring							
Test Mode	Mode 1: IEEE 802.11n 5GHz (20MHz) link mode							
Date of Test	10/16/2015							
Frequency (MHz)	Radar Signal	PRI (Msec)	Pulse width W (μs)	Pass Times	Fail Times	Probability	Limit	
5320	Type1	Type 5a	1	28	2	93.33%	≥ 60%	
	Type2	Random	Random	28	2	93.33%	≥ 60%	
	Type3	Random	Random	27	3	90.00%	≥ 60%	
	Type4	Random	Random	27	3	90.00%	≥ 60%	
	Type1~4						91.67%	≥ 80%
	Type5	Random	Random	26	4	86.67%	≥ 80%	
	Type6	Hopping	1	27	3	90.00%	≥ 70%	
5560	Type1	Type 5a	1	27	3	90.00%	≥ 60%	
	Type2	Random	Random	27	3	90.00%	≥ 60%	
	Type3	Random	Random	27	3	90.00%	≥ 60%	
	Type4	Random	Random	26	4	86.67%	≥ 60%	
	Type1~4						89.17%	≥ 80%
	Type5	Random	Random	25	5	83.33%	≥ 80%	
	Type6	Hopping	1	27	3	90.00%	≥ 70%	
5620	Type1	Type 5a	1	27	3	90.00%	≥ 60%	
	Type2	Random	Random	26	4	86.67%	≥ 60%	
	Type3	Random	Random	26	4	86.67%	≥ 60%	
	Type4	Random	Random	26	4	86.67%	≥ 60%	
	Type1~4						87.50%	≥ 80%
	Type5	Random	Random	25	5	83.33%	≥ 80%	
	Type6	Hopping	1	27	3	90.00%	≥ 70%	

Model Number	UAP-AC-LR							
Test Item	In-Service Monitoring							
Test Mode	Mode 2: IEEE 802.11n 5GHz (40MHz) link mode							
Date of Test	10/16/2015							
Frequency (MHz)	Radar Signal	PRI (Msec)	Pulse width W (μs)	Pass Times	Fail Times	Probability	Limit	
5310	Type1	Type 5a	1	29	1	96.67%	≥ 60%	
	Type2	Random	Random	26	4	86.67%	≥ 60%	
	Type3	Random	Random	30	0	100.00%	≥ 60%	
	Type4	Random	Random	27	3	90.00%	≥ 60%	
	Type1~4						93.33%	≥ 80%
	Type5	Random	Random	29	1	96.67%	≥ 80%	
	Type6	Hopping	1	30	0	100.00%	≥ 70%	
5550	Type1	Type 5a	1	27	3	90.00%	≥ 60%	
	Type2	Random	Random	28	2	93.33%	≥ 60%	
	Type3	Random	Random	25	5	83.33%	≥ 60%	
	Type4	Random	Random	24	6	80.00%	≥ 60%	
	Type1~4						86.67%	≥ 80%
	Type5	Random	Random	26	4	86.67%	≥ 80%	
	Type6	Hopping	1	28	2	93.33%	≥ 70%	
5630	Type1	Type 5a	1	27	3	90.00%	≥ 60%	
	Type2	Random	Random	25	5	83.33%	≥ 60%	
	Type3	Random	Random	26	4	86.67%	≥ 60%	
	Type4	Random	Random	26	4	86.67%	≥ 60%	
	Type1~4						86.67%	≥ 80%
	Type5	Random	Random	26	4	86.67%	≥ 80%	
	Type6	Hopping	1	27	3	90.00%	≥ 70%	

Model Number	UAP-AC-LR							
Test Item	In-Service Monitoring							
Test Mode	Mode 3: IEEE 802.11ac 80MHz link mode							
Date of Test	10/16/2015							
Frequency (MHz)	Radar Signal	PRI (Msec)	Pulse width W (μs)	Pass Times	Fail Times	Probability	Limit	
5290	Type1	Type 5a	1	27	3	90.00%	≥ 60%	
	Type2	Random	Random	25	5	83.33%	≥ 60%	
	Type3	Random	Random	24	6	80.00%	≥ 60%	
	Type4	Random	Random	28	2	93.33%	≥ 60%	
	Type1~4						86.67%	≥ 80%
	Type5	Random	Random	26	4	86.67%	≥ 80%	
	Type6	Hopping	1	28	2	93.33%	≥ 70%	
5530	Type1	Type 5a	1	28	2	93.33%	≥ 60%	
	Type2	Random	Random	26	4	86.67%	≥ 60%	
	Type3	Random	Random	26	4	86.67%	≥ 60%	
	Type4	Random	Random	26	4	86.67%	≥ 60%	
	Type1~4						88.33%	≥ 80%
	Type5	Random	Random	26	4	86.67%	≥ 80%	
	Type6	Hopping	1	27	3	90.00%	≥ 70%	
5610	Type1	Type 5a	1	28	2	93.33%	≥ 60%	
	Type2	Random	Random	26	4	86.67%	≥ 60%	
	Type3	Random	Random	25	5	83.33%	≥ 60%	
	Type4	Random	Random	25	5	83.33%	≥ 60%	
	Type1~4						86.67%	≥ 80%
	Type5	Random	Random	25	5	83.33%	≥ 80%	
	Type6	Hopping	1	27	3	90.00%	≥ 70%	

Test Mode		Mode 1				
Frequency		5.250~5.350 GHz				
Radar Signal		Type 1				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	PRF (Hz)	Pulses / Burst	1=Detection ; 0=No Detection
1	5311	1	638	1567	83	1
2	5312	1	858	1166	62	1
3	5313	1	738	1355	72	1
4	5314	1	538	1859	99	1
5	5315	1	778	1285	68	1
6	5316	1	658	1520	81	1
7	5317	1	3066	326	18	1
8	5318	1	598	1672	89	1
9	5319	1	578	1730	92	0
10	5320	1	698	1433	76	1
11	5321	1	618	1618	86	1
12	5322	1	798	1253	67	1
13	5323	1	678	1475	78	1
14	5324	1	558	1792	95	1
15	5325	1	818	1222	65	1
16	5326	1	1541	649	35	1
17	5327	1	891	1122	60	1
18	5328	1	929	1076	57	1
19	5329	1	2448	408	22	1
20	5311	1	1833	546	29	1
21	5312	1	1865	536	29	1
22	5313	1	1542	649	35	1
23	5314	1	2995	334	18	0
24	5315	1	1202	832	44	1
25	5316	1	1165	858	46	1
26	5317	1	1244	804	43	1
27	5318	1	2852	351	19	1
28	5319	1	2242	446	24	1
29	5320	1	1157	864	46	1
30	5321	1	1288	776	41	1
Detection Percentage (%)						93.33



Test Mode		Mode 1				
Frequency		5.250~5.350 GHz				
Radar Signal		Type 2				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	PRF (Hz)	Pulses / Burst	1=Detection ; 0=No Detection
1	5311	2.6	228	4386	23	1
2	5312	4.6	150	6667	27	1
3	5313	1.1	184	5435	29	1
4	5314	4.8	203	4926	24	1
5	5315	3.7	189	5291	25	1
6	5316	2.6	201	4975	24	1
7	5317	3.5	216	4630	26	1
8	5318	4.2	194	5155	23	0
9	5319	2.9	225	4444	25	1
10	5320	3.3	206	4854	27	1
11	5321	3.9	213	4695	28	1
12	5322	4.7	159	6289	26	1
13	5323	3.1	167	5988	24	1
14	5324	1.9	217	4608	23	1
15	5325	2.4	162	6173	25	1
16	5326	3.4	204	4902	28	1
17	5327	2.3	170	5882	27	1
18	5328	3.5	184	5435	23	1
19	5329	4.9	150	6667	27	1
20	5311	4.6	211	4739	29	1
21	5312	2.9	158	6329	23	1
22	5313	2.6	226	4425	27	1
23	5314	1.6	204	4902	26	1
24	5315	3.9	181	5525	25	1
25	5316	4.6	202	4950	24	0
26	5317	4.1	194	5155	27	1
27	5318	2.3	193	5181	28	1
28	5319	3.9	173	5780	29	1
29	5320	4.3	188	5319	23	1
30	5321	1.5	215	4651	26	1
Detection Percentage (%)						93.33

Test Mode		Mode 1				
Frequency		5.250~5.350 GHz				
Radar Signal		Type 3				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	PRF (Hz)	Pulses / Burst	1=Detection ; 0=No Detection
1	5311	8.0	492	2033	16	0
2	5312	6.7	200	5000	18	1
3	5313	8.6	418	2392	16	1
4	5314	9.4	351	2849	17	1
5	5315	7.4	383	2611	18	1
6	5316	9.8	232	4310	16	1
7	5317	7.6	245	4082	18	1
8	5318	8.2	289	3460	17	1
9	5319	6.5	306	3268	18	1
10	5320	7.3	421	2375	16	1
11	5321	7.8	335	2985	18	0
12	5322	8.8	375	2667	17	1
13	5323	9.6	324	3086	16	1
14	5324	9.4	259	3861	18	1
15	5325	6.4	220	4545	17	1
16	5326	7.2	342	2924	16	1
17	5327	9.1	377	2653	17	1
18	5328	9.6	457	2188	16	1
19	5329	8.0	471	2123	18	1
20	5311	9.0	304	3289	18	1
21	5312	8.0	316	3165	17	1
22	5313	9.8	325	3077	16	1
23	5314	8.0	409	2445	17	0
24	5315	9.9	200	5000	17	1
25	5316	8.8	458	2183	16	1
26	5317	8.0	232	4310	18	1
27	5318	8.3	250	4000	16	1
28	5319	8.7	270	3704	16	1
29	5320	7.7	350	2857	17	1
30	5321	7.1	230	4348	16	1
Detection Percentage (%)						90.00

Test Mode	Mode 1					
Frequency	5.250~5.350 GHz					
Radar Signal	Type 4					
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	PRF (Hz)	Pulses / Burst	1=Detection ; 0=No Detection
1	5311	18.0	493	2028	15	1
2	5312	19.9	200	5000	12	1
3	5313	12.9	487	2053	14	0
4	5314	13.7	377	2653	13	1
5	5315	15.6	462	2165	15	1
6	5316	18.4	358	2793	16	1
7	5317	13.4	267	3745	12	1
8	5318	15.7	349	2865	14	1
9	5319	19.1	409	2445	15	1
10	5320	18.2	423	2364	16	1
11	5321	13.2	325	3077	13	1
12	5322	14.6	264	3788	12	1
13	5323	18.6	326	3067	14	1
14	5324	15.0	452	2212	13	0
15	5325	16.3	230	4348	12	1
16	5326	19.8	238	4202	13	1
17	5327	18.2	420	2381	16	1
18	5328	16.3	452	2212	15	1
19	5329	14.2	495	2020	12	1
20	5311	17.8	228	4386	16	1
21	5312	19.1	211	4739	16	1
22	5313	18.4	283	3534	15	1
23	5314	11.8	411	2433	12	1
24	5315	14.2	284	3521	13	0
25	5316	13.9	202	4950	12	1
26	5317	17.8	340	2941	14	1
27	5318	15.6	290	3448	16	1
28	5319	14.6	250	4000	16	1
29	5320	14.4	484	2066	15	1
30	5321	18.9	387	2584	13	1
Detection Percentage (%)						90.00

Test Mode		Mode 1							
Frequency		5.250~5.350 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
1	5315	1	2	51.7	7	1146.3		647836	0
		2	1	93.2	15			1409398	
		3	3	79.6	10	1290.4	964.4	2872945	
		4	2	85.8	14	1559.2		4049183	
		5	2	76.5	14	1210.5	1553.5	4494059	
		6	1	61.7	8			5716328	
		7	3	83.6	7	1205.4	993.4	7308202	
		8	1	59.8	5			8119962	
		9	2	69.9	10	1355.1		9532813	
		10	3	94.3	10	1747.7	1408.7	10751035	
		11	2	61.8	18	1000.2		11053268	
2	5322	1	2	66.3	2	1226.7		3658	0
		2	1	94.2	9			1529901	
		3	3	96.7	6	1255.6	1330.6	2951972	
		4	2	60.8	11	1703.1		3038072	
		5	2	70	8	1886.2		4885843	
		6	1	93	16			5281738	
		7	3	87.7	10	1474.2	1427.2	6746502	
		8	1	84.5	18			7749910	
		9	2	89	12	1302.3		8035675	
		10	3	66.4	11	1031.7	1634.7	9089628	
		11	2	71.5	15	917.3		10039865	
		12	1	71.1	11			11195005	
3	5318	1	3	76.5	5	1658.5	1885.5	341903	1
		2	3	89.5	5	1162.5	1012.5	1039290	
		3	1	92.5	15			2530435	
		4	2	82.5	5	1869.5		3352797	
		5	1	68.5	9			3783207	
		6	3	78.3	17	1239.7	936.7	5292381	
		7	1	91	6			6334407	
		8	2	59.3	7	1898.7		6688649	
		9	2	58	13	1884		7600600	
		10	3	92.8	17	1029.2	1258.2	8865035	
		11	1	77.4	10			9464201	
		12	3	90.8	10	1219.2	1458.2	10488185	
		13	2	87.9	8	1764.1		11914643	

Test Mode		Mode 1							
Frequency		5.250~5.350 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
4	5313	1	3	50.9	16	1321.1	1333.1	77627	1
		2	2	73.9	16	1538.1		2317135	
		3	3	71.9	17	1596.1	1584.1	2684349	
		4	1	54.3	14			4779891	
		5	2	84.2	9	1055.8		5502401	
		6	1	99.3	18			6827573	
		7	1	89.5	13			8051166	
		8	3	78.1	5	1436.9	1262.9	9980082	
		9	2	51.1	13	1700.9		11274601	
5	5320	1	1	81.8	7			255617	1
		2	3	55.4	5	1016.6	1310.6	929954	
		3	2	61.7	18	1616.3		1699277	
		4	3	78.6	19	1882.4	1115.4	2516220	
		5	3	75.3	7	1730.7	1082.7	3350667	
		6	1	88.6	7			4671144	
		7	2	74.1	5	1510.9		5553525	
		8	1	75	18			6315577	
		9	3	79.5	8	1722.5	925.5	7021793	
		10	1	91.5	6			7652757	
		11	2	74.8	9	1531.2		8144794	
		12	2	88.4	10	1475.6		9507618	
		13	1	51.7	16			9965188	
		14	3	88.1	12	1605.9	1230.9	10600830	
		15	2	63.2	16	1448.8		11228243	
6	5326	1	3	81.6	15	1326.4	1816.4	420027	1
		2	3	81.6	9	960.4	1855.4	1213961	
		3	1	73.5	12			2412241	
		4	2	61.7	5	1305.3		2705526	
		5	1	63.1	15			4149665	
		6	3	61.4	15	1499.6	1396.6	4418842	
		7	1	99.3	11			5456509	
		8	2	74.9	5	1604.1		6153274	
		9	2	64.3	7	1079.7		7420401	
		10	3	71.1	15	1154.9	1510.9	8105166	
		11	1	59.4	12			9087685	
		12	1	84.5	17			9743762	
		13	3	99.1	11	1357.9	1730.9	10514412	
		14	2	78.4	12	1576.6		11920466	

Test Mode		Mode 1							
Frequency		5.250~5.350 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
7	5319	1	2	59.5	14	1515.5		154623	1
		2	1	71.2	5			860435	
		3	3	72.1	13	1820.9	1327.9	1566260	
		4	2	50.4	19	1603.6		2272135	
		5	3	99.2	11	1157.8	1085.8	2977376	
		6	1	53.8	13			3682861	
		7	2	93.4	7	1133.6		4388707	
		8	3	59.4	7	1374.6	993.6	5094518	
		9	2	53.6	13	1092.4		5799787	
		10	1	59.8	8			6505670	
		11	3	97.7	6	1593.3	1125.3	7209959	
		12	1	84.2	10			7915377	
		13	3	93.2	9	1104.8	1300.8	8619959	
		14	1	97.7	11			9326217	
		15	2	71.2	6	1580.8		10032059	
		16	2	79.8	8	1537.2		10736631	
		8	5322	1	3	95.8	12	1628.2	
2	2			52.2	15	1291.8		865214	
3	1			99.9	11			1685231	
4	3			97.4	8	1853.6	1822.6	2035426	
5	2			98.4	11	1706.6		2846253	
6	3			74.2	12	1752.8	1348.8	3625642	
7	1			63.1	6			4123561	
8	2			70.3	13	1127.7		4953621	
9	3			85.5	10	1782.5	1179.5	5512365	
10	2			73.3	18	1409.7		6125403	
11	1			50.9	10			6865868	
12	3			64.7	13	1564.3	1184.3	7421568	
13	1			56.1	10			8088234	
14	3			86.3	12	980.7	1184.7	8645235	
15	1			78	13			9236581	
16	2			62.9	11	1426.1		10132561	
17	2			88.8	10	1513.2		10765249	
18	3			67.4	14	1249.6	1172.6	11235461	

Test Mode		Mode 1							
Frequency		5.250~5.350 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
9	5327	1	3	13	13	1499.3	1528.3	125412	1
		2	1	17	17			782539	
		3	3	17	17	1939.3	1576.3	1526841	
		4	1	11	11			2156487	
		5	1	14	14			2651285	
		6	3	9	9	1629.4	1414.4	3326582	
		7	2	7	7	1535.8		3988625	
		8	3	14	14	1343	1104	4725418	
		9	2	14	14	1553.1		5326874	
		10	3	13	13	1520.9	918.9	5933652	
		11	1	13	13			6529425	
		12	2	11	11	1028.4		7149632	
		13	3	15	15	1525.4	1407.4	7759932	
		14	2	19	19	1369.6		8425981	
		15	1	8	8			9258412	
		16	1	9	9			9925874	
		17	2	9	9	1050.3		1026582	
		18	3	5	5	1701.2	1173.2	10963658	
		19	2	6	6	1305.2		11456981	
10	5327	1	1	60.7	9			353222	1
		2	3	59.2	13	1331.8	1077.8	1659461	
		3	2	96.1	8	1237.9		3432174	
		4	3	70.5	16	1145.5	1708.5	5432909	
		5	2	63.2	13	1721.8		6953575	
		6	1	51.5	7			8826390	
		7	1	89.1	5			10242227	
		8	2	86.1	12	1499.9		10759333	

Test Mode		Mode 1							
Frequency		5.250~5.350 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
11	5315	1	1	57.4	14			472419	1
		2	3	83.9	15	1079.1	1717.1	861133	
		3	2	67.1	17	1333.9		1822100	
		4	2	91.3	14	1877.7		2679041	
		5	3	60.1	9	1784.9	1515.9	3219408	
		6	1	72.3	11			4454844	
		7	2	92.6	7	1077.4		5169008	
		8	1	86.2	12			5476228	
		9	3	86.8	18	1713.2	1589.2	6009079	
		10	1	98.7	6			7247320	
		11	2	90.2	19	1747.8		7640035	
		12	2	63.9	9	1657.1		8752849	
		13	1	73.2	11			9365509	
		14	3	51.9	9	1842.1	1910.1	9792446	
		15	3	71.8	6	931.2	1825.2	10872322	
		16	2	56.9	8	1860.1		11513196	
12	5314	1	2	80.5	10	1697.5		546448	0
		2	1	72.8	5			648691	
		3	3	71	8	1728	1497	1673517	
		4	1	75.9	10			2025762	
		5	1	54.5	11			2534224	
		6	3	89.7	11	1854.3	1023.3	3251572	
		7	2	81.7	13	1285.3		3757399	
		8	3	59.1	10	1476.9	1529.9	4604714	
		9	2	73.4	15	1281.6		4987161	
		10	3	76	13	993	1043	5610535	
		11	1	55.3	19			6424881	
		12	2	70.2	11	1911.8		6679663	
		13	3	60.5	5	939.5	1600.5	7239430	
		14	2	95	5	964		7924694	
		15	1	68.6	6			8552192	
		16	1	99.3	5			9466622	
		17	2	84.8	18	1172.2		9696724	
		18	3	97	10	1390	1123	10603979	
		19	2	56.9	5	1291.1		10940382	
		20	3	97.1	7	1558.9	1362.9	11654047	



Test Mode		Mode 1							
Frequency		5.250~5.350 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
13	5320	1	2	96.9	19	1008.1		283689	1
		2	2	99	19	1492		1676999	
		3	3	87.1	13	989.9	1019.9	2426967	
		4	1	61.1	18			3625360	
		5	3	62.2	11	1243.8	1766.8	5925658	
		6	1	76	10			6865716	
		7	3	87.2	17	1144.8	1665.8	7529060	
		8	2	81.5	15	1055.5		9383932	
		9	1	69.8	17			10622080	
		10	2	92	19	1683		10957742	
14	5317	1	1	96.7	7			288367	1
		2	1	54.7	17			660896	
		3	3	52.6	10	1536.4	1334.4	1309965	
		4	2	64.1	17	1168.9		1923650	
		5	2	80.1	18	1808.9		2620524	
		6	3	78.4	19	1726.6	1378.6	3143297	
		7	3	84.3	17	1539.7	1402.7	3735001	
		8	3	81	17	1881	1717	4666585	
		9	2	74.1	18	1575.9		4851931	
		10	1	62.6	15			5483962	
		11	1	67.4	15			6577008	
		12	2	60.4	15	946.6		7056458	
		13	1	51.6	7			7440565	
		14	2	93.6	13	1476.4		8285629	
		15	3	97.5	8	1675.5	1795.5	8889250	
		16	3	73.7	6	1463.3	1294.3	9442593	
		17	2	91.3	9	916.7		9726948	
		18	1	56.5	7			10209408	
		19	2	72.6	14	1831.4		10836022	
		20	3	64.7	16	1625.3	1406.3	11597510	

Test Mode		Mode 1							
Frequency		5.250~5.350 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
15	5313	1	3	74.8	15	1654.2	1233.2	145982	1
		2	1	89.9	5			1058238	
		3	3	58.4	7	1156.6	1161.6	1435873	
		4	2	69.9	10	1722.1		2058964	
		5	2	52.6	16	1393.4		2799658	
		6	3	51.5	5	1113.5	1706.5	3158357	
		7	1	72.2	12			4215839	
		8	3	79.2	13	1336.8	1332.8	4835982	
		9	2	83.7	7	1758.3		5365821	
		10	1	52.8	5			5793588	
		11	1	86.9	11			6523987	
		12	3	83.5	13	1468.5	1231.5	7233985	
		13	2	73.9	18	1220.1		7736982	
		14	2	60.6	5	1880.4		8536827	
		15	1	86.3	6			8935821	
		16	3	97.4	14	1855.6	912.6	9726853	
		17	1	86.7	11			10236581	
		18	2	50.7	14	1644.3		10836582	
		19	3	60.2	5	1924.8	1679.8	11436882	
16	5318	1	3	67.7	13	1787.3	1501.3	193161	1
		2	2	96	10	1092		840518	
		3	1	74.5	7			1979690	
		4	3	95	8	907	1443	2372262	
		5	2	82.3	10	961.7		2691289	
		6	3	84.1	17	978.9	1507.9	3711257	
		7	1	63	10			4053880	
		8	2	93.6	19	1059.4		5119453	
		9	1	61.4	9			5565324	
		10	1	86	14			6228245	
		11	1	63.3	10			6802603	
		12	3	88.6	6	979.4	984.4	7553159	
		13	2	86.6	9	1035.4		8068688	
		14	3	62.4	16	1234.6	985.6	8939294	
		15	2	65.9	11	1859.1		9445705	
		16	2	51.5	15	1339.5		10042487	
		17	1	98.7	10			10888558	
		18	3	66.3	19	1350.7	1640.7	11906444	

Test Mode		Mode 1							
Frequency		5.250~5.350 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
17	5312	1	2	92.4	13	1522.6		354862	0
		2	2	85.9	16	1893.1		860452	
		3	3	65.9	7	1857.1	1823.1	1526845	
		4	1	95.1	9			2256871	
		5	3	87.1	11	934.9	928.9	2958635	
		6	1	73.5	8			3945874	
		7	2	68.7	8	1508.3		4756882	
		8	3	52.1	11	1324.9	987.9	5036528	
		9	1	76.4	10			5945372	
		10	3	96.4	5	1337.6	1898.6	6852981	
		11	2	83.4	11	1597.6		7535962	
		12	1	96.5	18			8018265	
		13	1	79.7	16			8625478	
		14	1	73	14			9347658	
		15	2	86.4	13	1439.6		9925348	
		16	3	90.8	17	1502.2	1389.2	10754826	
		17	3	67.1	16	1532.9	1649.9	11458283	
18	5322	1	1	51.3	11			420200	1
		2	3	56.3	12	1767.7	1360.7	1045128	
		3	2	61.7	10	1582.3		2054476	
		4	2	90.5	8	1722.5		2830215	
		5	3	87.8	13	1288.2	1741.2	3432245	
		6	1	50.9	19			4196566	
		7	1	54.4	12			4953029	
		8	2	91.6	18	1612.4		6311483	
		9	3	87.7	6	1436.3	1258.3	7141870	
		10	3	65.7	16	1723.3	1896.3	7944048	
		11	1	75.3	12			8374995	
		12	2	73.7	15	1892.3		9016434	
		13	2	96.2	13	1411.8		10197913	
		14	1	70.1	12			10817077	
		15	3	52.7	13	1021.3	1393.3	11848236	

Test Mode		Mode 1							
Frequency		5.250~5.350 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
19	5324	1	1	58.9	15			266760	1
		2	2	89.3	18	1728.7		1250019	
		3	1	53.6	14			1804563	
		4	2	66.6	14	1719.4		2650483	
		5	2	64.2	12	1649.8		3910049	
		6	3	57.4	19	1085.6	1816.6	4529777	
		7	1	64.9	10			5348374	
		8	2	69	19	1700		6227024	
		9	2	62	16	1885		7189539	
		10	3	69.2	8	1711.8	1049.8	8019511	
		11	3	80.1	19	1763.9	1461.9	8711083	
		12	1	84.4	9			9670463	
		13	3	59.6	19	1597.4	1092.4	10840806	
		14	3	69.7	17	1392.3	1694.3	11966423	
20	5315	1	2	96.9	19	1008.1		283689	1
		2	2	99	19	1492		1676999	
		3	3	87.1	13	989.9	1019.9	2426967	
		4	1	61.1	18			3625360	
		5	3	62.2	11	1243.8	1766.8	5925658	
		6	1	76	10			6865716	
		7	3	87.2	17	1144.8	1665.8	7529060	
		8	2	81.5	15	1055.5		9383932	
		9	1	69.8	17			10622080	
		10	2	92	19	1683		10957742	
21	5319	1	2	67.2	2	1432.5		3522	1
		2	1	93.3	8			1642901	
		3	3	95.8	7	1388.6	1342.6	2881972	
		4	2	61.7	13	1642.1		3426072	
		5	2	70.5	9	1765.2		4826843	
		6	1	92.7	15			5325738	
		7	3	86.7	9	1356.2	1567.2	6685502	
		8	1	83.2	17			7854910	
		9	2	88.6	13	1389.3		8926675	
		10	3	65.2	10	1211.6	1588.7	9237628	
		11	2	70.3	14	932.2		10074565	
		12	1	70.8	12			11184205	

Test Mode		Mode 1							
Frequency		5.250~5.350 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
22	5313	1	3	61.2	17	1426.1	1426.1	77457	1
		2	2	72.3	15	1674.1		1764135	
		3	3	69.5	16	1625.1	1621.1	2759349	
		4	1	83.2	13			4821891	
		5	2	82.6	10	1103.8		5492401	
		6	1	89.5	17			6759573	
		7	1	87.4	12			8102166	
		8	3	75.2	4	1379.9	1289.9	9890082	
		9	2	50.7	12	1694.9		11314601	
23	5314	1	1	80.2	9			248517	1
		2	3	54.3	4	1212.6	1276.6	976354	
		3	2	60.8	17	1587.3		1647277	
		4	3	72.5	17	1854.4	1202.4	2491220	
		5	3	74.3	6	1730.7	1117.7	3364667	
		6	1	87.6	8			4854144	
		7	2	74.9	6	1491.9		5632525	
		8	1	74	19			6428577	
		9	3	78.2	9	1716.5	945.7	7327793	
		10	1	90.8	7			7543757	
		11	2	74.8	10	1542.2		8279794	
		12	2	87.5	9	1481.6		9223718	
		13	1	50.3	15			9849588	
		14	3	87.7	13	1546.9	1246.6	10197832	
		15	2	64.2	15	1475.8		11345245	
24	5318	1	3	79.8	14	1346.3	1824.3	432429	1
		2	3	75.6	10	958.6	1762.4	1623461	
		3	1	74.7	11			2254243	
		4	2	62.3	6	1324.3		2724526	
		5	1	61.9	12			3169665	
		6	3	61.5	13	1512.6	1388.7	4347842	
		7	1	94.3	9			5546509	
		8	2	72.5	7	1642.1		6346274	
		9	2	62.7	6	1167.7		7501401	
		10	3	70.2	13	1164.9	1497.8	8203168	
		11	1	58.7	14			9129685	
		12	1	82.4	16			9678762	
		13	3	98.4	9	1421.9	1812.9	10274415	
		14	2	77.3	11	1621.6		11320469	

Test Mode		Mode 1							
Frequency		5.250~5.350 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
25	5320	1	3	93.2	13	1571.2	1867.2	142343	1
		2	2	51.4	13	1346.8		858714	
		3	1	96.4	12			1642231	
		4	3	95.2	9	1764.6	1763.7	2128428	
		5	2	96.7	12	1632.6		2754253	
		6	3	75.6	11	1679.8	1346.8	3624642	
		7	1	62.1	7			4237561	
		8	2	69.8	11	1326.7		4846623	
		9	3	88.3	12	1842.5	1201.4	5498365	
		10	2	71.4	17	1513.7		6237403	
		11	1	54.7	9			6742869	
		12	3	62.3	12	1614.3	1192.3	7379568	
		13	1	57.8	12			8124234	
		14	3	84.6	11	978.3	1194.7	8527236	
		15	1	77.3	12			9346581	
		16	2	63.4	10	1518.1		10292563	
		17	2	89.7	9	1462.2		10775249	
		18	3	65.6	12	1372.6	1218.2	11445468	
26	5316	1	1	55.3	12			453512	0
		2	3	52.7	13	1134.2	1642.1	864234	
		3	2	66.3	16	1347.4		1735103	
		4	2	90.2	13	1756.7		2648041	
		5	3	61.3	8	1647.4	1457.9	3628408	
		6	1	74.5	10			4589847	
		7	2	91.7	6	1127.3		5628008	
		8	1	84.3	11			5953726	
		9	3	84.5	17	1612.2	1743.2	6241079	
		10	1	94.7	7			7351321	
		11	2	91.5	18	1648.7		7642036	
		12	2	62.9	10	1572.3		8637847	
		13	1	82.4	9			9428509	
		14	3	50.7	10	1745.2	1845.1	9654445	
		15	3	70.4	7	927.2	1798.2	10327325	
		16	2	55.3	9	1774.3		11134196	

Test Mode		Mode 1							
Frequency		5.250~5.350 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
27	5328	1	2	78.4	12	1532.5		553748	1
		2	1	70.4	4			647891	
		3	3	71.6	7	1624	1479	1628517	
		4	1	73.7	10			2327762	
		5	1	52.7	13			2512224	
		6	3	87.9	9	1632.3	1208.3	3435572	
		7	2	81.2	10	1419.3		3727399	
		8	3	55.4	10	1478.9	1547.9	4819714	
		9	2	71.7	16	1429.6		4915161	
		10	3	73.8	13	756	1345	5516535	
		11	1	53.7	17			6823881	
		12	2	66.5	11	1749.8		6917663	
		13	3	62.7	6	875.5	1624.5	7428430	
		14	2	93.6	7	754		7924694	
		15	1	64.8	5			8916192	
		16	1	96.2	3			9623622	
		17	2	82.8	15	1315.2		9727724	
		18	3	96.5	10	1346	1324	10123949	
		19	2	54.9	8	1427.1		10790385	
		20	3	95.2	10	1549.9	1512.9	11384046	
28	5328	1	1	95.4	6			273267	1
		2	1	53.2	16			654996	
		3	3	51.6	9	1432.4	1279.4	1278965	
		4	2	63.4	15	1241.9		1846650	
		5	2	79.8	16	1756.9		2549524	
		6	3	77.6	18	1642.6	1428.6	3332297	
		7	3	83.4	17	1432.7	1399.7	3642001	
		8	3	80.2	16	1765	1648	4724585	
		9	2	72.9	17	1649.9		4868931	
		10	1	61.7	13			5516962	
		11	1	65.4	15			6613008	
		12	2	61.8	14	957.6		7127458	
		13	1	52.5	6			7742365	
		14	2	92.7	12	1321.4		8317629	
		15	3	95.6	7	1547.5	1815.5	8776250	
		16	3	72.6	8	1516.3	1315.3	9519593	
		17	2	92.7	10	925.7		9619948	
		18	1	55.4	6			10328408	
		19	2	71.8	13	1759.4		10750022	
		20	3	52.4	15	1637.3	1328.3	11495510	

Test Mode		Mode 1							
Frequency		5.250~5.350 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
29	5314	1	2	91.2	12	1426.6		344862	1
		2	2	86.4	15	1732.1		856752	
		3	3	64.2	8	1746.1	1728.1	1498845	
		4	1	94.3	10			2321871	
		5	3	88.4	10	932.9	937.9	2827635	
		6	1	72.1	9			3854874	
		7	2	67.4	7	1613.3		4647882	
		8	3	51.4	11	1334.9	967.9	5127528	
		9	1	74.3	11			5846372	
		10	3	94.8	6	1327.6	1795.6	6750981	
		11	2	82.1	10	1627.6		7432962	
		12	1	95.7	16			8128265	
		13	1	78.3	15			8567478	
		14	1	72.1	14			9201658	
		15	2	85.7	13	1517.6		9891348	
		16	3	91.3	16	1642.2	1426.2	10274828	
		17	3	68.2	15	1637.9	1527.9	11468285	
30	5324	1	1	61.2	14			251660	1
		2	2	88.4	18	1628.7		1318019	
		3	1	52.1	13			1742563	
		4	2	65.9	15	1678.4		2543483	
		5	2	63.2	13	1658.8		3873049	
		6	3	58.3	18	1129.6	1754.6	4627777	
		7	1	62.9	11			5438374	
		8	2	68.4	17	1627		6357024	
		9	2	63.1	15	1782		7219539	
		10	3	68.2	7	1641.8	1129.8	8128511	
		11	3	79.8	19	1645.9	1518.9	8624083	
		12	1	82.7	10			9714463	
		13	3	60.2	18	1427.4	1128.4	10260806	
		14	3	68.7	16	1384.3	1572.3	11876423	
Detection Percentage (%)									86.67



Test Mode	Mode 1			
Frequency	5.250~5.350 GHz			
Radar Signal	Type 6			
Trial #	Pulses / Hop	Pulse Width (us)	PRI (us)	1=Detection ; 0=No Detection
1	9	1	333	1
2	9	1	333	1
3	9	1	333	1
4	9	1	333	1
5	9	1	333	1
6	9	1	333	1
7	9	1	333	0
8	9	1	333	1
9	9	1	333	1
10	9	1	333	1
11	9	1	333	1
12	9	1	333	1
13	9	1	333	0
14	9	1	333	1
15	9	1	333	1
16	9	1	333	1
17	9	1	333	1
18	9	1	333	1
19	9	1	333	1
20	9	1	333	1
21	9	1	333	1
22	9	1	333	1
23	9	1	333	1
24	9	1	333	1
25	9	1	333	1
26	9	1	333	0
27	9	1	333	1
28	9	1	333	1
29	9	1	333	1
30	9	1	333	1
Detection Percentage (%)				90.00

Test Mode		Mode 1				
Frequency		5.470~5.725 GHz				
Radar Signal		Type 1				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	PRF (Hz)	Pulses / Burst	1=Detection ; 0=No Detection
1	5551	1	638	1567	83	1
2	5552	1	858	1166	62	1
3	5553	1	738	1355	72	1
4	5554	1	538	1859	99	0
5	5555	1	778	1285	68	1
6	5556	1	658	1520	81	1
7	5557	1	3066	326	18	1
8	5558	1	598	1672	89	1
9	5559	1	578	1730	92	1
10	5560	1	698	1433	76	1
11	5561	1	618	1618	86	1
12	5562	1	798	1253	67	1
13	5563	1	678	1475	78	1
14	5564	1	558	1792	95	1
15	5565	1	818	1222	65	1
16	5566	1	1541	649	35	1
17	5567	1	891	1122	60	1
18	5568	1	929	1076	57	1
19	5569	1	2448	408	22	1
20	5551	1	1833	546	29	1
21	5552	1	1865	536	29	0
22	5553	1	1542	649	35	1
23	5554	1	2995	334	18	1
24	5555	1	1202	832	44	1
25	5556	1	1165	858	46	1
26	5557	1	1244	804	43	1
27	5558	1	2852	351	19	1
28	5559	1	2242	446	24	1
29	5560	1	1157	864	46	1
30	5561	1	1288	776	41	0
Detection Percentage (%)						90.00

Test Mode		Mode 1				
Frequency		5.470~5.725 GHz				
Radar Signal		Type 2				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	PRF (Hz)	Pulses / Burst	1=Detection ; 0=No Detection
1	5551	2.6	228	4386	23	1
2	5552	4.6	150	6667	27	1
3	5553	1.1	184	5435	29	1
4	5554	4.8	203	4926	24	0
5	5555	3.7	189	5291	25	1
6	5556	2.6	201	4975	24	1
7	5557	3.5	216	4630	26	1
8	5558	4.2	194	5155	23	1
9	5559	2.9	225	4444	25	1
10	5560	3.3	206	4854	27	1
11	5561	3.9	213	4695	28	1
12	5562	4.7	159	6289	26	1
13	5563	3.1	167	5988	24	1
14	5564	1.9	217	4608	23	1
15	5565	2.4	162	6173	25	1
16	5566	3.4	204	4902	28	1
17	5567	2.3	170	5882	27	1
18	5568	3.5	184	5435	23	1
19	5569	4.9	150	6667	27	1
20	5551	4.6	211	4739	29	1
21	5552	2.9	158	6329	23	1
22	5553	2.6	226	4425	27	1
23	5554	1.6	204	4902	26	1
24	5555	3.9	181	5525	25	1
25	5556	4.6	202	4950	24	0
26	5557	4.1	194	5155	27	1
27	5558	2.3	193	5181	28	1
28	5559	3.9	173	5780	29	1
29	5560	4.3	188	5319	23	0
30	5561	1.5	215	4651	26	1
Detection Percentage (%)						90.00

Test Mode		Mode 1				
Frequency		5.470~5.725 GHz				
Radar Signal		Type 3				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	PRF (Hz)	Pulses / Burst	1=Detection ; 0=No Detection
1	5551	8	492	2033	16	1
2	5552	6.7	200	5000	18	1
3	5553	8.6	418	2392	16	1
4	5554	9.4	351	2849	17	1
5	5555	7.4	383	2611	18	1
6	5556	9.8	232	4310	16	1
7	5557	7.6	245	4082	18	1
8	5558	8.2	289	3460	17	1
9	5559	6.5	306	3268	18	0
10	5560	7.3	421	2375	16	1
11	5561	7.8	335	2985	18	1
12	5562	8.8	375	2667	17	1
13	5563	9.6	324	3086	16	1
14	5564	9.4	259	3861	18	1
15	5565	6.4	220	4545	17	1
16	5566	7.2	342	2924	16	1
17	5567	9.1	377	2653	17	0
18	5568	9.6	457	2188	16	1
19	5569	8	471	2123	18	1
20	5551	9	304	3289	18	1
21	5552	8	316	3165	17	0
22	5553	9.8	325	3077	16	1
23	5554	8	409	2445	17	1
24	5555	9.9	200	5000	17	1
25	5556	8.8	458	2183	16	1
26	5557	8	232	4310	18	1
27	5558	8.3	250	4000	16	1
28	5559	8.7	270	3704	16	1
29	5560	7.7	350	2857	17	1
30	5561	7.1	230	4348	16	1
Detection Percentage (%)						90.00

Test Mode		Mode 1				
Frequency		5.470~5.725 GHz				
Radar Signal		Type 4				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	PRF (Hz)	Pulses / Burst	1=Detection ; 0=No Detection
1	5551	18	493	2028	15	1
2	5552	19.9	200	5000	12	0
3	5553	12.9	487	2053	14	1
4	5554	13.7	377	2653	13	1
5	5555	15.6	462	2165	15	1
6	5556	18.4	358	2793	16	1
7	5557	13.4	267	3745	12	1
8	5558	15.7	349	2865	14	1
9	5559	19.1	409	2445	15	0
10	5560	18.2	423	2364	16	1
11	5561	13.2	325	3077	13	1
12	5562	14.6	264	3788	12	1
13	5563	18.6	326	3067	14	1
14	5564	15	452	2212	13	1
15	5565	16.3	230	4348	12	1
16	5566	19.8	238	4202	13	1
17	5567	18.2	420	2381	16	1
18	5568	16.3	452	2212	15	1
19	5569	14.2	495	2020	12	1
20	5551	17.8	228	4386	16	0
21	5552	19.1	211	4739	16	1
22	5553	18.4	283	3534	15	1
23	5554	11.8	411	2433	12	1
24	5555	14.2	284	3521	13	1
25	5556	13.9	202	4950	12	1
26	5557	17.8	340	2941	14	0
27	5558	15.6	290	3448	16	1
28	5559	14.6	250	4000	16	1
29	5560	14.4	484	2066	15	1
30	5561	18.9	387	2584	13	1
Detection Percentage (%)						86.67

Test Mode		Mode 1							
Frequency		5.470~5.725 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
1	5556	1	2	51.7	7	1146.3		647836	0
		2	1	93.2	15			1409398	
		3	3	79.6	10	1290.4	964.4	2872945	
		4	2	85.8	14	1559.2		4049183	
		5	2	76.5	14	1210.5	1553.5	4494059	
		6	1	61.7	8			5716328	
		7	3	83.6	7	1205.4	993.4	7308202	
		8	1	59.8	5			8119962	
		9	2	69.9	10	1355.1		9532813	
		10	3	94.3	10	1747.7	1408.7	10751035	
		11	2	61.8	18	1000.2		11053268	
2	5565	1	2	66.3	2	1226.7		3658	0
		2	1	94.2	9			1529901	
		3	3	96.7	6	75	5	2951972	
		4	2	60.8	11	1703.1		3038072	
		5	2	70	8	1886.2		4885843	
		6	1	93	16			5281738	
		7	3	87.7	10	1474.2	1427.2	6746502	
		8	1	84.5	18			7749910	
		9	2	89	12	1302.3		8035675	
		10	3	66.4	11	1031.7	1634.7	9089628	
		11	2	71.5	15	917.3		10039865	
		12	1	71.1	11			11195005	
3	5567	1	3	76.5	5	1658.5	1885.5	341903	1
		2	3	89.5	5	1162.5	1012.5	1039290	
		3	1	92.5	15			2530435	
		4	2	82.5	5	1869.5		3352797	
		5	1	68.5	9			3783207	
		6	3	78.3	17	1239.7	936.7	5292381	
		7	1	91	6			6334407	
		8	2	59.3	7	1898.7		6688649	
		9	2	58	13	1884		7600600	
		10	3	92.8	17	1029.2	1258.2	8865035	
		11	1	77.4	10			9464201	
		12	3	90.8	10	1219.2	1458.2	10488185	
		13	2	87.9	8	1764.1		11914643	

Test Mode		Mode 1							
Frequency		5.470~5.725 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
4	5561	1	3	50.9	16	1321.1	1333.1	77627	1
		2	2	73.9	16	1538.1		2317135	
		3	3	71.9	17	1596.1	1584.1	2684349	
		4	1	54.3	14			4779891	
		5	2	84.2	9	1055.8		5502401	
		6	1	99.3	18			6827573	
		7	1	89.5	13			8051166	
		8	3	78.1	5	1436.9	1262.9	9980082	
		9	2	51.1	13	1700.9		11274601	
5	5568	1	1	81.8	7			255617	0
		2	3	55.4	5	1016.6	1310.6	929954	
		3	2	61.7	18	1616.3		1699277	
		4	3	78.6	19	1882.4	1115.4	2516220	
		5	3	75.3	7	1730.7	1082.7	3350667	
		6	1	88.6	7			4671144	
		7	2	74.1	5	1510.9		5553525	
		8	1	75	18			6315577	
		9	3	79.5	8	1722.5	925.5	7021793	
		10	1	91.5	6			7652757	
		11	2	74.8	9	1531.2		8144794	
		12	2	88.4	10	1475.6		9507618	
		13	1	51.7	16			9965188	
		14	3	88.1	12	1605.9	1230.9	10600830	
		15	2	63.2	16	1448.8		11228243	
6	5567	1	3	81.6	15	1326.4	1816.4	420027	1
		2	3	81.6	9	960.4	1855.4	1213961	
		3	1	73.5	12			2412241	
		4	2	61.7	5	1305.3		2705526	
		5	1	63.1	15			4149665	
		6	3	61.4	15	1499.6	1396.6	4418842	
		7	1	99.3	11			5456509	
		8	2	74.9	5	1604.1		6153274	
		9	2	64.3	7	1079.7		7420401	
		10	3	71.1	15	1154.9	1510.9	8105166	
		11	1	59.4	12			9087685	
		12	1	84.5	17			9743762	
		13	3	99.1	11	1357.9	1730.9	10514412	
		14	2	78.4	12	1576.6		11920466	

Test Mode		Mode 1							
Frequency		5.470~5.725 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
7	5567	1	2	59.5	14	1515.5		154623	1
		2	1	71.2	5			860435	
		3	3	72.1	13	1820.9	1327.9	1566260	
		4	2	50.4	19	1603.6		2272135	
		5	3	99.2	11	1157.8	1085.8	2977376	
		6	1	53.8	13			3682861	
		7	2	93.4	7	1133.6		4388707	
		8	3	59.4	7	1374.6	993.6	5094518	
		9	2	53.6	13	1092.4		5799787	
		10	1	59.8	8			6505670	
		11	3	97.7	6	1593.3	1125.3	7209959	
		12	1	84.2	10			7915377	
		13	3	93.2	9	1104.8	1300.8	8619959	
		14	1	97.7	11			9326217	
		15	2	71.2	6	1580.8		10032059	
		16	2	79.8	8	1537.2		10736631	
		8	5559	1	3	95.8	12	1628.2	
2	2			52.2	15	1291.8		865214	
3	1			99.9	11			1685231	
4	3			97.4	8	1853.6	1822.6	2035426	
5	2			98.4	11	1706.6		2846253	
6	3			74.2	12	1752.8	1348.8	3625642	
7	1			63.1	6			4123561	
8	2			70.3	13	1127.7		4953621	
9	3			85.5	10	1782.5	1179.5	5512365	
10	2			73.3	18	1409.7		6125403	
11	1			50.9	10			6865868	
12	3			64.7	13	1564.3	1184.3	7421568	
13	1			56.1	10			8088234	
14	3			86.3	12	980.7	1184.7	8645235	
15	1			78	13			9236581	
16	2			62.9	11	1426.1		10132561	
17	2			88.8	10	1513.2		10765249	
18	3			67.4	14	1249.6	1172.6	11235461	



Test Mode		Mode 1							
Frequency		5.470~5.725 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
9	5553	1	3	13	13	1499.3	1528.3	125412	1
		2	1	17	17			782539	
		3	3	17	17	1939.3	1576.3	1526841	
		4	1	11	11			2156487	
		5	1	14	14			2651285	
		6	3	9	9	1629.4	1414.4	3326582	
		7	2	7	7	1535.8		3988625	
		8	3	14	14	1343	1104	4725418	
		9	2	14	14	1553.1		5326874	
		10	3	13	13	1520.9	918.9	5933652	
		11	1	13	13			6529425	
		12	2	11	11	1028.4		7149632	
		13	3	15	15	1525.4	1407.4	7759932	
		14	2	19	19	1369.6		8425981	
		15	1	8	8			9258412	
		16	1	9	9			9925874	
		17	2	9	9	1050.3		1026582	
		18	3	5	5	1701.2	1173.2	10963658	
		19	2	6	6	1305.2		11456981	
10	5567	1	1	60.7	9			353222	1
		2	3	59.2	13	1331.8	1077.8	1659461	
		3	2	96.1	8	1237.9		3432174	
		4	3	70.5	16	1145.5	1708.5	5432909	
		5	2	63.2	13	1721.8		6953575	
		6	1	51.5	7			8826390	
		7	1	89.1	5			10242227	
		8	2	86.1	12	1499.9		10759333	

Test Mode		Mode 1							
Frequency		5.470~5.725 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
11	5552	1	1	57.4	14			472419	1
		2	3	83.9	15	1079.1	1717.1	861133	
		3	2	67.1	17	1333.9		1822100	
		4	2	91.3	14	1877.7		2679041	
		5	3	60.1	9	1784.9	1515.9	3219408	
		6	1	72.3	11			4454844	
		7	2	92.6	7	1077.4		5169008	
		8	1	86.2	12			5476228	
		9	3	86.8	18	1713.2	1589.2	6009079	
		10	1	98.7	6			7247320	
		11	2	90.2	19	1747.8		7640035	
		12	2	63.9	9	1657.1		8752849	
		13	1	73.2	11			9365509	
		14	3	51.9	9	1842.1	1910.1	9792446	
		15	3	71.8	6	931.2	1825.2	10872322	
		16	2	56.9	8	1860.1		11513196	
12	5565	1	2	80.5	10	1697.5		546448	1
		2	1	72.8	5			648691	
		3	3	71	8	1728	1497	1673517	
		4	1	75.9	10			2025762	
		5	1	54.5	11			2534224	
		6	3	89.7	11	1854.3	1023.3	3251572	
		7	2	81.7	13	1285.3		3757399	
		8	3	59.1	10	1476.9	1529.9	4604714	
		9	2	73.4	15	1281.6		4987161	
		10	3	76	13	993	1043	5610535	
		11	1	55.3	19			6424881	
		12	2	70.2	11	1911.8		6679663	
		13	3	60.5	5	939.5	1600.5	7239430	
		14	2	95	5	964		7924694	
		15	1	68.6	6			8552192	
		16	1	99.3	5			9466622	
		17	2	84.8	18	1172.2		9696724	
		18	3	97	10	1390	1123	10603979	
		19	2	56.9	5	1291.1		10940382	
		20	3	97.1	7	1558.9	1362.9	11654047	

Test Mode		Mode 1							
Frequency		5.470~5.725 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
13	5552	1	2	96.9	19	1008.1		283689	1
		2	2	99	19	1492		1676999	
		3	3	87.1	13	989.9	1019.9	2426967	
		4	1	61.1	18			3625360	
		5	3	62.2	11	1243.8	1766.8	5925658	
		6	1	76	10			6865716	
		7	3	87.2	17	1144.8	1665.8	7529060	
		8	2	81.5	15	1055.5		9383932	
		9	1	69.8	17			10622080	
		10	2	92	19	1683		10957742	
14	5554	1	1	96.7	7			288367	1
		2	1	54.7	17			660896	
		3	3	52.6	10	1536.4	1334.4	1309965	
		4	2	64.1	17	1168.9		1923650	
		5	2	80.1	18	1808.9		2620524	
		6	3	78.4	19	1726.6	1378.6	3143297	
		7	3	84.3	17	1539.7	1402.7	3735001	
		8	3	81	17	1881	1717	4666585	
		9	2	74.1	18	1575.9		4851931	
		10	1	62.6	15			5483962	
		11	1	67.4	15			6577008	
		12	2	60.4	15	946.6		7056458	
		13	1	51.6	7			7440565	
		14	2	93.6	13	1476.4		8285629	
		15	3	97.5	8	1675.5	1795.5	8889250	
		16	3	73.7	6	1463.3	1294.3	9442593	
		17	2	91.3	9	916.7		9726948	
		18	1	56.5	7			10209408	
		19	2	72.6	14	1831.4		10836022	
		20	3	64.7	16	1625.3	1406.3	11597510	

Test Mode		Mode 1							
Frequency		5.470~5.725 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
15	5558	1	3	74.8	15	1654.2	1233.2	145982	1
		2	1	89.9	5			1058238	
		3	3	58.4	7	1156.6	1161.6	1435873	
		4	2	69.9	10	1722.1		2058964	
		5	2	52.6	16	1393.4		2799658	
		6	3	51.5	5	1113.5	1706.5	3158357	
		7	1	72.2	12			4215839	
		8	3	79.2	13	1336.8	1332.8	4835982	
		9	2	83.7	7	1758.3		5365821	
		10	1	52.8	5			5793588	
		11	1	86.9	11			6523987	
		12	3	83.5	13	1468.5	1231.5	7233985	
		13	2	73.9	18	1220.1		7736982	
		14	2	60.6	5	1880.4		8536827	
		15	1	86.3	6			8935821	
		16	3	97.4	14	1855.6	912.6	9726853	
		17	1	86.7	11			10236581	
		18	2	50.7	14	1644.3		10836582	
		19	3	60.2	5	1924.8	1679.8	11436882	
16	5554	1	3	67.7	13	1787.3	1501.3	193161	1
		2	2	96	10	1092		840518	
		3	1	74.5	7			1979690	
		4	3	95	8	907	1443	2372262	
		5	2	82.3	10	961.7		2691289	
		6	3	84.1	17	978.9	1507.9	3711257	
		7	1	63	10			4053880	
		8	2	93.6	19	1059.4		5119453	
		9	1	61.4	9			5565324	
		10	1	86	14			6228245	
		11	1	63.3	10			6802603	
		12	3	88.6	6	979.4	984.4	7553159	
		13	2	86.6	9	1035.4		8068688	
		14	3	62.4	16	1234.6	985.6	8939294	
		15	2	65.9	11	1859.1		9445705	
		16	2	51.5	15	1339.5		10042487	
		17	1	98.7	10			10888558	
		18	3	66.3	19	1350.7	1640.7	11906444	

Test Mode		Mode 1							
Frequency		5.470~5.725 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
17	5559	1	2	92.4	13	1522.6		354862	1
		2	2	85.9	16	1893.1		860452	
		3	3	65.9	7	1857.1	1823.1	1526845	
		4	1	95.1	9			2256871	
		5	3	87.1	11	934.9	928.9	2958635	
		6	1	73.5	8			3945874	
		7	2	68.7	8	1508.3		4756882	
		8	3	52.1	11	1324.9	987.9	5036528	
		9	1	76.4	10			5945372	
		10	3	96.4	5	1337.6	1898.6	6852981	
		11	2	83.4	11	1597.6		7535962	
		12	1	96.5	18			8018265	
		13	1	79.7	16			8625478	
		14	1	73	14			9347658	
		15	2	86.4	13	1439.6		9925348	
		16	3	90.8	17	1502.2	1389.2	10754826	
		17	3	67.1	16	1532.9	1649.9	11458283	
18	5568	1	1	51.3	11			420200	1
		2	3	56.3	12	1767.7	1360.7	1045128	
		3	2	61.7	10	1582.3		2054476	
		4	2	90.5	8	1722.5		2830215	
		5	3	87.8	13	1288.2	1741.2	3432245	
		6	1	50.9	19			4196566	
		7	1	54.4	12			4953029	
		8	2	91.6	18	1612.4		6311483	
		9	3	87.7	6	1436.3	1258.3	7141870	
		10	3	65.7	16	1723.3	1896.3	7944048	
		11	1	75.3	12			8374995	
		12	2	73.7	15	1892.3		9016434	
		13	2	96.2	13	1411.8		10197913	
		14	1	70.1	12			10817077	
		15	3	52.7	13	1021.3	1393.3	11848236	

Test Mode		Mode 1							
Frequency		5.470~5.725 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
19	5561	1	1	58.9	15			266760	1
		2	2	89.3	18	1728.7		1250019	
		3	1	53.6	14			1804563	
		4	2	66.6	14	1719.4		2650483	
		5	2	64.2	12	1649.8		3910049	
		6	3	57.4	19	1085.6	1816.6	4529777	
		7	1	64.9	10			5348374	
		8	2	69	19	1700		6227024	
		9	2	62	16	1885		7189539	
		10	3	69.2	8	1711.8	1049.8	8019511	
		11	3	80.1	19	1763.9	1461.9	8711083	
		12	1	84.4	9			9670463	
		13	3	59.6	19	1597.4	1092.4	10840806	
		14	3	69.7	17	1392.3	1694.3	11966423	
20	5556	1	2	96.9	19	1008.1		283689	1
		2	2	99	19	1492		1676999	
		3	3	87.1	13	989.9	1019.9	2426967	
		4	1	61.1	18			3625360	
		5	3	62.2	11	1243.8	1766.8	5925658	
		6	1	76	10			6865716	
		7	3	87.2	17	1144.8	1665.8	7529060	
		8	2	81.5	15	1055.5		9383932	
		9	1	69.8	17			10622080	
		10	2	92	19	1683		10957742	
21	5562	1	2	67.2	2	1432.5		3522	0
		2	1	93.3	8			1642901	
		3	3	95.8	7	1388.6	1342.6	2881972	
		4	2	61.7	13	1642.1		3426072	
		5	2	70.5	9	1765.2		4826843	
		6	1	92.7	15			5325738	
		7	3	86.7	9	1356.2	1567.2	6685502	
		8	1	83.2	17			7854910	
		9	2	88.6	13	1389.3		8926675	
		10	3	65.2	10	1211.6	1588.7	9237628	
		11	2	70.3	14	932.2		10074565	
		12	1	70.8	12			11184205	

Test Mode		Mode 1							
Frequency		5.470~5.725 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
22	5552	1	3	61.2	17	1426.1	1426.1	77457	0
		2	2	72.3	15	1674.1		1764135	
		3	3	69.5	16	1625.1	1621.1	2759349	
		4	1	83.2	13			4821891	
		5	2	82.6	10	1103.8		5492401	
		6	1	89.5	17			6759573	
		7	1	87.4	12			8102166	
		8	3	75.2	4	1379.9	1289.9	9890082	
		9	2	50.7	12	1694.9		11314601	
23	5555	1	1	80.2	9			248517	1
		2	3	54.3	4	1212.6	1276.6	976354	
		3	2	60.8	17	1587.3		1647277	
		4	3	72.5	17	1854.4	1202.4	2491220	
		5	3	74.3	6	1730.7	1117.7	3364667	
		6	1	87.6	8			4854144	
		7	2	74.9	6	1491.9		5632525	
		8	1	74	19			6428577	
		9	3	78.2	9	1716.5	945.7	7327793	
		10	1	90.8	7			7543757	
		11	2	74.8	10	1542.2		8279794	
		12	2	87.5	9	1481.6		9223718	
		13	1	50.3	15			9849588	
		14	3	87.7	13	1546.9	1246.6	10197832	
		15	2	64.2	15	1475.8		11345245	
24	5557	1	3	79.8	14	1346.3	1824.3	432429	1
		2	3	75.6	10	958.6	1762.4	1623461	
		3	1	74.7	11			2254243	
		4	2	62.3	6	1324.3		2724526	
		5	1	61.9	12			3169665	
		6	3	61.5	13	1512.6	1388.7	4347842	
		7	1	94.3	9			5546509	
		8	2	72.5	7	1642.1		6346274	
		9	2	62.7	6	1167.7		7501401	
		10	3	70.2	13	1164.9	1497.8	8203168	
		11	1	58.7	14			9129685	
		12	1	82.4	16			9678762	
		13	3	98.4	9	1421.9	1812.9	10274415	
		14	2	77.3	11	1621.6		11320469	

Test Mode		Mode 1							
Frequency		5.470~5.725 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
25	5555	1	3	93.2	13	1571.2	1867.2	142343	1
		2	2	51.4	13	1346.8		858714	
		3	1	96.4	12			1642231	
		4	3	95.2	9	1764.6	1763.7	2128428	
		5	2	96.7	12	1632.6		2754253	
		6	3	75.6	11	1679.8	1346.8	3624642	
		7	1	62.1	7			4237561	
		8	2	69.8	11	1326.7		4846623	
		9	3	88.3	12	1842.5	1201.4	5498365	
		10	2	71.4	17	1513.7		6237403	
		11	1	54.7	9			6742869	
		12	3	62.3	12	1614.3	1192.3	7379568	
		13	1	57.8	12			8124234	
		14	3	84.6	11	978.3	1194.7	8527236	
		15	1	77.3	12			9346581	
		16	2	63.4	10	1518.1		10292563	
		17	2	89.7	9	1462.2		10775249	
		18	3	65.6	12	1372.6	1218.2	11445468	
26	5555	1	1	55.3	12			453512	1
		2	3	52.7	13	1134.2	1642.1	864234	
		3	2	66.3	16	1347.4		1735103	
		4	2	90.2	13	1756.7		2648041	
		5	3	61.3	8	1647.4	1457.9	3628408	
		6	1	74.5	10			4589847	
		7	2	91.7	6	1127.3		5628008	
		8	1	84.3	11			5953726	
		9	3	84.5	17	1612.2	1743.2	6241079	
		10	1	94.7	7			7351321	
		11	2	91.5	18	1648.7		7642036	
		12	2	62.9	10	1572.3		8637847	
		13	1	82.4	9			9428509	
		14	3	50.7	10	1745.2	1845.1	9654445	
		15	3	70.4	7	927.2	1798.2	10327325	
		16	2	55.3	9	1774.3		11134196	



Test Mode		Mode 1							
Frequency		5.470~5.725 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
27	5568	1	2	78.4	12	1532.5		553748	1
		2	1	70.4	4			647891	
		3	3	71.6	7	1624	1479	1628517	
		4	1	73.7	10			2327762	
		5	1	52.7	13			2512224	
		6	3	87.9	9	1632.3	1208.3	3435572	
		7	2	81.2	10	1419.3		3727399	
		8	3	55.4	10	1478.9	1547.9	4819714	
		9	2	71.7	16	1429.6		4915161	
		10	3	73.8	13	756	1345	5516535	
		11	1	53.7	17			6823881	
		12	2	66.5	11	1749.8		6917663	
		13	3	62.7	6	875.5	1624.5	7428430	
		14	2	93.6	7	754		7924694	
		15	1	64.8	5			8916192	
		16	1	96.2	3			9623622	
		17	2	82.8	15	1315.2		9727724	
		18	3	96.5	10	1346	1324	10123949	
		19	2	54.9	8	1427.1		10790385	
		20	3	95.2	10	1549.9	1512.9	11384046	
28	5567	1	1	95.4	6			273267	1
		2	1	53.2	16			654996	
		3	3	51.6	9	1432.4	1279.4	1278965	
		4	2	63.4	15	1241.9		1846650	
		5	2	79.8	16	1756.9		2549524	
		6	3	77.6	18	1642.6	1428.6	3332297	
		7	3	83.4	17	1432.7	1399.7	3642001	
		8	3	80.2	16	1765	1648	4724585	
		9	2	72.9	17	1649.9		4868931	
		10	1	61.7	13			5516962	
		11	1	65.4	15			6613008	
		12	2	61.8	14	957.6		7127458	
		13	1	52.5	6			7742365	
		14	2	92.7	12	1321.4		8317629	
		15	3	95.6	7	1547.5	1815.5	8776250	
		16	3	72.6	8	1516.3	1315.3	9519593	
		17	2	92.7	10	925.7		9619948	
		18	1	55.4	6			10328408	
		19	2	71.8	13	1759.4		10750022	
		20	3	52.4	15	1637.3	1328.3	11495510	

Test Mode		Mode 1							
Frequency		5.470~5.725 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
29	5555	1	2	91.2	12	1426.6		344862	1
		2	2	86.4	15	1732.1		856752	
		3	3	64.2	8	1746.1	1728.1	1498845	
		4	1	94.3	10			2321871	
		5	3	88.4	10	932.9	937.9	2827635	
		6	1	72.1	9			3854874	
		7	2	67.4	7	1613.3		4647882	
		8	3	51.4	11	1334.9	967.9	5127528	
		9	1	74.3	11			5846372	
		10	3	94.8	6	1327.6	1795.6	6750981	
		11	2	82.1	10	1627.6		7432962	
		12	1	95.7	16			8128265	
		13	1	78.3	15			8567478	
		14	1	72.1	14			9201658	
		15	2	85.7	13	1517.6		9891348	
		16	3	91.3	16	1642.2	1426.2	10274828	
		17	3	68.2	15	1637.9	1527.9	11468285	
30	5560	1	1	61.2	14			251660	1
		2	2	88.4	18	1628.7		1318019	
		3	1	52.1	13			1742563	
		4	2	65.9	15	1678.4		2543483	
		5	2	63.2	13	1658.8		3873049	
		6	3	58.3	18	1129.6	1754.6	4627777	
		7	1	62.9	11			5438374	
		8	2	68.4	17	1627		6357024	
		9	2	63.1	15	1782		7219539	
		10	3	68.2	7	1641.8	1129.8	8128511	
		11	3	79.8	19	1645.9	1518.9	8624083	
		12	1	82.7	10			9714463	
		13	3	60.2	18	1427.4	1128.4	10260806	
		14	3	68.7	16	1384.3	1572.3	11876423	
Detection Percentage (%)									90.00

Test Mode	Mode 1			
Frequency	5.470~5.725 GHz			
Radar Signal	Type 6			
Trial #	Pulses / Hop	Pulse Width (us)	PRI (us)	1=Detection ; 0=No Detection
1	9	1	333	1
2	9	1	333	1
3	9	1	333	1
4	9	1	333	0
5	9	1	333	1
6	9	1	333	1
7	9	1	333	1
8	9	1	333	1
9	9	1	333	1
10	9	1	333	1
11	9	1	333	1
12	9	1	333	1
13	9	1	333	1
14	9	1	333	1
15	9	1	333	1
16	9	1	333	1
17	9	1	333	0
18	9	1	333	1
19	9	1	333	1
20	9	1	333	1
21	9	1	333	1
22	9	1	333	1
23	9	1	333	1
24	9	1	333	1
25	9	1	333	0
26	9	1	333	1
27	9	1	333	1
28	9	1	333	1
29	9	1	333	1
30	9	1	333	1
Detection Percentage (%)				90.00

Test Mode		Mode 1				
Frequency		5.600~5.650 GHz				
Radar Signal		Type 1				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	PRF (Hz)	Pulses / Burst	1=Detection ; 0=No Detection
1	5611	1	638	1567	83	1
2	5612	1	858	1166	62	1
3	5613	1	738	1355	72	1
4	5614	1	538	1859	99	1
5	5615	1	778	1285	68	0
6	5616	1	658	1520	81	1
7	5617	1	3066	326	18	1
8	5618	1	598	1672	89	1
9	5619	1	578	1730	92	1
10	5620	1	698	1433	76	1
11	5621	1	618	1618	86	1
12	5622	1	798	1253	67	1
13	5623	1	678	1475	78	1
14	5624	1	558	1792	95	1
15	5625	1	818	1222	65	1
16	5626	1	1541	649	35	1
17	5627	1	891	1122	60	0
18	5628	1	929	1076	57	1
19	5629	1	2448	408	22	1
20	5611	1	1833	546	29	1
21	5612	1	1865	536	29	1
22	5613	1	1542	649	35	1
23	5614	1	2995	334	18	0
24	5615	1	1202	832	44	1
25	5616	1	1165	858	46	1
26	5617	1	1244	804	43	1
27	5618	1	2852	351	19	1
28	5619	1	2242	446	24	1
29	5620	1	1157	864	46	1
30	5621	1	1288	776	41	1
Detection Percentage (%)						90.00

Test Mode		Mode 1				
Frequency		5.600~5.650 GHz				
Radar Signal		Type 2				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	PRF (Hz)	Pulses / Burst	1=Detection ; 0=No Detection
1	5611	2.6	228	4386	23	1
2	5612	4.6	150	6667	27	1
3	5613	1.1	184	5435	29	1
4	5614	4.8	203	4926	24	1
5	5615	3.7	189	5291	25	1
6	5616	2.6	201	4975	24	1
7	5617	3.5	216	4630	26	1
8	5618	4.2	194	5155	23	0
9	5619	2.9	225	4444	25	1
10	5620	3.3	206	4854	27	1
11	5621	3.9	213	4695	28	1
12	5622	4.7	159	6289	26	1
13	5623	3.1	167	5988	24	1
14	5624	1.9	217	4608	23	1
15	5625	2.4	162	6173	25	1
16	5626	3.4	204	4902	28	1
17	5627	2.3	170	5882	27	0
18	5628	3.5	184	5435	23	1
19	5629	4.9	150	6667	27	1
20	5611	4.6	211	4739	29	1
21	5612	2.9	158	6329	23	1
22	5613	2.6	226	4425	27	1
23	5614	1.6	204	4902	26	0
24	5615	3.9	181	5525	25	1
25	5616	4.6	202	4950	24	1
26	5617	4.1	194	5155	27	1
27	5618	2.3	193	5181	28	1
28	5619	3.9	173	5780	29	1
29	5620	4.3	188	5319	23	0
30	5621	1.5	215	4651	26	1
Detection Percentage (%)						86.67

Test Mode		Mode 1				
Frequency		5.600~5.650 GHz				
Radar Signal		Type 3				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	PRF (Hz)	Pulses / Burst	1=Detection ; 0=No Detection
1	5611	8	492	2033	16	1
2	5612	6.7	200	5000	18	0
3	5613	8.6	418	2392	16	1
4	5614	9.4	351	2849	17	1
5	5615	7.4	383	2611	18	1
6	5616	9.8	232	4310	16	1
7	5617	7.6	245	4082	18	1
8	5618	8.2	289	3460	17	1
9	5619	6.5	306	3268	18	1
10	5620	7.3	421	2375	16	1
11	5621	7.8	335	2985	18	1
12	5622	8.8	375	2667	17	1
13	5623	9.6	324	3086	16	0
14	5624	9.4	259	3861	18	1
15	5625	6.4	220	4545	17	1
16	5626	7.2	342	2924	16	1
17	5627	9.1	377	2653	17	1
18	5628	9.6	457	2188	16	1
19	5629	8	471	2123	18	1
20	5611	9	304	3289	18	1
21	5612	8	316	3165	17	0
22	5613	9.8	325	3077	16	1
23	5614	8	409	2445	17	1
24	5615	9.9	200	5000	17	1
25	5616	8.8	458	2183	16	0
26	5617	8	232	4310	18	1
27	5618	8.3	250	4000	16	1
28	5619	8.7	270	3704	16	1
29	5620	7.7	350	2857	17	1
30	5621	7.1	230	4348	16	1
Detection Percentage (%)						86.67

Test Mode		Mode 1				
Frequency		5.600~5.650 GHz				
Radar Signal		Type 4				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	PRF (Hz)	Pulses / Burst	1=Detection ; 0=No Detection
1	5611	18	493	2028	15	1
2	5612	19.9	200	5000	12	1
3	5613	12.9	487	2053	14	0
4	5614	13.7	377	2653	13	1
5	5615	15.6	462	2165	15	1
6	5616	18.4	358	2793	16	0
7	5617	13.4	267	3745	12	1
8	5618	15.7	349	2865	14	1
9	5619	19.1	409	2445	15	1
10	5620	18.2	423	2364	16	1
11	5621	13.2	325	3077	13	0
12	5622	14.6	264	3788	12	1
13	5623	18.6	326	3067	14	1
14	5624	15	452	2212	13	1
15	5625	16.3	230	4348	12	1
16	5626	19.8	238	4202	13	1
17	5627	18.2	420	2381	16	1
18	5628	16.3	452	2212	15	1
19	5629	14.2	495	2020	12	1
20	5611	17.8	228	4386	16	1
21	5612	19.1	211	4739	16	1
22	5613	18.4	283	3534	15	1
23	5614	11.8	411	2433	12	1
24	5615	14.2	284	3521	13	1
25	5616	13.9	202	4950	12	0
26	5617	17.8	340	2941	14	1
27	5618	15.6	290	3448	16	1
28	5619	14.6	250	4000	16	1
29	5620	14.4	484	2066	15	1
30	5621	18.9	387	2584	13	1
Detection Percentage (%)						86.67

Test Mode		Mode 1							
Frequency		5.600~5.650 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
1	5294	1	2	51.7	7	1146.3		647836	0
		2	1	93.2	15			1409398	
		3	3	79.6	10	1290.4	964.4	2872945	
		4	2	85.8	14	1559.2		4049183	
		5	2	76.5	14	1210.5	1553.5	4494059	
		6	1	61.7	8			5716328	
		7	3	83.6	7	1205.4	993.4	7308202	
		8	1	59.8	5			8119962	
		9	2	69.9	10	1355.1		9532813	
		10	3	94.3	10	1747.7	1408.7	10751035	
		11	2	61.8	18	1000.2		11053268	
2	5292	1	2	66.3	2	1226.7		3658	0
		2	1	94.2	9			1529901	
		3	3	96.7	6	1255.6	1330.6	2951972	
		4	2	60.8	11	1703.1		3038072	
		5	2	70	8	1886.2		4885843	
		6	1	93	16			5281738	
		7	3	87.7	10	1474.2	1427.2	6746502	
		8	1	84.5	18			7749910	
		9	2	89	12	1302.3		8035675	
		10	3	66.4	11	1031.7	1634.7	9089628	
		11	2	71.5	15	917.3		10039865	
		12	1	71.1	11			11195005	
3	5296	1	3	76.5	5	1658.5	1885.5	341903	0
		2	3	89.5	5	1162.5	1012.5	1039290	
		3	1	92.5	15			2530435	
		4	2	82.5	5	1869.5		3352797	
		5	1	68.5	9			3783207	
		6	3	78.3	17	1239.7	936.7	5292381	
		7	1	91	6			6334407	
		8	2	59.3	7	1898.7		6688649	
		9	2	58	13	1884		7600600	
		10	3	92.8	17	1029.2	1258.2	8865035	
		11	1	77.4	10			9464201	
		12	3	90.8	10	1219.2	1458.2	10488185	
		13	2	87.9	8	1764.1		11914643	



Test Mode		Mode 1							
Frequency		5.600~5.650 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
4	5296	1	3	50.9	16	1321.1	1333.1	77627	1
		2	2	73.9	16	1538.1		2317135	
		3	3	71.9	17	1596.1	1584.1	2684349	
		4	1	54.3	14			4779891	
		5	2	84.2	9	1055.8		5502401	
		6	1	99.3	18			6827573	
		7	1	89.5	13			8051166	
		8	3	78.1	5	1436.9	1262.9	9980082	
		9	2	51.1	13	1700.9		11274601	
5	5306	1	1	81.8	7			255617	1
		2	3	55.4	5	1016.6	1310.6	929954	
		3	2	61.7	18	1616.3		1699277	
		4	3	78.6	19	1882.4	1115.4	2516220	
		5	3	75.3	7	1730.7	1082.7	3350667	
		6	1	88.6	7			4671144	
		7	2	74.1	5	1510.9		5553525	
		8	1	75	18			6315577	
		9	3	79.5	8	1722.5	925.5	7021793	
		10	1	91.5	6			7652757	
		11	2	74.8	9	1531.2		8144794	
		12	2	88.4	10	1475.6		9507618	
		13	1	51.7	16			9965188	
		14	3	88.1	12	1605.9	1230.9	10600830	
		15	2	63.2	16	1448.8		11228243	
6	5302	1	3	81.6	15	1326.4	1816.4	420027	1
		2	3	81.6	9	960.4	1855.4	1213961	
		3	1	73.5	12			2412241	
		4	2	61.7	5	1305.3		2705526	
		5	1	63.1	15			4149665	
		6	3	61.4	15	1499.6	1396.6	4418842	
		7	1	99.3	11			5456509	
		8	2	74.9	5	1604.1		6153274	
		9	2	64.3	7	1079.7		7420401	
		10	3	71.1	15	1154.9	1510.9	8105166	
		11	1	59.4	12			9087685	
		12	1	84.5	17			9743762	
		13	3	99.1	11	1357.9	1730.9	10514412	
		14	2	78.4	12	1576.6		11920466	

Test Mode		Mode 1							
Frequency		5.600~5.650 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
7	5304	1	2	59.5	14	1515.5		154623	1
		2	1	71.2	5			860435	
		3	3	72.1	13	1820.9	1327.9	1566260	
		4	2	50.4	19	1603.6		2272135	
		5	3	99.2	11	1157.8	1085.8	2977376	
		6	1	53.8	13			3682861	
		7	2	93.4	7	1133.6		4388707	
		8	3	59.4	7	1374.6	993.6	5094518	
		9	2	53.6	13	1092.4		5799787	
		10	1	59.8	8			6505670	
		11	3	97.7	6	1593.3	1125.3	7209959	
		12	1	84.2	10			7915377	
		13	3	93.2	9	1104.8	1300.8	8619959	
		14	1	97.7	11			9326217	
		15	2	71.2	6	1580.8		10032059	
		16	2	79.8	8	1537.2		10736631	
		8	5296	1	3	95.8	12	1628.2	
2	2			52.2	15	1291.8		865214	
3	1			99.9	11			1685231	
4	3			97.4	8	1853.6	1822.6	2035426	
5	2			98.4	11	1706.6		2846253	
6	3			74.2	12	1752.8	1348.8	3625642	
7	1			63.1	6			4123561	
8	2			70.3	13	1127.7		4953621	
9	3			85.5	10	1782.5	1179.5	5512365	
10	2			73.3	18	1409.7		6125403	
11	1			50.9	10			6865868	
12	3			64.7	13	1564.3	1184.3	7421568	
13	1			56.1	10			8088234	
14	3			86.3	12	980.7	1184.7	8645235	
15	1			78	13			9236581	
16	2			62.9	11	1426.1		10132561	
17	2			88.8	10	1513.2		10765249	
18	3			67.4	14	1249.6	1172.6	11235461	

Test Mode		Mode 1							
Frequency		5.600~5.650 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
9	5292	1	3	13	13	1499.3	1528.3	125412	1
		2	1	17	17			782539	
		3	3	17	17	1939.3	1576.3	1526841	
		4	1	11	11			2156487	
		5	1	14	14			2651285	
		6	3	9	9	1629.4	1414.4	3326582	
		7	2	7	7	1535.8		3988625	
		8	3	14	14	1343	1104	4725418	
		9	2	14	14	1553.1		5326874	
		10	3	13	13	1520.9	918.9	5933652	
		11	1	13	13			6529425	
		12	2	11	11	1028.4		7149632	
		13	3	15	15	1525.4	1407.4	7759932	
		14	2	19	19	1369.6		8425981	
		15	1	8	8			9258412	
		16	1	9	9			9925874	
		17	2	9	9	1050.3		1026582	
		18	3	5	5	1701.2	1173.2	10963658	
		19	2	6	6	1305.2		11456981	
10	5305	1	1	60.7	9			353222	1
		2	3	59.2	13	1331.8	1077.8	1659461	
		3	2	96.1	8	1237.9		3432174	
		4	3	70.5	16	1145.5	1708.5	5432909	
		5	2	63.2	13	1721.8		6953575	
		6	1	51.5	7			8826390	
		7	1	89.1	5			10242227	
		8	2	86.1	12	1499.9		10759333	

Test Mode		Mode 1							
Frequency		5.600~5.650 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
11	5302	1	1	57.4	14			472419	1
		2	3	83.9	15	1079.1	1717.1	861133	
		3	2	67.1	17	1333.9		1822100	
		4	2	91.3	14	1877.7		2679041	
		5	3	60.1	9	1784.9	1515.9	3219408	
		6	1	72.3	11			4454844	
		7	2	92.6	7	1077.4		5169008	
		8	1	86.2	12			5476228	
		9	3	86.8	18	1713.2	1589.2	6009079	
		10	1	98.7	6			7247320	
		11	2	90.2	19	1747.8		7640035	
		12	2	63.9	9	1657.1		8752849	
		13	1	73.2	11			9365509	
		14	3	51.9	9	1842.1	1910.1	9792446	
		15	3	71.8	6	931.2	1825.2	10872322	
		16	2	56.9	8	1860.1		11513196	
12	5294	1	2	80.5	10	1697.5		546448	1
		2	1	72.8	5			648691	
		3	3	71	8	1728	1497	1673517	
		4	1	75.9	10			2025762	
		5	1	54.5	11			2534224	
		6	3	89.7	11	1854.3	1023.3	3251572	
		7	2	81.7	13	1285.3		3757399	
		8	3	59.1	10	1476.9	1529.9	4604714	
		9	2	73.4	15	1281.6		4987161	
		10	3	76	13	993	1043	5610535	
		11	1	55.3	19			6424881	
		12	2	70.2	11	1911.8		6679663	
		13	3	60.5	5	939.5	1600.5	7239430	
		14	2	95	5	964		7924694	
		15	1	68.6	6			8552192	
		16	1	99.3	5			9466622	
		17	2	84.8	18	1172.2		9696724	
		18	3	97	10	1390	1123	10603979	
		19	2	56.9	5	1291.1		10940382	
		20	3	97.1	7	1558.9	1362.9	11654047	

Test Mode		Mode 1							
Frequency		5.600~5.650 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
13	5293	1	2	96.9	19	1008.1		283689	1
		2	2	99	19	1492		1676999	
		3	3	87.1	13	989.9	1019.9	2426967	
		4	1	61.1	18			3625360	
		5	3	62.2	11	1243.8	1766.8	5925658	
		6	1	76	10			6865716	
		7	3	87.2	17	1144.8	1665.8	7529060	
		8	2	81.5	15	1055.5		9383932	
		9	1	69.8	17			10622080	
		10	2	92	19	1683		10957742	
14	5299	1	1	96.7	7			288367	1
		2	1	54.7	17			660896	
		3	3	52.6	10	1536.4	1334.4	1309965	
		4	2	64.1	17	1168.9		1923650	
		5	2	80.1	18	1808.9		2620524	
		6	3	78.4	19	1726.6	1378.6	3143297	
		7	3	84.3	17	1539.7	1402.7	3735001	
		8	3	81	17	1881	1717	4666585	
		9	2	74.1	18	1575.9		4851931	
		10	1	62.6	15			5483962	
		11	1	67.4	15			6577008	
		12	2	60.4	15	946.6		7056458	
		13	1	51.6	7			7440565	
		14	2	93.6	13	1476.4		8285629	
		15	3	97.5	8	1675.5	1795.5	8889250	
		16	3	73.7	6	1463.3	1294.3	9442593	
		17	2	91.3	9	916.7		9726948	
		18	1	56.5	7			10209408	
		19	2	72.6	14	1831.4		10836022	
		20	3	64.7	16	1625.3	1406.3	11597510	

Test Mode		Mode 1							
Frequency		5.600~5.650 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
15	5296	1	3	74.8	15	1654.2	1233.2	145982	1
		2	1	89.9	5			1058238	
		3	3	58.4	7	1156.6	1161.6	1435873	
		4	2	69.9	10	1722.1		2058964	
		5	2	52.6	16	1393.4		2799658	
		6	3	51.5	5	1113.5	1706.5	3158357	
		7	1	72.2	12			4215839	
		8	3	79.2	13	1336.8	1332.8	4835982	
		9	2	83.7	7	1758.3		5365821	
		10	1	52.8	5			5793588	
		11	1	86.9	11			6523987	
		12	3	83.5	13	1468.5	1231.5	7233985	
		13	2	73.9	18	1220.1		7736982	
		14	2	60.6	5	1880.4		8536827	
		15	1	86.3	6			8935821	
		16	3	97.4	14	1855.6	912.6	9726853	
		17	1	86.7	11			10236581	
		18	2	50.7	14	1644.3		10836582	
		19	3	60.2	5	1924.8	1679.8	11436882	
16	5301	1	3	67.7	13	1787.3	1501.3	193161	1
		2	2	96	10	1092		840518	
		3	1	74.5	7			1979690	
		4	3	95	8	907	1443	2372262	
		5	2	82.3	10	961.7		2691289	
		6	3	84.1	17	978.9	1507.9	3711257	
		7	1	63	10			4053880	
		8	2	93.6	19	1059.4		5119453	
		9	1	61.4	9			5565324	
		10	1	86	14			6228245	
		11	1	63.3	10			6802603	
		12	3	88.6	6	979.4	984.4	7553159	
		13	2	86.6	9	1035.4		8068688	
		14	3	62.4	16	1234.6	985.6	8939294	
		15	2	65.9	11	1859.1		9445705	
		16	2	51.5	15	1339.5		10042487	
		17	1	98.7	10			10888558	
		18	3	66.3	19	1350.7	1640.7	11906444	

Test Mode		Mode 1							
Frequency		5.600~5.650 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
17	5294	1	2	92.4	13	1522.6		354862	1
		2	2	85.9	16	1893.1		860452	
		3	3	65.9	7	1857.1	1823.1	1526845	
		4	1	95.1	9			2256871	
		5	3	87.1	11	934.9	928.9	2958635	
		6	1	73.5	8			3945874	
		7	2	68.7	8	1508.3		4756882	
		8	3	52.1	11	1324.9	987.9	5036528	
		9	1	76.4	10			5945372	
		10	3	96.4	5	1337.6	1898.6	6852981	
		11	2	83.4	11	1597.6		7535962	
		12	1	96.5	18			8018265	
		13	1	79.7	16			8625478	
		14	1	73	14			9347658	
		15	2	86.4	13	1439.6		9925348	
		16	3	90.8	17	1502.2	1389.2	10754826	
		17	3	67.1	16	1532.9	1649.9	11458283	
18	5298	1	1	51.3	11			420200	1
		2	3	56.3	12	1767.7	1360.7	1045128	
		3	2	61.7	10	1582.3		2054476	
		4	2	90.5	8	1722.5		2830215	
		5	3	87.8	13	1288.2	1741.2	3432245	
		6	1	50.9	19			4196566	
		7	1	54.4	12			4953029	
		8	2	91.6	18	1612.4		6311483	
		9	3	87.7	6	1436.3	1258.3	7141870	
		10	3	65.7	16	1723.3	1896.3	7944048	
		11	1	75.3	12			8374995	
		12	2	73.7	15	1892.3		9016434	
		13	2	96.2	13	1411.8		10197913	
		14	1	70.1	12			10817077	
		15	3	52.7	13	1021.3	1393.3	11848236	

Test Mode		Mode 1							
Frequency		5.600~5.650 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
19	5297	1	1	58.9	15			266760	1
		2	2	89.3	18	1728.7		1250019	
		3	1	53.6	14			1804563	
		4	2	66.6	14	1719.4		2650483	
		5	2	64.2	12	1649.8		3910049	
		6	3	57.4	19	1085.6	1816.6	4529777	
		7	1	64.9	10			5348374	
		8	2	69	19	1700		6227024	
		9	2	62	16	1885		7189539	
		10	3	69.2	8	1711.8	1049.8	8019511	
		11	3	80.1	19	1763.9	1461.9	8711083	
		12	1	84.4	9			9670463	
		13	3	59.6	19	1597.4	1092.4	10840806	
		14	3	69.7	17	1392.3	1694.3	11966423	
20	5294	1	2	96.9	19	1008.1		283689	0
		2	2	99	19	1492		1676999	
		3	3	87.1	13	989.9	1019.9	2426967	
		4	1	61.1	18			3625360	
		5	3	62.2	11	1243.8	1766.8	5925658	
		6	1	76	10			6865716	
		7	3	87.2	17	1144.8	1665.8	7529060	
		8	2	81.5	15	1055.5		9383932	
		9	1	69.8	17			10622080	
		10	2	92	19	1683		10957742	
21	5305	1	2	67.2	2	1432.5		3522	0
		2	1	93.3	8			1642901	
		3	3	95.8	7	1388.6	1342.6	2881972	
		4	2	61.7	13	1642.1		3426072	
		5	2	70.5	9	1765.2		4826843	
		6	1	92.7	15			5325738	
		7	3	86.7	9	1356.2	1567.2	6685502	
		8	1	83.2	17			7854910	
		9	2	88.6	13	1389.3		8926675	
		10	3	65.2	10	1211.6	1588.7	9237628	
		11	2	70.3	14	932.2		10074565	
		12	1	70.8	12			11184205	



Test Mode		Mode 1							
Frequency		5.600~5.650 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
22	5293	1	3	61.2	17	1426.1	1426.1	77457	1
		2	2	72.3	15	1674.1		1764135	
		3	3	69.5	16	1625.1	1621.1	2759349	
		4	1	83.2	13			4821891	
		5	2	82.6	10	1103.8		5492401	
		6	1	89.5	17			6759573	
		7	1	87.4	12			8102166	
		8	3	75.2	4	1379.9	1289.9	9890082	
		9	2	50.7	12	1694.9		11314601	
23	5299	1	1	80.2	9			248517	1
		2	3	54.3	4	1212.6	1276.6	976354	
		3	2	60.8	17	1587.3		1647277	
		4	3	72.5	17	1854.4	1202.4	2491220	
		5	3	74.3	6	1730.7	1117.7	3364667	
		6	1	87.6	8			4854144	
		7	2	74.9	6	1491.9		5632525	
		8	1	74	19			6428577	
		9	3	78.2	9	1716.5	945.7	7327793	
		10	1	90.8	7			7543757	
		11	2	74.8	10	1542.2		8279794	
		12	2	87.5	9	1481.6		9223718	
		13	1	50.3	15			9849588	
		14	3	87.7	13	1546.9	1246.6	10197832	
		15	2	64.2	15	1475.8		11345245	
24	5308	1	3	79.8	14	1346.3	1824.3	432429	1
		2	3	75.6	10	958.6	1762.4	1623461	
		3	1	74.7	11			2254243	
		4	2	62.3	6	1324.3		2724526	
		5	1	61.9	12			3169665	
		6	3	61.5	13	1512.6	1388.7	4347842	
		7	1	94.3	9			5546509	
		8	2	72.5	7	1642.1		6346274	
		9	2	62.7	6	1167.7		7501401	
		10	3	70.2	13	1164.9	1497.8	8203168	
		11	1	58.7	14			9129685	
		12	1	82.4	16			9678762	
		13	3	98.4	9	1421.9	1812.9	10274415	
		14	2	77.3	11	1621.6		11320469	

Test Mode		Mode 1							
Frequency		5.600~5.650 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
25	5304	1	3	93.2	13	1571.2	1867.2	142343	1
		2	2	51.4	13	1346.8		858714	
		3	1	96.4	12			1642231	
		4	3	95.2	9	1764.6	1763.7	2128428	
		5	2	96.7	12	1632.6		2754253	
		6	3	75.6	11	1679.8	1346.8	3624642	
		7	1	62.1	7			4237561	
		8	2	69.8	11	1326.7		4846623	
		9	3	88.3	12	1842.5	1201.4	5498365	
		10	2	71.4	17	1513.7		6237403	
		11	1	54.7	9			6742869	
		12	3	62.3	12	1614.3	1192.3	7379568	
		13	1	57.8	12			8124234	
		14	3	84.6	11	978.3	1194.7	8527236	
		15	1	77.3	12			9346581	
		16	2	63.4	10	1518.1		10292563	
		17	2	89.7	9	1462.2		10775249	
		18	3	65.6	12	1372.6	1218.2	11445468	
26	5306	1	1	55.3	12			453512	1
		2	3	52.7	13	1134.2	1642.1	864234	
		3	2	66.3	16	1347.4		1735103	
		4	2	90.2	13	1756.7		2648041	
		5	3	61.3	8	1647.4	1457.9	3628408	
		6	1	74.5	10			4589847	
		7	2	91.7	6	1127.3		5628008	
		8	1	84.3	11			5953726	
		9	3	84.5	17	1612.2	1743.2	6241079	
		10	1	94.7	7			7351321	
		11	2	91.5	18	1648.7		7642036	
		12	2	62.9	10	1572.3		8637847	
		13	1	82.4	9			9428509	
		14	3	50.7	10	1745.2	1845.1	9654445	
		15	3	70.4	7	927.2	1798.2	10327325	
		16	2	55.3	9	1774.3		11134196	

Test Mode		Mode 1							
Frequency		5.600~5.650 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
27	5297	1	2	78.4	12	1532.5		553748	1
		2	1	70.4	4			647891	
		3	3	71.6	7	1624	1479	1628517	
		4	1	73.7	10			2327762	
		5	1	52.7	13			2512224	
		6	3	87.9	9	1632.3	1208.3	3435572	
		7	2	81.2	10	1419.3		3727399	
		8	3	55.4	10	1478.9	1547.9	4819714	
		9	2	71.7	16	1429.6		4915161	
		10	3	73.8	13	756	1345	5516535	
		11	1	53.7	17			6823881	
		12	2	66.5	11	1749.8		6917663	
		13	3	62.7	6	875.5	1624.5	7428430	
		14	2	93.6	7	754		7924694	
		15	1	64.8	5			8916192	
		16	1	96.2	3			9623622	
		17	2	82.8	15	1315.2		9727724	
		18	3	96.5	10	1346	1324	10123949	
		19	2	54.9	8	1427.1		10790385	
		20	3	95.2	10	1549.9	1512.9	11384046	
28	5306	1	1	95.4	6			273267	1
		2	1	53.2	16			654996	
		3	3	51.6	9	1432.4	1279.4	1278965	
		4	2	63.4	15	1241.9		1846650	
		5	2	79.8	16	1756.9		2549524	
		6	3	77.6	18	1642.6	1428.6	3332297	
		7	3	83.4	17	1432.7	1399.7	3642001	
		8	3	80.2	16	1765	1648	4724585	
		9	2	72.9	17	1649.9		4868931	
		10	1	61.7	13			5516962	
		11	1	65.4	15			6613008	
		12	2	61.8	14	957.6		7127458	
		13	1	52.5	6			7742365	
		14	2	92.7	12	1321.4		8317629	
		15	3	95.6	7	1547.5	1815.5	8776250	
		16	3	72.6	8	1516.3	1315.3	9519593	
		17	2	92.7	10	925.7		9619948	
		18	1	55.4	6			10328408	
		19	2	71.8	13	1759.4		10750022	
		20	3	52.4	15	1637.3	1328.3	11495510	

Test Mode		Mode 1							
Frequency		5.600~5.650 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
29	5303	1	2	91.2	12	1426.6		344862	1
		2	2	86.4	15	1732.1		856752	
		3	3	64.2	8	1746.1	1728.1	1498845	
		4	1	94.3	10			2321871	
		5	3	88.4	10	932.9	937.9	2827635	
		6	1	72.1	9			3854874	
		7	2	67.4	7	1613.3		4647882	
		8	3	51.4	11	1334.9	967.9	5127528	
		9	1	74.3	11			5846372	
		10	3	94.8	6	1327.6	1795.6	6750981	
		11	2	82.1	10	1627.6		7432962	
		12	1	95.7	16			8128265	
		13	1	78.3	15			8567478	
		14	1	72.1	14			9201658	
		15	2	85.7	13	1517.6		9891348	
		16	3	91.3	16	1642.2	1426.2	10274828	
		17	3	68.2	15	1637.9	1527.9	11468285	
30	5303	1	1	61.2	14			251660	1
		2	2	88.4	18	1628.7		1318019	
		3	1	52.1	13			1742563	
		4	2	65.9	15	1678.4		2543483	
		5	2	63.2	13	1658.8		3873049	
		6	3	58.3	18	1129.6	1754.6	4627777	
		7	1	62.9	11			5438374	
		8	2	68.4	17	1627		6357024	
		9	2	63.1	15	1782		7219539	
		10	3	68.2	7	1641.8	1129.8	8128511	
		11	3	79.8	19	1645.9	1518.9	8624083	
		12	1	82.7	10			9714463	
		13	3	60.2	18	1427.4	1128.4	10260806	
		14	3	68.7	16	1384.3	1572.3	11876423	
Detection Percentage (%)									86.67

Test Mode	Mode 1			
Frequency	5.600~5.650 GHz			
Radar Signal	Type 6			
Trial #	Pulses / Hop	Pulse Width (us)	PRI (us)	1=Detection ; 0=No Detection
1	9	1	333	1
2	9	1	333	1
3	9	1	333	1
4	9	1	333	1
5	9	1	333	0
6	9	1	333	1
7	9	1	333	1
8	9	1	333	1
9	9	1	333	1
10	9	1	333	1
11	9	1	333	1
12	9	1	333	1
13	9	1	333	1
14	9	1	333	1
15	9	1	333	1
16	9	1	333	1
17	9	1	333	0
18	9	1	333	1
19	9	1	333	1
20	9	1	333	1
21	9	1	333	1
22	9	1	333	1
23	9	1	333	1
24	9	1	333	0
25	9	1	333	1
26	9	1	333	1
27	9	1	333	1
28	9	1	333	1
29	9	1	333	1
30	9	1	333	1
Detection Percentage (%)				90.00

Test Mode		Mode 2				
Frequency		5.250~5.350 GHz				
Radar Signal		Type 1				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	PRF (Hz)	Pulses / Burst	1=Detection ; 0=No Detection
1	5292	1	638	1567	83	1
2	5293	1	858	1166	62	1
3	5294	1	738	1355	72	1
4	5295	1	538	1859	99	1
5	5296	1	778	1285	68	1
6	5297	1	658	1520	81	1
7	5298	1	3066	326	18	1
8	5299	1	598	1672	89	1
9	5300	1	578	1730	92	1
10	5301	1	698	1433	76	1
11	5306	1	618	1618	86	1
12	5307	1	798	1253	67	1
13	5308	1	678	1475	78	1
14	5309	1	558	1792	95	1
15	5310	1	818	1222	65	1
16	5311	1	1541	649	35	1
17	5312	1	891	1122	60	1
18	5313	1	929	1076	57	1
19	5314	1	2448	408	22	1
20	5315	1	1833	546	29	1
21	5319	1	1865	536	29	1
22	5320	1	1542	649	35	1
23	5321	1	2995	334	18	1
24	5322	1	1202	832	44	1
25	5323	1	1165	858	46	1
26	5324	1	1244	804	43	1
27	5325	1	2852	351	19	1
28	5326	1	2242	446	24	0
29	5327	1	1157	864	46	1
30	5328	1	1288	776	41	1
Detection Percentage (%)						96.67

Test Mode		Mode 2				
Frequency		5.250~5.350 GHz				
Radar Signal		Type 2				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	PRF (Hz)	Pulses / Burst	1=Detection ; 0=No Detection
1	5292	2.6	228	4386	23	1
2	5293	4.6	150	6667	27	1
3	5294	1.1	184	5435	29	1
4	5295	4.8	203	4926	24	1
5	5296	3.7	189	5291	25	0
6	5297	2.6	201	4975	24	0
7	5298	3.5	216	4630	26	1
8	5299	4.2	194	5155	23	0
9	5300	2.9	225	4444	25	1
10	5301	3.3	206	4854	27	1
11	5306	3.9	213	4695	28	1
12	5307	4.7	159	6289	26	1
13	5308	3.1	167	5988	24	0
14	5309	1.9	217	4608	23	1
15	5310	2.4	162	6173	25	1
16	5311	3.4	204	4902	28	1
17	5312	2.3	170	5882	27	1
18	5313	3.5	184	5435	23	1
19	5314	4.9	150	6667	27	1
20	5315	4.6	211	4739	29	1
21	5319	2.9	158	6329	23	1
22	5320	2.6	226	4425	27	1
23	5321	1.6	204	4902	26	1
24	5322	3.9	181	5525	25	1
25	5323	4.6	202	4950	24	1
26	5324	4.1	194	5155	27	1
27	5325	2.3	193	5181	28	1
28	5326	3.9	173	5780	29	1
29	5327	4.3	188	5319	23	1
30	5328	1.5	215	4651	26	1
Detection Percentage (%)						86.67

Test Mode		Mode 2				
Frequency		5.250~5.350 GHz				
Radar Signal		Type 3				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	PRF (Hz)	Pulses / Burst	1=Detection ; 0=No Detection
1	5292	8.0	492	2033	16	1
2	5293	6.7	200	5000	18	1
3	5294	8.6	418	2392	16	1
4	5295	9.4	351	2849	17	1
5	5296	7.4	383	2611	18	1
6	5297	9.8	232	4310	16	1
7	5298	7.6	245	4082	18	1
8	5299	8.2	289	3460	17	1
9	5300	6.5	306	3268	18	1
10	5301	7.3	421	2375	16	1
11	5306	7.8	335	2985	18	1
12	5307	8.8	375	2667	17	1
13	5308	9.6	324	3086	16	1
14	5309	9.4	259	3861	18	1
15	5310	6.4	220	4545	17	1
16	5311	7.2	342	2924	16	1
17	5312	9.1	377	2653	17	1
18	5313	9.6	457	2188	16	1
19	5314	8.0	471	2123	18	1
20	5315	9.0	304	3289	18	1
21	5319	8.0	316	3165	17	1
22	5320	9.8	325	3077	16	1
23	5321	8.0	409	2445	17	1
24	5322	9.9	200	5000	17	1
25	5323	8.8	458	2183	16	1
26	5324	8.0	232	4310	18	1
27	5325	8.3	250	4000	16	1
28	5326	8.7	270	3704	16	1
29	5327	7.7	350	2857	17	1
30	5328	7.1	230	4348	16	1
Detection Percentage (%)						100.00



Test Mode		Mode 2				
Frequency		5.250~5.350 GHz				
Radar Signal		Type 4				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	PRF (Hz)	Pulses / Burst	1=Detection ; 0=No Detection
1	5292	18.0	493	2028	15	1
2	5293	19.9	200	5000	12	1
3	5294	12.9	487	2053	14	1
4	5295	13.7	377	2653	13	1
5	5296	15.6	462	2165	15	1
6	5297	18.4	358	2793	16	0
7	5298	13.4	267	3745	12	1
8	5299	15.7	349	2865	14	1
9	5300	19.1	409	2445	15	1
10	5301	18.2	423	2364	16	0
11	5306	13.2	325	3077	13	1
12	5307	14.6	264	3788	12	1
13	5308	18.6	326	3067	14	1
14	5309	15.0	452	2212	13	1
15	5310	16.3	230	4348	12	1
16	5311	19.8	238	4202	13	1
17	5312	18.2	420	2381	16	1
18	5313	16.3	452	2212	15	1
19	5314	14.2	495	2020	12	1
20	5315	17.8	228	4386	16	1
21	5319	19.1	211	4739	16	1
22	5320	18.4	283	3534	15	1
23	5321	11.8	411	2433	12	1
24	5322	14.2	284	3521	13	1
25	5323	13.9	202	4950	12	1
26	5324	17.8	340	2941	14	1
27	5325	15.6	290	3448	16	1
28	5326	14.6	250	4000	16	1
29	5327	14.4	484	2066	15	0
30	5328	18.9	387	2584	13	1
Detection Percentage (%)						90.00

Test Mode		Mode 2							
Frequency		5.250~5.350 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
1	5294	1	2	51.7	7	1146.3		647836	1
		2	1	93.2	15			1409398	
		3	3	79.6	10	1290.4	964.4	2872945	
		4	2	85.8	14	1559.2		4049183	
		5	2	76.5	14	1210.5	1553.5	4494059	
		6	1	61.7	8			5716328	
		7	3	83.6	7	1205.4	993.4	7308202	
		8	1	59.8	5			8119962	
		9	2	69.9	10	1355.1		9532813	
		10	3	94.3	10	1747.7	1408.7	10751035	
		11	2	61.8	18	1000.2		11053268	
2	5326	1	2	66.3	2	1226.7		3658	1
		2	1	94.2	9			1529901	
		3	3	96.7	6	1255.6	1330.6	2951972	
		4	2	60.8	11	1703.1		3038072	
		5	2	70	8	1886.2		4885843	
		6	1	93	16			5281738	
		7	3	87.7	10	1474.2	1427.2	6746502	
		8	1	84.5	18			7749910	
		9	2	89	12	1302.3		8035675	
		10	3	66.4	11	1031.7	1634.7	9089628	
		11	2	71.5	15	917.3		10039865	
		12	1	71.1	11			11195005	
3	5307	1	3	76.5	5	1658.5	1885.5	341903	1
		2	3	89.5	5	1162.5	1012.5	1039290	
		3	1	92.5	15			2530435	
		4	2	82.5	5	1869.5		3352797	
		5	1	68.5	9			3783207	
		6	3	78.3	17	1239.7	936.7	5292381	
		7	1	91	6			6334407	
		8	2	59.3	7	1898.7		6688649	
		9	2	58	13	1884		7600600	
		10	3	92.8	17	1029.2	1258.2	8865035	
		11	1	77.4	10			9464201	
		12	3	90.8	10	1219.2	1458.2	10488185	
		13	2	87.9	8	1764.1		11914643	

Test Mode		Mode 2							
Frequency		5.250~5.350 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
4	5313	1	3	50.9	16	1321.1	1333.1	77627	1
		2	2	73.9	16	1538.1		2317135	
		3	3	71.9	17	1596.1	1584.1	2684349	
		4	1	54.3	14			4779891	
		5	2	84.2	9	1055.8		5502401	
		6	1	99.3	18			6827573	
		7	1	89.5	13			8051166	
		8	3	78.1	5	1436.9	1262.9	9980082	
		9	2	51.1	13	1700.9		11274601	
5	5317	1	1	81.8	7			255617	0
		2	3	55.4	5	1016.6	1310.6	929954	
		3	2	61.7	18	1616.3		1699277	
		4	3	78.6	19	1882.4	1115.4	2516220	
		5	3	75.3	7	1730.7	1082.7	3350667	
		6	1	88.6	7			4671144	
		7	2	74.1	5	1510.9		5553525	
		8	1	75	18			6315577	
		9	3	79.5	8	1722.5	925.5	7021793	
		10	1	91.5	6			7652757	
		11	2	74.8	9	1531.2		8144794	
		12	2	88.4	10	1475.6		9507618	
		13	1	51.7	16			9965188	
		14	3	88.1	12	1605.9	1230.9	10600830	
		15	2	63.2	16	1448.8		11228243	
6	5321	1	3	81.6	15	1326.4	1816.4	420027	1
		2	3	81.6	9	960.4	1855.4	1213961	
		3	1	73.5	12			2412241	
		4	2	61.7	5	1305.3		2705526	
		5	1	63.1	15			4149665	
		6	3	61.4	15	1499.6	1396.6	4418842	
		7	1	99.3	11			5456509	
		8	2	74.9	5	1604.1		6153274	
		9	2	64.3	7	1079.7		7420401	
		10	3	71.1	15	1154.9	1510.9	8105166	
		11	1	59.4	12			9087685	
		12	1	84.5	17			9743762	
		13	3	99.1	11	1357.9	1730.9	10514412	
		14	2	78.4	12	1576.6		11920466	

Test Mode		Mode 2							
Frequency		5.250~5.350 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
7	5305	1	2	59.5	14	1515.5		154623	1
		2	1	71.2	5			860435	
		3	3	72.1	13	1820.9	1327.9	1566260	
		4	2	50.4	19	1603.6		2272135	
		5	3	99.2	11	1157.8	1085.8	2977376	
		6	1	53.8	13			3682861	
		7	2	93.4	7	1133.6		4388707	
		8	3	59.4	7	1374.6	993.6	5094518	
		9	2	53.6	13	1092.4		5799787	
		10	1	59.8	8			6505670	
		11	3	97.7	6	1593.3	1125.3	7209959	
		12	1	84.2	10			7915377	
		13	3	93.2	9	1104.8	1300.8	8619959	
		14	1	97.7	11			9326217	
		15	2	71.2	6	1580.8		10032059	
		16	2	79.8	8	1537.2		10736631	
		8	5307	1	3	95.8	12	1628.2	
2	2			52.2	15	1291.8		865214	
3	1			99.9	11			1685231	
4	3			97.4	8	1853.6	1822.6	2035426	
5	2			98.4	11	1706.6		2846253	
6	3			74.2	12	1752.8	1348.8	3625642	
7	1			63.1	6			4123561	
8	2			70.3	13	1127.7		4953621	
9	3			85.5	10	1782.5	1179.5	5512365	
10	2			73.3	18	1409.7		6125403	
11	1			50.9	10			6865868	
12	3			64.7	13	1564.3	1184.3	7421568	
13	1			56.1	10			8088234	
14	3			86.3	12	980.7	1184.7	8645235	
15	1			78	13			9236581	
16	2			62.9	11	1426.1		10132561	
17	2			88.8	10	1513.2		10765249	
18	3			67.4	14	1249.6	1172.6	11235461	

Test Mode		Mode 2							
Frequency		5.250~5.350 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
9	5311	1	3	13	13	1499.3	1528.3	125412	1
		2	1	17	17			782539	
		3	3	17	17	1939.3	1576.3	1526841	
		4	1	11	11			2156487	
		5	1	14	14			2651285	
		6	3	9	9	1629.4	1414.4	3326582	
		7	2	7	7	1535.8		3988625	
		8	3	14	14	1343	1104	4725418	
		9	2	14	14	1553.1		5326874	
		10	3	13	13	1520.9	918.9	5933652	
		11	1	13	13			6529425	
		12	2	11	11	1028.4		7149632	
		13	3	15	15	1525.4	1407.4	7759932	
		14	2	19	19	1369.6		8425981	
		15	1	8	8			9258412	
		16	1	9	9			9925874	
		17	2	9	9	1050.3		1026582	
		18	3	5	5	1701.2	1173.2	10963658	
		19	2	6	6	1305.2		11456981	
10	5308	1	1	60.7	9			353222	1
		2	3	59.2	13	1331.8	1077.8	1659461	
		3	2	96.1	8	1237.9		3432174	
		4	3	70.5	16	1145.5	1708.5	5432909	
		5	2	63.2	13	1721.8		6953575	
		6	1	51.5	7			8826390	
		7	1	89.1	5			10242227	
		8	2	86.1	12	1499.9		10759333	

Test Mode		Mode 2							
Frequency		5.250~5.350 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
11	5315	1	1	57.4	14			472419	1
		2	3	83.9	15	1079.1	1717.1	861133	
		3	2	67.1	17	1333.9		1822100	
		4	2	91.3	14	1877.7		2679041	
		5	3	60.1	9	1784.9	1515.9	3219408	
		6	1	72.3	11			4454844	
		7	2	92.6	7	1077.4		5169008	
		8	1	86.2	12			5476228	
		9	3	86.8	18	1713.2	1589.2	6009079	
		10	1	98.7	6			7247320	
		11	2	90.2	19	1747.8		7640035	
		12	2	63.9	9	1657.1		8752849	
		13	1	73.2	11			9365509	
		14	3	51.9	9	1842.1	1910.1	9792446	
		15	3	71.8	6	931.2	1825.2	10872322	
		16	2	56.9	8	1860.1		11513196	
12	5325	1	2	80.5	10	1697.5		546448	1
		2	1	72.8	5			648691	
		3	3	71	8	1728	1497	1673517	
		4	1	75.9	10			2025762	
		5	1	54.5	11			2534224	
		6	3	89.7	11	1854.3	1023.3	3251572	
		7	2	81.7	13	1285.3		3757399	
		8	3	59.1	10	1476.9	1529.9	4604714	
		9	2	73.4	15	1281.6		4987161	
		10	3	76	13	993	1043	5610535	
		11	1	55.3	19			6424881	
		12	2	70.2	11	1911.8		6679663	
		13	3	60.5	5	939.5	1600.5	7239430	
		14	2	95	5	964		7924694	
		15	1	68.6	6			8552192	
		16	1	99.3	5			9466622	
		17	2	84.8	18	1172.2		9696724	
		18	3	97	10	1390	1123	10603979	
		19	2	56.9	5	1291.1		10940382	
		20	3	97.1	7	1558.9	1362.9	11654047	

Test Mode		Mode 2							
Frequency		5.250~5.350 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
13	5300	1	2	96.9	19	1008.1		283689	1
		2	2	99	19	1492		1676999	
		3	3	87.1	13	989.9	1019.9	2426967	
		4	1	61.1	18			3625360	
		5	3	62.2	11	1243.8	1766.8	5925658	
		6	1	76	10			6865716	
		7	3	87.2	17	1144.8	1665.8	7529060	
		8	2	81.5	15	1055.5		9383932	
		9	1	69.8	17			10622080	
		10	2	92	19	1683		10957742	
14	5310	1	1	96.7	7			288367	1
		2	1	54.7	17			660896	
		3	3	52.6	10	1536.4	1334.4	1309965	
		4	2	64.1	17	1168.9		1923650	
		5	2	80.1	18	1808.9		2620524	
		6	3	78.4	19	1726.6	1378.6	3143297	
		7	3	84.3	17	1539.7	1402.7	3735001	
		8	3	81	17	1881	1717	4666585	
		9	2	74.1	18	1575.9		4851931	
		10	1	62.6	15			5483962	
		11	1	67.4	15			6577008	
		12	2	60.4	15	946.6		7056458	
		13	1	51.6	7			7440565	
		14	2	93.6	13	1476.4		8285629	
		15	3	97.5	8	1675.5	1795.5	8889250	
		16	3	73.7	6	1463.3	1294.3	9442593	
		17	2	91.3	9	916.7		9726948	
		18	1	56.5	7			10209408	
		19	2	72.6	14	1831.4		10836022	
		20	3	64.7	16	1625.3	1406.3	11597510	

Test Mode		Mode 2							
Frequency		5.250~5.350 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
15	5318	1	3	74.8	15	1654.2	1233.2	145982	1
		2	1	89.9	5			1058238	
		3	3	58.4	7	1156.6	1161.6	1435873	
		4	2	69.9	10	1722.1		2058964	
		5	2	52.6	16	1393.4		2799658	
		6	3	51.5	5	1113.5	1706.5	3158357	
		7	1	72.2	12			4215839	
		8	3	79.2	13	1336.8	1332.8	4835982	
		9	2	83.7	7	1758.3		5365821	
		10	1	52.8	5			5793588	
		11	1	86.9	11			6523987	
		12	3	83.5	13	1468.5	1231.5	7233985	
		13	2	73.9	18	1220.1		7736982	
		14	2	60.6	5	1880.4		8536827	
		15	1	86.3	6			8935821	
		16	3	97.4	14	1855.6	912.6	9726853	
		17	1	86.7	11			10236581	
		18	2	50.7	14	1644.3		10836582	
		19	3	60.2	5	1924.8	1679.8	11436882	
16	5303	1	3	67.7	13	1787.3	1501.3	193161	1
		2	2	96	10	1092		840518	
		3	1	74.5	7			1979690	
		4	3	95	8	907	1443	2372262	
		5	2	82.3	10	961.7		2691289	
		6	3	84.1	17	978.9	1507.9	3711257	
		7	1	63	10			4053880	
		8	2	93.6	19	1059.4		5119453	
		9	1	61.4	9			5565324	
		10	1	86	14			6228245	
		11	1	63.3	10			6802603	
		12	3	88.6	6	979.4	984.4	7553159	
		13	2	86.6	9	1035.4		8068688	
		14	3	62.4	16	1234.6	985.6	8939294	
		15	2	65.9	11	1859.1		9445705	
		16	2	51.5	15	1339.5		10042487	
		17	1	98.7	10			10888558	
		18	3	66.3	19	1350.7	1640.7	11906444	



Test Mode		Mode 2							
Frequency		5.250~5.350 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
17	5319	1	2	92.4	13	1522.6		354862	1
		2	2	85.9	16	1893.1		860452	
		3	3	65.9	7	1857.1	1823.1	1526845	
		4	1	95.1	9			2256871	
		5	3	87.1	11	934.9	928.9	2958635	
		6	1	73.5	8			3945874	
		7	2	68.7	8	1508.3		4756882	
		8	3	52.1	11	1324.9	987.9	5036528	
		9	1	76.4	10			5945372	
		10	3	96.4	5	1337.6	1898.6	6852981	
		11	2	83.4	11	1597.6		7535962	
		12	1	96.5	18			8018265	
		13	1	79.7	16			8625478	
		14	1	73	14			9347658	
		15	2	86.4	13	1439.6		9925348	
		16	3	90.8	17	1502.2	1389.2	10754826	
		17	3	67.1	16	1532.9	1649.9	11458283	
18	5321	1	1	51.3	11			420200	1
		2	3	56.3	12	1767.7	1360.7	1045128	
		3	2	61.7	10	1582.3		2054476	
		4	2	90.5	8	1722.5		2830215	
		5	3	87.8	13	1288.2	1741.2	3432245	
		6	1	50.9	19			4196566	
		7	1	54.4	12			4953029	
		8	2	91.6	18	1612.4		6311483	
		9	3	87.7	6	1436.3	1258.3	7141870	
		10	3	65.7	16	1723.3	1896.3	7944048	
		11	1	75.3	12			8374995	
		12	2	73.7	15	1892.3		9016434	
		13	2	96.2	13	1411.8		10197913	
		14	1	70.1	12			10817077	
		15	3	52.7	13	1021.3	1393.3	11848236	

Test Mode		Mode 2							
Frequency		5.250~5.350 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
19	5322	1	1	58.9	15			266760	1
		2	2	89.3	18	1728.7		1250019	
		3	1	53.6	14			1804563	
		4	2	66.6	14	1719.4		2650483	
		5	2	64.2	12	1649.8		3910049	
		6	3	57.4	19	1085.6	1816.6	4529777	
		7	1	64.9	10			5348374	
		8	2	69	19	1700		6227024	
		9	2	62	16	1885		7189539	
		10	3	69.2	8	1711.8	1049.8	8019511	
		11	3	80.1	19	1763.9	1461.9	8711083	
		12	1	84.4	9			9670463	
		13	3	59.6	19	1597.4	1092.4	10840806	
		14	3	69.7	17	1392.3	1694.3	11966423	
20	5319	1	2	96.9	19	1008.1		283689	1
		2	2	99	19	1492		1676999	
		3	3	87.1	13	989.9	1019.9	2426967	
		4	1	61.1	18			3625360	
		5	3	62.2	11	1243.8	1766.8	5925658	
		6	1	76	10			6865716	
		7	3	87.2	17	1144.8	1665.8	7529060	
		8	2	81.5	15	1055.5		9383932	
		9	1	69.8	17			10622080	
		10	2	92	19	1683		10957742	
21	5306	1	2	67.2	2	1432.5		3522	1
		2	1	93.3	8			1642901	
		3	3	95.8	7	1388.6	1342.6	2881972	
		4	2	61.7	13	1642.1		3426072	
		5	2	70.5	9	1765.2		4826843	
		6	1	92.7	15			5325738	
		7	3	86.7	9	1356.2	1567.2	6685502	
		8	1	83.2	17			7854910	
		9	2	88.6	13	1389.3		8926675	
		10	3	65.2	10	1211.6	1588.7	9237628	
		11	2	70.3	14	932.2		10074565	
		12	1	70.8	12			11184205	

Test Mode		Mode 2							
Frequency		5.250~5.350 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
22	5314	1	3	61.2	17	1426.1	1426.1	77457	1
		2	2	72.3	15	1674.1		1764135	
		3	3	69.5	16	1625.1	1621.1	2759349	
		4	1	83.2	13			4821891	
		5	2	82.6	10	1103.8		5492401	
		6	1	89.5	17			6759573	
		7	1	87.4	12			8102166	
		8	3	75.2	4	1379.9	1289.9	9890082	
		9	2	50.7	12	1694.9		11314601	
23	5316	1	1	80.2	9			248517	1
		2	3	54.3	4	1212.6	1276.6	976354	
		3	2	60.8	17	1587.3		1647277	
		4	3	72.5	17	1854.4	1202.4	2491220	
		5	3	74.3	6	1730.7	1117.7	3364667	
		6	1	87.6	8			4854144	
		7	2	74.9	6	1491.9		5632525	
		8	1	74	19			6428577	
		9	3	78.2	9	1716.5	945.7	7327793	
		10	1	90.8	7			7543757	
		11	2	74.8	10	1542.2		8279794	
		12	2	87.5	9	1481.6		9223718	
		13	1	50.3	15			9849588	
		14	3	87.7	13	1546.9	1246.6	10197832	
		15	2	64.2	15	1475.8		11345245	
24	5316	1	3	79.8	14	1346.3	1824.3	432429	1
		2	3	75.6	10	958.6	1762.4	1623461	
		3	1	74.7	11			2254243	
		4	2	62.3	6	1324.3		2724526	
		5	1	61.9	12			3169665	
		6	3	61.5	13	1512.6	1388.7	4347842	
		7	1	94.3	9			5546509	
		8	2	72.5	7	1642.1		6346274	
		9	2	62.7	6	1167.7		7501401	
		10	3	70.2	13	1164.9	1497.8	8203168	
		11	1	58.7	14			9129685	
		12	1	82.4	16			9678762	
		13	3	98.4	9	1421.9	1812.9	10274415	
		14	2	77.3	11	1621.6		11320469	

Test Mode		Mode 2							
Frequency		5.250~5.350 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
25	5323	1	3	93.2	13	1571.2	1867.2	142343	1
		2	2	51.4	13	1346.8		858714	
		3	1	96.4	12			1642231	
		4	3	95.2	9	1764.6	1763.7	2128428	
		5	2	96.7	12	1632.6		2754253	
		6	3	75.6	11	1679.8	1346.8	3624642	
		7	1	62.1	7			4237561	
		8	2	69.8	11	1326.7		4846623	
		9	3	88.3	12	1842.5	1201.4	5498365	
		10	2	71.4	17	1513.7		6237403	
		11	1	54.7	9			6742869	
		12	3	62.3	12	1614.3	1192.3	7379568	
		13	1	57.8	12			8124234	
		14	3	84.6	11	978.3	1194.7	8527236	
		15	1	77.3	12			9346581	
		16	2	63.4	10	1518.1		10292563	
		17	2	89.7	9	1462.2		10775249	
		18	3	65.6	12	1372.6	1218.2	11445468	
26	5297	1	1	55.3	12			453512	1
		2	3	52.7	13	1134.2	1642.1	864234	
		3	2	66.3	16	1347.4		1735103	
		4	2	90.2	13	1756.7		2648041	
		5	3	61.3	8	1647.4	1457.9	3628408	
		6	1	74.5	10			4589847	
		7	2	91.7	6	1127.3		5628008	
		8	1	84.3	11			5953726	
		9	3	84.5	17	1612.2	1743.2	6241079	
		10	1	94.7	7			7351321	
		11	2	91.5	18	1648.7		7642036	
		12	2	62.9	10	1572.3		8637847	
		13	1	82.4	9			9428509	
		14	3	50.7	10	1745.2	1845.1	9654445	
		15	3	70.4	7	927.2	1798.2	10327325	
		16	2	55.3	9	1774.3		11134196	

Test Mode		Mode 2							
Frequency		5.250~5.350 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
27	5321	1	2	78.4	12	1532.5		553748	1
		2	1	70.4	4			647891	
		3	3	71.6	7	1624	1479	1628517	
		4	1	73.7	10			2327762	
		5	1	52.7	13			2512224	
		6	3	87.9	9	1632.3	1208.3	3435572	
		7	2	81.2	10	1419.3		3727399	
		8	3	55.4	10	1478.9	1547.9	4819714	
		9	2	71.7	16	1429.6		4915161	
		10	3	73.8	13	756	1345	5516535	
		11	1	53.7	17			6823881	
		12	2	66.5	11	1749.8		6917663	
		13	3	62.7	6	875.5	1624.5	7428430	
		14	2	93.6	7	754		7924694	
		15	1	64.8	5			8916192	
		16	1	96.2	3			9623622	
		17	2	82.8	15	1315.2		9727724	
		18	3	96.5	10	1346	1324	10123949	
		19	2	54.9	8	1427.1		10790385	
		20	3	95.2	10	1549.9	1512.9	11384046	
28	5299	1	1	95.4	6			273267	1
		2	1	53.2	16			654996	
		3	3	51.6	9	1432.4	1279.4	1278965	
		4	2	63.4	15	1241.9		1846650	
		5	2	79.8	16	1756.9		2549524	
		6	3	77.6	18	1642.6	1428.6	3332297	
		7	3	83.4	17	1432.7	1399.7	3642001	
		8	3	80.2	16	1765	1648	4724585	
		9	2	72.9	17	1649.9		4868931	
		10	1	61.7	13			5516962	
		11	1	65.4	15			6613008	
		12	2	61.8	14	957.6		7127458	
		13	1	52.5	6			7742365	
		14	2	92.7	12	1321.4		8317629	
		15	3	95.6	7	1547.5	1815.5	8776250	
		16	3	72.6	8	1516.3	1315.3	9519593	
		17	2	92.7	10	925.7		9619948	
		18	1	55.4	6			10328408	
		19	2	71.8	13	1759.4		10750022	
		20	3	52.4	15	1637.3	1328.3	11495510	

Test Mode		Mode 2							
Frequency		5.250~5.350 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
29	5297	1	2	91.2	12	1426.6		344862	1
		2	2	86.4	15	1732.1		856752	
		3	3	64.2	8	1746.1	1728.1	1498845	
		4	1	94.3	10			2321871	
		5	3	88.4	10	932.9	937.9	2827635	
		6	1	72.1	9			3854874	
		7	2	67.4	7	1613.3		4647882	
		8	3	51.4	11	1334.9	967.9	5127528	
		9	1	74.3	11			5846372	
		10	3	94.8	6	1327.6	1795.6	6750981	
		11	2	82.1	10	1627.6		7432962	
		12	1	95.7	16			8128265	
		13	1	78.3	15			8567478	
		14	1	72.1	14			9201658	
		15	2	85.7	13	1517.6		9891348	
		16	3	91.3	16	1642.2	1426.2	10274828	
		17	3	68.2	15	1637.9	1527.9	11468285	
30	5321	1	1	61.2	14			251660	1
		2	2	88.4	18	1628.7		1318019	
		3	1	52.1	13			1742563	
		4	2	65.9	15	1678.4		2543483	
		5	2	63.2	13	1658.8		3873049	
		6	3	58.3	18	1129.6	1754.6	4627777	
		7	1	62.9	11			5438374	
		8	2	68.4	17	1627		6357024	
		9	2	63.1	15	1782		7219539	
		10	3	68.2	7	1641.8	1129.8	8128511	
		11	3	79.8	19	1645.9	1518.9	8624083	
		12	1	82.7	10			9714463	
		13	3	60.2	18	1427.4	1128.4	10260806	
		14	3	68.7	16	1384.3	1572.3	11876423	
Detection Percentage (%)									96.67

Test Mode	Mode 2			
Frequency	5.250~5.350 GHz			
Radar Signal	Type 6			
Trial #	Pulses / Hop	Pulse Width (us)	PRI (us)	1=Detection ; 0=No Detection
1	9	1	333	1
2	9	1	333	1
3	9	1	333	1
4	9	1	333	1
5	9	1	333	1
6	9	1	333	1
7	9	1	333	1
8	9	1	333	1
9	9	1	333	1
10	9	1	333	1
11	9	1	333	1
12	9	1	333	1
13	9	1	333	1
14	9	1	333	1
15	9	1	333	1
16	9	1	333	1
17	9	1	333	1
18	9	1	333	1
19	9	1	333	1
20	9	1	333	1
21	9	1	333	1
22	9	1	333	1
23	9	1	333	1
24	9	1	333	1
25	9	1	333	1
26	9	1	333	1
27	9	1	333	1
28	9	1	333	1
29	9	1	333	1
30	9	1	333	1
Detection Percentage (%)				100.00

Test Mode		Mode 2				
Frequency		5.470~5.725 GHz				
Radar Signal		Type 1				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	PRF (Hz)	Pulses / Burst	1=Detection ; 0=No Detection
1	5532	1	638	1567	83	1
2	5533	1	858	1166	62	1
3	5534	1	738	1355	72	1
4	5535	1	538	1859	99	1
5	5536	1	778	1285	68	1
6	5537	1	658	1520	81	0
7	5538	1	3066	326	18	1
8	5539	1	598	1672	89	1
9	5540	1	578	1730	92	1
10	5541	1	698	1433	76	1
11	5546	1	618	1618	86	1
12	5547	1	798	1253	67	1
13	5548	1	678	1475	78	1
14	5549	1	558	1792	95	1
15	5550	1	818	1222	65	1
16	5551	1	1541	649	35	1
17	5552	1	891	1122	60	1
18	5553	1	929	1076	57	1
19	5554	1	2448	408	22	0
20	5555	1	1833	546	29	1
21	5559	1	1865	536	29	1
22	5560	1	1542	649	35	1
23	5561	1	2995	334	18	1
24	5562	1	1202	832	44	1
25	5563	1	1165	858	46	1
26	5564	1	1244	804	43	1
27	5565	1	2852	351	19	0
28	5566	1	2242	446	24	1
29	5567	1	1157	864	46	1
30	5568	1	1288	776	41	1
Detection Percentage (%)						90.00



Test Mode		Mode 2				
Frequency		5.470~5.725 GHz				
Radar Signal		Type 2				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	PRF (Hz)	Pulses / Burst	1=Detection ; 0=No Detection
1	5532	2.6	228	4386	23	1
2	5533	4.6	150	6667	27	1
3	5534	1.1	184	5435	29	1
4	5535	4.8	203	4926	24	1
5	5536	3.7	189	5291	25	1
6	5537	2.6	201	4975	24	1
7	5538	3.5	216	4630	26	1
8	5539	4.2	194	5155	23	1
9	5540	2.9	225	4444	25	1
10	5541	3.3	206	4854	27	0
11	5546	3.9	213	4695	28	1
12	5547	4.7	159	6289	26	1
13	5548	3.1	167	5988	24	1
14	5549	1.9	217	4608	23	1
15	5550	2.4	162	6173	25	1
16	5551	3.4	204	4902	28	0
17	5552	2.3	170	5882	27	1
18	5553	3.5	184	5435	23	1
19	5554	4.9	150	6667	27	1
20	5555	4.6	211	4739	29	1
21	5559	2.9	158	6329	23	1
22	5560	2.6	226	4425	27	1
23	5561	1.6	204	4902	26	1
24	5562	3.9	181	5525	25	1
25	5563	4.6	202	4950	24	1
26	5564	4.1	194	5155	27	1
27	5565	2.3	193	5181	28	1
28	5566	3.9	173	5780	29	1
29	5567	4.3	188	5319	23	1
30	5568	1.5	215	4651	26	1
Detection Percentage (%)						93.33

Test Mode		Mode 2				
Frequency		5.470~5.725 GHz				
Radar Signal		Type 3				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	PRF (Hz)	Pulses / Burst	1=Detection ; 0=No Detection
1	5532	8.0	492	2033	16	1
2	5533	6.7	200	5000	18	1
3	5534	8.6	418	2392	16	0
4	5535	9.4	351	2849	17	1
5	5536	7.4	383	2611	18	1
6	5537	9.8	232	4310	16	0
7	5538	7.6	245	4082	18	1
8	5539	8.2	289	3460	17	1
9	5540	6.5	306	3268	18	1
10	5541	7.3	421	2375	16	1
11	5546	7.8	335	2985	18	1
12	5547	8.8	375	2667	17	1
13	5548	9.6	324	3086	16	1
14	5549	9.4	259	3861	18	1
15	5550	6.4	220	4545	17	1
16	5551	7.2	342	2924	16	1
17	5552	9.1	377	2653	17	1
18	5553	9.6	457	2188	16	1
19	5554	8.0	471	2123	18	0
20	5555	9.0	304	3289	18	1
21	5559	8.0	316	3165	17	1
22	5560	9.8	325	3077	16	0
23	5561	8.0	409	2445	17	1
24	5562	9.9	200	5000	17	1
25	5563	8.8	458	2183	16	1
26	5564	8.0	232	4310	18	0
27	5565	8.3	250	4000	16	1
28	5566	8.7	270	3704	16	1
29	5567	7.7	350	2857	17	1
30	5568	7.1	230	4348	16	1
Detection Percentage (%)						83.33

Test Mode		Mode 2				
Frequency		5.470~5.725 GHz				
Radar Signal		Type 4				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	PRF (Hz)	Pulses / Burst	1=Detection ; 0=No Detection
1	5532	18.0	493	2028	15	1
2	5533	19.9	200	5000	12	1
3	5534	12.9	487	2053	14	0
4	5535	13.7	377	2653	13	0
5	5536	15.6	462	2165	15	1
6	5537	18.4	358	2793	16	1
7	5538	13.4	267	3745	12	1
8	5539	15.7	349	2865	14	1
9	5540	19.1	409	2445	15	1
10	5541	18.2	423	2364	16	1
11	5546	13.2	325	3077	13	1
12	5547	14.6	264	3788	12	1
13	5548	18.6	326	3067	14	1
14	5549	15.0	452	2212	13	0
15	5550	16.3	230	4348	12	1
16	5551	19.8	238	4202	13	1
17	5552	18.2	420	2381	16	1
18	5553	16.3	452	2212	15	1
19	5554	14.2	495	2020	12	0
20	5555	17.8	228	4386	16	1
21	5559	19.1	211	4739	16	1
22	5560	18.4	283	3534	15	1
23	5561	11.8	411	2433	12	1
24	5562	14.2	284	3521	13	0
25	5563	13.9	202	4950	12	1
26	5564	17.8	340	2941	14	1
27	5565	15.6	290	3448	16	0
28	5566	14.6	250	4000	16	1
29	5567	14.4	484	2066	15	1
30	5568	18.9	387	2584	13	1
Detection Percentage (%)						80.00

Test Mode		Mode 2							
Frequency		5.470~5.725 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
1	5536	1	2	51.7	7	1146.3		647836	0
		2	1	93.2	15			1409398	
		3	3	79.6	10	1290.4	964.4	2872945	
		4	2	85.8	14	1559.2		4049183	
		5	2	76.5	14	1210.5	1553.5	4494059	
		6	1	61.7	8			5716328	
		7	3	83.6	7	1205.4	993.4	7308202	
		8	1	59.8	5			8119962	
		9	2	69.9	10	1355.1		9532813	
		10	3	94.3	10	1747.7	1408.7	10751035	
		11	2	61.8	18	1000.2		11053268	
2	5537	1	2	66.3	2	1226.7		3658	0
		2	1	94.2	9			1529901	
		3	3	96.7	6	1255.6	1330.6	2951972	
		4	2	60.8	11	1703.1		3038072	
		5	2	70	8	1886.2		4885843	
		6	1	93	16			5281738	
		7	3	87.7	10	1474.2	1427.2	6746502	
		8	1	84.5	18			7749910	
		9	2	89	12	1302.3		8035675	
		10	3	66.4	11	1031.7	1634.7	9089628	
		11	2	71.5	15	917.3		10039865	
		12	1	71.1	11			11195005	
3	5548	1	3	76.5	5	1658.5	1885.5	341903	0
		2	3	89.5	5	1162.5	1012.5	1039290	
		3	1	92.5	15			2530435	
		4	2	82.5	5	1869.5		3352797	
		5	1	68.5	9			3783207	
		6	3	78.3	17	1239.7	936.7	5292381	
		7	1	91	6			6334407	
		8	2	59.3	7	1898.7		6688649	
		9	2	58	13	1884		7600600	
		10	3	92.8	17	1029.2	1258.2	8865035	
		11	1	77.4	10			9464201	
		12	3	90.8	10	1219.2	1458.2	10488185	
		13	2	87.9	8	1764.1		11914643	

Test Mode		Mode 2							
Frequency		5.470~5.725 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
4	5555	1	3	50.9	16	1321.1	1333.1	77627	1
		2	2	73.9	16	1538.1		2317135	
		3	3	71.9	17	1596.1	1584.1	2684349	
		4	1	54.3	14			4779891	
		5	2	84.2	9	1055.8		5502401	
		6	1	99.3	18			6827573	
		7	1	89.5	13			8051166	
		8	3	78.1	5	1436.9	1262.9	9980082	
		9	2	51.1	13	1700.9		11274601	
5	5563	1	1	81.8	7			255617	1
		2	3	55.4	5	1016.6	1310.6	929954	
		3	2	61.7	18	1616.3		1699277	
		4	3	78.6	19	1882.4	1115.4	2516220	
		5	3	75.3	7	1730.7	1082.7	3350667	
		6	1	88.6	7			4671144	
		7	2	74.1	5	1510.9		5553525	
		8	1	75	18			6315577	
		9	3	79.5	8	1722.5	925.5	7021793	
		10	1	91.5	6			7652757	
		11	2	74.8	9	1531.2		8144794	
		12	2	88.4	10	1475.6		9507618	
		13	1	51.7	16			9965188	
		14	3	88.1	12	1605.9	1230.9	10600830	
		15	2	63.2	16	1448.8		11228243	
6	5545	1	3	81.6	15	1326.4	1816.4	420027	1
		2	3	81.6	9	960.4	1855.4	1213961	
		3	1	73.5	12			2412241	
		4	2	61.7	5	1305.3		2705526	
		5	1	63.1	15			4149665	
		6	3	61.4	15	1499.6	1396.6	4418842	
		7	1	99.3	11			5456509	
		8	2	74.9	5	1604.1		6153274	
		9	2	64.3	7	1079.7		7420401	
		10	3	71.1	15	1154.9	1510.9	8105166	
		11	1	59.4	12			9087685	
		12	1	84.5	17			9743762	
		13	3	99.1	11	1357.9	1730.9	10514412	
		14	2	78.4	12	1576.6		11920466	

Test Mode		Mode 2							
Frequency		5.470~5.725 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
7	5555	1	2	59.5	14	1515.5		154623	1
		2	1	71.2	5			860435	
		3	3	72.1	13	1820.9	1327.9	1566260	
		4	2	50.4	19	1603.6		2272135	
		5	3	99.2	11	1157.8	1085.8	2977376	
		6	1	53.8	13			3682861	
		7	2	93.4	7	1133.6		4388707	
		8	3	59.4	7	1374.6	993.6	5094518	
		9	2	53.6	13	1092.4		5799787	
		10	1	59.8	8			6505670	
		11	3	97.7	6	1593.3	1125.3	7209959	
		12	1	84.2	10			7915377	
		13	3	93.2	9	1104.8	1300.8	8619959	
		14	1	97.7	11			9326217	
		15	2	71.2	6	1580.8		10032059	
		16	2	79.8	8	1537.2		10736631	
		8	5562	1	3	95.8	12	1628.2	
2	2			52.2	15	1291.8		865214	
3	1			99.9	11			1685231	
4	3			97.4	8	1853.6	1822.6	2035426	
5	2			98.4	11	1706.6		2846253	
6	3			74.2	12	1752.8	1348.8	3625642	
7	1			63.1	6			4123561	
8	2			70.3	13	1127.7		4953621	
9	3			85.5	10	1782.5	1179.5	5512365	
10	2			73.3	18	1409.7		6125403	
11	1			50.9	10			6865868	
12	3			64.7	13	1564.3	1184.3	7421568	
13	1			56.1	10			8088234	
14	3			86.3	12	980.7	1184.7	8645235	
15	1			78	13			9236581	
16	2			62.9	11	1426.1		10132561	
17	2			88.8	10	1513.2		10765249	
18	3			67.4	14	1249.6	1172.6	11235461	

Test Mode		Mode 2							
Frequency		5.470~5.725 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
9	5541	1	3	13	13	1499.3	1528.3	125412	1
		2	1	17	17			782539	
		3	3	17	17	1939.3	1576.3	1526841	
		4	1	11	11			2156487	
		5	1	14	14			2651285	
		6	3	9	9	1629.4	1414.4	3326582	
		7	2	7	7	1535.8		3988625	
		8	3	14	14	1343	1104	4725418	
		9	2	14	14	1553.1		5326874	
		10	3	13	13	1520.9	918.9	5933652	
		11	1	13	13			6529425	
		12	2	11	11	1028.4		7149632	
		13	3	15	15	1525.4	1407.4	7759932	
		14	2	19	19	1369.6		8425981	
		15	1	8	8			9258412	
		16	1	9	9			9925874	
		17	2	9	9	1050.3		1026582	
		18	3	5	5	1701.2	1173.2	10963658	
		19	2	6	6	1305.2		11456981	
10	5554	1	1	60.7	9			353222	1
		2	3	59.2	13	1331.8	1077.8	1659461	
		3	2	96.1	8	1237.9		3432174	
		4	3	70.5	16	1145.5	1708.5	5432909	
		5	2	63.2	13	1721.8		6953575	
		6	1	51.5	7			8826390	
		7	1	89.1	5			10242227	
		8	2	86.1	12	1499.9		10759333	

Test Mode		Mode 2							
Frequency		5.470~5.725 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
11	5534	1	1	57.4	14			472419	1
		2	3	83.9	15	1079.1	1717.1	861133	
		3	2	67.1	17	1333.9		1822100	
		4	2	91.3	14	1877.7		2679041	
		5	3	60.1	9	1784.9	1515.9	3219408	
		6	1	72.3	11			4454844	
		7	2	92.6	7	1077.4		5169008	
		8	1	86.2	12			5476228	
		9	3	86.8	18	1713.2	1589.2	6009079	
		10	1	98.7	6			7247320	
		11	2	90.2	19	1747.8		7640035	
		12	2	63.9	9	1657.1		8752849	
		13	1	73.2	11			9365509	
		14	3	51.9	9	1842.1	1910.1	9792446	
		15	3	71.8	6	931.2	1825.2	10872322	
		16	2	56.9	8	1860.1		11513196	
12	5555	1	2	80.5	10	1697.5		546448	1
		2	1	72.8	5			648691	
		3	3	71	8	1728	1497	1673517	
		4	1	75.9	10			2025762	
		5	1	54.5	11			2534224	
		6	3	89.7	11	1854.3	1023.3	3251572	
		7	2	81.7	13	1285.3		3757399	
		8	3	59.1	10	1476.9	1529.9	4604714	
		9	2	73.4	15	1281.6		4987161	
		10	3	76	13	993	1043	5610535	
		11	1	55.3	19			6424881	
		12	2	70.2	11	1911.8		6679663	
		13	3	60.5	5	939.5	1600.5	7239430	
		14	2	95	5	964		7924694	
		15	1	68.6	6			8552192	
		16	1	99.3	5			9466622	
		17	2	84.8	18	1172.2		9696724	
		18	3	97	10	1390	1123	10603979	
		19	2	56.9	5	1291.1		10940382	
		20	3	97.1	7	1558.9	1362.9	11654047	



Test Mode		Mode 2							
Frequency		5.470~5.725 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
13	5540	1	2	96.9	19	1008.1		283689	1
		2	2	99	19	1492		1676999	
		3	3	87.1	13	989.9	1019.9	2426967	
		4	1	61.1	18			3625360	
		5	3	62.2	11	1243.8	1766.8	5925658	
		6	1	76	10			6865716	
		7	3	87.2	17	1144.8	1665.8	7529060	
		8	2	81.5	15	1055.5		9383932	
		9	1	69.8	17			10622080	
		10	2	92	19	1683		10957742	
14	5535	1	1	96.7	7			288367	1
		2	1	54.7	17			660896	
		3	3	52.6	10	1536.4	1334.4	1309965	
		4	2	64.1	17	1168.9		1923650	
		5	2	80.1	18	1808.9		2620524	
		6	3	78.4	19	1726.6	1378.6	3143297	
		7	3	84.3	17	1539.7	1402.7	3735001	
		8	3	81	17	1881	1717	4666585	
		9	2	74.1	18	1575.9		4851931	
		10	1	62.6	15			5483962	
		11	1	67.4	15			6577008	
		12	2	60.4	15	946.6		7056458	
		13	1	51.6	7			7440565	
		14	2	93.6	13	1476.4		8285629	
		15	3	97.5	8	1675.5	1795.5	8889250	
		16	3	73.7	6	1463.3	1294.3	9442593	
		17	2	91.3	9	916.7		9726948	
		18	1	56.5	7			10209408	
		19	2	72.6	14	1831.4		10836022	
		20	3	64.7	16	1625.3	1406.3	11597510	

Test Mode		Mode 2							
Frequency		5.470~5.725 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
15	5547	1	3	74.8	15	1654.2	1233.2	145982	1
		2	1	89.9	5			1058238	
		3	3	58.4	7	1156.6	1161.6	1435873	
		4	2	69.9	10	1722.1		2058964	
		5	2	52.6	16	1393.4		2799658	
		6	3	51.5	5	1113.5	1706.5	3158357	
		7	1	72.2	12			4215839	
		8	3	79.2	13	1336.8	1332.8	4835982	
		9	2	83.7	7	1758.3		5365821	
		10	1	52.8	5			5793588	
		11	1	86.9	11			6523987	
		12	3	83.5	13	1468.5	1231.5	7233985	
		13	2	73.9	18	1220.1		7736982	
		14	2	60.6	5	1880.4		8536827	
		15	1	86.3	6			8935821	
		16	3	97.4	14	1855.6	912.6	9726853	
		17	1	86.7	11			10236581	
		18	2	50.7	14	1644.3		10836582	
		19	3	60.2	5	1924.8	1679.8	11436882	
16	5538	1	3	67.7	13	1787.3	1501.3	193161	1
		2	2	96	10	1092		840518	
		3	1	74.5	7			1979690	
		4	3	95	8	907	1443	2372262	
		5	2	82.3	10	961.7		2691289	
		6	3	84.1	17	978.9	1507.9	3711257	
		7	1	63	10			4053880	
		8	2	93.6	19	1059.4		5119453	
		9	1	61.4	9			5565324	
		10	1	86	14			6228245	
		11	1	63.3	10			6802603	
		12	3	88.6	6	979.4	984.4	7553159	
		13	2	86.6	9	1035.4		8068688	
		14	3	62.4	16	1234.6	985.6	8939294	
		15	2	65.9	11	1859.1		9445705	
		16	2	51.5	15	1339.5		10042487	
		17	1	98.7	10			10888558	
		18	3	66.3	19	1350.7	1640.7	11906444	

Test Mode		Mode 2							
Frequency		5.470~5.725 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
17	5559	1	2	92.4	13	1522.6		354862	1
		2	2	85.9	16	1893.1		860452	
		3	3	65.9	7	1857.1	1823.1	1526845	
		4	1	95.1	9			2256871	
		5	3	87.1	11	934.9	928.9	2958635	
		6	1	73.5	8			3945874	
		7	2	68.7	8	1508.3		4756882	
		8	3	52.1	11	1324.9	987.9	5036528	
		9	1	76.4	10			5945372	
		10	3	96.4	5	1337.6	1898.6	6852981	
		11	2	83.4	11	1597.6		7535962	
		12	1	96.5	18			8018265	
		13	1	79.7	16			8625478	
		14	1	73	14			9347658	
		15	2	86.4	13	1439.6		9925348	
		16	3	90.8	17	1502.2	1389.2	10754826	
		17	3	67.1	16	1532.9	1649.9	11458283	
18	5551	1	1	51.3	11			420200	1
		2	3	56.3	12	1767.7	1360.7	1045128	
		3	2	61.7	10	1582.3		2054476	
		4	2	90.5	8	1722.5		2830215	
		5	3	87.8	13	1288.2	1741.2	3432245	
		6	1	50.9	19			4196566	
		7	1	54.4	12			4953029	
		8	2	91.6	18	1612.4		6311483	
		9	3	87.7	6	1436.3	1258.3	7141870	
		10	3	65.7	16	1723.3	1896.3	7944048	
		11	1	75.3	12			8374995	
		12	2	73.7	15	1892.3		9016434	
		13	2	96.2	13	1411.8		10197913	
		14	1	70.1	12			10817077	
		15	3	52.7	13	1021.3	1393.3	11848236	

Test Mode		Mode 2							
Frequency		5.470~5.725 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
19	5535	1	1	58.9	15			266760	0
		2	2	89.3	18	1728.7		1250019	
		3	1	53.6	14			1804563	
		4	2	66.6	14	1719.4		2650483	
		5	2	64.2	12	1649.8		3910049	
		6	3	57.4	19	1085.6	1816.6	4529777	
		7	1	64.9	10			5348374	
		8	2	69	19	1700		6227024	
		9	2	62	16	1885		7189539	
		10	3	69.2	8	1711.8	1049.8	8019511	
		11	3	80.1	19	1763.9	1461.9	8711083	
		12	1	84.4	9			9670463	
		13	3	59.6	19	1597.4	1092.4	10840806	
		14	3	69.7	17	1392.3	1694.3	11966423	
20	5536	1	2	96.9	19	1008.1		283689	1
		2	2	99	19	1492		1676999	
		3	3	87.1	13	989.9	1019.9	2426967	
		4	1	61.1	18			3625360	
		5	3	62.2	11	1243.8	1766.8	5925658	
		6	1	76	10			6865716	
		7	3	87.2	17	1144.8	1665.8	7529060	
		8	2	81.5	15	1055.5		9383932	
		9	1	69.8	17			10622080	
		10	2	92	19	1683		10957742	
21	5538	1	2	67.2	2	1432.5		3522	1
		2	1	93.3	8			1642901	
		3	3	95.8	7	1388.6	1342.6	2881972	
		4	2	61.7	13	1642.1		3426072	
		5	2	70.5	9	1765.2		4826843	
		6	1	92.7	15			5325738	
		7	3	86.7	9	1356.2	1567.2	6685502	
		8	1	83.2	17			7854910	
		9	2	88.6	13	1389.3		8926675	
		10	3	65.2	10	1211.6	1588.7	9237628	
		11	2	70.3	14	932.2		10074565	
		12	1	70.8	12			11184205	

Test Mode		Mode 2							
Frequency		5.470~5.725 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
22	5537	1	3	61.2	17	1426.1	1426.1	77457	1
		2	2	72.3	15	1674.1		1764135	
		3	3	69.5	16	1625.1	1621.1	2759349	
		4	1	83.2	13			4821891	
		5	2	82.6	10	1103.8		5492401	
		6	1	89.5	17			6759573	
		7	1	87.4	12			8102166	
		8	3	75.2	4	1379.9	1289.9	9890082	
		9	2	50.7	12	1694.9		11314601	
23	5554	1	1	80.2	9			248517	1
		2	3	54.3	4	1212.6	1276.6	976354	
		3	2	60.8	17	1587.3		1647277	
		4	3	72.5	17	1854.4	1202.4	2491220	
		5	3	74.3	6	1730.7	1117.7	3364667	
		6	1	87.6	8			4854144	
		7	2	74.9	6	1491.9		5632525	
		8	1	74	19			6428577	
		9	3	78.2	9	1716.5	945.7	7327793	
		10	1	90.8	7			7543757	
		11	2	74.8	10	1542.2		8279794	
		12	2	87.5	9	1481.6		9223718	
		13	1	50.3	15			9849588	
		14	3	87.7	13	1546.9	1246.6	10197832	
		15	2	64.2	15	1475.8		11345245	
24	5552	1	3	79.8	14	1346.3	1824.3	432429	1
		2	3	75.6	10	958.6	1762.4	1623461	
		3	1	74.7	11			2254243	
		4	2	62.3	6	1324.3		2724526	
		5	1	61.9	12			3169665	
		6	3	61.5	13	1512.6	1388.7	4347842	
		7	1	94.3	9			5546509	
		8	2	72.5	7	1642.1		6346274	
		9	2	62.7	6	1167.7		7501401	
		10	3	70.2	13	1164.9	1497.8	8203168	
		11	1	58.7	14			9129685	
		12	1	82.4	16			9678762	
		13	3	98.4	9	1421.9	1812.9	10274415	
		14	2	77.3	11	1621.6		11320469	

Test Mode		Mode 2							
Frequency		5.470~5.725 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
25	5550	1	3	93.2	13	1571.2	1867.2	142343	1
		2	2	51.4	13	1346.8		858714	
		3	1	96.4	12			1642231	
		4	3	95.2	9	1764.6	1763.7	2128428	
		5	2	96.7	12	1632.6		2754253	
		6	3	75.6	11	1679.8	1346.8	3624642	
		7	1	62.1	7			4237561	
		8	2	69.8	11	1326.7		4846623	
		9	3	88.3	12	1842.5	1201.4	5498365	
		10	2	71.4	17	1513.7		6237403	
		11	1	54.7	9			6742869	
		12	3	62.3	12	1614.3	1192.3	7379568	
		13	1	57.8	12			8124234	
		14	3	84.6	11	978.3	1194.7	8527236	
		15	1	77.3	12			9346581	
		16	2	63.4	10	1518.1		10292563	
		17	2	89.7	9	1462.2		10775249	
		18	3	65.6	12	1372.6	1218.2	11445468	
26	5558	1	1	55.3	12			453512	1
		2	3	52.7	13	1134.2	1642.1	864234	
		3	2	66.3	16	1347.4		1735103	
		4	2	90.2	13	1756.7		2648041	
		5	3	61.3	8	1647.4	1457.9	3628408	
		6	1	74.5	10			4589847	
		7	2	91.7	6	1127.3		5628008	
		8	1	84.3	11			5953726	
		9	3	84.5	17	1612.2	1743.2	6241079	
		10	1	94.7	7			7351321	
		11	2	91.5	18	1648.7		7642036	
		12	2	62.9	10	1572.3		8637847	
		13	1	82.4	9			9428509	
		14	3	50.7	10	1745.2	1845.1	9654445	
		15	3	70.4	7	927.2	1798.2	10327325	
		16	2	55.3	9	1774.3		11134196	

Test Mode		Mode 2							
Frequency		5.470~5.725 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
27	5545	1	2	78.4	12	1532.5		553748	1
		2	1	70.4	4			647891	
		3	3	71.6	7	1624	1479	1628517	
		4	1	73.7	10			2327762	
		5	1	52.7	13			2512224	
		6	3	87.9	9	1632.3	1208.3	3435572	
		7	2	81.2	10	1419.3		3727399	
		8	3	55.4	10	1478.9	1547.9	4819714	
		9	2	71.7	16	1429.6		4915161	
		10	3	73.8	13	756	1345	5516535	
		11	1	53.7	17			6823881	
		12	2	66.5	11	1749.8		6917663	
		13	3	62.7	6	875.5	1624.5	7428430	
		14	2	93.6	7	754		7924694	
		15	1	64.8	5			8916192	
		16	1	96.2	3			9623622	
		17	2	82.8	15	1315.2		9727724	
		18	3	96.5	10	1346	1324	10123949	
		19	2	54.9	8	1427.1		10790385	
		20	3	95.2	10	1549.9	1512.9	11384046	
28	5566	1	1	95.4	6			273267	1
		2	1	53.2	16			654996	
		3	3	51.6	9	1432.4	1279.4	1278965	
		4	2	63.4	15	1241.9		1846650	
		5	2	79.8	16	1756.9		2549524	
		6	3	77.6	18	1642.6	1428.6	3332297	
		7	3	83.4	17	1432.7	1399.7	3642001	
		8	3	80.2	16	1765	1648	4724585	
		9	2	72.9	17	1649.9		4868931	
		10	1	61.7	13			5516962	
		11	1	65.4	15			6613008	
		12	2	61.8	14	957.6		7127458	
		13	1	52.5	6			7742365	
		14	2	92.7	12	1321.4		8317629	
		15	3	95.6	7	1547.5	1815.5	8776250	
		16	3	72.6	8	1516.3	1315.3	9519593	
		17	2	92.7	10	925.7		9619948	
		18	1	55.4	6			10328408	
		19	2	71.8	13	1759.4		10750022	
		20	3	52.4	15	1637.3	1328.3	11495510	

Test Mode		Mode 2							
Frequency		5.470~5.725 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
29	5561	1	2	91.2	12	1426.6		344862	1
		2	2	86.4	15	1732.1		856752	
		3	3	64.2	8	1746.1	1728.1	1498845	
		4	1	94.3	10			2321871	
		5	3	88.4	10	932.9	937.9	2827635	
		6	1	72.1	9			3854874	
		7	2	67.4	7	1613.3		4647882	
		8	3	51.4	11	1334.9	967.9	5127528	
		9	1	74.3	11			5846372	
		10	3	94.8	6	1327.6	1795.6	6750981	
		11	2	82.1	10	1627.6		7432962	
		12	1	95.7	16			8128265	
		13	1	78.3	15			8567478	
		14	1	72.1	14			9201658	
		15	2	85.7	13	1517.6		9891348	
		16	3	91.3	16	1642.2	1426.2	10274828	
		17	3	68.2	15	1637.9	1527.9	11468285	
30	5560	1	1	61.2	14			251660	1
		2	2	88.4	18	1628.7		1318019	
		3	1	52.1	13			1742563	
		4	2	65.9	15	1678.4		2543483	
		5	2	63.2	13	1658.8		3873049	
		6	3	58.3	18	1129.6	1754.6	4627777	
		7	1	62.9	11			5438374	
		8	2	68.4	17	1627		6357024	
		9	2	63.1	15	1782		7219539	
		10	3	68.2	7	1641.8	1129.8	8128511	
		11	3	79.8	19	1645.9	1518.9	8624083	
		12	1	82.7	10			9714463	
		13	3	60.2	18	1427.4	1128.4	10260806	
		14	3	68.7	16	1384.3	1572.3	11876423	
Detection Percentage (%)									86.67



Test Mode	Mode 2			
Frequency	5.470~5.725 GHz			
Radar Signal	Type 6			
Trial #	Pulses / Hop	Pulse Width (us)	PRI (us)	1=Detection ; 0=No Detection
1	9	1	333	1
2	9	1	333	2
3	9	1	333	3
4	9	1	333	4
5	9	1	333	5
6	9	1	333	6
7	9	1	333	7
8	9	1	333	8
9	9	1	333	9
10	9	1	333	10
11	9	1	333	11
12	9	1	333	12
13	9	1	333	13
14	9	1	333	14
15	9	1	333	15
16	9	1	333	16
17	9	1	333	17
18	9	1	333	18
19	9	1	333	19
20	9	1	333	20
21	9	1	333	21
22	9	1	333	22
23	9	1	333	23
24	9	1	333	24
25	9	1	333	25
26	9	1	333	26
27	9	1	333	27
28	9	1	333	28
29	9	1	333	29
30	9	1	333	30
Detection Percentage (%)				93.33

Test Mode		Mode 2				
Frequency		5.600~5.650 GHz				
Radar Signal		Type 1				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	PRF (Hz)	Pulses / Burst	1=Detection ; 0=No Detection
1	5612	1	638	1567	83	1
2	5613	1	858	1166	62	0
3	5614	1	738	1355	72	1
4	5615	1	538	1859	99	1
5	5616	1	778	1285	68	1
6	5617	1	658	1520	81	1
7	5618	1	3066	326	18	1
8	5619	1	598	1672	89	1
9	5620	1	578	1730	92	1
10	5621	1	698	1433	76	1
11	5626	1	618	1618	86	1
12	5627	1	798	1253	67	1
13	5628	1	678	1475	78	1
14	5629	1	558	1792	95	1
15	5630	1	818	1222	65	1
16	5631	1	1541	649	35	1
17	5632	1	891	1122	60	1
18	5633	1	929	1076	57	0
19	5634	1	2448	408	22	1
20	5635	1	1833	546	29	1
21	5639	1	1865	536	29	1
22	5640	1	1542	649	35	1
23	5641	1	2995	334	18	1
24	5642	1	1202	832	44	1
25	5643	1	1165	858	46	1
26	5644	1	1244	804	43	0
27	5645	1	2852	351	19	1
28	5646	1	2242	446	24	1
29	5647	1	1157	864	46	1
30	5648	1	1288	776	41	1
Detection Percentage (%)						90.00

Test Mode		Mode 2				
Frequency		5.600~5.650 GHz				
Radar Signal		Type 2				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	PRF (Hz)	Pulses / Burst	1=Detection ; 0=No Detection
1	5612	2.6	228	4386	23	1
2	5613	4.6	150	6667	27	1
3	5614	1.1	184	5435	29	0
4	5615	4.8	203	4926	24	1
5	5616	3.7	189	5291	25	1
6	5617	2.6	201	4975	24	1
7	5618	3.5	216	4630	26	1
8	5619	4.2	194	5155	23	0
9	5620	2.9	225	4444	25	1
10	5621	3.3	206	4854	27	0
11	5626	3.9	213	4695	28	1
12	5627	4.7	159	6289	26	1
13	5628	3.1	167	5988	24	1
14	5629	1.9	217	4608	23	1
15	5630	2.4	162	6173	25	1
16	5631	3.4	204	4902	28	1
17	5632	2.3	170	5882	27	1
18	5633	3.5	184	5435	23	1
19	5634	4.9	150	6667	27	1
20	5635	4.6	211	4739	29	1
21	5639	2.9	158	6329	23	0
22	5640	2.6	226	4425	27	1
23	5641	1.6	204	4902	26	1
24	5642	3.9	181	5525	25	1
25	5643	4.6	202	4950	24	1
26	5644	4.1	194	5155	27	1
27	5645	2.3	193	5181	28	0
28	5646	3.9	173	5780	29	1
29	5647	4.3	188	5319	23	1
30	5648	1.5	215	4651	26	1
Detection Percentage (%)						83.33

Test Mode		Mode 2				
Frequency		5.600~5.650 GHz				
Radar Signal		Type 3				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	PRF (Hz)	Pulses / Burst	1=Detection ; 0=No Detection
1	5612	8.0	492	2033	16	1
2	5613	6.7	200	5000	18	1
3	5614	8.6	418	2392	16	0
4	5615	9.4	351	2849	17	1
5	5616	7.4	383	2611	18	1
6	5617	9.8	232	4310	16	1
7	5618	7.6	245	4082	18	1
8	5619	8.2	289	3460	17	1
9	5620	6.5	306	3268	18	1
10	5621	7.3	421	2375	16	1
11	5626	7.8	335	2985	18	1
12	5627	8.8	375	2667	17	1
13	5628	9.6	324	3086	16	1
14	5629	9.4	259	3861	18	0
15	5630	6.4	220	4545	17	1
16	5631	7.2	342	2924	16	1
17	5632	9.1	377	2653	17	1
18	5633	9.6	457	2188	16	1
19	5634	8.0	471	2123	18	1
20	5635	9.0	304	3289	18	1
21	5639	8.0	316	3165	17	1
22	5640	9.8	325	3077	16	1
23	5641	8.0	409	2445	17	1
24	5642	9.9	200	5000	17	1
25	5643	8.8	458	2183	16	1
26	5644	8.0	232	4310	18	1
27	5645	8.3	250	4000	16	0
28	5646	8.7	270	3704	16	1
29	5647	7.7	350	2857	17	1
30	5648	7.1	230	4348	16	0
Detection Percentage (%)						86.67

Test Mode		Mode 2				
Frequency		5.600~5.650 GHz				
Radar Signal		Type 4				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	PRF (Hz)	Pulses / Burst	1=Detection ; 0=No Detection
1	5612	18.0	493	2028	15	1
2	5613	19.9	200	5000	12	1
3	5614	12.9	487	2053	14	1
4	5615	13.7	377	2653	13	1
5	5616	15.6	462	2165	15	1
6	5617	18.4	358	2793	16	0
7	5618	13.4	267	3745	12	1
8	5619	15.7	349	2865	14	0
9	5620	19.1	409	2445	15	1
10	5621	18.2	423	2364	16	1
11	5626	13.2	325	3077	13	1
12	5627	14.6	264	3788	12	1
13	5628	18.6	326	3067	14	1
14	5629	15.0	452	2212	13	1
15	5630	16.3	230	4348	12	1
16	5631	19.8	238	4202	13	1
17	5632	18.2	420	2381	16	1
18	5633	16.3	452	2212	15	1
19	5634	14.2	495	2020	12	0
20	5635	17.8	228	4386	16	1
21	5639	19.1	211	4739	16	1
22	5640	18.4	283	3534	15	0
23	5641	11.8	411	2433	12	1
24	5642	14.2	284	3521	13	1
25	5643	13.9	202	4950	12	1
26	5644	17.8	340	2941	14	1
27	5645	15.6	290	3448	16	1
28	5646	14.6	250	4000	16	1
29	5647	14.4	484	2066	15	1
30	5648	18.9	387	2584	13	1
Detection Percentage (%)						86.67

Test Mode		Mode 2							
Frequency		5.600~5.650 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
1	5294	1	2	51.7	7	1146.3		647836	0
		2	1	93.2	15			1409398	
		3	3	79.6	10	1290.4	964.4	2872945	
		4	2	85.8	14	1559.2		4049183	
		5	2	76.5	14	1210.5	1553.5	4494059	
		6	1	61.7	8			5716328	
		7	3	83.6	7	1205.4	993.4	7308202	
		8	1	59.8	5			8119962	
		9	2	69.9	10	1355.1		9532813	
		10	3	94.3	10	1747.7	1408.7	10751035	
		11	2	61.8	18	1000.2		11053268	
2	5302	1	2	66.3	2	1226.7		3658	0
		2	1	94.2	9			1529901	
		3	3	96.7	6	1255.6	1330.6	2951972	
		4	2	60.8	11	1703.1		3038072	
		5	2	70	8	1886.2		4885843	
		6	1	93	16			5281738	
		7	3	87.7	10	1474.2	1427.2	6746502	
		8	1	84.5	18			7749910	
		9	2	89	12	1302.3		8035675	
		10	3	66.4	11	1031.7	1634.7	9089628	
		11	2	71.5	15	917.3		10039865	
		12	1	71.1	11			11195005	
3	5300	1	3	76.5	5	1658.5	1885.5	341903	1
		2	3	89.5	5	1162.5	1012.5	1039290	
		3	1	92.5	15			2530435	
		4	2	82.5	5	1869.5		3352797	
		5	1	68.5	9			3783207	
		6	3	78.3	17	1239.7	936.7	5292381	
		7	1	91	6			6334407	
		8	2	59.3	7	1898.7		6688649	
		9	2	58	13	1884		7600600	
		10	3	92.8	17	1029.2	1258.2	8865035	
		11	1	77.4	10			9464201	
		12	3	90.8	10	1219.2	1458.2	10488185	
		13	2	87.9	8	1764.1		11914643	

Test Mode		Mode 2							
Frequency		5.600~5.650 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
4	5300	1	3	50.9	16	1321.1	1333.1	77627	1
		2	2	73.9	16	1538.1		2317135	
		3	3	71.9	17	1596.1	1584.1	2684349	
		4	1	54.3	14			4779891	
		5	2	84.2	9	1055.8		5502401	
		6	1	99.3	18			6827573	
		7	1	89.5	13			8051166	
		8	3	78.1	5	1436.9	1262.9	9980082	
		9	2	51.1	13	1700.9		11274601	
5	5298	1	1	81.8	7			255617	0
		2	3	55.4	5	1016.6	1310.6	929954	
		3	2	61.7	18	1616.3		1699277	
		4	3	78.6	19	1882.4	1115.4	2516220	
		5	3	75.3	7	1730.7	1082.7	3350667	
		6	1	88.6	7			4671144	
		7	2	74.1	5	1510.9		5553525	
		8	1	75	18			6315577	
		9	3	79.5	8	1722.5	925.5	7021793	
		10	1	91.5	6			7652757	
		11	2	74.8	9	1531.2		8144794	
		12	2	88.4	10	1475.6		9507618	
		13	1	51.7	16			9965188	
		14	3	88.1	12	1605.9	1230.9	10600830	
		15	2	63.2	16	1448.8		11228243	
6	5297	1	3	81.6	15	1326.4	1816.4	420027	1
		2	3	81.6	9	960.4	1855.4	1213961	
		3	1	73.5	12			2412241	
		4	2	61.7	5	1305.3		2705526	
		5	1	63.1	15			4149665	
		6	3	61.4	15	1499.6	1396.6	4418842	
		7	1	99.3	11			5456509	
		8	2	74.9	5	1604.1		6153274	
		9	2	64.3	7	1079.7		7420401	
		10	3	71.1	15	1154.9	1510.9	8105166	
		11	1	59.4	12			9087685	
		12	1	84.5	17			9743762	
		13	3	99.1	11	1357.9	1730.9	10514412	
		14	2	78.4	12	1576.6		11920466	

Test Mode		Mode 2							
Frequency		5.600~5.650 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
7	5299	1	2	59.5	14	1515.5		154623	1
		2	1	71.2	5			860435	
		3	3	72.1	13	1820.9	1327.9	1566260	
		4	2	50.4	19	1603.6		2272135	
		5	3	99.2	11	1157.8	1085.8	2977376	
		6	1	53.8	13			3682861	
		7	2	93.4	7	1133.6		4388707	
		8	3	59.4	7	1374.6	993.6	5094518	
		9	2	53.6	13	1092.4		5799787	
		10	1	59.8	8			6505670	
		11	3	97.7	6	1593.3	1125.3	7209959	
		12	1	84.2	10			7915377	
		13	3	93.2	9	1104.8	1300.8	8619959	
		14	1	97.7	11			9326217	
		15	2	71.2	6	1580.8		10032059	
		16	2	79.8	8	1537.2		10736631	
		8	5296	1	3	95.8	12	1628.2	
2	2			52.2	15	1291.8		865214	
3	1			99.9	11			1685231	
4	3			97.4	8	1853.6	1822.6	2035426	
5	2			98.4	11	1706.6		2846253	
6	3			74.2	12	1752.8	1348.8	3625642	
7	1			63.1	6			4123561	
8	2			70.3	13	1127.7		4953621	
9	3			85.5	10	1782.5	1179.5	5512365	
10	2			73.3	18	1409.7		6125403	
11	1			50.9	10			6865868	
12	3			64.7	13	1564.3	1184.3	7421568	
13	1			56.1	10			8088234	
14	3			86.3	12	980.7	1184.7	8645235	
15	1			78	13			9236581	
16	2			62.9	11	1426.1		10132561	
17	2			88.8	10	1513.2		10765249	
18	3			67.4	14	1249.6	1172.6	11235461	



Test Mode		Mode 2							
Frequency		5.600~5.650 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
9	5308	1	3	13	13	1499.3	1528.3	125412	1
		2	1	17	17			782539	
		3	3	17	17	1939.3	1576.3	1526841	
		4	1	11	11			2156487	
		5	1	14	14			2651285	
		6	3	9	9	1629.4	1414.4	3326582	
		7	2	7	7	1535.8		3988625	
		8	3	14	14	1343	1104	4725418	
		9	2	14	14	1553.1		5326874	
		10	3	13	13	1520.9	918.9	5933652	
		11	1	13	13			6529425	
		12	2	11	11	1028.4		7149632	
		13	3	15	15	1525.4	1407.4	7759932	
		14	2	19	19	1369.6		8425981	
		15	1	8	8			9258412	
		16	1	9	9			9925874	
		17	2	9	9	1050.3		1026582	
		18	3	5	5	1701.2	1173.2	10963658	
		19	2	6	6	1305.2		11456981	
10	5298	1	1	60.7	9			353222	1
		2	3	59.2	13	1331.8	1077.8	1659461	
		3	2	96.1	8	1237.9		3432174	
		4	3	70.5	16	1145.5	1708.5	5432909	
		5	2	63.2	13	1721.8		6953575	
		6	1	51.5	7			8826390	
		7	1	89.1	5			10242227	
		8	2	86.1	12	1499.9		10759333	

Test Mode		Mode 2							
Frequency		5.600~5.650 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
11	5297	1	1	57.4	14			472419	1
		2	3	83.9	15	1079.1	1717.1	861133	
		3	2	67.1	17	1333.9		1822100	
		4	2	91.3	14	1877.7		2679041	
		5	3	60.1	9	1784.9	1515.9	3219408	
		6	1	72.3	11			4454844	
		7	2	92.6	7	1077.4		5169008	
		8	1	86.2	12			5476228	
		9	3	86.8	18	1713.2	1589.2	6009079	
		10	1	98.7	6			7247320	
		11	2	90.2	19	1747.8		7640035	
		12	2	63.9	9	1657.1		8752849	
		13	1	73.2	11			9365509	
		14	3	51.9	9	1842.1	1910.1	9792446	
		15	3	71.8	6	931.2	1825.2	10872322	
		16	2	56.9	8	1860.1		11513196	
12	5298	1	2	80.5	10	1697.5		546448	1
		2	1	72.8	5			648691	
		3	3	71	8	1728	1497	1673517	
		4	1	75.9	10			2025762	
		5	1	54.5	11			2534224	
		6	3	89.7	11	1854.3	1023.3	3251572	
		7	2	81.7	13	1285.3		3757399	
		8	3	59.1	10	1476.9	1529.9	4604714	
		9	2	73.4	15	1281.6		4987161	
		10	3	76	13	993	1043	5610535	
		11	1	55.3	19			6424881	
		12	2	70.2	11	1911.8		6679663	
		13	3	60.5	5	939.5	1600.5	7239430	
		14	2	95	5	964		7924694	
		15	1	68.6	6			8552192	
		16	1	99.3	5			9466622	
		17	2	84.8	18	1172.2		9696724	
		18	3	97	10	1390	1123	10603979	
		19	2	56.9	5	1291.1		10940382	
		20	3	97.1	7	1558.9	1362.9	11654047	

Test Mode		Mode 2							
Frequency		5.600~5.650 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
13	5293	1	2	96.9	19	1008.1		283689	1
		2	2	99	19	1492		1676999	
		3	3	87.1	13	989.9	1019.9	2426967	
		4	1	61.1	18			3625360	
		5	3	62.2	11	1243.8	1766.8	5925658	
		6	1	76	10			6865716	
		7	3	87.2	17	1144.8	1665.8	7529060	
		8	2	81.5	15	1055.5		9383932	
		9	1	69.8	17			10622080	
		10	2	92	19	1683		10957742	
14	5293	1	1	96.7	7			288367	1
		2	1	54.7	17			660896	
		3	3	52.6	10	1536.4	1334.4	1309965	
		4	2	64.1	17	1168.9		1923650	
		5	2	80.1	18	1808.9		2620524	
		6	3	78.4	19	1726.6	1378.6	3143297	
		7	3	84.3	17	1539.7	1402.7	3735001	
		8	3	81	17	1881	1717	4666585	
		9	2	74.1	18	1575.9		4851931	
		10	1	62.6	15			5483962	
		11	1	67.4	15			6577008	
		12	2	60.4	15	946.6		7056458	
		13	1	51.6	7			7440565	
		14	2	93.6	13	1476.4		8285629	
		15	3	97.5	8	1675.5	1795.5	8889250	
		16	3	73.7	6	1463.3	1294.3	9442593	
		17	2	91.3	9	916.7		9726948	
		18	1	56.5	7			10209408	
		19	2	72.6	14	1831.4		10836022	
		20	3	64.7	16	1625.3	1406.3	11597510	

Test Mode		Mode 2							
Frequency		5.600~5.650 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
15	5295	1	3	74.8	15	1654.2	1233.2	145982	1
		2	1	89.9	5			1058238	
		3	3	58.4	7	1156.6	1161.6	1435873	
		4	2	69.9	10	1722.1		2058964	
		5	2	52.6	16	1393.4		2799658	
		6	3	51.5	5	1113.5	1706.5	3158357	
		7	1	72.2	12			4215839	
		8	3	79.2	13	1336.8	1332.8	4835982	
		9	2	83.7	7	1758.3		5365821	
		10	1	52.8	5			5793588	
		11	1	86.9	11			6523987	
		12	3	83.5	13	1468.5	1231.5	7233985	
		13	2	73.9	18	1220.1		7736982	
		14	2	60.6	5	1880.4		8536827	
		15	1	86.3	6			8935821	
		16	3	97.4	14	1855.6	912.6	9726853	
		17	1	86.7	11			10236581	
		18	2	50.7	14	1644.3		10836582	
		19	3	60.2	5	1924.8	1679.8	11436882	
16	5303	1	3	67.7	13	1787.3	1501.3	193161	1
		2	2	96	10	1092		840518	
		3	1	74.5	7			1979690	
		4	3	95	8	907	1443	2372262	
		5	2	82.3	10	961.7		2691289	
		6	3	84.1	17	978.9	1507.9	3711257	
		7	1	63	10			4053880	
		8	2	93.6	19	1059.4		5119453	
		9	1	61.4	9			5565324	
		10	1	86	14			6228245	
		11	1	63.3	10			6802603	
		12	3	88.6	6	979.4	984.4	7553159	
		13	2	86.6	9	1035.4		8068688	
		14	3	62.4	16	1234.6	985.6	8939294	
		15	2	65.9	11	1859.1		9445705	
		16	2	51.5	15	1339.5		10042487	
		17	1	98.7	10			10888558	
		18	3	66.3	19	1350.7	1640.7	11906444	

Test Mode		Mode 2							
Frequency		5.600~5.650 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
17	5304	1	2	92.4	13	1522.6		354862	1
		2	2	85.9	16	1893.1		860452	
		3	3	65.9	7	1857.1	1823.1	1526845	
		4	1	95.1	9			2256871	
		5	3	87.1	11	934.9	928.9	2958635	
		6	1	73.5	8			3945874	
		7	2	68.7	8	1508.3		4756882	
		8	3	52.1	11	1324.9	987.9	5036528	
		9	1	76.4	10			5945372	
		10	3	96.4	5	1337.6	1898.6	6852981	
		11	2	83.4	11	1597.6		7535962	
		12	1	96.5	18			8018265	
		13	1	79.7	16			8625478	
		14	1	73	14			9347658	
		15	2	86.4	13	1439.6		9925348	
		16	3	90.8	17	1502.2	1389.2	10754826	
		17	3	67.1	16	1532.9	1649.9	11458283	
18	5297	1	1	51.3	11			420200	1
		2	3	56.3	12	1767.7	1360.7	1045128	
		3	2	61.7	10	1582.3		2054476	
		4	2	90.5	8	1722.5		2830215	
		5	3	87.8	13	1288.2	1741.2	3432245	
		6	1	50.9	19			4196566	
		7	1	54.4	12			4953029	
		8	2	91.6	18	1612.4		6311483	
		9	3	87.7	6	1436.3	1258.3	7141870	
		10	3	65.7	16	1723.3	1896.3	7944048	
		11	1	75.3	12			8374995	
		12	2	73.7	15	1892.3		9016434	
		13	2	96.2	13	1411.8		10197913	
		14	1	70.1	12			10817077	
		15	3	52.7	13	1021.3	1393.3	11848236	

Test Mode		Mode 2							
Frequency		5.600~5.650 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
19	5303	1	1	58.9	15			266760	1
		2	2	89.3	18	1728.7		1250019	
		3	1	53.6	14			1804563	
		4	2	66.6	14	1719.4		2650483	
		5	2	64.2	12	1649.8		3910049	
		6	3	57.4	19	1085.6	1816.6	4529777	
		7	1	64.9	10			5348374	
		8	2	69	19	1700		6227024	
		9	2	62	16	1885		7189539	
		10	3	69.2	8	1711.8	1049.8	8019511	
		11	3	80.1	19	1763.9	1461.9	8711083	
		12	1	84.4	9			9670463	
		13	3	59.6	19	1597.4	1092.4	10840806	
		14	3	69.7	17	1392.3	1694.3	11966423	
20	5298	1	2	96.9	19	1008.1		283689	1
		2	2	99	19	1492		1676999	
		3	3	87.1	13	989.9	1019.9	2426967	
		4	1	61.1	18			3625360	
		5	3	62.2	11	1243.8	1766.8	5925658	
		6	1	76	10			6865716	
		7	3	87.2	17	1144.8	1665.8	7529060	
		8	2	81.5	15	1055.5		9383932	
		9	1	69.8	17			10622080	
		10	2	92	19	1683		10957742	
21	5302	1	2	67.2	2	1432.5		3522	0
		2	1	93.3	8			1642901	
		3	3	95.8	7	1388.6	1342.6	2881972	
		4	2	61.7	13	1642.1		3426072	
		5	2	70.5	9	1765.2		4826843	
		6	1	92.7	15			5325738	
		7	3	86.7	9	1356.2	1567.2	6685502	
		8	1	83.2	17			7854910	
		9	2	88.6	13	1389.3		8926675	
		10	3	65.2	10	1211.6	1588.7	9237628	
		11	2	70.3	14	932.2		10074565	
		12	1	70.8	12			11184205	

Test Mode		Mode 2							
Frequency		5.600~5.650 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
22	5300	1	3	61.2	17	1426.1	1426.1	77457	1
		2	2	72.3	15	1674.1		1764135	
		3	3	69.5	16	1625.1	1621.1	2759349	
		4	1	83.2	13			4821891	
		5	2	82.6	10	1103.8		5492401	
		6	1	89.5	17			6759573	
		7	1	87.4	12			8102166	
		8	3	75.2	4	1379.9	1289.9	9890082	
		9	2	50.7	12	1694.9		11314601	
23	5293	1	1	80.2	9			248517	1
		2	3	54.3	4	1212.6	1276.6	976354	
		3	2	60.8	17	1587.3		1647277	
		4	3	72.5	17	1854.4	1202.4	2491220	
		5	3	74.3	6	1730.7	1117.7	3364667	
		6	1	87.6	8			4854144	
		7	2	74.9	6	1491.9		5632525	
		8	1	74	19			6428577	
		9	3	78.2	9	1716.5	945.7	7327793	
		10	1	90.8	7			7543757	
		11	2	74.8	10	1542.2		8279794	
		12	2	87.5	9	1481.6		9223718	
		13	1	50.3	15			9849588	
		14	3	87.7	13	1546.9	1246.6	10197832	
		15	2	64.2	15	1475.8		11345245	
24	5302	1	3	79.8	14	1346.3	1824.3	432429	1
		2	3	75.6	10	958.6	1762.4	1623461	
		3	1	74.7	11			2254243	
		4	2	62.3	6	1324.3		2724526	
		5	1	61.9	12			3169665	
		6	3	61.5	13	1512.6	1388.7	4347842	
		7	1	94.3	9			5546509	
		8	2	72.5	7	1642.1		6346274	
		9	2	62.7	6	1167.7		7501401	
		10	3	70.2	13	1164.9	1497.8	8203168	
		11	1	58.7	14			9129685	
		12	1	82.4	16			9678762	
		13	3	98.4	9	1421.9	1812.9	10274415	
		14	2	77.3	11	1621.6		11320469	

Test Mode		Mode 2							
Frequency		5.600~5.650 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
25	5300	1	3	93.2	13	1571.2	1867.2	142343	1
		2	2	51.4	13	1346.8		858714	
		3	1	96.4	12			1642231	
		4	3	95.2	9	1764.6	1763.7	2128428	
		5	2	96.7	12	1632.6		2754253	
		6	3	75.6	11	1679.8	1346.8	3624642	
		7	1	62.1	7			4237561	
		8	2	69.8	11	1326.7		4846623	
		9	3	88.3	12	1842.5	1201.4	5498365	
		10	2	71.4	17	1513.7		6237403	
		11	1	54.7	9			6742869	
		12	3	62.3	12	1614.3	1192.3	7379568	
		13	1	57.8	12			8124234	
		14	3	84.6	11	978.3	1194.7	8527236	
		15	1	77.3	12			9346581	
		16	2	63.4	10	1518.1		10292563	
		17	2	89.7	9	1462.2		10775249	
		18	3	65.6	12	1372.6	1218.2	11445468	
26	5300	1	1	55.3	12			453512	1
		2	3	52.7	13	1134.2	1642.1	864234	
		3	2	66.3	16	1347.4		1735103	
		4	2	90.2	13	1756.7		2648041	
		5	3	61.3	8	1647.4	1457.9	3628408	
		6	1	74.5	10			4589847	
		7	2	91.7	6	1127.3		5628008	
		8	1	84.3	11			5953726	
		9	3	84.5	17	1612.2	1743.2	6241079	
		10	1	94.7	7			7351321	
		11	2	91.5	18	1648.7		7642036	
		12	2	62.9	10	1572.3		8637847	
		13	1	82.4	9			9428509	
		14	3	50.7	10	1745.2	1845.1	9654445	
		15	3	70.4	7	927.2	1798.2	10327325	
		16	2	55.3	9	1774.3		11134196	



Test Mode		Mode 2							
Frequency		5.600~5.650 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
27	5292	1	2	78.4	12	1532.5		553748	1
		2	1	70.4	4			647891	
		3	3	71.6	7	1624	1479	1628517	
		4	1	73.7	10			2327762	
		5	1	52.7	13			2512224	
		6	3	87.9	9	1632.3	1208.3	3435572	
		7	2	81.2	10	1419.3		3727399	
		8	3	55.4	10	1478.9	1547.9	4819714	
		9	2	71.7	16	1429.6		4915161	
		10	3	73.8	13	756	1345	5516535	
		11	1	53.7	17			6823881	
		12	2	66.5	11	1749.8		6917663	
		13	3	62.7	6	875.5	1624.5	7428430	
		14	2	93.6	7	754		7924694	
		15	1	64.8	5			8916192	
		16	1	96.2	3			9623622	
		17	2	82.8	15	1315.2		9727724	
		18	3	96.5	10	1346	1324	10123949	
		19	2	54.9	8	1427.1		10790385	
		20	3	95.2	10	1549.9	1512.9	11384046	
28	5299	1	1	95.4	6			273267	1
		2	1	53.2	16			654996	
		3	3	51.6	9	1432.4	1279.4	1278965	
		4	2	63.4	15	1241.9		1846650	
		5	2	79.8	16	1756.9		2549524	
		6	3	77.6	18	1642.6	1428.6	3332297	
		7	3	83.4	17	1432.7	1399.7	3642001	
		8	3	80.2	16	1765	1648	4724585	
		9	2	72.9	17	1649.9		4868931	
		10	1	61.7	13			5516962	
		11	1	65.4	15			6613008	
		12	2	61.8	14	957.6		7127458	
		13	1	52.5	6			7742365	
		14	2	92.7	12	1321.4		8317629	
		15	3	95.6	7	1547.5	1815.5	8776250	
		16	3	72.6	8	1516.3	1315.3	9519593	
		17	2	92.7	10	925.7		9619948	
		18	1	55.4	6			10328408	
		19	2	71.8	13	1759.4		10750022	
		20	3	52.4	15	1637.3	1328.3	11495510	

Test Mode		Mode 2							
Frequency		5.600~5.650 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
29	5302	1	2	91.2	12	1426.6		344862	1
		2	2	86.4	15	1732.1		856752	
		3	3	64.2	8	1746.1	1728.1	1498845	
		4	1	94.3	10			2321871	
		5	3	88.4	10	932.9	937.9	2827635	
		6	1	72.1	9			3854874	
		7	2	67.4	7	1613.3		4647882	
		8	3	51.4	11	1334.9	967.9	5127528	
		9	1	74.3	11			5846372	
		10	3	94.8	6	1327.6	1795.6	6750981	
		11	2	82.1	10	1627.6		7432962	
		12	1	95.7	16			8128265	
		13	1	78.3	15			8567478	
		14	1	72.1	14			9201658	
		15	2	85.7	13	1517.6		9891348	
		16	3	91.3	16	1642.2	1426.2	10274828	
		17	3	68.2	15	1637.9	1527.9	11468285	
30	5302	1	1	61.2	14			251660	1
		2	2	88.4	18	1628.7		1318019	
		3	1	52.1	13			1742563	
		4	2	65.9	15	1678.4		2543483	
		5	2	63.2	13	1658.8		3873049	
		6	3	58.3	18	1129.6	1754.6	4627777	
		7	1	62.9	11			5438374	
		8	2	68.4	17	1627		6357024	
		9	2	63.1	15	1782		7219539	
		10	3	68.2	7	1641.8	1129.8	8128511	
		11	3	79.8	19	1645.9	1518.9	8624083	
		12	1	82.7	10			9714463	
		13	3	60.2	18	1427.4	1128.4	10260806	
		14	3	68.7	16	1384.3	1572.3	11876423	
Detection Percentage (%)									86.67

Test Mode	Mode 2			
Frequency	5.600~5.650 GHz			
Radar Signal	Type 6			
Trial #	Pulses / Hop	Pulse Width (us)	PRI (us)	1=Detection ; 0=No Detection
1	9	1	333	1
2	9	1	333	1
3	9	1	333	1
4	9	1	333	1
5	9	1	333	0
6	9	1	333	1
7	9	1	333	1
8	9	1	333	1
9	9	1	333	1
10	9	1	333	1
11	9	1	333	1
12	9	1	333	1
13	9	1	333	0
14	9	1	333	1
15	9	1	333	1
16	9	1	333	1
17	9	1	333	1
18	9	1	333	1
19	9	1	333	1
20	9	1	333	1
21	9	1	333	1
22	9	1	333	1
23	9	1	333	1
24	9	1	333	0
25	9	1	333	1
26	9	1	333	1
27	9	1	333	1
28	9	1	333	1
29	9	1	333	1
30	9	1	333	1
Detection Percentage (%)				90.00

Test Mode		Mode 3				
Frequency		5.250~5.350 GHz				
Radar Signal		Type 1				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	PRF (Hz)	Pulses / Burst	1=Detection ; 0=No Detection
1	5252	1	638	1567	83	1
2	5253	1	858	1166	62	1
3	5254	1	738	1355	72	1
4	5255	1	538	1859	99	1
5	5256	1	778	1285	68	1
6	5257	1	658	1520	81	0
7	5258	1	3066	326	18	1
8	5259	1	598	1672	89	1
9	5260	1	578	1730	92	1
10	5261	1	698	1433	76	1
11	5286	1	618	1618	86	1
12	5287	1	798	1253	67	1
13	5288	1	678	1475	78	1
14	5289	1	558	1792	95	1
15	5290	1	818	1222	65	0
16	5291	1	1541	649	35	1
17	5292	1	891	1122	60	1
18	5293	1	929	1076	57	1
19	5294	1	2448	408	22	1
20	5295	1	1833	546	29	1
21	5319	1	1865	536	29	1
22	5320	1	1542	649	35	1
23	5321	1	2995	334	18	0
24	5322	1	1202	832	44	1
25	5323	1	1165	858	46	1
26	5324	1	1244	804	43	1
27	5325	1	2852	351	19	1
28	5326	1	2242	446	24	1
29	5327	1	1157	864	46	1
30	5328	1	1288	776	41	1
Detection Percentage (%)						90.00

Test Mode		Mode 3				
Frequency		5.250~5.350 GHz				
Radar Signal		Type 2				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	PRF (Hz)	Pulses / Burst	1=Detection ; 0=No Detection
1	5252	2.6	228	4386	23	1
2	5253	4.6	150	6667	27	0
3	5254	1.1	184	5435	29	0
4	5255	4.8	203	4926	24	1
5	5256	3.7	189	5291	25	1
6	5257	2.6	201	4975	24	1
7	5258	3.5	216	4630	26	1
8	5259	4.2	194	5155	23	1
9	5260	2.9	225	4444	25	1
10	5261	3.3	206	4854	27	1
11	5286	3.9	213	4695	28	1
12	5287	4.7	159	6289	26	1
13	5288	3.1	167	5988	24	1
14	5289	1.9	217	4608	23	1
15	5290	2.4	162	6173	25	1
16	5291	3.4	204	4902	28	0
17	5292	2.3	170	5882	27	1
18	5293	3.5	184	5435	23	1
19	5294	4.9	150	6667	27	1
20	5295	4.6	211	4739	29	1
21	5319	2.9	158	6329	23	1
22	5320	2.6	226	4425	27	0
23	5321	1.6	204	4902	26	1
24	5322	3.9	181	5525	25	1
25	5323	4.6	202	4950	24	1
26	5324	4.1	194	5155	27	1
27	5325	2.3	193	5181	28	1
28	5326	3.9	173	5780	29	1
29	5327	4.3	188	5319	23	0
30	5328	1.5	215	4651	26	1
Detection Percentage (%)						83.33

Test Mode		Mode 3				
Frequency		5.250~5.350 GHz				
Radar Signal		Type 3				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	PRF (Hz)	Pulses / Burst	1=Detection ; 0=No Detection
1	5252	8.0	492	2033	16	1
2	5253	6.7	200	5000	18	1
3	5254	8.6	418	2392	16	1
4	5255	9.4	351	2849	17	1
5	5256	7.4	383	2611	18	1
6	5257	9.8	232	4310	16	1
7	5258	7.6	245	4082	18	1
8	5259	8.2	289	3460	17	1
9	5260	6.5	306	3268	18	1
10	5261	7.3	421	2375	16	1
11	5286	7.8	335	2985	18	1
12	5287	8.8	375	2667	17	0
13	5288	9.6	324	3086	16	1
14	5289	9.4	259	3861	18	1
15	5290	6.4	220	4545	17	0
16	5291	7.2	342	2924	16	1
17	5292	9.1	377	2653	17	1
18	5293	9.6	457	2188	16	1
19	5294	8.0	471	2123	18	1
20	5295	9.0	304	3289	18	1
21	5319	8.0	316	3165	17	1
22	5320	9.8	325	3077	16	0
23	5321	8.0	409	2445	17	1
24	5322	9.9	200	5000	17	1
25	5323	8.8	458	2183	16	0
26	5324	8.0	232	4310	18	0
27	5325	8.3	250	4000	16	1
28	5326	8.7	270	3704	16	1
29	5327	7.7	350	2857	17	1
30	5328	7.1	230	4348	16	0
Detection Percentage (%)						80.00

Test Mode		Mode 3				
Frequency		5.250~5.350 GHz				
Radar Signal		Type 4				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	PRF (Hz)	Pulses / Burst	1=Detection ; 0=No Detection
1	5252	18.0	493	2028	15	1
2	5253	19.9	200	5000	12	1
3	5254	12.9	487	2053	14	0
4	5255	13.7	377	2653	13	1
5	5256	15.6	462	2165	15	1
6	5257	18.4	358	2793	16	1
7	5258	13.4	267	3745	12	1
8	5259	15.7	349	2865	14	1
9	5260	19.1	409	2445	15	1
10	5261	18.2	423	2364	16	1
11	5286	13.2	325	3077	13	1
12	5287	14.6	264	3788	12	1
13	5288	18.6	326	3067	14	1
14	5289	15.0	452	2212	13	1
15	5290	16.3	230	4348	12	1
16	5291	19.8	238	4202	13	1
17	5292	18.2	420	2381	16	1
18	5293	16.3	452	2212	15	0
19	5294	14.2	495	2020	12	1
20	5295	17.8	228	4386	16	1
21	5319	19.1	211	4739	16	1
22	5320	18.4	283	3534	15	1
23	5321	11.8	411	2433	12	1
24	5322	14.2	284	3521	13	1
25	5323	13.9	202	4950	12	1
26	5324	17.8	340	2941	14	1
27	5325	15.6	290	3448	16	1
28	5326	14.6	250	4000	16	1
29	5327	14.4	484	2066	15	1
30	5328	18.9	387	2584	13	1
Detection Percentage (%)						93.33

Test Mode		Mode 3							
Frequency		5.250~5.350 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
1	5279	1	2	51.7	7	1146.3		647836	0
		2	1	93.2	15			1409398	
		3	3	79.6	10	1290.4	964.4	2872945	
		4	2	85.8	14	1559.2		4049183	
		5	2	76.5	14	1210.5	1553.5	4494059	
		6	1	61.7	8			5716328	
		7	3	83.6	7	1205.4	993.4	7308202	
		8	1	59.8	5			8119962	
		9	2	69.9	10	1355.1		9532813	
		10	3	94.3	10	1747.7	1408.7	10751035	
		11	2	61.8	18	1000.2		11053268	
2	5281	1	2	66.3	2	1226.7		3658	0
		2	1	94.2	9			1529901	
		3	3	96.7	6	1255.6	1330.6	2951972	
		4	2	60.8	11	1703.1		3038072	
		5	2	70	8	1886.2		4885843	
		6	1	93	16			5281738	
		7	3	87.7	10	1474.2	1427.2	6746502	
		8	1	84.5	18			7749910	
		9	2	89	12	1302.3		8035675	
		10	3	66.4	11	1031.7	1634.7	9089628	
		11	2	71.5	15	917.3		10039865	
		12	1	71.1	11			11195005	
3	5268	1	3	76.5	5	1658.5	1885.5	341903	0
		2	3	89.5	5	1162.5	1012.5	1039290	
		3	1	92.5	15			2530435	
		4	2	82.5	5	1869.5		3352797	
		5	1	68.5	9			3783207	
		6	3	78.3	17	1239.7	936.7	5292381	
		7	1	91	6			6334407	
		8	2	59.3	7	1898.7		6688649	
		9	2	58	13	1884		7600600	
		10	3	92.8	17	1029.2	1258.2	8865035	
		11	1	77.4	10			9464201	
		12	3	90.8	10	1219.2	1458.2	10488185	
		13	2	87.9	8	1764.1		11914643	



Test Mode		Mode 3							
Frequency		5.250~5.350 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
4	5321	1	3	50.9	16	1321.1	1333.1	77627	0
		2	2	73.9	16	1538.1		2317135	
		3	3	71.9	17	1596.1	1584.1	2684349	
		4	1	54.3	14			4779891	
		5	2	84.2	9	1055.8		5502401	
		6	1	99.3	18			6827573	
		7	1	89.5	13			8051166	
		8	3	78.1	5	1436.9	1262.9	9980082	
		9	2	51.1	13	1700.9		11274601	
5	5286	1	1	81.8	7			255617	1
		2	3	55.4	5	1016.6	1310.6	929954	
		3	2	61.7	18	1616.3		1699277	
		4	3	78.6	19	1882.4	1115.4	2516220	
		5	3	75.3	7	1730.7	1082.7	3350667	
		6	1	88.6	7			4671144	
		7	2	74.1	5	1510.9		5553525	
		8	1	75	18			6315577	
		9	3	79.5	8	1722.5	925.5	7021793	
		10	1	91.5	6			7652757	
		11	2	74.8	9	1531.2		8144794	
		12	2	88.4	10	1475.6		9507618	
		13	1	51.7	16			9965188	
		14	3	88.1	12	1605.9	1230.9	10600830	
		15	2	63.2	16	1448.8		11228243	
6	5302	1	3	81.6	15	1326.4	1816.4	420027	1
		2	3	81.6	9	960.4	1855.4	1213961	
		3	1	73.5	12			2412241	
		4	2	61.7	5	1305.3		2705526	
		5	1	63.1	15			4149665	
		6	3	61.4	15	1499.6	1396.6	4418842	
		7	1	99.3	11			5456509	
		8	2	74.9	5	1604.1		6153274	
		9	2	64.3	7	1079.7		7420401	
		10	3	71.1	15	1154.9	1510.9	8105166	
		11	1	59.4	12			9087685	
		12	1	84.5	17			9743762	
		13	3	99.1	11	1357.9	1730.9	10514412	
		14	2	78.4	12	1576.6		11920466	

Test Mode		Mode 3							
Frequency		5.250~5.350 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
7	5311	1	2	59.5	14	1515.5		154623	1
		2	1	71.2	5			860435	
		3	3	72.1	13	1820.9	1327.9	1566260	
		4	2	50.4	19	1603.6		2272135	
		5	3	99.2	11	1157.8	1085.8	2977376	
		6	1	53.8	13			3682861	
		7	2	93.4	7	1133.6		4388707	
		8	3	59.4	7	1374.6	993.6	5094518	
		9	2	53.6	13	1092.4		5799787	
		10	1	59.8	8			6505670	
		11	3	97.7	6	1593.3	1125.3	7209959	
		12	1	84.2	10			7915377	
		13	3	93.2	9	1104.8	1300.8	8619959	
		14	1	97.7	11			9326217	
		15	2	71.2	6	1580.8		10032059	
		16	2	79.8	8	1537.2		10736631	
		8	5267	1	3	95.8	12	1628.2	
2	2			52.2	15	1291.8		865214	
3	1			99.9	11			1685231	
4	3			97.4	8	1853.6	1822.6	2035426	
5	2			98.4	11	1706.6		2846253	
6	3			74.2	12	1752.8	1348.8	3625642	
7	1			63.1	6			4123561	
8	2			70.3	13	1127.7		4953621	
9	3			85.5	10	1782.5	1179.5	5512365	
10	2			73.3	18	1409.7		6125403	
11	1			50.9	10			6865868	
12	3			64.7	13	1564.3	1184.3	7421568	
13	1			56.1	10			8088234	
14	3			86.3	12	980.7	1184.7	8645235	
15	1			78	13			9236581	
16	2			62.9	11	1426.1		10132561	
17	2			88.8	10	1513.2		10765249	
18	3			67.4	14	1249.6	1172.6	11235461	

Test Mode		Mode 3							
Frequency		5.250~5.350 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
9	5268	1	3	13	13	1499.3	1528.3	125412	1
		2	1	17	17			782539	
		3	3	17	17	1939.3	1576.3	1526841	
		4	1	11	11			2156487	
		5	1	14	14			2651285	
		6	3	9	9	1629.4	1414.4	3326582	
		7	2	7	7	1535.8		3988625	
		8	3	14	14	1343	1104	4725418	
		9	2	14	14	1553.1		5326874	
		10	3	13	13	1520.9	918.9	5933652	
		11	1	13	13			6529425	
		12	2	11	11	1028.4		7149632	
		13	3	15	15	1525.4	1407.4	7759932	
		14	2	19	19	1369.6		8425981	
		15	1	8	8			9258412	
		16	1	9	9			9925874	
		17	2	9	9	1050.3		1026582	
		18	3	5	5	1701.2	1173.2	10963658	
		19	2	6	6	1305.2		11456981	
10	5304	1	1	60.7	9			353222	1
		2	3	59.2	13	1331.8	1077.8	1659461	
		3	2	96.1	8	1237.9		3432174	
		4	3	70.5	16	1145.5	1708.5	5432909	
		5	2	63.2	13	1721.8		6953575	
		6	1	51.5	7			8826390	
		7	1	89.1	5			10242227	
		8	2	86.1	12	1499.9		10759333	

Test Mode		Mode 3							
Frequency		5.250~5.350 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
11	5299	1	1	57.4	14			472419	1
		2	3	83.9	15	1079.1	1717.1	861133	
		3	2	67.1	17	1333.9		1822100	
		4	2	91.3	14	1877.7		2679041	
		5	3	60.1	9	1784.9	1515.9	3219408	
		6	1	72.3	11			4454844	
		7	2	92.6	7	1077.4		5169008	
		8	1	86.2	12			5476228	
		9	3	86.8	18	1713.2	1589.2	6009079	
		10	1	98.7	6			7247320	
		11	2	90.2	19	1747.8		7640035	
		12	2	63.9	9	1657.1		8752849	
		13	1	73.2	11			9365509	
		14	3	51.9	9	1842.1	1910.1	9792446	
		15	3	71.8	6	931.2	1825.2	10872322	
		16	2	56.9	8	1860.1		11513196	
12	5291	1	2	80.5	10	1697.5		546448	1
		2	1	72.8	5			648691	
		3	3	71	8	1728	1497	1673517	
		4	1	75.9	10			2025762	
		5	1	54.5	11			2534224	
		6	3	89.7	11	1854.3	1023.3	3251572	
		7	2	81.7	13	1285.3		3757399	
		8	3	59.1	10	1476.9	1529.9	4604714	
		9	2	73.4	15	1281.6		4987161	
		10	3	76	13	993	1043	5610535	
		11	1	55.3	19			6424881	
		12	2	70.2	11	1911.8		6679663	
		13	3	60.5	5	939.5	1600.5	7239430	
		14	2	95	5	964		7924694	
		15	1	68.6	6			8552192	
		16	1	99.3	5			9466622	
		17	2	84.8	18	1172.2		9696724	
		18	3	97	10	1390	1123	10603979	
		19	2	56.9	5	1291.1		10940382	
		20	3	97.1	7	1558.9	1362.9	11654047	

Test Mode		Mode 3							
Frequency		5.250~5.350 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
13	5303	1	2	96.9	19	1008.1		283689	1
		2	2	99	19	1492		1676999	
		3	3	87.1	13	989.9	1019.9	2426967	
		4	1	61.1	18			3625360	
		5	3	62.2	11	1243.8	1766.8	5925658	
		6	1	76	10			6865716	
		7	3	87.2	17	1144.8	1665.8	7529060	
		8	2	81.5	15	1055.5		9383932	
		9	1	69.8	17			10622080	
		10	2	92	19	1683		10957742	
14	5268	1	1	96.7	7			288367	1
		2	1	54.7	17			660896	
		3	3	52.6	10	1536.4	1334.4	1309965	
		4	2	64.1	17	1168.9		1923650	
		5	2	80.1	18	1808.9		2620524	
		6	3	78.4	19	1726.6	1378.6	3143297	
		7	3	84.3	17	1539.7	1402.7	3735001	
		8	3	81	17	1881	1717	4666585	
		9	2	74.1	18	1575.9		4851931	
		10	1	62.6	15			5483962	
		11	1	67.4	15			6577008	
		12	2	60.4	15	946.6		7056458	
		13	1	51.6	7			7440565	
		14	2	93.6	13	1476.4		8285629	
		15	3	97.5	8	1675.5	1795.5	8889250	
		16	3	73.7	6	1463.3	1294.3	9442593	
		17	2	91.3	9	916.7		9726948	
		18	1	56.5	7			10209408	
		19	2	72.6	14	1831.4		10836022	
		20	3	64.7	16	1625.3	1406.3	11597510	

Test Mode		Mode 3							
Frequency		5.250~5.350 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
15	5310	1	3	74.8	15	1654.2	1233.2	145982	1
		2	1	89.9	5			1058238	
		3	3	58.4	7	1156.6	1161.6	1435873	
		4	2	69.9	10	1722.1		2058964	
		5	2	52.6	16	1393.4		2799658	
		6	3	51.5	5	1113.5	1706.5	3158357	
		7	1	72.2	12			4215839	
		8	3	79.2	13	1336.8	1332.8	4835982	
		9	2	83.7	7	1758.3		5365821	
		10	1	52.8	5			5793588	
		11	1	86.9	11			6523987	
		12	3	83.5	13	1468.5	1231.5	7233985	
		13	2	73.9	18	1220.1		7736982	
		14	2	60.6	5	1880.4		8536827	
		15	1	86.3	6			8935821	
		16	3	97.4	14	1855.6	912.6	9726853	
		17	1	86.7	11			10236581	
		18	2	50.7	14	1644.3		10836582	
		19	3	60.2	5	1924.8	1679.8	11436882	
16	5273	1	3	67.7	13	1787.3	1501.3	193161	1
		2	2	96	10	1092		840518	
		3	1	74.5	7			1979690	
		4	3	95	8	907	1443	2372262	
		5	2	82.3	10	961.7		2691289	
		6	3	84.1	17	978.9	1507.9	3711257	
		7	1	63	10			4053880	
		8	2	93.6	19	1059.4		5119453	
		9	1	61.4	9			5565324	
		10	1	86	14			6228245	
		11	1	63.3	10			6802603	
		12	3	88.6	6	979.4	984.4	7553159	
		13	2	86.6	9	1035.4		8068688	
		14	3	62.4	16	1234.6	985.6	8939294	
		15	2	65.9	11	1859.1		9445705	
		16	2	51.5	15	1339.5		10042487	
		17	1	98.7	10			10888558	
		18	3	66.3	19	1350.7	1640.7	11906444	

Test Mode		Mode 3							
Frequency		5.250~5.350 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
17	5293	1	2	92.4	13	1522.6		354862	1
		2	2	85.9	16	1893.1		860452	
		3	3	65.9	7	1857.1	1823.1	1526845	
		4	1	95.1	9			2256871	
		5	3	87.1	11	934.9	928.9	2958635	
		6	1	73.5	8			3945874	
		7	2	68.7	8	1508.3		4756882	
		8	3	52.1	11	1324.9	987.9	5036528	
		9	1	76.4	10			5945372	
		10	3	96.4	5	1337.6	1898.6	6852981	
		11	2	83.4	11	1597.6		7535962	
		12	1	96.5	18			8018265	
		13	1	79.7	16			8625478	
		14	1	73	14			9347658	
		15	2	86.4	13	1439.6		9925348	
		16	3	90.8	17	1502.2	1389.2	10754826	
		17	3	67.1	16	1532.9	1649.9	11458283	
18	5284	1	1	51.3	11			420200	1
		2	3	56.3	12	1767.7	1360.7	1045128	
		3	2	61.7	10	1582.3		2054476	
		4	2	90.5	8	1722.5		2830215	
		5	3	87.8	13	1288.2	1741.2	3432245	
		6	1	50.9	19			4196566	
		7	1	54.4	12			4953029	
		8	2	91.6	18	1612.4		6311483	
		9	3	87.7	6	1436.3	1258.3	7141870	
		10	3	65.7	16	1723.3	1896.3	7944048	
		11	1	75.3	12			8374995	
		12	2	73.7	15	1892.3		9016434	
		13	2	96.2	13	1411.8		10197913	
		14	1	70.1	12			10817077	
		15	3	52.7	13	1021.3	1393.3	11848236	

Test Mode		Mode 3							
Frequency		5.250~5.350 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
19	5262	1	1	58.9	15			266760	1
		2	2	89.3	18	1728.7		1250019	
		3	1	53.6	14			1804563	
		4	2	66.6	14	1719.4		2650483	
		5	2	64.2	12	1649.8		3910049	
		6	3	57.4	19	1085.6	1816.6	4529777	
		7	1	64.9	10			5348374	
		8	2	69	19	1700		6227024	
		9	2	62	16	1885		7189539	
		10	3	69.2	8	1711.8	1049.8	8019511	
		11	3	80.1	19	1763.9	1461.9	8711083	
		12	1	84.4	9			9670463	
		13	3	59.6	19	1597.4	1092.4	10840806	
		14	3	69.7	17	1392.3	1694.3	11966423	
20	5289	1	2	96.9	19	1008.1		283689	1
		2	2	99	19	1492		1676999	
		3	3	87.1	13	989.9	1019.9	2426967	
		4	1	61.1	18			3625360	
		5	3	62.2	11	1243.8	1766.8	5925658	
		6	1	76	10			6865716	
		7	3	87.2	17	1144.8	1665.8	7529060	
		8	2	81.5	15	1055.5		9383932	
		9	1	69.8	17			10622080	
		10	2	92	19	1683		10957742	
21	5268	1	2	67.2	2	1432.5		3522	1
		2	1	93.3	8			1642901	
		3	3	95.8	7	1388.6	1342.6	2881972	
		4	2	61.7	13	1642.1		3426072	
		5	2	70.5	9	1765.2		4826843	
		6	1	92.7	15			5325738	
		7	3	86.7	9	1356.2	1567.2	6685502	
		8	1	83.2	17			7854910	
		9	2	88.6	13	1389.3		8926675	
		10	3	65.2	10	1211.6	1588.7	9237628	
		11	2	70.3	14	932.2		10074565	
		12	1	70.8	12			11184205	



Test Mode		Mode 3							
Frequency		5.250~5.350 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
22	5322	1	3	61.2	17	1426.1	1426.1	77457	1
		2	2	72.3	15	1674.1		1764135	
		3	3	69.5	16	1625.1	1621.1	2759349	
		4	1	83.2	13			4821891	
		5	2	82.6	10	1103.8		5492401	
		6	1	89.5	17			6759573	
		7	1	87.4	12			8102166	
		8	3	75.2	4	1379.9	1289.9	9890082	
		9	2	50.7	12	1694.9		11314601	
23	5263	1	1	80.2	9			248517	1
		2	3	54.3	4	1212.6	1276.6	976354	
		3	2	60.8	17	1587.3		1647277	
		4	3	72.5	17	1854.4	1202.4	2491220	
		5	3	74.3	6	1730.7	1117.7	3364667	
		6	1	87.6	8			4854144	
		7	2	74.9	6	1491.9		5632525	
		8	1	74	19			6428577	
		9	3	78.2	9	1716.5	945.7	7327793	
		10	1	90.8	7			7543757	
		11	2	74.8	10	1542.2		8279794	
		12	2	87.5	9	1481.6		9223718	
		13	1	50.3	15			9849588	
		14	3	87.7	13	1546.9	1246.6	10197832	
		15	2	64.2	15	1475.8		11345245	
24	5286	1	3	79.8	14	1346.3	1824.3	432429	1
		2	3	75.6	10	958.6	1762.4	1623461	
		3	1	74.7	11			2254243	
		4	2	62.3	6	1324.3		2724526	
		5	1	61.9	12			3169665	
		6	3	61.5	13	1512.6	1388.7	4347842	
		7	1	94.3	9			5546509	
		8	2	72.5	7	1642.1		6346274	
		9	2	62.7	6	1167.7		7501401	
		10	3	70.2	13	1164.9	1497.8	8203168	
		11	1	58.7	14			9129685	
		12	1	82.4	16			9678762	
		13	3	98.4	9	1421.9	1812.9	10274415	
		14	2	77.3	11	1621.6		11320469	

Test Mode		Mode 3							
Frequency		5.250~5.350 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
25	5312	1	3	93.2	13	1571.2	1867.2	142343	1
		2	2	51.4	13	1346.8		858714	
		3	1	96.4	12			1642231	
		4	3	95.2	9	1764.6	1763.7	2128428	
		5	2	96.7	12	1632.6		2754253	
		6	3	75.6	11	1679.8	1346.8	3624642	
		7	1	62.1	7			4237561	
		8	2	69.8	11	1326.7		4846623	
		9	3	88.3	12	1842.5	1201.4	5498365	
		10	2	71.4	17	1513.7		6237403	
		11	1	54.7	9			6742869	
		12	3	62.3	12	1614.3	1192.3	7379568	
		13	1	57.8	12			8124234	
		14	3	84.6	11	978.3	1194.7	8527236	
		15	1	77.3	12			9346581	
		16	2	63.4	10	1518.1		10292563	
		17	2	89.7	9	1462.2		10775249	
		18	3	65.6	12	1372.6	1218.2	11445468	
26	5322	1	1	55.3	12			453512	1
		2	3	52.7	13	1134.2	1642.1	864234	
		3	2	66.3	16	1347.4		1735103	
		4	2	90.2	13	1756.7		2648041	
		5	3	61.3	8	1647.4	1457.9	3628408	
		6	1	74.5	10			4589847	
		7	2	91.7	6	1127.3		5628008	
		8	1	84.3	11			5953726	
		9	3	84.5	17	1612.2	1743.2	6241079	
		10	1	94.7	7			7351321	
		11	2	91.5	18	1648.7		7642036	
		12	2	62.9	10	1572.3		8637847	
		13	1	82.4	9			9428509	
		14	3	50.7	10	1745.2	1845.1	9654445	
		15	3	70.4	7	927.2	1798.2	10327325	
		16	2	55.3	9	1774.3		11134196	

Test Mode		Mode 3							
Frequency		5.250~5.350 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
27	5286	1	2	78.4	12	1532.5		553748	1
		2	1	70.4	4			647891	
		3	3	71.6	7	1624	1479	1628517	
		4	1	73.7	10			2327762	
		5	1	52.7	13			2512224	
		6	3	87.9	9	1632.3	1208.3	3435572	
		7	2	81.2	10	1419.3		3727399	
		8	3	55.4	10	1478.9	1547.9	4819714	
		9	2	71.7	16	1429.6		4915161	
		10	3	73.8	13	756	1345	5516535	
		11	1	53.7	17			6823881	
		12	2	66.5	11	1749.8		6917663	
		13	3	62.7	6	875.5	1624.5	7428430	
		14	2	93.6	7	754		7924694	
		15	1	64.8	5			8916192	
		16	1	96.2	3			9623622	
		17	2	82.8	15	1315.2		9727724	
		18	3	96.5	10	1346	1324	10123949	
		19	2	54.9	8	1427.1		10790385	
		20	3	95.2	10	1549.9	1512.9	11384046	
28	5285	1	1	95.4	6			273267	1
		2	1	53.2	16			654996	
		3	3	51.6	9	1432.4	1279.4	1278965	
		4	2	63.4	15	1241.9		1846650	
		5	2	79.8	16	1756.9		2549524	
		6	3	77.6	18	1642.6	1428.6	3332297	
		7	3	83.4	17	1432.7	1399.7	3642001	
		8	3	80.2	16	1765	1648	4724585	
		9	2	72.9	17	1649.9		4868931	
		10	1	61.7	13			5516962	
		11	1	65.4	15			6613008	
		12	2	61.8	14	957.6		7127458	
		13	1	52.5	6			7742365	
		14	2	92.7	12	1321.4		8317629	
		15	3	95.6	7	1547.5	1815.5	8776250	
		16	3	72.6	8	1516.3	1315.3	9519593	
		17	2	92.7	10	925.7		9619948	
		18	1	55.4	6			10328408	
		19	2	71.8	13	1759.4		10750022	
		20	3	52.4	15	1637.3	1328.3	11495510	

Test Mode		Mode 3							
Frequency		5.250~5.350 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
29	5282	1	2	91.2	12	1426.6		344862	1
		2	2	86.4	15	1732.1		856752	
		3	3	64.2	8	1746.1	1728.1	1498845	
		4	1	94.3	10			2321871	
		5	3	88.4	10	932.9	937.9	2827635	
		6	1	72.1	9			3854874	
		7	2	67.4	7	1613.3		4647882	
		8	3	51.4	11	1334.9	967.9	5127528	
		9	1	74.3	11			5846372	
		10	3	94.8	6	1327.6	1795.6	6750981	
		11	2	82.1	10	1627.6		7432962	
		12	1	95.7	16			8128265	
		13	1	78.3	15			8567478	
		14	1	72.1	14			9201658	
		15	2	85.7	13	1517.6		9891348	
		16	3	91.3	16	1642.2	1426.2	10274828	
		17	3	68.2	15	1637.9	1527.9	11468285	
30	5262	1	1	61.2	14			251660	1
		2	2	88.4	18	1628.7		1318019	
		3	1	52.1	13			1742563	
		4	2	65.9	15	1678.4		2543483	
		5	2	63.2	13	1658.8		3873049	
		6	3	58.3	18	1129.6	1754.6	4627777	
		7	1	62.9	11			5438374	
		8	2	68.4	17	1627		6357024	
		9	2	63.1	15	1782		7219539	
		10	3	68.2	7	1641.8	1129.8	8128511	
		11	3	79.8	19	1645.9	1518.9	8624083	
		12	1	82.7	10			9714463	
		13	3	60.2	18	1427.4	1128.4	10260806	
		14	3	68.7	16	1384.3	1572.3	11876423	
Detection Percentage (%)									86.67

Test Mode	Mode 3			
Frequency	5.250~5.350 GHz			
Radar Signal	Type 6			
Trial #	Pulses / Hop	Pulse Width (us)	PRI (us)	1=Detection ; 0=No Detection
1	9	1	333	1
2	9	1	333	1
3	9	1	333	0
4	9	1	333	1
5	9	1	333	1
6	9	1	333	1
7	9	1	333	1
8	9	1	333	1
9	9	1	333	1
10	9	1	333	1
11	9	1	333	1
12	9	1	333	1
13	9	1	333	1
14	9	1	333	1
15	9	1	333	1
16	9	1	333	1
17	9	1	333	1
18	9	1	333	1
19	9	1	333	1
20	9	1	333	1
21	9	1	333	1
22	9	1	333	1
23	9	1	333	0
24	9	1	333	1
25	9	1	333	1
26	9	1	333	1
27	9	1	333	1
28	9	1	333	1
29	9	1	333	1
30	9	1	333	1
Detection Percentage (%)				93.33

Test Mode		Mode 3				
Frequency		5.470~5.725 GHz				
Radar Signal		Type 1				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	PRF (Hz)	Pulses / Burst	1=Detection ; 0=No Detection
1	5491	1	638	1567	83	1
2	5492	1	858	1166	62	1
3	5493	1	738	1355	72	1
4	5494	1	538	1859	99	1
5	5495	1	778	1285	68	1
6	5496	1	658	1520	81	1
7	5497	1	3066	326	18	1
8	5498	1	598	1672	89	1
9	5499	1	578	1730	92	1
10	5500	1	698	1433	76	0
11	5526	1	618	1618	86	1
12	5527	1	798	1253	67	1
13	5528	1	678	1475	78	1
14	5529	1	558	1792	95	1
15	5530	1	818	1222	65	1
16	5531	1	1541	649	35	1
17	5532	1	891	1122	60	1
18	5533	1	929	1076	57	1
19	5534	1	2448	408	22	1
20	5535	1	1833	546	29	1
21	5560	1	1865	536	29	1
22	5561	1	1542	649	35	1
23	5562	1	2995	334	18	1
24	5563	1	1202	832	44	1
25	5564	1	1165	858	46	1
26	5565	1	1244	804	43	1
27	5566	1	2852	351	19	1
28	5567	1	2242	446	24	1
29	5568	1	1157	864	46	1
30	5569	1	1288	776	41	0
Detection Percentage (%)						93.33

Test Mode		Mode 3				
Frequency		5.470~5.725 GHz				
Radar Signal		Type 2				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	PRF (Hz)	Pulses / Burst	1=Detection ; 0=No Detection
1	5491	2.6	228	4386	23	1
2	5492	4.6	150	6667	27	0
3	5493	1.1	184	5435	29	1
4	5494	4.8	203	4926	24	1
5	5495	3.7	189	5291	25	1
6	5496	2.6	201	4975	24	1
7	5497	3.5	216	4630	26	1
8	5498	4.2	194	5155	23	1
9	5499	2.9	225	4444	25	1
10	5500	3.3	206	4854	27	0
11	5526	3.9	213	4695	28	1
12	5527	4.7	159	6289	26	1
13	5528	3.1	167	5988	24	1
14	5529	1.9	217	4608	23	1
15	5530	2.4	162	6173	25	1
16	5531	3.4	204	4902	28	1
17	5532	2.3	170	5882	27	1
18	5533	3.5	184	5435	23	1
19	5534	4.9	150	6667	27	1
20	5535	4.6	211	4739	29	0
21	5560	2.9	158	6329	23	1
22	5561	2.6	226	4425	27	1
23	5562	1.6	204	4902	26	1
24	5563	3.9	181	5525	25	1
25	5564	4.6	202	4950	24	0
26	5565	4.1	194	5155	27	1
27	5566	2.3	193	5181	28	1
28	5567	3.9	173	5780	29	1
29	5568	4.3	188	5319	23	1
30	5569	1.5	215	4651	26	1
Detection Percentage (%)						86.67

Test Mode		Mode 3				
Frequency		5.470~5.725 GHz				
Radar Signal		Type 3				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	PRF (Hz)	Pulses / Burst	1=Detection ; 0=No Detection
1	5491	8.0	492	2033	16	1
2	5492	6.7	200	5000	18	1
3	5493	8.6	418	2392	16	1
4	5494	9.4	351	2849	17	1
5	5495	7.4	383	2611	18	1
6	5496	9.8	232	4310	16	0
7	5497	7.6	245	4082	18	0
8	5498	8.2	289	3460	17	1
9	5499	6.5	306	3268	18	1
10	5500	7.3	421	2375	16	1
11	5526	7.8	335	2985	18	1
12	5527	8.8	375	2667	17	1
13	5528	9.6	324	3086	16	1
14	5529	9.4	259	3861	18	1
15	5530	6.4	220	4545	17	0
16	5531	7.2	342	2924	16	1
17	5532	9.1	377	2653	17	1
18	5533	9.6	457	2188	16	1
19	5534	8.0	471	2123	18	1
20	5535	9.0	304	3289	18	0
21	5560	8.0	316	3165	17	1
22	5561	9.8	325	3077	16	1
23	5562	8.0	409	2445	17	1
24	5563	9.9	200	5000	17	1
25	5564	8.8	458	2183	16	1
26	5565	8.0	232	4310	18	1
27	5566	8.3	250	4000	16	1
28	5567	8.7	270	3704	16	1
29	5568	7.7	350	2857	17	1
30	5569	7.1	230	4348	16	1
Detection Percentage (%)						86.67



Test Mode		Mode 3				
Frequency		5.470~5.725 GHz				
Radar Signal		Type 4				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	PRF (Hz)	Pulses / Burst	1=Detection ; 0=No Detection
1	5491	18.0	493	2028	15	1
2	5492	19.9	200	5000	12	0
3	5493	12.9	487	2053	14	1
4	5494	13.7	377	2653	13	1
5	5495	15.6	462	2165	15	1
6	5496	18.4	358	2793	16	0
7	5497	13.4	267	3745	12	1
8	5498	15.7	349	2865	14	1
9	5499	19.1	409	2445	15	1
10	5500	18.2	423	2364	16	1
11	5526	13.2	325	3077	13	1
12	5527	14.6	264	3788	12	1
13	5528	18.6	326	3067	14	1
14	5529	15.0	452	2212	13	1
15	5530	16.3	230	4348	12	1
16	5531	19.8	238	4202	13	1
17	5532	18.2	420	2381	16	1
18	5533	16.3	452	2212	15	1
19	5534	14.2	495	2020	12	1
20	5535	17.8	228	4386	16	1
21	5560	19.1	211	4739	16	1
22	5561	18.4	283	3534	15	0
23	5562	11.8	411	2433	12	1
24	5563	14.2	284	3521	13	1
25	5564	13.9	202	4950	12	1
26	5565	17.8	340	2941	14	0
27	5566	15.6	290	3448	16	1
28	5567	14.6	250	4000	16	1
29	5568	14.4	484	2066	15	1
30	5569	18.9	387	2584	13	1
Detection Percentage (%)						86.67

Test Mode		Mode 3							
Frequency		5.470~5.725 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
1	5551	1	2	51.7	7	1146.3		647836	0
		2	1	93.2	15			1409398	
		3	3	79.6	10	1290.4	964.4	2872945	
		4	2	85.8	14	1559.2		4049183	
		5	2	76.5	14	1210.5	1553.5	4494059	
		6	1	61.7	8			5716328	
		7	3	83.6	7	1205.4	993.4	7308202	
		8	1	59.8	5			8119962	
		9	2	69.9	10	1355.1		9532813	
		10	3	94.3	10	1747.7	1408.7	10751035	
		11	2	61.8	18	1000.2		11053268	
2	5527	1	2	66.3	2	1226.7		3658	1
		2	1	94.2	9			1529901	
		3	3	96.7	6	1255.6	1330.6	2951972	
		4	2	60.8	11	1703.1		3038072	
		5	2	70	8	1886.2		4885843	
		6	1	93	16			5281738	
		7	3	87.7	10	1474.2	1427.2	6746502	
		8	1	84.5	18			7749910	
		9	2	89	12	1302.3		8035675	
		10	3	66.4	11	1031.7	1634.7	9089628	
		11	2	71.5	15	917.3		10039865	
		12	1	71.1	11			11195005	
3	5511	1	3	76.5	5	1658.5	1885.5	341903	0
		2	3	89.5	5	1162.5	1012.5	1039290	
		3	1	92.5	15			2530435	
		4	2	82.5	5	1869.5		3352797	
		5	1	68.5	9			3783207	
		6	3	78.3	17	1239.7	936.7	5292381	
		7	1	91	6			6334407	
		8	2	59.3	7	1898.7		6688649	
		9	2	58	13	1884		7600600	
		10	3	92.8	17	1029.2	1258.2	8865035	
		11	1	77.4	10			9464201	
		12	3	90.8	10	1219.2	1458.2	10488185	
		13	2	87.9	8	1764.1		11914643	

Test Mode		Mode 3							
Frequency		5.470~5.725 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
4	5535	1	3	50.9	16	1321.1	1333.1	77627	1
		2	2	73.9	16	1538.1		2317135	
		3	3	71.9	17	1596.1	1584.1	2684349	
		4	1	54.3	14			4779891	
		5	2	84.2	9	1055.8		5502401	
		6	1	99.3	18			6827573	
		7	1	89.5	13			8051166	
		8	3	78.1	5	1436.9	1262.9	9980082	
		9	2	51.1	13	1700.9		11274601	
5	5551	1	1	81.8	7			255617	1
		2	3	55.4	5	1016.6	1310.6	929954	
		3	2	61.7	18	1616.3		1699277	
		4	3	78.6	19	1882.4	1115.4	2516220	
		5	3	75.3	7	1730.7	1082.7	3350667	
		6	1	88.6	7			4671144	
		7	2	74.1	5	1510.9		5553525	
		8	1	75	18			6315577	
		9	3	79.5	8	1722.5	925.5	7021793	
		10	1	91.5	6			7652757	
		11	2	74.8	9	1531.2		8144794	
		12	2	88.4	10	1475.6		9507618	
		13	1	51.7	16			9965188	
		14	3	88.1	12	1605.9	1230.9	10600830	
		15	2	63.2	16	1448.8		11228243	
6	5561	1	3	81.6	15	1326.4	1816.4	420027	1
		2	3	81.6	9	960.4	1855.4	1213961	
		3	1	73.5	12			2412241	
		4	2	61.7	5	1305.3		2705526	
		5	1	63.1	15			4149665	
		6	3	61.4	15	1499.6	1396.6	4418842	
		7	1	99.3	11			5456509	
		8	2	74.9	5	1604.1		6153274	
		9	2	64.3	7	1079.7		7420401	
		10	3	71.1	15	1154.9	1510.9	8105166	
		11	1	59.4	12			9087685	
		12	1	84.5	17			9743762	
		13	3	99.1	11	1357.9	1730.9	10514412	
		14	2	78.4	12	1576.6		11920466	

Test Mode		Mode 3							
Frequency		5.470~5.725 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
7	5546	1	2	59.5	14	1515.5		154623	1
		2	1	71.2	5			860435	
		3	3	72.1	13	1820.9	1327.9	1566260	
		4	2	50.4	19	1603.6		2272135	
		5	3	99.2	11	1157.8	1085.8	2977376	
		6	1	53.8	13			3682861	
		7	2	93.4	7	1133.6		4388707	
		8	3	59.4	7	1374.6	993.6	5094518	
		9	2	53.6	13	1092.4		5799787	
		10	1	59.8	8			6505670	
		11	3	97.7	6	1593.3	1125.3	7209959	
		12	1	84.2	10			7915377	
		13	3	93.2	9	1104.8	1300.8	8619959	
		14	1	97.7	11			9326217	
		15	2	71.2	6	1580.8		10032059	
		16	2	79.8	8	1537.2		10736631	
		8	5550	1	3	95.8	12	1628.2	
2	2			52.2	15	1291.8		865214	
3	1			99.9	11			1685231	
4	3			97.4	8	1853.6	1822.6	2035426	
5	2			98.4	11	1706.6		2846253	
6	3			74.2	12	1752.8	1348.8	3625642	
7	1			63.1	6			4123561	
8	2			70.3	13	1127.7		4953621	
9	3			85.5	10	1782.5	1179.5	5512365	
10	2			73.3	18	1409.7		6125403	
11	1			50.9	10			6865868	
12	3			64.7	13	1564.3	1184.3	7421568	
13	1			56.1	10			8088234	
14	3			86.3	12	980.7	1184.7	8645235	
15	1			78	13			9236581	
16	2			62.9	11	1426.1		10132561	
17	2			88.8	10	1513.2		10765249	
18	3			67.4	14	1249.6	1172.6	11235461	

Test Mode		Mode 3							
Frequency		5.470~5.725 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
9	5506	1	3	13	13	1499.3	1528.3	125412	1
		2	1	17	17			782539	
		3	3	17	17	1939.3	1576.3	1526841	
		4	1	11	11			2156487	
		5	1	14	14			2651285	
		6	3	9	9	1629.4	1414.4	3326582	
		7	2	7	7	1535.8		3988625	
		8	3	14	14	1343	1104	4725418	
		9	2	14	14	1553.1		5326874	
		10	3	13	13	1520.9	918.9	5933652	
		11	1	13	13			6529425	
		12	2	11	11	1028.4		7149632	
		13	3	15	15	1525.4	1407.4	7759932	
		14	2	19	19	1369.6		8425981	
		15	1	8	8			9258412	
		16	1	9	9			9925874	
		17	2	9	9	1050.3		1026582	
		18	3	5	5	1701.2	1173.2	10963658	
		19	2	6	6	1305.2		11456981	
10	5516	1	1	60.7	9			353222	1
		2	3	59.2	13	1331.8	1077.8	1659461	
		3	2	96.1	8	1237.9		3432174	
		4	3	70.5	16	1145.5	1708.5	5432909	
		5	2	63.2	13	1721.8		6953575	
		6	1	51.5	7			8826390	
		7	1	89.1	5			10242227	
		8	2	86.1	12	1499.9		10759333	

Test Mode		Mode 3							
Frequency		5.470~5.725 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
11	5543	1	1	57.4	14			472419	1
		2	3	83.9	15	1079.1	1717.1	861133	
		3	2	67.1	17	1333.9		1822100	
		4	2	91.3	14	1877.7		2679041	
		5	3	60.1	9	1784.9	1515.9	3219408	
		6	1	72.3	11			4454844	
		7	2	92.6	7	1077.4		5169008	
		8	1	86.2	12			5476228	
		9	3	86.8	18	1713.2	1589.2	6009079	
		10	1	98.7	6			7247320	
		11	2	90.2	19	1747.8		7640035	
		12	2	63.9	9	1657.1		8752849	
		13	1	73.2	11			9365509	
		14	3	51.9	9	1842.1	1910.1	9792446	
		15	3	71.8	6	931.2	1825.2	10872322	
		16	2	56.9	8	1860.1		11513196	
12	5533	1	2	80.5	10	1697.5		546448	0
		2	1	72.8	5			648691	
		3	3	71	8	1728	1497	1673517	
		4	1	75.9	10			2025762	
		5	1	54.5	11			2534224	
		6	3	89.7	11	1854.3	1023.3	3251572	
		7	2	81.7	13	1285.3		3757399	
		8	3	59.1	10	1476.9	1529.9	4604714	
		9	2	73.4	15	1281.6		4987161	
		10	3	76	13	993	1043	5610535	
		11	1	55.3	19			6424881	
		12	2	70.2	11	1911.8		6679663	
		13	3	60.5	5	939.5	1600.5	7239430	
		14	2	95	5	964		7924694	
		15	1	68.6	6			8552192	
		16	1	99.3	5			9466622	
		17	2	84.8	18	1172.2		9696724	
		18	3	97	10	1390	1123	10603979	
		19	2	56.9	5	1291.1		10940382	
		20	3	97.1	7	1558.9	1362.9	11654047	

Test Mode		Mode 3							
Frequency		5.470~5.725 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
13	5555	1	2	96.9	19	1008.1		283689	1
		2	2	99	19	1492		1676999	
		3	3	87.1	13	989.9	1019.9	2426967	
		4	1	61.1	18			3625360	
		5	3	62.2	11	1243.8	1766.8	5925658	
		6	1	76	10			6865716	
		7	3	87.2	17	1144.8	1665.8	7529060	
		8	2	81.5	15	1055.5		9383932	
		9	1	69.8	17			10622080	
		10	2	92	19	1683		10957742	
14	5543	1	1	96.7	7			288367	1
		2	1	54.7	17			660896	
		3	3	52.6	10	1536.4	1334.4	1309965	
		4	2	64.1	17	1168.9		1923650	
		5	2	80.1	18	1808.9		2620524	
		6	3	78.4	19	1726.6	1378.6	3143297	
		7	3	84.3	17	1539.7	1402.7	3735001	
		8	3	81	17	1881	1717	4666585	
		9	2	74.1	18	1575.9		4851931	
		10	1	62.6	15			5483962	
		11	1	67.4	15			6577008	
		12	2	60.4	15	946.6		7056458	
		13	1	51.6	7			7440565	
		14	2	93.6	13	1476.4		8285629	
		15	3	97.5	8	1675.5	1795.5	8889250	
		16	3	73.7	6	1463.3	1294.3	9442593	
		17	2	91.3	9	916.7		9726948	
		18	1	56.5	7			10209408	
		19	2	72.6	14	1831.4		10836022	
		20	3	64.7	16	1625.3	1406.3	11597510	

Test Mode		Mode 3							
Frequency		5.470~5.725 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
15	5536	1	3	74.8	15	1654.2	1233.2	145982	1
		2	1	89.9	5			1058238	
		3	3	58.4	7	1156.6	1161.6	1435873	
		4	2	69.9	10	1722.1		2058964	
		5	2	52.6	16	1393.4		2799658	
		6	3	51.5	5	1113.5	1706.5	3158357	
		7	1	72.2	12			4215839	
		8	3	79.2	13	1336.8	1332.8	4835982	
		9	2	83.7	7	1758.3		5365821	
		10	1	52.8	5			5793588	
		11	1	86.9	11			6523987	
		12	3	83.5	13	1468.5	1231.5	7233985	
		13	2	73.9	18	1220.1		7736982	
		14	2	60.6	5	1880.4		8536827	
		15	1	86.3	6			8935821	
		16	3	97.4	14	1855.6	912.6	9726853	
		17	1	86.7	11			10236581	
		18	2	50.7	14	1644.3		10836582	
		19	3	60.2	5	1924.8	1679.8	11436882	
16	5540	1	3	67.7	13	1787.3	1501.3	193161	1
		2	2	96	10	1092		840518	
		3	1	74.5	7			1979690	
		4	3	95	8	907	1443	2372262	
		5	2	82.3	10	961.7		2691289	
		6	3	84.1	17	978.9	1507.9	3711257	
		7	1	63	10			4053880	
		8	2	93.6	19	1059.4		5119453	
		9	1	61.4	9			5565324	
		10	1	86	14			6228245	
		11	1	63.3	10			6802603	
		12	3	88.6	6	979.4	984.4	7553159	
		13	2	86.6	9	1035.4		8068688	
		14	3	62.4	16	1234.6	985.6	8939294	
		15	2	65.9	11	1859.1		9445705	
		16	2	51.5	15	1339.5		10042487	
		17	1	98.7	10			10888558	
		18	3	66.3	19	1350.7	1640.7	11906444	



Test Mode		Mode 3							
Frequency		5.470~5.725 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
17	5529	1	2	92.4	13	1522.6		354862	1
		2	2	85.9	16	1893.1		860452	
		3	3	65.9	7	1857.1	1823.1	1526845	
		4	1	95.1	9			2256871	
		5	3	87.1	11	934.9	928.9	2958635	
		6	1	73.5	8			3945874	
		7	2	68.7	8	1508.3		4756882	
		8	3	52.1	11	1324.9	987.9	5036528	
		9	1	76.4	10			5945372	
		10	3	96.4	5	1337.6	1898.6	6852981	
		11	2	83.4	11	1597.6		7535962	
		12	1	96.5	18			8018265	
		13	1	79.7	16			8625478	
		14	1	73	14			9347658	
		15	2	86.4	13	1439.6		9925348	
		16	3	90.8	17	1502.2	1389.2	10754826	
		17	3	67.1	16	1532.9	1649.9	11458283	
18	5546	1	1	51.3	11			420200	1
		2	3	56.3	12	1767.7	1360.7	1045128	
		3	2	61.7	10	1582.3		2054476	
		4	2	90.5	8	1722.5		2830215	
		5	3	87.8	13	1288.2	1741.2	3432245	
		6	1	50.9	19			4196566	
		7	1	54.4	12			4953029	
		8	2	91.6	18	1612.4		6311483	
		9	3	87.7	6	1436.3	1258.3	7141870	
		10	3	65.7	16	1723.3	1896.3	7944048	
		11	1	75.3	12			8374995	
		12	2	73.7	15	1892.3		9016434	
		13	2	96.2	13	1411.8		10197913	
		14	1	70.1	12			10817077	
		15	3	52.7	13	1021.3	1393.3	11848236	

Test Mode		Mode 3							
Frequency		5.470~5.725 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
19	5543	1	1	58.9	15			266760	1
		2	2	89.3	18	1728.7		1250019	
		3	1	53.6	14			1804563	
		4	2	66.6	14	1719.4		2650483	
		5	2	64.2	12	1649.8		3910049	
		6	3	57.4	19	1085.6	1816.6	4529777	
		7	1	64.9	10			5348374	
		8	2	69	19	1700		6227024	
		9	2	62	16	1885		7189539	
		10	3	69.2	8	1711.8	1049.8	8019511	
		11	3	80.1	19	1763.9	1461.9	8711083	
		12	1	84.4	9			9670463	
		13	3	59.6	19	1597.4	1092.4	10840806	
		14	3	69.7	17	1392.3	1694.3	11966423	
20	5516	1	2	96.9	19	1008.1		283689	1
		2	2	99	19	1492		1676999	
		3	3	87.1	13	989.9	1019.9	2426967	
		4	1	61.1	18			3625360	
		5	3	62.2	11	1243.8	1766.8	5925658	
		6	1	76	10			6865716	
		7	3	87.2	17	1144.8	1665.8	7529060	
		8	2	81.5	15	1055.5		9383932	
		9	1	69.8	17			10622080	
		10	2	92	19	1683		10957742	
21	5543	1	2	67.2	2	1432.5		3522	1
		2	1	93.3	8			1642901	
		3	3	95.8	7	1388.6	1342.6	2881972	
		4	2	61.7	13	1642.1		3426072	
		5	2	70.5	9	1765.2		4826843	
		6	1	92.7	15			5325738	
		7	3	86.7	9	1356.2	1567.2	6685502	
		8	1	83.2	17			7854910	
		9	2	88.6	13	1389.3		8926675	
		10	3	65.2	10	1211.6	1588.7	9237628	
		11	2	70.3	14	932.2		10074565	
		12	1	70.8	12			11184205	

Test Mode		Mode 3							
Frequency		5.470~5.725 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
22	5541	1	3	61.2	17	1426.1	1426.1	77457	1
		2	2	72.3	15	1674.1		1764135	
		3	3	69.5	16	1625.1	1621.1	2759349	
		4	1	83.2	13			4821891	
		5	2	82.6	10	1103.8		5492401	
		6	1	89.5	17			6759573	
		7	1	87.4	12			8102166	
		8	3	75.2	4	1379.9	1289.9	9890082	
		9	2	50.7	12	1694.9		11314601	
23	5522	1	1	80.2	9			248517	1
		2	3	54.3	4	1212.6	1276.6	976354	
		3	2	60.8	17	1587.3		1647277	
		4	3	72.5	17	1854.4	1202.4	2491220	
		5	3	74.3	6	1730.7	1117.7	3364667	
		6	1	87.6	8			4854144	
		7	2	74.9	6	1491.9		5632525	
		8	1	74	19			6428577	
		9	3	78.2	9	1716.5	945.7	7327793	
		10	1	90.8	7			7543757	
		11	2	74.8	10	1542.2		8279794	
		12	2	87.5	9	1481.6		9223718	
		13	1	50.3	15			9849588	
		14	3	87.7	13	1546.9	1246.6	10197832	
		15	2	64.2	15	1475.8		11345245	
24	5549	1	3	79.8	14	1346.3	1824.3	432429	1
		2	3	75.6	10	958.6	1762.4	1623461	
		3	1	74.7	11			2254243	
		4	2	62.3	6	1324.3		2724526	
		5	1	61.9	12			3169665	
		6	3	61.5	13	1512.6	1388.7	4347842	
		7	1	94.3	9			5546509	
		8	2	72.5	7	1642.1		6346274	
		9	2	62.7	6	1167.7		7501401	
		10	3	70.2	13	1164.9	1497.8	8203168	
		11	1	58.7	14			9129685	
		12	1	82.4	16			9678762	
		13	3	98.4	9	1421.9	1812.9	10274415	
		14	2	77.3	11	1621.6		11320469	

Test Mode		Mode 3							
Frequency		5.470~5.725 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
25	5513	1	3	93.2	13	1571.2	1867.2	142343	1
		2	2	51.4	13	1346.8		858714	
		3	1	96.4	12			1642231	
		4	3	95.2	9	1764.6	1763.7	2128428	
		5	2	96.7	12	1632.6		2754253	
		6	3	75.6	11	1679.8	1346.8	3624642	
		7	1	62.1	7			4237561	
		8	2	69.8	11	1326.7		4846623	
		9	3	88.3	12	1842.5	1201.4	5498365	
		10	2	71.4	17	1513.7		6237403	
		11	1	54.7	9			6742869	
		12	3	62.3	12	1614.3	1192.3	7379568	
		13	1	57.8	12			8124234	
		14	3	84.6	11	978.3	1194.7	8527236	
		15	1	77.3	12			9346581	
		16	2	63.4	10	1518.1		10292563	
		17	2	89.7	9	1462.2		10775249	
		18	3	65.6	12	1372.6	1218.2	11445468	
26	5560	1	1	55.3	12			453512	0
		2	3	52.7	13	1134.2	1642.1	864234	
		3	2	66.3	16	1347.4		1735103	
		4	2	90.2	13	1756.7		2648041	
		5	3	61.3	8	1647.4	1457.9	3628408	
		6	1	74.5	10			4589847	
		7	2	91.7	6	1127.3		5628008	
		8	1	84.3	11			5953726	
		9	3	84.5	17	1612.2	1743.2	6241079	
		10	1	94.7	7			7351321	
		11	2	91.5	18	1648.7		7642036	
		12	2	62.9	10	1572.3		8637847	
		13	1	82.4	9			9428509	
		14	3	50.7	10	1745.2	1845.1	9654445	
		15	3	70.4	7	927.2	1798.2	10327325	
		16	2	55.3	9	1774.3		11134196	

Test Mode		Mode 3							
Frequency		5.470~5.725 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
27	5521	1	2	78.4	12	1532.5		553748	1
		2	1	70.4	4			647891	
		3	3	71.6	7	1624	1479	1628517	
		4	1	73.7	10			2327762	
		5	1	52.7	13			2512224	
		6	3	87.9	9	1632.3	1208.3	3435572	
		7	2	81.2	10	1419.3		3727399	
		8	3	55.4	10	1478.9	1547.9	4819714	
		9	2	71.7	16	1429.6		4915161	
		10	3	73.8	13	756	1345	5516535	
		11	1	53.7	17			6823881	
		12	2	66.5	11	1749.8		6917663	
		13	3	62.7	6	875.5	1624.5	7428430	
		14	2	93.6	7	754		7924694	
		15	1	64.8	5			8916192	
		16	1	96.2	3			9623622	
		17	2	82.8	15	1315.2		9727724	
		18	3	96.5	10	1346	1324	10123949	
		19	2	54.9	8	1427.1		10790385	
		20	3	95.2	10	1549.9	1512.9	11384046	
28	5520	1	1	95.4	6			273267	1
		2	1	53.2	16			654996	
		3	3	51.6	9	1432.4	1279.4	1278965	
		4	2	63.4	15	1241.9		1846650	
		5	2	79.8	16	1756.9		2549524	
		6	3	77.6	18	1642.6	1428.6	3332297	
		7	3	83.4	17	1432.7	1399.7	3642001	
		8	3	80.2	16	1765	1648	4724585	
		9	2	72.9	17	1649.9		4868931	
		10	1	61.7	13			5516962	
		11	1	65.4	15			6613008	
		12	2	61.8	14	957.6		7127458	
		13	1	52.5	6			7742365	
		14	2	92.7	12	1321.4		8317629	
		15	3	95.6	7	1547.5	1815.5	8776250	
		16	3	72.6	8	1516.3	1315.3	9519593	
		17	2	92.7	10	925.7		9619948	
		18	1	55.4	6			10328408	
		19	2	71.8	13	1759.4		10750022	
		20	3	52.4	15	1637.3	1328.3	11495510	

Test Mode		Mode 3							
Frequency		5.470~5.725 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
29	5531	1	2	91.2	12	1426.6		344862	1
		2	2	86.4	15	1732.1		856752	
		3	3	64.2	8	1746.1	1728.1	1498845	
		4	1	94.3	10			2321871	
		5	3	88.4	10	932.9	937.9	2827635	
		6	1	72.1	9			3854874	
		7	2	67.4	7	1613.3		4647882	
		8	3	51.4	11	1334.9	967.9	5127528	
		9	1	74.3	11			5846372	
		10	3	94.8	6	1327.6	1795.6	6750981	
		11	2	82.1	10	1627.6		7432962	
		12	1	95.7	16			8128265	
		13	1	78.3	15			8567478	
		14	1	72.1	14			9201658	
		15	2	85.7	13	1517.6		9891348	
		16	3	91.3	16	1642.2	1426.2	10274828	
		17	3	68.2	15	1637.9	1527.9	11468285	
30	5550	1	1	61.2	14			251660	1
		2	2	88.4	18	1628.7		1318019	
		3	1	52.1	13			1742563	
		4	2	65.9	15	1678.4		2543483	
		5	2	63.2	13	1658.8		3873049	
		6	3	58.3	18	1129.6	1754.6	4627777	
		7	1	62.9	11			5438374	
		8	2	68.4	17	1627		6357024	
		9	2	63.1	15	1782		7219539	
		10	3	68.2	7	1641.8	1129.8	8128511	
		11	3	79.8	19	1645.9	1518.9	8624083	
		12	1	82.7	10			9714463	
		13	3	60.2	18	1427.4	1128.4	10260806	
		14	3	68.7	16	1384.3	1572.3	11876423	
Detection Percentage (%)									86.67

Test Mode	Mode 3			
Frequency	5.470~5.725 GHz			
Radar Signal	Type 6			
Trial #	Pulses / Hop	Pulse Width (us)	PRI (us)	1=Detection ; 0=No Detection
1	9	1	333	1
2	9	1	333	0
3	9	1	333	1
4	9	1	333	1
5	9	1	333	1
6	9	1	333	1
7	9	1	333	1
8	9	1	333	1
9	9	1	333	1
10	9	1	333	1
11	9	1	333	1
12	9	1	333	1
13	9	1	333	0
14	9	1	333	1
15	9	1	333	1
16	9	1	333	1
17	9	1	333	1
18	9	1	333	1
19	9	1	333	1
20	9	1	333	1
21	9	1	333	1
22	9	1	333	1
23	9	1	333	1
24	9	1	333	1
25	9	1	333	1
26	9	1	333	1
27	9	1	333	1
28	9	1	333	1
29	9	1	333	0
30	9	1	333	1
Detection Percentage (%)				90.00

Test Mode		Mode 3				
Frequency		5.600~5.650 GHz				
Radar Signal		Type 1				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	PRF (Hz)	Pulses / Burst	1=Detection ; 0=No Detection
1	5571	1	638	1567	83	1
2	5572	1	858	1166	62	0
3	5573	1	738	1355	72	1
4	5574	1	538	1859	99	1
5	5575	1	778	1285	68	1
6	5576	1	658	1520	81	1
7	5577	1	3066	326	18	1
8	5578	1	598	1672	89	1
9	5579	1	578	1730	92	1
10	5580	1	698	1433	76	1
11	5605	1	618	1618	86	1
12	5606	1	798	1253	67	1
13	5607	1	678	1475	78	1
14	5608	1	558	1792	95	1
15	5609	1	818	1222	65	1
16	5610	1	1541	649	35	1
17	5611	1	891	1122	60	1
18	5612	1	929	1076	57	1
19	5613	1	2448	408	22	1
20	5614	1	1833	546	29	1
21	5640	1	1865	536	29	1
22	5641	1	1542	649	35	1
23	5642	1	2995	334	18	1
24	5643	1	1202	832	44	0
25	5644	1	1165	858	46	1
26	5645	1	1244	804	43	1
27	5646	1	2852	351	19	1
28	5647	1	2242	446	24	1
29	5648	1	1157	864	46	1
30	5649	1	1288	776	41	1
Detection Percentage (%)						93.33



Test Mode		Mode 3				
Frequency		5.600~5.650 GHz				
Radar Signal		Type 2				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	PRF (Hz)	Pulses / Burst	1=Detection ; 0=No Detection
1	5571	2.6	228	4386	23	1
2	5572	4.6	150	6667	27	1
3	5573	1.1	184	5435	29	1
4	5574	4.8	203	4926	24	1
5	5575	3.7	189	5291	25	1
6	5576	2.6	201	4975	24	1
7	5577	3.5	216	4630	26	1
8	5578	4.2	194	5155	23	1
9	5579	2.9	225	4444	25	0
10	5580	3.3	206	4854	27	1
11	5605	3.9	213	4695	28	1
12	5606	4.7	159	6289	26	1
13	5607	3.1	167	5988	24	1
14	5608	1.9	217	4608	23	1
15	5609	2.4	162	6173	25	1
16	5610	3.4	204	4902	28	1
17	5611	2.3	170	5882	27	0
18	5612	3.5	184	5435	23	1
19	5613	4.9	150	6667	27	1
20	5614	4.6	211	4739	29	1
21	5640	2.9	158	6329	23	1
22	5641	2.6	226	4425	27	1
23	5642	1.6	204	4902	26	0
24	5643	3.9	181	5525	25	1
25	5644	4.6	202	4950	24	1
26	5645	4.1	194	5155	27	1
27	5646	2.3	193	5181	28	1
28	5647	3.9	173	5780	29	1
29	5648	4.3	188	5319	23	0
30	5649	1.5	215	4651	26	1
Detection Percentage (%)						86.67

Test Mode		Mode 3				
Frequency		5.600~5.650 GHz				
Radar Signal		Type 3				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	PRF (Hz)	Pulses / Burst	1=Detection ; 0=No Detection
1	5571	8.0	492	2033	16	0
2	5572	6.7	200	5000	18	1
3	5573	8.6	418	2392	16	1
4	5574	9.4	351	2849	17	1
5	5575	7.4	383	2611	18	1
6	5576	9.8	232	4310	16	1
7	5577	7.6	245	4082	18	1
8	5578	8.2	289	3460	17	0
9	5579	6.5	306	3268	18	1
10	5580	7.3	421	2375	16	1
11	5605	7.8	335	2985	18	1
12	5606	8.8	375	2667	17	1
13	5607	9.6	324	3086	16	1
14	5608	9.4	259	3861	18	0
15	5609	6.4	220	4545	17	1
16	5610	7.2	342	2924	16	1
17	5611	9.1	377	2653	17	1
18	5612	9.6	457	2188	16	1
19	5613	8.0	471	2123	18	1
20	5614	9.0	304	3289	18	0
21	5640	8.0	316	3165	17	1
22	5641	9.8	325	3077	16	1
23	5642	8.0	409	2445	17	0
24	5643	9.9	200	5000	17	1
25	5644	8.8	458	2183	16	1
26	5645	8.0	232	4310	18	1
27	5646	8.3	250	4000	16	1
28	5647	8.7	270	3704	16	1
29	5648	7.7	350	2857	17	1
30	5649	7.1	230	4348	16	1
Detection Percentage (%)						83.33

Test Mode		Mode 3				
Frequency		5.600~5.650 GHz				
Radar Signal		Type 4				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	PRF (Hz)	Pulses / Burst	1=Detection ; 0=No Detection
1	5571	18.0	493	2028	15	0
2	5572	19.9	200	5000	12	1
3	5573	12.9	487	2053	14	1
4	5574	13.7	377	2653	13	1
5	5575	15.6	462	2165	15	1
6	5576	18.4	358	2793	16	1
7	5577	13.4	267	3745	12	1
8	5578	15.7	349	2865	14	1
9	5579	19.1	409	2445	15	1
10	5580	18.2	423	2364	16	1
11	5605	13.2	325	3077	13	1
12	5606	14.6	264	3788	12	1
13	5607	18.6	326	3067	14	1
14	5608	15.0	452	2212	13	0
15	5609	16.3	230	4348	12	1
16	5610	19.8	238	4202	13	1
17	5611	18.2	420	2381	16	0
18	5612	16.3	452	2212	15	1
19	5613	14.2	495	2020	12	0
20	5614	17.8	228	4386	16	1
21	5640	19.1	211	4739	16	1
22	5641	18.4	283	3534	15	1
23	5642	11.8	411	2433	12	1
24	5643	14.2	284	3521	13	0
25	5644	13.9	202	4950	12	1
26	5645	17.8	340	2941	14	1
27	5646	15.6	290	3448	16	1
28	5647	14.6	250	4000	16	1
29	5648	14.4	484	2066	15	1
30	5649	18.9	387	2584	13	1
Detection Percentage (%)						83.33

Test Mode		Mode 3							
Frequency		5.600~5.650 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
1	5301	1	2	51.7	7	1146.3		647836	0
		2	1	93.2	15			1409398	
		3	3	79.6	10	1290.4	964.4	2872945	
		4	2	85.8	14	1559.2		4049183	
		5	2	76.5	14	1210.5	1553.5	4494059	
		6	1	61.7	8			5716328	
		7	3	83.6	7	1205.4	993.4	7308202	
		8	1	59.8	5			8119962	
		9	2	69.9	10	1355.1		9532813	
		10	3	94.3	10	1747.7	1408.7	10751035	
		11	2	61.8	18	1000.2		11053268	
2	5294	1	2	66.3	2	1226.7		3658	0
		2	1	94.2	9			1529901	
		3	3	96.7	6	1255.6	1330.6	2951972	
		4	2	60.8	11	1703.1		3038072	
		5	2	70	8	1886.2		4885843	
		6	1	93	16			5281738	
		7	3	87.7	10	1474.2	1427.2	6746502	
		8	1	84.5	18			7749910	
		9	2	89	12	1302.3		8035675	
		10	3	66.4	11	1031.7	1634.7	9089628	
		11	2	71.5	15	917.3		10039865	
		12	1	71.1	11			11195005	
3	5308	1	3	76.5	5	1658.5	1885.5	341903	1
		2	3	89.5	5	1162.5	1012.5	1039290	
		3	1	92.5	15			2530435	
		4	2	82.5	5	1869.5		3352797	
		5	1	68.5	9			3783207	
		6	3	78.3	17	1239.7	936.7	5292381	
		7	1	91	6			6334407	
		8	2	59.3	7	1898.7		6688649	
		9	2	58	13	1884		7600600	
		10	3	92.8	17	1029.2	1258.2	8865035	
		11	1	77.4	10			9464201	
		12	3	90.8	10	1219.2	1458.2	10488185	
		13	2	87.9	8	1764.1		11914643	

Test Mode		Mode 3							
Frequency		5.600~5.650 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
4	5308	1	3	50.9	16	1321.1	1333.1	77627	1
		2	2	73.9	16	1538.1		2317135	
		3	3	71.9	17	1596.1	1584.1	2684349	
		4	1	54.3	14			4779891	
		5	2	84.2	9	1055.8		5502401	
		6	1	99.3	18			6827573	
		7	1	89.5	13			8051166	
		8	3	78.1	5	1436.9	1262.9	9980082	
		9	2	51.1	13	1700.9		11274601	
5	5295	1	1	81.8	7			255617	1
		2	3	55.4	5	1016.6	1310.6	929954	
		3	2	61.7	18	1616.3		1699277	
		4	3	78.6	19	1882.4	1115.4	2516220	
		5	3	75.3	7	1730.7	1082.7	3350667	
		6	1	88.6	7			4671144	
		7	2	74.1	5	1510.9		5553525	
		8	1	75	18			6315577	
		9	3	79.5	8	1722.5	925.5	7021793	
		10	1	91.5	6			7652757	
		11	2	74.8	9	1531.2		8144794	
		12	2	88.4	10	1475.6		9507618	
		13	1	51.7	16			9965188	
		14	3	88.1	12	1605.9	1230.9	10600830	
		15	2	63.2	16	1448.8		11228243	
6	5306	1	3	81.6	15	1326.4	1816.4	420027	1
		2	3	81.6	9	960.4	1855.4	1213961	
		3	1	73.5	12			2412241	
		4	2	61.7	5	1305.3		2705526	
		5	1	63.1	15			4149665	
		6	3	61.4	15	1499.6	1396.6	4418842	
		7	1	99.3	11			5456509	
		8	2	74.9	5	1604.1		6153274	
		9	2	64.3	7	1079.7		7420401	
		10	3	71.1	15	1154.9	1510.9	8105166	
		11	1	59.4	12			9087685	
		12	1	84.5	17			9743762	
		13	3	99.1	11	1357.9	1730.9	10514412	
		14	2	78.4	12	1576.6		11920466	

Test Mode		Mode 3							
Frequency		5.600~5.650 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
7	5304	1	2	59.5	14	1515.5		154623	1
		2	1	71.2	5			860435	
		3	3	72.1	13	1820.9	1327.9	1566260	
		4	2	50.4	19	1603.6		2272135	
		5	3	99.2	11	1157.8	1085.8	2977376	
		6	1	53.8	13			3682861	
		7	2	93.4	7	1133.6		4388707	
		8	3	59.4	7	1374.6	993.6	5094518	
		9	2	53.6	13	1092.4		5799787	
		10	1	59.8	8			6505670	
		11	3	97.7	6	1593.3	1125.3	7209959	
		12	1	84.2	10			7915377	
		13	3	93.2	9	1104.8	1300.8	8619959	
		14	1	97.7	11			9326217	
		15	2	71.2	6	1580.8		10032059	
		16	2	79.8	8	1537.2		10736631	
		17	3	77.2	17	1423.8	1233.8	11442475	
8	5302	1	3	95.8	12	1628.2	1867.2	132542	1
		2	2	52.2	15	1291.8		865214	
		3	1	99.9	11			1685231	
		4	3	97.4	8	1853.6	1822.6	2035426	
		5	2	98.4	11	1706.6		2846253	
		6	3	74.2	12	1752.8	1348.8	3625642	
		7	1	63.1	6			4123561	
		8	2	70.3	13	1127.7		4953621	
		9	3	85.5	10	1782.5	1179.5	5512365	
		10	2	73.3	18	1409.7		6125403	
		11	1	50.9	10			6865868	
		12	3	64.7	13	1564.3	1184.3	7421568	
		13	1	56.1	10			8088234	
		14	3	86.3	12	980.7	1184.7	8645235	
		15	1	78	13			9236581	
		16	2	62.9	11	1426.1		10132561	
		17	2	88.8	10	1513.2		10765249	
		18	3	67.4	14	1249.6	1172.6	11235461	

Test Mode		Mode 3							
Frequency		5.600~5.650 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
9	5293	1	3	13	13	1499.3	1528.3	125412	0
		2	1	17	17			782539	
		3	3	17	17	1939.3	1576.3	1526841	
		4	1	11	11			2156487	
		5	1	14	14			2651285	
		6	3	9	9	1629.4	1414.4	3326582	
		7	2	7	7	1535.8		3988625	
		8	3	14	14	1343	1104	4725418	
		9	2	14	14	1553.1		5326874	
		10	3	13	13	1520.9	918.9	5933652	
		11	1	13	13			6529425	
		12	2	11	11	1028.4		7149632	
		13	3	15	15	1525.4	1407.4	7759932	
		14	2	19	19	1369.6		8425981	
		15	1	8	8			9258412	
		16	1	9	9			9925874	
		17	2	9	9	1050.3		1026582	
		18	3	5	5	1701.2	1173.2	10963658	
		19	2	6	6	1305.2		11456981	
10	5297	1	1	60.7	9			353222	1
		2	3	59.2	13	1331.8	1077.8	1659461	
		3	2	96.1	8	1237.9		3432174	
		4	3	70.5	16	1145.5	1708.5	5432909	
		5	2	63.2	13	1721.8		6953575	
		6	1	51.5	7			8826390	
		7	1	89.1	5			10242227	
		8	2	86.1	12	1499.9		10759333	

Test Mode		Mode 3							
Frequency		5.600~5.650 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
11	5301	1	1	57.4	14			472419	1
		2	3	83.9	15	1079.1	1717.1	861133	
		3	2	67.1	17	1333.9		1822100	
		4	2	91.3	14	1877.7		2679041	
		5	3	60.1	9	1784.9	1515.9	3219408	
		6	1	72.3	11			4454844	
		7	2	92.6	7	1077.4		5169008	
		8	1	86.2	12			5476228	
		9	3	86.8	18	1713.2	1589.2	6009079	
		10	1	98.7	6			7247320	
		11	2	90.2	19	1747.8		7640035	
		12	2	63.9	9	1657.1		8752849	
		13	1	73.2	11			9365509	
		14	3	51.9	9	1842.1	1910.1	9792446	
		15	3	71.8	6	931.2	1825.2	10872322	
		16	2	56.9	8	1860.1		11513196	
12	5297	1	2	80.5	10	1697.5		546448	1
		2	1	72.8	5			648691	
		3	3	71	8	1728	1497	1673517	
		4	1	75.9	10			2025762	
		5	1	54.5	11			2534224	
		6	3	89.7	11	1854.3	1023.3	3251572	
		7	2	81.7	13	1285.3		3757399	
		8	3	59.1	10	1476.9	1529.9	4604714	
		9	2	73.4	15	1281.6		4987161	
		10	3	76	13	993	1043	5610535	
		11	1	55.3	19			6424881	
		12	2	70.2	11	1911.8		6679663	
		13	3	60.5	5	939.5	1600.5	7239430	
		14	2	95	5	964		7924694	
		15	1	68.6	6			8552192	
		16	1	99.3	5			9466622	
		17	2	84.8	18	1172.2		9696724	
		18	3	97	10	1390	1123	10603979	
		19	2	56.9	5	1291.1		10940382	
		20	3	97.1	7	1558.9	1362.9	11654047	



Test Mode		Mode 3							
Frequency		5.600~5.650 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
13	5308	1	2	96.9	19	1008.1		283689	1
		2	2	99	19	1492		1676999	
		3	3	87.1	13	989.9	1019.9	2426967	
		4	1	61.1	18			3625360	
		5	3	62.2	11	1243.8	1766.8	5925658	
		6	1	76	10			6865716	
		7	3	87.2	17	1144.8	1665.8	7529060	
		8	2	81.5	15	1055.5		9383932	
		9	1	69.8	17			10622080	
		10	2	92	19	1683		10957742	
14	5297	1	1	96.7	7			288367	1
		2	1	54.7	17			660896	
		3	3	52.6	10	1536.4	1334.4	1309965	
		4	2	64.1	17	1168.9		1923650	
		5	2	80.1	18	1808.9		2620524	
		6	3	78.4	19	1726.6	1378.6	3143297	
		7	3	84.3	17	1539.7	1402.7	3735001	
		8	3	81	17	1881	1717	4666585	
		9	2	74.1	18	1575.9		4851931	
		10	1	62.6	15			5483962	
		11	1	67.4	15			6577008	
		12	2	60.4	15	946.6		7056458	
		13	1	51.6	7			7440565	
		14	2	93.6	13	1476.4		8285629	
		15	3	97.5	8	1675.5	1795.5	8889250	
		16	3	73.7	6	1463.3	1294.3	9442593	
		17	2	91.3	9	916.7		9726948	
		18	1	56.5	7			10209408	
		19	2	72.6	14	1831.4		10836022	
		20	3	64.7	16	1625.3	1406.3	11597510	

Test Mode		Mode 3							
Frequency		5.600~5.650 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
15	5300	1	3	74.8	15	1654.2	1233.2	145982	1
		2	1	89.9	5			1058238	
		3	3	58.4	7	1156.6	1161.6	1435873	
		4	2	69.9	10	1722.1		2058964	
		5	2	52.6	16	1393.4		2799658	
		6	3	51.5	5	1113.5	1706.5	3158357	
		7	1	72.2	12			4215839	
		8	3	79.2	13	1336.8	1332.8	4835982	
		9	2	83.7	7	1758.3		5365821	
		10	1	52.8	5			5793588	
		11	1	86.9	11			6523987	
		12	3	83.5	13	1468.5	1231.5	7233985	
		13	2	73.9	18	1220.1		7736982	
		14	2	60.6	5	1880.4		8536827	
		15	1	86.3	6			8935821	
		16	3	97.4	14	1855.6	912.6	9726853	
		17	1	86.7	11			10236581	
		18	2	50.7	14	1644.3		10836582	
		19	3	60.2	5	1924.8	1679.8	11436882	
16	5307	1	3	67.7	13	1787.3	1501.3	193161	1
		2	2	96	10	1092		840518	
		3	1	74.5	7			1979690	
		4	3	95	8	907	1443	2372262	
		5	2	82.3	10	961.7		2691289	
		6	3	84.1	17	978.9	1507.9	3711257	
		7	1	63	10			4053880	
		8	2	93.6	19	1059.4		5119453	
		9	1	61.4	9			5565324	
		10	1	86	14			6228245	
		11	1	63.3	10			6802603	
		12	3	88.6	6	979.4	984.4	7553159	
		13	2	86.6	9	1035.4		8068688	
		14	3	62.4	16	1234.6	985.6	8939294	
		15	2	65.9	11	1859.1		9445705	
		16	2	51.5	15	1339.5		10042487	
		17	1	98.7	10			10888558	
		18	3	66.3	19	1350.7	1640.7	11906444	

Test Mode		Mode 3							
Frequency		5.600~5.650 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
17	5293	1	2	92.4	13	1522.6		354862	1
		2	2	85.9	16	1893.1		860452	
		3	3	65.9	7	1857.1	1823.1	1526845	
		4	1	95.1	9			2256871	
		5	3	87.1	11	934.9	928.9	2958635	
		6	1	73.5	8			3945874	
		7	2	68.7	8	1508.3		4756882	
		8	3	52.1	11	1324.9	987.9	5036528	
		9	1	76.4	10			5945372	
		10	3	96.4	5	1337.6	1898.6	6852981	
		11	2	83.4	11	1597.6		7535962	
		12	1	96.5	18			8018265	
		13	1	79.7	16			8625478	
		14	1	73	14			9347658	
		15	2	86.4	13	1439.6		9925348	
		16	3	90.8	17	1502.2	1389.2	10754826	
		17	3	67.1	16	1532.9	1649.9	11458283	
18	5306	1	1	51.3	11			420200	1
		2	3	56.3	12	1767.7	1360.7	1045128	
		3	2	61.7	10	1582.3		2054476	
		4	2	90.5	8	1722.5		2830215	
		5	3	87.8	13	1288.2	1741.2	3432245	
		6	1	50.9	19			4196566	
		7	1	54.4	12			4953029	
		8	2	91.6	18	1612.4		6311483	
		9	3	87.7	6	1436.3	1258.3	7141870	
		10	3	65.7	16	1723.3	1896.3	7944048	
		11	1	75.3	12			8374995	
		12	2	73.7	15	1892.3		9016434	
		13	2	96.2	13	1411.8		10197913	
		14	1	70.1	12			10817077	
		15	3	52.7	13	1021.3	1393.3	11848236	

Test Mode		Mode 3							
Frequency		5.600~5.650 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
19	5304	1	1	58.9	15			266760	0
		2	2	89.3	18	1728.7		1250019	
		3	1	53.6	14			1804563	
		4	2	66.6	14	1719.4		2650483	
		5	2	64.2	12	1649.8		3910049	
		6	3	57.4	19	1085.6	1816.6	4529777	
		7	1	64.9	10			5348374	
		8	2	69	19	1700		6227024	
		9	2	62	16	1885		7189539	
		10	3	69.2	8	1711.8	1049.8	8019511	
		11	3	80.1	19	1763.9	1461.9	8711083	
		12	1	84.4	9			9670463	
		13	3	59.6	19	1597.4	1092.4	10840806	
		14	3	69.7	17	1392.3	1694.3	11966423	
20	5298	1	2	96.9	19	1008.1		283689	1
		2	2	99	19	1492		1676999	
		3	3	87.1	13	989.9	1019.9	2426967	
		4	1	61.1	18			3625360	
		5	3	62.2	11	1243.8	1766.8	5925658	
		6	1	76	10			6865716	
		7	3	87.2	17	1144.8	1665.8	7529060	
		8	2	81.5	15	1055.5		9383932	
		9	1	69.8	17			10622080	
		10	2	92	19	1683		10957742	
21	5299	1	2	67.2	2	1432.5		3522	1
		2	1	93.3	8			1642901	
		3	3	95.8	7	1388.6	1342.6	2881972	
		4	2	61.7	13	1642.1		3426072	
		5	2	70.5	9	1765.2		4826843	
		6	1	92.7	15			5325738	
		7	3	86.7	9	1356.2	1567.2	6685502	
		8	1	83.2	17			7854910	
		9	2	88.6	13	1389.3		8926675	
		10	3	65.2	10	1211.6	1588.7	9237628	
		11	2	70.3	14	932.2		10074565	
		12	1	70.8	12			11184205	

Test Mode		Mode 3							
Frequency		5.600~5.650 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
22	5304	1	3	61.2	17	1426.1	1426.1	77457	1
		2	2	72.3	15	1674.1		1764135	
		3	3	69.5	16	1625.1	1621.1	2759349	
		4	1	83.2	13			4821891	
		5	2	82.6	10	1103.8		5492401	
		6	1	89.5	17			6759573	
		7	1	87.4	12			8102166	
		8	3	75.2	4	1379.9	1289.9	9890082	
		9	2	50.7	12	1694.9		11314601	
23	5295	1	1	80.2	9			248517	1
		2	3	54.3	4	1212.6	1276.6	976354	
		3	2	60.8	17	1587.3		1647277	
		4	3	72.5	17	1854.4	1202.4	2491220	
		5	3	74.3	6	1730.7	1117.7	3364667	
		6	1	87.6	8			4854144	
		7	2	74.9	6	1491.9		5632525	
		8	1	74	19			6428577	
		9	3	78.2	9	1716.5	945.7	7327793	
		10	1	90.8	7			7543757	
		11	2	74.8	10	1542.2		8279794	
		12	2	87.5	9	1481.6		9223718	
		13	1	50.3	15			9849588	
		14	3	87.7	13	1546.9	1246.6	10197832	
		15	2	64.2	15	1475.8		11345245	
24	5295	1	3	79.8	14	1346.3	1824.3	432429	1
		2	3	75.6	10	958.6	1762.4	1623461	
		3	1	74.7	11			2254243	
		4	2	62.3	6	1324.3		2724526	
		5	1	61.9	12			3169665	
		6	3	61.5	13	1512.6	1388.7	4347842	
		7	1	94.3	9			5546509	
		8	2	72.5	7	1642.1		6346274	
		9	2	62.7	6	1167.7		7501401	
		10	3	70.2	13	1164.9	1497.8	8203168	
		11	1	58.7	14			9129685	
		12	1	82.4	16			9678762	
		13	3	98.4	9	1421.9	1812.9	10274415	
		14	2	77.3	11	1621.6		11320469	

Test Mode		Mode 3							
Frequency		5.600~5.650 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
25	5304	1	3	93.2	13	1571.2	1867.2	142343	0
		2	2	51.4	13	1346.8		858714	
		3	1	96.4	12			1642231	
		4	3	95.2	9	1764.6	1763.7	2128428	
		5	2	96.7	12	1632.6		2754253	
		6	3	75.6	11	1679.8	1346.8	3624642	
		7	1	62.1	7			4237561	
		8	2	69.8	11	1326.7		4846623	
		9	3	88.3	12	1842.5	1201.4	5498365	
		10	2	71.4	17	1513.7		6237403	
		11	1	54.7	9			6742869	
		12	3	62.3	12	1614.3	1192.3	7379568	
		13	1	57.8	12			8124234	
		14	3	84.6	11	978.3	1194.7	8527236	
		15	1	77.3	12			9346581	
		16	2	63.4	10	1518.1		10292563	
		17	2	89.7	9	1462.2		10775249	
		18	3	65.6	12	1372.6	1218.2	11445468	
26	5306	1	1	55.3	12			453512	1
		2	3	52.7	13	1134.2	1642.1	864234	
		3	2	66.3	16	1347.4		1735103	
		4	2	90.2	13	1756.7		2648041	
		5	3	61.3	8	1647.4	1457.9	3628408	
		6	1	74.5	10			4589847	
		7	2	91.7	6	1127.3		5628008	
		8	1	84.3	11			5953726	
		9	3	84.5	17	1612.2	1743.2	6241079	
		10	1	94.7	7			7351321	
		11	2	91.5	18	1648.7		7642036	
		12	2	62.9	10	1572.3		8637847	
		13	1	82.4	9			9428509	
		14	3	50.7	10	1745.2	1845.1	9654445	
		15	3	70.4	7	927.2	1798.2	10327325	
		16	2	55.3	9	1774.3		11134196	

Test Mode		Mode 3							
Frequency		5.600~5.650 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
27	5292	1	2	78.4	12	1532.5		553748	1
		2	1	70.4	4			647891	
		3	3	71.6	7	1624	1479	1628517	
		4	1	73.7	10			2327762	
		5	1	52.7	13			2512224	
		6	3	87.9	9	1632.3	1208.3	3435572	
		7	2	81.2	10	1419.3		3727399	
		8	3	55.4	10	1478.9	1547.9	4819714	
		9	2	71.7	16	1429.6		4915161	
		10	3	73.8	13	756	1345	5516535	
		11	1	53.7	17			6823881	
		12	2	66.5	11	1749.8		6917663	
		13	3	62.7	6	875.5	1624.5	7428430	
		14	2	93.6	7	754		7924694	
		15	1	64.8	5			8916192	
		16	1	96.2	3			9623622	
		17	2	82.8	15	1315.2		9727724	
		18	3	96.5	10	1346	1324	10123949	
		19	2	54.9	8	1427.1		10790385	
		20	3	95.2	10	1549.9	1512.9	11384046	
28	5293	1	1	95.4	6			273267	0
		2	1	53.2	16			654996	
		3	3	51.6	9	1432.4	1279.4	1278965	
		4	2	63.4	15	1241.9		1846650	
		5	2	79.8	16	1756.9		2549524	
		6	3	77.6	18	1642.6	1428.6	3332297	
		7	3	83.4	17	1432.7	1399.7	3642001	
		8	3	80.2	16	1765	1648	4724585	
		9	2	72.9	17	1649.9		4868931	
		10	1	61.7	13			5516962	
		11	1	65.4	15			6613008	
		12	2	61.8	14	957.6		7127458	
		13	1	52.5	6			7742365	
		14	2	92.7	12	1321.4		8317629	
		15	3	95.6	7	1547.5	1815.5	8776250	
		16	3	72.6	8	1516.3	1315.3	9519593	
		17	2	92.7	10	925.7		9619948	
		18	1	55.4	6			10328408	
		19	2	71.8	13	1759.4		10750022	
		20	3	52.4	15	1637.3	1328.3	11495510	

Test Mode		Mode 3							
Frequency		5.600~5.650 GHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	No. of Pulses	Pulse Width (us)	Chirp (MHz)	Pulse 1-to-2 Spacing (us)	Pulse 2-to-3 Spacing (us)	Starting Location Within Interval (us)	1=Detection ; 0=No Detection
29	5297	1	2	91.2	12	1426.6		344862	1
		2	2	86.4	15	1732.1		856752	
		3	3	64.2	8	1746.1	1728.1	1498845	
		4	1	94.3	10			2321871	
		5	3	88.4	10	932.9	937.9	2827635	
		6	1	72.1	9			3854874	
		7	2	67.4	7	1613.3		4647882	
		8	3	51.4	11	1334.9	967.9	5127528	
		9	1	74.3	11			5846372	
		10	3	94.8	6	1327.6	1795.6	6750981	
		11	2	82.1	10	1627.6		7432962	
		12	1	95.7	16			8128265	
		13	1	78.3	15			8567478	
		14	1	72.1	14			9201658	
		15	2	85.7	13	1517.6		9891348	
		16	3	91.3	16	1642.2	1426.2	10274828	
		17	3	68.2	15	1637.9	1527.9	11468285	
30	5307	1	1	61.2	14			251660	1
		2	2	88.4	18	1628.7		1318019	
		3	1	52.1	13			1742563	
		4	2	65.9	15	1678.4		2543483	
		5	2	63.2	13	1658.8		3873049	
		6	3	58.3	18	1129.6	1754.6	4627777	
		7	1	62.9	11			5438374	
		8	2	68.4	17	1627		6357024	
		9	2	63.1	15	1782		7219539	
		10	3	68.2	7	1641.8	1129.8	8128511	
		11	3	79.8	19	1645.9	1518.9	8624083	
		12	1	82.7	10			9714463	
		13	3	60.2	18	1427.4	1128.4	10260806	
		14	3	68.7	16	1384.3	1572.3	11876423	
Detection Percentage (%)									83.33



Test Mode	Mode 3			
Frequency	5.600~5.650 GHz			
Radar Signal	Type 6			
Trial #	Pulses / Hop	Pulse Width (us)	PRI (us)	1=Detection ; 0=No Detection
1	9	1	333	1
2	9	1	333	1
3	9	1	333	1
4	9	1	333	1
5	9	1	333	1
6	9	1	333	1
7	9	1	333	0
8	9	1	333	1
9	9	1	333	1
10	9	1	333	1
11	9	1	333	1
12	9	1	333	1
13	9	1	333	1
14	9	1	333	0
15	9	1	333	1
16	9	1	333	1
17	9	1	333	1
18	9	1	333	1
19	9	1	333	1
20	9	1	333	1
21	9	1	333	1
22	9	1	333	1
23	9	1	333	1
24	9	1	333	1
25	9	1	333	0
26	9	1	333	1
27	9	1	333	1
28	9	1	333	1
29	9	1	333	1
30	9	1	333	1
Detection Percentage (%)				90.00