

## Appendix B

### RF Test Data for BT V4.2(BDR/EDR) (Conducted Measurement)

Product Name: Bluetooth Speaker

Trade Mark: GSOU


Test Model: V6

#### Environmental Conditions

Temperature:	23.6 ° C
Relative Humidity:	50.3%
ATM Pressure:	100.0 kPa
Test Engineer:	Mina.xu
Supervised by:	Jayden.Zhuo


#### B.1 Duty Cycle

Test Mode	Test Channel	Ant	Duty Cycle[%]	Verdict
BT LE	2440	Ant1	100	PASS

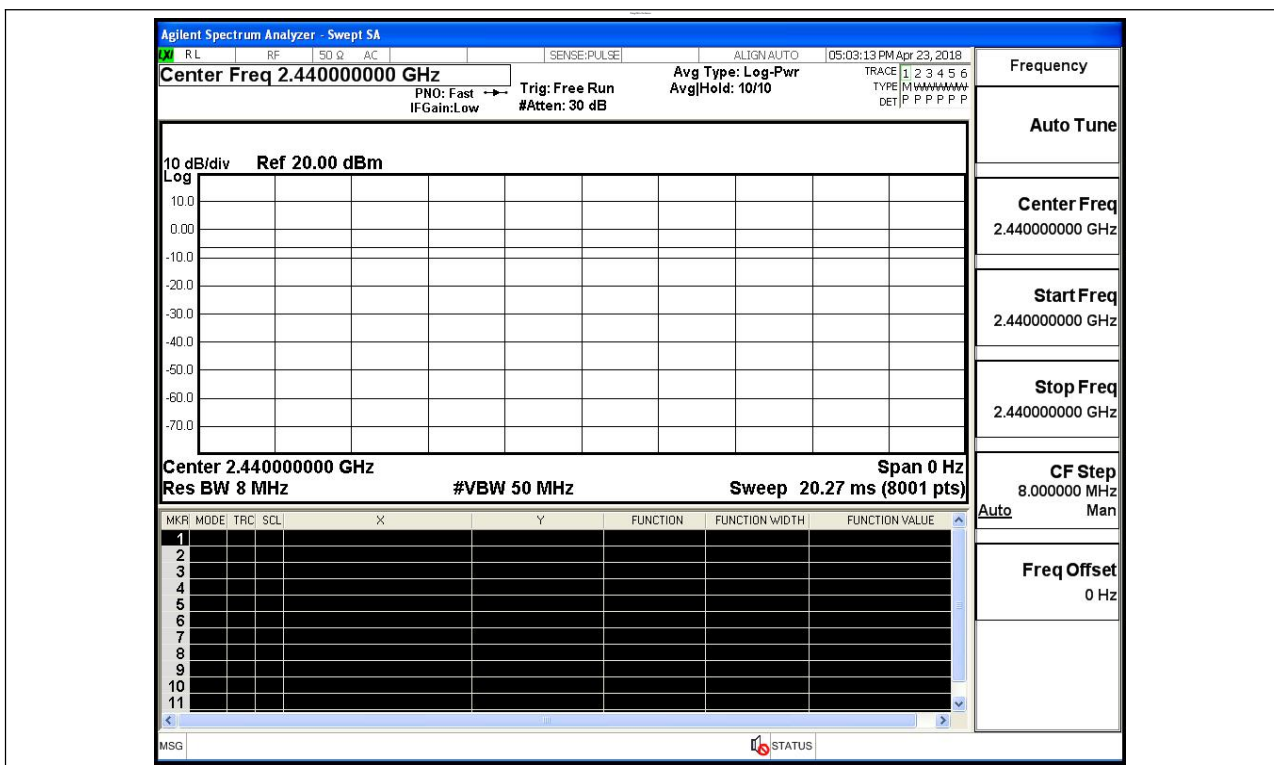


### B.2 Maximum Conducted Peak Output Power

Mode	Channel	Conduct Peak Power[dBm]	Limit [dBm]	Verdict
BT LE	LCH	-1.452	30	PASS
BT LE	MCH	0.653	30	PASS
BT LE	HCH	1.904	30	PASS

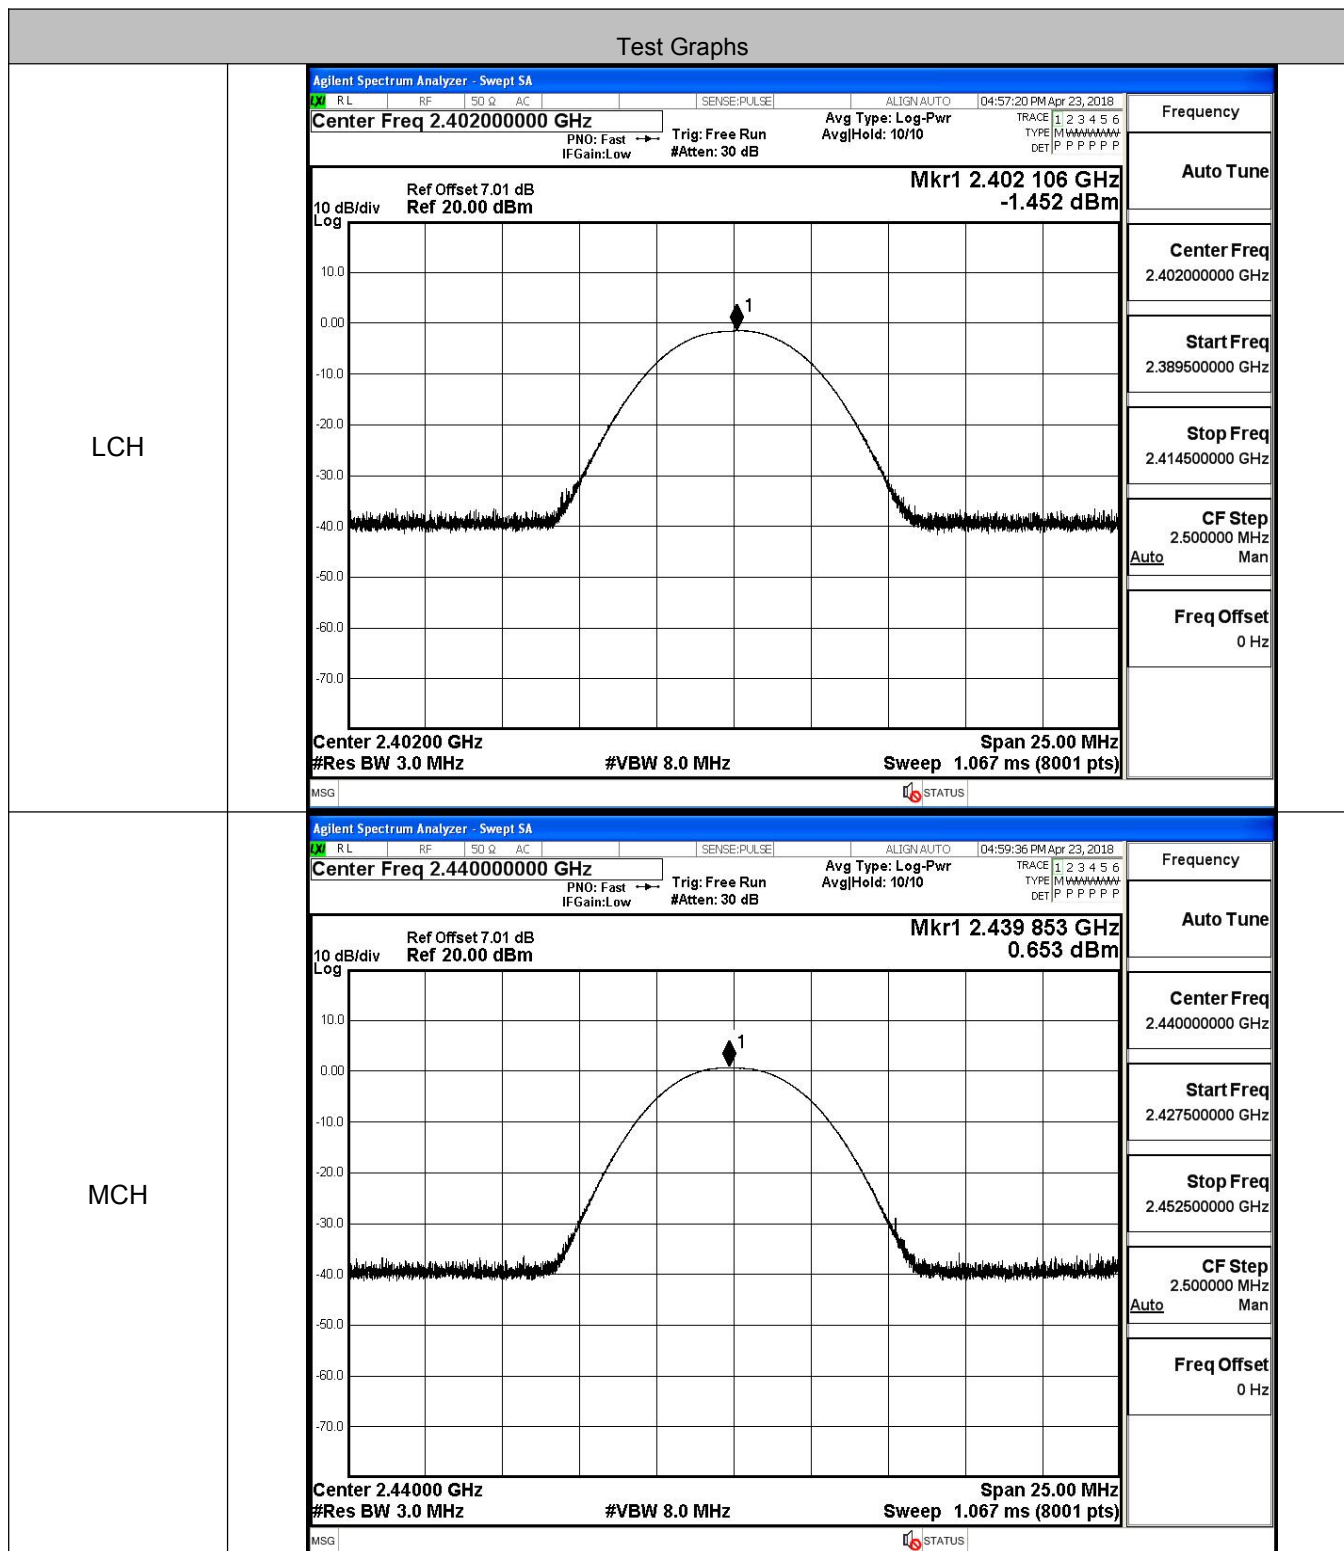

HCH

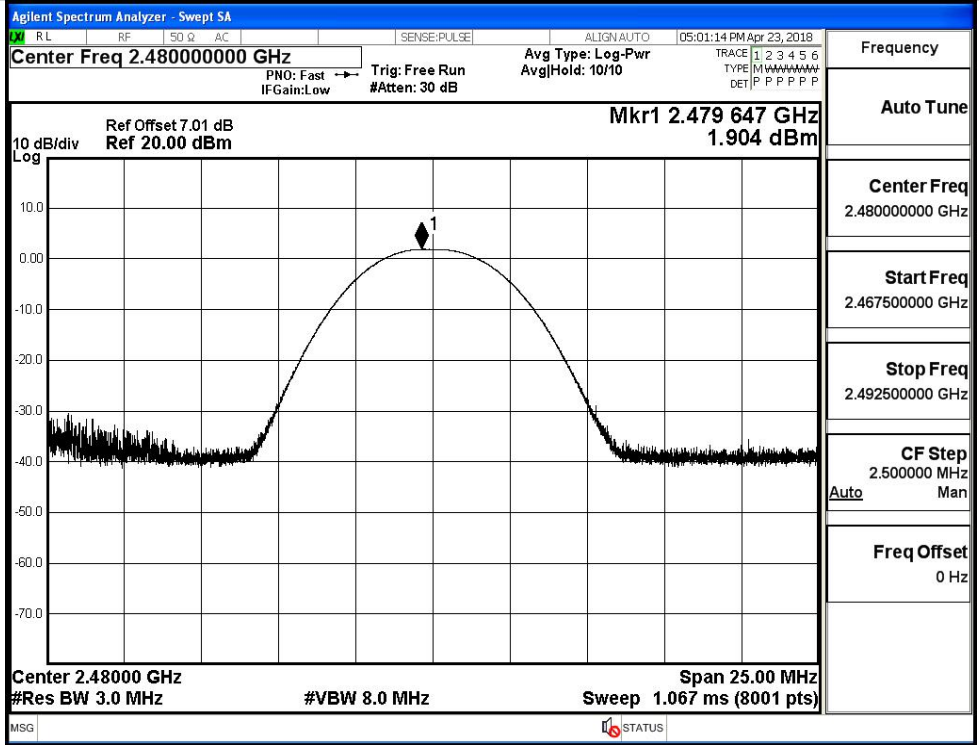


### B.3 Maximum Power Spectral Density

Mode	Channel	PSD [dBm/3KHz]	Limit [dBm/3KHz]	Verdict
BT LE	LCH	-17.165	8	PASS
BT LE	MCH	-14.819	8	PASS
BT LE	HCH	-13.589	8	PASS

#### Test Graphs



LCH		<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.40200000 GHz</p> <p>Mkr1 2.401 988 0 GHz -17.165 dBm</p> <p>Ref Offset 7.01 dB Ref 20.00 dBm</p> <p>10 dB/div Log</p> <p>Center 2.4020000 GHz #Res BW 3.0 kHz</p> <p>#VBW 10 kHz</p> <p>Span 1.500 MHz Sweep 158.2 ms (1001 pts)</p>	<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.402000000 GHz</p> <p>Start Freq 2.401250000 GHz</p> <p>Stop Freq 2.402750000 GHz</p> <p>CF Step 150.000 kHz Auto Man</p> <p>Freq Offset 0 Hz</p>
	MCH		<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.44000000 GHz</p> <p>Mkr1 2.439 985 0 GHz -14.819 dBm</p> <p>Ref Offset 7.01 dB Ref 20.00 dBm</p> <p>10 dB/div Log</p> <p>Center 2.4400000 GHz #Res BW 3.0 kHz</p> <p>#VBW 10 kHz</p> <p>Span 1.500 MHz Sweep 158.2 ms (1001 pts)</p>

HCH

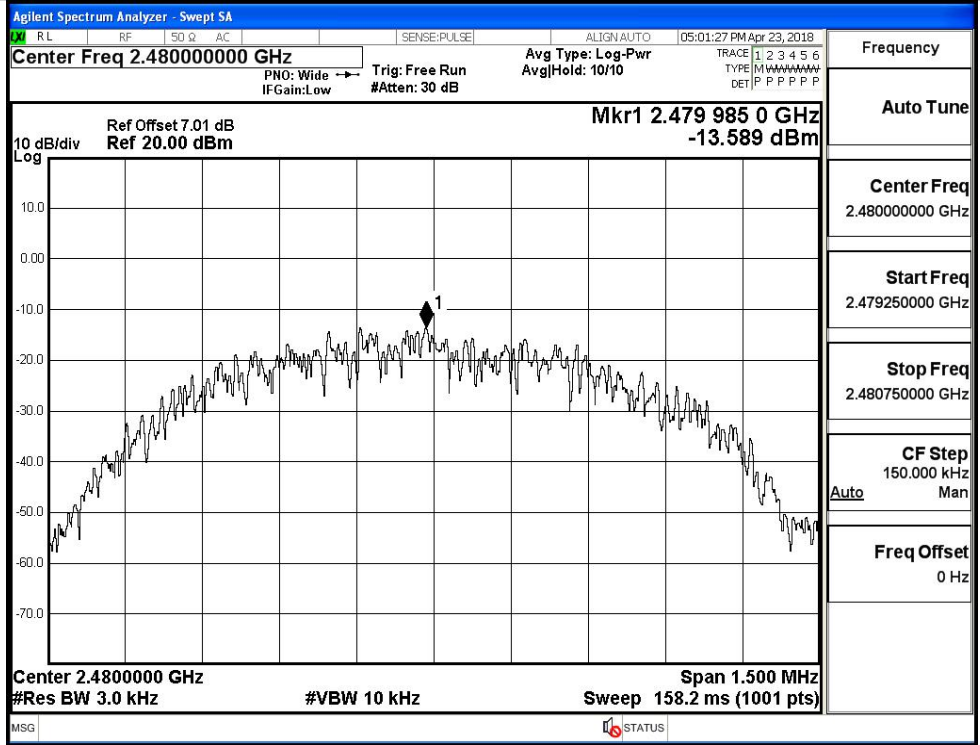


**B.4 6dB Bandwidth**

Mode	Channel	6dB Bandwidth [MHz]	Limit [MHz]	Verdict
BT LE	LCH	0.7063	≥0.5	PASS
BT LE	MCH	0.6997	≥0.5	PASS
BT LE	HCH	0.6996	≥0.5	PASS

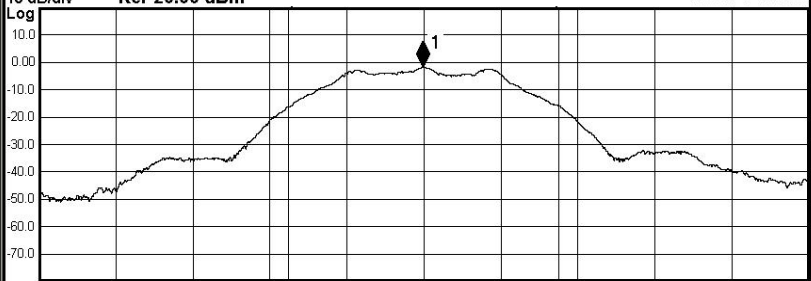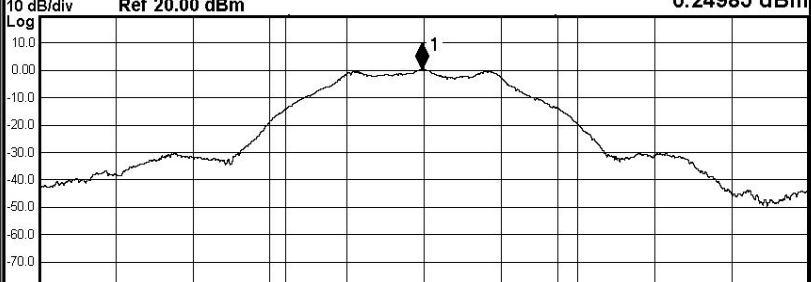Test Graphs																
LCH	<div style="border: 1px solid black; padding: 5px;"> <p style="text-align: center; margin: 0;">Agilent Spectrum Analyzer - Occupied BW</p> <p style="font-size: small; margin: 0;">RL RF 50 Ω AC SENSE:PULSE ALIGN:AUTO 04:57:09 PM Apr 23, 2018</p> <p style="margin: 0;">Center Freq 2.402000000 GHz Center Freq: 2.402000000 GHz Radio Std: None</p> <p style="margin: 0;">Trig: Free Run AvgHold: 1/1</p> <p style="margin: 0;">#IFGain:Low #Atten: 30 dB Radio Device: BTS</p> <div style="border: 1px solid black; padding: 2px;"> <p style="margin: 0;">10 dB/div Ref Offset 7.01 dB Mkr1 2.4019963 GHz</p> <p style="margin: 0;">Log Ref 20.00 dBm -1.9294 dBm</p>  <p style="margin: 0;">Center 2.402 GHz Span 3 MHz</p> <p style="margin: 0;">#Res BW 100 kHz #VBW 300 kHz Sweep 1.067 ms</p> <table style="width: 100%; font-size: small;"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>4.78 dBm</td> </tr> <tr> <td style="text-align: center;"><b>1.0467 MHz</b></td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>1.728 kHz</td> <td>OBW Power</td> </tr> <tr> <td>x dB Bandwidth</td> <td>706.3 kHz</td> <td>x dB</td> </tr> <tr> <td></td> <td></td> <td>-6.00 dB</td> </tr> </table> </div> <p style="font-size: x-small; margin: 0;">MSG STATUS</p> </div>	Occupied Bandwidth	Total Power	4.78 dBm	<b>1.0467 MHz</b>			Transmit Freq Error	1.728 kHz	OBW Power	x dB Bandwidth	706.3 kHz	x dB			-6.00 dB
Occupied Bandwidth	Total Power	4.78 dBm														
<b>1.0467 MHz</b>																
Transmit Freq Error	1.728 kHz	OBW Power														
x dB Bandwidth	706.3 kHz	x dB														
		-6.00 dB														
MCH	<div style="border: 1px solid black; padding: 5px;"> <p style="text-align: center; margin: 0;">Agilent Spectrum Analyzer - Occupied BW</p> <p style="font-size: small; margin: 0;">RL RF 50 Ω AC SENSE:PULSE ALIGN:AUTO 04:59:25 PM Apr 23, 2018</p> <p style="margin: 0;">Center Freq 2.440000000 GHz Center Freq: 2.440000000 GHz Radio Std: None</p> <p style="margin: 0;">Trig: Free Run AvgHold: 1/1</p> <p style="margin: 0;">#IFGain:Low #Atten: 30 dB Radio Device: BTS</p> <div style="border: 1px solid black; padding: 2px;"> <p style="margin: 0;">10 dB/div Ref Offset 7.01 dB Mkr1 2.4399918 GHz</p> <p style="margin: 0;">Log Ref 20.00 dBm 0.24985 dBm</p>  <p style="margin: 0;">Center 2.44 GHz Span 3 MHz</p> <p style="margin: 0;">#Res BW 100 kHz #VBW 300 kHz Sweep 1.067 ms</p> <table style="width: 100%; font-size: small;"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>7.00 dBm</td> </tr> <tr> <td style="text-align: center;"><b>1.0508 MHz</b></td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>-5.694 kHz</td> <td>OBW Power</td> </tr> <tr> <td>x dB Bandwidth</td> <td>699.7 kHz</td> <td>x dB</td> </tr> <tr> <td></td> <td></td> <td>-6.00 dB</td> </tr> </table> </div> <p style="font-size: x-small; margin: 0;">MSG STATUS</p> </div>	Occupied Bandwidth	Total Power	7.00 dBm	<b>1.0508 MHz</b>			Transmit Freq Error	-5.694 kHz	OBW Power	x dB Bandwidth	699.7 kHz	x dB			-6.00 dB
Occupied Bandwidth	Total Power	7.00 dBm														
<b>1.0508 MHz</b>																
Transmit Freq Error	-5.694 kHz	OBW Power														
x dB Bandwidth	699.7 kHz	x dB														
		-6.00 dB														


HCH

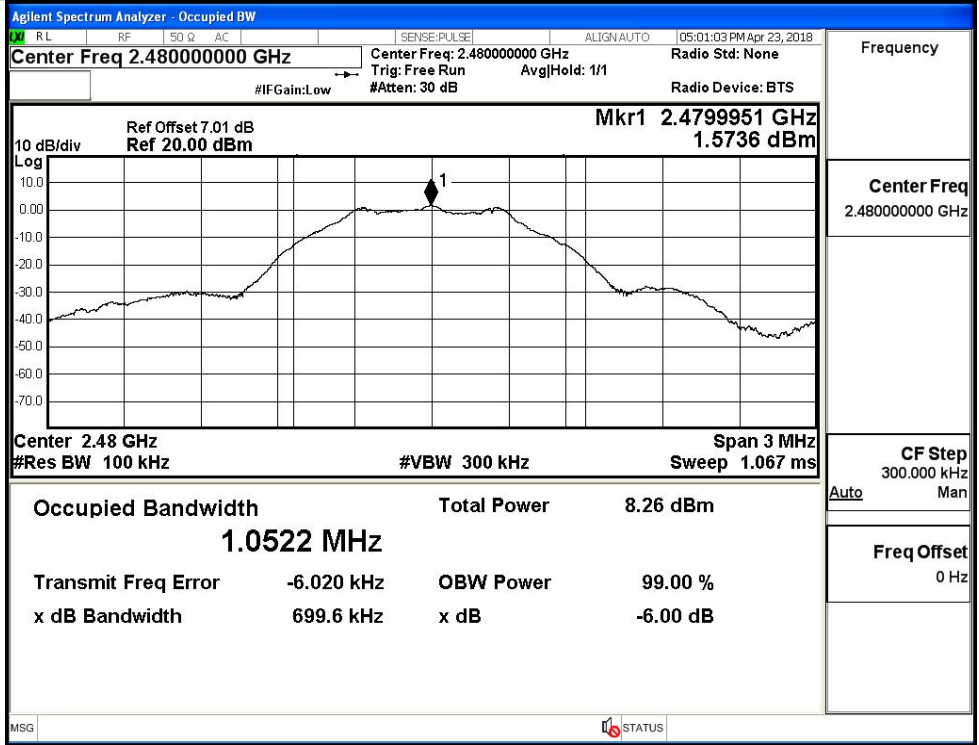

### B.5 RF Conducted Spurious Emissions

Mode	Channel	Pref [dBm]	Max. Level [dBm]	Limit [dBm]	Verdict
BT LE	LCH	-2.024	-25.666	-22.024	PASS
BT LE	MCH	0.271	-29.095	-19.729	PASS
BT LE	HCH	1.569	-27.045	-18.431	PASS

BT LE\_LCH\_Graphs

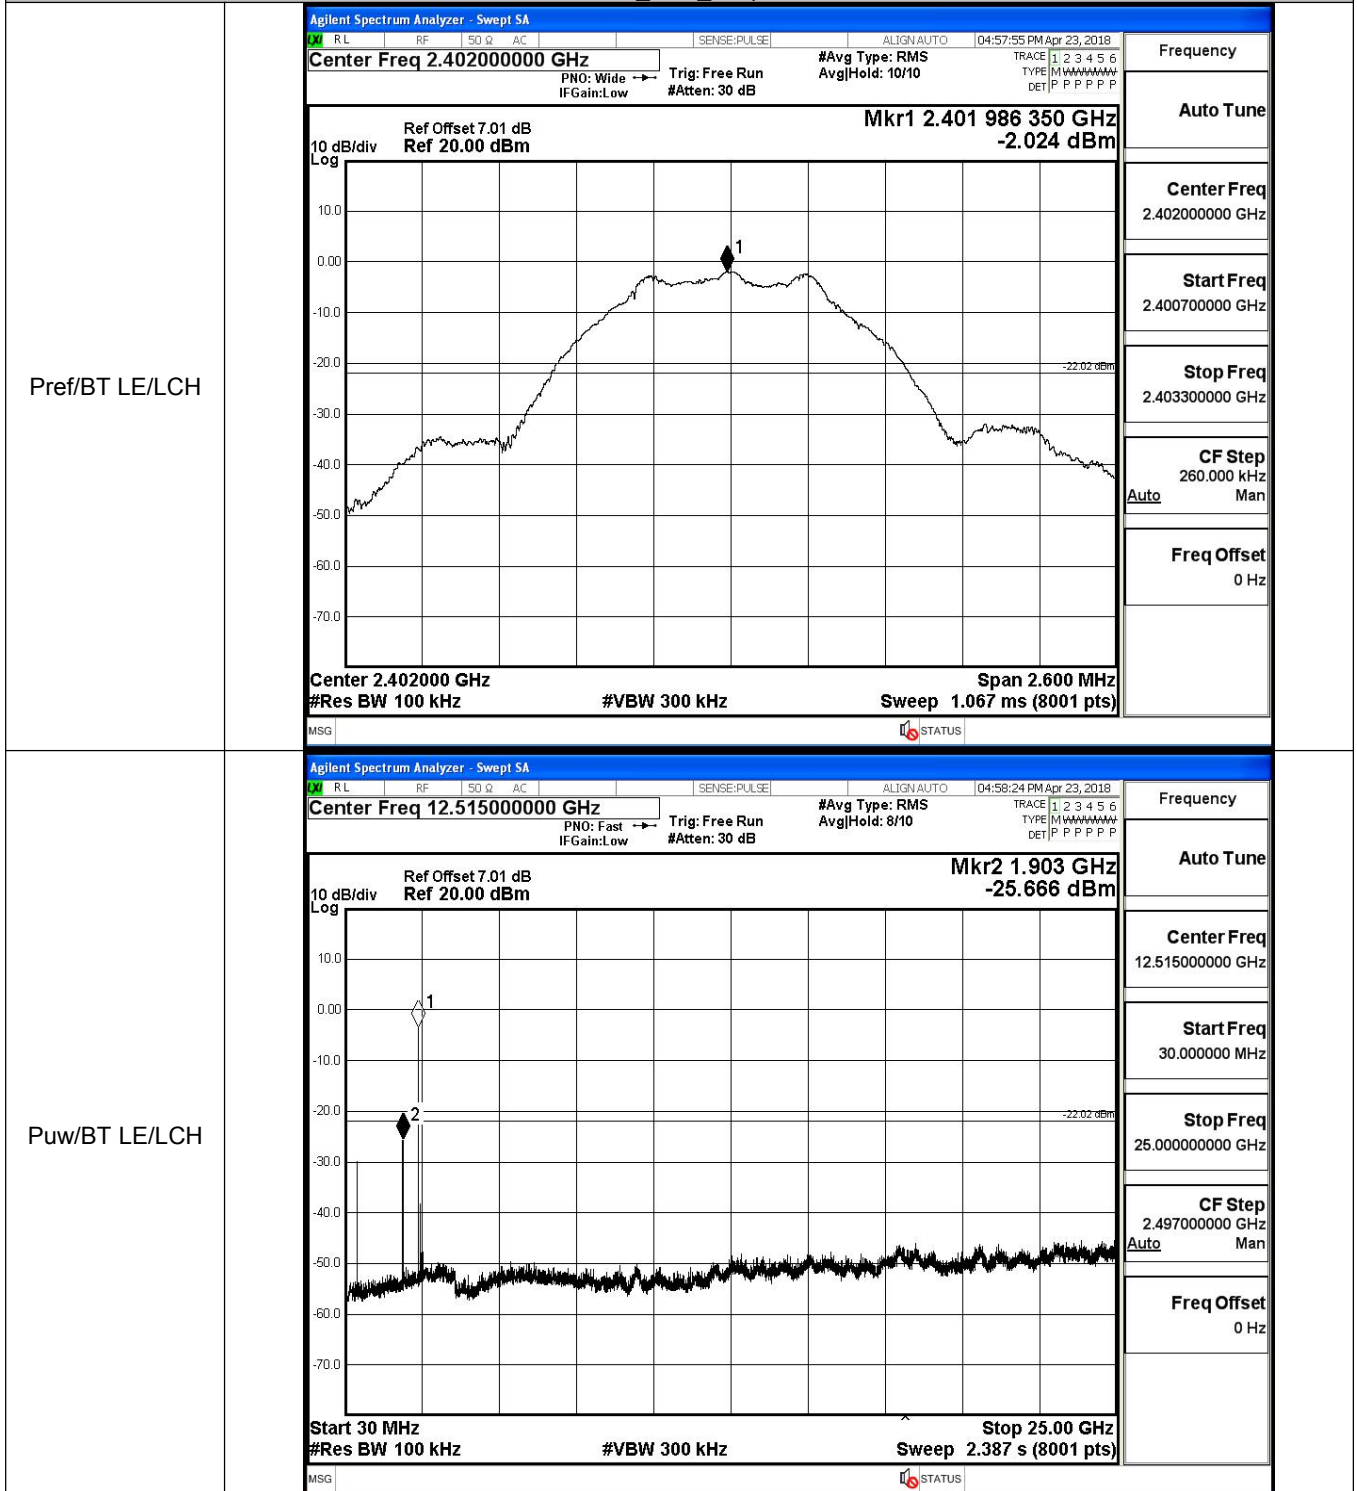





--	--

BT LE MCH Graphs

Pref/BT LE/MCH

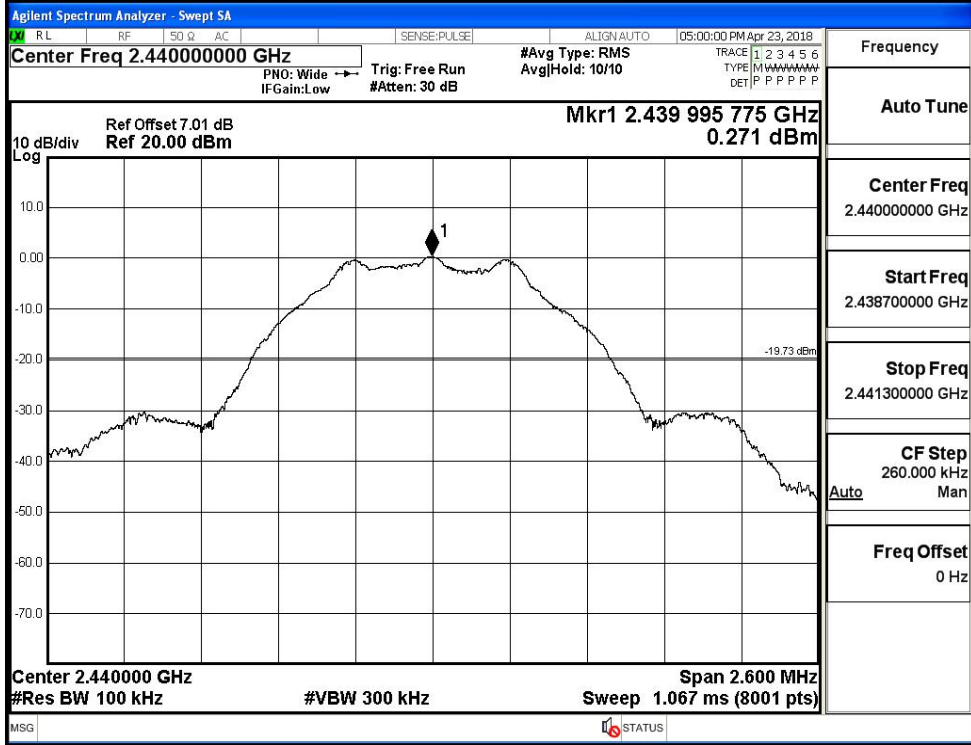


Puw/BT LE/MCH

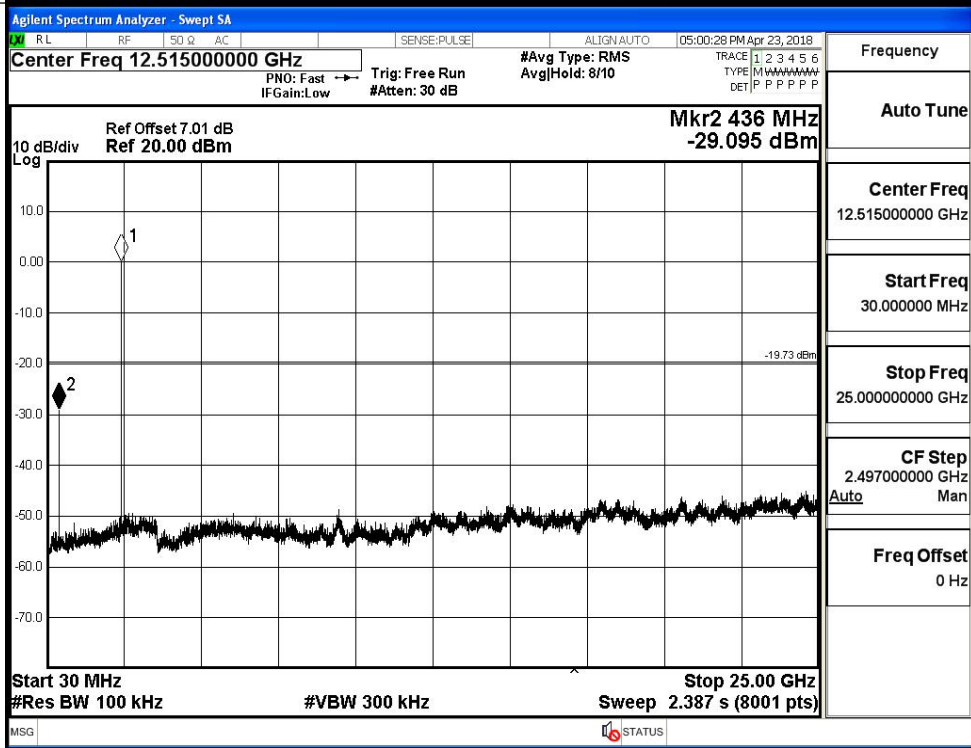


BT LE HCH Graphs

Pref/BT LE/HCH

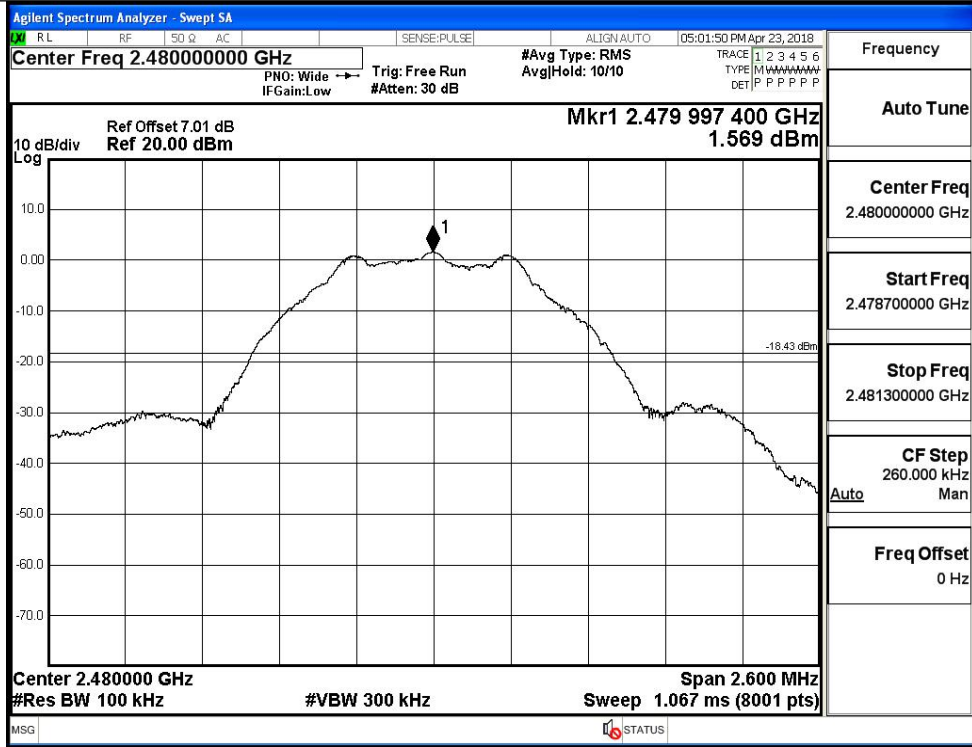



Puw/BT LE/HCH

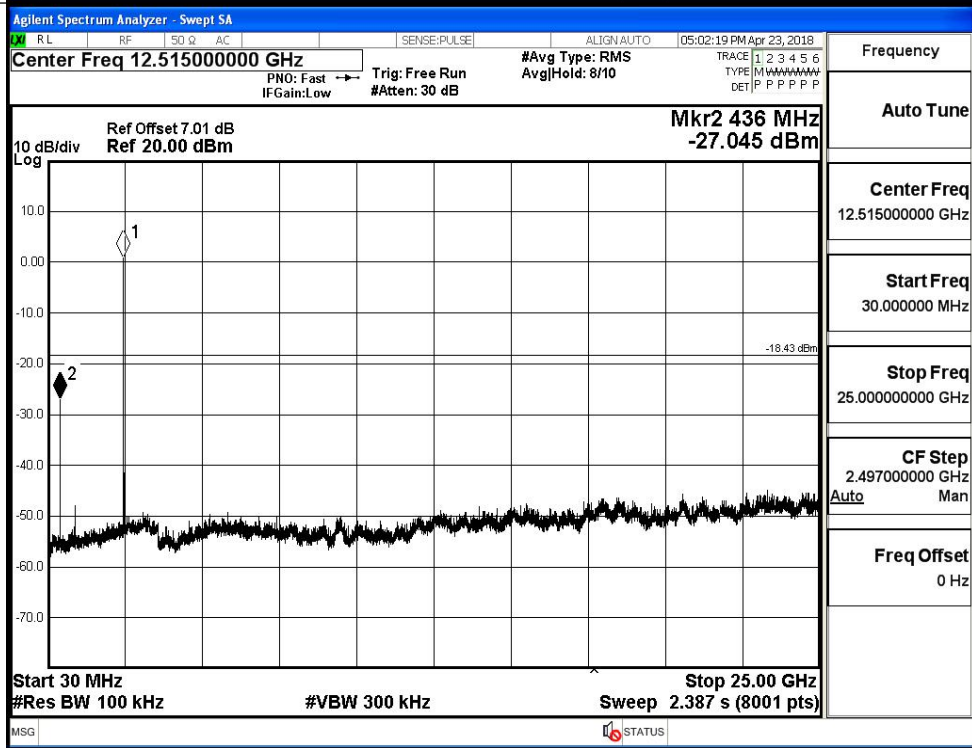

### B.6 Band-edge for RF Conducted Emissions

Mode	Channel	Carrier Power[dBm]	Max.Spurious Level [dBm]	Limit [dBm]	Verdict
BT LE	LCH	-1.824	-51.328	-21.82	PASS
BT LE	HCH	1.681	-49.758	-18.32	PASS


#### Test Graphs

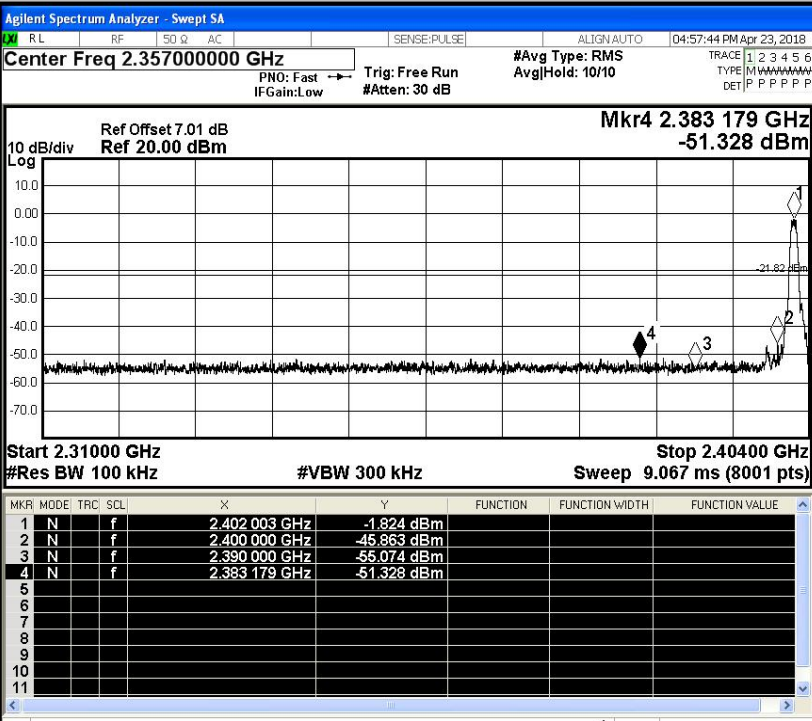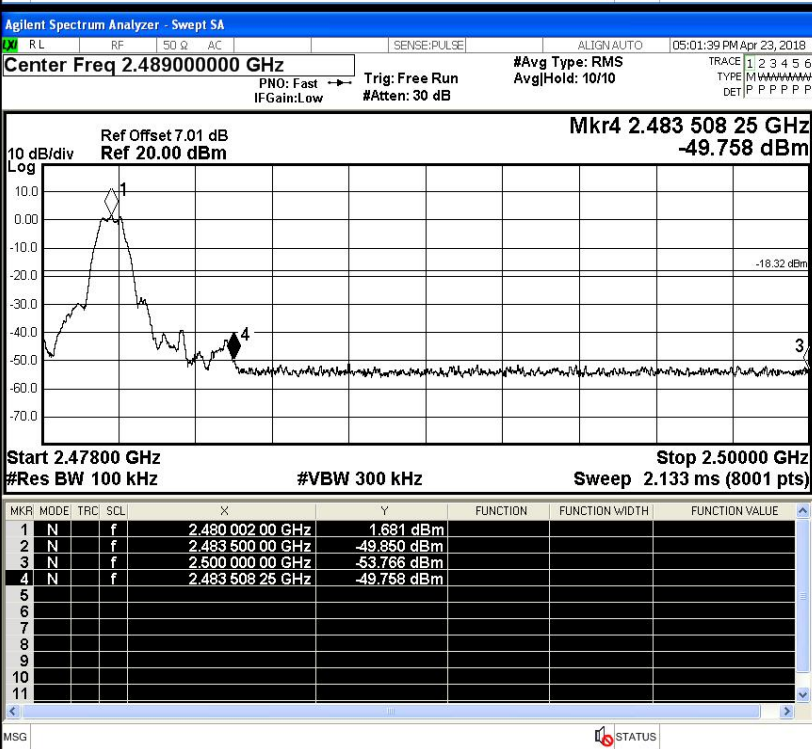LCH		<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.35700000 GHz</p> <p>Start Freq 2.31000000 GHz</p> <p>Stop Freq 2.40400000 GHz</p> <p>CF Step 9.400000 MHz</p> <p>Freq Offset 0 Hz</p>
		<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.48900000 GHz</p> <p>Start Freq 2.47800000 GHz</p> <p>Stop Freq 2.50000000 GHz</p> <p>CF Step 2.200000 MHz</p> <p>Freq Offset 0 Hz</p>


**B.7 Restrict-band band-edge measurements**

Test Mode	Test Channel	Ant	Freq.	Power [dBm]	Gain	Ground Factor	E [dBuV/m]	Detector	Limit [dBuV/m]	Verdi
BT LE	2402	Ant1	2310.0	-44.84	2.0	0	50.41	PEAK	74	PASS
		Ant1	2310.0	-55.05	2.0	0	40.21	AV	54	PASS
		Ant1	2390.0	-44.41	2.0	0	50.85	PEAK	74	PASS
		Ant1	2390.0	-54.78	2.0	0	40.48	AV	54	PASS
	2480	Ant1	2483.5	-38.43	2.0	0	56.82	PEAK	74	PASS
		Ant1	2483.5	-51.70	2.0	0	43.56	AV	54	PASS
		Ant1	2500.0	-44.66	2.0	0	50.59	PEAK	74	PASS
		Ant1	2500.0	-54.34	2.0	0	40.92	AV	54	PASS


Restrict-band band-edge measurements\_BT LE\_2402\_Ant1\_PEAK

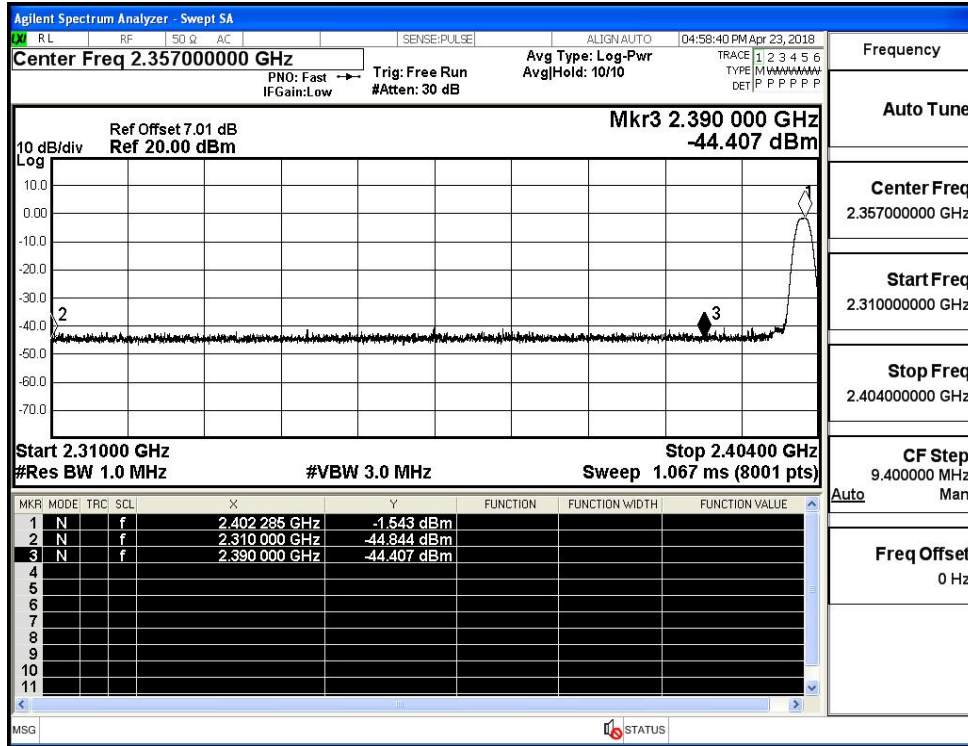

Restrict-band band-edge measurements\_BT LE\_2402\_Ant1\_AV

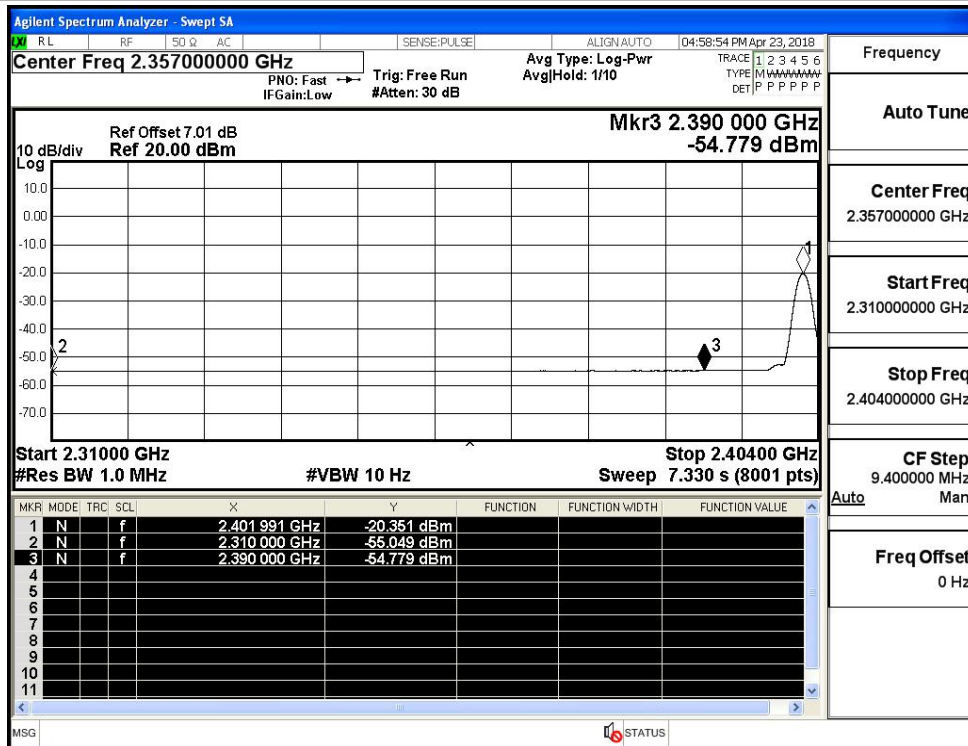

Restrict-band band-edge measurements\_BT LE\_2480\_Ant1\_PEAK

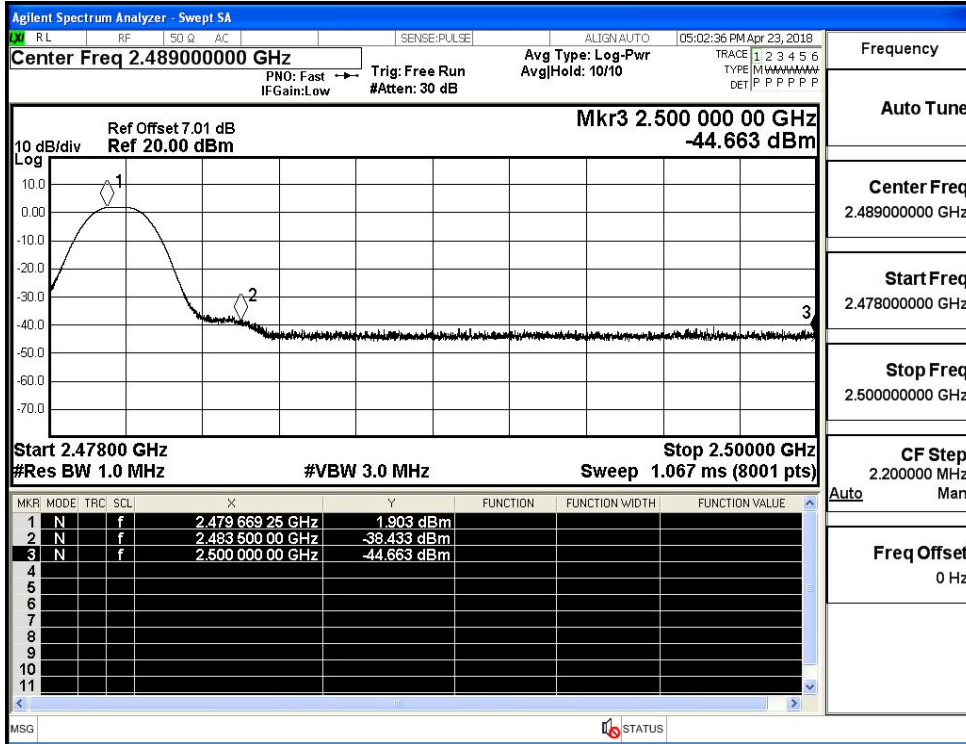

Restrict-band band-edge measurements\_BT LE\_2480\_Ant1\_AV

