



OUTDOOR SPEAKER MANUAL

V6

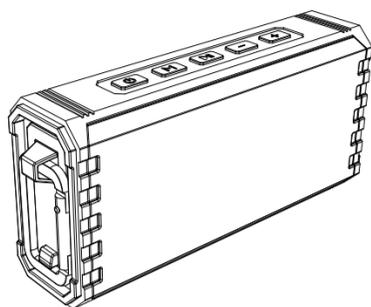

INTRODUCTION >>>

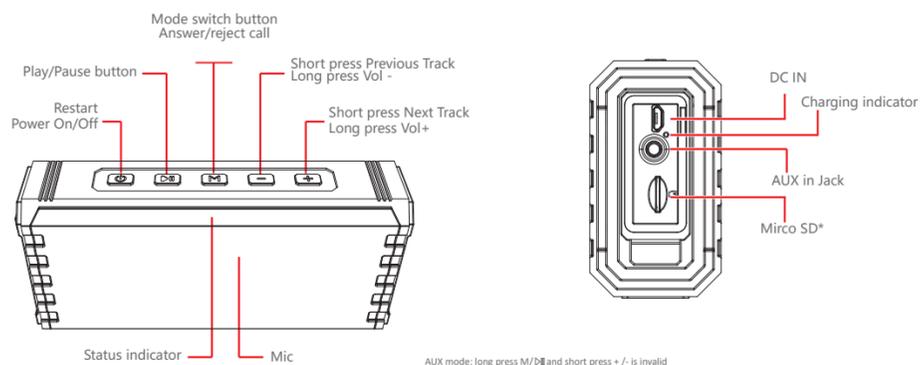

HOW TO CONNECT >>>

- 1 Long press the power on/off button and it will be in Bluetooth mode the Blue indicator flashes
- 2 Connect to your device Setting>Bluetooth>Choose device >V6 Connected successfully Status indicator steady on

In Bluetooth mode, press the M key, disconnect the current connection, and the light flashes

FUNCTIONS >>>



Note:

1. Short press the mode switch button, you can switch among Bluetooth /Mirco SD /Aux in mode.
2. If the device is crashed, please long press the POWER ON button at least 10 seconds to reset.
3. Answer/reject call button, short press for answering, Long press for rejecting call.
4. Support Mirco SD max 32G.
5. Micro SD Card support format: MP3 , WMA , WAV , FLAC , APE.

IPX7 :

Submerged in 1 meter of depth in water up to 30 minutes.

OTHER >>>

Charging

Charging via a computer through a USB cable or buy a USB charger separately.

Indicator


| | |
|----------------------------------|---|
| Blue indicator flashes | Status of pairing |
| Blue indicator remains steady on | Connected to Bluetooth® source or connected to aux-in/Mirco SD Card devices |
| Red indicator flashes | Battery voltage lower than 3.4V , Red light flashes means your speaker needs charging |
| Red charging indicator on | Red indicator is on when charging , and off when fully charged. |

Note: Your speaker will power off automatically within 15 minutes if you did not pair it with playback devices in order to save energy.


SPECIFICATIONS >>>

| | |
|--|---------------------|
| Bluetooth version: | 4.2 |
| Driver spec: | Φ45mm 4Ω/8Wx2 |
| Size: | L165*W78.6*H43.5 mm |
| Net weight: | 357g +/-5g |
| Frequency response: | 80HZ - 20KHZ |
| Sensitivity: | 80dB |
| S/N ratio: | ≥75dB |
| Distortion: | ≤0.3% @ 1W |
| Working distance: | about 33 feet/ 10M |
| Transmission Power: | Class2, ≤4dbm |
| Bluetooth profiles: | A2DP, AVRCP, HFP |
| Working current: | ≤700mA |
| Working voltage: | 3.3 - 4.2V |
| Charging voltage: | DC 5V |
| Charging current: | ≤1000MA |
| Battery capacity: | 3600MAH |
| Static standby current under shutdown status : | ≤80 uA |
| Static standby current under power on status : | ≤25mA |
| Charging time: | about 4-5hours |
| Playtime at full volume: | about 4 hours |
| Playtime at 60% volume: | about 9-10 hours |
| Waterproof: | IPX7 |

CONTAIN >>>



V6 OUTDOOR SPEAKER

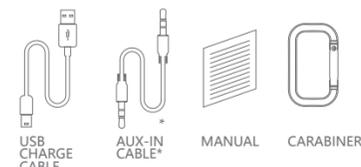

WARRANTY POLICY >>>

Your Bluetooth speaker is covered by a limited warranty. It is backed by 1 year performance warranty against any manufacturing defects in material or workmanship from the date of original purchase. This warranty entitles the purchaser to get the product repaired or replaced under the following conditions:

- The warranty applies to the original purchase, Proof of original purchase is required
- The warranty does not cover the damage caused by misuse, abuse or improper storage.
- In no event shall be responsible for any direct, incidental, consequential or other damages of any kind.

FCC WARNING >>> ⚠

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution: Any changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this equipment. The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

WARNING >>>



The company reserves the right to the product modification for appearance and function, which is subject to change without prior notice.

158x350mm 158x70mm, 85g