

Special-purpose cell-phone

(G3300)

Operation instructions



Catalogue

FIRST, GUIDE SPEECH	错 误！未定义书签。
<u>TWO: WARN SAFELY AND THE PRECAUTIONS ARE 5</u>	
<u>DANGEROUS: 5</u>	
<u>NOTICE: 5</u>	
<u>WARN: 5</u>	
WARN SAFELY	6
<u>SECURITY OF THE BATTERY</u>	7
<u>THREE: SPECIFICATION TABLE OF THE CELL-PHONE</u>	8
<u>FOUR: PRODUCT INTRODUCTION</u>	9
<u>4.1 FUNCTION SKETCH MAP OF THE CELL-PHONE</u>	9
<u>4.2 RANDOM ENCLOSURE</u>	9
<u>FIVE: BEGIN TO USE</u>	10
<u>5.1 INSTALL THE BATTERY</u>	10
<u>5.2 PUT THROUGH THE CELL-PHONE</u>	10
<u>5.3 THE SCREEN EXPLAINING</u>	11
<u>5.4 SHUT OFF THE CELL-PHONE</u>	11
<u>SIX: OPERATION OF THE CELL-PHONE</u>	12
<u>6.1 WATCH OPERATES THE FUNCTION</u>	12
<u>6.2 THE TELEPHONE IS THIN</u>	12
<u>6.3 ANSWER A CALL</u>	14
<u>6.4 SEND SHORT INFORMATION</u>	14
<u>6.5 ACCEPT SHORT INFORMATION</u>	14
<u>6.6 CONVERSATION RECORD</u>	15

<u>6.7 ESTABLISHMENT</u>	15
<u>6.8 RESTRICTED ESTABLISHMENT</u>	19
<u>6.9 CARRIES AND SETS UP 21 FAR</u>	
<u>7.0 AT A DISTURBANCE OF THE BELL TO SET UP</u>	27
<u>SEVEN: MAINTAIN AND SAFEGUARD</u>	29

EIGHT: THE TROUBLE DIAGNOSING 30

FIRST, GUIDE SPEECH

- !ö Thank you for buying a product.
- !ö In front of using the cell-phone, please read a manual carefully , so as to ensure and use correctly.
- !ö Be sure to read security warning and precautions , in case that use causing the dangerous accident improperly.
- !ö Warn the item to be to used for preventing the injury to the human body and property safely.

Operating sequence and method of the cell-phone that in this manual display , illustration adopted ,etc. to prove directly for being more detailedly.

Two: Warn safely and the precautions

Item of using the cell-phone and charger and must be paid attention to together

Dangerous:

!ö **The ones that can only use our company to appoint , battery charger related to cell-phone.** Use the products of other manufacturers to cause the battery to leak the liquid , overheated danger bursting even breaking out a fire.

Notice:

!ö Please don't place humidity , high temperature , dust many place on, so as not to the trouble of leading to the fact.

!ö Cell-phone , battery , charger and AC adapter are not waterproof, should prevent the situation of drenching by the rain etc. from taking place .

!ö **Before the cell-phone is charged, please install the battery well first , connect the charger again.** Just install the battery after making sure not to connect the charger to, so as not to cause the cell-phone trouble.

Warn:

!ö Please don't collide , shake or throw the cell-phone or the battery strongly , so as not to cause the battery to leak the liquid , overheated , breaks or breaks out a fire.

!ö Please don't put the battery , cell-phone or charger in the microwave oven or the high voltage equipment , so as not to cause

battery leak liquid, overheated break or not on firing, and cell-phone or overheated , smolder , on fire or damaged circuit , AC of adapter.

!ö The place that please don't be having volatility gas uses the cell-phone , so as not to cause the flame , trouble or damage.

!ö Please don't disassemble the cell-phone , battery , charger or alter its inside structure without authorization , in order to prevent the accident or the trouble.

Warn safely

Warn: The cell-phone defends the label of dismantling like damaging , the in-service attendance loses efficiency promptly.

Warn: Will result in guaranteeing and losing efficiency to improperly use!



Please read these concise rules carefully, so as not to emerge dangerously or offend against the law.

Pay attention to the traffic safety

Please don't use the cellular telephone while driving. If want to use, please park the good car first .

In conformity with shut-down aboard

The cellular telephone can cause and interfere , it is illegal to use aboard , please turn off your cellular telephone before boarding. (the shut-down alarm clock function of the cell-phone

should be in the state of closing)

Call out promptly

Guarantee that the cellular telephone starts the machine and in serving the district, input the urgent number, then press Tell the position where you locate the key. Without permission , please don't finish conversing .

In conformity with shut-down near the place of exploding

In order to avoid interfering blowing up and operating , are " blowing up at the scene " or the place to put up graphic presentation of " turning off the two-way radio " should close the cellular telephone . Pay attention to having something to do and limiting, and observe any relevant regulation or regulations .

Want shut-down near the hazardous articles

In the service station and place of the dangerous article close to the fuel and chemical preparation ,etc., please shut off the cellular telephone.

In conformity with shut-down in the hospital

Near indicating the medical equipment that can't use the cellular telephone , please shut off the cellular telephone. The cellular telephone will be interfered pacemaker , audiphone and other medical science that are planted into and plant into the equipment. Pressing close to the

pacemaker uses the cellular telephone to make the function of the equipment disorderly. Should avoid putting the microphone on the pacemaker , namely in the jacket bag.

Interference

All cellular telephones may be interfered, thus influence the performance of the telephone.

Fittings and battery

Can only use the appointed fittings and battery of the producer . It will cause the danger that the battery changes improperly. Traveling charger that this machine is appointed by our company, desk-top charger charge, is it charge equipment might lead to the fact dangerously while being other to use.

Use the telephone rationally

When facing toward the microphone speech, make the aerial in the upright state, highly exceed the shoulder.
When it is unnecessary , don't contact the aerial .

Security of the battery

!ô Please use your battery appointed of former factory of cell-phone. Use any other fittings to make all in-service attendances turn into invalid. Your cell-phone manufacturers will not bear any guarantee responsibility to the damage of using the non- former factory fittings to cause on any unrestrained cell-phone of source .

- !ô Please don't let the metal things (for example the key in your pocket) cause the short circuit situation of the battery contactor .
- !ô Please don't bend or open the battery by force .
- !ô Please don't soak the battery in water or put in the fire .

!ô The battery must be charged under closing to the room temperature. If temperature is lower than 0 degrees Centigrade (32 degrees Fahrenheit) or higher than 45 degrees Centigrade (113 degrees Fahrenheit), the battery may be unable to charge.

Three: Specification table of the cell-phone	Describe briefly
Model Specification	
Size	45mm x 94mm x 26mm
Volume	xxxxxxxxxxxx26mm
Weight	xxxxxxxxxx26mm
Display	2 colors
SIM card kind	GSM
Use the system	lunix
Capacity of the phone book	50
The telephone sets aside the memory group to count again	50
Short information memory capacity	100
The incoming telegram shaking	Have
Sound kind of	Have

electric bell comes	
EL is in a poor light	Have
Long range control	Have
The whole world of GPS makes a reservation	Have
Call for help promptly	Have
Call out and limit	Have
The incoming telegram number showing	Have
Converse and write the fee / dial regularly	Have
Dial automatically again	No
At a disturbance of the bell	Have
Calculator	No
The whole Chinese shows	Have
Chinese and English short information	Have
Side button	Have

Four: Product introduction

4.1 Function sketch map of the cell-phone

(the concrete appearance of cell-phone and size rely mainly on material object)



■ 4.2 Random enclosure

- Cell-phone One (Include two batteries)
- Charger One
- Earphone One
- Operation instructions One
- After-sale service manual One
- Certificate of quality One

Point out: Please don't use the charger or battery outside the enclosure , may damage the cell-phone like that.

Five: Begin to use

5.1 Install the battery

Please confirm at first that the battery has already been charged for 82 hours. While charging for the first time, take about 8 hours to fill fully, while charging again , have done in about 3 hours.

While charging, the ones that connected one of wire's end of the charger to left of the cell-phone charged holes, then connect another end to the outlet.

When the battery is used up quickly , the cell-phone is while awaiting the opportune moment or operating the state of the cell-phone , the picture will show that the low-voltage will be warned.

Warn:

Must use the original packaging battery

Must use the original packaging charger

5.2 Put through the cell-phone

Notice: Please confirm that the battery has already been installed appropriatly .

Pin " power turn on / imprison  " one second such as key , you will see display screen is it is it turn on flexible to paint to present to begin, meanwhile, you will also hear a section of music of starting the machine

。 About 30 seconds later,



Open and draw flexibly

The cartoon and music stop, the display screen shows date , time , intensity of signal and battery electric consumption of the same day ,etc. (call this picture the picture of awaiting the opportune moment followingly while explaining). So far, the cell-phone has been already ready , wait for you to converse or set up etc. and operate.



Picture that await the opportune moment

5.3 The screen explaining



Display

— Receive signal power brief on (serve district put through the telephone , this graphic presentation is on.

Receive the power level of the signal in aerial identification and vertical line. If not the serving area, there is not this that show)

- ✉ — The message brief on (have not had messages to read, this graphic presentation shows)
- 📞 — Answer incoming telegram brief on (whether answer, this graphic presentation shows)
- ⏰ — The alarm clock is it brief on to set up(after establishing the function of the alarm clock, this graphic presentation shows)
- ibrate — Vibration brief on (after establishing vibration and pointing out, this graphic presentation shows)
- 🔋 — Suggestion of the battery (Show each electric consumption level of the battery)

5.4 Shut off the cell-phone

Pin " power turn on / imprison  " 2 seconds such as key, the cell-phone shows one section and turns off flexible drawing and shut-down music, show that the cell-phone is operating shut-down.



Close and draw flexibly

Six: Operation of the cell-phone

Important suggestion: Should carry on relevant information to set up first before using and buying the cell-phone and conversing or sending short information ,etc. and operating newly (Please see the detailed method " Explanation on set up ")

Main menu cartoon special project:

- Phone book () — Short information ()
- Conversation record () — This machine is set up ()
- Restricted establishment () — Carry and set up far ()

—At a disturbance of the bell ()

6.1 Watch operates the function

Await the opportune moment under the picture ,  the key can enter the main function form and choose the interface in middle direction. The procedure shows a name and graphic presentation of function form chosen the last time at first, then swing the rocker (the middle direction key ) and enter subordinate function form and picture .

6.2 The telephone is thin

Phone through the directory on 6.2.1



The telephone is tabulated thinly

The key  in middle direction under awaiting the opportune moment the picture , it is thin to enter the telephone. Press and swing the middle direction key  screen and show directory names of persons to contact or call again. Left and right sides swing the middle direction key  and


move the cursor the person to contact who arrived and wanted to dial, pressing " green key " begins to call out.



Press " the power is turned on / turned off " the key  can finish conversing " , and get back to the state of awaiting the opportune moment ".

Phone through the dialing device on 6.2.2

Await the opportune moment under the picture , swinging the middle direction key  right, the screen presents the picture of the dialing device . Left and right sides swing the middle direction key  and move the vernier the digit which wants introduction , the key confirm in middle direction, several that the vernier belongs to will be shown in the higher authority and the entourage. Repeat the operation above, until inputting all telephone numbers , then press " green key "  and begin to call out.




Picture of the dialing device

Important suggestion: Is it is it set up to limit to breathe out (is it is it prove partly to " set up " to see), so unable to use dialing device dial.

6.3 Answer a call

When it is breathed out and enter that wanted on the phone, the cell-phone sends out the tinkle of bells or vibrations booked in advance (see and set up that explains partly), display caller's name at the same time (or telephone number). Press " the green key "

 Will put through the incoming telegram and begin to converse. If does not want to answer , can press " the power opens / closes " the key  is refused to be answered " " .



The incoming telegram showing

Important suggestion: If breathe out the telephone number which enters the telephone and is limited (see and set up that explains partly), so

The cell-phone will be refused automatically should send a telegram here , the cell-phone does not provide any suggestion .

6.4 Send short information

Choose short information to operate the function form, preset the message in the display cell-phone .

Swing the middle direction key  and move the vernier to the message wanted to send from head to foot, the message is sent to press " green key "  and enter numbers and tabulate and choose the things that you want to send at the beginning.




Preset the message

6.5 Accept short information

When short information is spread into, the cell-phone sends out the tinkle of bells or vibrations booked in advance (see and set up that explains partly), at the same time the screen is pointed out to receive a new short information, press "

green key  and read this information.




Read information

Important suggestion: If the telephone number which spreads into short information is limited (see and set up that explains partly), cell-phone then refuse short information this automatically, cell-phone provide any brief on.

6.6 Conversation record

Conversation record	Have already answered the call
Allocate the telephone	Have not answered the call

Is it is it write down function form item to converse to choose, display " dial telephone already " , " answer the call " and " answer the call " 3 stature function form. All conversations of the form one move the vernier to menu one wanted to look over , the key  is confirmed in middle direction, the screen is listed and correspondent to the sub function record.

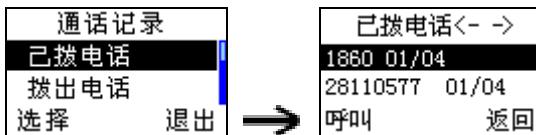


Converse and write down the function form	Have already dialed the function form of the telephone
--	---

6.7 Establishment

Establishment	Date	Show languages
Contrast ratio	The sound sets up	
GPS position	GPS Start	CPS Close

The 6.7.1 sets up on date




Date time establishment

Time

The cell-phone shows present time at first, left and right sides swing the middle direction key  and move to the vernier digit yuan needing revising are had, it can make the figure of the vernier place change between 0-9 to swing the middle direction key  from head to foot. Press " the green key  " after finishing revising Accept amended time.

Time form



Swing the middle direction key and move the vernier on the form wanted to choose, press " the green key  " Affirmation .

Date

The cell-phone shows present date at first, swing the middle direction key and move to the digit that needs revising the cursor to have, it can make the figure of the cursor office change between 0- to swing the middle direction key from head to foot. Press after finishing revising " The green key "

 accepts amended date.

Date form

Swing the middle direction key and move the cursor on the form wanted to choose, press " the green key " Affirmation .


Time zone

For choosing in 24 time zones in all

Show languages on 6.7.2

You can swing the middle direction key  and move the vernier in simplified Chinese character , Chinese-traditional and these three languages of English to choose one kind as display language of screen of the cell-phone from head to foot , then press " green key "  to confirm .

Show that languages are once established , all shows that the content will show according to the language established immediately .




The language showing

Contrast ratio on 6.7.3

You can operate and change the contrast ratio which show the screen through this .

Contrast ratio is 10 grades, you swing the middle direction key  and can see that the contrast ratio of the screen will change with change of the instruction one from side to side in the course of adjusting.



Contrast ratio is set up

The sound sets up on 6.7.4

The sound sets up Sound of electric bell comes
Ringing sound of short information Tinkle of bells of
the alarm clock Sound of the button

**Sound of electric bell comes Ringing sound of short
information Tinkle of bells of the alarm clock**


Above-mentioned 3 kinds of sounds are correspondent to the

incoming telegram , receive the suggestion sound when three kinds of incidents of messages and alarm clock time happen separately, they can operate and select one's own sound types and sound volume through the sub function form , and can determine that start and shake .

The tinkle of bells is chosen

Prestore 30 short songs for you to use as pointing out the tinkle of bells in the cell-phone . You can through direction key


① is it is it want vernier choose prestore tinkle of bells pay to arrive to move in the middle of swinging, press " the green key "

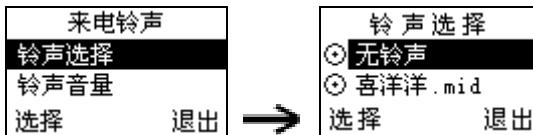

Prestore the tinkle of bells

Sound amount of the bell

You can through direction key ② change real core figure of piece is it change tinkle of bells sound volume when to come in the middle of swinging from side to side. You can hear the change of sound volume immediately in the course of adjusting volume, the sound emitted is the song that you chose in the voice type.




Volume regulating

Shake the way

Whether you can launch the shaking device to can appoint when three kinds of above-mentioned incidents appear .

The shaking device can appear with point out the tinkle of bells , can work alone too.




Shake the way

Sound of the button

Swing the middle direction key and can choose to launch or close the sound of buttons from head to foot, press " green key " to confirm .

But has not shaken and chosen one in sound of the button.



Sound of the button

6.8 Restricted establishment

Important suggestion: Restricted establishment could go on after the authentication of the password .

Exercise restraint in setting up

Limit the incoming


telegram **Exercise restraint in calling out** Quite
period **Alter the password** **Call out promptly**
Appear on the stage in the factory and set up extensivly
again

Authentication of the password

You carry when setting up far in restricted establishment of carrying on, cell-phone will brief on you check the cell-phone password. Password of altering that please see the method to set up about cell-phone password

Limit the incoming telegram on 6.8.1

The telephone number that you can appoint to allow to dial in is only limited to the person to contact who wrote down in the directory, can appoint all numbers and can be dialed in too.



Limit the incoming telegram

If the telephone number dialed in is limited, cell-phone then refuse incoming telegram automatically , provide any brief on.

Exercise restraint in calling out on 6.8.2

The telephone number that you can appoint to allow to allocate is only limited to the person to contact who wrote down in the directory, be able to allocate any number to can appoint too.

限制呼叫
<input checked="" type="radio"/> 仅电话簿中号码
<input type="radio"/> 任意
选择
取消

Exercise restraint in calling out

Quite period of 6.8.3

When you can appoint to present the incoming telegram in some time slots of some day in one week , the cell-phone does not give out and point out the tinkle of bells or shake (quiet sound), only provide the characters to brief on.

Can appoint for 15 quite time slots within one day at most.

静音时段
静音时段1
静音时段2
选择
取消

Quite time slot

Alter the password on 6.8.4

You can be through operating and revising the cell-phone password . After revising, at the time of the operation needing to check the password that next time go on some more , you need the amended password of introduction .

请输入密码
0
0123456789
确定
取消

Cell-phone password

The cell-phone password is made up of 4 digits.

Important suggestion: When the cell-phone is dispatched from the factory, the cell-phone password is


set up as " 0000 ".

After buying the cell-phone , please change the cell-phone password at first , and keep the passwords set up properly, don't reveal the password and give having nothing to do to personnel .

Call out promptly on 6.8.5

You can input several telephone numbers here . The cell-phone user is while encountering the emergency, will send the message of crying for help promptly to these telephone numbers, and offer guardian's telephone service by way of monitoring (see and cry for help promptly that explains partly).

You can input one and walk and accuse of the telephone number of the centre , a guardian's telephone number and 3 telephone numbers of other urgent persons to contact at most .



Set up promptly

6.8.6 Appear on the stage in the factory and set up extensivly again

You can adopt and appear on the stage the establishment that the factory set up and reduce you extensivly again

6.9 is carried and set up far



Carry and set up far

Carried and set up and used for setting up and revising the

content of the directory through SIM card far.

Important suggestion: The treasure electromechanical book can only be through carrying and setting up keeping within the cell-phone far. Except carry and set up operating far, the telephone number stored on SIM card can't be used by the cell-phone .

A machine is initialized on 6.9.1

The working technique is as follows:

Prepare

One can be editted and can keep the ordinary cell-phone that the telephone number record got on SIM card .

One can be kept at least SIM card that 50 telephone numbers are written down.

Important suggestion: Carry and set up and operate and remove the already existing telephone number record on SIM card far. So, before operating , please confirm that the useful telephone on SIM card is written down and has already been backed up.

Step 1

Close the treasure machine power, start the machine after inserting SIM card planned in the treasure machine.

Step 2

Choose to carry and set up the sub function form one and " prepare SIM card " far.

The treasure machine will remove all SIM card telephone numbers to write down at first, then write down and all copy the

existing telephone number within the cell-phone on SIM card . Copying it after finishing, the cell-phone will provide briefing on.

Point out: If there is not any telephone number that is written down in the treasure machine, then the cell-phone only removes SIM card record.

Step 3

The treasure closing machine, take out SIM card , and insert this SIM card on the ordinary cell-phones prepared, then start the machine.


Operate the record editor of phone book on the ordinary cell-phone , including increase , delete or revise the telephone number record on SIM card .

Important suggestion: The treasure machine can store 50 telephone numbers record at most. So, the record that please pay attention to being kept on SIM card don't be over 50. If exceed, the treasure machine will only accept the first 50 records arranged in in-sequence.

Confirm that shuts off the ordinary cell-phone after writing down intactly and errorlessly in telephone number on SIM card , take out SIM card, insert this SIM card in the treasure machine again.

Step 4

Put through the treasure machine power, enter and carry and set up the sub function form to " read from SIM " far, the treasure machine will be automatic to copy the directory content on SIM card in the treasure getting machine.



Read SIM card

Step 5

Withdraw and carry and set up the function form interface far.

If everything above-mentioned is normal. Then, after withdrawing from and carrying and setting up the function form interface far, the treasure machine will write down all telephone numbers set up in the form of message and send to the guardian automatically, in order to check.

Point out: Before setting up the urgent person to contact , can carry and set up operating far at first , in order to pass from the directory and obtain the telephone number of the urgent person to contact.

Carry and set up far through short information on 6.9.2

The remarks: When the cell-phone receives short information, it is one that it judges this short information carries and sets up the order far, if then carry out the corresponding order in the backstage, and does not provide any suggestion .

Carry and set up the telephone number record of the person to contact far

You can send and increase the treasure machine and hit the bookkeeping record of the telephone to the treasure machine according to the message that the fixed form write .

The form of the message is:	Content
Classification of the message	
Change passwords	*password*99*new password#
Guardian's name and telephone number	*password*10*name*phone number#
Cry for help person to contact 1 promptly	*password*21*name*phone number#
Cry for help person to contact 2 promptly	*password*22*name*phone number#
Cry for help person to contact 3 promptly	*password*23*name*phone number#
Add the general person to contact	*password*30*name*phone number#
The message is lacked sentence to cry for help promptly	*password*E0*message#
Inquire about the order in GPS's positioning	*password*P0*command code#

GPS's positioning	
1 of daily short sentence of message	*password*M0*message#
Daily short sentence of message is 2	*password*M1*message#
	!-!-!-
Daily short sentence of message is 10	*password*M9*message#
Ask to monitor	*password*GP*phone number#

The remarks:

Order to begin with the *th in message, there are several fields in the middle, separate with the *th , is over with number , the first two fields of orders are passwords , order codes.

Following field meaning:

- 1, the password is four digits, express with password.
- 2, order codes to be two words yuan, such as password of revising being 99.
- 3, name _ Person to contact name: Chinese and English word yuan will do, Chinese does not exceed 6 word yuan , English does not exceed 12 .
- 4, phone number telephone number: The figure, the length does not exceed 20 .
- 5, message message content, it is Chinese and English word yuan, Chinese can't exceed 35 . English can't exceed 70 .

Order to give an example

Suppose as follows that the primitive password is 0000

1, set up the password

If it is 1234 to want to set up the password, order the form as follows:

*0000*99*1234#

2, change guardian's telephone number

If it is 07558555558 to want to set up numbers, order the form as follows:

*0000*10*keeper*07558555558#

3, change the 1/2/3 telephone number of the urgent person to contact

If it is 07558555558 to want to set up numbers, order the form as follows:

**07558555558 #s of 0000*21*sos1 change the telephone number of the urgent person to contact 1

**07558555558 #s of 0000*22*sos2 change the telephone number of the urgent person to contact 2

**07558555558 #s of 0000*22*sos3 change the telephone number of the urgent person to contact 3

4, add the general person to contact

The person to contact that if wants to add name is LEONA, the number is 07558555558, order the form as follows:

**07558555558 #s of 0000*30*LEONA change the telephone number of the urgent person to contact 1

5, the GPS's positioning is ordered

When the other side sent the GPS's positioning to order, this computer GPS part will make present GPS geographical position, and reciprocate to the designated telephone number. If the designated number is 07558555558, order the form as follows:

*0000*P0*07558555558#

6, alter the daily message content

If it is " HELLO " to want to set up the content of the self-defining message of article 1 Order the form as follows:

*0000*M0*HELLO#

Article 2 is

*0000*M1*HELLO#

And so on and so forth

7, ask to monitor the order

The guardian or other persons to contact allowed to breathe out and enter, can is it monitor order get copies of machine , then copies of chance breathe out enter designated number automatically to send, and open the microphone, help the other side listen attentively to the sound around, in order to judge whether children are in the danger

If it is 07558555558 to want to accept the number monitored, order the form as follows

*0000*GP*07558555558#

Important suggestion: The treasure machine can store 50 telephone numbers record at most. If the book of electromechanical treasure has already been stored fully, then after the treasure machine receives above-mentioned messages, told a message of carriage returning , the directory has been already full.

Carry and set up prestoring the short short sentence of information far

What you can send according to the message of the fixed form and pursue to store on the plane by revising treasures as above to the treasure machine prestores the short short contents of information.

Important suggestion: The message prestored on the treasure plane is divided into two parts, a part is the regular message that can't be revised . Another part can operate the message revised through being above-mentioned, there are 30 altogether.

Carry and inquire about GPS position far

To treasure's cell-phone according to having and pursueing to send messages in form of messages, it pass

message report of at present treasure cell-phone in geographical position (longitude and latitude, orient time).

Important suggestion: Because may appear situation that GPS can't make a reservation for the moment, so treasure chance is it is it operate it to orientate to go on frequently according to sure method. When receive and inquire about the order, if can't confirm the newest position quickly , the treasure machine will send the last time's localization materials out at first.

Monitor

The guardian (the first urgent person to contact) can be through sending and appointing the message of the content to monitor the sound around of the treasure machine to the treasure machine. The content of the message is as follows: The treasure machine will carry out the following a series of to operate after receiving messages: Check passwords . If the password is too incorrect to do any treatment . Shut off the receiver, turn on the mouthpiece.

Call out guardian automatically (whether one cry for help person to contact promptly), provide any brief on, including the characters show and go back the sound of the bell. After the guardian replies , the treasure machine is put through automatically. At this moment, the guardian can hear the sound around of the treasure machine .

Important suggestion: In above-mentioned course, because the treasure machine will not provide any suggestion, the user of the treasure machine is ignorant .

Cry for help promptly

When the experience emergency needs to cry for help , push cell-phone both sides cry for help the button promptly, the cell-phone will send the message of crying for help automatically promptly , message content is it cry for help the phrase and materials of GPS's positioning promptly to include. At the same time, the cell-phone will be alike too to operate a series of receiving the message of monitoring, so that the guardian monitors the sound around the cell-phone .

7.0 At a disturbance of the bell to set up


Notice: If open the function of the alarm clock , will show the graphic presentation on the screen. Sound the bell at the moment when the cell-phone will be in you established in advance , sound the bell. You can press the wanton key and sound the bell , the picture that the carriage return of the screen awaits the opportune moment .

Set up cycle : Offer six kinds of choices (" every one ", " every day " " to five in each Monday ", " to six in each Monday ", " each Saturday ", " each Sunday ")

At a disturbance of bell time and set up and swing the middle direction key  to enter the main menu while awaiting the opportune moment, left and right sides swing the middle direction key  and choose to be " at a disturbance of the bell ", the key  is entered and at a disturbance of bell time to set up in middle direction.

At a disturbance of bell time to set up on 6.10.1


Swinging the middle direction key  and moving to the digit that needs revising to have, it can make the figure of the vernier place change between 0 to 9 swing the middle direction key from head to foot. Press " green key "  and accept amended time after finishing revising , and enter week the alarm clock is set up .



At a disturbance of bell time

6.10.2 The alarm clock is set up in week

Swinging on the middle digit from Monday to Sunday of direction key  , the ones that chose you to need every week were at a disturbance of bell time, then the key  key is confirmed , thus enter the alarm clock and set up interfaces in middle direction.



At a disturbance of the bell in week

6.10.3 The alarm clock is set up

After it set up alarm clock time and week according to, press " key not green "  Launch the alarm clock to set up .



Seven: Maintain and safeguard

- !ô Your cell-phone is the products with fine design and craft , while using, observe and propose lengthening the service life of the cell-phone followingly.
- !ô Please keep the cell-phone dry. The rainwater , moisture and liquid contain the mineral substance , will corrode the electronic circuit.
- !ô Please don't use or preserve the cell-phone in the dust or the not clean place , may destroy its detachable part .
- !ô Please don't place the cell-phone on the place of the overheated or subcooling .
- !ô Handle with care , please don't make the cell-phone shaken or rocked mechanically .

!ô Please polish the cell-phone outer cover by doing the cloth. Don't wash the cell-phone with the chemicals , cleaner , or strong detergent!

!ô Please don't daub the cell-phone with the color . Daubing will block incidentals to influence the normal running in the detachable part.

!ô Please don't dismantle or refit the cell-phone by oneself . (If need to repair , must ask qualified professional and technical personnel for help .)

!ô Only use the battery that cell-phone manufacturers approved of this type . Use other power supply units to violate approving, at the same time , will damage the cell-phone and battery , will cause the danger .

!ô Please don't dismantle the aerial by oneself , don't use other aerials or objects to substitute either, otherwise will influence conversation quality greatly , and may change the radiation amount of the aerial , endanger your health.

**Propose being suitable for your
cell-phone , battery , charger and other
fittings too in the above. If they can't
work normally , please send it to the
nearest authorized maintenance center.**

If necessary, they would help you to arrange the maintenance matters .

Eight: The trouble diagnosing

<p>Before contacting facilitator after sale, carry on the following briefly inspection, perhaps can economize unnecessary time and expenses for you .</p>	<p>Solution</p>
---	------------------------

Trouble phenomenon	
The cell-phone can't start the machine	Check whether the electric consumption of the battery is sufficient the correct installation.
Can't phone	Check whether to prestore the telephone number , the serving area or not. Check and limit in conversation period.
Can't receive the telephone	Check whether the cell-phone has already started the machine; Check whether there is a signal of networks; Check and limit in conversation period.
Can't send short news correctly	Check whether the other side's number is stored correctly in the number one.
There are incoming telegrams but not hear the sound	Check whether to set up the loud bell way that the scene is set up as " sounding the bell " or not.
Conversation quality is bad	Look over that the intensity of signal points out marks on the display screen: The one behind of mark counts and shows that the intensity of signal is from strong to weak.
While phoning, the cell-phone was not dialed this number	Check whether this number is input correctly. If necessary, store numbers again.