
FCC Part 90 Test Report

Report No.: AGC00589151102FE09

FCC ID : T4KD858V
PRODUCT DESIGNATION : DIGITAL RADIO
BRAND NAME : N/A
MODEL NAME : D858, D878, D888, D898, 858, 878, 888, 898
CLIENT : QixiangElectron Science & Technology Co., Ltd.
DATE OF ISSUE : Nov.13, 2015
STANDARD(S) : FCC Part 90 Rules
REPORT VERSION : V 1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd



CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Nov.13, 2015	Valid	Original Report

TABLE OF CONTENTS

1. VERIFICATION OF COMPLIANCE 5

2. GENERAL INFORMATION..... 6

 2.1 PRODUCT DESCRIPTION..... 6

 2.2 RELATED SUBMITTAL(S) / GRANT (S)..... 7

 2.3 TEST METHODOLOGY 8

 2.4 TEST FACILITY 8

 2.5 SPECIAL ACCESSORIES 8

 2.6 EQUIPMENT MODIFICATIONS 8

3. SYSTEM TEST CONFIGURATION 9

 3.1 EUT CONFIGURATION..... 9

 3.2 EUT EXERCISE 9

 3.3 GENERAL TECHNICAL REQUIREMENTS..... 9

 3.4 CONFIGURATION OF TESTED SYSTEM 10

 3.5. SUMMARY OF TEST RESULTS 10

4. IDENTIFICATION OF THE RESPONSIBLE TESTING LOCATION 11

5. DESCRIPTION OF TEST MODES..... 12

6. FREQUENCY TOLERANCE..... 13

 6.1 PROVISIONS APPLICABLE..... 13

 6.2 MEASUREMENT PROCEDURE 13

 6.3 TEST SETUP BLOCK DIAGRAM..... 14

 6.4 TEST RESULT..... 15

7. EMISSION BANDWIDTH..... 27

 7.1 PROVISIONS APPLICABLE..... 31

 7.2 MEASUREMENT PROCEDURE 31

 7.3 TEST SETUP BLOCK DIAGRAM..... 31

 7.4 MEASUREMENT RESULT 32

8. UNWANTED RADIATION 35

 8.1 PROVISIONS APPLICABLE..... 36

 8.2 MEASUREMENT PROCEDURE 36

 8.3 TEST SETUP BLOCK DIAGRAM..... 37

 8.4 MEASUREMENT RESULTS:..... 39

 8.5 EMISSION MASK PLOT..... 48

9. MODULATION CHARACTERISTICS 51

 9.1 PROVISIONS APPLICABLE..... 51

 9.2 MEASUREMENT METHOD 51

 9.3 MEASUREMENT RESULT 52

10. MAXIMUM TRANSMITTER POWER 61

 10.1 PROVISIONS APPLICABLE 64

 10.2 TEST PROCEDURE 64

 10.3 TEST CONFIGURATION 64

 10.4 TEST RESULT 66

 10.5 CONDUCT SPURIOUS PLOT 69

11. TRANSMITTER FREQUENCY BEHAVIOR 74

 11.1 PROVISIONS APPLICABLE 74

 11.2 TEST METHOD 74

 11.3 DESCRIBE LIMIT LINE OF TRANSMITTER FREQUENCY BEHAVIOR 75

 11.4 MEASURE RESULT 77

12. AUDIO LOW PASS FILTER RESPONSE 78

 12.1 LIMITS 78

 12.2. METHOD OF MEASUREMENTS 78

 12.3 TEST DATA 79

APPENDIX I: PHOTOGRAPHS OF SETUP 81

APPENDIX II: EXTERNAL VIEW OF EUT 82

1. VERIFICATION OF COMPLIANCE

Applicant	Qixiang Electron Science & Technology Co., Ltd.
Address	Qixiang Building, Tangxi Industrial Zone, Luojiang District, Quanzhou, Fujian, China
Manufacturer	Qixiang Electron Science & Technology Co., Ltd.
Address	Qixiang Building, Tangxi Industrial Zone, Luojiang District, Quanzhou, Fujian, China
Product Designation	DIGITAL RADIO
Brand Name	N/A
Test Model	D858
Series Model	D878, D888, D898, 858, 878, 888, 898
Difference description	All the same except for the model name and appearance shap.
Date of Test	Nov.06, 2015 to Nov.08, 2015

WE HEREBY CERTIFY THAT:

The above equipment was tested by Dong guan Precise Testing Service Co., Ltd. The data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in TIA/EIA 603. The sample tested as described in this report is in compliance with the FCC Rules Part 90 requirements

The test results of this report relate only to the tested sample identified in this report.

Tested by

Steven Zhou

Steven Zhou(Zhou Pengyun) Nov.13, 2015

Reviewed by

Rock Huang

Rock Huang(Huang Dinglue) Nov.13, 2015

Approved by

Solger Zhang

Solger Zhang(Zhang Hongyi)
Authorized Officer Nov.13, 2015

2. GENERAL INFORMATION

2.1 PRODUCT DESCRIPTION

The EUT is a DIGITAL RADIO designed for voice/data communication. It is designed by way of utilizing the FM/4FSK modulation achieves the system operating.

A major technical description of EUT is described as following:

Communication Type	Voice / Data
Emission Type	11K0F3E, 7K60FXD, 7K60FXW
Modulation	FM/4FSK
Emission Bandwidth	Analog:8.503KHz(5W),10.41 KHz(1W) Digital:9.560KHz(5W),9.459 KHz(1W)
Peak Frequency Deviation	Analog:1.78KHz Digital:1.81KHz
Audio Frequency Response	Analog:11.03dB Digital:11.17 dB
Maximum Transmitter Power	Analog: 36.91 dBm(5W), 29.91dBm (1W) Digital: 36.85 dBm(5W), 29.92dBm (1W)
Output power Modification	1/5W (It was fixed by the manufacturer, any individual can't arbitrarily change it.)
Data Rate	9600bps/12.5KHz(Channel Spacing)
Antenna Designation	Detachable
Antenna Model	QA13V
Antenna Gain	2.15 dBi
Antenna Length	13 cm
Power Supply	DC 7.4V, 2000mAh (by battery)
Adapter Parameter	Input: 100-240V, 50Hz, 0.4A Output: 12V, 0.5A
Limiting Voltage	DC 6 V-DC 8.51V
Operation Frequency Range and Channel	Frequency Range: 136MHz to 174MHz Channel Separation:12.5KHz (Analog), 12.5KHz(Digital)
	Top Channel: 136.025MHz Centre Channel: 155.025MHz Bottom Channel: 173.975MHz
Frequency Tolerance	1.098ppm

Frequency Range (MHz)	Rated Transmit Power(W)(Conducted)	Transmit Mode/Emission Designator
136-174	1/5	11K0F3E(Analog Voice;NB)
136-174	1/5	7K60FXD/7K60FXW(9600Data/Digital Voice NB)

Channel No. (6.25KHz)	Channel No. (12.5KHz)	12.5KHz Channel Spaced 400MHz Band Plan(MHz)
1	1-2	136.025
2		
3	3-4	155.025
4		
5	5-6	173.975
6		

FCC Rules and Regulations Part 2.202: Necessary Bandwidth and Emission Bandwidth

Voice –FM Analog (12.5KHz)

Calculation:

Max modulation (M) in kHz : 3.0

Max deviation(D) in kHz:2.5

Constant factor (K): 1(assumed)

$B_n = 2XM + 2XDK = 11.0 \text{ KHz}$

Emission designator: 11K0F3E

9600 Digital Voice/data (12.5KHz)

Calculation:

Data rate in bps(R)=9600

Deviation Peak deviation of carrier(D)=2359.585

Constant factor (K): 1 (default)

$B_n = 3.86D + 1.27RK = 3.86(2359.585) + 0.27(9600)(1) = 11.7 \text{ KHz}$

Emission designator: 11K0FXD

2.2 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID:T4KD858V**, filing to comply with the FCC Part 90 requirements .

2.3 TEST METHODOLOGY

The radiated emission testing was performed according to the procedures of TIA/EIA 603 and FCC CFR 47 Rules of 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057.

2.4 TEST FACILITY

The test site used to collect the radiated data is located on the address of Dong guan Precise Testing Service Co., Ltd. The test site is constructed and calibrated to meet the FCC requirements in documents TIA/EIA 603.

2.5 SPECIAL ACCESSORIES

Not available for this EUT intended for grant.

2.6 EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

3. SYSTEM TEST CONFIGURATION

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

3.3 GENERAL TECHNICAL REQUIREMENTS

For FCC Part 90 requirements:

- (1). Section 90.205: Maximum ERP is dependent upon the station's antenna HAAT and required service area
- (2). Section 90.207: Modulation Characteristic
- (3). Section 90.209: Occupied Bandwidth
- (4). Section 90.210: Emission Mask
- (5). Section 90.213: Frequency Tolerance
- (6). Section 90.214: Transient Frequency Behavior

3.4 CONFIGURATION OF TESTED SYSTEM

Fig. 2-1 Configuration of Tested System



Table 2-1 Equipment Used in Tested System

Item	Equipment	Model No.	Identifier	Note
1	DIGITAL RADIO	D858	FCC ID: T4KD858V	EUT

3.5. SUMMARY OF TEST RESULTS

FCC Rules	Description Of Test	Result
§90.205	Maximum Transmitter Power	Compliant
§90.207	Modulation Characteristic	Compliant
§90.209	Occupied Bandwidth	Compliant
§90.210	Emission Mask	Compliant
§90.213	Frequency Tolerance	Compliant
§90.214	Transient Frequency Behavior	Compliant

4. IDENTIFICATION OF THE RESPONSIBLE TESTING LOCATION

Site	Dongguan Precise Testing Service Co., Ltd.
Location	Building D, Baoding Technology Park, Guangming Road2, Dongcheng District, Dongguan, Guangdong, China.
Description	The test site is constructed and calibrated to meet the FCC requirements in documents TIA/EIA 603
FCC Registration No.	371540

List of Equipments Used

NAME OF EQUIPMENT	MANUFACTURER	MODEL	SERIAL NO.	Cal. Date	Cal. Due
CLIMATE CHAMBER	EXPERY	TN-400	TN2007SR038	2015.07.14	2016.07.13
ATTENUATOR	WEINSCHTEL CORP	58-30-33	ML030	2015.03.06	2016.03.05
DC POWER SUPPLY	ZHAOXIN	RXN-605D	N/A	2015.03.06	2016.03.05
MODULATION ANALYZER	HP	8920B	3104A03367	2015.07.23	2016.07.22
SIGNAL GENERATOR	AGILENT	E4421B	122501288	2015.07.25	2016.07.24
SIGNAL GENERATOR	R&S	SMT03	A0304261	2015.07.25	2016.07.24
EMI Test Receiver	Rohde & Schwarz	ESCI	101417	2015.07.04	2016.07.03
Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3355	2015.07.04	2016.07.03
Substitution Antenna	SCHWARZBECK	VULB9160	9168-494	2015.07.04	2016.07.03
Signal Amplifier	SCHWARZBECK	BBV 9475	9745-0013	2015.07.04	2016.07.03
RF Cable	SCHWARZBECK	AK9515E	96221	2015.07.04	2016.07.03
3m Anechoic Chamber	CHENGYU	966	PTS-001	2015.06.06	2016.06.05
MULTI-DEVICE Positioning Controller	Max-Full	MF-7802	MF780208339	N/A	N/A
Active loop antenna (9K-30MHz)	Schwarzbeck	FMZB1519	1519-038	2015.06.06	2016.06.05
Spectrum analyzer	Agilent	E4407B	MY46185649	2015.06.06	2016.06.05
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	2015.06.06	2016.06.05
Substitution ANTENNA	EM	EM-AH-10180	67	2015.06.06	2016.06.05
Modulation Domain Analyzer	HP	53310A	3121A02467	2015.06.06	2016.06.05
EMI Test Receiver	Rohde & Schwarz	ESCI	101417	2015.07.06	2016.07.05
RF Cable	SCHWARZBECK	AK9515E	96222	2015.07.04	2016.07.03
Shielded Room	CHENGYU	843	PTS-002	2015.06.06	2016.06.05

NOTE: 8920B can generate audio modulation frequency.

5. DESCRIPTION OF TEST MODES

RF TEST MODES

The EUT (DIGITAL RADIO) has been tested under normal operating condition. (The top channel, the middle channel and the bottom channel) are chosen for testing at each channel separation.

Analog:

No.	TEST MODES	CHANNEL SEPARATION
1	Low Channel	12.5 KHz
2	Middle Channel	12.5 KHz
3	High Channel	12.5 KHz

Digital:

No.	TEST MODES	CHANNEL SEPARATION
1	Low Channel	12.5 KHz
2	Middle Channel	12.5 KHz
3	High Channel	12.5 KHz

Note: Only the result of the worst case was recorded in the report.

6. FREQUENCY TOLERANCE

6.1 PROVISIONS APPLICABLE

- a). According to FCC Part 2 Section 2.1055(a)(1), the frequency stability shall be measured with variation of ambient temperature from -30°C to $+50^{\circ}\text{C}$ centigrade.
- b). According to FCC Part 2 Section 2.1055(d)(2), for battery powered equipment, the frequency stability shall be measured with reducing primary supply voltage to the battery operating end point, which is specified by the manufacturer.
- c). According to FCC Part 90 Section 90.213, the frequency tolerance must be maintained within 0.00025% for 12.5 KHz channel separation and 0.0001% for 6.25 KHz channel separation.

6.2 MEASUREMENT PROCEDURE


6.2.1 Frequency stability versus environmental temperature

1. Setup the configuration per figure 1 for frequencies measurement inside an environment chamber, Install new battery in the EUT.
2. Turn on EUT and set SA center frequency to the EUT radiated frequency. Set SA Resolution Bandwidth to 1KHz and Video Resolution Bandwidth to 1KHz and Frequency Span to 50KHz. Record this frequency as reference frequency.
3. Set the temperature of chamber to 50°C . Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. While maintaining a constant temperature inside the chamber, turn the EUT on and measure the EUT operating frequency.
4. Repeat step 2 with a 10°C decreased per stage until the lowest temperature -30°C is measured, record all measured frequencies on each temperature step.

6.2.2 Frequency stability versus input voltage

1. Setup the configuration per figure 1 for frequencies measured at temperature if it is within 15°C to 25°C . Otherwise, an environment chamber set for a temperature of 20°C shall be used. The EUT shall be powered by DC 7.4V.
2. Set SA center frequency to the EUT radiated frequency. Set SA Resolution Bandwidth to 1 KHz and Video Resolution Bandwidth to 1KHz. Record this frequency as reference frequency.
3. Supply the EUT primary voltage at the operating end point which is specified by manufacturer and record the frequency.

6.3 TEST SETUP BLOCK DIAGRAM

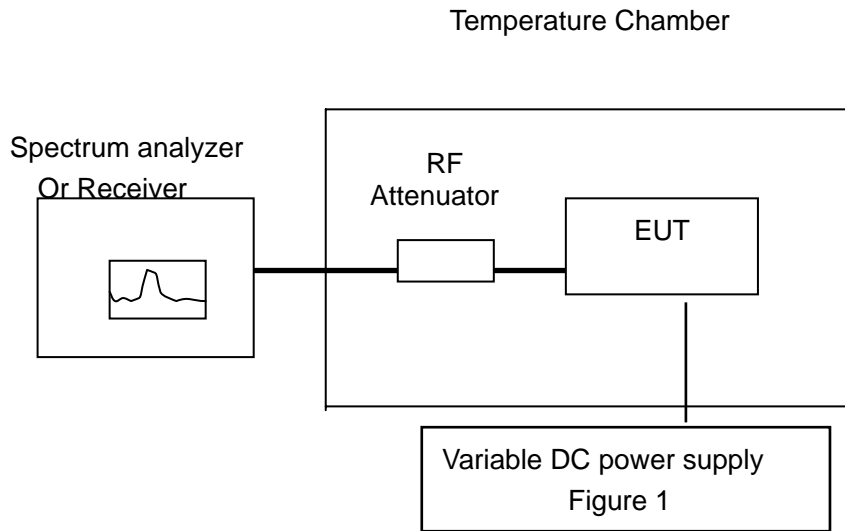

6.4 TEST RESULT

Analog:

(1)Frequency stability versus input voltage (Supply nominal voltage is 7.4V)-5W

Bottom Channel @ 12.5 KHz Channel Separation

Reference Frequency:	136.025	Limit:	5.0ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 7.4 V	136.025052	0.382
40	DC 7.4 V	136.025085	0.625
30	DC 7.4 V	136.025037	0.272
20	DC 7.4 V	136.025076	0.559
10	DC 7.4 V	136.025055	0.404
0	DC 7.4 V	136.025087	0.640
-10	DC 7.4 V	136.025068	0.500
-20	DC 7.4 V	136.025109	0.801
-30	DC 7.4 V	136.025103	0.757

Middle Channel @ 12.5 KHz Channel Separation

Reference Frequency:	155.025 MHz	Limit:	5.0ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 7.4 V	155.025135	0.871
40	DC 7.4 V	155.025146	0.942
30	DC 7.4 V	155.025131	0.845
20	DC 7.4 V	155.025132	0.851
10	DC 7.4 V	155.025152	0.980
0	DC 7.4 V	155.025121	0.781
-10	DC 7.4 V	155.025124	0.800
-20	DC 7.4 V	155.025122	0.787
-30	DC 7.4 V	155.025131	0.845

Top Channel @ 12.5 KHz Channel Separation

Reference Frequency:	173.975 MHz	Limit:	5.0ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 7.4 V	173.975143	0.822
40	DC 7.4 V	173.975162	0.931
30	DC 7.4 V	173.975141	0.810
20	DC 7.4 V	173.975155	0.891
10	DC 7.4 V	173.975151	0.868
0	DC 7.4 V	173.975122	0.701
-10	DC 7.4 V	173.975134	0.770
-20	DC 7.4 V	173.975126	0.724
-30	DC 7.4 V	173.975167	0.960

(2) Frequency stability versus input voltage (Battery Limiting voltage is 6.29V) **-5W**

Bottom Channel @ 12.5 KHz Channel Separation

Reference Frequency:	136.025 MHz	Limit:	5.0ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 6.29 V	136.025079	0.581
40	DC 6.29 V	136.025092	0.676
30	DC 6.29 V	136.025087	0.640
20	DC 6.29 V	136.025083	0.610
10	DC 6.29 V	136.025062	0.456
0	DC 6.29 V	136.025086	0.632
-10	DC 6.29 V	136.025079	0.581
-20	DC 6.29 V	136.025082	0.603
-30	DC 6.29 V	136.025054	0.397

Middle Channel @ 12.5 KHz Channel Separation

Reference Frequency:	155.025 MHz	Limit:	5.0ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 6.29 V	155.025092	0.593
40	DC 6.29 V	155.025065	0.419
30	DC 6.29 V	155.025067	0.432
20	DC 6.29 V	155.025058	0.374
10	DC 6.29 V	155.025099	0.639
0	DC 6.29 V	155.025067	0.432
-10	DC 6.29 V	155.025076	0.490
-20	DC 6.29 V	155.025086	0.555
-30	DC 6.29 V	155.025053	0.342

Top Channel @ 12.5 KHz Channel Separation

Reference Frequency:	173.975 MHz	Limit:	5.0ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 6.29 V	173.975098	0.563
40	DC 6.29 V	173.975074	0.425
30	DC 6.29 V	173.975075	0.431
20	DC 6.29 V	173.975067	0.385
10	DC 6.29 V	173.975045	0.259
0	DC 6.29 V	173.975022	0.126
-10	DC 6.29 V	173.975025	0.144
-20	DC 6.29 V	173.975039	0.224
-30	DC 6.29 V	173.975055	0.316

(3) Frequency stability versus input voltage (Battery Fully Charged voltage is 8.51V) **-5W**

Bottom Channel @ 12.5 KHz Channel Separation

Reference Frequency:	136.025 MHz	Limit:	5.0ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 8.51 V	136.0250897	0.659
40	DC 8.51 V	136.025082	0.603
30	DC 8.51 V	136.025046	0.338
20	DC 8.51 V	136.025127	0.934
10	DC 8.51 V	136.025081	0.595
0	DC 8.51 V	136.025093	0.684
-10	DC 8.51 V	136.025051	0.375
-20	DC 8.51 V	136.025062	0.456
-30	DC 8.51 V	136.025104	0.765

Middle Channel @ 12.5 KHz Channel Separation

Reference Frequency:	155.025 MHz	Limit:	5.0ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 8.51 V	155.025056	0.361
40	DC 8.51 V	155.025092	0.593
30	DC 8.51 V	155.025085	0.548
20	DC 8.51 V	155.025071	0.458
10	DC 8.51 V	155.025069	0.445
0	DC 8.51 V	155.025081	0.522
-10	DC 8.51 V	155.025078	0.503
-20	DC 8.51 V	155.025086	0.555
-30	DC 8.51 V	155.025121	0.781

Top Channel @ 12.5 KHz Channel Separation

Reference Frequency:	173.975 MHz	Limit:	5.0ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 8.51 V	173.975076	0.437
40	DC 8.51 V	173.975089	0.512
30	DC 8.51 V	173.975078	0.448
20	DC 8.51 V	173.975067	0.385
10	DC 8.51 V	173.975083	0.477
0	DC 8.51 V	173.975096	0.552
-10	DC 8.51 V	173.975075	0.431
-20	DC 8.51 V	173.975094	0.540
-30	DC 8.51 V	173.975082	0.471

(4) Frequency stability versus input voltage(Battery endpoint is 6V) -5W

Bottom Channel @ 12.5 KHz Channel Separation

Reference Frequency:	136.025 MHz	Limit:	5.0ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 6.29 V	136.025079	0.581
40	DC 6.29 V	136.025092	0.676
30	DC 6.29 V	136.025087	0.640
20	DC 6.29 V	136.025083	0.610
10	DC 6.29 V	136.025062	0.456
0	DC 6.29 V	136.025086	0.632
-10	DC 6.29 V	136.025079	0.581
-20	DC 6.29 V	136.025082	0.603
-30	DC 6.29 V	136.025054	0.397

Middle Channel @ 12.5 KHz Channel Separation

Reference Frequency:	155.025 MHz	Limit:	5.0ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 6.29 V	155.025092	0.593
40	DC 6.29 V	155.025065	0.419
30	DC 6.29 V	155.025067	0.432
20	DC 6.29 V	155.025058	0.374
10	DC 6.29 V	155.025099	0.639
0	DC 6.29 V	155.025067	0.432
-10	DC 6.29 V	155.025076	0.490
-20	DC 6.29 V	155.025086	0.555
-30	DC 6.29 V	155.025053	0.342

Top Channel @ 12.5 KHz Channel Separation

Reference Frequency:	173.975 MHz	Limit:	5.0ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 6.29 V	173.975098	0.563
40	DC 6.29 V	173.975074	0.425
30	DC 6.29 V	173.975075	0.431
20	DC 6.29 V	173.975067	0.385
10	DC 6.29 V	173.975045	0.259
0	DC 6.29 V	173.975022	0.126
-10	DC 6.29 V	173.975025	0.144
-20	DC 6.29 V	173.975039	0.224
-30	DC 6.29 V	173.975055	0.316

(1)Frequency stability versus input voltage (Supply nominal voltage is 7.4V)-1W

Bottom Channel @ 12.5 KHz Channel Separation

Reference Frequency:	136.025	Limit:	5.0ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 7.4 V	136.025102	0.750
40	DC 7.4 V	136.025093	0.684
30	DC 7.4 V	136.025059	0.434
20	DC 7.4 V	136.025043	0.316
10	DC 7.4 V	136.025026	0.191
0	DC 7.4 V	136.025032	0.235
-10	DC 7.4 V	136.025036	0.265
-20	DC 7.4 V	136.025062	0.456
-30	DC 7.4 V	136.025049	0.360

Middle Channel @ 12.5 KHz Channel Separation

Reference Frequency:	155.025 MHz	Limit:	5.0ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 7.4 V	155.025149	0.961
40	DC 7.4 V	155.025154	0.993
30	DC 7.4 V	155.025128	0.826
20	DC 7.4 V	155.025116	0.748
10	DC 7.4 V	155.025109	0.703
0	DC 7.4 V	155.025128	0.826
-10	DC 7.4 V	155.025148	0.955
-20	DC 7.4 V	155.025153	0.987
-30	DC 7.4 V	155.025149	0.961

Top Channel @ 12.5 KHz Channel Separation

Reference Frequency:	173.975 MHz	Limit:	5.0ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 7.4 V	173.975159	0.914
40	DC 7.4 V	173.975142	0.816
30	DC 7.4 V	173.975153	0.879
20	DC 7.4 V	173.975119	0.684
10	DC 7.4 V	173.975121	0.696
0	DC 7.4 V	173.975154	0.885
-10	DC 7.4 V	173.975146	0.839
-20	DC 7.4 V	173.975139	0.799
-30	DC 7.4 V	173.975146	0.839

(2) Frequency stability versus input voltage (Battery Limiting voltage is 6.29V) -1W

Bottom Channel @ 12.5 KHz Channel Separation

Reference Frequency:	136.025 MHz	Limit:	5.0ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 6.29 V	136.025085	0.625
40	DC 6.29 V	136.025129	0.948
30	DC 6.29 V	136.025108	0.794
20	DC 6.29 V	136.025043	0.316
10	DC 6.29 V	136.025084	0.618
0	DC 6.29 V	136.025095	0.698
-10	DC 6.29 V	136.025062	0.456
-20	DC 6.29 V	136.025114	0.838
-30	DC 6.29 V	136.025034	0.250

Middle Channel @ 12.5 KHz Channel Separation

Reference Frequency:	155.025 MHz	Limit:	5.0ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 6.29 V	155.025082	0.529
40	DC 6.29 V	155.025036	0.232
30	DC 6.29 V	155.025096	0.619
20	DC 6.29 V	155.025057	0.368
10	DC 6.29 V	155.025092	0.593
0	DC 6.29 V	155.025052	0.335
-10	DC 6.29 V	155.025049	0.316
-20	DC 6.29 V	155.025085	0.548
-30	DC 6.29 V	155.025106	0.684

Top Channel @ 12.5 KHz Channel Separation

Reference Frequency:	173.975 MHz	Limit:	5.0ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 6.29 V	173.975052	0.299
40	DC 6.29 V	173.975096	0.552
30	DC 6.29 V	173.975074	0.425
20	DC 6.29 V	173.975104	0.598
10	DC 6.29 V	173.975098	0.563
0	DC 6.29 V	173.975091	0.523
-10	DC 6.29 V	173.975056	0.322
-20	DC 6.29 V	173.975073	0.420
-30	DC 6.29 V	173.975081	0.466

(3) Frequency stability versus input voltage (Battery Fully Charged voltage is 8.51V) -1W

Bottom Channel @ 12.5 KHz Channel Separation

Reference Frequency:	136.025 MHz	Limit:	5.0ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 8.51 V	136.025026	0.191
40	DC 8.51 V	136.025051	0.375
30	DC 8.51 V	136.025082	0.603
20	DC 8.51 V	136.025094	0.691
10	DC 8.51 V	136.025062	0.456
0	DC 8.51 V	136.025071	0.522
-10	DC 8.51 V	136.025034	0.250
-20	DC 8.51 V	136.025082	0.603
-30	DC 8.51 V	136.025124	0.912

Middle Channel @ 12.5 KHz Channel Separation

Reference Frequency:	155.025 MHz	Limit:	5.0ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 8.51 V	155.025061	0.393
40	DC 8.51 V	155.025084	0.542
30	DC 8.51 V	155.025093	0.600
20	DC 8.51 V	155.025108	0.697
10	DC 8.51 V	155.025051	0.329
0	DC 8.51 V	155.025034	0.219
-10	DC 8.51 V	155.025056	0.361
-20	DC 8.51 V	155.025076	0.490
-30	DC 8.51 V	155.025096	0.619

Top Channel @ 12.5 KHz Channel Separation

Reference Frequency:	173.975 MHz	Limit:	5.0ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 8.51 V	173.975052	0.299
40	DC 8.51 V	173.975091	0.523
30	DC 8.51 V	173.975073	0.420
20	DC 8.51 V	173.975096	0.552
10	DC 8.51 V	173.975065	0.374
0	DC 8.51 V	173.975077	0.443
-10	DC 8.51 V	173.975084	0.483
-20	DC 8.51 V	173.975092	0.529
-30	DC 8.51 V	173.975058	0.333

(4) Frequency stability versus input voltage(Battery endpoint is 6V) -1W

Bottom Channel @ 12.5 KHz Channel Separation

Reference Frequency:	136.025 MHz	Limit:	5.0ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 6.29 V	136.025105	0.772
40	DC 6.29 V	136.025149	1.095
30	DC 6.29 V	136.025135	0.992
20	DC 6.29 V	136.025059	0.434
10	DC 6.29 V	136.025067	0.493
0	DC 6.29 V	136.025093	0.684
-10	DC 6.29 V	136.025062	0.456
-20	DC 6.29 V	136.025053	0.390
-30	DC 6.29 V	136.025097	0.713

Middle Channel @ 12.5 KHz Channel Separation

Reference Frequency:	155.025 MHz	Limit:	5.0ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 6.29 V	155.025092	0.593
40	DC 6.29 V	155.025065	0.419
30	DC 6.29 V	155.025067	0.432
20	DC 6.29 V	155.025058	0.374
10	DC 6.29 V	155.025099	0.639
0	DC 6.29 V	155.025067	0.432
-10	DC 6.29 V	155.025076	0.490
-20	DC 6.29 V	155.025086	0.555
-30	DC 6.29 V	155.025053	0.342

Top Channel @ 12.5 KHz Channel Separation

Reference Frequency:	173.975 MHz	Limit:	5.0ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 6.29 V	173.975085	0.489
40	DC 6.29 V	173.975112	0.644
30	DC 6.29 V	173.975109	0.627
20	DC 6.29 V	173.975096	0.552
10	DC 6.29 V	173.975059	0.339
0	DC 6.29 V	173.975068	0.391
-10	DC 6.29 V	173.975053	0.305
-20	DC 6.29 V	173.975038	0.218
-30	DC 6.29 V	173.975094	0.540

Digital:

(1)Frequency stability versus input voltage (Supply nominal voltage is 7.4V) **-5W**

Bottom Channel @ 12.5 KHz Channel Separation

Reference Frequency:	136.025	Limit:	5.0ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	7.4	136.025036	0.265
40	7.4	136.025025	0.184
30	7.4	136.025048	0.353
20	7.4	136.025076	0.559
10	7.4	136.025077	0.566
0	7.4	136.025062	0.456
-10	7.4	136.025068	0.500
-20	7.4	136.025098	0.720
-30	7.4	136.025085	0.625

Middle Channel @ 12.5 KHz Channel Separation

Reference Frequency:	155.025 MHz	Limit:	5.0ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	7.4	155.025119	0.768
40	7.4	155.025128	0.826
30	7.4	155.025134	0.864
20	7.4	155.025127	0.819
10	7.4	155.025148	0.955
0	7.4	155.025113	0.729
-10	7.4	155.025125	0.806
-20	7.4	155.025146	0.942
-30	7.4	155.025151	0.974

Top Channel @ 12.5 KHz Channel Separation

Reference Frequency:	173.975 MHz	Limit:	5.0ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	7.4	173.975128	0.736
40	7.4	173.975147	0.845
30	7.4	173.975153	0.879
20	7.4	173.975129	0.741
10	7.4	173.975142	0.816
0	7.4	173.975109	0.627
-10	7.4	173.975112	0.644
-20	7.4	173.975143	0.822
-30	7.4	173.975157	0.902

(2) Frequency stability versus input voltage (Battery Limiting voltage is 6.29V) -5W

Bottom Channel @ 12.5 KHz Channel Separation

Reference Frequency:	136.025 MHz	Limit:	5.0ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 6.29 V	136.025089	0.654
40	DC 6.29 V	136.025076	0.559
30	DC 6.29 V	136.025053	0.390
20	DC 6.29 V	136.025098	0.720
10	DC 6.29 V	136.025086	0.632
0	DC 6.29 V	136.025074	0.544
-10	DC 6.29 V	136.025067	0.493
-20	DC 6.29 V	136.025059	0.434
-30	DC 6.29 V	136.025048	0.353

Middle Channel @ 12.5 KHz Channel Separation

Reference Frequency:	155.025 MHz	Limit:	5.0ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 6.29 V	155.025102	0.658
40	DC 6.29 V	155.025085	0.548
30	DC 6.29 V	155.025074	0.477
20	DC 6.29 V	155.025068	0.439
10	DC 6.29 V	155.025079	0.510
0	DC 6.29 V	155.025053	0.342
-10	DC 6.29 V	155.025062	0.400
-20	DC 6.29 V	155.025074	0.477
-30	DC 6.29 V	155.025089	0.574

Top Channel @ 12.5 KHz Channel Separation

Reference Frequency:	173.975 MHz	Limit:	5.0ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 6.29 V	173.975086	0.494
40	DC 6.29 V	173.975097	0.558
30	DC 6.29 V	173.975069	0.397
20	DC 6.29 V	173.975078	0.448
10	DC 6.29 V	173.975064	0.368
0	DC 6.29 V	173.975087	0.500
-10	DC 6.29 V	173.975046	0.264
-20	DC 6.29 V	173.975058	0.333
-30	DC 6.29 V	173.975061	0.351

(3) Frequency stability versus input voltage (Battery Fully Charged voltage is 8.51V) **-5W**

Bottom Channel @ 12.5 KHz Channel Separation

Reference Frequency:	136.025 MHz	Limit:	5.0ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 8.51 V	136.025075	0.551
40	DC 8.51 V	136.025072	0.529
30	DC 8.51 V	136.025061	0.448
20	DC 8.51 V	136.025099	0.728
10	DC 8.51 V	136.025073	0.537
0	DC 8.51 V	136.025064	0.471
-10	DC 8.51 V	136.025086	0.632
-20	DC 8.51 V	136.025073	0.537
-30	DC 8.51 V	136.025115	0.845

Middle Channel @ 12.5 KHz Channel Separation

Reference Frequency:	155.025 MHz	Limit:	5.0ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 8.51 V	155.025088	0.568
40	DC 8.51 V	155.0250972	0.627
30	DC 8.51 V	155.025073	0.471
20	DC 8.51 V	155.025068	0.439
10	DC 8.51 V	155.025078	0.503
0	DC 8.51 V	155.025122	0.787
-10	DC 8.51 V	155.025108	0.697
-20	DC 8.51 V	155.025113	0.729
-30	DC 8.51 V	155.025096	0.619

Top Channel @ 12.5 KHz Channel Separation

Reference Frequency:	173.975 MHz	Limit:	5.0ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 8.51 V	173.97507	0.402
40	DC 8.51 V	173.97508	0.460
30	DC 8.51 V	173.97511	0.632
20	DC 8.51 V	173.97509	0.517
10	DC 8.51 V	173.97512	0.690
0	DC 8.51 V	173.97516	0.920
-10	DC 8.51 V	173.97509	0.517
-20	DC 8.51 V	173.975051	0.293
-30	DC 8.51 V	173.97513	0.747

(4) Frequency stability versus input voltage (Battery endpoint is 6V) **-5W**

Bottom Channel @ 12.5 KHz Channel Separation

Reference Frequency:	136.025 MHz	Limit:	5.0ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 6.00 V	136.025089	0.654
40	DC 6.00 V	136.025076	0.559
30	DC 6.00 V	136.025053	0.390
20	DC 6.00 V	136.025098	0.720
10	DC 6.00 V	136.025086	0.632
0	DC 6.00 V	136.025074	0.544
-10	DC 6.00 V	136.025067	0.493
-20	DC 6.00 V	136.025059	0.434
-30	DC 6.00 V	136.025048	0.353

Middle Channel @ 12.5 KHz Channel Separation

Reference Frequency:	155.025 MHz	Limit:	5.0ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 6.00 V	155.025102	0.658
40	DC 6.00 V	155.025085	0.548
30	DC 6.00 V	155.025074	0.477
20	DC 6.00 V	155.025068	0.439
10	DC 6.00 V	155.025079	0.510
0	DC 6.00 V	155.025053	0.342
-10	DC 6.00 V	155.025062	0.400
-20	DC 6.00 V	155.025074	0.477
-30	DC 6.00 V	155.025089	0.574

Top Channel @ 12.5 KHz Channel Separation

Reference Frequency:	173.975 MHz	Limit:	5.0ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 6.00 V	173.975086	0.494
40	DC 6.00 V	173.975097	0.558
30	DC 6.00 V	173.975069	0.397
20	DC 6.00 V	173.975078	0.448
10	DC 6.00 V	173.975064	0.368
0	DC 6.00 V	173.975087	0.500
-10	DC 6.00 V	173.975046	0.264
-20	DC 6.00 V	173.975058	0.333
-30	DC 6.00 V	173.975061	0.351

(1)Frequency stability versus input voltage (Supply nominal voltage is 7.4V) --1W

Bottom Channel @ 12.5 KHz Channel Separation

Reference Frequency:	136.025	Limit:	5.0ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	7.4	136.025048	0.353
40	7.4	136.025036	0.265
30	7.4	136.025082	0.603
20	7.4	136.025094	0.691
10	7.4	136.025054	0.397
0	7.4	136.025065	0.478
-10	7.4	136.025094	0.691
-20	7.4	136.025073	0.537
-30	7.4	136.025079	0.581

Middle Channel @ 12.5 KHz Channel Separation

Reference Frequency:	155.025 MHz	Limit:	5.0ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	7.4	155.025103	0.664
40	7.4	155.025098	0.632
30	7.4	155.025064	0.413
20	7.4	155.025082	0.529
10	7.4	155.025073	0.471
0	7.4	155.025068	0.439
-10	7.4	155.025092	0.593
-20	7.4	155.025082	0.529
-30	7.4	155.025092	0.593

Top Channel @ 12.5 KHz Channel Separation

Reference Frequency:	173.975 MHz	Limit:	5.0ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	7.4	173.975108	0.621
40	7.4	173.975125	0.718
30	7.4	173.975191	1.098
20	7.4	173.975102	0.586
10	7.4	173.975156	0.897
0	7.4	173.975086	0.494
-10	7.4	173.975114	0.655
-20	7.4	173.975106	0.609
-30	7.4	173.975131	0.753

(2) Frequency stability versus input voltage (Battery Limiting voltage is 6.29V) --1W

Bottom Channel @ 12.5 KHz Channel Separation

Reference Frequency:	136.025 MHz	Limit:	5.0ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 6.29 V	136.025072	0.529
40	DC 6.29 V	136.025081	0.595
30	DC 6.29 V	136.025106	0.779
20	DC 6.29 V	136.025139	1.022
10	DC 6.29 V	136.025047	0.346
0	DC 6.29 V	136.025077	0.566
-10	DC 6.29 V	136.025106	0.779
-20	DC 6.29 V	136.025113	0.831
-30	DC 6.29 V	136.025092	0.676

Middle Channel @ 12.5 KHz Channel Separation

Reference Frequency:	155.025 MHz	Limit:	5.0ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 6.29 V	155.025109	0.703
40	DC 6.29 V	155.025095	0.613
30	DC 6.29 V	155.025096	0.619
20	DC 6.29 V	155.025073	0.471
10	DC 6.29 V	155.025061	0.393
0	DC 6.29 V	155.025091	0.587
-10	DC 6.29 V	155.025084	0.542
-20	DC 6.29 V	155.025069	0.445
-30	DC 6.29 V	155.025128	0.826

Top Channel @ 12.5 KHz Channel Separation

Reference Frequency:	173.975 MHz	Limit:	5.0ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 6.29 V	173.975105	0.604
40	DC 6.29 V	173.975092	0.529
30	DC 6.29 V	173.975059	0.339
20	DC 6.29 V	173.975063	0.362
10	DC 6.29 V	173.975058	0.333
0	DC 6.29 V	173.975064	0.368
-10	DC 6.29 V	173.975056	0.322
-20	DC 6.29 V	173.975072	0.414
-30	DC 6.29 V	173.975094	0.540

(3) Frequency stability versus input voltage (Battery Fully Charged voltage is 8.51V) --1W

Bottom Channel @ 12.5 KHz Channel Separation

Reference Frequency:	136.025 MHz	Limit:	5.0ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 8.51 V	136.025057	0.419
40	DC 8.51 V	136.025039	0.287
30	DC 8.51 V	136.025083	0.610
20	DC 8.51 V	136.025061	0.448
10	DC 8.51 V	136.025052	0.382
0	DC 8.51 V	136.025075	0.551
-10	DC 8.51 V	136.025099	0.728
-20	DC 8.51 V	136.025083	0.610
-30	DC 8.51 V	136.025105	0.772

Middle Channel @ 12.5 KHz Channel Separation

Reference Frequency:	155.025 MHz	Limit:	5.0ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 8.51 V	155.025092	0.593
40	DC 8.51 V	155.025051	0.329
30	DC 8.51 V	155.025063	0.406
20	DC 8.51 V	155.025088	0.568
10	DC 8.51 V	155.025107	0.690
0	DC 8.51 V	155.025126	0.813
-10	DC 8.51 V	155.025131	0.845
-20	DC 8.51 V	155.025106	0.684
-30	DC 8.51 V	155.025095	0.613

Top Channel @ 12.5 KHz Channel Separation

Reference Frequency:	173.975 MHz	Limit:	5.0ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 8.51 V	173.975069	0.397
40	DC 8.51 V	173.975125	0.718
30	DC 8.51 V	173.975106	0.609
20	DC 8.51 V	173.975132	0.759
10	DC 8.51 V	173.975152	0.874
0	DC 8.51 V	173.975118	0.678
-10	DC 8.51 V	173.975132	0.759
-20	DC 8.51 V	173.975107	0.615
-30	DC 8.51 V	173.975135	0.776

(4) Frequency stability versus input voltage (Battery endpoint is 6V) --1W

Bottom Channel @ 12.5 KHz Channel Separation

Reference Frequency:	136.025 MHz	Limit:	5.0ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 6.00 V	136.025053	0.390
40	DC 6.00 V	136.025103	0.757
30	DC 6.00 V	136.025096	0.706
20	DC 6.00 V	136.025114	0.838
10	DC 6.00 V	136.025068	0.500
0	DC 6.00 V	136.025094	0.691
-10	DC 6.00 V	136.025047	0.346
-20	DC 6.00 V	136.025063	0.463
-30	DC 6.00 V	136.025054	0.397

Middle Channel @ 12.5 KHz Channel Separation

Reference Frequency:	155.025 MHz	Limit:	5.0ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 6.00 V	155.025152	0.980
40	DC 6.00 V	155.025068	0.439
30	DC 6.00 V	155.025076	0.490
20	DC 6.00 V	155.025095	0.613
10	DC 6.00 V	155.025081	0.522
0	DC 6.00 V	155.025067	0.432
-10	DC 6.00 V	155.025106	0.684
-20	DC 6.00 V	155.025098	0.632
-30	DC 6.00 V	155.025072	0.464

Top Channel @ 12.5 KHz Channel Separation

Reference Frequency:	173.975 MHz	Limit:	5.0ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 6.00 V	173.975091	0.523
40	DC 6.00 V	173.975062	0.356
30	DC 6.00 V	173.975053	0.305
20	DC 6.00 V	173.975064	0.368
10	DC 6.00 V	173.975039	0.224
0	DC 6.00 V	173.975097	0.558
-10	DC 6.00 V	173.975104	0.598
-20	DC 6.00 V	173.975126	0.724
-30	DC 6.00 V	173.975147	0.845

7. EMISSION BANDWIDTH


7.1 PROVISIONS APPLICABLE

According to FCC Part 90 Section 90.209: The authorized bandwidth shall be 11.25 KHz for 12.5 KHz channel separation and 6 KHz for 6.25 KHz channel separation.

7.2 MEASUREMENT PROCEDURE

- 1). The EUT was placed on a turn table which is 0.8m above ground plane.
- 2). The EUT was modulated by 2.5 KHz Sine wave audio signal, The level of the audio signal employed is 16 dB greater than that necessary to produce 50% of rated system deviation. Rated system deviation is 2.5 kHz (12.5 kHz channel spacing).
- 3). Set SPA Center Frequency = fundamental frequency, RBW=100 Hz, VBW= 300 Hz, Span =50 KHz.
- 4). Set SPA Max hold. Mark peak, -26 dB.

7.3 TEST SETUP BLOCK DIAGRAM

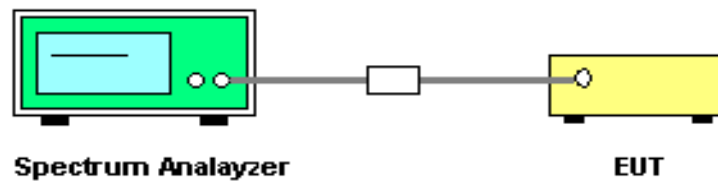


7.4 MEASUREMENT RESULT

Analog:


26 dB Bandwidth Measurement Result-5W			
Operating Frequency	12.5 KHz Channel Separation		
	Test Data	Limits	Result
136.025MHz	8.503KHz	11.25 KHz	Pass
155.025MHz	8.431KHz	11.25 KHz	Pass
173.975MHz	8.476KHz	11.25 KHz	Pass

Occupied bandwidth of Low Channel (136.025MHz) @ 12.5 KHz Channel Separation

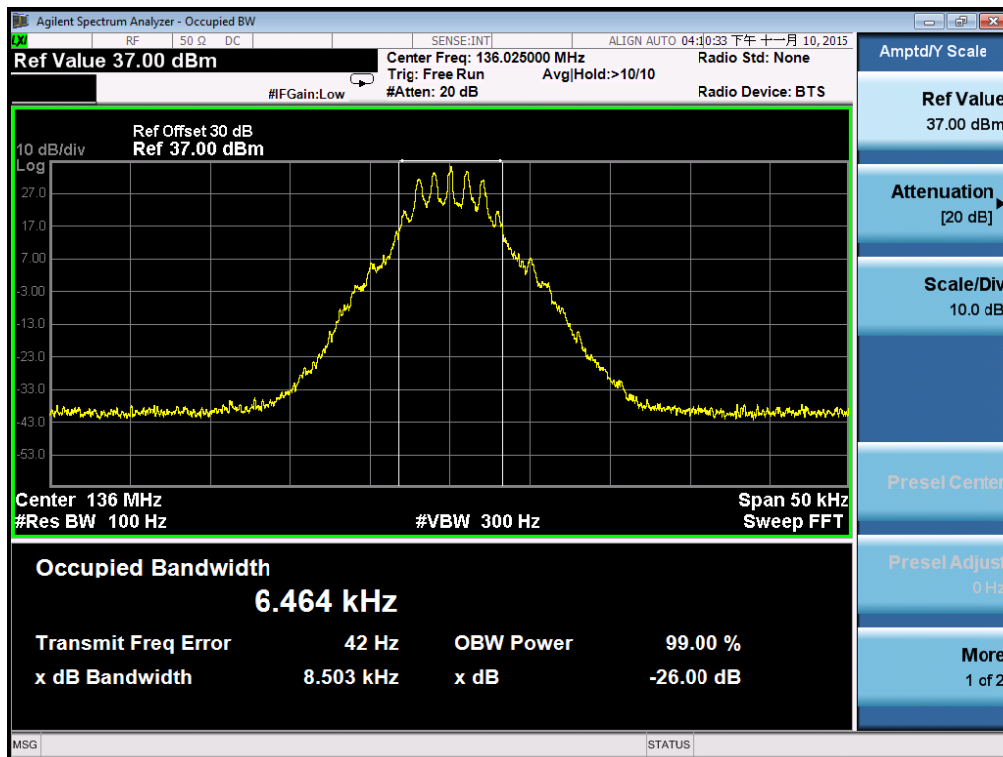

26 dB Bandwidth Measurement Result-1W			
Operating Frequency	12.5 KHz Channel Separation		
	Test Data	Limits	Result
136.025MHz	10.30KHz	11.25 KHz	Pass
155.025MHz	10.41KHz	11.25 KHz	Pass
173.975MHz	10.23KHz	11.25 KHz	Pass

Occupied bandwidth of Middle Channel (155.025MHz) @ 12.5 KHz Channel Separation

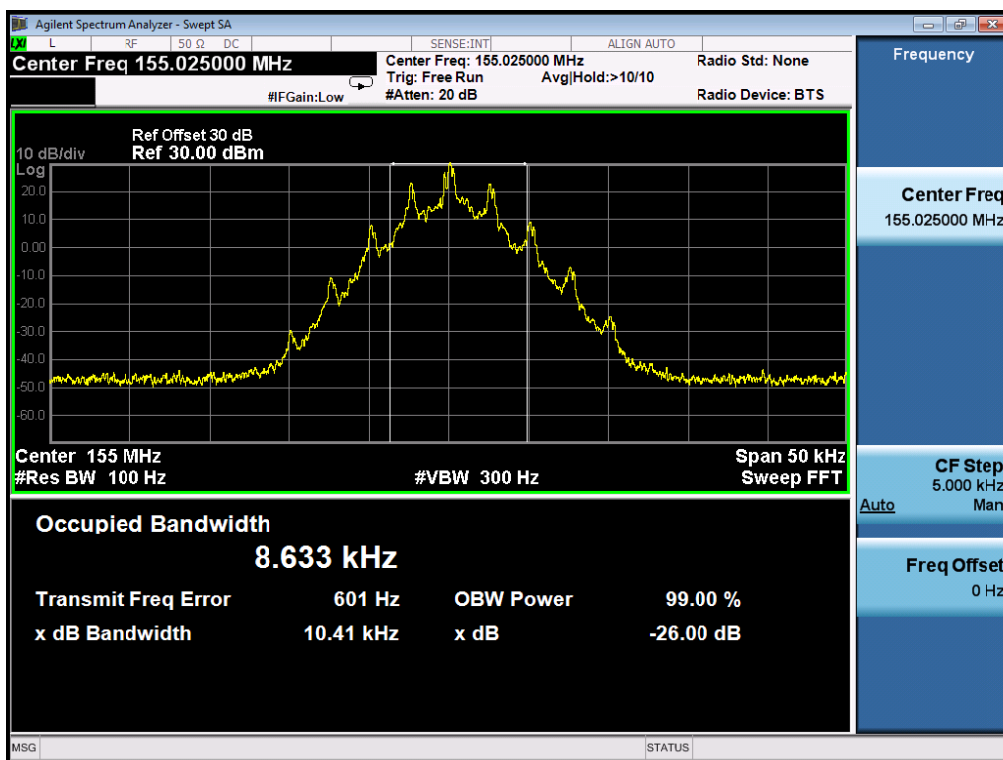


Digital:

TEST RESULTS

26 DB BANDWIDTH MEASUREMENT RESULT			
Operating Frequency	12.5 KHz Channel Separation		
	Test Data	Limits	Result
136.025MHz	9.548KHz	11.25 KHz	Pass
155.025MHz	9.560KHz	11.25 KHz	Pass
173.975MHz	9.532KHz	11.25 KHz	Pass


Occupied bandwidth of Middle Channel (155.025) @ 12.5 KHz Channel Separation

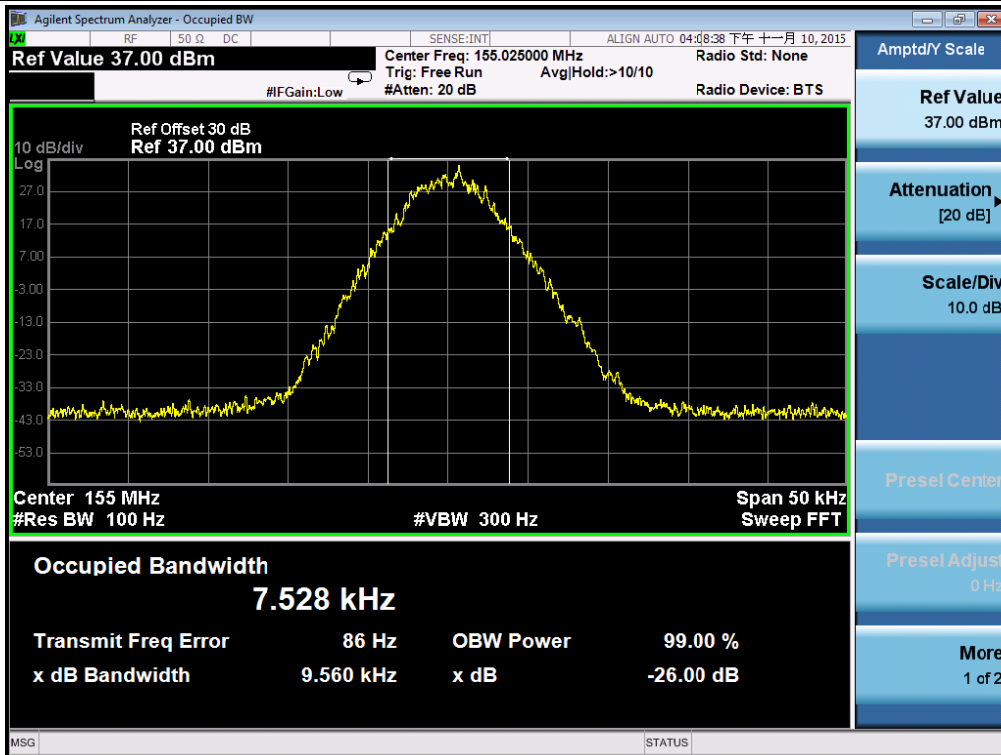

TEST RESULTS

26 DB BANDWIDTH MEASUREMENT RESULT			
Operating Frequency	12.5 KHz Channel Separation		
	Test Data	Limits	Result
136.025MHz	9.406KHz	11.25 KHz	Pass
155.025MHz	9.352KHz	11.25 KHz	Pass
173.975MHz	9.459KHz	11.25 KHz	Pass

Occupied bandwidth of Top Channel (173.975MHz) @ 12.5 KHz Channel Separation

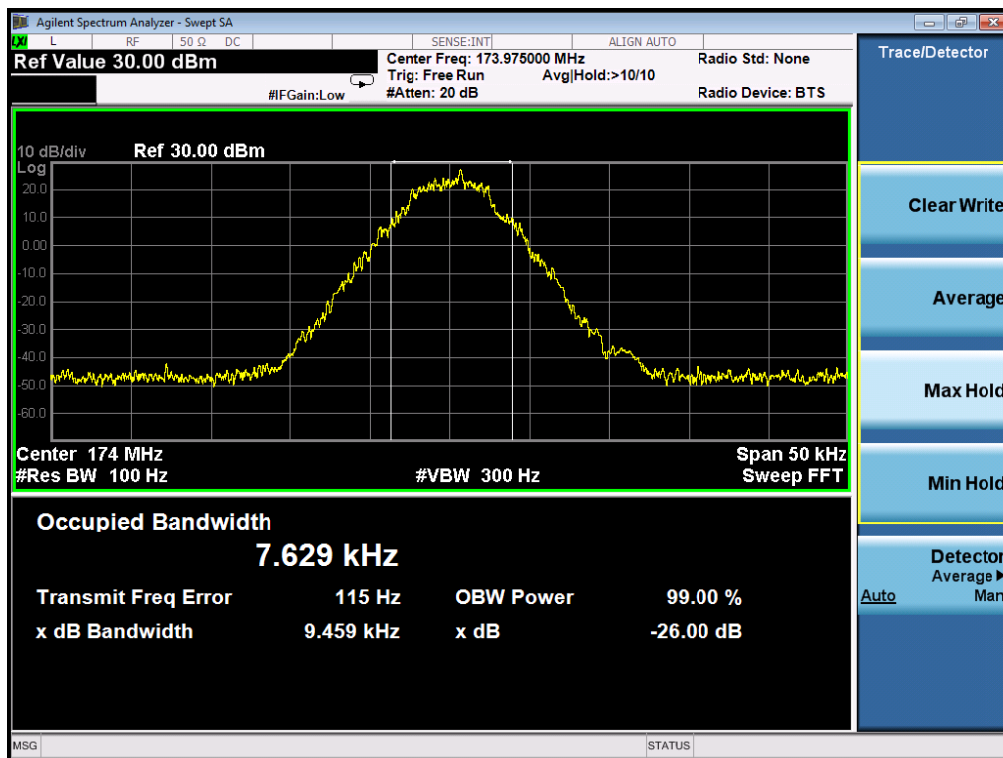

8. UNWANTED RADIATION

8.1 PROVISIONS APPLICABLE

8.1.1 According to Section 90.210, the power of each unwanted emission shall be less than Transmitted Power as specified below for transmitters designed to operate with each channel separation.

For 12.5 KHz Channel Separation:

- (1). On any frequency removed from the center of the authorized bandwidth f_0 to 5.625 KHz removed from f_0 : Zero dB.
- (2). On any frequency removed from the center of the authorized bandwidth by a displacement Frequency (f_d in KHz) f_0 of more than 5.625 KHz but no more than 12.5 KHz: At least $7.27(f_d - 2.88 \text{ KHz})$ dB
- (3). On any frequency removed from the center of the authorized bandwidth by a displacement Frequency (f_d in KHz) f_0 of more than 12.5 KHz: At least $50 + 10 \log(P)$ dB or 70 dB, whichever is lesser attenuation.

For 6.25 KHz Channel Separation:

- (1). On any frequency from the center of the authorized bandwidth f_0 to 3.0 kHz removed from f_0 : Zero dB.
- (2). On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 3.0 kHz but no more than 4.6 kHz: At least $30 + 16.67(f_d - 3 \text{ kHz})$ or $55 + 10 \log(P)$ or 65 dB, whichever is the lesser attenuation.
- (3). On any frequency removed from the center of the authorized bandwidth by more than 4.6 kHz: At least $55 + 10 \log(P)$ or 65 dB, whichever is the lesser attenuation.

8.2 MEASUREMENT PROCEDURE



- (1) On a test site, the EUT shall be placed on a turntable, and in the position closest to the normal use as declared by the user.
- (2) The test antenna shall be oriented initially for vertical polarization located 3m from the EUT to correspond to the transmitter.
- (3) The output of the antenna shall be connected to the measuring receiver and either a peak or quasi-peak detector was used for the measurement as indicated on the report. The detector selection is based on how close the emission level was approaching the limit.
- (4) The transmitter shall be switched on; if possible, without the modulation and the measurement receiver shall be tuned to the frequency of the transmitter under test.
- (5) The test antenna shall be raised and lowered through the specified range of height until the measuring receiver detects a maximum signal level.
- (6) The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- (7) The test antenna shall be raised and lowered again through the specified range of height until the measuring receiver detects a maximum signal level.

- (8) The maximum signal level detected by the measuring receiver shall be noted.
- (9) The measurement shall be repeated with the test antenna set to horizontal polarization.
- (10) Replace the antenna with a proper Antenna (substitution antenna).
- (11) The substitution antenna shall be oriented for vertical polarization and, if necessary, the length of the substitution antenna shall be adjusted to correspond to the frequency of transmitting.
- (12) The substitution antenna shall be connected to a calibrated signal generator.
- (13) If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- (14) The test antenna shall be raised and lowered through the specified range of the height to ensure that the maximum signal is received.
- (15) The input signal to substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.
- (16) The input level to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver.
- (17) The measurement shall be repeated with the test antenna and the substitution antenna oriented for horizontal polarization.



8.3 TEST SETUP BLOCK DIAGRAM

SUBSTITUTION METHOD: (Radiated Emissions)

Radiated Below 1GHz

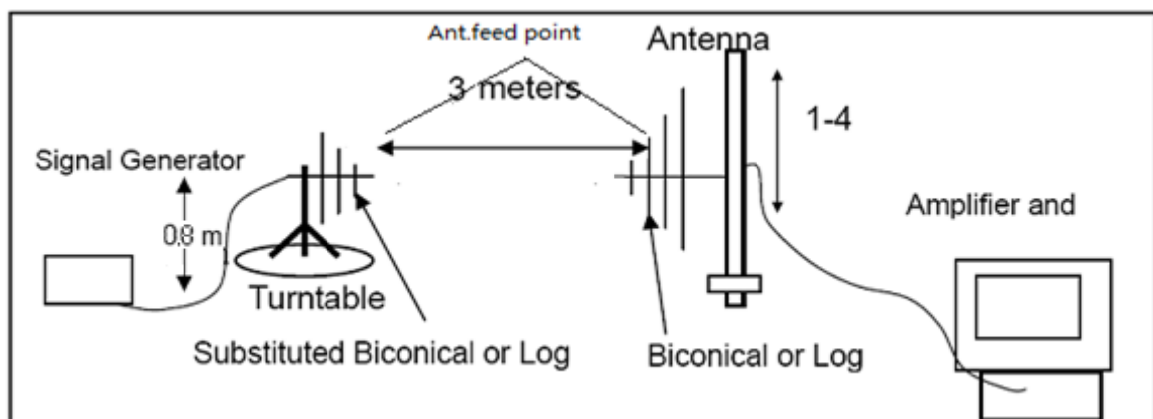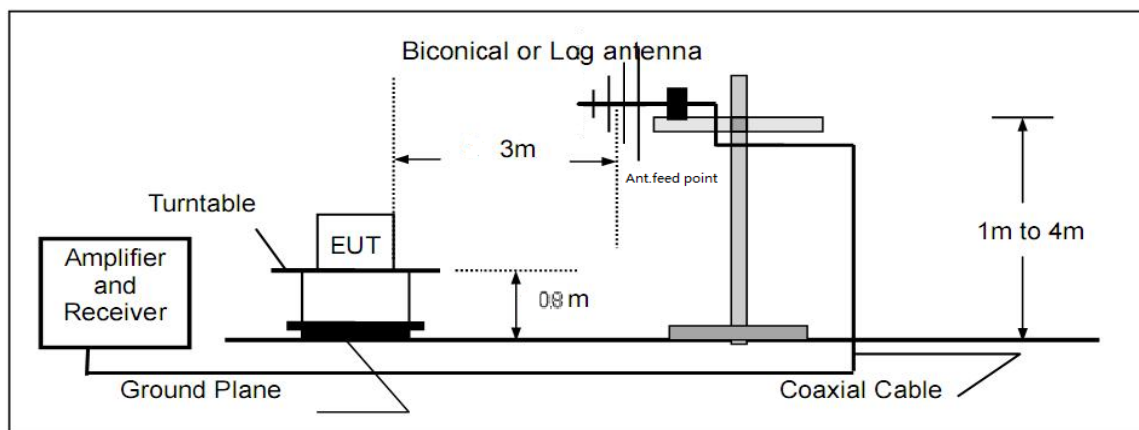

Radiated Above 1 GHz

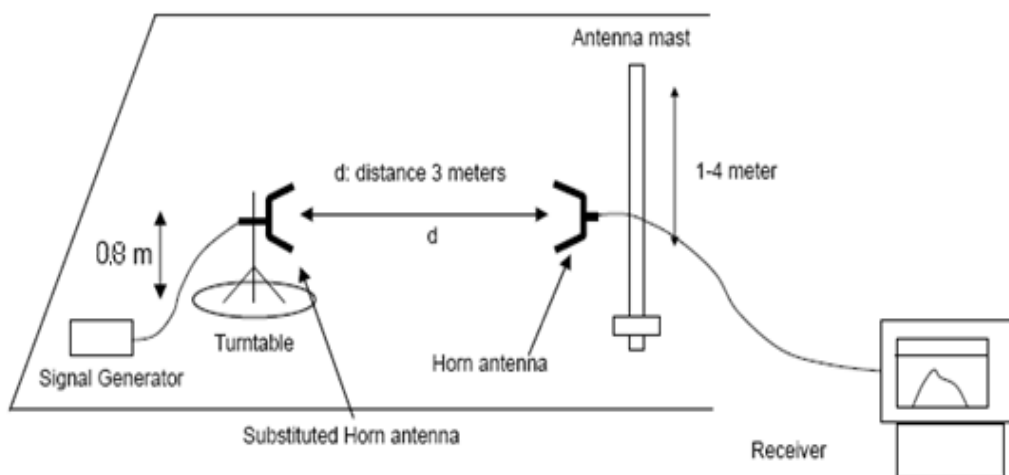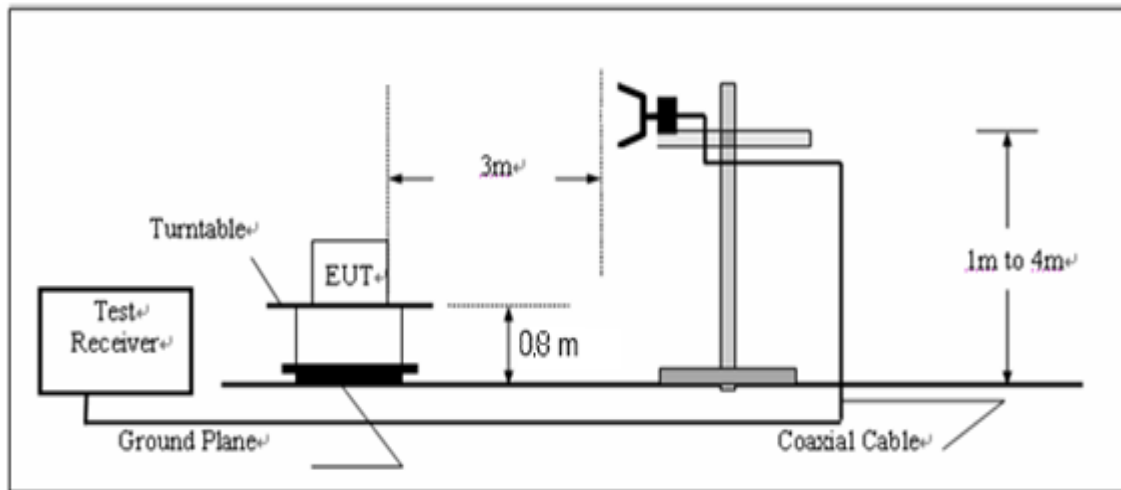

8.4 MEASUREMENT RESULTS:

Measurement Result for 12.5 KHz Channel Separation

On any frequency removed from the center of the authorized bandwidth by a displacement Frequency (fd in KHz) fo of more than 12.5 KHz: At least 50+10 log(P) dB or 70 dB, whichever is lesser attenuation.

Limit: At least 50+10 log (P) =50+10log (5) =57 (dB)—5W

At least 50+10 log (P) =50+10log (1) =50 (dB)—1W

Analog:

TEST RESULTS--5W

Measurement Result for 12.5 KHz Channel Separation @ 136.025MHz

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result Below carrier(dBc)	Limit below carrier(dBc)	Result(P/F)
136.025	H	0		pass
272.050	H	70.52	57	pass
408.08	H	72.31	57	pass
544.100	H	72.36	57	pass
680.125	H	73.27	57	pass
816.150	H	75.69	57	pass
952.175	H	77.51	57	pass
1088.200	H	81.36	57	pass
1224.225	H	82.54	57	pass
1360.250	H	83.06	57	pass

Emission Frequency (MHz)	Ant. Polarity(H/H)	Measurement Result Below carrier(dBc)	Limit below carrier(dBc)	Result(P/F)
136.025	V	0		pass
272.050	V	69.35	57	pass
408.08	V	70.16	57	pass
544.100	V	70.23	57	pass
680.125	V	72.52	57	pass
816.150	V	74.96	57	pass
952.175	V	75.31	57	pass
1088.200	V	77.28	57	pass
1224.225	V	79.74	57	pass
1360.250	V	81.15	57	pass

Measurement Result for 12.5 KHz Channel Separation @ 155.025MHz

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result Below carrier(dBc)	Limit below carrier(dBc)	Result(P/F)
155.025	H	0		pass
310.050	H	71.31	57	pass
465.075	H	72.61	57	pass
620.100	H	71.53	57	pass
775.125	H	73.62	57	pass
930.150	H	75.29	57	pass
1085.175	H	77.38	57	pass
1240.200	H	78.69	57	pass
1395.225	H	81.57	57	pass
1550.250	H	82.05	57	pass

Emission Frequency (MHz)	Ant. Polarity(H/H)	Measurement Result Below carrier(dBc)	Limit below carrier(dBc)	Result(P/F)
155.000	V	0		pass
310.000	V	70.89	57	pass
465.000	V	69.36	57	pass
620.000	V	72.59	57	pass
775.000	V	75.62	57	pass
930.000	V	76.15	57	pass
1085.000	V	78.36	57	pass
1240.000	V	70.57	57	pass
1395.000	V	80.39	57	pass
1550.000	V	81.06	57	pass

Measurement Result for 12.5 KHz Channel Separation @ 173.975MHz

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result Below carrier(dBc)	Limit below carrier(dBc)	Result(P/F)
173.975	H	0		pass
347.950	H	72.62	57	pass
521.925	H	72.96	57	pass
695.900	H	73.54	57	pass
869.875	H	74.62	57	pass
1043.850	H	76.85	57	pass
1217.825	H	77.43	57	pass
1391.800	H	78.35	57	pass
1565.775	H	80.51	57	pass
1739.750	H	82.06	57	pass

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result Below carrier(dBc)	Limit below carrier(dBc)	Result(P/F)
173.975	V	0		pass
347.950	V	70.57	57	pass
521.925	V	71.33	57	pass
695.900	V	73.28	57	pass
869.875	V	74.45	57	pass
1043.850	V	75.42	57	pass
1217.825	V	77.57	57	pass
1391.800	V	79.54	57	pass
1565.775	V	80.48	57	pass
1739.750	V	81.72	57	pass

TEST RESULTS--1W**Measurement Result for 12.5 KHz Channel Separation @ 136.025MHz**

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result Below carrier(dBc)	Limit below carrier(dBc)	Result(P/F)
136.025	H	0		pass
272.050	H	76.62	50	pass
408.08	H	75.38	50	pass
544.100	H	74.29	50	pass
680.125	H	75.37	50	pass
816.150	H	75.68	50	pass
952.175	H	77.35	50	pass
1088.200	H	80.82	50	pass
1224.225	H	81.69	50	pass
1360.250	H	82.64	50	pass

Emission Frequency (MHz)	Ant. Polarity(H/H)	Measurement Result Below carrier(dBc)	Limit below carrier(dBc)	Result(P/F)
136.025	V	0		pass
272.050	V	71.43	50	pass
408.08	V	72.64	50	pass
544.100	V	72.48	50	pass
680.125	V	72.63	50	pass
816.150	V	75.92	50	pass
952.175	V	76.44	50	pass
1088.200	V	76.51	50	pass
1224.225	V	81.66	50	pass
1360.250	V	82.27	50	pass

Measurement Result for 12.5 KHz Channel Separation @ 155.025MHz

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result Below carrier(dBc)	Limit below carrier(dBc)	Result(P/F)
155.025	H	0		pass
310.050	H	74.65	50	pass
465.075	H	73.62	50	pass
620.100	H	75.49	50	pass
775.125	H	76.94	50	pass
930.150	H	74.69	50	pass
1085.175	H	78.95	50	pass
1240.200	H	79.68	50	pass
1395.225	H	82.94	50	pass
1550.250	H	85.66	50	pass

Emission Frequency (MHz)	Ant. Polarity(H/H)	Measurement Result Below carrier(dBc)	Limit below carrier(dBc)	Result(P/F)
155.000	V	0		pass
310.000	V	72.59	50	pass
465.000	V	73.67	50	pass
620.000	V	74.33	50	pass
775.000	V	74.15	50	pass
930.000	V	77.62	50	pass
1085.000	V	79.54	50	pass
1240.000	V	80.66	50	pass
1395.000	V	81.94	50	pass
1550.000	V	82.48	50	pass

Measurement Result for 12.5 KHz Channel Separation @ 173.975MHz

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result Below carrier(dBc)	Limit below carrier(dBc)	Result(P/F)
173.975	H	0		pass
347.950	H	74.66	50	pass
521.925	H	73.58	50	pass
695.900	H	74.86	50	pass
869.875	H	75.92	50	pass
1043.850	H	76.11	50	pass
1217.825	H	78.63	50	pass
1391.800	H	79.61	50	pass
1565.775	H	81.47	50	pass
1739.750	H	83.46	50	pass

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result Below carrier(dBc)	Limit below carrier(dBc)	Result(P/F)
173.975	V	0		pass
347.950	V	72.69	50	pass
521.925	V	73.64	50	pass
695.900	V	75.91	50	pass
869.875	V	76.24	50	pass
1043.850	V	78.13	50	pass
1217.825	V	76.91	50	pass
1391.800	V	78.24	50	pass
1565.775	V	80.29	50	pass
1739.750	V	82.36	50	pass

Digital:**TEST RESULTS-5W****Measurement Result for 12.5 KHz Channel Separation @ 136.025MHz**

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result Below carrier(dBc)	Limit below carrier(dBc)	Result(P/F)
136.025	H	0		pass
272.050	H	71.53	57	pass
408.08	H	72.31	57	pass
544.100	H	72.92	57	pass
680.125	H	74.5	57	pass
816.150	H	75.27	57	pass
952.175	H	77.61	57	pass
1088.200	H	80.04	57	pass
1224.225	H	81.39	57	pass
1360.250	H	82.75	57	pass

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result Below carrier(dBc)	Limit below carrier(dBc)	Result(P/F)
136.025	V	0		pass
272.050	V	71.14	57	pass
408.08	V	71.62	57	pass
544.100	V	72.1	57	pass
680.125	V	73.63	57	pass
816.150	V	74.52	57	pass
952.175	V	76.16	57	pass
1088.200	V	79.5	57	pass
1224.225	V	80.85	57	pass
1360.250	V	81.16	57	pass

Measurement Result for 12.5 KHz Channel Separation @ 155.025MHz

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result Below carrier(dBc)	Limit below carrier(dBc)	Result(P/F)
155.025	H	0		pass
310.050	H	71.39	57	pass
465.075	H	72.16	57	pass
620.100	H	73.93	57	pass
775.125	H	75.34	57	pass
930.150	H	76.29	57	pass
1085.175	H	78.52	57	pass
1240.200	H	79.51	57	pass
1395.225	H	80.34	57	pass
1550.250	H	81.61	57	pass

Emission Frequency (MHz)	Ant. Polarity(H/H)	Measurement Result Below carrier(dBc)	Limit below carrier(dBc)	Result(P/F)
155.025	V	0		pass
310.050	V	69.85	57	pass
465.08	V	70.23	57	pass
620.100	V	70.02	57	pass
775.125	V	72.36	57	pass
930.150	V	73.06	57	pass
1085.175	V	74.56	57	pass
1240.200	V	75.36	57	pass
1395.225	V	78.83	57	pass
1550.250	V	80.36	57	pass

Measurement Result for 12.5 KHz Channel Separation @ 173.975MHz

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result Below carrier(dBc)	Limit below carrier(dBc)	Result(P/F)
173.975	H	0		pass
347.950	H	70.83	57	pass
521.925	H	71.52	57	pass
695.900	H	72.31	57	pass
869.875	H	73.34	57	pass
1043.850	H	74.5	57	pass
1217.825	H	75.63	57	pass
1391.800	H	78.68	57	pass
1565.775	H	81.36	57	pass
1739.750	H	82.25	57	pass

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result Below carrier(dBc)	Limit below carrier(dBc)	Result(P/F)
173.975	V	0		pass
347.950	V	70.36	57	pass
521.925	V	72.15	57	pass
695.900	V	74.39	57	pass
869.875	V	75.26	57	pass
1043.850	V	76.16	57	pass
1217.825	V	76.51	57	pass
1391.800	V	78.53	57	pass
1565.775	V	80.48	57	pass
1739.750	V	81.25	57	pass

TEST RESULTS-1W

Measurement Result for 12.5 KHz Channel Separation @ 136.025MHz

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result Below carrier(dBc)	Limit below carrier(dBc)	Result(P/F)
136.025	H	0		pass
272.050	H	73.55	50	pass
408.08	H	74.68	50	pass
544.100	H	75.92	50	pass
680.125	H	75.63	50	pass
816.150	H	78.51	50	pass
952.175	H	79.26	50	pass
1088.200	H	80.16	50	pass
1224.225	H	81.54	50	pass
1360.250	H	88.69	50	pass

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result Below carrier(dBc)	Limit below carrier(dBc)	Result(P/F)
136.025	V	0		pass
272.050	V	71.65	50	pass
408.08	V	72.59	50	pass
544.100	V	73.57	50	pass
680.125	V	74.69	50	pass
816.150	V	75.85	50	pass
952.175	V	77.66	50	pass
1088.200	V	78.94	50	pass
1224.225	V	79.84	50	pass
1360.250	V	80.67	50	pass

Measurement Result for 12.5 KHz Channel Separation @ 155.025MHz

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result Below carrier(dBc)	Limit below carrier(dBc)	Result(P/F)
155.025	H	0		pass
310.050	H	72.13	50	pass
465.075	H	73.52	50	pass
620.100	H	75.61	50	pass
775.125	H	75.92	50	pass
930.150	H	77.72	50	pass
1085.175	H	76.42	50	pass
1240.200	H	78.59	50	pass
1395.225	H	81.65	50	pass
1550.250	H	82.49	50	pass

Emission Frequency (MHz)	Ant. Polarity(H/H)	Measurement Result Below carrier(dBc)	Limit below carrier(dBc)	Result(P/F)
155.025	V	0		pass
310.050	V	73.62	50	pass
465.08	V	74.92	50	pass
620.100	V	75.46	50	pass
775.125	V	76.84	50	pass
930.150	V	77.61	50	pass
1085.175	V	78.94	50	pass
1240.200	V	79.12	50	pass
1395.225	V	80.62	50	pass
1550.250	V	81.96	50	pass

Measurement Result for 12.5 KHz Channel Separation @ 173.975MHz

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result Below carrier(dBc)	Limit below carrier(dBc)	Result(P/F)
173.975	H	0		pass
347.950	H	72.58	50	pass
521.925	H	73.62	50	pass
695.900	H	72.36	50	pass
869.875	H	73.51	50	pass
1043.850	H	75.92	50	pass
1217.825	H	76.21	50	pass
1391.800	H	77.92	50	pass
1565.775	H	80.64	50	pass
1739.750	H	82.64	50	pass

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result Below carrier(dBc)	Limit below carrier(dBc)	Result(P/F)
173.975	V	0		pass
347.950	V	72.61	50	pass
521.925	V	73.64	50	pass
695.900	V	75.91	50	pass
869.875	V	76.49	50	pass
1043.850	V	77.95	50	pass
1217.825	V	78.51	50	pass
1391.800	V	79.54	50	pass
1565.775	V	81.63	50	pass
1739.750	V	82.69	50	pass


8.5 EMISSION MASK PLOT

The detailed procedure employed for Emission Mask measurements are specified as following:

- The transmitter shall be modulated by a 2.5 kHz audio signal,
- The level of the audio signal employed is 16 dB greater than that necessary to produce 50% of rated system deviation. Rated system deviation is 2.5 kHz.


Analog:

The Worst Emission Mask (173.975MHz) for 12.5 KHz channel Separation (5W)

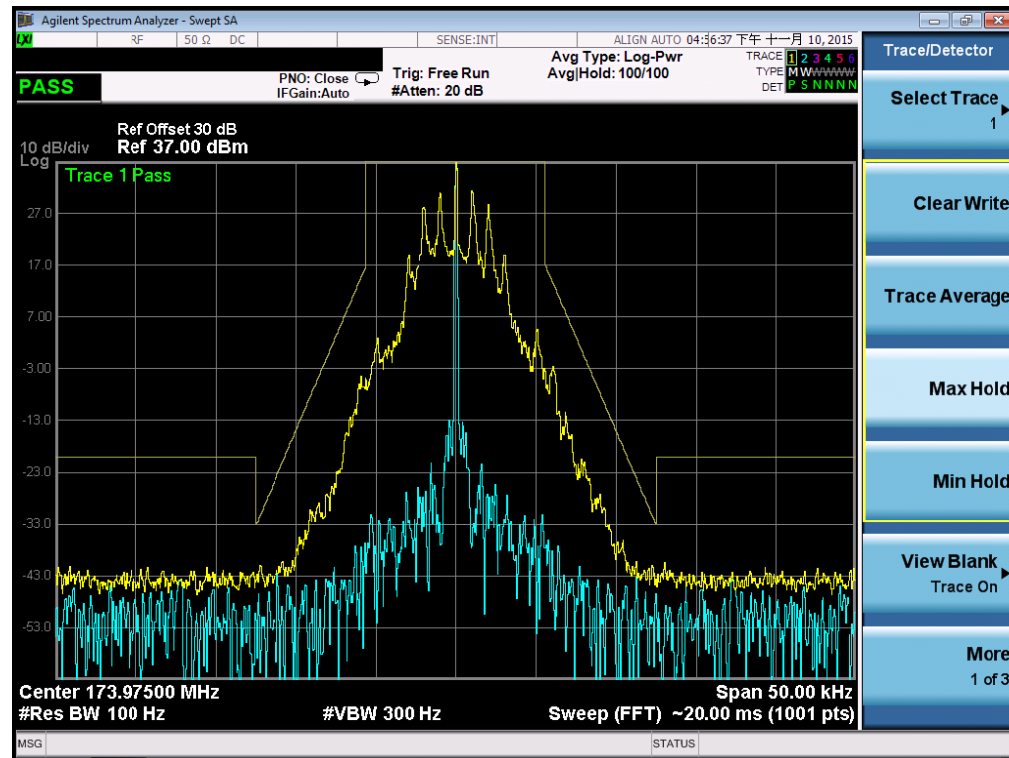


Digital:

The Worst Emission Mask (136.025MHz) for 12.5 KHz channel Separation (5W)

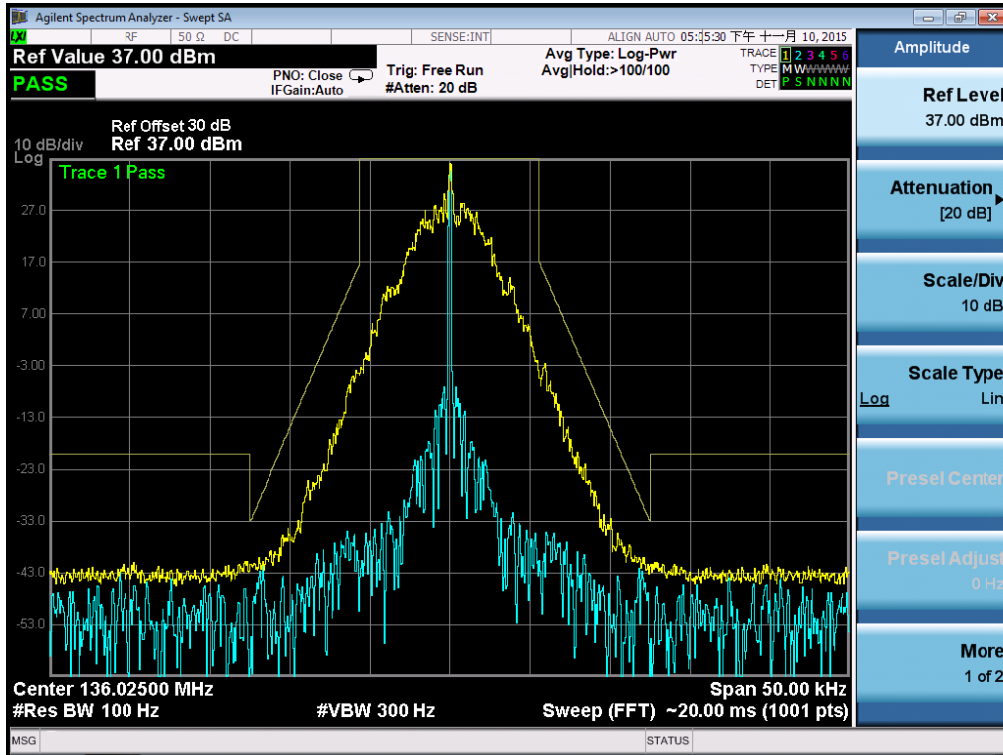

The Worst Emission Mask (173.975MHz) for 12.5 KHz channel Separation (1W)

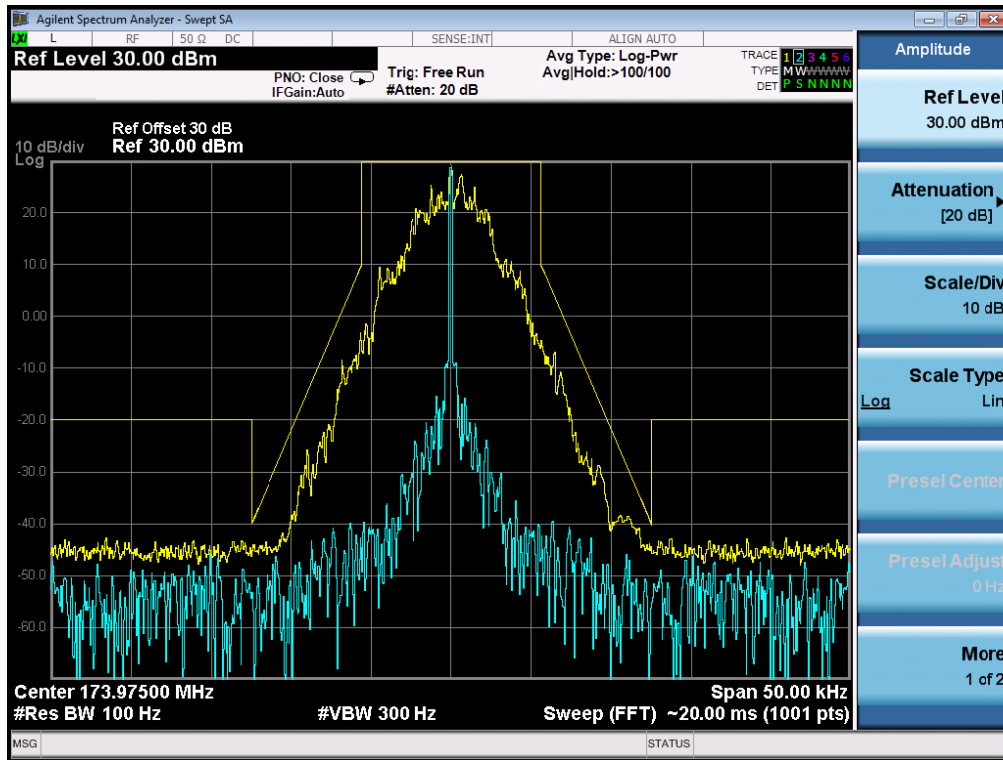

9. MODULATION CHARACTERISTICS

9.1 PROVISIONS APPLICABLE

According to CFR 47 section 2.1047(a), for Voice Modulation Communication Equipment, the frequency response of the audio modulation circuit over a range of 100 to 5000Hz shall be measured.

9.2 MEASUREMENT METHOD

9.2.1 Modulation Limit

- (1). Configure the EUT as shown in figure 1, adjust the audio input for 60% of rated system deviation at 1KHz using this level as a reference (0dB) and vary the input level from -20 to +20dB. Record the frequency deviation obtained as a function of the input level.
- (2). Repeat step 1 with input frequency changing to 300, 1000, 1500 and 3000Hz in sequence.

9.2.2 Audio Frequency Response

- (1). Configure the EUT as shown in figure 1.
- (2). Adjust the audio input for 20% of rated system deviation at 1 KHz using this level as a reference (0 dB).
- (3). Vary the Audio frequency from 100 Hz to 10 KHz and record the frequency deviation.
- (4). Audio Frequency Response = $20\log_{10}(\text{Deviation of test frequency}/\text{Deviation of 1 KHz reference})$.

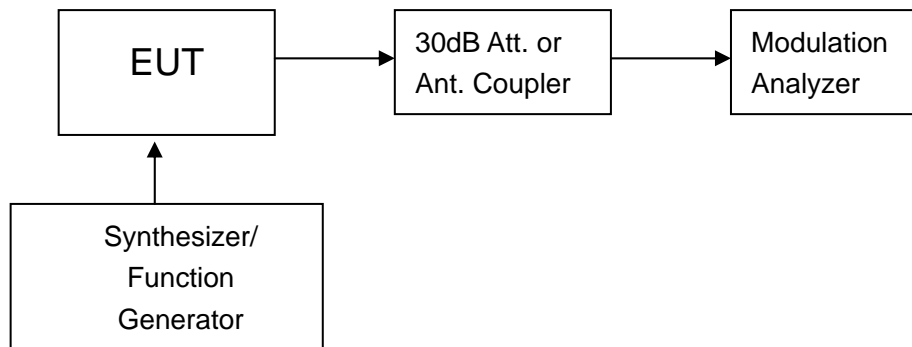


Figure 1: Modulation characteristic measurement configuration

9.3 MEASUREMENT RESULT


Analog:

TEST RESULTS—5W

(A). MODULATION LIMIT

Middle Channel @ 12.5 KHz Channel Separations

Modulation Level (dB)	Peak Freq. Deviation At 300 Hz	Peak Freq. Deviation At 1000 Hz	Peak Freq. Deviation At 1500 Hz	Peak Freq. Deviation At 3000 Hz
-20	0.22	0.8	0.75	0.9
-15	0.36	0.96	0.95	1.06
-10	0.45	1.31	1.22	1.36
-5	0.52	1.35	1.43	1.44
0	0.61	1.52	1.52	1.53
+5	0.76	1.62	1.75	1.85
+10	0.85	1.74	1.73	1.83
+15	0.95	1.63	1.72	1.88
+20	0.88	1.58	1.58	1.74

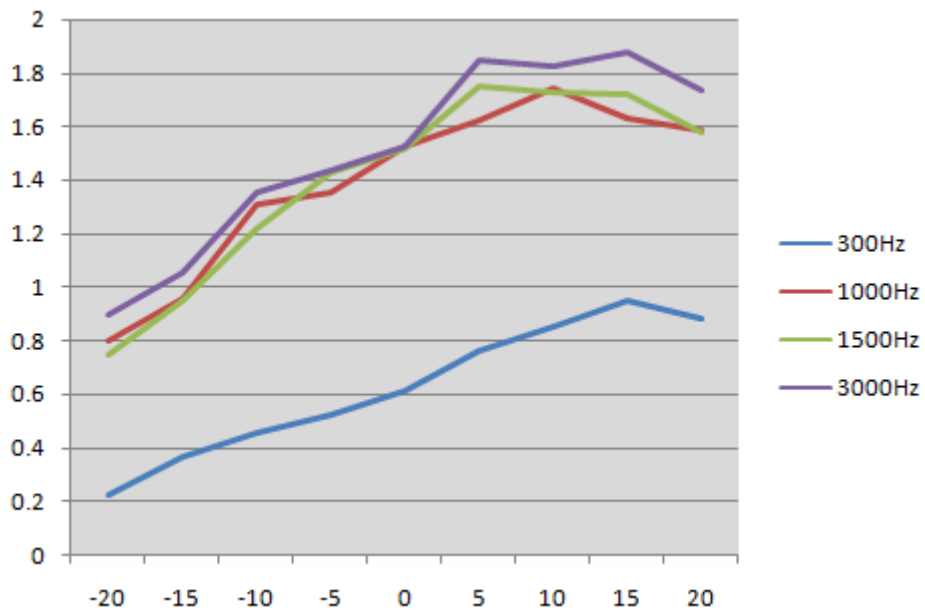


Note: All the modes had been tested, but only the worst data recorded in the report.

(B). AUDIO FREQUENCY RESPONSE:

Middle Channel @ 12.5 KHz Channel Separations

Frequency (Hz)	Deviation (KHz)	Audio Frequency Response(dB)
100	--	--
200	--	--
300	0.13	-11.70
400	0.19	-8.40
500	0.25	-6.02
600	0.29	-4.73
700	0.31	-4.15
800	0.38	-2.38
900	0.43	-1.31
1000	0.56	0.98
1200	0.60	1.58
1400	0.64	2.14
1600	0.75	3.52
1800	0.91	5.20
2000	0.98	5.85
2400	1.26	8.03
2500	1.45	9.25
2800	1.70	10.63
3000	1.76	10.93
3200	1.73	10.78
3600	1.57	9.94
4000	1.03	6.28
4500	0.86	4.71
5000	0.75	3.52
5500	0.57	1.14
6000	0.14	-11.06
6500	0.12	-12.40
7000	0.05	-20.00
7500	0.01	-33.98
9000	--	--
10000	--	--
14000	--	--
18000	--	--
20000	--	--
30000	--	--

Frequency Response of Middle Channel
12.5 KHz Channel Separations

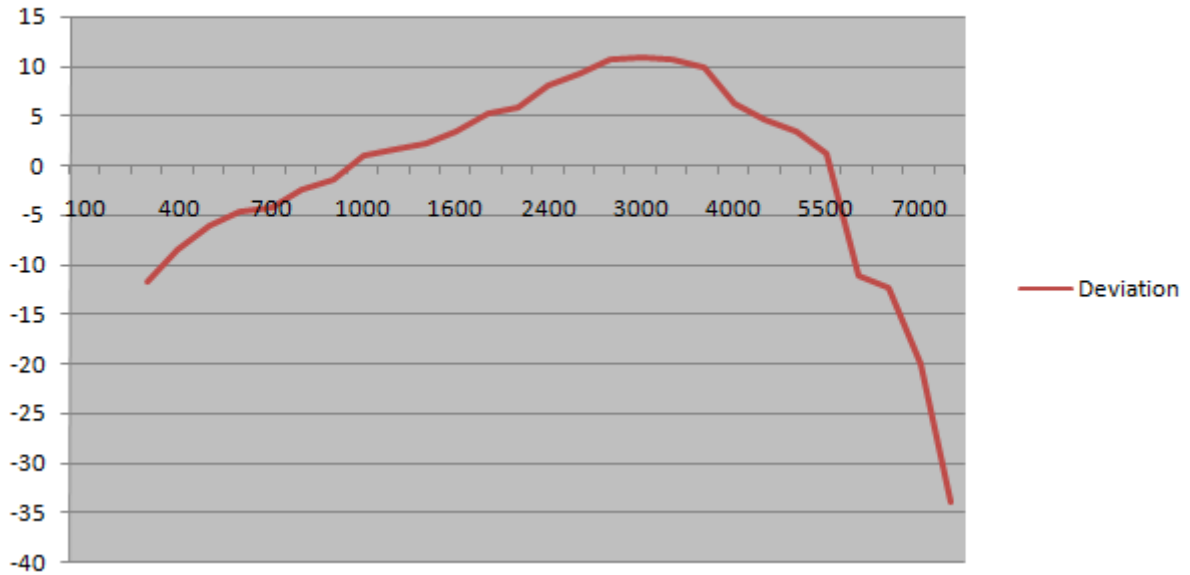


Note: All the modes had been tested, but only the worst data recorded in the report.

TEST RESULTS—1W
(A). MODULATION LIMIT

Top Channel @ 12.5 KHz Channel Separations

Modulation Level (dB)	Peak Freq. Deviation At 300 Hz	Peak Freq. Deviation At 1000 Hz	Peak Freq. Deviation At 1500 Hz	Peak Freq. Deviation At 3000 Hz
-20	0.21	0.65	0.73	0.96
-15	0.34	0.72	0.82	1.01
-10	0.39	1.02	1.11	1.15
-5	0.43	1.16	1.19	1.33
0	0.55	1.31	1.49	1.57
+5	0.78	1.56	1.63	1.72
+10	0.89	1.69	1.74	1.81
+15	0.91	1.63	1.78	1.85
+20	0.96	1.56	1.67	1.92

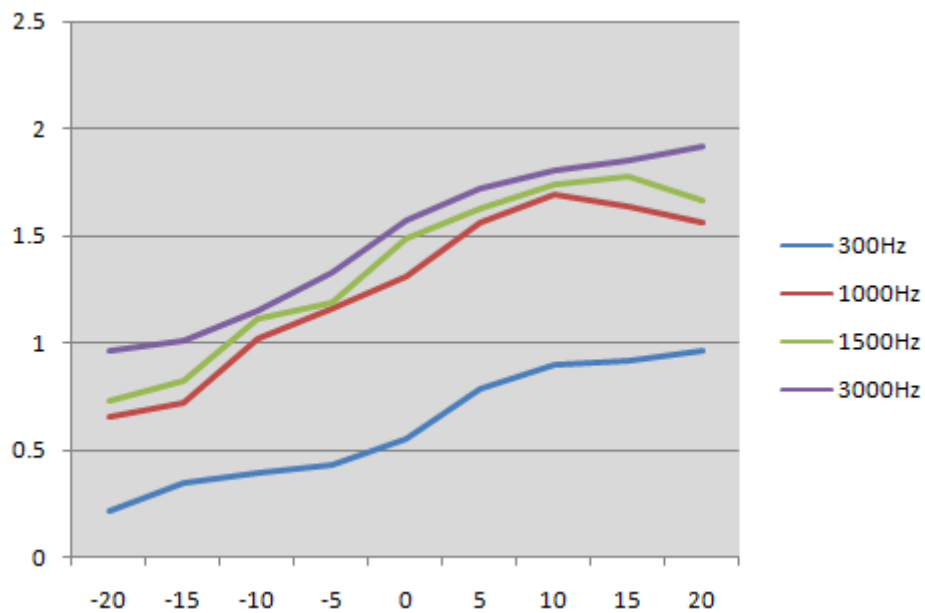

Note: All the modes had been tested, but only the worst data recorded in the report.


(B). AUDIO FREQUENCY RESPONSE:

Top Channel @ 12.5 KHz Channel Separations

Frequency (Hz)	Deviation (KHz)	Audio Frequency Response(dB)
100	--	--
200	--	--
300	0.1	-13.98
400	0.14	-11.06
500	0.22	-7.13
600	0.28	-5.04
700	0.3	-4.44
800	0.35	-3.10
900	0.41	-1.72
1000	0.43	-1.31
1200	0.52	0.34
1400	0.65	2.28
1600	0.74	3.41
1800	0.86	4.71
2000	0.93	5.39
2400	1.19	7.53
2500	1.41	9.00
2800	1.52	9.66
3000	1.72	10.73
3200	1.78	11.03
3600	1.43	9.13
4000	1.02	6.19
4500	0.83	4.40
5000	0.71	3.05
5500	0.48	-0.35
6000	0.17	-9.37
6500	0.05	-20.00
7000	0.03	-24.44
7500	0.01	-33.98
9000	--	--
10000	--	--
14000	--	--
18000	--	--
20000	--	--
30000	--	--

Frequency Response of Top Channel

12.5 KHz Channel Separations

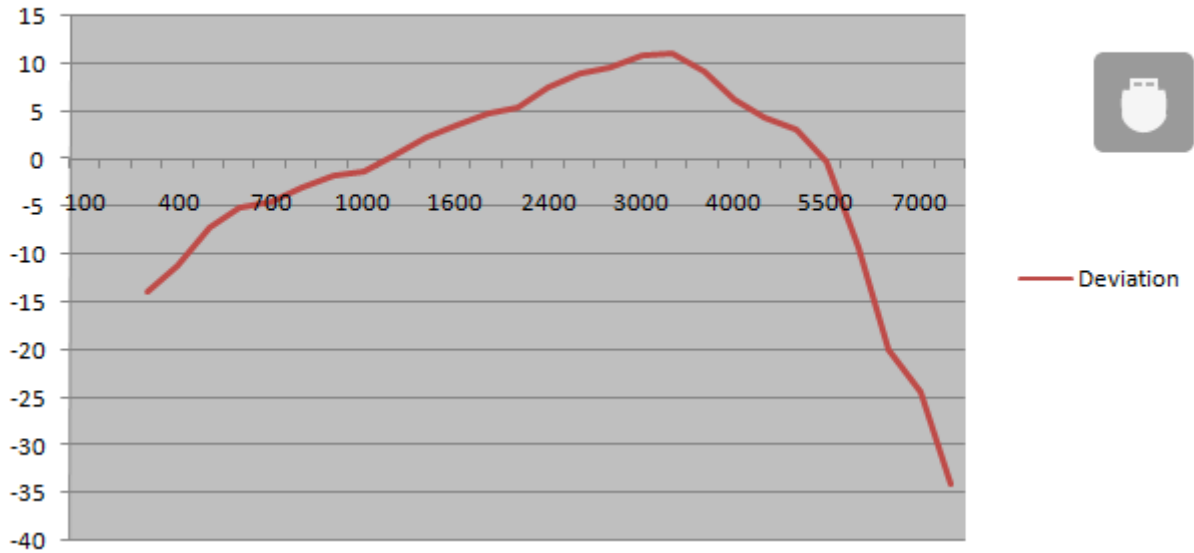

Note: All the modes had been tested, but only the worst data recorded in the report.


Digital:

TEST RESULTS—5W

(A). MODULATION LIMIT:

Middle Channel @ 12.5 KHz Channel Separations

Modulation Level (dB)	Peak Freq. Deviation At 300 Hz	Peak Freq. Deviation At 1000 Hz	Peak Freq. Deviation At 1500 Hz	Peak Freq. Deviation At 3000 Hz
-20	0.23	0.84	0.89	0.94
1	0.35	0.92	1.30	1.05
-10	0.62	1.13	1.28	1.38
-5	0.52	1.36	1.42	1.46
0	0.68	1.56	1.52	1.66
+5	0.75	1.66	1.78	1.89
+10	0.85	1.71	1.86	1.94
+15	0.92	1.64	1.76	1.85
+20	0.83	1.52	1.64	1.78

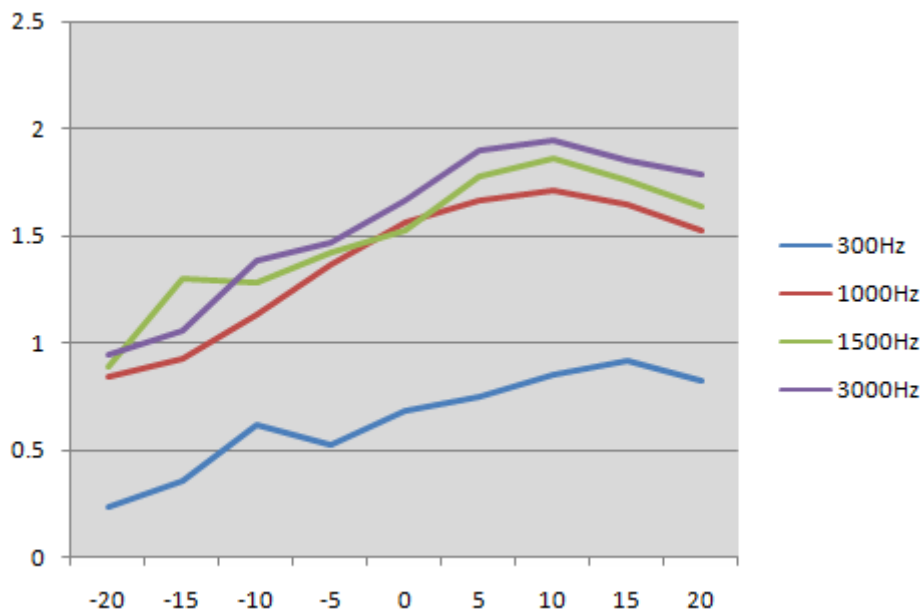

Note: All the modes had been tested, but only the worst data recorded in the report.


(B). AUDIO FREQUENCY RESPONSE:

Middle Channel @ 12.5 KHz Channel Separations

Frequency (Hz)	Deviation (KHz)	Audio Frequency Response(dB)
100	--	--
200	--	--
300	0.15	-10.46
400	0.22	-7.13
500	0.27	-5.35
600	0.31	-4.15
700	0.34	-3.35
800	0.39	-2.16
900	0.42	-1.51
1000	0.56	0.98
1200	0.60	1.58
1400	0.63	2.01
1600	0.77	3.75
1800	0.96	5.67
2000	0.99	5.93
2400	1.27	8.10
2500	1.48	9.43
2800	1.67	10.47
3000	1.77	10.98
3200	1.75	10.88
3600	1.58	9.99
4000	1.07	6.61
4500	0.82	4.30
5000	0.76	3.64
5500	0.58	1.29
6000	0.15	-10.46
6500	0.14	-11.06
7000	0.05	-20.00
7500	0.01	-33.98
9000	--	--
10000	--	--
14000	--	--
18000	--	--
20000	--	--
30000	--	--

Frequency Response of Middle Channel

12.5 KHz Channel Separations

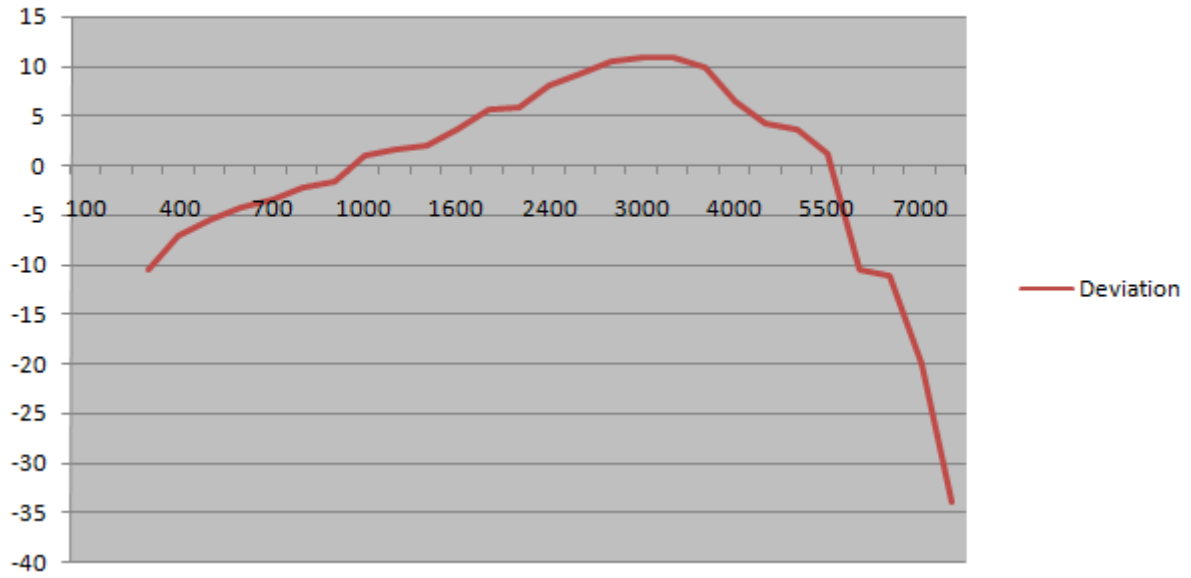


Note: All the modes had been tested, but only the worst data recorded in the report.

TEST RESULTS—1W

(A). MODULATION LIMIT:

Middle Channel @ 12.5 KHz Channel Separations

Modulation Level (dB)	Peak Freq. Deviation At 300 Hz	Peak Freq. Deviation At 1000 Hz	Peak Freq. Deviation At 1500 Hz	Peak Freq. Deviation At 3000 Hz
-20	0.21	0.59	0.73	0.92
1	0.34	0.72	0.82	1.04
-10	0.36	1.03	1.11	1.17
-5	0.42	1.19	1.25	1.32
0	0.55	1.34	1.52	1.58
+5	0.73	1.64	1.67	1.76
+10	0.85	1.72	1.76	1.85
+15	0.88	1.68	1.8	1.93
+20	0.93	1.58	1.69	1.9

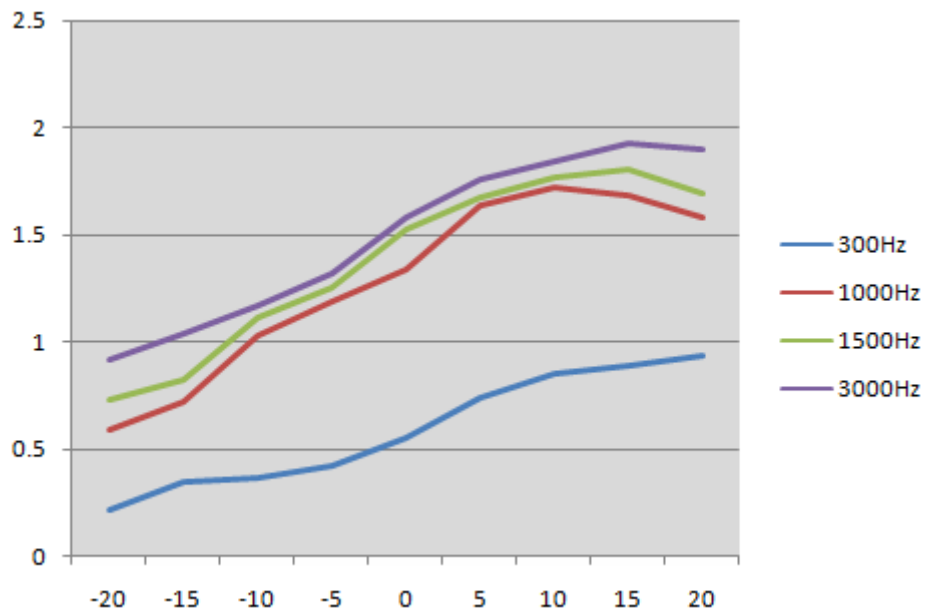


Note: All the modes had been tested, but only the worst data recorded in the report.

(B). AUDIO FREQUENCY RESPONSE:

Middle Channel @ 12.5 KHz Channel Separations

Frequency (Hz)	Deviation (KHz)	Audio Frequency Response(dB)
100	--	--
200	--	--
300	0.08	-15.92
400	0.15	-10.46
500	0.24	-6.38
600	0.26	-5.68
700	0.31	-4.15
800	0.33	-3.61
900	0.46	-0.72
1000	0.49	-0.18
1200	0.53	0.51
1400	0.63	2.01
1600	0.71	3.05
1800	0.89	5.01
2000	0.95	5.58
2400	1.16	7.31
2500	1.45	9.25
2800	1.54	9.77
3000	1.76	10.93
3200	1.81	11.17
3600	1.46	9.31
4000	1.03	6.28
4500	0.81	4.19
5000	0.69	2.80
5500	0.45	-0.92
6000	0.18	-8.87
6500	0.06	-18.42
7000	0.04	-21.94
7500	0.01	-33.98
9000	--	--
10000	--	--
14000	--	--
18000	--	--
20000	--	--
30000	--	--

Frequency Response of Middle Channel
12.5 KHz Channel Separations

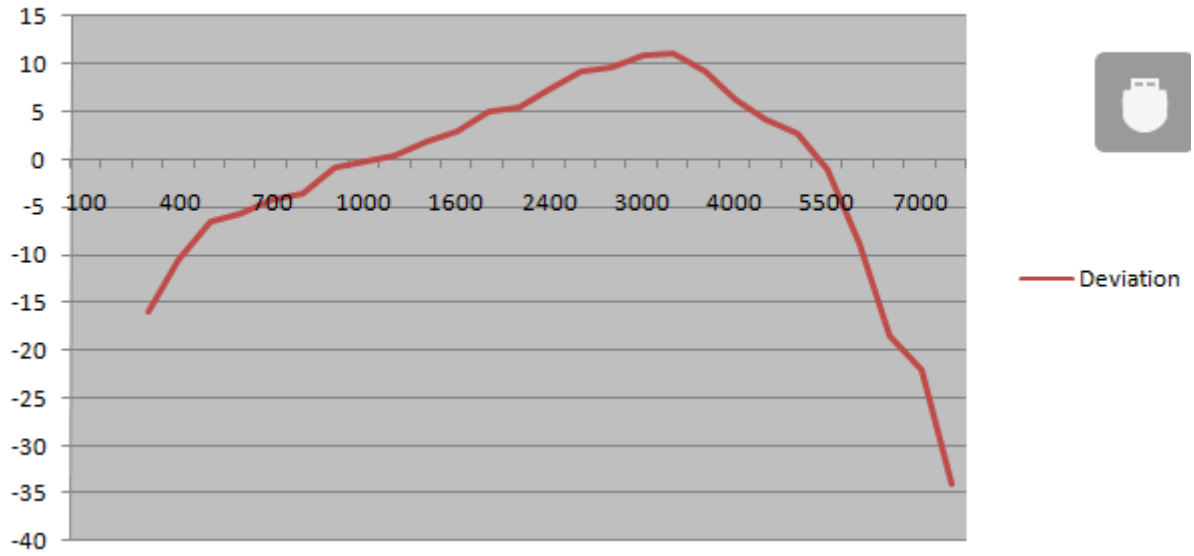

Note: All the modes had been tested, but only the worst data recorded in the report.

10. MAXIMUM TRANSMITTER POWER

10.1 PROVISIONS APPLICABLE


Per FCC §2.1046 and §90.205: Maximum ERP is dependent upon the station's antenna HAAT and required service area.

10.2 TEST PROCEDURE


The RF output of Two-way Radio was conducted to a spectrum analyzer through an appropriate attenuator.


10.3 TEST CONFIGURATION

Conducted Output Power:


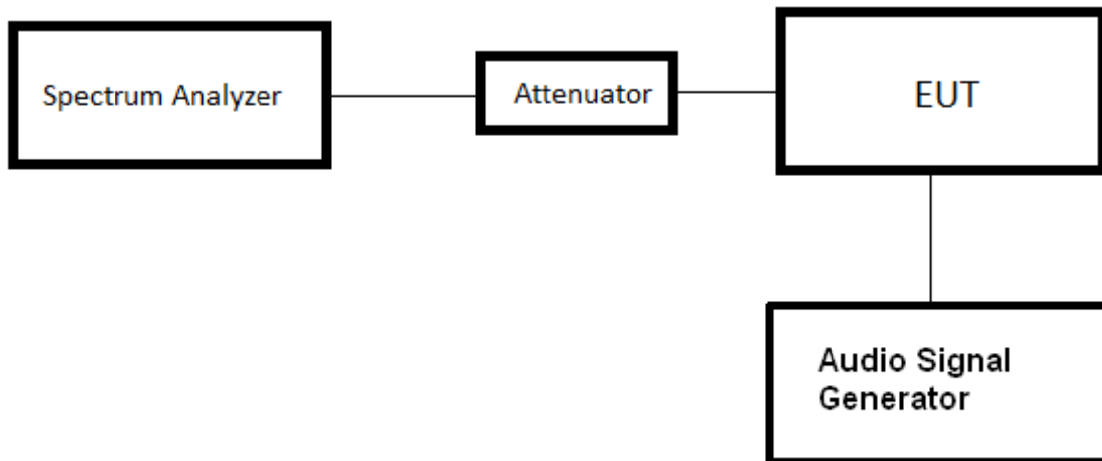


Effective Radiated Power :

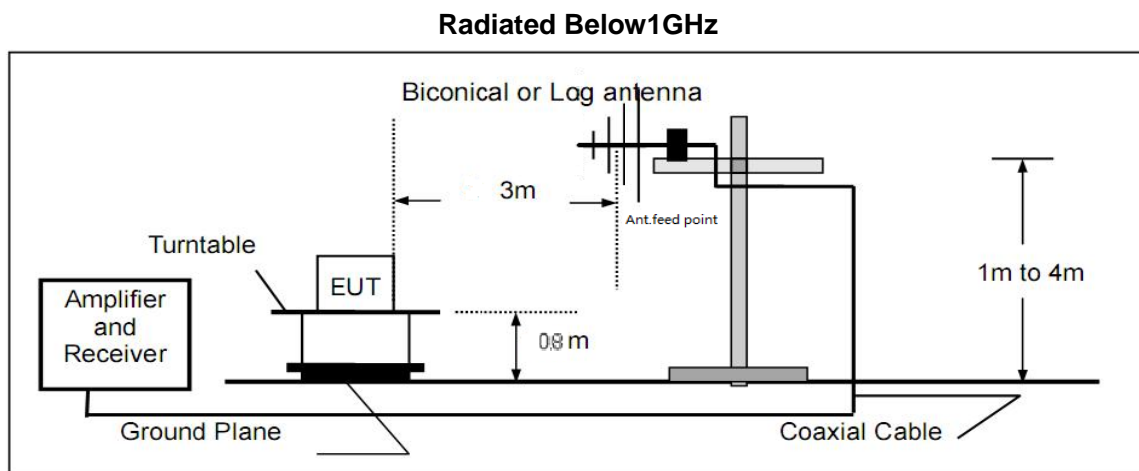

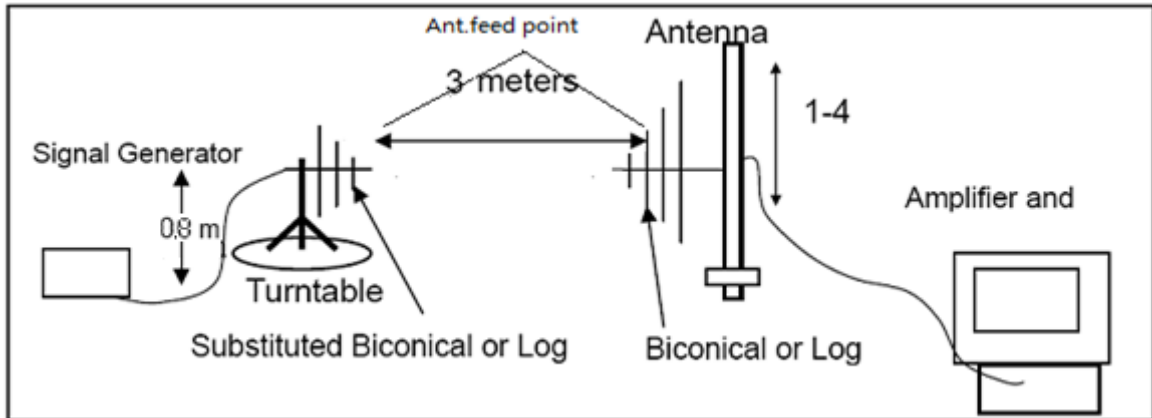

Radiated Above 1 GHz

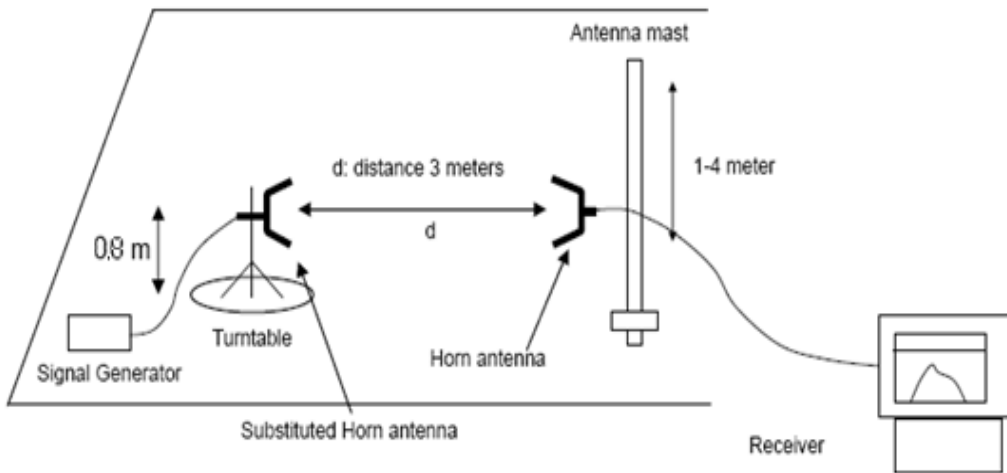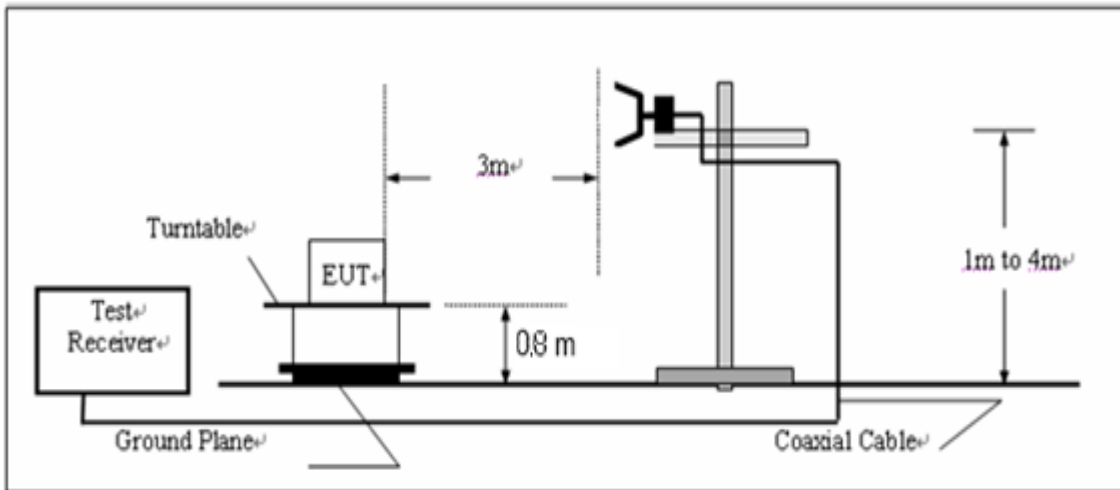

10.4 TEST RESULT

The maximum Conducted Power (CP) is

Analog: 5W/1 W for 12.5 KHz Channel Separation

Digital: 5W/1 W for 12.5 KHz Channel Separation

Calculation Formula: $CP = R + A + L$

* Note:

CP: The final Conducted Power

R : The reading value from spectrum analyzer

A : The attenuation value of the used attenuator

L : The loss of all connection cables

Analog:

Conducted Power Measurement Results		
Channel Separation	Channel	Measurement Result (dBm)
		For 36.99dBm(5W)
12.5 KHz	Bottom(136.025MHz)	36.91
	Middle(155.025MHz)	36.81
	Top (173.975MHz)	36.75

Radiated Power Measurement Results		
Channel Separation	Channel	Measurement Result (dBm)
		For 36.99dBm(5W)
12.5 KHz	Bottom(136.025MHz)	36.89
	Middle(155.025MHz)	36.83
	Top (173.975MHz)	36.75

Conducted Power Measurement Results		
Channel Separation	Channel	Measurement Result (dBm)
		For 30dBm(1W)
12.5 KHz	Bottom(136.025MHz)	29.77
	Middle(155.025MHz)	29.85
	Top (173.975MHz)	29.89

Radiated Power Measurement Results		
Channel Separation	Channel	Measurement Result (dBm)
		For 30dBm(1W)
12.5 KHz	Bottom(136.025MHz)	29.84
	Middle(155.025MHz)	29.91
	Top (173.975MHz)	29.83

Digital:

Date + voice:

Conducted Power Measurement Results		
Channel Separation	Channel	Measurement Result (dBm)
		For 36.99dBm(5W)
12.5 KHz	Bottom(136.025MHz)	36.72
	Middle(155.025MHz)	36.85
	Top (173.975MHz)	36.78

Radiated Power Measurement Results		
Channel Separation	Channel	Measurement Result (dBm)
		For 36.99dBm(5W)
12.5 KHz	Bottom(136.025MHz)	36.84
	Middle(155.025MHz)	36.79
	Top (173.975MHz)	36.76

Date transmission mode:

Conducted Power Measurement Results		
Channel Separation	Channel	Measurement Result (dBm)
		For 36.99dBm(5W)
12.5 KHz	Bottom(136.025MHz)	36.84
	Middle(155.025MHz)	36.79
	Top (173.975MHz)	36.76

Radiated Power Measurement Results		
Channel Separation	Channel	Measurement Result (dBm)
		For 36.99dBm(5W)
12.5 KHz	Bottom(136.025MHz)	36.83
	Middle(155.025MHz)	36.75
	Top (173.975MHz)	36.85

Date + voice:

Conducted Power Measurement Results		
Channel Separation	Channel	Measurement Result (dBm)
		For 30dBm(1W)
12.5 KHz	Bottom(136.025MHz)	29.86
	Middle(155.025MHz)	29.87
	Top (173.975MHz)	29.84

Radiated Power Measurement Results		
Channel Separation	Channel	Measurement Result (dBm)
		For 30dBm(1W)
12.5 KHz	Bottom(136.025MHz)	29.89
	Middle(155.025MHz)	29.92
	Top (173.975MHz)	29.84

Date transmission mode:


Conducted Power Measurement Results		
Channel Separation	Channel	Measurement Result (dBm)
		For 30dBm(1W)
12.5 KHz	Bottom(136.025MHz)	29.81
	Middle(155.025MHz)	29.75
	Top (173.975MHz)	29.79

Radiated Power Measurement Results		
Channel Separation	Channel	Measurement Result (dBm)
		For 30dBm(1W)
12.5 KHz	Bottom(136.025MHz)	29.80
	Middle(155.025MHz)	29.79
	Top (173.975MHz)	29.82


10.5 CONDUCT SPURIOUS PLOT

Analog:

Conducted Spurious Emission (worst) @173.975MHz With 12.5 KHz Channel Separation-5W
30MHz-1GHz

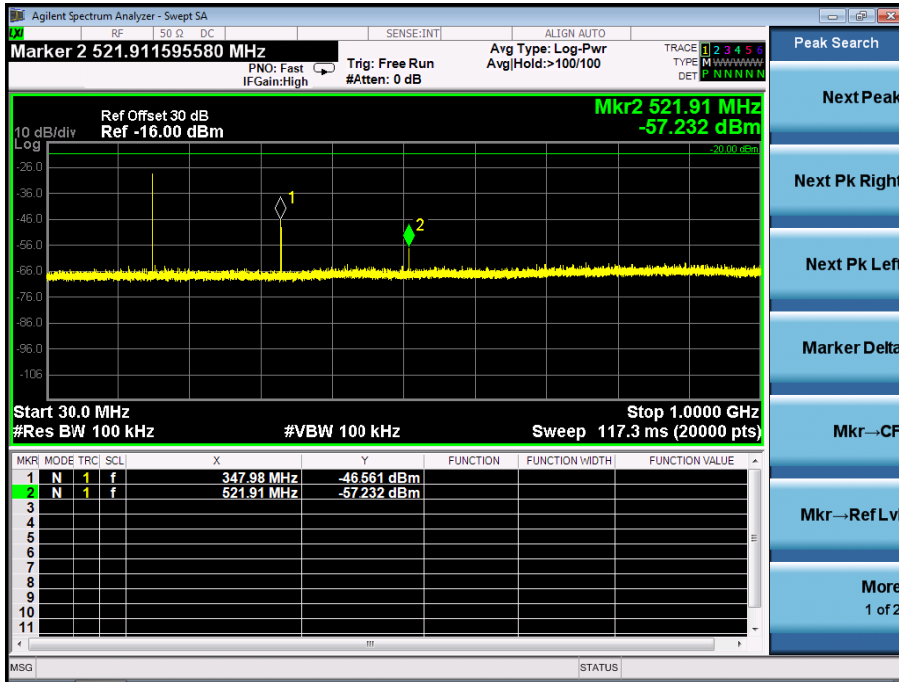


Conduct Spurious Emission (worst) @ 173.975MHz With 12.5 KHz Channel Separation-5W
1GHz-12.75GHz

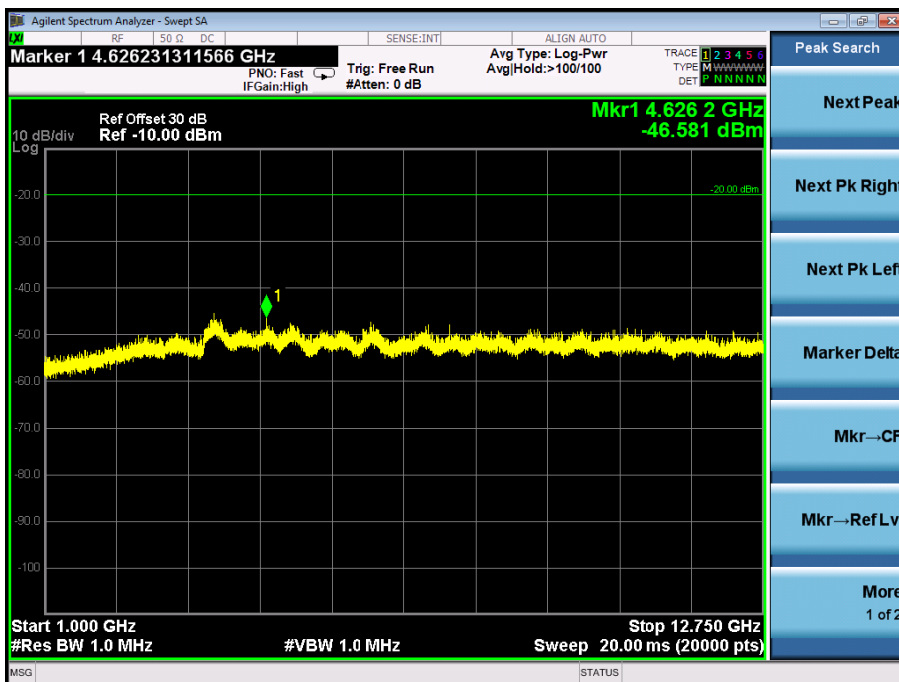


Digital:


Conducted Spurious Emission (worst) @136.025 MHz With 12.5 KHz Channel Separation-5W
30MHz-1GHz

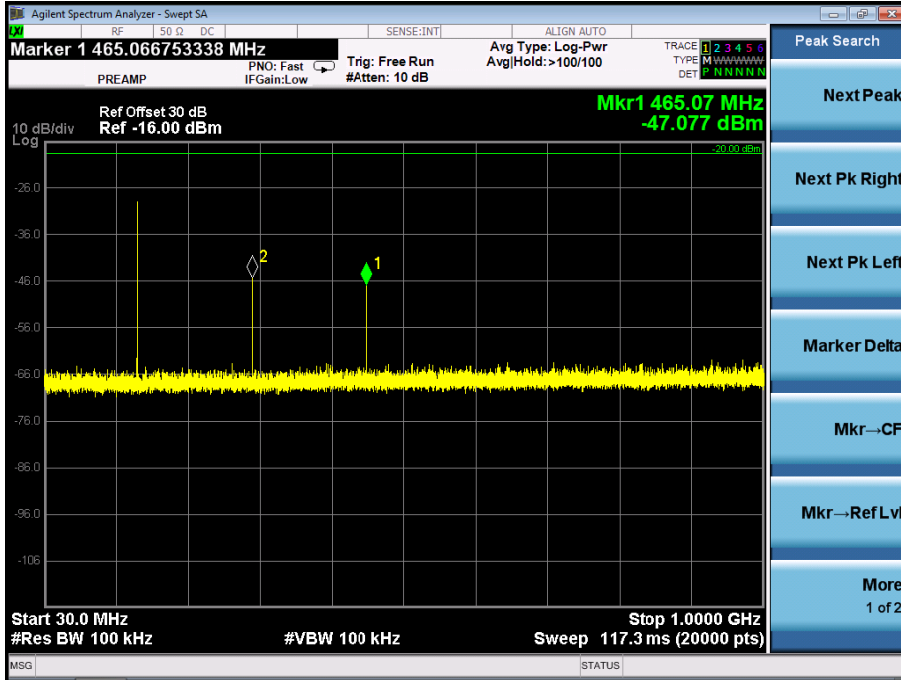


Conduct Spurious Emission (worst) @ 136.025MHz With 12.5 KHz Channel Separation-5W
1GHz-12.75GHz

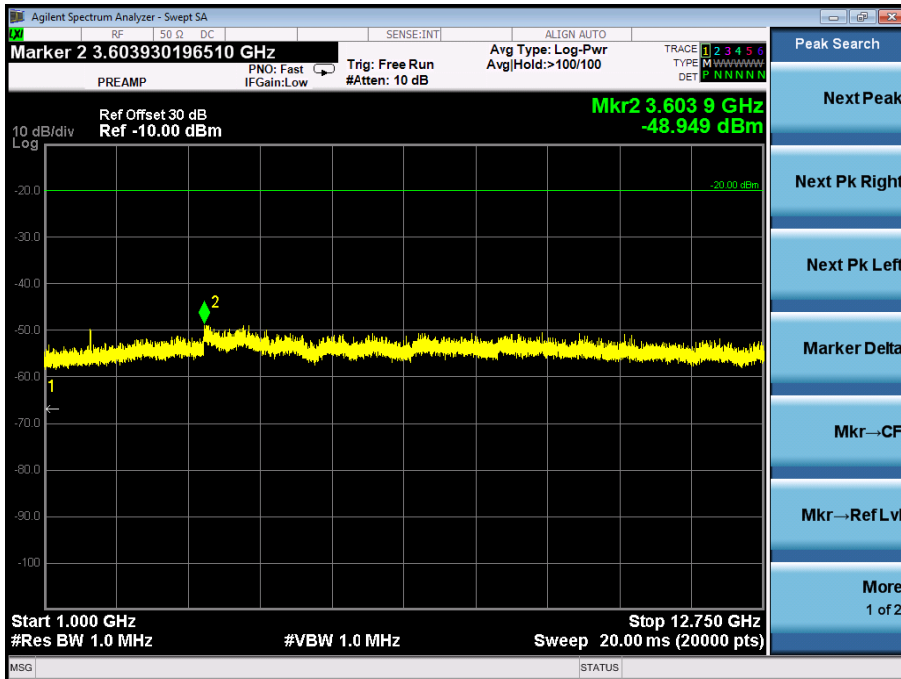

Conducted Spurious Emission (worst) @173.975MHz With 12.5 KHz Channel Separation-1W
 30MHz-1GHz

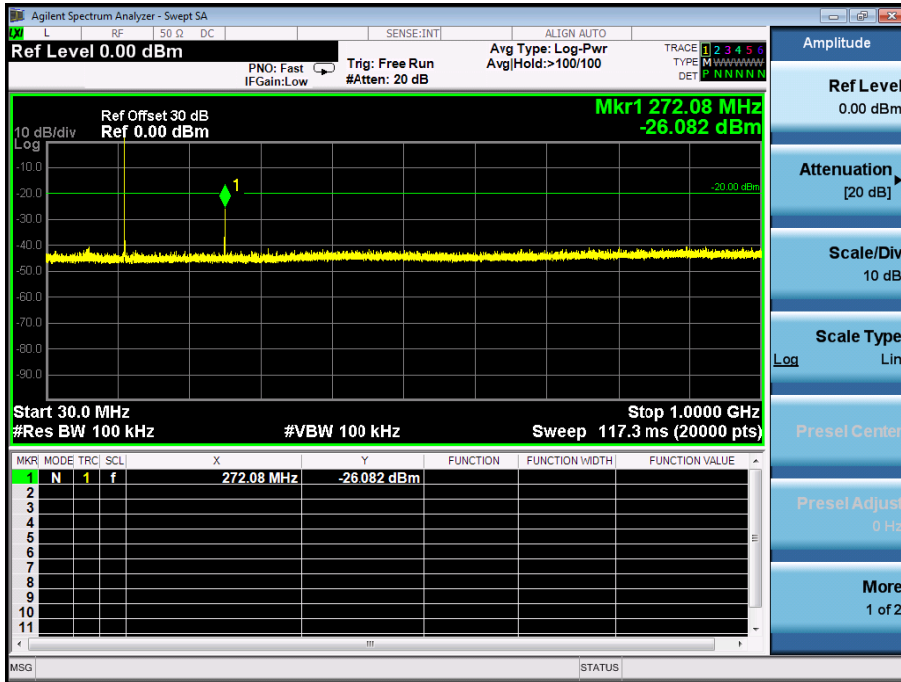

Conduct Spurious Emission (worst) @ 173.975MHz With 12.5 KHz Channel Separation-1W
 1GHz-12.75GHz

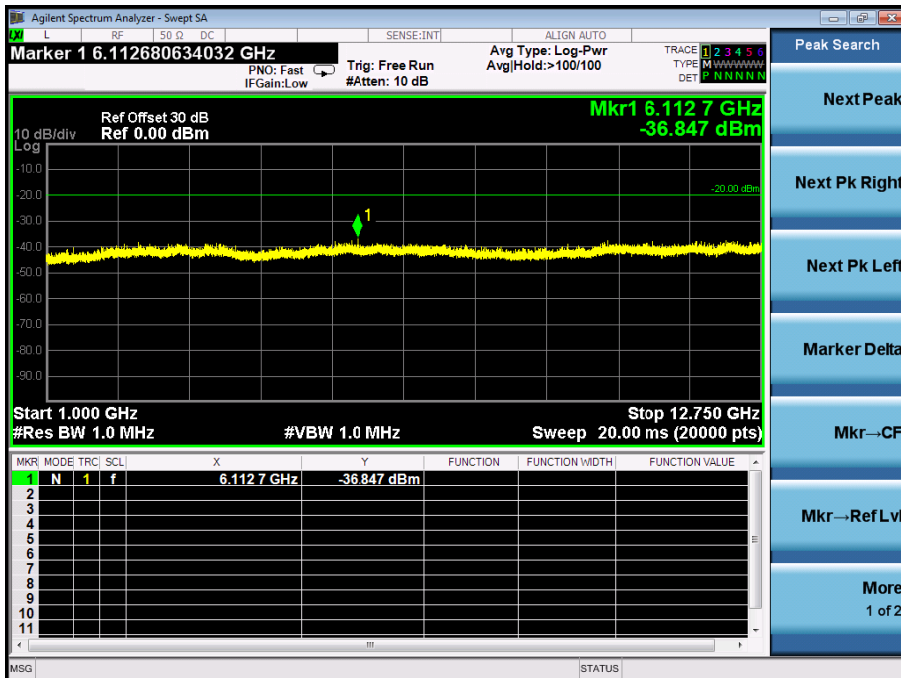

Note: only result the worst case in this part.

11. TRANSMITTER FREQUENCY BEHAVIOR

11.1 PROVISIONS APPLICABLE

Section 90.214

Time intervals ^{1, 2}	Maximum frequency difference ³	All equipment	
		150 to 174 MHz	421 to 512 MHz
Transient Frequency Behavior for Equipment Designed to Operate on 25 kHz Channels			
t_1^4	± 25.0 kHz	5.0 ms	10.0 ms
t_2	± 12.5 kHz	20.0 ms	25.0 ms
t_3^4	± 25.0 kHz	5.0 ms	10.0 ms
Transient Frequency Behavior for Equipment Designed to Operate on 12.5 kHz Channels			
t_1^4	± 12.5 kHz	5.0 ms	10.0 ms
t_2	± 6.25 kHz	20.0 ms	25.0 ms
t_3^4	± 12.5 kHz	5.0 ms	10.0 ms
Transient Frequency Behavior for Equipment Designed to Operate on 6.25 kHz Channels			
t_1^4	± 6.25 kHz	5.0 ms	10.0 ms
t_2	± 3.125 kHz	20.0 ms	25.0 ms
t_3^4	± 6.25 kHz	5.0 ms	10.0 ms

¹ t_{on} is the instant when a 1 kHz test signal is completely suppressed, including any capture time due to phasing.

t_1 is the time period immediately following t_{on} .

t_2 is the time period immediately following t_1 .

t_3 is the time period from the instant when the transmitter is turned off until t_{off} .

t_{off} is the instant when the 1 kHz test signal starts to rise.

² During the time from the end of t_2 to the beginning of t_3 , the frequency difference must not exceed the limits specified in §90.213.

³ Difference between the actual transmitter frequency and the assigned transmitter frequency.

⁴ If the transmitter carrier output power rating is 6 watts or less, the frequency difference during this time period may exceed the maximum frequency difference for this time period.

11.2 TEST METHOD

TIA/EIA-603 2.2.19

11.3 DESCRIBE LIMIT LINE OF TRANSMITTER FREQUENCY BEHAVIOR


ton: The switch-on instant t_{on} of a transmitter is defined by the condition when the output power, measured at the antenna terminal, exceeds 0,1 % of the full output power (-30 dBc).


t1: period of time starting at t_{on} and finishing according to above 11.1

t2: period of time starting at the end of t_1 and finishing according to above 11.1

toff: switch-off instant defined by the condition when the output power falls below 0,1 % of the full output power (-30 dBc).


t3: period of time that finishing at t_{off} and starting according to above 11.1

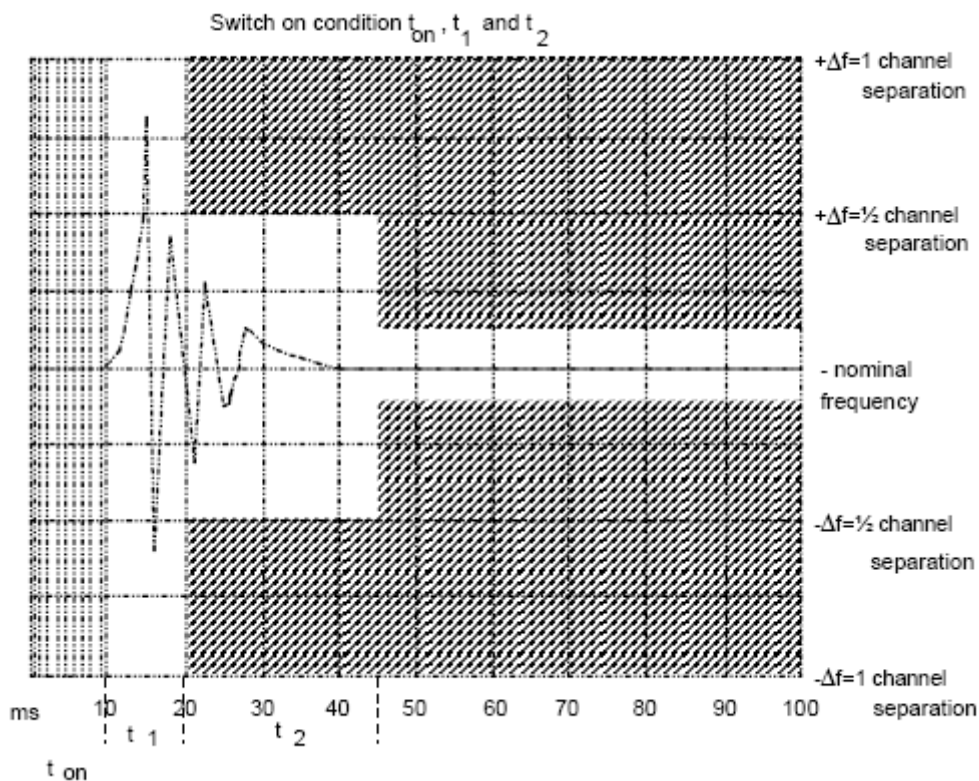

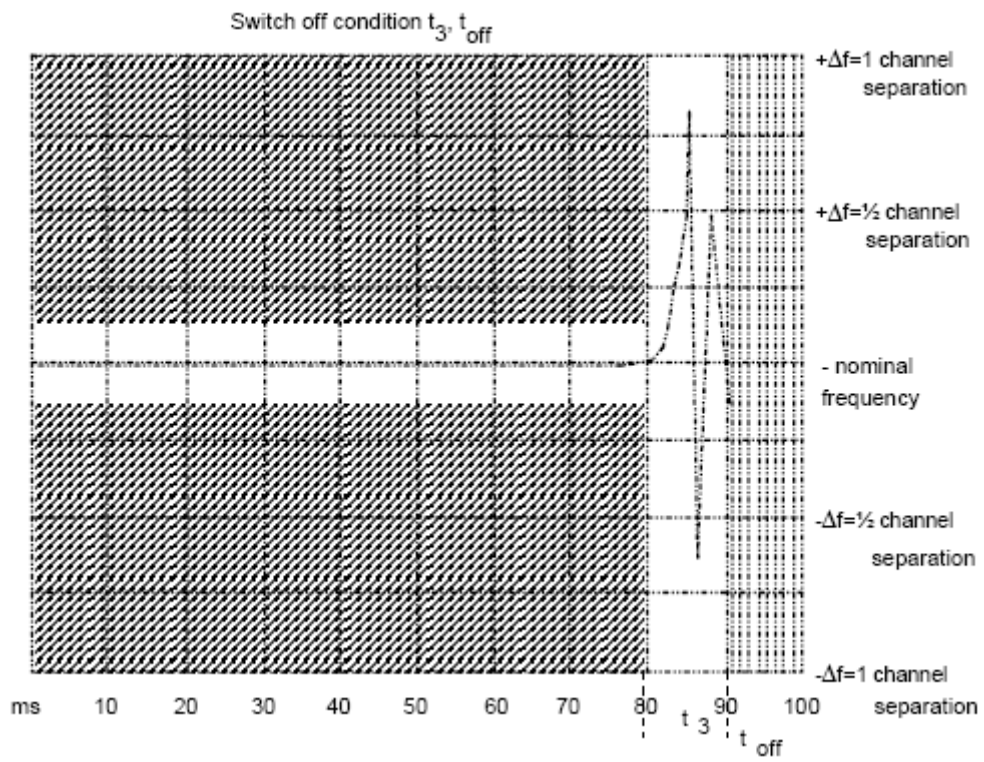


11.4 MEASURE RESULT

Transmitter Frequency Behavior @ 12.5 KHz Channel Separation--Off to On

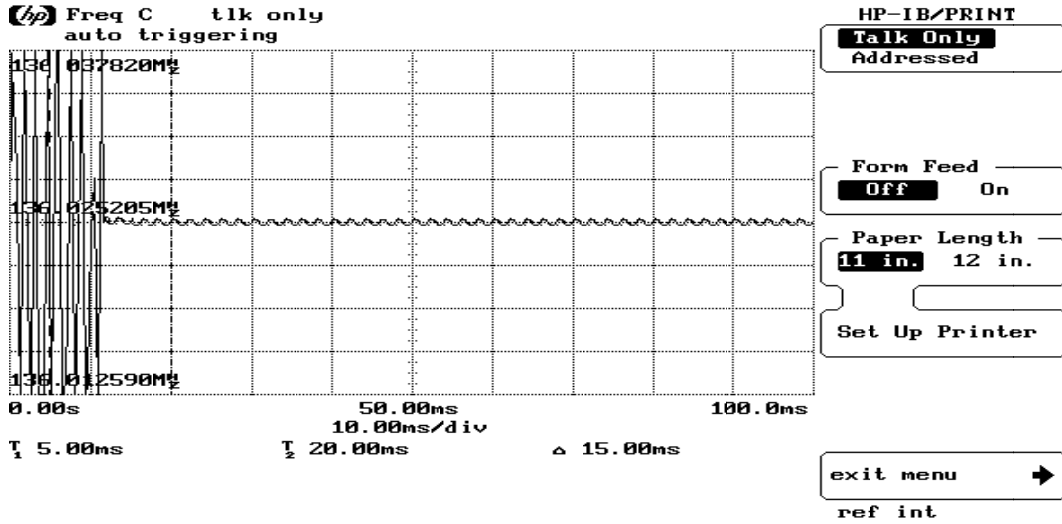

Transmitter Frequency Behavior @ 12.5 KHz Channel Separation--On to Off

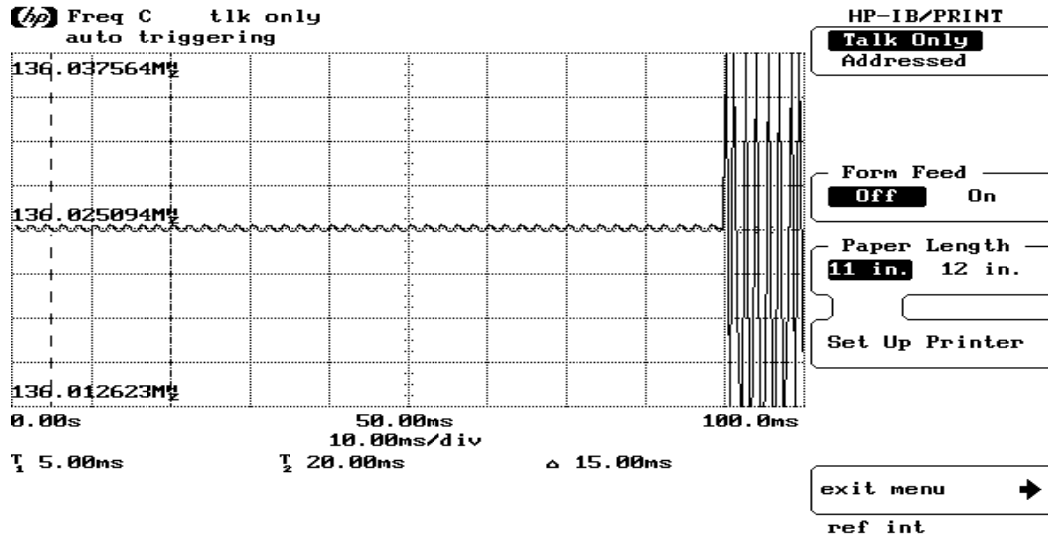

12. AUDIO LOW PASS FILTER RESPONSE

12.1 LIMITS

2.1047(a): Voice modulated communication equipment. A curve or equivalent data showing the frequency response of the audio modulating circuit over a range of 100 to 5000 Hz shall be submitted. For equipment required to have an audio low-pass filter, a curve showing the frequency response of the filter or of all circuitry installed between the modulation limiter and the modulated stage shall be submitted.

90.242(b)(8): Recommended audio filter attenuation characteristics are given below:

Audio band	Minimum Attenuation Rel. to 1 KHz Attenuation
3 – 20 KHz 20 – 30 KHz	$60 \log_{10}(f/3)$ dB where f is in KHz 50dB

12.2. METHOD OF MEASUREMENTS


The rated audio input signal was applied to the input of the audio low-pass filter (or of all modulation stages) using an audio oscillator, this input signal level and its corresponding output signal were then measured and recorded using the FFT Digital Spectrum Analyzer. Tests were repeated at different audio signal frequencies from 0 to 50 KHz.

12.3 TEST DATA

12.5 KHZ CHANNEL SPACING, F3E, FREQUENCY OF ALL MODULATION STATES R VHF)

Frequency	Audio In	Audio out	Attenuation	Attenuation	Recommended
(KHz)	(dBV)	(dBV)	(Out_In)	Rel.to 3 KHz	Attenuation
			dB	(dB)	(dB)
0.1	-76.17	-31.21	46.38	-36.53	
0.2	-76.17	-17.38	58.25	-25.63	
0.4	-76.17	-6.29	71.65	-12.83	
0.6	-76.17	0.41	74.25	-6.43	
0.8	-76.17	4.17	78.95	-2.93	
1.0	-76.17	7.18	83.65	-0.03	
1.5	-76.17	8.27	84.85	2.16	
2.0	-76.17	8.99	85.35	1.57	
2.5	-76.17	7.52	83.85	0.67	
3.0	-76.17	6.27	82.55	-1.82	0
3.5	-76.17	2.63	78.45	-4.93	-4
4.0	-76.17	-2.3	74.65	-9.43	-7
4.5	-76.17	-9.21	68.25	-16.53	-12
5.0	-76.17	-15.17	60.65	-21.73	-15
6.0	-76.17	-21.23	54.15	-28.63	-18
7.0	-76.17	-31.61	46.25	-36.43	-22
8.0	-76.17	-39.22	37.95	-47.63	-26
9.0	-76.17	-61.95	15.15	-66.93	-28
10.0	-76.17	-61.95	15.15	-66.43	-31
12.0	-76.17	-61.95	15.15	-66.43	-37
14.0	-76.17	-61.95	15.15	-66.43	-40
16.0	-76.17	-61.95	15.15	-66.43	-44
18.0	-76.17	-61.95	15.15	-66.43	-47
20.0	-76.17	-61.95	15.15	-66.43	-49
25.0	-76.17	-61.95	15.15	-66.43	-49
30.0	-76.17	-61.95	15.15	-66.43	-49
35.0	-76.17	-61.95	15.15	-66.43	-49
40.0	-76.17	-61.95	15.15	-66.43	-49
45.0	-76.17	-61.95	15.15	-66.43	-49
50.0	-76.17	-61.95	15.15	-66.43	-49



Note: Due to the difficulty of measuring the Frequency Response of the internal low-pass filter, the Frequency Response of All Modulation States is performed to show the roll-off at 3 KHz in comparison with the recommended audio filter attenuation.

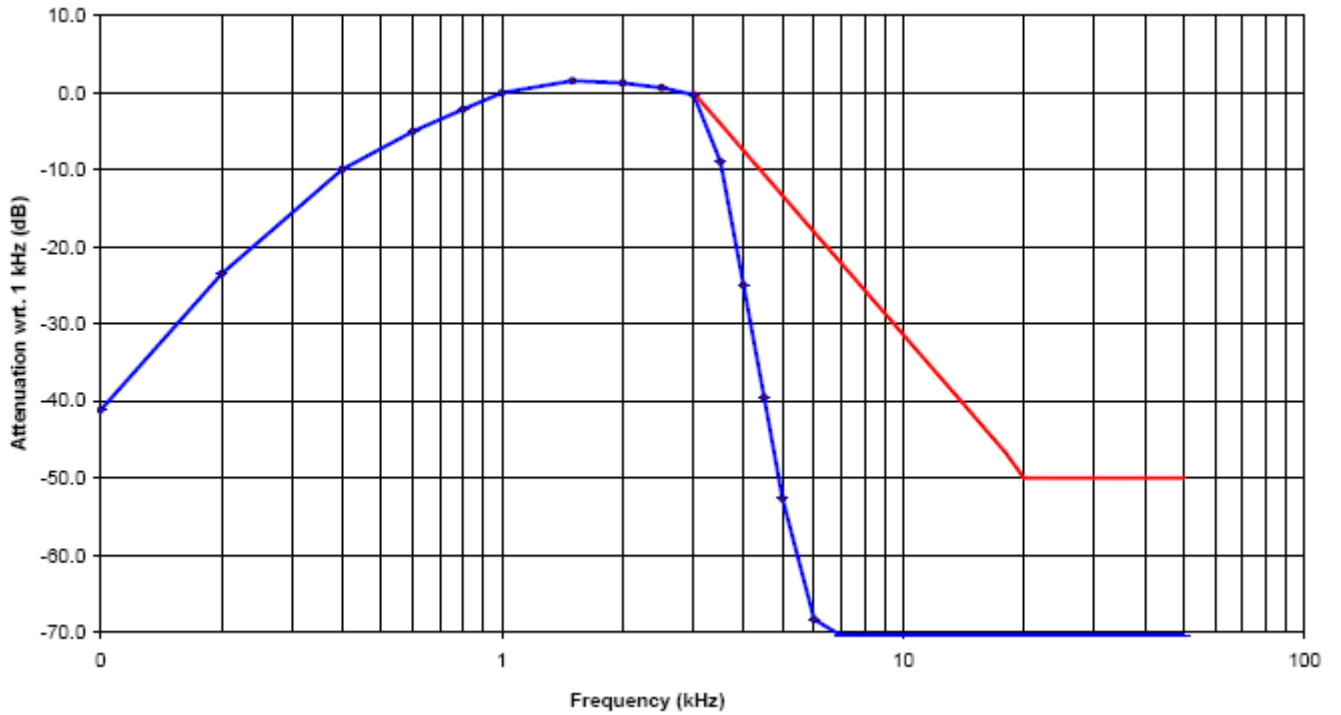

Note: All the UHF and the VHF had been test, but only the worst data recorded in the reported.

APPENDIX I: PHOTOGRAPHS OF SETUP

RADIATED EMISSION TEST SETUP

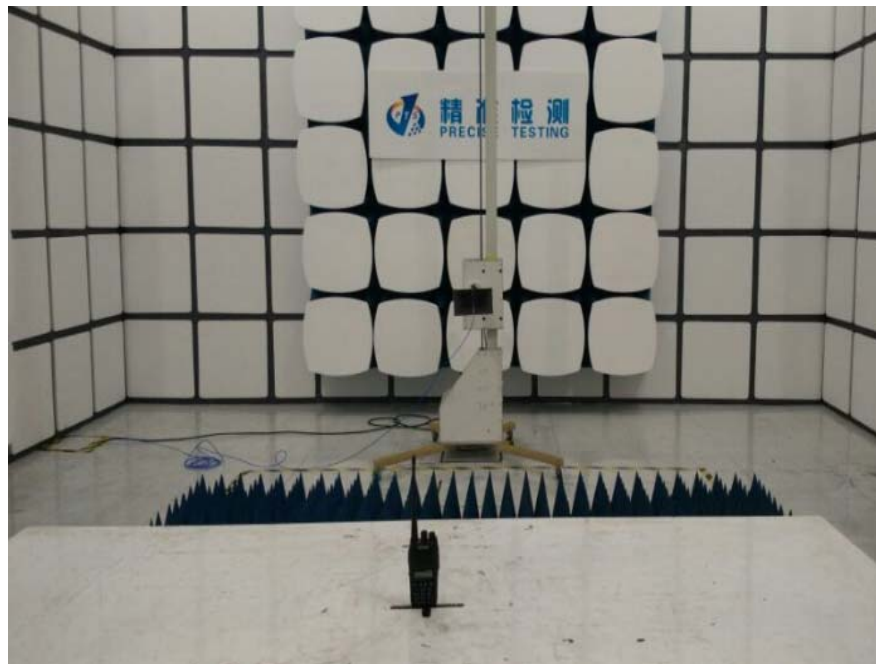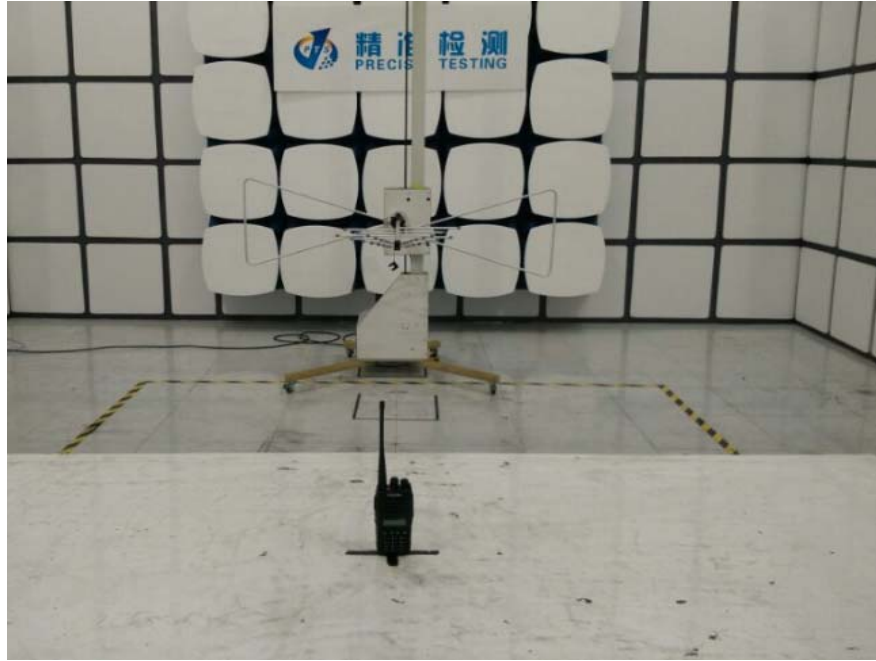

APPENDIX II: EXTERNAL VIEW OF EUT

ALL VIEW OF EUT



TOP VIEW OF EUT



BOTTOM VIEW OF EUT



FRONT VIEW OF EUT



BACK VIEW OF EUT



LEFT VIEW OF EUT



RIGHT VIEW OF EUT



THE LABEL OF POWER ADAPTER MARKETED




OPEN VIEW OF EUT-1




OPEN VIEW OF EUT-2




INTERNAL VIEW OF EUT-1

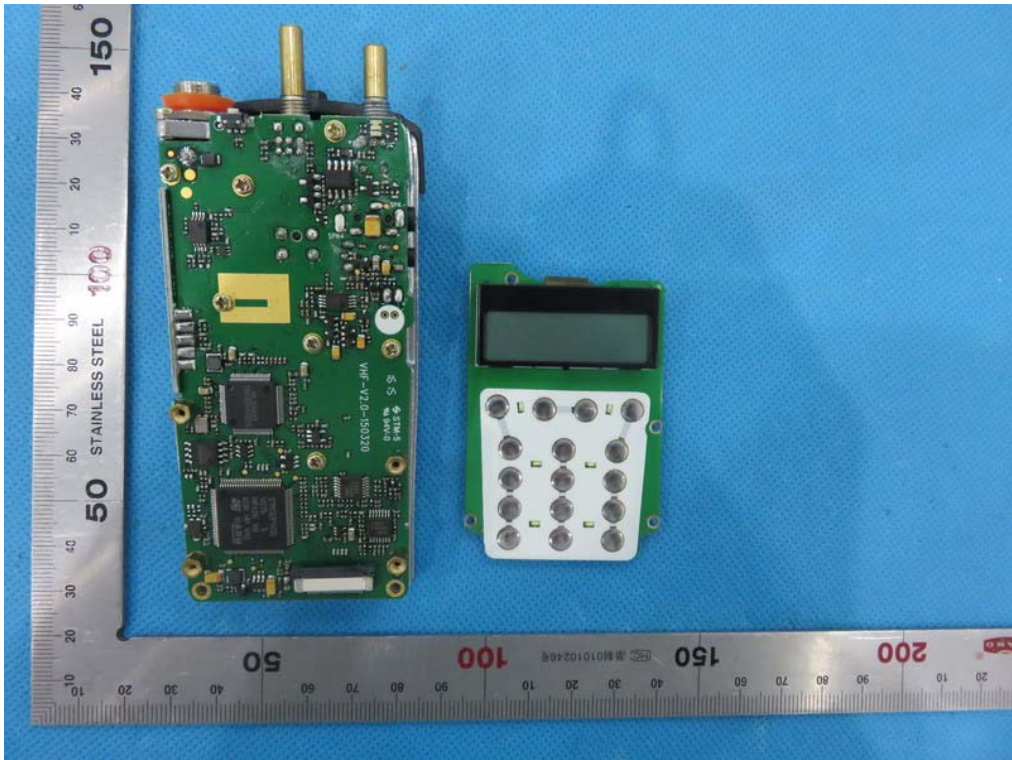

INTERNAL VIEW OF EUT-2

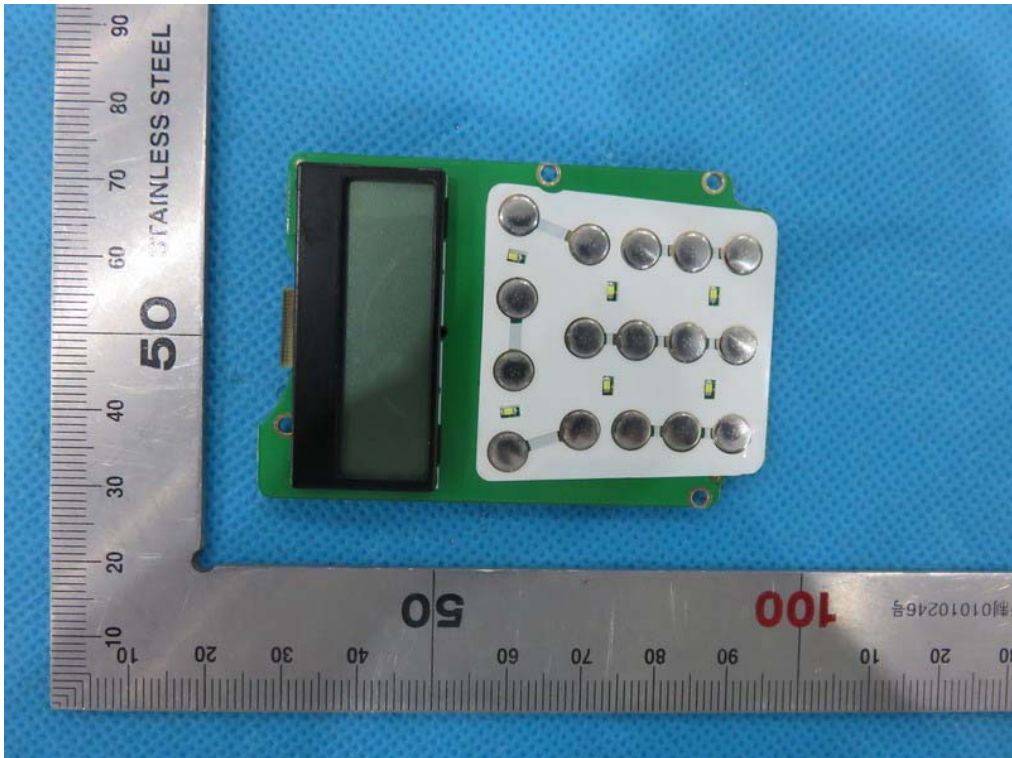


INTERNAL VIEW OF EUT-3

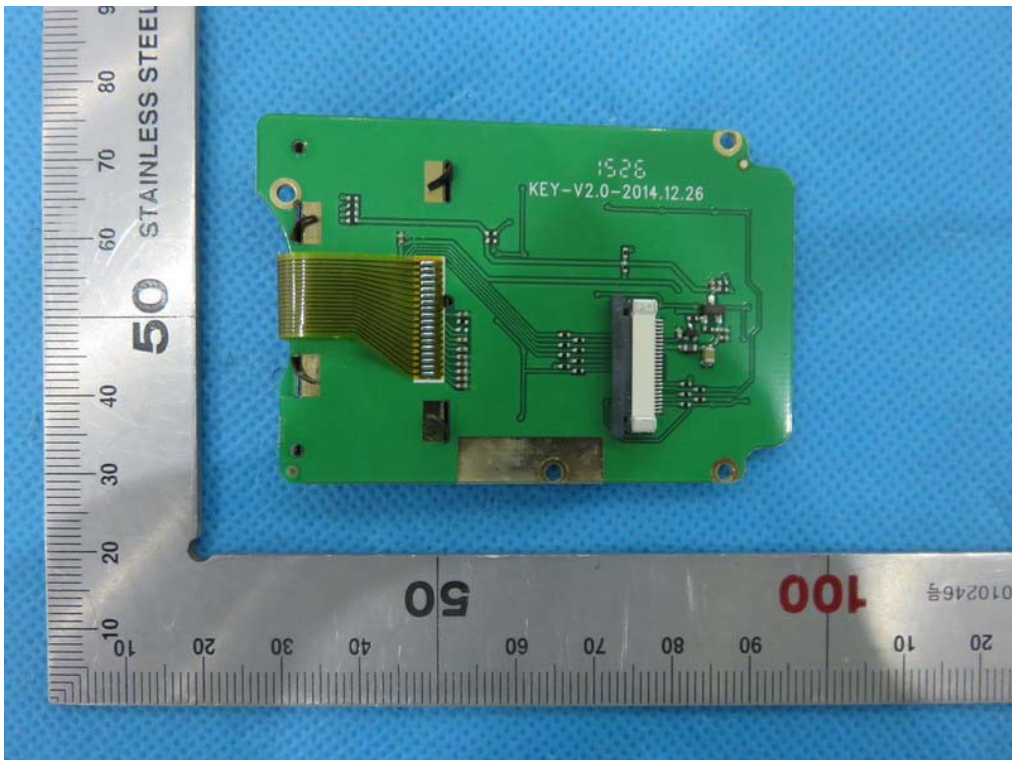


INTERNAL VIEW OF EUT-4



INTERNAL VIEW OF EUT-5

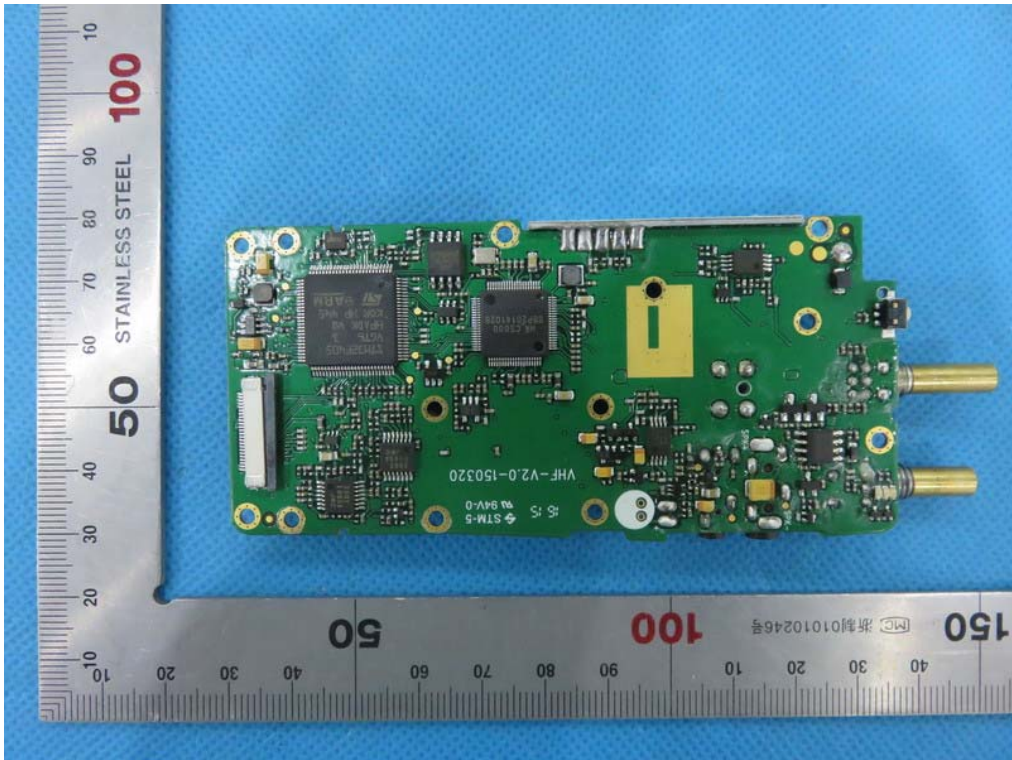

INTERNAL VIEW OF EUT-6

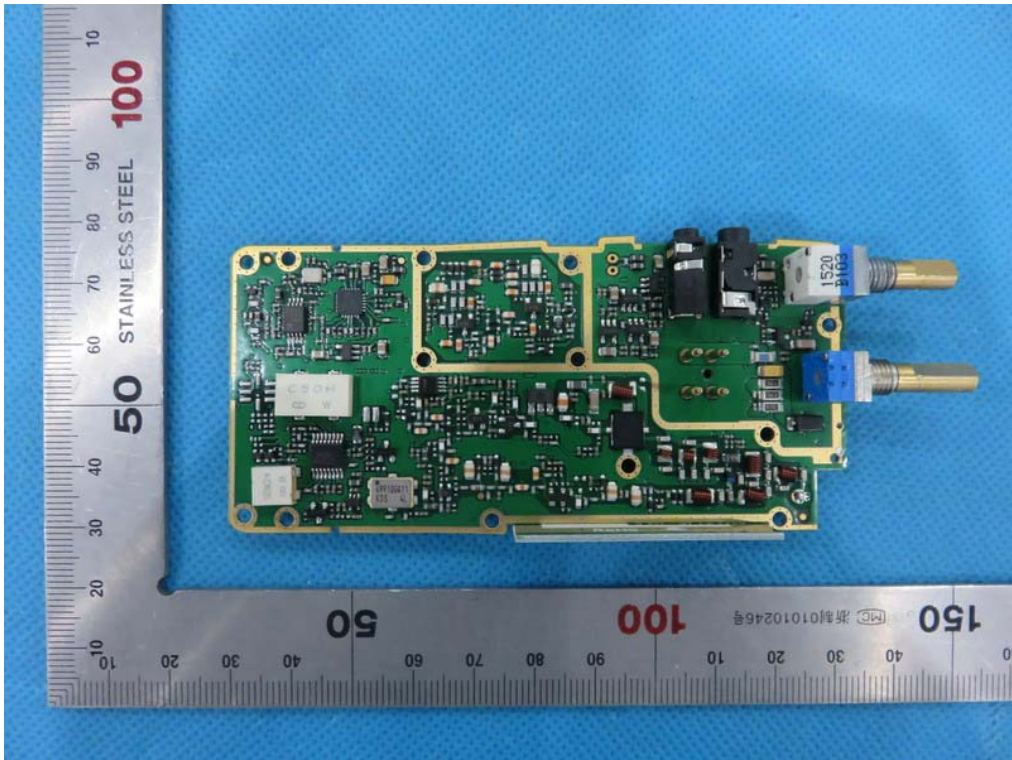

-----END OF REPORT-----