





Impedance Measurement Plot for Body TSL

10 Sep 2013 09:01:43
[CH1] S11 1 U FS 3: 52.527 Ω 2.8496 Ω 185.11 μH 2 450.000 000 MHz

*
Del
Ca
Avg
16
H1 d

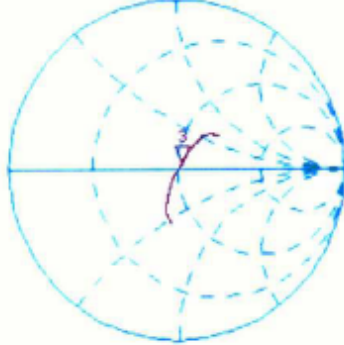

CH2 S11 LOG 5 dB/REF -20 dB 3:-28.596 dB 2 450.000 000 MHz

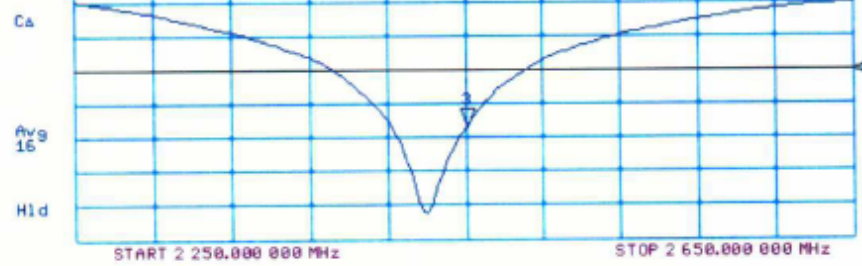



6. DAE4 Calibration Certificate

Calibration Laboratory of Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'etalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Client Neutron Engineering (Auden)

Certificate No: DAE4-1390_Sep13

CALIBRATION CERTIFICATE

Object DAE4 - SD 000 D04 BM - SN: 1390
Calibration procedure(s) QA CAL-06.v26 Calibration procedure for the data acquisition electronics (DAE)
Calibration date: September 10, 2013

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Table with 4 columns: Standards, ID #, Date, and Scheduled. Includes Primary Standards (Keithley Multimeter) and Secondary Standards (Auto DAE Calibration Unit, Calibrator Box).

Calibrated by: R. Mayoraz, Technician
Approved by: Fin Bomholt, Deputy Technical Manager

Issued: September 10, 2013

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Glossary

DAE data acquisition electronics
Connector angle information used in DASY system to align probe sensor X to the robot coordinate system.

Methods Applied and Interpretation of Parameters

- *DC Voltage Measurement:* Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- *Connector angle:* The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The following parameters as documented in the Appendix contain technical information as a result from the performance test and require no uncertainty.
 - *DC Voltage Measurement Linearity:* Verification of the Linearity at +10% and -10% of the nominal calibration voltage. Influence of offset voltage is included in this measurement.
 - *Common mode sensitivity:* Influence of a positive or negative common mode voltage on the differential measurement.
 - *Channel separation:* Influence of a voltage on the neighbor channels not subject to an input voltage.
 - *AD Converter Values with inputs shorted:* Values on the internal AD converter corresponding to zero input voltage
 - *Input Offset Measurement:* Output voltage and statistical results over a large number of zero voltage measurements.
 - *Input Offset Current:* Typical value for information; Maximum channel input offset current, not considering the input resistance.
 - *Input resistance:* Typical value for information: DAE input resistance at the connector, during internal auto-zeroing and during measurement.
 - *Low Battery Alarm Voltage:* Typical value for information. Below this voltage, a battery alarm signal is generated.
 - *Power consumption:* Typical value for information. Supply currents in various operating modes.



DC Voltage Measurement

A/D - Converter Resolution nominal

High Range: 1LSB = 6.1µV, full range = -100...+300 mV

Low Range: 1LSB = 61nV, full range = -1.....+3mV

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Calibration Factors	X	Y	Z
High Range	403.648 ± 0.02% (k=2)	403.367 ± 0.02% (k=2)	404.248 ± 0.02% (k=2)
Low Range	3.96280 ± 1.50% (k=2)	3.98266 ± 1.50% (k=2)	3.98218 ± 1.50% (k=2)

Connector Angle

Connector Angle to be used in DASY system	70.5 ° ± 1 °
---	--------------



Appendix

1. DC Voltage Linearity

High Range		Reading (μV)	Difference (μV)	Error (%)
Channel X	+ Input	199997.35	0.91	0.00
Channel X	+ Input	20001.49	1.47	0.01
Channel X	- Input	-20001.51	0.14	-0.00
Channel Y	+ Input	199996.87	0.53	0.00
Channel Y	+ Input	19998.65	-1.35	-0.01
Channel Y	- Input	-20003.75	-2.14	0.01
Channel Z	+ Input	199996.57	0.03	0.00
Channel Z	+ Input	19998.48	-1.49	-0.01
Channel Z	- Input	-20002.14	-0.43	0.00

Low Range		Reading (μV)	Difference (μV)	Error (%)
Channel X	+ Input	2000.37	0.14	0.01
Channel X	+ Input	200.69	0.09	0.04
Channel X	- Input	-198.98	0.26	-0.13
Channel Y	+ Input	2000.03	-0.21	-0.01
Channel Y	+ Input	199.35	-1.26	-0.63
Channel Y	- Input	-200.62	-1.31	0.66
Channel Z	+ Input	2000.23	0.08	0.00
Channel Z	+ Input	199.71	-0.80	-0.40
Channel Z	- Input	-200.19	-0.80	0.40

2. Common mode sensitivity

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Common mode Input Voltage (mV)	High Range Average Reading (μV)	Low Range Average Reading (μV)
Channel X	200	-3.16	-5.14
	- 200	6.37	4.63
Channel Y	200	15.87	15.47
	- 200	-18.18	-18.66
Channel Z	200	13.55	13.42
	- 200	-15.48	-15.78

3. Channel separation

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Input Voltage (mV)	Channel X (μV)	Channel Y (μV)	Channel Z (μV)
Channel X	200	-	1.53	-4.47
Channel Y	200	9.07	-	4.25
Channel Z	200	9.52	5.92	-